


Product specification


1. Technical indicators of products

Frequency Range (MHz)	2400~2500
Band Width (MHz)	100
Impedance (Ω)	50
VSWR	1.91 MAX
Return Loss (dB)	-15.3
Peak Gain (dBi)	1.78
Polarization	Linear Vertical
Antenna Material	PCB
Operating Temp (℃)	—20~65
Storage Temp (℃)	—30~75


2. Product picture

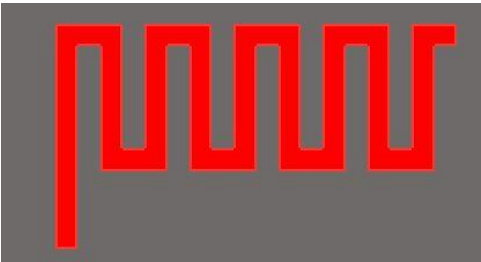


3. Return Loss

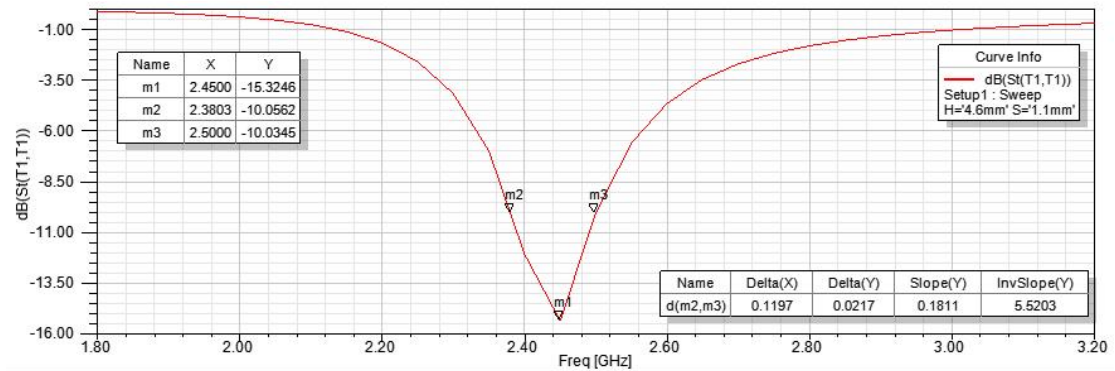

4. VSWR

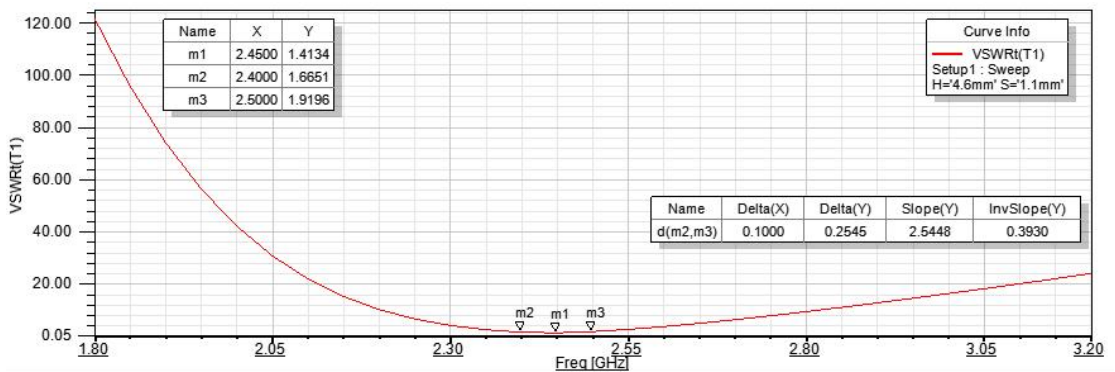


6. 3D gain pattern

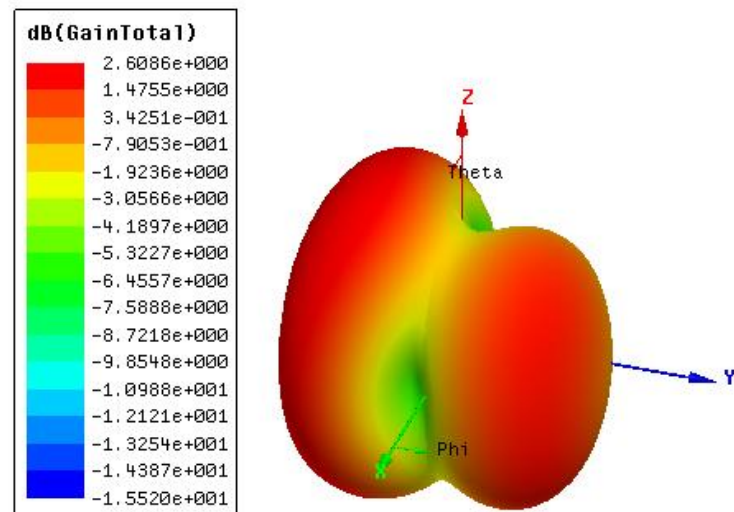

Frequency (GHz)	2. 41GHz	2. 43GHz	2. 45GHz	2. 48 GHz	2. 5GHz
Pick Gain(dBi)	1. 78	1. 76	1. 78	1. 77	1. 78

7. E ,h plan

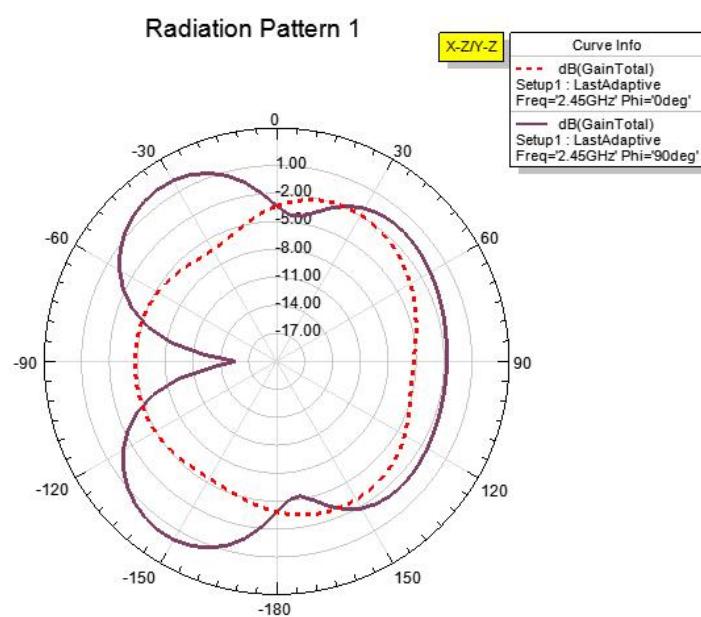

Radiation Pattern 2

