



Report No.: 170208032GZU-001
Issued: 2017-3-24

TEST REPORT

Applicant Name & : LF BEAUTY LIMITED
Address : 2/F, HK Spinners Industrial Building Phases I & II, 800 Cheung Sha Wan Road, Kowloon, Hong Kong

Sample Description
Product : MC GLASSES LUMINOUS C2
FCC ID : 2ALCP2040058
Model No. : 2040058
Electrical Rating : 100-240V, 50/60Hz

Date Received : 08 February 2017

Date Test Conducted : 08 February 2017-22 March 2017

Test standards : 47 CFR PART 15 Subpart C: 2015 section 15.249

Test Result : Pass

Conclusion : The submitted samples complied with the above rules/standards.

Remark : None.

*****End of Page*****

Prepared and Checked By:

Sky Zhu
Engineer
Intertek Guangzhou

Approved By:

Helen Ma
Team Leader
Intertek Guangzhou
24 March 2017 ***Date***

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. The test report only allows to be revised within three years from its original issued date unless further standard or the requirement was noticed.

Intertek Testing Services Shenzhen Ltd. Guangzhou Branch
Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City, GETDD Guangzhou, China
Tel / Fax: 86-20-8213 9688/86-20-3205 7538
© 2016 Intertek



Report No.: 170208032GZU-001
Issued: 2017-3-24

CONTENT

TEST REPORT	1
CONTENT	2
1.0 Summary of Test	3
2.0 General Description	4
2.1 Product Description	4
2.2 Related Submittal(s) Grants	5
2.3 Test Methodology	5
2.4 Test Facility	5
3.0 System Test Configuration	6
3.1 Justification	6
3.2 EUT Exercising Software	7
3.3 Special Accessories	7
3.4 Measurement Uncertainty	7
3.5 Equipment Modification	7
3.6 Support Equipment List and Description	7
4.0 Measurement Results	8
4.1 Antenna Requirement:	8
4.2 Occupied Bandwidth:	9
4.3 Radiated Emission	14
4.4 Band Edges Requirement	27
4.5 Conducted Emissions at Mains Terminals	30
5.0 Test Equipment List	33



Report No.: 170208032GZU-001
Issued: 2017-3-24

1.0 Summary of Test

TEST	TEST REQUIREMENT	TEST METHOD	RESULT
Antenna Requirement	FCC PART 15 C Section 15.203	FCC PART 15 C Section 15.203	PASS
Occupied Bandwidth	FCC PART 15 C section 15.215(c)	ANSI C63.10: Clause 6.9	PASS
Radiated Emission	FCC PART 15 C section 15.249 (a), (d)	ANSI C63.10: Clause 6.4, 6.5 & 6.6	PASS
Band Edges Measurement	FCC PART 15 C section 15.249 (d)	ANSI C63.10: Clause 6.10	PASS
Conducted Emissions at Mains Terminals	FCC PART 15 C section 15.207	ANSI C63.10: Clause 6.2	PASS
Remark: N/A: not applicable. Refer to the relative section for the details. EUT: In this whole report EUT means Equipment Under Test. Tx: In this whole report Tx (or tx) means Transmitter. Rx: In this whole report Rx (or rx) means Receiver. RF: In this whole report RF means Radio Frequency. ANSI C63.10: the detail version is ANSI C63.10:2013 in the whole report.			

2.0 General Description

2.1 Product Description

Operating Frequency	2402 MHz to 2480 MHz
Type of Modulation:	GFSK
Number of Channels	40 Channels
Channel Separation:	2 MHz
Antenna Type	Integral
Antenna gain:	3 dBi
Speciality:	Bluetooth 4.1 with BLE (Bluetooth Low Energy)
Function:	Glasses with BT function to receiver information from the APP
Power Supply:	120V/60Hz
Power cord:	1.1 m x 2 wires unscreened AC supply cable
EUT modulation and data packet during test:	
The EUT has been tested on the Modulation of GFSK with 1 Mbps data rate.	

EUT channels and frequencies list:

Test frequencies are the lowest channel 0: 2402 MHz, middle channel 19: 2440 MHz and the highest channel 39: 2480 MHz

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	14	2430	28	2458
1	2404	15	2432	29	2460
2	2406	16	2434	30	2462
3	2408	17	2436	31	2464
4	2410	18	2438	32	2466
5	2412	19	2440	33	2468
6	2414	20	2442	34	2470
7	2416	21	2444	35	2472
8	2418	22	2446	36	2474
9	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454	/	/
13	2428	27	2456	/	/



Report No.: 170208032GZU-001
Issued: 2017-3-24

2.2 Related Submittal(s) Grants

This is an application for certification of:
DXX - Low power communications device transmitter

Remaining portions are subject to the following procedures:

1. Receiver portion of BLE: exempt from technical requirement of this Part.

2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10:2013. Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans and final tests were performed in the semi-anechoic chamber to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise.

2.4 Test Facility

All of the tests are performed at:
Intertek Testing Services Shenzhen Ltd. Guangzhou Branch
Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City, GETDD Guangzhou, China.

This test facility and site measurement data have been fully placed on file with the FCC, test firm registration number is 549654.

3.0 System Test Configuration

3.1 Justification

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, AC power line was manipulated to produce worst case emissions. It was powered by AC 120V/60Hz supply.

The signal is maximized through rotation; the antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. The spurious emissions more than 20 dB below the permissible value are not reported.

For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

Frequency range of radiated emission measurements

Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified

Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom



Report No.: 170208032GZU-001
Issued: 2017-3-24

3.2 EUT Exercising Software

No special exercising software

3.3 Special Accessories

No special accessories used.

3.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	RF output power (conducted)	1.1 dB
2	Occupied Channel Bandwidth	2.3%
3	Power Spectral Density	1.5dB
4	Spurious Emission (TX)-Radiated	4.7 dB (25 MHz-1 GHz)
		4.8 dB (1 GHz-18 GHz)
5	Spurious Emission (TX)-Conducted	1.5 dB
6	Spurious Emission (RX) -Radiated	4.7 dB (25 MHz-1 GHz)
		4.8 dB (1 GHz-25 GHz)
7	Spurious Emission (RX)-Conducted	1.5 dB
8	Temperature	0.5 °C
9	Humidity	0.4 %
10	Time	1.2%

3.5 Equipment Modification

Any modifications installed previous to testing by LF BEAUTY LIMITED will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Guangzhou Branch.

3.6 Support Equipment List and Description

The client make a special Engineering Sample can adjust the high, middle, low frequency channel for test.

4.0 Measurement Results

4.1 Antenna Requirement:


Standard requirement

15.203 requirement:

For intentional device. According to 15.203, an intentional radiator shall be designed to Ensure that no antenna other than that furnished by the responsible party shall be used with the device.

EUT Antenna


The antenna is an integral antenna and no consideration of replacement. The best case gain of the antenna is 3 dBi.

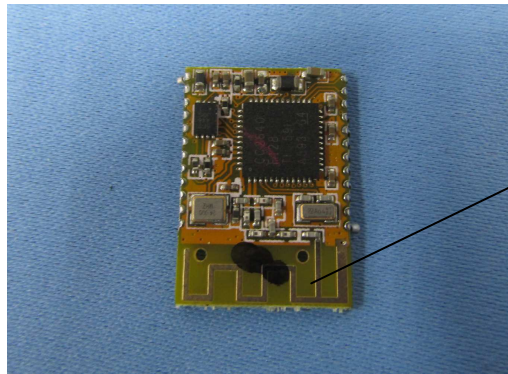

Antenna

4.2 Occupied Bandwidth:

Test Requirement:	FCC PART 15 C section 15.215(c) (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated
Test Method:	ANSI C63.10: Clause 6.9
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). The highest, middle and the lowest channels were selected for the final test as listed below.
Test Configuration:	

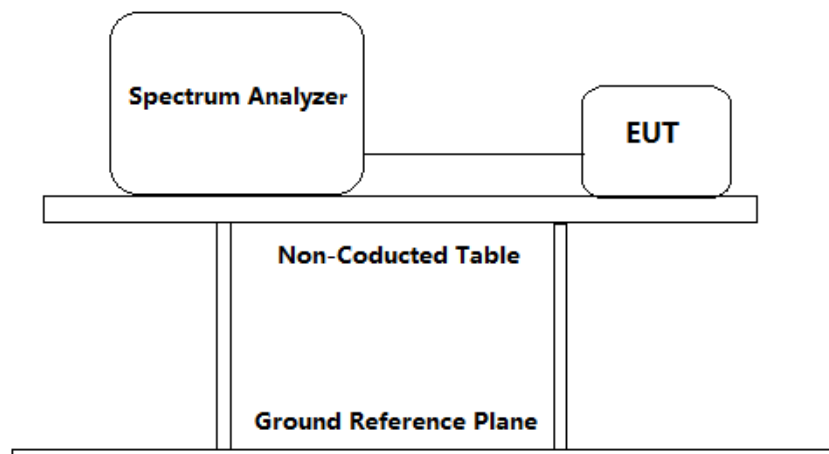

Test Procedure:

The transmitter was operated at its maximum carrier power measured under normal test conditions.

- The instrument center frequency was set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer was between 1.5 times and 5.0 times the OBW(20 dB Bandwidth).
- The nominal IF filter bandwidth (3 dB RBW) was set to 50kHz and VBW was approximately three times the RBW.
- Set the reference level of the instrument as required, keeping the signal from exceeding the

maximum input mixer level for linear operation. In general, the peak of the spectral envelope was more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level.

- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) The dynamic range of the instrument at the selected RBW was more than 10 dB below the target “-20 dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW was at least 30 dB below the reference value.
- f) Peak detection and max hold mode (until the trace stabilizes) was used.
- g) Used the 20dB bandwidth function of the instrument and reported the measured bandwidth.
- h) The occupied bandwidth was reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division was clearly labeled. Tabular data was reported in addition to the plot(s).


20 dB bandwidth:

Channel No.	Frequency (MHz)	Measured 20 dB bandwidth (MHz)	Limit (MHz)	Result
0	2402	1.230	2400 to 2483.5	Pass
19	2440	1.237		Pass
39	2480	1.237		Pass


20dB bandwidth:

Result plot as follows:


Lowest channel (2.402 GHz):

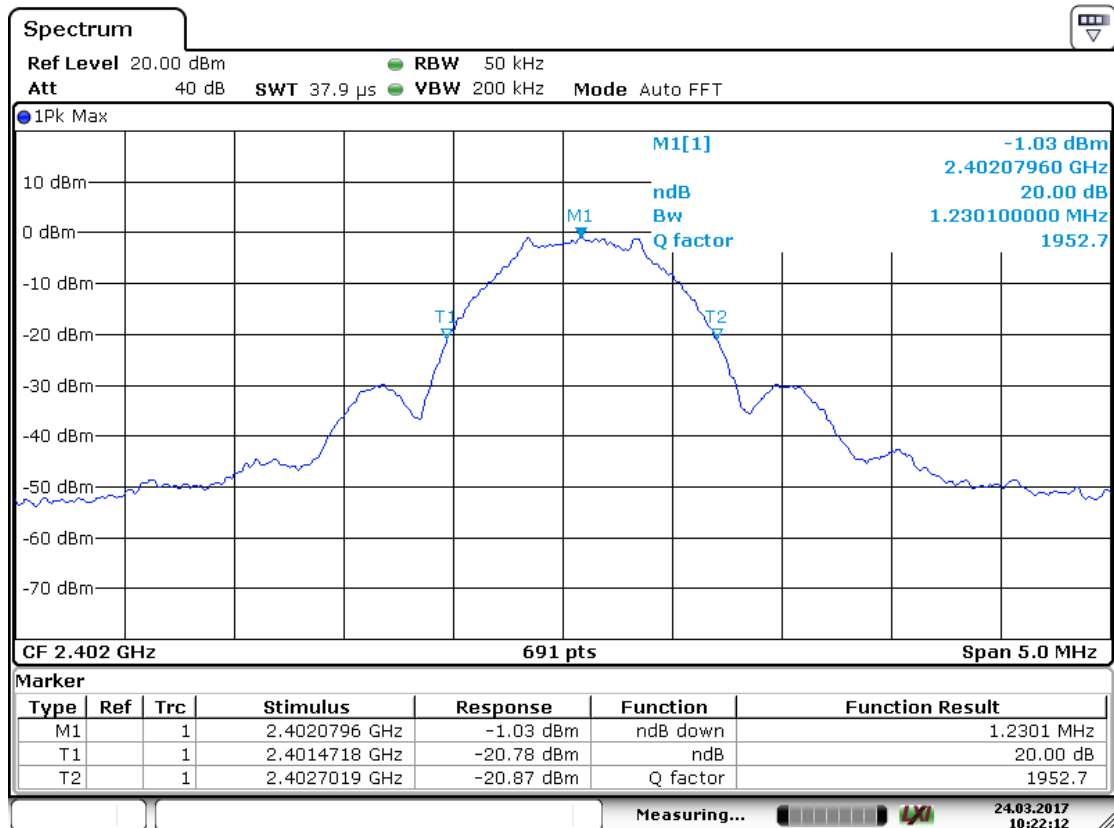

Middle Channel (2.440 GHz):

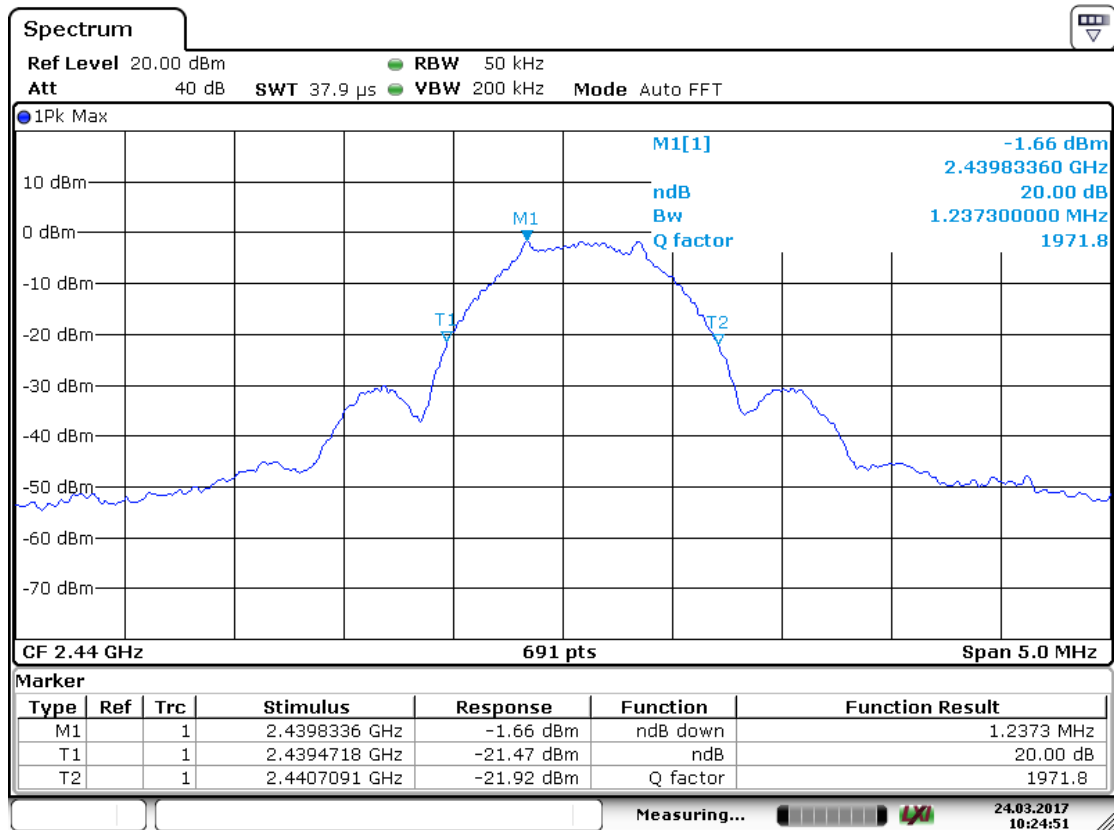

Highest Channel (2.480 GHz):

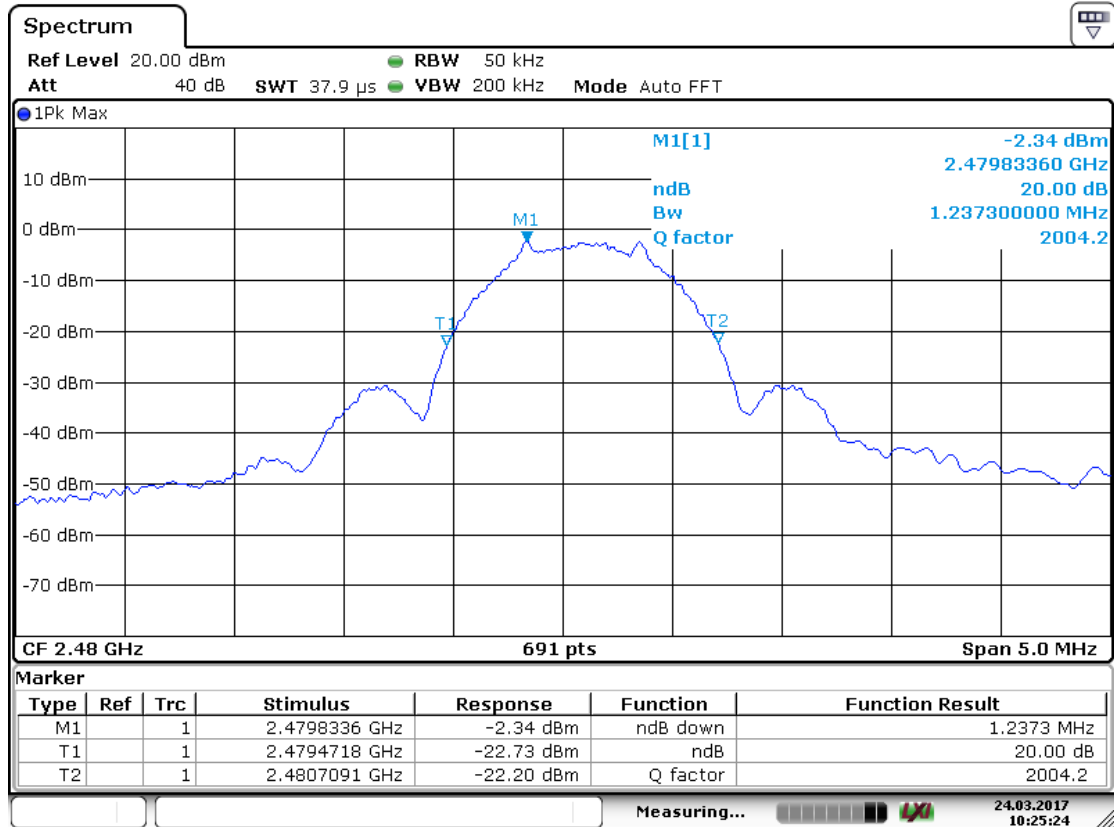

4.3 Radiated Emission

Test Requirement:

FCC PART 15 C section 15.249 (a), (d)

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBμV/m @ 3m)	Field Strength of Harmonics (dBμV/m @ 3m)
902 to 928	94.0	54.0
2400 to 2483.5	94.0	54.0
5725 to 5875	94.0	54.0

Note: The limits shown in the above table are based on measurements using an average detector, except for the fundamental emission in the frequency band 902-928 MHz, which is based on measurements using a CISPR quasi-peak detector.

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.

Test Method:

ANSI C63.10: Clause 6.4, 6.5 and 6.6

Test Status:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). The lowest, middle and the lowest channels were selected for the final test as listed below.

Test site:

Measurement Distance: 3m (Semi-Anechoic Chamber)

Limit:

The field strength of radiated emission outside of the specified frequency bands, except for harmonics at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Field Strength (dBμV/m @ 3m)
30-88	40.0
88-216	43.5
216-960	46.0
Above 960	54.0

Detector:

For Peak and Quasi-Peak value:
200 Hz for 9 kHz to 150 kHz
9 kHz for 150 kHz to 30 MHz

120 kHz for 30 MHz to 1GHz

RBW = 1 MHz for $f \geq 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak for $f \geq 1$ GHz, QP for $f < 1$ GHz

Trace = max hold

For AV value:

RBW = 1 MHz for $f \geq 1$ GHz

VBW=3 MHz

Detector function: Average

Sweep = auto


Trace = max hold

Section 15.205 Restricted bands of operation.


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 -	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.69525	960 - 1240	7.25 - 7.75
4.125 - 4.128	16.80425 -	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	16.80475	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	25.5 - 25.67	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	37.5 - 38.25	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	73 - 74.6	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	74.8 - 75.2	2200 - 2300	14.47 - 14.5
8.291 - 8.294	108 - 121.94	2310 - 2390	15.35 - 16.2
8.362 - 8.366	123 - 138	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	149.9 - 150.05	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.52475 -	3260 - 3267	23.6 - 24.0
12.29 - 12.293	156.52525	3332 - 3339	31.2 - 31.8
12.51975 -	156.7 - 156.9	3345.8 - 3358	36.43 - 36.5
12.52025	162.0125 - 167.17	3600 - 4400	
12.57675 -	167.72 - 173.2		
12.57725	240 - 285		
13.36 - 13.41	322 - 335.4		

Test Configuration:


1) 9 kHz to 30 MHz emissions:

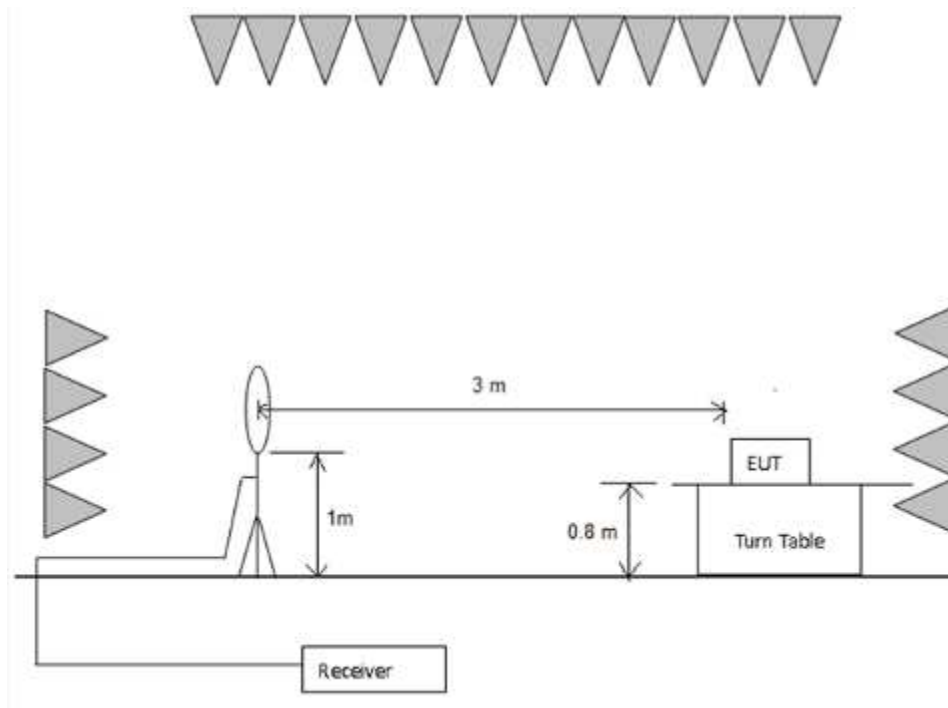

2) 30 MHz to 1 GHz emissions:

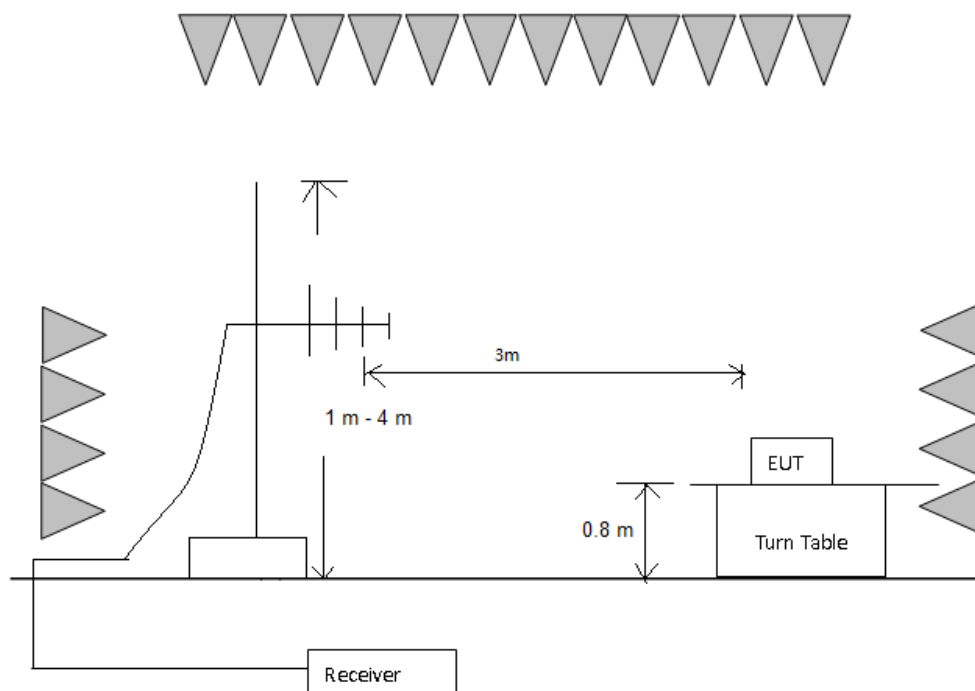

3) 1 GHz to 40 GHz emissions:

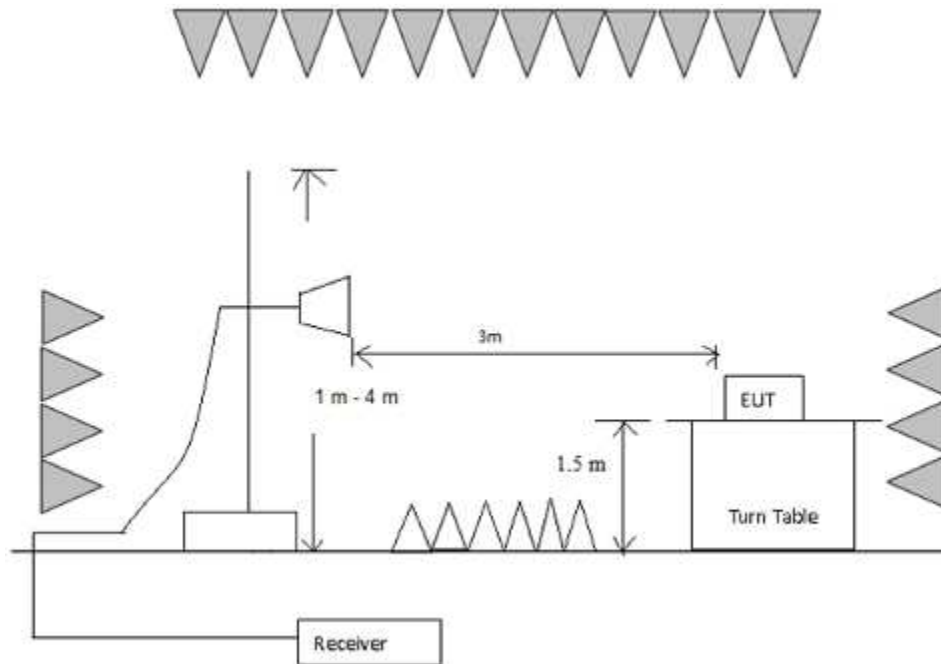

Test Procedure:

1) 9 kHz to 30 MHz emissions:

For testing performed with the loop antenna. The centre of the loop was positioned 1 m above the ground and positioned with its plane vertical at the special distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

2) 30 MHz to 1 GHz emissions:

For testing performed with the bi-log type antenna. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

3) 1 GHz to 25 GHz emissions:

Test site with RF absorbing material covering the ground plane that met the site validation criterion called out in CISPR 16-1-4:2007 was used to perform radiated emission test above 1 GHz.

For testing performed with the horn antenna. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

4) The receiver was scanned from 9 kHz to 25 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators,



Report No.: 170208032GZU-001

Issued: 2017-3-24


measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

Radiated Emissions (Below 1GHz)


Test curve and data: Operation Frequency: 2402MHz
 Horizontal

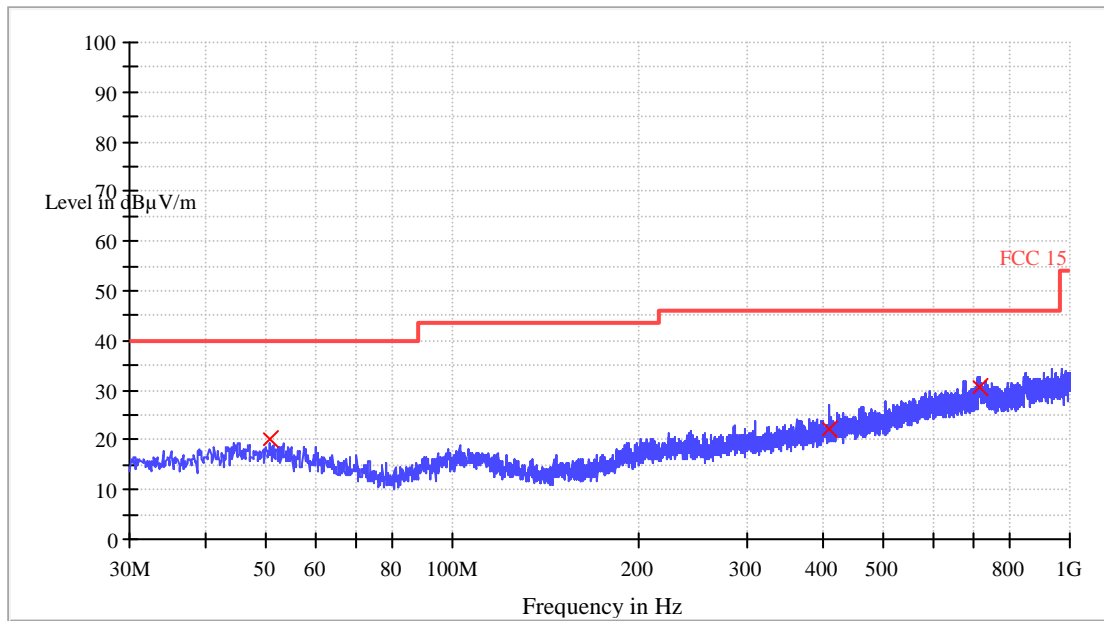

QP

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
50.600000	20.2	120.000	H	14.0	19.8	40.0
407.800000	22.0	120.000	H	17.8	24.0	46.0
714.040000	30.7	120.000	H	23.1	15.3	46.0


Vertical

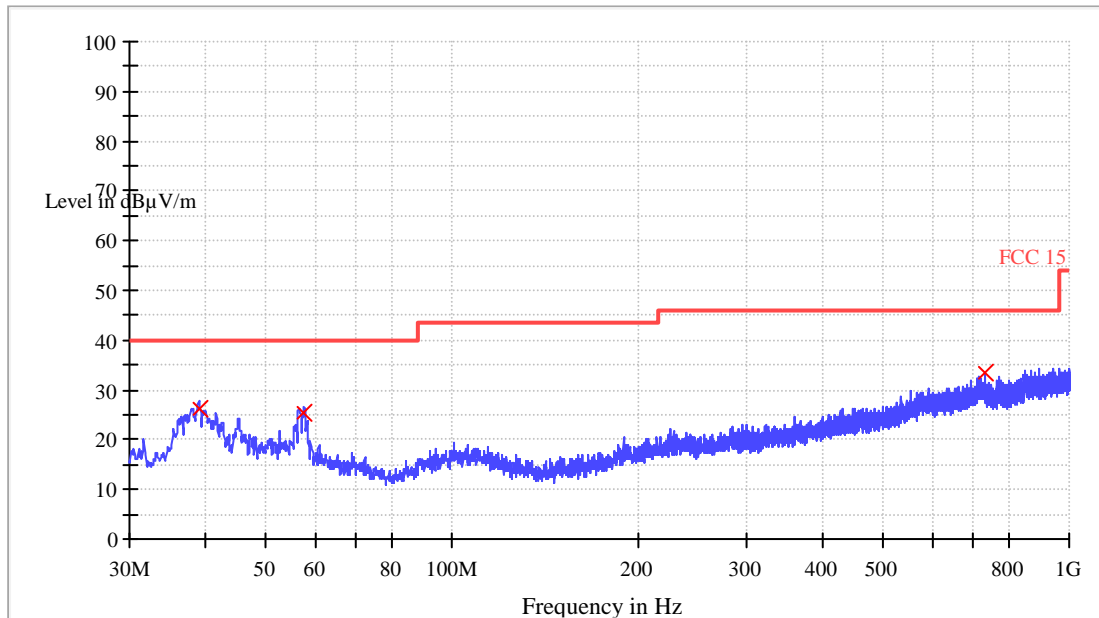

QP

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
38.920000	26.1	120.000	V	12.9	13.9	40.0
57.600000	25.2	120.000	V	13.1	14.8	40.0
729.600000	33.3	120.000	V	23.3	12.7	46.0


Test curve and data: Operation Frequency: 2440MHz
 Horizontal

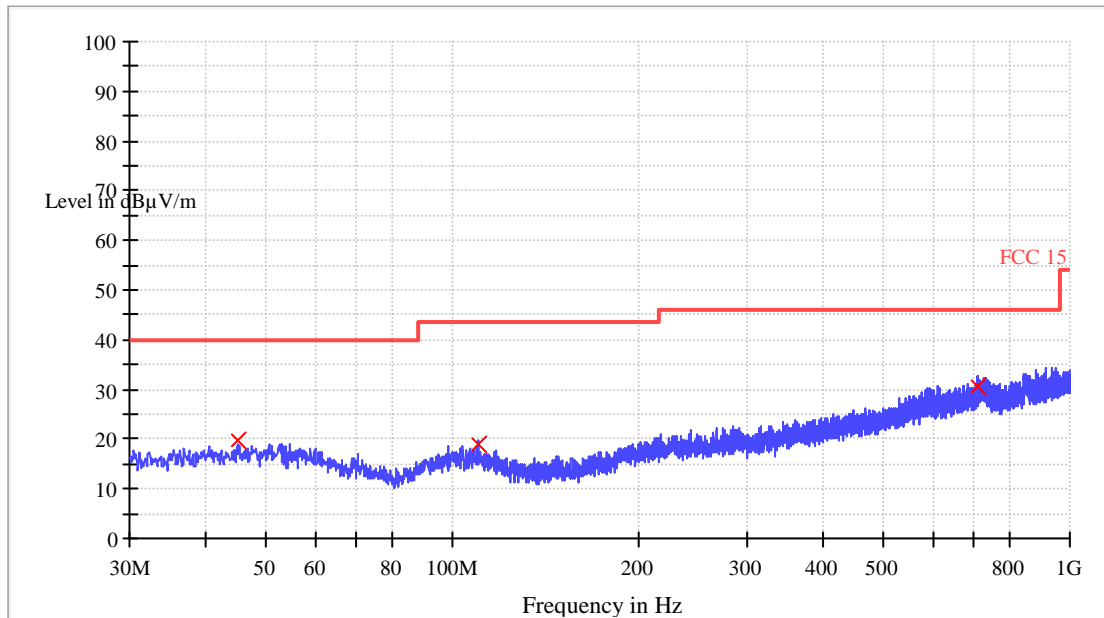

QP

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
45.040000	19.8	120.000	H	14.2	20.2	40.0
110.080000	18.8	120.000	H	12.2	24.7	43.5
710.400000	30.8	120.000	H	23.1	15.3	46.0


Vertical

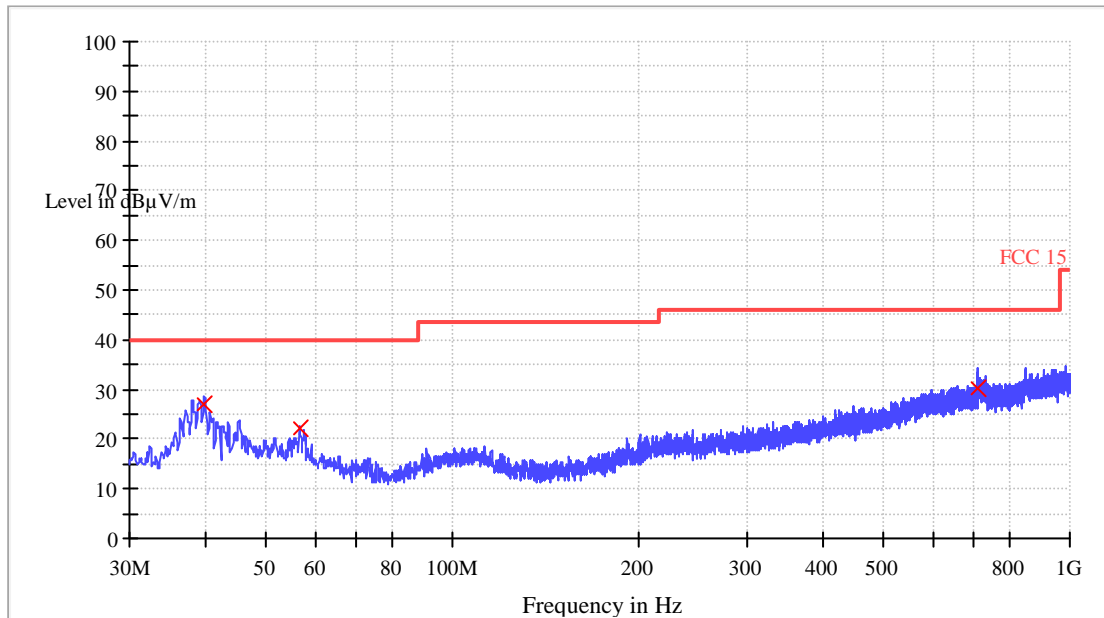

QP

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
39.680000	27.1	120.000	V	13.1	12.9	40.0
56.720000	22.2	120.000	V	13.2	17.8	40.0
710.080000	30.2	120.000	V	23.1	15.8	46.0


Test curve and data: Operation Frequency: 2480MHz
 Horizontal

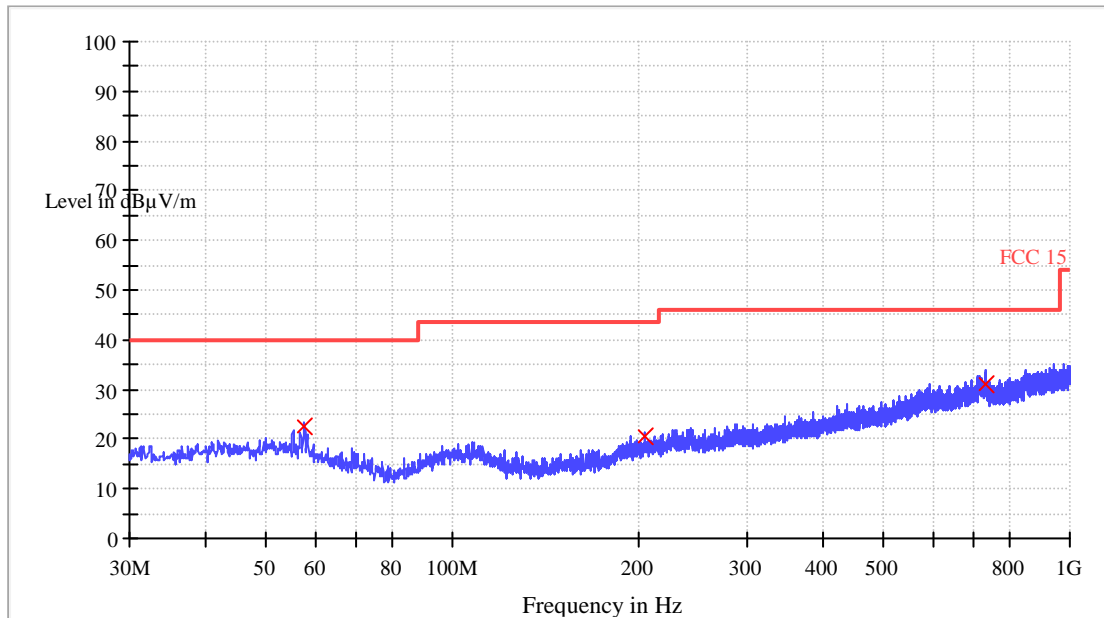

QP

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
57.600000	22.7	120.000	H	13.1	17.3	40.0
205.280000	20.7	120.000	H	12.7	22.8	43.5
729.880000	31.2	120.000	H	23.3	14.8	46.0

Vertical

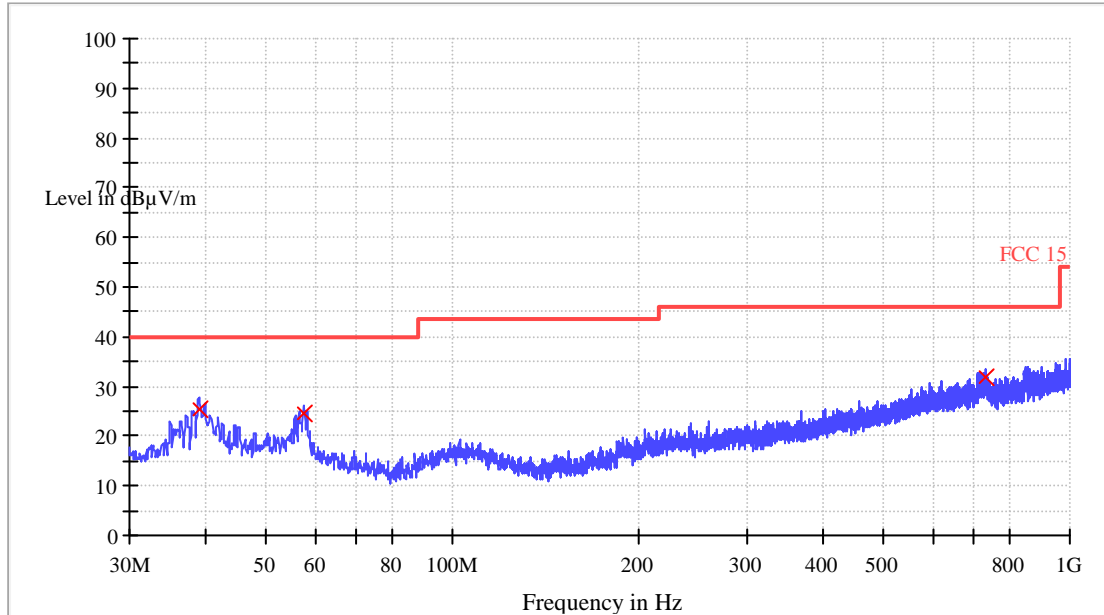

QP

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
38.920000	25.5	120.000	V	12.9	14.5	40.0
57.400000	24.5	120.000	V	13.1	15.5	40.0
728.880000	31.8	120.000	V	23.3	14.2	46.0



Report No.: 170208032GZU-001
Issued: 2017-3-24

Radiated Emissions (Above 1GHz)

Operation Frequency: 2402MHz:

Polarization	Frequency (MHz)	PK Net at 3m (dBμV/m)	AV Net at 3m (dBμV/m)	Correction Factor (dB)	PK Limit at 3m (dBμV/m)	PK Margin (dB)	AV Limit at 3m (dBμV/m)	AV Margin (dB)
Horizontal	2401.437	91.1	81.5	-7.3	114.0	-22.9	94.0	-12.5
Horizontal	2015.750	38.4	--	-8.0	--	--	54.0	-15.6
Horizontal	4803.750	45.7	--	-0.5	--	--	54.0	-8.3
Horizontal	7206.000	47.5	--	3.4	--	--	54.0	-6.5
Vertical	2015.218	44.9	--	-8.0	--	--	54.0	-9.1
Vertical	2401.600	85.7	76.7	-7.3	114.0	-28.3	94.0	-17.3
Vertical	4790.468	42.6	--	-0.5	--	--	54.0	-11.4
Vertical	7206.400	50.7	--	3.4	--	--	54.0	-3.3

Operation Frequency: 2440MHz:

Polarization	Frequency (MHz)	PK Net at 3m (dBμV/m)	AV Net at 3m (dBμV/m)	Correction Factor (dB)	PK Limit at 3m (dBμV/m)	PK Margin (dB)	AV Limit at 3m (dBμV/m)	AV Margin (dB)
Horizontal	2439.688	90.9	82.7	-7.1	114.0	-23.1	94.0	-11.3
Horizontal	2270.800	38.4	--	-7.5	--	--	54.0	-15.6
Horizontal	4879.600	43.2	--	-0.5	--	--	54.0	-10.8
Horizontal	7320.800	48.1	--	3.8	--	--	54.0	-5.9
Vertical	1991.200	37.1	--	-8.1	--	--	54.0	-16.9
Vertical	2440.400	85.4	80.6	-7.1	114.0	-28.6	94.0	-13.4
Vertical	4538.800	42.5	--	-0.5	--	--	54.0	-11.5
Vertical	7319.200	50.9	--	3.8	--	--	54.0	-3.1

Operation Frequency: 2480MHz:

Polarization	Frequency (MHz)	PK Net at 3m (dBμV/m)	AV Net at 3m (dBμV/m)	Correction Factor (dB)	PK Limit at 3m (dBμV/m)	PK Margin (dB)	AV Limit at 3m (dBμV/m)	AV Margin (dB)
Horizontal	2480.000	90.1	82.1	-7.1	114.0	-23.9	94.0	-11.9
Horizontal	2052.800	36.2	--	-7.9	--	--	54.0	-17.8
Horizontal	4511.600	42.6	--	-0.5	--	--	54.0	-11.4
Horizontal	7440.400	48.6	--	4.2	--	--	54.0	-5.4
Vertical	2012.562	40.9	--	-8.0	--	--	54.0	-13.1
Vertical	2480.000	88.1	80.2	-7.1	114.0	-25.9	94.0	-13.8
Vertical	4440.800	41.3	--	-0.7	--	--	54.0	-12.7
Vertical	7440.400	49.9	--	4.2	--	--	54.0	-4.1



Report No.: 170208032GZU-001

Issued: 2017-3-24


Final Test Level = Receiver Reading + Correction factor

Correction factor = Antenna Factor + Cable Loss – Preamplifier Factor

- Notes:
1. At frequencies equal to or less than 1000MHz, quasi-peak detector was used, above 1000MHz, Peak detector and Average detector were used.
 2. All measurements were made at 3 meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. When Peak emission level was below AV limit, the AV emission level was not recorded.

4.4 Band Edges Requirement

Test Requirement:	FCC PART 15 C section 15.249 (d) (d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.
Frequency Band:	2400 MHz to 2483.5 MHz
Test Method:	ANSI C63.10: Clause 6.10
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). The lowest, middle and the highest channels were selected for the final test as listed below.
Test Configuration:	

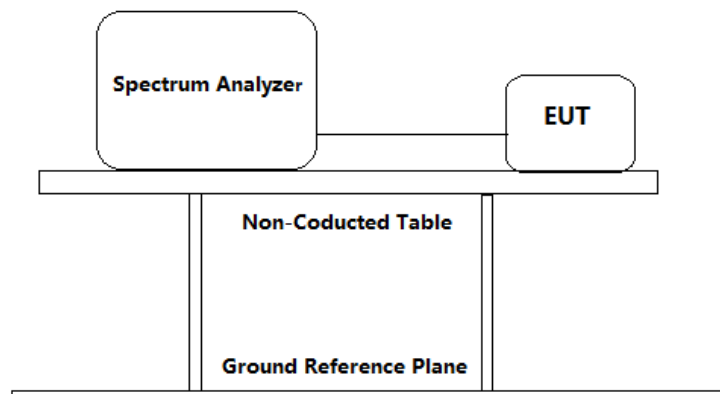




Report No.: 170208032GZU-001
Issued: 2017-3-24


Test result with plots as follows:

Result plot as follows:

Channel 0: 2.402 GHz

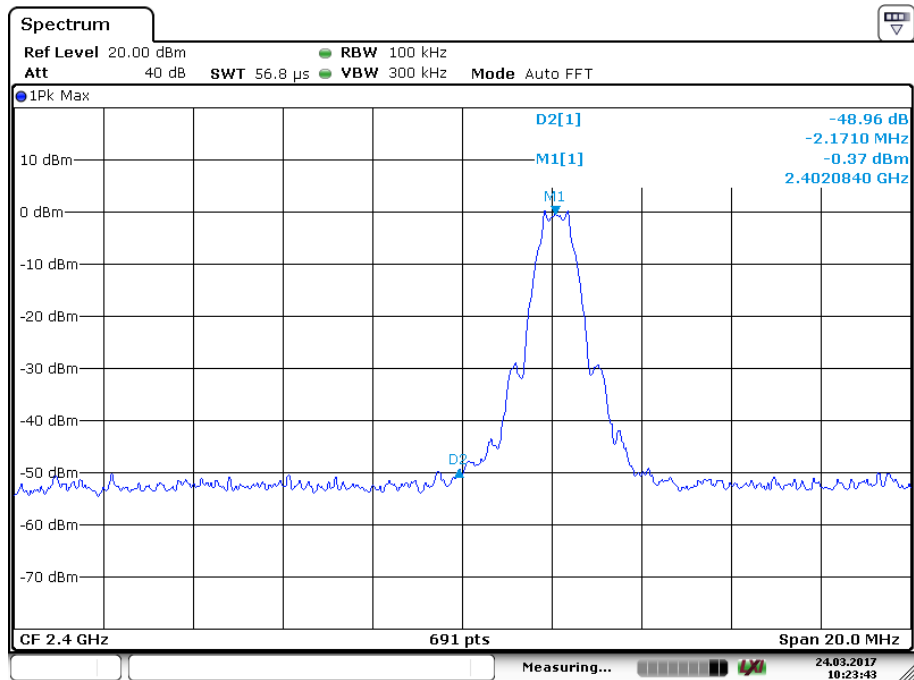

Channel 39: 2.480 GHz

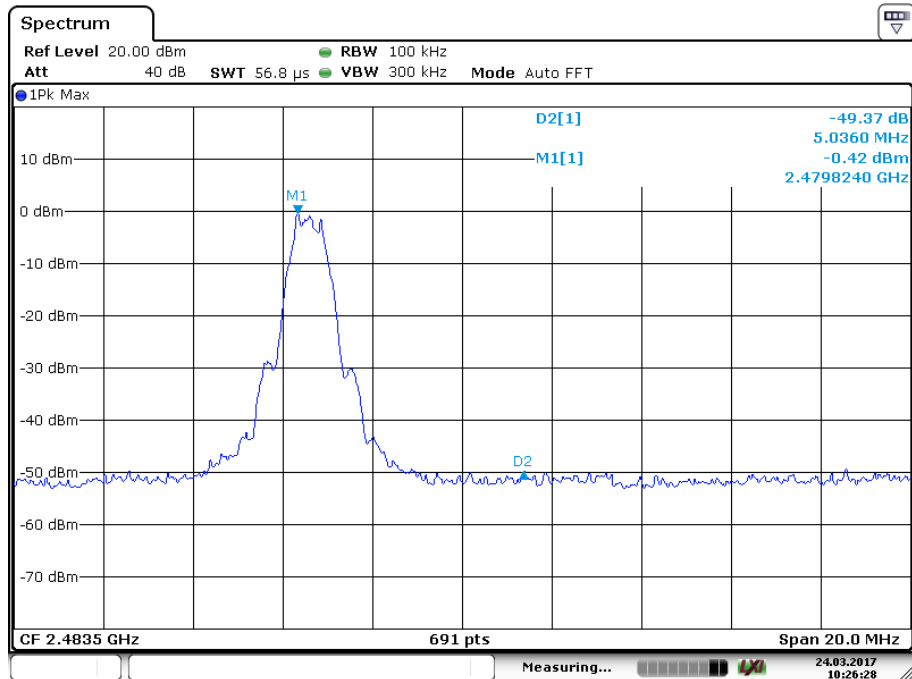

Peak Measurement

Band-edge compliance is determined by applying marker-delta method, i.e (Band-edge Plot).

(i) Lower band-edge:

Peak Resultant field strength

=Fundamental emissions (Peak value) – delta from the band-edge plot

= 91.1dB μ V/m – 48.9dB

= 42.2dB μ V/m

Average Resultant field strength

=Fundamental emissions (Average value) – delta from the band-edge plot

= 81.5dB μ V/m – 48.9dB

= 32.6dB μ V/m

(ii) Upper band-edge:

Peak Resultant field strength

=Fundamental emissions (Peak value) – delta from the band-edge plot

= 90.1dB μ V/m – 49.3dB

= 40.8dB μ V/m

AV Resultant field strength

=Fundamental emissions (Average value) – delta from the band-edge plot

= 82.1dB μ V/m – 49.3dB


= 32.8dB μ V/m

The Peak resultant field strength meets the general radiated emission Peak limit 74dB μ V/m, so it complies with the requirement.

The AV resultant field strength meets the general radiated emission AV limit 54dB μ V/m, so it complies with the requirement.

4.5 Conducted Emissions at Mains Terminals

Test Configuration:

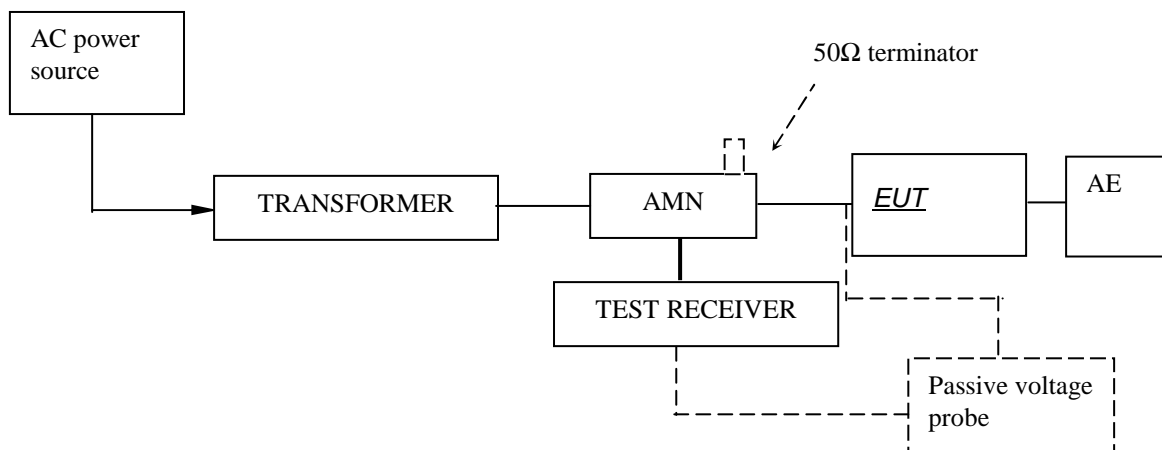

Test Setup and Procedure

Test was performed according to ANSI C63.10 Clause 6.2. The EUT was set to achieve the maximum emission level. The mains terminal disturbance voltage was measured with the EUT in a shielded room. The EUT was connected to AC power source through an Artificial Mains Network which provides a 50Ω linear impedance. Artificial hand is used if appropriate (for handheld apparatus). The load/control terminal disturbance voltage was measured with passive voltage probe if appropriate.

The table-top EUT was placed on a 0.8m high non-metallic table above earthed ground plane (Ground Reference Plane). And for floor standing EUT, was placed on a 10mm high non-metallic supported on GRP. The EUT keeps a distance of at least 0.8m from any other of the metallic surface. The Artificial Mains Network is situated at a distance of 0.8m from the EUT.

During the test, mains lead of EUT excess 0.8m was folded back and forth parallel to the lead so as to form a horizontal bundle with a length between 0.3m and 0.4m.

The bandwidth of test receiver was set at 9 kHz. The frequency range from 150 kHz to 30MHz was checked.

Pre-test in the three channels: 2402MHz, 2440MHz and 2480MHz and found the conducted emission on 2440MHz was the worst case, so below test data was for 2440MHz.



Report No.: 170208032GZU-001

Issued: 2017-3-24

Test Data

At main terminal: Pass

Tested Wire: Live

Operation Mode: Operate at 2440MHz Continuous transmit


EDIT PEAK LIST (Final Measurement Results)				
Trace1:	FCC15QP			
Trace2:	FCC15AV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL	dBμV	DELTA LIMIT dB
2 Average	434 kHz	38.64	L1	-8.52
1 Quasi Peak	434 kHz	45.26	L1	-11.91
2 Average	1.05 MHz	26.31	L1	-19.68
1 Quasi Peak	178 kHz	44.77	L1	-19.80
2 Average	178 kHz	32.97	L1	-21.60
1 Quasi Peak	990 kHz	34.16	L1	-21.83
1 Quasi Peak	2.574 MHz	32.75	L1	-23.24

Tested Wire: Neutral


Operation Mode: Operate at 2440MHz Continuous transmit

EDIT PEAK LIST (Final Measurement Results)				
Trace1:		FCC15QP		
Trace2:		FCC15AV		
Trace3:		---		
TRACE	FREQUENCY	LEVEL dBμV		DELTA LIMIT dB
2 Average	434 kHz	37.42	L1	-9.74
2 Average	418 kHz	36.76	L1	-10.71
1 Quasi Peak	434 kHz	43.36	L1	-13.81
1 Quasi Peak	418 kHz	41.01	L1	-16.47
1 Quasi Peak	158 kHz	45.93	L1	-19.63
2 Average	754 kHz	23.92	L1	-22.07

Emission Curve Tested Wire: Live

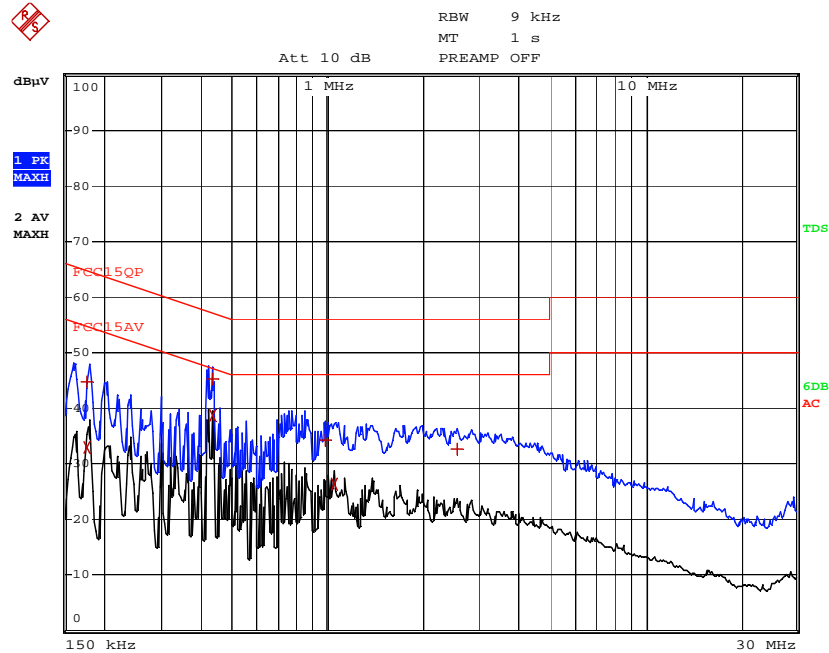

Tested Wire: Neutral

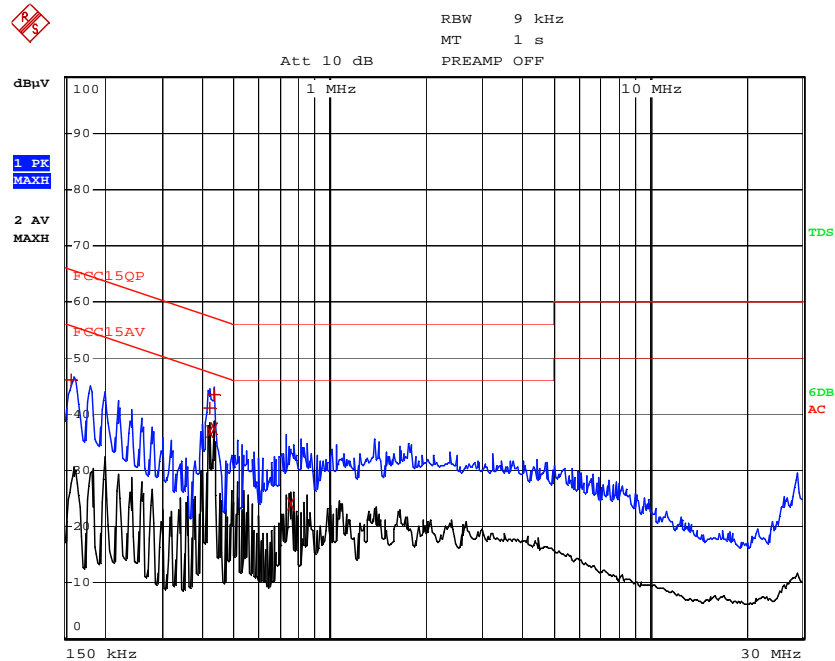



Report No.: 170208032GZU-001
Issued: 2017-3-24

5.0 Test Equipment List

Equipment No.	Equipment	Model	Manufacturer	Cal. Due date (YYYY-MM-DD)	Calibration Interval
EM030-04	3m Semi-Anechoic Chamber	9×6×6 m ³	ETS•LINDGRE N	2017/5/9	1Y
EM031-02	EMI Test Receiver (9 kHz~7 GHz)	R&S ESR7	R&S	2017/6/7	1Y
EM031-03	Signal and Spectrum Analyzer (10 Hz~40 GHz)	R&S FSV40	R&S	2017/6/3	1Y
EM011-04	Loop antenna (9 kHz-30 MHz)	HFH2-Z2	R&S	2017/6/6	1Y
EM061-03	TRILOG Super Broadband test Antenna (30 MHz-1.5 GHz) (TX)	VULB 9161	SCHWARZBECK	2017/6/6	1Y
EM033-01	TRILOG Super Broadband test Antenna(30 MHz-3 GHz) (RX)	VULB 9163	SCHWARZBECK	2017/9/2	1Y
EM033-02	Bouble-Ridged Waveguide Horn Antenna (800 MHz-18 GHz)(RX)	R&S HF907	R&S	2017/6/6	1Y
EM033-03	High Frequency Antenna & preamplifier(18 GHz~26.5 GHz) (RX)	R&S SCU-26	R&S	2017/4/1	1Y
EM033-04	High Frequency Antenna & preamplifier (26 GHz-40 GHz)	R&S SCU-40	R&S	2017/4/1	1Y
EM031-02-01	Coaxial cable(9 kHz-1 GHz)	N/A	R&S	2017/5/30	1Y
EM033-02-02	Coaxial cable(1 GHz-18 GHz)	N/A	R&S	2017/5/30	1Y
EM033-04-02	Coaxial cable(18 GHz~40 GHz)	N/A	R&S	2017/4/1	1Y
EM031-01	Signal Generator (9 kHz~6 GHz)	SMB100A	R&S	2017/6/11	1Y
SZ180-10	Signal Generator (10MHz-40GHz)	68369B	Wiltron	2017/5/23	1Y
EM040-01	Band Reject/Notch Filter	WRHFV	Wainwright	N/A	1Y
EM040-02	Band Reject/Notch Filter	WRCGV	Wainwright	N/A	1Y
EM040-03	Band Reject/Notch Filter	WRCGV	Wainwright	N/A	1Y
EM022-03	2.45 GHz Filter	BRM50702	Micro-Tronics	2017/5/9	1Y
SA016-16	Programmable Temperature & Humidity Test Chamber	MHU-800LJ	TERCHY	2017/10/26	1Y
SA012-74	Digital Multimeter	FLUKE175	FLUKE	2017/10/12	1Y
EM010-01	Regulated DC Power supply	PAB-3003A	GUANHUA	N/A	1Y
SA040-22	Regulated DC Power supply	IT6721	ITECH	2017/9/22	1Y
EM084-06	Audio Analyzer	8903B	HP	2017/3/29	1Y
EM084-07	Modulation Analyzer	8901B	HP	2017/6/5	1Y

Equipment No.	Equipment	Model	Manufacturer	Cal. Due date (YYYY-MM-DD)	Calibration Interval
EM080-05	EMI receiver	ESCI	R&S	2017/7/27	1Y
EM006-05	LISN	ENV216	R&S	2017/9/28	1Y
EM006-06	LISN	ENV216	R&S	2017/9/16	1Y
EM006-06-01	Coaxial cable	/	R&S	2017/4/11	1Y
EM004-04	EMC shield Room	8m×3m×3m	Zhongyu	2018/1/25	1Y