



SPORTON International Inc.


No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

Project No: CB10506165

Maximum Permissible Exposure Report

Applicant's company	Cisco Systems, Inc.
Applicant Address	170 West Tasman Drive San Jose, CA 95134 USA
FCC ID	UDX-60043010
Manufacturer's company	Accton Technology Corporation
Manufacturer Address	1, Creation Road 3, Hsinchu Science Park Hsinchu 30077, Taiwan R.O.C.

Product Name	802.11a/b/g/n/ac Wireless Access Point
Brand Name	CISCO
Model Name	MR84-HW
Ref. Standard(s)	47 CFR FCC Part 2 Subpart J, section 2.1091
Received Date	Jan. 27, 2016
Final Test Date	Jun. 02, 2016
Submission Type	Original Equipment

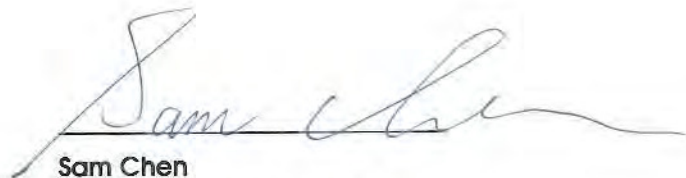

Sam Chen

SPORTON INTERNATIONAL INC.



Testing Laboratory
1190

Table of Contents

1. GENERAL DESCRIPTION.....	1
1.1. EUT General Information	1
1.2. Testing Location.....	1
2. MAXIMUM PERMISSIBLE EXPOSURE.....	2
2.1. Limit of Maximum Permissible Exposure	2
2.2. MPE Calculation Method	2
2.3. Calculated Result and Limit.....	3

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA641615	Rev. 01	Initial issue of report	Jul. 13, 2016

1. GENERAL DESCRIPTION

1.1. EUT General Information

RF General Information			
Evaluation Mode	Frequency Range (MHz)	Operating Frequency (MHz)	Modulation Type
2.4GHz WLAN	2400-2483.5	2412-2462	802.11b: DSSS (DBPSK, DQPSK, CCK) 802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
5GHz WLAN	5150-5250 5725-5850	5180-5240 5745-5825	802.11a/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
Bluetooth	2400-2483.5	2402-2480	LE: DSSS (GFSK)

1.2. Testing Location

Testing Location		
☐	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-327-0973
☒	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

2. MAXIMUM PERMISSIBLE EXPOSURE

2.1. Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

2.2. MPE Calculation Method

The MPE was calculated at 27.5 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

2.3. Calculated Result and Limit

Exposure Environment: General Population / Uncontrolled Exposure

For 5GHz Band:

For Radio 2 :

Antenna Type : Panel Antenna

Conducted Power for IEEE 802.11a: 25.98 dBm

Distance (cm)	Test Freq. (MHz)	Antenna Gain (dBi)	Antenna Gain (numeric)	The maximum combined Average Output Power		Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
				(dBm)	(mW)			
27.5	5745	10.00	10.0000	25.9846	396.7020	0.417647	1	Complies

For Radio 3 :

Antenna Type : Metal Antenna

Conducted Power for IEEE 802.11ac MCS0/Nss1 (VHT20): 21.46dBm

Distance (cm)	Test Freq. (MHz)	Antenna Gain (dBi)	Antenna Gain (numeric)	Average Output Power		Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
				(dBm)	(mW)			
27.5	5200	5.40	3.4674	21.4600	139.9587	0.051091	1	Complies

For 2.4GHz Band:

For Radio 1:

Antenna Type : Panel Antenna

Conducted Power for IEEE 802.11ac MCS0/Nss1 (VHT40): 20.07dBm

Distance (cm)	Test Freq. (MHz)	Directional Gain (dBi)	Antenna Gain (numeric)	The maximum combined Average Output Power		Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
				(dBm)	(mW)			
27.5	2437	15.92	39.0947	20.0736	101.7093	0.418623	1	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$

For Radio 3:

Antenna Type : Metal Antenna

Conducted Power for IEEE 802.11g: 24.92 dBm

Distance (cm)	Test Freq. (MHz)	Antenna Gain (dBi)	Antenna Gain (numeric)	Average Output Power		Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
				(dBm)	(mW)			
27.5	2437	6.30	4.2658	24.9200	310.4560	0.139426	1	Complies

For Bluetooth function:

For Radio 4 :

Antenna Type : Metal Antenna

Conducted Power for Bluetooth 4.0: 3.39 dBm

Distance (cm)	Test Freq. (MHz)	Antenna Gain (dBi)	Antenna Gain (numeric)	Average Output Power		Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
				(dBm)	(mW)			
27.5	2402	7.30	5.3703	3.39	2.1827	0.0012	1	Complies

Conclusion:

Both of the Radio 1 (2.4GHz WLAN function) + Radio 2 (5GHz WLAN function) + Radio 3 (2.4GHz WLAN function) + Bluetooth can transmit simultaneously, the formula of calculated the MPE is:

$$CPD1 / LPD1 + CPD2 / LPD2 +etc. < 1$$

CPD = Calculation power density

LPD = Limit of power density

Therefore, the worst-case situation is $0.418623 / 1 + 0.417647 / 1 + 0.139426 / 1 + 0.0012 / 1 = 0.9768$, which is less than "1". This confirmed that the device complies.

Conclusion:

Both of the Radio 1 (2.4GHz WLAN function) + Radio 2 (5GHz WLAN function) + Radio 3 (5GHz WLAN function) + Bluetooth can transmit simultaneously, the formula of calculated the MPE is:

$$CPD1 / LPD1 + CPD2 / LPD2 +etc. < 1$$

CPD = Calculation power density

LPD = Limit of power density

Therefore, the worst-case situation is $0.418623 / 1 + 0.417647 / 1 + 0.051091 / 1 + 0.0012 / 1 = 0.8884$, which is less than "1". This confirmed that the device complies.