

Appendix B

Detailed Test Results

1. GSM
GSM 850 for Head & Body
GSM 1900 for Head & Body
2. WCDMA
WCDMA V for Head & Body
3. LTE
LTE Band 5 for Head & Body
LTE Band 12 for Head & Body
4. WIFI
WIFI 2.4G for Head & Body
WIFI 5G for Head & Body
5. BT
BT for Head & Body
6. NFC
NFC for Body

Test Laboratory: SGS-SAR Lab

GSM850 GPRS 3TX 190CH Right cheek

DUT: Mobile phone; Serial: HQ62B20636

Communication System: UID 0, GPRS/EGPRS Mode(3up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.77

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 39.956$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.73, 10.73, 10.73); Calibrated: 2022-11-20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: SAM5; Type: SAM; Serial: 1481
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.440 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.804 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.488 W/kg

SAR(1 g) = 0.360 W/kg; SAR(10 g) = 0.266 W/kg

Maximum value of SAR (measured) = 0.440 W/kg

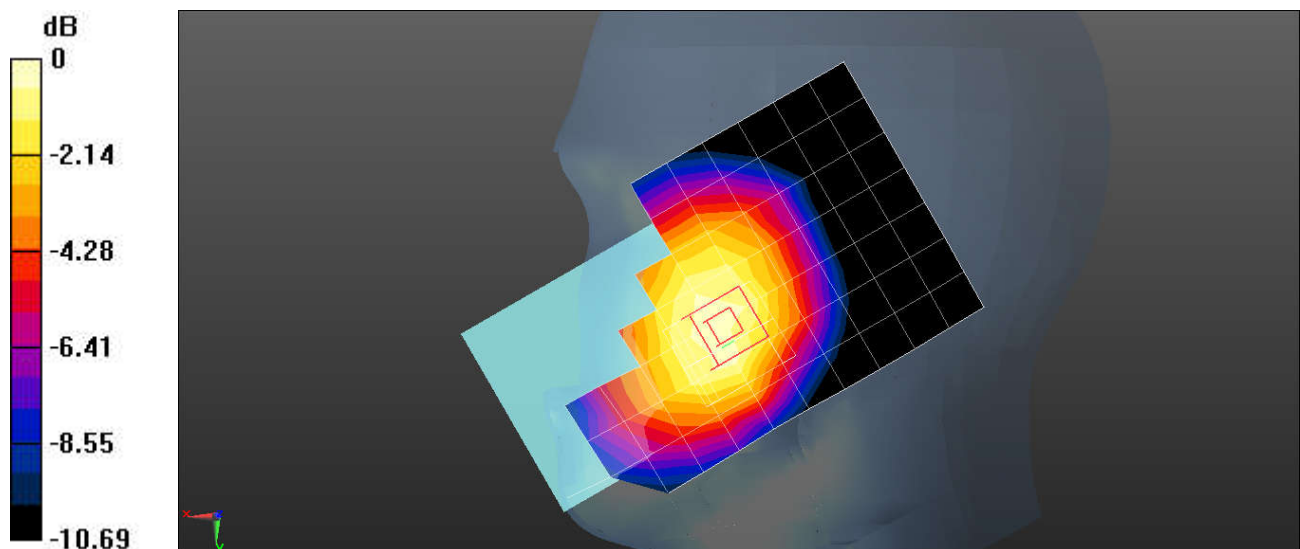

Test Laboratory: SGS-SAR Lab

GSM850 GPRS 3TX 190CH Back side 10mm

DUT: Mobile phone; Serial: HQ62B20636

Communication System: UID 0, GPRS/EGPRS Mode(3up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.77

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 39.956$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.73, 10.73, 10.73); Calibrated: 2022-11-20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: SAM5; Type: SAM; Serial: 1481
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.529 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.19 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.607 W/kg

SAR(1 g) = 0.443 W/kg; SAR(10 g) = 0.328 W/kg

Maximum value of SAR (measured) = 0.550 W/kg

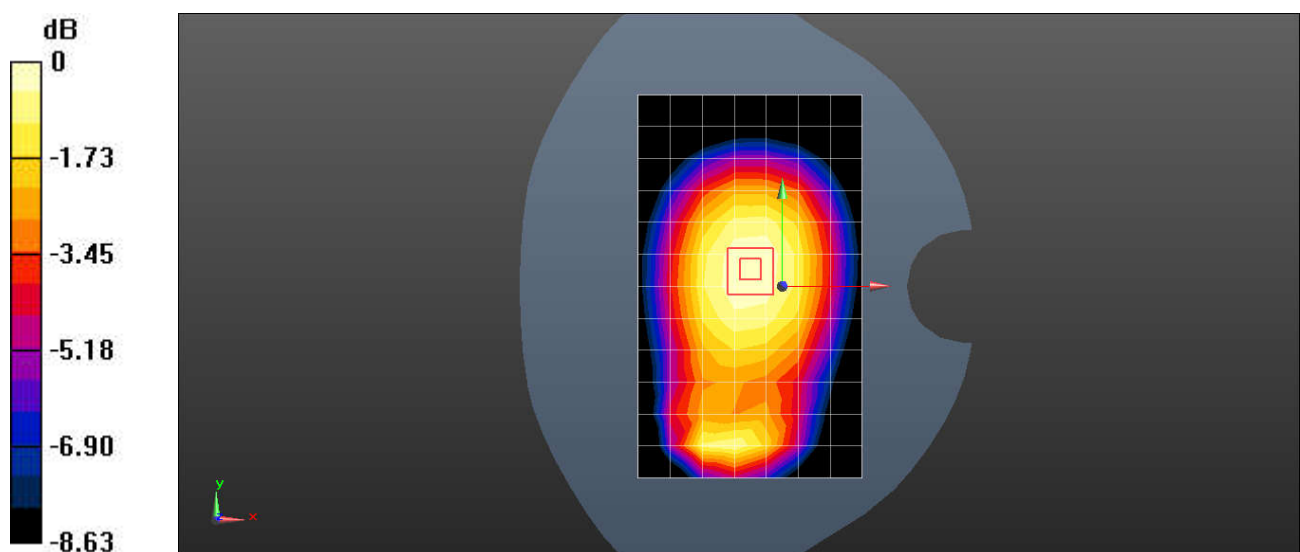

0 dB = 0.550 W/kg = -2.60 dBW/kg

Test Laboratory: SGS-SAR Lab

GSM1900 GPRS 4TX 661CH Left cheek

DUT: Mobile phone; Serial: HQ62B20636

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:2.075

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.382$ S/m; $\epsilon_r = 40.06$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.65, 8.65, 8.65); Calibrated: 2022-11-20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: SAM5; Type: SAM; Serial: 1481
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.148 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.117 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.180 W/kg

SAR(1 g) = 0.108 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.151 W/kg

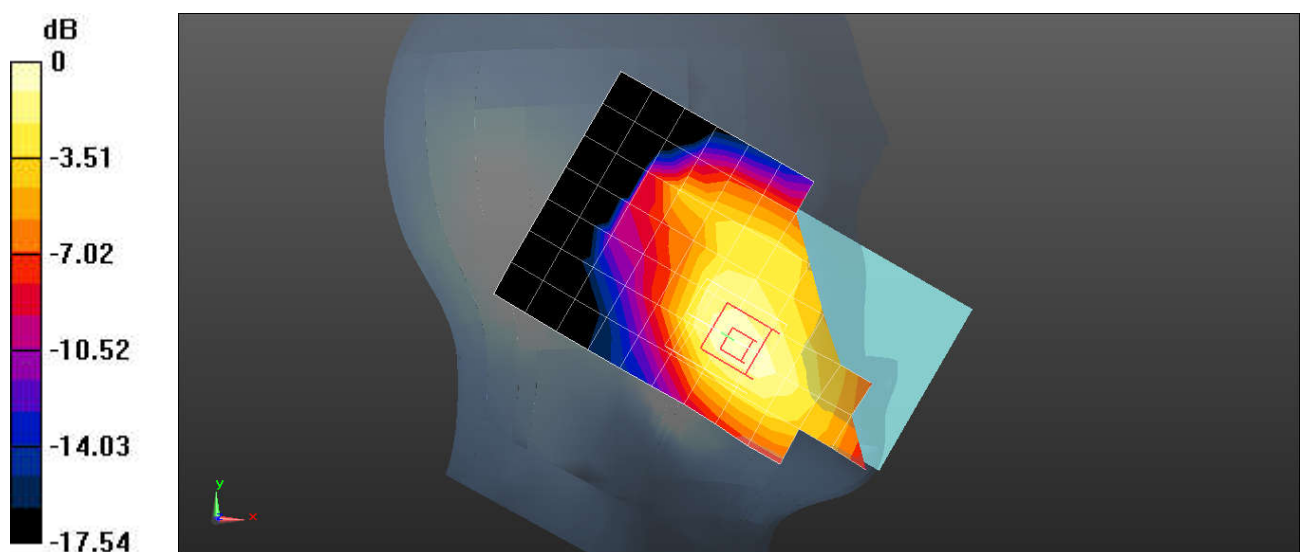

0 dB = 0.151 W/kg = -8.21 dBW/kg

Test Laboratory: SGS-SAR Lab

GSM1900 GPRS 4TX 661CH Back side 10mm

DUT: Mobile phone; Serial: HQ62B20636

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:2.075

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.382$ S/m; $\epsilon_r = 40.06$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.65, 8.65, 8.65); Calibrated: 2022-11-20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: SAM5; Type: SAM; Serial: 1481
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.466 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.469 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.563 W/kg

SAR(1 g) = 0.319 W/kg; SAR(10 g) = 0.193 W/kg

Maximum value of SAR (measured) = 0.470 W/kg

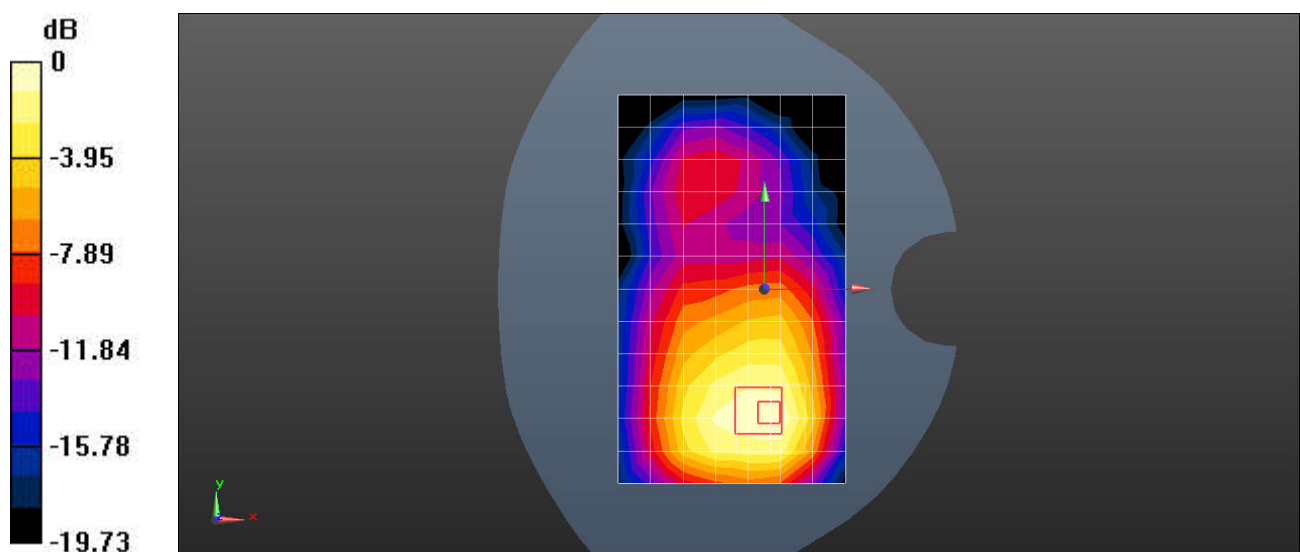

0 dB = 0.470 W/kg = -3.28 dBW/kg

Test Laboratory: SGS-SAR Lab

WCDMA V RMC 4182CH Right cheek

DUT: Mobile phone; Serial: HQ62B20636

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.907$ S/m; $\epsilon_r = 39.971$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.73, 10.73, 10.73); Calibrated: 2022-11-20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: SAM5; Type: SAM; Serial: 1481
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.354 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.485 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.393 W/kg

SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.211 W/kg

Maximum value of SAR (measured) = 0.350 W/kg

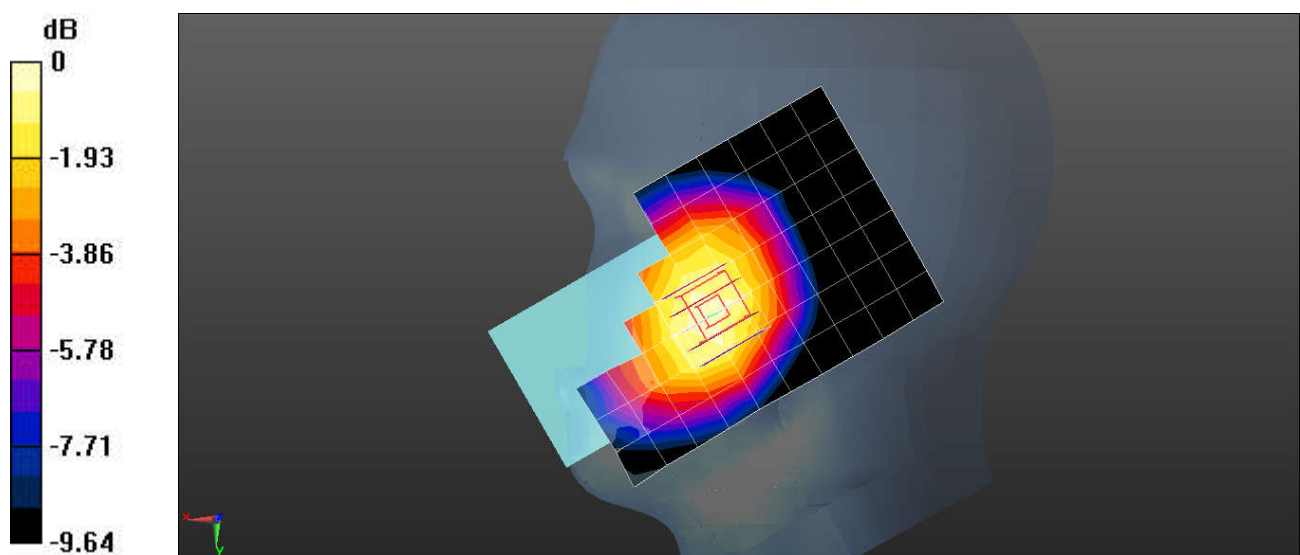

0 dB = 0.350 W/kg = -4.56 dBW/kg

Test Laboratory: SGS-SAR Lab

WCDMA V RMC 4182CH Back side 10mm

DUT: Mobile phone; Serial: HQ62B20636

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.907$ S/m; $\epsilon_r = 39.971$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.73, 10.73, 10.73); Calibrated: 2022-11-20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: SAM5; Type: SAM; Serial: 1481
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.499 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.65 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.568 W/kg

SAR(1 g) = 0.412 W/kg; SAR(10 g) = 0.305 W/kg

Maximum value of SAR (measured) = 0.510 W/kg

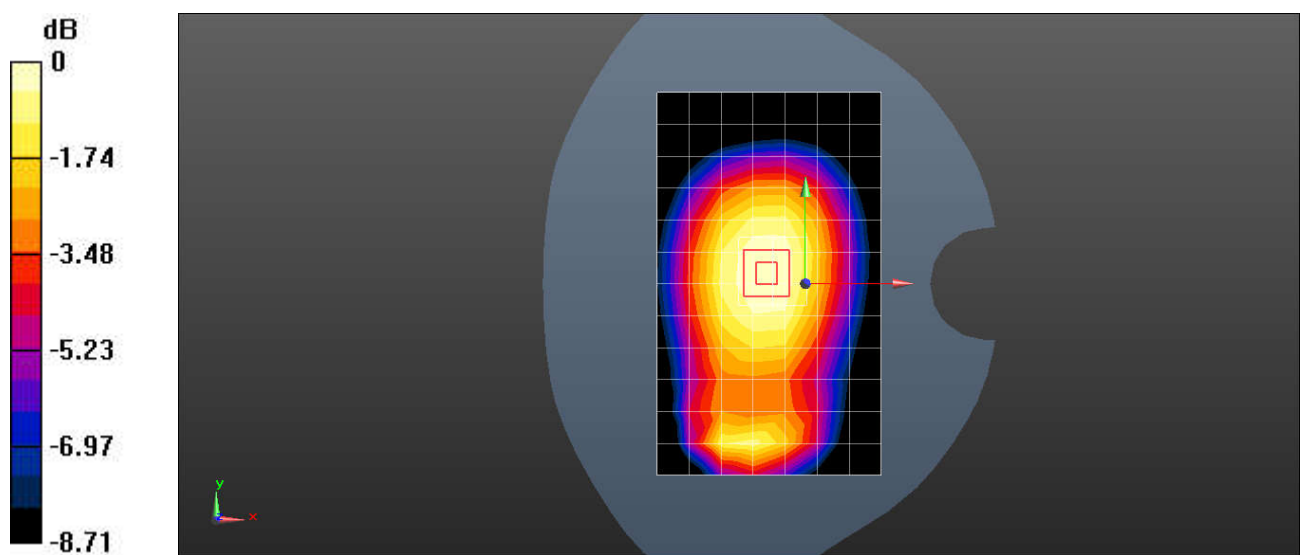

0 dB = 0.510 W/kg = -2.92 dBW/kg

Test Laboratory: SGS-SAR Lab

LTE Band 5 QPSK 10M 1RB0 20450CH Right cheek

DUT: Mobile phone; Serial: HQ62B20636

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 829$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 40.111$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.73, 10.73, 10.73); Calibrated: 2022-11-20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: SAM5; Type: SAM; Serial: 1481
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.292 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.710 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.327 W/kg

SAR(1 g) = 0.242 W/kg; SAR(10 g) = 0.177 W/kg

Maximum value of SAR (measured) = 0.294 W/kg

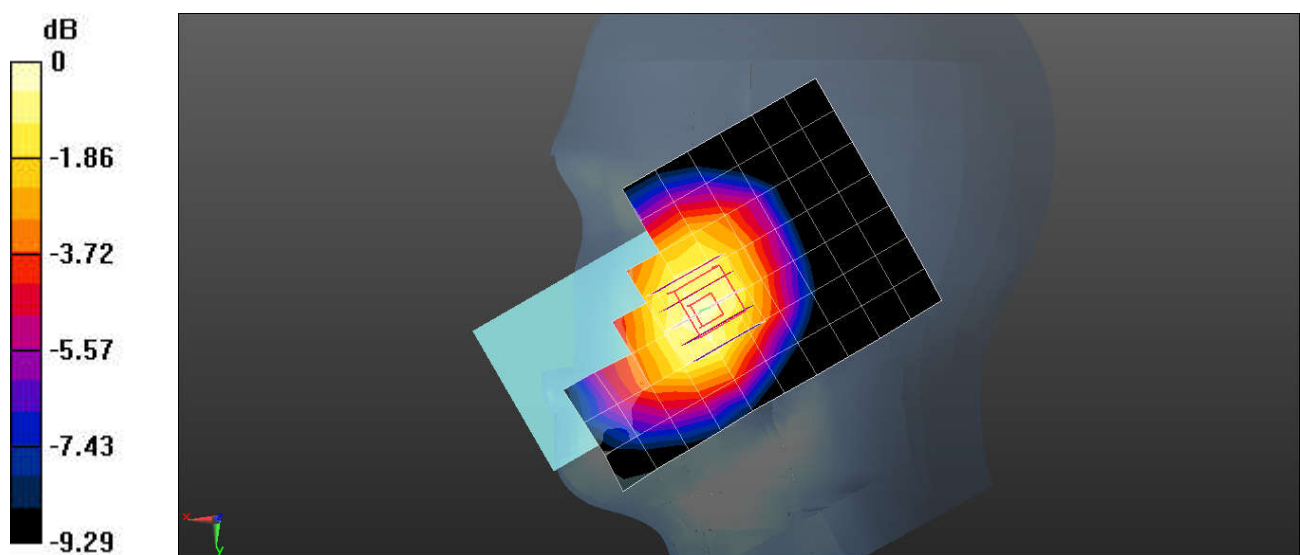

0 dB = 0.294 W/kg = -5.32 dBW/kg

Test Laboratory: SGS-SAR Lab

LTE Band 5 QPSK 10M 1RB0 20450CH Back side 10mm

DUT: Mobile phone; Serial: HQ62B20636

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 829$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 40.111$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.73, 10.73, 10.73); Calibrated: 2022-11-20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: SAM5; Type: SAM; Serial: 1481
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.410 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.02 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.464 W/kg

SAR(1 g) = 0.340 W/kg; SAR(10 g) = 0.251 W/kg

Maximum value of SAR (measured) = 0.419 W/kg

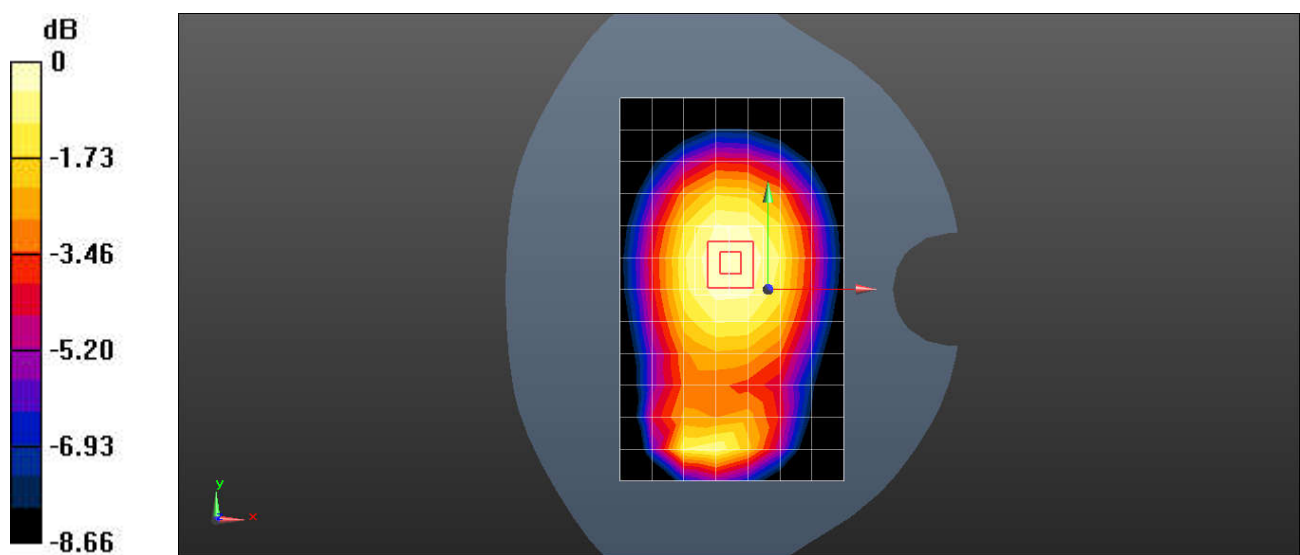

Test Laboratory: SGS-SAR Lab

LTE Band 12 QPSK 20M 1RB0 23095CH Right cheek

DUT: Mobile phone; Serial: HQ62B20636

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 43.442$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(11.13, 11.13, 11.13); Calibrated: 2022-11-20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: SAM5; Type: SAM; Serial: 1481
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.186 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.409 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.204 W/kg

SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.116 W/kg

Maximum value of SAR (measured) = 0.183 W/kg

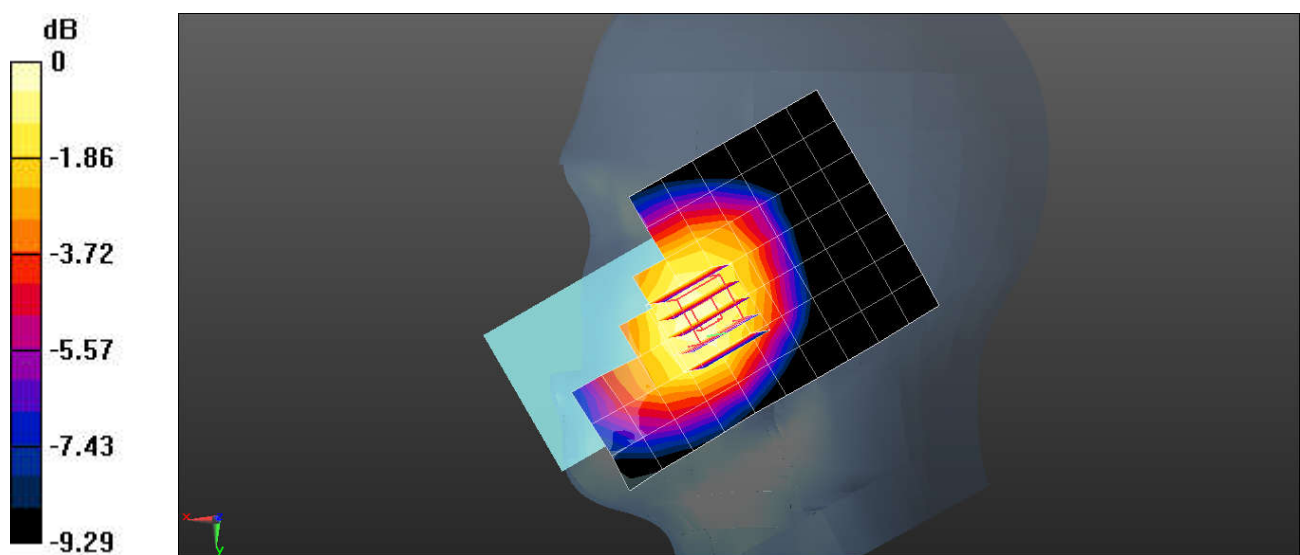

0 dB = 0.183 W/kg = -7.38 dBW/kg

Test Laboratory: SGS-SAR Lab

LTE Band 12 QPSK 10M 1RB0 23095CH Back side 10mm

DUT: Mobile phone; Serial: HQ62B20636

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 43.442$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(11.13, 11.13, 11.13); Calibrated: 2022-11-20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: SAM5; Type: SAM; Serial: 1481
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.368 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.93 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.423 W/kg

SAR(1 g) = 0.307 W/kg; SAR(10 g) = 0.229 W/kg

Maximum value of SAR (measured) = 0.381 W/kg

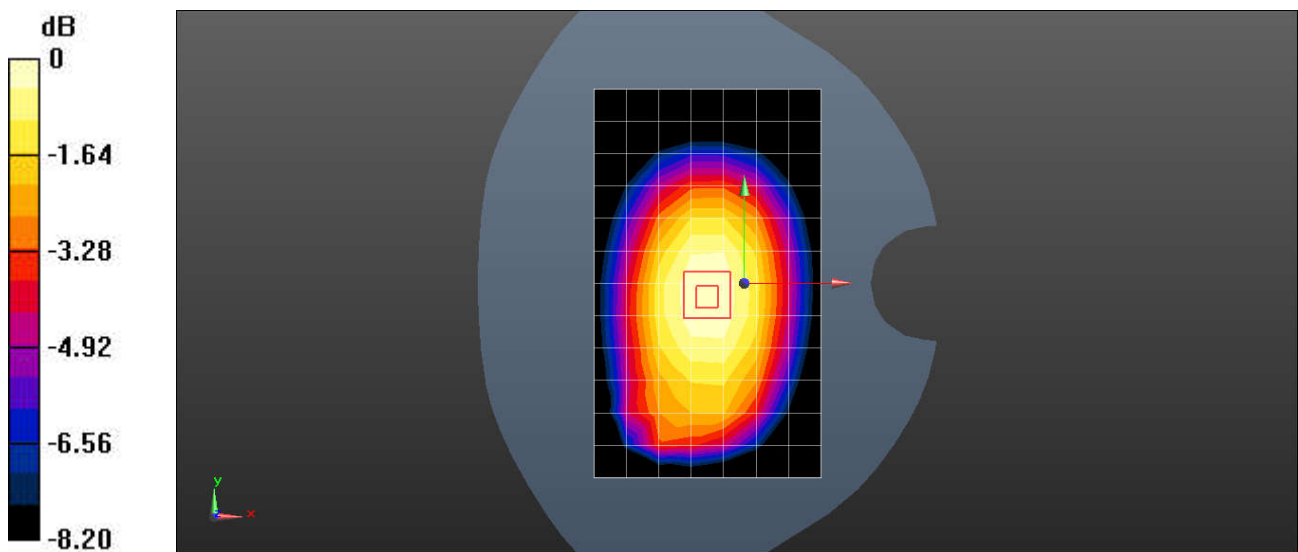

Test Laboratory: SGS-SAR Lab

WLAN2.4G 802.11b 1Mbps 1CH Right cheek

DUT: Mobile phone; Serial: HQ62B20644

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2412 MHz;Duty Cycle: 1:1.009

Medium: HSL2450;Medium parameters used: $f = 2412$ MHz; $\sigma = 1.738$ S/m; $\epsilon_r = 38.59$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.98, 6.98, 6.98); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2022-04-27
- Phantom: SAM3; Type: SAM; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.310 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.089 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.444 W/kg

SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.323 W/kg

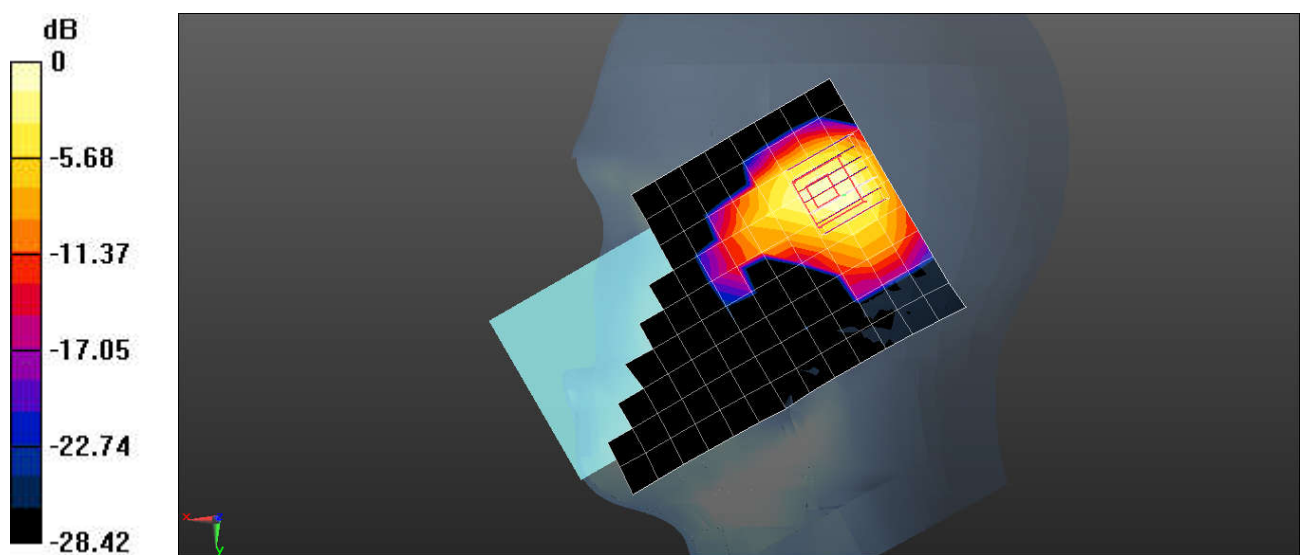

0 dB = 0.323 W/kg = -4.91 dBW/kg

Test Laboratory: SGS-SAR Lab

WLAN2.4G 802.11b 1Mbps 1CH Back side 10mm

DUT: Mobile phone; Serial: HQ62B20644

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2412 MHz;Duty Cycle: 1:1.009

Medium: HSL2450;Medium parameters used: $f = 2412$ MHz; $\sigma = 1.738$ S/m; $\epsilon_r = 38.59$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.98, 6.98, 6.98); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2022-04-27
- Phantom: SAM3; Type: SAM; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.185 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.491 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.272 W/kg

SAR(1 g) = 0.118 W/kg; SAR(10 g) = 0.053 W/kg

Maximum value of SAR (measured) = 0.210 W/kg

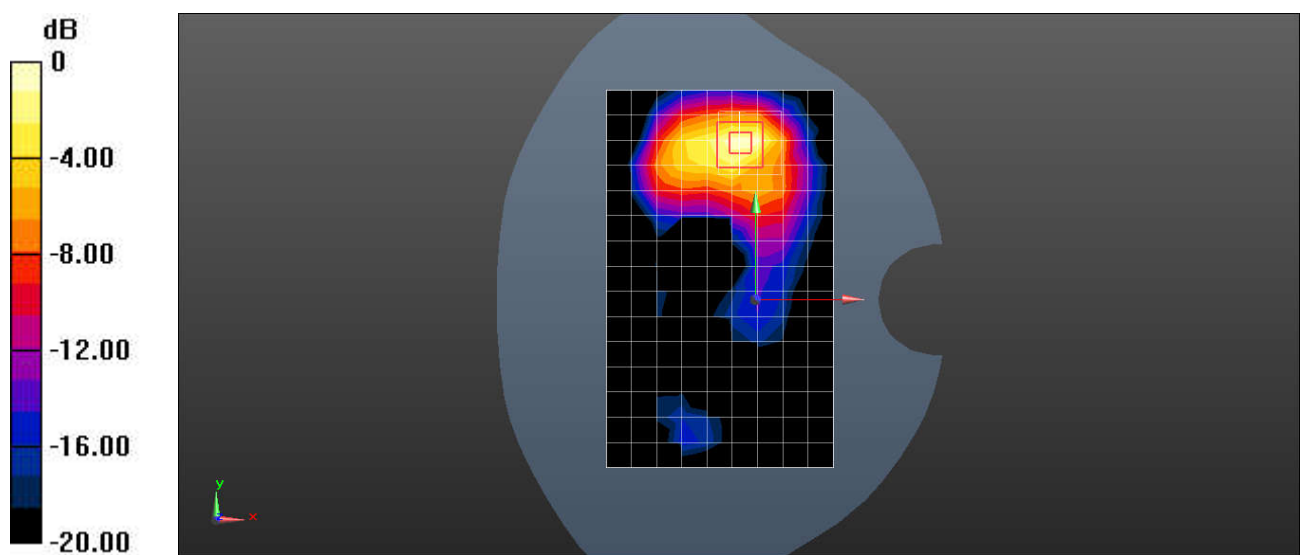

Test Laboratory: SGS-SAR Lab

WLAN5G 802.11ac 80M 58CH Right tilted 0mm

DUT: Mobile phone; Serial: HQ62B20644

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5290 MHz;Duty Cycle: 1:1.037

Medium: HSL5G;Medium parameters used: $f = 5290$ MHz; $\sigma = 4.782$ S/m; $\epsilon_r = 36.427$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(5.02, 5.02, 5.02); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2022-04-27
- Phantom: SAM3; Type: SAM; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (12x20x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.298 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.5330 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.639 W/kg

SAR(1 g) = 0.159 W/kg; SAR(10 g) = 0.039 W/kg

Maximum value of SAR (measured) = 0.395 W/kg

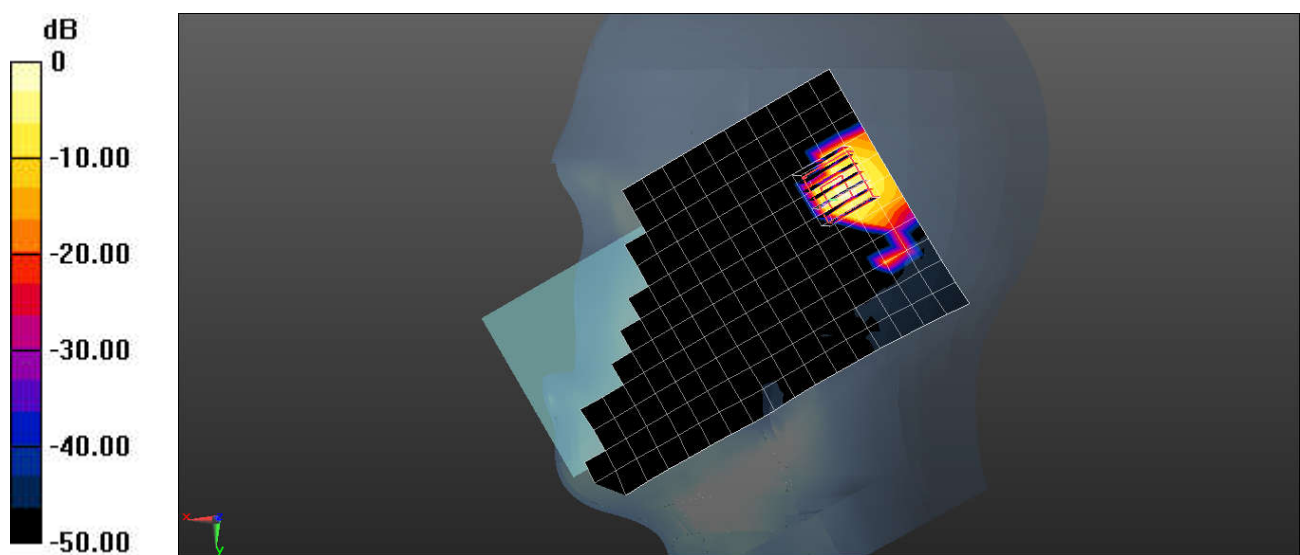

0 dB = 0.395 W/kg = -4.03 dBW/kg

Test Laboratory: SGS-SAR Lab

WLAN5G 802.11ac 80M 106CH Right tilted 0mm

DUT: Mobile phone; Serial: HQ62B20644

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5530 MHz;Duty Cycle: 1:1.037

Medium: HSL5G;Medium parameters used: $f = 5530 \text{ MHz}$; $\sigma = 5.069 \text{ S/m}$; $\epsilon_r = 35.794$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(4.43, 4.43, 4.43); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2022-04-27
- Phantom: SAM3; Type: SAM; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (12x20x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 0.477 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 2.193 V/m ; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.839 W/kg

SAR(1 g) = 0.208 W/kg ; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.512 W/kg

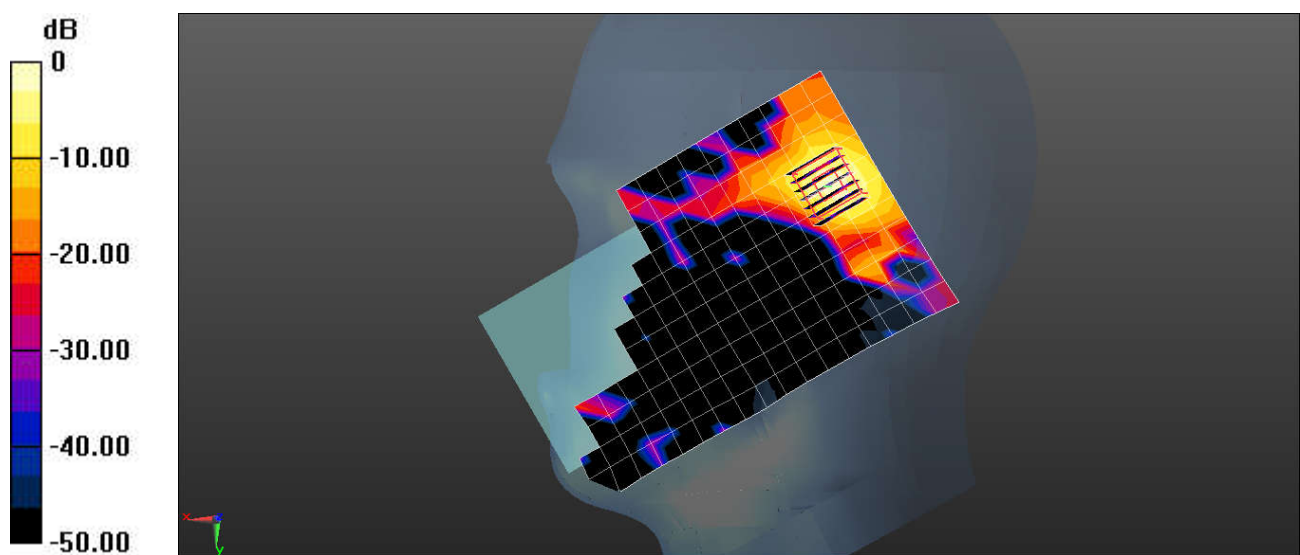

0 dB = 0.512 W/kg = -2.91 dBW/kg

Test Laboratory: SGS-SAR Lab

WLAN5G 802.11ac 80M 155CH Right tilted 0mm

DUT: Mobile phone; Serial: HQ62B20644

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5775 MHz;Duty Cycle: 1:1.037

Medium: HSL5G;Medium parameters used: $f = 5775$ MHz; $\sigma = 5.365$ S/m; $\epsilon_r = 35.159$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(4.55, 4.55, 4.55); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2022-04-27
- Phantom: SAM3; Type: SAM; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (12x20x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.255 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.528 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.466 W/kg

SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.294 W/kg

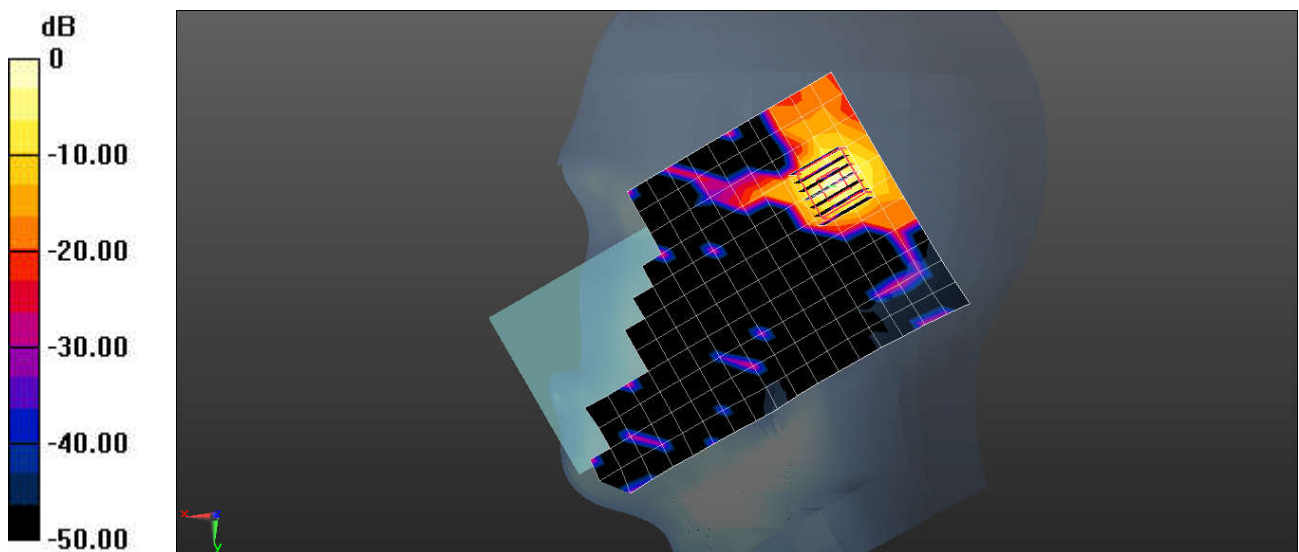

Test Laboratory: SGS-SAR Lab

WLAN5G 802.11ac 80M 58CH Back side 10mm

DUT: Mobile phone; Serial: HQ62B20644

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5290 MHz; Duty Cycle: 1:1.037

Medium: HSL5G; Medium parameters used: $f = 5290 \text{ MHz}$; $\sigma = 4.782 \text{ S/m}$; $\epsilon_r = 36.427$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(5.02, 5.02, 5.02); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2022-04-27
- Phantom: SAM3; Type: SAM; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (12x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 0.222 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 0 V/m ; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.131 W/kg ; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.330 W/kg

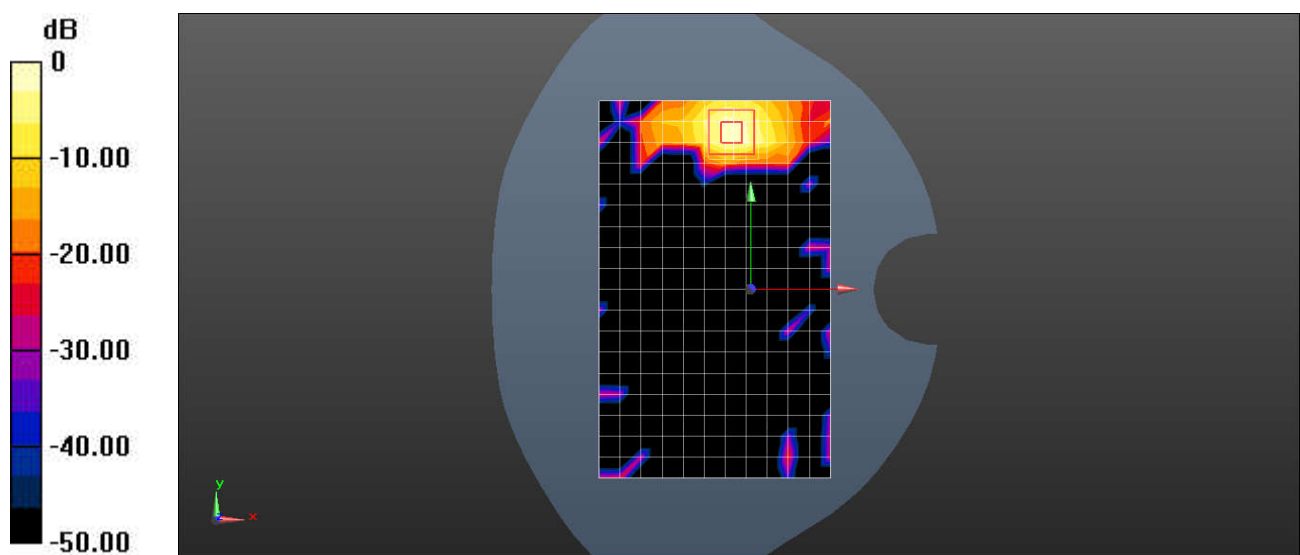

$0 \text{ dB} = 0.330 \text{ W/kg} = -4.81 \text{ dBW/kg}$

Test Laboratory: SGS-SAR Lab

WLAN5G 802.11ac 80M 106CH Back side 10mm

DUT: Mobile phone; Serial: HQ62B20644

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5530 MHz; Duty Cycle: 1:1.037

Medium: HSL5G; Medium parameters used: $f = 5530$ MHz; $\sigma = 5.069$ S/m; $\epsilon_r = 35.794$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(4.43, 4.43, 4.43); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2022-04-27
- Phantom: SAM3; Type: SAM; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (12x19x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.332 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.668 W/kg

SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.055 W/kg

Maximum value of SAR (measured) = 0.432 W/kg

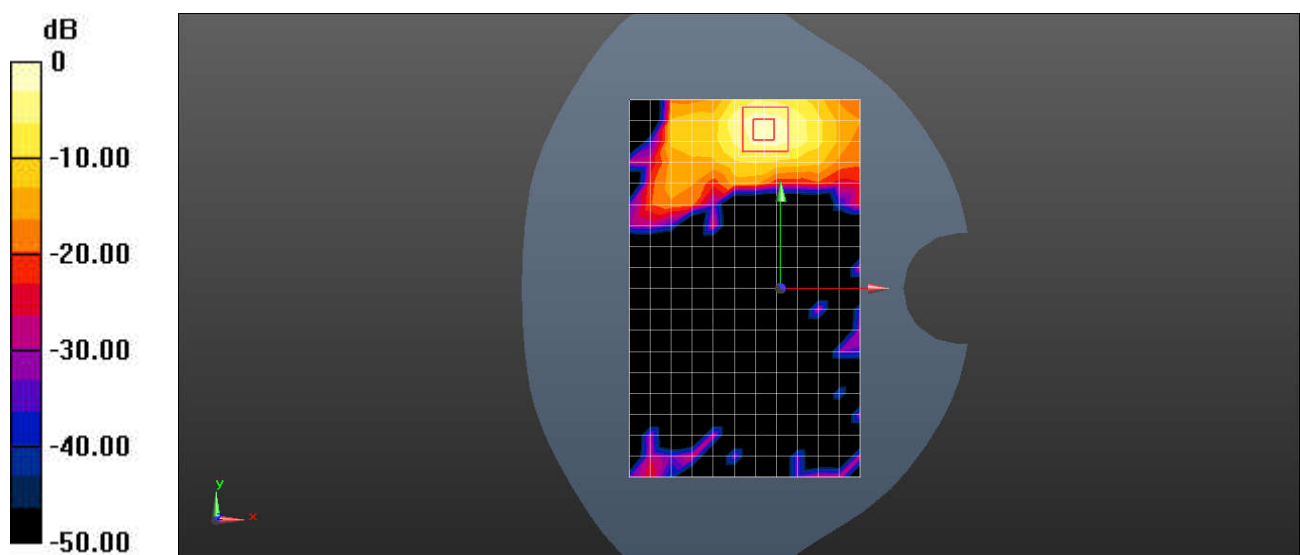

0 dB = 0.432 W/kg = -3.65 dBW/kg

Test Laboratory: SGS-SAR Lab

WLAN5G 802.11ac 80M 155CH Back side 10mm

DUT: Mobile phone; Serial: HQ62B20644

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5775 MHz;Duty Cycle: 1:1.037

Medium: HSL5G;Medium parameters used: $f = 5775 \text{ MHz}$; $\sigma = 5.365 \text{ S/m}$; $\epsilon_r = 35.159$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(4.55, 4.55, 4.55); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2022-04-27
- Phantom: SAM3; Type: SAM; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (12x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 0.303 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 0 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.518 W/kg

SAR(1 g) = 0.124 W/kg ; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.316 W/kg

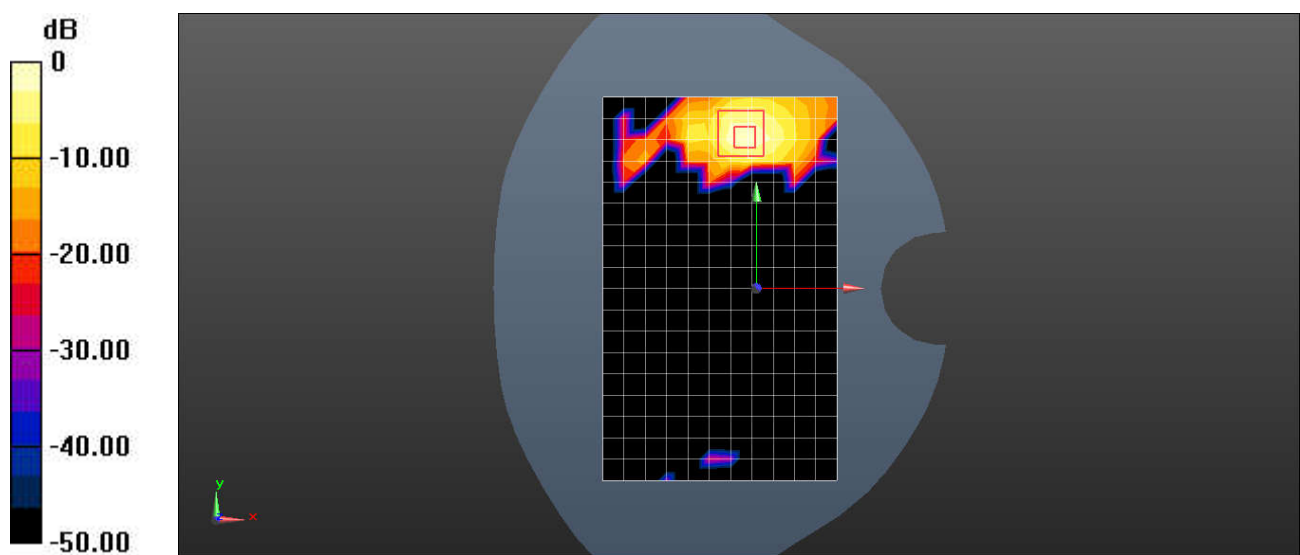

0 dB = 0.316 W/kg = -5.00 dBW/kg

Test Laboratory: SGS-SAR Lab

WLAN5G 802.11ac 80M 42CH Back side 10mm

DUT: Mobile phone; Serial: HQ62B20644

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5210 MHz;Duty Cycle: 1:1

Medium: HSL5G;Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 4.697 \text{ S/m}$; $\epsilon_r = 36.65$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(5.02, 5.02, 5.02); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2022-04-27
- Phantom: SAM3; Type: SAM; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (12x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 0.216 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 0 V/m ; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.336 W/kg

SAR(1 g) = 0.092 W/kg ; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.217 W/kg

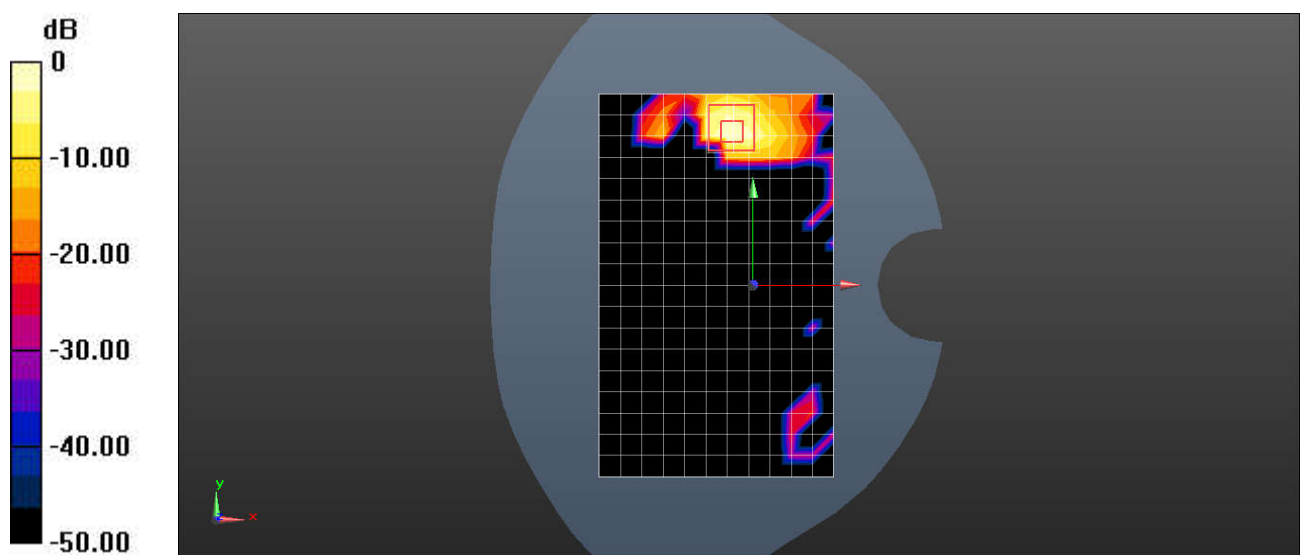

0 dB = 0.217 W/kg = -6.64 dBW/kg

Test Laboratory: SGS-SAR Lab

WLAN5G 802.11ac 80M 58CH Back side 0mm

DUT: Mobile phone; Serial: HQ62B20644

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5290 MHz;Duty Cycle: 1:1.037

Medium: HSL5G;Medium parameters used: $f = 5290$ MHz; $\sigma = 4.782$ S/m; $\epsilon_r = 36.427$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(5.02, 5.02, 5.02); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2022-04-27
- Phantom: SAM3; Type: SAM; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (12x19x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 3.27 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 6.26 W/kg

SAR(1 g) = 1.2 W/kg; SAR(10 g) = 0.233 W/kg

Maximum value of SAR (measured) = 3.75 W/kg

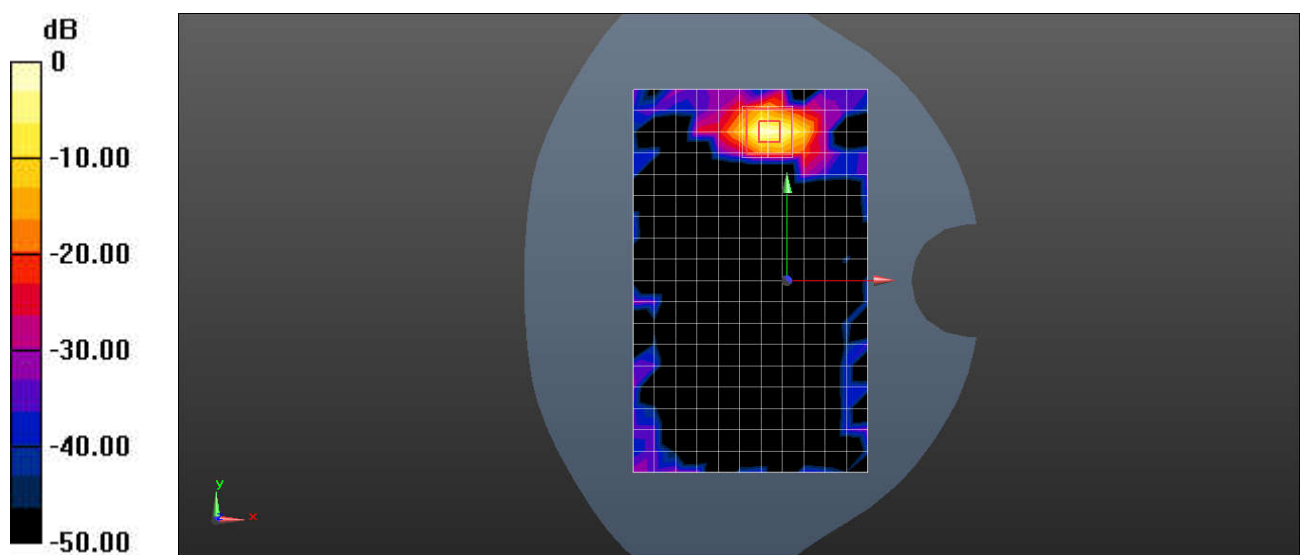

Test Laboratory: SGS-SAR Lab

WLAN5G 802.11ac 80M 106CH Back side 0mm

DUT: Mobile phone; Serial: HQ62B20644

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5530 MHz;Duty Cycle: 1:1.037

Medium: HSL5G;Medium parameters used: $f = 5530 \text{ MHz}$; $\sigma = 5.069 \text{ S/m}$; $\epsilon_r = 35.794$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(4.43, 4.43, 4.43); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2022-04-27
- Phantom: SAM3; Type: SAM; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (12x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 3.50 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 0 V/m ; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 7.67 W/kg

SAR(1 g) = 1.46 W/kg ; SAR(10 g) = 0.316 W/kg

Maximum value of SAR (measured) = 4.27 W/kg

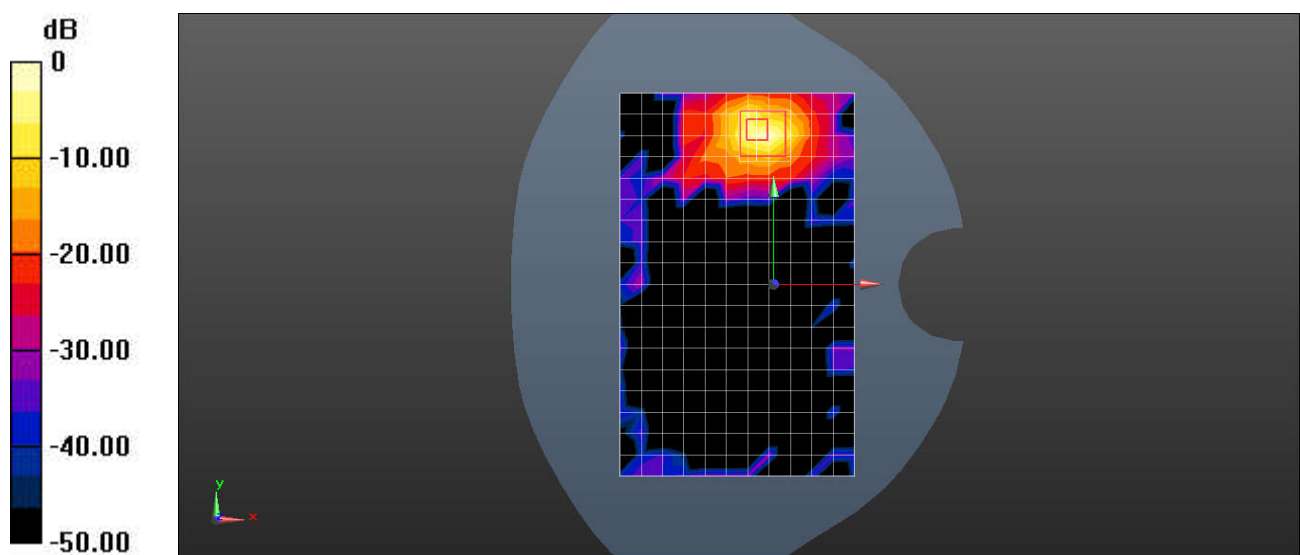

Test Laboratory: SGS-SAR Lab

Bluetooth DH5 39CH Right cheek

DUT: Mobile phone; Serial: HQ62B20644

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.301

Medium: HSL2450; Medium parameters used: $f = 2441$ MHz; $\sigma = 1.772$ S/m; $\epsilon_r = 38.379$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.98, 6.98, 6.98); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2022-04-27
- Phantom: SAM3; Type: SAM; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0454 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.127 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0840 W/kg

SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0488 W/kg

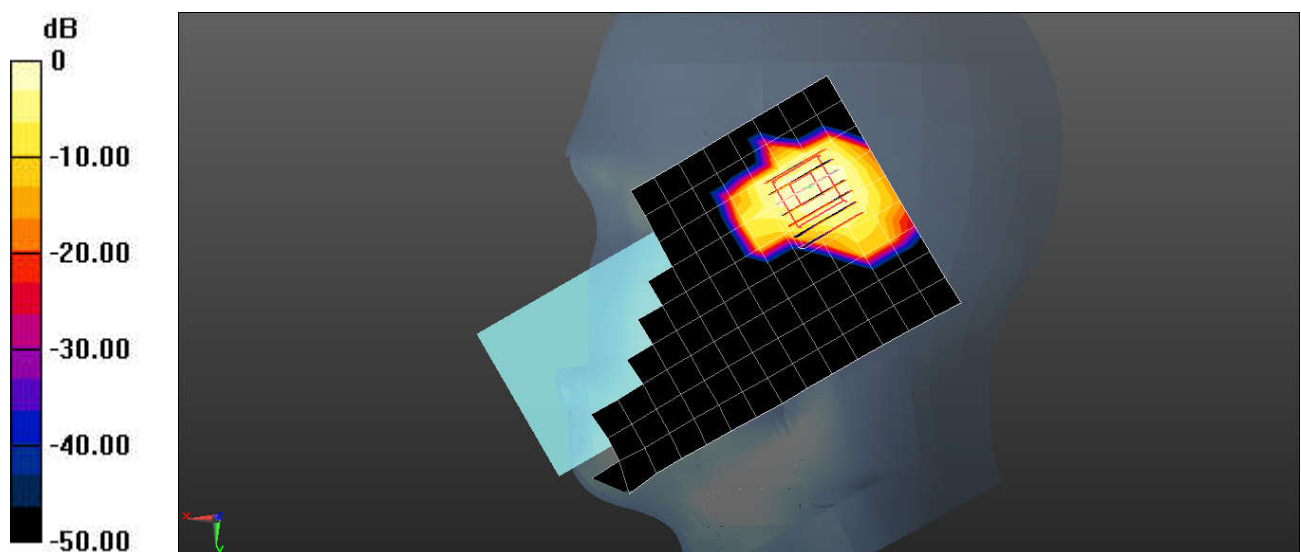

0 dB = 0.0488 W/kg = -13.12 dBW/kg

Test Laboratory: SGS-SAR Lab

Bluetooth DH5 39CH Back side 10mm

DUT: Mobile phone; Serial: HQ62B20644

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1.301

Medium: HSL2450; Medium parameters used: $f = 2480$ MHz; $\sigma = 1.818$ S/m; $\epsilon_r = 38.281$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.98, 6.98, 6.98); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1428; Calibrated: 2022-04-27
- Phantom: SAM3; Type: SAM; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0287 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0420 W/kg

SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.00799 W/kg

Maximum value of SAR (measured) = 0.0254 W/kg

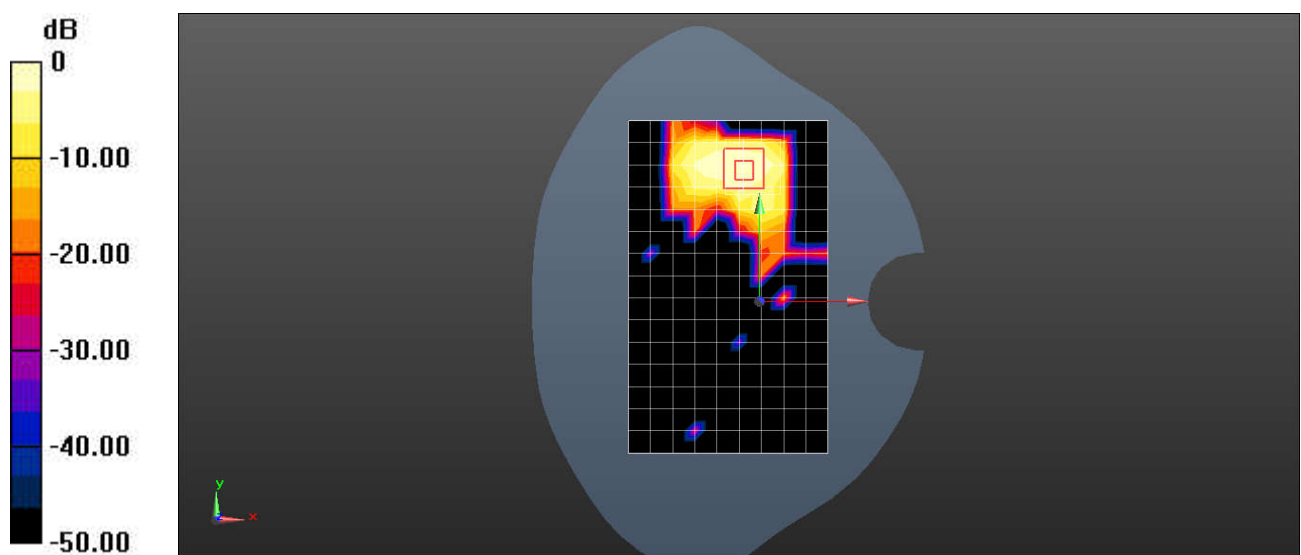

0 dB = 0.0254 W/kg = -15.95 dBW/kg

Test Laboratory: SGS-SAR Lab

NFC 13.56M Back side 0mm

DUT: Mobile phone; Serial: HQ62B20644

Communication System: UID 0, NFC (0); Frequency: 13.56 MHz; Duty Cycle: 1:1

Medium: HSL13; Medium parameters used: $f = 13.56 \text{ MHz}$; $\sigma = 0.726 \text{ S/m}$; $\epsilon_r = 54.547$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(15.3, 15.3, 15.3); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: ELI5; Type: ELI5; Serial: 1143
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Ch/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.099 W/kg


Configuration/Ch/Zoom Scan (6x7x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 0.7280 V/m ; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.156 W/kg

SAR(1 g) = 0.038 W/kg ; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.142 W/kg

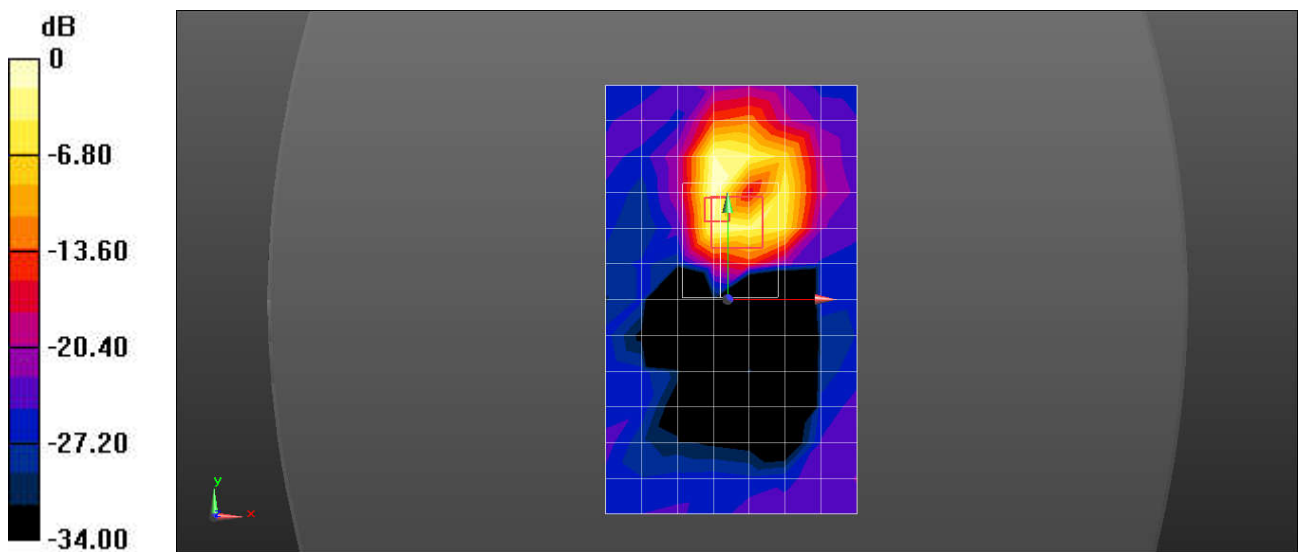

0 dB = 0.142 W/kg = -8.36 dBW/kg