

Appendix B

Detailed Test Results

1. GSM
GSM850 for Head & Body
GSM1900 for Head & Body
2. WCDMA
WCDMA Band II for Head & Body
WCDMA Band IV for Head & Body
WCDMA Band V for Head & Body
3. LTE
LTE Band 12 for Head & Body
LTE Band 25(Band2) for Head & Body
LTE Band 26(Band5) for Head & Body
LTE Band 30 for Head & Body
LTE Band 66(Band4) for Head & Body
LTE Band 71 for Head & Body
4. WIFI
WIFI 2.4G for Head & Body
WIFI 5G for Head & Body
5. BT
BT for Head & Body

Test Laboratory: SGS-SAR Lab

SL201D GSM850 GSM 190CH Right Cheek

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, GSM Only Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.887$ S/m; $\epsilon_r = 40.787$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.02, 10.02, 10.02); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.243 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.142 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.268 W/kg

SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.161 W/kg

Maximum value of SAR (measured) = 0.248 W/kg

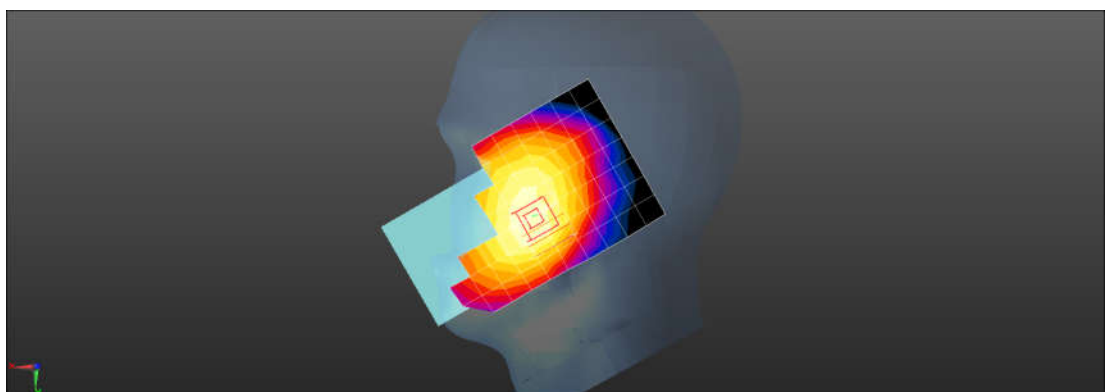

0 dB = 0.248 W/kg = -6.06 dBW/kg

Test Laboratory: SGS-SAR Lab

SL201D GSM850 GSM 190CH Back Side 15mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, GSM Only Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.887$ S/m; $\epsilon_r = 40.787$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.02, 10.02, 10.02); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.369 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.32 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.393 W/kg

SAR(1 g) = 0.303 W/kg; SAR(10 g) = 0.236 W/kg

Maximum value of SAR (measured) = 0.361 W/kg

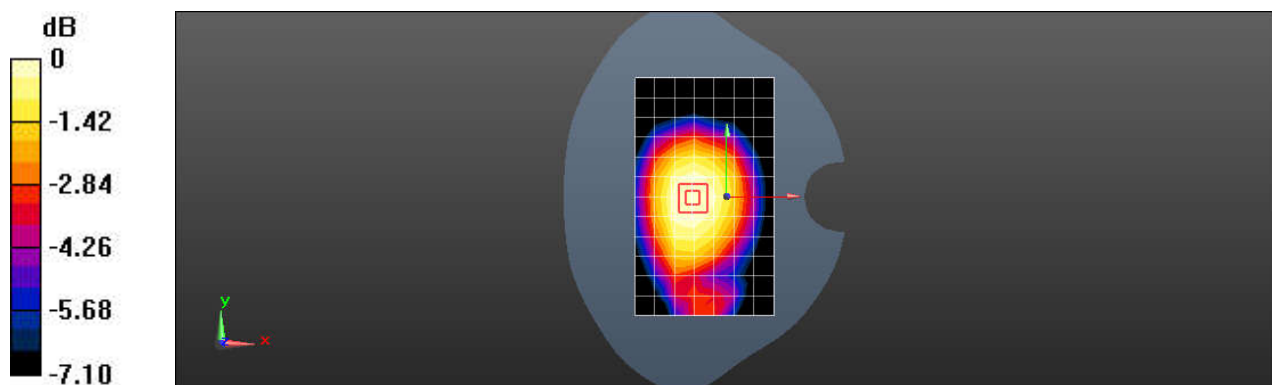

0 dB = 0.361 W/kg = -4.42 dBW/kg

Test Laboratory: SGS-SAR Lab

SL201D GSM850 GPRS 4TS 190CH Back Side 10mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.075

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.887$ S/m; $\epsilon_r = 40.787$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.02, 10.02, 10.02); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.541 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.94 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.613 W/kg

SAR(1 g) = 0.453 W/kg; SAR(10 g) = 0.347 W/kg

Maximum value of SAR (measured) = 0.555 W/kg

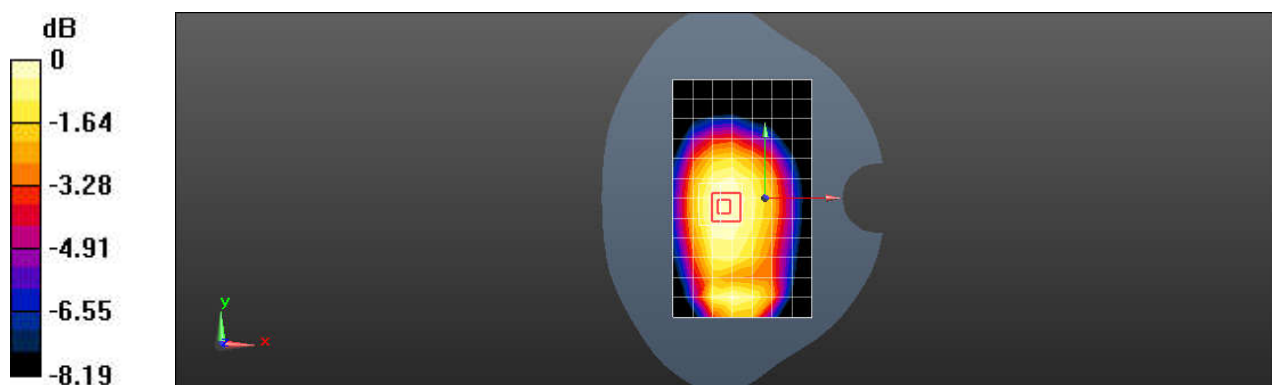

Test Laboratory: SGS-SAR Lab

SL201D GSM1900 GSM 661CH Right Cheek

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, GSM Only Communication System (0); Frequency: 1880 MHz;
DutyCycle: 1:8.3

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 40.732$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.33, 8.33, 8.33); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.357 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.820 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.506 W/kg

SAR(1 g) = 0.249 W/kg; SAR(10 g) = 0.128 W/kg

Maximum value of SAR (measured) = 0.378 W/kg

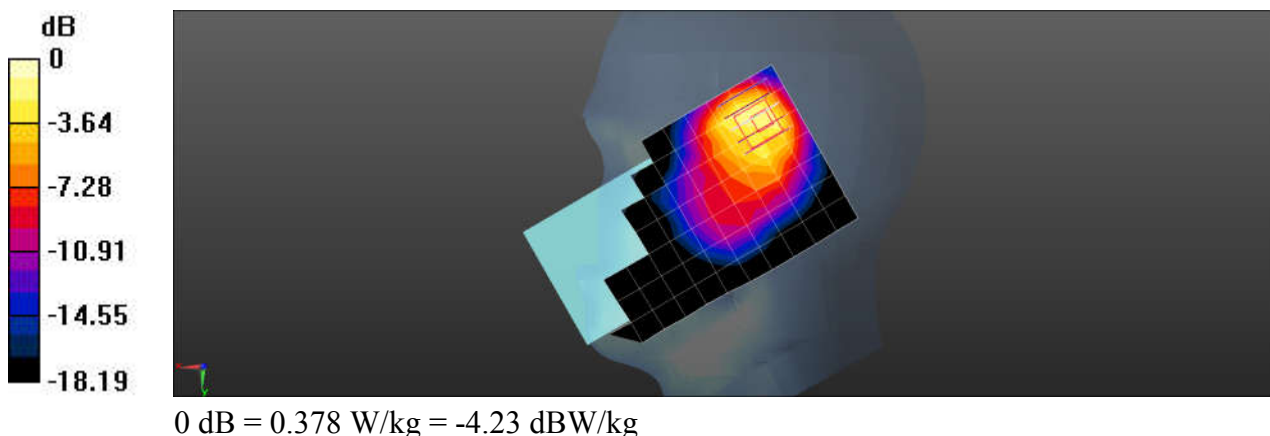

Test Laboratory: SGS-SAR Lab

SL201D GSM1900 GSM 661CH Back Side 15mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, GSM Only Communication System (0); Frequency: 1880 MHz;
DutyCycle: 1:8.3

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 40.732$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.33, 8.33, 8.33); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.441 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.65 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.559 W/kg

SAR(1 g) = 0.301 W/kg; SAR(10 g) = 0.160 W/kg

Maximum value of SAR (measured) = 0.443 W/kg

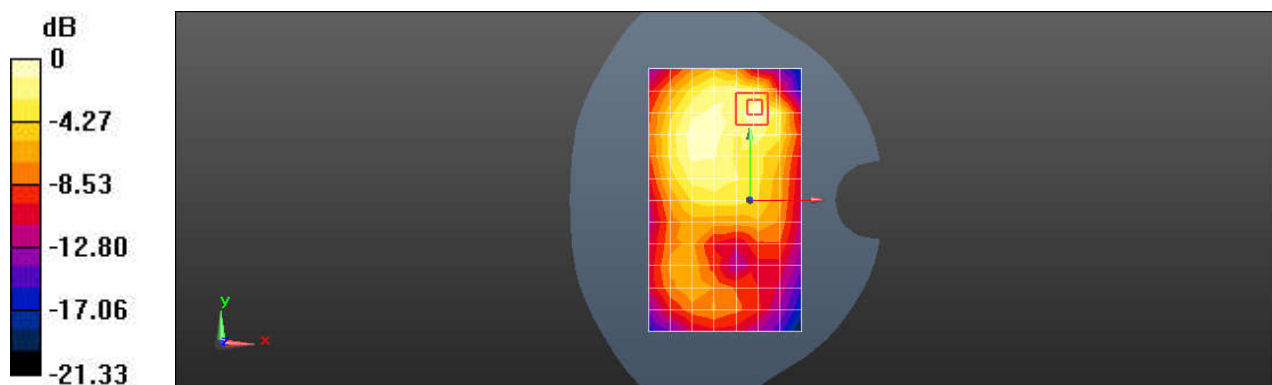

Test Laboratory: SGS-SAR Lab

SL201D GSM1900 GPRS 4TS 661CH Back Side 10mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:2.075

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 40.732$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.33, 8.33, 8.33); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 1.16 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.73 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.733 W/kg; SAR(10 g) = 0.364 W/kg

Maximum value of SAR (measured) = 1.11 W/kg

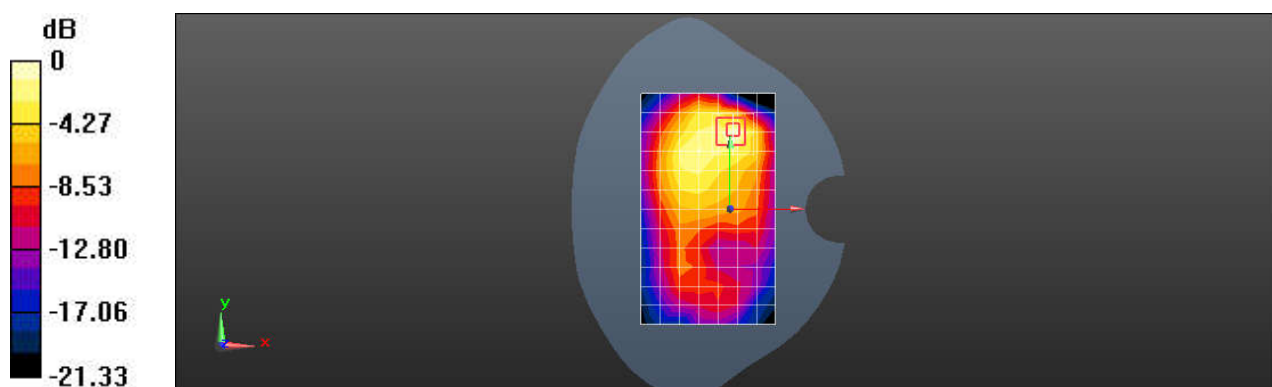

Test Laboratory: SGS-SAR Lab

SL201D WCDMA II RMC12.2kbps 9400CH Right Cheek

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 40.732$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.33, 8.33, 8.33); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.718 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.48 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.542 W/kg; SAR(10 g) = 0.273 W/kg

Maximum value of SAR (measured) = 0.856 W/kg

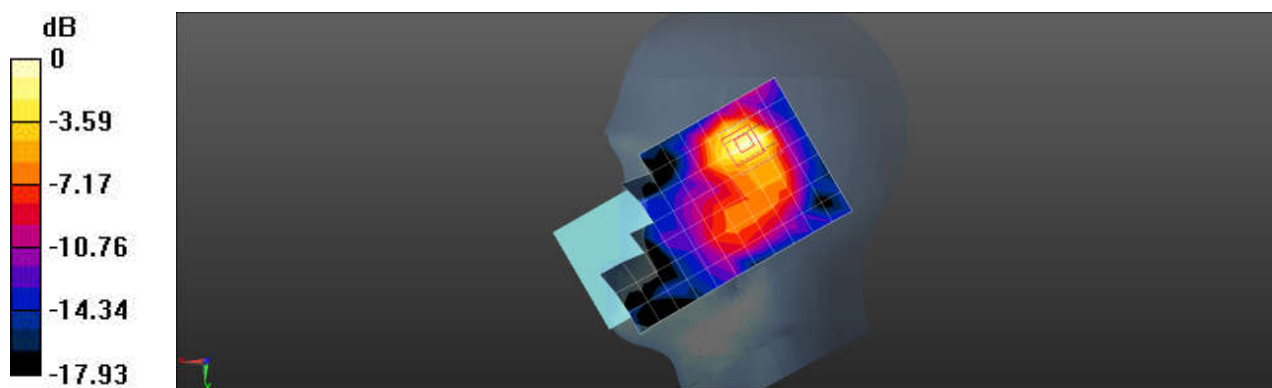

0 dB = 0.856 W/kg = -0.68 dBW/kg

Test Laboratory: SGS-SAR Lab

SL201D WCDMA II RMC12.2kbps 9400CH Back Side 15mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 40.732$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.33, 8.33, 8.33); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.621 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.47 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.835 W/kg

SAR(1 g) = 0.456 W/kg; SAR(10 g) = 0.251 W/kg

Maximum value of SAR (measured) = 0.667 W/kg

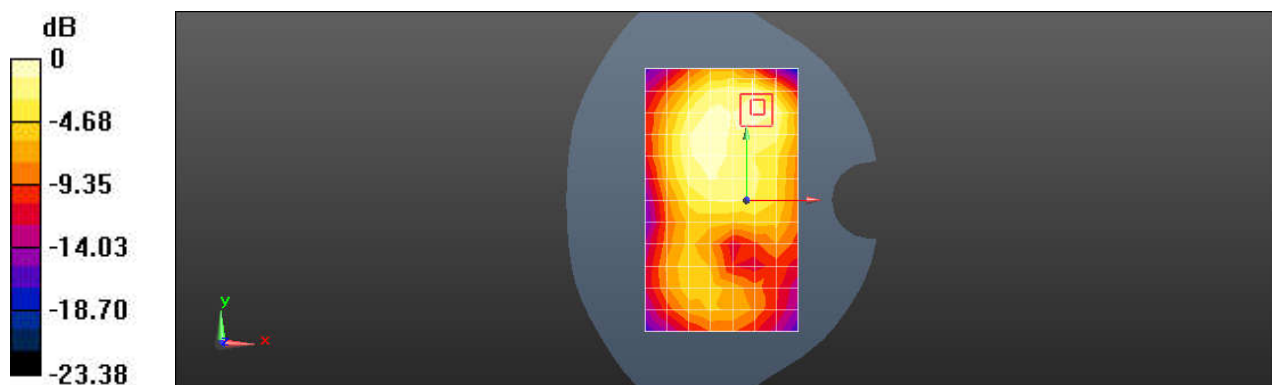

0 dB = 0.667 W/kg = -1.76 dBW/kg

Test Laboratory: SGS-SAR Lab

SL201D WCDMA II RMC12.2kbps 9400CH Back Side 10mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 40.732$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.33, 8.33, 8.33); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 1.39 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.80 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.95 W/kg

SAR(1 g) = 0.968 W/kg; SAR(10 g) = 0.485 W/kg

Maximum value of SAR (measured) = 1.51 W/kg

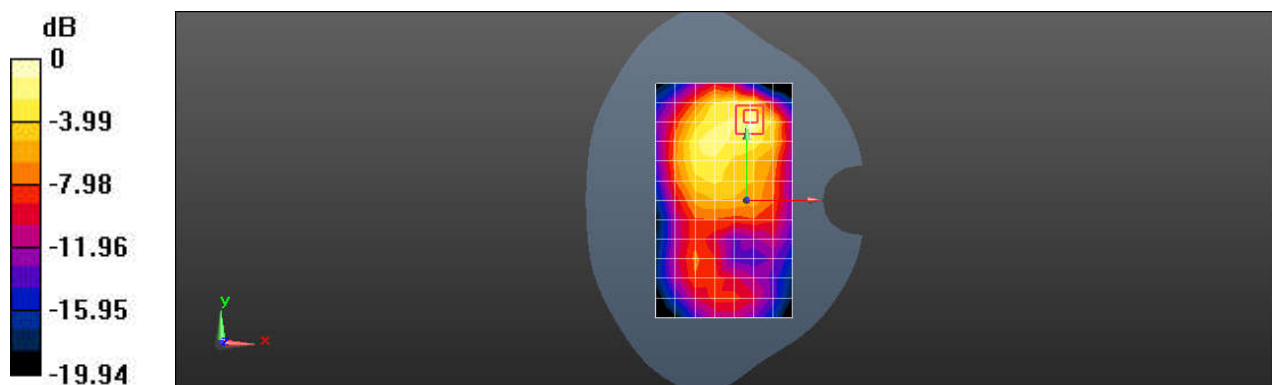

Test Laboratory: SGS-SAR Lab

SL201D WCDMA IV RMC12.2kbps 1513CH Right cheek

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1753$ MHz; $\sigma = 1.349$ S/m; $\epsilon_r = 40.612$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.5, 8.5, 8.5); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.780 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.093 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.617 W/kg; SAR(10 g) = 0.314 W/kg

Maximum value of SAR (measured) = 0.919 W/kg

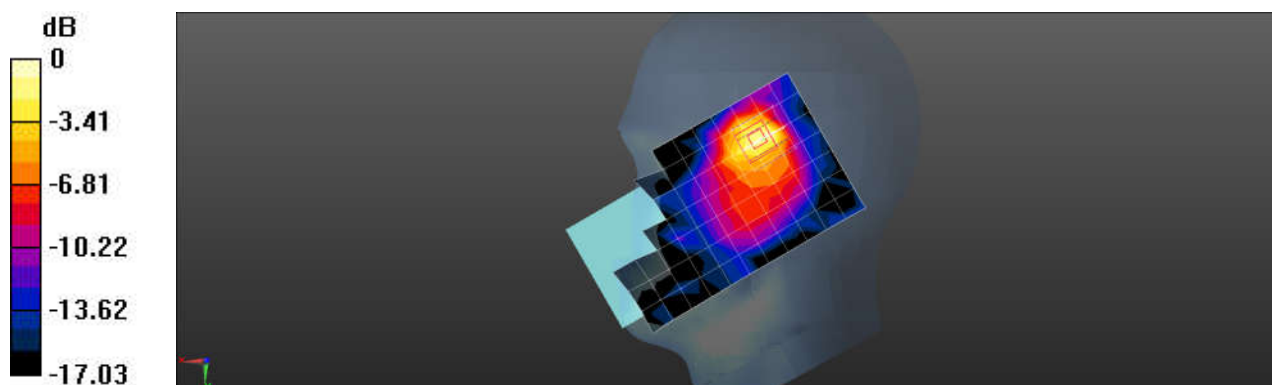

0 dB = 0.919 W/kg = -0.37 dBW/kg

Test Laboratory: SGS-SAR Lab

SL201D WCDMA IV RMC12.2kbps 1412CH Back Side 15mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1732.4$ MHz; $\sigma = 1.32$ S/m; $\epsilon_r = 40.669$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.5, 8.5, 8.5); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.492 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.303 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.567 W/kg

SAR(1 g) = 0.364 W/kg; SAR(10 g) = 0.231 W/kg

Maximum value of SAR (measured) = 0.488 W/kg

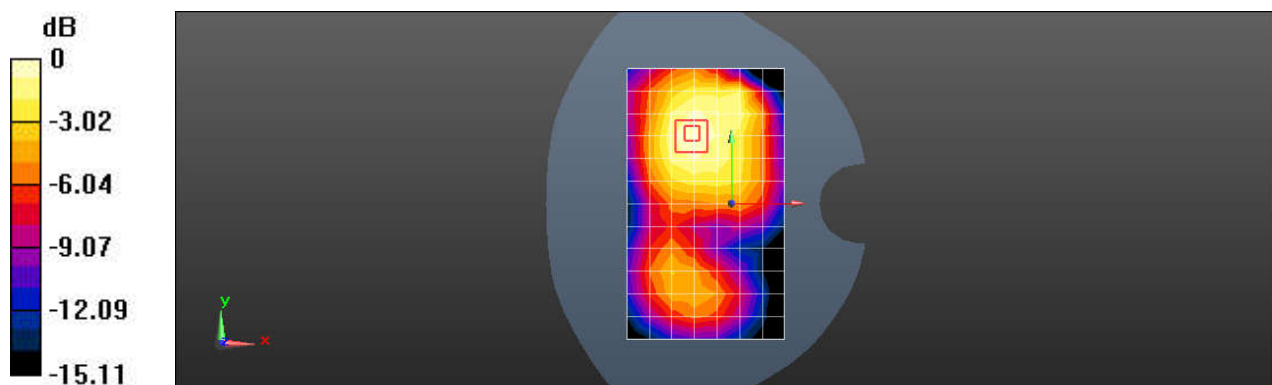

Test Laboratory: SGS-SAR Lab

SL201D WCDMA IV RMC12.2kbps 1513CH Back Side 10mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1753$ MHz; $\sigma = 1.349$ S/m; $\epsilon_r = 40.612$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.5, 8.5, 8.5); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.986 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.93 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.685 W/kg; SAR(10 g) = 0.347 W/kg

Maximum value of SAR (measured) = 1.11 W/kg

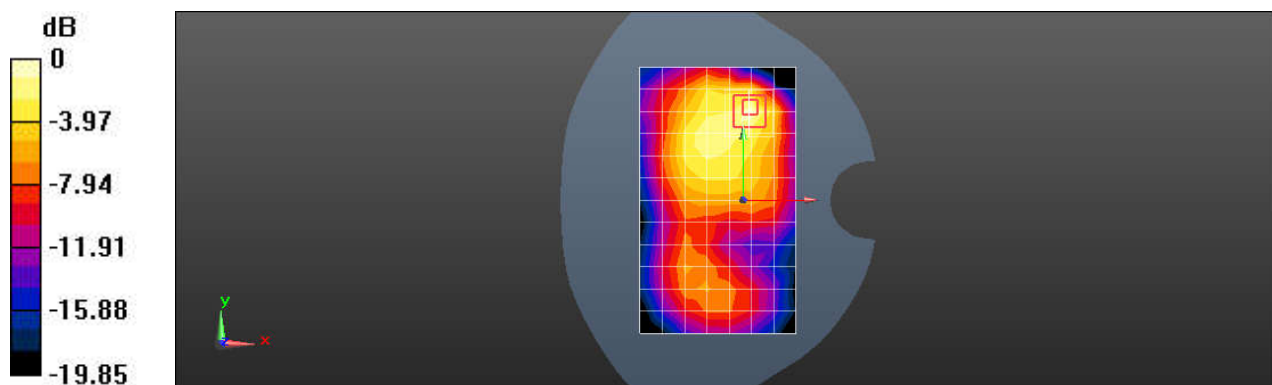

Test Laboratory: SGS-SAR Lab

SL201D WCDMA V RMC12.2kbps 4182CH Right Cheek

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.887$ S/m; $\epsilon_r = 40.79$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.02, 10.02, 10.02); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.248 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.741 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.276 W/kg

SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.165 W/kg

Maximum value of SAR (measured) = 0.255 W/kg

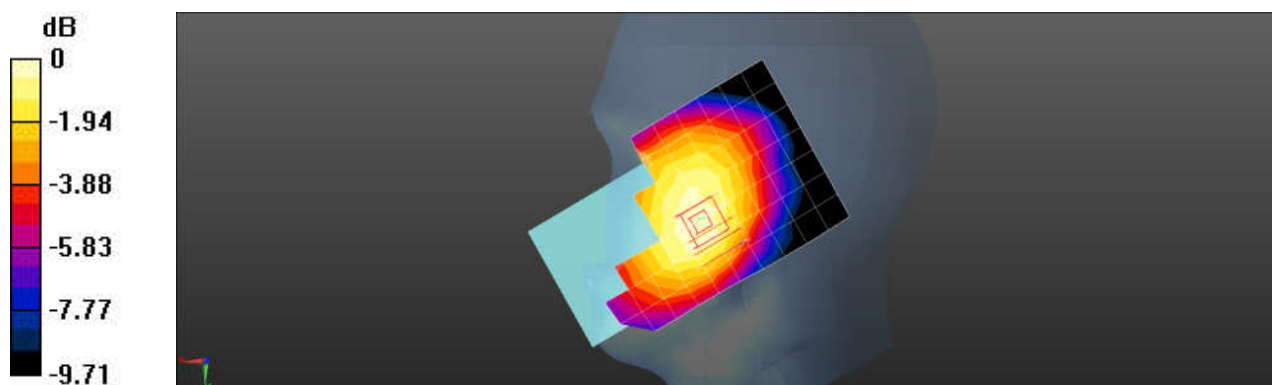

0 dB = 0.255 W/kg = -5.93 dBW/kg

Test Laboratory: SGS-SAR Lab

SL201D WCDMA V RMC12.2kbps 4182CH Back Side 15mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.887$ S/m; $\epsilon_r = 40.79$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.02, 10.02, 10.02); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.381 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.23 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.418 W/kg

SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.236 W/kg

Maximum value of SAR (measured) = 0.377 W/kg

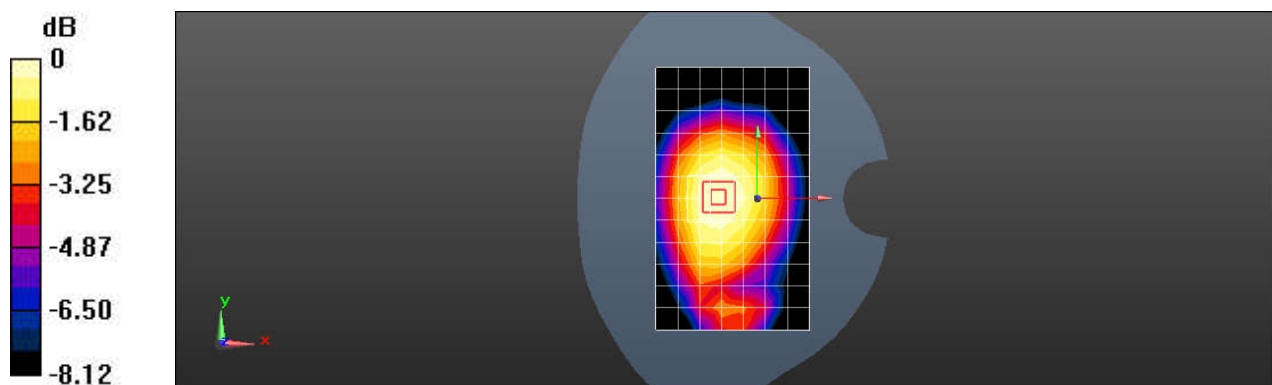

Test Laboratory: SGS-SAR Lab

SL201D WCDMA V RMC12.2kbps 4182CH Back Side 10mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.887$ S/m; $\epsilon_r = 40.79$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.02, 10.02, 10.02); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.413 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.69 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.459 W/kg

SAR(1 g) = 0.340 W/kg; SAR(10 g) = 0.259 W/kg

Maximum value of SAR (measured) = 0.415 W/kg

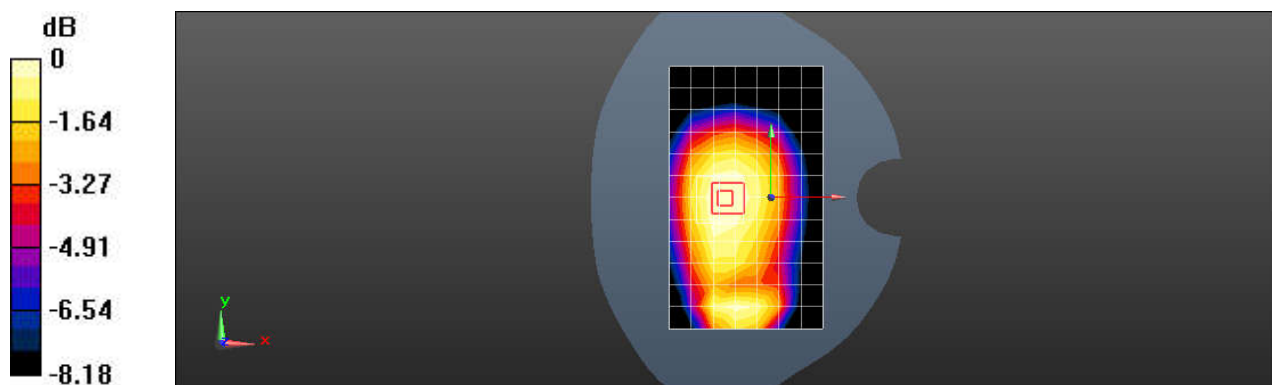

Test Laboratory: SGS-SAR Lab

SL201D LTE Band 12 10M QPSK 1RB0 23095CH Right cheek

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 43.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.4, 10.4, 10.4); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.149 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.808 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.168 W/kg

SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 0.153 W/kg

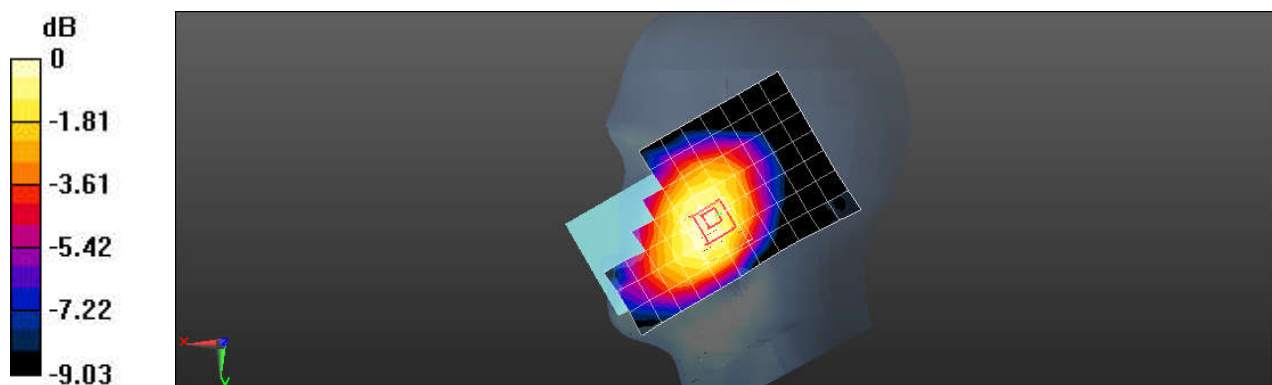

0 dB = 0.153 W/kg = -8.15 dBW/kg

Test Laboratory: SGS-SAR Lab

SL201D LTE Band 12 10M QPSK 1RB0 23095CH Back Side 15mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 43.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.4, 10.4, 10.4); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.213 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.78 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.242 W/kg

SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.128 W/kg

Maximum value of SAR (measured) = 0.210 W/kg

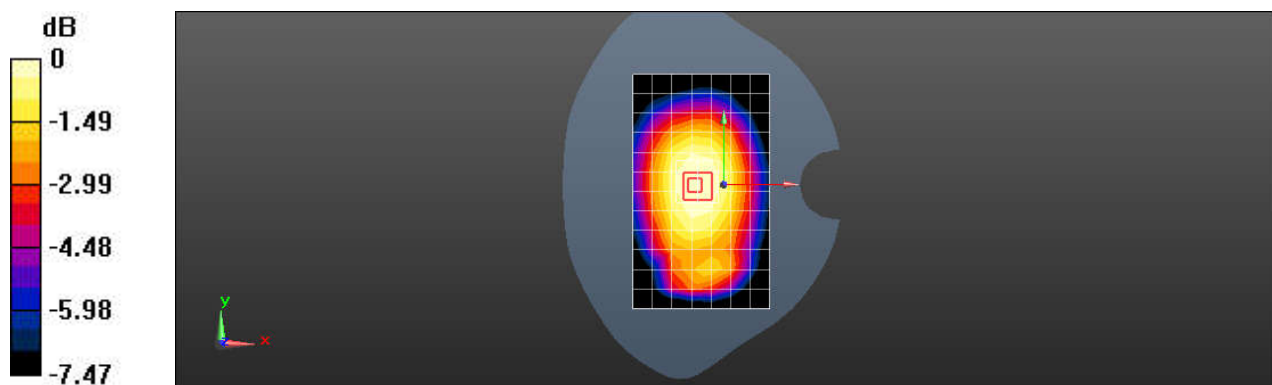

Test Laboratory: SGS-SAR Lab

SL201D LTE Band 12 10M QPSK 1RB0 23095CH Back Side 10mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 43.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.4, 10.4, 10.4); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.245 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.92 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.334 W/kg

SAR(1 g) = 0.173 W/kg; SAR(10 g) = 0.106 W/kg

Maximum value of SAR (measured) = 0.267 W/kg

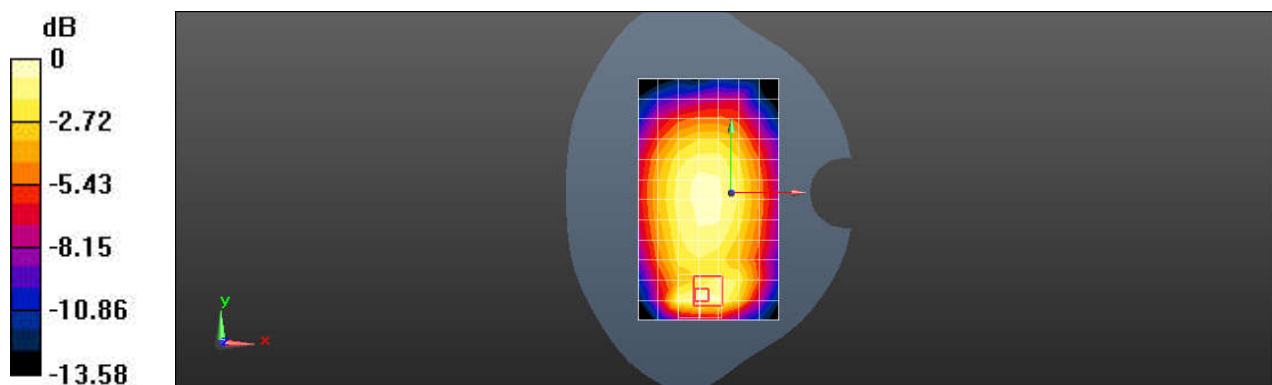

Test Laboratory: SGS-SAR Lab

SL201D LTE Band 25 20M QPSK 50RB0 26140CH Right Cheek

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1860$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 40.814$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.33, 8.33, 8.33); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.783 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.89 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.618 W/kg; SAR(10 g) = 0.317 W/kg

Maximum value of SAR (measured) = 0.904 W/kg

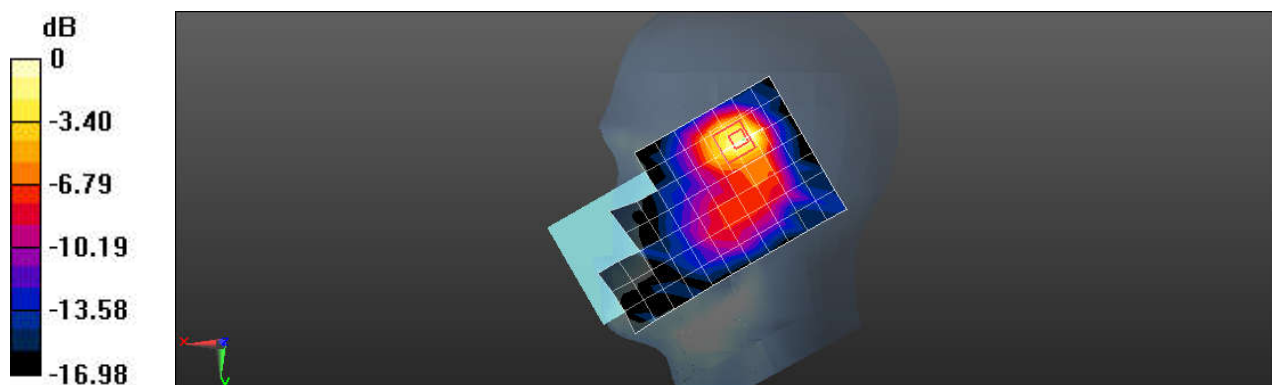

0 dB = 0.904 W/kg = -0.44 dBW/kg

Test Laboratory: SGS-SAR Lab

SL201D LTE Band 25 20M QPSK 1RB0 26365CH Back Side 15mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 39.86$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.33, 8.33, 8.33); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.500 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.01 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.478 W/kg

SAR(1 g) = 0.281 W/kg; SAR(10 g) = 0.169 W/kg

Maximum value of SAR (measured) = 0.402 W/kg

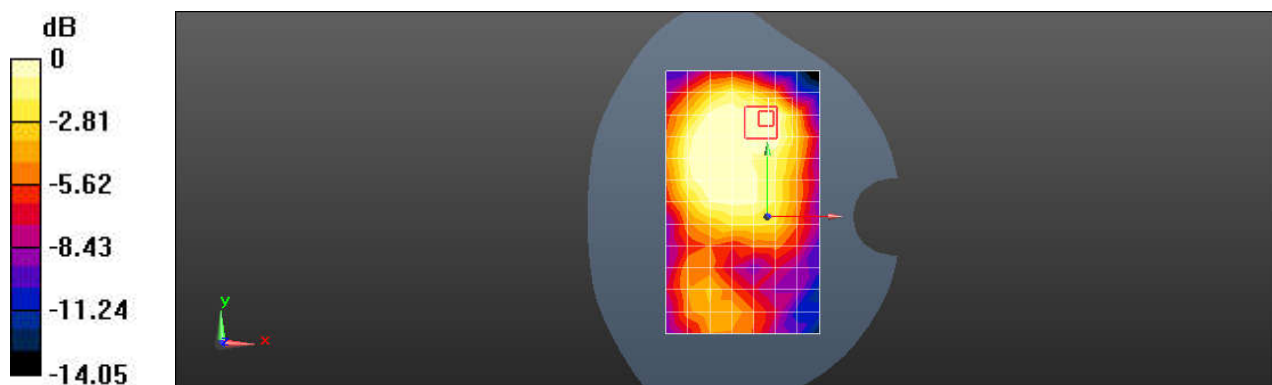

0 dB = 0.402 W/kg = -3.96 dBW/kg

Test Laboratory: SGS-SAR Lab

SL201D LTE Band 25 20M QPSK 1RB0 26365CH Back Side 10mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 39.86$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.33, 8.33, 8.33); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.884 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 13.64 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.631 W/kg; SAR(10 g) = 0.346 W/kg

Maximum value of SAR (measured) = 0.902 W/kg

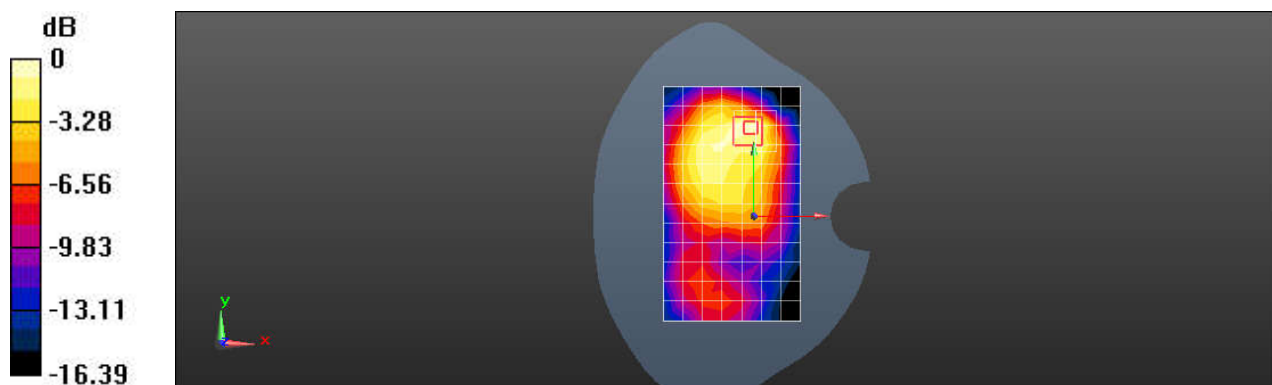

0 dB = 0.902 W/kg = -0.45 dBW/kg

Test Laboratory: SGS-SAR Lab

SL201D LTE Band 26 15M QPSK 1RB0 26865CH Right cheek

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 42.76$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.02, 10.02, 10.02); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.284 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.830 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.660 W/kg

SAR(1 g) = 0.234 W/kg; SAR(10 g) = 0.162 W/kg

Maximum value of SAR (measured) = 0.450 W/kg

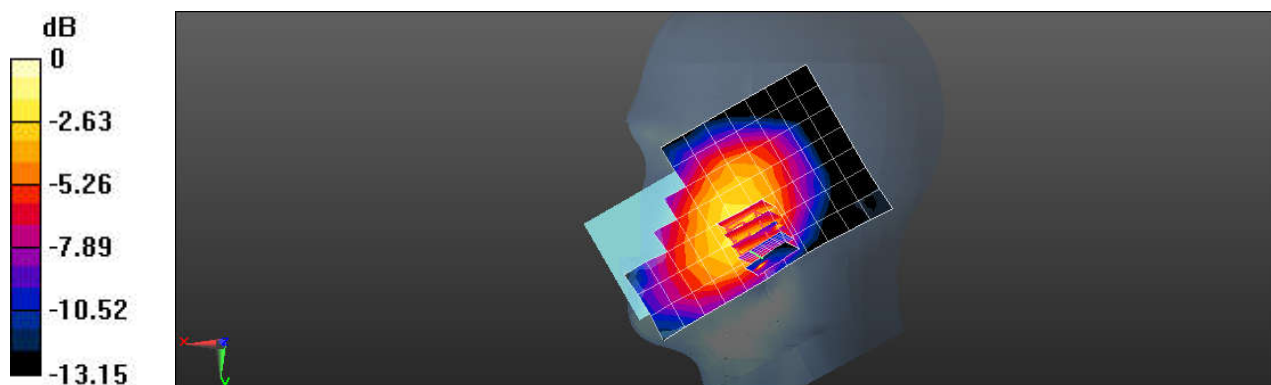

0 dB = 0.450 W/kg = -3.47 dBW/kg

Test Laboratory: SGS-SAR Lab

SL201D LTE Band 26 15M QPSK 1RB0 26865CH Back Side 15mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 42.76$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.02, 10.02, 10.02); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.253 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.34 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.287 W/kg

SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.158 W/kg

Maximum value of SAR (measured) = 0.258 W/kg

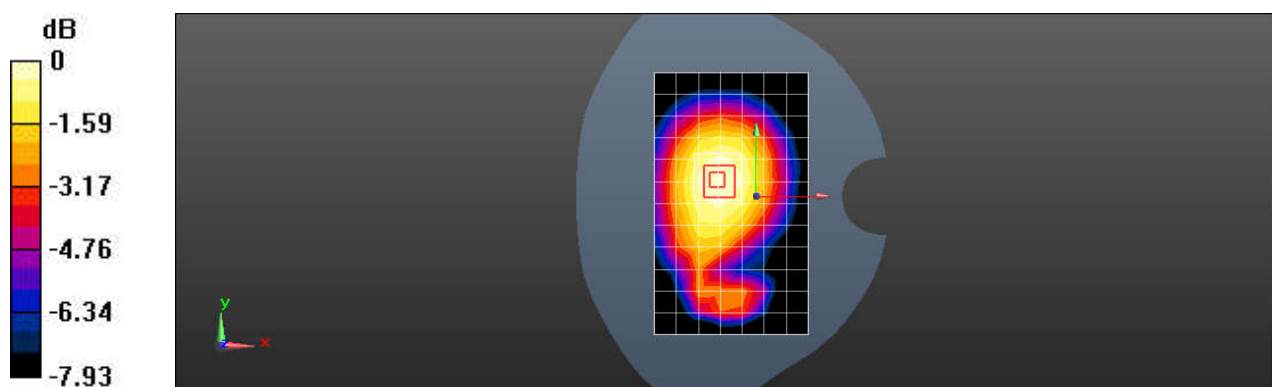

0 dB = 0.258 W/kg = -5.88 dBW/kg

Test Laboratory: SGS-SAR Lab

SL201D LTE Band 26 15M QPSK 1RB0 26865CH Back Side 10mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 42.76$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.02, 10.02, 10.02); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.279 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.12 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.465 W/kg

SAR(1 g) = 0.242 W/kg; SAR(10 g) = 0.134 W/kg

Maximum value of SAR (measured) = 0.377 W/kg

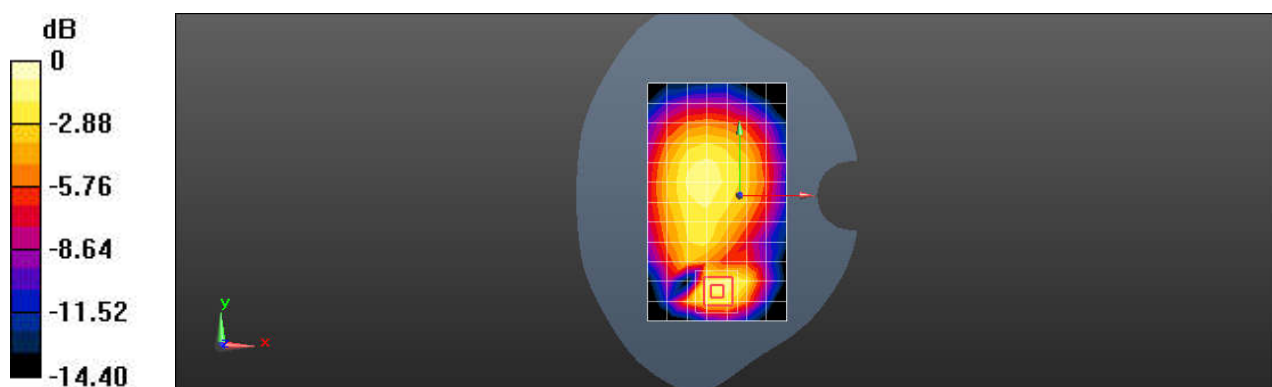

Test Laboratory: SGS-SAR Lab

SL201D LTE Band 30 10M QPSK 1RB0 27710CH Right tilted

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 2310 MHz;Duty Cycle: 1:1

Medium: HSL2300;Medium parameters used: $f = 2310$ MHz; $\sigma = 1.68$ S/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.06, 8.06, 8.06); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.187 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.910 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.220 W/kg

SAR(1 g) = 0.137 W/kg; SAR(10 g) = 0.078 W/kg

Maximum value of SAR (measured) = 0.189 W/kg

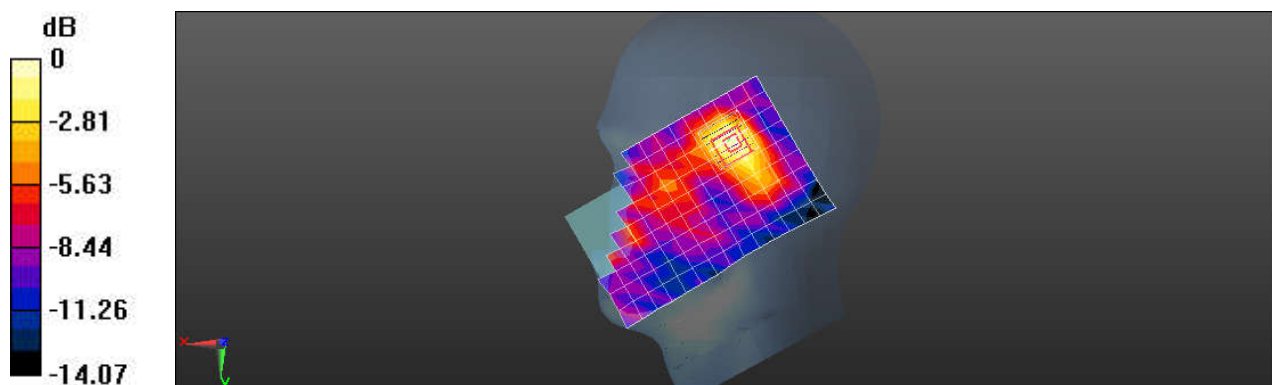

0 dB = 0.189 W/kg = -7.24 dBW/kg

Test Laboratory: SGS-SAR Lab

SL201D LTE Band 30 10M QPSK 1RB0 27710CH Back Side 15mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL2300; Medium parameters used: $f = 2310$ MHz; $\sigma = 1.68$ S/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.06, 8.06, 8.06); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.322 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.204 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.386 W/kg

SAR(1 g) = 0.233 W/kg; SAR(10 g) = 0.133 W/kg

Maximum value of SAR (measured) = 0.334 W/kg

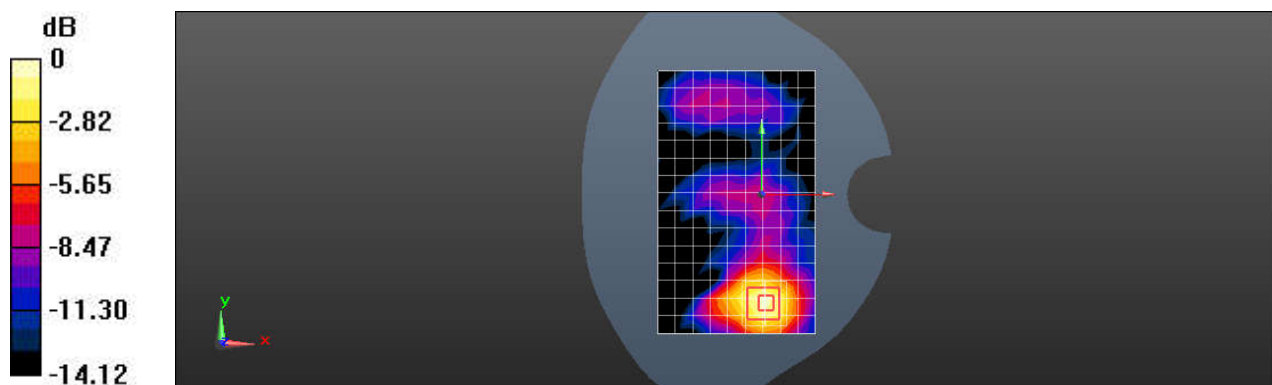

0 dB = 0.334 W/kg = -4.76 dBW/kg

Test Laboratory: SGS-SAR Lab

SL201D LTE Band 30 10M QPSK 1RB0 27710CH Bottom Side 10mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 2310 MHz;Duty Cycle: 1:1

Medium: HSL2300;Medium parameters used: $f = 2310$ MHz; $\sigma = 1.68$ S/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.06, 8.06, 8.06); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.22 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.282 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.793 W/kg; SAR(10 g) = 0.374 W/kg

Maximum value of SAR (measured) = 1.30 W/kg

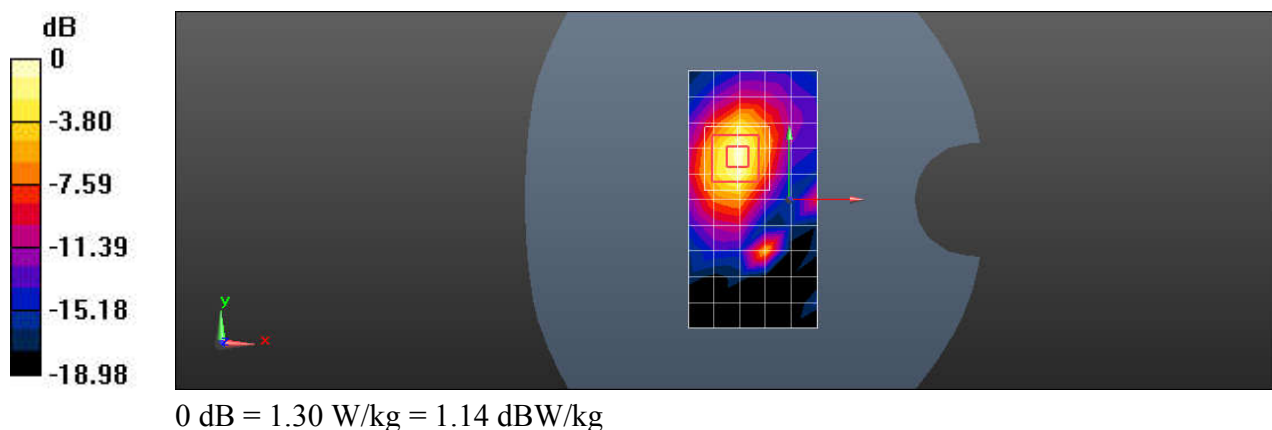

Test Laboratory: SGS-SAR Lab

SL201D LTE Band 66 20M QPSK 50RB0 132572CH Right Cheek

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1770$ MHz; $\sigma = 1.362$ S/m; $\epsilon_r = 40.57$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.5, 8.5, 8.5); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.981 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.15 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.823 W/kg; SAR(10 g) = 0.422 W/kg

Maximum value of SAR (measured) = 1.20 W/kg

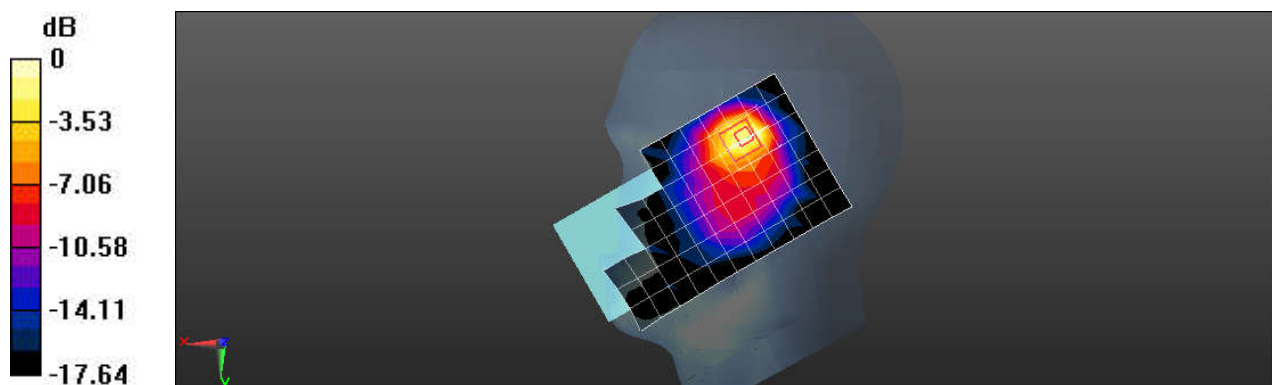

0 dB = 1.20 W/kg = 0.79 dBW/kg

Test Laboratory: SGS-SAR Lab

SL201D LTE Band 66 20M QPSK 1RB0 132322CH Back Side 15mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.78$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.5, 8.5, 8.5); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.531 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.73 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.638 W/kg

SAR(1 g) = 0.405 W/kg; SAR(10 g) = 0.258 W/kg

Maximum value of SAR (measured) = 0.554 W/kg

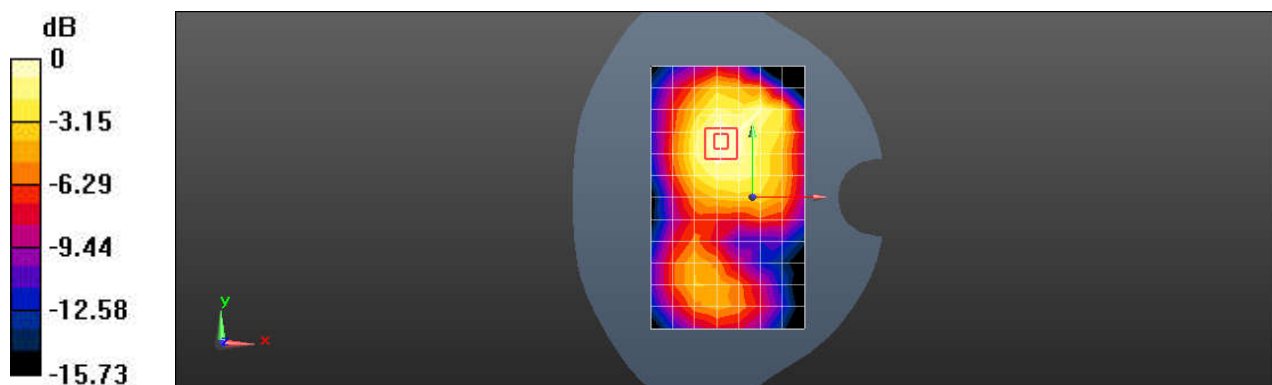

Test Laboratory: SGS-SAR Lab

SL201D LTE Band 66 20M QPSK 1RB0 132572CH Back Side 10mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1770$ MHz; $\sigma = 1.362$ S/m; $\epsilon_r = 40.57$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.5, 8.5, 8.5); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.37 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.35 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 0.975 W/kg; SAR(10 g) = 0.559 W/kg

Maximum value of SAR (measured) = 1.46 W/kg

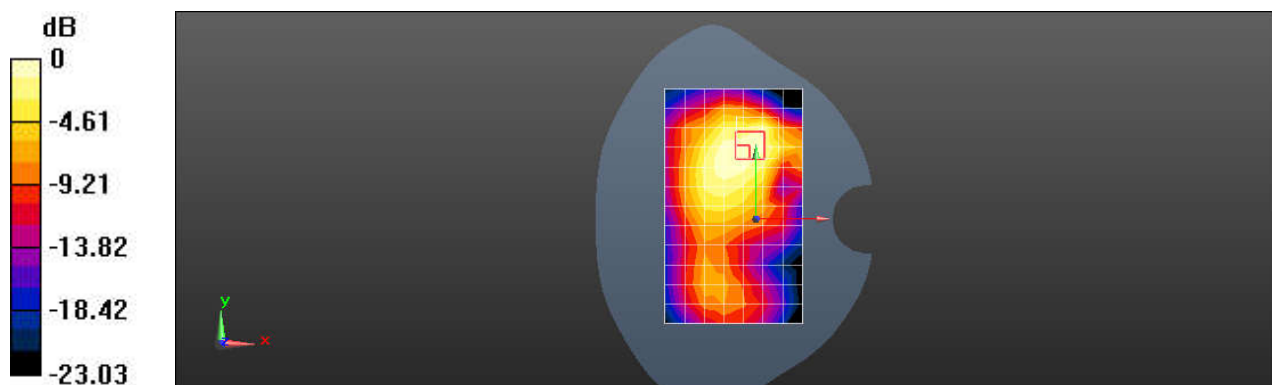

0 dB = 1.46 W/kg = 1.64 dBW/kg

Test Laboratory: SGS-SAR Lab

SL201D LTE Band 71 20M QPSK 1RB0 133322CH Left cheek

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 683 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 683$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 43.364$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.4, 10.4, 10.4); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.0799 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.628 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0880 W/kg

SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.053 W/kg

Maximum value of SAR (measured) = 0.0803 W/kg

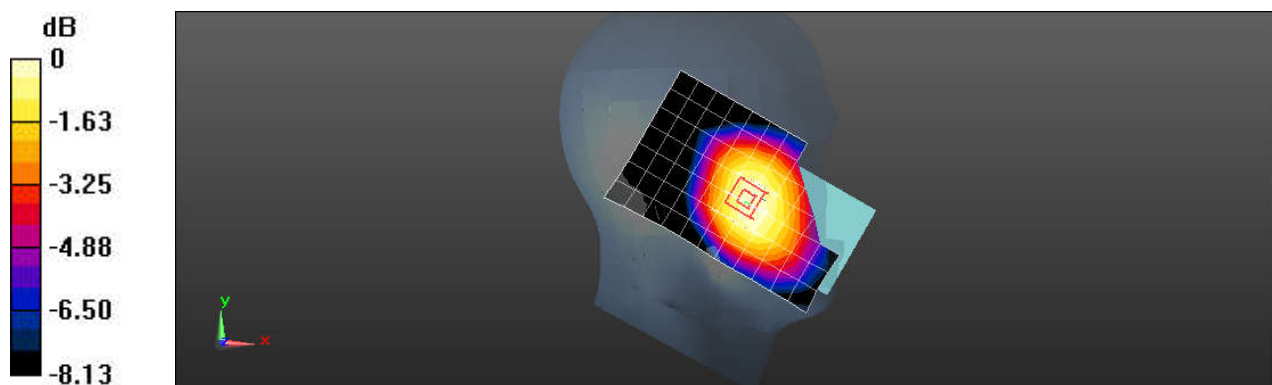

0 dB = 0.0803 W/kg = -10.95 dBW/kg

Test Laboratory: SGS-SAR Lab

SL201D LTE Band 71 20M QPSK 1RB0 133322CH Back side 15mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 683 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 683$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 43.364$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.4, 10.4, 10.4); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.187 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.17 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.211 W/kg

SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.115 W/kg

Maximum value of SAR (measured) = 0.189 W/kg

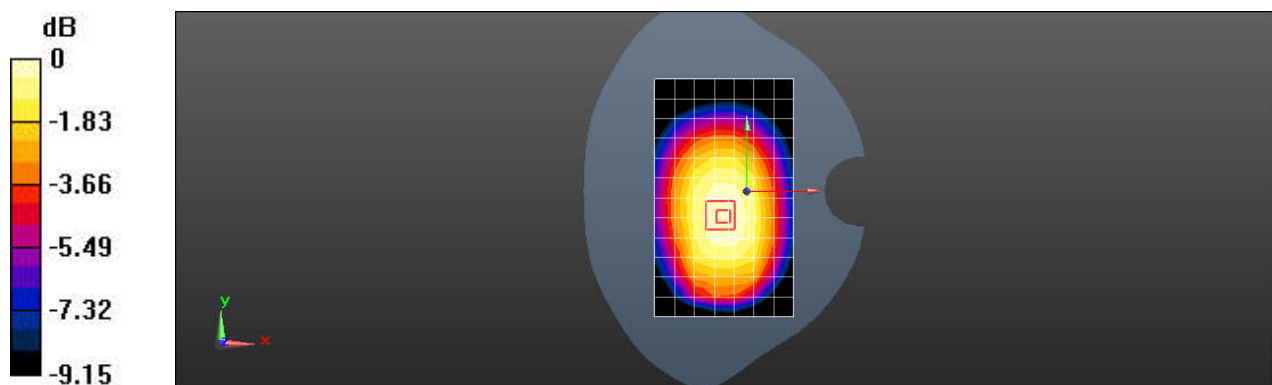

0 dB = 0.189 W/kg = -7.24 dBW/kg

Test Laboratory: SGS-SAR Lab

SL201D LTE Band 71 20M QPSK 1RB0 133322CH Back side 10mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 683 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 683 \text{ MHz}$; $\sigma = 0.885 \text{ S/m}$; $\epsilon_r = 43.364$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.4, 10.4, 10.4); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.216 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.72 V/m ; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.239 W/kg

SAR(1 g) = 0.175 W/kg ; SAR(10 g) = 0.133 W/kg

Maximum value of SAR (measured) = 0.215 W/kg

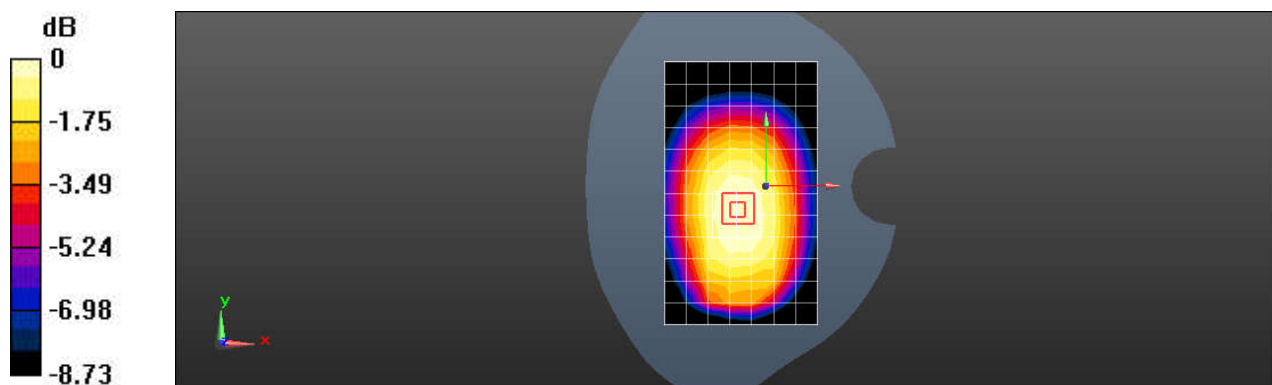

Test Laboratory: SGS-SAR Lab

SL201D WLAN2.4GHz 802.11b 6CH Left cheek

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: HSL2450;Medium parameters used: $f = 2437$ MHz; $\sigma = 1.795$ S/m; $\epsilon_r = 39.952$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.77, 7.77, 7.77); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.524 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.82 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.707 W/kg

SAR(1 g) = 0.315 W/kg; SAR(10 g) = 0.134 W/kg

Maximum value of SAR (measured) = 0.533 W/kg

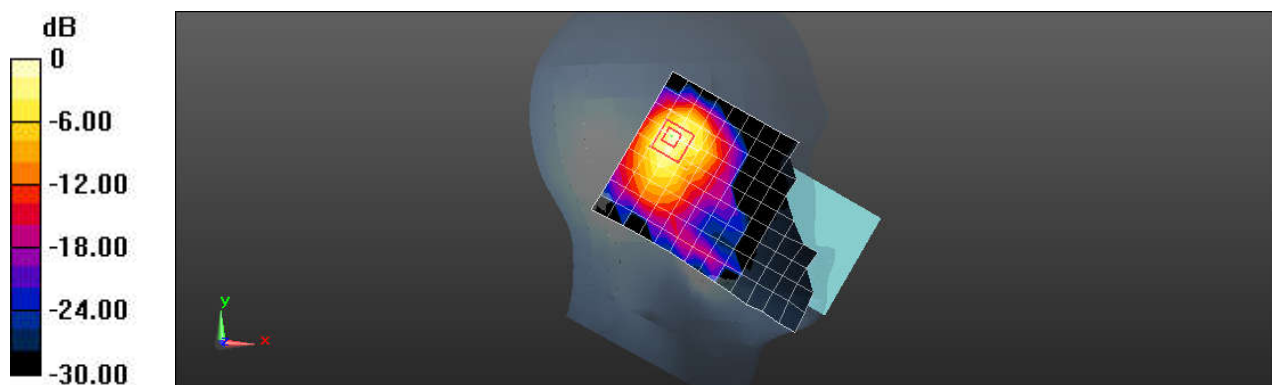

0 dB = 0.533 W/kg = -2.73 dBW/kg

Test Laboratory: SGS-SAR Lab

SL201D WLAN2.4GHz 802.11b 6CH Back Side 15mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: HSL2450;Medium parameters used: $f = 2437$ MHz; $\sigma = 1.795$ S/m; $\epsilon_r = 39.952$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.5, 8.5, 8.5); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.326 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.394 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.429 W/kg

SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.353 W/kg

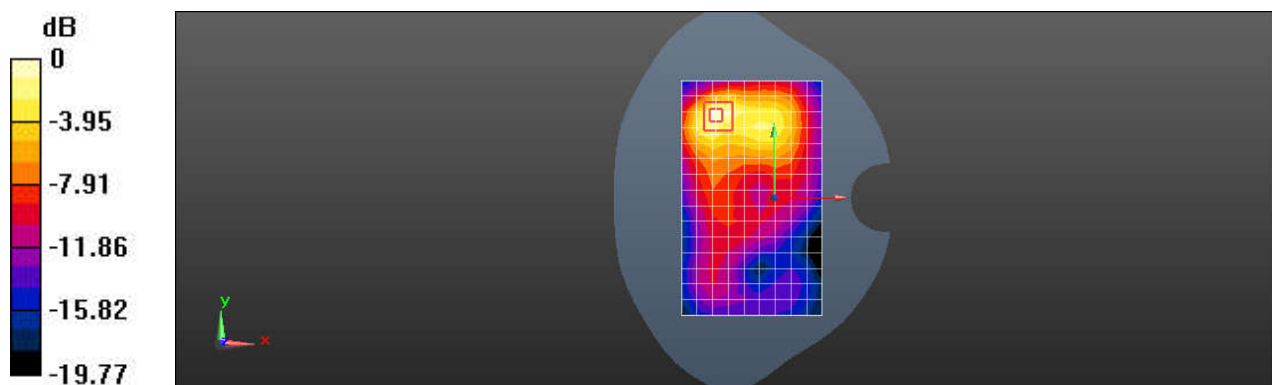

Test Laboratory: SGS-SAR Lab

SL201D WLAN2.4GHz 802.11b 6CH Back Side 10mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: HSL2450;Medium parameters used: $f = 2437$ MHz; $\sigma = 1.795$ S/m; $\epsilon_r = 39.952$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.77, 7.77, 7.77); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.566 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.857 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.709 W/kg

SAR(1 g) = 0.330 W/kg; SAR(10 g) = 0.147 W/kg

Maximum value of SAR (measured) = 0.569 W/kg

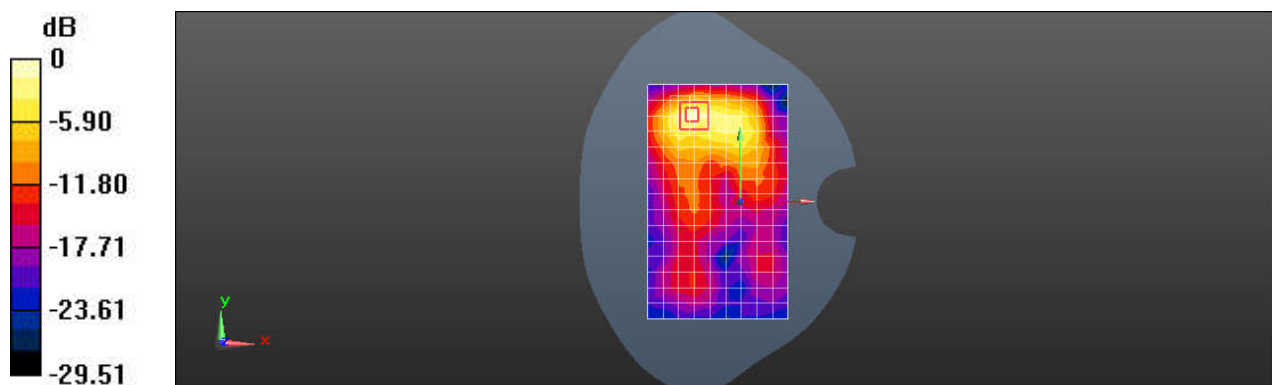

0 dB = 0.569 W/kg = -2.45 dBW/kg

Test Laboratory: SGS-SAR Lab

SL201D WLAN5GHz 802.11ac 80M MCS0 58CH Left cheek

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5290 MHz; Duty Cycle: 1:1

Medium: HSL5G; Medium parameters used: $f = 5290 \text{ MHz}$; $\sigma = 4.747 \text{ S/m}$; $\epsilon_r = 36.33$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(5.55, 5.55, 5.55); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (11x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 1.26 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 7.404 V/m ; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 2.02 W/kg

SAR(1 g) = 0.501 W/kg ; SAR(10 g) = 0.137 W/kg

Maximum value of SAR (measured) = 1.29 W/kg

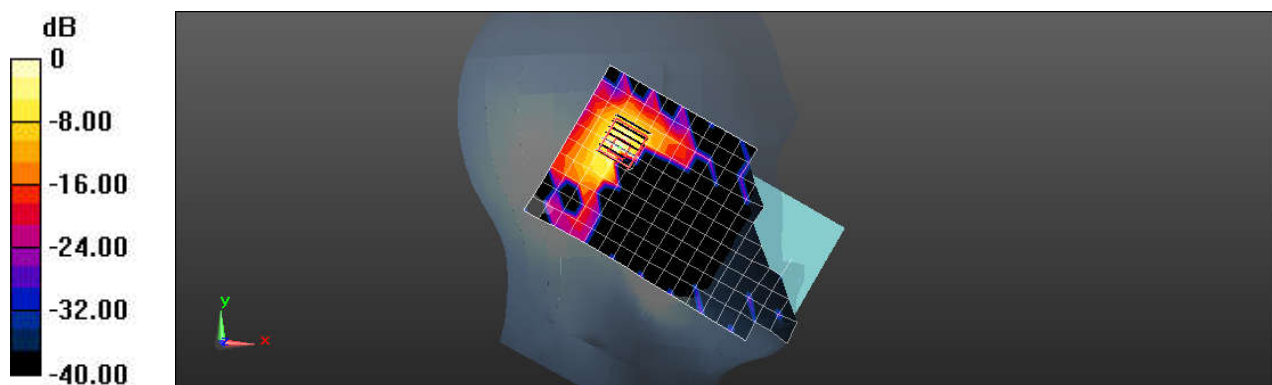

$0 \text{ dB} = 1.29 \text{ W/kg} = 1.11 \text{ dBW/kg}$

Test Laboratory: SGS-SAR Lab

SL201D WLAN5GHz 802.11ac 80M MCS0 122CH Left cheek

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5610 MHz; Duty Cycle: 1:1

Medium: HSL5G; Medium parameters used: $f = 5610 \text{ MHz}$; $\sigma = 5.112 \text{ S/m}$; $\epsilon_r = 35.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(5, 5, 5); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x18x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 1.44 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 6.029 V/m ; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.48 W/kg

SAR(1 g) = 0.560 W/kg ; SAR(10 g) = 0.168 W/kg

Maximum value of SAR (measured) = 1.55 W/kg

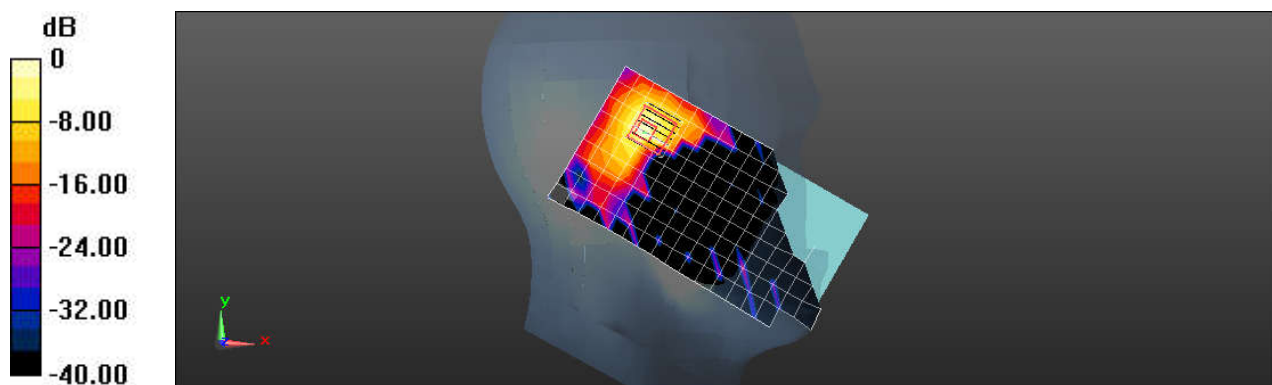

0 dB = 1.55 W/kg = 1.90 dBW/kg

Test Laboratory: SGS-SAR Lab

SL201D WLAN5GHz 802.11ac 80M MCS0 155CH Left cheek

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium: HSL5G; Medium parameters used: $f = 5775 \text{ MHz}$; $\sigma = 5.301 \text{ S/m}$; $\epsilon_r = 35.39$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(5.1, 5.1, 5.1); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x18x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 1.03 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 4.201 V/m ; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.89 W/kg

SAR(1 g) = 0.417 W/kg ; SAR(10 g) = 0.116 W/kg

Maximum value of SAR (measured) = 1.09 W/kg

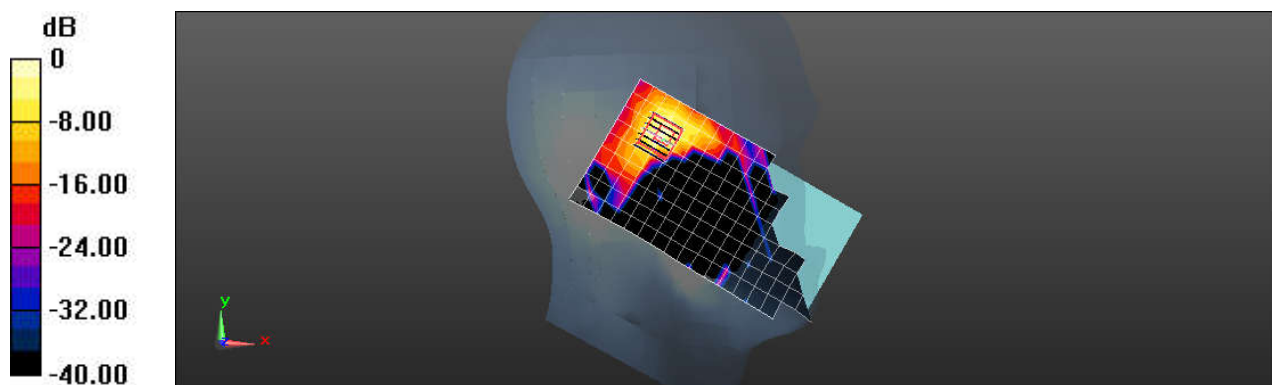

0 dB = 1.09 W/kg = 0.37 dBW/kg

Test Laboratory: SGS-SAR Lab

SL201D WLAN5GHz 802.11a 6Mbps 64CH Back side 15mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5320 MHz; Duty Cycle: 1:1

Medium: HSL5G; Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 4.777 \text{ S/m}$; $\epsilon_r = 36.13$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(5.55, 5.55, 5.55); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x20x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 1.64 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 1.016 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.73 W/kg

SAR(1 g) = 0.772 W/kg ; SAR(10 g) = 0.285 W/kg

Maximum value of SAR (measured) = 1.74 W/kg

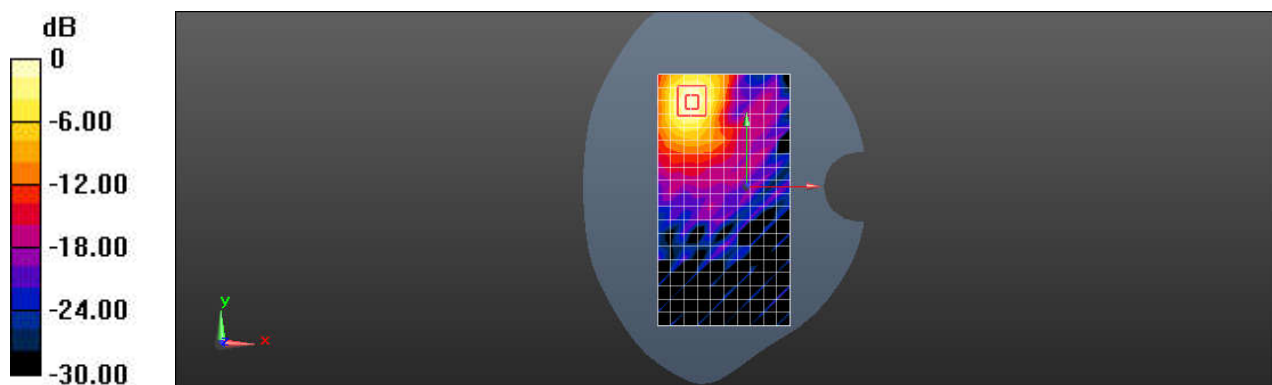

0 dB = 1.74 W/kg = 2.41 dBW/kg

Test Laboratory: SGS-SAR Lab

SL201D WLAN5GHz 802.11a 6Mbps 140CH Back side 15mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5700 MHz; Duty Cycle: 1:1

Medium: HSL5G; Medium parameters used: $f = 5700 \text{ MHz}$; $\sigma = 5.197 \text{ S/m}$; $\epsilon_r = 35.36$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(5, 5, 5); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x18x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 1.73 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 0 V/m ; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.85 W/kg

SAR(1 g) = 0.738 W/kg ; SAR(10 g) = 0.260 W/kg

Maximum value of SAR (measured) = 1.76 W/kg

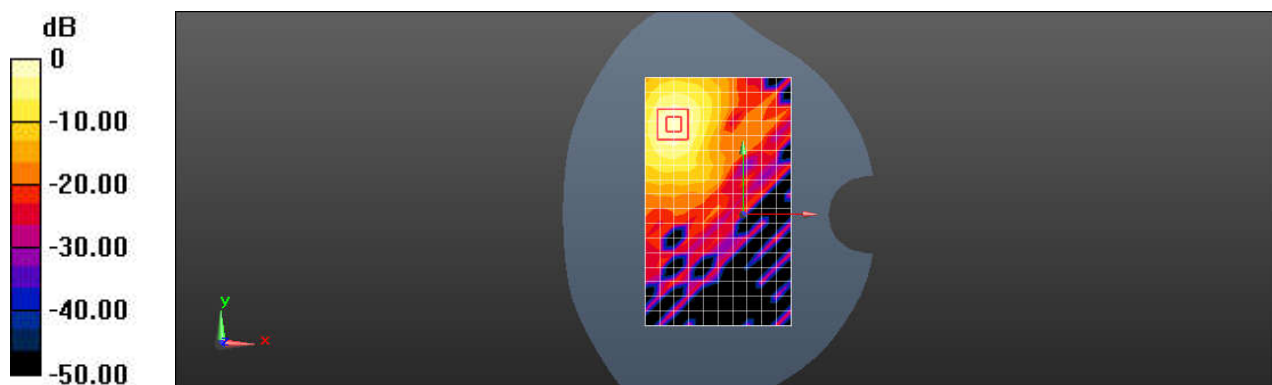

Test Laboratory: SGS-SAR Lab

SL201D WLAN5GHz 802.11a 6Mbps 165CH Back side 15mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: HSL5G; Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 5.324 \text{ S/m}$; $\epsilon_r = 35.09$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(5.1, 5.1, 5.1); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x18x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 1.74 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 0 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.83 W/kg

SAR(1 g) = 0.709 W/kg ; SAR(10 g) = 0.245 W/kg

Maximum value of SAR (measured) = 1.73 W/kg

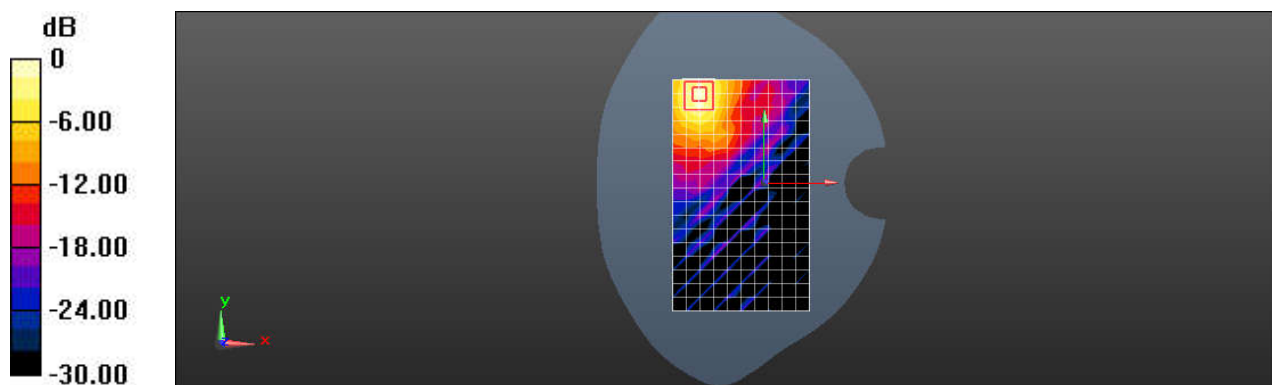

$0 \text{ dB} = 1.73 \text{ W/kg} = 2.38 \text{ dBW/kg}$

Test Laboratory: SGS-SAR Lab

SL201D WLAN5GHz 802.11ac 80M MCS0 42CH Back side 10mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5210 MHz; Duty Cycle: 1:1

Medium: HSL5G; Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 4.666 \text{ S/m}$; $\epsilon_r = 36.37$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(5.55, 5.55, 5.55); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 0.385 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 0 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.170 W/kg ; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.415 W/kg

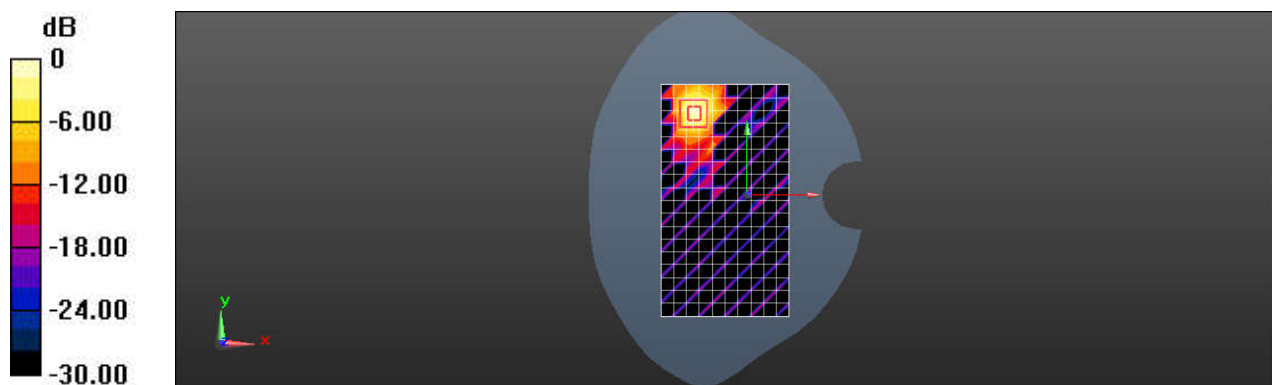

$0 \text{ dB} = 0.415 \text{ W/kg} = -3.82 \text{ dBW/kg}$

Test Laboratory: SGS-SAR Lab

SL201D WLAN5GHz 802.11ac 80M MCS0 155CH Back side 10mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium: HSL5G; Medium parameters used: $f = 5775$ MHz; $\sigma = 5.301$ S/m; $\epsilon_r = 35.39$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(5.1, 5.1, 5.1); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.504 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.896 W/kg

SAR(1 g) = 0.208 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.559 W/kg

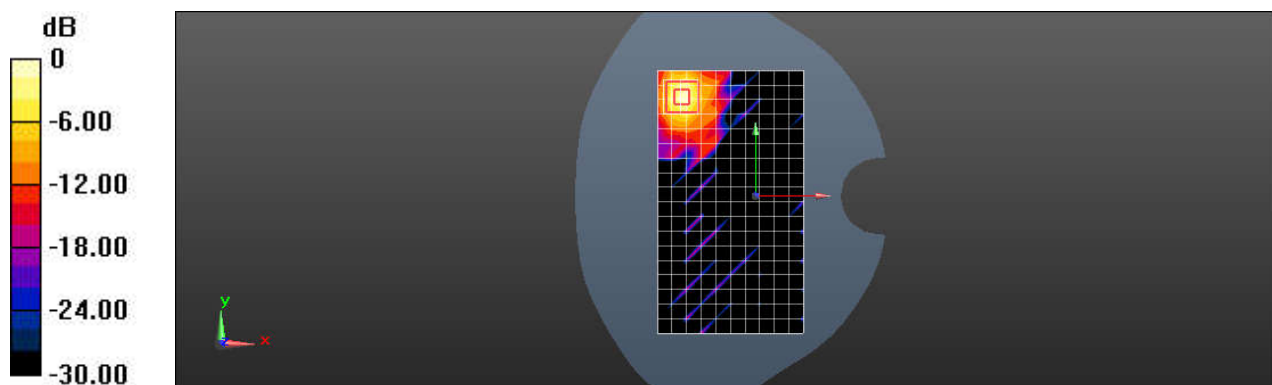

0 dB = 0.559 W/kg = -2.53 dBW/kg

Test Laboratory: SGS-SAR Lab

SL201D WLAN5GHz 802.11a 6Mbps 64CH Back side 0mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5320 MHz; Duty Cycle: 1:1

Medium: HSL5G; Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 4.777 \text{ S/m}$; $\epsilon_r = 36.13$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(5.55, 5.55, 5.55); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x18x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 10.2 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 3.077 V/m ; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 21.9 W/kg

SAR(1 g) = 4.11 W/kg ; SAR(10 g) = 1.1 W/kg

Maximum value of SAR (measured) = 11.2 W/kg

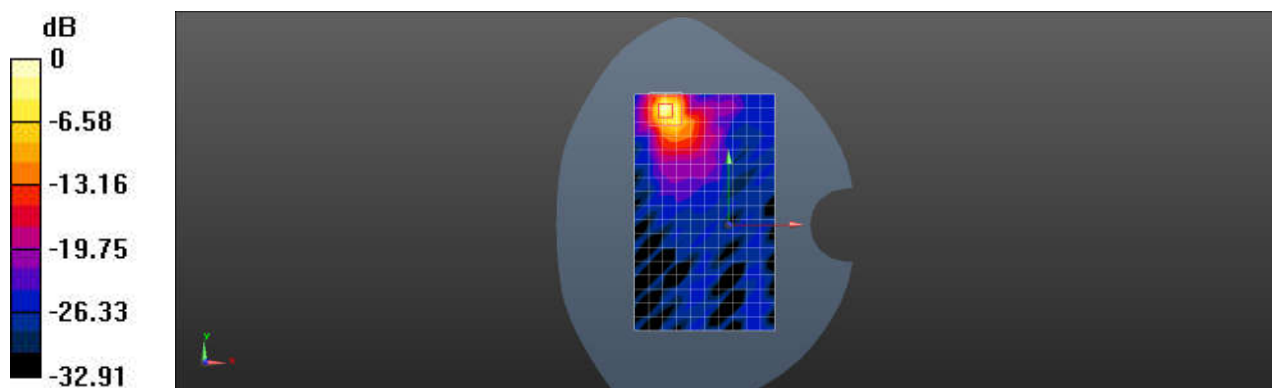

0 dB = 11.2 W/kg = 10.49 dBW/kg

Test Laboratory: SGS-SAR Lab

SL201D WLAN5GHz 802.11a 6Mbps 140CH Back side 0mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5700 MHz; Duty Cycle: 1:1

Medium: HSL5G; Medium parameters used: $f = 5700 \text{ MHz}$; $\sigma = 5.197 \text{ S/m}$; $\epsilon_r = 35.36$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(5, 5, 5); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x18x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 12.7 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 2.663 V/m ; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 42.8 W/kg

SAR(1 g) = 5.71 W/kg ; SAR(10 g) = 1.25 W/kg

Maximum value of SAR (measured) = 16.9 W/kg

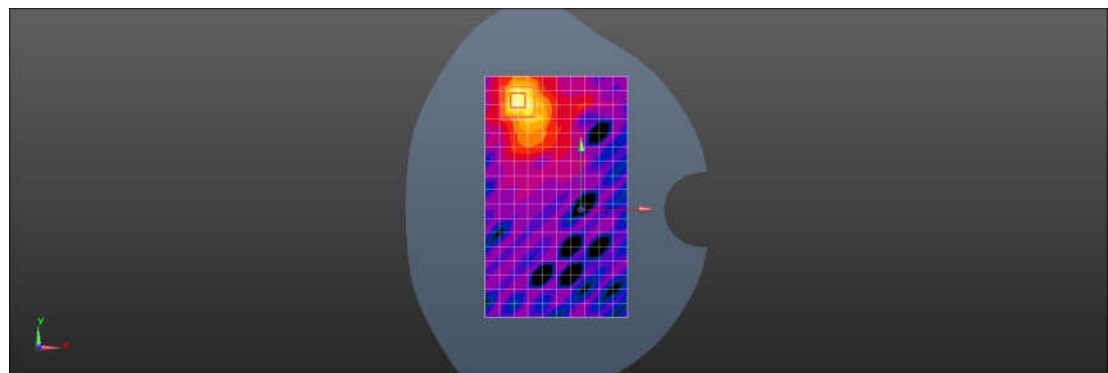

$0 \text{ dB} = 16.9 \text{ W/kg} = 12.28 \text{ dBW/kg}$

Test Laboratory: SGS-SAR Lab

SL201D Bluetooth DH5 78CH Left cheek

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium parameters used: $f = 2480$ MHz; $\sigma = 1.854$ S/m; $\epsilon_r = 39.876$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.77, 7.77, 7.77); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0615 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.778 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.106 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.0781 W/kg

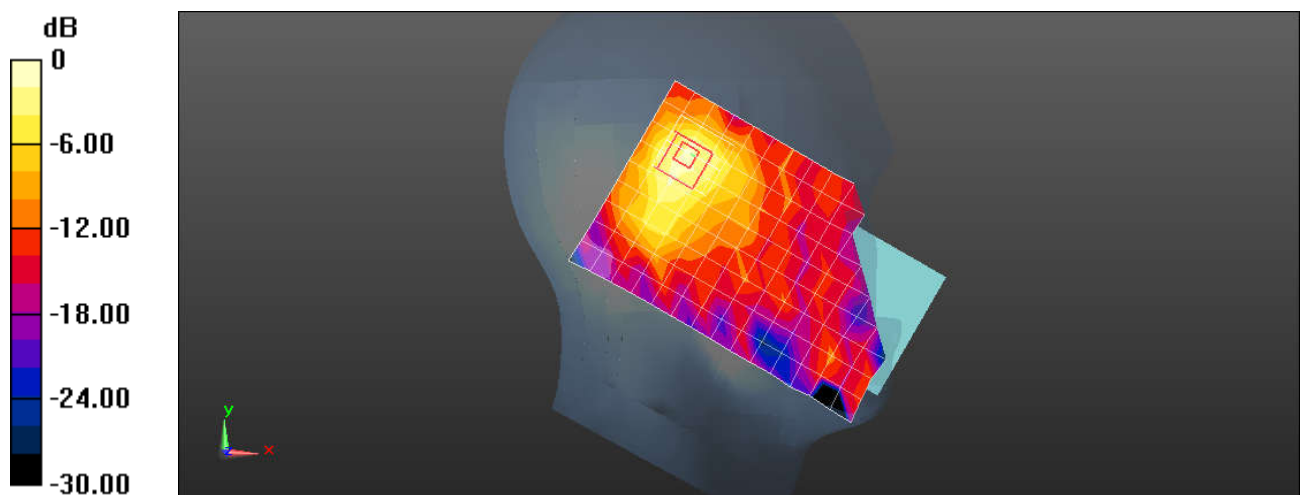

0 dB = 0.0781 W/kg = -11.07 dBW/kg

Test Laboratory: SGS-SAR Lab

SL201D Bluetooth DH5 78CH Back side 15mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium parameters used: $f = 2480$ MHz; $\sigma = 1.854$ S/m; $\epsilon_r = 39.876$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.77, 7.77, 7.77); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0286 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.420 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0360 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.00672 W/kg

Maximum value of SAR (measured) = 0.0252 W/kg

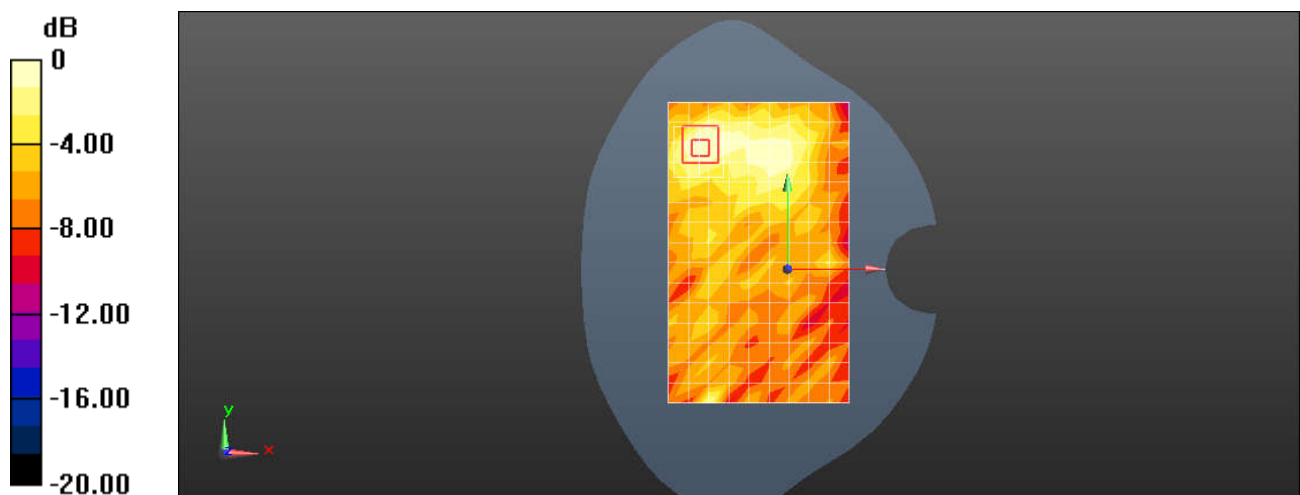

0 dB = 0.0252 W/kg = -15.99 dBW/kg

Test Laboratory: SGS-SAR Lab

SL201D Bluetooth DH5 78CH Back side 10mm

DUT: SL201D; Type: Mobile Phone; Serial: 355581700005010

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium parameters used: $f = 2480$ MHz; $\sigma = 1.854$ S/m; $\epsilon_r = 39.876$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.77, 7.77, 7.77); Calibrated: 2021-12-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1455; Calibrated: 2021-12-29
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1563
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0662 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.658 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0880 W/kg

SAR(1 g) = 0.041 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0690 W/kg

