

# **FCC Test Report**

Report No.: AGC14499230205FE04

FCC ID : 2APPZ-LH100

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION**: IP Phone

BRAND NAME : LINXVIL

MODEL NAME : LH100

**APPLICANT**: Fanvil Technology Co., Ltd

**DATE OF ISSUE** : Mar. 24, 2023

**STANDARD(S)** : FCC Part 15.247

**REPORT VERSION**: V1.0


Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 46

## REPORT REVISE RECORD

Report Version	on Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Mar. 24, 2023	Valid	Initial Release





## **TABLE OF CONTENTS**

1. VERIFICATION OF COMPLIANCE	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	6
2.3. RELATED SUBMITTAL(S)/GRANT(S)	7
2.4. TEST METHODOLOGY	7
2.5. SPECIAL ACCESSORIES	
2.6. EQUIPMENT MODIFICATIONS	
2.7. ANTENNA REQUIREMENT	7
3. MEASUREMENT UNCERTAINTY	8
4. DESCRIPTION OF TEST MODES	9
5. SYSTEM TEST CONFIGURATION	10
5.1. CONFIGURATION OF TESTED SYSTEM	10
5.2. EQUIPMENT USED IN TESTED SYSTEM	10
5.3. SUMMARY OF TEST RESULTS	10
6. TEST FACILITY	11
7. PEAK OUTPUT POWER	12
7.1. MEASUREMENT PROCEDURE	12
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	12
7.3. LIMITS AND MEASUREMENT RESULT	13
8. 6 DB BANDWIDTH	17
8.1. MEASUREMENT PROCEDURE	17
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	17
8.3. LIMITS AND MEASUREMENT RESULTS	17
9. CONDUCTED SPURIOUS EMISSION	21
9.1. MEASUREMENT PROCEDURE	21
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
9.3. MEASUREMENT EQUIPMENT USED	
9.4. LIMITS AND MEASUREMENT RESULT	21
10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	the "Dedicated Testing/Inspection



Page 4 of 46

10.1. MEASUREMENT PROCEDURE	30
10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	30
10.3. MEASUREMENT EQUIPMENT USED	
10.4. LIMITS AND MEASUREMENT RESULT	30
11. RADIATED EMISSION	34
11.1. MEASUREMENT PROCEDURE	34
11.2. TEST SETUP	35
11.3. LIMITS AND MEASUREMENT RESULT	36
11.4. TEST RESULT	36
12. FCC LINE CONDUCTED EMISSION TEST	42
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	42
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	42
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	43
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	44
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	46
APPENDIX B: PHOTOGRAPHS OF EUT	46



Page 5 of 46

## 1. VERIFICATION OF COMPLIANCE

Applicant	Fanvil Technology Co., Ltd	
Address	10/F Block A, Dualshine Global Science Innovation Center, Honglang Nortl Road, Bao'an District, Shenzhen, China	
Manufacturer	Fanvil Technology Co., Ltd	
Address	10/F Block A, Dualshine Global Science Innovation Center, Honglang North 2nd Road, Bao'an District, Shenzhen, China	
Factory	Fanvil Technology Co., Ltd	
Address	10/F Block A, Dualshine Global Science Innovation Center, Honglang North 2nd Road, Bao'an District, Shenzhen, China	
Product Designation	IP Phone	
Brand Name	LINKVIL	
Test Model	LH100	
Date of receipt of test item	Feb. 14, 2023	
Date of test	Feb. 14, 2023 to Mar. 24, 2023	
Deviation	No any deviation from the test method	
Condition of Test Sample	Normal	
Test Result	Pass	
Report Template	AGCRT-US-BLE/RF	

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC part 15.247.

Prepared By	Bibo thay	
	Bibo Zhang (Project Engineer)	Mar. 24, 2023
Reviewed By	Calvin Lin	
	Calvin Liu (Reviewer)	Mar. 24, 2023
Approved By	Max Zhang	
	Max Zhang (Authorized Officer)	Mar. 24, 2023



Page 6 of 46

## 2. GENERAL INFORMATION

## 2.1. PRODUCT DESCRIPTION

The EUT is designed as a "IP Phone". It is designed by way of utilizing the OFDM technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	4MHz:906MHz-926MHz
Operation requeitey	8MHz:908MHz-924MHz
RF Output Power	4MHz:28.710dBm (Max)
Kr Output rower	8MHz:28.509dBm (Max)
Modulation	OFDM
Number of channels	4MHz:6 Channels
Number of Chamileis	8MHz:3 Channels
Antenna Designation	PIFA antenna (Comply with requirements of the FCC part 15.203)
Antenna Gain	3.9dBi
Hardware Version	V1.0
Software Version	T2.12.2
Power Supply	DC 5V/1A by adapter or DC 48V by POE

## 2.2. TABLE OF CARRIER FREQUENCYS

906MHz-926MHz for 4MHz bandwidth

Channel Number	Frequency (MHZ)	Channel Number	Frequency (MHZ)
00	906	03	918
01	910	04	922
02	914	05	926

## 908MHz-924MHz for 8MHz bandwidth

Channel Number	Frequency (MHZ)
00	908
01	916
02	924



Page 7 of 46

## 2.3. RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: 2APPZ-LH100** filing to comply with the FCC Part 15.247 requirements.

#### 2.4. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

#### 2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

#### 2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

#### 2.7. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



Page 8 of 46

## 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission,  $U_c = \pm 2.9 \text{ dB}$
- Uncertainty of Radiated Emission below 1GHz,  $U_c = \pm 3.8 \text{ dB}$
- Uncertainty of Radiated Emission above 1GHz,  $U_c = \pm 4.9 \text{ dB}$
- Uncertainty of total RF power, conducted,  $U_c = \pm 0.8 \text{ dB}$
- Uncertainty of RF power density, conducted,  $U_c = \pm 2.6 \text{ dB}$
- Uncertainty of spurious emissions, conducted,  $U_c = \pm 2.7 \%$
- Uncertainty of Occupied Channel Bandwidth:  $U_c$  =  $\pm 2~\%$




#### 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX(906MHz)
2	Middle channel TX(914MHz)
3	High channel TX(926MHz)
4	Low channel TX(908MHz)
5	Middle channel TX(916MHz)
6	High channel TX(924MHz)

#### Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

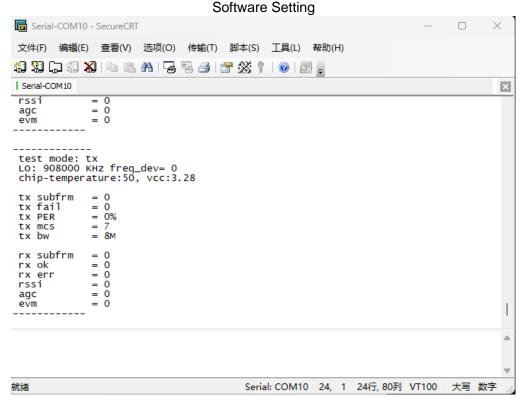




Page 10 of 46


## 5. SYSTEM TEST CONFIGURATION

## **5.1. CONFIGURATION OF TESTED SYSTEM**

Radiated Emission Configure:



## Conducted Emission Configure:



## **5.2. EQUIPMENT USED IN TESTED SYSTEM**

Item	Equipment	Model No.	ID or Specification	Remark
1	IP Phone	LH100	2APPZ-LH100	EUT
2	Control Box	USB TO TTL	N/A	AE
3	Adapter	TPA-97H050100UW01	N/A	AE
4	Charger line	N/A	1.5m unshielded	AE

#### 5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(3)	Peak Output Power	Compliant
15.247 (a)(2)	6 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.247 (e)	Maximum Conducted Output Power Density	Compliant
15.209	Radiated Emission	Compliant
15.207	Conducted Emission	Compliant



Page 11 of 46

## **6. TEST FACILITY**

Test Site Attestation of Global Compliance (Shenzhen) Co., Ltd	
Location  1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Fuhai Street, Bao'an District, Shenzhen, Guangdong, China	
Designation Number CN1259	
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA

## TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESPI	101206	Mar. 28, 2022	Mar. 27, 2023
Artificial power network	R&S	ESH2-Z5	100086	Jun. 08, 2022	Jun. 07, 2023
Test Software	FARA	EZ-EMC	Ver. AGC-CON03 A1	N/A	N/A

#### **TEST EQUIPMENT OF RADIATED EMISSION TEST**

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
EXA Signal Analyzer	Agilent	N9010A	MY53470504	Aug. 04, 2022	Aug. 03, 2023
Signal Analyzer	Aglient	N9020A	MY52090123	Aug. 04, 2022	Aug. 03, 2023
2.4GHz Filter	EM Electronics	N/A	N/A	Mar. 18, 2022	Mar. 19, 2024
Attenuator	ZHINAN	E-002	N/A	Aug. 04, 2022	Aug. 03, 2024
Horn Antenna	SCHWARZBEC	BBHA9170	768	Oct. 31, 2021	Oct. 30, 2023
Active Loop Antenna (9K-30Mhz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS	3117	00154520	Sep. 06, 2021	Sep. 05, 2023
Preamplifier Assembly	ETS	3117PA	00225134	Sep. 01, 2022	Sep. 02, 2024
Wideband Antenna	SCHWARZBECK	VULB9168	D69250	Apr. 28, 2021	Apr. 27, 2023
Test Software	FARA	EZ-EMC	Ver.RA-03A	N/A	N/A



Page 12 of 46

## 7. PEAK OUTPUT POWER


#### 7.1. MEASUREMENT PROCEDURE

For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. RBW ≥ DTS bandwidth
- 3. VBW≥3\*RBW.
- 4. SPAN≥VBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

## 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) PEAK POWER TEST SETUP

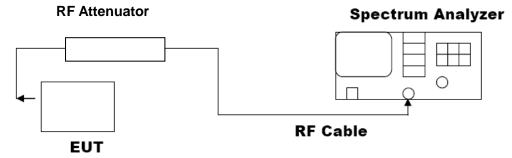





Page 13 of 46

#### 7.3. LIMITS AND MEASUREMENT RESULT

TIOI EIIIITTO TITO INELTOCITEMENT INECOET						
Test Data of Conducted Output Power for 4MHz bandwidth						
Test Mode	Test Mode Test Channel Peak Power Limits (MHz) (dBm) (dBm)					
	906	28.651	≤30	Pass		
OFDM	914	28.710	≤30	Pass		
	926	28.676	≤30	Pass		

**Test Graphs of Conducted Output Power** 

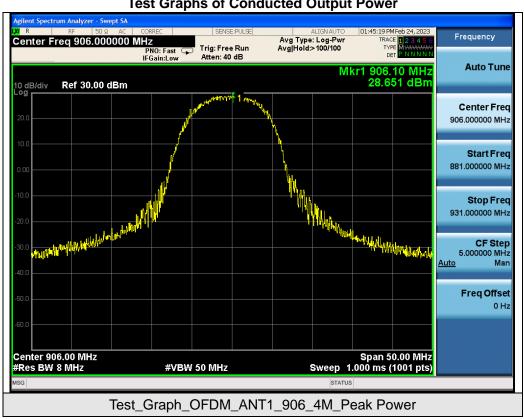
















Test Data of Conducted Output Power for 8MHz bandwidth Limits Test Channel **Peak Power** Test Mode Pass or Fail (MHz) (dBm) (dBm) 28.179 ≤30 **Pass** 908 ≤30 28.393 Pass **OFDM** 916 28.509 ≤30 **Pass** 924

**Test Graphs of Conducted Output Power** 

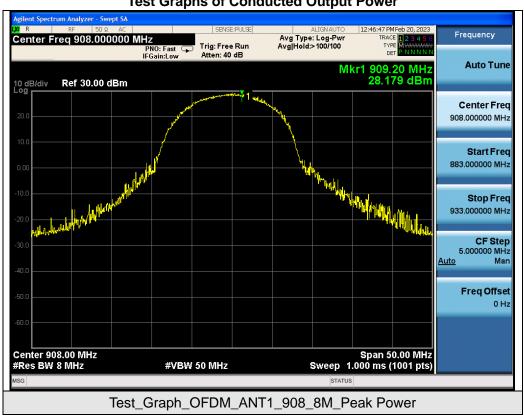











Page 17 of 46

#### 8. 6 DB BANDWIDTH

#### **8.1. MEASUREMENT PROCEDURE**

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW ≥ 3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.


## 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


The same as described in section 7.2.

#### **8.3. LIMITS AND MEASUREMENT RESULTS**


Test Data of Occupied Bandwidth and DTS Bandwidth for 4MHz bandwidth						
Test Mode	Test Mode Test Channel 99% Occupied -6dB Limits (MHz) Bandwidth (MHz) Bandwidth (MHz) Pass or F					
	906	3.7157	3.655	≥0.5	Pass	
OFDM	914	3.6952	3.642	≥0.5	Pass	
	926	3.7084	3.650	≥0.5	Pass	

## **Test Graphs of DTS Bandwidth**

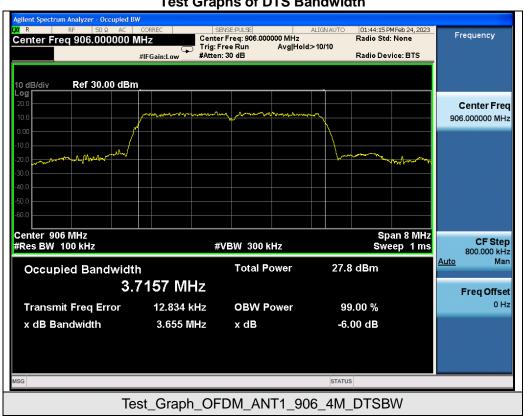





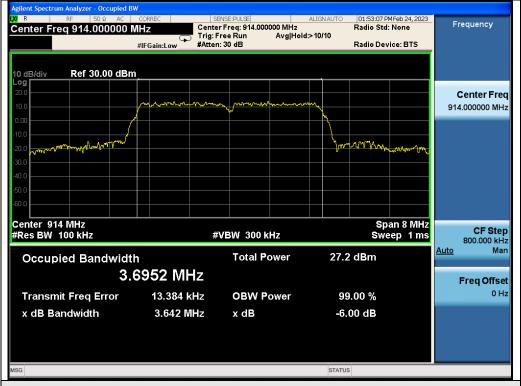







Page 19 of 46


Test Data of Occupied Bandwidth and DTS Bandwidth for 8MHz bandwidth						
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-6dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail	
	908	7.5493	7.597	≥0.5	Pass	
OFDM	916	7.5690	7.627	≥0.5	Pass	
	924	7.5562	7.598	≥0.5	Pass	

## **Test Graphs of DTS Bandwidth**

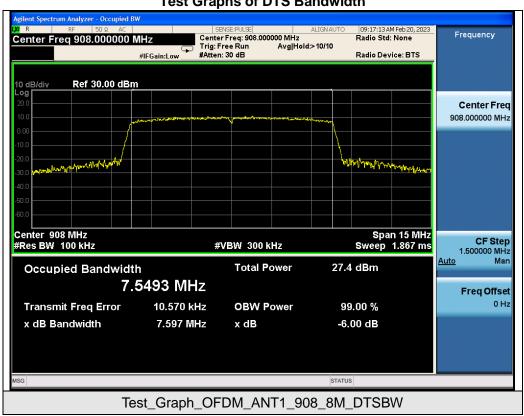





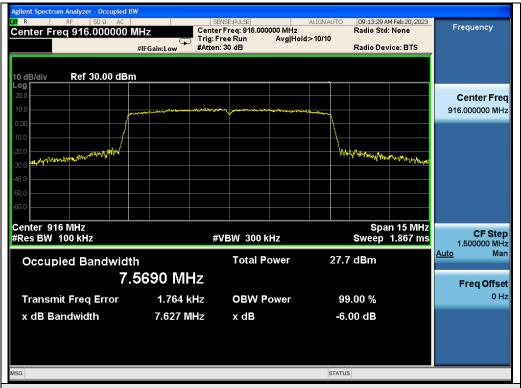





Page 21 of 46

## 9. CONDUCTED SPURIOUS EMISSION

#### 9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

## 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


The same as described in section 7.2.

#### 9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.


#### 9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT					
A 11 11 12 12	Measurement Result				
Applicable Limits	Test Data	Criteria			
In any 100 kHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	At least -20dBc than the reference level	PASS			







Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands

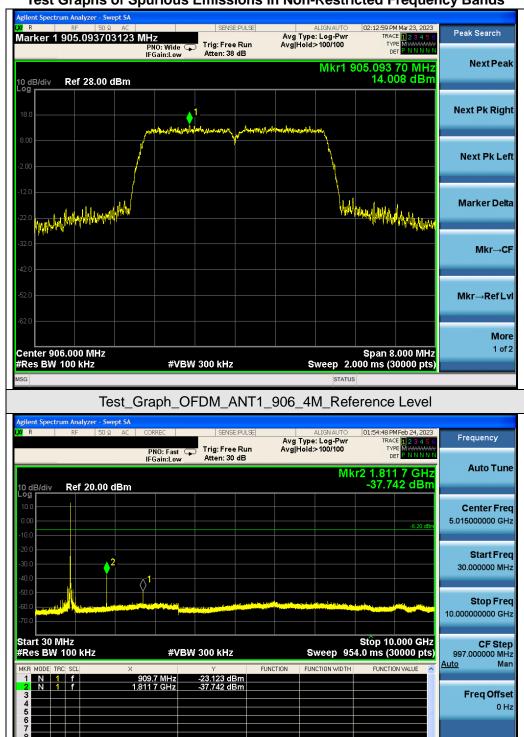



Test\_Graph\_OFDM\_ANT1\_906\_4M\_Band Emissions






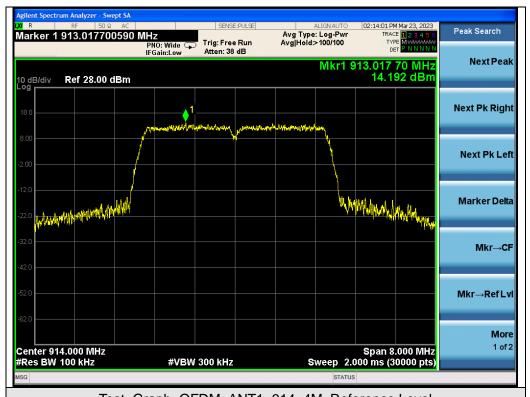


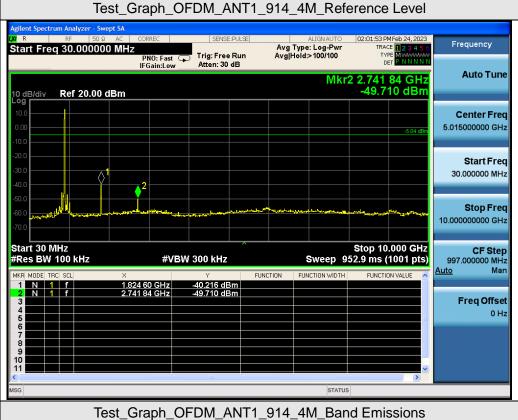






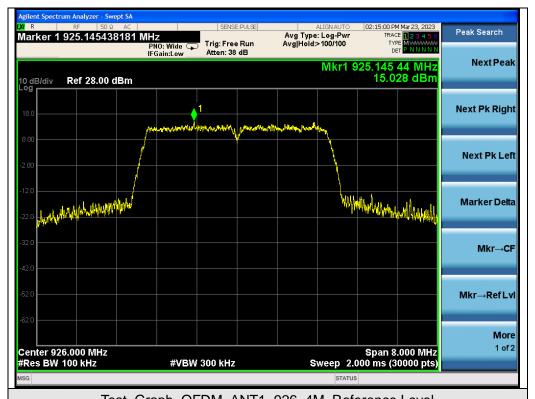


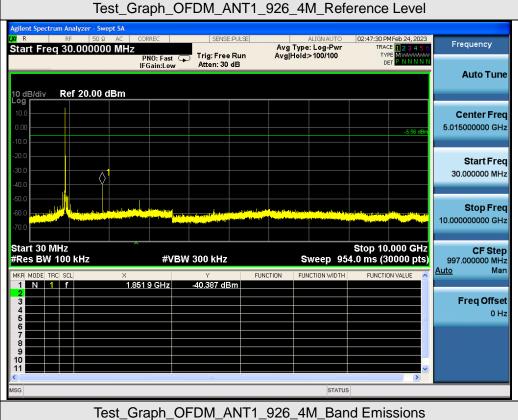







Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands

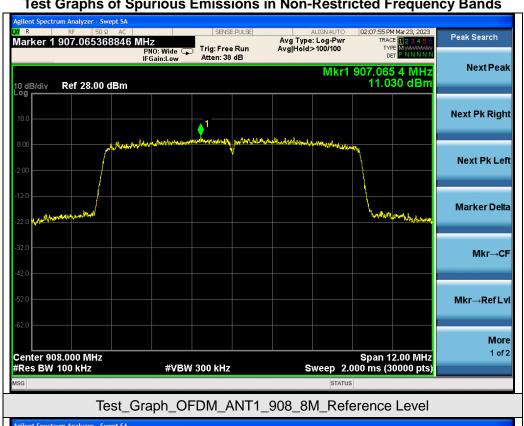

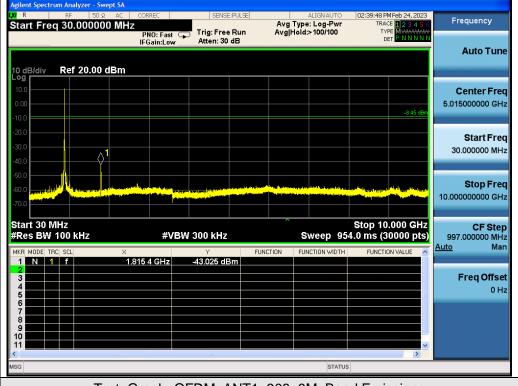



Test\_Graph\_OFDM\_ANT1\_908\_8M\_Band Emissions








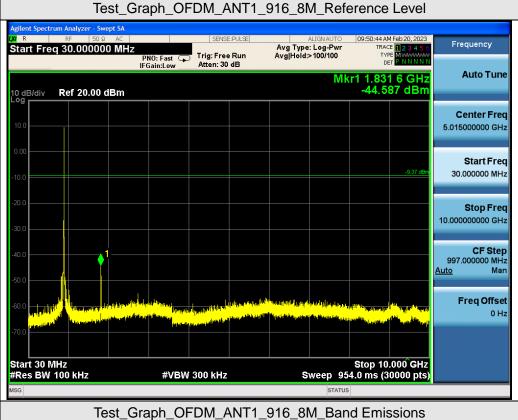








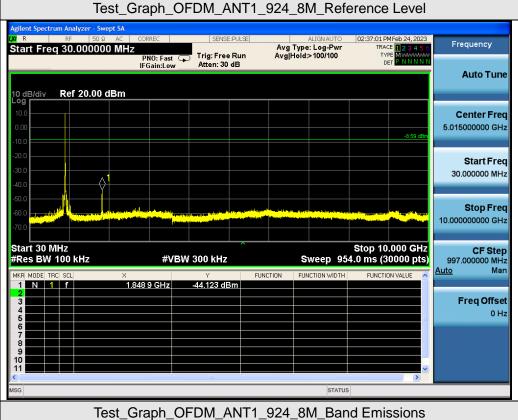






Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands








Test\_Graph\_OFDM\_ANT1\_926\_4M\_Higher Band Edge Emissions





Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands

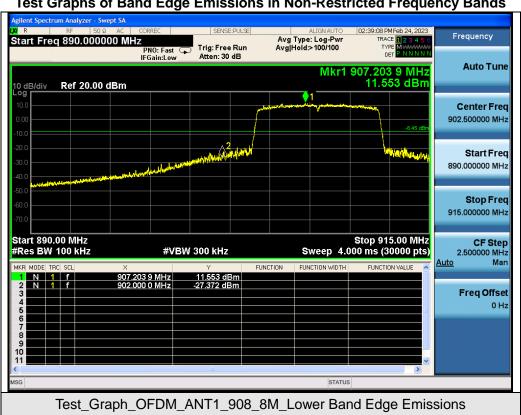



Test\_Graph\_OFDM\_ANT1\_924\_8M\_Higher Band Edge Emissions



Page 30 of 46

## 10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

#### 10.1. MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set the SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 10.2 was used in this testing.

## 10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer to Section 7.2.


#### 10.3. MEASUREMENT EQUIPMENT USED


Refer to Section 6.

#### 10.4. LIMITS AND MEASUREMENT RESULT


Test Data of Conducted Output Power Spectral Density						
Test Mode Test Channel Power density Limit Pass (dBm/3kHz) Pass						
	906	1.037	<b>≤8</b>	Pass		
OFDM	914	1.481	≤8	Pass		
	926	1.611	≪8	Pass		


Test Graphs of Conducted Output Power Spectral Density

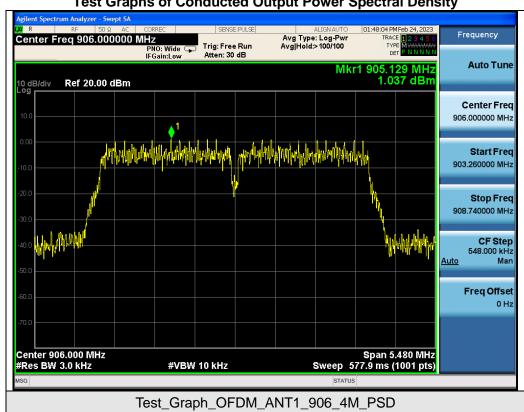





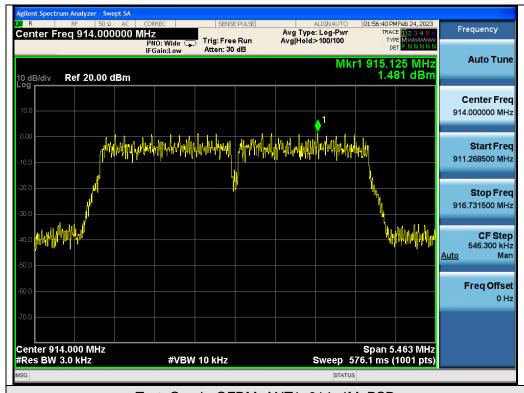

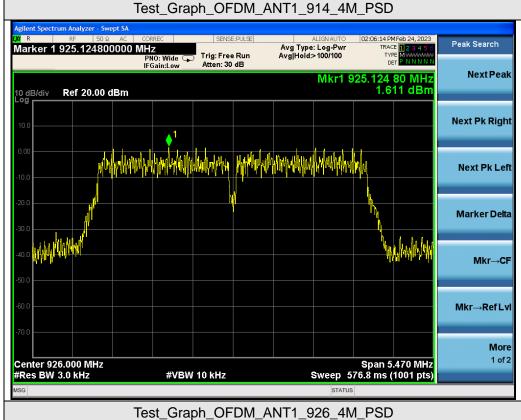



Freq Offset

Page 32 of 46

Test Data of Conducted Output Power Spectral Density						
Test Mode	Test Mode Test Channel Power density Limit (MHz) (dBm/3kHz) (dBm/3kHz)					
	908	-2.127	≪8	Pass		
OFDM	916	-2.892	≪8	Pass		
	924	-2.823	≪8	Pass		

**Test Graphs of Conducted Output Power Spectral Density** Frequency Center Freq 908.000000 MHz Avg Type: Log-Pw Avg|Hold>100/100 Trig: Free Run **Auto Tune** Mkr1 908.686 MHz -2.127 dBm Ref 20.00 dBm Center Freq 908.000000 MHz Start Freq 902.280000 MHz Stop Freq 913.720000 MHz <u>Auto</u> Man


Test\_Graph\_OFDM\_ANT1\_908\_8M\_PSD

#VBW 10 kHz


Span 11.44 MHz Sweep 1.206 s (1001 pts)


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Center 908.000 MHz #Res BW 3.0 kHz





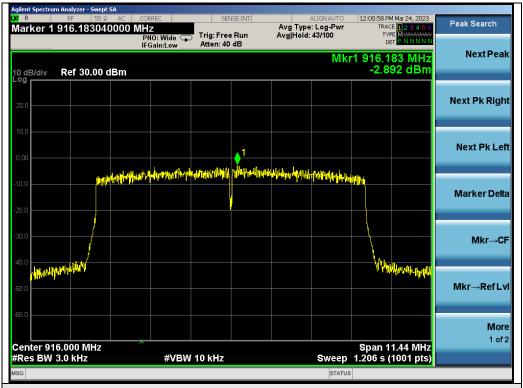

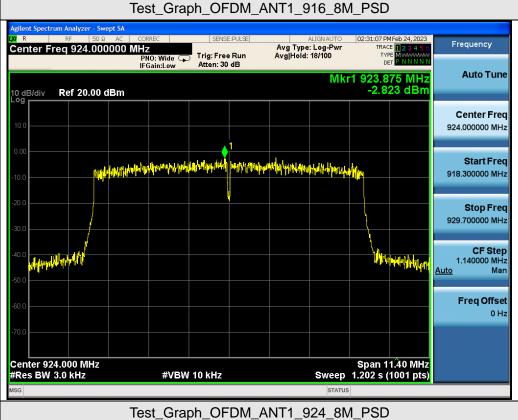




Page 34 of 46

## 11. RADIATED EMISSION

#### 11.1. MEASUREMENT PROCEDURE


- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.






#### 11.2. TEST SETUP


## Radiated Emission Test-Setup Frequency Below 30MHz

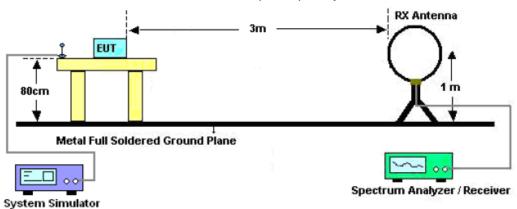

## RADIATED EMISSION TEST SETUP 30MHz-1000MHz

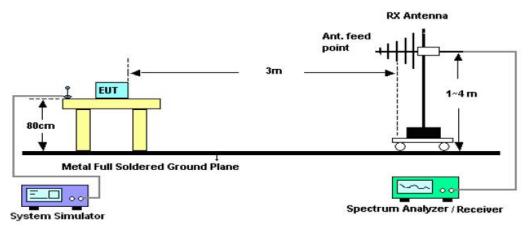

#### RADIATED EMISSION TEST SETUP ABOVE 1000MHz

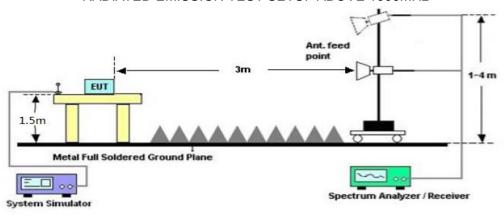



Page 36 of 46

## 11.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

#### 11.4. TEST RESULT

#### **RADIATED EMISSION BELOW 30MHz**


The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



Page 37 of 46

#### **RADIATED EMISSION BELOW 1GHZ**

EUT	IP Phone	Model Name	LH100
Temperature	22.8°C	Relative Humidity	53.1%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

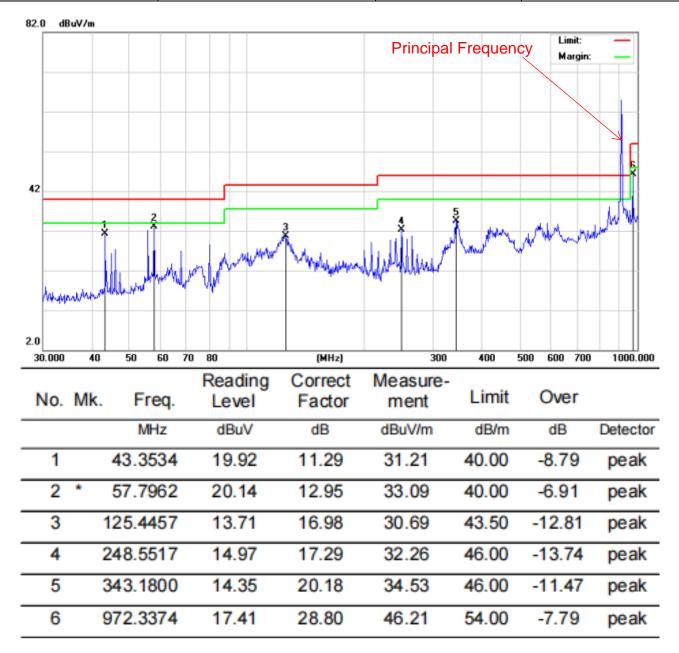


**RESULT: PASS** 





**EUT** IP Phone LH100 Model Name 22.8°C **Temperature Relative Humidity** 53.1% 985hPa Normal Voltage **Pressure Test Voltage Test Mode** Mode 2 **Antenna** Vertical

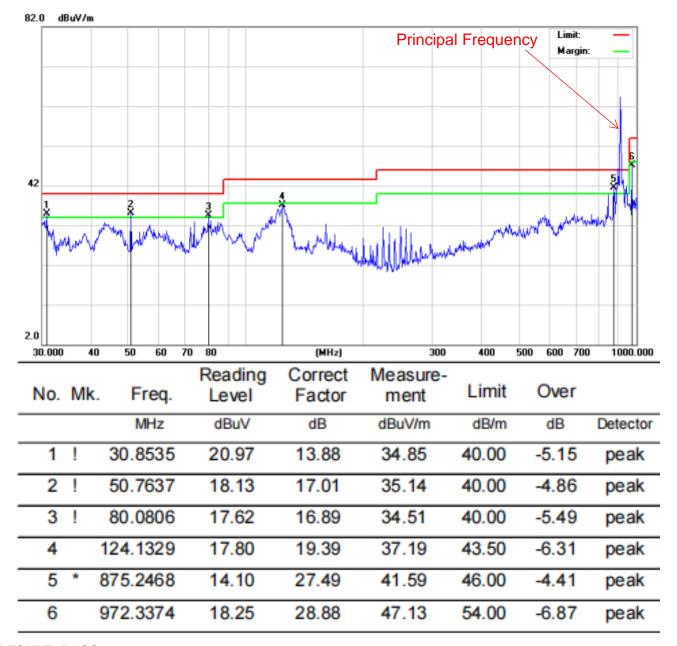

## **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Over=Measurement-Limit.

2. All test modes had been tested. The mode 2 is the worst case and recorded in the report.



Page 39 of 46

## **RADIATED EMISSION ABOVE 1GHZ**

EUT	IP Phone	Model Name	LH100
Temperature	22.8°C	Relative Humidity	53.1%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type		
1812.000	46.27	0.08	46.35	74	-27.65	peak		
1812.000	37.61	0.08	37.69	54	-16.31	AVG		
2718.000	42.72	2.21	44.93	74	-29.07	peak		
2718.000	31.78	2.21	33.99	54	-20.01	AVG		
Remark:								
Factor = Anter	na Factor + Cabl	e Loss – Pre-a	mplifier.	·	·			

EUT	IP Phone	Model Name	LH100
Temperature	22.8°C	Relative Humidity	53.1%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Time
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
1812.000	45.86	0.08	45.94	74	-28.06	peak
1812.000	36.74	0.08	36.82	54	-17.18	AVG
2718.000	40.14	2.21	42.35	74	-31.65	peak
2718.000	30.94	2.21	33.15	54	-20.85	AVG
Remark:					•	•
Factor = Anten	na Factor + Cabl	e Loss – Pre-a	mplifier.			



Page 40 of 46

EUT	IP Phone	Model Name	LH100
Temperature	22.8°C	Relative Humidity	53.1%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Time
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
1828.000	47.53	0.14	47.67	74	-26.33	peak
1828.000	37.25	0.14	37.39	54	-16.61	AVG
2742.000	43.61	2.36	45.97	74	-28.03	peak
2742.000	32.95	2.36	35.31	54	-18.69	AVG
Remark:						
Factor = Anter	na Factor + Cab	le Loss – Pre-a	mplifier.		·	·

EUT	IP Phone	Model Name	LH100
Temperature	22.8°C	Relative Humidity	53.1%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
1828.000	45.37	0.14	45.51	74	-28.49	peak	
1828.000	35.84	0.14	35.98	54	-18.02	AVG	
2742.000	39.18	2.36	41.54	74	-32.46	peak	
2742.000	30.07	2.36	32.43	54	-21.57	AVG	
Remark:	'						
actor = Anter	nna Factor + Cabl	e Loss – Pre-a	mplifier.				



Page 41 of 46

EUT	IP Phone	Model Name	LH100
Temperature	22.8°C	Relative Humidity	53.1%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	\/alva Tree
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
1852.000	48.37	0.22	48.59	74	-25.41	peak
1852.000	38.42	0.22	38.64	54	-15.36	AVG
2778.000	43.04	2.64	45.68	74	-28.32	peak
2778.000	34.17	2.64	36.81	54	-17.19	AVG
Remark:						
actor = Anter	nna Factor + Cable	e Loss – Pre-	amplifier.	·		

EUT	IP Phone	Model Name	LH100
Temperature	22.8°C	Relative Humidity	53.1%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
1852.000	46.53	0.22	46.75	74	-27.25	peak
1852.000	37.43	0.22	37.65	54	-16.35	AVG
2778.000	42.44	2.64	45.08	74	-28.92	peak
2778.000	31.82	2.64	34.46	54	-19.54	AVG
Remark:						
Factor = Anter	na Factor + Cabl	e Loss – Pre-a	mplifier.			

#### **RESULT: PASS**

#### Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin=Emission Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been tested. The 4MHz bandwidth modulation is the worst case and recorded in the report.



Page 42 of 46

## 12. FCC LINE CONDUCTED EMISSION TEST


## 12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Francos	Maximum RF Line Voltage					
Frequency	Q.P.(dBuV)	Average(dBuV)				
150kHz~500kHz	66-56	56-46				
500kHz~5MHz	56	46				
5MHz~30MHz	60	50				

Note: 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

## 12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

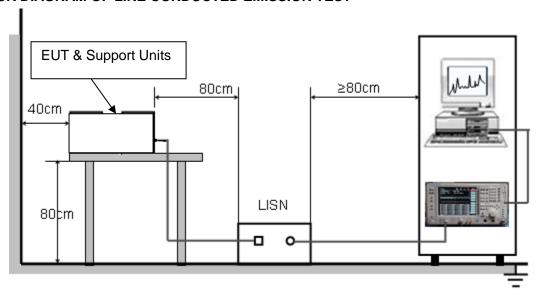



Page 43 of 46

#### 12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V by adapter or DC 48V by POE which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


#### 12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.



## 12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Line Conducted Emission Test Line 1-L

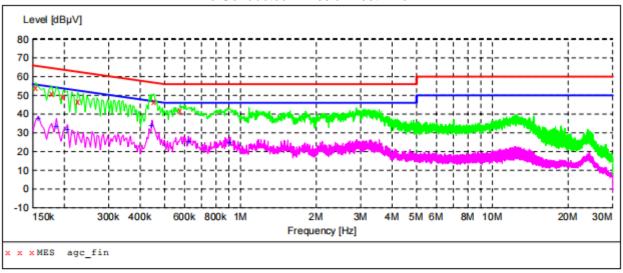

## MEASUREMENT RESULT: "agc\_fin"

2023/2/27 Frequenc	4	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.15400	0 54.20	6.9	66	11.6	QP	L1	GND
0.17800	0 51.20	6.7	65	13.4	QP	L1	GND
0.19800	0 49.40	6.6	64	14.3	QP	L1	GND
0.22600	0 46.40	6.4	63	16.2	QP	L1	GND
0.45400	0 46.40	5.5	57	10.4	QP	L1	GND
0.57800	0 41.90	5.4	56	14.1	QP	L1	GND


## MEASUREMENT RESULT: "agc fin2"

Frequen	9:37 cy Level Hz dBμV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.1580	00 37.30	6.8	56	18.3	AV	L1	GND
0.1860	00 33.40	6.6	54	20.8	AV	L1	GND
0.2060	00 31.50	6.5	53	21.9	AV	L1	GND
0.4460	00 34.10	5.5	47	12.8	AV	L1	GND
0.6220	00 25.10	5.4	46	20.9	AV	L1	GND
0.9100	00 24.50	5.4	46	21.5	AV	L1	GND

**RESULT: PASS** 





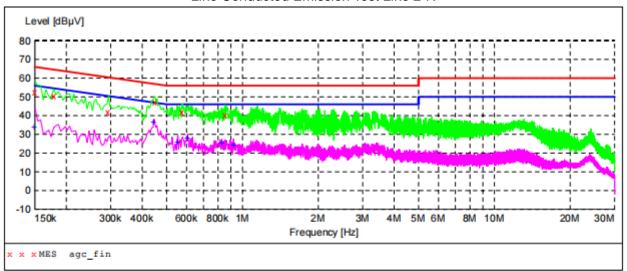

## MEASUREMENT RESULT: "agc\_fin"

2023/2/27 9:39 Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.150000 0.178000 0.294000 0.450000 0.578000	52.70 50.50 41.90 47.20 41.70	6.9 6.7 6.1 5.5 5.4	66 65 60 57 56	13.3 14.1 18.5 9.7 14.3	QP QP QP QP QP	N N N N	GND GND GND GND GND
0.854000	40.40	5.4	56	15.6	QP	N	GND

## MEASUREMENT RESULT: "agc fin2"

2023/2/27 9:39 Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.150000	33.70	6.9	56	22.3	AV	N	GND
0.446000	36.70	5.5	47	10.2	AV	N	GND
0.554000	26.00	5.4	46	20.0	AV	N	GND
0.606000	27.90	5.4	46	18.1	AV	N	GND
0.826000	25.30	5.4	46	20.7	AV	N	GND
0.922000	24.20	5.4	46	21.8	AV	N	GND

#### **RESULT: PASS**

Note: All the test modes had been tested, the mode 2 was the worst case. Only the data of the worst case would be record in this test report.



Page 46 of 46

## APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC14499230205AP01

**APPENDIX B: PHOTOGRAPHS OF EUT** 

Refer to the Report No.: AGC14499230205AP02

----END OF REPORT----



## Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.