

Product Spec.

Customer Name	Tymphany		
Project Name	S53		
Customer P/N			
TE P/N	1-2195498-2		
Description	WLAN (Free Space)		
DWG. Version		Doc. Version	A
Green Part			


ME engineer	RD engineer	RD Supervisor	RD Manager
<i>Allen Hu</i>	<i>Raymond Wang</i>		

Customer engineer Approval




[Index](#)

- 1. Drawing**
- 2. Antenna Photo**
- 3. Antenna Related Data**
- 4. Antenna Testing Conditions**
- 5. Test Result**

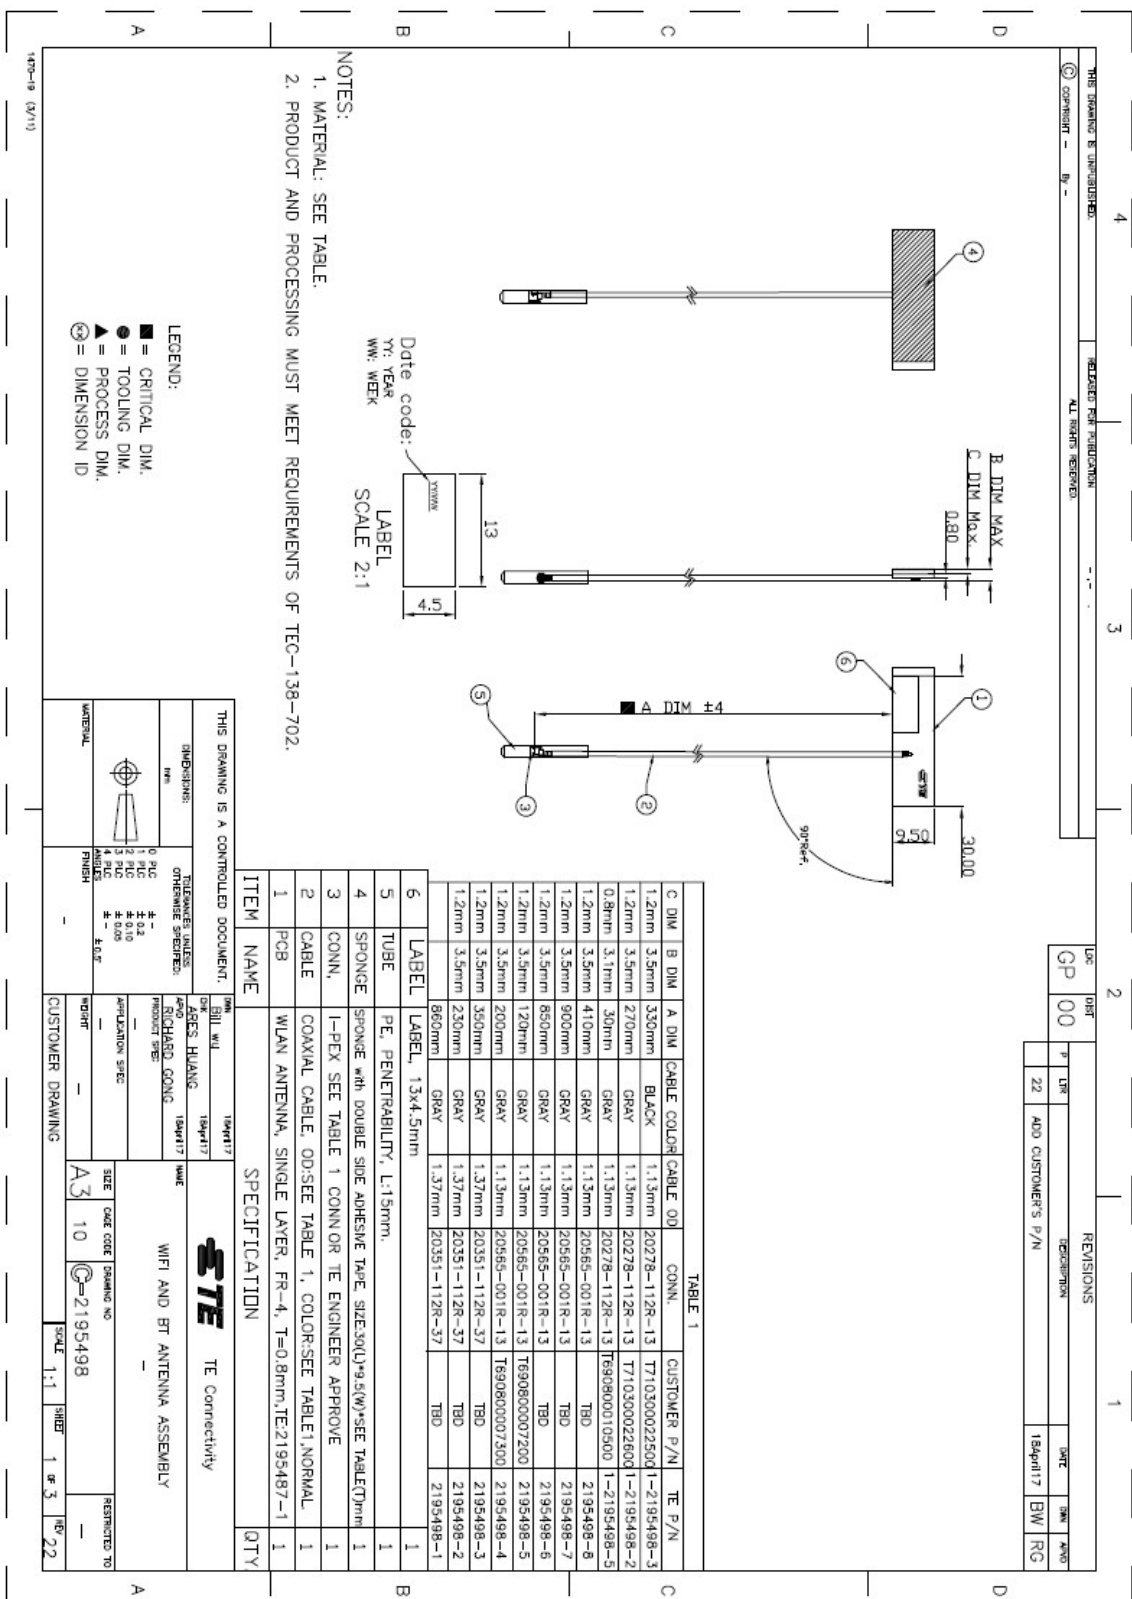

2. Antenna Photo

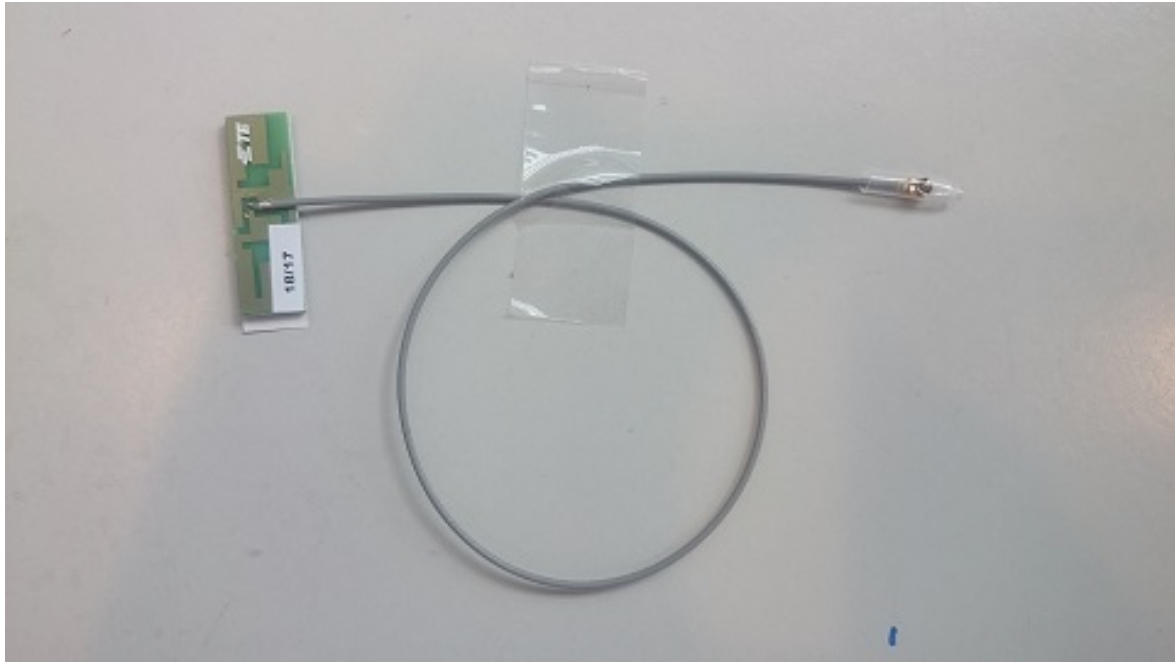



3. Antenna Related Data.

Frequency Range:

WLAN : 2400~2500MHz & 5150 ~ 5875MHz

Cable Color:

WLAN : Gray

Cable Type :

WLAN : $\Phi 1.13\text{mm}$

VSWR:

2400~2500MHz ≤ 7.5

5150~5875MHz ≤ 3.5


Average Gain :

$\geq -8.5 \text{ dBi @ } 2400\sim 2500\text{MHz}$

$\geq -5.0 \text{ dBi @ } 5150\sim 5875\text{MHz}$

4. Antenna Testing Conditions

Test Configuration(3D):

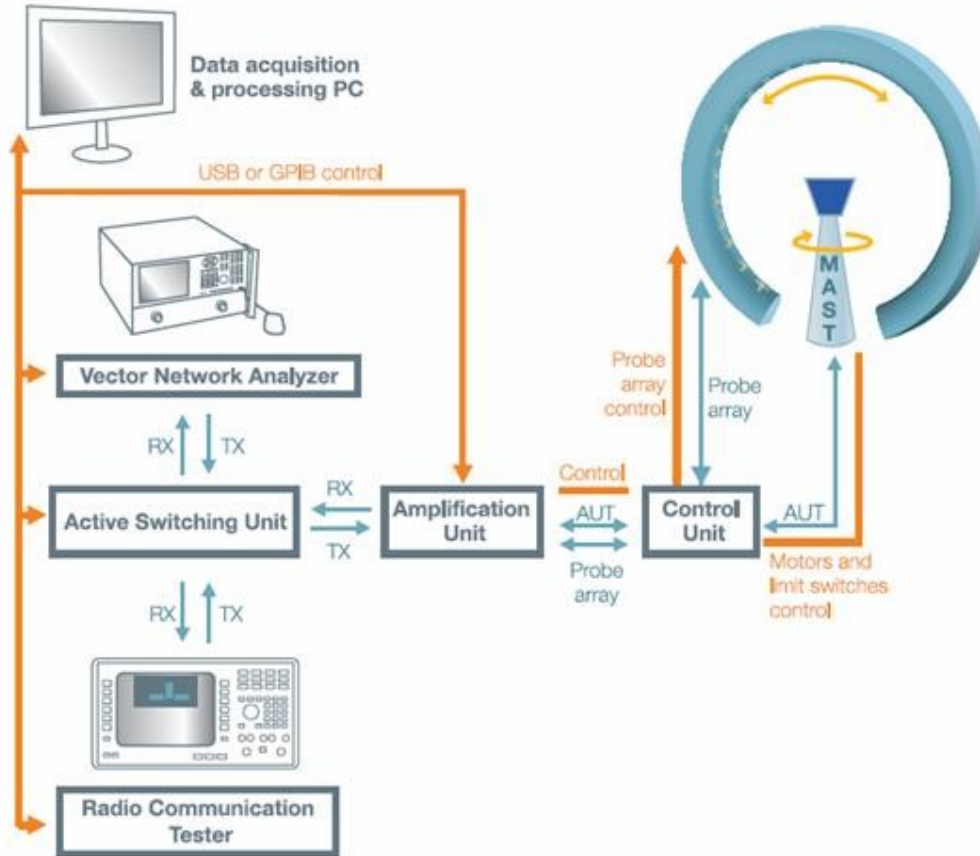


(Testing by 3D anechoic chamber)

5. Test Result.

5.1 VSWR

WLAN

Frequency (MHz)	2400	2500	5150	5875
WLAN	5.78	3.93	1.90	2.08

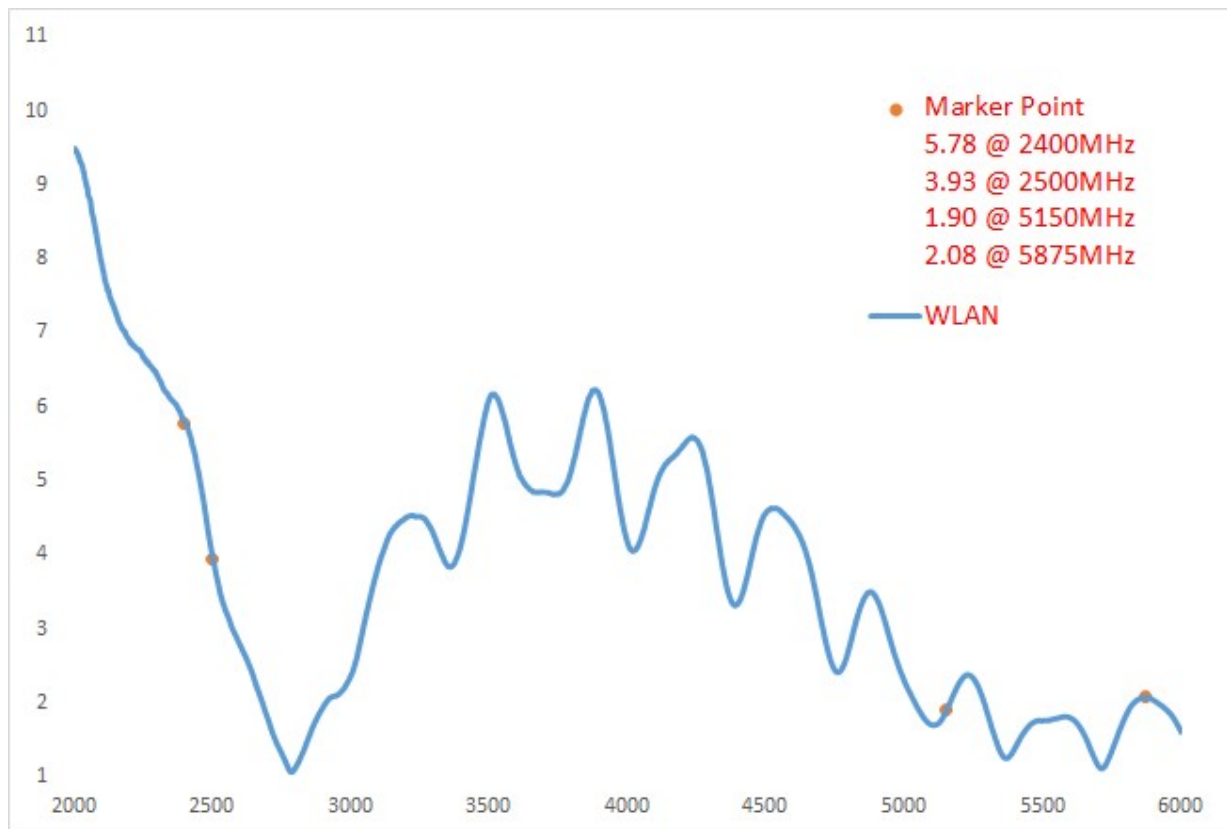


5.2 Gain value (Testing by 3D anechoic chamber)

WLAN


Antenna	WLAN	
Frequency (MHz)	Gain (dBi)	Efficiency (%)
2400	-7.00	20.0%
2450	-5.09	31.0%
2500	-4.46	35.8%
5150	-3.53	44.4%
5250	-3.08	49.2%
5350	-2.68	54.0%
5470	-2.97	50.4%
5725	-2.71	53.5%
5785	-3.13	48.7%
5875	-3.30	46.8%

5.3 Gain Pattern (Testing by 3D anechoic chamber)


WLAN

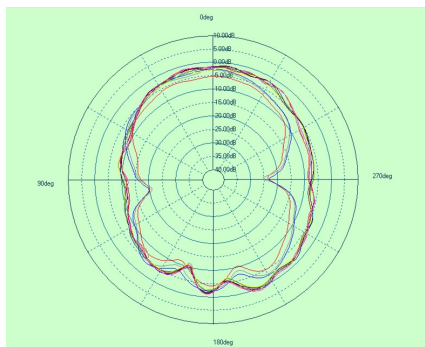

Phi 0

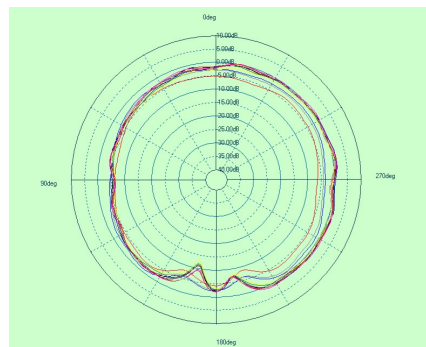

Phi 90

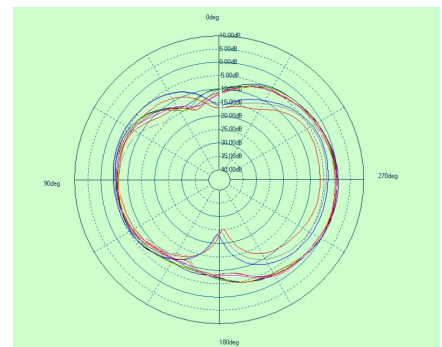

Theta90