

东莞市纳昇电子科技有限公司

Dongguan National Electronics Technology Co., LTD

客户承认书

SPECIFICATION FOR APPROVAL

客户名称
CUSTOMER: 东莞市雷雅智能科技有限公司

认证号 FILE NO:

客户料号
CUSTOMER PART NO: A11-43.5-0.08*24P*2C*10TS

品名规格
DESCRIPTION: 裸铜线 ϕ 0.08*24P*2C*10TS硬磁片
 ϕ 43.5*5.0孔双槽磁片发射线圈6.3uH 线长40MM

料号
PART NO: NSLY-A11-43.5-0.08*24P*2C*10TS-001

本公司工程部核准/FOR ENGINEER DEPARTMENT APPROVED

版本/REV	描述/DESCRIPTION	日期/DATE	修改页码REVISED PAGE	PREPARED BY
AA版	首次发行/FIRST ISSUE	2025/3/31		
非环保/NON RoHS ☐ 环保/RoHS ☒				
制图/DRAWING		审核/CHECKED	批准/APPROVED	
张家运		曹少平		

确认签字、盖章后请寄回此承认书一份

PLEASE RETURN TO US ONE COPY OF, , SPECIFICATION
FOR APPROVAL, , WITH YOUR APPROVED SIGNATURES

客户签名/CUSTOMER, S S I G N A T U R E

☐ 完全承认 FULL APPROVED	☐ 有条件承认 CONDITIONAL APPROVED	☐ 不予承认 REJECTED
审核/CHECKED	确认/APPROVAL	批准/APPROVED

公司地址:广东省东莞市寮步镇岭厦村岭安街38号聚特工业区B栋4楼

ADD (DG):4/F, Building B , Shenmeite ,38 Lingan street , Lingxia Viliage , Liaobu town ,Dongguan City , Guangdong Province P . R . C

香港: 九龙弥敦道625号雅兰中心办公楼二期15楼1508室

ADD (HK):Room1508,15/F. Office Tower Two , Grand Plaza .625 Nathan Road , kowloon , Hong Kong . P . R . C

TEL: 0769-81008683 FAX: 0769-81008683

PART NO	A11-43.5- 0.08*24P*2C*10TS	MODEL	裸铜线 ϕ 0.08*24P*2C*10TS硬磁 片 ϕ 43.5*5.0孔双槽磁片 发射线圈6.3uH 线长 400mm	REV	AA版
Product Name	无线充发射线圈	DRAWING NO	NSLY-A11-43.5- 0.08*24P*2C*10TS- 001	DOC TYPE	A0




修订履历

[illegible]

SPECIFICATION FOR APPROVAL

PART NO	A11-43.5- 0.08*24P*2C*10TS	MODEL	裸铜线 ϕ 0.08*24P*2C*10TS硬磁 片 ϕ 43.5*5.0孔双槽磁片 发射线圈6.3uH 线长 40mm	REV	AA版
Product Name	无线充发射线圈	DRAWING NO	NSLY-A11-43.5- 0.08*24P*2C*10TS- 001	DOC TYPE	A0

1. CONSTRUCTION DIMENSION (UNIT:mm)

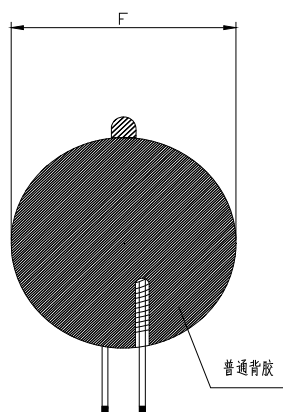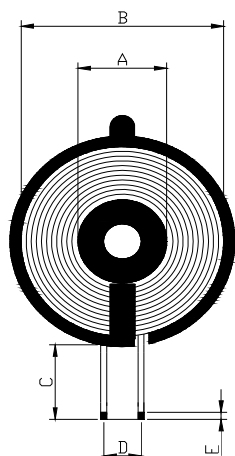


A	20.5±1.5
B	MAX40.0
C	40.0±1.5
D	REF.20.0
E	4.0±2.0
F	43.5±0.5
G	0.6±0.1
H	1.0±0.2
I	1.5±0.3

2. WINDING CONSTRUCTION:

ORDER 顺序	S----F	WIRE SIZE	TURNS	高温胶带	绕线方式	备 注
	开始--结束	线径	圈数	7.0mm	C. C. W	
N1	S--F	ϕ 0.08*24P*2C 裸铜自粘线	10TS	1.5TS		

3. SCHEMATIC CIRCUIT:

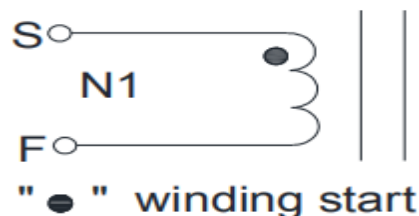

APPROVED BY	CHECKED BY	PREPARED BY
王秀明	曹少平	张家运

SPECIFICATION FOR APPROVAL

PART NO	A11-43.5-0.08*24P*2C*10TS	MODEL	裸铜线Φ 0.08*24P*2C*10TS硬磁片 Φ43.5*5.0孔双槽磁片 发射线圈6.3uH 线长40mm	REV	AA版
Product Name	无线充发射线圈	DRAWING NO	NSLY-A11-43.5-0.08*24P*2C*10TS-001	DOC TYPE	A0
PART NO	A11-43.5-0.08*24P*2C*10TS	MODEL	裸铜线Φ 0.08*24P*2C*10TS硬磁片 Φ43.5*5.0孔双槽磁片 发射线圈6.3uH 线长40mm	REV	AA版
Product Name	无线充发射线圈	DRAWING NO	NSLY-A11-43.5-0.08*24P*2C*10TS-001	DOC TYPE	

4. ELECTRICAL SPEC

- (1). INDUCTANCE TEST:AT 100KHZ , 0.25Vrms (CHEN HWA1062)
L: (S--F) =6.3uH±10%
(2) .DCR:50mΩ MAX
(3) .Q值/Q-VALUE: 8.0 Min

5. MATERIAL LIST材料清单:

序号	材料名称	材质	耐温等级	供应商	备 注
1	CORE	Φ43.5*T0.6, 硬磁片开双槽	230℃	HUIZHOU HUIBOCHENG MAGNET CO.,LTD	
2	WIRE	Φ0.08*24P*2C自粘线	255℃	JANPAN FUSHIFAYING CO.,LTD	
3	EPXOY	808A/B	180℃	DONGGUAN HONGBO TECHNOLOGY CO.,LTD	
4	SOLDER	Sn0.7Cu	320℃	DONGGUAN YUEXING METAL MATERIAL CO.,LTD	

APPROVED BY	CHECKED BY	PREPARED BY
王秀明	曹少平	张家运

SPECIFICATION FOR APPROVAL

PART NO	A11-43.5- 0.08*24P*2C*10TS	MODEL	裸铜线Φ 0.08*24P*2C*10TS硬磁 片 Φ43.5*5.0孔双槽磁片 发射线圈6.3uH 线长 40MM	REV	AA版
Product Name	无线充发射线圈	DRAWING NO	NSLY-A11-43.5- 0.08*24P*2C*10TS- 001	DOC TYPE	A0