

## 7.7 Radiated Emission Measurements

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in FCC §15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown FCC §15.209 and RSS-Gen (8.9).***

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 7-26. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013 – Section 6.6.4.3

### Test Settings

#### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be  $\geq 2 \times \text{span/RBW}$ )
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces


FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140042-04.A3L	Test Dates: 06/17/2024 – 08/08/2024	EUT Type: Portable Tablet	Page 96 of 134

### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

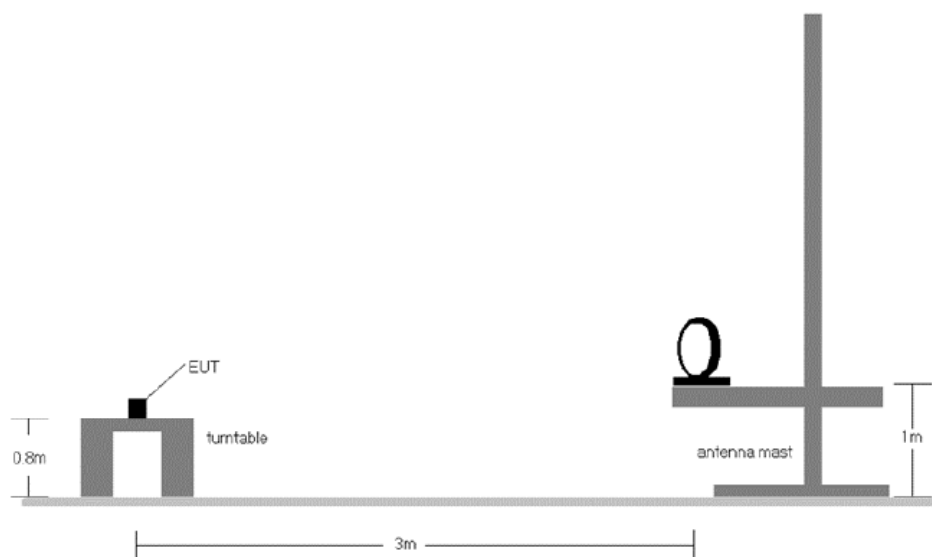

**Figure 7-6. Radiated Test Setup < 30MHz**

<b>FCC ID:</b> A3LSMX920	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2405140042-04.A3L	<b>Test Dates:</b> 06/17/2024 – 08/08/2024	<b>EUT Type:</b> Portable Tablet	Page 97 of 134

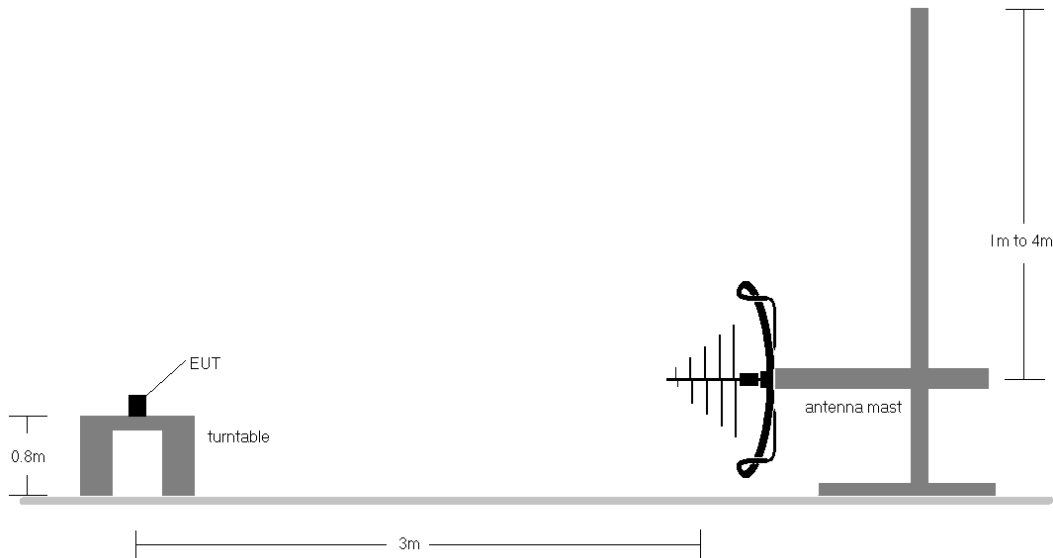


Figure 7-7. Radiated Test Setup < 1GHz

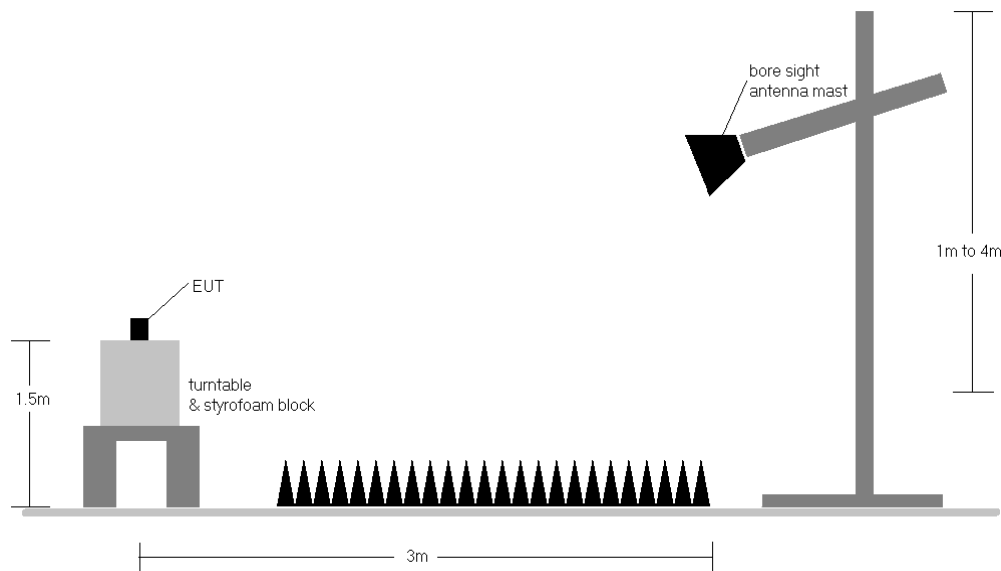


Figure 7-8. Test Instrument & Measurement Setup

**Test Notes**

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of ANSI C63.10-2013 Section 11.3 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 is below the limits shown in §15.209.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit tested with its standard battery.

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140042-04.A3L	Test Dates: 06/17/2024 – 08/08/2024	EUT Type: Portable Tablet	Page 98 of 134

5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
9. Some band edge measurements were performed using a channel integration method to determine compliance with the out of band average radiated spurious emissions limit in the 2483.5 – 2500MHz band. Per KDB 558074 D01 v05r02 Section 13.3, a measurement was performed using a RBW of 100kHz at the frequency with highest emission outside of band edge. For integration that does not start at 2483.5MHz, consideration was taken to ensure the worst-case emission is in the 1MHz spectrum. The results were integrated up to the 1MHz reference bandwidth to show compliance with the 15.209 radiated limit for emissions greater than 1GHz.
10. For radiated measurements, emissions were investigated for the fully-loaded RU configuration and for all the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.

## **Sample Calculations**

### **Determining Spurious Emissions Levels**


- Field Strength Level  $_{[dB\mu V/m]} = \text{Analyzer Level}_{[dBm]} + 107 + \text{AFCL}_{[dB/m]}$
- $\text{AFCL}_{[dB/m]} = \text{Antenna Factor}_{[dB/m]} + \text{Cable Loss}_{[dB]}$
- $\text{Margin}_{[dB]} = \text{Field Strength Level}_{[dB\mu V/m]} - \text{Limit}_{[dB\mu V/m]}$

### **Radiated Band Edge Measurement Offset**


- The amplitude offset shown in the radiated restricted band edge plots in Section 7.4 was calculated using the formula:  
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

<b>FCC ID:</b> A3LSMX920	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2405140042-04.A3L	<b>Test Dates:</b> 06/17/2024 – 08/08/2024	<b>EUT Type:</b> Portable Tablet	Page 99 of 134


## 7.7.1 SISO Antenna-1 Radiated Spurious Emission Pre-Scans

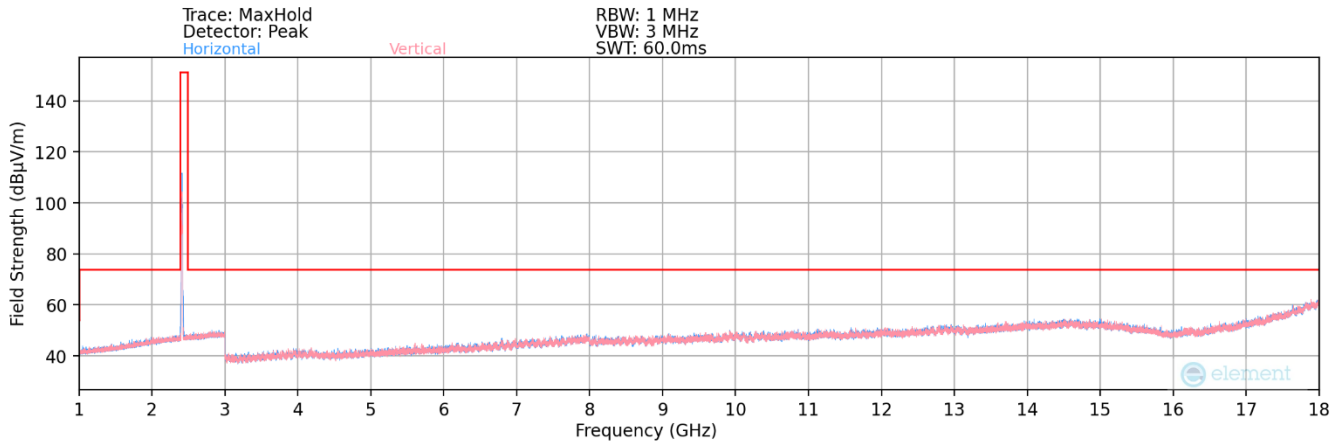

Plot 7-129. Radiated Spurious Plot above 1GHz – SISO ANT1 (802.11ax/be OFDMA – 26 Tones – Ch. 1)

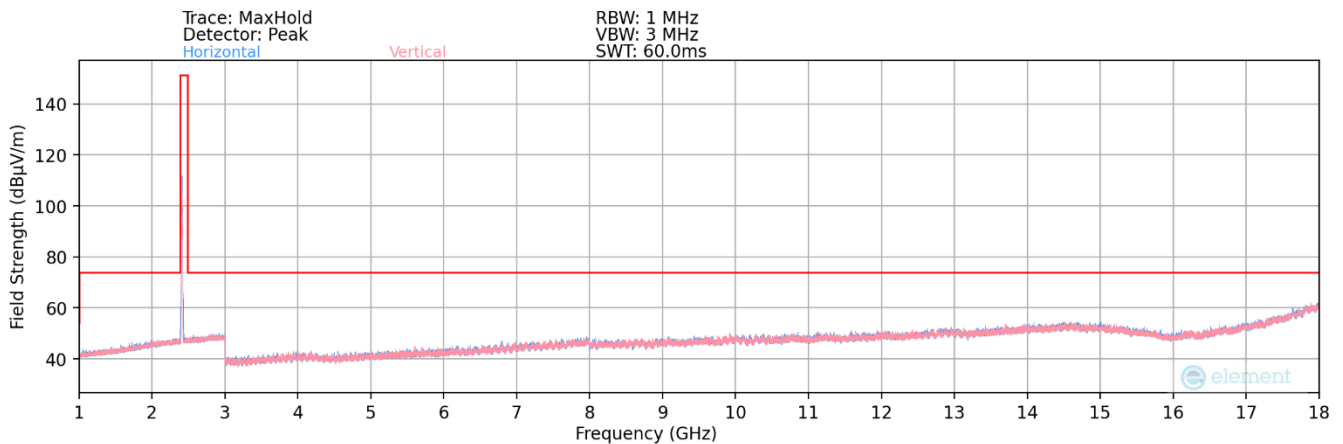


Plot 7-130. Radiated Spurious Plot above 1GHz – SISO ANT1 (802.11ax/be OFDMA – 26 Tones – Ch. 6)

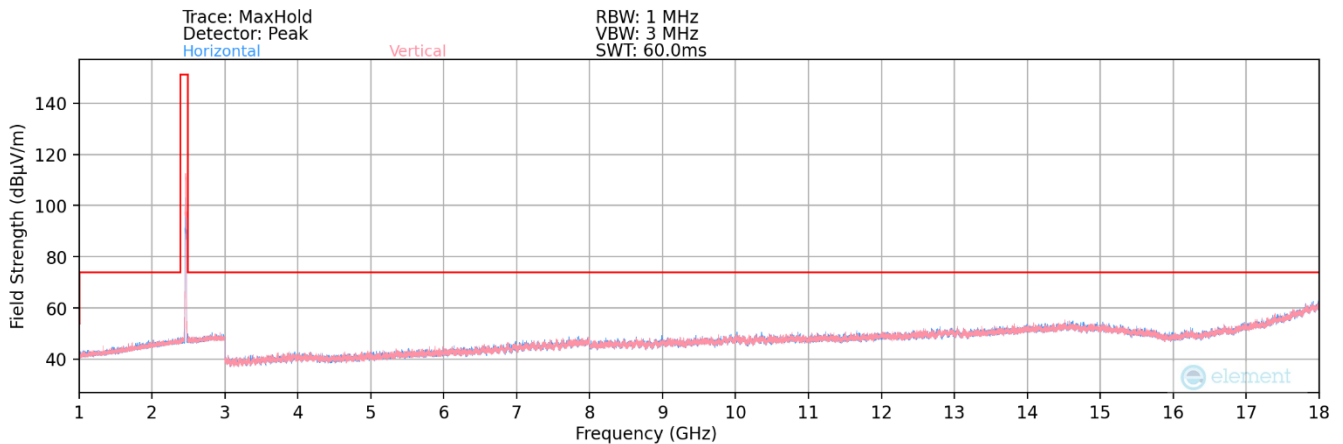


Plot 7-131. Radiated Spurious Plot above 1GHz– SISO ANT1 (802.11ax/be OFDMA – 26 Tones – Ch. 11)


FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140042-04.A3L	Test Dates: 06/17/2024 – 08/08/2024	EUT Type: Portable Tablet	Page 100 of 134

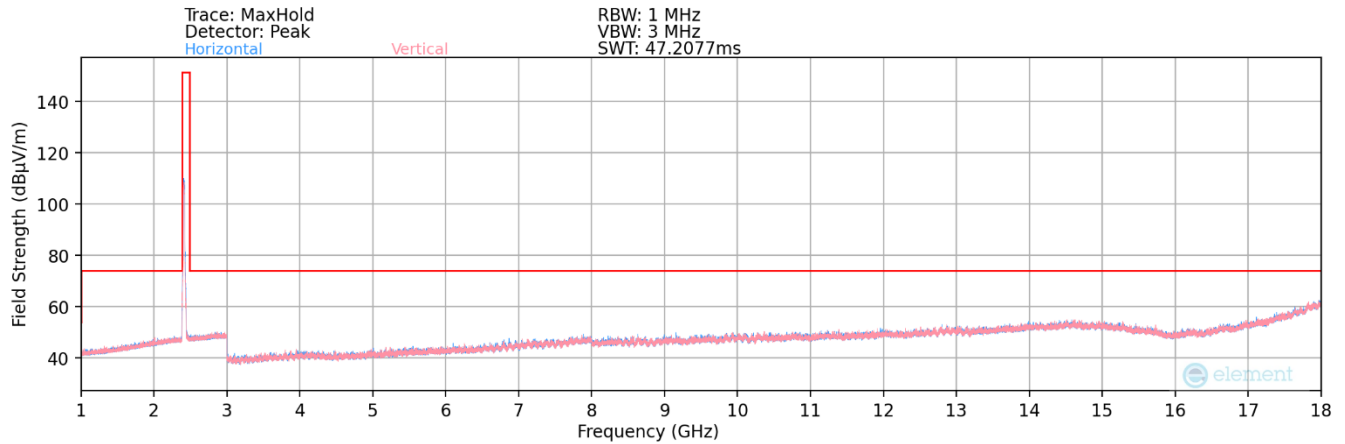

**Plot 7-132. Radiated Spurious Plot above 1GHz – SISO ANT1 (802.11ax/be OFDMA – 242 Tones – Ch. 1)**

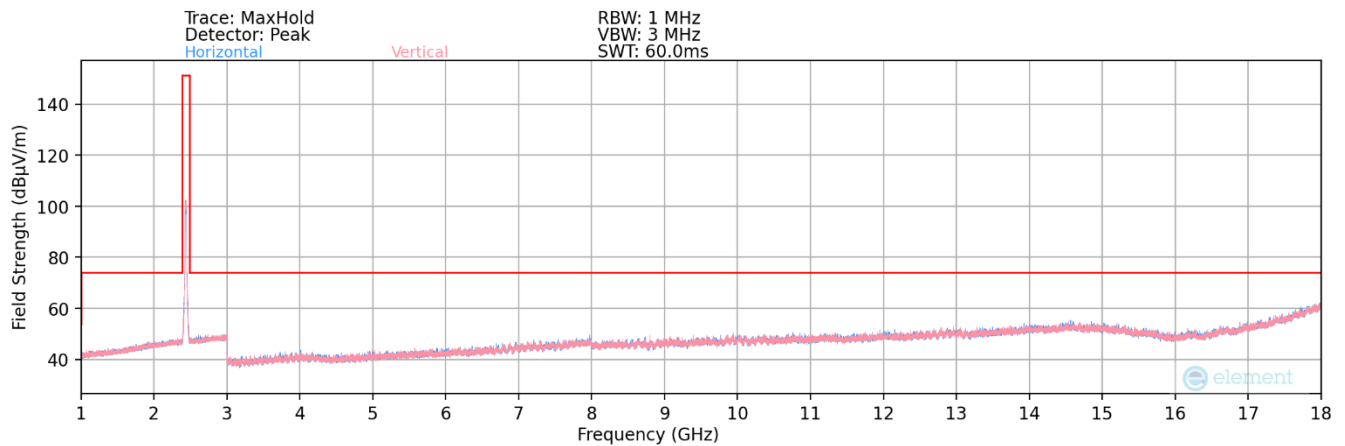

**Plot 7-133. Radiated Spurious Plot above 1GHz – SISO ANT1 (802.11ax/be OFDMA – 242 Tones – Ch. 6)**

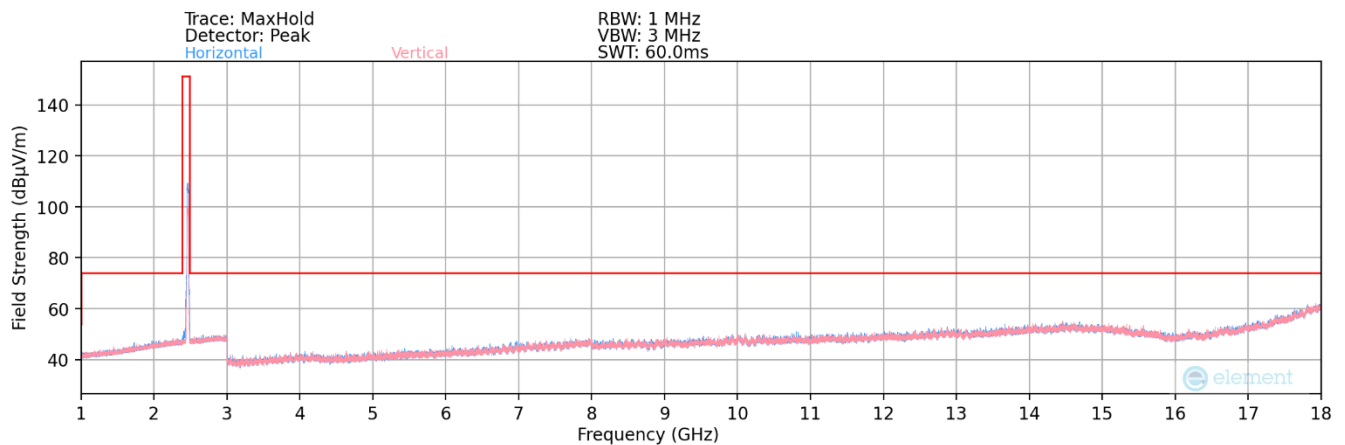

**Plot 7-134. Radiated Spurious Plot above 1GHz – SISO ANT1 (802.11ax/be OFDMA – 242 Tones – Ch. 11)**

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140042-04.A3L	Test Dates: 06/17/2024 – 08/08/2024	EUT Type: Portable Tablet	Page 101 of 134

## 7.7.2 SISO Antenna-1 Radiated Spurious Emission Measurements

Worst Case Mode:	802.11ax/be OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	4
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	V	-	-	-76.08	0.87	31.79	53.98	-22.18
4824.00	Peak	V	-	-	-64.82	0.87	43.05	73.98	-30.92
12060.00	Avg	V	-	-	-80.79	13.37	39.58	53.98	-14.39
12060.00	Peak	V	-	-	-69.41	13.37	50.96	73.98	-23.01

**Table 7-27. Radiated Measurements SISO Antenna-1 (26 Tones)**

Worst Case Mode:	802.11ax/be OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	4
Distance of Measurements:	3 Meters
Operating Frequency:	2437MHz
Channel:	6

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	V	-	-	-75.85	0.89	32.04	53.98	-21.94
4874.00	Peak	V	-	-	-64.84	0.89	43.05	73.98	-30.93
7311.00	Avg	V	-	-	-77.11	6.35	36.24	53.98	-17.74
7311.00	Peak	V	-	-	-66.34	6.35	47.01	73.98	-26.97
12185.00	Avg	V	-	-	-80.15	12.79	39.64	53.98	-14.34
12185.00	Peak	V	-	-	-69.72	12.79	50.07	73.98	-23.91

**Table 7-28. Radiated Measurements SISO Antenna-1 (26 Tones)**

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140042-04.A3L	Test Dates: 06/17/2024 – 08/08/2024	EUT Type: Portable Tablet	Page 102 of 134

Worst Case Mode: 802.11ax/be OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 4  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	V	-	-	-76.18	1.57	32.39	53.98	-21.59
4924.00	Peak	V	-	-	-64.74	1.57	43.83	73.98	-30.15
7386.00	Avg	V	-	-	-77.08	7.06	36.98	53.98	-17.00
7386.00	Peak	V	-	-	-65.67	7.06	48.39	73.98	-25.59
12310.00	Avg	V	-	-	-80.34	13.21	39.87	53.98	-14.11
12310.00	Peak	V	-	-	-69.44	13.21	50.77	73.98	-23.21

**Table 7-29. Radiated Measurements SISO Antenna-1 (26 Tones)**

Worst Case Mode: 802.11ax/be OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	V	-	-	-76.09	0.87	31.78	53.98	-22.19
4824.00	Peak	V	-	-	-65.12	0.87	42.75	73.98	-31.22
12060.00	Avg	V	-	-	-81.11	13.37	39.26	53.98	-14.71
12060.00	Peak	V	-	-	-69.62	13.37	50.75	73.98	-23.22

**Table 7-30. Radiated Measurements SISO Antenna-1 (242 Tones)**

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140042-04.A3L	Test Dates: 06/17/2024 – 08/08/2024	EUT Type: Portable Tablet	Page 103 of 134



Worst Case Mode: 802.11ax/be OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 6

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	V	-	-	-76.03	0.89	31.86	53.98	-22.12
4874.00	Peak	V	-	-	-64.61	0.89	43.28	73.98	-30.70
7311.00	Avg	V	-	-	-77.08	6.35	36.27	53.98	-17.71
7311.00	Peak	V	-	-	-66.59	6.35	46.76	73.98	-27.22
12185.00	Avg	V	-	-	-80.34	12.79	39.45	53.98	-14.53
12185.00	Peak	V	-	-	-69.47	12.79	50.32	73.98	-23.66

**Table 7-31. Radiated Measurements SISO Antenna-1 (242 Tones)**


Worst Case Mode: 802.11ax/be OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	V	-	-	-76.18	1.57	32.39	53.98	-21.59
4924.00	Peak	V	-	-	-64.75	1.57	43.82	73.98	-30.16
7386.00	Avg	V	-	-	-77.03	7.06	37.03	53.98	-16.95
7386.00	Peak	V	-	-	-65.52	7.06	48.54	73.98	-25.44
12310.00	Avg	V	-	-	-80.46	13.21	39.75	53.98	-14.23
12310.00	Peak	V	-	-	-69.74	13.21	50.47	73.98	-23.51


**Table 7-32. Radiated Measurements SISO Antenna-1 (242 Tones)**

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140042-04.A3L	Test Dates: 06/17/2024 – 08/08/2024	EUT Type: Portable Tablet	Page 104 of 134


### 7.7.3 SISO Antenna-2 Radiated Spurious Emission Pre-Scans

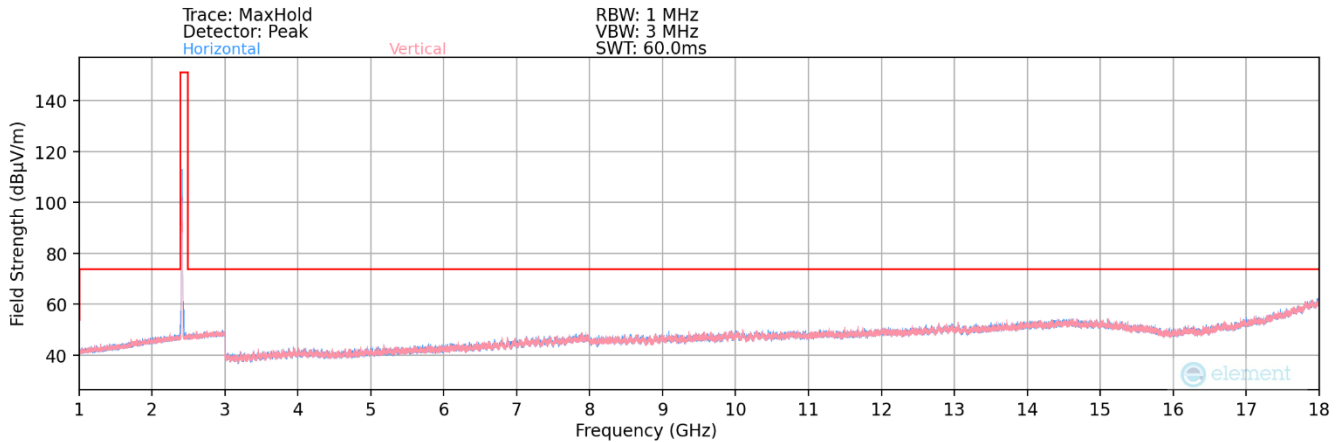

**Plot 7-135. Radiated Spurious Plot above 1GHz – SISO ANT2 (802.11ax/be OFDMA – 26 Tones – Ch. 1)**

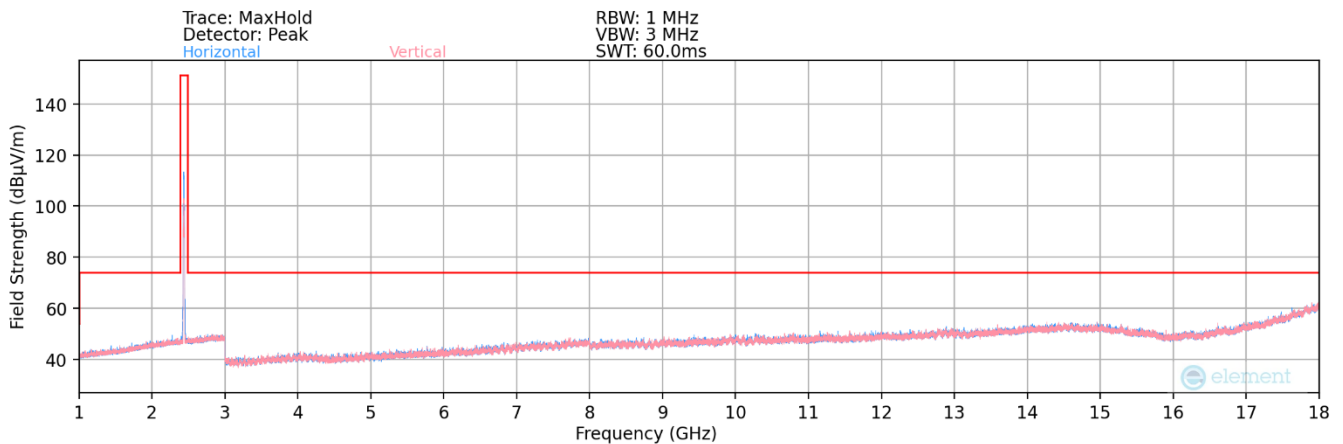


**Plot 7-136. Radiated Spurious Plot above 1GHz – SISO ANT2 (802.11ax/be OFDMA – 26 Tones – Ch. 6)**

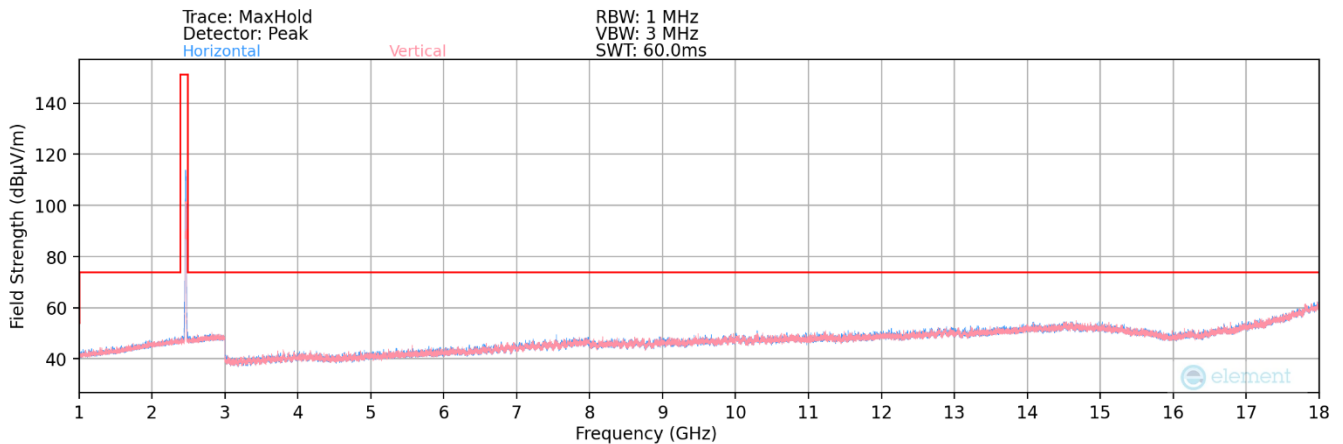


**Plot 7-137. Radiated Spurious Plot above 1GHz– SISO ANT2 (802.11ax/be OFDMA – 26 Tones – Ch. 11)**


FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140042-04.A3L	Test Dates: 06/17/2024 – 08/08/2024	EUT Type: Portable Tablet	Page 105 of 134

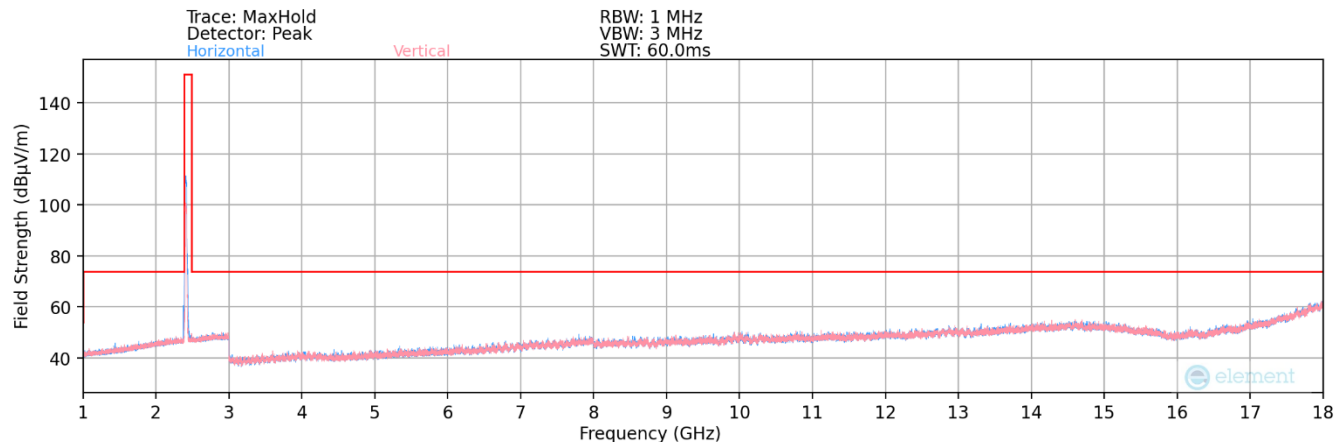

**Plot 7-138. Radiated Spurious Plot above 1GHz – SISO ANT2 (802.11ax/be OFDMA – 242 Tones – Ch. 1)**

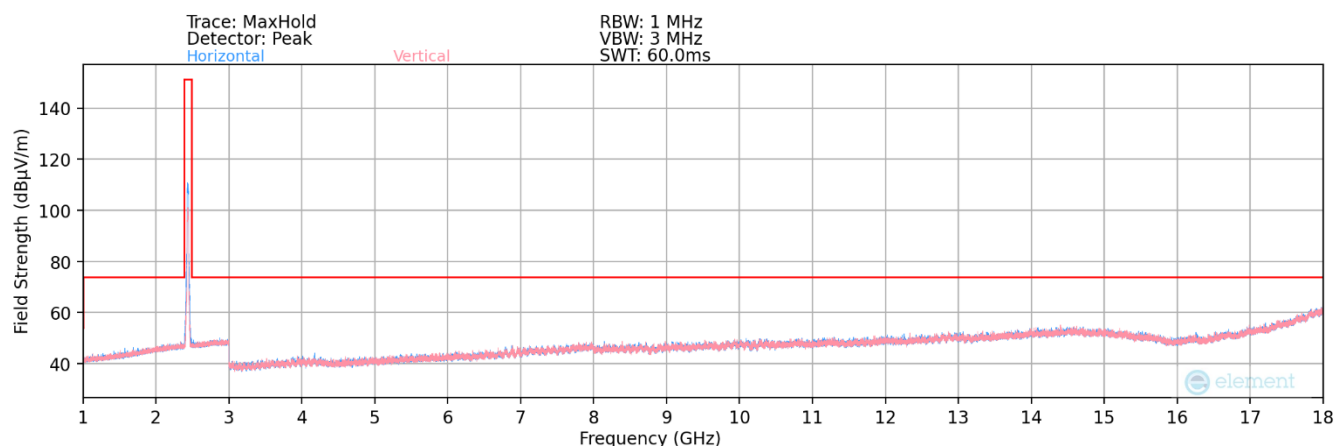

**Plot 7-139. Radiated Spurious Plot above 1GHz – SISO ANT2 (802.11ax/be OFDMA – 242 Tones – Ch. 6)**

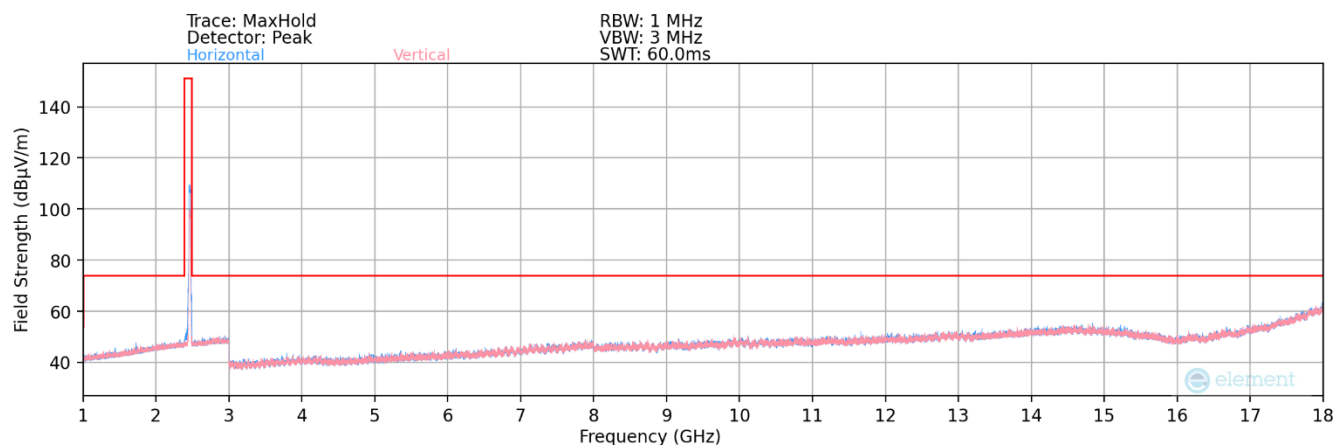

**Plot 7-140. Radiated Spurious Plot above 1GHz – SISO ANT2 (802.11ax/be OFDMA – 242 Tones – Ch. 11)**

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140042-04.A3L	Test Dates: 06/17/2024 – 08/08/2024	EUT Type: Portable Tablet	Page 106 of 134

## 7.7.4 SISO Antenna-2 Radiated Spurious Emission Measurements

Worst Case Mode:	802.11ax/be OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	4
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	V	-	-	-76.09	0.87	31.78	53.98	-22.19
4824.00	Peak	V	-	-	-64.75	0.87	43.12	73.98	-30.85
12060.00	Avg	V	-	-	-81.18	13.37	39.19	53.98	-14.78
12060.00	Peak	V	-	-	-69.76	13.37	50.61	73.98	-23.36

**Table 7-33. Radiated Measurements SISO Antenna-2 (26 Tones)**

Worst Case Mode:	802.11ax/be OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	4
Distance of Measurements:	3 Meters
Operating Frequency:	2437MHz
Channel:	6

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	V	-	-	-75.98	0.89	31.91	53.98	-22.07
4874.00	Peak	V	-	-	-64.69	0.89	43.20	73.98	-30.78
7311.00	Avg	V	-	-	-77.05	6.35	36.30	53.98	-17.68
7311.00	Peak	V	-	-	-66.39	6.35	46.96	73.98	-27.02
12185.00	Avg	V	-	-	-80.17	12.79	39.62	53.98	-14.36
12185.00	Peak	V	-	-	-69.77	12.79	50.02	73.98	-23.96

**Table 7-34. Radiated Measurements SISO Antenna-2 (26 Tones)**

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140042-04.A3L	Test Dates: 06/17/2024 – 08/08/2024	EUT Type: Portable Tablet	Page 107 of 134

Worst Case Mode: 802.11ax/be OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 4  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	V	-	-	-76.28	1.57	32.29	53.98	-21.69
4924.00	Peak	V	-	-	-64.62	1.57	43.95	73.98	-30.03
7386.00	Avg	V	-	-	-77.01	7.06	37.05	53.98	-16.93
7386.00	Peak	V	-	-	-65.52	7.06	48.54	73.98	-25.44
12310.00	Avg	V	-	-	-80.29	13.21	39.92	53.98	-14.06
12310.00	Peak	V	-	-	-69.74	13.21	50.47	73.98	-23.51

**Table 7-35. Radiated Measurements SISO Antenna-2 (26 Tones)**

Worst Case Mode: 802.11ax/be OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	V	-	-	-76.09	0.87	31.78	53.98	-22.19
4824.00	Peak	V	-	-	-65.12	0.87	42.75	73.98	-31.22
12060.00	Avg	V	-	-	-81.11	13.37	39.26	53.98	-14.71
12060.00	Peak	V	-	-	-69.62	13.37	50.75	73.98	-23.22

**Table 7-36. Radiated Measurements SISO Antenna-2 (242 Tones)**

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140042-04.A3L	Test Dates: 06/17/2024 – 08/08/2024	EUT Type: Portable Tablet	Page 108 of 134

Worst Case Mode: 802.11ax/be OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 6

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	V	-	-	-76.03	0.89	31.86	53.98	-22.12
4874.00	Peak	V	-	-	-64.61	0.89	43.28	73.98	-30.70
7311.00	Avg	V	-	-	-77.08	6.35	36.27	53.98	-17.71
7311.00	Peak	V	-	-	-66.59	6.35	46.76	73.98	-27.22
12185.00	Avg	V	-	-	-80.34	12.79	39.45	53.98	-14.53
12185.00	Peak	V	-	-	-69.47	12.79	50.32	73.98	-23.66

**Table 7-37. Radiated Measurements SISO Antenna-2 (242 Tones)**


Worst Case Mode: 802.11ax/be OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	V	-	-	-76.18	1.57	32.39	53.98	-21.59
4924.00	Peak	V	-	-	-64.75	1.57	43.82	73.98	-30.16
7386.00	Avg	V	-	-	-77.03	7.06	37.03	53.98	-16.95
7386.00	Peak	V	-	-	-65.52	7.06	48.54	73.98	-25.44
12310.00	Avg	V	-	-	-80.46	13.21	39.75	53.98	-14.23
12310.00	Peak	V	-	-	-69.74	13.21	50.47	73.98	-23.51


**Table 7-38. Radiated Measurements SISO Antenna-2 (242 Tones)**

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140042-04.A3L	Test Dates: 06/17/2024 – 08/08/2024	EUT Type: Portable Tablet	Page 109 of 134


## 7.7.5 MIMO Radiated Spurious Emission Pre-Scans

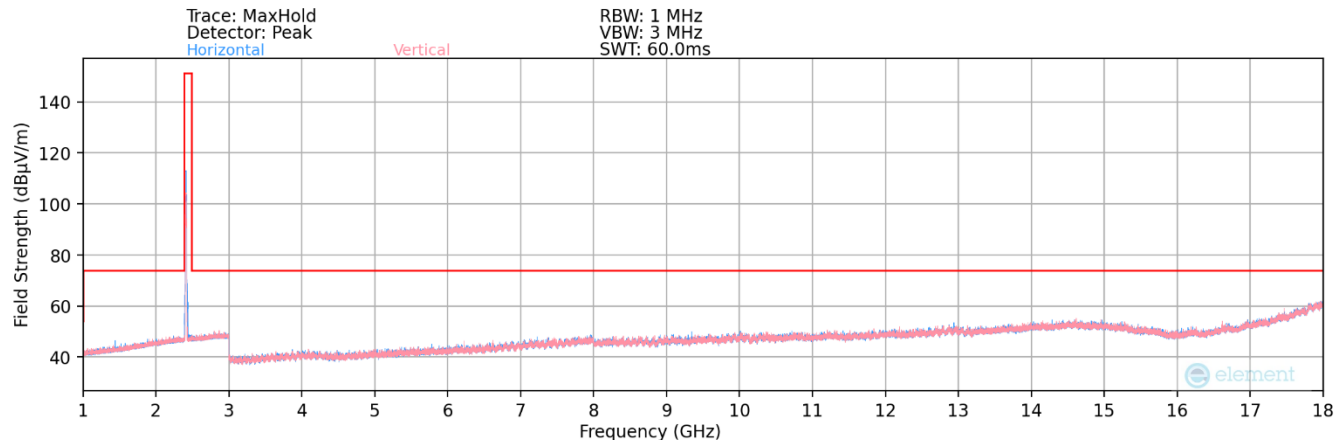

Plot 7-141. Radiated Spurious Plot above 1GHz – MIMO (802.11ax/be OFDMA – 26 Tones – Ch. 1)

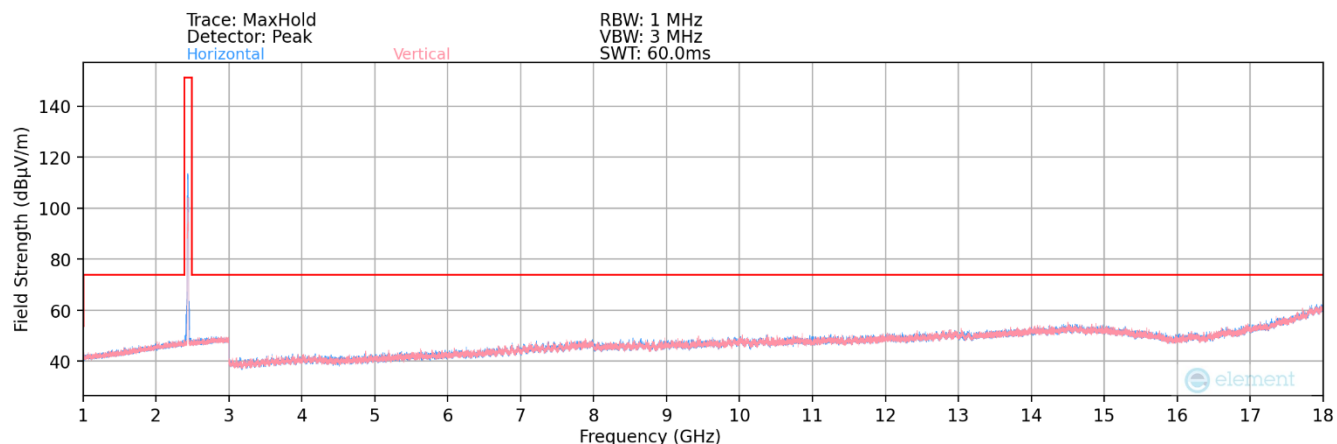


Plot 7-142. Radiated Spurious Plot above 1GHz – MIMO (802.11ax/be OFDMA – 26 Tones – Ch. 6)

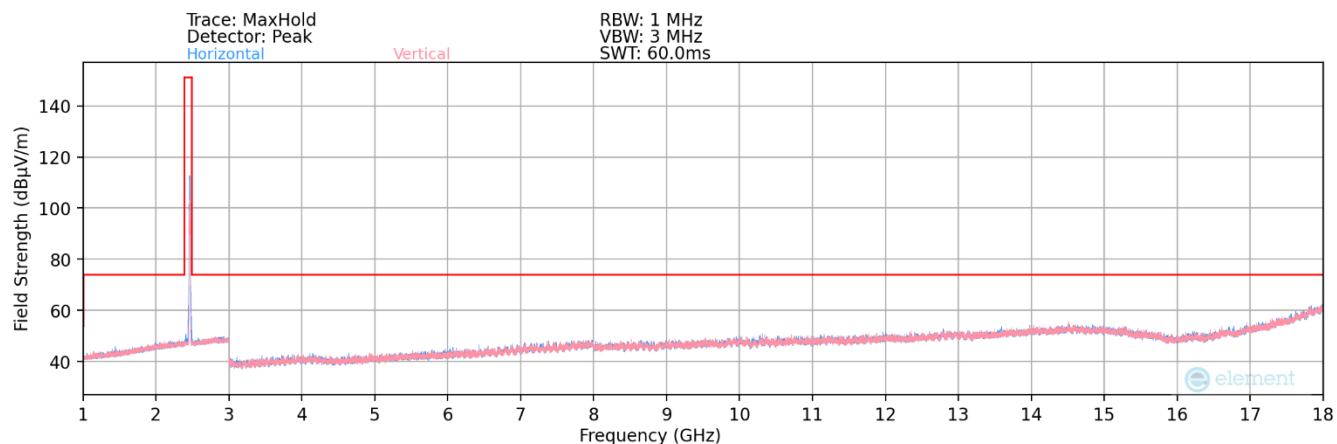


Plot 7-143. Radiated Spurious Plot above 1GHz– MIMO (802.11ax/be OFDMA – 26 Tones – Ch. 11)


FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140042-04.A3L	Test Dates: 06/17/2024 – 08/08/2024	EUT Type: Portable Tablet	Page 110 of 134

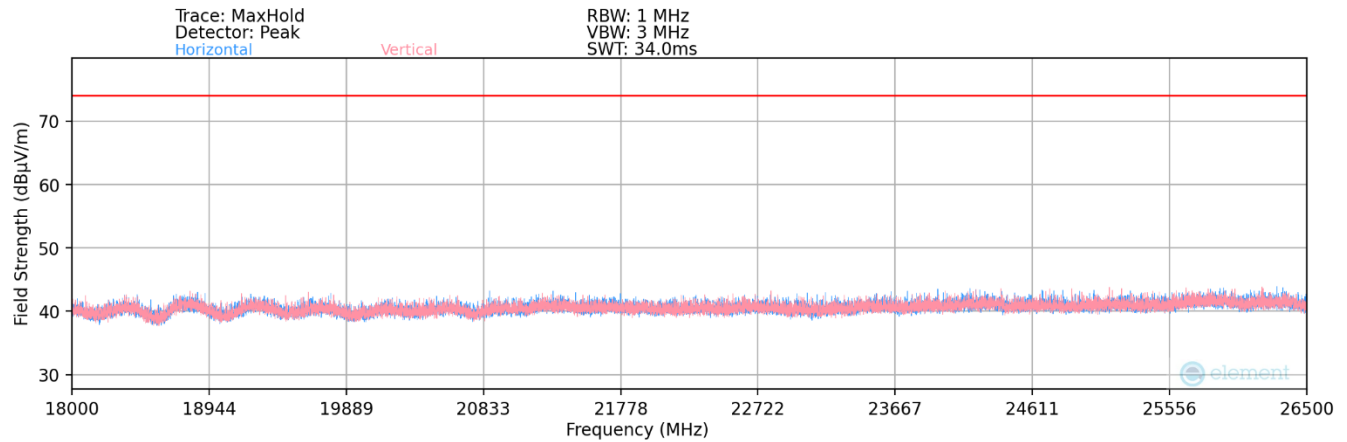

**Plot 7-144. Radiated Spurious Plot above 18GHz – MIMO ANT2 (802.11ax/be OFDMA – 26 Tones)**

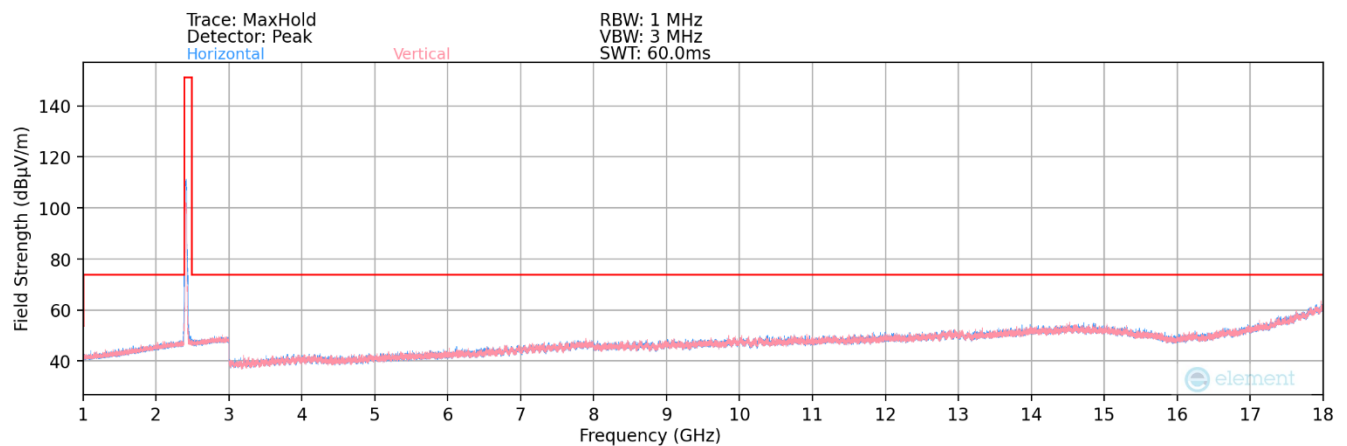


**Plot 7-145. Radiated Spurious Plot above 1GHz – MIMO (802.11ax/be OFDMA – 242 Tones – Ch. 1)**

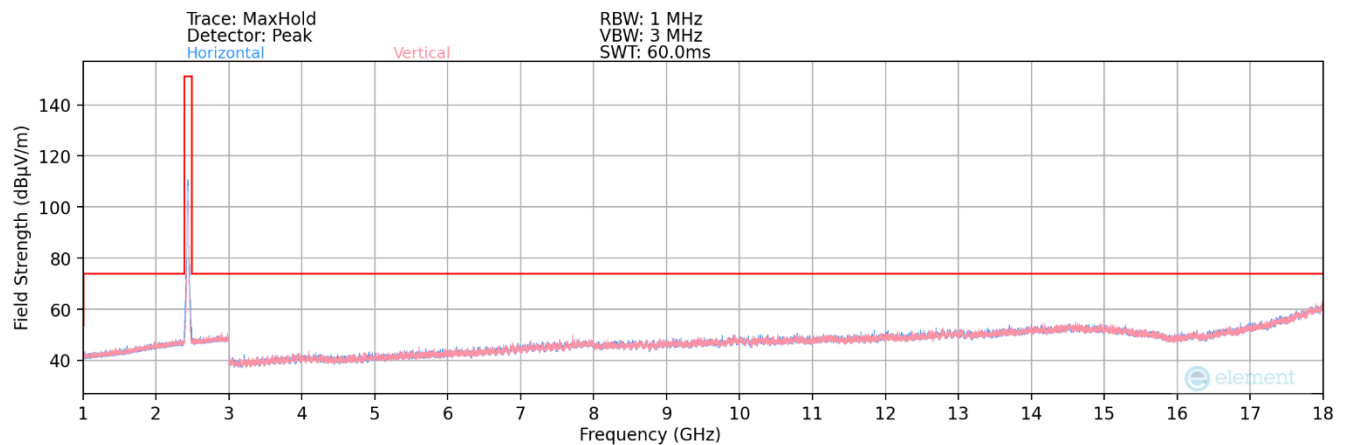


**Plot 7-146. Radiated Spurious Plot above 1GHz – MIMO (802.11ax/be OFDMA – 242 Tones – Ch. 6)**

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140042-04.A3L	Test Dates: 06/17/2024 – 08/08/2024	EUT Type: Portable Tablet	Page 111 of 134



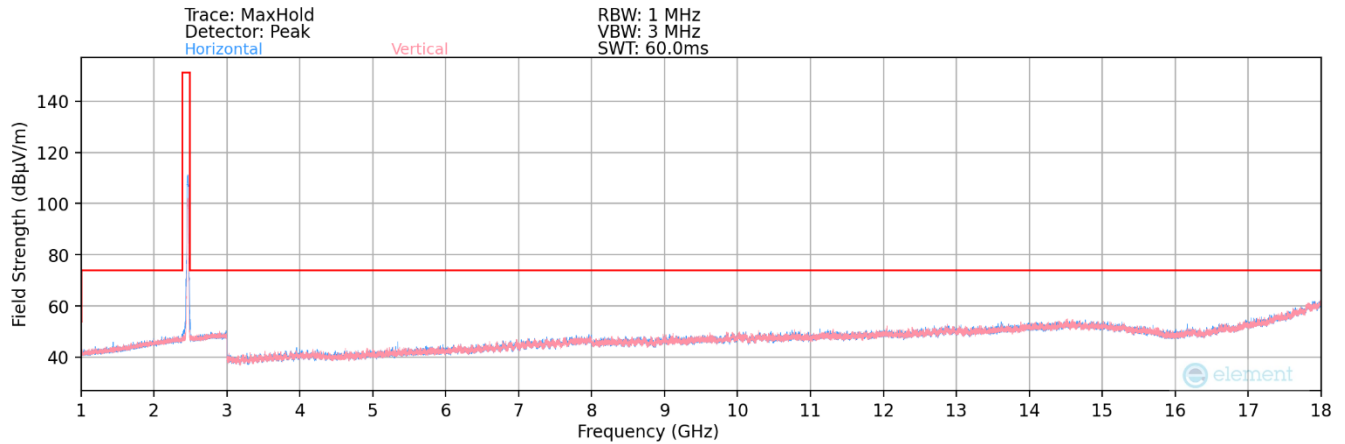

**Plot 7-147. Radiated Spurious Plot above 1GHz – MIMO (802.11ax/be OFDMA – 242 Tones – Ch. 11)**

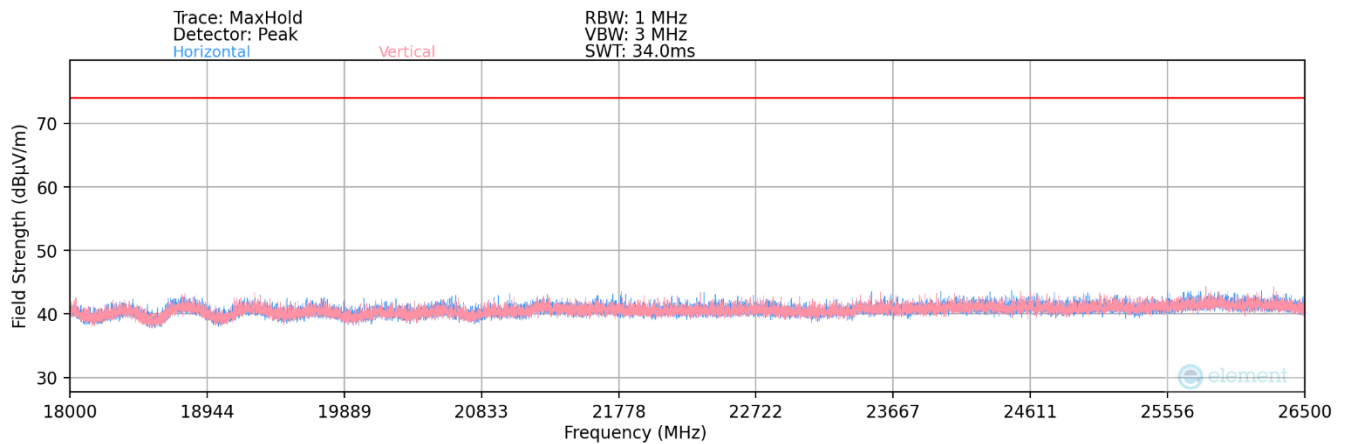

**Plot 7-148. Radiated Spurious Plot above 18GHz – MIMO (802.11ax/be OFDMA – 242 Tones)**

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140042-04.A3L	Test Dates: 06/17/2024 – 08/08/2024	EUT Type: Portable Tablet	Page 112 of 134

## 7.7.6 MIMO Radiated Spurious Emission Measurements

Worst Case Mode:	802.11ax/be OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	4
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	V	109	314	-74.38	0.87	33.49	53.98	-20.48
4824.00	Peak	V	109	314	-62.37	0.87	45.50	73.98	-28.47
12060.00	Avg	V	-	-	-81.08	13.37	39.29	53.98	-14.68
12060.00	Peak	V	-	-	-69.86	13.37	50.51	73.98	-23.46

**Table 7-39. Radiated Measurements MIMO (26 Tones)**

Worst Case Mode:	802.11ax/be OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	4
Distance of Measurements:	3 Meters
Operating Frequency:	2437MHz
Channel:	6

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	V	105	354	-74.27	0.89	33.62	53.98	-20.36
4874.00	Peak	V	105	354	-62.28	0.89	45.61	73.98	-28.37
7311.00	Avg	V	-	-	-76.89	6.35	36.46	53.98	-17.52
7311.00	Peak	V	-	-	-65.64	6.35	47.71	73.98	-26.27
12185.00	Avg	V	-	-	-80.21	12.79	39.58	53.98	-14.40
12185.00	Peak	V	-	-	-69.34	12.79	50.45	73.98	-23.53

**Table 7-40. Radiated Measurements MIMO (26 Tones)**

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140042-04.A3L	Test Dates: 06/17/2024 – 08/08/2024	EUT Type: Portable Tablet	Page 113 of 134

Worst Case Mode: 802.11ax/be OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 4  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	V	102	286	-74.41	1.57	34.16	53.98	-19.82
4924.00	Peak	V	102	286	-63.46	1.57	45.11	73.98	-28.87
7386.00	Avg	V	-	-	-76.86	7.06	37.20	53.98	-16.78
7386.00	Peak	V	-	-	-65.51	7.06	48.55	73.98	-25.43
12310.00	Avg	V	-	-	-80.19	13.21	40.02	53.98	-13.96
12310.00	Peak	V	-	-	-69.32	13.21	50.89	73.98	-23.09

**Table 7-41. Radiated Measurements MIMO (26 Tones)**

Worst Case Mode: 802.11ax/be OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	V	101	320	-74.89	0.87	32.98	53.98	-20.99
4824.00	Peak	V	101	320	-64.26	0.87	43.61	73.98	-30.36
12060.00	Avg	V	-	-	-81.17	13.37	39.20	53.98	-14.77
12060.00	Peak	V	-	-	-69.86	13.37	50.51	73.98	-23.46

**Table 7-42. Radiated Measurements MIMO (242 Tones)**

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140042-04.A3L	Test Dates: 06/17/2024 – 08/08/2024	EUT Type: Portable Tablet	Page 114 of 134

Worst Case Mode: 802.11ax/be OFDMA  
Worst Case Transfer Rate: MCS0  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 2437MHz  
Channel: 6

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	V	102	317	-74.56	0.89	33.33	53.98	-20.65
4874.00	Peak	V	102	317	-63.04	0.89	44.85	73.98	-29.13
7311.00	Avg	V	-	-	-77.02	6.35	36.33	53.98	-17.65
7311.00	Peak	V	-	-	-65.71	6.35	47.64	73.98	-26.34
12185.00	Avg	V	-	-	-80.07	12.79	39.72	53.98	-14.26
12185.00	Peak	V	-	-	-69.32	12.79	50.47	73.98	-23.51

**Table 7-43. Radiated Measurements MIMO (242 Tones)**

Worst Case Mode: 802.11ax/be OFDMA  
Worst Case Transfer Rate: MCS0  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 2462MHz  
Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	V	105	289	-75.12	1.57	33.45	53.98	-20.53
4924.00	Peak	V	105	289	-63.27	1.57	45.30	73.98	-28.68
7386.00	Avg	V	-	-	-76.84	7.06	37.22	53.98	-16.76
7386.00	Peak	V	-	-	-65.51	7.06	48.55	73.98	-25.43
12310.00	Avg	V	-	-	-80.23	13.21	39.98	53.98	-14.00
12310.00	Peak	V	-	-	-69.27	13.21	50.94	73.98	-23.04


**Table 7-44. Radiated Measurements MIMO (242 Tones)**

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140042-04.A3L	Test Dates: 06/17/2024 – 08/08/2024	EUT Type: Portable Tablet	Page 115 of 134


## 7.7.7 SISO Antenna-1 Radiated Restricted Band Edge Measurements

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11ax/be OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	53
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

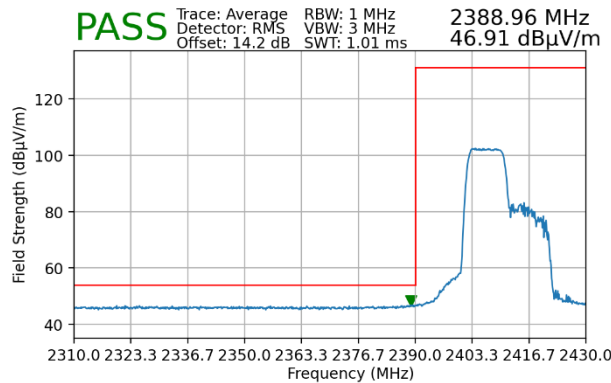


**Plot 7-149. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Average – 106 Tones)**

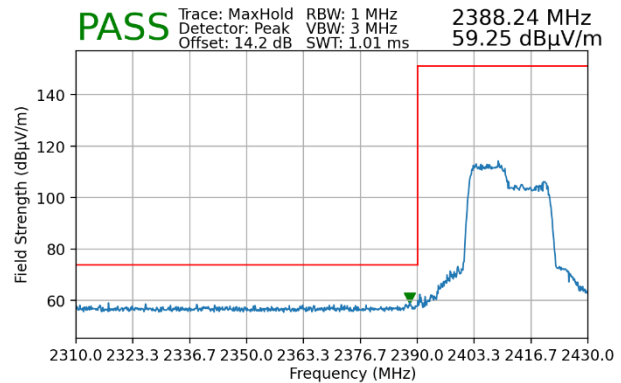


**Plot 7-150. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Peak – 106 Tones)**

Worst Case Mode:	802.11ax/be OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	54
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

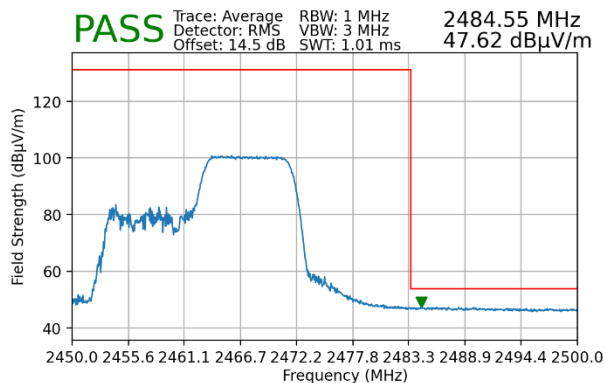


**Plot 7-151. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average – 106 Tones)**

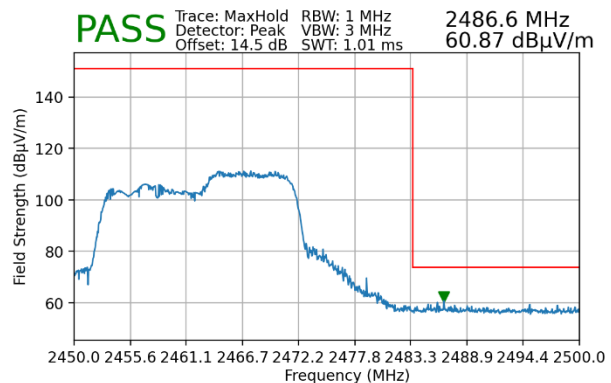


**Plot 7-152. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak – 106 Tones)**

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140042-04.A3L	Test Dates: 06/17/2024 – 08/08/2024	EUT Type: Portable Tablet	Page 116 of 134

Worst Case Mode: 802.11ax/be OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 54  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

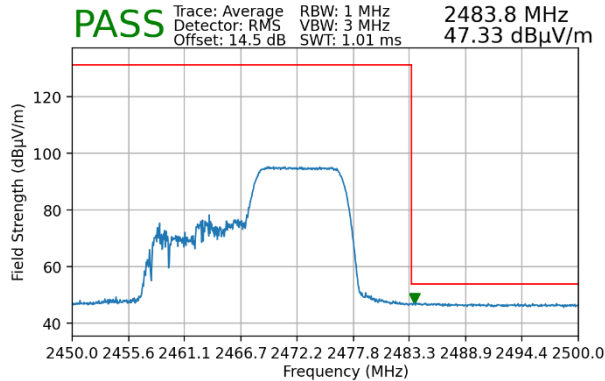


**Plot 7-153. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Average – 106 Tones)**

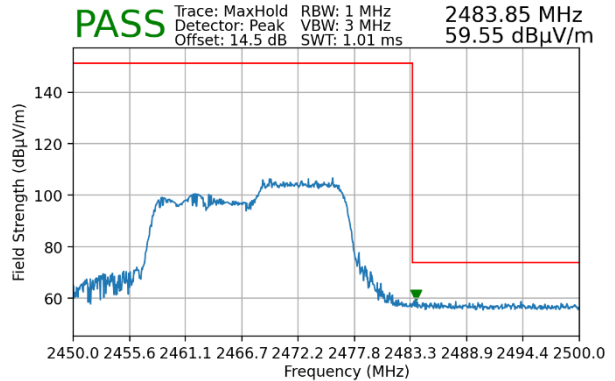


**Plot 7-154. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Peak – 106 Tones)**

Worst Case Mode: 802.11ax/be OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 54  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2472MHz  
 Channel: 13

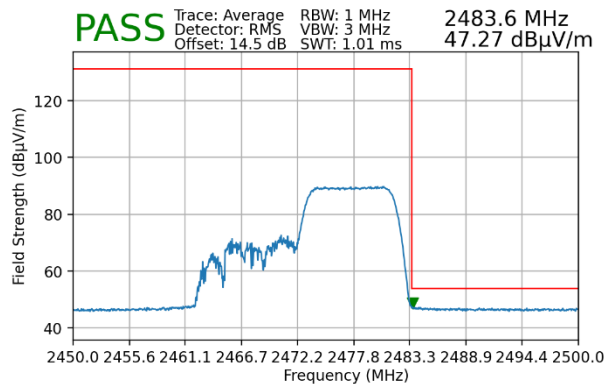


**Plot 7-155. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average – 106 Tones)**

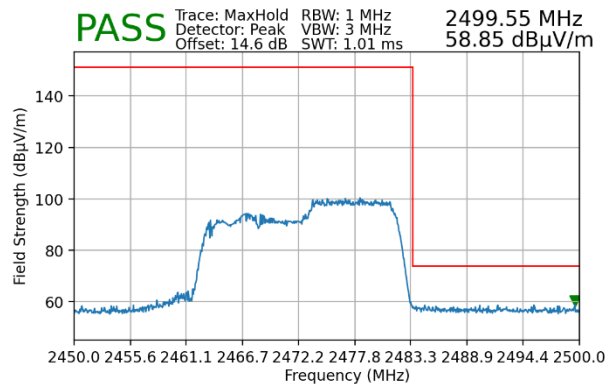


**Plot 7-156. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak – 106 Tones)**

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140042-04.A3L	Test Dates: 06/17/2024 – 08/08/2024	EUT Type: Portable Tablet	Page 117 of 134

Worst Case Mode: 802.11be OFDMA  
Worst Case Transfer Rate: MCS0  
RU Index: 82  
Distance of Measurements: 3 Meters  
Operating Frequency: 2412MHz  
Channel: 1

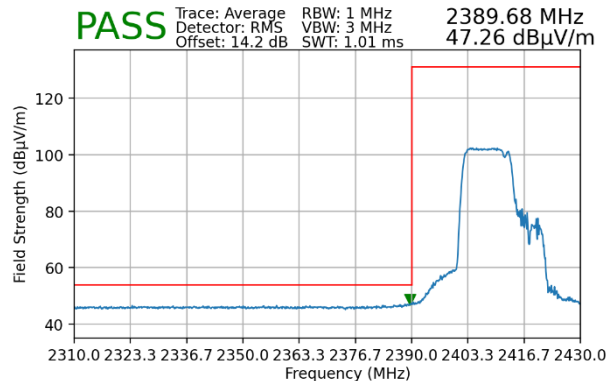


**Plot 7-157. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Average – 106+26 Tones)**

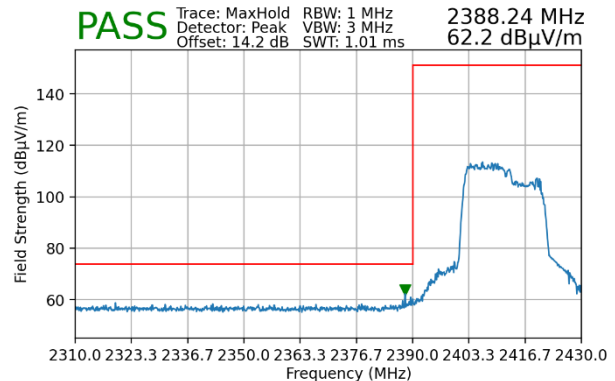


**Plot 7-158. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Peak – 106+26 Tones)**

Worst Case Mode: 802.11be OFDMA  
Worst Case Transfer Rate: MCS0  
RU Index: 83  
Distance of Measurements: 3 Meters  
Operating Frequency: 2462MHz  
Channel: 11

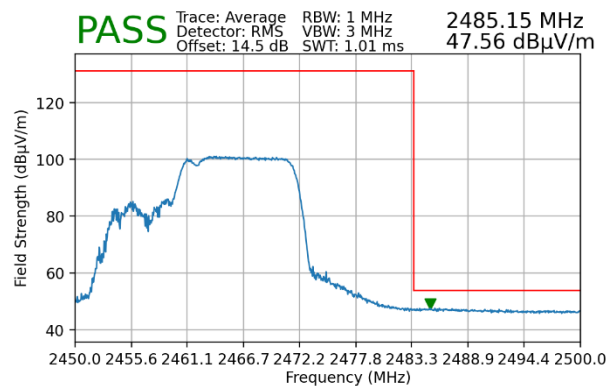


**Plot 7-159. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average – 106+26 Tones)**

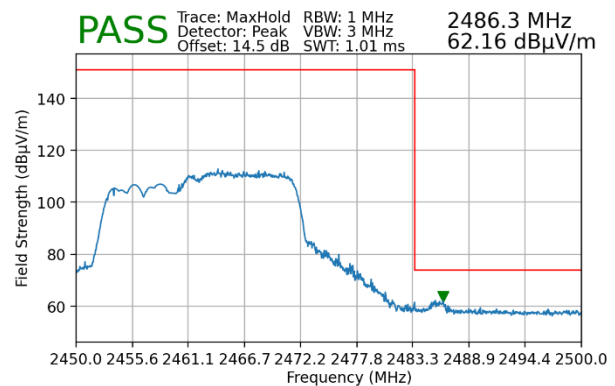


**Plot 7-160. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak – 106+26 Tones)**

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140042-04.A3L	Test Dates: 06/17/2024 – 08/08/2024	EUT Type: Portable Tablet	Page 118 of 134

Worst Case Mode: 802.11be OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 83  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

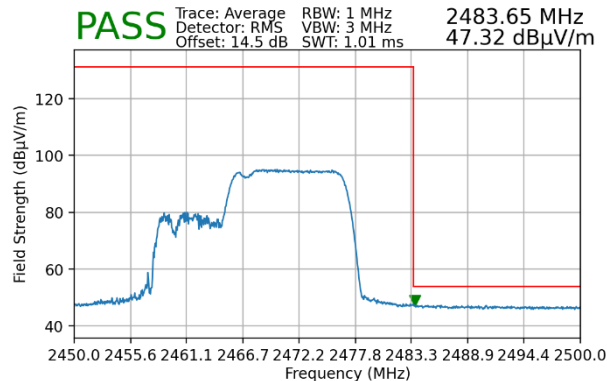


**Plot 7-161. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Average – 106+26 Tones)**

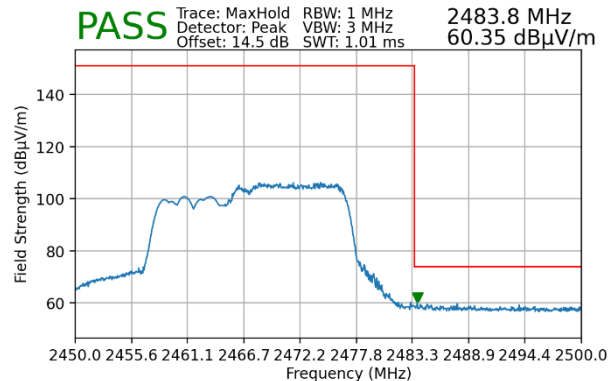


**Plot 7-162. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Peak – 106+26 Tones)**

Worst Case Mode: 802.11be OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 83  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2472MHz  
 Channel: 13

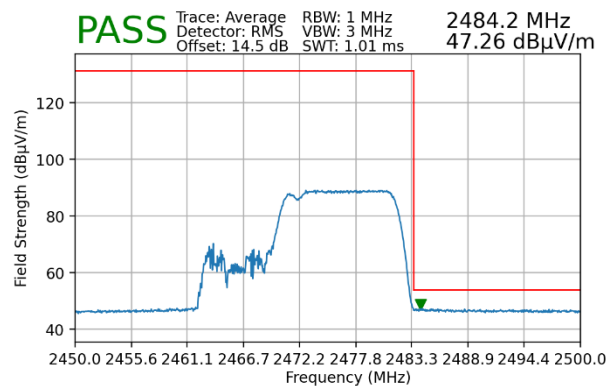

**Plot 7-163. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average – 106+26 Tones)**

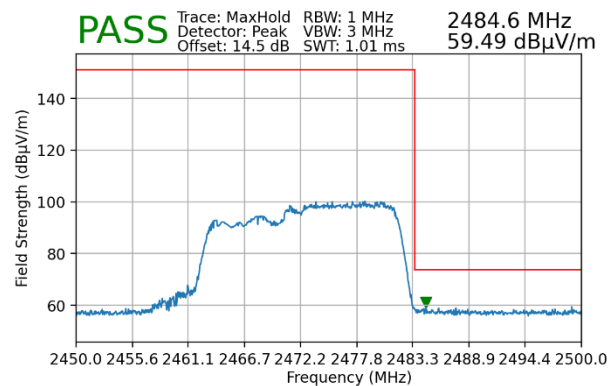


**Plot 7-164. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak – 106+26 Tones)**


FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140042-04.A3L	Test Dates: 06/17/2024 – 08/08/2024	EUT Type: Portable Tablet	Page 119 of 134



Worst Case Mode: 802.11ax/be OFDMA  
Worst Case Transfer Rate: MCS0  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 2412MHz  
Channel: 1

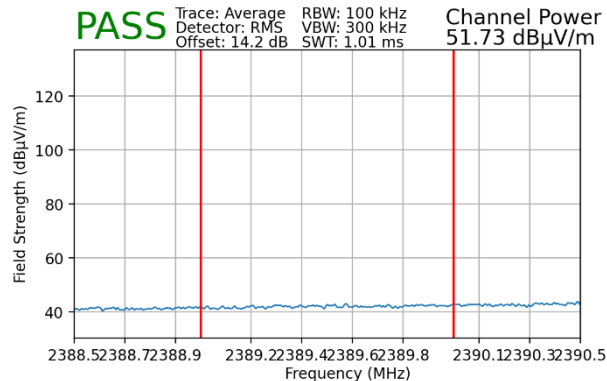


**Plot 7-165. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Average – 242 Tones)**

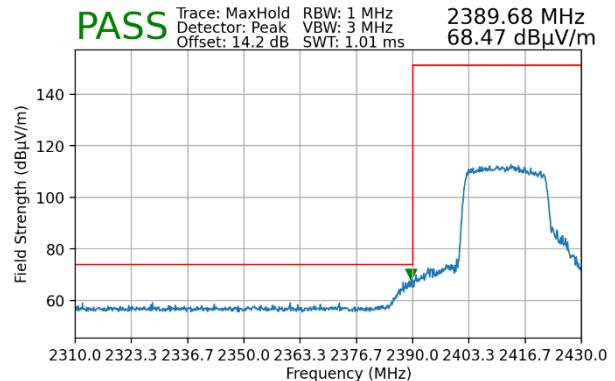


**Plot 7-166. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Peak – 242 Tones)**

Worst Case Mode: 802.11ax/be OFDMA  
Worst Case Transfer Rate: MCS0  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 2462MHz  
Channel: 11

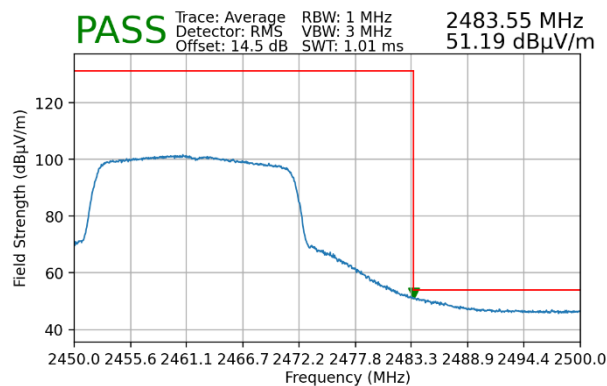


**Plot 7-167. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average – 242 Tones)**

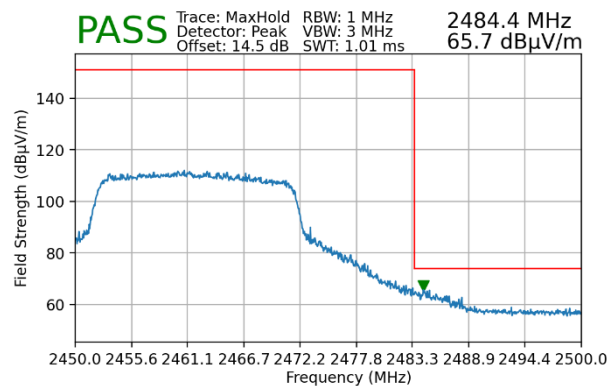


**Plot 7-168. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak – 242 Tones)**

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140042-04.A3L	Test Dates: 06/17/2024 – 08/08/2024	EUT Type: Portable Tablet	Page 120 of 134

Worst Case Mode: 802.11ax/be OFDMA  
Worst Case Transfer Rate: MCS0  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 2467MHz  
Channel: 12

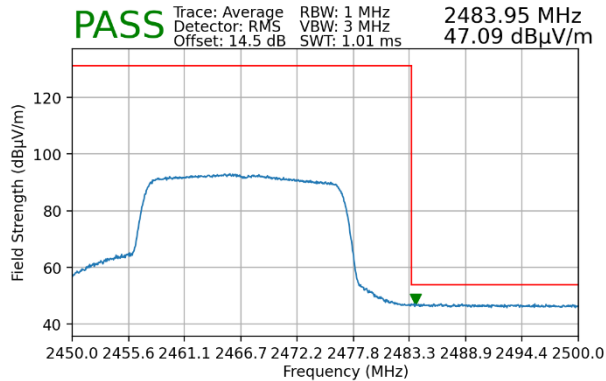


**Plot 7-169. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Average – 242 Tones)**

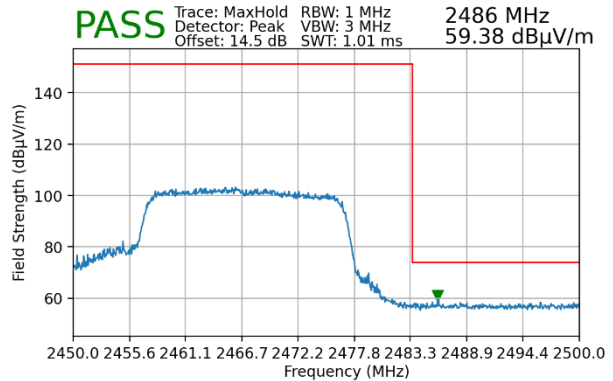


**Plot 7-170. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Peak – 242 Tones)**

Worst Case Mode: 802.11ax/be OFDMA  
Worst Case Transfer Rate: MCS0  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 2472MHz  
Channel: 13

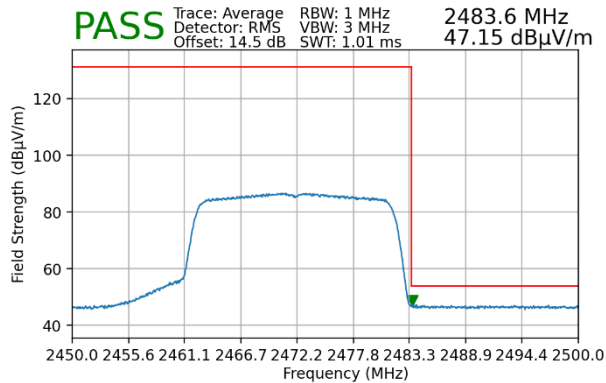

**Plot 7-171. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average – 242 Tones)**

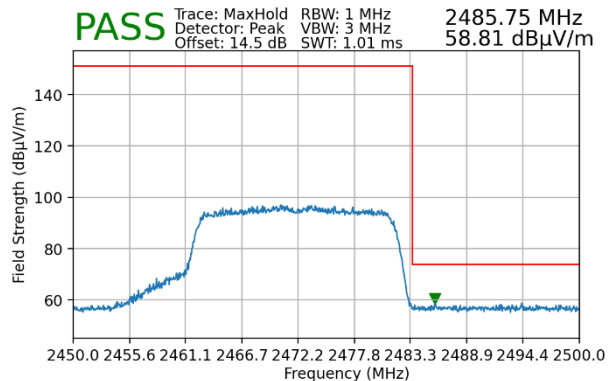


**Plot 7-172. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak – 242 Tones)**

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140042-04.A3L	Test Dates: 06/17/2024 – 08/08/2024	EUT Type: Portable Tablet	Page 121 of 134


## 7.7.8 SISO Antenna-2 Radiated Restricted Band Edge Measurements

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11ax/be OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	53
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

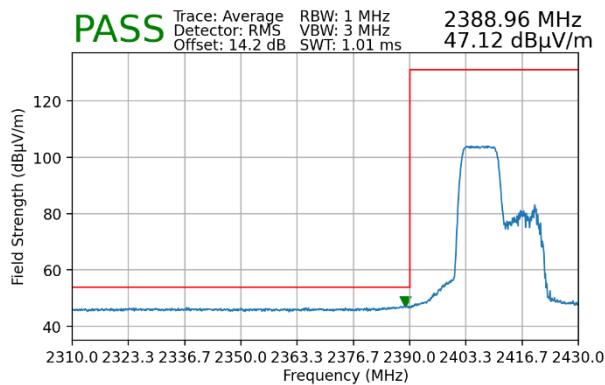


**Plot 7-173. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Average – 106 Tones)**

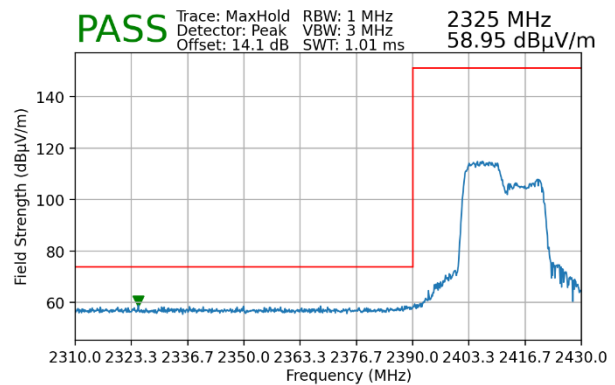


**Plot 7-174. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Peak – 106 Tones)**

Worst Case Mode:	802.11ax/be OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	54
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

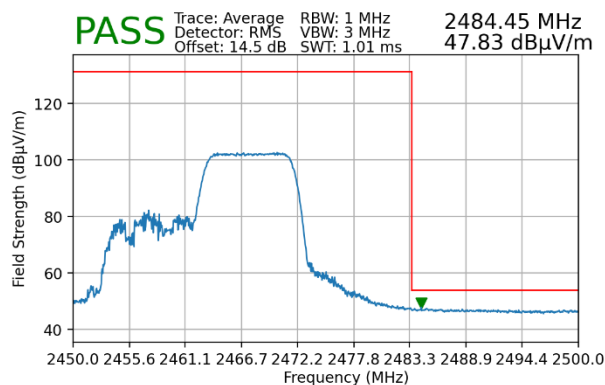


**Plot 7-175. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average – 106 Tones)**

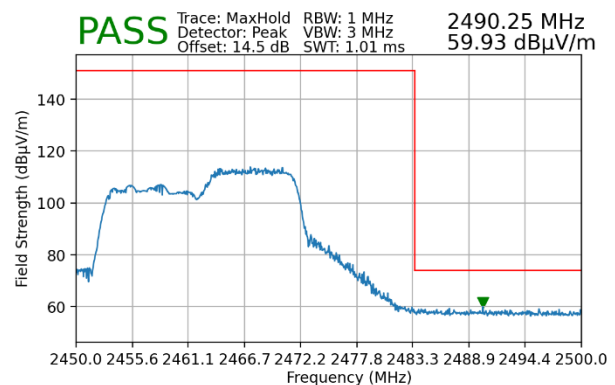


**Plot 7-176. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak – 106 Tones)**

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140042-04.A3L	Test Dates: 06/17/2024 – 08/08/2024	EUT Type: Portable Tablet	Page 122 of 134

Worst Case Mode: 802.11ax/be OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 54  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

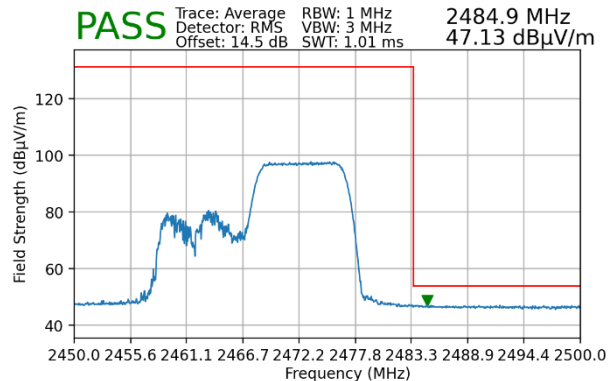


**Plot 7-177. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Average – 106 Tones)**

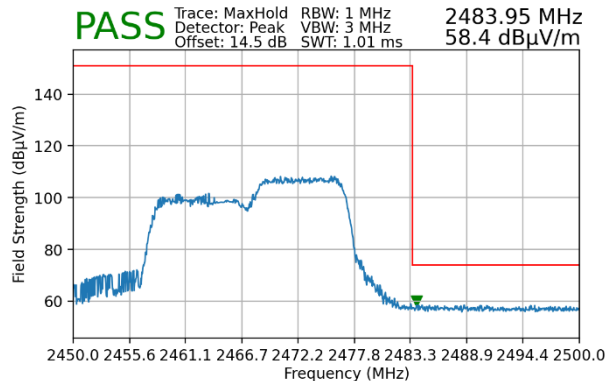


**Plot 7-178. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Peak – 106 Tones)**

Worst Case Mode: 802.11ax/be OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 54  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2472MHz  
 Channel: 13

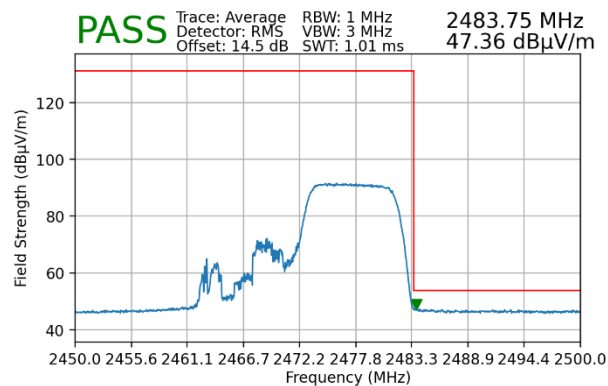


**Plot 7-179. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average – 106 Tones)**

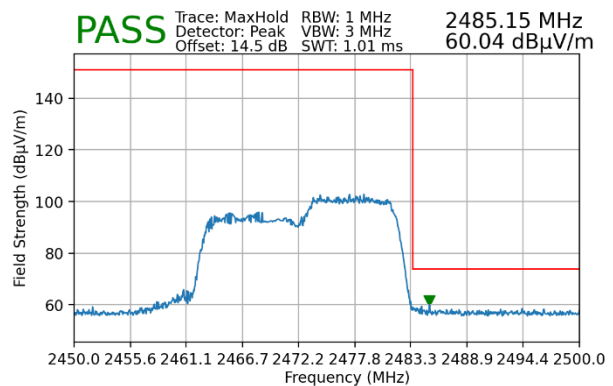


**Plot 7-180. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak – 106 Tones)**

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140042-04.A3L	Test Dates: 06/17/2024 – 08/08/2024	EUT Type: Portable Tablet	Page 123 of 134

Worst Case Mode: 802.11be OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 82  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 1

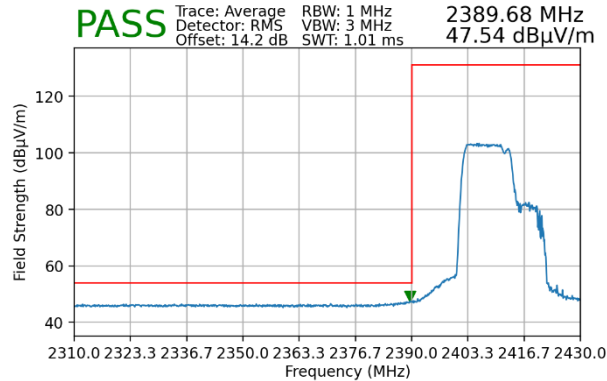


**Plot 7-181. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Average – 106+26 Tones)**

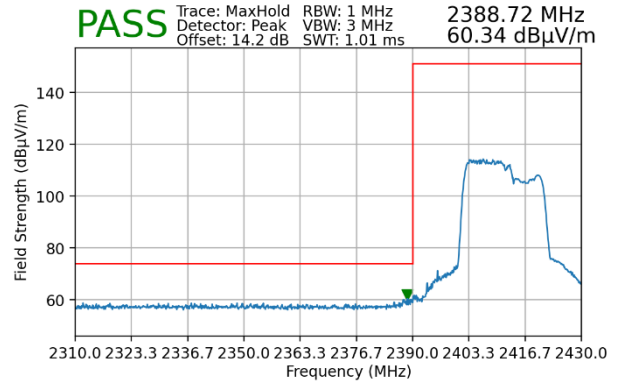


**Plot 7-182. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Peak – 106+26 Tones)**

Worst Case Mode: 802.11be OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 83  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

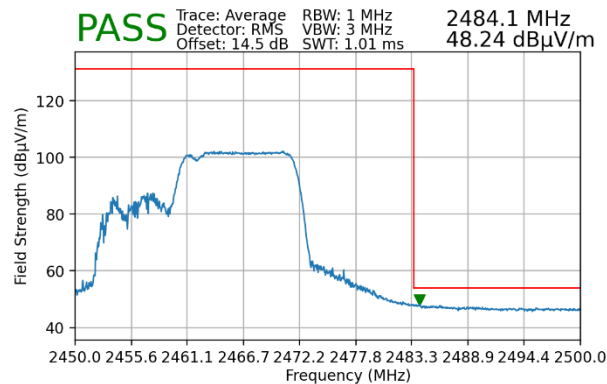


**Plot 7-183. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average – 106+26 Tones)**

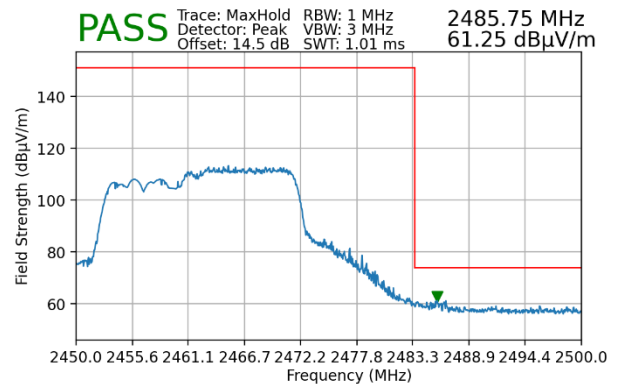


**Plot 7-184. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak – 106+26 Tones)**

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140042-04.A3L	Test Dates: 06/17/2024 – 08/08/2024	EUT Type: Portable Tablet	Page 124 of 134

Worst Case Mode: 802.11be OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 83  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

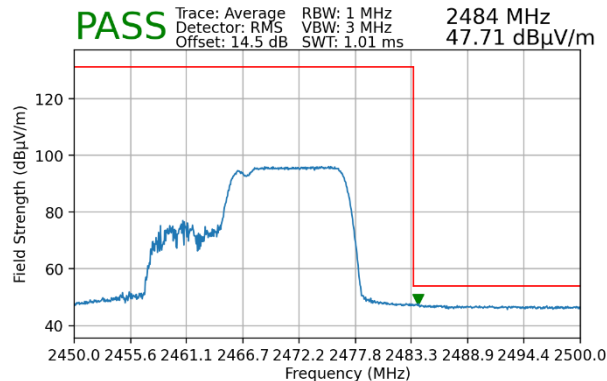


**Plot 7-185. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Average – 106+26 Tones)**

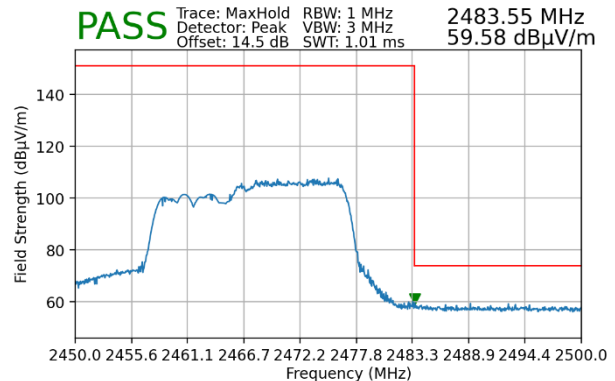


**Plot 7-186. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Peak – 106+26 Tones)**

Worst Case Mode: 802.11be OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 83  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2472MHz  
 Channel: 13

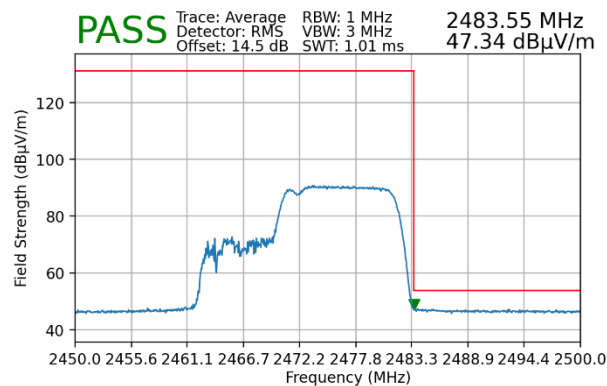

**Plot 7-187. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average – 106+26 Tones)**

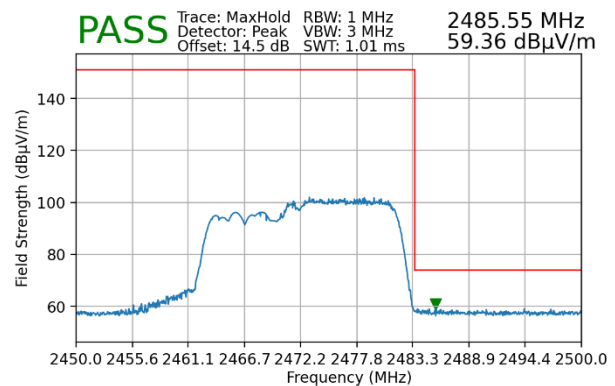

**Plot 7-188. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak – 106+26 Tones)**

FCC ID: A3LSMX920	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140042-04.A3L	Test Dates: 06/17/2024 – 08/08/2024	EUT Type: Portable Tablet	Page 125 of 134