

FCC Test Report

Report No.: AGC01043220701FE08

FCC ID : 2APX7K58B

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION : Smart phone

BRAND NAME : KRIP

MODEL NAME : K58b

APPLICANT : KRIPTO MOBILE CORPORATION

DATE OF ISSUE : Aug. 08, 2022

STANDARD(S) : FCC Part 22H & 24E

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd.





Page 2 of 70

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug. 08, 2022	Valid	Initial Release







TABLE OF CONTENTS

1. GENERAL INFORMATION	5
2. PRODUCT INFORMATION	6
2.1 PRODUCT TECHNICAL DESCRIPTION	6
2.2 RELATED SUBMITTAL(S) / GRANT (S)	8
2.3 TEST METHODOLOGY	8
2.4 DEVICE CAPABILITIES	8
2.5 SPECIAL ACCESSORIES	8
2.6 EQUIPMENT MODIFICATIONS	8
2.7 EMISSION DESIGNATOR	9
3. TEST ENVIRONMENT	10
3.1 ADDRESS OF THE TEST LABORATORY	10
3.2 TEST FACILITY	10
3.3 ENVIRONMENTAL CONDITIONS	11
3.4 MEASUREMENT UNCERTAINTY	11
3.5 LIST OF TEST EQUIPMENT	12
4. SYSTEM TEST CONFIGURATION	14
4.1 EUT CONFIGURATION	14
4.2 EUT EXERCISE	14
4.3 CONFIGURATION OF EUT SYSTEM	14
4.4 EQUIPMENT USED IN TESTED SYSTEM	14
5. SUMMARY OF TEST RESULTS	15
5.1 TEST CONDITION : CONDUCTED TEST	15
5.2 TEST CONDITION : RADIATED TEST	15
6. DESCRIPTION OF TEST MODES	16
7. CONDUCTED OUTPUT POWER	18
7.1 PROVISIONS APPLICABLE	18
7.2 MEASUREMENT METHOD	18
7.3 MEASUREMENT SETUP	18
7.4 MEASUREMENT RESULT	19
8. RADIATED OUTPUT POWER	21
8.1 PROVISIONS APPLICABLE	21
8.2 MEASUREMENT METHOD	21
8.3 MEASUREMENT SETUP	22
8.4 MEASUREMENT RESULT	24
9. PEAK-TO-AVERAGE RATIO	26





9.1 PROVISIONS APPLICABLE	26
9.2 MEASUREMENT METHOD	26
9.3 MEASUREMENT SETUP	27
9.4 MEASUREMENT RESULT	28
10. OCCUPIED BANDWIDTH	29
10.1 PROVISIONS APPLICABLE	29
10.2 MEASUREMENT METHOD	29
10.3 MEASUREMENT SETUP	29
10.4 MEASUREMENT RESULT	30
11. BAND EDGE EMISSIONS AT ANTENNA TERMINAL	35
11.1 MEASUREMENT OVERVIEW	35
11.2 MEASUREMENT METHOD	35
11.3 MEASUREMENT METHOD	35
11.4 MEASUREMENT RESULT	36
12. SPURIOUS EMISSIONS AT ANTENNA TERMINAL	39
12.1 PROVISIONS APPLICABLE	39
12.2 MEASUREMENT METHOD	39
12.3 MEASUREMENT SETUP	39
12.4 MEASUREMENT RESULT	40
13. RADIATED SPURIOUS EMISSION	49
13.1. PROVISIONS APPLICABLE	49
13.2. MEASUREMENT PROCEDURE	49
13.3. MEASUREMENT SETUP	50
13.4 MEASUREMENT RESULT	51
14. FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	59
14.1 PROVISIONS APPLICABLE	59
14.2 MEASUREMENT METHOD	59
14.3 MEASUREMENT SETUP	60
13.4 MEASUREMENT RESULT	61
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	70
APPENDIX B: PHOTOGRAPHS OF EUT	70



Page 5 of 70

1. GENERAL INFORMATION

Applicant	KRIPTO MOBILE CORPORATION		
Address	7640 NW 25TH ST STE 101, MIAMI, FL 33122		
Manufacturer	HuaYueShiTong Software Technology Co., Ltd		
Address	Room 703-704, Building B, Phase 1, Wanke Yuncheng Innovation Valley, Xili Street, Nanshan District, Shenzhen		
Factory	HuaYueShiTong Software Technology Co., Ltd		
Address	Room 703-704, Building B, Phase 1, Wanke Yuncheng Innovation Valley, Xili Street, Nanshan District, Shenzhen		
Product Designation	Smart phone		
Brand Name	KRIP		
Test Model	K58b		
Date of test	Jul. 13, 2022~Aug. 08, 2022		
Deviation	No any deviation from the test method.		
Condition of Test Sample	Normal		

WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance(Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI/TIA-603-E-2016. The sample tested as described in this report is in compliance with the FCC Rules Part 22H, 24E. The test results of this report relate only to the tested sample identified in this report.

Prepared By	Foler zhan			
	Eder Zhan (Project Engineer)	Aug. 08, 2022		
Reviewed By	Colin	Lin		
	Calvin Liu (Reviewer)	Aug. 08, 2022		
Approved By	Max Zha	ng		
_	Max Zhang Authorized Officer	Aug. 08, 2022		



Page 6 of 70

2. PRODUCT INFORMATION

2.1 PRODUCT TECHNICAL DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	Smart phone			
Hardware Version:	TH106 V1.1			
Software Version:	V1.0			
Support Networks:	-	ACDMA HEDDA HELIDA		
Support Networks.	GSM, GPRS, EDGE, WCDMA, HSDPA, HSUPA			
	☐ GPRS 850 ☐ PCS1900 (U.S. Bands)			
	□ SGSM 900 □ DCS 1800 (Non-U.S. Bands)			
Frequency Bands:	☐ UMTS FDD Band II [
	☐UMTS FDD Band V (,		
		UMTS FDD Band VIII (N	,	
Type of Modulation:	GMSK,8PSK Modulation	on For GSM/GPRS/EDGE		
Typo of Modulation.	BPSK,QPSK Modulation	on For WCDMA/HSDPA/H	SUPA	
	GSM/GPRS/EDGE 850): 824.2MHz-848.8 MHz		
Frequency Range:	GSM/GPRS/EDGE 1900: 1850.2MHz-1909.8 MHz			
r requerity realige.	WCDMA Band II: 1852.4MHz-1907.6 MHz			
	WCDMA Band V: 826.4-846.6 MHz			
	GSM/GPRS 850:	249KGXW		
	EDGE 850:	259KG7W		
Emission Designator:	GSM/GPRS 1900:	247KGXW		
Emission Designator:	EDGE 1900:	248KG7W		
	WCDMA Band II:	4M16F9W		
	WCDMA Band V:	4M18F9W		
Antenna Type:	PIFA Antenna			
Automorphis	GSM850:0.94dBi	PCS1900: 1.15dBi		
Antenna gain:	WCDMA850:0.94dBi	WCDMA1900:1.15dBi		
Power Supply:	DC 3.85V by Built-in Li-ion Battery			
Battery parameter:	DC 3.85V 4800mAh			
Dual Card:	GSM /WCDMA Card Slot			
Extreme Vol. Limits:	DC3.27V to 4.40V (Normal: DC 3.85V)			
Extreme Temp. Tolerance	-30 °C to +50 °C			
Temperature range: -10°C to +45°C				



Page 7 of 70

GSM/WCDMA SLOT 1:

	Maximum ERP/EIRP	Max. Average
	(dBm)	Burst Power (dBm)
GSM 850	30.54	32.70
PCS 1900	27.05	29.67
UMTS BAND V	20.33	22.25
UMTS BAND II	21.17	22.90

GSM/WCDMA SLOT 2:

	Maximum ERP/EIRP	Max. Average	
	(dBm)	Burst Power (dBm)	
GSM 850	29.12	31.58	
PCS 1900	26.11	28.47	
UMTS BAND V	19.42	21.83	
UMTS BAND II	19.86	21.48	



Page 8 of 70

2.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2APX7K58B**, filing to comply with the FCC Part 22H&24E requirements.

2.3 TEST METHODOLOGY

The tests were performed according to following standards:

No.	Identity	Document Title		
1	47 CFR FCC Part 2	Frequency allocations and radio treaty matters, general rules and regulations.		
2	47 CFR FCC Part 22	Public Mobile Services.		
3	47 CFR FCC Part 24 Personal Communications Services.			
4	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters		
		Used in Licensed Radio Services		
5	ANSI/TIA-603-E-2016	Land Mobile FM or PM Communications Equipment Measurement and		
5	ANSI/11A-003-E-2010	Performance Standards		
6	KDB 971168	D01 v03r01 Measurement Guidance For Certification Of Licensed Digital		
6		Transmitters.		

2.4 DEVICE CAPABILITIES

850/1900 GSM/GPRS/EGPRS,850/1900 WCDMA/HSPA, Multi-Band LTE,802.11 b/g/n for WLAN, Bluetooth (1X,EDR,LE),GPS.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration.

The emissions below 1GHz and above 18GHz were tested with the highest transmitting power channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

2.5 SPECIAL ACCESSORIES

The battery was supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

2.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.



Page 9 of 70

2.7 EMISSION DESIGNATOR

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand



Page 10 of 70

3. TEST ENVIRONMENT

3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842



Page 11 of 70

3.3 ENVIRONMENTAL CONDITIONS

	NORMAL CONDITIONS	EXTREME CONDITIONS	
Temperature range	15~35℃	-30℃~55℃	
Humidty range	20 % to 75 %.	20 % to 75 %.	
Pressure range	86-106kPa	86-106kPa	
Power supply	DC 3.85V	DC 3.27V or 4.40V	

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

3.4 MEASUREMENT UNCERTAINTY

Test	Measurement Uncertainty	Notes
Transmitter power conducted	±0.57 dB	(1)
Transmitter power Radiated	±2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	±2.20 dB	(1)
Occupied Bandwidth	±0.01ppm	(1)
Radiated Emission 30~1000MHz	±4.10dB	(1)
Radiated Emission Above 1GHz	±4.32dB	(1)
Conducted Disturbance0.15~30MHz	±3.20dB	(1)
Radio Frequency	± 6.5 x 10-8	(1)
RF Power, Conducted	± 0.9 dB	(1)

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Page 12 of 70

3.5 LIST OF TEST EQUIPMENT

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Mar. 28, 2022	Mar. 27, 2023
LISN	R&S	ESH2-Z5	100086	Jun. 08, 2022	Jun. 07, 2023
TEST RECEIVER	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Nov. 17, 2021	Nov. 16, 2022
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep. 19, 2021	Sep. 18, 2023
preamplifier	ChengYi	EMC184045S E	980508	Sep. 19, 2021	Sep. 18, 2022
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun. 07, 2022	Jun. 06, 2023
ANTENNA	SCHWARZBECK	VULB9168	D69250	Apr. 28, 2021	Apr. 27, 2023
SIGNAL ANALYZER	Agilent	N9020A	MY52090123	Sep. 06, 2021	Sep. 05, 2022
USB Wideband Power Sensor	Agilent	U2021XA	MY54110007	May 11, 2021	May 10, 2025
Universal Radio Communication Tester	R&S	CMU200	120237	Jun. 07, 2022	Jun. 06, 2023
Universal Radio Communication Tester	Agilent	8960	GB46200384	Aug. 18, 2021	Aug. 17, 2022
Power Splitter	Agilent	11636A	34	Jun.06, 2022	Jun.05, 2023
Attenuator	JFW	50FHC-006-5 0	N/A	Jun.06, 2022	Jun.05, 2023
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170		Sep. 19, 2021	Sep. 18, 2022
Horn Ant (18G-40GHz)	ETS	QWH_SL_18 _40_K_SG		Sep. 19, 2021	Sep. 18, 2022
Power Splitter	Agilent	11636A	/	Sep.14, 2021	Sep.13, 2022
CMU200	R&S	120237	/	Jun. 07, 2022	Jun. 06, 2023
Artificial Mains	R&S	101242	/	Jun. 07, 2022	Jun. 06, 2023



Page 13 of 70

Network ENV216					
Filter Bank Notch 1(880-915MHz)	MICRO-TRONICS	010	/	Feb. 21, 2022	Feb. 20, 2023
Filter Bank Notch 2 (1710-1785MHz)	MICRO-TRONICS	009	/	Feb. 21, 2022	Feb. 20, 2023
Filter Bank Notch 3 (1920-1980MHz)	MICRO-TRONICS	008	/	Feb. 21, 2022	Feb. 20, 2023



Page 14 of 70

4. SYSTEM TEST CONFIGURATION

4.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

4.3 CONFIGURATION OF EUT SYSTEM

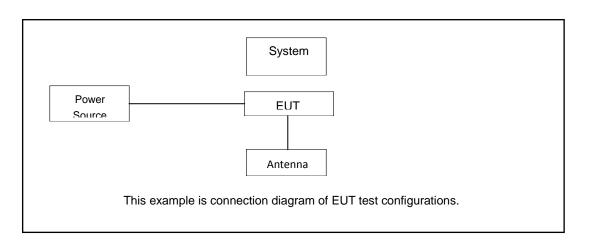


Table 2-1 Equipment Used in EUT System

4.4 EQUIPMENT USED IN TESTED SYSTEM

The Following Peripheral Devices And Interface Cables Were Connected During The Measurement:

☐ Test Accessories Come From The Laboratory

☐ Test Accessories Come From The Manufacturer

Item	Equipment	Model No.	Identifier	Note
1	Smart phone	K58b	2APX7K58B	EUT
2	Adapter	C58	Input: AC 50/60Hz, 0.2A	AE
	Adaptei	C36	Output: DC 5.0V 1.5A	AL
3	Battery	K58b	DC 3.85V 4800mAh	AE
4	USB Cable	N/A	N/A	AE



Page 15 of 70

5. SUMMARY OF TEST RESULTS

5.1 TEST CONDITION: CONDUCTED TEST

Item	Test Description	FCC Rules	Result
1	Occupied Bandwidth	§2.1049	Pass
2	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal	§2.1051, §22.917(a), §24.238(a)	Pass
5	Conducted Output Power	§2.1046	Pass
6	Frequency stability / variation of ambient temperature	§2.1055, § 22.355, §24.235	Pass
7	Peak- to- Average Ratio	§24.232(d)	Pass

5.2 TEST CONDITION: RADIATED TEST

Item	Test Description	FCC Rules	Result
1	Effective Radiated Power	§22.913(a)(5)	Pass
2	Equivalent Isotropic Radiated Power	§24.232(c)	Pass
3	Radiated Spurious and Harmonic Emissions	§2.1053, §22.917(a), §24.238(a),	Pass



Page 16 of 70

6. DESCRIPTION OF TEST MODES

		RF Channel		
Bands	Tx/Rx Frequency	Low(L)	Middle(M)	High(H)
GSM/GPRS/	TX	Channel 128	Channel 190	Channel 251
EDGE850	(824 MHz ~ 849 MHz)	824.2 MHz	836.6 MHz	848.8 MHz
	TX	Channel 4132	Channel 4182	Channel 4233
WCDMA band V	(824 MHz ~ 849 MHz)	826.4 MHz	836.4 MHz	846.6 MHz

Bands	Tx/Rx Frequency	RF Channel		
Builds	TANK Trequency	Low(L)	Middle(M)	High(H)
GSM/GPRS/	TX	Channel 512	Channel 661	Channel 810
EDGE1900	(1850 MHz-1910 MHz)	1850.2 MHz	1880.0 MHz	1909.8 MHz
	TX	Channel 9262	Channel 9400	Channel 9538
WCDMA Band II	(1850 MHz-1910 MHz)	1852.4 MHz	1880.0 MHz	1907.6 MHz

		RF Channel		
Bands	Tx/Rx Frequency	Low(L)	Middle(M)	High(H)
	TX	Channel 1312	Channel 1412	Channel 1513
WCDMA Band IV	(1710 MHz-1755 MHz)	1712.4 MHz	1732.4 MHz	1752.6 MHz

Pre-scan all bandwidth and RB, find worse case mode are chosen to the report, the worse mode applicability and tested channel detail as below:

Band	Radiated	Conducted
	GSM (GMSK, 1Tx-slot) Link	GSM (GMSK,1Tx-slot) Link
GSM/GPRS/	GPRS (GMSK, 1Tx-slot) Link	GPRS (GMSK, 1Tx-slot) Link
EDGE 850/1900	EDGE (8PSK, 1Tx-slot) Link	EDGE (8PSK, 1Tx-slot) Link
WCDMA Band II/V	RMC 12.2kbps Link	RMC 12.2kbps Link



Page 17 of 70

ACCORDING TO 3GPP 25.101 SUB-CLAUSE 6.2.2, THE MAXIMUM OUTPUT POWER IS ALLOWED TO BE REDUCED BY FOLLOWING THE TABLE.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)	
For all combinations of ,DPDCH,DPCCH	0≤ CM≤3.5	MAN(CNA 4 O)	
HS-DPDCH,E-DPDCH and E-DPCCH	05 CIVIS3.5	MAX(CM-1,0)	

Note: CM=1 for $\beta \ d = 12/15$, $\beta \ d = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH,

E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done. However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.



Page 18 of 70

7. CONDUCTED OUTPUT POWER

7.1 PROVISIONS APPLICABLE

The conduction test is carried out in a shielded room.

According to the test, connect the device under test to the antenna port on the non-conductive platform directly to the test device for evaluation and measurement (ANSI-C63.26-2015 Clause 5.4)

7.2 MEASUREMENT METHOD

- The transmitter output port was connected to base station.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
- The path loss was compensated to the results for each measurement.

Measure the maximum burst average power and average power for other modulation signal.

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all mode (GSM/EGPRS 850, GSM/EGPRS 1900, WCDMA/HSPA band II, WCDMA/HSPA band IV ,WCDMA/HSPA band V)at 3 typical channels (the Top Channel, the Middle Channel and the Bottom Channel) for each band.

7.3 MEASUREMENT SETUP






Page 19 of 70

7.4 MEASUREMENT RESULT

GSM 850 Maximum Average Power (dBm)					
Channel	128	190	251		
Frequency(MHz)	824.2 MHz	836.6 MHz	848.8 MHz		
GSM (GMSK, 1Tx-slot)	32.70	32.64	32.52		
GPRS (GMSK, 1Tx-slot)	32.70	32.58	32.46		
GPRS (GMSK, 2Tx-slot)	30.94	30.89	30.91		
GPRS (GMSK, 3Tx-slot)	28.46	28.58	28.61		
GPRS (GMSK, 4Tx-slot)	26.67	26.70	26.69		
EDGE (8PSK, 1Tx-slot)	27.66	27.44	27.42		
EDGE (8PSK, 2Tx-slot)	25.23	25.19	25.21		
EDGE (8PSK, 3Tx-slot)	23.14	23.05	23.42		
EDGE (8PSK, 4Tx-slot)	20.22	20.15	20.19		

PCS 1900 Maximum Average Power (dBm)				
Channel	512	661	810	
Frequency(MHz)	1850.2 MHz	1880.0 MHz	1909.8 MHz	
GSM (GMSK, 1Tx-slot)	29.67	29.50	29.02	
GPRS (GMSK, 1Tx-slot)	29.67	29.43	29.00	
GPRS (GMSK, 2Tx-slot)	27.58	27.44	27.56	
GPRS (GMSK, 3Tx-slot)	25.63	25.59	25.31	
GPRS (GMSK, 4Tx-slot)	23.40	23.33	23.27	
EDGE (8PSK, 1Tx-slot)	24.34	24.66	25.34	
EDGE (8PSK, 2Tx-slot)	23.29	23.81	23.11	
EDGE (8PSK, 3Tx-slot)	21.22	21.34	21.19	
EDGE (8PSK, 4Tx-slot)	19.74	19.63	19.28	





	WCDMA Band II Maximum Average Power (dBm)				
Channel	9262	9400	9538		
Frequency(MHz)	1852.4 MHz	1880.0 MHz	1907.6 MHz		
RMC 12.2kbps	21.96	22.14	22.25		
HSDPA Subtest-1	21.07	21.33	21.43		
HSDPA Subtest-2	20.30	20.61	20.68		
HSDPA Subtest-3	20.30	20.58	20.75		
HSDPA Subtest-4	20.39	20.54	20.66		
HSUPA Subtest-1	18.84	18.97	19.11		
HSUPA Subtest-2	18.97	19.06	19.13		
HSUPA Subtest-3	19.96	20.03	20.03		
HSUPA Subtest-4	18.27	18.58	18.75		
HSUPA Subtest-5	17.98	18.34	18.43		

	WCDMA Band V Maximum Average Power (dBm)							
Channel	4132	4182	4233					
Frequency(MHz)	826.4 MHz	836.4 MHz	846.6 MHz					
RMC 12.2kbps	22.85	22.90	22.88					
HSDPA Subtest-1	21.89	21.93	21.87					
HSDPA Subtest-2	21.19	21.11	21.10					
HSDPA Subtest-3	20.99	21.05	21.04					
HSDPA Subtest-4	20.94	21.05	20.98					
HSUPA Subtest-1	19.71	19.76	19.63					
HSUPA Subtest-2	19.76	19.74	19.73					
HSUPA Subtest-3	20.71	20.70	20.66					
HSUPA Subtest-4	19.31	19.25	19.19					
HSUPA Subtest-5	18.64	18.71	18.93					



Page 21 of 70

8. RADIATED OUTPUT POWER

8.1 PROVISIONS APPLICABLE

The radiation test is carried out in a semi-anechoic chamber.

According to the test, put the device under test on a non-conductive platform 3 meters away from the receiving antenna (ANSI/TIA-603-E-2016 Article 2.2.17).

The following rules are for the maximum radiated power limit requirements of the product:

Mode	Nominal Peak Power
GSM 850	< 7 Watts max. ERP (38.45dBm)
PCS 1900	< 2 Watts max. EIRP (33dBm)
WCDMA Band II	< 2 Watts max. EIRP (33dBm)
WCDMA Band V	< 7 Watts max. ERP (38.45dBm)

8.2 MEASUREMENT METHOD

- 1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
- 2. RBW = 1 5% of the expected OBW, not to exceed 1MHz
- 3. VBW \geq 3 x RBW
- 4. Span = 1.5 times the OBW
- 5. No. of sweep points > 2 x span / RBW
- 6. Detector = RMS
- 7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
- 8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
- 9. Trace mode = trace averaging (RMS) over 100 sweeps
- 10. The trace was allowed to stabilize.



Page 22 of 70

Radiation Construction Method:

- 1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
- 2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula:


$$Pd(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dB)$$


Where: Pd is the dipole equivalent power and Pg is the generator output power into the substitution antenna.

- 3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
- 4. The EUT was tested in three orthogonal planes (X, Y, Z) and in all possible test configurations and positioning.
- 5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.


8.3 MEASUREMENT SETUP

Radiated Power 30MHz to 1GHz Test setup

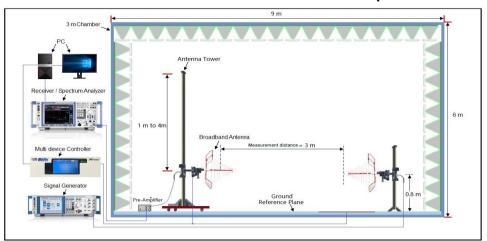







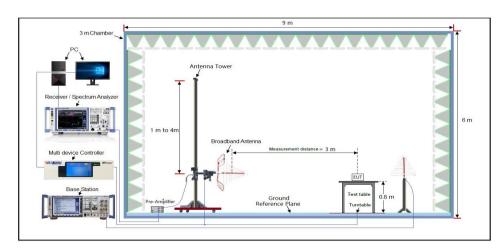

Radiated Power Above 1GHz Test setup

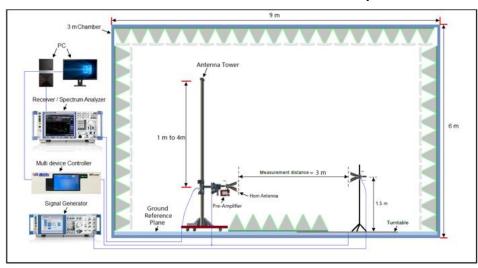

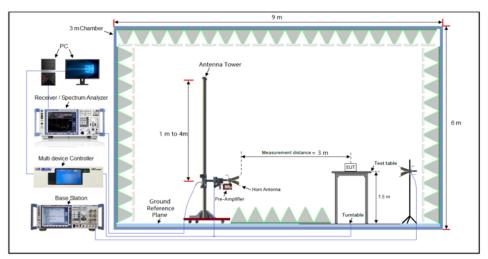



Page 24 of 70

8.4 MEASUREMENT RESULT

	Ch.	/ Freq.	Substitute	Ant.			Limit	EF	RP
Mode	channel	Freq. (MHz)	LEVEL (dBm)	Gain (dBd)	C.L	Pol.	w	W	dBm
GSM850	128	824.2	35.23	5.90	1.21	Н		1.132	30.54
	190	836.6	37.06	5.90	1.22	Н		1.730	32.38
	251	848.8	36.98	5.90	1.25	Н		1.710	32.33
	128	824.2	31.18	5.90	1.21	Н	< 7.00	0.446	26.49
EDGE	190	836.6	31.23	5.90	1.22	Н		0.452	26.55
	251	848.8	31.02	5.90	1.25	Н		0.434	26.37
WCDMA850	4132	826.4	24.84	5.90	1.21	Н		0.104	20.15
	4183	836.6	24.98	5.90	1.25	Н		0.108	20.33
	4233	846.6	24.93	5.90	1.24	Н		0.106	20.27
	4132	826.4	23.03	5.90	1.21	Н		0.068	18.34
HSPA	4183	836.6	22.94	5.90	1.25	Н		0.067	18.29
	4233	846.6	22.87	5.90	1.24	Н		0.066	18.21



	Ch./ Freq.		Substitute	Ant.			Limit		EIRP
Mode	channel	Freq. (MHz)	LEVEL Gain (dBm) (dBi)		C.L	Pol.	w	W	dBm
	512	1850.2	33.45	8.6	2.11	Н		0.497	26.96
PCS1900	661	1880.0	33.50	8.6	2.15	Н		0.507	27.05
	810	1909.8	33.29	8.6	2.15	Н		0.483	26.84
EDGE	512	1850.2	28.81	8.6	2.11	Н	< 2.00	0.171	22.32
	661	1880.0	28.94	8.6	2.15	Н		0.177	22.49
	810	1909.8	28.96	8.6	2.15	Н		0.178	22.51
WCDMA 1900	9262	1852.4	27.64	8.6	2.11	Н		0.130	21.15
	9400	1880.0	27.45	8.6	2.15	Н		0.126	21.00
	9538	1907.6	27.62	8.6	2.15	Н		0.131	21.17
	9262	1852.4	26.24	8.6	2.11	Н		0.094	19.75
HSPA	9400	1880.0	26.05	8.6	2.15	Н		0.091	19.60
	9538	1907.6	26.32	8.6	2.15	Н		0.097	19.87

Note:1._EIRP/ERP = Substitute LEVEL (dBm) + Ant. Gain - C.L (Cable Loss)

2. All polarizations and modes have been tested, only the worst mode is recorded in the report



Page 26 of 70

9. PEAK-TO-AVERAGE RATIO

9.1 PROVISIONS APPLICABLE

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

9.2 MEASUREMENT METHOD

① CCDF Procedure for PAPR:

- 1. Set resolution/measurement bandwidth ≥ signal's occupied bandwidth;
- 2. Set the number of counts to a value that stabilizes the measured CCDF curve;
- 3. Set the measurement interval as follows:
- -for continuous transmissions, set to 1 ms,
- -or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time

that is less than or equal to the burst duration.

4. Record the maximum PAPR level associated with a probability of 0.1%.

2 Alternate Procedure for PAPR:

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as PPk. Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and recordas PAvg. Determine the P.A.R. from:


P.A.R(dB) = PPk (dBm) – PAvg (dBm) (PAvg = Average Power + Duty cycle Factor) Allow trace to fully stabilize.

Use the peak marker function to determine the peak amplitude level.

Test Settings(Peak Power):

The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW \geq 3 × RBW.

- 1. Set the RBW ≥ OBW.
- 2. Set VBW ≥ 3 × RBW.
- 3. Set span ≥ 2 × OBW.






- 4. Sweep time \geq 10 × (number of points in sweep) × (transmission symbol period).
- 5. Detector = peak.
- 6. Trace mode = max hold.
- 7. Allow trace to fully stabilize.
- 8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

- 1. Set span to 2 x to 3 x the OBW.
- 2. Set RBW ≥ OBW.
- 3. Set VBW ≥ 3 × RBW.
- 4. Set number of measurement points in sweep ≥ 2 × span / RBW.
- 5. Sweep time: Set ≥ [10 × (number of points in sweep) × (transmission period)] for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
- 6. Detector = power averaging (rms).
- 7. Set sweep trigger to "free run."
- 8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. Add [10 log (1/duty cycle)] to the measured maximum power level to compute the average power during continuous transmission. For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is a constant 25%.

9.3 MEASUREMENT SETUP

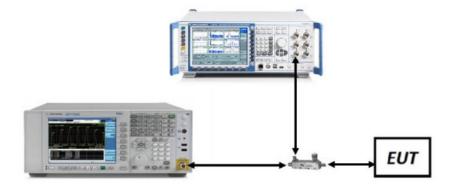



Page 28 of 70

9.4 MEASUREMENT RESULT

Bands	Modulation	Peak-t	o-average rat	Limit	Result	
Ballas	Modulation	Lowest	Middle	Highest	(dB)	Result
CCM 050	GSM	2.64	2.67	2.65	13	Pass
GSM 850	EDGE	5.41	5.45	5.45	13	Pass
PCS 1900	GSM	2.66	2.65	2.65	13	Pass
	EDGE	5.55	5.54	5.57	13	Pass
WCDMA Band II	RMC 12.2kbps	3.09	3.06	3.01	13	Pass
WCDMA Band II	HSUPA	4.55	4.53	4.49	13	Pass
WCDMA Band II	HSDPA	3.20	3.22	3.19	13	Pass
WCDMA Band V	RMC 12.2kbps	2.19	2.35	2.33	13	Pass
WCDMA Band V	HSUPA	4.31	4.32	4.21	13	Pass
WCDMA Band V	HSDPA	2.83	2.82	2.74	13	Pass



Page 29 of 70

10. OCCUPIED BANDWIDTH

10.1 PROVISIONS APPLICABLE

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission. The EUT makes a call to the communication simulator.

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

10.2 MEASUREMENT METHOD

- 1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- 3. VBW ≥ 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
 - 1 5% of the 99% occupied bandwidth observed in Step 7

10.3 MEASUREMENT SETUP





Page 30 of 70

10.4 MEASUREMENT RESULT

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHz)	Emission Bandwidth (KHz)	Verdict
GSM 850 EDGE		LCH	248.7	314	PASS
		MCH	248.5	319	PASS
		HCH	245.2	307	PASS
		LCH	259.0	326	PASS
		MCH	251.6	316	PASS
		HCH	253.9	316	PASS


Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHz)	Emission Bandwidth (KHz)	Verdict
		LCH	246.7	311	PASS
PCS 1900 -	GSM	MCH	244.8	312	PASS
		HCH	245.2	314	PASS
		LCH	247.6	315	PASS
		MCH	247.3	315	PASS
		HCH	246.3	307	PASS




Page 31 of 70


Test Band Test Mode	Test Mode	Test Channel	Occupied Bandwidth	Emission Bandwidth	Verdict
	rest orialine	(KHz)	(KHz)	VOIGIO	
WCDMA 850 UMTS		LCH	4174.6	4734	PASS
	UMTS	MCH	4178.0	4739	PASS
		HCH	4172.0	4747	PASS

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHz)	Emission Bandwidth (KHz)	Verdict
WCDMA 1900	UMTS	LCH	4155.4	4685	PASS
		MCH	4147.8	4670	PASS
		HCH	4162.4	4688	PASS







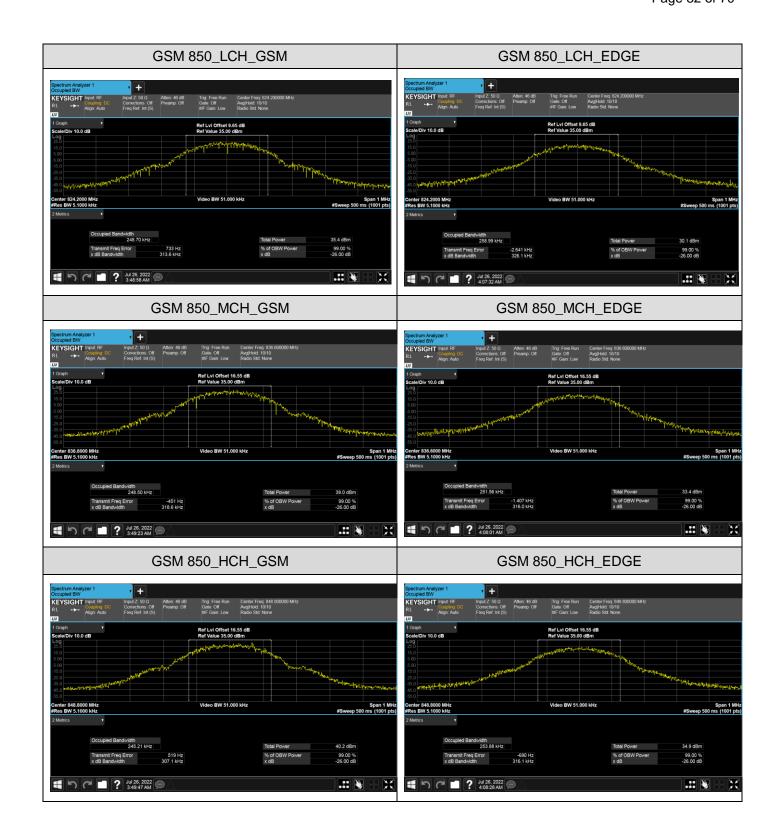





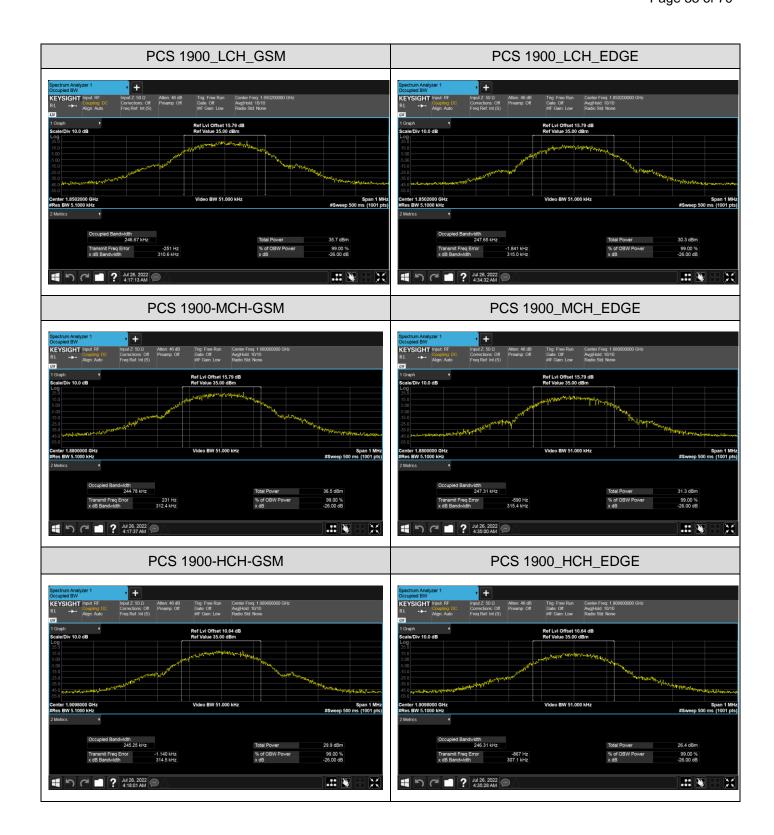









Page 35 of 70

11. BAND EDGE EMISSIONS AT ANTENNA TERMINAL

11.1 MEASUREMENT OVERVIEW

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


11.2 MEASUREMENT METHOD


- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- 4. $VBW > 3 \times RBW$
- 5. Detector = RMS
- 6. Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize

TEST NOTE

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. All measurements were done at 2 channels(low and high operational frequency range.) The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.


11.3 MEASUREMENT METHOD

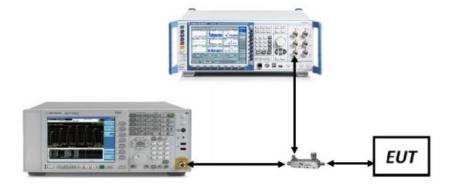








11.4 MEASUREMENT RESULT

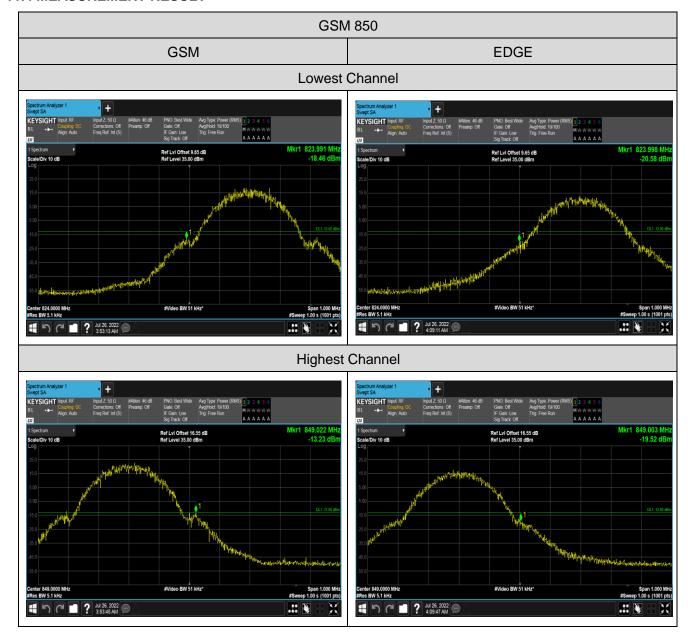






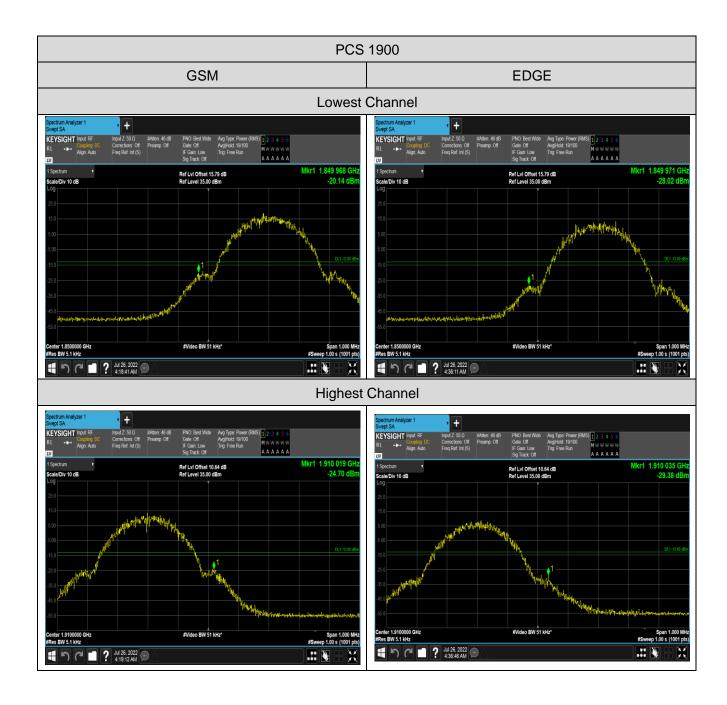





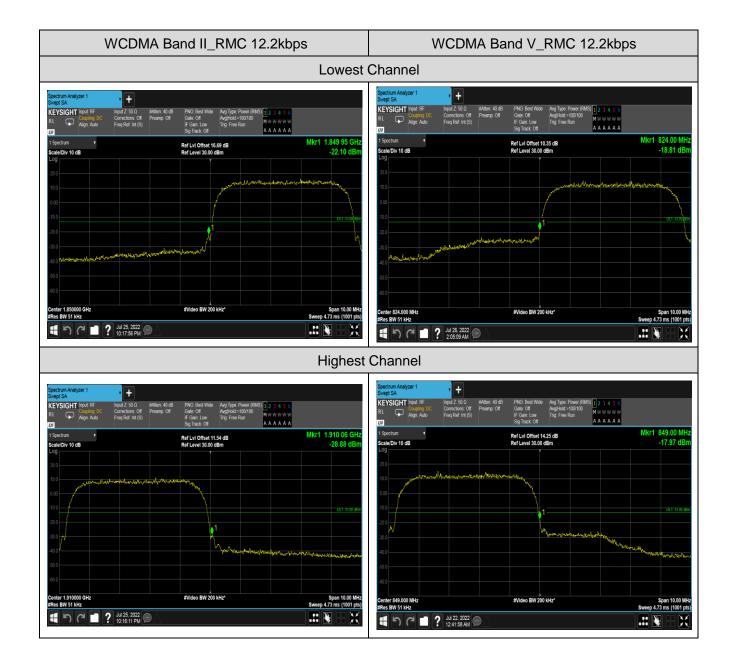



Page 39 of 70

12. SPURIOUS EMISSIONS AT ANTENNA TERMINAL

12.1 PROVISIONS APPLICABLE

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

12.2 MEASUREMENT METHOD


Test Settings (GSM)


- 1. RBW = 1 MHz
- 2. VBW ≥ 3 MHz
- 3. Detector = Peak
- 4. Trace Mode = max hold
- 5. Sweep time = auto
- 6. Number of points in sweep ≥ 2 x Span / RBW

Test Settings (WCDMA)

- 1. RBW = 1 MHz
- 2. VBW ≥ 3 MHz
- 3. Detector = RMS
- 4. Trace Mode = trace average
- 5. Sweep time = auto
- 6. Number of points in sweep \geq 2 x Span / RBW


12.3 MEASUREMENT SETUP

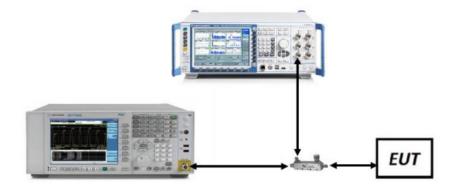





12.4 MEASUREMENT RESULT

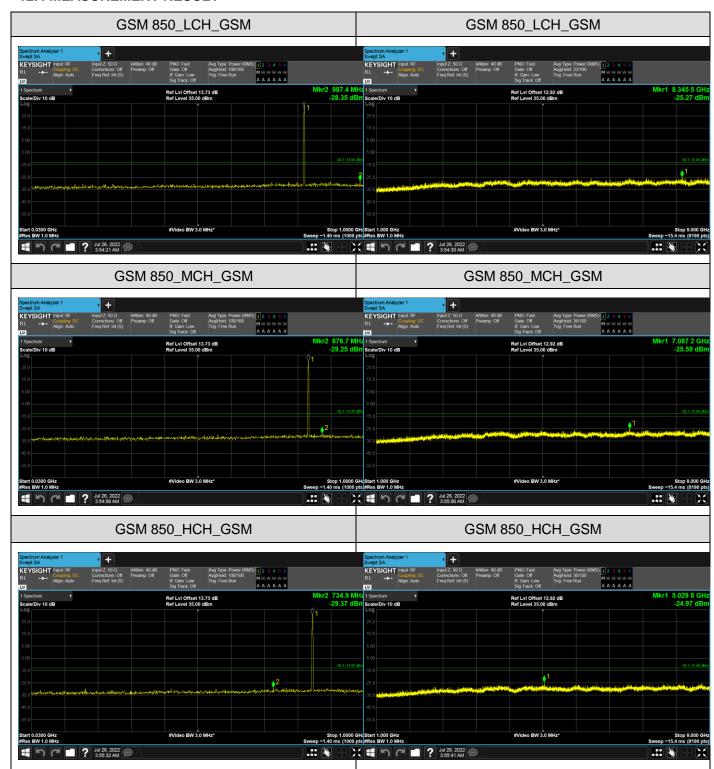

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

