

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
be240,BF_240MHz_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5610MHz Straddle 5.47-5.725GHz	Pass	2.52	6.02	5.55	5.75	6.11	11.88	24.00	14.40	30.00
5610MHz Straddle 5.725-5.85GHz	Pass	2.56	-11.48	-11.4	-11.11	-10.86	-5.18	30.00	-2.62	36.00

DG = Directional Gain; Port X = Port X output power

For 802.11be

Antenna	Antenna Gain (dBi)			
	5150 ~ 5250 MHz	5250 ~ 5350 MHz	5470 ~ 5725 MHz	5725 ~ 5850 MHz
1	1.56	1.78	2.3	0.63
2	3.1	3.19	2.26	2.74
3	2.67	2.61	3.25	2.8
4	2.62	3.19	2.69	2.69
5	0.70	1.24	1.65	0.40
6	2.75	3.2	2.71	3.77
Directional Gain (Antenna 1/3/5/6)	2.00	2.27	2.52	2.14
Directional Gain** (Antenna 2/4/5/6)	2.39	2.78	2.35	2.56
Max Directional Gain	2.39	2.78	2.52	2.56

Note 1: Directional Gain = $10 \log [(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	14.34	22.70
802.11be EHT20_Nss4,(MCS0)_4TX	14.15	16.54
802.11be EHT40_Nss4,(MCS0)_4TX	9.72	12.11
802.11be EHT80_Nss4,(MCS0)_4TX	4.02	6.41
802.11be EHT160_Nss4,(MCS0)_4TX	-1.69	0.70
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	8.06	16.83
802.11be EHT20_Nss4,(MCS0)_4TX	9.94	12.72
802.11be EHT40_Nss4,(MCS0)_4TX	6.65	9.43
802.11be EHT80_Nss4,(MCS0)_4TX	3.98	6.76
802.11be EHT160_Nss4,(MCS0)_4TX	-1.7	1.08
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	8.31	16.83
802.11be EHT20_Nss4,(MCS0)_4TX	10.01	12.53
802.11be EHT40_Nss4,(MCS0)_4TX	7.32	9.84
802.11be EHT80_Nss4,(MCS0)_4TX	4.32	6.84
802.11be EHT160_Nss4,(MCS0)_4TX	-1.97	0.55
be240_240MHz_Nss4,(MCS0)_4TX	-6.39	-3.87
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	13.50	22.00
802.11be EHT20_Nss4,(MCS0)_4TX	13.11	15.67
802.11be EHT40_Nss4,(MCS0)_4TX	9.49	12.05
802.11be EHT80_Nss4,(MCS0)_4TX	4.23	6.79
be240_240MHz_Nss4,(MCS0)_4TX	-7.84	-5.28

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	8.36	6.44	6.89	6.44	6.51	12.27	14.64	20.63	23.00
5200MHz	Pass	8.36	7.61	8.35	7.72	8.28	13.83	14.64	22.19	23.00
5240MHz	Pass	8.36	8.52	8.46	8.33	8.58	14.34	14.64	22.70	23.00
5260MHz	Pass	8.77	2.11	1.88	2.17	1.72	7.76	8.23	16.53	17.00
5300MHz	Pass	8.77	2.05	1.85	2.01	2.25	7.88	8.23	16.65	17.00
5320MHz	Pass	8.77	2.05	2.11	2.02	2.7	8.06	8.23	16.83	17.00
5500MHz	Pass	8.52	1.92	1.74	2.55	2.41	8.01	8.48	16.53	17.00
5580MHz	Pass	8.52	2.19	1.7	2.4	2.39	8.04	8.48	16.56	17.00
5700MHz	Pass	8.52	1.85	2.16	2.33	2.45	8.02	8.48	16.54	17.00
5720MHz Straddle 5.47-5.725GHz	Pass	8.52	2.38	2.08	2.66	2.86	8.31	8.48	16.83	17.00
5720MHz Straddle 5.725-5.85GHz	Pass	8.50	0.98	0.68	1.16	1.39	6.93	27.50	15.43	36.00
5745MHz	Pass	8.50	6.98	7.69	7.82	8.36	13.43	27.50	21.93	36.00
5785MHz	Pass	8.50	7.16	7.65	7.74	8.20	13.50	27.50	22.00	36.00
5825MHz	Pass	8.50	7.30	7.65	7.69	8.02	13.49	27.50	21.99	36.00
802.11be EHT20_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	2.39	5.32	5.52	5.43	5.68	11.31	17.00	13.70	23.00
5200MHz	Pass	2.39	6.70	7.50	6.85	7.08	12.86	17.00	15.25	23.00
5240MHz	Pass	2.39	8.46	8.42	8.08	8.22	14.15	17.00	16.54	23.00
5260MHz	Pass	2.78	3.51	4.26	4.07	4.15	9.78	11.00	12.56	17.00
5300MHz	Pass	2.78	4.26	3.83	4.04	4.31	9.93	11.00	12.71	17.00
5320MHz	Pass	2.78	3.77	4.08	4.11	4.63	9.94	11.00	12.72	17.00
5500MHz	Pass	2.52	3.69	4.02	4.30	4.64	9.94	11.00	12.46	17.00
5580MHz	Pass	2.52	4.1	3.83	4.34	4.36	10.01	11.00	12.53	17.00
5700MHz	Pass	2.52	3.37	4.35	4.11	4.17	9.84	11.00	12.36	17.00
5720MHz Straddle 5.47-5.725GHz	Pass	2.52	4.11	3.79	4.13	4.38	9.99	11.00	12.51	17.00
5720MHz Straddle 5.725-5.85GHz	Pass	2.56	2.59	2.42	2.85	2.95	8.48	30.00	11.04	36.00
5745MHz	Pass	2.56	6.39	7.18	7.22	7.55	12.96	30.00	15.52	36.00
5785MHz	Pass	2.56	6.97	7.23	7.32	7.83	13.08	30.00	15.64	36.00
5825MHz	Pass	2.56	6.80	7.26	7.41	7.82	13.11	30.00	15.67	36.00
802.11be EHT40_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	2.39	1.36	2.16	2.02	2.01	7.64	17.00	10.03	23.00
5230MHz	Pass	2.39	3.73	4.09	3.84	3.85	9.72	17.00	12.11	23.00
5270MHz	Pass	2.78	0.35	0.93	1.31	0.97	6.60	11.00	9.38	17.00
5310MHz	Pass	2.78	0.14	0.82	1.29	1.17	6.65	11.00	9.43	17.00
5510MHz	Pass	2.52	0.47	0.88	1.35	1.57	6.75	11.00	9.27	17.00
5590MHz	Pass	2.52	0.67	1.40	1.62	1.73	7.12	11.00	9.64	17.00
5670MHz	Pass	2.52	0.22	0.90	1.00	1.30	6.64	11.00	9.16	17.00
5710MHz Straddle 5.47-5.725GHz	Pass	2.52	1.34	1.03	1.55	1.93	7.32	11.00	9.84	17.00
5710MHz Straddle 5.725-5.85GHz	Pass	2.56	-0.13	-0.3	0.12	0.34	5.87	30.00	8.43	36.00

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
5755MHz	Pass	2.56	2.95	3.77	3.49	3.98	9.25	30.00	11.81	36.00
5795MHz	Pass	2.56	3.10	4.04	3.44	4.24	9.49	30.00	12.05	36.00
802.11be EHT80_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	2.39	-1.98	-1.65	-1.62	-1.55	4.02	17.00	6.41	23.00
5290MHz	Pass	2.78	-2.31	-1.84	-1.40	-1.51	3.98	11.00	6.76	17.00
5530MHz	Pass	2.52	-2.68	-2.26	-1.58	-1.59	3.67	11.00	6.19	17.00
5610MHz	Pass	2.52	-2.52	-1.73	-1.70	-1.49	3.96	11.00	6.48	17.00
5690MHz Straddle 5.47-5.725GHz	Pass	2.52	-1.54	-1.9	-1.27	-1.2	4.32	11.00	6.84	17.00
5690MHz Straddle 5.725-5.85GHz	Pass	2.56	-3.27	-3.44	-3.02	-2.6	2.77	30.00	5.33	36.00
5775MHz	Pass	2.56	-2.01	-1.48	-1.69	-1.15	4.23	30.00	6.79	36.00
802.11be EHT160_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	2.39	-7.21	-7.57	-7.74	-7.92	-1.69	17.00	0.70	23.00
5250MHz Straddle 5.25-5.35GHz	Pass	2.78	-7.18	-7.46	-7.41	-7.56	-1.70	11.00	1.08	17.00
5570MHz	Pass	2.52	-8.54	-8.03	-7.21	-7.42	-1.97	11.00	0.55	17.00
be240_240MHz_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5610MHz Straddle 5.47-5.725GHz	Pass	2.52	-12.39	-12.5	-12.17	-12	-6.39	11.00	-3.87	17.00
5610MHz Straddle 5.725-5.85GHz	Pass	2.56	-13.9	-13.77	-13.57	-13.34	-7.84	30.00	-5.28	36.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

For 802.11a

Ant. No.	Operating Frequencies (MHz) / Antenna Gain (dBi)			
	5150 ~ 5250	5250 ~ 5350	5470 ~ 5725	5725 ~ 5850
1	1.56	1.78	2.3	0.63
2	3.1	3.19	2.26	2.74
3	2.67	2.61	3.25	2.8
4	2.62	3.19	2.69	2.69
5	0.70	1.24	1.65	0.40
6	2.75	3.2	2.71	3.77
Directional Gain (Antenna 1/3/5/6)	7.98	8.26	8.52	8.04
Directional Gain** (Antenna 2/4/5/6)	8.36	8.77	8.36	8.50
Max Directional Gain	8.36	8.77	8.52	8.50
PSD limit (Antenna gain <= 6dBi)	17.00	11.00	11.00	30.00
PSD limit (Antenna gain > 6dBi)	14.64	8.23	8.48	27.49

Note 1: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20})^2 / N_{ANT}]$

Note 2: Limit is reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

For 802.11be

Ant. No.	Operating Frequencies (MHz) / Antenna Gain (dBi)			
	5150 ~ 5250	5250 ~ 5350	5470 ~ 5725	5725 ~ 5850
1	1.56	1.78	2.3	0.63
2	3.1	3.19	2.26	2.74
3	2.67	2.61	3.25	2.8
4	2.62	3.19	2.69	2.69
5	0.70	1.24	1.65	0.40
6	2.75	3.2	2.71	3.77
Directional Gain (Antenna 1/3/5/6)	2.00	2.27	2.52	2.14
Directional Gain** (Antenna 2/4/5/6)	2.39	2.78	2.35	2.56
Max Directional Gain	2.39	2.78	2.52	2.56


Note 1: Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{Gn/10})/N_{ANT}]$

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5180MHz

CF
5.18GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

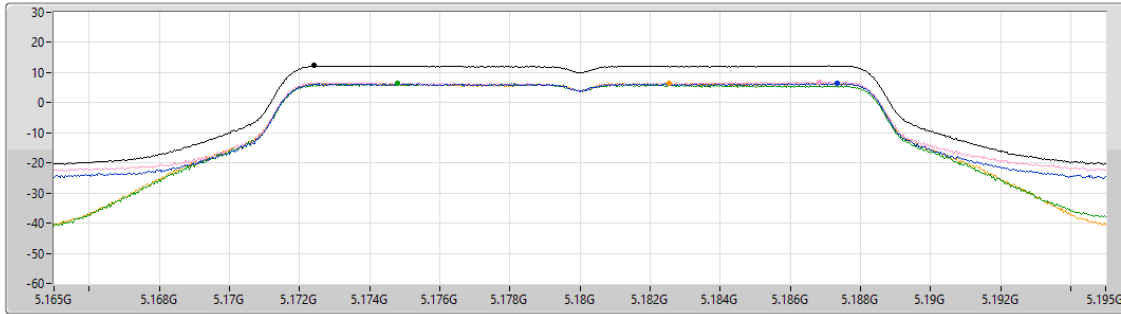


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
12.27	12.27	6.44	6.89	6.44	6.51

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5200MHz

CF
5.2GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

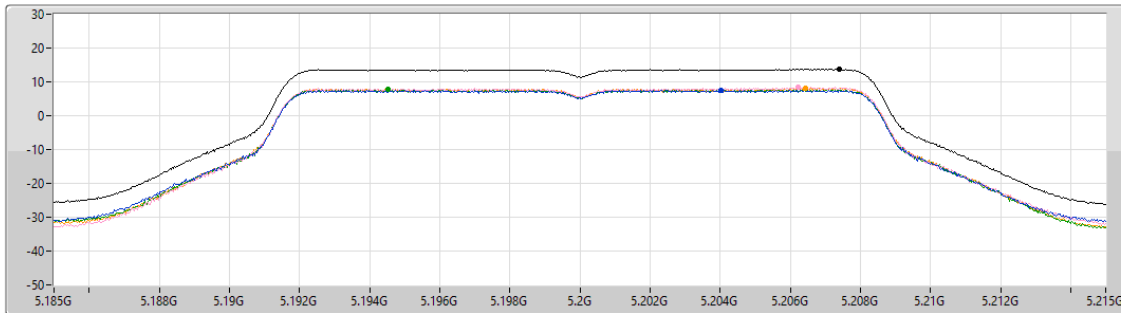


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
13.83	13.83	7.61	8.35	7.72	8.28

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5240MHz

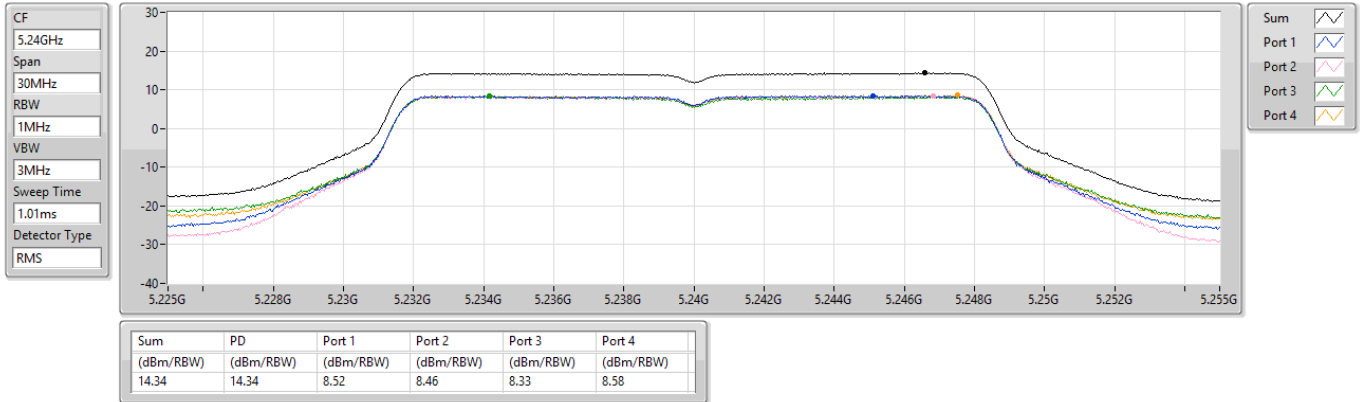

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5260MHz

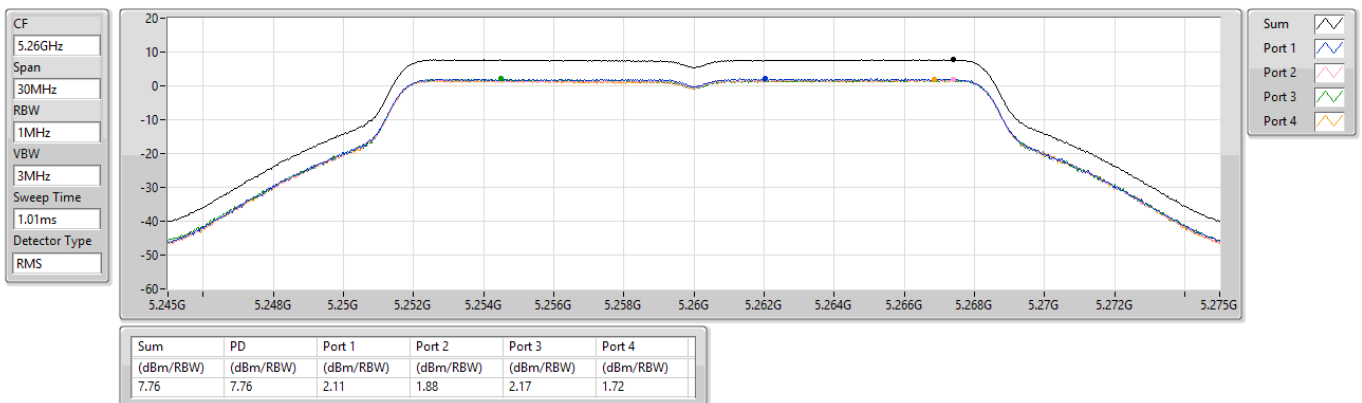


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5300MHz

CF
5.3GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

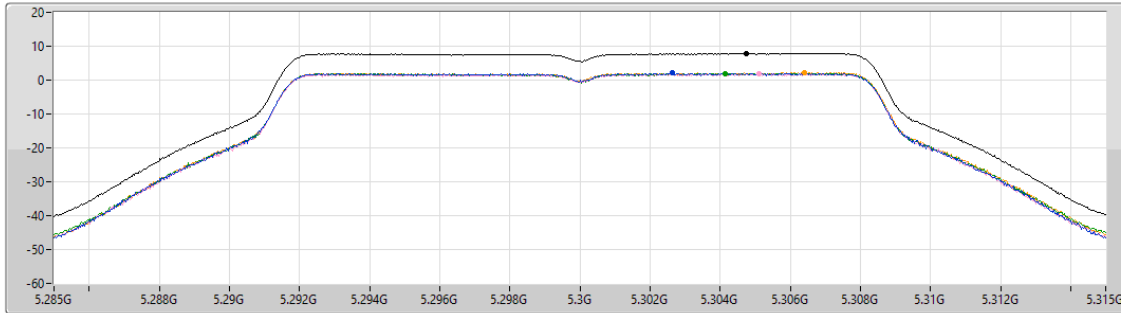

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.88	7.88	2.05	1.85	2.01	2.25

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5320MHz

CF
5.32GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

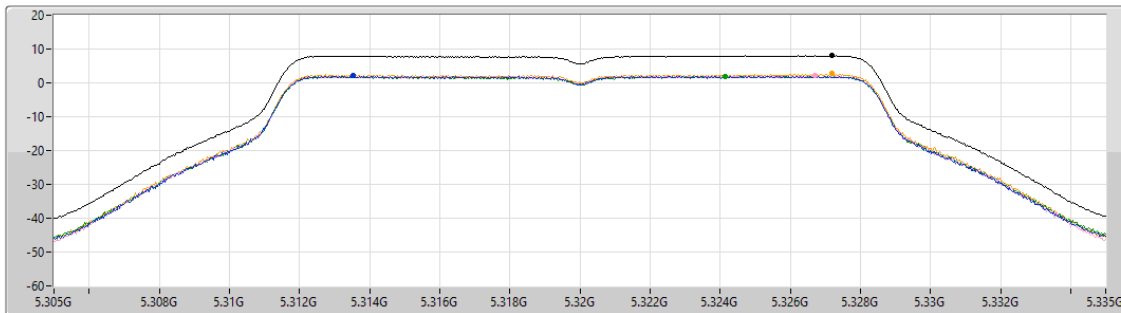

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.06	8.06	2.05	2.11	2.02	2.70

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5500MHz

CF
5.5GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

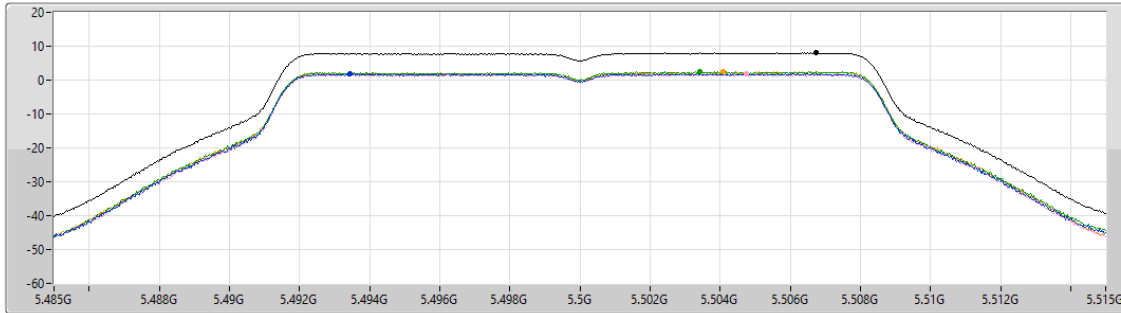

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.01	8.01	1.92	1.74	2.55	2.41

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5580MHz

CF
5.58GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

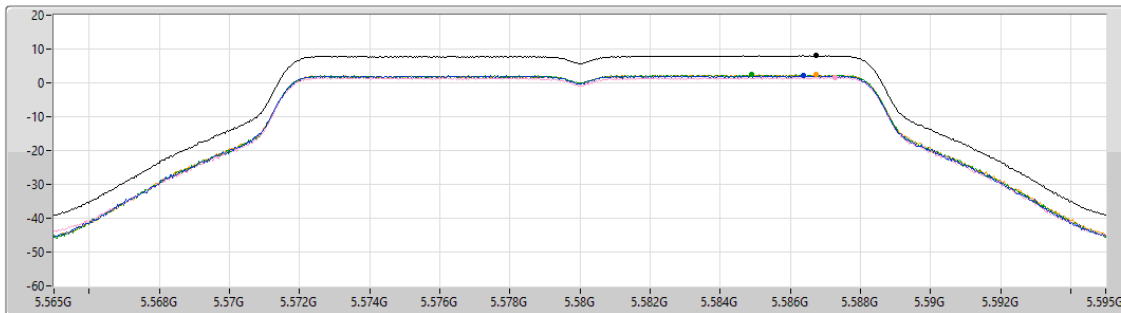

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.04	8.04	2.19	1.70	2.40	2.39

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5700MHz

CF
5.7GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

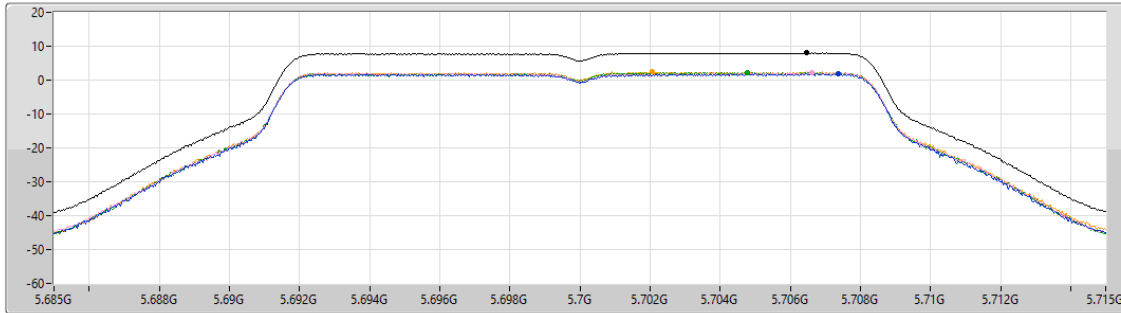

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.02	8.02	1.85	2.16	2.33	2.45

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5720MHz Straddle 5.47-5.725GHz

CF
5.71GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

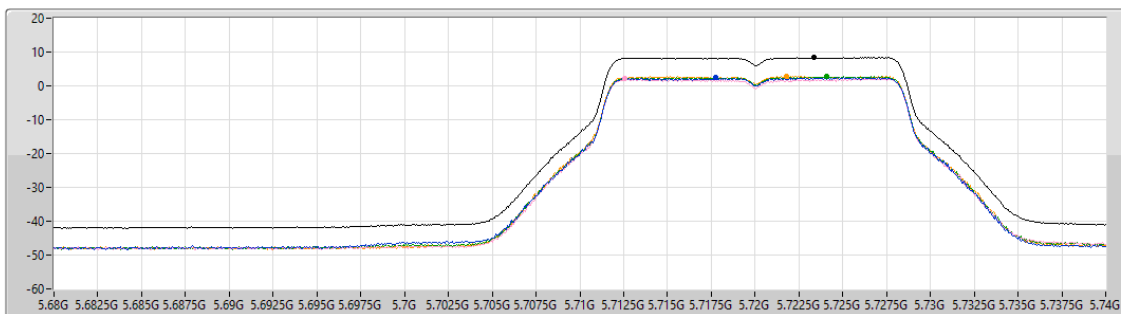


Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.31	8.31	2.38	2.08	2.66	2.86

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5720MHz Straddle 5.725-5.85GHz

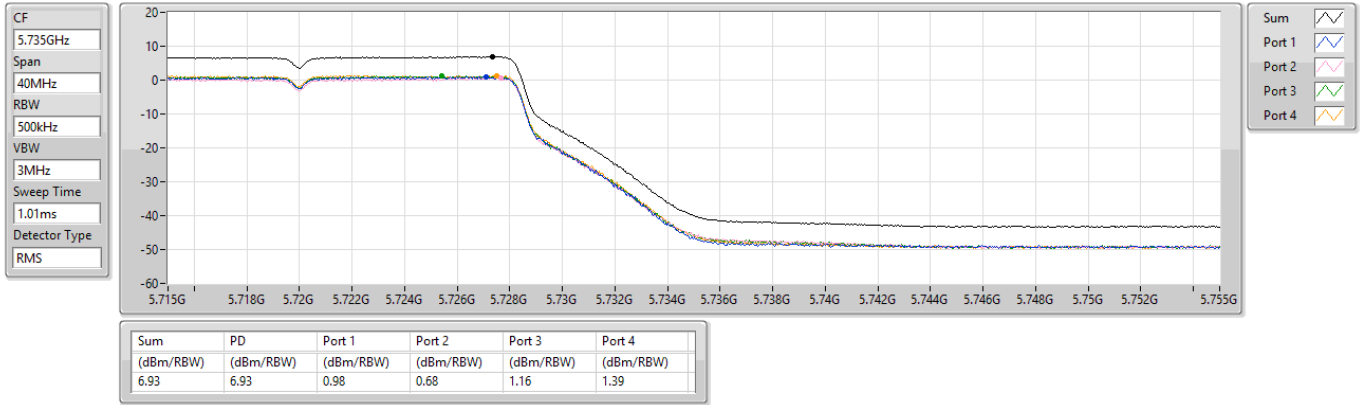

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5745MHz

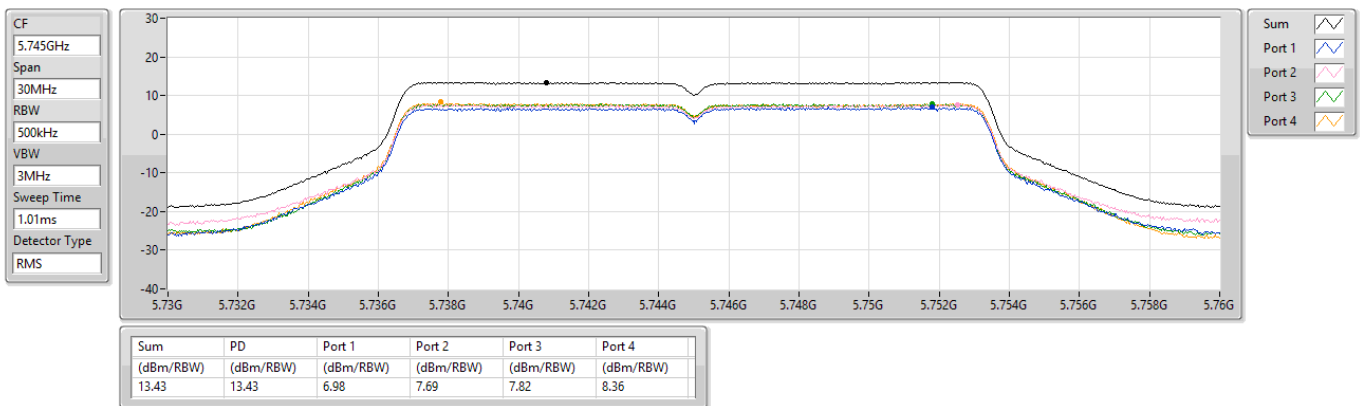

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5785MHz

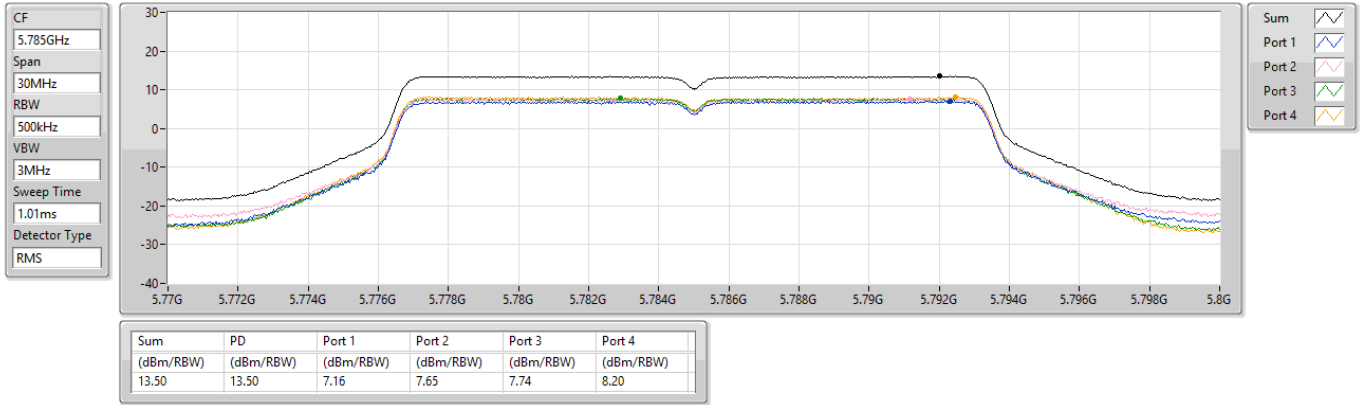

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5825MHz

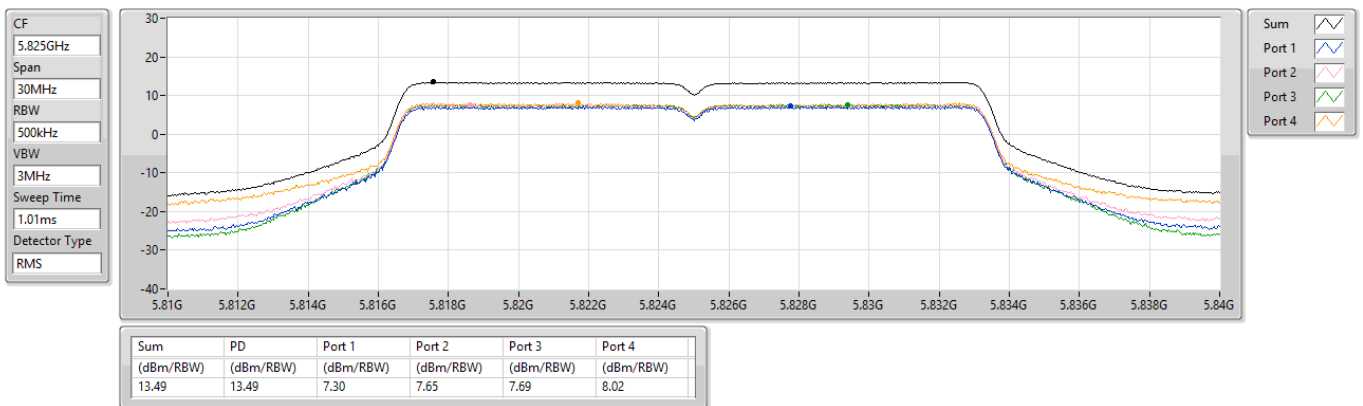

5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


5180MHz

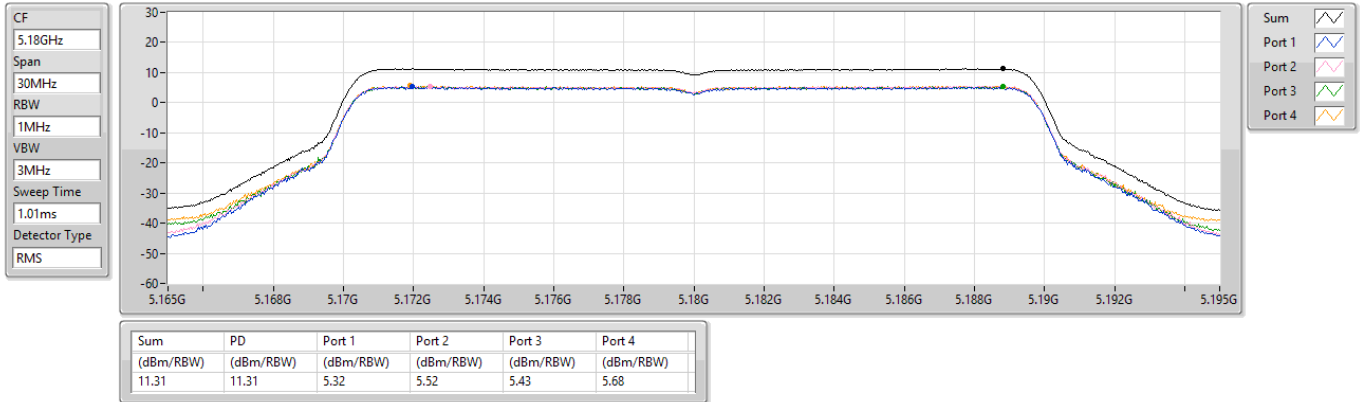

5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD

5200MHz

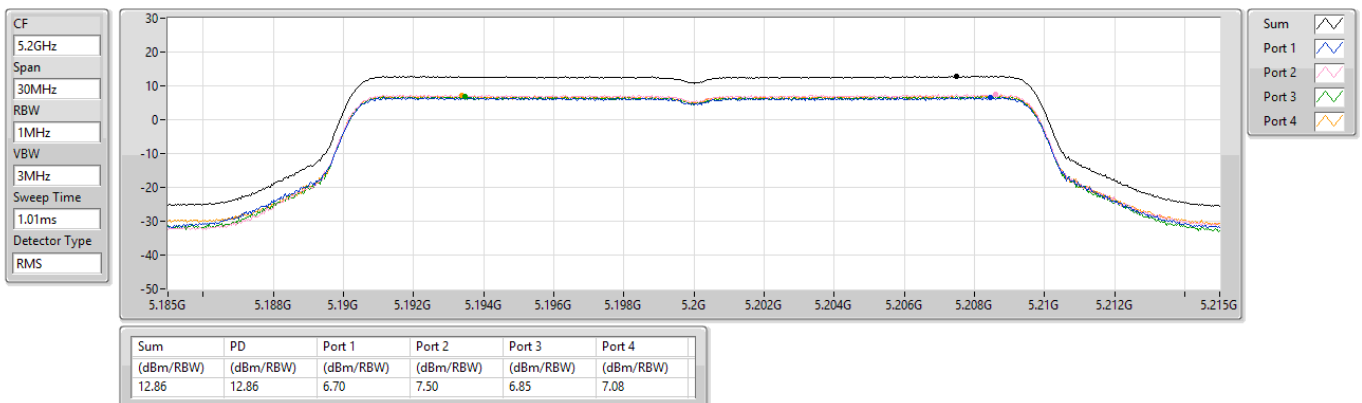


5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD

5240MHz

CF
5.24GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

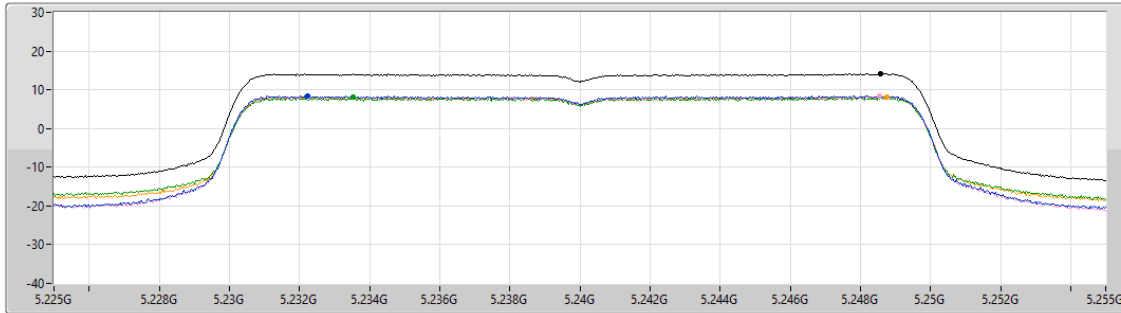


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.15	14.15	8.46	8.42	8.08	8.22

5.25-5.35GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD

5260MHz

CF
5.26GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

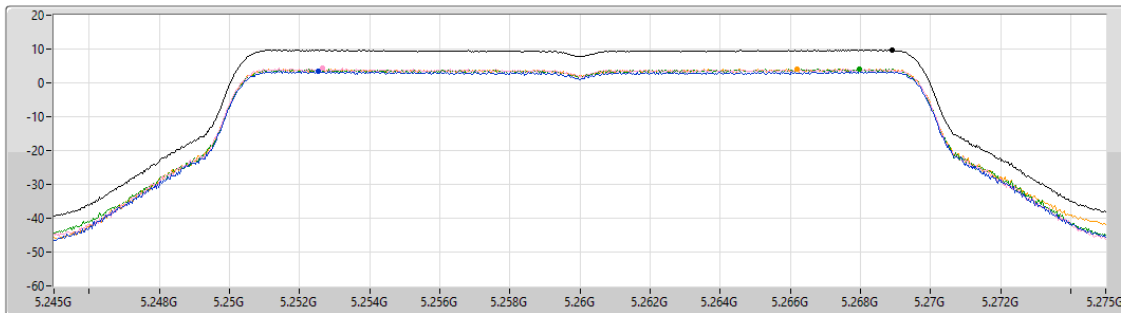


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.78	9.78	3.51	4.26	4.07	4.15

5.25-5.35GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD

5300MHz

CF
5.3GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

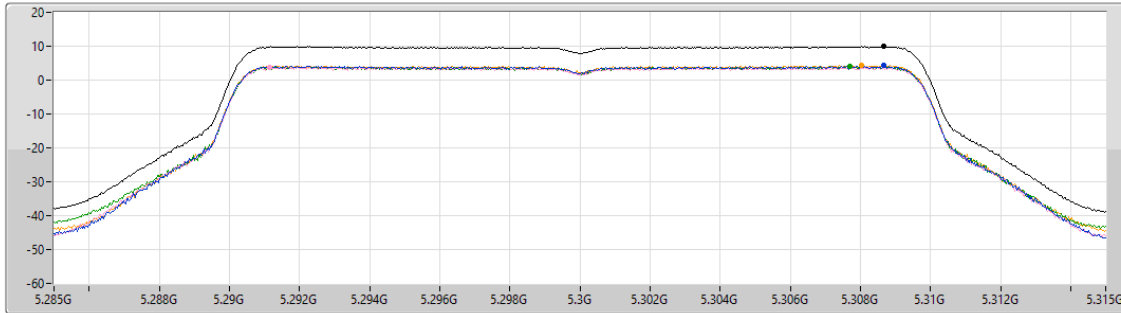

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.93	9.93	4.26	3.83	4.04	4.31

5.25-5.35GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD

5320MHz

CF
5.32GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

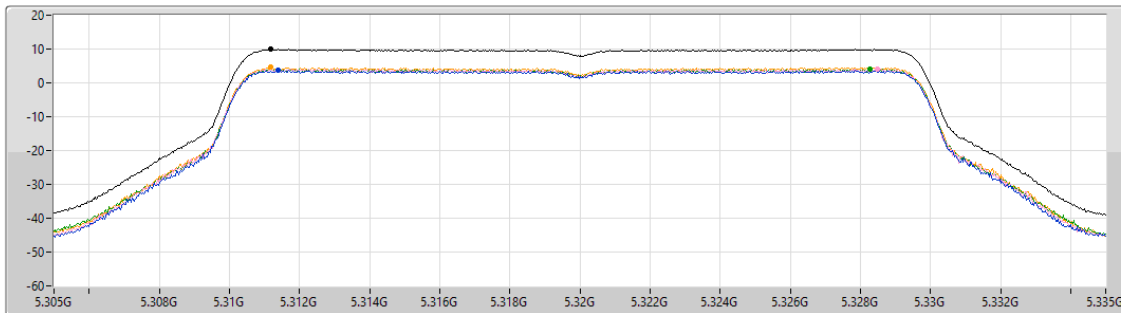

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.94	9.94	3.77	4.08	4.11	4.63

5.47-5.725GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD

5500MHz

CF
5.5GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

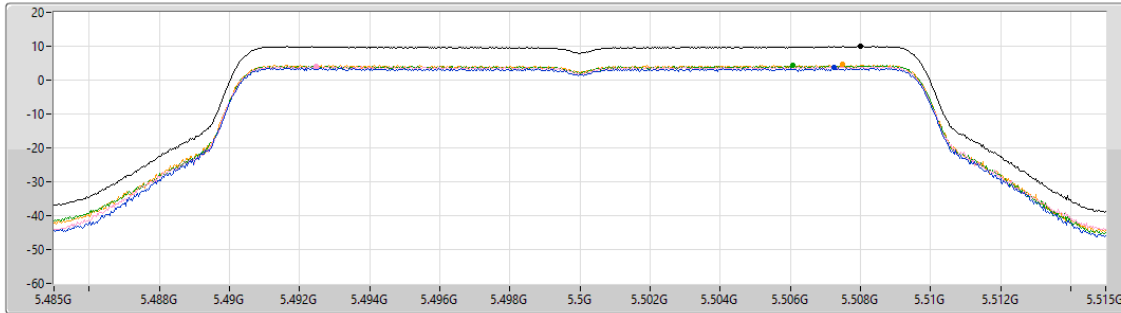

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.94	9.94	3.69	4.02	4.30	4.64

5.47-5.725GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD

5580MHz

CF
5.58GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

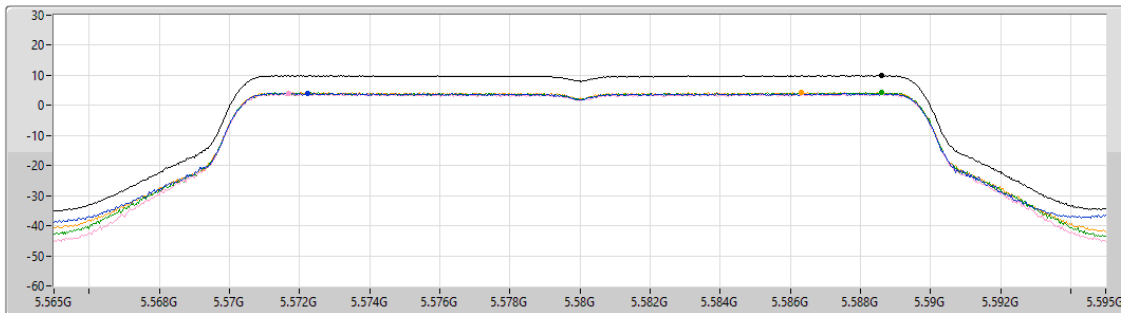

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
10.01	10.01	4.10	3.83	4.34	4.36

5.47-5.725GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD

5700MHz

CF
5.7GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

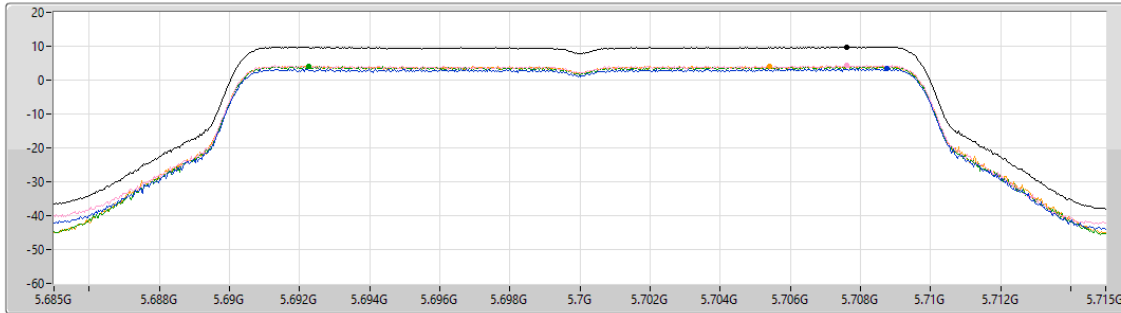

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.84	9.84	3.37	4.35	4.11	4.17

5.47-5.725GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD

5720MHz Straddle 5.47-5.725GHz

CF
5.71GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

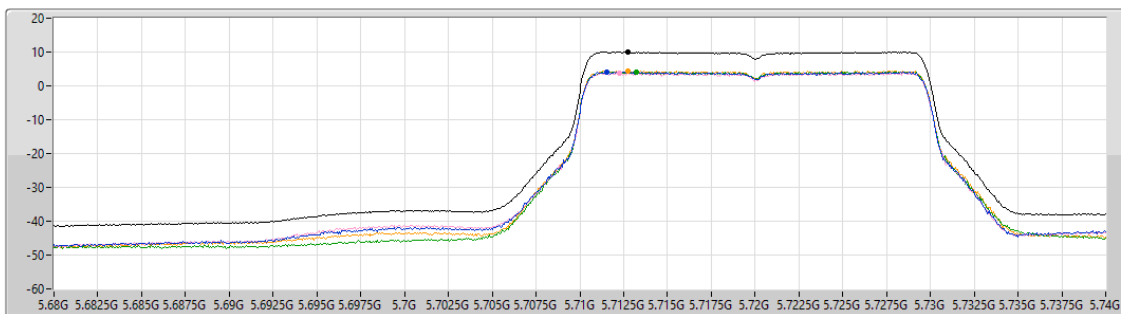


Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.99	9.99	4.11	3.79	4.13	4.38

5.725-5.85GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


5720MHz Straddle 5.725-5.85GHz

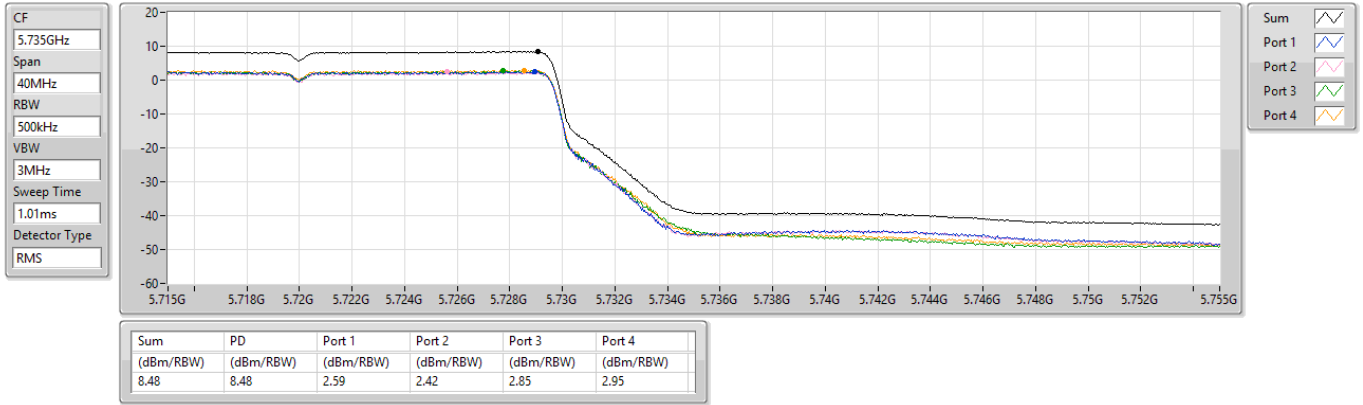

5.725-5.85GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


5745MHz

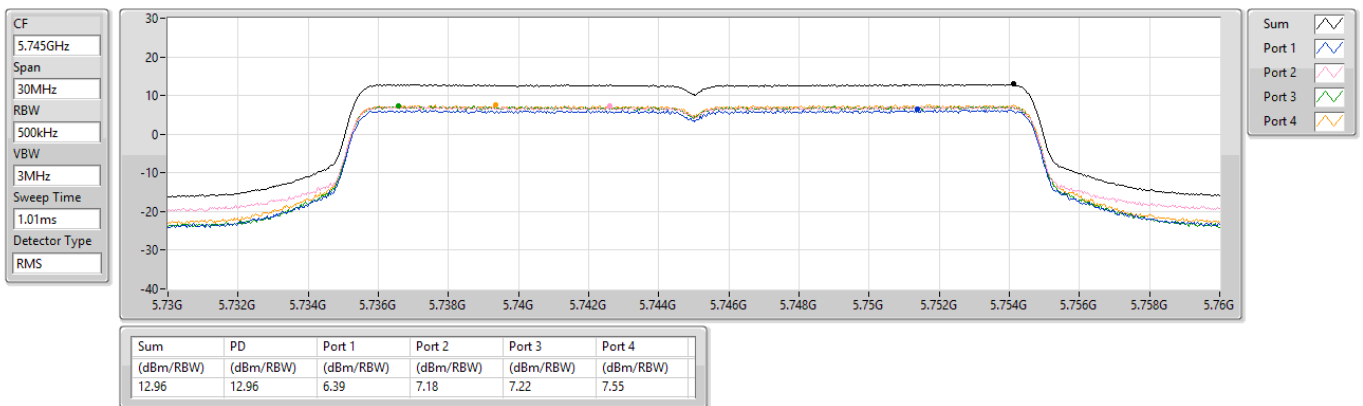

5.725-5.85GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


5785MHz

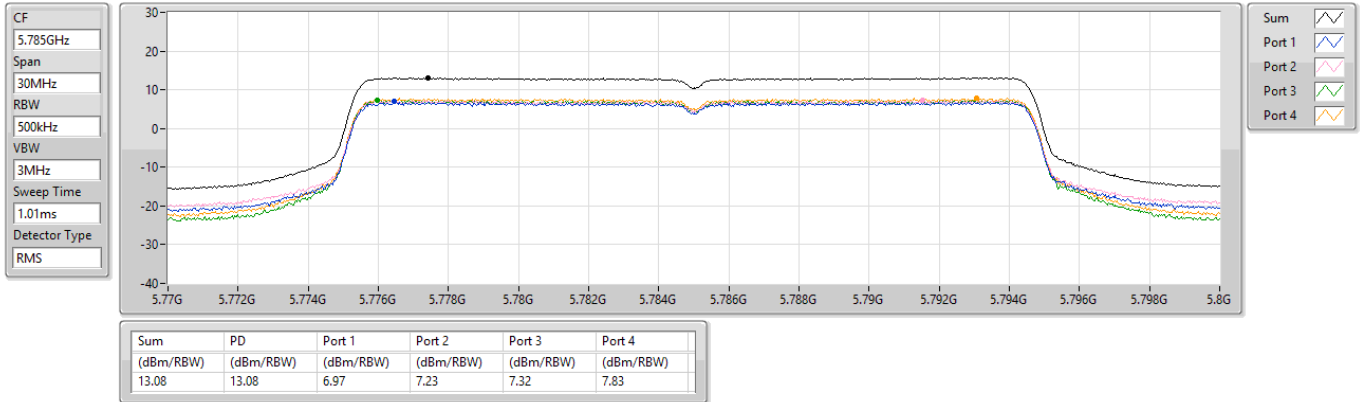

5.725-5.85GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


5825MHz

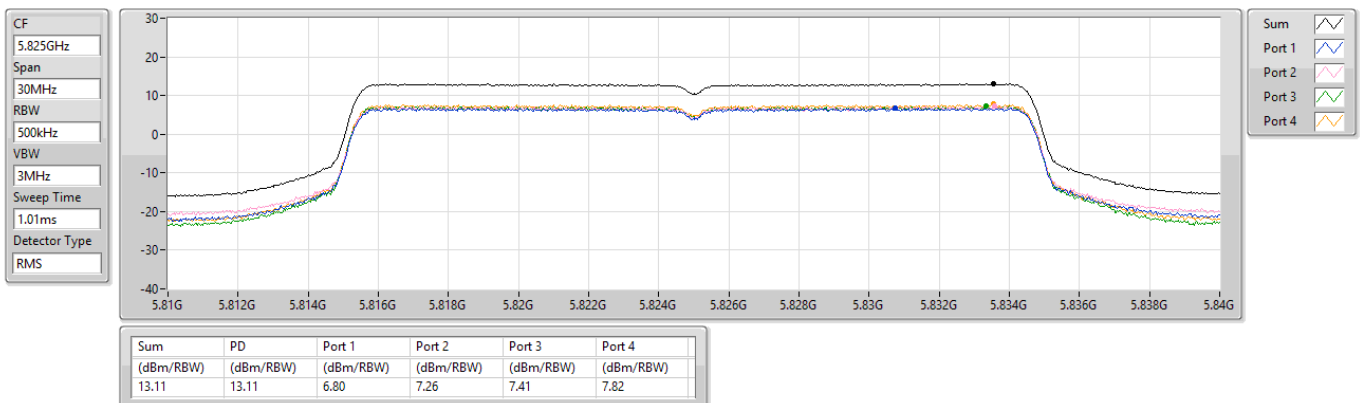

5.15-5.25GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


5190MHz

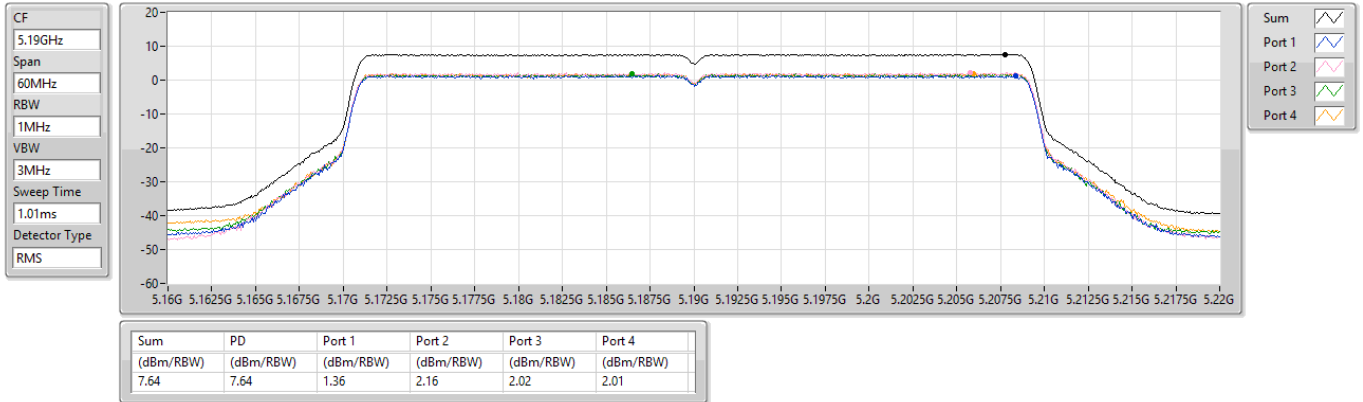

5.15-5.25GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


5230MHz

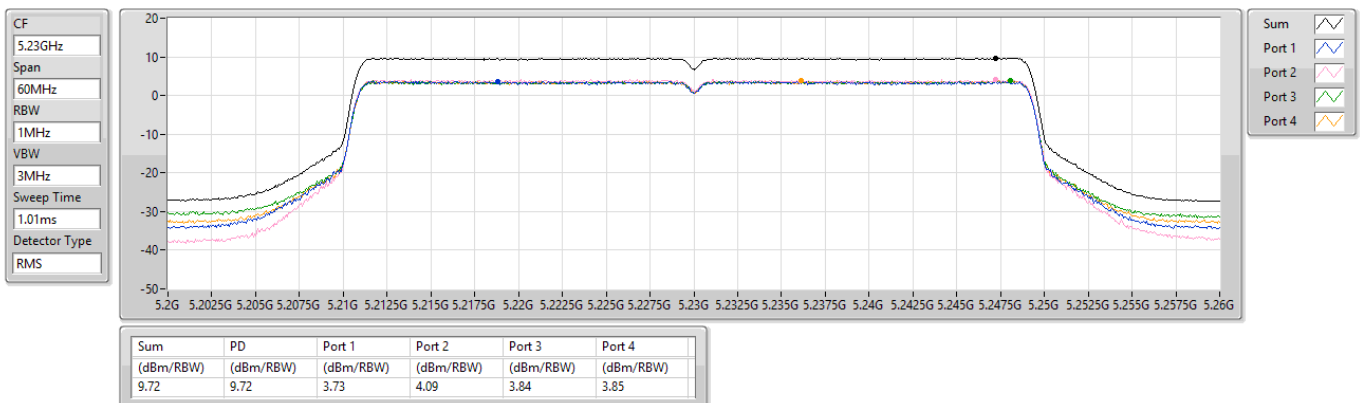

5.25-5.35GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


5270MHz

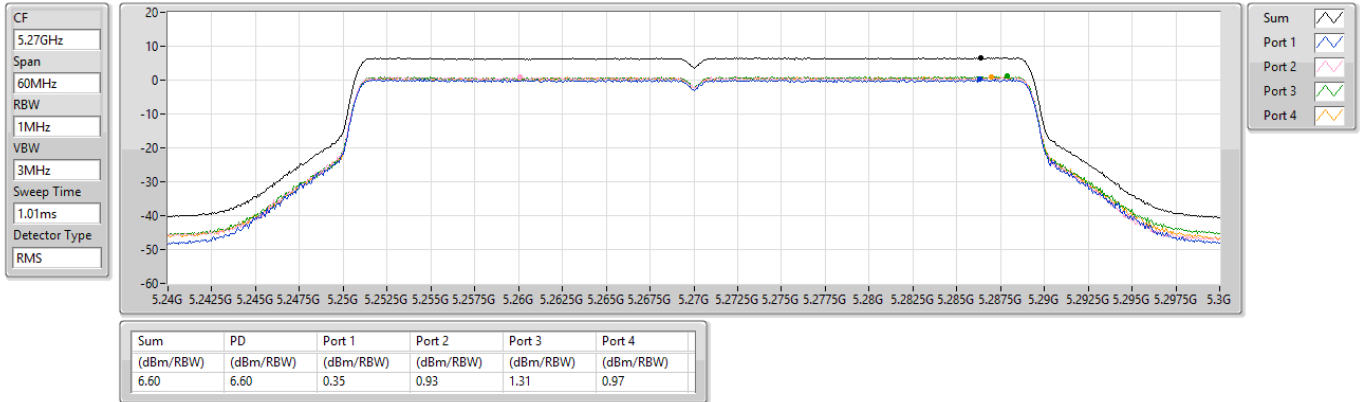

5.25-5.35GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


5310MHz

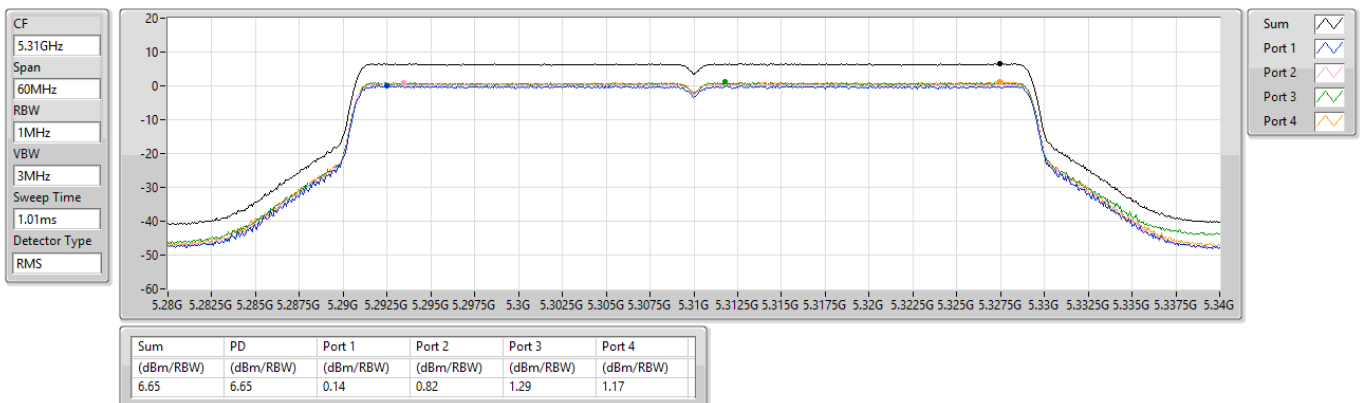

5.47-5.725GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


5510MHz

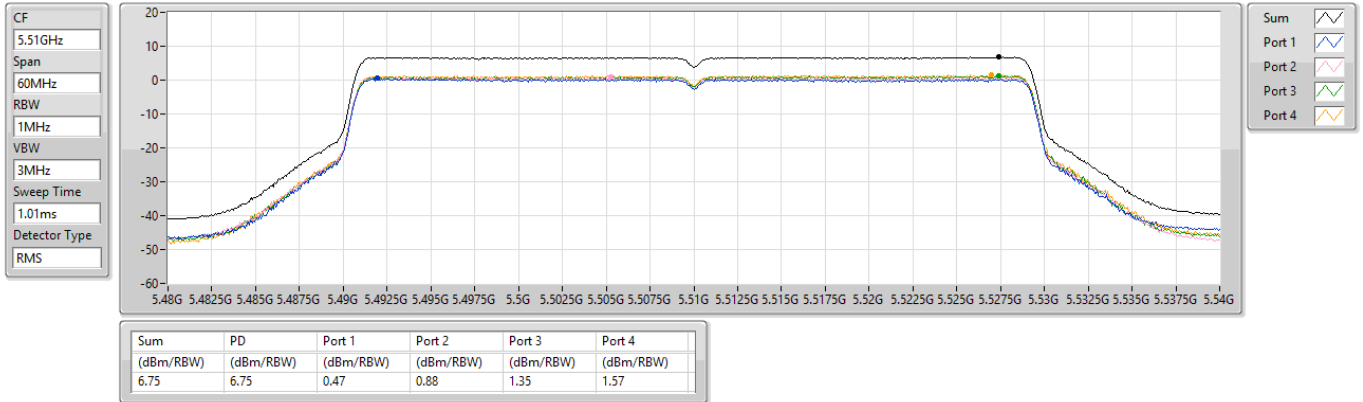

5.47-5.725GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


5590MHz

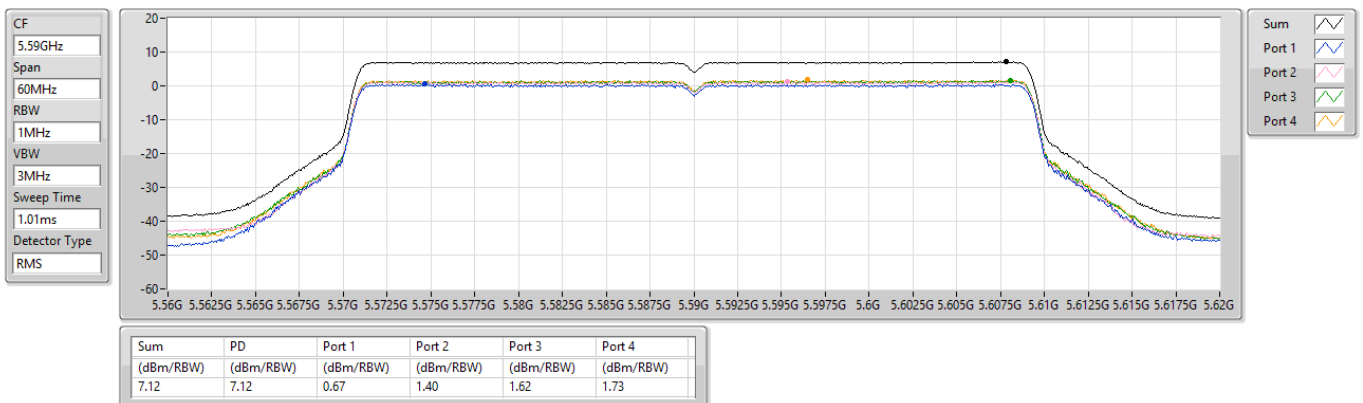

5.47-5.725GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


5670MHz

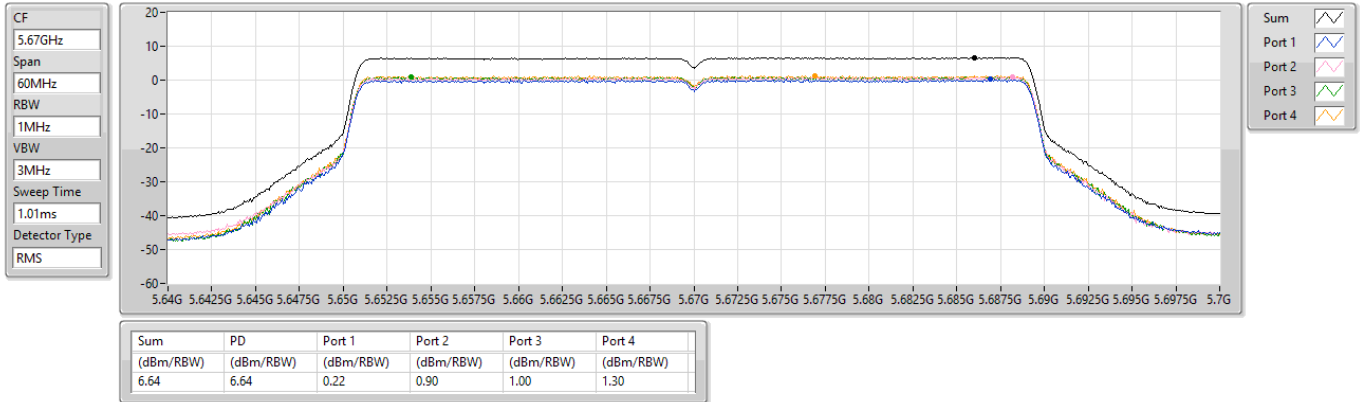

5.47-5.725GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


5710MHz Straddle 5.47-5.725GHz

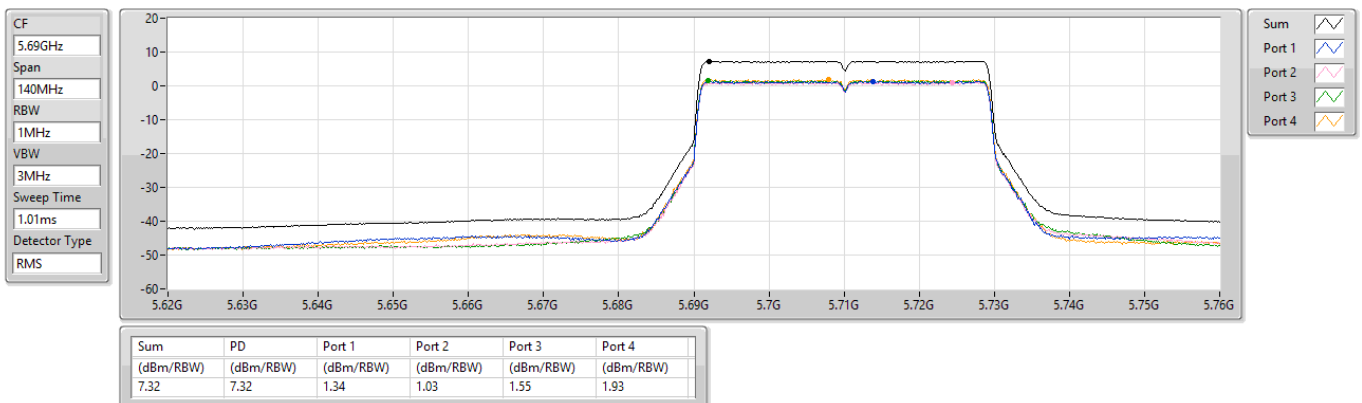

5.725-5.85GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


5710MHz Straddle 5.725-5.85GHz

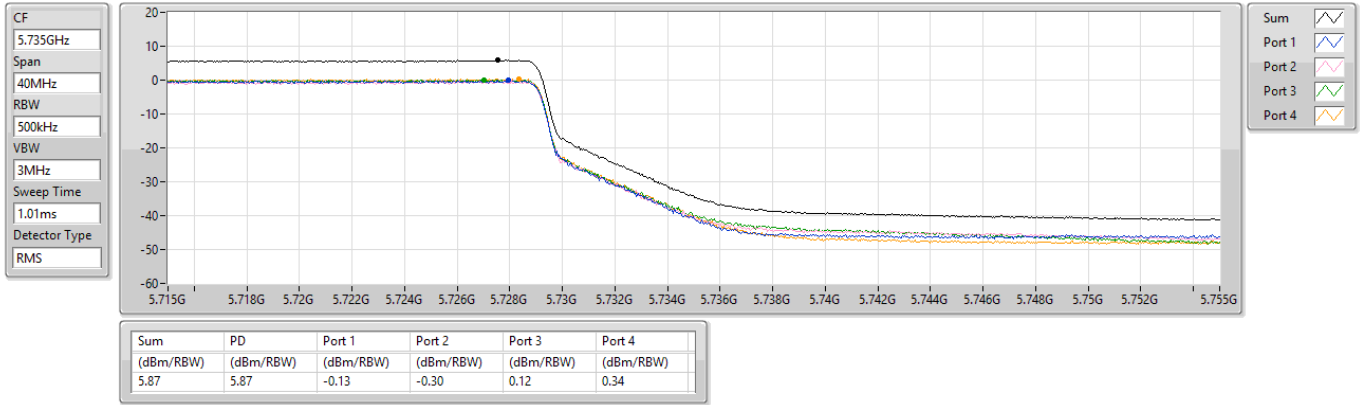

5.725-5.85GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


5755MHz

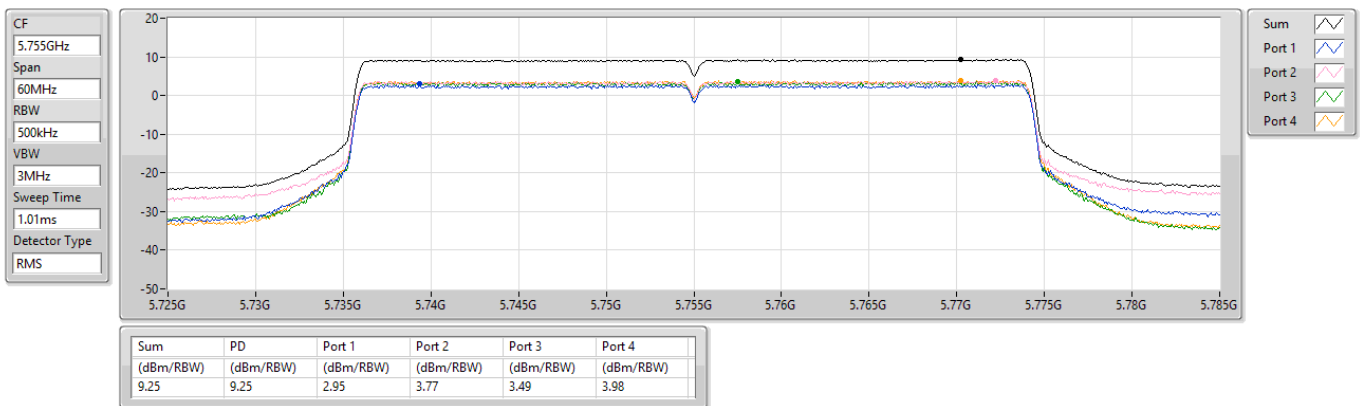

5.725-5.85GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


5795MHz

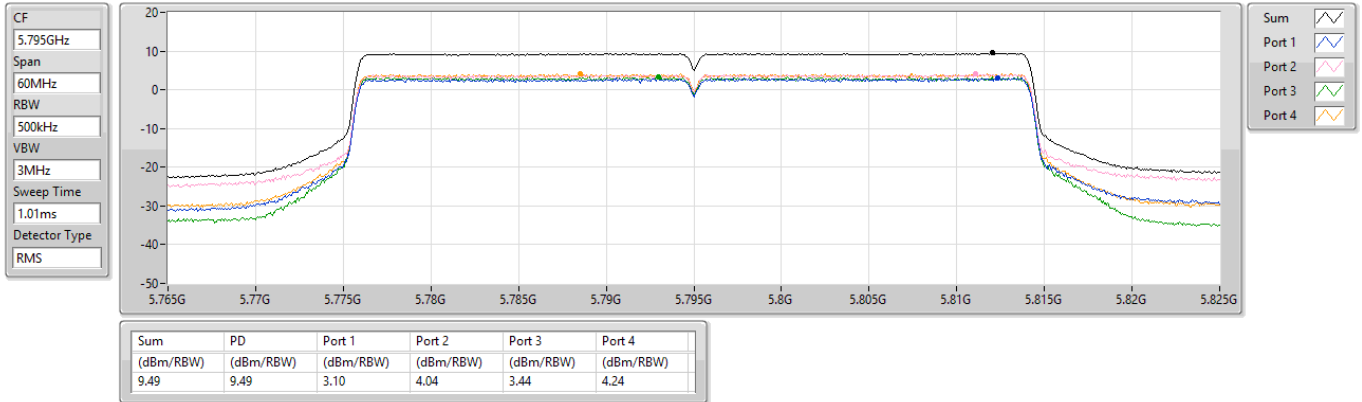

5.15-5.25GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD

5210MHz

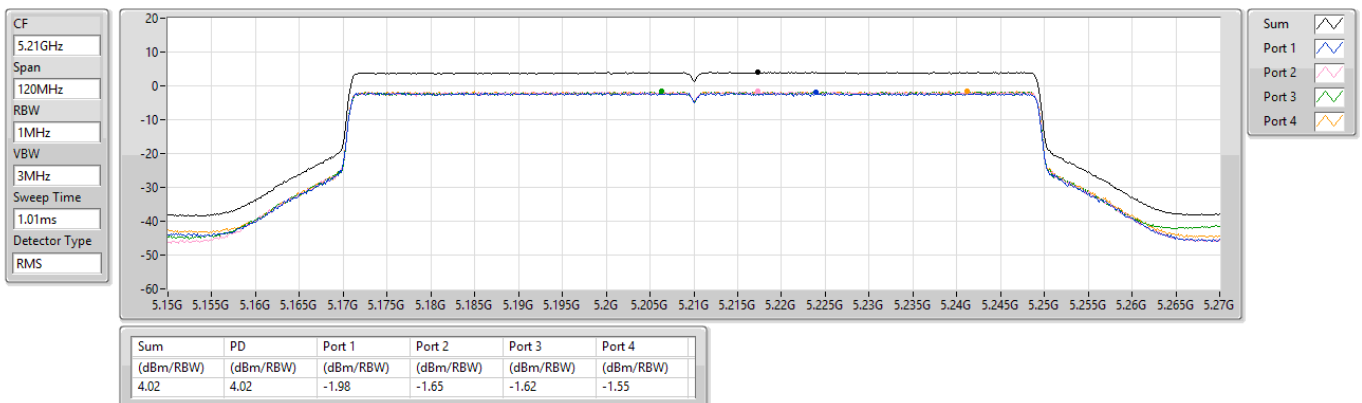


5.25-5.35GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD

5290MHz

CF
5.29GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

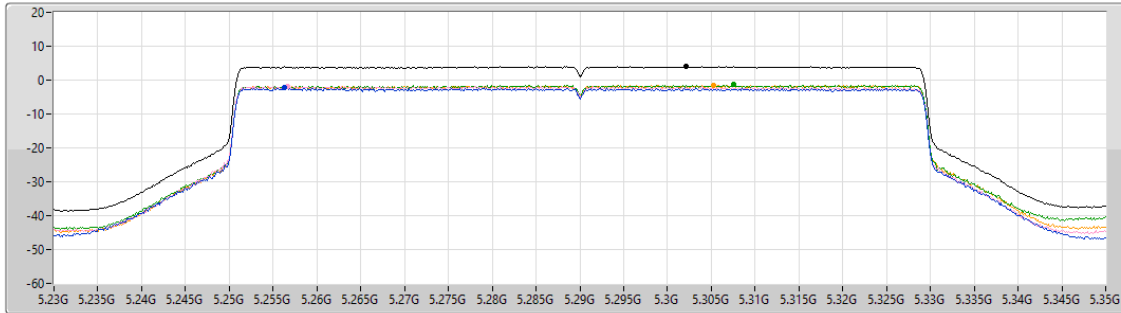

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.98	3.98	-2.31	-1.84	-1.40	-1.51

5.47-5.725GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD

5530MHz

CF
5.53GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

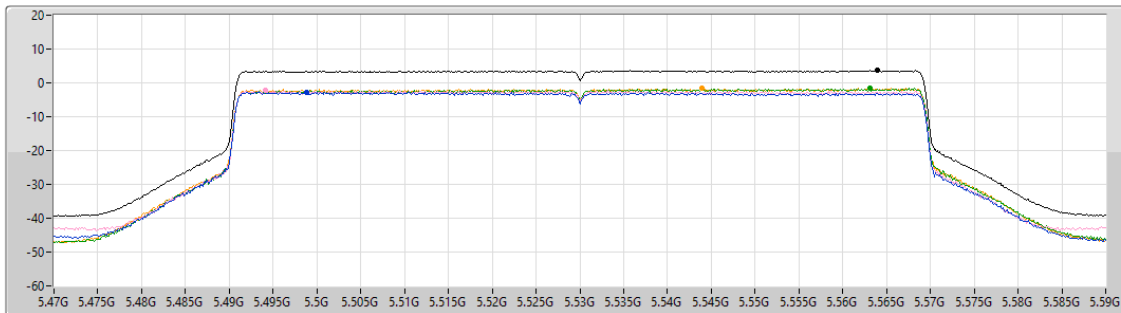


Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.67	3.67	-2.68	-2.26	-1.58	-1.59

5.47-5.725GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD


5610MHz

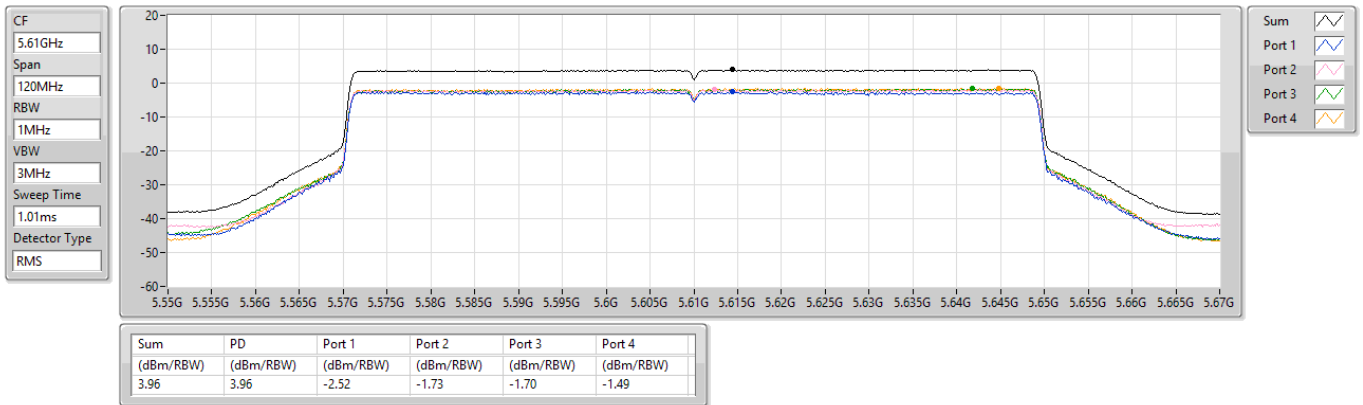

5.47-5.725GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD


5690MHz Straddle 5.47-5.725GHz

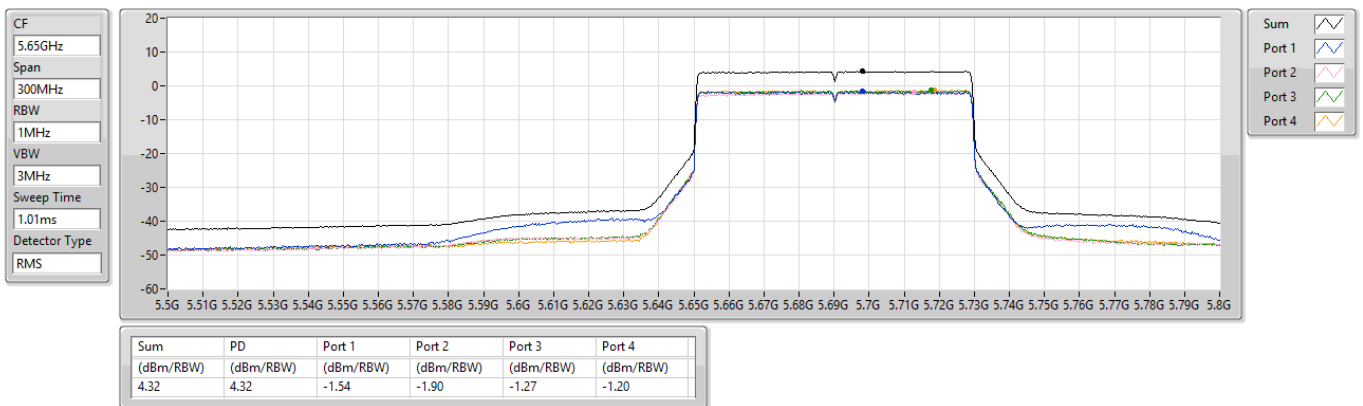

5.725-5.85GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD


5690MHz Straddle 5.725-5.85GHz

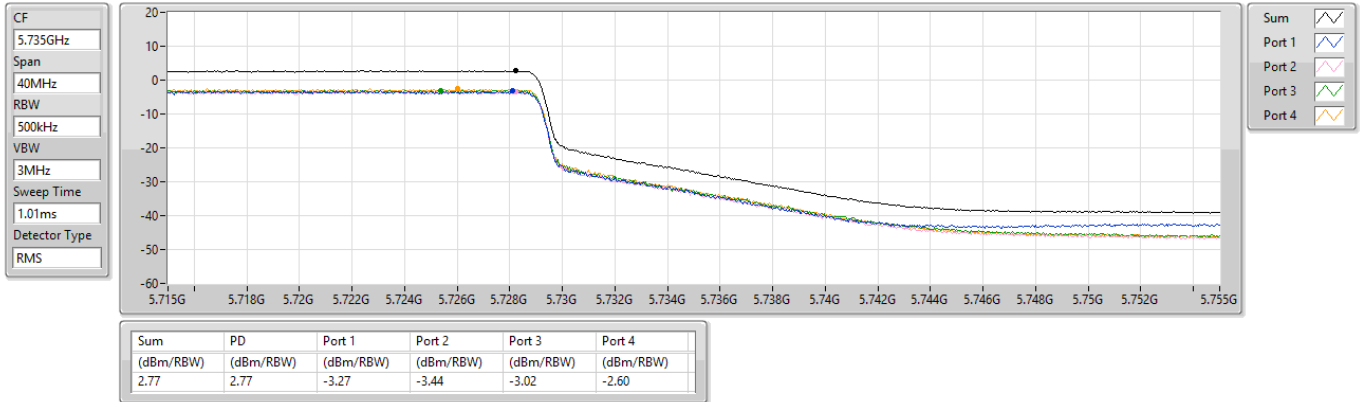

5.725-5.85GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD


5775MHz

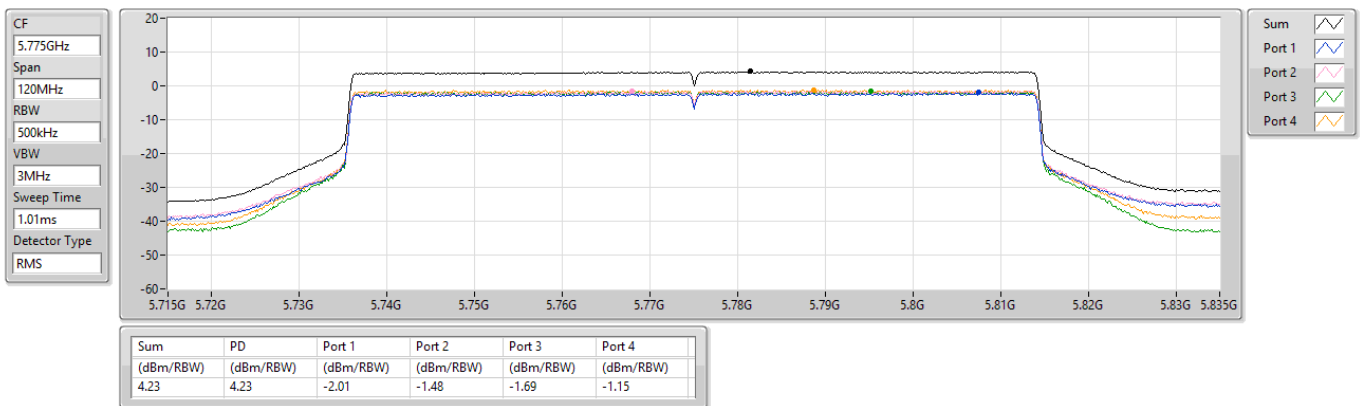

5.15-5.25GHz_802.11be EHT160_Nss4,(MCS0)_4TX

PSD


5250MHz Straddle 5.15-5.25GHz

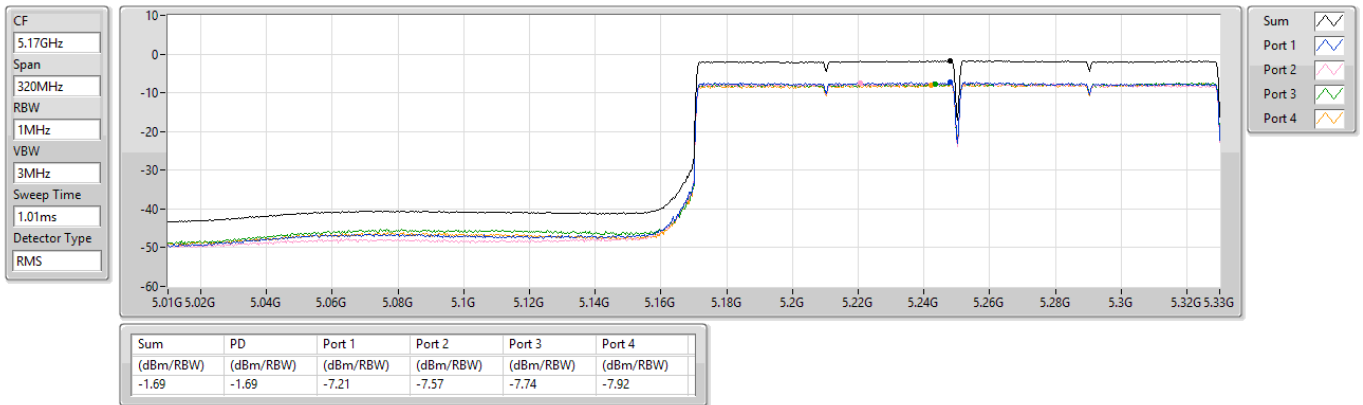

5.25-5.35GHz_802.11be EHT160_Nss4,(MCS0)_4TX

PSD


5250MHz Straddle 5.25-5.35GHz

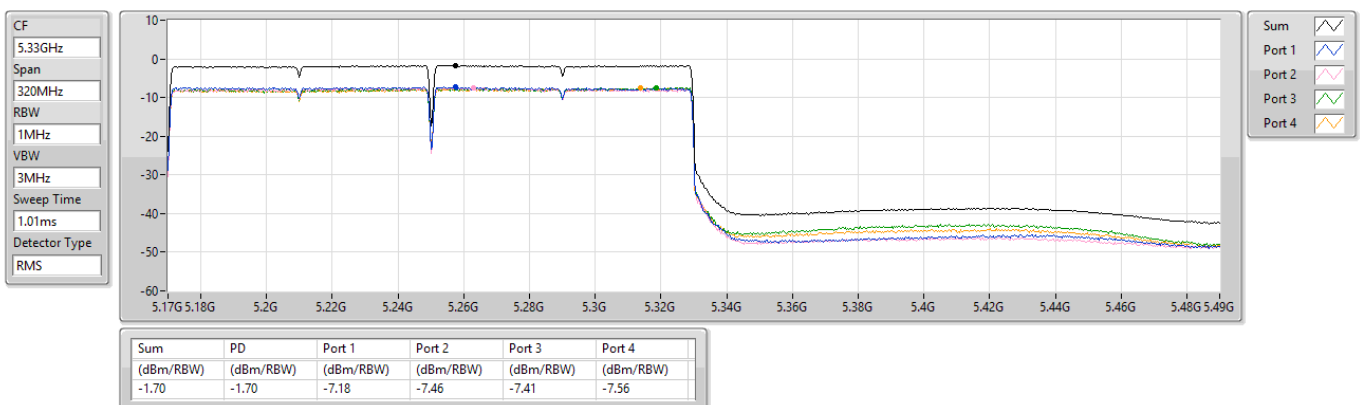

5.47-5.725GHz_802.11be EHT160_Nss4,(MCS0)_4TX

PSD


5570MHz

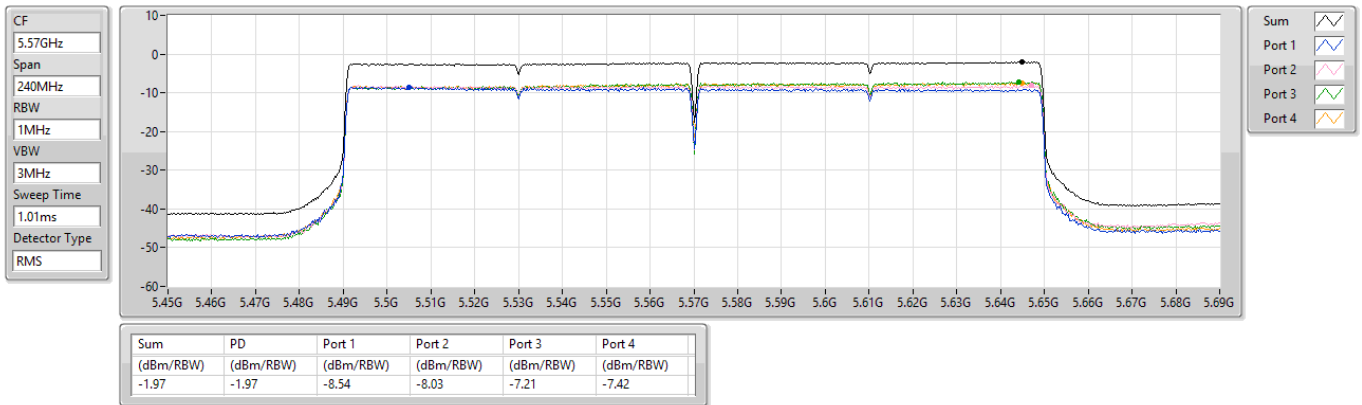

5.47-5.725GHz_be240_240MHz_Nss4,(MCS0)_4TX

PSD


5610MHz Straddle 5.47-5.725GHz

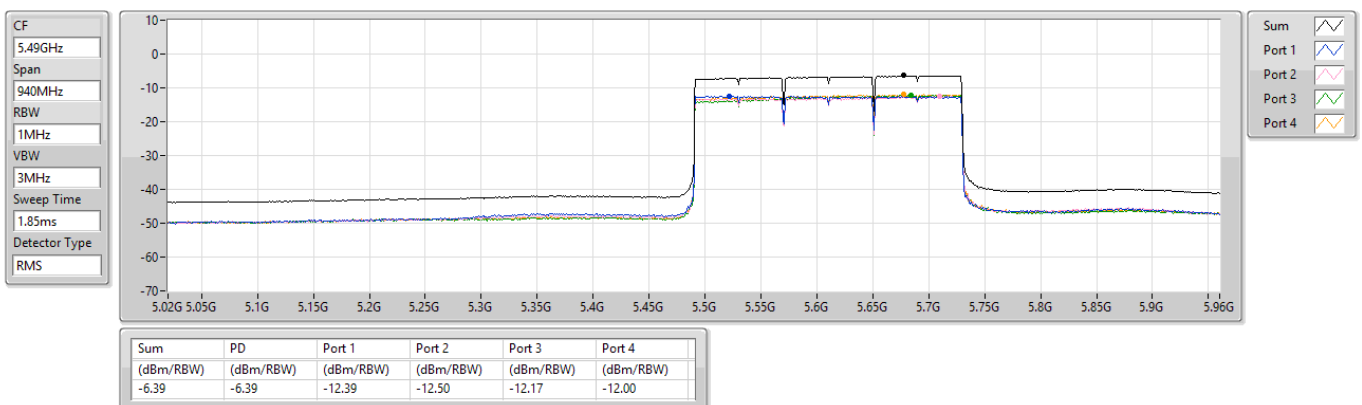

5.725-5.85GHz_be240_240MHz_Nss4,(MCS0)_4TX

PSD

5610MHz Straddle 5.725-5.85GHz

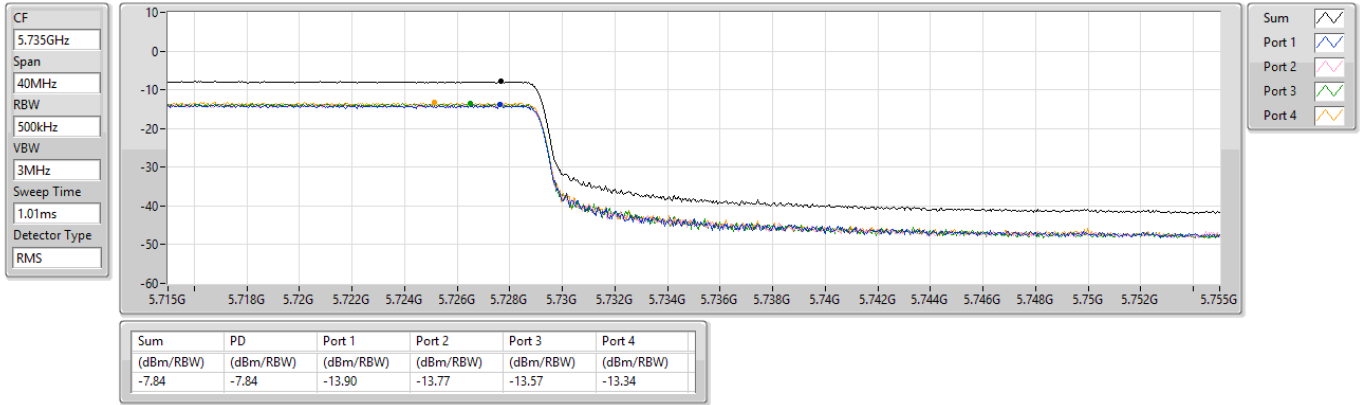



POE mode

Unwanted Emissions (Below 1GHz)

Modulation	be EHT20	Test Freq. (MHz)	5240
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):61			
Level (dBuV/m)			



Modulation	be EHT20	Test Freq. (MHz)	5240																																																																						
Polarization	Vertical																																																																								
Test By :Brad Wu Temperature(°C):24 Humidity(%):61																																																																									
Level (dBuV/m) CLASS-B <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>46.52</td><td>36.52</td><td>40.00</td><td>-3.48</td><td>45.35</td><td>-8.83</td><td>QP</td><td>100</td><td>309</td></tr><tr><td>2</td><td>93.19</td><td>25.67</td><td>43.50</td><td>-17.83</td><td>39.78</td><td>-14.11</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>143.52</td><td>23.61</td><td>43.50</td><td>-19.89</td><td>32.38</td><td>-8.77</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>189.21</td><td>26.52</td><td>43.50</td><td>-16.98</td><td>37.69</td><td>-11.17</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>231.66</td><td>23.97</td><td>46.00</td><td>-22.03</td><td>35.12</td><td>-11.15</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>547.82</td><td>33.77</td><td>46.00</td><td>-12.23</td><td>35.77</td><td>-2.00</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	46.52	36.52	40.00	-3.48	45.35	-8.83	QP	100	309	2	93.19	25.67	43.50	-17.83	39.78	-14.11	Peak	---	---	3	143.52	23.61	43.50	-19.89	32.38	-8.77	Peak	---	---	4	189.21	26.52	43.50	-16.98	37.69	-11.17	Peak	---	---	5	231.66	23.97	46.00	-22.03	35.12	-11.15	Peak	---	---	6	547.82	33.77	46.00	-12.23	35.77	-2.00	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	46.52	36.52	40.00	-3.48	45.35	-8.83	QP	100	309																																																																
2	93.19	25.67	43.50	-17.83	39.78	-14.11	Peak	---	---																																																																
3	143.52	23.61	43.50	-19.89	32.38	-8.77	Peak	---	---																																																																
4	189.21	26.52	43.50	-16.98	37.69	-11.17	Peak	---	---																																																																
5	231.66	23.97	46.00	-22.03	35.12	-11.15	Peak	---	---																																																																
6	547.82	33.77	46.00	-12.23	35.77	-2.00	Peak	---	---																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																									




Modulation	be EHT20	Test Freq. (MHz)	5825
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):61			
Level (dBUV/m) </			



Modulation	be EHT20	Test Freq. (MHz)	5825																																																																						
Polarization	Vertical																																																																								
Test By :Brad Wu Temperature(°C):24 Humidity(%):61																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>43.44</td><td>36.39</td><td>40.00</td><td>-3.61</td><td>45.54</td><td>-9.15</td><td>QP</td><td>100</td><td>303</td></tr><tr><td>2</td><td>93.11</td><td>24.64</td><td>43.50</td><td>-18.86</td><td>38.75</td><td>-14.11</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>133.83</td><td>22.75</td><td>43.50</td><td>-20.75</td><td>32.33</td><td>-9.58</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>171.56</td><td>24.42</td><td>43.50</td><td>-19.08</td><td>33.66</td><td>-9.24</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>187.25</td><td>24.45</td><td>43.50</td><td>-19.05</td><td>35.45</td><td>-11.00</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>547.22</td><td>34.70</td><td>46.00</td><td>-11.30</td><td>36.70</td><td>-2.00</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	43.44	36.39	40.00	-3.61	45.54	-9.15	QP	100	303	2	93.11	24.64	43.50	-18.86	38.75	-14.11	Peak	---	---	3	133.83	22.75	43.50	-20.75	32.33	-9.58	Peak	---	---	4	171.56	24.42	43.50	-19.08	33.66	-9.24	Peak	---	---	5	187.25	24.45	43.50	-19.05	35.45	-11.00	Peak	---	---	6	547.22	34.70	46.00	-11.30	36.70	-2.00	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	43.44	36.39	40.00	-3.61	45.54	-9.15	QP	100	303																																																																
2	93.11	24.64	43.50	-18.86	38.75	-14.11	Peak	---	---																																																																
3	133.83	22.75	43.50	-20.75	32.33	-9.58	Peak	---	---																																																																
4	171.56	24.42	43.50	-19.08	33.66	-9.24	Peak	---	---																																																																
5	187.25	24.45	43.50	-19.05	35.45	-11.00	Peak	---	---																																																																
6	547.22	34.70	46.00	-11.30	36.70	-2.00	Peak	---	---																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																									


Unwanted Emissions (Above 1GHz) for 11a

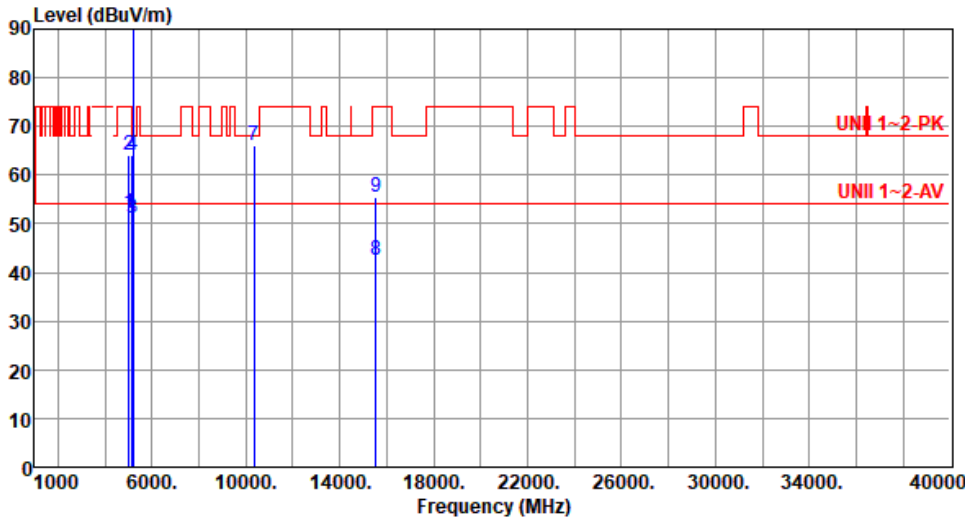Modulation	11a	Test Freq. (MHz)	5180																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Brad Wu Temperature(°C):26 Humidity(%):61																																																																																																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5026.00</td><td>52.14</td><td>54.00</td><td>-1.86</td><td>51.77</td><td>0.37</td><td>Average</td><td>230</td><td>303</td></tr><tr><td>2</td><td>5026.00</td><td>63.97</td><td>74.00</td><td>-10.03</td><td>63.60</td><td>0.37</td><td>Peak</td><td>230</td><td>303</td></tr><tr><td>3</td><td>5150.00</td><td>51.05</td><td>54.00</td><td>-2.95</td><td>50.33</td><td>0.72</td><td>Average</td><td>306</td><td>301</td></tr><tr><td>4</td><td>5150.00</td><td>64.12</td><td>74.00</td><td>-9.88</td><td>63.40</td><td>0.72</td><td>Peak</td><td>306</td><td>301</td></tr><tr><td>5 *</td><td>5180.00</td><td>108.72</td><td></td><td></td><td>108.05</td><td>0.67</td><td>Average</td><td>306</td><td>301</td></tr><tr><td>6 *</td><td>5180.00</td><td>118.62</td><td></td><td></td><td>117.95</td><td>0.67</td><td>Peak</td><td>306</td><td>301</td></tr><tr><td>7</td><td>10360.00</td><td>66.04</td><td>68.20</td><td>-2.16</td><td>57.85</td><td>8.19</td><td>Peak</td><td>222</td><td>293</td></tr><tr><td>8</td><td>15540.00</td><td>42.59</td><td>54.00</td><td>-11.41</td><td>37.58</td><td>5.01</td><td>Average</td><td>100</td><td>166</td></tr><tr><td>9</td><td>15540.00</td><td>55.38</td><td>74.00</td><td>-18.62</td><td>50.37</td><td>5.01</td><td>Peak</td><td>100</td><td>166</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5026.00	52.14	54.00	-1.86	51.77	0.37	Average	230	303	2	5026.00	63.97	74.00	-10.03	63.60	0.37	Peak	230	303	3	5150.00	51.05	54.00	-2.95	50.33	0.72	Average	306	301	4	5150.00	64.12	74.00	-9.88	63.40	0.72	Peak	306	301	5 *	5180.00	108.72			108.05	0.67	Average	306	301	6 *	5180.00	118.62			117.95	0.67	Peak	306	301	7	10360.00	66.04	68.20	-2.16	57.85	8.19	Peak	222	293	8	15540.00	42.59	54.00	-11.41	37.58	5.01	Average	100	166	9	15540.00	55.38	74.00	-18.62	50.37	5.01	Peak	100	166
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5026.00	52.14	54.00	-1.86	51.77	0.37	Average	230	303																																																																																														
2	5026.00	63.97	74.00	-10.03	63.60	0.37	Peak	230	303																																																																																														
3	5150.00	51.05	54.00	-2.95	50.33	0.72	Average	306	301																																																																																														
4	5150.00	64.12	74.00	-9.88	63.40	0.72	Peak	306	301																																																																																														
5 *	5180.00	108.72			108.05	0.67	Average	306	301																																																																																														
6 *	5180.00	118.62			117.95	0.67	Peak	306	301																																																																																														
7	10360.00	66.04	68.20	-2.16	57.85	8.19	Peak	222	293																																																																																														
8	15540.00	42.59	54.00	-11.41	37.58	5.01	Average	100	166																																																																																														
9	15540.00	55.38	74.00	-18.62	50.37	5.01	Peak	100	166																																																																																														




Modulation	11a	Test Freq. (MHz)	5180
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m)			

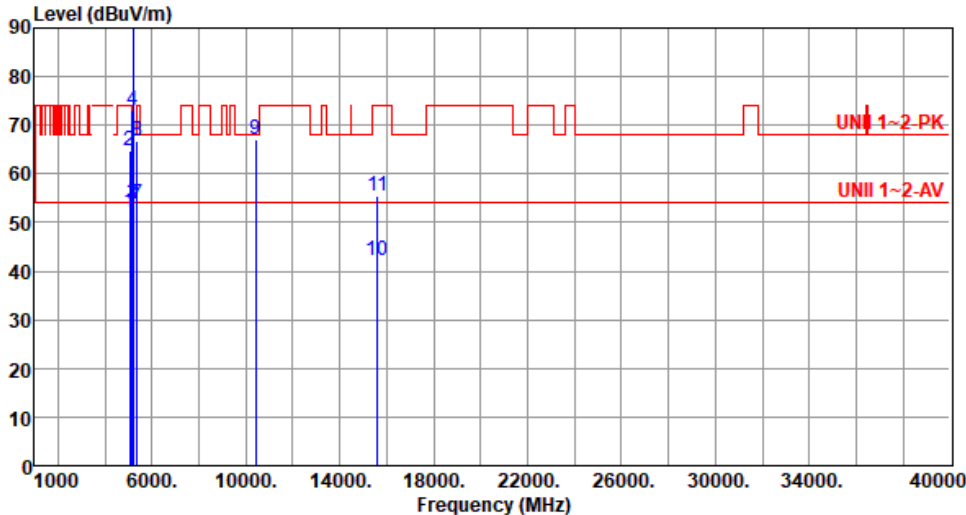

Modulation	11a	Test Freq. (MHz)	5200						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):26 Humidity(%):61									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5053.00	52.13	54.00	-1.87	51.70	0.43	Average	223	303
2	5053.00	64.65	74.00	-9.35	64.22	0.43	Peak	223	303
3	5150.00	53.85	54.00	-0.15	53.13	0.72	Average	229	297
4	5150.00	73.14	74.00	-0.86	72.42	0.72	Peak	229	297
5 *	5200.00	110.41			109.78	0.63	Average	229	297
6 *	5200.00	121.32			120.69	0.63	Peak	229	297
7	5354.00	53.82	54.00	-0.18	53.61	0.21	Average	210	300
8	5354.00	66.72	74.00	-7.28	66.51	0.21	Peak	210	300
9	10400.00	67.24	68.20	-0.96	58.72	8.52	Peak	224	289
10	15600.00	42.09	54.00	-11.91	37.33	4.76	Average	100	184
11	15600.00	55.41	74.00	-18.59	50.65	4.76	Peak	100	184

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3: "*" is Peak / Average value of fundamental frequency

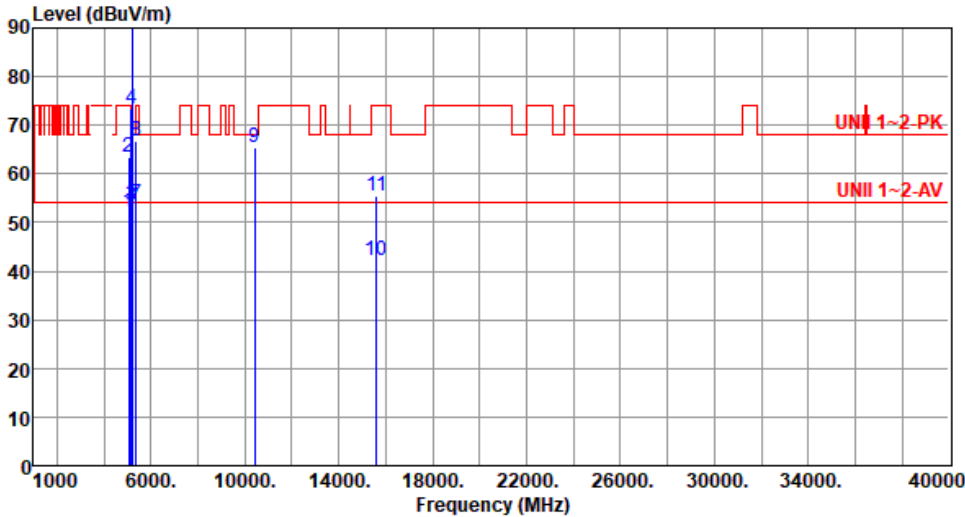


Modulation	11a	Test Freq. (MHz)	5200						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):26 Humidity(%):61									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5053.00	52.14	54.00	-1.86	51.71	0.43	Average	268	344
2	5053.00	63.55	74.00	-10.45	63.12	0.43	Peak	268	344
3	5150.00	53.51	54.00	-0.49	52.79	0.72	Average	292	345
4	5150.00	73.47	74.00	-0.53	72.75	0.72	Peak	292	345
5 *	5200.00	110.27			109.64	0.63	Average	292	356
6 *	5200.00	121.09			120.46	0.63	Peak	292	356
7	5354.00	53.88	54.00	-0.12	53.67	0.21	Average	268	350
8	5354.00	66.89	74.00	-7.11	66.68	0.21	Peak	268	350
9	10400.00	65.54	68.20	-2.66	57.02	8.52	Peak	164	350
10	15600.00	42.30	54.00	-11.70	37.54	4.76	Average	100	176
11	15600.00	55.53	74.00	-18.47	50.77	4.76	Peak	100	176

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency




Modulation	11a	Test Freq. (MHz)	5240
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m)			

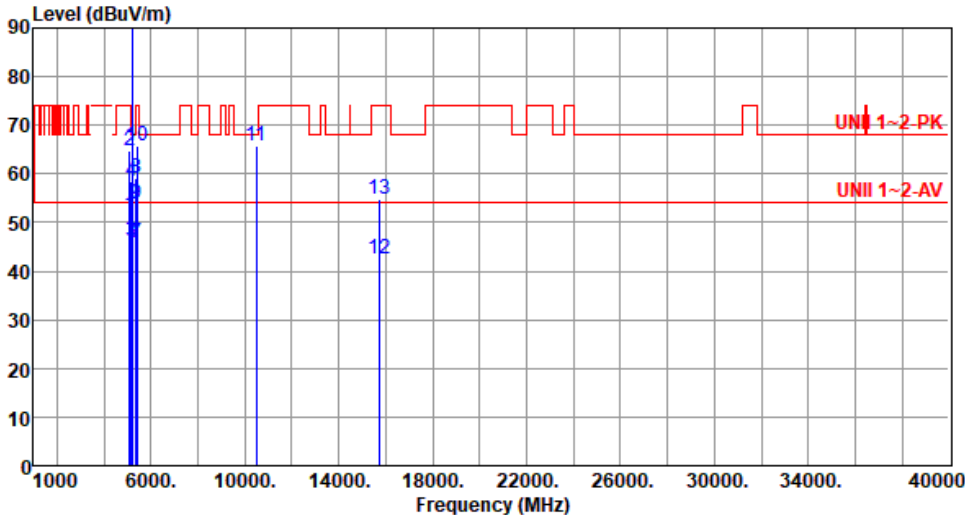

Modulation	11a	Test Freq. (MHz)	5240						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):26 Humidity(%):61									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5086.00	51.34	54.00	-2.66	50.70	0.64	Average	275	348
2	5086.00	64.81	74.00	-9.19	64.17	0.64	Peak	275	348
3	5150.00	46.19	54.00	-7.81	45.47	0.72	Average	281	355
4	5150.00	58.39	74.00	-15.61	57.67	0.72	Peak	281	355
5 *	5240.00	111.74			111.33	0.41	Average	281	355
6 *	5240.00	122.57			122.16	0.41	Peak	281	355
7	5350.00	45.69	54.00	-8.31	45.48	0.21	Average	281	355
8	5350.00	59.16	74.00	-14.84	58.95	0.21	Peak	281	355
9	5394.00	53.89	54.00	-0.11	53.66	0.23	Average	278	348
10	5394.00	65.72	74.00	-8.28	65.49	0.23	Peak	278	348
11	10480.00	65.92	68.20	-2.28	57.37	8.55	Peak	159	349
12	15720.00	42.61	54.00	-11.39	37.57	5.04	Average	100	203
13	15720.00	54.65	74.00	-19.35	49.61	5.04	Peak	100	203

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3: "*" is Peak / Average value of fundamental frequency

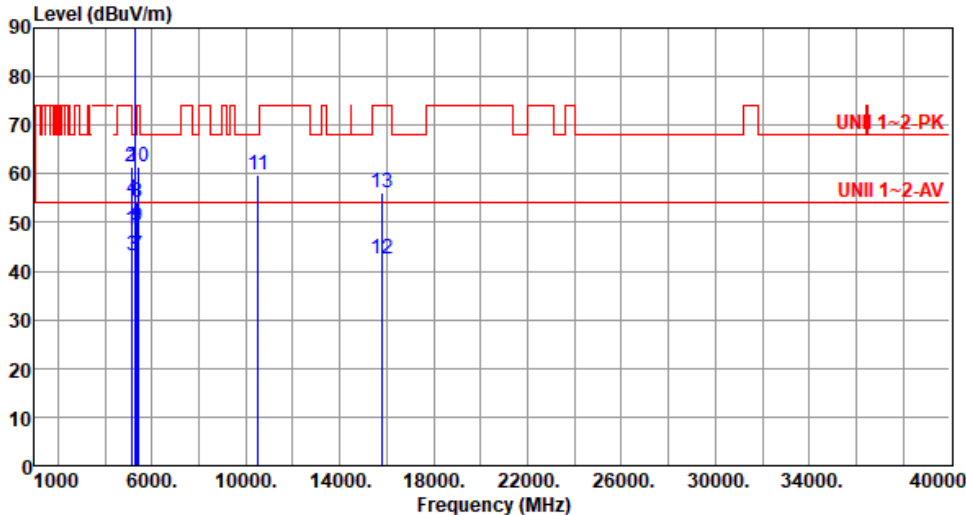

Modulation	11a	Test Freq. (MHz)	5260						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):24 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5106.00	48.65	54.00	-5.35	47.94	0.71	Average	332	287
2	5106.00	61.29	74.00	-12.71	60.58	0.71	Peak	332	287
3	5150.00	43.28	54.00	-10.72	42.56	0.72	Average	332	287
4	5150.00	54.83	74.00	-19.17	54.11	0.72	Peak	332	287
5 *	5260.00	103.76			103.43	0.33	Average	332	287
6 *	5260.00	114.36			114.03	0.33	Peak	332	287
7	5350.00	43.09	54.00	-10.91	42.88	0.21	Average	332	287
8	5350.00	54.18	74.00	-19.82	53.97	0.21	Peak	332	287
9	5414.00	49.19	54.00	-4.81	48.88	0.31	Average	286	296
10	5414.00	61.60	74.00	-12.40	61.29	0.31	Peak	286	296
11	10520.00	59.65	68.20	-8.55	51.22	8.43	Peak	208	279
12	15780.00	42.39	54.00	-11.61	37.56	4.83	Average	100	120
13	15780.00	56.09	74.00	-17.91	51.26	4.83	Peak	100	120

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: "*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5260						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):24 Humidity(%):64									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5106.00	47.85	54.00	-6.15	47.14	0.71	Average	277	43
2	5106.00	60.45	74.00	-13.55	59.74	0.71	Peak	277	43
3	5150.00	43.45	54.00	-10.55	42.73	0.72	Average	326	14
4	5150.00	54.76	74.00	-19.24	54.04	0.72	Peak	326	14
5 *	5260.00	102.69			102.36	0.33	Average	326	14
6 *	5260.00	113.36			113.03	0.33	Peak	326	14
7	5350.00	42.96	54.00	-11.04	42.75	0.21	Average	326	14
8	5350.00	54.25	74.00	-19.75	54.04	0.21	Peak	326	14
9	5414.00	48.95	54.00	-5.05	48.64	0.31	Average	298	28
10	5414.00	61.21	74.00	-12.79	60.90	0.31	Peak	298	28
11	10520.00	59.36	68.20	-8.84	50.93	8.43	Peak	100	342
12	15780.00	42.39	54.00	-11.61	37.56	4.83	Average	100	148
13	15780.00	55.49	74.00	-18.51	50.66	4.83	Peak	100	148


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: "*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5300						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):24 Humidity(%):64									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	47.38	54.00	-6.62	46.66	0.72	Average	232	304
2	5150.00	58.68	74.00	-15.32	57.96	0.72	Peak	232	304
3 *	5300.00	104.74			104.47	0.27	Average	232	304
4 *	5300.00	115.78			115.51	0.27	Peak	232	304
5	5350.00	44.09	54.00	-9.91	43.88	0.21	Average	232	304
6	5350.00	57.26	74.00	-16.74	57.05	0.21	Peak	232	304
7	5448.00	50.49	54.00	-3.51	49.96	0.53	Average	234	318
8	5448.00	61.75	74.00	-12.25	61.22	0.53	Peak	234	318
9	10600.00	44.72	54.00	-9.28	36.34	8.38	Average	214	293
10	10600.00	58.69	74.00	-15.31	50.31	8.38	Peak	214	293
11	15900.00	42.41	54.00	-11.59	37.60	4.81	Average	100	24
12	15900.00	56.20	74.00	-17.80	51.39	4.81	Peak	100	24

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

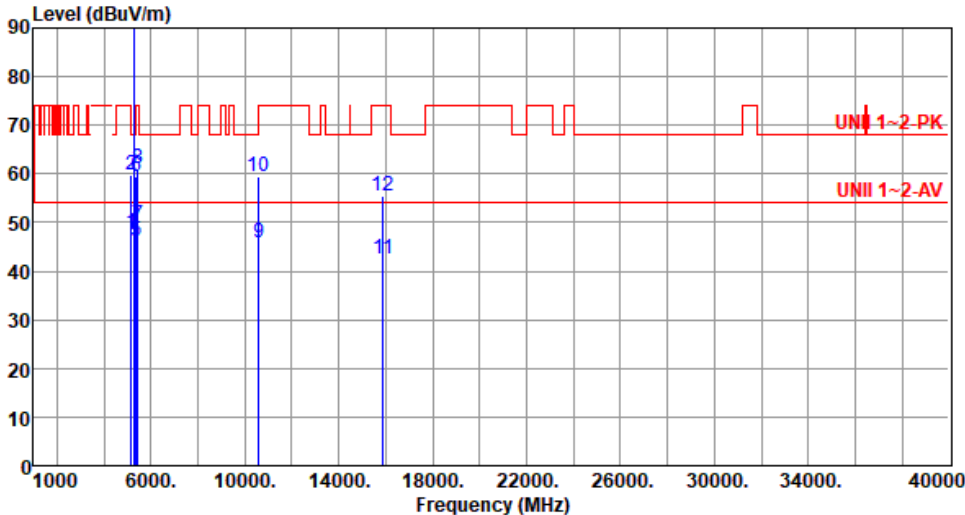


Modulation	11a	Test Freq. (MHz)	5300						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):24 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	47.82	54.00	-6.18	47.10	0.72	Average	339	26
2	5150.00	59.90	74.00	-14.10	59.18	0.72	Peak	339	26
3 *	5300.00	105.18			104.91	0.27	Average	339	26
4 *	5300.00	116.46			116.19	0.27	Peak	339	26
5	5350.00	46.01	54.00	-7.99	45.80	0.21	Average	339	26
6	5350.00	59.59	74.00	-14.41	59.38	0.21	Peak	339	26
7	5448.00	49.62	54.00	-4.38	49.09	0.53	Average	339	31
8	5448.00	61.23	74.00	-12.77	60.70	0.53	Peak	339	31
9	10600.00	45.81	54.00	-8.19	37.43	8.38	Average	100	348
10	10600.00	59.42	74.00	-14.58	51.04	8.38	Peak	100	348
11	15900.00	42.40	54.00	-11.60	37.59	4.81	Average	100	19
12	15900.00	55.40	74.00	-18.60	50.59	4.81	Peak	100	19

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: "*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5320																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Sean Yu Temperature(°C):24 Humidity(%):64																																																																																																																	
Level (dBuV/m) UNII 1~2-PK UNII 1~2-AV <table><thead><tr><th></th><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>5320.00</td><td>104.09</td><td></td><td></td><td>103.84</td><td>0.25</td><td>Average</td><td>164</td><td>296</td></tr><tr><td>2</td><td>*</td><td>5320.00</td><td>114.58</td><td></td><td></td><td>114.33</td><td>0.25</td><td>Peak</td><td>164</td><td>296</td></tr><tr><td>3</td><td></td><td>5350.00</td><td>43.28</td><td>54.00</td><td>-10.72</td><td>43.07</td><td>0.21</td><td>Average</td><td>164</td><td>296</td></tr><tr><td>4</td><td></td><td>5350.00</td><td>55.52</td><td>74.00</td><td>-18.48</td><td>55.31</td><td>0.21</td><td>Peak</td><td>164</td><td>296</td></tr><tr><td>5</td><td></td><td>5474.00</td><td>61.98</td><td>68.20</td><td>-6.22</td><td>61.39</td><td>0.59</td><td>Peak</td><td>163</td><td>291</td></tr><tr><td>6</td><td></td><td>10640.00</td><td>44.75</td><td>54.00</td><td>-9.25</td><td>36.31</td><td>8.44</td><td>Average</td><td>220</td><td>289</td></tr><tr><td>7</td><td></td><td>10640.00</td><td>58.90</td><td>74.00</td><td>-15.10</td><td>50.46</td><td>8.44</td><td>Peak</td><td>220</td><td>289</td></tr><tr><td>8</td><td></td><td>15960.00</td><td>42.29</td><td>54.00</td><td>-11.71</td><td>37.57</td><td>4.72</td><td>Average</td><td>100</td><td>228</td></tr><tr><td>9</td><td></td><td>15960.00</td><td>55.98</td><td>74.00</td><td>-18.02</td><td>51.26</td><td>4.72</td><td>Peak</td><td>100</td><td>228</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency						Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	*	5320.00	104.09			103.84	0.25	Average	164	296	2	*	5320.00	114.58			114.33	0.25	Peak	164	296	3		5350.00	43.28	54.00	-10.72	43.07	0.21	Average	164	296	4		5350.00	55.52	74.00	-18.48	55.31	0.21	Peak	164	296	5		5474.00	61.98	68.20	-6.22	61.39	0.59	Peak	163	291	6		10640.00	44.75	54.00	-9.25	36.31	8.44	Average	220	289	7		10640.00	58.90	74.00	-15.10	50.46	8.44	Peak	220	289	8		15960.00	42.29	54.00	-11.71	37.57	4.72	Average	100	228	9		15960.00	55.98	74.00	-18.02	51.26	4.72	Peak	100	228
		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																							
1	*	5320.00	104.09			103.84	0.25	Average	164	296																																																																																																							
2	*	5320.00	114.58			114.33	0.25	Peak	164	296																																																																																																							
3		5350.00	43.28	54.00	-10.72	43.07	0.21	Average	164	296																																																																																																							
4		5350.00	55.52	74.00	-18.48	55.31	0.21	Peak	164	296																																																																																																							
5		5474.00	61.98	68.20	-6.22	61.39	0.59	Peak	163	291																																																																																																							
6		10640.00	44.75	54.00	-9.25	36.31	8.44	Average	220	289																																																																																																							
7		10640.00	58.90	74.00	-15.10	50.46	8.44	Peak	220	289																																																																																																							
8		15960.00	42.29	54.00	-11.71	37.57	4.72	Average	100	228																																																																																																							
9		15960.00	55.98	74.00	-18.02	51.26	4.72	Peak	100	228																																																																																																							

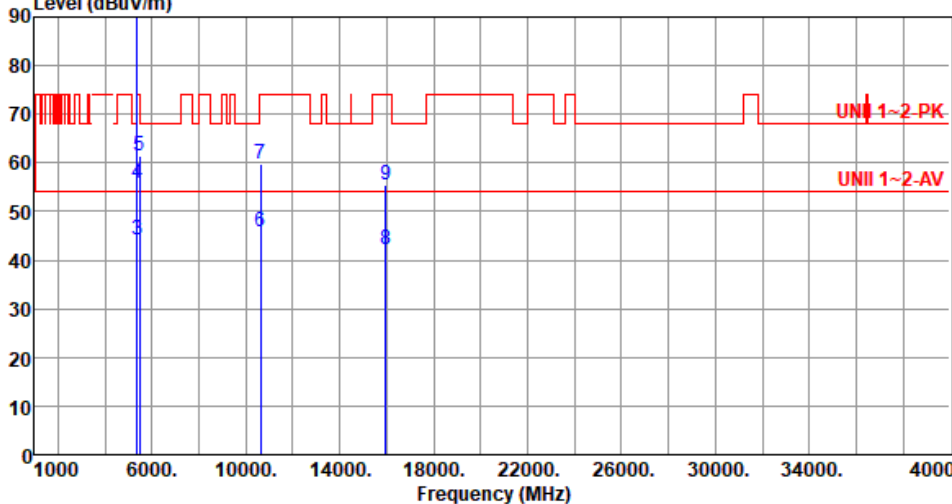


Modulation	11a	Test Freq. (MHz)	5320																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Sean Yu Temperature(°C):24 Humidity(%):64																																																																																																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>5320.00</td><td>103.92</td><td></td><td></td><td>103.67</td><td>0.25</td><td>Average</td><td>340</td><td>336</td></tr><tr><td>2</td><td>*</td><td>5320.00</td><td>113.64</td><td></td><td></td><td>113.39</td><td>0.25</td><td>Peak</td><td>340</td><td>336</td></tr><tr><td>3</td><td></td><td>5350.00</td><td>44.26</td><td>54.00</td><td>-9.74</td><td>44.05</td><td>0.21</td><td>Average</td><td>340</td><td>336</td></tr><tr><td>4</td><td></td><td>5350.00</td><td>55.76</td><td>74.00</td><td>-18.24</td><td>55.55</td><td>0.21</td><td>Peak</td><td>340</td><td>336</td></tr><tr><td>5</td><td></td><td>5474.00</td><td>61.29</td><td>68.20</td><td>-6.91</td><td>60.70</td><td>0.59</td><td>Peak</td><td>317</td><td>328</td></tr><tr><td>6</td><td></td><td>10640.00</td><td>45.99</td><td>54.00</td><td>-8.01</td><td>37.55</td><td>8.44</td><td>Average</td><td>100</td><td>351</td></tr><tr><td>7</td><td></td><td>10640.00</td><td>59.65</td><td>74.00</td><td>-14.35</td><td>51.21</td><td>8.44</td><td>Peak</td><td>100</td><td>351</td></tr><tr><td>8</td><td></td><td>15960.00</td><td>42.24</td><td>54.00</td><td>-11.76</td><td>37.52</td><td>4.72</td><td>Average</td><td>100</td><td>248</td></tr><tr><td>9</td><td></td><td>15960.00</td><td>55.38</td><td>74.00</td><td>-18.62</td><td>50.66</td><td>4.72</td><td>Peak</td><td>100</td><td>248</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency						Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	*	5320.00	103.92			103.67	0.25	Average	340	336	2	*	5320.00	113.64			113.39	0.25	Peak	340	336	3		5350.00	44.26	54.00	-9.74	44.05	0.21	Average	340	336	4		5350.00	55.76	74.00	-18.24	55.55	0.21	Peak	340	336	5		5474.00	61.29	68.20	-6.91	60.70	0.59	Peak	317	328	6		10640.00	45.99	54.00	-8.01	37.55	8.44	Average	100	351	7		10640.00	59.65	74.00	-14.35	51.21	8.44	Peak	100	351	8		15960.00	42.24	54.00	-11.76	37.52	4.72	Average	100	248	9		15960.00	55.38	74.00	-18.62	50.66	4.72	Peak	100	248
		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																							
1	*	5320.00	103.92			103.67	0.25	Average	340	336																																																																																																							
2	*	5320.00	113.64			113.39	0.25	Peak	340	336																																																																																																							
3		5350.00	44.26	54.00	-9.74	44.05	0.21	Average	340	336																																																																																																							
4		5350.00	55.76	74.00	-18.24	55.55	0.21	Peak	340	336																																																																																																							
5		5474.00	61.29	68.20	-6.91	60.70	0.59	Peak	317	328																																																																																																							
6		10640.00	45.99	54.00	-8.01	37.55	8.44	Average	100	351																																																																																																							
7		10640.00	59.65	74.00	-14.35	51.21	8.44	Peak	100	351																																																																																																							
8		15960.00	42.24	54.00	-11.76	37.52	4.72	Average	100	248																																																																																																							
9		15960.00	55.38	74.00	-18.62	50.66	4.72	Peak	100	248																																																																																																							



Modulation	11a	Test Freq. (MHz)	5500
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			

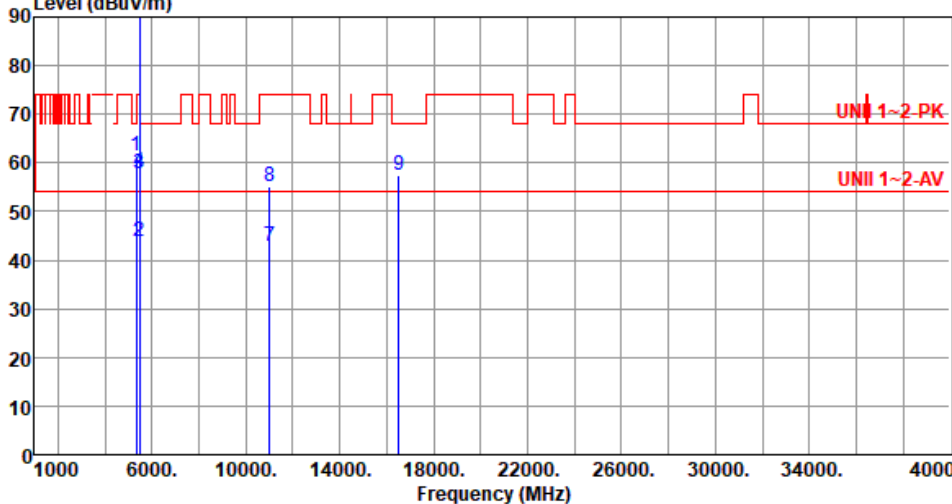


Modulation	11a	Test Freq. (MHz)	5500																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Sean Yu Temperature(°C):24 Humidity(%):64																																																																																																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5346.00</td><td>61.45</td><td>68.20</td><td>-6.75</td><td>61.24</td><td>0.21</td><td>Peak</td><td>311</td><td>304</td></tr><tr><td>2</td><td>5460.00</td><td>43.95</td><td>54.00</td><td>-10.05</td><td>43.39</td><td>0.56</td><td>Average</td><td>300</td><td>323</td></tr><tr><td>3</td><td>5460.00</td><td>57.68</td><td>74.00</td><td>-16.32</td><td>57.12</td><td>0.56</td><td>Peak</td><td>300</td><td>323</td></tr><tr><td>4</td><td>5470.00</td><td>57.99</td><td>68.20</td><td>-10.21</td><td>57.40</td><td>0.59</td><td>Peak</td><td>300</td><td>323</td></tr><tr><td>5 *</td><td>5500.00</td><td>103.63</td><td></td><td></td><td>102.98</td><td>0.65</td><td>Average</td><td>300</td><td>323</td></tr><tr><td>6 *</td><td>5500.00</td><td>114.23</td><td></td><td></td><td>113.58</td><td>0.65</td><td>Peak</td><td>300</td><td>323</td></tr><tr><td>7</td><td>11000.00</td><td>42.95</td><td>54.00</td><td>-11.05</td><td>34.21</td><td>8.74</td><td>Average</td><td>100</td><td>126</td></tr><tr><td>8</td><td>11000.00</td><td>55.21</td><td>74.00</td><td>-18.79</td><td>46.47</td><td>8.74</td><td>Peak</td><td>100</td><td>126</td></tr><tr><td>9</td><td>16500.00</td><td>57.48</td><td>68.20</td><td>-10.72</td><td>51.13</td><td>6.35</td><td>Peak</td><td>100</td><td>234</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5346.00	61.45	68.20	-6.75	61.24	0.21	Peak	311	304	2	5460.00	43.95	54.00	-10.05	43.39	0.56	Average	300	323	3	5460.00	57.68	74.00	-16.32	57.12	0.56	Peak	300	323	4	5470.00	57.99	68.20	-10.21	57.40	0.59	Peak	300	323	5 *	5500.00	103.63			102.98	0.65	Average	300	323	6 *	5500.00	114.23			113.58	0.65	Peak	300	323	7	11000.00	42.95	54.00	-11.05	34.21	8.74	Average	100	126	8	11000.00	55.21	74.00	-18.79	46.47	8.74	Peak	100	126	9	16500.00	57.48	68.20	-10.72	51.13	6.35	Peak	100	234
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5346.00	61.45	68.20	-6.75	61.24	0.21	Peak	311	304																																																																																														
2	5460.00	43.95	54.00	-10.05	43.39	0.56	Average	300	323																																																																																														
3	5460.00	57.68	74.00	-16.32	57.12	0.56	Peak	300	323																																																																																														
4	5470.00	57.99	68.20	-10.21	57.40	0.59	Peak	300	323																																																																																														
5 *	5500.00	103.63			102.98	0.65	Average	300	323																																																																																														
6 *	5500.00	114.23			113.58	0.65	Peak	300	323																																																																																														
7	11000.00	42.95	54.00	-11.05	34.21	8.74	Average	100	126																																																																																														
8	11000.00	55.21	74.00	-18.79	46.47	8.74	Peak	100	126																																																																																														
9	16500.00	57.48	68.20	-10.72	51.13	6.35	Peak	100	234																																																																																														




Modulation	11a	Test Freq. (MHz)	5580
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) <			

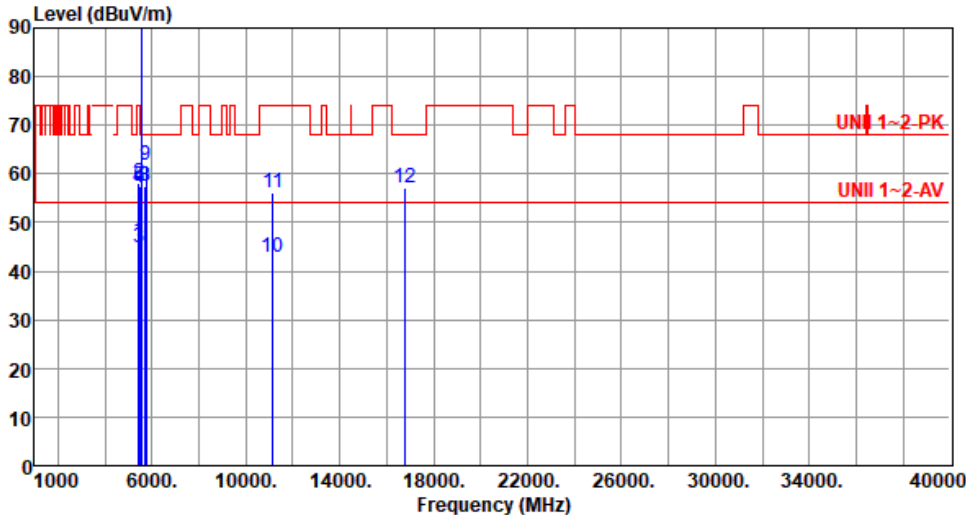

Modulation	11a	Test Freq. (MHz)	5580						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):24 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5434.00	46.14	54.00	-7.86	45.71	0.43	Average	350	341
2	5434.00	58.17	74.00	-15.83	57.74	0.43	Peak	350	341
3	5460.00	44.92	54.00	-9.08	44.36	0.56	Average	350	341
4	5460.00	57.24	74.00	-16.76	56.68	0.56	Peak	350	341
5	5470.00	57.33	68.20	-10.87	56.74	0.59	Peak	350	341
6 *	5580.00	105.44			104.85	0.59	Average	350	341
7 *	5580.00	116.78			116.19	0.59	Peak	350	341
8	5725.00	57.59	68.20	-10.61	56.57	1.02	Peak	350	341
9	5735.00	61.76	68.20	-6.44	60.71	1.05	Peak	350	341
10	11160.00	42.70	54.00	-11.30	34.37	8.33	Average	100	19
11	11160.00	56.05	74.00	-17.95	47.72	8.33	Peak	100	19
12	16740.00	57.09	68.20	-11.11	50.68	6.41	Peak	100	11

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

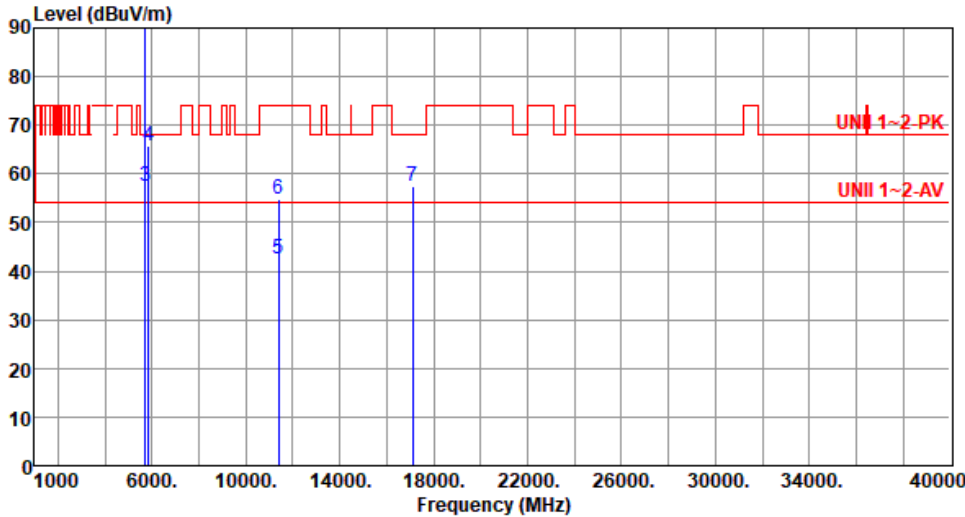

Modulation	11a	Test Freq. (MHz)	5700																																																																																
Polarization	Horizontal																																																																																		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64																																																																																			
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1 *</td><td>5700.00</td><td>104.85</td><td></td><td></td><td>103.89</td><td>0.96</td><td>Average</td><td>239</td><td>296</td></tr><tr><td>2 *</td><td>5700.00</td><td>115.51</td><td></td><td></td><td>114.55</td><td>0.96</td><td>Peak</td><td>239</td><td>296</td></tr><tr><td>3</td><td>5725.00</td><td>57.41</td><td>68.20</td><td>-10.79</td><td>56.39</td><td>1.02</td><td>Peak</td><td>239</td><td>296</td></tr><tr><td>4</td><td>5854.00</td><td>65.70</td><td>68.20</td><td>-2.50</td><td>64.52</td><td>1.18</td><td>Peak</td><td>242</td><td>301</td></tr><tr><td>5</td><td>11400.00</td><td>42.67</td><td>54.00</td><td>-11.33</td><td>34.51</td><td>8.16</td><td>Average</td><td>100</td><td>284</td></tr><tr><td>6</td><td>11400.00</td><td>54.73</td><td>74.00</td><td>-19.27</td><td>46.57</td><td>8.16</td><td>Peak</td><td>100</td><td>284</td></tr><tr><td>7</td><td>17100.00</td><td>57.55</td><td>68.20</td><td>-10.65</td><td>51.63</td><td>5.92</td><td>Peak</td><td>100</td><td>169</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	5700.00	104.85			103.89	0.96	Average	239	296	2 *	5700.00	115.51			114.55	0.96	Peak	239	296	3	5725.00	57.41	68.20	-10.79	56.39	1.02	Peak	239	296	4	5854.00	65.70	68.20	-2.50	64.52	1.18	Peak	242	301	5	11400.00	42.67	54.00	-11.33	34.51	8.16	Average	100	284	6	11400.00	54.73	74.00	-19.27	46.57	8.16	Peak	100	284	7	17100.00	57.55	68.20	-10.65	51.63	5.92	Peak	100	169
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1 *	5700.00	104.85			103.89	0.96	Average	239	296																																																																										
2 *	5700.00	115.51			114.55	0.96	Peak	239	296																																																																										
3	5725.00	57.41	68.20	-10.79	56.39	1.02	Peak	239	296																																																																										
4	5854.00	65.70	68.20	-2.50	64.52	1.18	Peak	242	301																																																																										
5	11400.00	42.67	54.00	-11.33	34.51	8.16	Average	100	284																																																																										
6	11400.00	54.73	74.00	-19.27	46.57	8.16	Peak	100	284																																																																										
7	17100.00	57.55	68.20	-10.65	51.63	5.92	Peak	100	169																																																																										



Modulation	11a	Test Freq. (MHz)	5700
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) <			




Modulation	11a	Test Freq. (MHz)	5720
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			



Modulation	11a	Test Freq. (MHz)	5720																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Sean Yu Temperature(°C):24 Humidity(%):64																																																																																																																	
Level (dBuV/m) UNII 1~2-PK UNII 1~2-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>43.60</td><td>54.00</td><td>-10.40</td><td>43.04</td><td>0.56</td><td>Average</td><td>319</td><td>351</td></tr><tr><td>2</td><td>5460.00</td><td>54.96</td><td>74.00</td><td>-19.04</td><td>54.40</td><td>0.56</td><td>Peak</td><td>319</td><td>351</td></tr><tr><td>3</td><td>5470.00</td><td>55.06</td><td>68.20</td><td>-13.14</td><td>54.47</td><td>0.59</td><td>Peak</td><td>319</td><td>351</td></tr><tr><td>4 *</td><td>5720.00</td><td>105.61</td><td></td><td></td><td>104.60</td><td>1.01</td><td>Average</td><td>319</td><td>351</td></tr><tr><td>5 *</td><td>5720.00</td><td>116.69</td><td></td><td></td><td>115.68</td><td>1.01</td><td>Peak</td><td>319</td><td>351</td></tr><tr><td>6</td><td>5850.00</td><td>55.62</td><td>68.20</td><td>-12.58</td><td>54.47</td><td>1.15</td><td>Peak</td><td>319</td><td>351</td></tr><tr><td>7</td><td>5874.00</td><td>64.28</td><td>68.20</td><td>-3.92</td><td>62.97</td><td>1.31</td><td>Peak</td><td>307</td><td>309</td></tr><tr><td>8</td><td>11440.00</td><td>42.88</td><td>54.00</td><td>-11.12</td><td>34.64</td><td>8.24</td><td>Average</td><td>100</td><td>104</td></tr><tr><td>9</td><td>11440.00</td><td>55.08</td><td>74.00</td><td>-18.92</td><td>46.84</td><td>8.24</td><td>Peak</td><td>100</td><td>104</td></tr><tr><td>10</td><td>17160.00</td><td>57.65</td><td>68.20</td><td>-10.55</td><td>52.03</td><td>5.62</td><td>Peak</td><td>100</td><td>223</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	43.60	54.00	-10.40	43.04	0.56	Average	319	351	2	5460.00	54.96	74.00	-19.04	54.40	0.56	Peak	319	351	3	5470.00	55.06	68.20	-13.14	54.47	0.59	Peak	319	351	4 *	5720.00	105.61			104.60	1.01	Average	319	351	5 *	5720.00	116.69			115.68	1.01	Peak	319	351	6	5850.00	55.62	68.20	-12.58	54.47	1.15	Peak	319	351	7	5874.00	64.28	68.20	-3.92	62.97	1.31	Peak	307	309	8	11440.00	42.88	54.00	-11.12	34.64	8.24	Average	100	104	9	11440.00	55.08	74.00	-18.92	46.84	8.24	Peak	100	104	10	17160.00	57.65	68.20	-10.55	52.03	5.62	Peak	100	223
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	5460.00	43.60	54.00	-10.40	43.04	0.56	Average	319	351																																																																																																								
2	5460.00	54.96	74.00	-19.04	54.40	0.56	Peak	319	351																																																																																																								
3	5470.00	55.06	68.20	-13.14	54.47	0.59	Peak	319	351																																																																																																								
4 *	5720.00	105.61			104.60	1.01	Average	319	351																																																																																																								
5 *	5720.00	116.69			115.68	1.01	Peak	319	351																																																																																																								
6	5850.00	55.62	68.20	-12.58	54.47	1.15	Peak	319	351																																																																																																								
7	5874.00	64.28	68.20	-3.92	62.97	1.31	Peak	307	309																																																																																																								
8	11440.00	42.88	54.00	-11.12	34.64	8.24	Average	100	104																																																																																																								
9	11440.00	55.08	74.00	-18.92	46.84	8.24	Peak	100	104																																																																																																								
10	17160.00	57.65	68.20	-10.55	52.03	5.62	Peak	100	223																																																																																																								

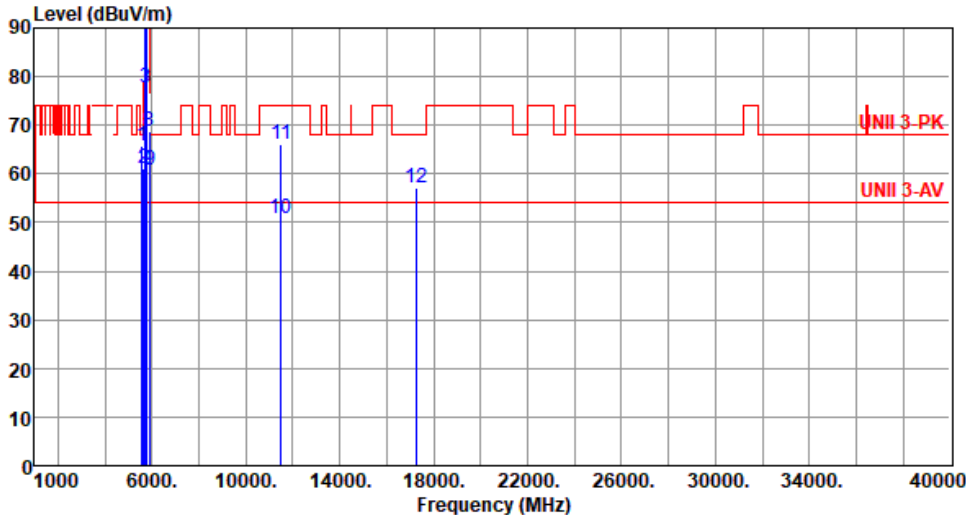


Modulation	11a	Test Freq. (MHz)	5745						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):25 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5591.00	65.79	68.20	-2.41	65.20	0.59	Peak	234	298
2	5650.00	61.08	68.20	-7.12	60.35	0.73	Peak	151	299
3	5700.00	77.75	105.20	-27.45	76.79	0.96	Peak	151	299
4	5720.00	89.31	110.80	-21.49	88.30	1.01	Peak	151	299
5	5725.00	94.14	122.20	-28.06	93.12	1.02	Peak	151	299
6 *	5745.00	114.05			112.98	1.07	Average	151	299
7 *	5745.00	124.01			122.94	1.07	Peak	151	299
8	5899.00	68.91	87.40	-18.49	67.43	1.48	Peak	173	298
9	5925.00	60.87	68.20	-7.33	59.35	1.52	Peak	151	299
10	11490.00	50.78	54.00	-3.22	42.28	8.50	Average	120	299
11	11490.00	66.00	74.00	-8.00	57.50	8.50	Peak	120	299
12	17235.00	57.10	68.20	-11.10	51.47	5.63	Peak	100	228

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: "*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5745																																																																																																																																		
Polarization	Vertical																																																																																																																																				
Test By :Sean Yu Temperature(°C):25 Humidity(%):62																																																																																																																																					
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5591.00</td><td>65.21</td><td>68.20</td><td>-2.99</td><td>64.62</td><td>0.59</td><td>Peak</td><td>335</td><td>344</td></tr><tr><td>2</td><td>5650.00</td><td>59.36</td><td>68.20</td><td>-8.84</td><td>58.63</td><td>0.73</td><td>Peak</td><td>350</td><td>24</td></tr><tr><td>3</td><td>5700.00</td><td>76.04</td><td>105.20</td><td>-29.16</td><td>75.08</td><td>0.96</td><td>Peak</td><td>350</td><td>24</td></tr><tr><td>4</td><td>5720.00</td><td>87.79</td><td>110.80</td><td>-23.01</td><td>86.78</td><td>1.01</td><td>Peak</td><td>350</td><td>24</td></tr><tr><td>5</td><td>5725.00</td><td>92.39</td><td>122.20</td><td>-29.81</td><td>91.37</td><td>1.02</td><td>Peak</td><td>350</td><td>24</td></tr><tr><td>6 *</td><td>5745.00</td><td>112.63</td><td></td><td></td><td>111.56</td><td>1.07</td><td>Average</td><td>350</td><td>24</td></tr><tr><td>7 *</td><td>5745.00</td><td>123.45</td><td></td><td></td><td>122.38</td><td>1.07</td><td>Peak</td><td>350</td><td>24</td></tr><tr><td>8</td><td>5899.00</td><td>66.46</td><td>87.40</td><td>-20.94</td><td>64.98</td><td>1.48</td><td>Peak</td><td>274</td><td>339</td></tr><tr><td>9</td><td>5925.00</td><td>60.16</td><td>68.20</td><td>-8.04</td><td>58.64</td><td>1.52</td><td>Peak</td><td>350</td><td>24</td></tr><tr><td>10</td><td>11490.00</td><td>48.76</td><td>54.00</td><td>-5.24</td><td>40.26</td><td>8.50</td><td>Average</td><td>100</td><td>350</td></tr><tr><td>11</td><td>11490.00</td><td>63.22</td><td>74.00</td><td>-10.78</td><td>54.72</td><td>8.50</td><td>Peak</td><td>100</td><td>350</td></tr><tr><td>12</td><td>17235.00</td><td>56.95</td><td>68.20</td><td>-11.25</td><td>51.32</td><td>5.63</td><td>Peak</td><td>100</td><td>125</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5591.00	65.21	68.20	-2.99	64.62	0.59	Peak	335	344	2	5650.00	59.36	68.20	-8.84	58.63	0.73	Peak	350	24	3	5700.00	76.04	105.20	-29.16	75.08	0.96	Peak	350	24	4	5720.00	87.79	110.80	-23.01	86.78	1.01	Peak	350	24	5	5725.00	92.39	122.20	-29.81	91.37	1.02	Peak	350	24	6 *	5745.00	112.63			111.56	1.07	Average	350	24	7 *	5745.00	123.45			122.38	1.07	Peak	350	24	8	5899.00	66.46	87.40	-20.94	64.98	1.48	Peak	274	339	9	5925.00	60.16	68.20	-8.04	58.64	1.52	Peak	350	24	10	11490.00	48.76	54.00	-5.24	40.26	8.50	Average	100	350	11	11490.00	63.22	74.00	-10.78	54.72	8.50	Peak	100	350	12	17235.00	56.95	68.20	-11.25	51.32	5.63	Peak	100	125
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																												
1	5591.00	65.21	68.20	-2.99	64.62	0.59	Peak	335	344																																																																																																																												
2	5650.00	59.36	68.20	-8.84	58.63	0.73	Peak	350	24																																																																																																																												
3	5700.00	76.04	105.20	-29.16	75.08	0.96	Peak	350	24																																																																																																																												
4	5720.00	87.79	110.80	-23.01	86.78	1.01	Peak	350	24																																																																																																																												
5	5725.00	92.39	122.20	-29.81	91.37	1.02	Peak	350	24																																																																																																																												
6 *	5745.00	112.63			111.56	1.07	Average	350	24																																																																																																																												
7 *	5745.00	123.45			122.38	1.07	Peak	350	24																																																																																																																												
8	5899.00	66.46	87.40	-20.94	64.98	1.48	Peak	274	339																																																																																																																												
9	5925.00	60.16	68.20	-8.04	58.64	1.52	Peak	350	24																																																																																																																												
10	11490.00	48.76	54.00	-5.24	40.26	8.50	Average	100	350																																																																																																																												
11	11490.00	63.22	74.00	-10.78	54.72	8.50	Peak	100	350																																																																																																																												
12	17235.00	56.95	68.20	-11.25	51.32	5.63	Peak	100	125																																																																																																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																																					

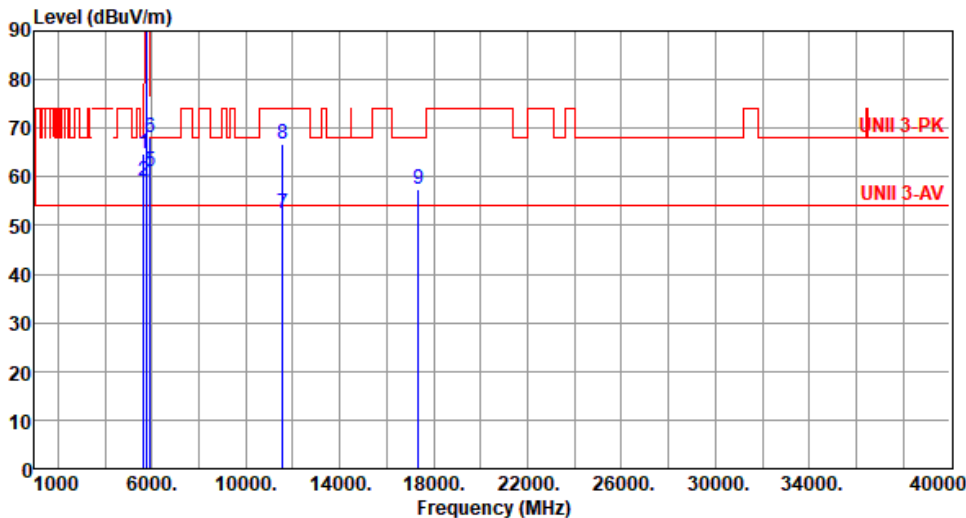


Modulation	11a	Test Freq. (MHz)	5785																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):25 Humidity(%):62																																																																																													
Level (dBUV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBUV/m dB reading dB/m High Table dBUV/m dBUV cm deg <table><tr><td>1</td><td>5631.00</td><td>64.82</td><td>68.20</td><td>-3.38</td><td>64.14</td><td>0.68</td><td>Peak</td><td>163</td><td>299</td></tr><tr><td>2</td><td>5650.00</td><td>59.01</td><td>68.20</td><td>-9.19</td><td>58.28</td><td>0.73</td><td>Peak</td><td>162</td><td>296</td></tr><tr><td>3 *</td><td>5785.00</td><td>113.94</td><td></td><td></td><td>112.83</td><td>1.11</td><td>Average</td><td>162</td><td>296</td></tr><tr><td>4 *</td><td>5785.00</td><td>125.81</td><td></td><td></td><td>124.70</td><td>1.11</td><td>Peak</td><td>162</td><td>296</td></tr><tr><td>5</td><td>5925.00</td><td>61.13</td><td>68.20</td><td>-7.07</td><td>59.61</td><td>1.52</td><td>Peak</td><td>162</td><td>296</td></tr><tr><td>6</td><td>5939.00</td><td>68.00</td><td>68.20</td><td>-0.20</td><td>66.48</td><td>1.52</td><td>Peak</td><td>181</td><td>299</td></tr><tr><td>7</td><td>11570.00</td><td>52.36</td><td>54.00</td><td>-1.64</td><td>43.92</td><td>8.44</td><td>Average</td><td>122</td><td>295</td></tr><tr><td>8</td><td>11570.00</td><td>66.87</td><td>74.00</td><td>-7.13</td><td>58.43</td><td>8.44</td><td>Peak</td><td>122</td><td>295</td></tr><tr><td>9</td><td>17355.00</td><td>57.43</td><td>68.20</td><td>-10.77</td><td>51.37</td><td>6.06</td><td>Peak</td><td>100</td><td>182</td></tr></table>				1	5631.00	64.82	68.20	-3.38	64.14	0.68	Peak	163	299	2	5650.00	59.01	68.20	-9.19	58.28	0.73	Peak	162	296	3 *	5785.00	113.94			112.83	1.11	Average	162	296	4 *	5785.00	125.81			124.70	1.11	Peak	162	296	5	5925.00	61.13	68.20	-7.07	59.61	1.52	Peak	162	296	6	5939.00	68.00	68.20	-0.20	66.48	1.52	Peak	181	299	7	11570.00	52.36	54.00	-1.64	43.92	8.44	Average	122	295	8	11570.00	66.87	74.00	-7.13	58.43	8.44	Peak	122	295	9	17355.00	57.43	68.20	-10.77	51.37	6.06	Peak	100	182
1	5631.00	64.82	68.20	-3.38	64.14	0.68	Peak	163	299																																																																																				
2	5650.00	59.01	68.20	-9.19	58.28	0.73	Peak	162	296																																																																																				
3 *	5785.00	113.94			112.83	1.11	Average	162	296																																																																																				
4 *	5785.00	125.81			124.70	1.11	Peak	162	296																																																																																				
5	5925.00	61.13	68.20	-7.07	59.61	1.52	Peak	162	296																																																																																				
6	5939.00	68.00	68.20	-0.20	66.48	1.52	Peak	181	299																																																																																				
7	11570.00	52.36	54.00	-1.64	43.92	8.44	Average	122	295																																																																																				
8	11570.00	66.87	74.00	-7.13	58.43	8.44	Peak	122	295																																																																																				
9	17355.00	57.43	68.20	-10.77	51.37	6.06	Peak	100	182																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																													




Modulation	11a	Test Freq. (MHz)	5785																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Sean Yu Temperature(°C):25 Humidity(%):62																																																																																																							
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5631.00</td><td>66.09</td><td>68.20</td><td>-2.11</td><td>65.41</td><td>0.68</td><td>Peak</td><td>283</td><td>341</td></tr><tr><td>2</td><td>5650.00</td><td>59.41</td><td>68.20</td><td>-8.79</td><td>58.68</td><td>0.73</td><td>Peak</td><td>350</td><td>21</td></tr><tr><td>3 *</td><td>5785.00</td><td>112.88</td><td></td><td></td><td>111.77</td><td>1.11</td><td>Average</td><td>350</td><td>21</td></tr><tr><td>4 *</td><td>5785.00</td><td>123.28</td><td></td><td></td><td>122.17</td><td>1.11</td><td>Peak</td><td>350</td><td>21</td></tr><tr><td>5</td><td>5925.00</td><td>60.68</td><td>68.20</td><td>-7.52</td><td>59.16</td><td>1.52</td><td>Peak</td><td>350</td><td>21</td></tr><tr><td>6</td><td>5939.00</td><td>66.40</td><td>68.20</td><td>-1.80</td><td>64.88</td><td>1.52</td><td>Peak</td><td>306</td><td>341</td></tr><tr><td>7</td><td>11570.00</td><td>48.58</td><td>54.00</td><td>-5.42</td><td>40.14</td><td>8.44</td><td>Average</td><td>100</td><td>351</td></tr><tr><td>8</td><td>11570.00</td><td>64.94</td><td>74.00</td><td>-9.06</td><td>56.50</td><td>8.44</td><td>Peak</td><td>100</td><td>351</td></tr><tr><td>9</td><td>17355.00</td><td>57.91</td><td>68.20</td><td>-10.29</td><td>51.85</td><td>6.06</td><td>Peak</td><td>100</td><td>246</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5631.00	66.09	68.20	-2.11	65.41	0.68	Peak	283	341	2	5650.00	59.41	68.20	-8.79	58.68	0.73	Peak	350	21	3 *	5785.00	112.88			111.77	1.11	Average	350	21	4 *	5785.00	123.28			122.17	1.11	Peak	350	21	5	5925.00	60.68	68.20	-7.52	59.16	1.52	Peak	350	21	6	5939.00	66.40	68.20	-1.80	64.88	1.52	Peak	306	341	7	11570.00	48.58	54.00	-5.42	40.14	8.44	Average	100	351	8	11570.00	64.94	74.00	-9.06	56.50	8.44	Peak	100	351	9	17355.00	57.91	68.20	-10.29	51.85	6.06	Peak	100	246
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5631.00	66.09	68.20	-2.11	65.41	0.68	Peak	283	341																																																																																														
2	5650.00	59.41	68.20	-8.79	58.68	0.73	Peak	350	21																																																																																														
3 *	5785.00	112.88			111.77	1.11	Average	350	21																																																																																														
4 *	5785.00	123.28			122.17	1.11	Peak	350	21																																																																																														
5	5925.00	60.68	68.20	-7.52	59.16	1.52	Peak	350	21																																																																																														
6	5939.00	66.40	68.20	-1.80	64.88	1.52	Peak	306	341																																																																																														
7	11570.00	48.58	54.00	-5.42	40.14	8.44	Average	100	351																																																																																														
8	11570.00	64.94	74.00	-9.06	56.50	8.44	Peak	100	351																																																																																														
9	17355.00	57.91	68.20	-10.29	51.85	6.06	Peak	100	246																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																							

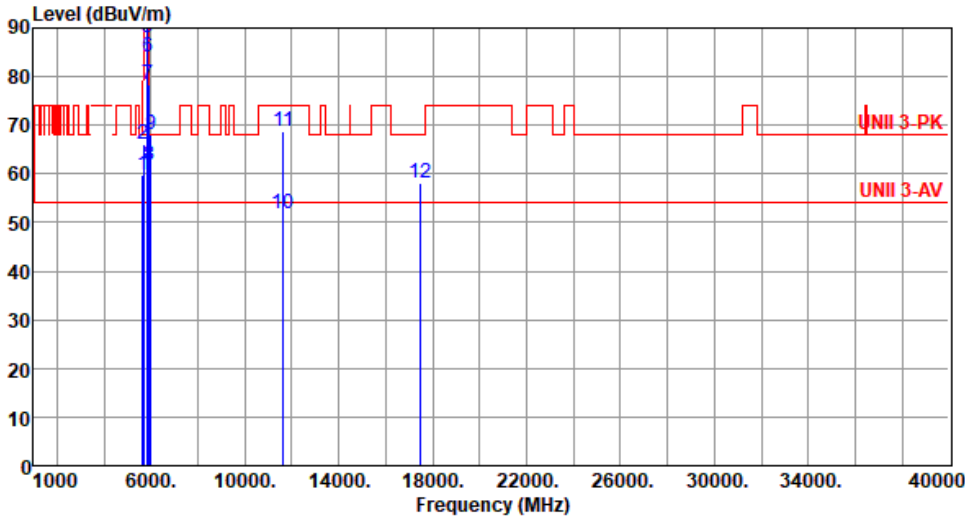

Modulation	11a	Test Freq. (MHz)	5825						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):25 Humidity(%):62									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	59.62	68.20	-8.58	58.89	0.73	Peak	168	298
2	5671.00	66.03	83.78	-17.75	65.20	0.83	Peak	168	296
3 *	5825.00	114.05			112.92	1.13	Average	168	298
4 *	5825.00	125.17			124.04	1.13	Peak	168	298
5	5850.00	88.14	122.20	-34.06	86.99	1.15	Peak	168	298
6	5855.00	84.06	110.80	-26.74	82.87	1.19	Peak	168	298
7	5875.00	78.48	105.20	-26.72	77.16	1.32	Peak	168	298
8	5925.00	61.66	68.20	-6.54	60.14	1.52	Peak	168	298
9	5979.00	68.08	68.20	-0.12	66.53	1.55	Peak	183	298
10	11650.00	51.84	54.00	-2.16	43.81	8.03	Average	121	299
11	11650.00	68.88	74.00	-5.12	60.85	8.03	Peak	121	299
12	17475.00	58.01	68.20	-10.19	51.43	6.58	Peak	100	284


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3: "*" is Peak / Average value of fundamental frequency

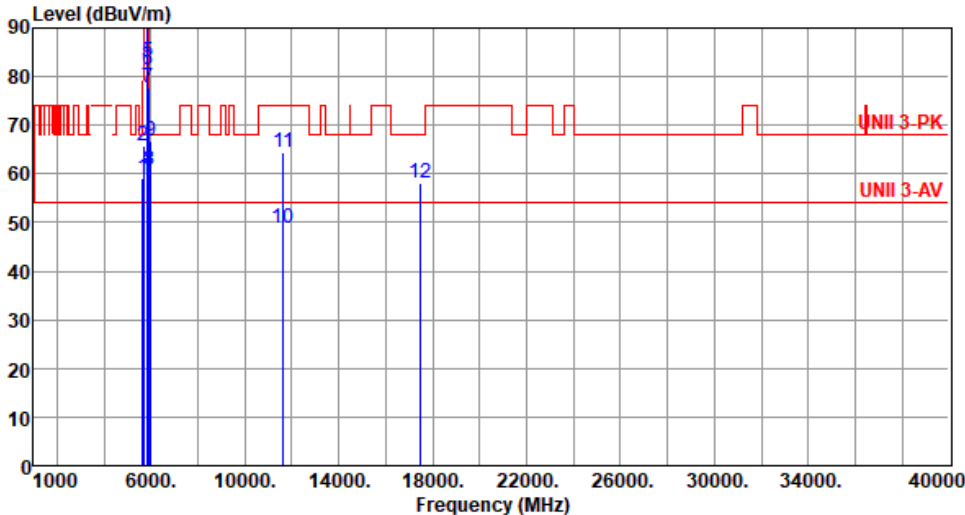

Modulation	11a	Test Freq. (MHz)	5825						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):25 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	59.25	68.20	-8.95	58.52	0.73	Peak	350	17
2	5671.00	65.74	83.78	-18.04	64.91	0.83	Peak	281	340
3 *	5825.00	112.91			111.78	1.13	Average	350	17
4 *	5825.00	123.52			122.39	1.13	Peak	350	17
5	5850.00	82.96	122.20	-39.24	81.81	1.15	Peak	350	17
6	5855.00	81.45	110.80	-29.35	80.26	1.19	Peak	350	17
7	5875.00	77.80	105.20	-27.40	76.48	1.32	Peak	350	17
8	5925.00	60.88	68.20	-7.32	59.36	1.52	Peak	350	17
9	5979.00	66.70	68.20	-1.50	65.15	1.55	Peak	316	344
10	11650.00	48.67	54.00	-5.33	40.64	8.03	Average	100	350
11	11650.00	64.57	74.00	-9.43	56.54	8.03	Peak	100	350
12	17475.00	58.25	68.20	-9.95	51.67	6.58	Peak	100	208

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: "*" is Peak / Average value of fundamental frequency


Unwanted Emissions (Above 1GHz) for be EHT20

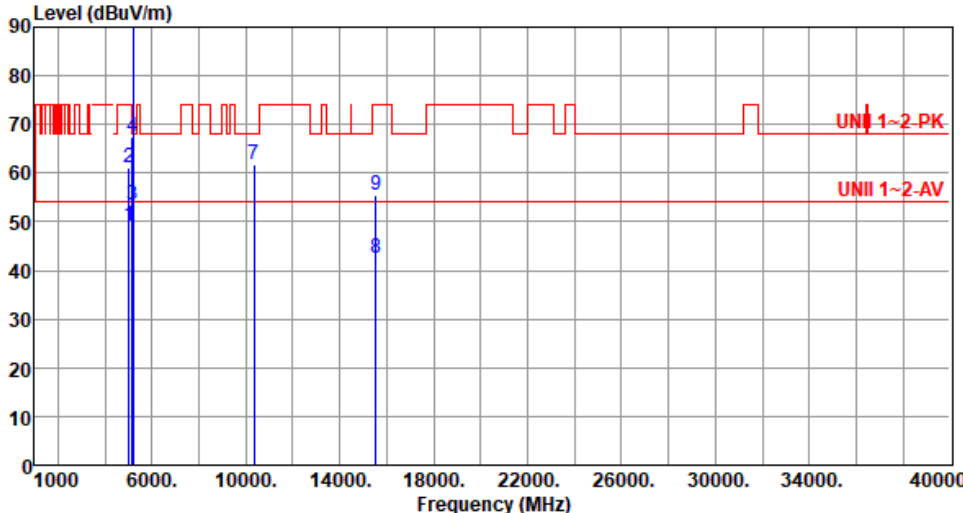Modulation	be EHT20	Test Freq. (MHz)	5180																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																																							
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5026.00</td><td>49.13</td><td>54.00</td><td>-4.87</td><td>48.76</td><td>0.37</td><td>Average</td><td>228</td><td>301</td></tr><tr><td>2</td><td>5026.00</td><td>61.24</td><td>74.00</td><td>-12.76</td><td>60.87</td><td>0.37</td><td>Peak</td><td>228</td><td>301</td></tr><tr><td>3</td><td>5150.00</td><td>53.60</td><td>54.00</td><td>-0.40</td><td>52.88</td><td>0.72</td><td>Average</td><td>228</td><td>301</td></tr><tr><td>4</td><td>5150.00</td><td>67.44</td><td>74.00</td><td>-6.56</td><td>66.72</td><td>0.72</td><td>Peak</td><td>228</td><td>301</td></tr><tr><td>5 *</td><td>5180.00</td><td>104.52</td><td></td><td></td><td>103.85</td><td>0.67</td><td>Average</td><td>228</td><td>301</td></tr><tr><td>6 *</td><td>5180.00</td><td>117.46</td><td></td><td></td><td>116.79</td><td>0.67</td><td>Peak</td><td>228</td><td>301</td></tr><tr><td>7</td><td>10360.00</td><td>61.81</td><td>68.20</td><td>-6.39</td><td>53.62</td><td>8.19</td><td>Peak</td><td>230</td><td>302</td></tr><tr><td>8</td><td>15540.00</td><td>42.52</td><td>54.00</td><td>-11.48</td><td>37.51</td><td>5.01</td><td>Average</td><td>100</td><td>126</td></tr><tr><td>9</td><td>15540.00</td><td>55.43</td><td>74.00</td><td>-18.57</td><td>50.42</td><td>5.01</td><td>Peak</td><td>100</td><td>126</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5026.00	49.13	54.00	-4.87	48.76	0.37	Average	228	301	2	5026.00	61.24	74.00	-12.76	60.87	0.37	Peak	228	301	3	5150.00	53.60	54.00	-0.40	52.88	0.72	Average	228	301	4	5150.00	67.44	74.00	-6.56	66.72	0.72	Peak	228	301	5 *	5180.00	104.52			103.85	0.67	Average	228	301	6 *	5180.00	117.46			116.79	0.67	Peak	228	301	7	10360.00	61.81	68.20	-6.39	53.62	8.19	Peak	230	302	8	15540.00	42.52	54.00	-11.48	37.51	5.01	Average	100	126	9	15540.00	55.43	74.00	-18.57	50.42	5.01	Peak	100	126
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5026.00	49.13	54.00	-4.87	48.76	0.37	Average	228	301																																																																																														
2	5026.00	61.24	74.00	-12.76	60.87	0.37	Peak	228	301																																																																																														
3	5150.00	53.60	54.00	-0.40	52.88	0.72	Average	228	301																																																																																														
4	5150.00	67.44	74.00	-6.56	66.72	0.72	Peak	228	301																																																																																														
5 *	5180.00	104.52			103.85	0.67	Average	228	301																																																																																														
6 *	5180.00	117.46			116.79	0.67	Peak	228	301																																																																																														
7	10360.00	61.81	68.20	-6.39	53.62	8.19	Peak	230	302																																																																																														
8	15540.00	42.52	54.00	-11.48	37.51	5.01	Average	100	126																																																																																														
9	15540.00	55.43	74.00	-18.57	50.42	5.01	Peak	100	126																																																																																														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																							




Modulation	be EHT20	Test Freq. (MHz)	5180
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m)			

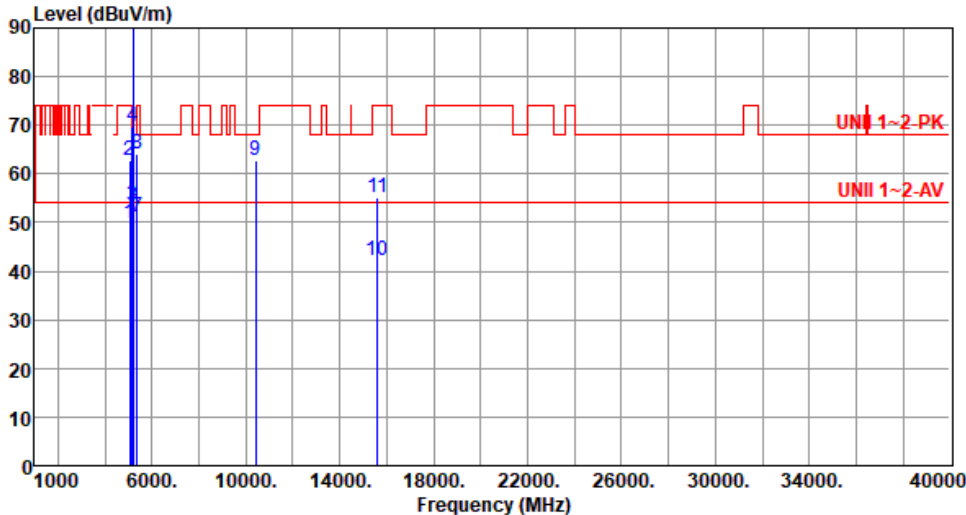

Modulation	be EHT20	Test Freq. (MHz)	5200						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):26 Humidity(%):61									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5046.00	49.98	54.00	-4.02	49.57	0.41	Average	224	301
2	5046.00	62.80	74.00	-11.20	62.39	0.41	Peak	224	301
3	5150.00	53.51	54.00	-0.49	52.79	0.72	Average	228	300
4	5150.00	69.65	74.00	-4.35	68.93	0.72	Peak	228	300
5 *	5200.00	107.38			106.75	0.63	Average	228	300
6 *	5200.00	120.70			120.07	0.63	Peak	228	300
7	5354.00	51.12	54.00	-2.88	50.91	0.21	Average	235	298
8	5354.00	64.05	74.00	-9.95	63.84	0.21	Peak	235	298
9	10400.00	62.67	68.20	-5.53	54.15	8.52	Peak	238	296
10	15600.00	42.23	54.00	-11.77	37.47	4.76	Average	100	284
11	15600.00	55.22	74.00	-18.78	50.46	4.76	Peak	100	284


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

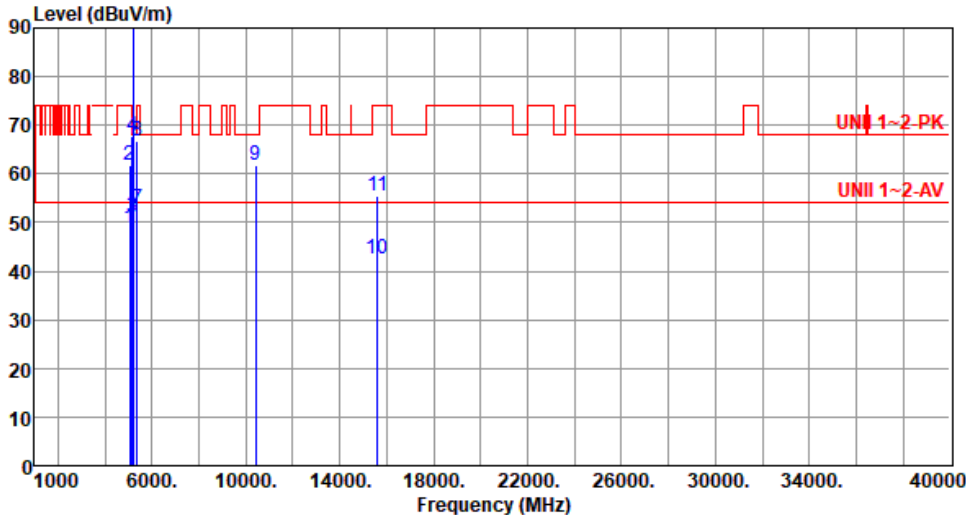

Modulation	be EHT20	Test Freq. (MHz)	5200						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):26 Humidity(%):61									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5046.00	48.75	54.00	-5.25	48.34	0.41	Average	344	343
2	5046.00	61.92	74.00	-12.08	61.51	0.41	Peak	344	343
3	5150.00	51.27	54.00	-2.73	50.55	0.72	Average	335	346
4	5150.00	67.81	74.00	-6.19	67.09	0.72	Peak	335	346
5 *	5200.00	106.91			106.28	0.63	Average	335	346
6 *	5200.00	119.46			118.83	0.63	Peak	335	346
7	5354.00	52.89	54.00	-1.11	52.68	0.21	Average	303	344
8	5354.00	66.65	74.00	-7.35	66.44	0.21	Peak	303	344
9	10400.00	61.93	68.20	-6.27	53.41	8.52	Peak	100	1
10	15600.00	42.38	54.00	-11.62	37.62	4.76	Average	100	238
11	15600.00	55.42	74.00	-18.58	50.66	4.76	Peak	100	238


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3: "*" is Peak / Average value of fundamental frequency

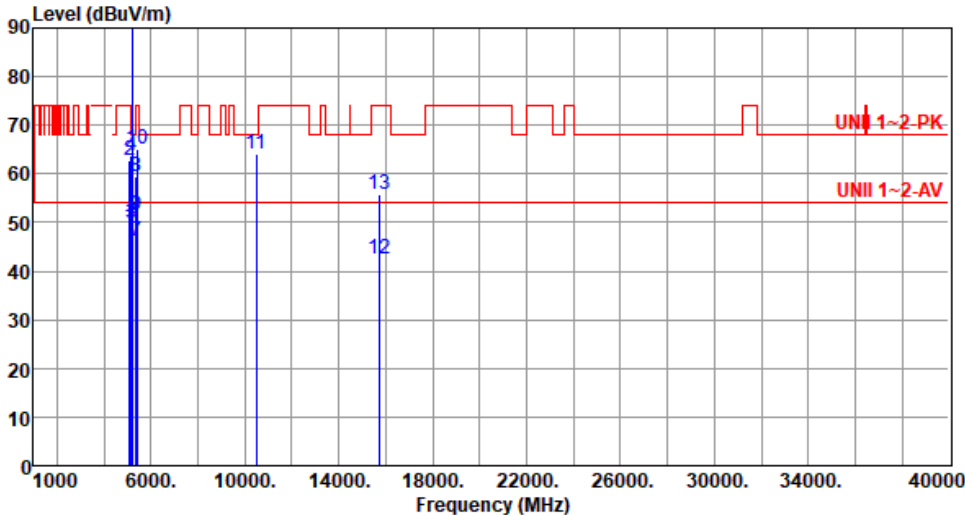

Modulation	be EHT20	Test Freq. (MHz)	5240						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):25 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5086.00	49.12	54.00	-4.88	48.48	0.64	Average	228	300
2	5086.00	62.67	74.00	-11.33	62.03	0.64	Peak	228	300
3	5150.00	49.96	54.00	-4.04	49.24	0.72	Average	224	303
4	5150.00	63.83	74.00	-10.17	63.11	0.72	Peak	224	303
5 *	5240.00	108.26			107.85	0.41	Average	214	303
6 *	5240.00	121.22			120.81	0.41	Peak	214	303
7	5350.00	46.21	54.00	-7.79	46.00	0.21	Average	224	303
8	5350.00	59.30	74.00	-14.70	59.09	0.21	Peak	224	303
9	5394.00	51.36	54.00	-2.64	51.13	0.23	Average	239	296
10	5394.00	65.08	74.00	-8.92	64.85	0.23	Peak	239	296
11	10480.00	63.98	68.20	-4.22	55.43	8.55	Peak	233	299
12	15720.00	42.66	54.00	-11.34	37.62	5.04	Average	100	108
13	15720.00	55.72	74.00	-18.28	50.68	5.04	Peak	100	108

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: "*" is Peak / Average value of fundamental frequency

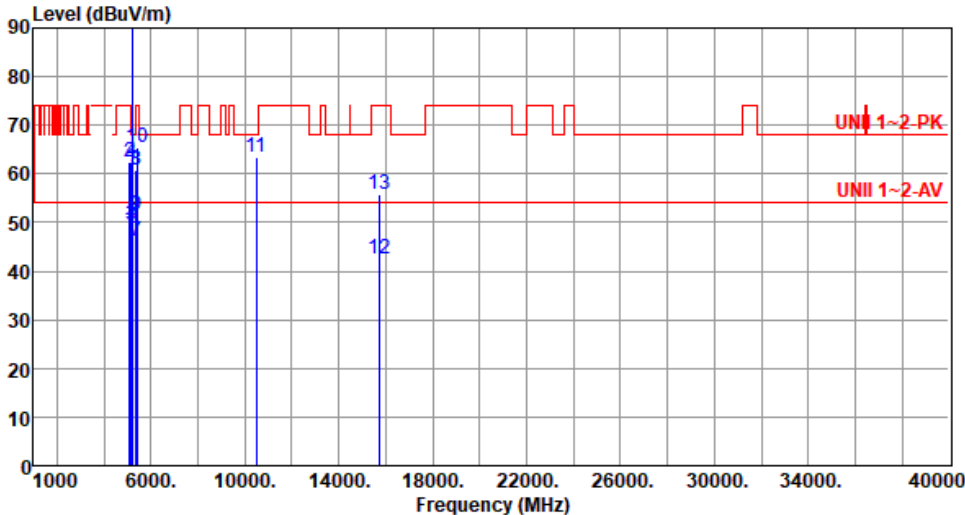

Modulation	be EHT20	Test Freq. (MHz)	5240																																																																																																																																													
Polarization	Vertical																																																																																																																																															
Test By :Sean Yu Temperature(°C):25 Humidity(%):62																																																																																																																																																
																																																																																																																																																
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5086.00</td><td>48.45</td><td>54.00</td><td>-5.55</td><td>47.81</td><td>0.64</td><td>Average</td><td>276</td><td>348</td></tr><tr><td>2</td><td>5086.00</td><td>62.34</td><td>74.00</td><td>-11.66</td><td>61.70</td><td>0.64</td><td>Peak</td><td>276</td><td>348</td></tr><tr><td>3</td><td>5150.00</td><td>49.53</td><td>54.00</td><td>-4.47</td><td>48.81</td><td>0.72</td><td>Average</td><td>311</td><td>345</td></tr><tr><td>4</td><td>5150.00</td><td>62.28</td><td>74.00</td><td>-11.72</td><td>61.56</td><td>0.72</td><td>Peak</td><td>311</td><td>345</td></tr><tr><td>5 *</td><td>5240.00</td><td>108.35</td><td></td><td></td><td>107.94</td><td>0.41</td><td>Average</td><td>311</td><td>345</td></tr><tr><td>6 *</td><td>5240.00</td><td>120.82</td><td></td><td></td><td>120.41</td><td>0.41</td><td>Peak</td><td>311</td><td>345</td></tr><tr><td>7</td><td>5350.00</td><td>46.32</td><td>54.00</td><td>-7.68</td><td>46.11</td><td>0.21</td><td>Average</td><td>311</td><td>345</td></tr><tr><td>8</td><td>5350.00</td><td>60.86</td><td>74.00</td><td>-13.14</td><td>60.65</td><td>0.21</td><td>Peak</td><td>311</td><td>345</td></tr><tr><td>9</td><td>5394.00</td><td>51.64</td><td>54.00</td><td>-2.36</td><td>51.41</td><td>0.23</td><td>Average</td><td>277</td><td>351</td></tr><tr><td>10</td><td>5394.00</td><td>65.30</td><td>74.00</td><td>-8.70</td><td>65.07</td><td>0.23</td><td>Peak</td><td>277</td><td>351</td></tr><tr><td>11</td><td>10480.00</td><td>63.34</td><td>68.20</td><td>-4.86</td><td>54.79</td><td>8.55</td><td>Peak</td><td>100</td><td>2</td></tr><tr><td>12</td><td>15720.00</td><td>42.55</td><td>54.00</td><td>-11.45</td><td>37.51</td><td>5.04</td><td>Average</td><td>100</td><td>148</td></tr><tr><td>13</td><td>15720.00</td><td>55.70</td><td>74.00</td><td>-18.30</td><td>50.66</td><td>5.04</td><td>Peak</td><td>100</td><td>148</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5086.00	48.45	54.00	-5.55	47.81	0.64	Average	276	348	2	5086.00	62.34	74.00	-11.66	61.70	0.64	Peak	276	348	3	5150.00	49.53	54.00	-4.47	48.81	0.72	Average	311	345	4	5150.00	62.28	74.00	-11.72	61.56	0.72	Peak	311	345	5 *	5240.00	108.35			107.94	0.41	Average	311	345	6 *	5240.00	120.82			120.41	0.41	Peak	311	345	7	5350.00	46.32	54.00	-7.68	46.11	0.21	Average	311	345	8	5350.00	60.86	74.00	-13.14	60.65	0.21	Peak	311	345	9	5394.00	51.64	54.00	-2.36	51.41	0.23	Average	277	351	10	5394.00	65.30	74.00	-8.70	65.07	0.23	Peak	277	351	11	10480.00	63.34	68.20	-4.86	54.79	8.55	Peak	100	2	12	15720.00	42.55	54.00	-11.45	37.51	5.04	Average	100	148	13	15720.00	55.70	74.00	-18.30	50.66	5.04	Peak	100	148			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																																							
1	5086.00	48.45	54.00	-5.55	47.81	0.64	Average	276	348																																																																																																																																							
2	5086.00	62.34	74.00	-11.66	61.70	0.64	Peak	276	348																																																																																																																																							
3	5150.00	49.53	54.00	-4.47	48.81	0.72	Average	311	345																																																																																																																																							
4	5150.00	62.28	74.00	-11.72	61.56	0.72	Peak	311	345																																																																																																																																							
5 *	5240.00	108.35			107.94	0.41	Average	311	345																																																																																																																																							
6 *	5240.00	120.82			120.41	0.41	Peak	311	345																																																																																																																																							
7	5350.00	46.32	54.00	-7.68	46.11	0.21	Average	311	345																																																																																																																																							
8	5350.00	60.86	74.00	-13.14	60.65	0.21	Peak	311	345																																																																																																																																							
9	5394.00	51.64	54.00	-2.36	51.41	0.23	Average	277	351																																																																																																																																							
10	5394.00	65.30	74.00	-8.70	65.07	0.23	Peak	277	351																																																																																																																																							
11	10480.00	63.34	68.20	-4.86	54.79	8.55	Peak	100	2																																																																																																																																							
12	15720.00	42.55	54.00	-11.45	37.51	5.04	Average	100	148																																																																																																																																							
13	15720.00	55.70	74.00	-18.30	50.66	5.04	Peak	100	148																																																																																																																																							
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																																																																



Modulation	be EHT20	Test Freq. (MHz)	5260						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):24 Humidity(%):64									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5106.00	47.89	54.00	-6.11	47.18	0.71	Average	138	288
2	5106.00	61.71	74.00	-12.29	61.00	0.71	Peak	138	288
3	5150.00	43.01	54.00	-10.99	42.29	0.72	Average	127	288
4	5150.00	54.90	74.00	-19.10	54.18	0.72	Peak	127	288
5 *	5260.00	104.34			104.01	0.33	Average	127	288
6 *	5260.00	117.65			117.32	0.33	Peak	127	288
7	5350.00	42.38	54.00	-11.62	42.17	0.21	Average	127	288
8	5350.00	54.32	74.00	-19.68	54.11	0.21	Peak	127	288
9	5414.00	49.99	54.00	-4.01	49.68	0.31	Average	138	288
10	5414.00	62.92	74.00	-11.08	62.61	0.31	Peak	138	288
11	10520.00	57.79	68.20	-10.41	49.36	8.43	Peak	100	33
12	15780.00	42.69	54.00	-11.31	37.86	4.83	Average	100	216
13	15780.00	56.06	74.00	-17.94	51.23	4.83	Peak	100	216

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency




Modulation	be EHT20	Test Freq. (MHz)	5260						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):24 Humidity(%):64									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5106.00	48.73	54.00	-5.27	48.02	0.71	Average	321	340
2	5106.00	62.21	74.00	-11.79	61.50	0.71	Peak	321	340
3	5150.00	43.46	54.00	-10.54	42.74	0.72	Average	321	340
4	5150.00	54.97	74.00	-19.03	54.25	0.72	Peak	321	340
5 *	5260.00	103.70			103.37	0.33	Average	321	340
6 *	5260.00	116.58			116.25	0.33	Peak	321	340
7	5350.00	43.00	54.00	-11.00	42.79	0.21	Average	321	340
8	5350.00	54.50	74.00	-19.50	54.29	0.21	Peak	321	340
9	5414.00	50.16	54.00	-3.84	49.85	0.31	Average	321	340
10	5414.00	63.86	74.00	-10.14	63.55	0.31	Peak	321	340
11	10520.00	58.42	68.20	-9.78	49.99	8.43	Peak	100	3
12	15780.00	42.47	54.00	-11.53	37.64	4.83	Average	100	8
13	15780.00	55.77	74.00	-18.23	50.94	4.83	Peak	100	8

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: "*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5300
Polarization	Horizontal		
Test By :Allen Lee Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) </			

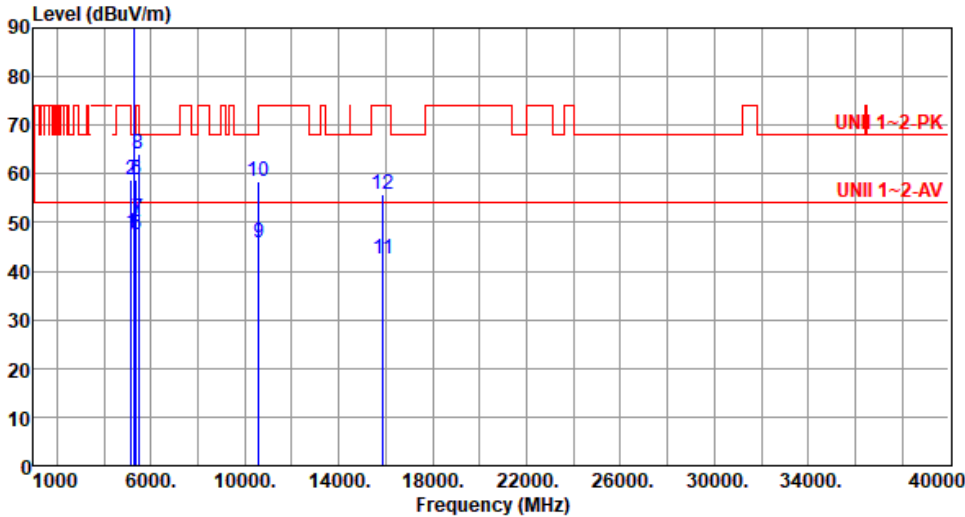


Modulation	be EHT20	Test Freq. (MHz)	5300						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):24 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	47.70	54.00	-6.30	46.98	0.72	Average	278	207
2	5150.00	58.85	74.00	-15.15	58.13	0.72	Peak	278	207
3 *	5300.00	104.30			104.03	0.27	Average	278	207
4 *	5300.00	117.71			117.44	0.27	Peak	278	207
5	5350.00	47.61	54.00	-6.39	47.40	0.21	Average	278	207
6	5350.00	58.87	74.00	-15.13	58.66	0.21	Peak	278	207
7	5454.00	50.94	54.00	-3.06	50.39	0.55	Average	284	213
8	5454.00	64.15	74.00	-9.85	63.60	0.55	Peak	284	213
9	10600.00	45.82	54.00	-8.18	37.44	8.38	Average	100	9
10	10600.00	58.59	74.00	-15.41	50.21	8.38	Peak	100	9
11	15900.00	42.61	54.00	-11.39	37.80	4.81	Average	100	59
12	15900.00	55.74	74.00	-18.26	50.93	4.81	Peak	100	59

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5320
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63			
Level (dBuV/m) </			

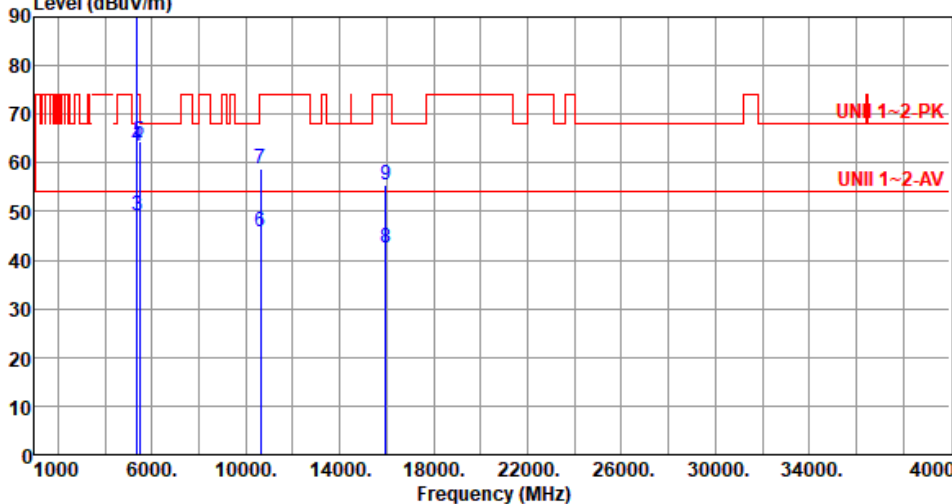


Modulation	be EHT20	Test Freq. (MHz)	5320																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																																																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>5320.00</td><td>104.40</td><td></td><td></td><td>104.15</td><td>0.25</td><td>Average</td><td>303</td><td>345</td></tr><tr><td>2</td><td>*</td><td>5320.00</td><td>117.36</td><td></td><td></td><td>117.11</td><td>0.25</td><td>Peak</td><td>303</td><td>345</td></tr><tr><td>3</td><td></td><td>5350.00</td><td>49.13</td><td>54.00</td><td>-4.87</td><td>48.92</td><td>0.21</td><td>Average</td><td>303</td><td>345</td></tr><tr><td>4</td><td></td><td>5350.00</td><td>63.47</td><td>74.00</td><td>-10.53</td><td>63.26</td><td>0.21</td><td>Peak</td><td>303</td><td>345</td></tr><tr><td>5</td><td></td><td>5474.00</td><td>64.31</td><td>68.20</td><td>-3.89</td><td>63.72</td><td>0.59</td><td>Peak</td><td>288</td><td>346</td></tr><tr><td>6</td><td></td><td>10640.00</td><td>45.95</td><td>54.00</td><td>-8.05</td><td>37.51</td><td>8.44</td><td>Average</td><td>100</td><td>13</td></tr><tr><td>7</td><td></td><td>10640.00</td><td>58.77</td><td>74.00</td><td>-15.23</td><td>50.33</td><td>8.44</td><td>Peak</td><td>100</td><td>13</td></tr><tr><td>8</td><td></td><td>15960.00</td><td>42.36</td><td>54.00</td><td>-11.64</td><td>37.64</td><td>4.72</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>9</td><td></td><td>15960.00</td><td>55.60</td><td>74.00</td><td>-18.40</td><td>50.88</td><td>4.72</td><td>Peak</td><td>100</td><td>208</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency						Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	*	5320.00	104.40			104.15	0.25	Average	303	345	2	*	5320.00	117.36			117.11	0.25	Peak	303	345	3		5350.00	49.13	54.00	-4.87	48.92	0.21	Average	303	345	4		5350.00	63.47	74.00	-10.53	63.26	0.21	Peak	303	345	5		5474.00	64.31	68.20	-3.89	63.72	0.59	Peak	288	346	6		10640.00	45.95	54.00	-8.05	37.51	8.44	Average	100	13	7		10640.00	58.77	74.00	-15.23	50.33	8.44	Peak	100	13	8		15960.00	42.36	54.00	-11.64	37.64	4.72	Average	100	208	9		15960.00	55.60	74.00	-18.40	50.88	4.72	Peak	100	208
		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																							
1	*	5320.00	104.40			104.15	0.25	Average	303	345																																																																																																							
2	*	5320.00	117.36			117.11	0.25	Peak	303	345																																																																																																							
3		5350.00	49.13	54.00	-4.87	48.92	0.21	Average	303	345																																																																																																							
4		5350.00	63.47	74.00	-10.53	63.26	0.21	Peak	303	345																																																																																																							
5		5474.00	64.31	68.20	-3.89	63.72	0.59	Peak	288	346																																																																																																							
6		10640.00	45.95	54.00	-8.05	37.51	8.44	Average	100	13																																																																																																							
7		10640.00	58.77	74.00	-15.23	50.33	8.44	Peak	100	13																																																																																																							
8		15960.00	42.36	54.00	-11.64	37.64	4.72	Average	100	208																																																																																																							
9		15960.00	55.60	74.00	-18.40	50.88	4.72	Peak	100	208																																																																																																							

Modulation	be EHT20	Test Freq. (MHz)	5500
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63			
Level (dBuV/m) </			




Modulation	be EHT20	Test Freq. (MHz)	5500
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63			
Level (dBuV/m)			

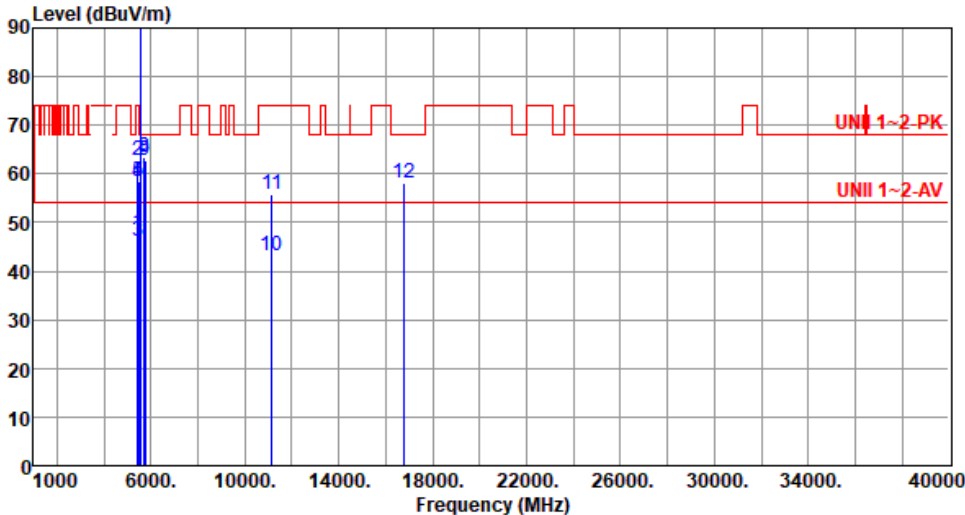

Modulation	be EHT20	Test Freq. (MHz)	5580						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):24 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5426.00	47.86	54.00	-6.14	47.46	0.40	Average	238	304
2	5426.00	62.85	74.00	-11.15	62.45	0.40	Peak	238	304
3	5460.00	46.23	54.00	-7.77	45.67	0.56	Average	238	304
4	5460.00	58.47	74.00	-15.53	57.91	0.56	Peak	238	304
5	5470.00	58.57	68.20	-9.63	57.98	0.59	Peak	238	304
6 *	5580.00	104.53			103.94	0.59	Average	238	304
7 *	5580.00	117.51			116.92	0.59	Peak	238	304
8	5725.00	63.28	68.20	-4.92	62.26	1.02	Peak	238	304
9	5734.00	62.83	68.20	-5.37	61.78	1.05	Peak	238	298
10	11160.00	43.06	54.00	-10.94	34.73	8.33	Average	100	62
11	11160.00	55.84	74.00	-18.16	47.51	8.33	Peak	100	62
12	16740.00	58.03	68.20	-10.17	51.62	6.41	Peak	100	73


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

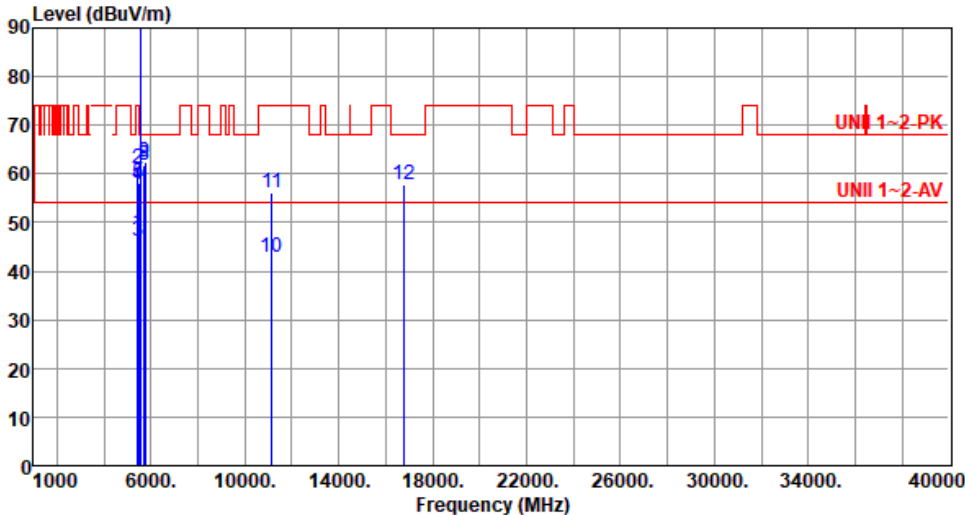

Modulation	be EHT20	Test Freq. (MHz)	5580						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):24 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5426.00	47.92	54.00	-6.08	47.52	0.40	Average	327	350
2	5426.00	61.22	74.00	-12.78	60.82	0.40	Peak	329	350
3	5460.00	46.17	54.00	-7.83	45.61	0.56	Average	329	350
4	5460.00	57.94	74.00	-16.06	57.38	0.56	Peak	329	350
5	5470.00	58.06	68.20	-10.14	57.47	0.59	Peak	329	350
6 *	5580.00	103.96			103.37	0.59	Average	329	350
7 *	5580.00	115.97			115.38	0.59	Peak	329	350
8	5725.00	61.75	68.20	-6.45	60.73	1.02	Peak	329	350
9	5734.00	62.50	68.20	-5.70	61.45	1.05	Peak	331	348
10	11160.00	42.86	54.00	-11.14	34.53	8.33	Average	100	10
11	11160.00	56.08	74.00	-17.92	47.75	8.33	Peak	100	10
12	16740.00	57.70	68.20	-10.50	51.29	6.41	Peak	100	146

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: "*" is Peak / Average value of fundamental frequency

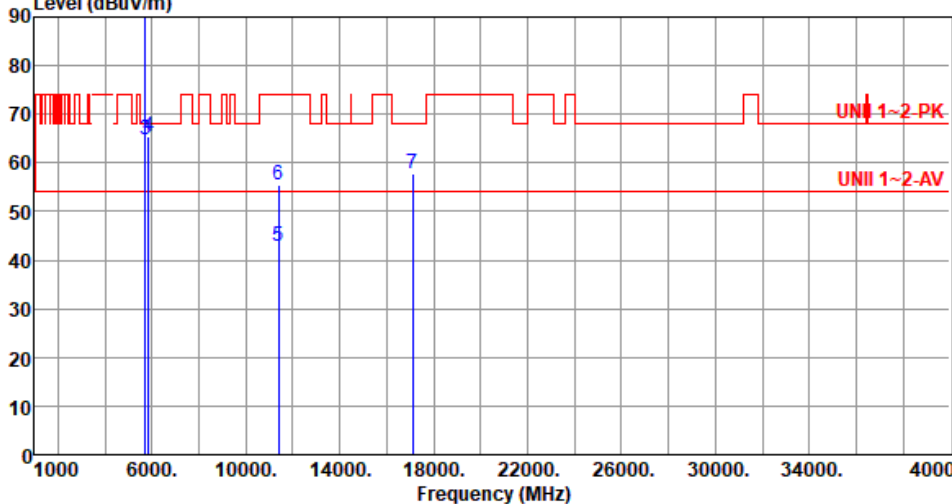


Modulation	be EHT20	Test Freq. (MHz)	5700																																																																																
Polarization	Horizontal																																																																																		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																																			
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1 *</td><td>5700.00</td><td>105.39</td><td></td><td></td><td>104.43</td><td>0.96</td><td>Average</td><td>210</td><td>301</td></tr><tr><td>2 *</td><td>5700.00</td><td>118.61</td><td></td><td></td><td>117.65</td><td>0.96</td><td>Peak</td><td>210</td><td>301</td></tr><tr><td>3</td><td>5725.00</td><td>64.60</td><td>68.20</td><td>-3.60</td><td>63.58</td><td>1.02</td><td>Peak</td><td>210</td><td>301</td></tr><tr><td>4</td><td>5854.00</td><td>65.57</td><td>68.20</td><td>-2.63</td><td>64.39</td><td>1.18</td><td>Peak</td><td>192</td><td>296</td></tr><tr><td>5</td><td>11400.00</td><td>42.92</td><td>54.00</td><td>-11.08</td><td>34.76</td><td>8.16</td><td>Average</td><td>100</td><td>188</td></tr><tr><td>6</td><td>11400.00</td><td>55.59</td><td>74.00</td><td>-18.41</td><td>47.43</td><td>8.16</td><td>Peak</td><td>100</td><td>188</td></tr><tr><td>7</td><td>17100.00</td><td>57.68</td><td>68.20</td><td>-10.52</td><td>51.76</td><td>5.92</td><td>Peak</td><td>100</td><td>203</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	5700.00	105.39			104.43	0.96	Average	210	301	2 *	5700.00	118.61			117.65	0.96	Peak	210	301	3	5725.00	64.60	68.20	-3.60	63.58	1.02	Peak	210	301	4	5854.00	65.57	68.20	-2.63	64.39	1.18	Peak	192	296	5	11400.00	42.92	54.00	-11.08	34.76	8.16	Average	100	188	6	11400.00	55.59	74.00	-18.41	47.43	8.16	Peak	100	188	7	17100.00	57.68	68.20	-10.52	51.76	5.92	Peak	100	203
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1 *	5700.00	105.39			104.43	0.96	Average	210	301																																																																										
2 *	5700.00	118.61			117.65	0.96	Peak	210	301																																																																										
3	5725.00	64.60	68.20	-3.60	63.58	1.02	Peak	210	301																																																																										
4	5854.00	65.57	68.20	-2.63	64.39	1.18	Peak	192	296																																																																										
5	11400.00	42.92	54.00	-11.08	34.76	8.16	Average	100	188																																																																										
6	11400.00	55.59	74.00	-18.41	47.43	8.16	Peak	100	188																																																																										
7	17100.00	57.68	68.20	-10.52	51.76	5.92	Peak	100	203																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																			



Modulation	be EHT20	Test Freq. (MHz)	5700
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63			
Level (dBuV/m) <			

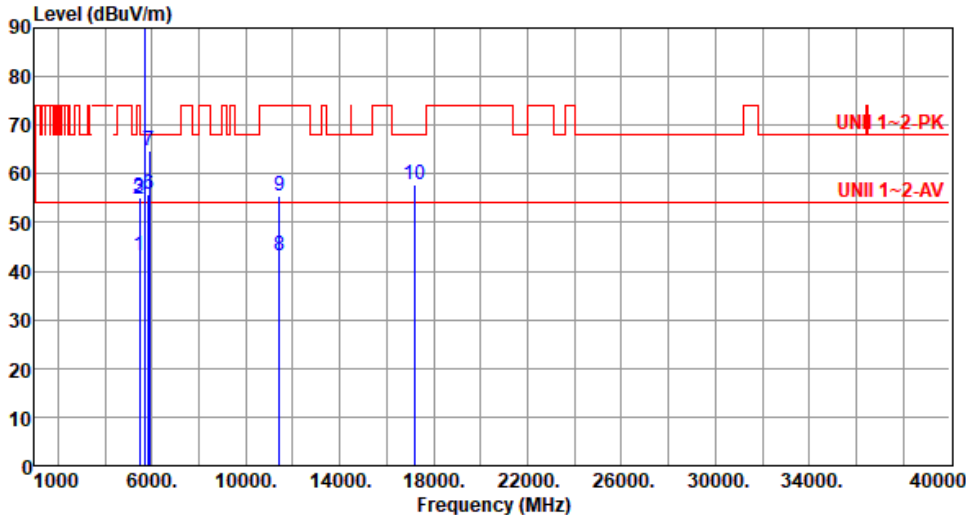

Modulation	be EHT20	Test Freq. (MHz)	5720																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Sean Yu Temperature(°C):24 Humidity(%):64																																																																																																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>43.24</td><td>54.00</td><td>-10.76</td><td>42.68</td><td>0.56</td><td>Average</td><td>199</td><td>291</td></tr><tr><td>2</td><td>5460.00</td><td>54.84</td><td>74.00</td><td>-19.16</td><td>54.28</td><td>0.56</td><td>Peak</td><td>199</td><td>291</td></tr><tr><td>3</td><td>5470.00</td><td>55.15</td><td>68.20</td><td>-13.05</td><td>54.56</td><td>0.59</td><td>Peak</td><td>199</td><td>291</td></tr><tr><td>4 *</td><td>5720.00</td><td>105.08</td><td></td><td></td><td>104.07</td><td>1.01</td><td>Average</td><td>199</td><td>291</td></tr><tr><td>5 *</td><td>5720.00</td><td>117.81</td><td></td><td></td><td>116.80</td><td>1.01</td><td>Peak</td><td>199</td><td>291</td></tr><tr><td>6</td><td>5850.00</td><td>55.82</td><td>68.20</td><td>-12.38</td><td>54.67</td><td>1.15</td><td>Peak</td><td>199</td><td>291</td></tr><tr><td>7</td><td>5874.00</td><td>64.77</td><td>68.20</td><td>-3.43</td><td>63.46</td><td>1.31</td><td>Peak</td><td>203</td><td>291</td></tr><tr><td>8</td><td>11440.00</td><td>43.18</td><td>54.00</td><td>-10.82</td><td>34.94</td><td>8.24</td><td>Average</td><td>100</td><td>192</td></tr><tr><td>9</td><td>11440.00</td><td>55.56</td><td>74.00</td><td>-18.44</td><td>47.32</td><td>8.24</td><td>Peak</td><td>100</td><td>192</td></tr><tr><td>10</td><td>17160.00</td><td>57.75</td><td>68.20</td><td>-10.45</td><td>52.13</td><td>5.62</td><td>Peak</td><td>100</td><td>227</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	43.24	54.00	-10.76	42.68	0.56	Average	199	291	2	5460.00	54.84	74.00	-19.16	54.28	0.56	Peak	199	291	3	5470.00	55.15	68.20	-13.05	54.56	0.59	Peak	199	291	4 *	5720.00	105.08			104.07	1.01	Average	199	291	5 *	5720.00	117.81			116.80	1.01	Peak	199	291	6	5850.00	55.82	68.20	-12.38	54.67	1.15	Peak	199	291	7	5874.00	64.77	68.20	-3.43	63.46	1.31	Peak	203	291	8	11440.00	43.18	54.00	-10.82	34.94	8.24	Average	100	192	9	11440.00	55.56	74.00	-18.44	47.32	8.24	Peak	100	192	10	17160.00	57.75	68.20	-10.45	52.13	5.62	Peak	100	227
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	5460.00	43.24	54.00	-10.76	42.68	0.56	Average	199	291																																																																																																								
2	5460.00	54.84	74.00	-19.16	54.28	0.56	Peak	199	291																																																																																																								
3	5470.00	55.15	68.20	-13.05	54.56	0.59	Peak	199	291																																																																																																								
4 *	5720.00	105.08			104.07	1.01	Average	199	291																																																																																																								
5 *	5720.00	117.81			116.80	1.01	Peak	199	291																																																																																																								
6	5850.00	55.82	68.20	-12.38	54.67	1.15	Peak	199	291																																																																																																								
7	5874.00	64.77	68.20	-3.43	63.46	1.31	Peak	203	291																																																																																																								
8	11440.00	43.18	54.00	-10.82	34.94	8.24	Average	100	192																																																																																																								
9	11440.00	55.56	74.00	-18.44	47.32	8.24	Peak	100	192																																																																																																								
10	17160.00	57.75	68.20	-10.45	52.13	5.62	Peak	100	227																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																																	




Modulation	be EHT20	Test Freq. (MHz)	5720
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			



Modulation	be EHT20	Test Freq. (MHz)	5745
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):25 Humidity(%):62			
Level (dBuV/m) </			

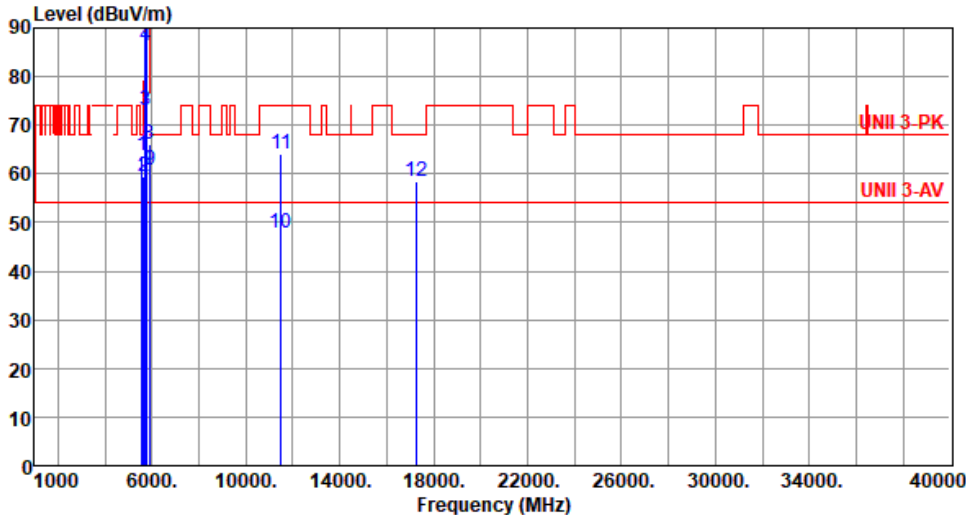


Modulation	be EHT20	Test Freq. (MHz)	5745						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):25 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5591.00	63.74	68.20	-4.46	63.15	0.59	Peak	333	341
2	5650.00	59.45	68.20	-8.75	58.72	0.73	Peak	331	373
3	5700.00	73.18	105.20	-32.02	72.22	0.96	Peak	331	373
4	5720.00	86.37	110.80	-24.43	85.36	1.01	Peak	331	373
5	5725.00	89.42	122.20	-32.78	88.40	1.02	Peak	331	373
6 *	5745.00	107.89			106.82	1.07	Average	331	373
7 *	5745.00	121.14			120.07	1.07	Peak	331	373
8	5899.00	66.09	87.40	-21.31	64.61	1.48	Peak	239	336
9	5925.00	60.83	68.20	-7.37	59.31	1.52	Peak	331	373
10	11490.00	47.73	54.00	-6.27	39.23	8.50	Average	100	352
11	11490.00	63.96	74.00	-10.04	55.46	8.50	Peak	100	352
12	17235.00	58.50	68.20	-9.70	52.87	5.63	Peak	100	203

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency




Modulation	be EHT20	Test Freq. (MHz)	5785																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Sean Yu Temperature(°C):25 Humidity(%):62																																																																																																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5631.00</td><td>63.99</td><td>68.20</td><td>-4.21</td><td>63.31</td><td>0.68</td><td>Peak</td><td>215</td><td>297</td></tr><tr><td>2</td><td>5650.00</td><td>59.26</td><td>68.20</td><td>-8.94</td><td>58.53</td><td>0.73</td><td>Peak</td><td>194</td><td>303</td></tr><tr><td>3 *</td><td>5785.00</td><td>109.61</td><td></td><td></td><td>108.50</td><td>1.11</td><td>Average</td><td>194</td><td>303</td></tr><tr><td>4 *</td><td>5785.00</td><td>122.69</td><td></td><td></td><td>121.58</td><td>1.11</td><td>Peak</td><td>194</td><td>303</td></tr><tr><td>5</td><td>5925.00</td><td>61.03</td><td>68.20</td><td>-7.17</td><td>59.51</td><td>1.52</td><td>Peak</td><td>194</td><td>303</td></tr><tr><td>6</td><td>5939.00</td><td>67.94</td><td>68.20</td><td>-0.26</td><td>66.42</td><td>1.52</td><td>Peak</td><td>197</td><td>297</td></tr><tr><td>7</td><td>11570.00</td><td>50.90</td><td>54.00</td><td>-3.10</td><td>42.46</td><td>8.44</td><td>Average</td><td>117</td><td>294</td></tr><tr><td>8</td><td>11570.00</td><td>64.74</td><td>74.00</td><td>-9.26</td><td>56.30</td><td>8.44</td><td>Peak</td><td>117</td><td>294</td></tr><tr><td>9</td><td>17355.00</td><td>58.85</td><td>68.20</td><td>-9.35</td><td>52.79</td><td>6.06</td><td>Peak</td><td>100</td><td>148</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5631.00	63.99	68.20	-4.21	63.31	0.68	Peak	215	297	2	5650.00	59.26	68.20	-8.94	58.53	0.73	Peak	194	303	3 *	5785.00	109.61			108.50	1.11	Average	194	303	4 *	5785.00	122.69			121.58	1.11	Peak	194	303	5	5925.00	61.03	68.20	-7.17	59.51	1.52	Peak	194	303	6	5939.00	67.94	68.20	-0.26	66.42	1.52	Peak	197	297	7	11570.00	50.90	54.00	-3.10	42.46	8.44	Average	117	294	8	11570.00	64.74	74.00	-9.26	56.30	8.44	Peak	117	294	9	17355.00	58.85	68.20	-9.35	52.79	6.06	Peak	100	148
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5631.00	63.99	68.20	-4.21	63.31	0.68	Peak	215	297																																																																																														
2	5650.00	59.26	68.20	-8.94	58.53	0.73	Peak	194	303																																																																																														
3 *	5785.00	109.61			108.50	1.11	Average	194	303																																																																																														
4 *	5785.00	122.69			121.58	1.11	Peak	194	303																																																																																														
5	5925.00	61.03	68.20	-7.17	59.51	1.52	Peak	194	303																																																																																														
6	5939.00	67.94	68.20	-0.26	66.42	1.52	Peak	197	297																																																																																														
7	11570.00	50.90	54.00	-3.10	42.46	8.44	Average	117	294																																																																																														
8	11570.00	64.74	74.00	-9.26	56.30	8.44	Peak	117	294																																																																																														
9	17355.00	58.85	68.20	-9.35	52.79	6.06	Peak	100	148																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																							

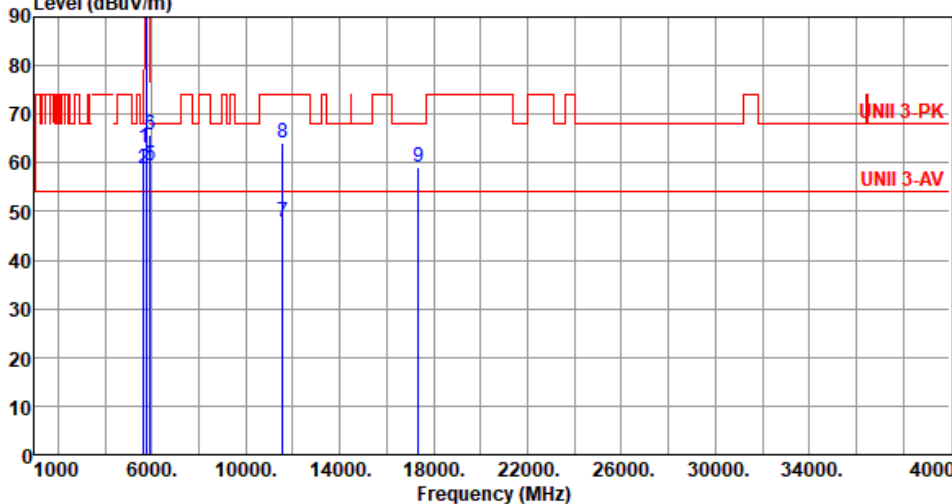


Modulation	be EHT20	Test Freq. (MHz)	5785																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Sean Yu Temperature(°C):25 Humidity(%):62																																																																																																							
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5631.00</td><td>62.94</td><td>68.20</td><td>-5.26</td><td>62.26</td><td>0.68</td><td>Peak</td><td>310</td><td>333</td></tr><tr><td>2</td><td>5650.00</td><td>58.69</td><td>68.20</td><td>-9.51</td><td>57.96</td><td>0.73</td><td>Peak</td><td>310</td><td>341</td></tr><tr><td>3 *</td><td>5785.00</td><td>108.15</td><td></td><td></td><td>107.04</td><td>1.11</td><td>Average</td><td>310</td><td>341</td></tr><tr><td>4 *</td><td>5785.00</td><td>121.30</td><td></td><td></td><td>120.19</td><td>1.11</td><td>Peak</td><td>310</td><td>341</td></tr><tr><td>5</td><td>5925.00</td><td>59.49</td><td>68.20</td><td>-8.71</td><td>57.97</td><td>1.52</td><td>Peak</td><td>310</td><td>341</td></tr><tr><td>6</td><td>5939.00</td><td>65.82</td><td>68.20</td><td>-2.38</td><td>64.30</td><td>1.52</td><td>Peak</td><td>307</td><td>317</td></tr><tr><td>7</td><td>11570.00</td><td>47.86</td><td>54.00</td><td>-6.14</td><td>39.42</td><td>8.44</td><td>Average</td><td>100</td><td>346</td></tr><tr><td>8</td><td>11570.00</td><td>64.05</td><td>74.00</td><td>-9.95</td><td>55.61</td><td>8.44</td><td>Peak</td><td>100</td><td>346</td></tr><tr><td>9</td><td>17355.00</td><td>59.09</td><td>68.20</td><td>-9.11</td><td>53.03</td><td>6.06</td><td>Peak</td><td>100</td><td>223</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5631.00	62.94	68.20	-5.26	62.26	0.68	Peak	310	333	2	5650.00	58.69	68.20	-9.51	57.96	0.73	Peak	310	341	3 *	5785.00	108.15			107.04	1.11	Average	310	341	4 *	5785.00	121.30			120.19	1.11	Peak	310	341	5	5925.00	59.49	68.20	-8.71	57.97	1.52	Peak	310	341	6	5939.00	65.82	68.20	-2.38	64.30	1.52	Peak	307	317	7	11570.00	47.86	54.00	-6.14	39.42	8.44	Average	100	346	8	11570.00	64.05	74.00	-9.95	55.61	8.44	Peak	100	346	9	17355.00	59.09	68.20	-9.11	53.03	6.06	Peak	100	223
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5631.00	62.94	68.20	-5.26	62.26	0.68	Peak	310	333																																																																																														
2	5650.00	58.69	68.20	-9.51	57.96	0.73	Peak	310	341																																																																																														
3 *	5785.00	108.15			107.04	1.11	Average	310	341																																																																																														
4 *	5785.00	121.30			120.19	1.11	Peak	310	341																																																																																														
5	5925.00	59.49	68.20	-8.71	57.97	1.52	Peak	310	341																																																																																														
6	5939.00	65.82	68.20	-2.38	64.30	1.52	Peak	307	317																																																																																														
7	11570.00	47.86	54.00	-6.14	39.42	8.44	Average	100	346																																																																																														
8	11570.00	64.05	74.00	-9.95	55.61	8.44	Peak	100	346																																																																																														
9	17355.00	59.09	68.20	-9.11	53.03	6.06	Peak	100	223																																																																																														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																							

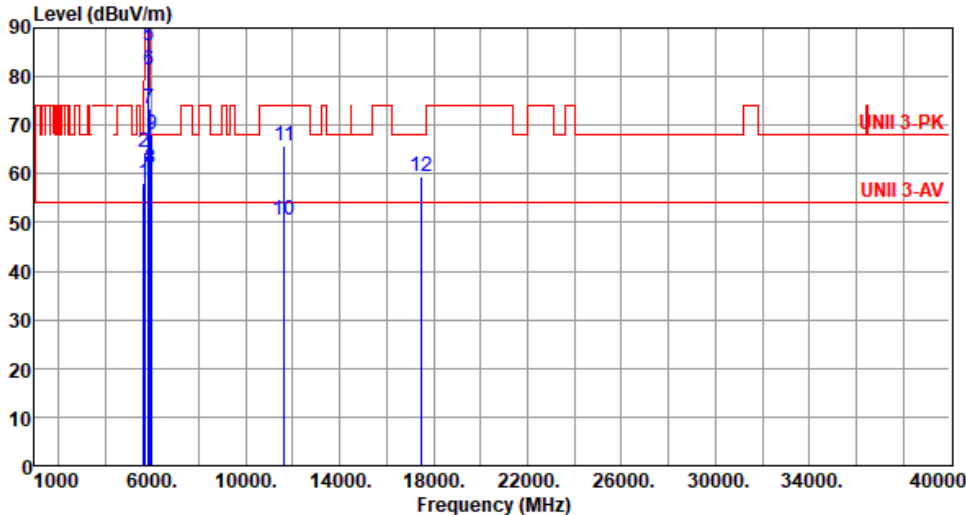

Modulation	be EHT20	Test Freq. (MHz)	5825																																																																																																																																			
Polarization	Horizontal																																																																																																																																					
Test By :Sean Yu Temperature(°C):25 Humidity(%):62																																																																																																																																						
																																																																																																																																						
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5650.00</td><td>57.99</td><td>68.20</td><td>-10.21</td><td>57.26</td><td>0.73</td><td>Peak</td><td>180</td><td>300</td></tr><tr><td>2</td><td>5671.00</td><td>64.38</td><td>83.78</td><td>-19.40</td><td>63.55</td><td>0.83</td><td>Peak</td><td>205</td><td>295</td></tr><tr><td>3 *</td><td>5825.00</td><td>109.57</td><td></td><td></td><td>108.44</td><td>1.13</td><td>Average</td><td>180</td><td>300</td></tr><tr><td>4 *</td><td>5825.00</td><td>122.63</td><td></td><td></td><td>121.50</td><td>1.13</td><td>Peak</td><td>180</td><td>300</td></tr><tr><td>5</td><td>5850.00</td><td>86.36</td><td>122.20</td><td>-35.84</td><td>85.21</td><td>1.15</td><td>Peak</td><td>180</td><td>300</td></tr><tr><td>6</td><td>5855.00</td><td>81.41</td><td>110.80</td><td>-29.39</td><td>80.22</td><td>1.19</td><td>Peak</td><td>180</td><td>300</td></tr><tr><td>7</td><td>5875.00</td><td>73.43</td><td>105.20</td><td>-31.77</td><td>72.11</td><td>1.32</td><td>Peak</td><td>180</td><td>300</td></tr><tr><td>8</td><td>5925.00</td><td>61.17</td><td>68.20</td><td>-7.03</td><td>59.65</td><td>1.52</td><td>Peak</td><td>180</td><td>300</td></tr><tr><td>9</td><td>5979.00</td><td>68.02</td><td>68.20</td><td>-0.18</td><td>66.47</td><td>1.55</td><td>Peak</td><td>186</td><td>297</td></tr><tr><td>10</td><td>11650.00</td><td>50.60</td><td>54.00</td><td>-3.40</td><td>42.57</td><td>8.03</td><td>Average</td><td>128</td><td>297</td></tr><tr><td>11</td><td>11650.00</td><td>65.70</td><td>74.00</td><td>-8.30</td><td>57.67</td><td>8.03</td><td>Peak</td><td>128</td><td>297</td></tr><tr><td>12</td><td>17475.00</td><td>59.60</td><td>68.20</td><td>-8.60</td><td>53.02</td><td>6.58</td><td>Peak</td><td>100</td><td>185</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	57.99	68.20	-10.21	57.26	0.73	Peak	180	300	2	5671.00	64.38	83.78	-19.40	63.55	0.83	Peak	205	295	3 *	5825.00	109.57			108.44	1.13	Average	180	300	4 *	5825.00	122.63			121.50	1.13	Peak	180	300	5	5850.00	86.36	122.20	-35.84	85.21	1.15	Peak	180	300	6	5855.00	81.41	110.80	-29.39	80.22	1.19	Peak	180	300	7	5875.00	73.43	105.20	-31.77	72.11	1.32	Peak	180	300	8	5925.00	61.17	68.20	-7.03	59.65	1.52	Peak	180	300	9	5979.00	68.02	68.20	-0.18	66.47	1.55	Peak	186	297	10	11650.00	50.60	54.00	-3.40	42.57	8.03	Average	128	297	11	11650.00	65.70	74.00	-8.30	57.67	8.03	Peak	128	297	12	17475.00	59.60	68.20	-8.60	53.02	6.58	Peak	100	185			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																													
1	5650.00	57.99	68.20	-10.21	57.26	0.73	Peak	180	300																																																																																																																													
2	5671.00	64.38	83.78	-19.40	63.55	0.83	Peak	205	295																																																																																																																													
3 *	5825.00	109.57			108.44	1.13	Average	180	300																																																																																																																													
4 *	5825.00	122.63			121.50	1.13	Peak	180	300																																																																																																																													
5	5850.00	86.36	122.20	-35.84	85.21	1.15	Peak	180	300																																																																																																																													
6	5855.00	81.41	110.80	-29.39	80.22	1.19	Peak	180	300																																																																																																																													
7	5875.00	73.43	105.20	-31.77	72.11	1.32	Peak	180	300																																																																																																																													
8	5925.00	61.17	68.20	-7.03	59.65	1.52	Peak	180	300																																																																																																																													
9	5979.00	68.02	68.20	-0.18	66.47	1.55	Peak	186	297																																																																																																																													
10	11650.00	50.60	54.00	-3.40	42.57	8.03	Average	128	297																																																																																																																													
11	11650.00	65.70	74.00	-8.30	57.67	8.03	Peak	128	297																																																																																																																													
12	17475.00	59.60	68.20	-8.60	53.02	6.58	Peak	100	185																																																																																																																													
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																																																						

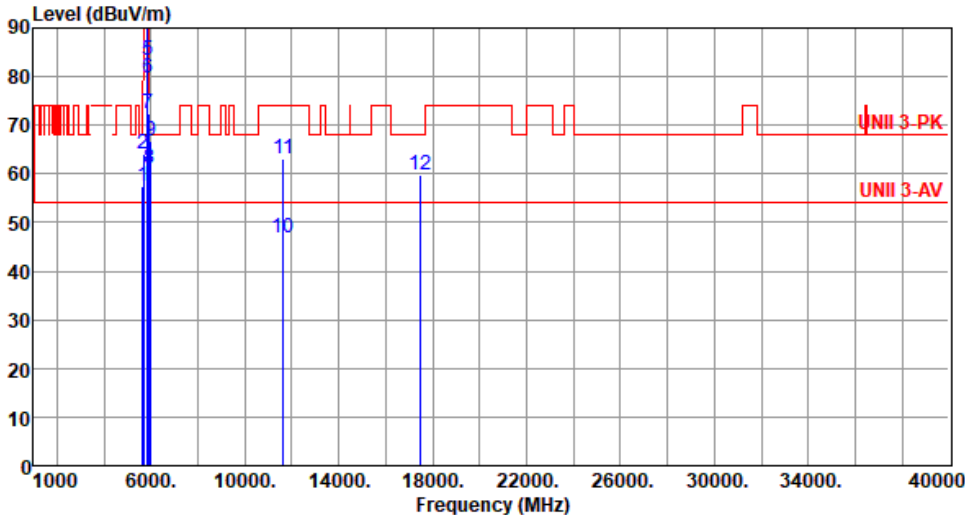

Modulation	be EHT20	Test Freq. (MHz)	5825						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):25 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	57.58	68.20	-10.62	56.85	0.73	Peak	350	344
2	5671.00	64.06	83.78	-19.72	63.23	0.83	Peak	337	327
3 *	5825.00	108.26			107.13	1.13	Average	350	344
4 *	5825.00	121.31			120.18	1.13	Peak	350	344
5	5850.00	83.38	122.20	-38.82	82.23	1.15	Peak	350	344
6	5855.00	79.82	110.80	-30.98	78.63	1.19	Peak	350	344
7	5875.00	72.25	105.20	-32.95	70.93	1.32	Peak	350	344
8	5925.00	60.95	68.20	-7.25	59.43	1.52	Peak	350	344
9	5979.00	66.91	68.20	-1.29	65.36	1.55	Peak	349	342
10	11650.00	46.98	54.00	-7.02	38.95	8.03	Average	100	357
11	11650.00	63.26	74.00	-10.74	55.23	8.03	Peak	100	357
12	17475.00	59.69	68.20	-8.51	53.11	6.58	Peak	100	195


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: "*" is Peak / Average value of fundamental frequency



Unwanted Emissions (Above 1GHz) for be EHT40

Modulation	be EHT40	Test Freq. (MHz)	5190																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Brad Wu Temperature(°C):26 Humidity(%):61																																																																																																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5036.00</td><td>47.23</td><td>54.00</td><td>-6.77</td><td>46.85</td><td>0.38</td><td>Average</td><td>233</td><td>303</td></tr><tr><td>2</td><td>5036.00</td><td>59.96</td><td>74.00</td><td>-14.04</td><td>59.58</td><td>0.38</td><td>Peak</td><td>233</td><td>303</td></tr><tr><td>3</td><td>5150.00</td><td>53.57</td><td>54.00</td><td>-0.43</td><td>52.85</td><td>0.72</td><td>Average</td><td>227</td><td>298</td></tr><tr><td>4</td><td>5150.00</td><td>69.30</td><td>74.00</td><td>-4.70</td><td>68.58</td><td>0.72</td><td>Peak</td><td>227</td><td>298</td></tr><tr><td>5 *</td><td>5190.00</td><td>102.34</td><td></td><td></td><td>101.70</td><td>0.64</td><td>Average</td><td>227</td><td>298</td></tr><tr><td>6 *</td><td>5190.00</td><td>115.24</td><td></td><td></td><td>114.60</td><td>0.64</td><td>Peak</td><td>227</td><td>298</td></tr><tr><td>7</td><td>10380.00</td><td>59.01</td><td>68.20</td><td>-9.19</td><td>50.65</td><td>8.36</td><td>Peak</td><td>234</td><td>310</td></tr><tr><td>8</td><td>15570.00</td><td>42.34</td><td>54.00</td><td>-11.66</td><td>37.45</td><td>4.89</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>9</td><td>15570.00</td><td>55.22</td><td>74.00</td><td>-18.78</td><td>50.33</td><td>4.89</td><td>Peak</td><td>100</td><td>208</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5036.00	47.23	54.00	-6.77	46.85	0.38	Average	233	303	2	5036.00	59.96	74.00	-14.04	59.58	0.38	Peak	233	303	3	5150.00	53.57	54.00	-0.43	52.85	0.72	Average	227	298	4	5150.00	69.30	74.00	-4.70	68.58	0.72	Peak	227	298	5 *	5190.00	102.34			101.70	0.64	Average	227	298	6 *	5190.00	115.24			114.60	0.64	Peak	227	298	7	10380.00	59.01	68.20	-9.19	50.65	8.36	Peak	234	310	8	15570.00	42.34	54.00	-11.66	37.45	4.89	Average	100	208	9	15570.00	55.22	74.00	-18.78	50.33	4.89	Peak	100	208
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5036.00	47.23	54.00	-6.77	46.85	0.38	Average	233	303																																																																																														
2	5036.00	59.96	74.00	-14.04	59.58	0.38	Peak	233	303																																																																																														
3	5150.00	53.57	54.00	-0.43	52.85	0.72	Average	227	298																																																																																														
4	5150.00	69.30	74.00	-4.70	68.58	0.72	Peak	227	298																																																																																														
5 *	5190.00	102.34			101.70	0.64	Average	227	298																																																																																														
6 *	5190.00	115.24			114.60	0.64	Peak	227	298																																																																																														
7	10380.00	59.01	68.20	-9.19	50.65	8.36	Peak	234	310																																																																																														
8	15570.00	42.34	54.00	-11.66	37.45	4.89	Average	100	208																																																																																														
9	15570.00	55.22	74.00	-18.78	50.33	4.89	Peak	100	208																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																							

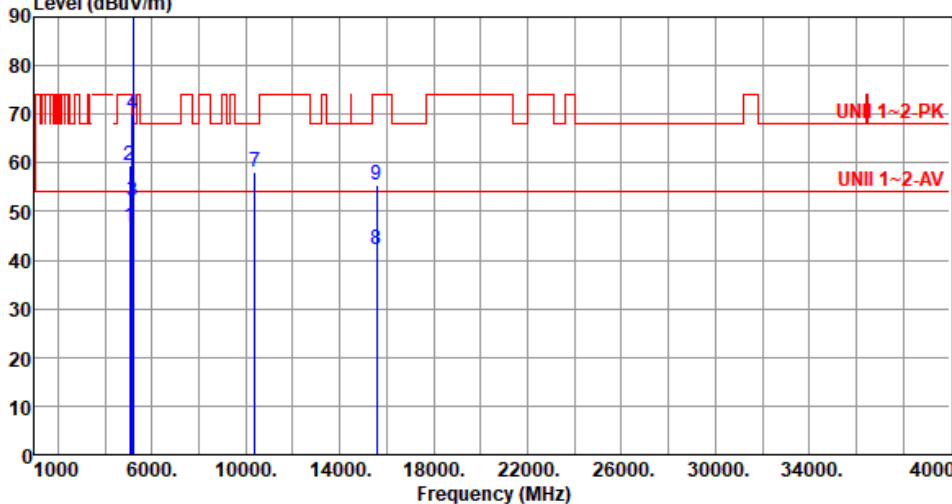


Modulation	be EHT40	Test Freq. (MHz)	5190																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Brad Wu Temperature(°C):26 Humidity(%):61																																																																																																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5036.00</td><td>46.79</td><td>54.00</td><td>-7.21</td><td>46.41</td><td>0.38</td><td>Average</td><td>312</td><td>350</td></tr><tr><td>2</td><td>5036.00</td><td>59.59</td><td>74.00</td><td>-14.41</td><td>59.21</td><td>0.38</td><td>Peak</td><td>312</td><td>350</td></tr><tr><td>3</td><td>5150.00</td><td>52.28</td><td>54.00</td><td>-1.72</td><td>51.56</td><td>0.72</td><td>Average</td><td>312</td><td>343</td></tr><tr><td>4</td><td>5150.00</td><td>70.01</td><td>74.00</td><td>-3.99</td><td>69.29</td><td>0.72</td><td>Peak</td><td>312</td><td>343</td></tr><tr><td>5 *</td><td>5190.00</td><td>101.59</td><td></td><td></td><td>100.95</td><td>0.64</td><td>Average</td><td>312</td><td>343</td></tr><tr><td>6 *</td><td>5190.00</td><td>114.48</td><td></td><td></td><td>113.84</td><td>0.64</td><td>Peak</td><td>312</td><td>343</td></tr><tr><td>7</td><td>10380.00</td><td>58.03</td><td>68.20</td><td>-10.17</td><td>49.67</td><td>8.36</td><td>Peak</td><td>100</td><td>5</td></tr><tr><td>8</td><td>15570.00</td><td>42.31</td><td>54.00</td><td>-11.69</td><td>37.42</td><td>4.89</td><td>Average</td><td>100</td><td>128</td></tr><tr><td>9</td><td>15570.00</td><td>55.47</td><td>74.00</td><td>-18.53</td><td>50.58</td><td>4.89</td><td>Peak</td><td>100</td><td>128</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5036.00	46.79	54.00	-7.21	46.41	0.38	Average	312	350	2	5036.00	59.59	74.00	-14.41	59.21	0.38	Peak	312	350	3	5150.00	52.28	54.00	-1.72	51.56	0.72	Average	312	343	4	5150.00	70.01	74.00	-3.99	69.29	0.72	Peak	312	343	5 *	5190.00	101.59			100.95	0.64	Average	312	343	6 *	5190.00	114.48			113.84	0.64	Peak	312	343	7	10380.00	58.03	68.20	-10.17	49.67	8.36	Peak	100	5	8	15570.00	42.31	54.00	-11.69	37.42	4.89	Average	100	128	9	15570.00	55.47	74.00	-18.53	50.58	4.89	Peak	100	128
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5036.00	46.79	54.00	-7.21	46.41	0.38	Average	312	350																																																																																														
2	5036.00	59.59	74.00	-14.41	59.21	0.38	Peak	312	350																																																																																														
3	5150.00	52.28	54.00	-1.72	51.56	0.72	Average	312	343																																																																																														
4	5150.00	70.01	74.00	-3.99	69.29	0.72	Peak	312	343																																																																																														
5 *	5190.00	101.59			100.95	0.64	Average	312	343																																																																																														
6 *	5190.00	114.48			113.84	0.64	Peak	312	343																																																																																														
7	10380.00	58.03	68.20	-10.17	49.67	8.36	Peak	100	5																																																																																														
8	15570.00	42.31	54.00	-11.69	37.42	4.89	Average	100	128																																																																																														
9	15570.00	55.47	74.00	-18.53	50.58	4.89	Peak	100	128																																																																																														



Modulation	be EHT40	Test Freq. (MHz)	5230																																																																																																																																												
Polarization	Horizontal																																																																																																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																																																																															
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5076.00</td><td>47.32</td><td>54.00</td><td>-6.68</td><td>46.74</td><td>0.58</td><td>Average</td><td>231</td><td>308</td></tr><tr><td>2</td><td>5076.00</td><td>60.84</td><td>74.00</td><td>-13.16</td><td>60.26</td><td>0.58</td><td>Peak</td><td>231</td><td>308</td></tr><tr><td>3</td><td>5150.00</td><td>53.88</td><td>54.00</td><td>-0.12</td><td>53.16</td><td>0.72</td><td>Average</td><td>223</td><td>302</td></tr><tr><td>4</td><td>5150.00</td><td>68.48</td><td>74.00</td><td>-5.52</td><td>67.76</td><td>0.72</td><td>Peak</td><td>223</td><td>302</td></tr><tr><td>5 *</td><td>5230.00</td><td>103.47</td><td></td><td></td><td>103.01</td><td>0.46</td><td>Average</td><td>223</td><td>302</td></tr><tr><td>6 *</td><td>5230.00</td><td>116.43</td><td></td><td></td><td>115.97</td><td>0.46</td><td>Peak</td><td>223</td><td>302</td></tr><tr><td>7</td><td>5350.00</td><td>47.86</td><td>54.00</td><td>-6.14</td><td>47.65</td><td>0.21</td><td>Average</td><td>223</td><td>302</td></tr><tr><td>8</td><td>5350.00</td><td>65.49</td><td>74.00</td><td>-8.51</td><td>65.28</td><td>0.21</td><td>Peak</td><td>223</td><td>302</td></tr><tr><td>9</td><td>5384.00</td><td>49.64</td><td>54.00</td><td>-4.36</td><td>49.42</td><td>0.22</td><td>Average</td><td>223</td><td>302</td></tr><tr><td>10</td><td>5384.00</td><td>59.85</td><td>74.00</td><td>-14.15</td><td>59.63</td><td>0.22</td><td>Peak</td><td>223</td><td>302</td></tr><tr><td>11</td><td>10460.00</td><td>60.05</td><td>68.20</td><td>-8.15</td><td>51.46</td><td>8.59</td><td>Peak</td><td>233</td><td>305</td></tr><tr><td>12</td><td>15690.00</td><td>42.47</td><td>54.00</td><td>-11.53</td><td>37.52</td><td>4.95</td><td>Average</td><td>100</td><td>182</td></tr><tr><td>13</td><td>15690.00</td><td>55.53</td><td>74.00</td><td>-18.47</td><td>50.58</td><td>4.95</td><td>Peak</td><td>100</td><td>182</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5076.00	47.32	54.00	-6.68	46.74	0.58	Average	231	308	2	5076.00	60.84	74.00	-13.16	60.26	0.58	Peak	231	308	3	5150.00	53.88	54.00	-0.12	53.16	0.72	Average	223	302	4	5150.00	68.48	74.00	-5.52	67.76	0.72	Peak	223	302	5 *	5230.00	103.47			103.01	0.46	Average	223	302	6 *	5230.00	116.43			115.97	0.46	Peak	223	302	7	5350.00	47.86	54.00	-6.14	47.65	0.21	Average	223	302	8	5350.00	65.49	74.00	-8.51	65.28	0.21	Peak	223	302	9	5384.00	49.64	54.00	-4.36	49.42	0.22	Average	223	302	10	5384.00	59.85	74.00	-14.15	59.63	0.22	Peak	223	302	11	10460.00	60.05	68.20	-8.15	51.46	8.59	Peak	233	305	12	15690.00	42.47	54.00	-11.53	37.52	4.95	Average	100	182	13	15690.00	55.53	74.00	-18.47	50.58	4.95	Peak	100	182
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																																						
1	5076.00	47.32	54.00	-6.68	46.74	0.58	Average	231	308																																																																																																																																						
2	5076.00	60.84	74.00	-13.16	60.26	0.58	Peak	231	308																																																																																																																																						
3	5150.00	53.88	54.00	-0.12	53.16	0.72	Average	223	302																																																																																																																																						
4	5150.00	68.48	74.00	-5.52	67.76	0.72	Peak	223	302																																																																																																																																						
5 *	5230.00	103.47			103.01	0.46	Average	223	302																																																																																																																																						
6 *	5230.00	116.43			115.97	0.46	Peak	223	302																																																																																																																																						
7	5350.00	47.86	54.00	-6.14	47.65	0.21	Average	223	302																																																																																																																																						
8	5350.00	65.49	74.00	-8.51	65.28	0.21	Peak	223	302																																																																																																																																						
9	5384.00	49.64	54.00	-4.36	49.42	0.22	Average	223	302																																																																																																																																						
10	5384.00	59.85	74.00	-14.15	59.63	0.22	Peak	223	302																																																																																																																																						
11	10460.00	60.05	68.20	-8.15	51.46	8.59	Peak	233	305																																																																																																																																						
12	15690.00	42.47	54.00	-11.53	37.52	4.95	Average	100	182																																																																																																																																						
13	15690.00	55.53	74.00	-18.47	50.58	4.95	Peak	100	182																																																																																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																																																															

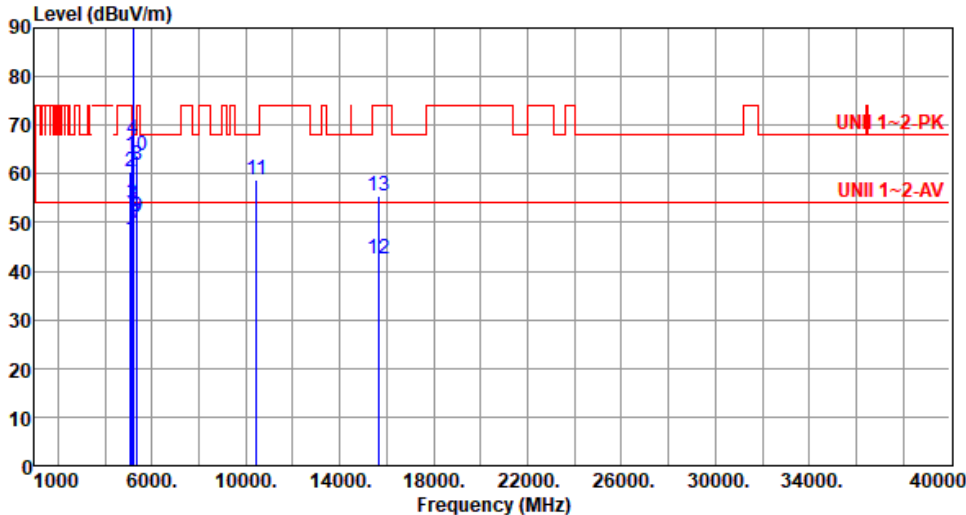

Modulation	be EHT40	Test Freq. (MHz)	5230						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5076.00	46.51	54.00	-7.49	45.93	0.58	Average	321	340
2	5076.00	60.43	74.00	-13.57	59.85	0.58	Peak	321	340
3	5150.00	53.86	54.00	-0.14	53.14	0.72	Average	318	341
4	5150.00	67.24	74.00	-6.76	66.52	0.72	Peak	318	341
5 *	5230.00	103.35			102.89	0.46	Average	318	357
6 *	5230.00	115.44			114.98	0.46	Peak	318	357
7	5350.00	49.66	54.00	-4.34	49.45	0.21	Average	318	357
8	5350.00	61.82	74.00	-12.18	61.61	0.21	Peak	318	357
9	5384.00	51.05	54.00	-2.95	50.83	0.22	Average	322	338
10	5384.00	63.83	74.00	-10.17	63.61	0.22	Peak	322	338
11	10460.00	58.93	68.20	-9.27	50.34	8.59	Peak	100	7
12	15690.00	42.64	54.00	-11.36	37.69	4.95	Average	100	185
13	15690.00	55.53	74.00	-18.47	50.58	4.95	Peak	100	185

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3: "*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	5270
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			



Modulation	be EHT40	Test Freq. (MHz)	5270
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			




Modulation	be EHT40	Test Freq. (MHz)	5310
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63			
Level (dBuV/m)			



Modulation	be EHT40	Test Freq. (MHz)	5310
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63			
Level (dBuV/m)			

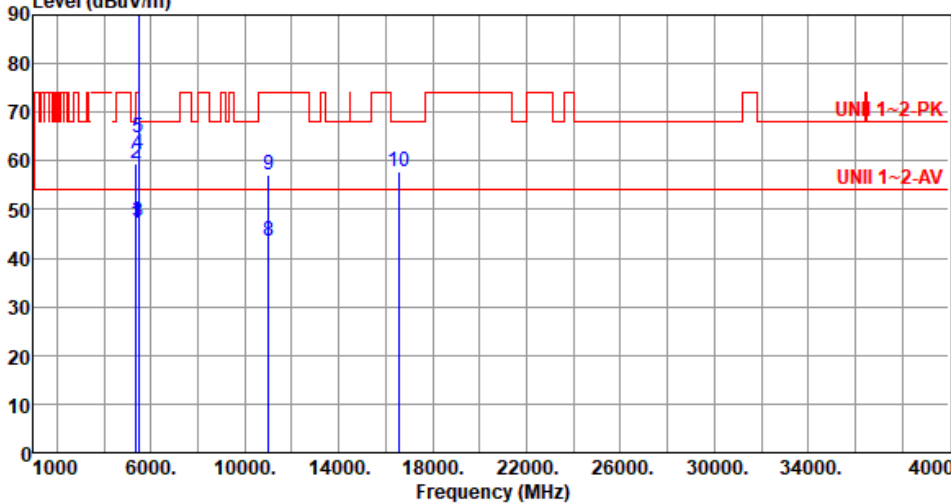

Modulation	be EHT40	Test Freq. (MHz)	5510																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																																																																	
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5356.00</td><td>47.12</td><td>54.00</td><td>-6.88</td><td>46.92</td><td>0.20</td><td>Average</td><td>220</td><td>299</td></tr><tr><td>2</td><td>5356.00</td><td>59.48</td><td>74.00</td><td>-14.52</td><td>59.28</td><td>0.20</td><td>Peak</td><td>220</td><td>299</td></tr><tr><td>3</td><td>5460.00</td><td>47.41</td><td>54.00</td><td>-6.59</td><td>46.85</td><td>0.56</td><td>Average</td><td>222</td><td>298</td></tr><tr><td>4</td><td>5460.00</td><td>61.42</td><td>74.00</td><td>-12.58</td><td>60.86</td><td>0.56</td><td>Peak</td><td>222</td><td>298</td></tr><tr><td>5</td><td>5470.00</td><td>64.78</td><td>68.20</td><td>-3.42</td><td>64.19</td><td>0.59</td><td>Peak</td><td>222</td><td>298</td></tr><tr><td>6 *</td><td>5510.00</td><td>100.84</td><td></td><td></td><td>100.21</td><td>0.63</td><td>Average</td><td>222</td><td>298</td></tr><tr><td>7 *</td><td>5510.00</td><td>114.11</td><td></td><td></td><td>113.48</td><td>0.63</td><td>Peak</td><td>222</td><td>298</td></tr><tr><td>8</td><td>11020.00</td><td>43.65</td><td>54.00</td><td>-10.35</td><td>35.03</td><td>8.62</td><td>Average</td><td>100</td><td>176</td></tr><tr><td>9</td><td>11020.00</td><td>57.13</td><td>74.00</td><td>-16.87</td><td>48.51</td><td>8.62</td><td>Peak</td><td>100</td><td>176</td></tr><tr><td>10</td><td>16530.00</td><td>57.89</td><td>68.20</td><td>-10.31</td><td>51.76</td><td>6.13</td><td>Peak</td><td>100</td><td>223</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5356.00	47.12	54.00	-6.88	46.92	0.20	Average	220	299	2	5356.00	59.48	74.00	-14.52	59.28	0.20	Peak	220	299	3	5460.00	47.41	54.00	-6.59	46.85	0.56	Average	222	298	4	5460.00	61.42	74.00	-12.58	60.86	0.56	Peak	222	298	5	5470.00	64.78	68.20	-3.42	64.19	0.59	Peak	222	298	6 *	5510.00	100.84			100.21	0.63	Average	222	298	7 *	5510.00	114.11			113.48	0.63	Peak	222	298	8	11020.00	43.65	54.00	-10.35	35.03	8.62	Average	100	176	9	11020.00	57.13	74.00	-16.87	48.51	8.62	Peak	100	176	10	16530.00	57.89	68.20	-10.31	51.76	6.13	Peak	100	223
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	5356.00	47.12	54.00	-6.88	46.92	0.20	Average	220	299																																																																																																								
2	5356.00	59.48	74.00	-14.52	59.28	0.20	Peak	220	299																																																																																																								
3	5460.00	47.41	54.00	-6.59	46.85	0.56	Average	222	298																																																																																																								
4	5460.00	61.42	74.00	-12.58	60.86	0.56	Peak	222	298																																																																																																								
5	5470.00	64.78	68.20	-3.42	64.19	0.59	Peak	222	298																																																																																																								
6 *	5510.00	100.84			100.21	0.63	Average	222	298																																																																																																								
7 *	5510.00	114.11			113.48	0.63	Peak	222	298																																																																																																								
8	11020.00	43.65	54.00	-10.35	35.03	8.62	Average	100	176																																																																																																								
9	11020.00	57.13	74.00	-16.87	48.51	8.62	Peak	100	176																																																																																																								
10	16530.00	57.89	68.20	-10.31	51.76	6.13	Peak	100	223																																																																																																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																																	



Modulation	be EHT40	Test Freq. (MHz)	5510
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63			
Level (dBuV/m)			




Modulation	be EHT40	Test Freq. (MHz)	5590																																																																																																																								
Polarization	Horizontal																																																																																																																										
Test By :Sean Yu Temperature(°C):24 Humidity(%):64																																																																																																																											
Level (dBuV/m) UNII 1~2-PK UNII 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5436.00</td><td>47.15</td><td>54.00</td><td>-6.85</td><td>46.70</td><td>0.45</td><td>Average</td><td>236</td><td>298</td></tr><tr><td>2</td><td>5436.00</td><td>59.74</td><td>74.00</td><td>-14.26</td><td>59.29</td><td>0.45</td><td>Peak</td><td>236</td><td>298</td></tr><tr><td>3</td><td>5460.00</td><td>44.40</td><td>54.00</td><td>-9.60</td><td>43.84</td><td>0.56</td><td>Average</td><td>236</td><td>298</td></tr><tr><td>4</td><td>5460.00</td><td>55.53</td><td>74.00</td><td>-18.47</td><td>54.97</td><td>0.56</td><td>Peak</td><td>236</td><td>298</td></tr><tr><td>5</td><td>5470.00</td><td>57.41</td><td>68.20</td><td>-10.79</td><td>56.82</td><td>0.59</td><td>Peak</td><td>236</td><td>298</td></tr><tr><td>6 *</td><td>5590.00</td><td>101.51</td><td></td><td></td><td>100.92</td><td>0.59</td><td>Average</td><td>223</td><td>302</td></tr><tr><td>7 *</td><td>5590.00</td><td>115.13</td><td></td><td></td><td>114.54</td><td>0.59</td><td>Peak</td><td>223</td><td>302</td></tr><tr><td>8</td><td>5725.00</td><td>63.10</td><td>68.20</td><td>-5.10</td><td>62.08</td><td>1.02</td><td>Peak</td><td>231</td><td>295</td></tr><tr><td>9</td><td>11180.00</td><td>43.63</td><td>54.00</td><td>-10.37</td><td>35.35</td><td>8.28</td><td>Average</td><td>100</td><td>175</td></tr><tr><td>10</td><td>11180.00</td><td>56.63</td><td>74.00</td><td>-17.37</td><td>48.35</td><td>8.28</td><td>Peak</td><td>100</td><td>175</td></tr><tr><td>11</td><td>16770.00</td><td>58.78</td><td>68.20</td><td>-9.42</td><td>52.33</td><td>6.45</td><td>Peak</td><td>100</td><td>226</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5436.00	47.15	54.00	-6.85	46.70	0.45	Average	236	298	2	5436.00	59.74	74.00	-14.26	59.29	0.45	Peak	236	298	3	5460.00	44.40	54.00	-9.60	43.84	0.56	Average	236	298	4	5460.00	55.53	74.00	-18.47	54.97	0.56	Peak	236	298	5	5470.00	57.41	68.20	-10.79	56.82	0.59	Peak	236	298	6 *	5590.00	101.51			100.92	0.59	Average	223	302	7 *	5590.00	115.13			114.54	0.59	Peak	223	302	8	5725.00	63.10	68.20	-5.10	62.08	1.02	Peak	231	295	9	11180.00	43.63	54.00	-10.37	35.35	8.28	Average	100	175	10	11180.00	56.63	74.00	-17.37	48.35	8.28	Peak	100	175	11	16770.00	58.78	68.20	-9.42	52.33	6.45	Peak	100	226
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																		
1	5436.00	47.15	54.00	-6.85	46.70	0.45	Average	236	298																																																																																																																		
2	5436.00	59.74	74.00	-14.26	59.29	0.45	Peak	236	298																																																																																																																		
3	5460.00	44.40	54.00	-9.60	43.84	0.56	Average	236	298																																																																																																																		
4	5460.00	55.53	74.00	-18.47	54.97	0.56	Peak	236	298																																																																																																																		
5	5470.00	57.41	68.20	-10.79	56.82	0.59	Peak	236	298																																																																																																																		
6 *	5590.00	101.51			100.92	0.59	Average	223	302																																																																																																																		
7 *	5590.00	115.13			114.54	0.59	Peak	223	302																																																																																																																		
8	5725.00	63.10	68.20	-5.10	62.08	1.02	Peak	231	295																																																																																																																		
9	11180.00	43.63	54.00	-10.37	35.35	8.28	Average	100	175																																																																																																																		
10	11180.00	56.63	74.00	-17.37	48.35	8.28	Peak	100	175																																																																																																																		
11	16770.00	58.78	68.20	-9.42	52.33	6.45	Peak	100	226																																																																																																																		



Modulation	be EHT40	Test Freq. (MHz)	5590																																																																																																																								
Polarization	Vertical																																																																																																																										
Test By :Sean Yu Temperature(°C):24 Humidity(%):64																																																																																																																											
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5436.00</td><td>46.85</td><td>54.00</td><td>-7.15</td><td>46.40</td><td>0.45</td><td>Average</td><td>341</td><td>351</td></tr><tr><td>2</td><td>5436.00</td><td>59.60</td><td>74.00</td><td>-14.40</td><td>59.15</td><td>0.45</td><td>Peak</td><td>341</td><td>351</td></tr><tr><td>3</td><td>5460.00</td><td>44.29</td><td>54.00</td><td>-9.71</td><td>43.73</td><td>0.56</td><td>Average</td><td>341</td><td>351</td></tr><tr><td>4</td><td>5460.00</td><td>56.81</td><td>74.00</td><td>-17.19</td><td>56.25</td><td>0.56</td><td>Peak</td><td>341</td><td>351</td></tr><tr><td>5</td><td>5470.00</td><td>57.91</td><td>68.20</td><td>-10.29</td><td>57.32</td><td>0.59</td><td>Peak</td><td>341</td><td>351</td></tr><tr><td>6 *</td><td>5590.00</td><td>101.02</td><td></td><td></td><td>100.43</td><td>0.59</td><td>Average</td><td>338</td><td>350</td></tr><tr><td>7 *</td><td>5590.00</td><td>114.61</td><td></td><td></td><td>114.02</td><td>0.59</td><td>Peak</td><td>338</td><td>350</td></tr><tr><td>8</td><td>5725.00</td><td>62.32</td><td>68.20</td><td>-5.88</td><td>61.30</td><td>1.02</td><td>Peak</td><td>337</td><td>339</td></tr><tr><td>9</td><td>11180.00</td><td>43.55</td><td>54.00</td><td>-10.45</td><td>35.27</td><td>8.28</td><td>Average</td><td>100</td><td>178</td></tr><tr><td>10</td><td>11180.00</td><td>56.90</td><td>74.00</td><td>-17.10</td><td>48.62</td><td>8.28</td><td>Peak</td><td>100</td><td>178</td></tr><tr><td>11</td><td>16770.00</td><td>58.27</td><td>68.20</td><td>-9.93</td><td>51.82</td><td>6.45</td><td>Peak</td><td>100</td><td>203</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5436.00	46.85	54.00	-7.15	46.40	0.45	Average	341	351	2	5436.00	59.60	74.00	-14.40	59.15	0.45	Peak	341	351	3	5460.00	44.29	54.00	-9.71	43.73	0.56	Average	341	351	4	5460.00	56.81	74.00	-17.19	56.25	0.56	Peak	341	351	5	5470.00	57.91	68.20	-10.29	57.32	0.59	Peak	341	351	6 *	5590.00	101.02			100.43	0.59	Average	338	350	7 *	5590.00	114.61			114.02	0.59	Peak	338	350	8	5725.00	62.32	68.20	-5.88	61.30	1.02	Peak	337	339	9	11180.00	43.55	54.00	-10.45	35.27	8.28	Average	100	178	10	11180.00	56.90	74.00	-17.10	48.62	8.28	Peak	100	178	11	16770.00	58.27	68.20	-9.93	51.82	6.45	Peak	100	203
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																		
1	5436.00	46.85	54.00	-7.15	46.40	0.45	Average	341	351																																																																																																																		
2	5436.00	59.60	74.00	-14.40	59.15	0.45	Peak	341	351																																																																																																																		
3	5460.00	44.29	54.00	-9.71	43.73	0.56	Average	341	351																																																																																																																		
4	5460.00	56.81	74.00	-17.19	56.25	0.56	Peak	341	351																																																																																																																		
5	5470.00	57.91	68.20	-10.29	57.32	0.59	Peak	341	351																																																																																																																		
6 *	5590.00	101.02			100.43	0.59	Average	338	350																																																																																																																		
7 *	5590.00	114.61			114.02	0.59	Peak	338	350																																																																																																																		
8	5725.00	62.32	68.20	-5.88	61.30	1.02	Peak	337	339																																																																																																																		
9	11180.00	43.55	54.00	-10.45	35.27	8.28	Average	100	178																																																																																																																		
10	11180.00	56.90	74.00	-17.10	48.62	8.28	Peak	100	178																																																																																																																		
11	16770.00	58.27	68.20	-9.93	51.82	6.45	Peak	100	203																																																																																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																																											

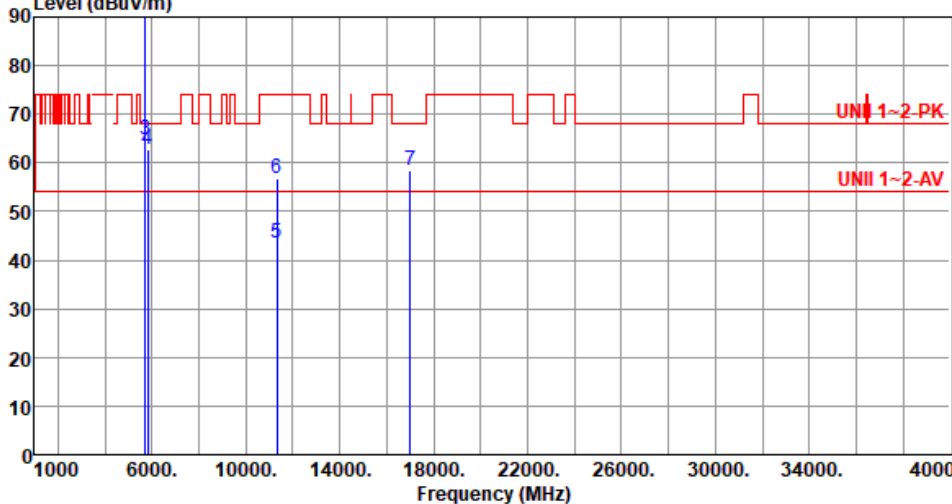

Modulation	be EHT40	Test Freq. (MHz)	5670																																																																																
Polarization	Horizontal																																																																																		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																																			
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1 *</td><td>5670.00</td><td>101.73</td><td></td><td></td><td>100.90</td><td>0.83</td><td>Average</td><td>232</td><td>302</td></tr><tr><td>2 *</td><td>5670.00</td><td>116.06</td><td></td><td></td><td>115.23</td><td>0.83</td><td>Peak</td><td>232</td><td>302</td></tr><tr><td>3</td><td>5725.00</td><td>64.88</td><td>68.20</td><td>-3.32</td><td>63.86</td><td>1.02</td><td>Peak</td><td>232</td><td>302</td></tr><tr><td>4</td><td>5824.00</td><td>62.68</td><td>68.20</td><td>-5.52</td><td>61.55</td><td>1.13</td><td>Peak</td><td>234</td><td>300</td></tr><tr><td>5</td><td>11340.00</td><td>43.56</td><td>54.00</td><td>-10.44</td><td>35.33</td><td>8.23</td><td>Average</td><td>100</td><td>153</td></tr><tr><td>6</td><td>11340.00</td><td>56.85</td><td>74.00</td><td>-17.15</td><td>48.62</td><td>8.23</td><td>Peak</td><td>100</td><td>153</td></tr><tr><td>7</td><td>17010.00</td><td>58.52</td><td>68.20</td><td>-9.68</td><td>52.46</td><td>6.06</td><td>Peak</td><td>100</td><td>215</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	5670.00	101.73			100.90	0.83	Average	232	302	2 *	5670.00	116.06			115.23	0.83	Peak	232	302	3	5725.00	64.88	68.20	-3.32	63.86	1.02	Peak	232	302	4	5824.00	62.68	68.20	-5.52	61.55	1.13	Peak	234	300	5	11340.00	43.56	54.00	-10.44	35.33	8.23	Average	100	153	6	11340.00	56.85	74.00	-17.15	48.62	8.23	Peak	100	153	7	17010.00	58.52	68.20	-9.68	52.46	6.06	Peak	100	215
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1 *	5670.00	101.73			100.90	0.83	Average	232	302																																																																										
2 *	5670.00	116.06			115.23	0.83	Peak	232	302																																																																										
3	5725.00	64.88	68.20	-3.32	63.86	1.02	Peak	232	302																																																																										
4	5824.00	62.68	68.20	-5.52	61.55	1.13	Peak	234	300																																																																										
5	11340.00	43.56	54.00	-10.44	35.33	8.23	Average	100	153																																																																										
6	11340.00	56.85	74.00	-17.15	48.62	8.23	Peak	100	153																																																																										
7	17010.00	58.52	68.20	-9.68	52.46	6.06	Peak	100	215																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																			




Modulation	be EHT40	Test Freq. (MHz)	5670
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63			
Level (dBuV/m) <			



Modulation	be EHT40	Test Freq. (MHz)	5710																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Sean Yu Temperature(°C):24 Humidity(%):64																																																																																																							
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>45.13</td><td>54.00</td><td>-8.87</td><td>44.57</td><td>0.56</td><td>Average</td><td>236</td><td>298</td></tr><tr><td>2</td><td>5460.00</td><td>56.99</td><td>74.00</td><td>-17.01</td><td>56.43</td><td>0.56</td><td>Peak</td><td>236</td><td>298</td></tr><tr><td>3</td><td>5470.00</td><td>57.53</td><td>68.20</td><td>-10.67</td><td>56.94</td><td>0.59</td><td>Peak</td><td>236</td><td>298</td></tr><tr><td>4 *</td><td>5710.00</td><td>101.08</td><td></td><td></td><td>100.10</td><td>0.98</td><td>Average</td><td>236</td><td>298</td></tr><tr><td>5 *</td><td>5710.00</td><td>113.16</td><td></td><td></td><td>112.18</td><td>0.98</td><td>Peak</td><td>236</td><td>298</td></tr><tr><td>6</td><td>5850.00</td><td>61.77</td><td>68.20</td><td>-6.43</td><td>60.62</td><td>1.15</td><td>Peak</td><td>236</td><td>298</td></tr><tr><td>7</td><td>11420.00</td><td>43.84</td><td>54.00</td><td>-10.16</td><td>35.64</td><td>8.20</td><td>Average</td><td>100</td><td>178</td></tr><tr><td>8</td><td>11420.00</td><td>56.87</td><td>74.00</td><td>-17.13</td><td>48.67</td><td>8.20</td><td>Peak</td><td>100</td><td>178</td></tr><tr><td>9</td><td>17130.00</td><td>58.38</td><td>68.20</td><td>-9.82</td><td>52.64</td><td>5.74</td><td>Peak</td><td>100</td><td>243</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	45.13	54.00	-8.87	44.57	0.56	Average	236	298	2	5460.00	56.99	74.00	-17.01	56.43	0.56	Peak	236	298	3	5470.00	57.53	68.20	-10.67	56.94	0.59	Peak	236	298	4 *	5710.00	101.08			100.10	0.98	Average	236	298	5 *	5710.00	113.16			112.18	0.98	Peak	236	298	6	5850.00	61.77	68.20	-6.43	60.62	1.15	Peak	236	298	7	11420.00	43.84	54.00	-10.16	35.64	8.20	Average	100	178	8	11420.00	56.87	74.00	-17.13	48.67	8.20	Peak	100	178	9	17130.00	58.38	68.20	-9.82	52.64	5.74	Peak	100	243
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	45.13	54.00	-8.87	44.57	0.56	Average	236	298																																																																																														
2	5460.00	56.99	74.00	-17.01	56.43	0.56	Peak	236	298																																																																																														
3	5470.00	57.53	68.20	-10.67	56.94	0.59	Peak	236	298																																																																																														
4 *	5710.00	101.08			100.10	0.98	Average	236	298																																																																																														
5 *	5710.00	113.16			112.18	0.98	Peak	236	298																																																																																														
6	5850.00	61.77	68.20	-6.43	60.62	1.15	Peak	236	298																																																																																														
7	11420.00	43.84	54.00	-10.16	35.64	8.20	Average	100	178																																																																																														
8	11420.00	56.87	74.00	-17.13	48.67	8.20	Peak	100	178																																																																																														
9	17130.00	58.38	68.20	-9.82	52.64	5.74	Peak	100	243																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																							

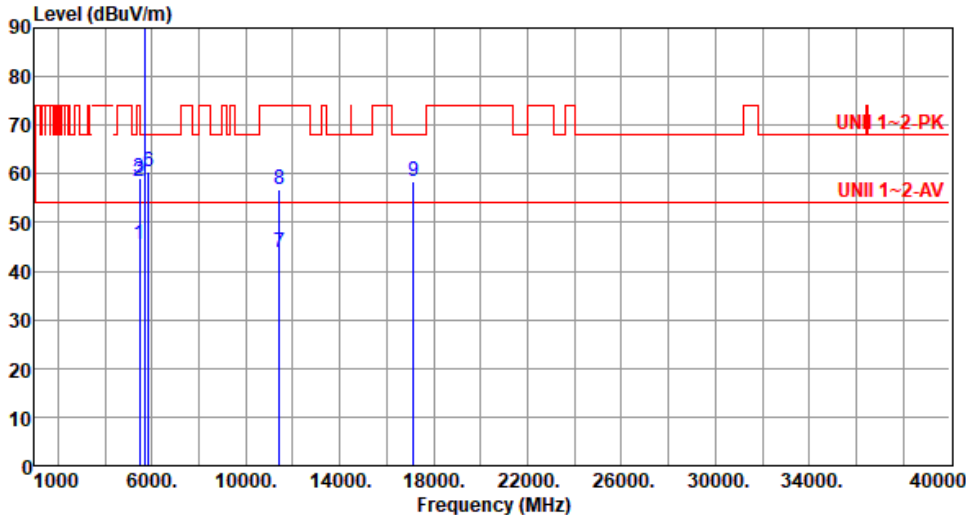

Modulation	be EHT40	Test Freq. (MHz)	5710						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):24 Humidity(%):64									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	45.60	54.00	-8.40	45.04	0.56	Average	326	339
2	5460.00	58.50	74.00	-15.50	57.94	0.56	Peak	326	339
3	5470.00	59.20	68.20	-9.00	58.61	0.59	Peak	326	339
4 *	5710.00	100.84			99.86	0.98	Average	326	339
5 *	5710.00	113.80			112.82	0.98	Peak	326	339
6	5850.00	60.37	68.20	-7.83	59.22	1.15	Peak	326	339
7	11420.00	43.88	54.00	-10.12	35.68	8.20	Average	100	177
8	11420.00	56.95	74.00	-17.05	48.75	8.20	Peak	100	177
9	17130.00	58.58	68.20	-9.62	52.84	5.74	Peak	100	288

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "*" is Peak / Average value of fundamental frequency




Modulation	be EHT40	Test Freq. (MHz)	5755																																																																																																																																		
Polarization	Horizontal																																																																																																																																				
Test By :Brad Wu Temperature(°C):26 Humidity(%):61																																																																																																																																					
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5601.00</td><td>65.73</td><td>68.20</td><td>-2.47</td><td>65.13</td><td>0.60</td><td>Peak</td><td>169</td><td>308</td></tr><tr><td>2</td><td>5650.00</td><td>67.72</td><td>68.20</td><td>-0.48</td><td>66.99</td><td>0.73</td><td>Peak</td><td>169</td><td>300</td></tr><tr><td>3</td><td>5700.00</td><td>84.30</td><td>105.20</td><td>-20.90</td><td>83.34</td><td>0.96</td><td>Peak</td><td>169</td><td>300</td></tr><tr><td>4</td><td>5720.00</td><td>91.95</td><td>110.80</td><td>-18.85</td><td>90.94</td><td>1.01</td><td>Peak</td><td>169</td><td>300</td></tr><tr><td>5</td><td>5725.00</td><td>88.13</td><td>122.20</td><td>-34.07</td><td>87.11</td><td>1.02</td><td>Peak</td><td>169</td><td>300</td></tr><tr><td>6 *</td><td>5755.00</td><td>106.34</td><td></td><td></td><td>105.25</td><td>1.09</td><td>Average</td><td>169</td><td>300</td></tr><tr><td>7 *</td><td>5755.00</td><td>119.91</td><td></td><td></td><td>118.82</td><td>1.09</td><td>Peak</td><td>169</td><td>300</td></tr><tr><td>8</td><td>5909.00</td><td>67.78</td><td>80.01</td><td>-12.23</td><td>66.28</td><td>1.50</td><td>Peak</td><td>169</td><td>296</td></tr><tr><td>9</td><td>5925.00</td><td>65.64</td><td>68.20</td><td>-2.56</td><td>64.12</td><td>1.52</td><td>Peak</td><td>169</td><td>300</td></tr><tr><td>10</td><td>11510.00</td><td>48.12</td><td>54.00</td><td>-5.88</td><td>39.55</td><td>8.57</td><td>Average</td><td>119</td><td>289</td></tr><tr><td>11</td><td>11510.00</td><td>61.98</td><td>74.00</td><td>-12.02</td><td>53.41</td><td>8.57</td><td>Peak</td><td>119</td><td>289</td></tr><tr><td>12</td><td>17265.00</td><td>58.50</td><td>68.20</td><td>-9.70</td><td>52.85</td><td>5.65</td><td>Peak</td><td>100</td><td>178</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5601.00	65.73	68.20	-2.47	65.13	0.60	Peak	169	308	2	5650.00	67.72	68.20	-0.48	66.99	0.73	Peak	169	300	3	5700.00	84.30	105.20	-20.90	83.34	0.96	Peak	169	300	4	5720.00	91.95	110.80	-18.85	90.94	1.01	Peak	169	300	5	5725.00	88.13	122.20	-34.07	87.11	1.02	Peak	169	300	6 *	5755.00	106.34			105.25	1.09	Average	169	300	7 *	5755.00	119.91			118.82	1.09	Peak	169	300	8	5909.00	67.78	80.01	-12.23	66.28	1.50	Peak	169	296	9	5925.00	65.64	68.20	-2.56	64.12	1.52	Peak	169	300	10	11510.00	48.12	54.00	-5.88	39.55	8.57	Average	119	289	11	11510.00	61.98	74.00	-12.02	53.41	8.57	Peak	119	289	12	17265.00	58.50	68.20	-9.70	52.85	5.65	Peak	100	178
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																												
1	5601.00	65.73	68.20	-2.47	65.13	0.60	Peak	169	308																																																																																																																												
2	5650.00	67.72	68.20	-0.48	66.99	0.73	Peak	169	300																																																																																																																												
3	5700.00	84.30	105.20	-20.90	83.34	0.96	Peak	169	300																																																																																																																												
4	5720.00	91.95	110.80	-18.85	90.94	1.01	Peak	169	300																																																																																																																												
5	5725.00	88.13	122.20	-34.07	87.11	1.02	Peak	169	300																																																																																																																												
6 *	5755.00	106.34			105.25	1.09	Average	169	300																																																																																																																												
7 *	5755.00	119.91			118.82	1.09	Peak	169	300																																																																																																																												
8	5909.00	67.78	80.01	-12.23	66.28	1.50	Peak	169	296																																																																																																																												
9	5925.00	65.64	68.20	-2.56	64.12	1.52	Peak	169	300																																																																																																																												
10	11510.00	48.12	54.00	-5.88	39.55	8.57	Average	119	289																																																																																																																												
11	11510.00	61.98	74.00	-12.02	53.41	8.57	Peak	119	289																																																																																																																												
12	17265.00	58.50	68.20	-9.70	52.85	5.65	Peak	100	178																																																																																																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																																					

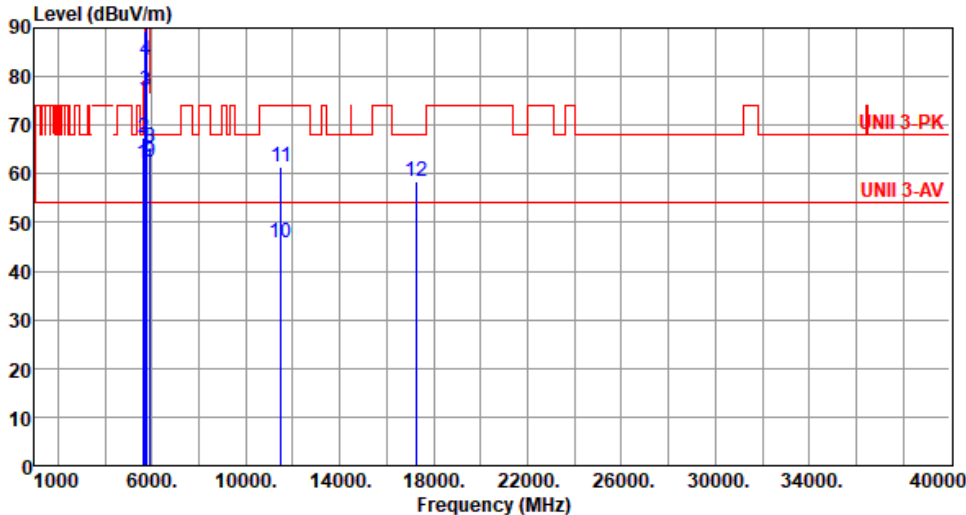


Modulation	be EHT40	Test Freq. (MHz)	5755						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):26 Humidity(%):61									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5601.00	62.17	68.20	-6.03	61.57	0.60	Peak	318	351
2	5650.00	67.30	68.20	-0.90	66.57	0.73	Peak	313	347
3	5700.00	77.09	105.20	-28.11	76.13	0.96	Peak	313	347
4	5720.00	83.37	110.80	-27.43	82.36	1.01	Peak	313	347
5	5725.00	89.27	122.20	-32.93	88.25	1.02	Peak	313	347
6 *	5755.00	105.52			104.43	1.09	Average	313	347
7 *	5755.00	118.64			117.55	1.09	Peak	313	347
8	5909.00	65.34	80.01	-14.67	63.84	1.50	Peak	313	347
9	5925.00	62.35	68.20	-5.85	60.83	1.52	Peak	313	347
10	11510.00	45.69	54.00	-8.31	37.12	8.57	Average	100	351
11	11510.00	61.42	74.00	-12.58	52.85	8.57	Peak	100	351
12	17265.00	58.42	68.20	-9.78	52.77	5.65	Peak	100	224

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

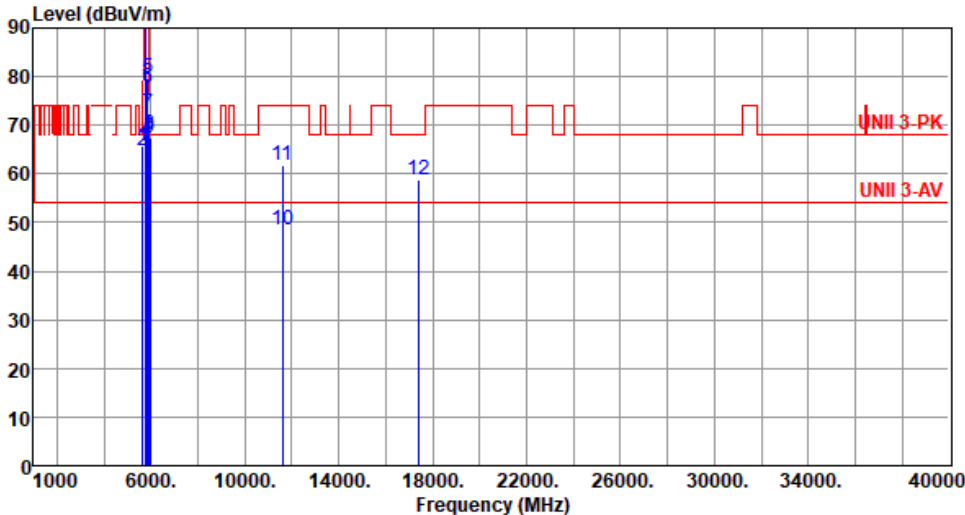

Modulation	be EHT40	Test Freq. (MHz)	5795						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5641.00	65.64	68.20	-2.56	64.93	0.71	Peak	224	304
2	5650.00	64.64	68.20	-3.56	63.91	0.73	Peak	224	304
3 *	5795.00	105.81			104.69	1.12	Average	224	299
4 *	5795.00	119.40			118.28	1.12	Peak	224	299
5	5850.00	79.84	122.20	-42.36	78.69	1.15	Peak	224	304
6	5855.00	77.83	110.80	-32.97	76.64	1.19	Peak	224	304
7	5875.00	72.31	105.20	-32.89	70.99	1.32	Peak	224	304
8	5925.00	67.98	68.20	-0.22	66.46	1.52	Peak	224	304
9	5949.00	67.57	68.20	-0.63	66.04	1.53	Peak	224	301
10	11590.00	48.39	54.00	-5.61	40.11	8.28	Average	121	293
11	11590.00	61.70	74.00	-12.30	53.42	8.28	Peak	121	293
12	17385.00	58.90	68.20	-9.30	52.66	6.24	Peak	100	188
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency									

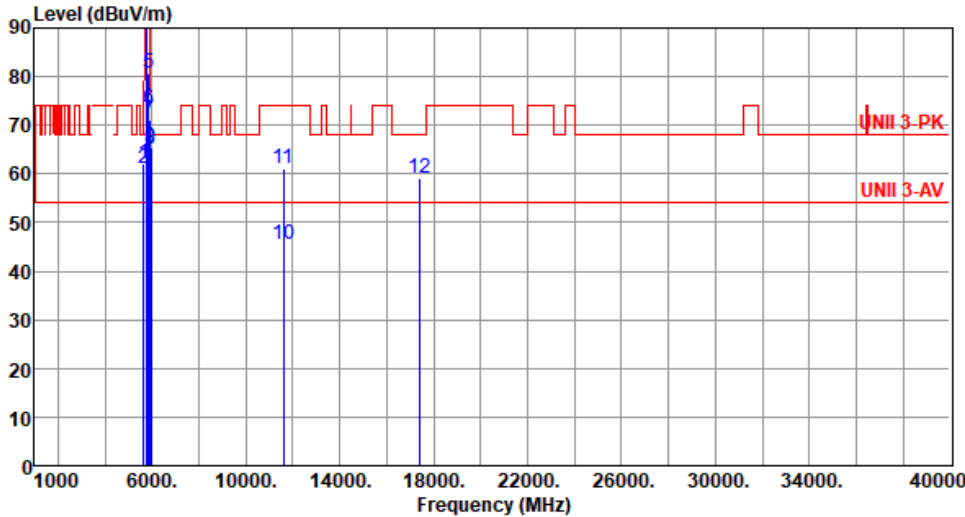

Modulation	be EHT40	Test Freq. (MHz)	5795																																																																																																																																		
Polarization	Vertical																																																																																																																																				
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																																																																																					
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5641.00</td><td>62.19</td><td>68.20</td><td>-6.01</td><td>61.48</td><td>0.71</td><td>Peak</td><td>329</td><td>18</td></tr><tr><td>2</td><td>5650.00</td><td>61.22</td><td>68.20</td><td>-6.98</td><td>60.49</td><td>0.73</td><td>Peak</td><td>329</td><td>18</td></tr><tr><td>3 *</td><td>5795.00</td><td>104.83</td><td></td><td></td><td>103.71</td><td>1.12</td><td>Average</td><td>329</td><td>18</td></tr><tr><td>4 *</td><td>5795.00</td><td>108.75</td><td></td><td></td><td>107.63</td><td>1.12</td><td>Peak</td><td>329</td><td>18</td></tr><tr><td>5</td><td>5850.00</td><td>80.62</td><td>122.20</td><td>-41.58</td><td>79.47</td><td>1.15</td><td>Peak</td><td>329</td><td>18</td></tr><tr><td>6</td><td>5855.00</td><td>73.49</td><td>110.80</td><td>-37.31</td><td>72.30</td><td>1.19</td><td>Peak</td><td>329</td><td>18</td></tr><tr><td>7</td><td>5875.00</td><td>71.11</td><td>105.20</td><td>-34.09</td><td>69.79</td><td>1.32</td><td>Peak</td><td>329</td><td>18</td></tr><tr><td>8</td><td>5925.00</td><td>65.21</td><td>68.20</td><td>-2.99</td><td>63.69</td><td>1.52</td><td>Peak</td><td>329</td><td>18</td></tr><tr><td>9</td><td>5949.00</td><td>65.27</td><td>68.20</td><td>-2.93</td><td>63.74</td><td>1.53</td><td>Peak</td><td>329</td><td>18</td></tr><tr><td>10</td><td>11590.00</td><td>45.43</td><td>54.00</td><td>-8.57</td><td>37.15</td><td>8.28</td><td>Average</td><td>100</td><td>348</td></tr><tr><td>11</td><td>11590.00</td><td>60.94</td><td>74.00</td><td>-13.06</td><td>52.66</td><td>8.28</td><td>Peak</td><td>100</td><td>348</td></tr><tr><td>12</td><td>17385.00</td><td>59.27</td><td>68.20</td><td>-8.93</td><td>53.03</td><td>6.24</td><td>Peak</td><td>100</td><td>228</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5641.00	62.19	68.20	-6.01	61.48	0.71	Peak	329	18	2	5650.00	61.22	68.20	-6.98	60.49	0.73	Peak	329	18	3 *	5795.00	104.83			103.71	1.12	Average	329	18	4 *	5795.00	108.75			107.63	1.12	Peak	329	18	5	5850.00	80.62	122.20	-41.58	79.47	1.15	Peak	329	18	6	5855.00	73.49	110.80	-37.31	72.30	1.19	Peak	329	18	7	5875.00	71.11	105.20	-34.09	69.79	1.32	Peak	329	18	8	5925.00	65.21	68.20	-2.99	63.69	1.52	Peak	329	18	9	5949.00	65.27	68.20	-2.93	63.74	1.53	Peak	329	18	10	11590.00	45.43	54.00	-8.57	37.15	8.28	Average	100	348	11	11590.00	60.94	74.00	-13.06	52.66	8.28	Peak	100	348	12	17385.00	59.27	68.20	-8.93	53.03	6.24	Peak	100	228
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																												
1	5641.00	62.19	68.20	-6.01	61.48	0.71	Peak	329	18																																																																																																																												
2	5650.00	61.22	68.20	-6.98	60.49	0.73	Peak	329	18																																																																																																																												
3 *	5795.00	104.83			103.71	1.12	Average	329	18																																																																																																																												
4 *	5795.00	108.75			107.63	1.12	Peak	329	18																																																																																																																												
5	5850.00	80.62	122.20	-41.58	79.47	1.15	Peak	329	18																																																																																																																												
6	5855.00	73.49	110.80	-37.31	72.30	1.19	Peak	329	18																																																																																																																												
7	5875.00	71.11	105.20	-34.09	69.79	1.32	Peak	329	18																																																																																																																												
8	5925.00	65.21	68.20	-2.99	63.69	1.52	Peak	329	18																																																																																																																												
9	5949.00	65.27	68.20	-2.93	63.74	1.53	Peak	329	18																																																																																																																												
10	11590.00	45.43	54.00	-8.57	37.15	8.28	Average	100	348																																																																																																																												
11	11590.00	60.94	74.00	-13.06	52.66	8.28	Peak	100	348																																																																																																																												
12	17385.00	59.27	68.20	-8.93	53.03	6.24	Peak	100	228																																																																																																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																																																					



Unwanted Emissions (Above 1GHz) for be EHT80

Modulation	be EHT80	Test Freq. (MHz)	5210						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):26 Humidity(%):61									
Level (dBUV/m) UNI 1-2-PK UNI 1-2-AV Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	53.56	54.00	-0.44	52.84	0.72	Average	224	303
2	5150.00	66.58	74.00	-7.42	65.86	0.72	Peak	224	303
3 *	5210.00	98.80			98.23	0.57	Average	224	303
4 *	5210.00	111.86			111.29	0.57	Peak	224	303
5	10420.00	56.08	68.20	-12.12	47.52	8.56	Peak	100	153
6	15630.00	42.31	54.00	-11.69	37.56	4.75	Average	100	206
7	15630.00	54.88	74.00	-19.12	50.13	4.75	Peak	100	206

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3: "*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	5210
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m) </			



Modulation	be EHT80	Test Freq. (MHz)	5290						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):25 Humidity(%):62									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	5290.00	98.12			97.83	0.29	Average	214	301
2 *	5290.00	111.69			111.40	0.29	Peak	214	301
3	5350.00	53.58	54.00	-0.42	53.37	0.21	Average	214	301
4	5350.00	65.25	74.00	-8.75	65.04	0.21	Peak	214	301
5	10580.00	56.00	68.20	-12.20	47.66	8.34	Peak	100	163
6	15870.00	42.26	54.00	-11.74	37.56	4.70	Average	100	284
7	15870.00	55.47	74.00	-18.53	50.77	4.70	Peak	100	284
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									




Modulation	be EHT80	Test Freq. (MHz)	5290						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):25 Humidity(%):62									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	5290.00	97.99			97.70	0.29	Average	292	346
2 *	5290.00	111.05			110.76	0.29	Peak	292	346
3	5350.00	52.66	54.00	-1.34	52.45	0.21	Average	292	346
4	5350.00	65.22	74.00	-8.78	65.01	0.21	Peak	292	346
5	10580.00	56.12	68.20	-12.08	47.78	8.34	Peak	100	285
6	15870.00	42.39	54.00	-11.61	37.69	4.70	Average	100	195
7	15870.00	55.83	74.00	-18.17	51.13	4.70	Peak	100	195

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3: "*" is Peak / Average value of fundamental frequency




Modulation	be EHT80	Test Freq. (MHz)	5530
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):25 Humidity(%):62			
Level (dBuV/m)			

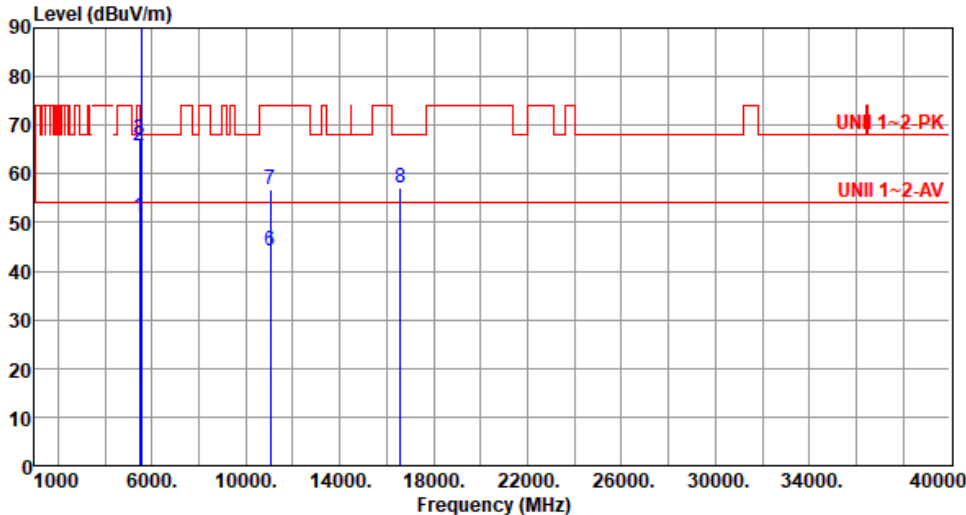

Modulation	be EHT80	Test Freq. (MHz)	5530						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):25 Humidity(%):62									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	51.16	54.00	-2.84	50.60	0.56	Average	348	342
2	5460.00	65.74	74.00	-8.26	65.18	0.56	Peak	348	342
3	5470.00	66.94	68.20	-1.26	66.35	0.59	Peak	348	342
4 *	5530.00	97.11			96.51	0.60	Average	348	342
5 *	5530.00	110.82			110.22	0.60	Peak	348	342
6	11060.00	44.01	54.00	-9.99	35.57	8.44	Average	100	271
7	11060.00	56.77	74.00	-17.23	48.33	8.44	Peak	100	271
8	16590.00	57.17	68.20	-11.03	51.23	5.94	Peak	100	246


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

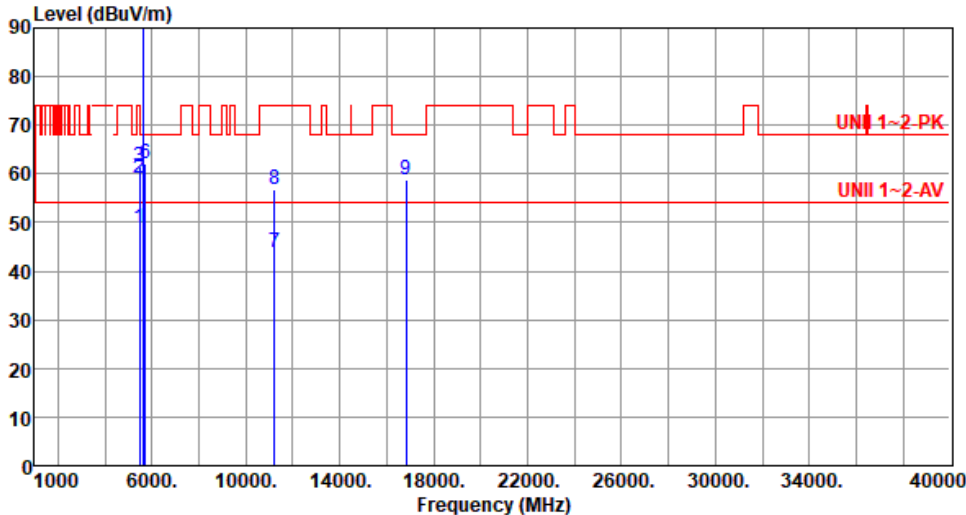

Modulation	be EHT80	Test Freq. (MHz)	5610						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):24 Humidity(%):64									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	48.79	54.00	-5.21	48.23	0.56	Average	287	304
2	5460.00	59.25	74.00	-14.75	58.69	0.56	Peak	287	304
3	5470.00	61.42	68.20	-6.78	60.83	0.59	Peak	287	304
4 *	5610.00	97.76			97.13	0.63	Average	287	304
5 *	5610.00	111.61			110.98	0.63	Peak	287	304
6	5725.00	62.02	68.20	-6.18	61.00	1.02	Peak	287	304
7	11220.00	43.72	54.00	-10.28	35.51	8.21	Average	100	248
8	11220.00	56.87	74.00	-17.13	48.66	8.21	Peak	100	248
9	16830.00	58.62	68.20	-9.58	52.12	6.50	Peak	100	203

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

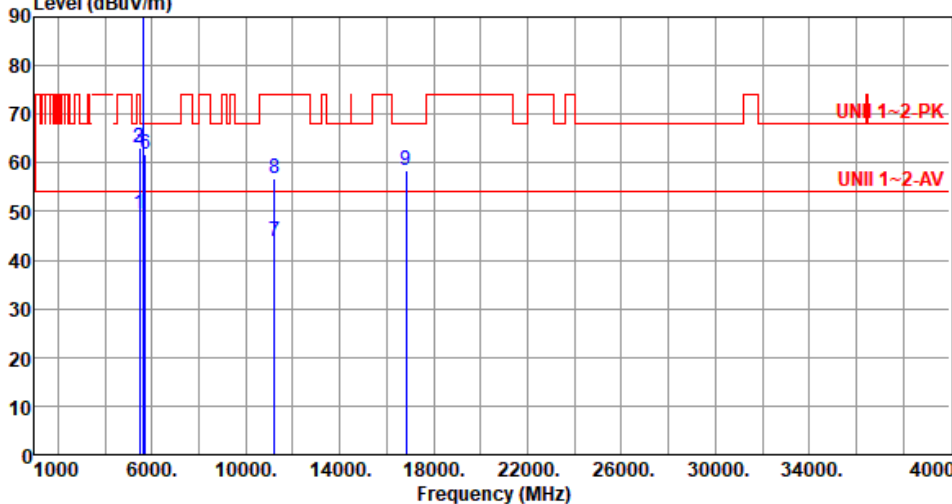

Modulation	be EHT80	Test Freq. (MHz)	5610																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Allen Lee Temperature(°C):24 Humidity(%):64																																																																																																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>49.62</td><td>54.00</td><td>-4.38</td><td>49.06</td><td>0.56</td><td>Average</td><td>337</td><td>344</td></tr><tr><td>2</td><td>5460.00</td><td>63.03</td><td>74.00</td><td>-10.97</td><td>62.47</td><td>0.56</td><td>Peak</td><td>337</td><td>344</td></tr><tr><td>3</td><td>5470.00</td><td>63.23</td><td>68.20</td><td>-4.97</td><td>62.64</td><td>0.59</td><td>Peak</td><td>337</td><td>344</td></tr><tr><td>4 *</td><td>5610.00</td><td>98.77</td><td></td><td></td><td>98.14</td><td>0.63</td><td>Average</td><td>337</td><td>344</td></tr><tr><td>5 *</td><td>5610.00</td><td>110.37</td><td></td><td></td><td>109.74</td><td>0.63</td><td>Peak</td><td>337</td><td>344</td></tr><tr><td>6</td><td>5725.00</td><td>61.78</td><td>68.20</td><td>-6.42</td><td>60.76</td><td>1.02</td><td>Peak</td><td>337</td><td>344</td></tr><tr><td>7</td><td>11220.00</td><td>43.69</td><td>54.00</td><td>-10.31</td><td>35.48</td><td>8.21</td><td>Average</td><td>100</td><td>146</td></tr><tr><td>8</td><td>11220.00</td><td>56.78</td><td>74.00</td><td>-17.22</td><td>48.57</td><td>8.21</td><td>Peak</td><td>100</td><td>146</td></tr><tr><td>9</td><td>16830.00</td><td>58.35</td><td>68.20</td><td>-9.85</td><td>51.85</td><td>6.50</td><td>Peak</td><td>100</td><td>275</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	49.62	54.00	-4.38	49.06	0.56	Average	337	344	2	5460.00	63.03	74.00	-10.97	62.47	0.56	Peak	337	344	3	5470.00	63.23	68.20	-4.97	62.64	0.59	Peak	337	344	4 *	5610.00	98.77			98.14	0.63	Average	337	344	5 *	5610.00	110.37			109.74	0.63	Peak	337	344	6	5725.00	61.78	68.20	-6.42	60.76	1.02	Peak	337	344	7	11220.00	43.69	54.00	-10.31	35.48	8.21	Average	100	146	8	11220.00	56.78	74.00	-17.22	48.57	8.21	Peak	100	146	9	16830.00	58.35	68.20	-9.85	51.85	6.50	Peak	100	275
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	49.62	54.00	-4.38	49.06	0.56	Average	337	344																																																																																														
2	5460.00	63.03	74.00	-10.97	62.47	0.56	Peak	337	344																																																																																														
3	5470.00	63.23	68.20	-4.97	62.64	0.59	Peak	337	344																																																																																														
4 *	5610.00	98.77			98.14	0.63	Average	337	344																																																																																														
5 *	5610.00	110.37			109.74	0.63	Peak	337	344																																																																																														
6	5725.00	61.78	68.20	-6.42	60.76	1.02	Peak	337	344																																																																																														
7	11220.00	43.69	54.00	-10.31	35.48	8.21	Average	100	146																																																																																														
8	11220.00	56.78	74.00	-17.22	48.57	8.21	Peak	100	146																																																																																														
9	16830.00	58.35	68.20	-9.85	51.85	6.50	Peak	100	275																																																																																														




Modulation	be EHT80	Test Freq. (MHz)	5690
Polarization	Horizontal		
Test By :Allen Lee Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			




Modulation	be EHT80	Test Freq. (MHz)	5690
Polarization	Vertical		
Test By :Allen Lee Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			

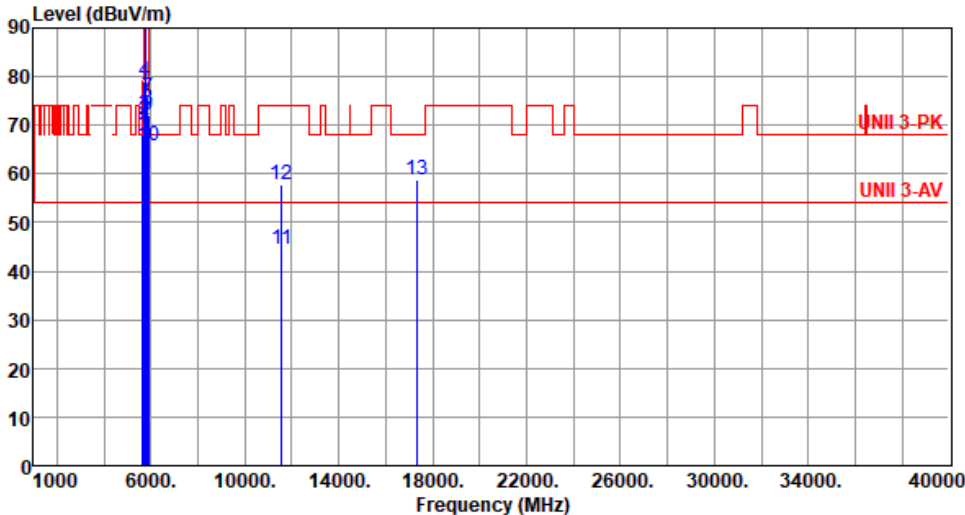

Modulation	be EHT80	Test Freq. (MHz)	5775						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	67.95	68.20	-0.25	67.22	0.73	Peak	226	297
2	5700.00	71.22	105.20	-33.98	70.26	0.96	Peak	226	297
3	5720.00	72.23	110.80	-38.57	71.22	1.01	Peak	226	297
4	5725.00	79.09	122.20	-43.11	78.07	1.02	Peak	226	297
5 *	5775.00	100.18			99.08	1.10	Average	226	297
6 *	5775.00	114.96			113.86	1.10	Peak	226	297
7	5850.00	75.79	122.20	-46.41	74.64	1.15	Peak	226	297
8	5855.00	73.47	110.80	-37.33	72.28	1.19	Peak	226	297
9	5875.00	71.94	105.20	-33.26	70.62	1.32	Peak	226	297
10	5925.00	65.74	68.20	-2.46	64.22	1.52	Peak	226	297
11	11550.00	44.42	54.00	-9.58	35.83	8.59	Average	100	176
12	11550.00	57.69	74.00	-16.31	49.10	8.59	Peak	100	176
13	17325.00	58.74	68.20	-9.46	52.86	5.88	Peak	100	225

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

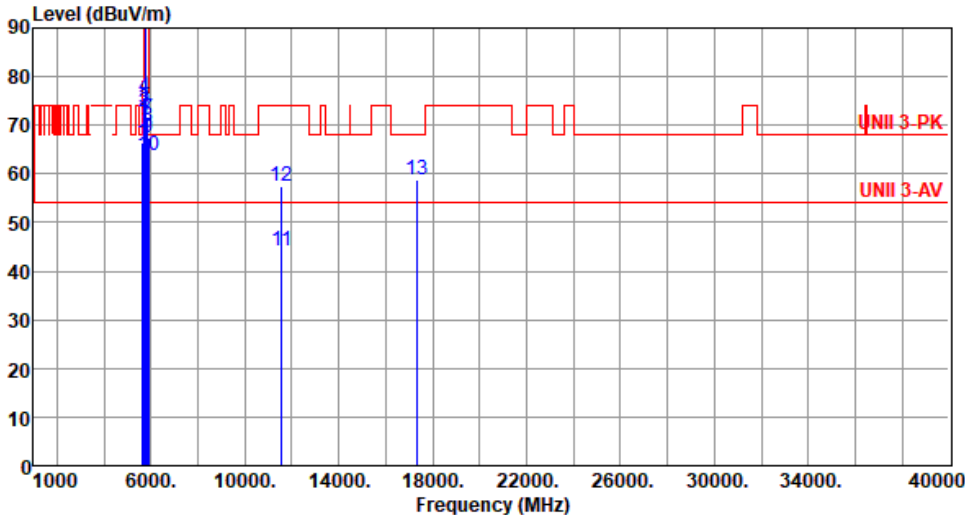

Modulation	be EHT80	Test Freq. (MHz)	5775						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	66.57	68.20	-1.63	65.84	0.73	Peak	331	341
2	5700.00	72.89	105.20	-32.31	71.93	0.96	Peak	331	341
3	5720.00	73.47	110.80	-37.33	72.46	1.01	Peak	331	341
4	5725.00	75.68	122.20	-46.52	74.66	1.02	Peak	331	341
5 *	5775.00	99.54			98.44	1.10	Average	331	341
6 *	5775.00	113.49			112.39	1.10	Peak	331	341
7	5850.00	71.38	122.20	-50.82	70.23	1.15	Peak	331	341
8	5855.00	69.65	110.80	-41.15	68.46	1.19	Peak	331	341
9	5875.00	67.43	105.20	-37.77	66.11	1.32	Peak	331	341
10	5925.00	63.79	68.20	-4.41	62.27	1.52	Peak	331	341
11	11550.00	44.25	54.00	-9.75	35.66	8.59	Average	100	335
12	11550.00	57.47	74.00	-16.53	48.88	8.59	Peak	100	335
13	17325.00	58.76	68.20	-9.44	52.88	5.88	Peak	100	156


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: "*" is Peak / Average value of fundamental frequency



Unwanted Emissions (Above 1GHz) for be EHT160

Modulation	be EHT160	Test Freq. (MHz)	5250
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m)			

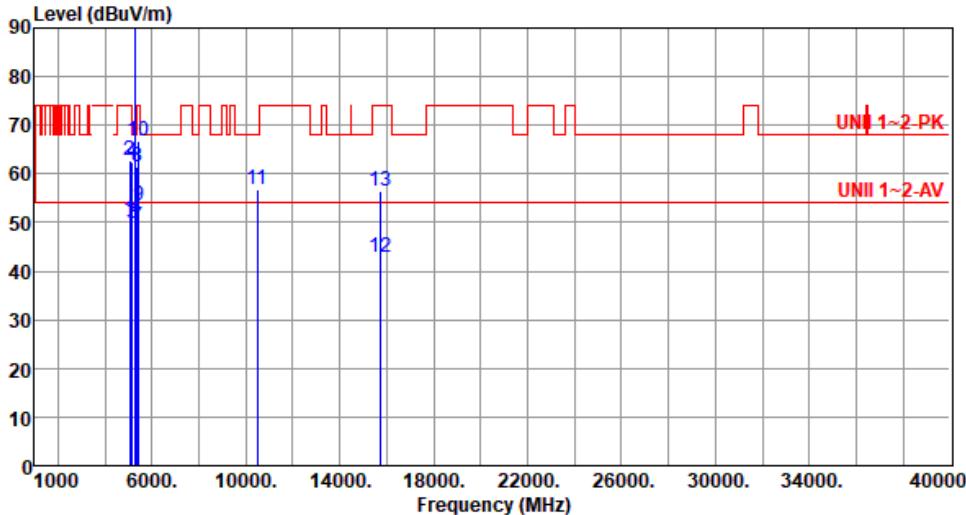

Modulation	be EHT160	Test Freq. (MHz)	5250						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):26 Humidity(%):61									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5060.00	50.44	54.00	-3.56	49.96	0.48	Average	310	354
2	5060.00	62.85	74.00	-11.15	62.37	0.48	Peak	310	354
3	5150.00	49.68	54.00	-4.32	48.96	0.72	Average	310	354
4	5150.00	62.32	74.00	-11.68	61.60	0.72	Peak	310	354
5 *	5250.00	92.32			91.97	0.35	Average	310	354
6 *	5250.00	105.84			105.49	0.35	Peak	310	354
7	5350.00	49.15	54.00	-4.85	48.94	0.21	Average	310	354
8	5350.00	61.36	74.00	-12.64	61.15	0.21	Peak	310	354
9	5433.00	53.42	54.00	-0.58	52.99	0.43	Average	310	354
10	5433.00	66.85	74.00	-7.15	66.42	0.43	Peak	310	354
11	10500.00	56.84	68.20	-11.36	48.33	8.51	Peak	100	175
12	15750.00	42.73	54.00	-11.27	37.64	5.09	Average	100	284
13	15750.00	56.36	74.00	-17.64	51.27	5.09	Peak	100	284


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: "*" is Peak / Average value of fundamental frequency



Modulation	be EHT160	Test Freq. (MHz)	5570						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):25 Humidity(%):62									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	50.26	54.00	-3.74	49.70	0.56	Average	223	298
2	5460.00	64.32	74.00	-9.68	63.76	0.56	Peak	223	298
3	5470.00	64.49	68.20	-3.71	63.90	0.59	Peak	223	298
4 *	5570.00	92.78			92.20	0.58	Average	223	298
5 *	5570.00	106.50			105.92	0.58	Peak	223	298
6	5725.00	68.05	68.20	-0.15	67.03	1.02	Peak	223	298
7	11140.00	43.80	54.00	-10.20	35.44	8.36	Average	100	177
8	11140.00	57.60	74.00	-16.40	49.24	8.36	Peak	100	177
9	16710.00	59.01	68.20	-9.19	52.68	6.33	Peak	100	243

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

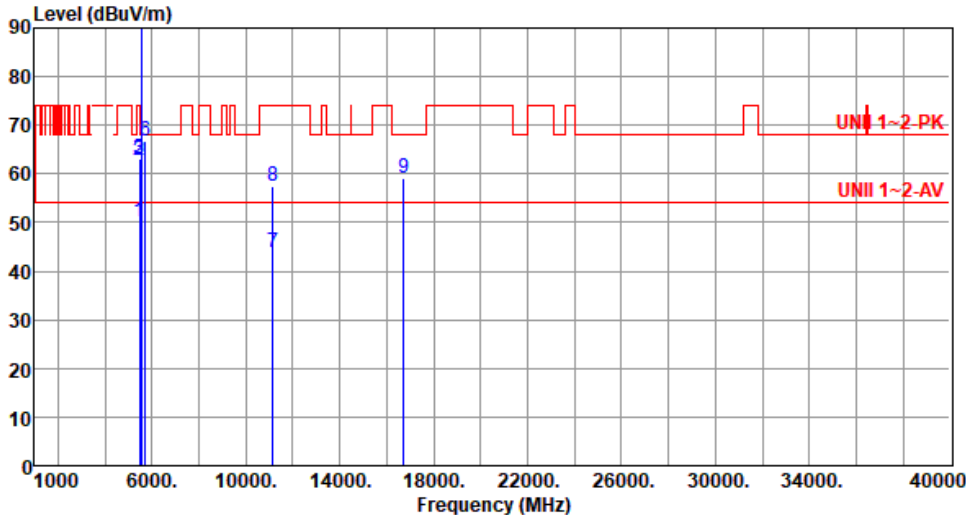

Modulation	be EHT160	Test Freq. (MHz)	5570																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Brad Wu Temperature(°C):25 Humidity(%):62																																																																																																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>50.19</td><td>54.00</td><td>-3.81</td><td>49.63</td><td>0.56</td><td>Average</td><td>350</td><td>348</td></tr><tr><td>2</td><td>5460.00</td><td>62.84</td><td>74.00</td><td>-11.16</td><td>62.28</td><td>0.56</td><td>Peak</td><td>350</td><td>348</td></tr><tr><td>3</td><td>5470.00</td><td>63.17</td><td>68.20</td><td>-5.03</td><td>62.58</td><td>0.59</td><td>Peak</td><td>350</td><td>348</td></tr><tr><td>4 *</td><td>5570.00</td><td>91.51</td><td></td><td></td><td>90.93</td><td>0.58</td><td>Average</td><td>350</td><td>348</td></tr><tr><td>5 *</td><td>5570.00</td><td>104.65</td><td></td><td></td><td>104.07</td><td>0.58</td><td>Peak</td><td>350</td><td>348</td></tr><tr><td>6</td><td>5725.00</td><td>66.88</td><td>68.20</td><td>-1.32</td><td>65.86</td><td>1.02</td><td>Peak</td><td>349</td><td>348</td></tr><tr><td>7</td><td>11140.00</td><td>43.95</td><td>54.00</td><td>-10.05</td><td>35.59</td><td>8.36</td><td>Average</td><td>100</td><td>172</td></tr><tr><td>8</td><td>11140.00</td><td>57.32</td><td>74.00</td><td>-16.68</td><td>48.96</td><td>8.36</td><td>Peak</td><td>100</td><td>172</td></tr><tr><td>9</td><td>16710.00</td><td>59.26</td><td>68.20</td><td>-8.94</td><td>52.93</td><td>6.33</td><td>Peak</td><td>100</td><td>287</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	50.19	54.00	-3.81	49.63	0.56	Average	350	348	2	5460.00	62.84	74.00	-11.16	62.28	0.56	Peak	350	348	3	5470.00	63.17	68.20	-5.03	62.58	0.59	Peak	350	348	4 *	5570.00	91.51			90.93	0.58	Average	350	348	5 *	5570.00	104.65			104.07	0.58	Peak	350	348	6	5725.00	66.88	68.20	-1.32	65.86	1.02	Peak	349	348	7	11140.00	43.95	54.00	-10.05	35.59	8.36	Average	100	172	8	11140.00	57.32	74.00	-16.68	48.96	8.36	Peak	100	172	9	16710.00	59.26	68.20	-8.94	52.93	6.33	Peak	100	287
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	50.19	54.00	-3.81	49.63	0.56	Average	350	348																																																																																														
2	5460.00	62.84	74.00	-11.16	62.28	0.56	Peak	350	348																																																																																														
3	5470.00	63.17	68.20	-5.03	62.58	0.59	Peak	350	348																																																																																														
4 *	5570.00	91.51			90.93	0.58	Average	350	348																																																																																														
5 *	5570.00	104.65			104.07	0.58	Peak	350	348																																																																																														
6	5725.00	66.88	68.20	-1.32	65.86	1.02	Peak	349	348																																																																																														
7	11140.00	43.95	54.00	-10.05	35.59	8.36	Average	100	172																																																																																														
8	11140.00	57.32	74.00	-16.68	48.96	8.36	Peak	100	172																																																																																														
9	16710.00	59.26	68.20	-8.94	52.93	6.33	Peak	100	287																																																																																														




Unwanted Emissions (Above 1GHz) for be EHT240

Modulation	be EHT240	Test Freq. (MHz)	5610						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):25 Humidity(%):62									
Level (dBUV/m) UNI 1-2-PK UNI 1-2-AV Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	46.84	54.00	-7.16	46.28	0.56	Average	223	302
2	5460.00	61.85	74.00	-12.15	61.29	0.56	Peak	223	302
3	5470.00	62.61	68.20	-5.59	62.02	0.59	Peak	223	302
4 *	5610.00	87.64			87.01	0.63	Average	223	302
5 *	5610.00	101.67			101.04	0.63	Peak	223	302
6	5850.00	62.98	68.20	-5.22	61.83	1.15	Peak	223	302
7	5875.00	68.00	68.20	-0.20	66.68	1.32	Peak	223	302
8	11220.00	43.85	54.00	-10.15	35.64	8.21	Average	100	182
9	11220.00	57.07	74.00	-16.93	48.86	8.21	Peak	100	182
10	16830.00	58.48	68.20	-9.72	51.98	6.50	Peak	100	238

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

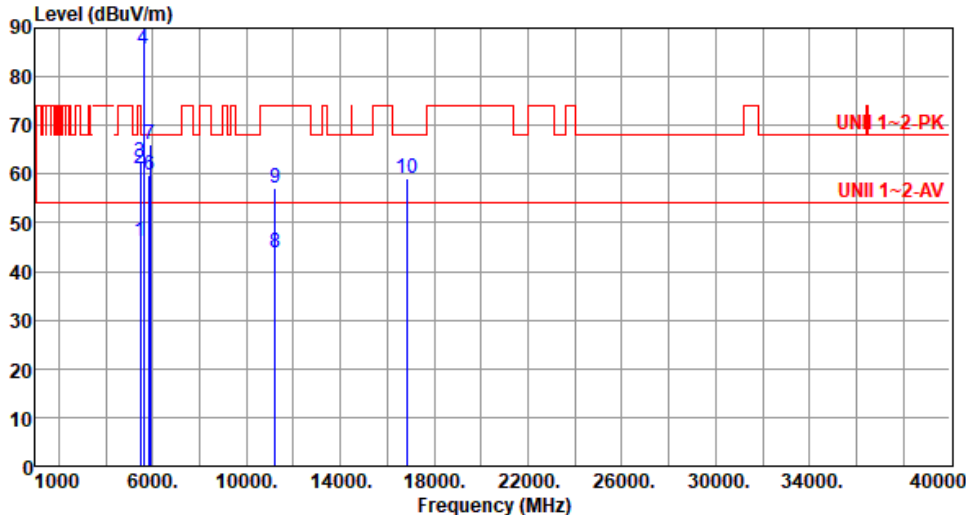

Modulation	be EHT240	Test Freq. (MHz)	5610																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Brad Wu Temperature(°C):25 Humidity(%):62																																																																																																																	
																																																																																																																	
	<table><tr><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5460.00</td><td>46.17</td><td>54.00</td><td>-7.83</td><td>45.61</td><td>0.56</td><td>Average</td><td>348</td><td>349</td></tr><tr><td>2</td><td>5460.00</td><td>61.17</td><td>74.00</td><td>-12.83</td><td>60.61</td><td>0.56</td><td>Peak</td><td>348</td><td>349</td></tr><tr><td>3</td><td>5470.00</td><td>62.46</td><td>68.20</td><td>-5.74</td><td>61.87</td><td>0.59</td><td>Peak</td><td>348</td><td>349</td></tr><tr><td>4 *</td><td>5610.00</td><td>85.59</td><td></td><td></td><td>84.96</td><td>0.63</td><td>Average</td><td>348</td><td>349</td></tr><tr><td>5 *</td><td>5610.00</td><td>99.60</td><td></td><td></td><td>98.97</td><td>0.63</td><td>Peak</td><td>348</td><td>349</td></tr><tr><td>6</td><td>5850.00</td><td>59.84</td><td>68.20</td><td>-8.36</td><td>58.69</td><td>1.15</td><td>Peak</td><td>348</td><td>349</td></tr><tr><td>7</td><td>5875.00</td><td>66.03</td><td>68.20</td><td>-2.17</td><td>64.71</td><td>1.32</td><td>Peak</td><td>348</td><td>349</td></tr><tr><td>8</td><td>11220.00</td><td>43.85</td><td>54.00</td><td>-10.15</td><td>35.64</td><td>8.21</td><td>Average</td><td>100</td><td>148</td></tr><tr><td>9</td><td>11220.00</td><td>57.16</td><td>74.00</td><td>-16.84</td><td>48.95</td><td>8.21</td><td>Peak</td><td>100</td><td>148</td></tr><tr><td>10</td><td>16830.00</td><td>59.13</td><td>68.20</td><td>-9.07</td><td>52.63</td><td>6.50</td><td>Peak</td><td>100</td><td>222</td></tr></table>	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	46.17	54.00	-7.83	45.61	0.56	Average	348	349	2	5460.00	61.17	74.00	-12.83	60.61	0.56	Peak	348	349	3	5470.00	62.46	68.20	-5.74	61.87	0.59	Peak	348	349	4 *	5610.00	85.59			84.96	0.63	Average	348	349	5 *	5610.00	99.60			98.97	0.63	Peak	348	349	6	5850.00	59.84	68.20	-8.36	58.69	1.15	Peak	348	349	7	5875.00	66.03	68.20	-2.17	64.71	1.32	Peak	348	349	8	11220.00	43.85	54.00	-10.15	35.64	8.21	Average	100	148	9	11220.00	57.16	74.00	-16.84	48.95	8.21	Peak	100	148	10	16830.00	59.13	68.20	-9.07	52.63	6.50	Peak	100	222			
Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																									
1	5460.00	46.17	54.00	-7.83	45.61	0.56	Average	348	349																																																																																																								
2	5460.00	61.17	74.00	-12.83	60.61	0.56	Peak	348	349																																																																																																								
3	5470.00	62.46	68.20	-5.74	61.87	0.59	Peak	348	349																																																																																																								
4 *	5610.00	85.59			84.96	0.63	Average	348	349																																																																																																								
5 *	5610.00	99.60			98.97	0.63	Peak	348	349																																																																																																								
6	5850.00	59.84	68.20	-8.36	58.69	1.15	Peak	348	349																																																																																																								
7	5875.00	66.03	68.20	-2.17	64.71	1.32	Peak	348	349																																																																																																								
8	11220.00	43.85	54.00	-10.15	35.64	8.21	Average	100	148																																																																																																								
9	11220.00	57.16	74.00	-16.84	48.95	8.21	Peak	100	148																																																																																																								
10	16830.00	59.13	68.20	-9.07	52.63	6.50	Peak	100	222																																																																																																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																																	



Adapter mode

Unwanted Emissions (Below 1GHz)

Modulation	be EHT20	Test Freq. (MHz)	5240																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):24 Humidity(%):61																																																																																													
Level (dBUV/m) CLASS-B Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>40.67</td><td>22.88</td><td>40.00</td><td>-17.12</td><td>32.33</td><td>-9.45</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>110.51</td><td>21.46</td><td>43.50</td><td>-22.04</td><td>33.18</td><td>-11.72</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>157.07</td><td>26.12</td><td>43.50</td><td>-17.38</td><td>34.69</td><td>-8.57</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>193.93</td><td>27.28</td><td>43.50</td><td>-16.22</td><td>38.81</td><td>-11.53</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>199.68</td><td>29.09</td><td>43.50</td><td>-14.41</td><td>40.86</td><td>-11.77</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>212.24</td><td>27.88</td><td>43.50</td><td>-15.62</td><td>39.85</td><td>-11.97</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table						dBuV			cm	deg	1	40.67	22.88	40.00	-17.12	32.33	-9.45	Peak	---	---	2	110.51	21.46	43.50	-22.04	33.18	-11.72	Peak	---	---	3	157.07	26.12	43.50	-17.38	34.69	-8.57	Peak	---	---	4	193.93	27.28	43.50	-16.22	38.81	-11.53	Peak	---	---	5	199.68	29.09	43.50	-14.41	40.86	-11.77	Peak	---	---	6	212.24	27.88	43.50	-15.62	39.85	-11.97	Peak	---	---
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
					dBuV			cm	deg																																																																																				
1	40.67	22.88	40.00	-17.12	32.33	-9.45	Peak	---	---																																																																																				
2	110.51	21.46	43.50	-22.04	33.18	-11.72	Peak	---	---																																																																																				
3	157.07	26.12	43.50	-17.38	34.69	-8.57	Peak	---	---																																																																																				
4	193.93	27.28	43.50	-16.22	38.81	-11.53	Peak	---	---																																																																																				
5	199.68	29.09	43.50	-14.41	40.86	-11.77	Peak	---	---																																																																																				
6	212.24	27.88	43.50	-15.62	39.85	-11.97	Peak	---	---																																																																																				



Modulation	be EHT20	Test Freq. (MHz)	5240
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):24 Humidity(%):61			
Level (dBuV/m)			



Modulation	be EHT20	Test Freq. (MHz)	5825																																																																						
Polarization	Horizontal																																																																								
Test By :Brad Wu Temperature(°C):24 Humidity(%):61																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>48.39</td><td>22.62</td><td>40.00</td><td>-17.38</td><td>31.33</td><td>-8.71</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>107.60</td><td>22.39</td><td>43.50</td><td>-21.11</td><td>34.36</td><td>-11.97</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>155.13</td><td>25.38</td><td>43.50</td><td>-18.12</td><td>33.76</td><td>-8.38</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>187.41</td><td>26.34</td><td>43.50</td><td>-17.16</td><td>37.35</td><td>-11.01</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>193.86</td><td>27.57</td><td>43.50</td><td>-15.93</td><td>39.10</td><td>-11.53</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>204.60</td><td>27.19</td><td>43.50</td><td>-16.31</td><td>39.07</td><td>-11.88</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	48.39	22.62	40.00	-17.38	31.33	-8.71	Peak	---	---	2	107.60	22.39	43.50	-21.11	34.36	-11.97	Peak	---	---	3	155.13	25.38	43.50	-18.12	33.76	-8.38	Peak	---	---	4	187.41	26.34	43.50	-17.16	37.35	-11.01	Peak	---	---	5	193.86	27.57	43.50	-15.93	39.10	-11.53	Peak	---	---	6	204.60	27.19	43.50	-16.31	39.07	-11.88	Peak	---	---
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	48.39	22.62	40.00	-17.38	31.33	-8.71	Peak	---	---																																																																
2	107.60	22.39	43.50	-21.11	34.36	-11.97	Peak	---	---																																																																
3	155.13	25.38	43.50	-18.12	33.76	-8.38	Peak	---	---																																																																
4	187.41	26.34	43.50	-17.16	37.35	-11.01	Peak	---	---																																																																
5	193.86	27.57	43.50	-15.93	39.10	-11.53	Peak	---	---																																																																
6	204.60	27.19	43.50	-16.31	39.07	-11.88	Peak	---	---																																																																



Modulation	be EHT20	Test Freq. (MHz)	5825																																																																						
Polarization	Vertical																																																																								
Test By :Brad Wu Temperature(°C):24 Humidity(%):61																																																																									
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>48.26</td><td>34.77</td><td>40.00</td><td>-5.23</td><td>43.48</td><td>-8.71</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>69.77</td><td>25.34</td><td>40.00</td><td>-14.66</td><td>36.44</td><td>-11.10</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>149.31</td><td>24.40</td><td>43.50</td><td>-19.10</td><td>32.97</td><td>-8.57</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>159.01</td><td>25.00</td><td>43.50</td><td>-18.50</td><td>33.46</td><td>-8.46</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>186.17</td><td>24.38</td><td>43.50</td><td>-19.12</td><td>35.35</td><td>-10.97</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>538.28</td><td>35.68</td><td>46.00</td><td>-10.32</td><td>37.82</td><td>-2.14</td><td>Peak</td><td>---</td><td>---</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	48.26	34.77	40.00	-5.23	43.48	-8.71	Peak	---	---	2	69.77	25.34	40.00	-14.66	36.44	-11.10	Peak	---	---	3	149.31	24.40	43.50	-19.10	32.97	-8.57	Peak	---	---	4	159.01	25.00	43.50	-18.50	33.46	-8.46	Peak	---	---	5	186.17	24.38	43.50	-19.12	35.35	-10.97	Peak	---	---	6	538.28	35.68	46.00	-10.32	37.82	-2.14	Peak	---	---
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	48.26	34.77	40.00	-5.23	43.48	-8.71	Peak	---	---																																																																
2	69.77	25.34	40.00	-14.66	36.44	-11.10	Peak	---	---																																																																
3	149.31	24.40	43.50	-19.10	32.97	-8.57	Peak	---	---																																																																
4	159.01	25.00	43.50	-18.50	33.46	-8.46	Peak	---	---																																																																
5	186.17	24.38	43.50	-19.12	35.35	-10.97	Peak	---	---																																																																
6	538.28	35.68	46.00	-10.32	37.82	-2.14	Peak	---	---																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																									

Frequency: 5300 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	0.46	0.01	-0.47	-0.66
T20°CVmin	4.56	4.05	3.59	3.37
T50°CVnom	0.28	-0.22	-0.72	-0.90
T40°CVnom	0.32	-0.15	-0.62	-0.84
T30°CVnom	0.37	-0.10	-0.61	-0.78
T20°CVnom	0.45	-0.08	-0.54	-0.69
T10°CVnom	4.64	4.06	3.60	3.37
T0°CVnom	6.68	6.12	5.62	5.50
T-10°CVnom	12.55	12.15	11.87	11.74
T-20°CVnom	14.82	14.12	13.42	13.12
Vnom [V]: 110	Vmax [V]: 126.5		Vmin [V]: 93.5	
Tnom [°C]: 20	Tmax [°C]: 50		Tmin [°C]: -20	

Frequency: 5785 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	0.45	0.08	-0.24	-0.44
T20°CVmin	6.07	5.61	5.11	4.96
T50°CVnom	0.21	-0.15	-0.46	-0.60
T40°CVnom	0.24	-0.13	-0.48	-0.57
T30°CVnom	0.29	-0.07	-0.38	-0.52
T20°CVnom	0.37	0.04	-0.31	-0.44
T10°CVnom	6.10	5.65	5.19	4.99
T0°CVnom	9.06	8.61	8.24	8.04
T-10°CVnom	12.24	11.56	10.91	10.59
T-20°CVnom	13.68	13.01	12.31	12.04
Vnom [V]: 110	Vmax [V]: 126.5		Vmin [V]: 93.5	
Tnom [°C]: 20	Tmax [°C]: 50		Tmin [°C]: -20	




POE mode

Modulation Mode	be EHT20	Test Freq. (MHz)	5240
Power Phase	Line		

Test by : Michael Shang

Temperature: 21°C

Humidity: 61%

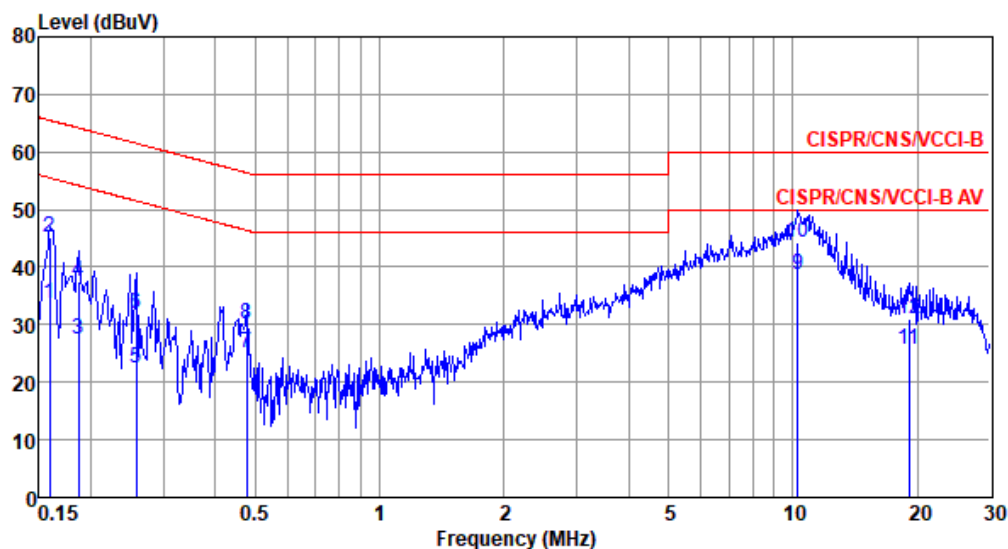

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.159	33.69	55.52	-21.83	23.96	9.65	0.08	0.00	Average
2	0.159	45.20	65.52	-20.32	35.47	9.65	0.08	0.00	QP
3	0.186	27.33	54.20	-26.87	17.60	9.65	0.08	0.00	Average
4	0.186	37.44	64.20	-26.76	27.71	9.65	0.08	0.00	QP
5	0.258	22.32	51.51	-29.19	12.59	9.65	0.08	0.00	Average
6	0.258	31.79	61.51	-29.72	22.06	9.65	0.08	0.00	QP
7	0.476	24.99	46.41	-21.42	15.26	9.64	0.09	0.00	Average
8	0.476	30.10	56.41	-26.31	20.37	9.64	0.09	0.00	QP
9*	10.288	38.59	50.00	-11.41	28.57	9.71	0.31	0.00	Average
10	10.288	44.26	60.00	-15.74	34.24	9.71	0.31	0.00	QP
11	19.122	25.73	50.00	-24.27	15.50	9.68	0.55	0.00	Average
12	19.122	30.86	60.00	-29.14	20.63	9.68	0.55	0.00	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).




Modulation Mode	be EHT20	Test Freq. (MHz)	5240
Power Phase	Neutral		

Test by : Michael Shang

Temperature: 21°C

Humidity: 61%

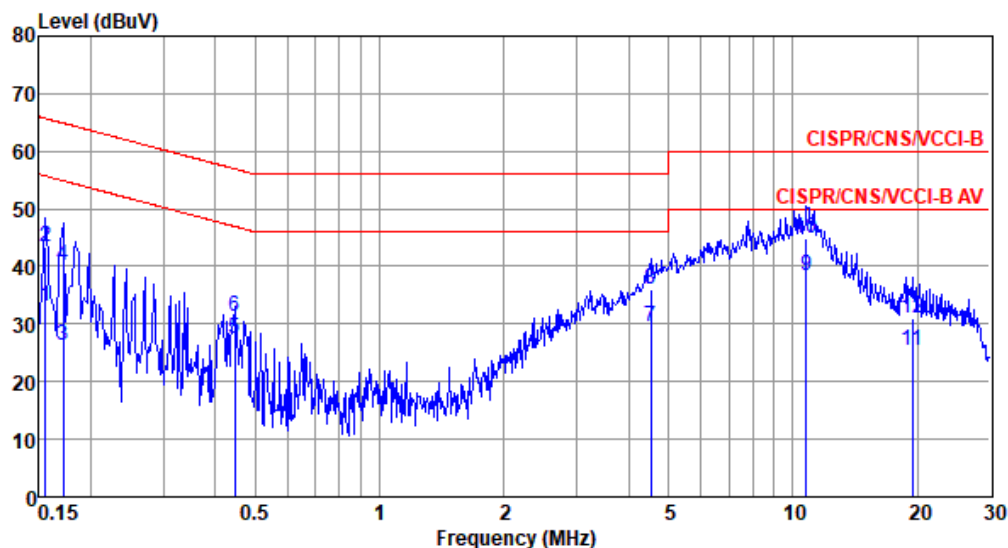

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.156	33.05	55.69	-22.64	23.31	9.66	0.08	0.00	Average
2	0.156	43.29	65.69	-22.40	33.55	9.66	0.08	0.00	QP
3	0.171	26.33	54.90	-28.57	16.59	9.66	0.08	0.00	Average
4	0.171	40.17	64.90	-24.73	30.43	9.66	0.08	0.00	QP
5	0.447	27.38	46.93	-19.55	17.65	9.64	0.09	0.00	Average
6	0.447	31.43	56.93	-25.50	21.70	9.64	0.09	0.00	QP
7	4.525	29.53	46.00	-16.47	19.61	9.69	0.23	0.00	Average
8	4.525	36.11	56.00	-19.89	26.19	9.69	0.23	0.00	QP
9*	10.790	38.46	50.00	-11.54	28.38	9.75	0.33	0.00	Average
10	10.790	44.75	60.00	-15.25	34.67	9.75	0.33	0.00	QP
11	19.428	25.44	50.00	-24.56	15.05	9.83	0.56	0.00	Average
12	19.428	30.86	60.00	-29.14	20.47	9.83	0.56	0.00	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).




Modulation Mode	be EHT20	Test Freq. (MHz)	5825
Power Phase	Line		

Test by : Michael Shang

Temperature: 21°C

Humidity: 61%

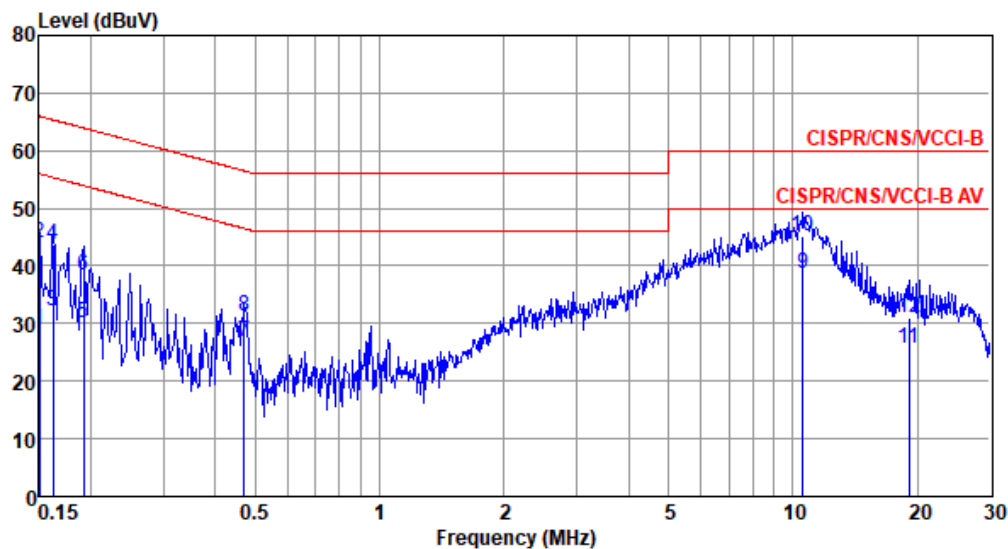

	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	
	MHz	dBuV	Line	Limit	Level		loss		Remark
			dBuV	dB	dBuV	dB	dB	dB	
1	0.150	29.00	56.00	-27.00	19.27	9.65	0.08	0.00	Average
2	0.150	44.00	66.00	-22.00	34.27	9.65	0.08	0.00	QP
3	0.162	32.26	55.34	-23.08	22.53	9.65	0.08	0.00	Average
4	0.162	43.57	65.34	-21.77	33.84	9.65	0.08	0.00	QP
5	0.192	30.10	53.93	-23.83	20.37	9.65	0.08	0.00	Average
6	0.192	38.41	63.93	-25.52	28.68	9.65	0.08	0.00	QP
7	0.471	26.72	46.49	-19.77	16.99	9.64	0.09	0.00	Average
8	0.471	31.36	56.49	-25.13	21.63	9.64	0.09	0.00	QP
9*	10.564	38.80	50.00	-11.20	28.77	9.71	0.32	0.00	Average
10	10.564	45.22	60.00	-14.78	35.19	9.71	0.32	0.00	QP
11	19.122	25.70	50.00	-24.30	15.47	9.68	0.55	0.00	Average
12	19.122	30.85	60.00	-29.15	20.62	9.68	0.55	0.00	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).


2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).

Modulation Mode	be EHT20	Test Freq. (MHz)	5825
Power Phase	Line		

Test by : Michael Shang

Temperature: 21°C

Humidity: 61%

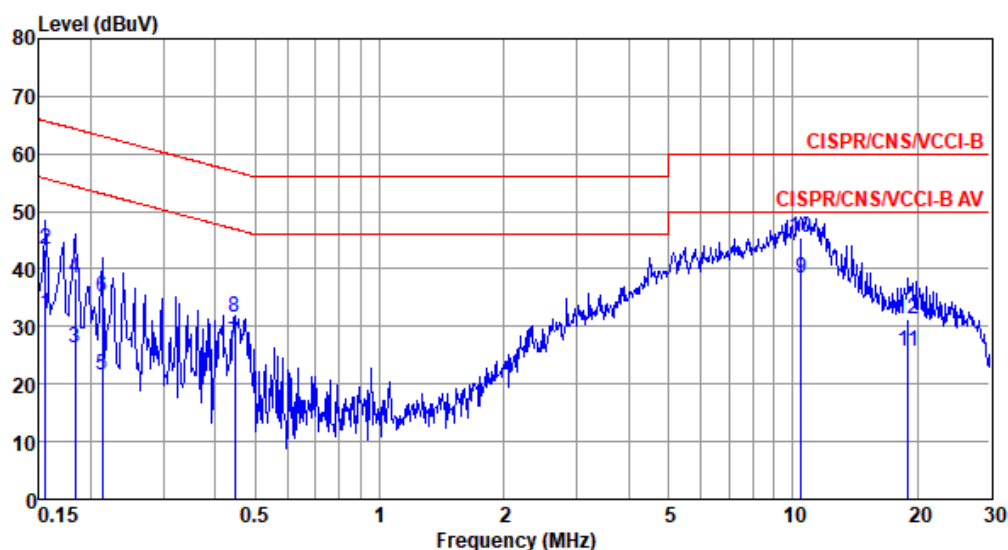

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.156	32.26	55.69	-23.43	22.52	9.66	0.08	0.00	Average
2	0.156	43.54	65.69	-22.15	33.80	9.66	0.08	0.00	QP
3	0.183	26.36	54.33	-27.97	16.63	9.65	0.08	0.00	Average
4	0.183	38.28	64.33	-26.05	28.55	9.65	0.08	0.00	QP
5	0.213	21.44	53.10	-31.66	11.71	9.65	0.08	0.00	Average
6	0.213	35.01	63.10	-28.09	25.28	9.65	0.08	0.00	QP
7	0.447	27.28	46.93	-19.65	17.55	9.64	0.09	0.00	Average
8	0.447	31.47	56.93	-25.46	21.74	9.64	0.09	0.00	QP
9*	10.452	38.40	50.00	-11.60	28.34	9.75	0.31	0.00	Average
10	10.452	45.53	60.00	-14.47	35.47	9.75	0.31	0.00	QP
11	19.021	25.58	50.00	-24.42	15.21	9.82	0.55	0.00	Average
12	19.021	31.22	60.00	-28.78	20.85	9.82	0.55	0.00	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).




Adapter mode

Modulation Mode	be EHT20	Test Freq. (MHz)	5240
Power Phase	Neutral		

Test by : Michael Shang

Temperature: 21°C

Humidity: 61%

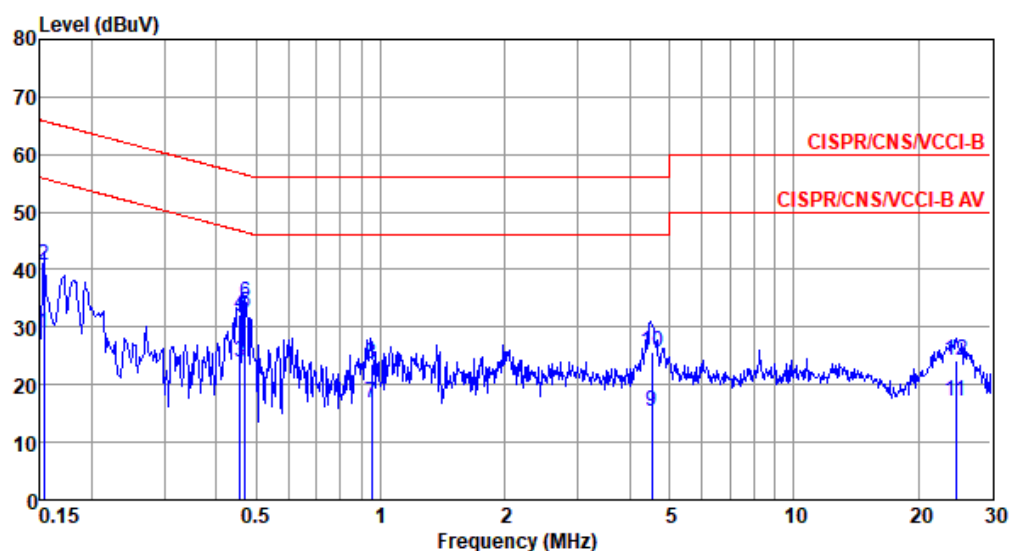

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.153	28.88	55.82	-26.94	18.94	9.65	0.08	0.21	Average
2	0.153	40.73	65.82	-25.09	30.79	9.65	0.08	0.21	QP
3	0.456	23.96	46.76	-22.80	13.90	9.64	0.09	0.33	Average
4	0.456	32.18	56.76	-24.58	22.12	9.64	0.09	0.33	QP
5*	0.471	32.52	46.49	-13.97	22.46	9.64	0.09	0.33	Average
6	0.471	34.11	56.49	-22.38	24.05	9.64	0.09	0.33	QP
7	0.953	16.75	46.00	-29.25	6.60	9.65	0.10	0.40	Average
8	0.953	23.50	56.00	-32.50	13.35	9.65	0.10	0.40	QP
9	4.525	15.43	46.00	-30.57	5.04	9.68	0.23	0.48	Average
10	4.525	25.74	56.00	-30.26	15.35	9.68	0.23	0.48	QP
11	24.659	17.07	50.00	-32.93	6.05	9.66	0.63	0.73	Average
12	24.659	24.11	60.00	-35.89	13.09	9.66	0.63	0.73	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).



Modulation Mode	be EHT20	Test Freq. (MHz)	5240																																																																																																																																																						
Power Phase	Line																																																																																																																																																								
Test by : Michael Shang Temperature: 21°C Humidity: 61%																																																																																																																																																									
<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Cable</th><th>Aux</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV</th><th>Line</th><th>Limit</th><th>Level</th><th>dB</th><th>loss</th><th>dB</th><th></th></tr><tr><th></th><th></th><th></th><th>dBuV</th><th>dB</th><th>dBuV</th><th></th><th>dB</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>0.165</td><td>30.29</td><td>55.21</td><td>-24.92</td><td>20.39</td><td>9.66</td><td>0.08</td><td>0.16</td><td>Average</td></tr><tr><td>2</td><td>0.165</td><td>41.21</td><td>65.21</td><td>-24.00</td><td>31.31</td><td>9.66</td><td>0.08</td><td>0.16</td><td>QP</td></tr><tr><td>3</td><td>0.198</td><td>30.56</td><td>53.71</td><td>-23.15</td><td>20.63</td><td>9.65</td><td>0.08</td><td>0.20</td><td>Average</td></tr><tr><td>4</td><td>0.198</td><td>39.67</td><td>63.71</td><td>-24.04</td><td>29.74</td><td>9.65</td><td>0.08</td><td>0.20</td><td>QP</td></tr><tr><td>5</td><td>0.461</td><td>27.13</td><td>46.67</td><td>-19.54</td><td>17.13</td><td>9.64</td><td>0.09</td><td>0.27</td><td>Average</td></tr><tr><td>6*</td><td>0.461</td><td>38.35</td><td>56.67</td><td>-18.32</td><td>28.35</td><td>9.64</td><td>0.09</td><td>0.27</td><td>QP</td></tr><tr><td>7</td><td>0.582</td><td>25.85</td><td>46.00</td><td>-20.15</td><td>15.82</td><td>9.64</td><td>0.09</td><td>0.30</td><td>Average</td></tr><tr><td>8</td><td>0.582</td><td>32.02</td><td>56.00</td><td>-23.98</td><td>21.99</td><td>9.64</td><td>0.09</td><td>0.30</td><td>QP</td></tr><tr><td>9</td><td>1.054</td><td>23.74</td><td>46.00</td><td>-22.26</td><td>13.64</td><td>9.65</td><td>0.10</td><td>0.35</td><td>Average</td></tr><tr><td>10</td><td>1.054</td><td>29.68</td><td>56.00</td><td>-26.32</td><td>19.58</td><td>9.65</td><td>0.10</td><td>0.35</td><td>QP</td></tr><tr><td>11</td><td>23.888</td><td>20.11</td><td>50.00</td><td>-29.89</td><td>8.99</td><td>9.84</td><td>0.62</td><td>0.66</td><td>Average</td></tr><tr><td>12</td><td>23.888</td><td>24.84</td><td>60.00</td><td>-35.16</td><td>13.72</td><td>9.84</td><td>0.62</td><td>0.66</td><td>QP</td></tr></tbody></table>					Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark		MHz	dBuV	Line	Limit	Level	dB	loss	dB					dBuV	dB	dBuV		dB			1	0.165	30.29	55.21	-24.92	20.39	9.66	0.08	0.16	Average	2	0.165	41.21	65.21	-24.00	31.31	9.66	0.08	0.16	QP	3	0.198	30.56	53.71	-23.15	20.63	9.65	0.08	0.20	Average	4	0.198	39.67	63.71	-24.04	29.74	9.65	0.08	0.20	QP	5	0.461	27.13	46.67	-19.54	17.13	9.64	0.09	0.27	Average	6*	0.461	38.35	56.67	-18.32	28.35	9.64	0.09	0.27	QP	7	0.582	25.85	46.00	-20.15	15.82	9.64	0.09	0.30	Average	8	0.582	32.02	56.00	-23.98	21.99	9.64	0.09	0.30	QP	9	1.054	23.74	46.00	-22.26	13.64	9.65	0.10	0.35	Average	10	1.054	29.68	56.00	-26.32	19.58	9.65	0.10	0.35	QP	11	23.888	20.11	50.00	-29.89	8.99	9.84	0.62	0.66	Average	12	23.888	24.84	60.00	-35.16	13.72	9.84	0.62	0.66	QP
	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark																																																																																																																																																
	MHz	dBuV	Line	Limit	Level	dB	loss	dB																																																																																																																																																	
			dBuV	dB	dBuV		dB																																																																																																																																																		
1	0.165	30.29	55.21	-24.92	20.39	9.66	0.08	0.16	Average																																																																																																																																																
2	0.165	41.21	65.21	-24.00	31.31	9.66	0.08	0.16	QP																																																																																																																																																
3	0.198	30.56	53.71	-23.15	20.63	9.65	0.08	0.20	Average																																																																																																																																																
4	0.198	39.67	63.71	-24.04	29.74	9.65	0.08	0.20	QP																																																																																																																																																
5	0.461	27.13	46.67	-19.54	17.13	9.64	0.09	0.27	Average																																																																																																																																																
6*	0.461	38.35	56.67	-18.32	28.35	9.64	0.09	0.27	QP																																																																																																																																																
7	0.582	25.85	46.00	-20.15	15.82	9.64	0.09	0.30	Average																																																																																																																																																
8	0.582	32.02	56.00	-23.98	21.99	9.64	0.09	0.30	QP																																																																																																																																																
9	1.054	23.74	46.00	-22.26	13.64	9.65	0.10	0.35	Average																																																																																																																																																
10	1.054	29.68	56.00	-26.32	19.58	9.65	0.10	0.35	QP																																																																																																																																																
11	23.888	20.11	50.00	-29.89	8.99	9.84	0.62	0.66	Average																																																																																																																																																
12	23.888	24.84	60.00	-35.16	13.72	9.84	0.62	0.66	QP																																																																																																																																																
Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).																																																																																																																																																									




Modulation Mode	be EHT20	Test Freq. (MHz)	5825
Power Phase	Neutral		

Test by : Michael Shang

Temperature: 21°C

Humidity: 61%

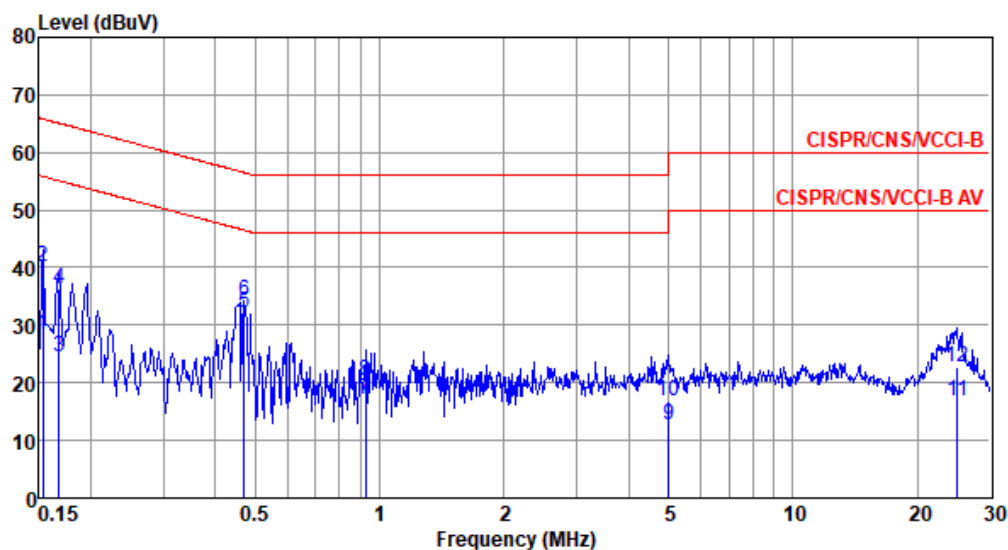

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.153	28.44	55.82	-27.38	18.50	9.65	0.08	0.21	Average
2	0.153	40.26	65.82	-25.56	30.32	9.65	0.08	0.21	QP
3	0.168	24.36	55.08	-30.72	14.40	9.65	0.08	0.23	Average
4	0.168	36.35	65.08	-28.73	26.39	9.65	0.08	0.23	QP
5*	0.471	32.24	46.49	-14.25	22.18	9.64	0.09	0.33	Average
6	0.471	34.27	56.49	-22.22	24.21	9.64	0.09	0.33	QP
7	0.923	17.20	46.00	-28.80	7.06	9.65	0.10	0.39	Average
8	0.923	20.42	56.00	-35.58	10.28	9.65	0.10	0.39	QP
9	5.005	12.66	50.00	-37.34	2.26	9.68	0.24	0.48	Average
10	5.005	16.75	60.00	-43.25	6.35	9.68	0.24	0.48	QP
11	25.055	16.76	50.00	-33.24	5.73	9.66	0.63	0.74	Average
12	25.055	22.76	60.00	-37.24	11.73	9.66	0.63	0.74	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).



Modulation Mode	be EHT20	Test Freq. (MHz)	5825																																																																																																																																		
Power Phase	Neutral																																																																																																																																				
Test by : Michael Shang Temperature: 21°C Humidity: 61%																																																																																																																																					
Level (dBuV) Frequency (MHz) <table><tr><th></th><th>Freq MHz</th><th>Level dBuV</th><th>Limit Line dBuV</th><th>Over Limit dB</th><th>Read Level dBuV</th><th>Factor dB</th><th>Cable loss dB</th><th>Aux dB</th><th>Remark</th></tr><tr><td>1</td><td>0.156</td><td>34.65</td><td>55.69</td><td>-21.04</td><td>24.76</td><td>9.66</td><td>0.08</td><td>0.15</td><td>Average</td></tr><tr><td>2</td><td>0.156</td><td>44.30</td><td>65.69</td><td>-21.39</td><td>34.41</td><td>9.66</td><td>0.08</td><td>0.15</td><td>QP</td></tr><tr><td>3*</td><td>0.471</td><td>37.40</td><td>46.49</td><td>-9.09</td><td>27.39</td><td>9.64</td><td>0.09</td><td>0.28</td><td>Average</td></tr><tr><td>4</td><td>0.471</td><td>38.96</td><td>56.49</td><td>-17.53</td><td>28.95</td><td>9.64</td><td>0.09</td><td>0.28</td><td>QP</td></tr><tr><td>5</td><td>0.589</td><td>26.58</td><td>46.00</td><td>-19.42</td><td>16.55</td><td>9.64</td><td>0.09</td><td>0.30</td><td>Average</td></tr><tr><td>6</td><td>0.589</td><td>31.34</td><td>56.00</td><td>-24.66</td><td>21.31</td><td>9.64</td><td>0.09</td><td>0.30</td><td>QP</td></tr><tr><td>7</td><td>1.210</td><td>21.69</td><td>46.00</td><td>-24.31</td><td>11.55</td><td>9.65</td><td>0.12</td><td>0.37</td><td>Average</td></tr><tr><td>8</td><td>1.210</td><td>30.63</td><td>56.00</td><td>-25.37</td><td>20.49</td><td>9.65</td><td>0.12</td><td>0.37</td><td>QP</td></tr><tr><td>9</td><td>4.549</td><td>19.50</td><td>46.00</td><td>-26.50</td><td>9.10</td><td>9.69</td><td>0.23</td><td>0.48</td><td>Average</td></tr><tr><td>10</td><td>4.549</td><td>26.41</td><td>56.00</td><td>-29.59</td><td>16.01</td><td>9.69</td><td>0.23</td><td>0.48</td><td>QP</td></tr><tr><td>11</td><td>23.387</td><td>17.52</td><td>50.00</td><td>-32.48</td><td>6.41</td><td>9.84</td><td>0.61</td><td>0.66</td><td>Average</td></tr><tr><td>12</td><td>23.387</td><td>22.31</td><td>60.00</td><td>-37.69</td><td>11.20</td><td>9.84</td><td>0.61</td><td>0.66</td><td>QP</td></tr></table>					Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark	1	0.156	34.65	55.69	-21.04	24.76	9.66	0.08	0.15	Average	2	0.156	44.30	65.69	-21.39	34.41	9.66	0.08	0.15	QP	3*	0.471	37.40	46.49	-9.09	27.39	9.64	0.09	0.28	Average	4	0.471	38.96	56.49	-17.53	28.95	9.64	0.09	0.28	QP	5	0.589	26.58	46.00	-19.42	16.55	9.64	0.09	0.30	Average	6	0.589	31.34	56.00	-24.66	21.31	9.64	0.09	0.30	QP	7	1.210	21.69	46.00	-24.31	11.55	9.65	0.12	0.37	Average	8	1.210	30.63	56.00	-25.37	20.49	9.65	0.12	0.37	QP	9	4.549	19.50	46.00	-26.50	9.10	9.69	0.23	0.48	Average	10	4.549	26.41	56.00	-29.59	16.01	9.69	0.23	0.48	QP	11	23.387	17.52	50.00	-32.48	6.41	9.84	0.61	0.66	Average	12	23.387	22.31	60.00	-37.69	11.20	9.84	0.61	0.66	QP
	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark																																																																																																																												
1	0.156	34.65	55.69	-21.04	24.76	9.66	0.08	0.15	Average																																																																																																																												
2	0.156	44.30	65.69	-21.39	34.41	9.66	0.08	0.15	QP																																																																																																																												
3*	0.471	37.40	46.49	-9.09	27.39	9.64	0.09	0.28	Average																																																																																																																												
4	0.471	38.96	56.49	-17.53	28.95	9.64	0.09	0.28	QP																																																																																																																												
5	0.589	26.58	46.00	-19.42	16.55	9.64	0.09	0.30	Average																																																																																																																												
6	0.589	31.34	56.00	-24.66	21.31	9.64	0.09	0.30	QP																																																																																																																												
7	1.210	21.69	46.00	-24.31	11.55	9.65	0.12	0.37	Average																																																																																																																												
8	1.210	30.63	56.00	-25.37	20.49	9.65	0.12	0.37	QP																																																																																																																												
9	4.549	19.50	46.00	-26.50	9.10	9.69	0.23	0.48	Average																																																																																																																												
10	4.549	26.41	56.00	-29.59	16.01	9.69	0.23	0.48	QP																																																																																																																												
11	23.387	17.52	50.00	-32.48	6.41	9.84	0.61	0.66	Average																																																																																																																												
12	23.387	22.31	60.00	-37.69	11.20	9.84	0.61	0.66	QP																																																																																																																												
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).																																																																																																																																					