

Tonal

TEST REPORT FOR

Apollo Board
Model: 500-0806

Trainer
Model: T2

Tested to The Following Standards:

FCC Part 15 Subpart E Section(s)

15.207 & 15.407
(NII 5725 – 5850 MHz)

Report No.: 110285-32

Date of issue: November 27, 2024



Test Certificate # 803.01

This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of testing for CKC Laboratories, Inc.

We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

This report contains a total of 157 pages and may be reproduced in full only. Partial reproduction may only be done with the written consent of CKC Laboratories, Inc.

TABLE OF CONTENTS

Administrative Information	3
Test Report Information	3
Report Authorization	3
Test Facility Information	4
Software Versions	4
Site Registration & Accreditation Information	4
Summary of Results	5
Standard / Specification: FCC Part 15 Subpart E - 15.407 (NII 5725 – 5850 MHz)	5
Modifications During Testing	5
Conditions During Testing	5
Equipment Under Test (EUT)	6
General Product Information:	7
FCC Part 15 Subpart E	11
15.407(e) Occupied Bandwidth	11
15.407(a) Output Power	51
15.407(a) Power Spectral Density	73
15.407(b) Radiated Emissions & Band Edge	94
15.207 AC Conducted Emissions	146
APPENDIX A: Modifications Made During Testing	155
Supplemental Information	156
Measurement Uncertainty	156
Emissions Test Details	156

Administrative Information

Test Report Information

REPORT PREPARED FOR:

Tonal
69 Converse, Suite 200
San Francisco, CA 94103

Representative: Lars Gilstrom
Customer Reference Number: PO3196

REPORT PREPARED BY:

Viviana Prado
CKC Laboratories, Inc.
5046 Sierra Pines Drive
Mariposa, CA 95338

Project Number: 110285

DATE OF EQUIPMENT RECEIPT:

October 2, 2024

DATE(S) OF TESTING:

October 7, 8, 9, 17, 24, and 25, 2024
And November 1 and 6, 2024

Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the equipment provided by the client, tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.

A handwritten signature in black ink that reads "Steve Behm".

Steve Behm
Director of Quality Assurance & Engineering Services
CKC Laboratories, Inc.

Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable, and affordable test results.

TEST LOCATION(S):
CKC Laboratories, Inc.
1120 Fulton Place
Fremont, CA 94539

Software Versions

CKC Laboratories Proprietary Software	Version
EMITest Emissions	5.03.20

Site Registration & Accreditation Information

Location	*NIST CB #	FCC	Canada	Japan
Canyon Park, Bothell, WA	US0103	US1024	3082C	A-0136
Brea, CA	US0103	US1024	3082D	A-0136
Fremont, CA	US0103	US1024	3082B	A-0136
Mariposa, CA	US0103	US1024	3082A	A-0136

*CKC's list of NIST designated countries can be found at: <https://standards.gov/cabs/designations.html>

Summary of Results

Standard / Specification: FCC Part 15 Subpart E - 15.407 (NII 5725 – 5850 MHz)

Test Procedure	Description	Modifications	Results
15.407(e)	6dB Bandwidth	NA	Pass
15.407(a)	Output Power	NA	Pass
15.407(a)	Power Spectral Density	NA	Pass
15.407(b)	Radiated Emissions & Band Edge	Mod. #1	Pass
15.407(g)	Frequency Stability	NA	NA1
15.207	AC Conducted Emissions	Mod. #1	Pass

NA = Not applicable

NA1 = In accordance with KDB 789033, this test is not required.

ISO/IEC 17025 Decision Rule

The equipment sample utilized for testing is selected by the manufacturer. The declaration of pass or fail herein is a binary statement for simple acceptance rule (ILAC G8) based upon assessment to the specification(s) listed above, without consideration of measurement uncertainties. For performance related tests, equipment was monitored for specified criteria identified in that section of testing.

Modifications During Testing

This list is a summary of the modifications made to the equipment during testing.

Summary of Conditions

Modification #1: Added a ferrite (Würth: 742 712 21) on lower resistor wire.
Green Resistor.

Modifications listed above must be incorporated into all production units.

Conditions During Testing

This list is a summary of the conditions noted to the equipment during testing.

Summary of Conditions

Worst case tested:
802.11a 18Mbit/s
802.11n HT20 MSC2
802.11n HT40 MSC0
802.11ac VHT20 MSC2
802.11ac VHT40 MSC0
802.11ac VHT80 MSC1

Equipment Under Test (EUT)

During testing numerous configurations may have been utilized. The configurations listed below support compliance to the standard(s) listed in the Summary of Results section.

Configuration A

Equipment Under Test (= EUT):*

Device Name	Manufacturer	Model #	S/N
Apollo Board	Tonal System	500-0806	080600030001263

Support Devices:

Device Name	Manufacturer	Model #	S/N
MCB Board	Tonal Systems	500-0131	500-0131_rev003_00001286_20240909_17
Laptop	Dell	XPS	22E00911
AC/DC Adapter for Laptop	Dell	DA130PM130	CN-06TTY6-48661-4CO-27M7-A00

Configuration 1

Equipment Under Test (= EUT):*

Device Name	Manufacturer	Model #	S/N
Trainer	Tonal System	T2	4000055


Support Devices:

Device Name	Manufacturer	Model #	S/N
Laptop	Dell	XPS	22E00911
AC/DC Adapter for Laptop	Dell	DA130PM130	CN-06TTY6-48661-4CO-27M7-A00

General Product Information:

Description of EUT	
Exercise Trainer	
Product Information	Manufacturer-Provided Details
Operating Frequencies Tested:	5745-5825MHz
Equipment Type:	Stand-Alone Equipment
Type of Wideband System:	802.11
Maximum Duty Cycle:	100%
Modulation Type(s):	802.11a (BPSK, QPSK, 16QAM, 64QAM) 802.11n HT20 (BPSK, QPSK, 16QAM, 64QAM) 802.11n HT40 (BPSK, QPSK, 16QAM, 64QAM) 802.11ac VHT20 (BPSK, QPSK, 16QAM, 64QAM, 256QAM) 802.11ac VHT40 (BPSK, QPSK, 16QAM, 64QAM, 256QAM) 802.11ac VHT80 (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
Number of TX Chains:	2 Note: The manufacturer declared MIMO is not enabled, completely uncorrelated transmission.
Beamforming Type:	NA
Antenna Type(s) and Gain:	External/4.66dBi
Antenna Connection Type:	External Connector
Nominal Input Voltage:	12VDC
Firmware / Software Version(s):	QRCT (Qualcomm Radio Control Toolkit) Version 4.1
Firmware / Software Description:	Using C-Prompt and QRCT application to control all modulation types and frequencies to continuously transmit or receive as intended
Firmware / Software Setting(s):	NA
Tune-up or Adjustment(s):	NA
Declared Operational Configuration:	<input type="checkbox"/> Indoor Access Point <input type="checkbox"/> Outdoor Access Point <input checked="" type="checkbox"/> Indoor Client <input type="checkbox"/> Outdoor Client <input type="checkbox"/> Outdoor Fixed Equipment
The validity of results is dependent on the stated product details, the accuracy of which the manufacturer assumes full responsibility.	

EUT and Accessory Photo(s)

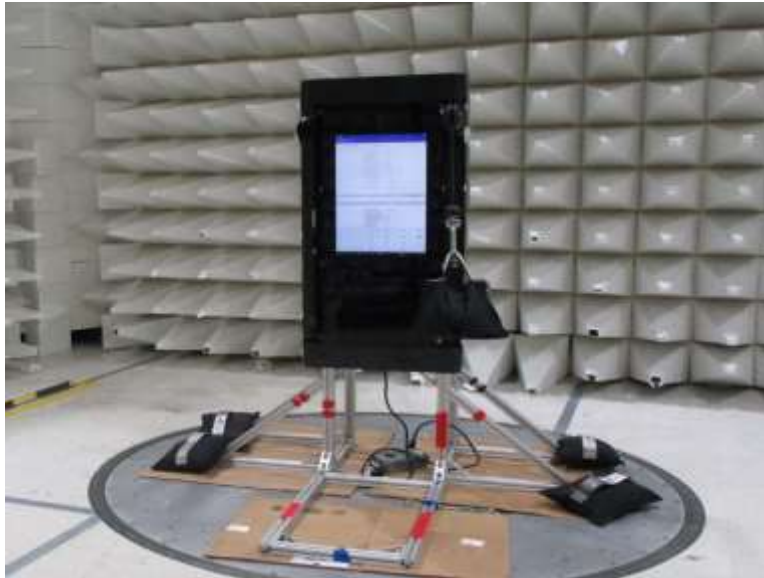


Support Equipment Photo(s)




Block Diagram of Test Setup(s)

Config#	Setup Description of Block Diagram
1 & A	Radiated Measurement: The antenna is set up at 3meter distance from the EUT according to ANSI C63.10 2020. The EUT is set up and operated as intended.
	Conducted Measurement: The EUT is placed non-conducted table. It is operated as intended. It is connected straight to a Spectrum Analyzer.

Radiated Method Setup

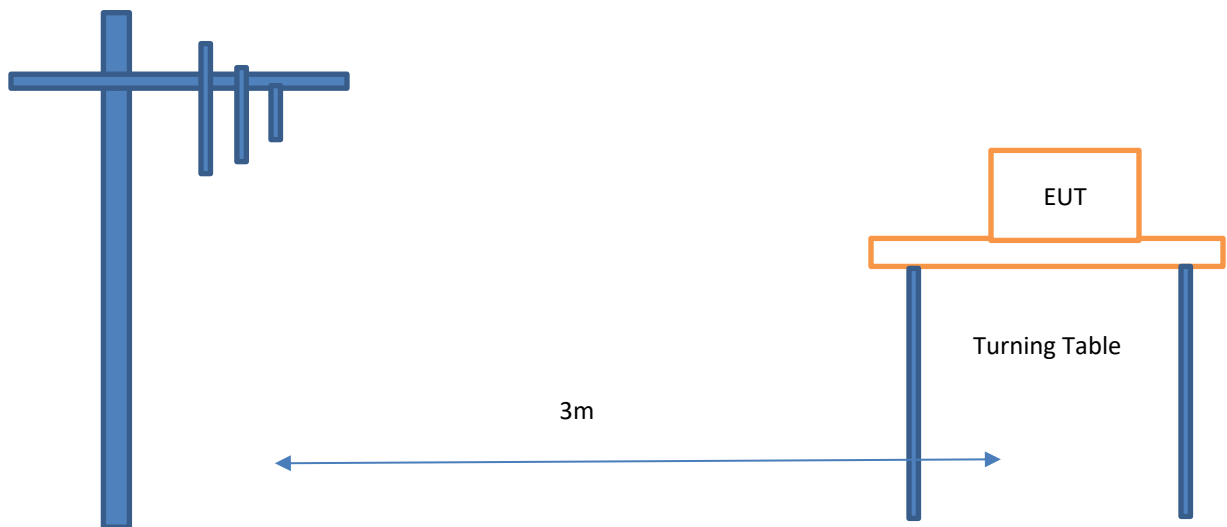

Conducted Method Setup

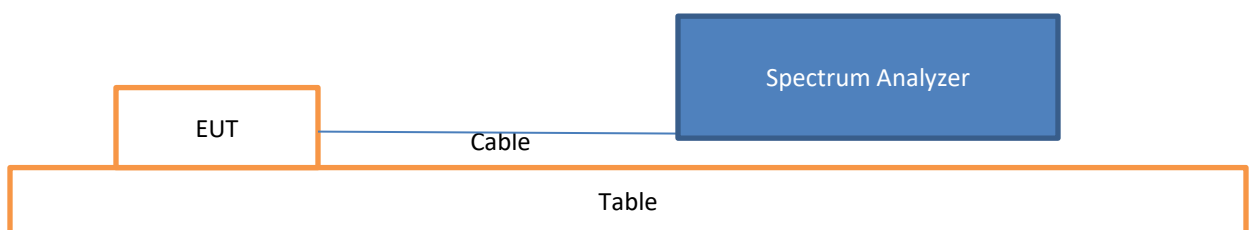

FCC Part 15 Subpart E

15.407(e) Occupied Bandwidth

Test Setup/Conditions			
Test Location:	Fremont Lab Bench	Test Engineer:	Hieu Song Nguyenpham
Test Method:	ANSI C63.10 (2020), KDB 789033	Test Date(s):	10/07-09/2024
Configuration:	A		
Test Setup:	The EUT is placed non-conducted table. It is operated as intended. It is connected straight to a Spectrum Analyzer.		

Environmental Conditions			
Temperature (°C)	21.2-23.7	Relative Humidity (%):	39-45

Test Equipment					
Asset#	Description	Manufacturer	Model	Cal Date	Cal Due
03013	Cable	Astrolab	32022-2-2909K-36TC	1/9/2024	1/9/2026
P07365	Attenuator	Weinschel	54A-10	5/26/2023	5/26/2025
03471	Spectrum Analyzer	Agilent	E4440A	2/23/2024	2/23/2026

6dB Occupied Bandwidth

Test Data Summary					
Frequency (MHz)	Antenna Port	Modulation	Measured (kHz)	Limit (kHz)	Results
5745	0	802.11a	16015	≥500	Pass
5785	0	802.11a	15982	≥500	Pass
5825	0	802.11a	15994	≥500	Pass
5745	0	802.11n HT20	16836	≥500	Pass
5785	0	802.11n HT20	16376	≥500	Pass
5825	0	802.11n HT20	17200	≥500	Pass
5745	0	802.11ac 20MHz	16869	≥500	Pass
5785	0	802.11ac 20MHz	16834	≥500	Pass
5825	0	802.11ac 20MHz	16850	≥500	Pass
5755	0	802.11n HT40	35109	≥500	Pass
5795	0	802.11n HT40	35704	≥500	Pass
5755	0	802.11ac 40MHz	35138	≥500	Pass
5795	0	802.11ac 40MHz	35699	≥500	Pass
5775	0	802.11ac 80MHz	75138	≥500	Pass

Test Data Summary					
Frequency (MHz)	Antenna Port	Modulation	Measured (kHz)	Limit (kHz)	Results
5745	1	802.11a	16348	≥500	Pass
5785	1	802.11a	15949	≥500	Pass
5825	1	802.11a	15965	≥500	Pass
5745	1	802.11n HT20	16852	≥500	Pass
5785	1	802.11n HT20	16845	≥500	Pass
5825	1	802.11n HT20	17083	≥500	Pass
5745	1	802.11ac 20MHz	15935	≥500	Pass
5785	1	802.11ac 20MHz	15401	≥500	Pass
5825	1	802.11ac 20MHz	15719	≥500	Pass
5755	1	802.11n HT40	36059	≥500	Pass
5795	1	802.11n HT40	35944	≥500	Pass
5755	1	802.11ac 40MHz	35653	≥500	Pass
5795	1	802.11ac 40MHz	36060	≥500	Pass
5775	1	802.11ac 80MHz	75152	≥500	Pass

99% Occupied Bandwidth

Test Data Summary					
Frequency (MHz)	Antenna Port	Modulation	Measured (kHz)	Limit (kHz)	Results
5745	0	802.11a	16718.5	None	N/A
5785	0	802.11a	16723.0		
5825	0	802.11a	16703.1		
5745	0	802.11n HT20	17922.0		
5785	0	802.11n HT20	17920.3		
5825	0	802.11n HT20	17910.8		
5745	0	802.11ac 20MHz	17915.5		
5785	0	802.11ac 20MHz	17912.5		
5825	0	802.11ac 20MHz	17912.4		
5755	0	802.11n HT40	36425.2		
5795	0	802.11n HT40	36386.4		
5755	0	802.11ac 40MHz	36361.9		
5795	0	802.11ac 40MHz	36372.7		
5775	0	802.11ac 80MHz	75612.5		


Test Data Summary					
Frequency (MHz)	Antenna Port	Modulation	Measured (kHz)	Limit (kHz)	Results
5745	1	802.11a	16645.9	None	N/A
5785	1	802.11a	16715.3		
5825	1	802.11a	16705.8		
5745	1	802.11n HT20	17909.6		
5785	1	802.11n HT20	17919.7		
5825	1	802.11n HT20	17915.7		
5745	1	802.11ac 20MHz	17928.7		
5785	1	802.11ac 20MHz	17927.5		
5825	1	802.11ac 20MHz	17913.3		
5755	1	802.11n HT40	36246.3		
5795	1	802.11n HT40	36288.0		
5755	1	802.11ac 40MHz	36232.3		
5795	1	802.11ac 40MHz	36241.9		
5775	1	802.11ac 80MHz	75663.1		

Plot(s)


6dB Occupied Bandwidth

Chain 0


802.11a

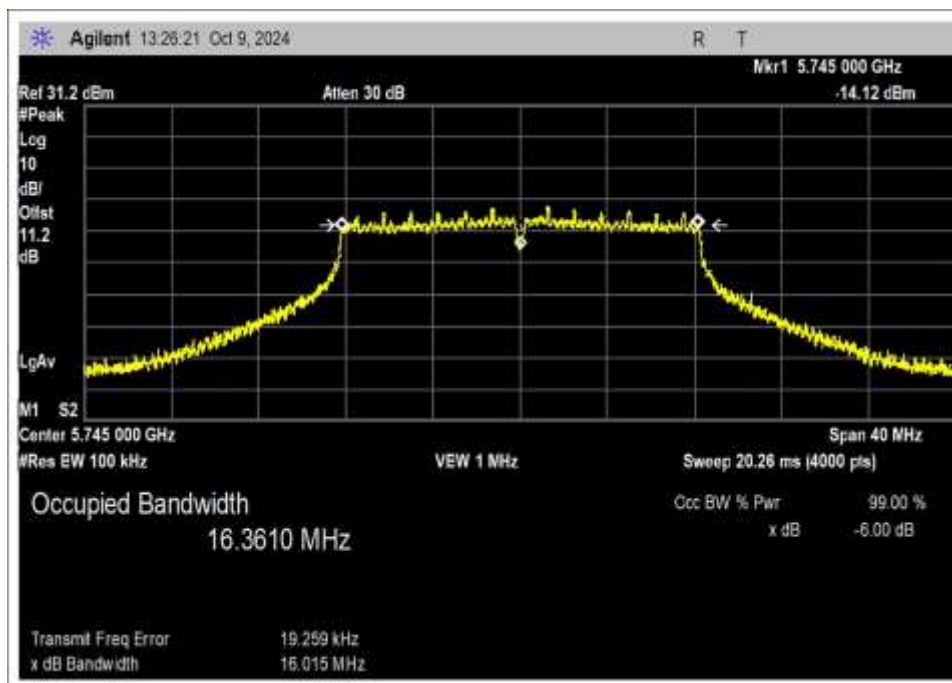

Low Channel

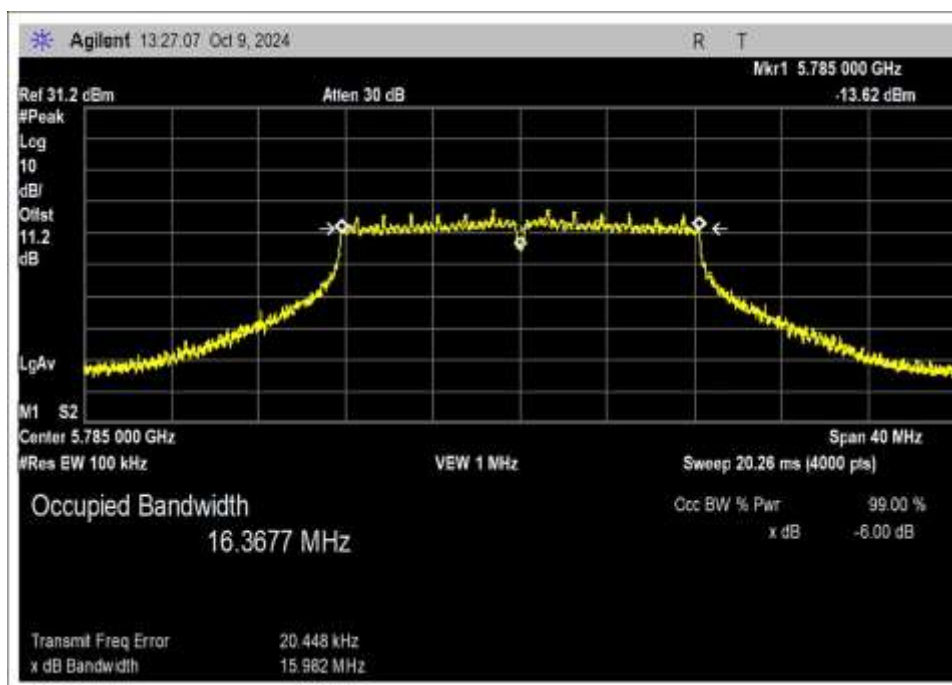


Middle Channel

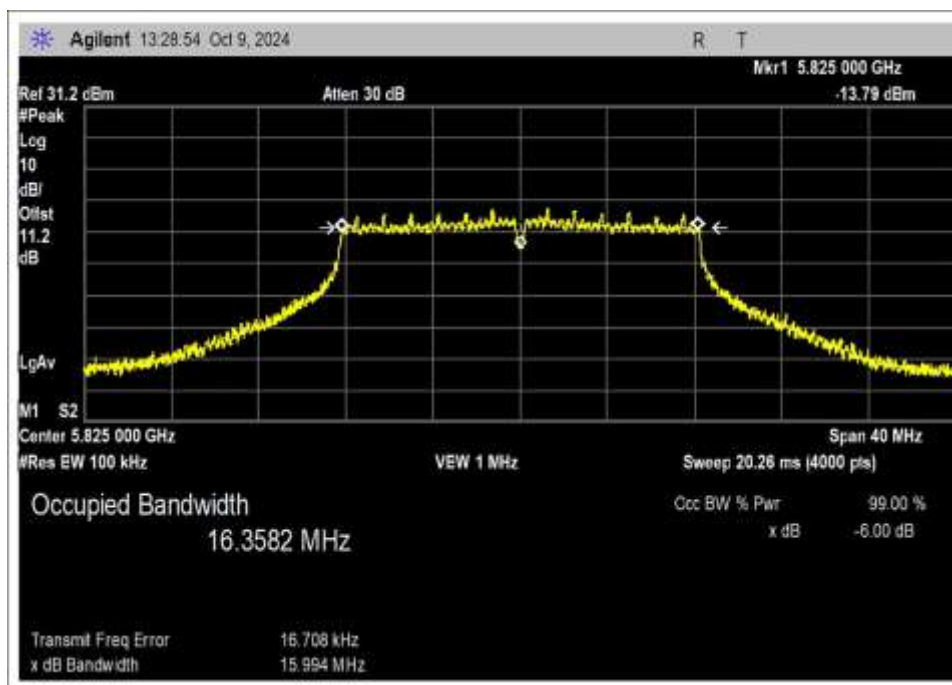


High Channel


802.11n HT20

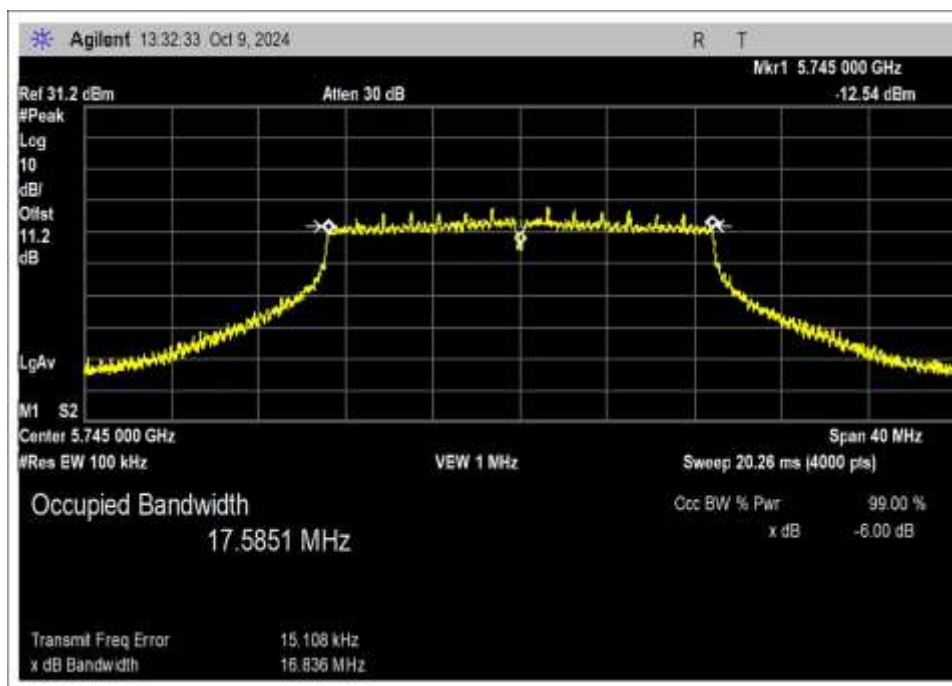

Low Channel

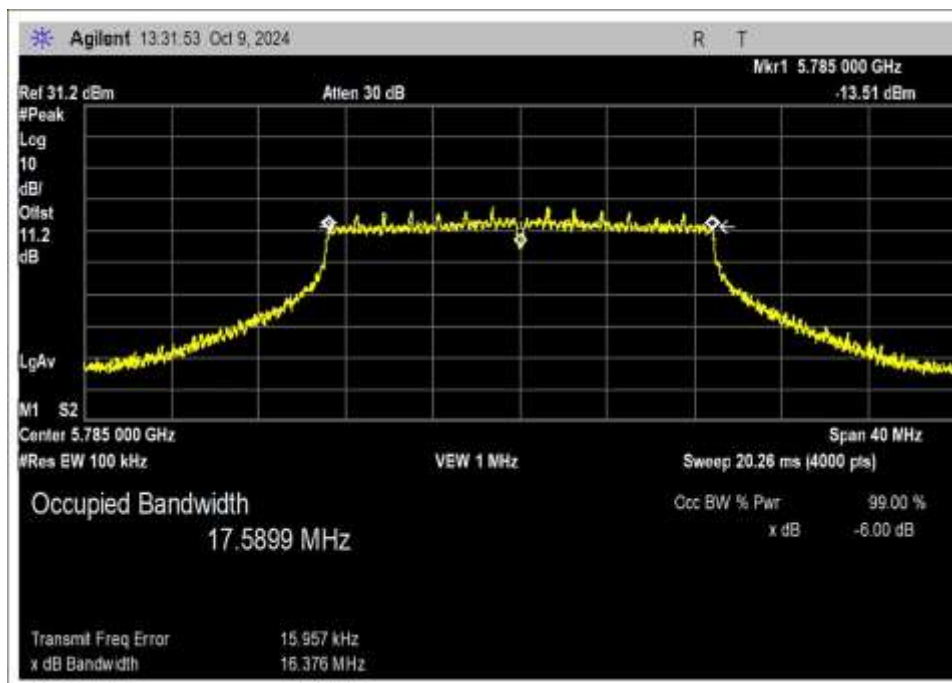


Middle Channel

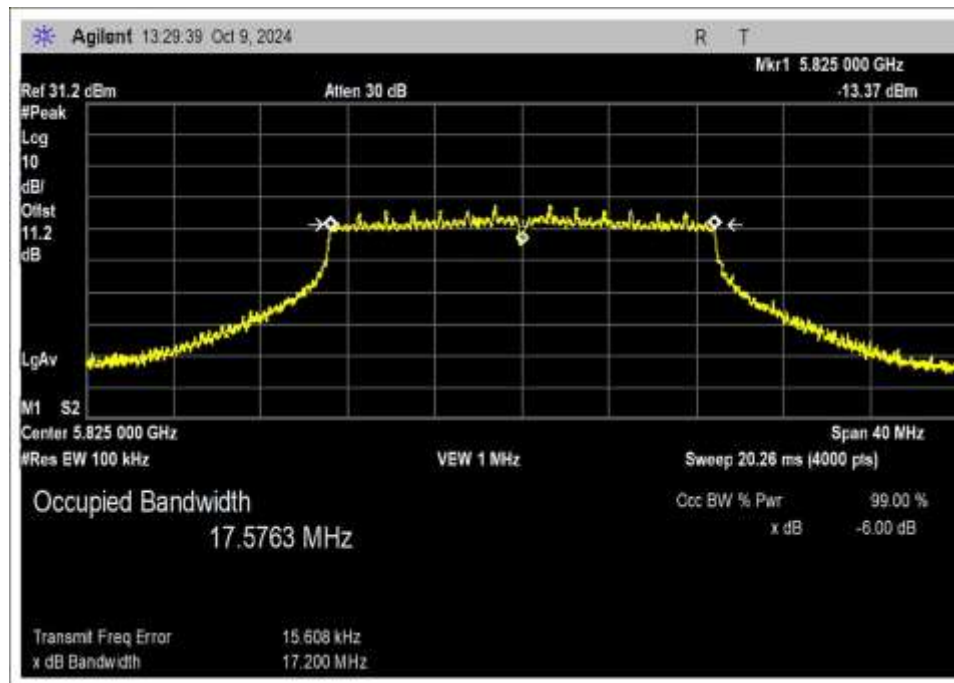


High Channel


802.11ac 20MHz

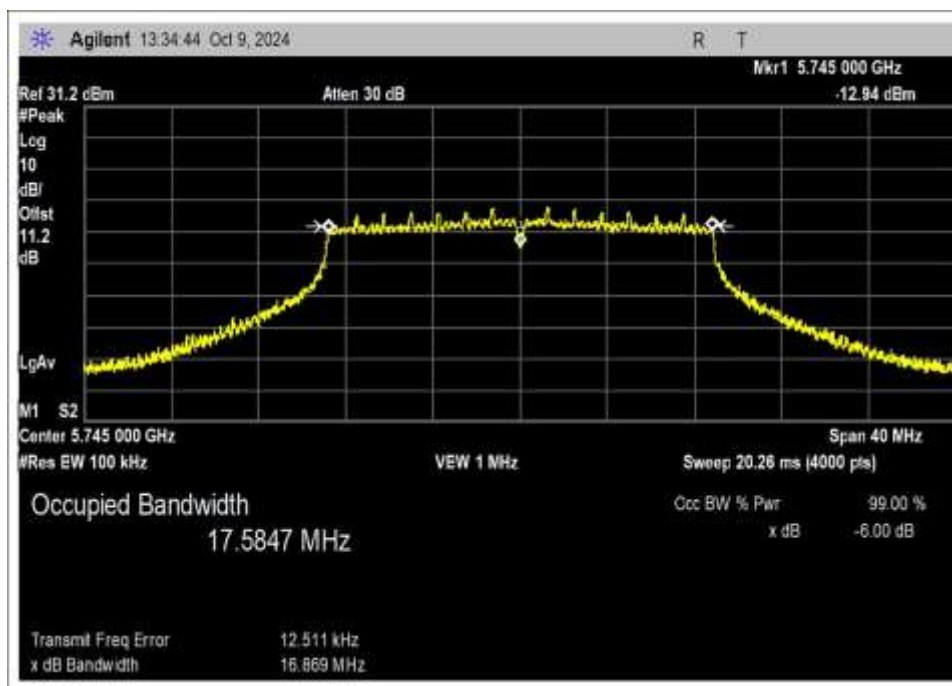

Low Channel

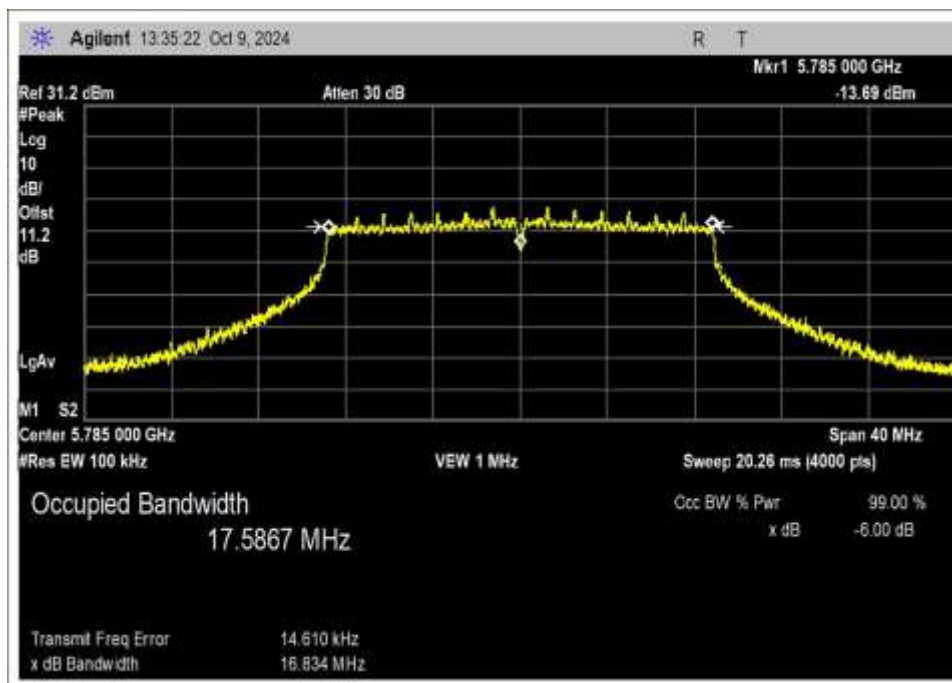


Middle Channel

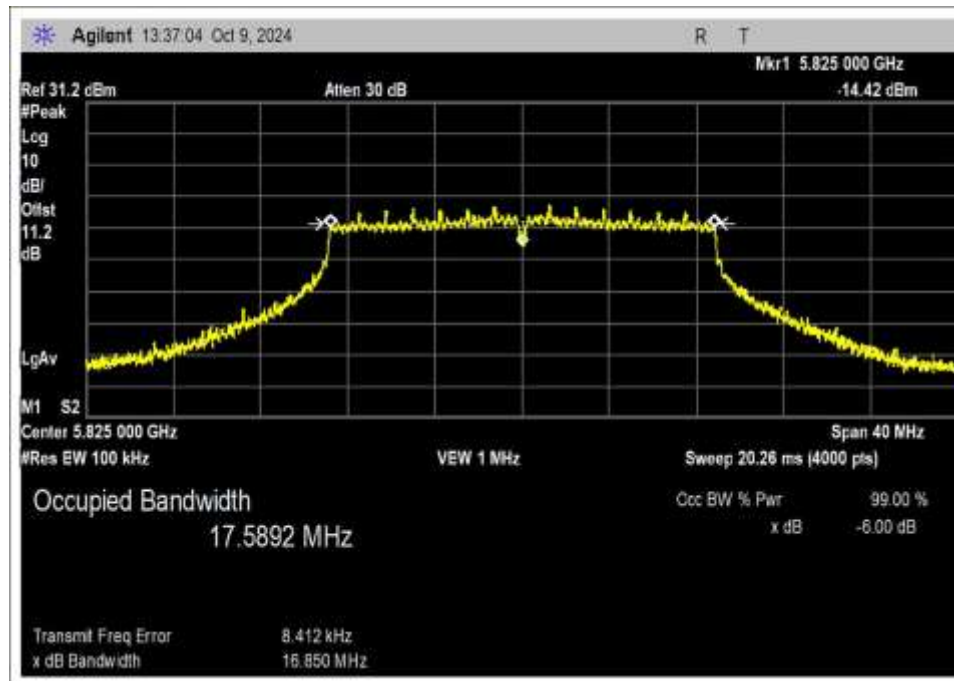


High Channel

802.11 n HT40

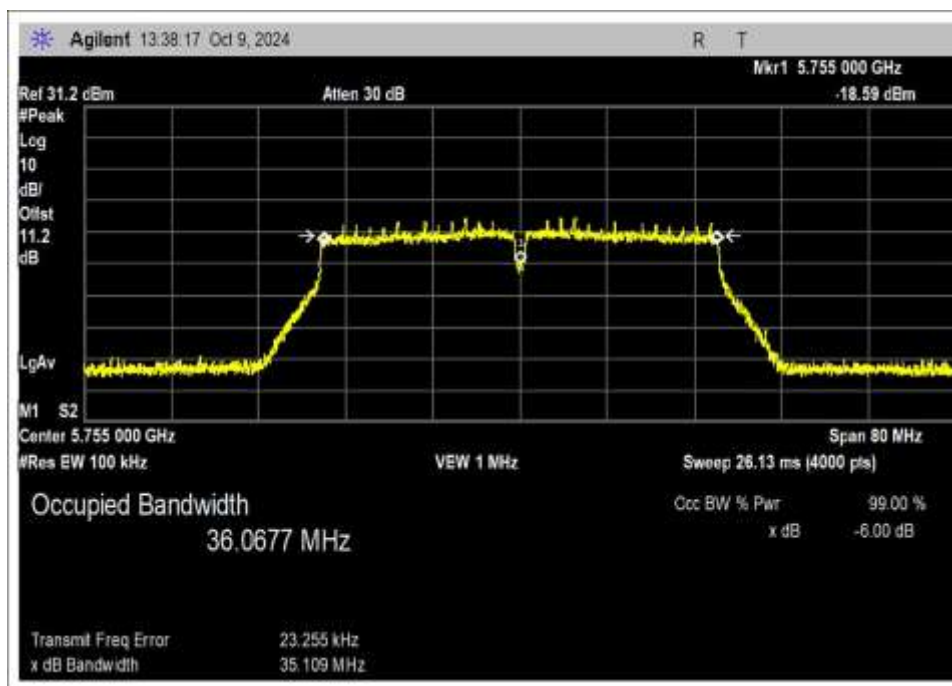


Low Channel

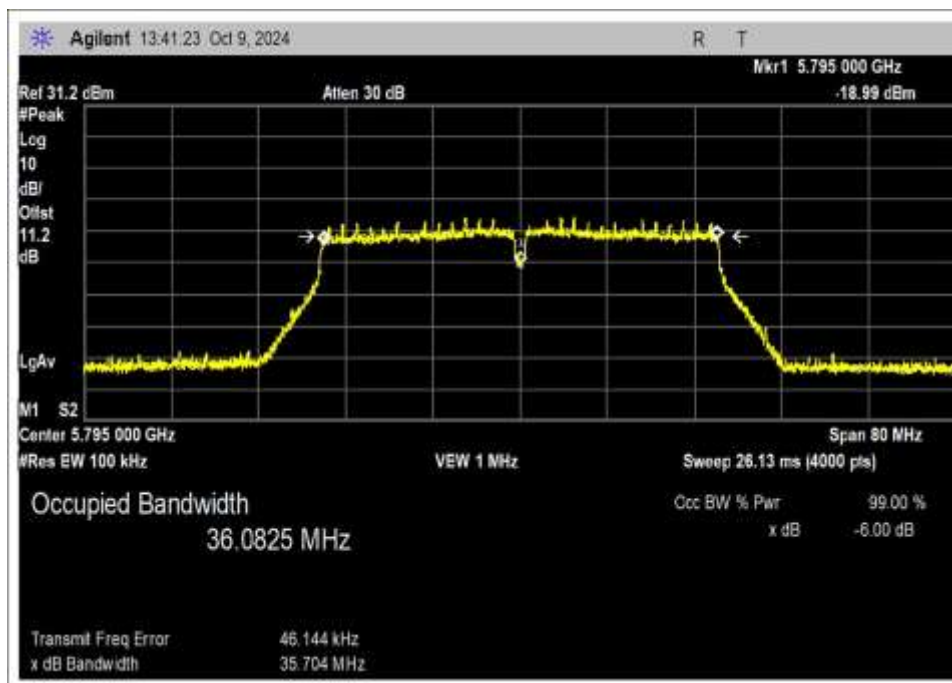


High Channel

802.11ac 40MHz

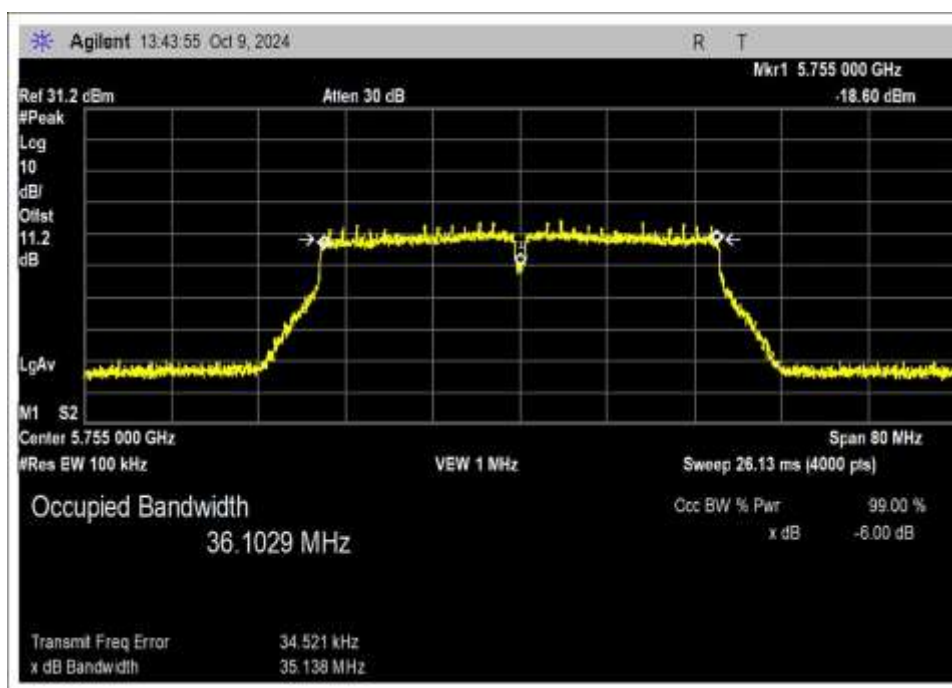


Low Channel

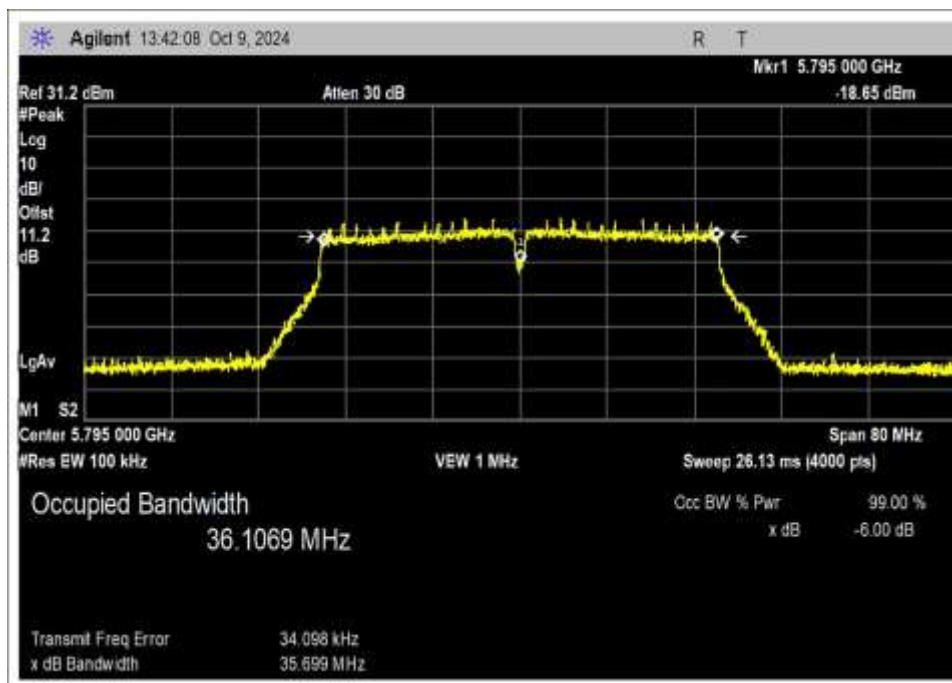


High Channel


802.11ac 80MHz

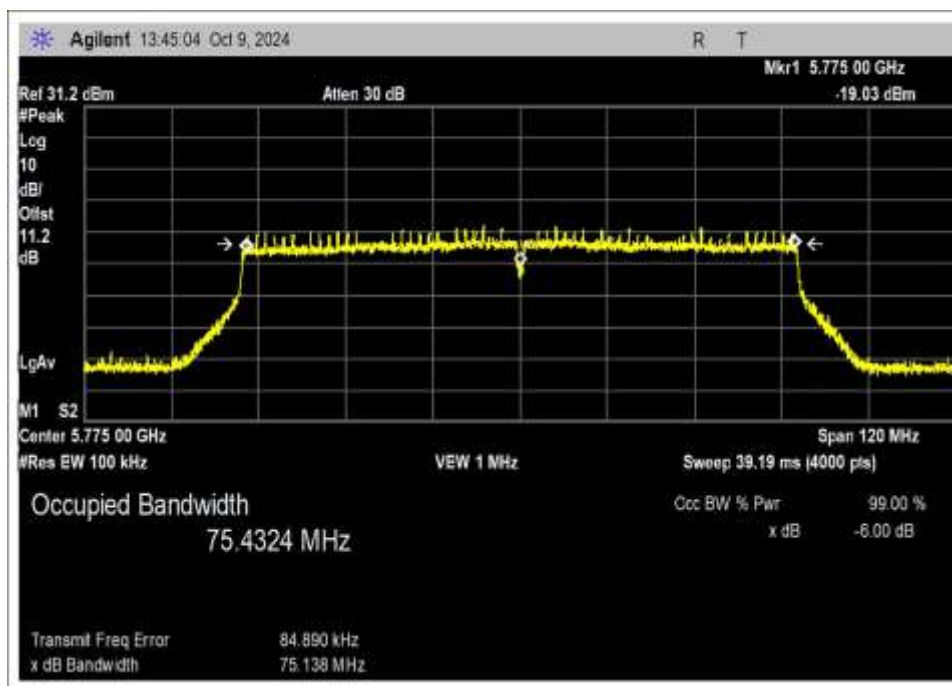


Chain 1
802.11a

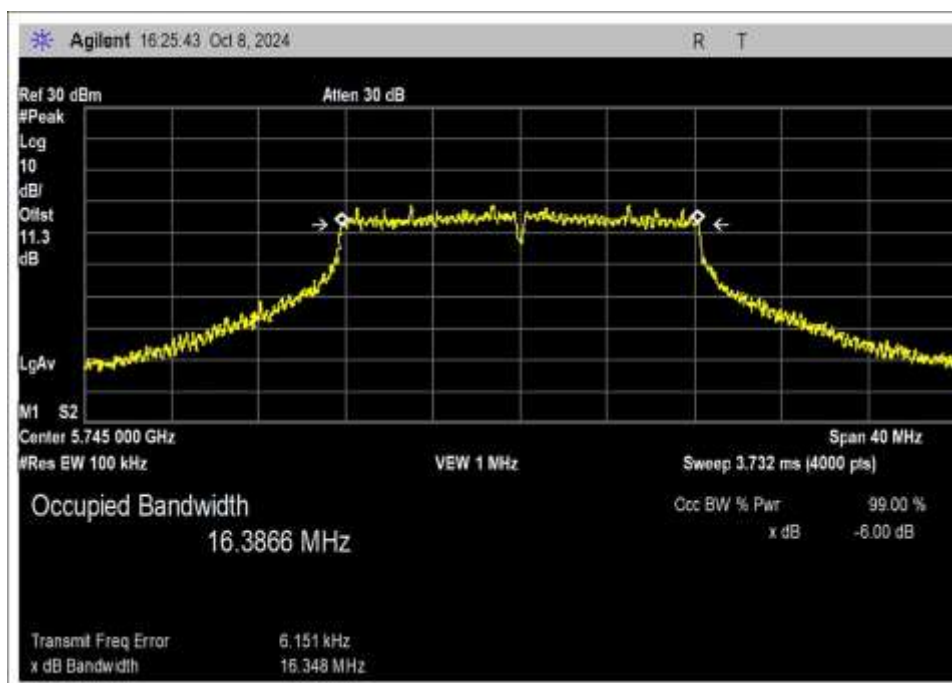

Low Channel

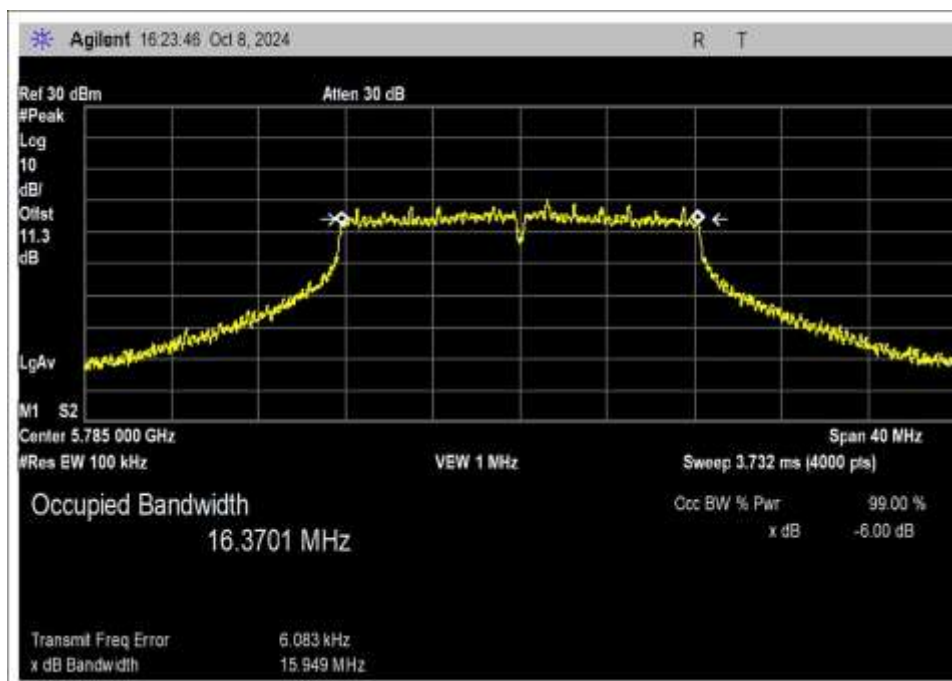


Middle Channel

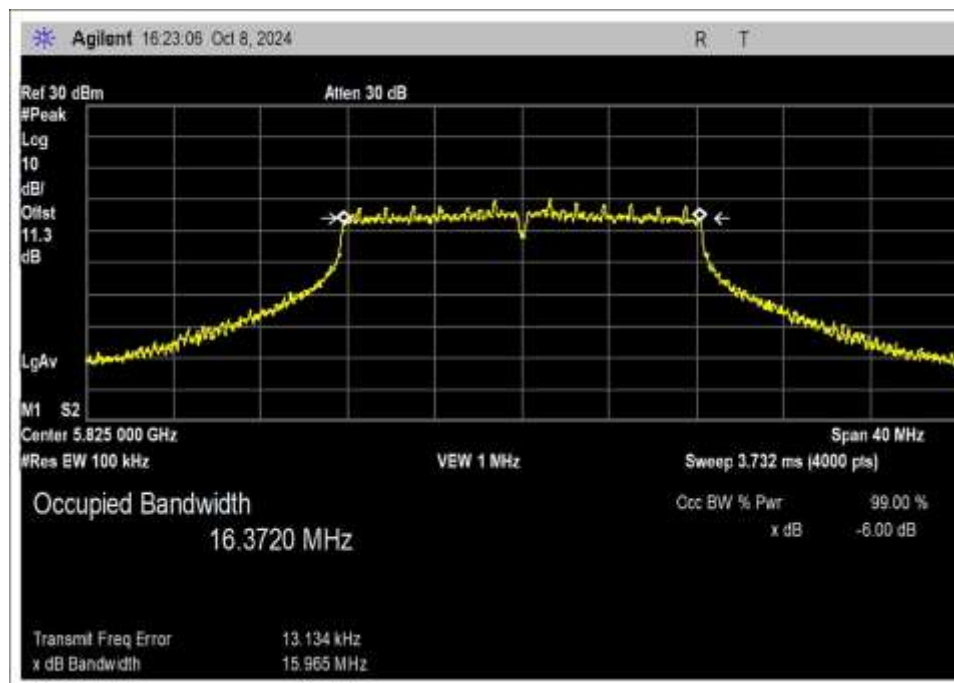


High Channel


802.11n HT20

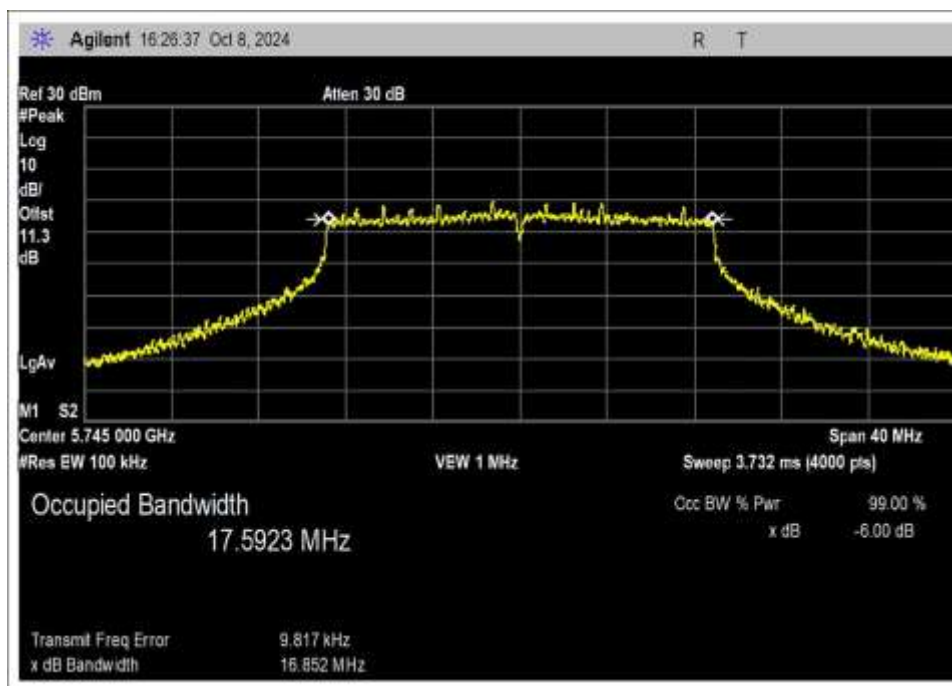

Low Channel

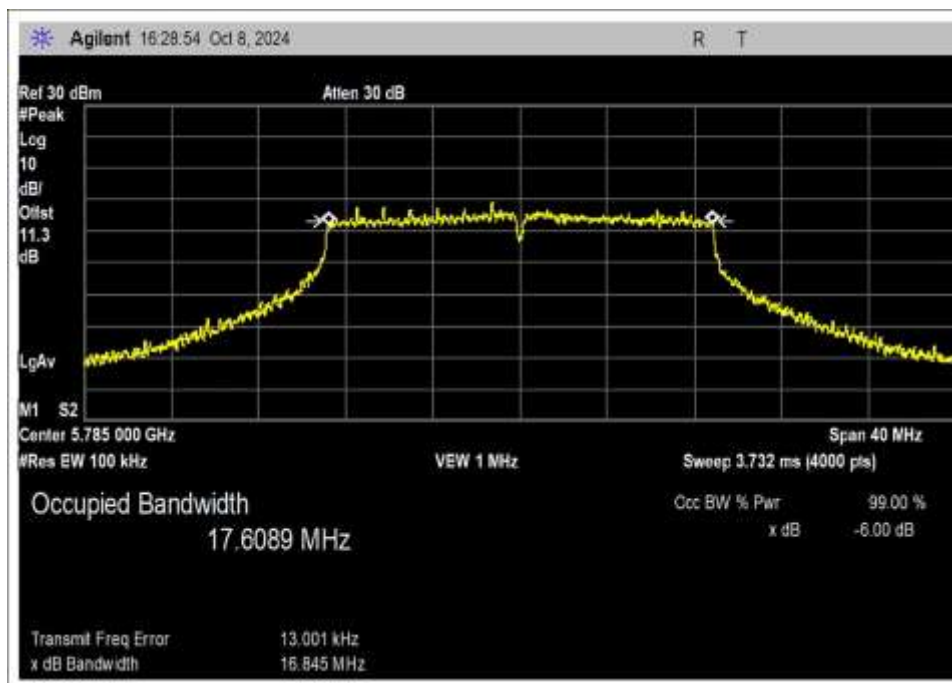


Middle Channel

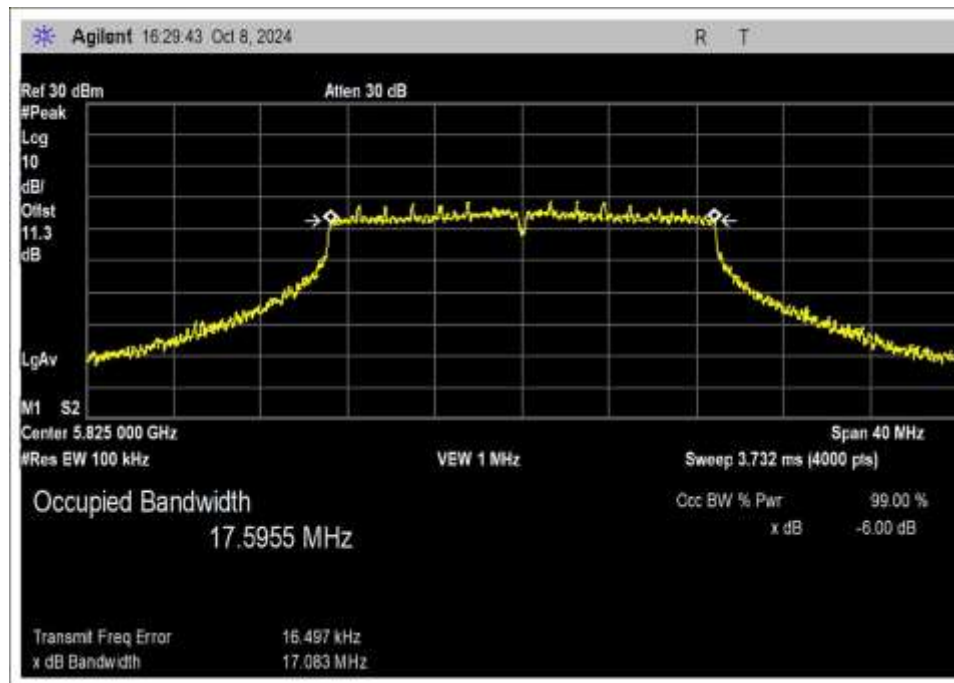


High Channel


802.11ac 20MHz

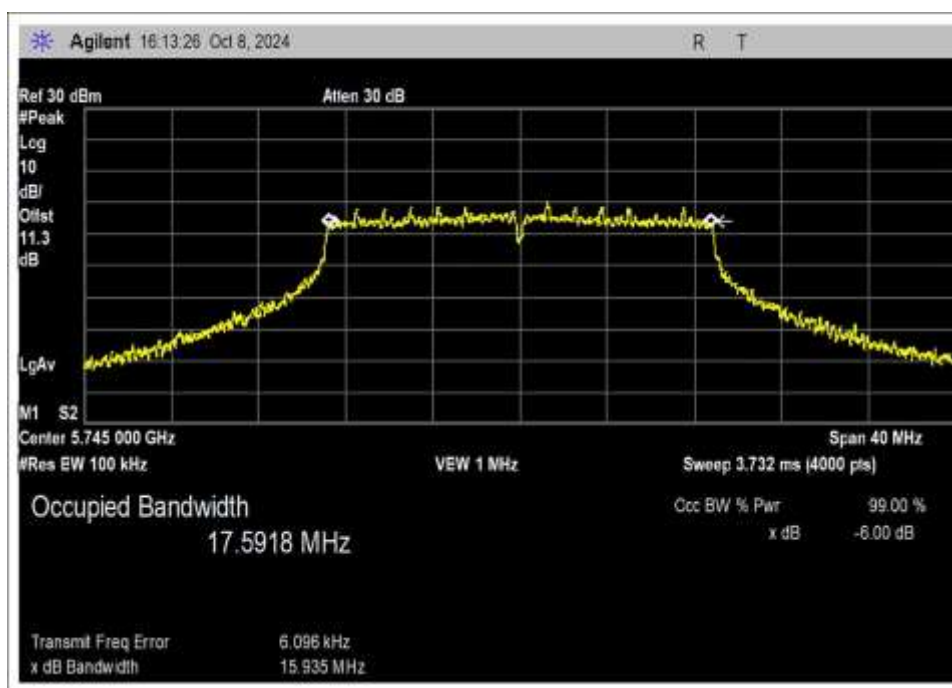

Low Channel

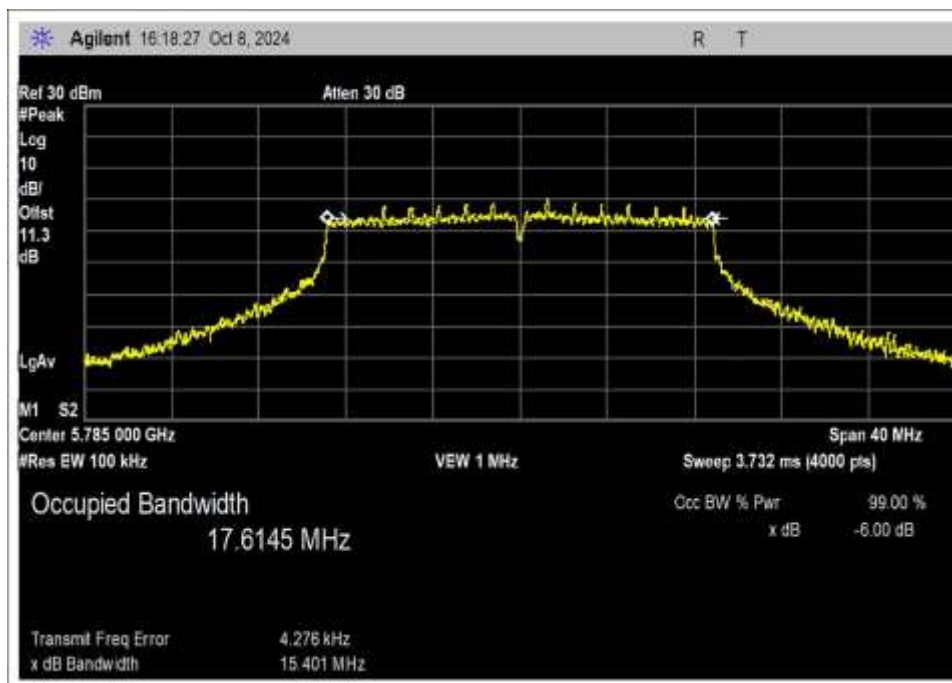


Middle Channel

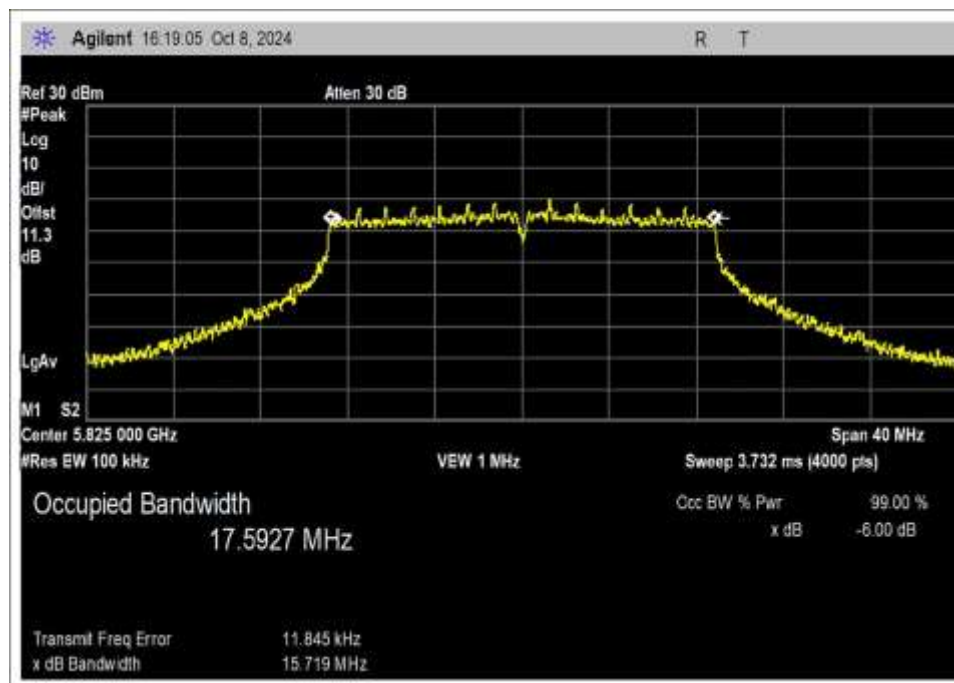


High Channel

802.11 n HT40

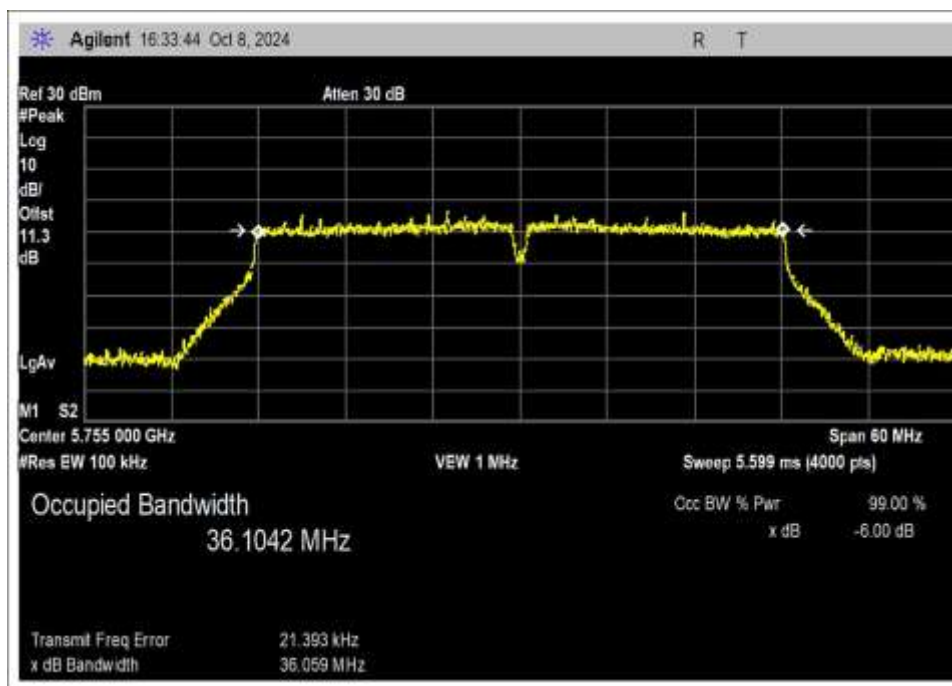


Low Channel

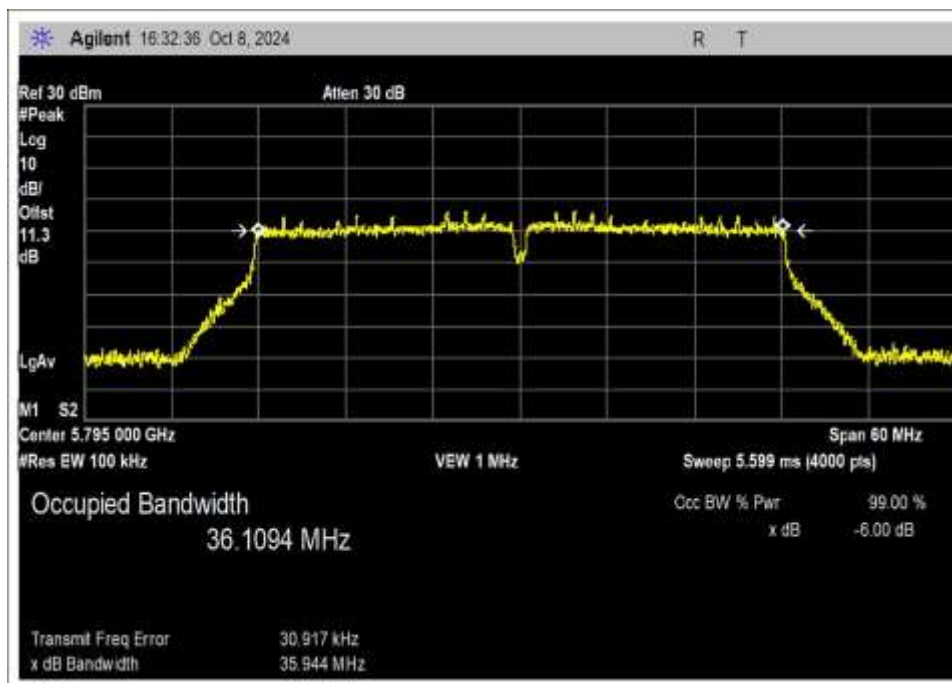


High Channel

802.11ac 40MHz

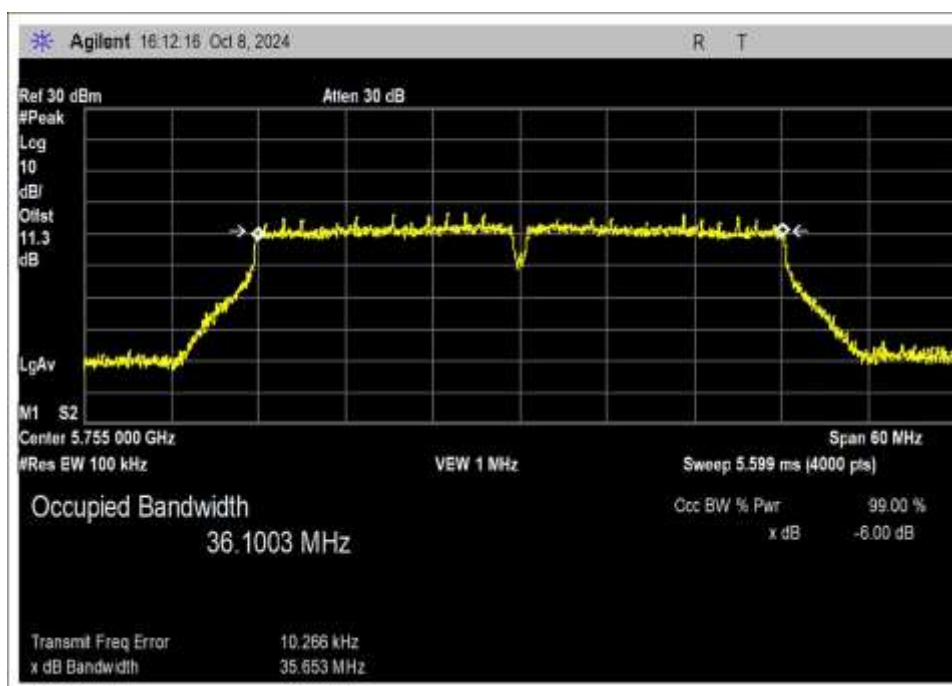


Low Channel

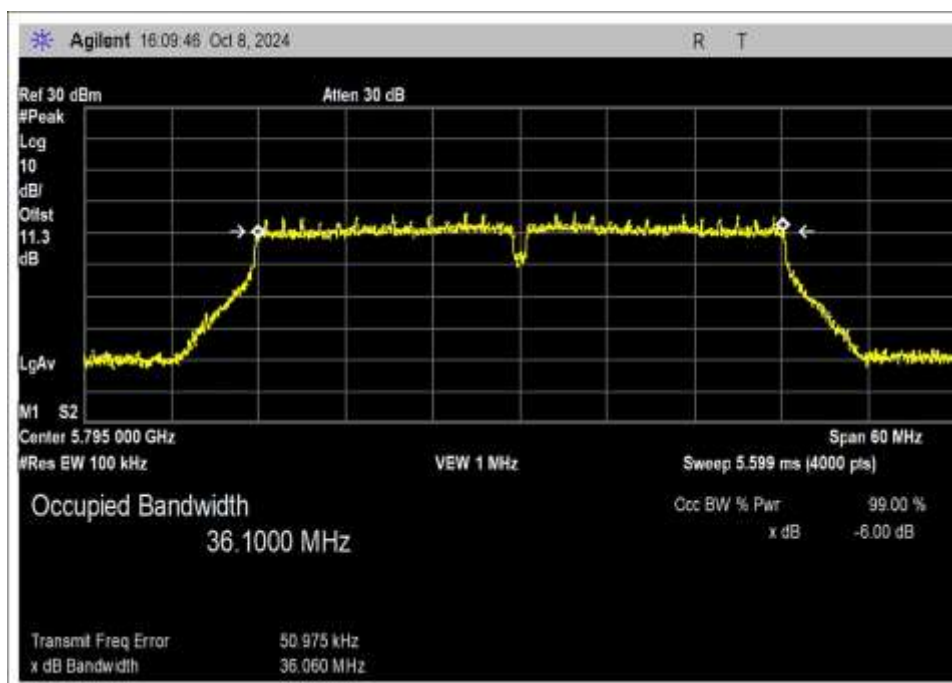

High Channel


802.11ac 80MHz

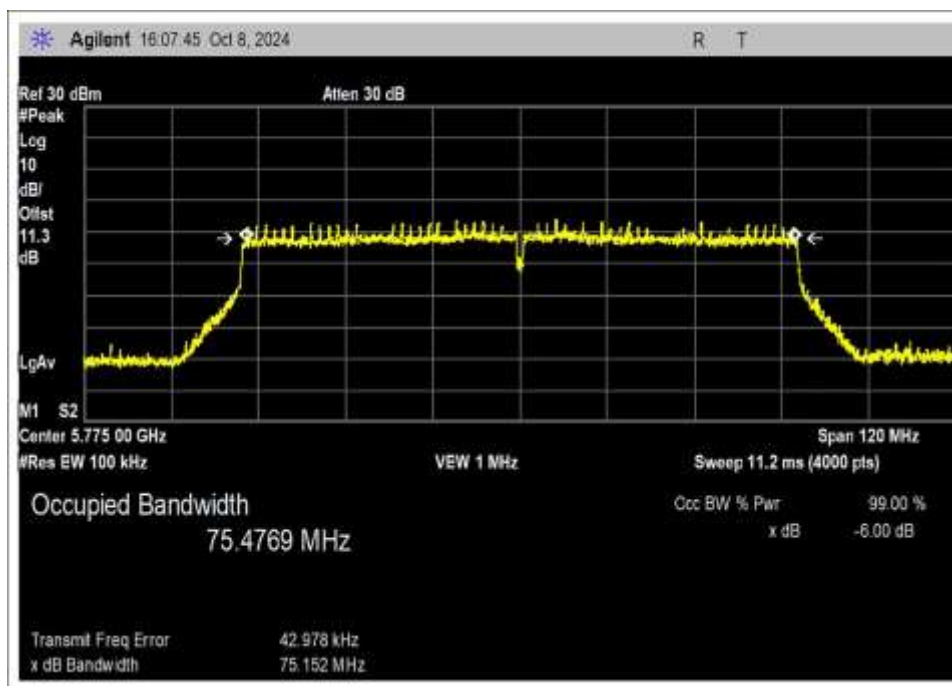


99% Occupied Bandwidth

Chain 0


802.11a

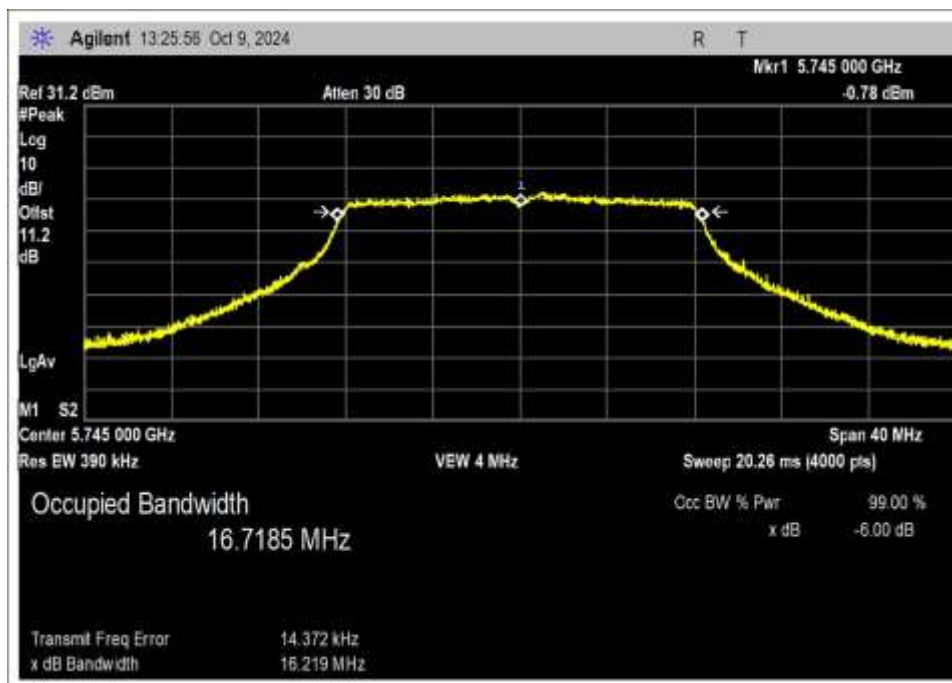

Low Channel

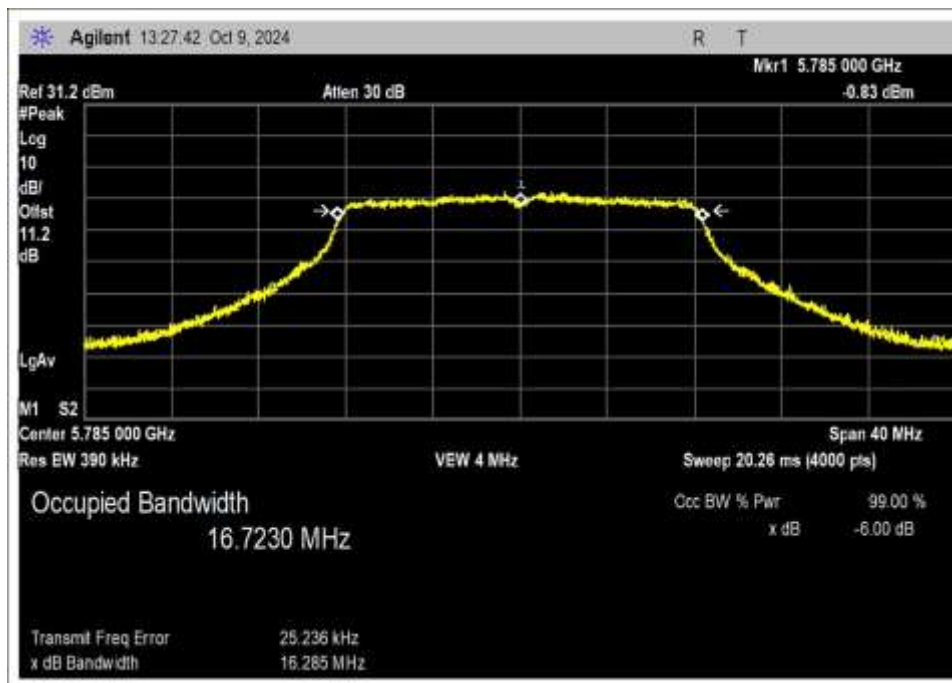


Middle Channel

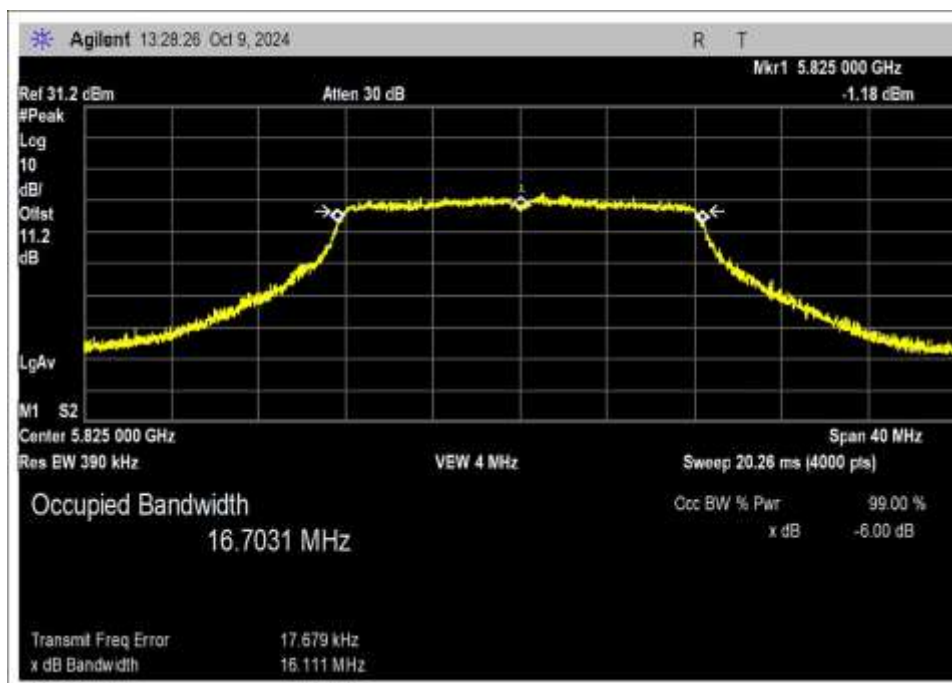


High Channel


802.11n HT20

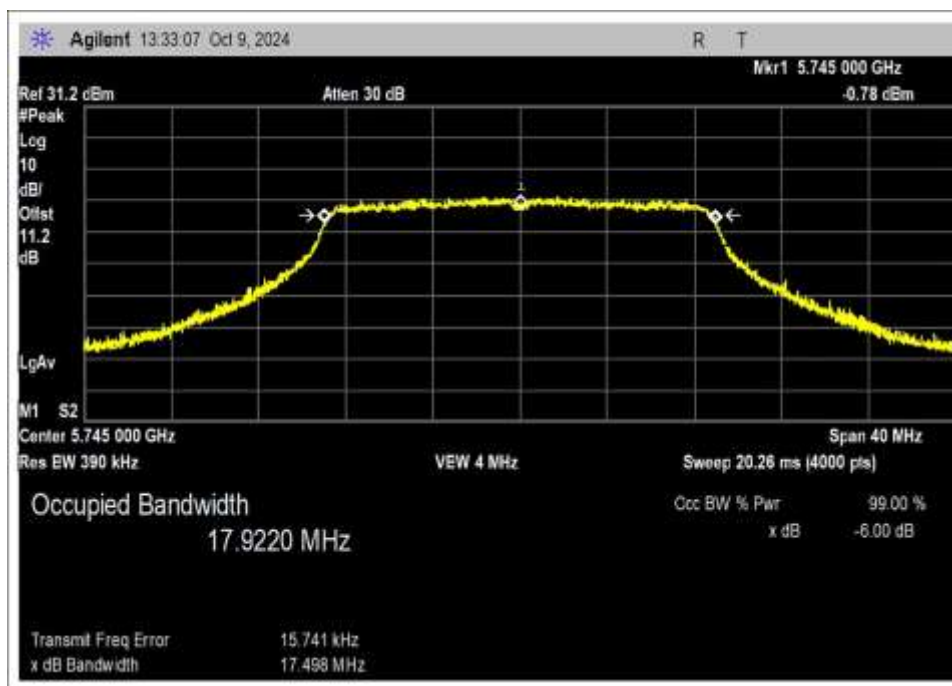

Low Channel

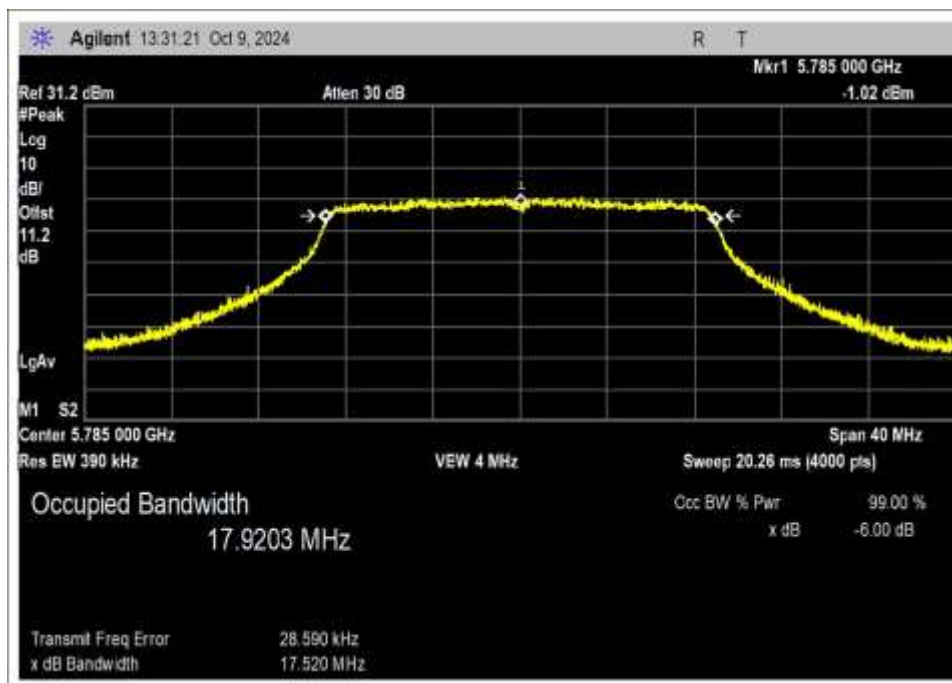


Middle Channel

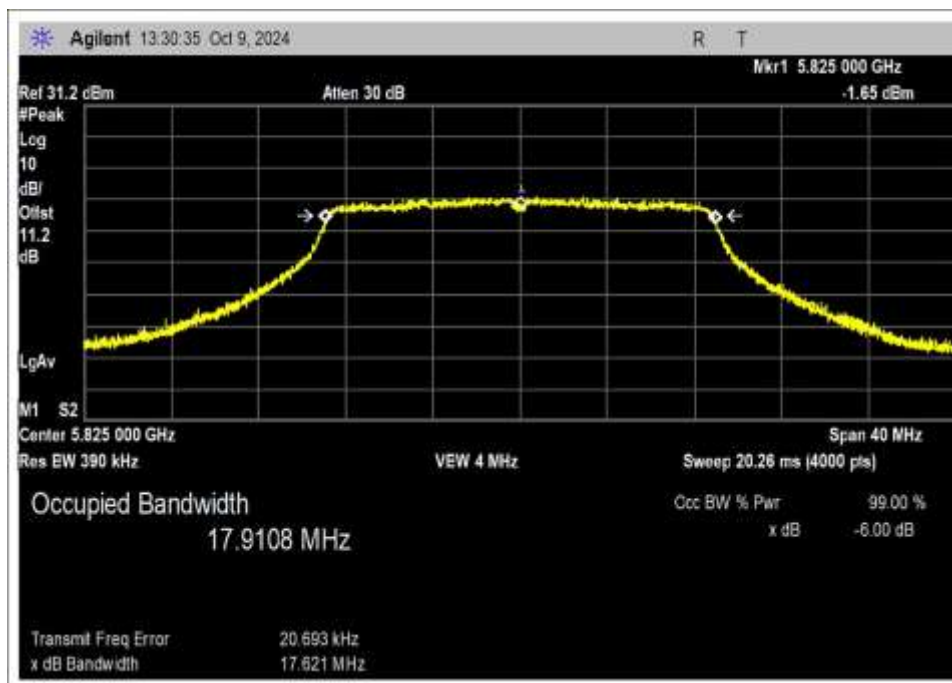


High Channel


802.11ac 20MHz

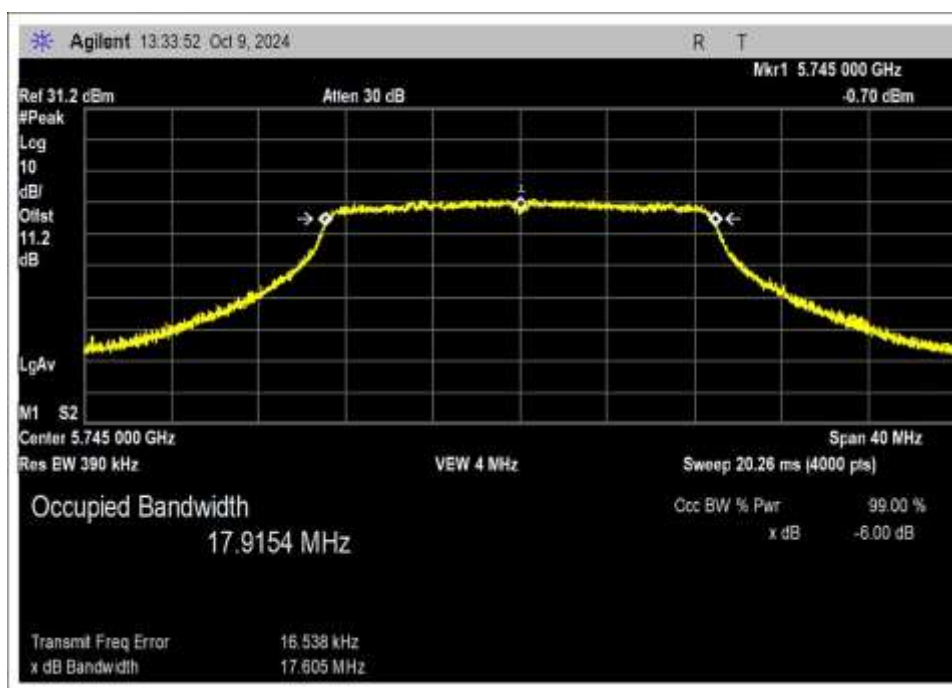

Low Channel

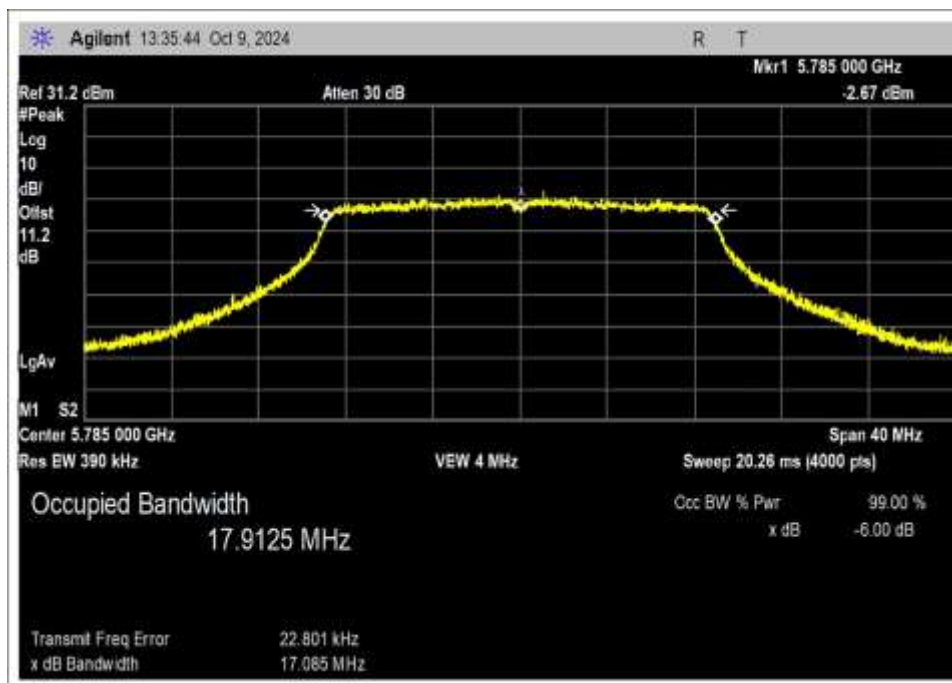


Middle Channel

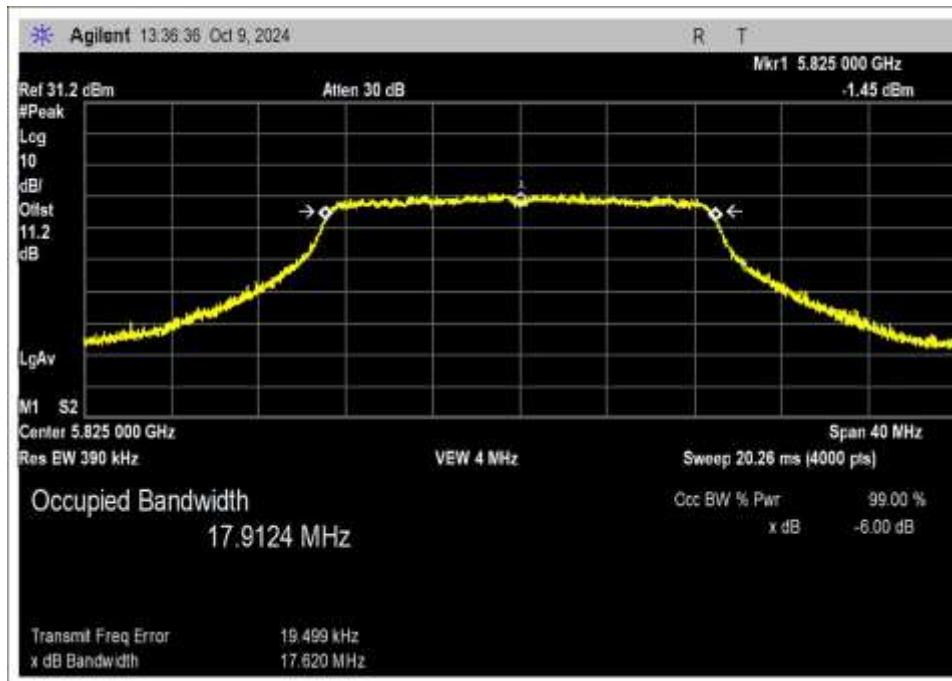


High Channel

802.11 n HT40

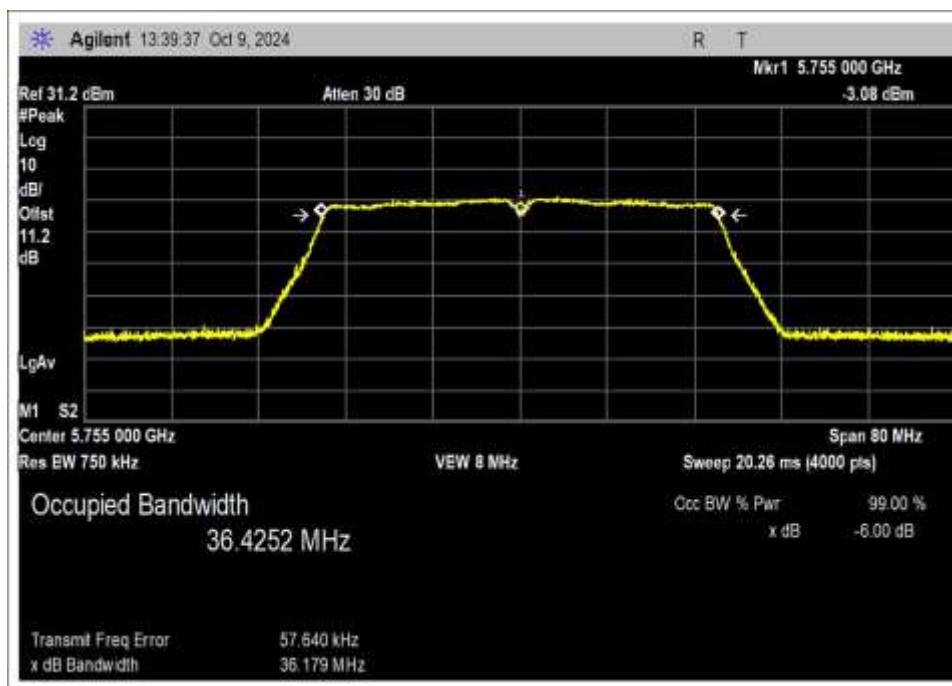


Low Channel

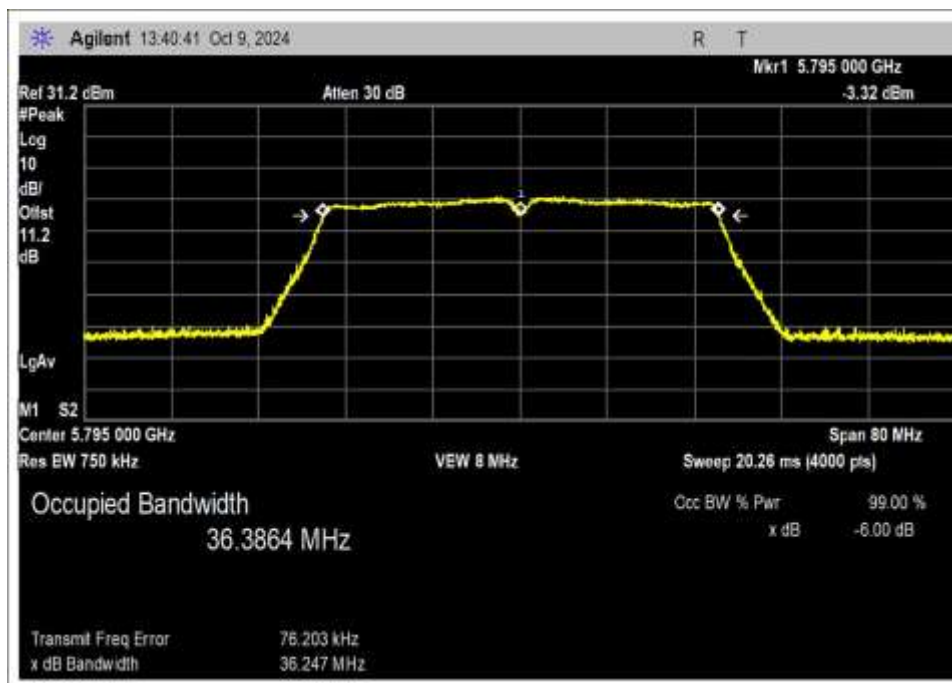


High Channel

802.11ac 40MHz

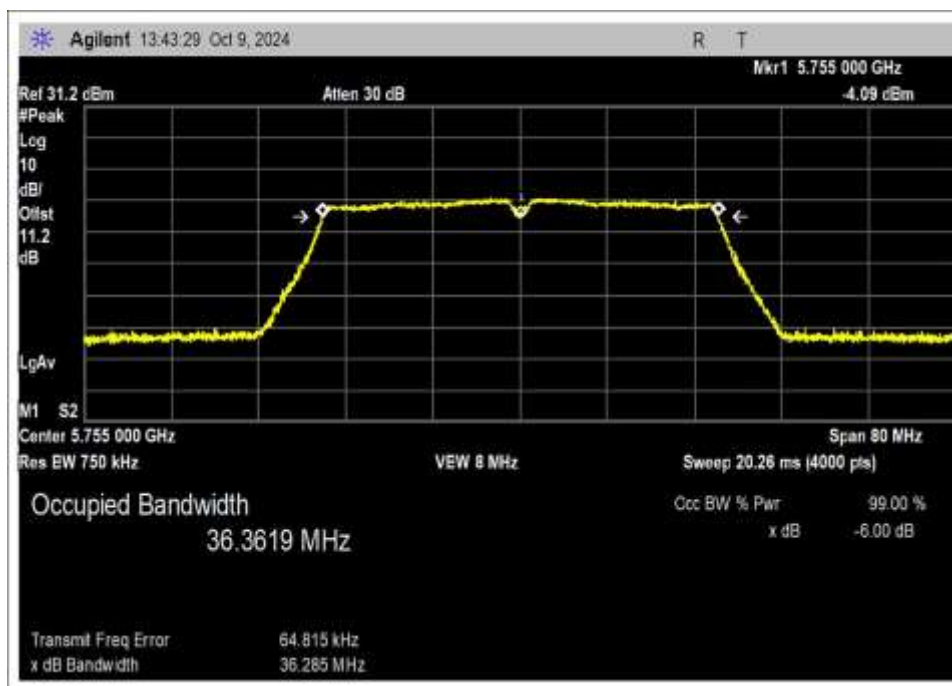


Low Channel

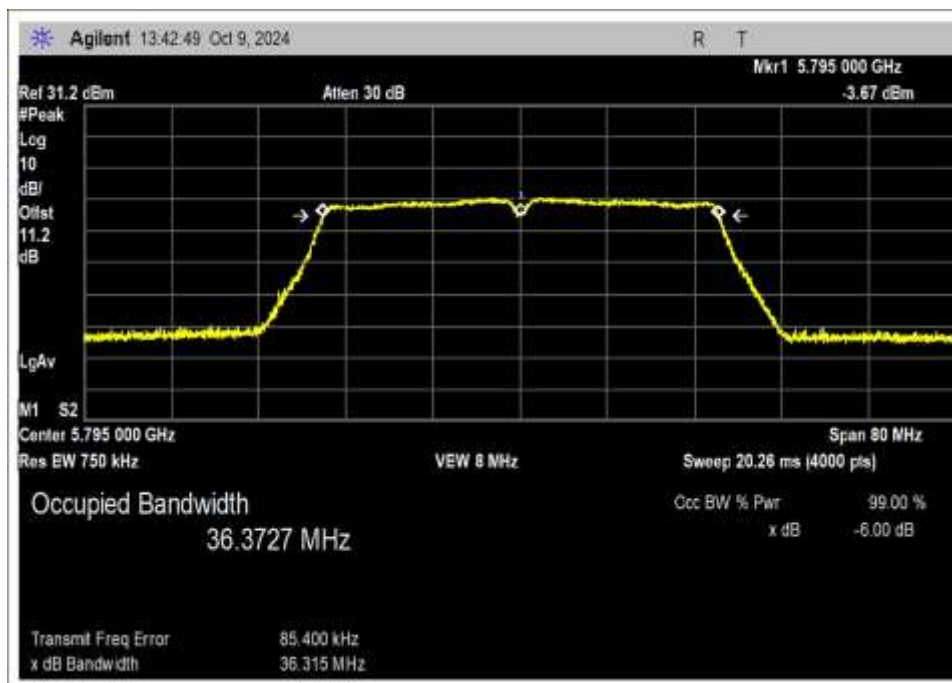


High Channel


802.11ac 80MHz

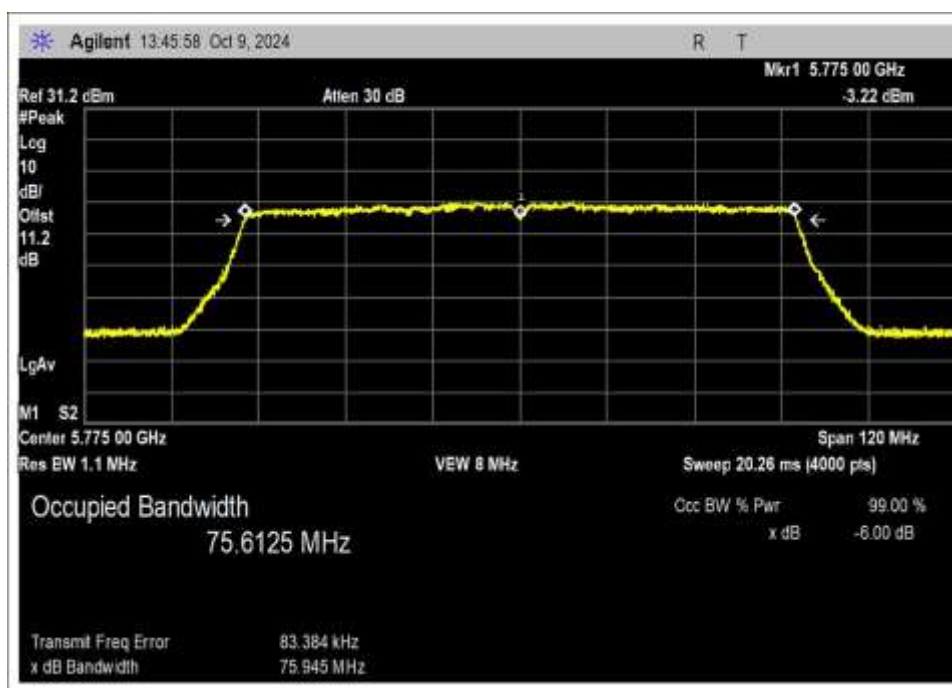


Chain 1
802.11a

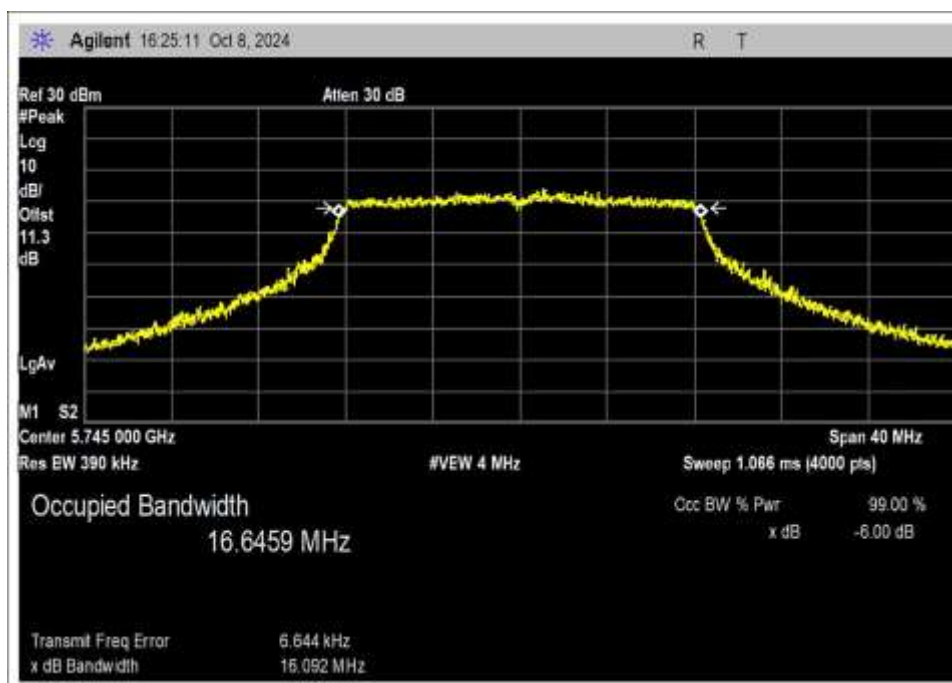

Low Channel

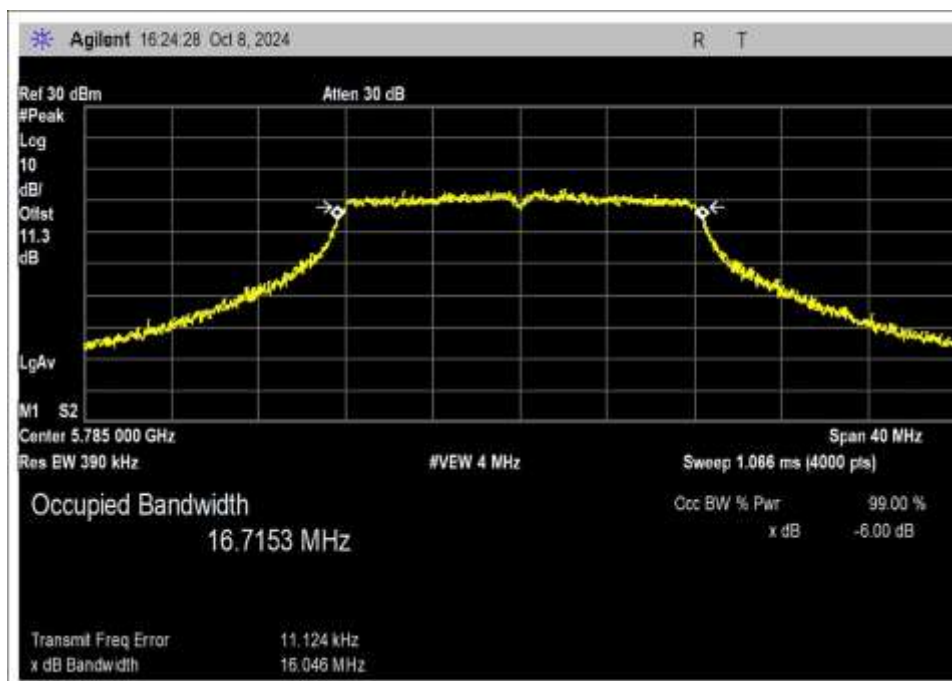


Middle Channel

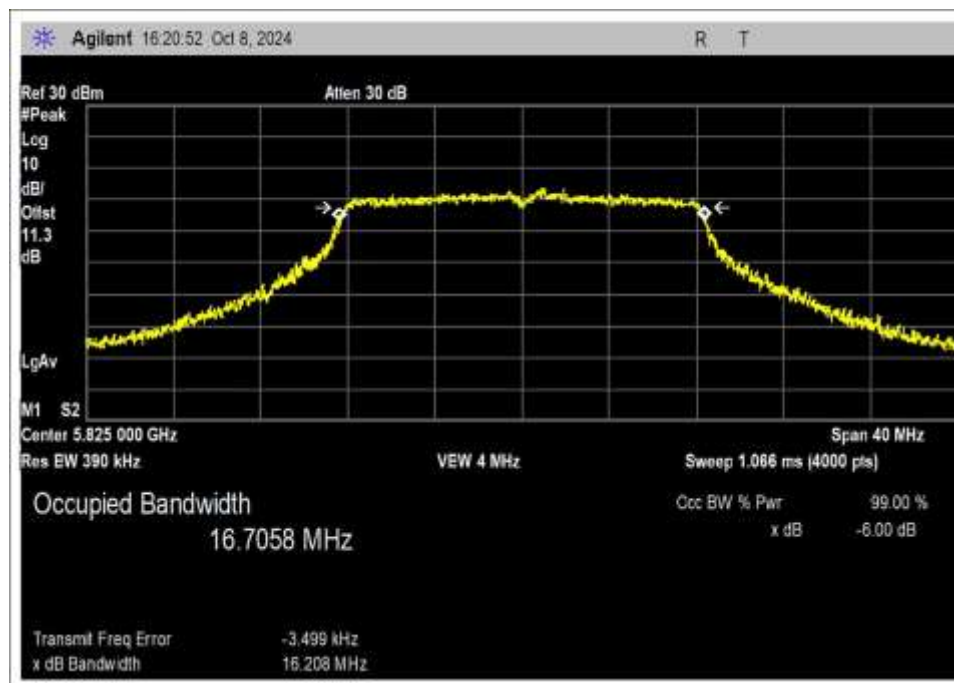


High Channel


802.11n HT20

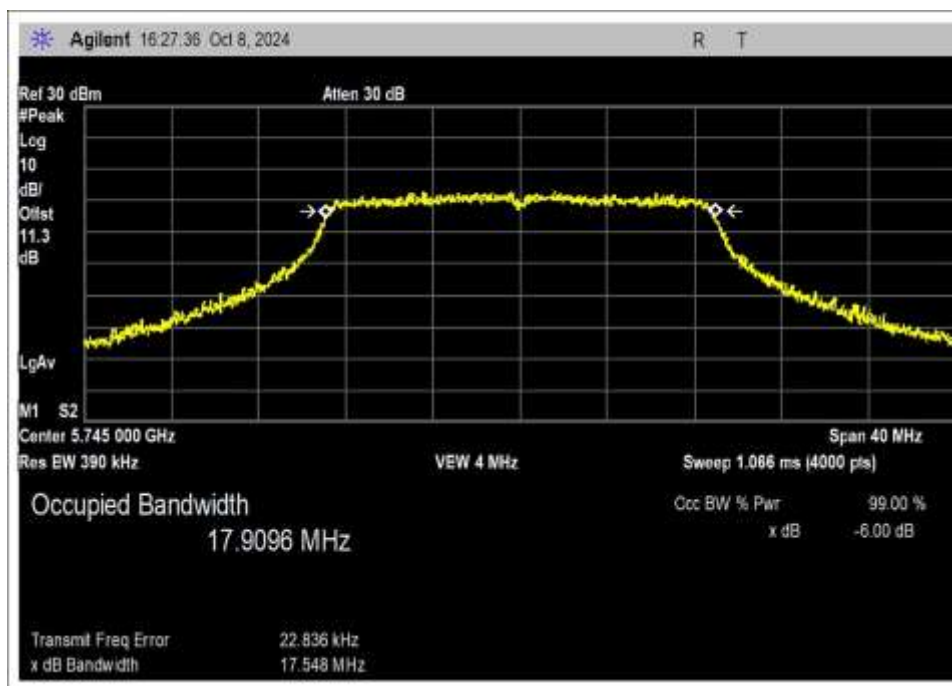

Low Channel

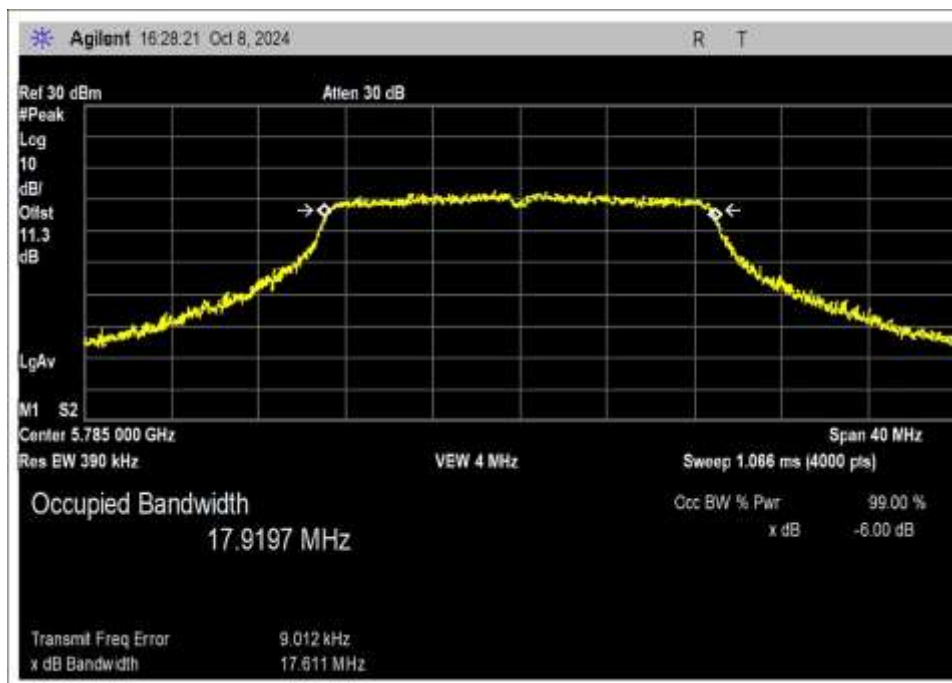


Middle Channel

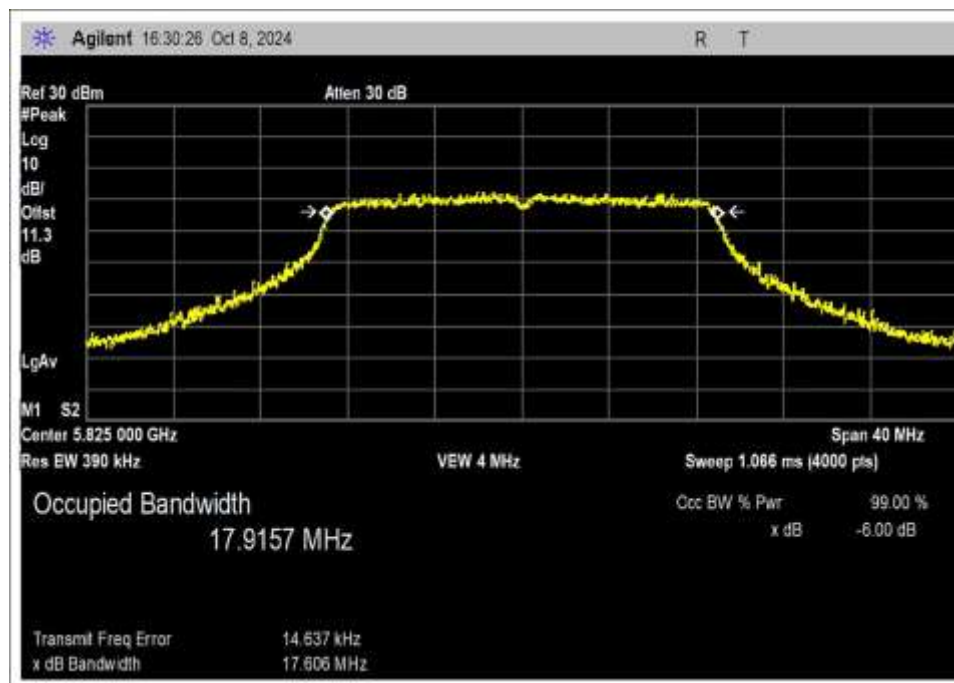


High Channel


802.11ac 20MHz

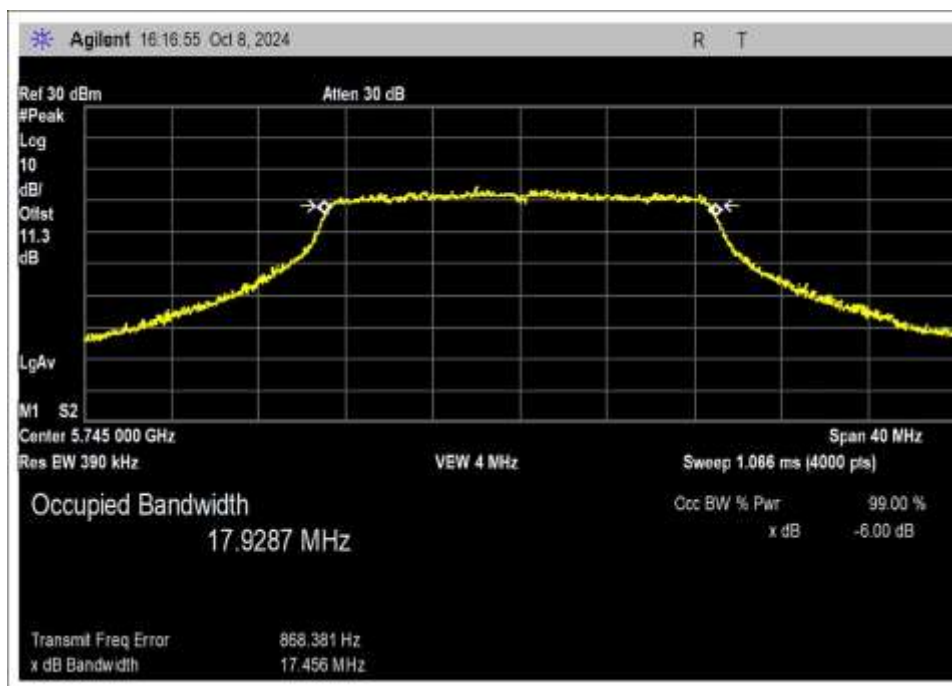

Low Channel

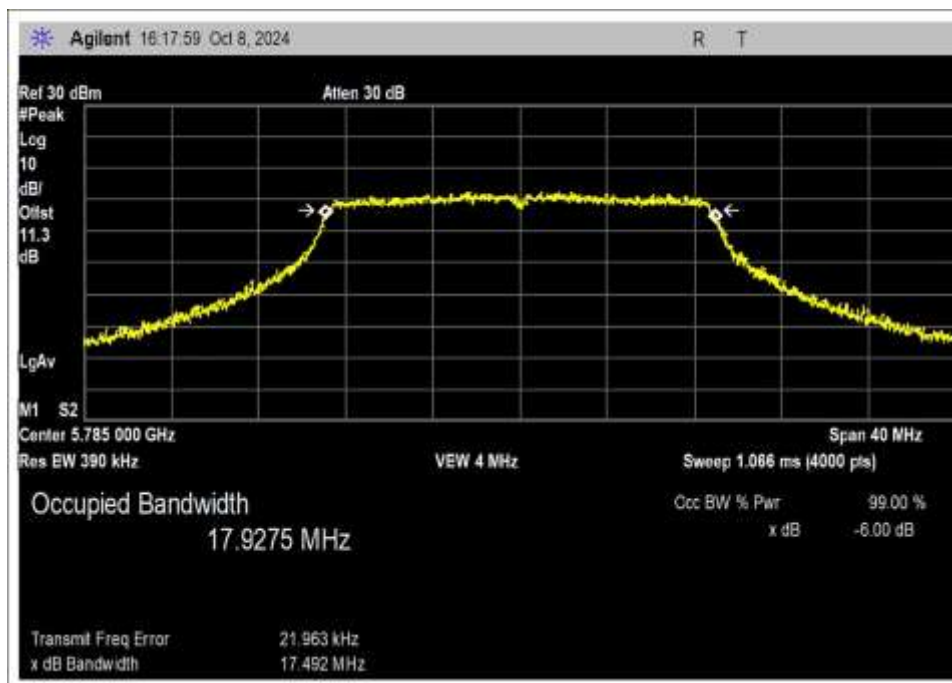


Middle Channel

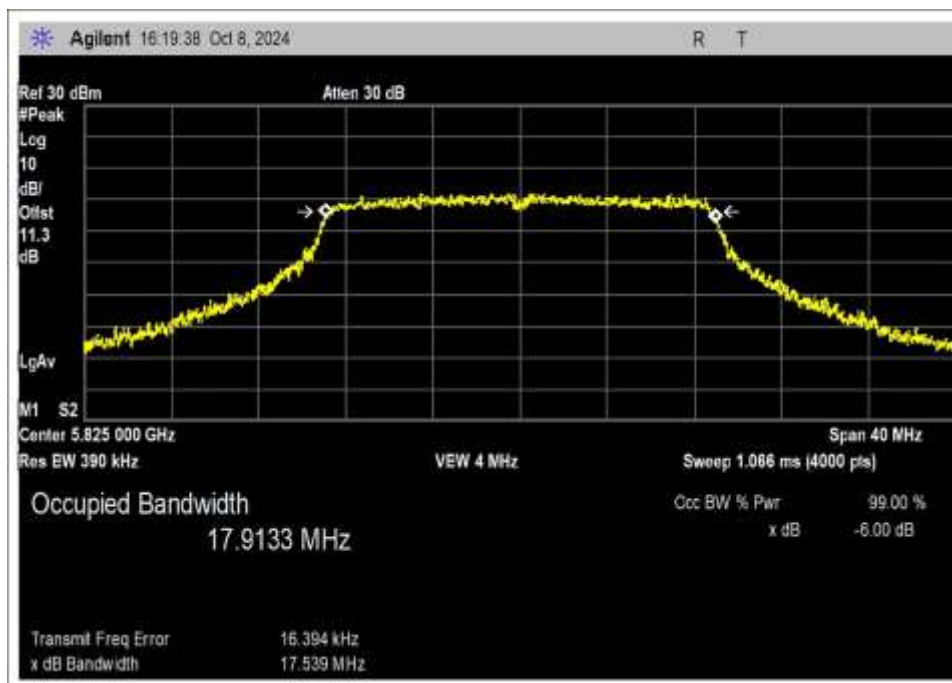


High Channel

802.11 n HT40

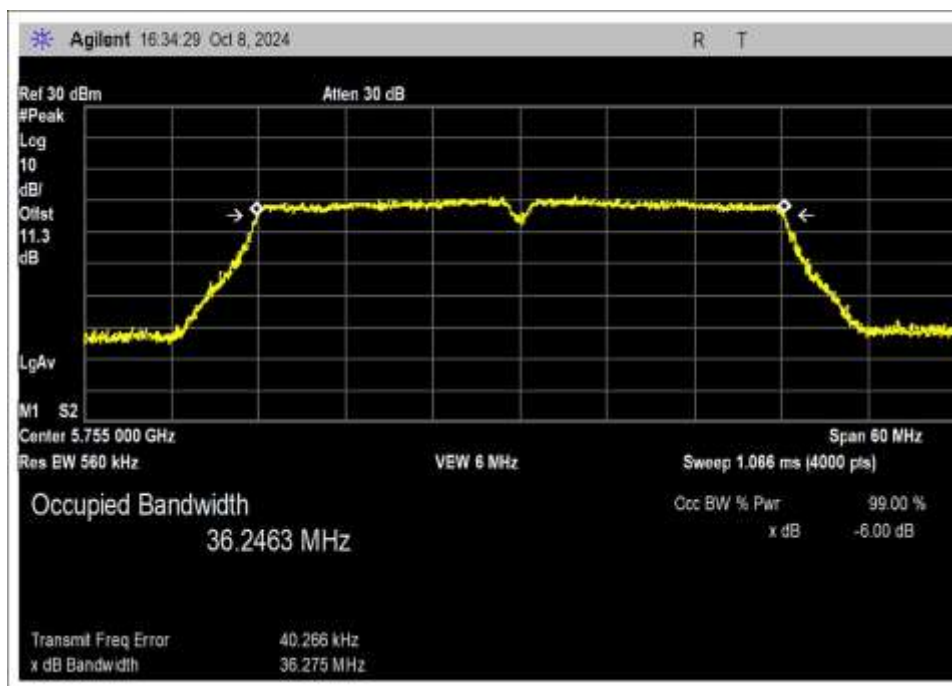


Low Channel

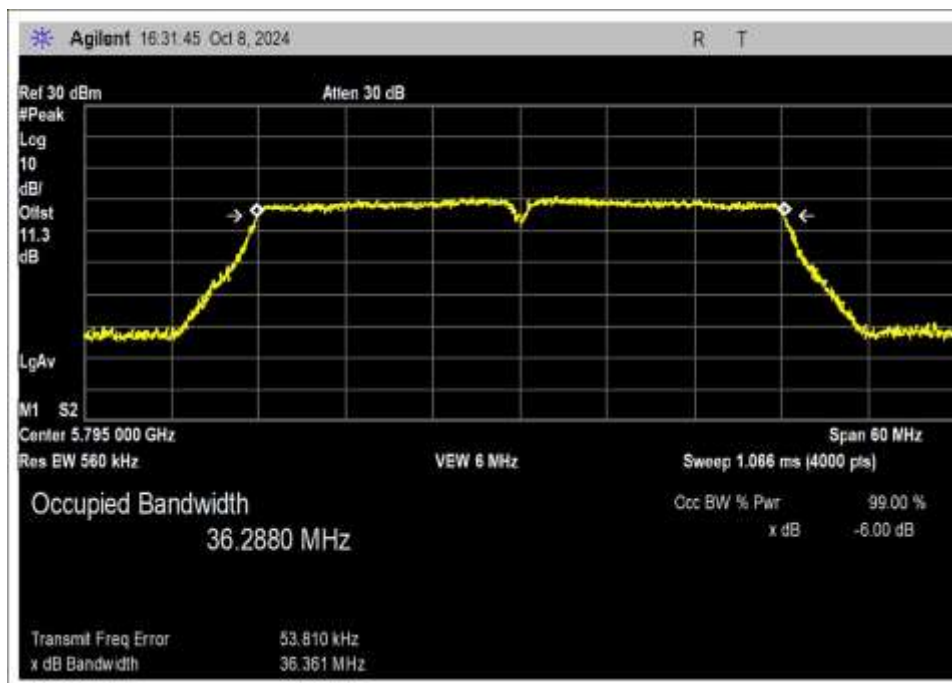


High Channel

802.11ac 40MHz

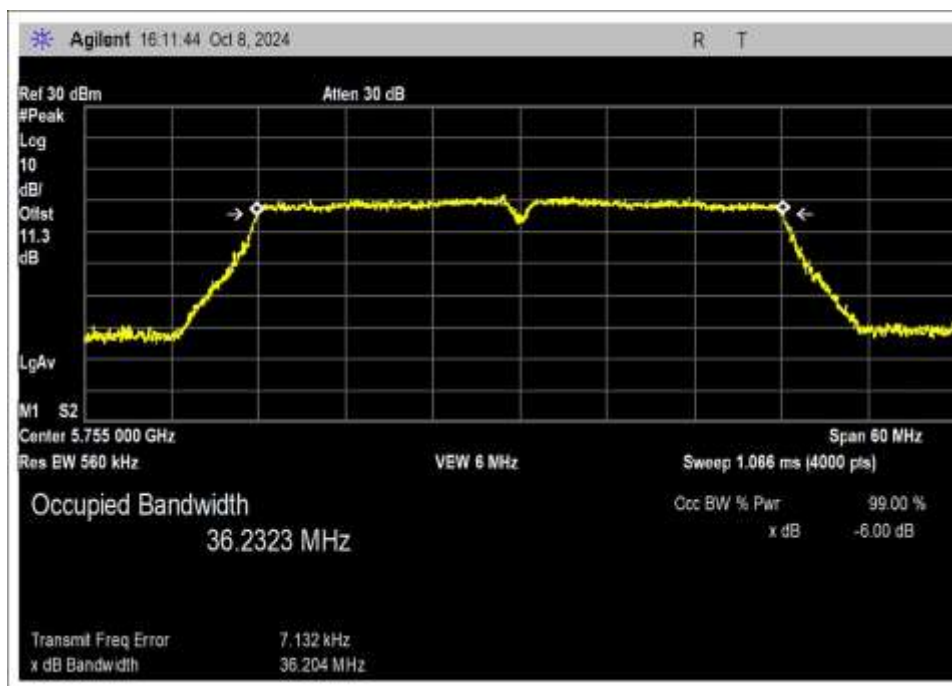


Low Channel

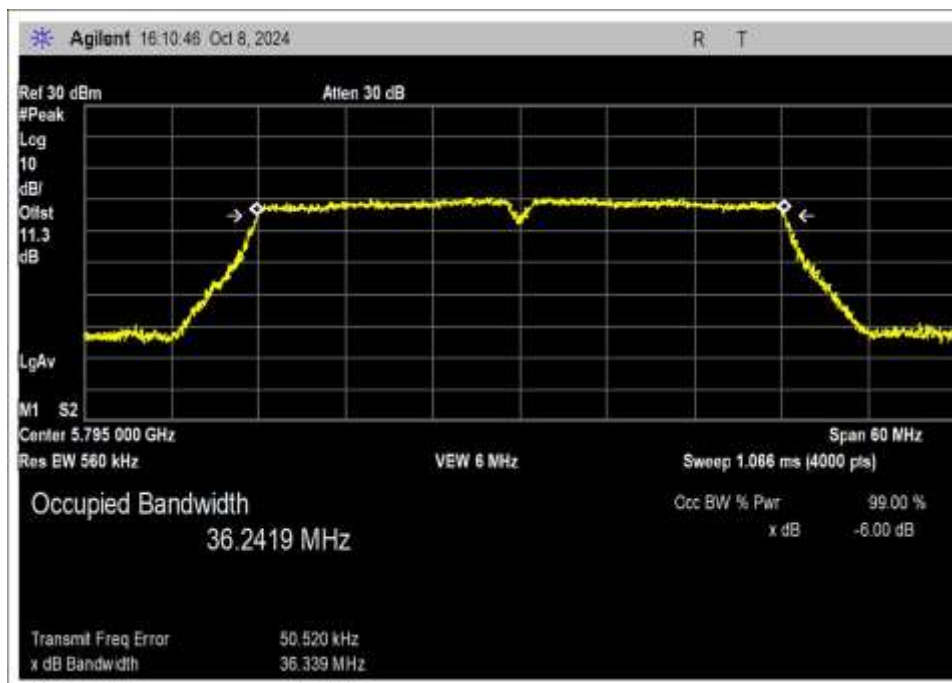

High Channel

802.11ac 80MHz

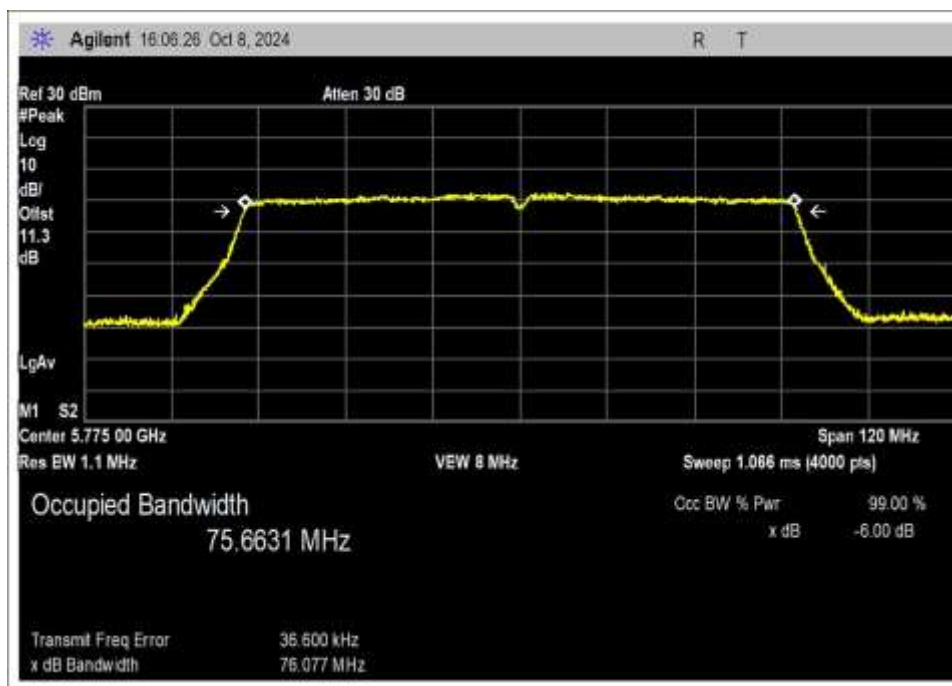

Test Setup Photo(s)



Test Setup



Test Setup, Close View

15.407(a) Output Power

Test Setup/Conditions

Test Location:	Fremont Lab Bench	Test Engineer:	Hieu Song Nguyenpham
Test Method:	ANSI C63.10 (2020), KDB 789033	Test Date(s):	10/07-09/2024
Configuration:	A		
Test Setup:	The EUT is placed non-conducted table. It is operated as intended. It is connected straight to a Spectrum Analyzer.		

Environmental Conditions

Temperature (°C)	21.2-23.7	Relative Humidity (%):	39-45
------------------	-----------	------------------------	-------

Test Equipment

Asset#	Description	Manufacturer	Model	Cal Date	Cal Due
03013	Cable	Astrolab	32022-2-2909K-36TC	1/9/2024	1/9/2026
P07365	Attenuator	Weinschel	54A-10	5/26/2023	5/26/2025
03471	Spectrum Analyzer	Agilent	E4440A	2/23/2024	2/23/2026

Test Data Summary - Voltage Variations

Frequency (MHz)	Modulation / Ant Port	V _{Minimum} (dBm)	V _{Nominal} (dBm)	V _{Maximum} (dBm)	Max Deviation from V _{Nominal} (dB)
5745	802.11a/1	10.46	10.47	10.47	0.01
5785	802.11a/1	9.87	9.85	9.86	0.02
5825	802.11a/1	9.81	9.81	9.83	0.01

Test performed using operational mode with the highest output power, representing worst case.

Parameter Definitions:

Measurements performed at input voltage V_{Nominal} ± 15%.

Parameter	Value
V _{Nominal} :	12VDC
V _{Minimum} :	10.2VDC
V _{Maximum} :	13.8VDC

Test Data Summary - RF Conducted Measurement- Chain 0							
Measurement Option: AVGSA-1							
Frequency (MHz)	Modulation	Ant. Type / Gain (dBi)	RF Conducted (dBm)		EIRP (dBm)		Results
			Measured	Limit	Calculated	Limit	
5745	802.11a	External/4.66	9.52	≤30	13.91	≤36	Pass
5785	802.11a	External/4.66	9.27	≤30	13.93	≤36	Pass
5825	802.11a	External/4.66	8.26	≤30	12.92	≤36	Pass
5745	802.11n HT20	External/4.66	8.50	≤30	13.16	≤36	Pass
5785	802.11n HT20	External/4.66	8.16	≤30	12.82	≤36	Pass
5825	802.11n HT20	External/4.66	8.10	≤30	12.76	≤36	Pass
5745	802.11ac 20MHz	External/4.66	8.30	≤30	12.96	≤36	Pass
5785	802.11ac 20MHz	External/4.66	7.92	≤30	12.58	≤36	Pass
5825	802.11ac 20MHz	External/4.66	7.89	≤30	12.55	≤36	Pass
5755	802.11n HT40	External/4.66	8.14	≤30	12.8	≤36	Pass
5795	802.11n HT40	External/4.66	8.12	≤30	12.78	≤36	Pass
5755	802.11ac 40MHz	External/4.66	8.12	≤30	12.78	≤36	Pass
5795	802.11ac 40MHz	External/4.66	8.19	≤30	12.85	≤36	Pass
5775	802.11ac 80MHz	External/4.66	6.51	≤30	11.17	≤36	Pass

Test Data Summary - RF Conducted Measurement- Chain 1							
Measurement Option: AVGSA-1							
Frequency (MHz)	Modulation	Ant. Type / Gain (dBi)	RF Conducted (dBm)		EIRP (dBm)		Results
			Measured	Limit	Calculated	Limit	
5745	802.11a	External/4.66	10.47	≤30	15.13	≤36	Pass
5785	802.11a	External/4.66	9.85	≤30	14.51	≤36	Pass
5825	802.11a	External/4.66	9.81	≤30	14.47	≤36	Pass
5745	802.11n HT20	External/4.66	10.10	≤30	14.76	≤36	Pass
5785	802.11n HT20	External/4.66	9.44	≤30	14.1	≤36	Pass
5825	802.11n HT20	External/4.66	9.50	≤30	14.16	≤36	Pass
5745	802.11ac 20MHz	External/4.66	10.13	≤30	14.79	≤36	Pass
5785	802.11ac 20MHz	External/4.66	9.81	≤30	14.47	≤36	Pass
5825	802.11ac 20MHz	External/4.66	9.65	≤30	14.31	≤36	Pass
5755	802.11n HT40	External/4.66	10.12	≤30	14.78	≤36	Pass
5795	802.11n HT40	External/4.66	9.92	≤30	14.58	≤36	Pass
5755	802.11ac 40MHz	External/4.66	10.11	≤30	14.77	≤36	Pass
5795	802.11ac 40MHz	External/4.66	9.86	≤30	14.52	≤36	Pass
5775	802.11ac 80MHz	External/4.66	9.56	≤30	14.22	≤36	Pass



EIRP is calculated as RF conducted power (dBm) + antenna gain (dBi)

For equipment using antennas other than in fixed point-to-point applications, the limit is calculated in accordance with 15.407(a)(3):

$$\text{Limit} = 30 - \text{Roundup}(G - 6)$$


For equipment using antennas in fixed point-to-point applications, the limit is calculated in accordance with 15.407(a)(3):

$$\text{Limit} = 30$$


Plot(s)

Chain 0


802.11a

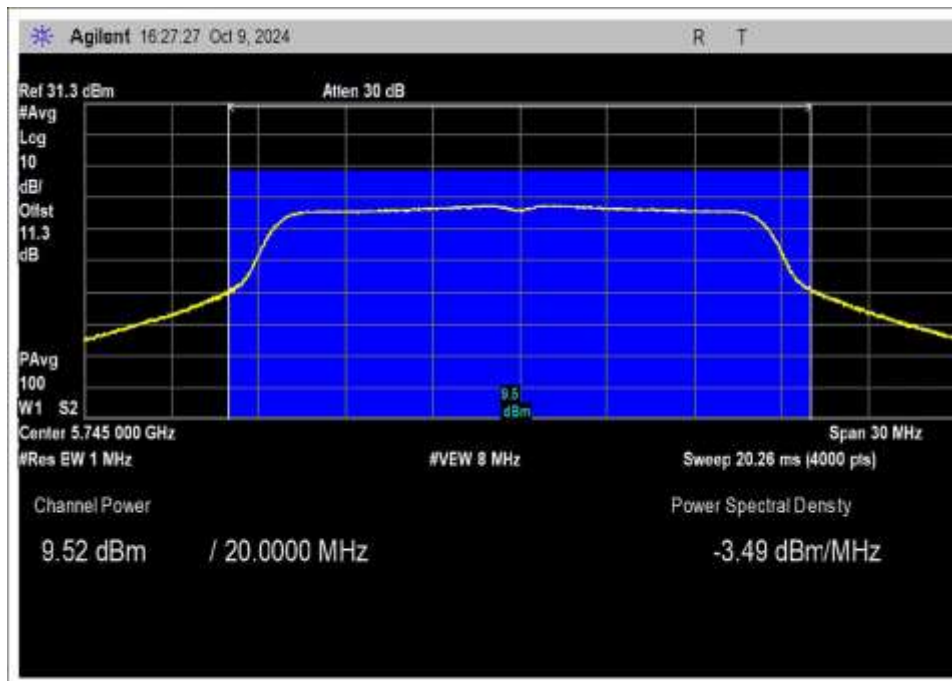

Low Channel

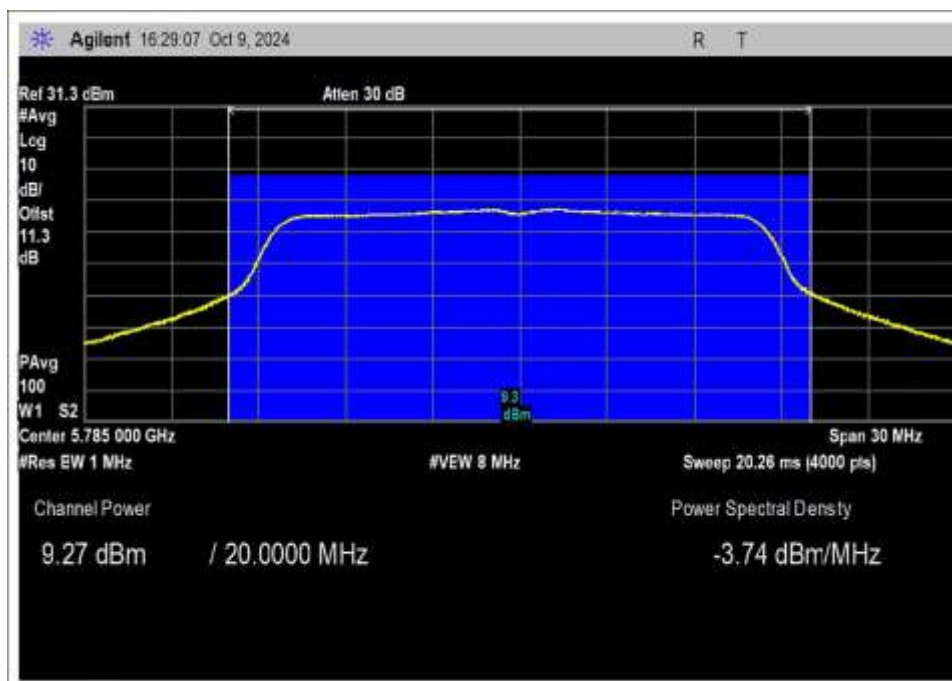


Middle Channel

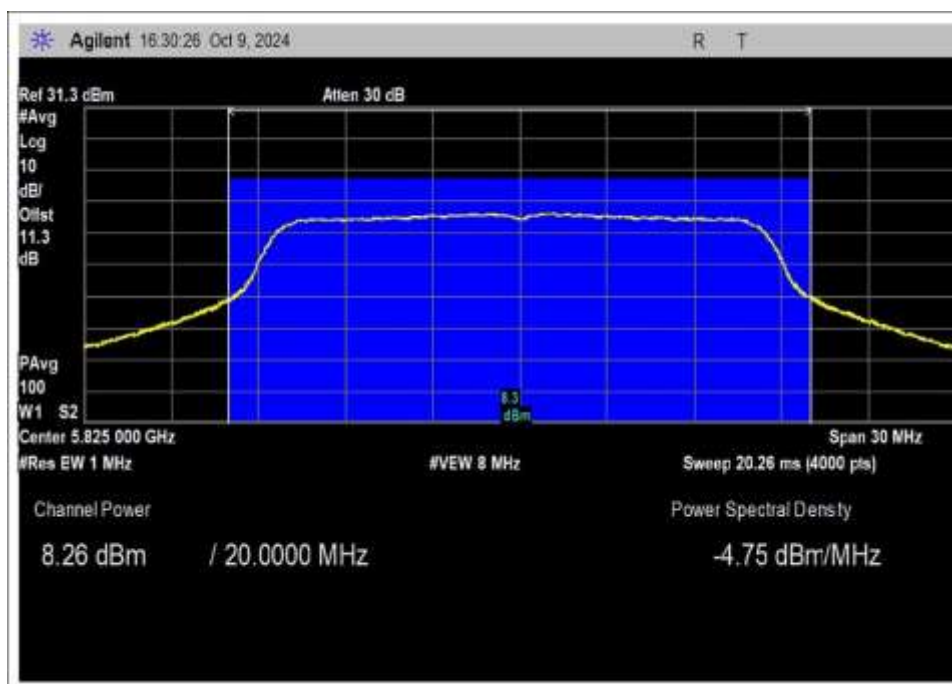


High Channel


802.11n HT20

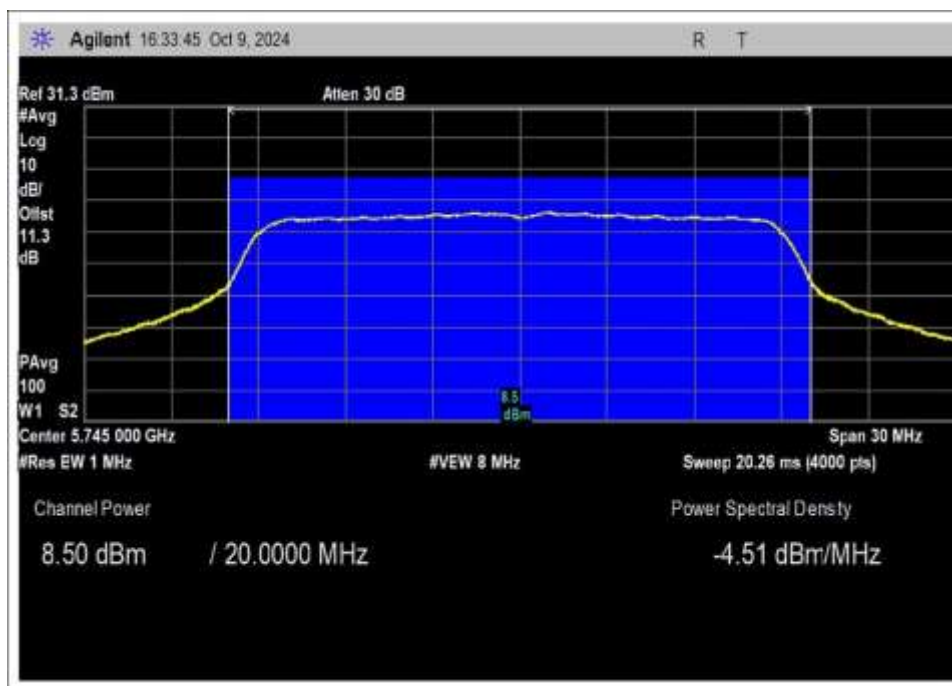

Low Channel

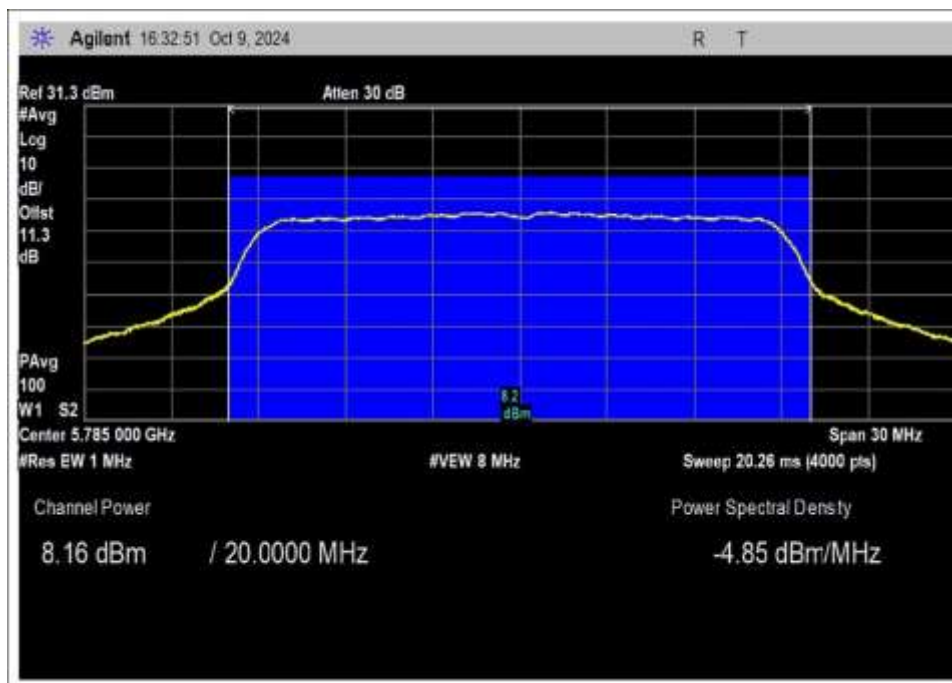


Middle Channel

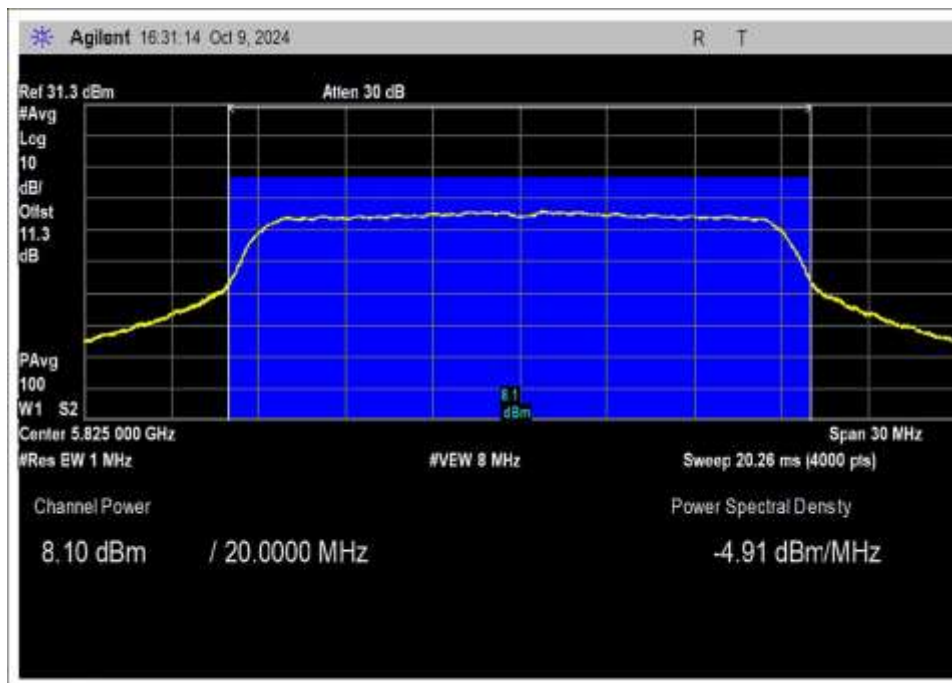


High Channel


802.11ac 20MHz

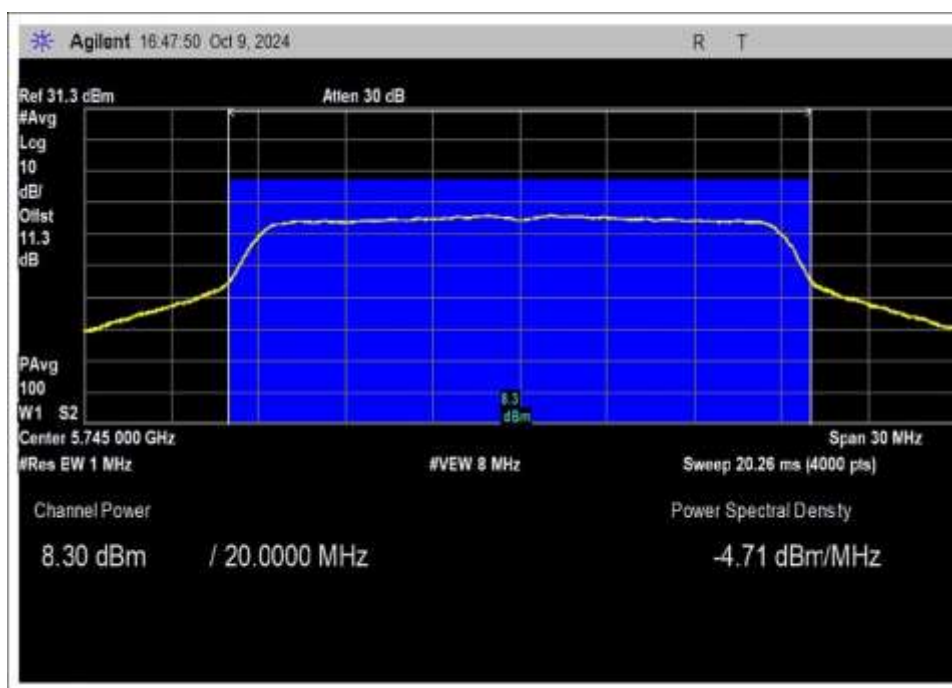

Low Channel

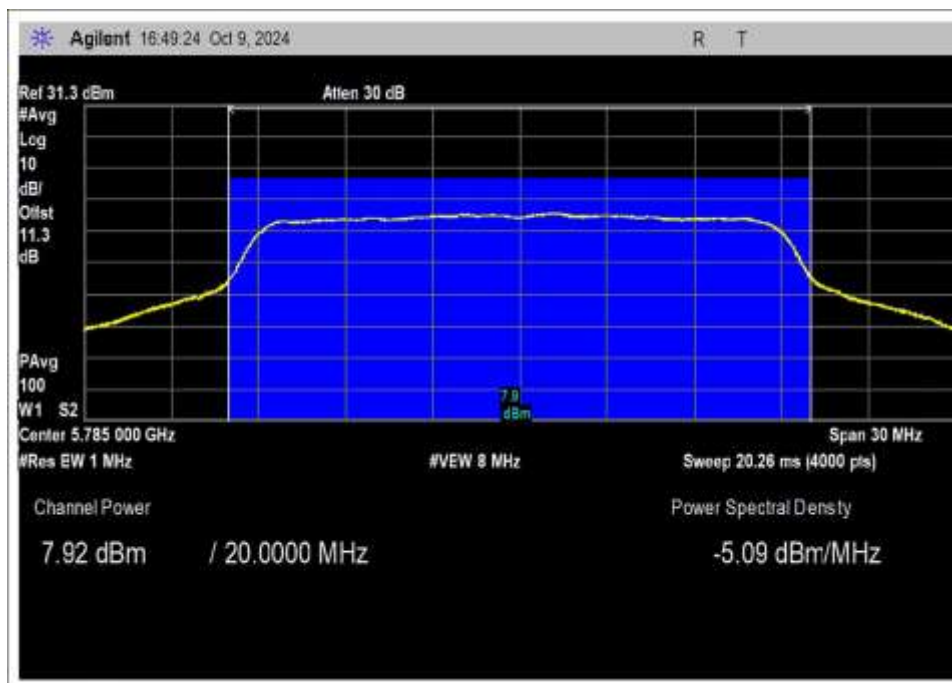


Middle Channel

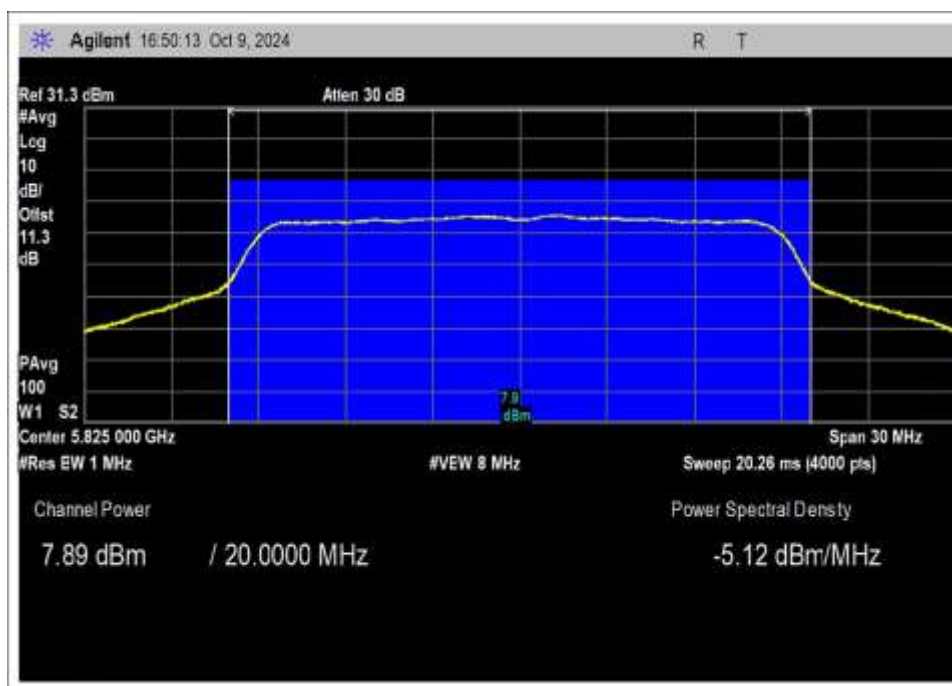


High Channel

802.11 n HT40

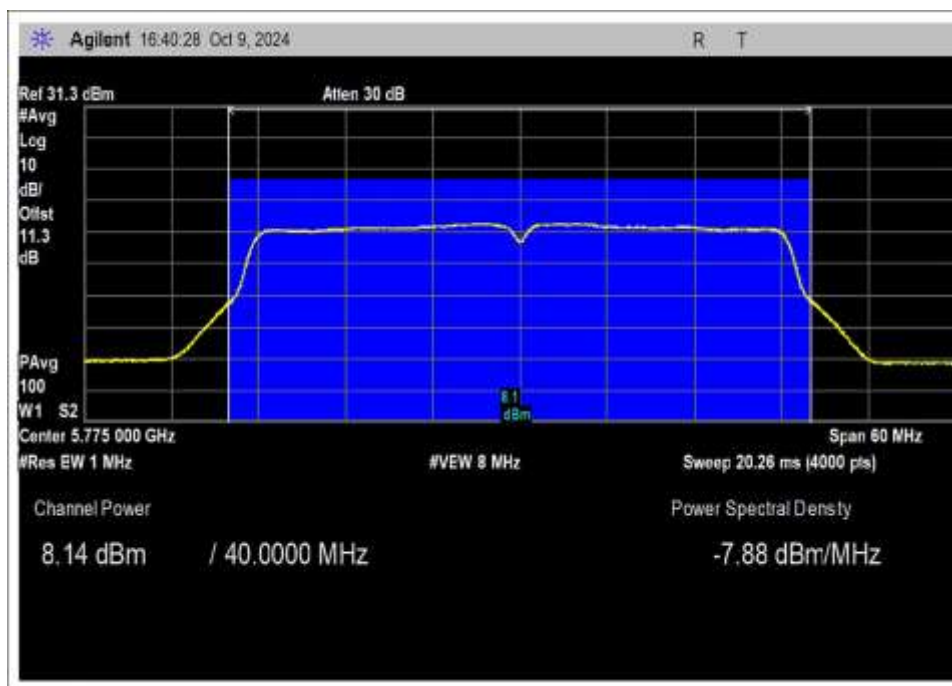


Low Channel

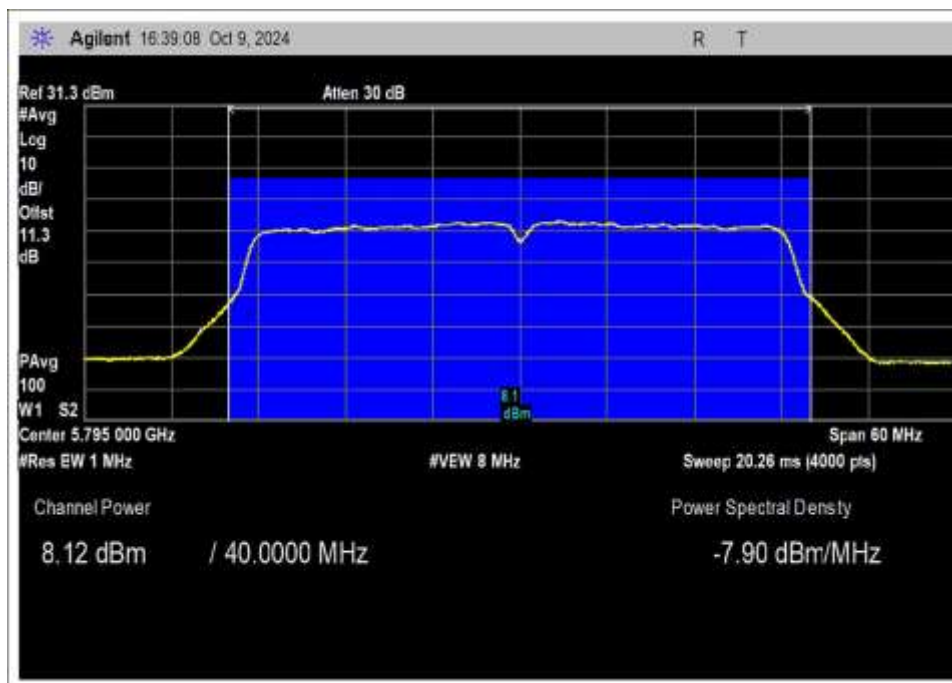


High Channel

802.11ac 40MHz

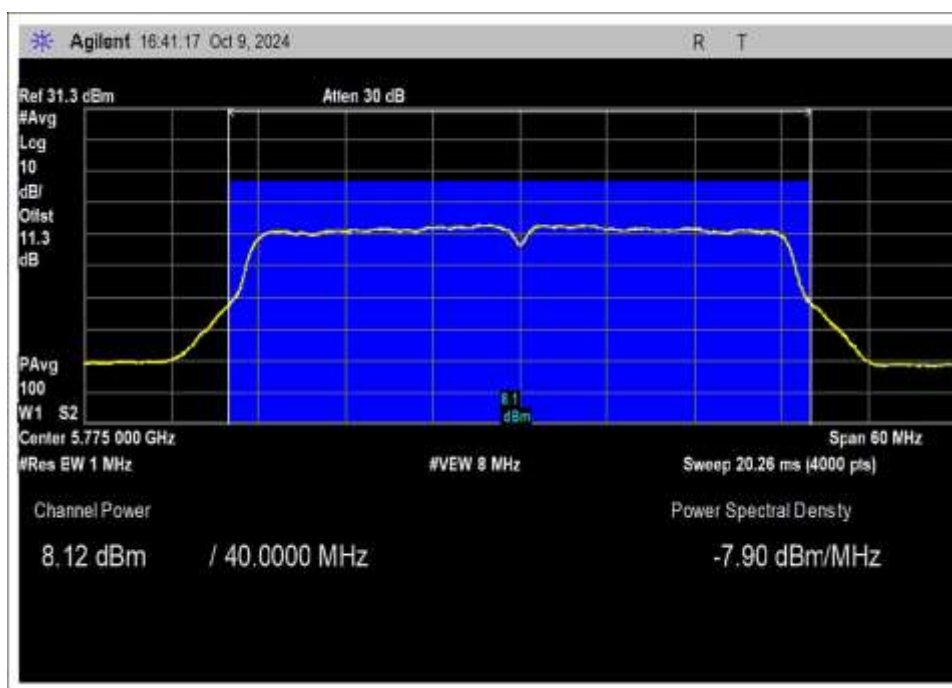


Low Channel

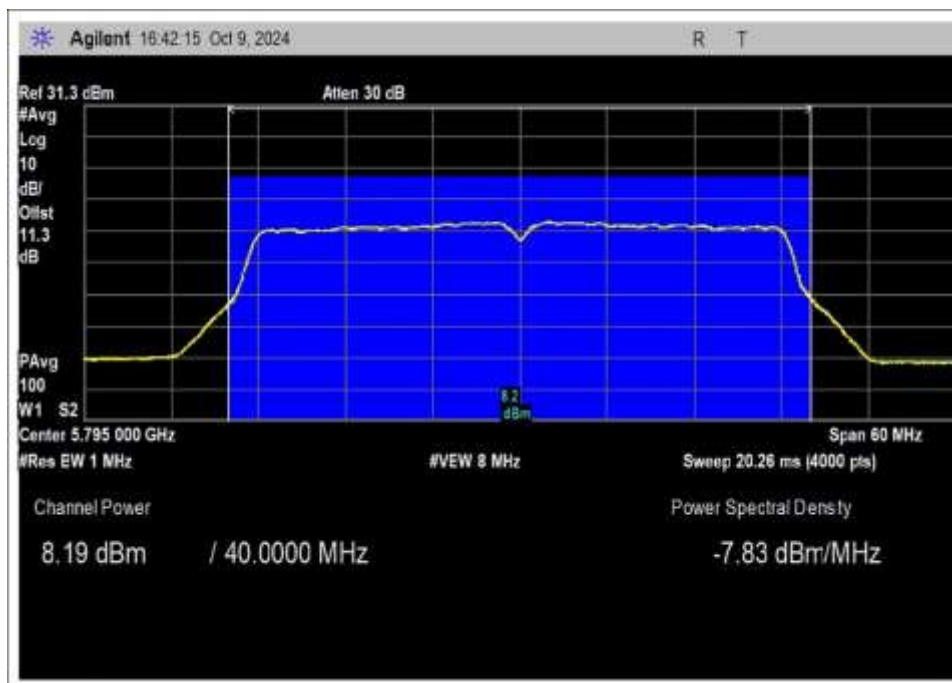


High Channel


802.11ac 80MHz

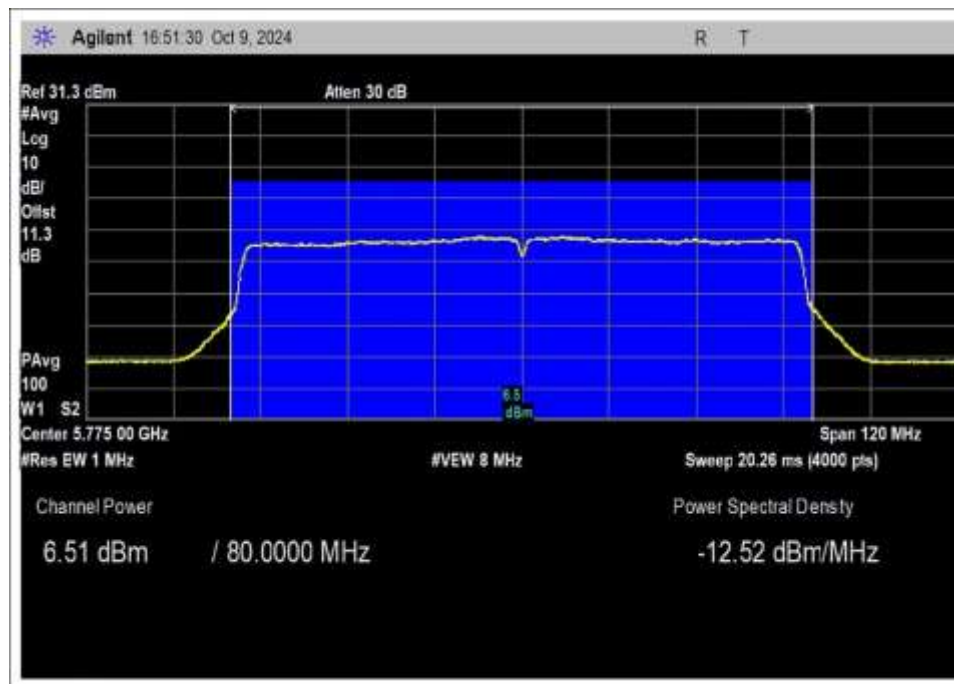


Chain 1
802.11a

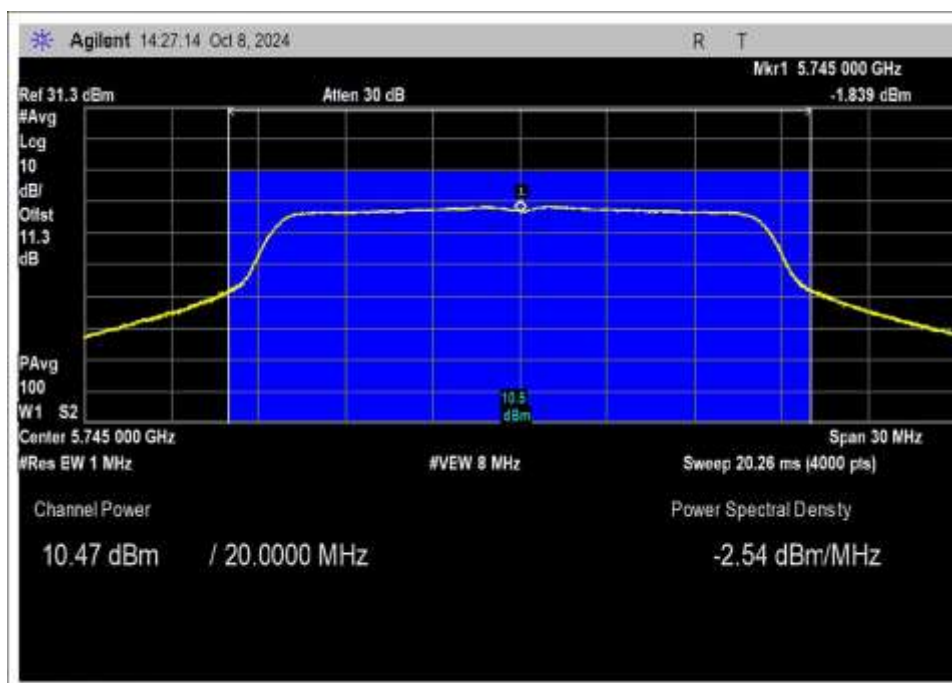

Low Channel

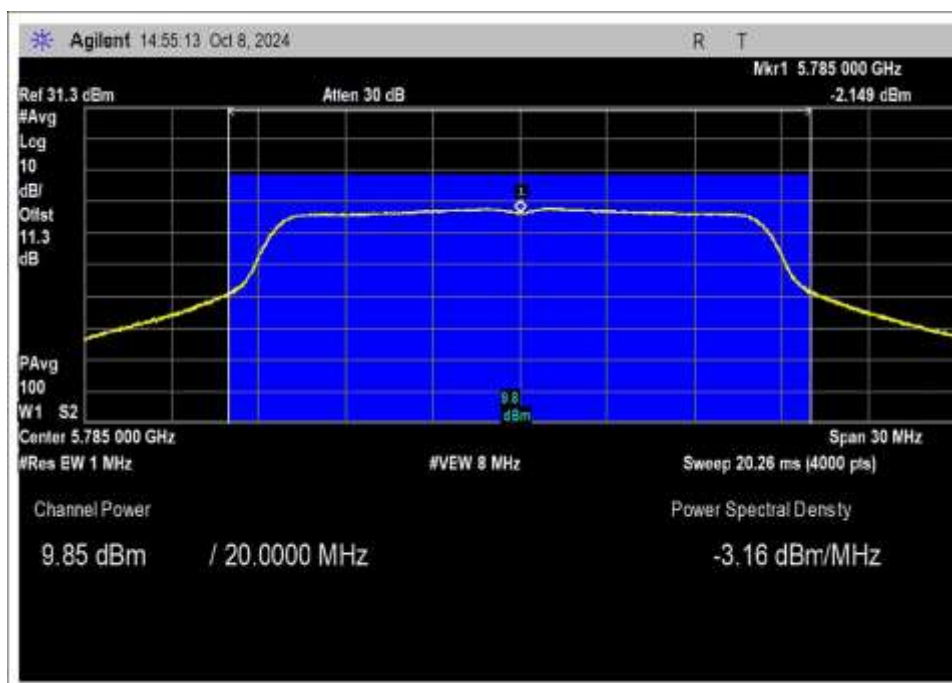


Middle Channel

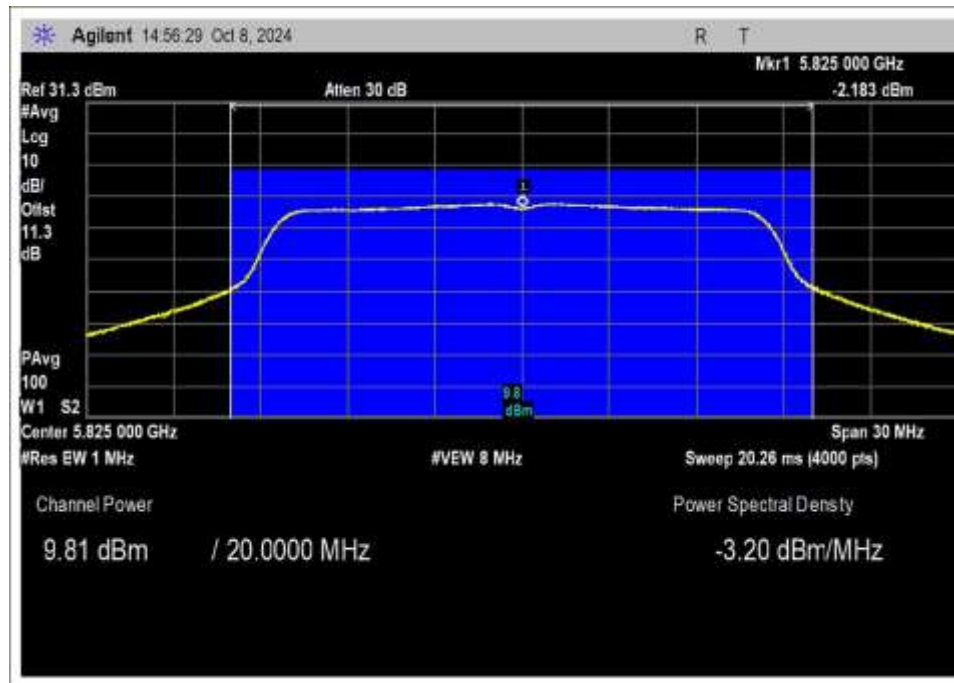


High Channel


802.11n HT20

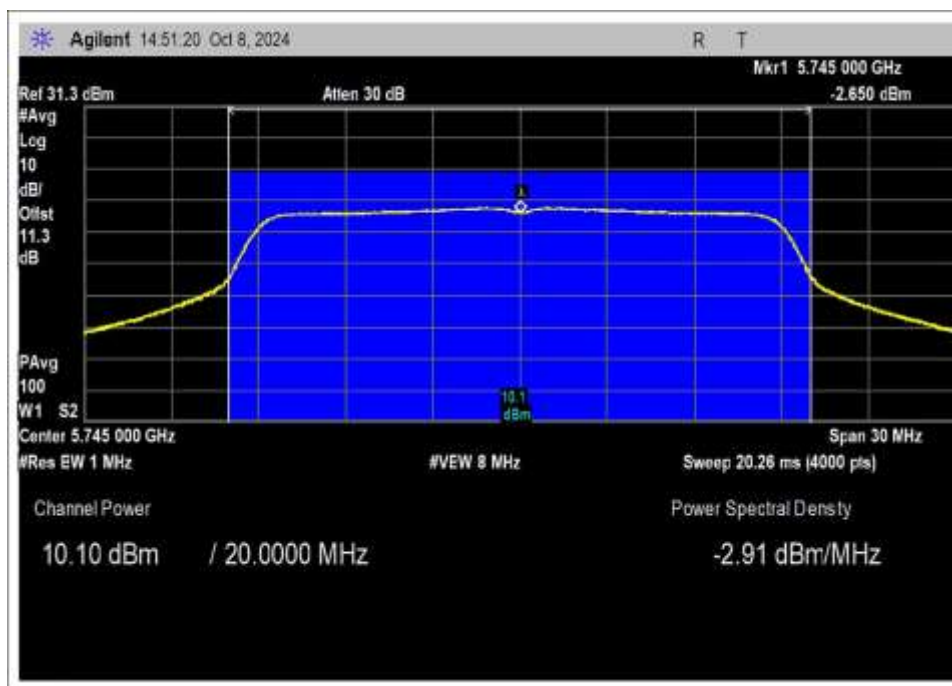

Low Channel

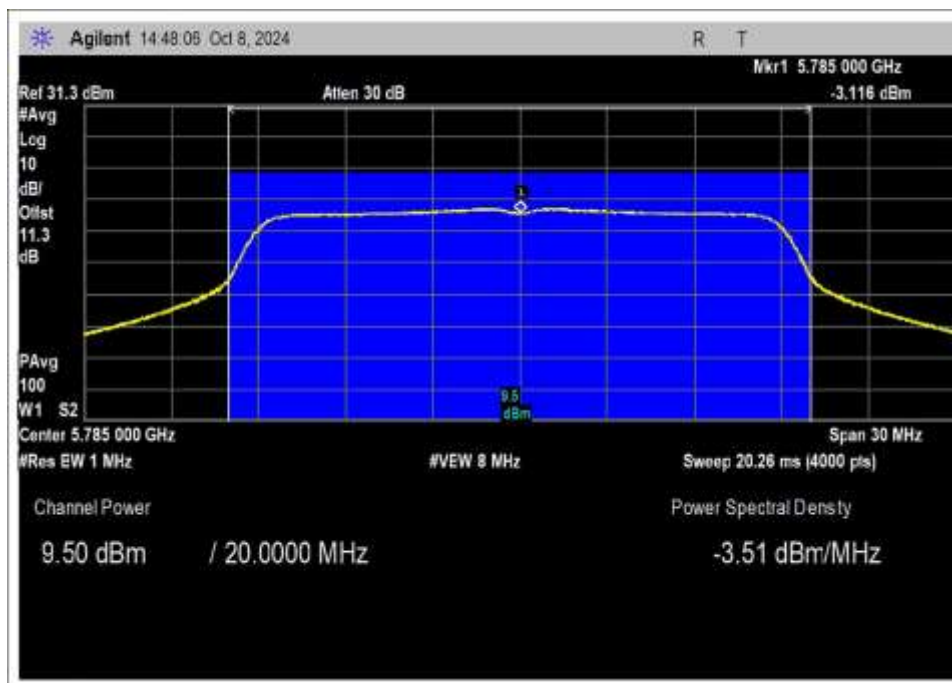


Middle Channel

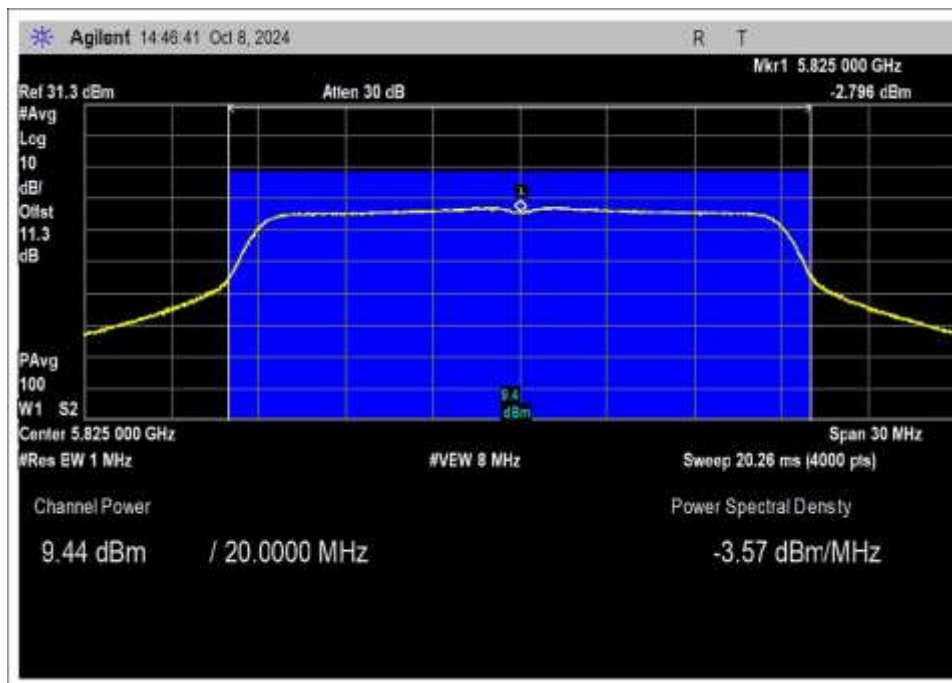


High Channel


802.11ac 20MHz

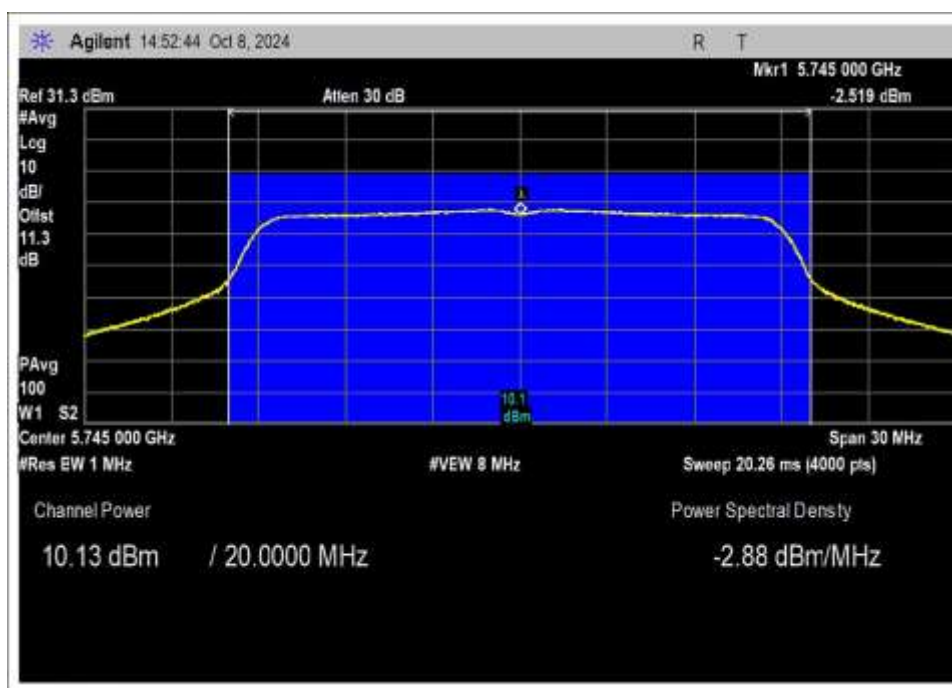

Low Channel

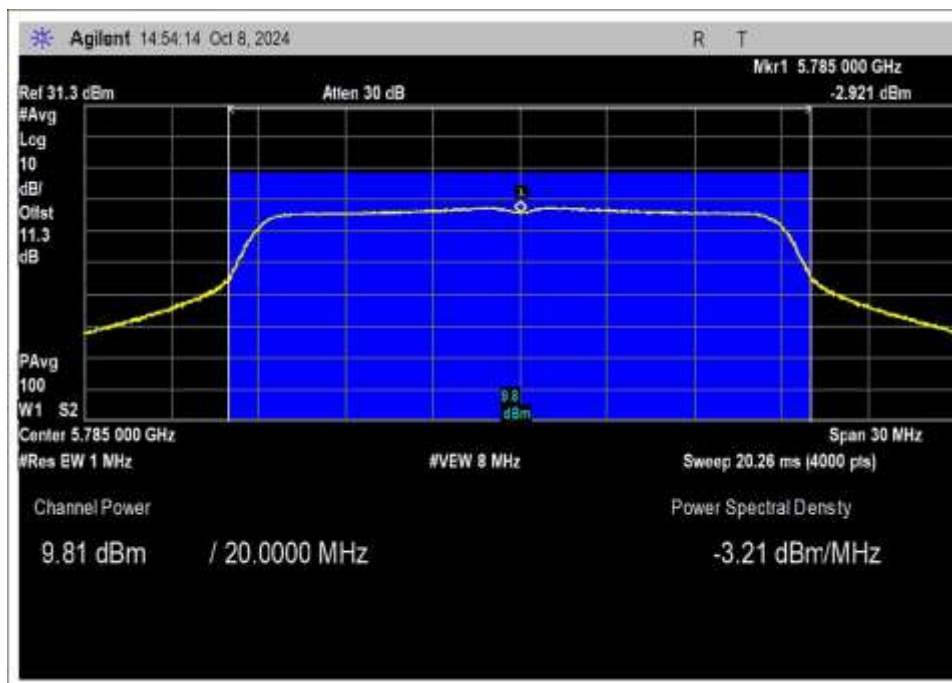


Middle Channel

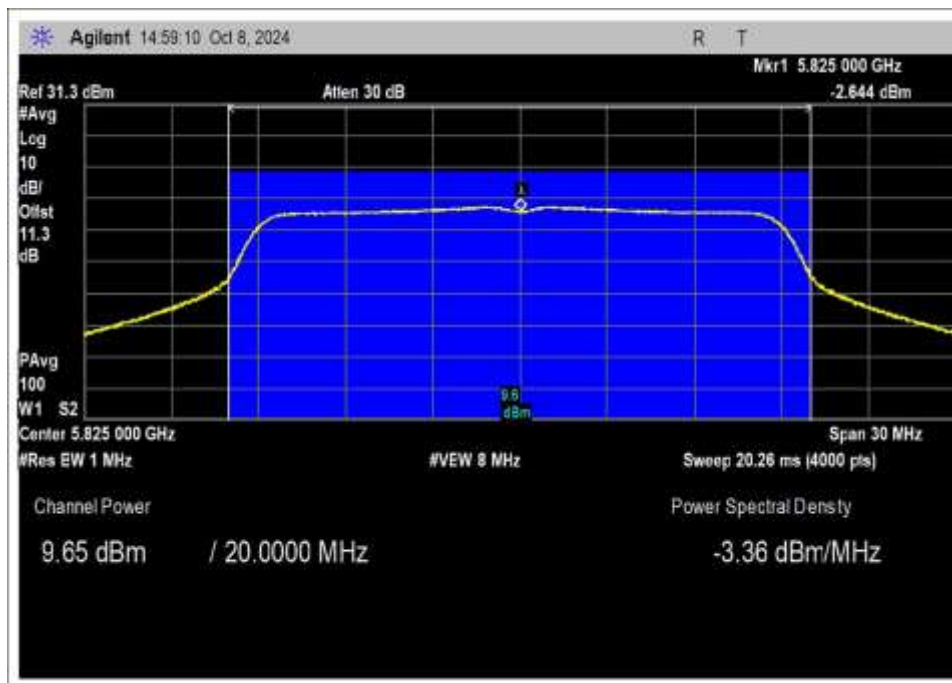


High Channel

802.11 n HT40

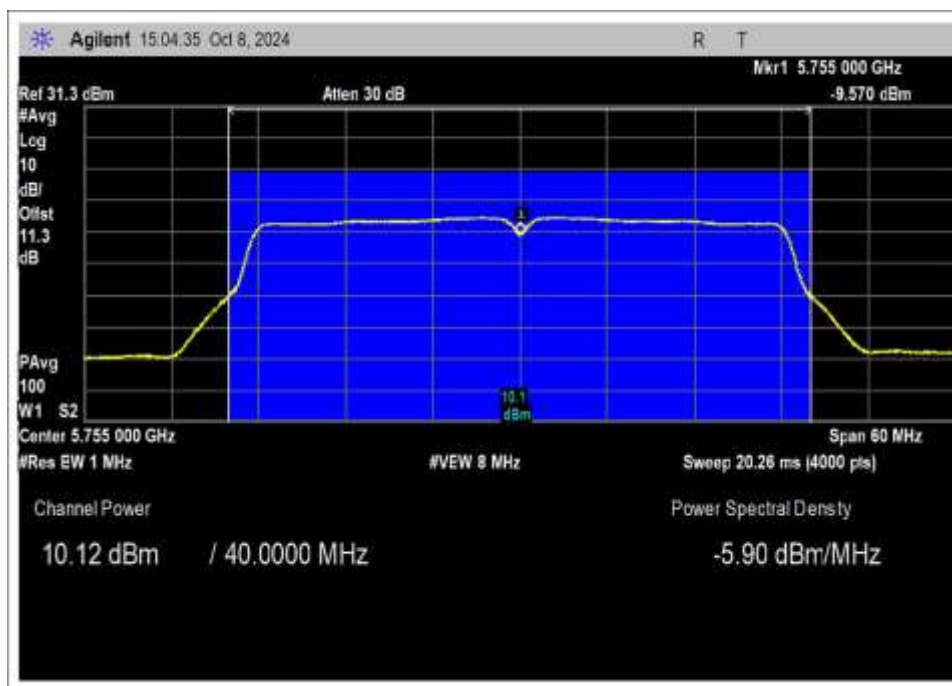


Low Channel

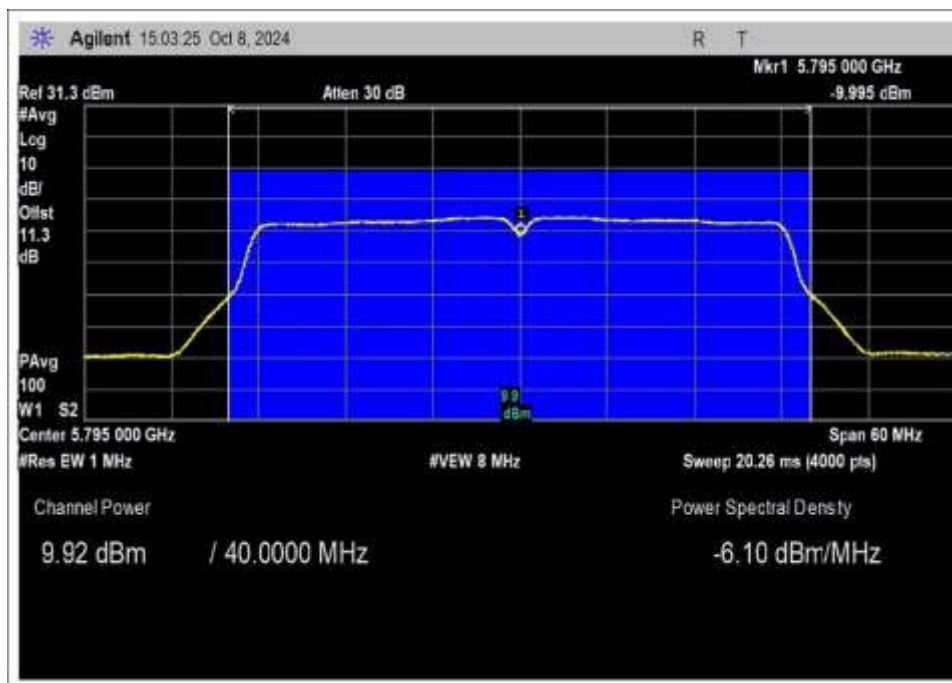


High Channel

802.11ac 40MHz

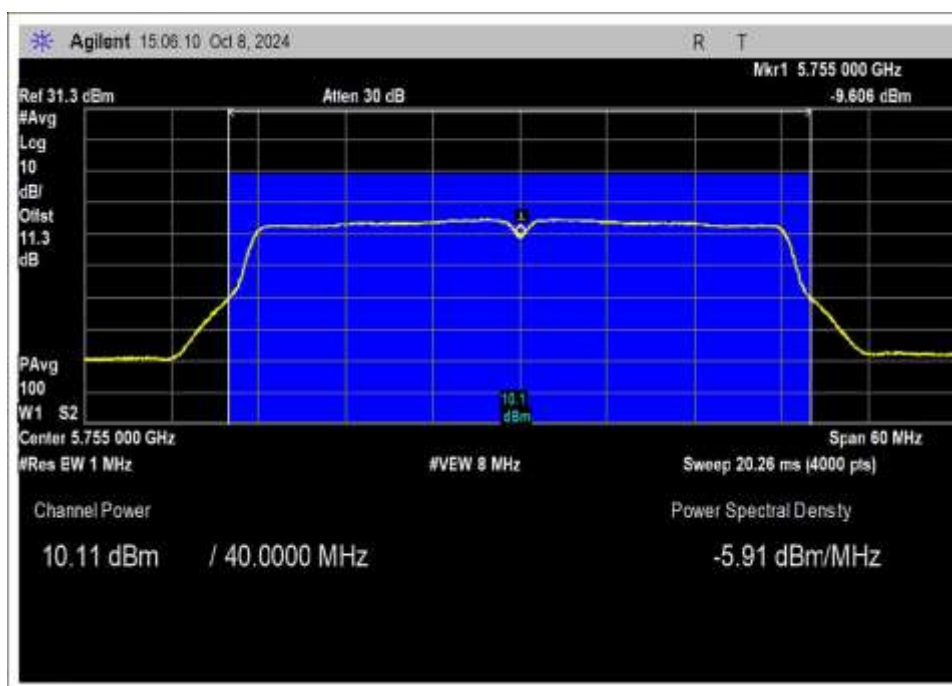


Low Channel

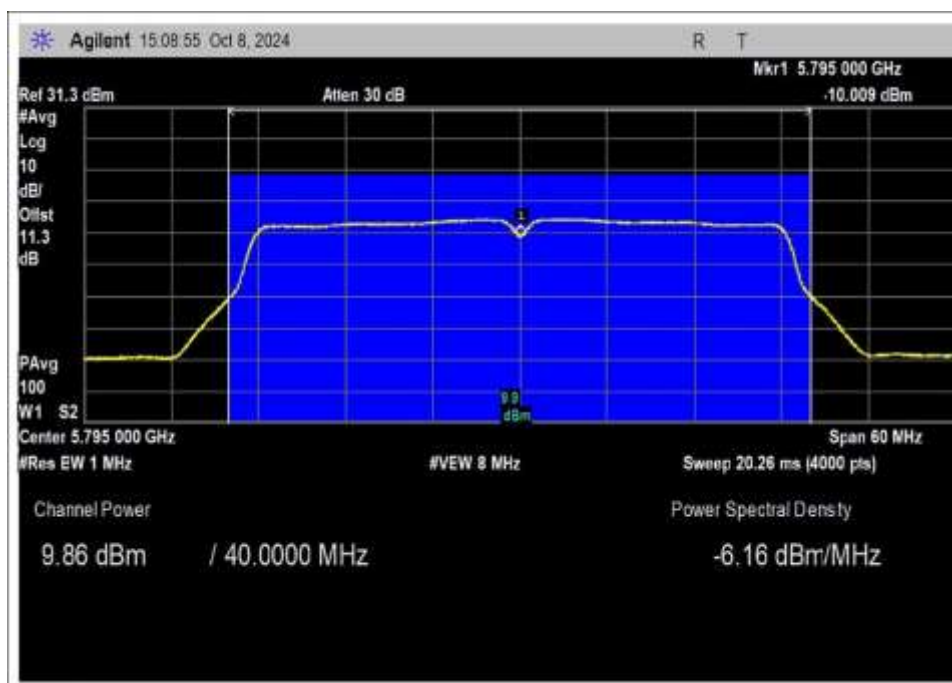

High Channel

802.11ac 80MHz

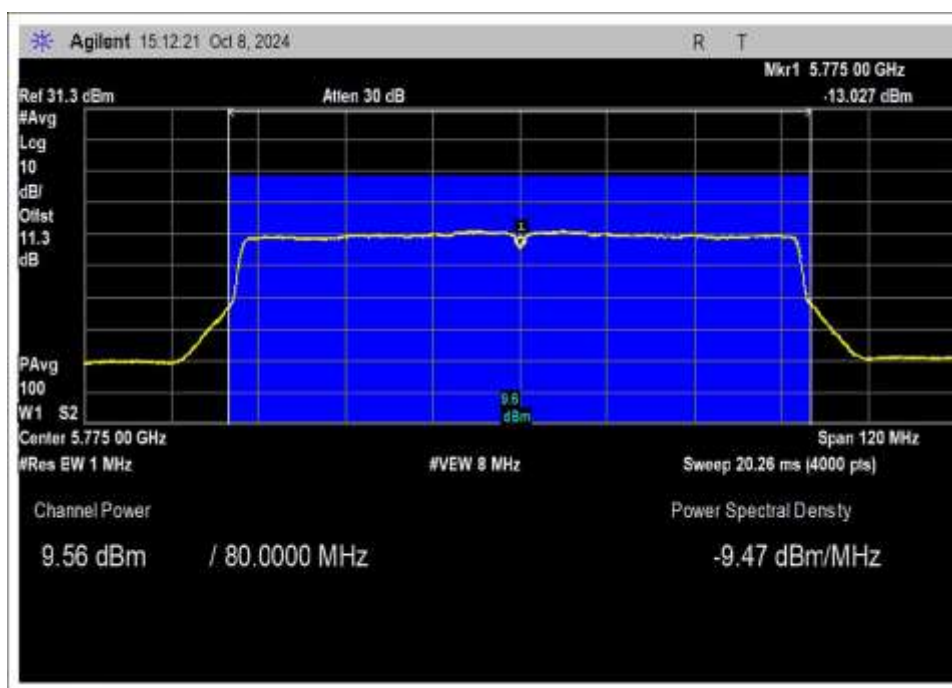

Test Setup Photo(s)



Test Setup



Test Setup, Close View

15.407(a) Power Spectral Density

Test Setup/Conditions

Test Location:	Fremont Lab Bench	Test Engineer:	Hieu Song Nguyenpham
Test Method:	ANSI C63.10 (2020), KDB 789033	Test Date(s):	10/07-09/2024
Configuration:	A		
Test Setup:	The EUT is placed non-conducted table. It is operated as intended. It is connected straight to a Spectrum Analyzer.		

Environmental Conditions

Temperature (°C)	21.2-23.7	Relative Humidity (%):	39-45
------------------	-----------	------------------------	-------

Test Equipment

Asset#	Description	Manufacturer	Model	Cal Date	Cal Due
03013	Cable	Astrolab	32022-2-2909K-36TC	1/9/2024	1/9/2026
P07365	Attenuator	Weinschel	54A-10	5/26/2023	5/26/2025
03471	Spectrum Analyzer	Agilent	E4440A	2/23/2024	2/23/2026


Test Data Summary - RF Conducted Measurement -Chain 0					
Measurement Option: AVGSA-1					
Frequency (MHz)	Modulation	Ant. Type / Gain (dBi)	Measured (dBm/500kHz)	Limit (dBm/500kHz)	Results
5745	802.11a	External/4.66	-3.365	≤30	Pass
5785	802.11a	External/4.66	-3.672	≤30	Pass
5825	802.11a	External/4.66	-3.332	≤30	Pass
5745	802.11n HT20	External/4.66	-3.423	≤30	Pass
5785	802.11n HT20	External/4.66	-3.977	≤30	Pass
5825	802.11n HT20	External/4.66	-4.043	≤30	Pass
5745	802.11ac 20MHz	External/4.66	-3.806	≤30	Pass
5785	802.11ac 20MHz	External/4.66	-4.077	≤30	Pass
5825	802.11ac 20MHz	External/4.66	-4.094	≤30	Pass
5755	802.11n HT40	External/4.66	-6.926	≤30	Pass
5795	802.11n HT40	External/4.66	-6.875	≤30	Pass
5755	802.11ac 40MHz	External/4.66	-7.159	≤30	Pass
5795	802.11ac 40MHz	External/4.66	-7.066	≤30	Pass
5775	802.11ac 80MHz	External/4.66	-10.365	≤30	Pass

Test Data Summary - RF Conducted Measurement -Chain 1					
Measurement Option: AVGSA-1					
Frequency (MHz)	Modulation	Ant. Type / Gain (dBi)	Measured (dBm/500kHz)	Limit (dBm/500kHz)	Results
5745	802.11a	External/4.66	-2.712	≤30	Pass
5785	802.11a	External/4.66	-2.961	≤30	Pass
5825	802.11a	External/4.66	-3.204	≤30	Pass
5745	802.11n HT20	External/4.66	-2.925	≤30	Pass
5785	802.11n HT20	External/4.66	-3.021	≤30	Pass
5825	802.11n HT20	External/4.66	-3.622	≤30	Pass
5745	802.11ac 20MHz	External/4.66	-3.681	≤30	Pass
5785	802.11ac 20MHz	External/4.66	-3.313	≤30	Pass
5825	802.11ac 20MHz	External/4.66	-3.233	≤30	Pass
5755	802.11n HT40	External/4.66	-6.343	≤30	Pass
5795	802.11n HT40	External/4.66	-6.387	≤30	Pass
5755	802.11ac 40MHz	External/4.66	-6.178	≤30	Pass
5795	802.11ac 40MHz	External/4.66	-6.421	≤30	Pass
5775	802.11ac 80MHz	External/4.66	-9.879	≤30	Pass


Plot(s)

Chain 0


802.11a

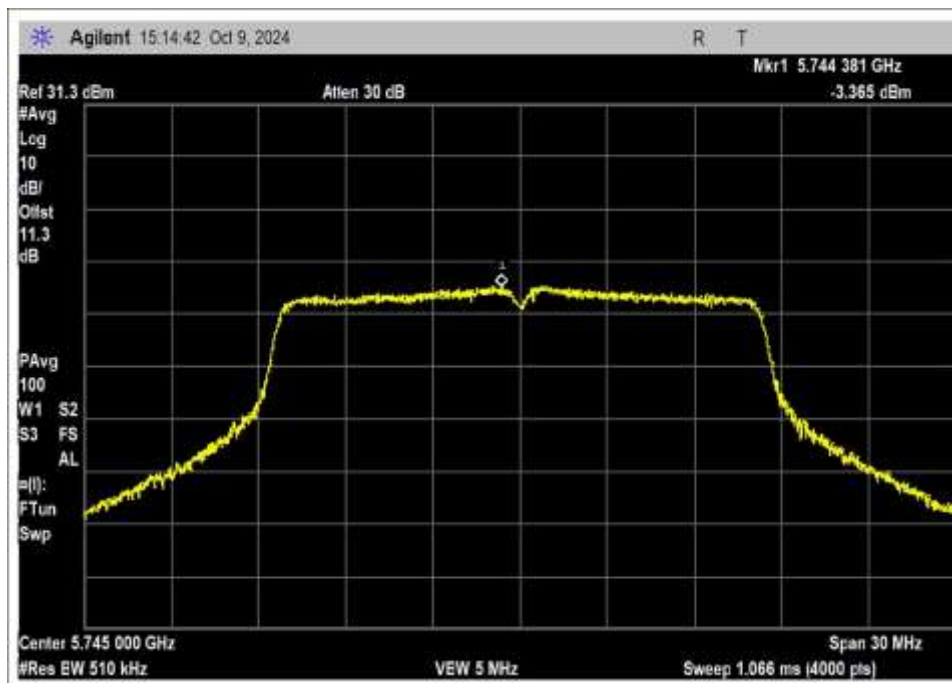

Low Channel

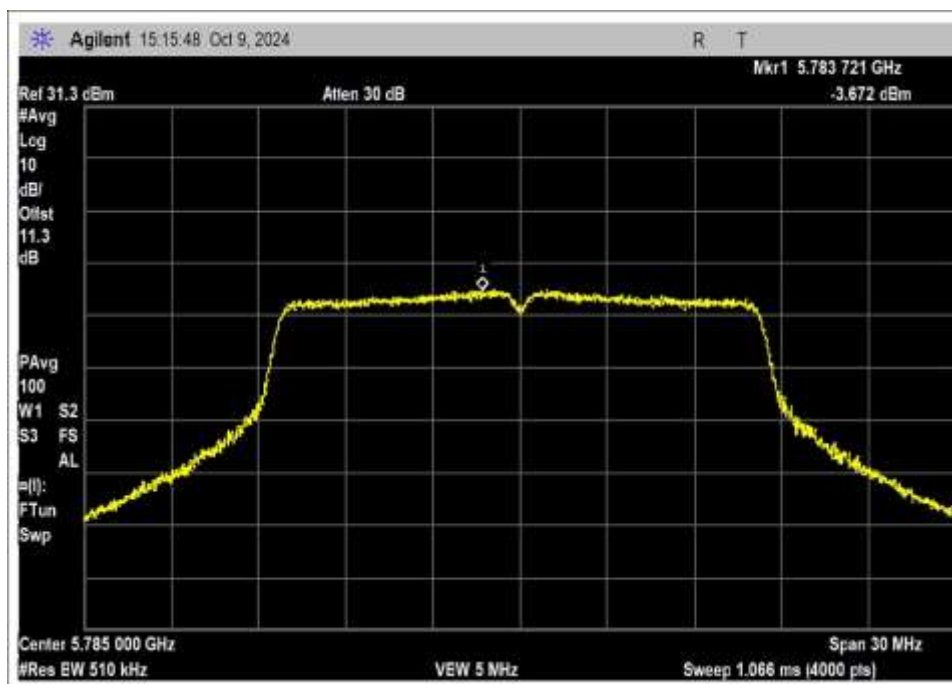


Middle Channel

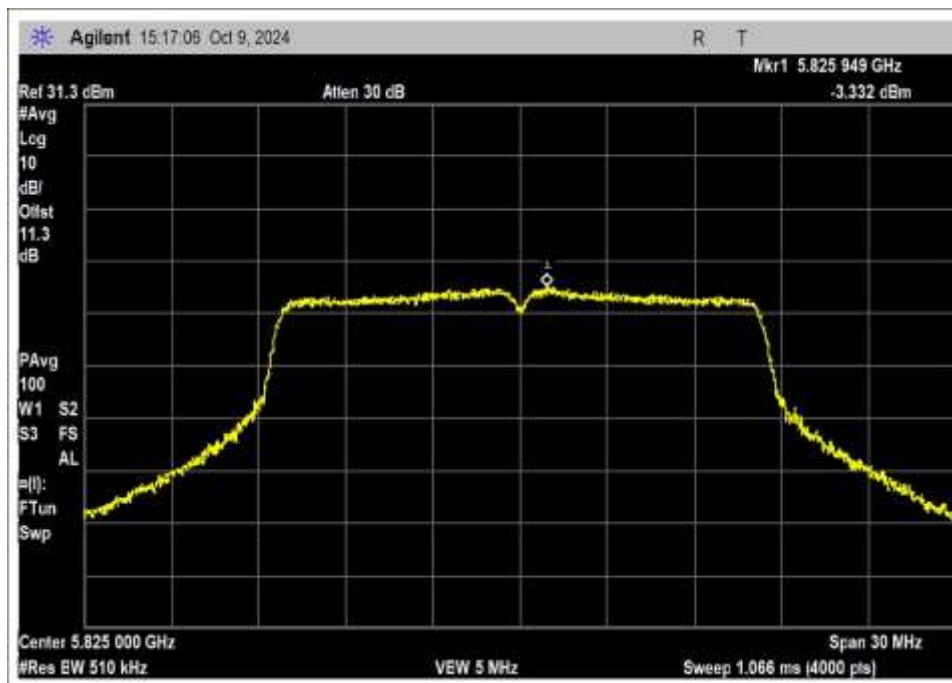


High Channel


802.11n HT20

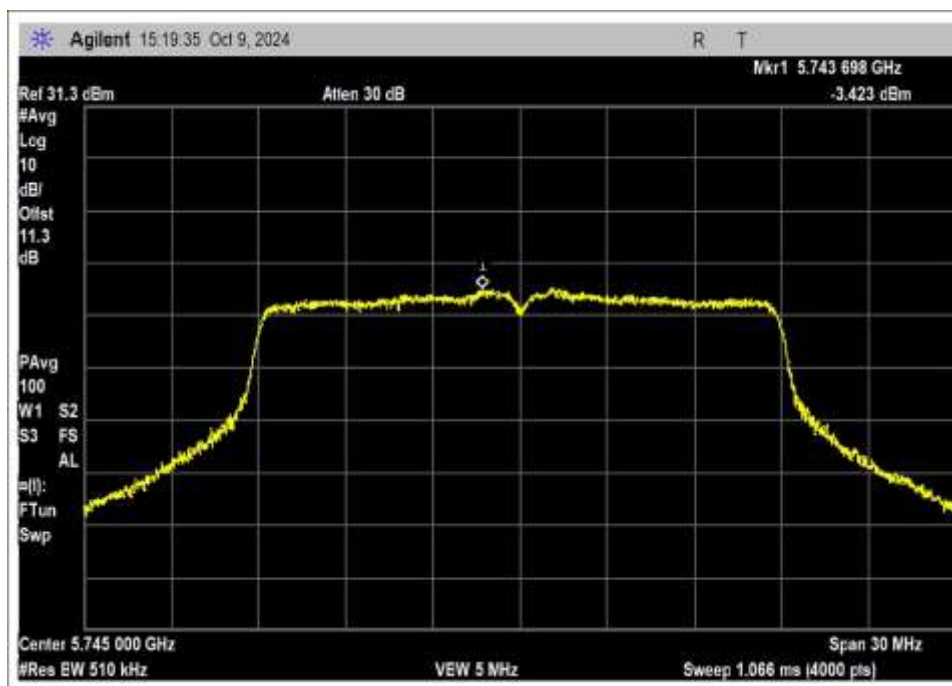

Low Channel

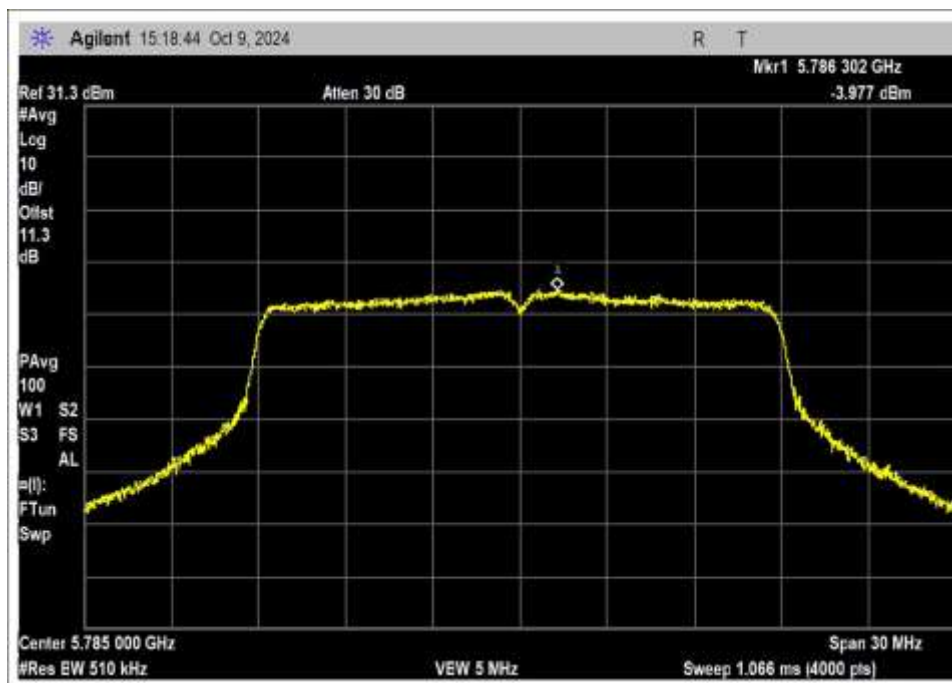


Middle Channel

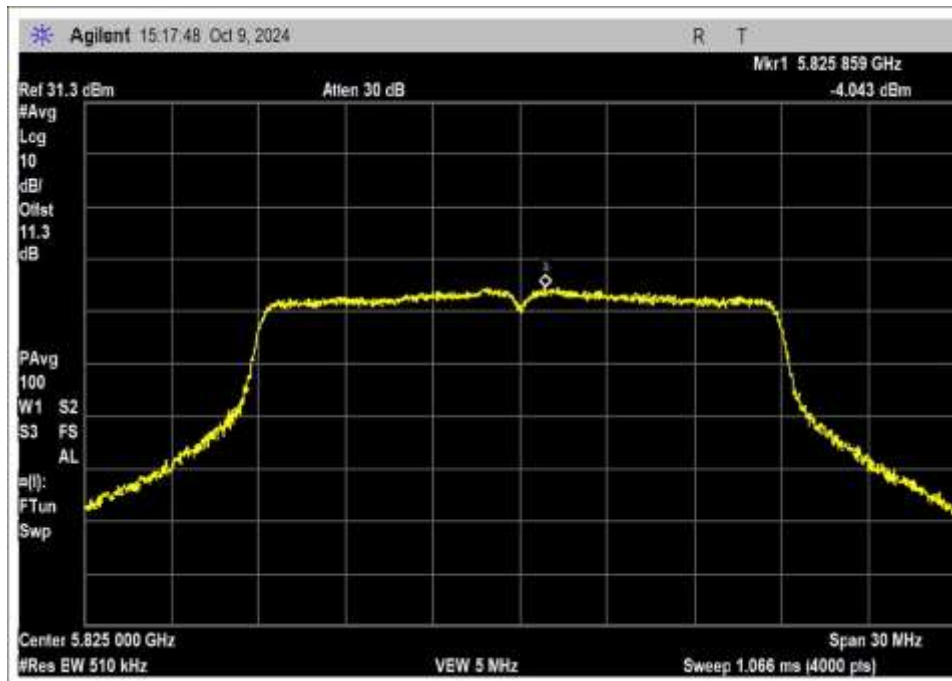


High Channel


802.11ac 20MHz

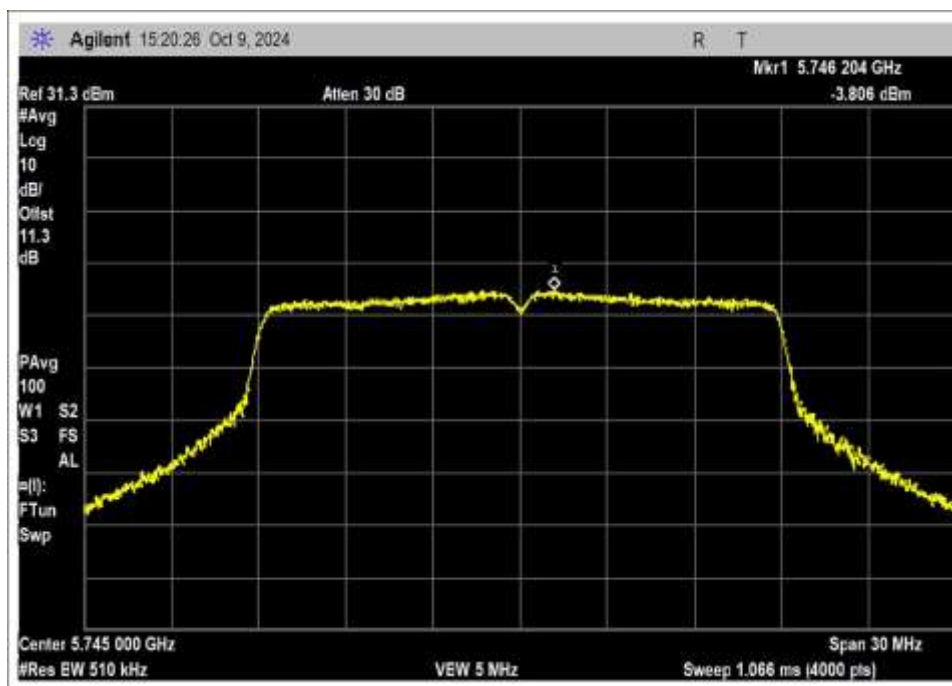

Low Channel

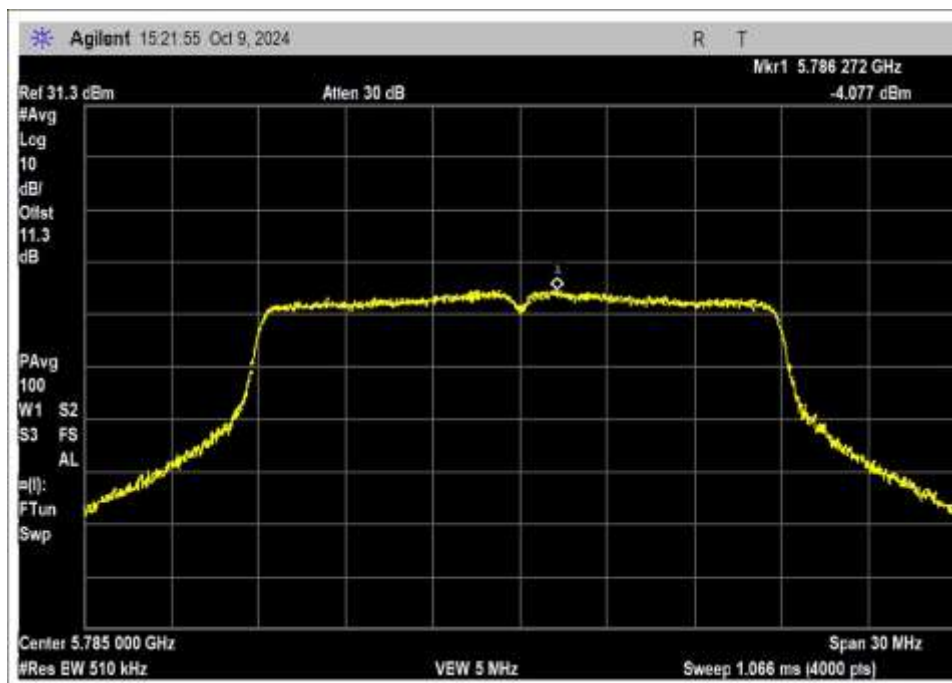


Middle Channel

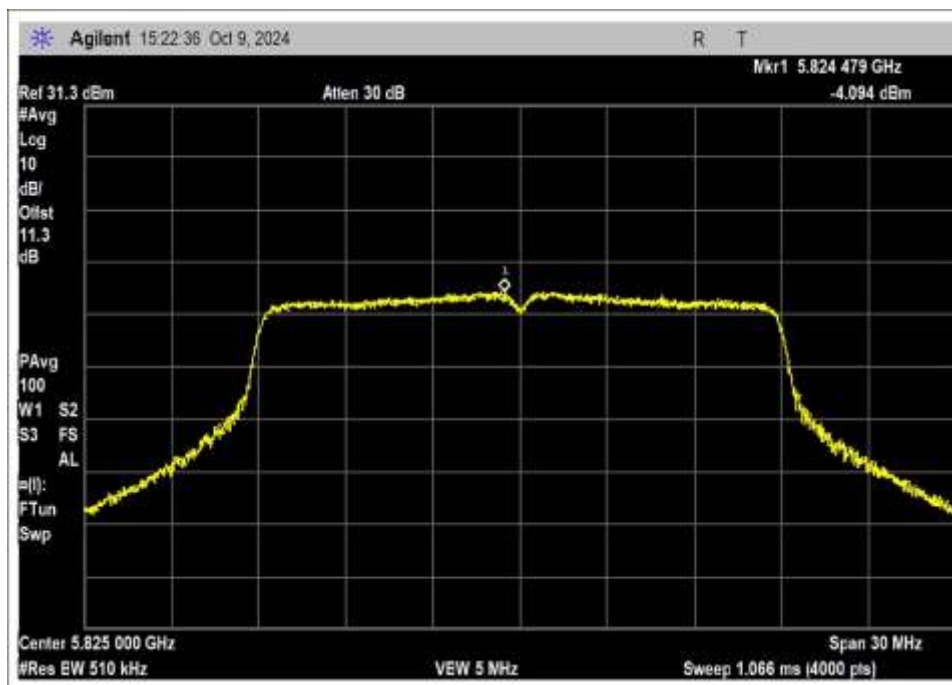


High Channel

802.11 n HT40

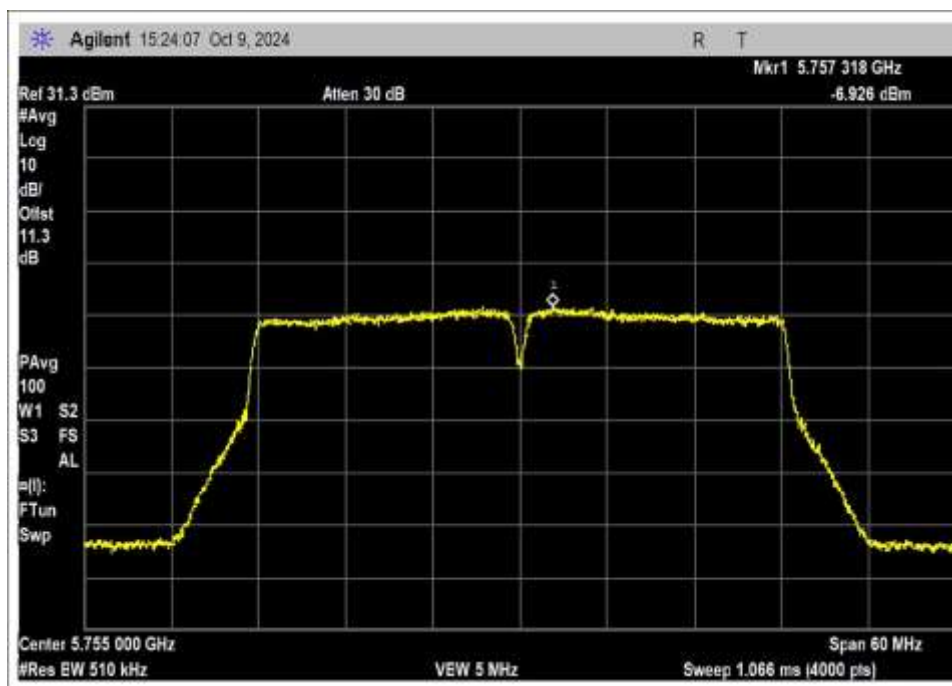


Low Channel

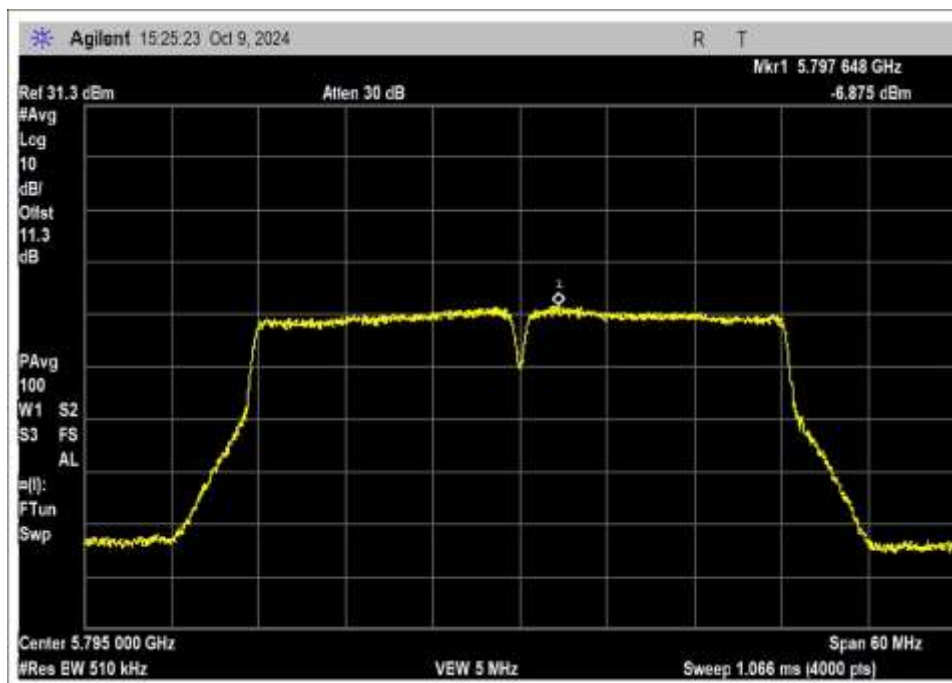


High Channel

802.11ac 40MHz

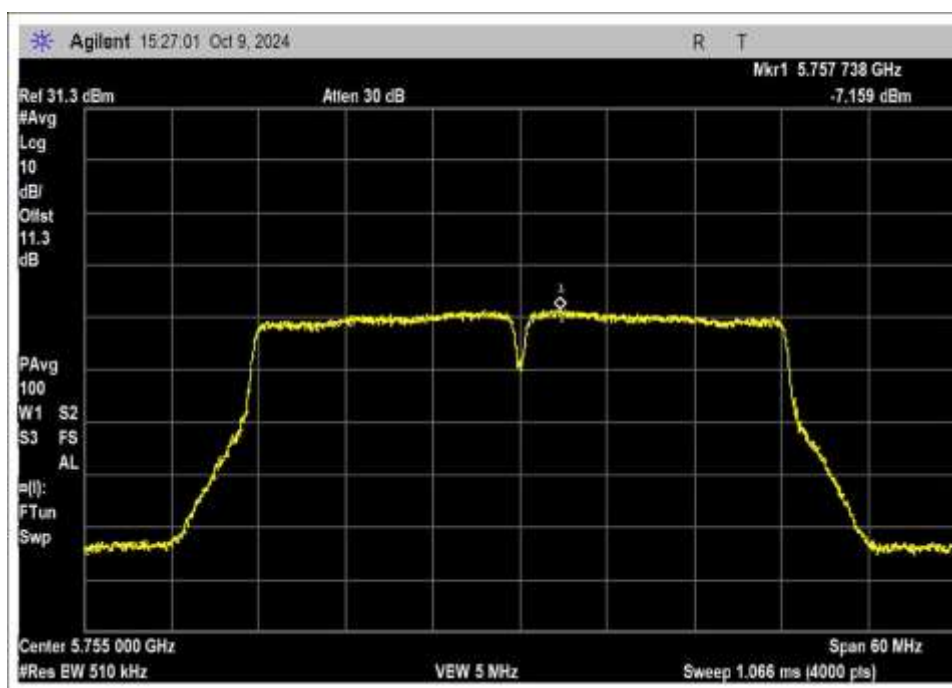


Low Channel

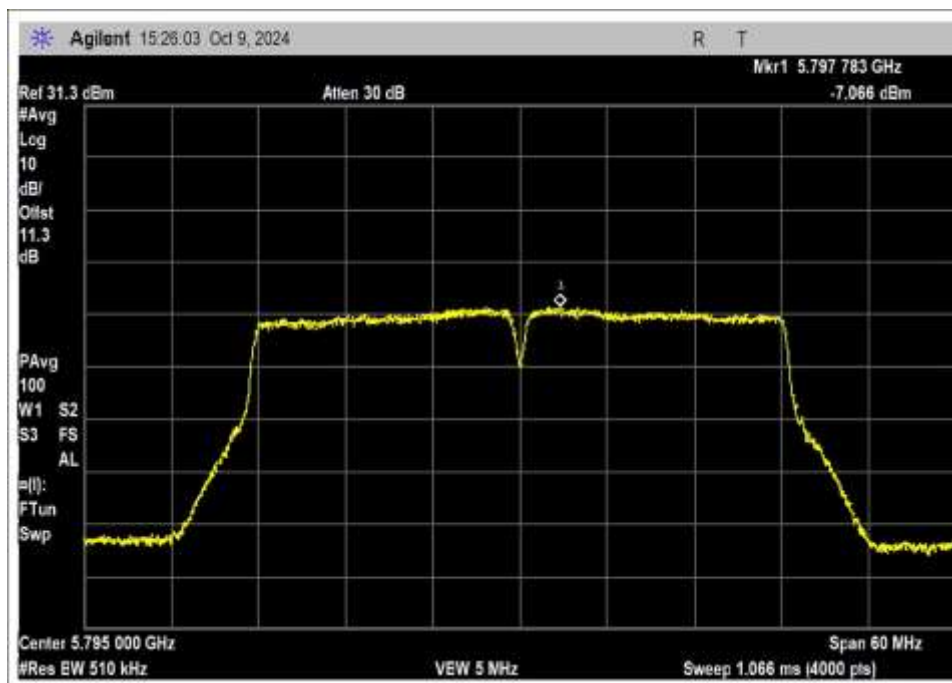


Middle Channel


802.11ac 80MHz

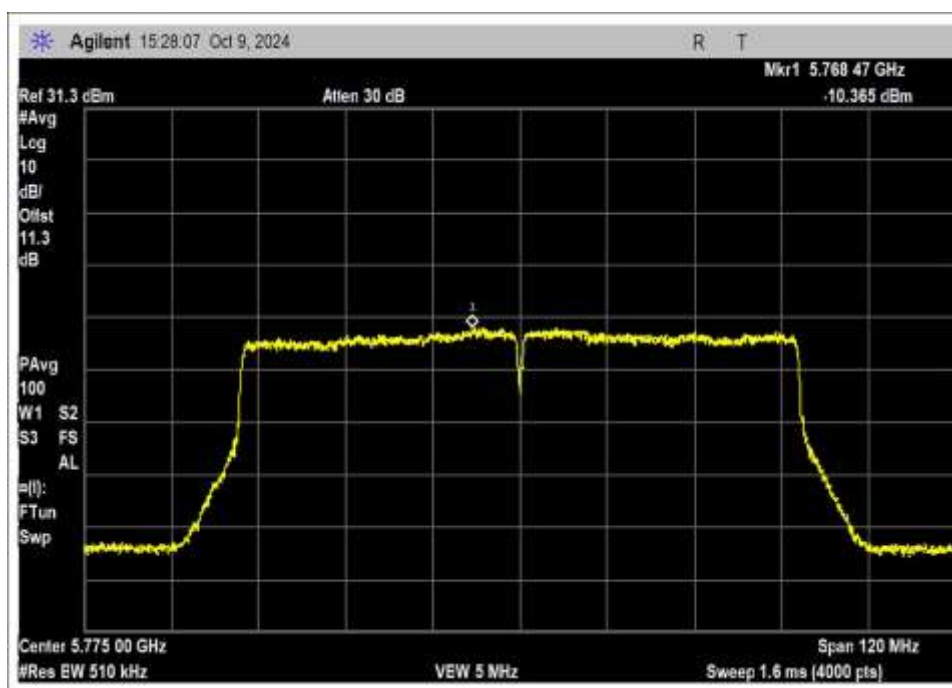


Chain 1
802.11a

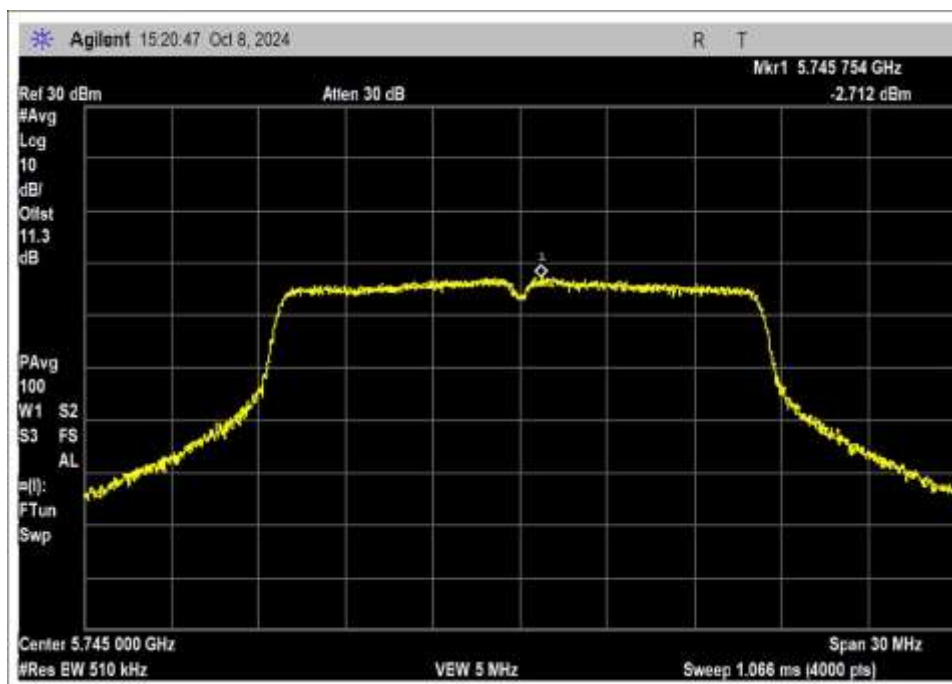

Low Channel

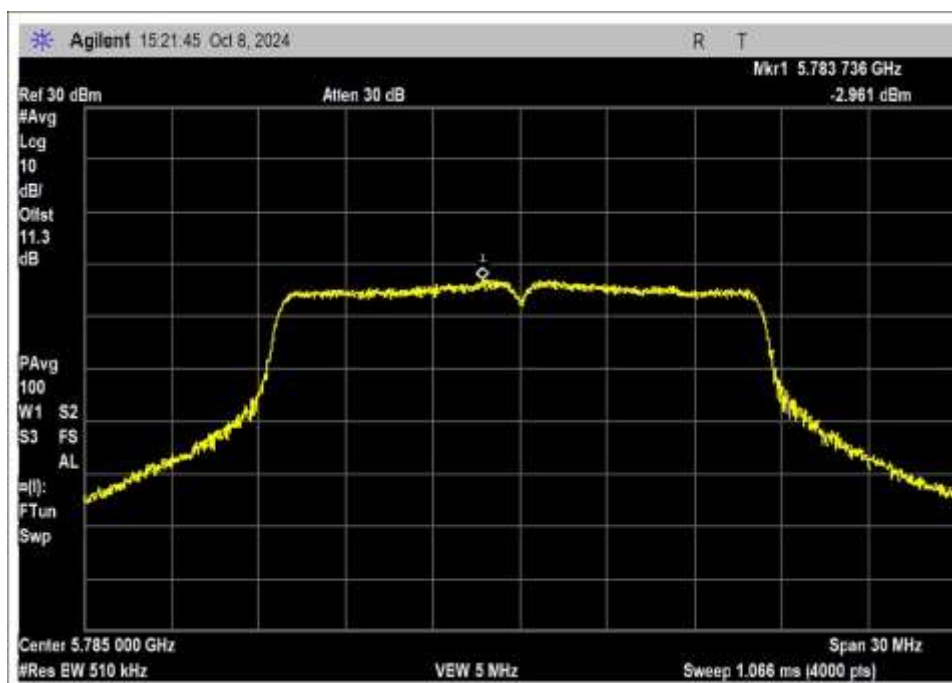


Middle Channel

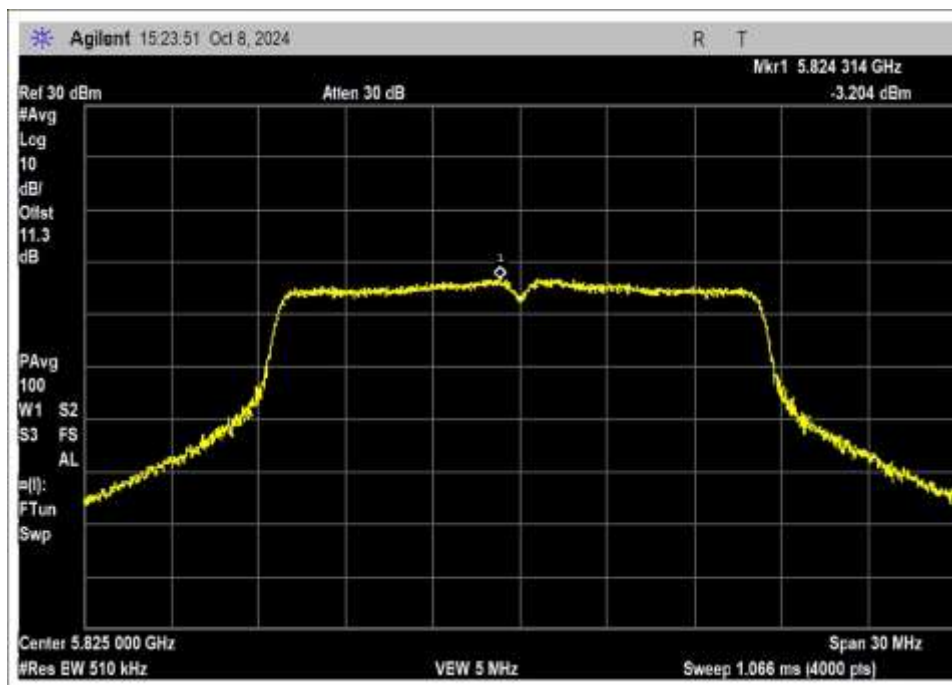


High Channel


802.11n HT20

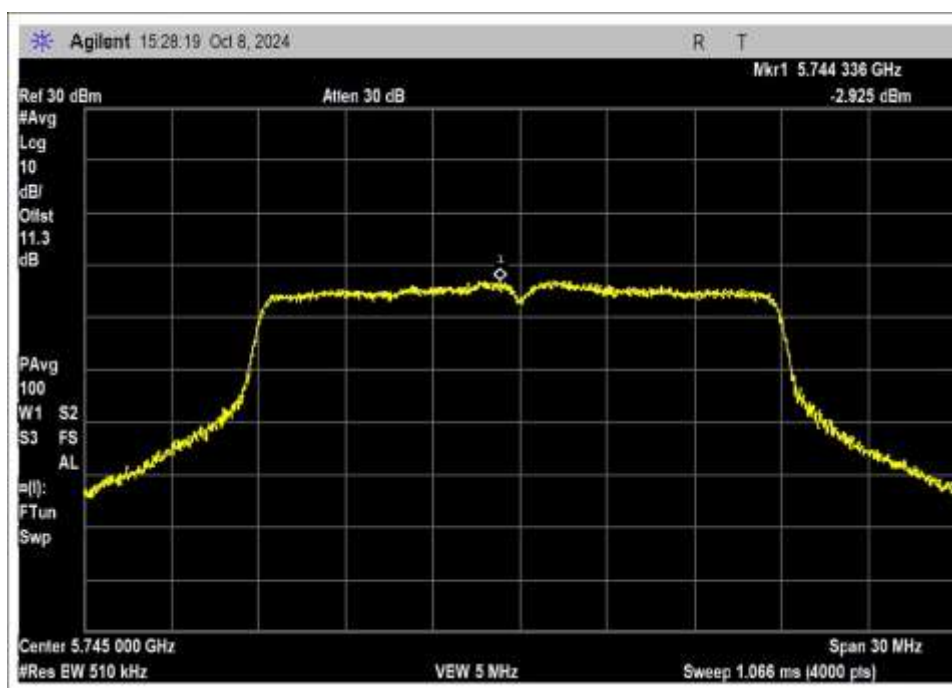

Low Channel

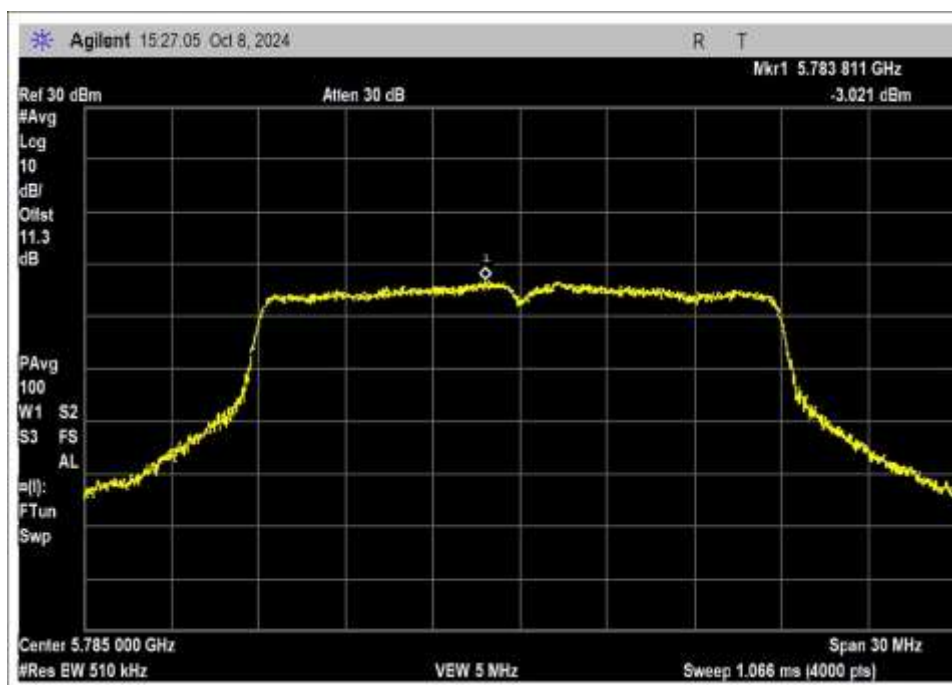


Middle Channel

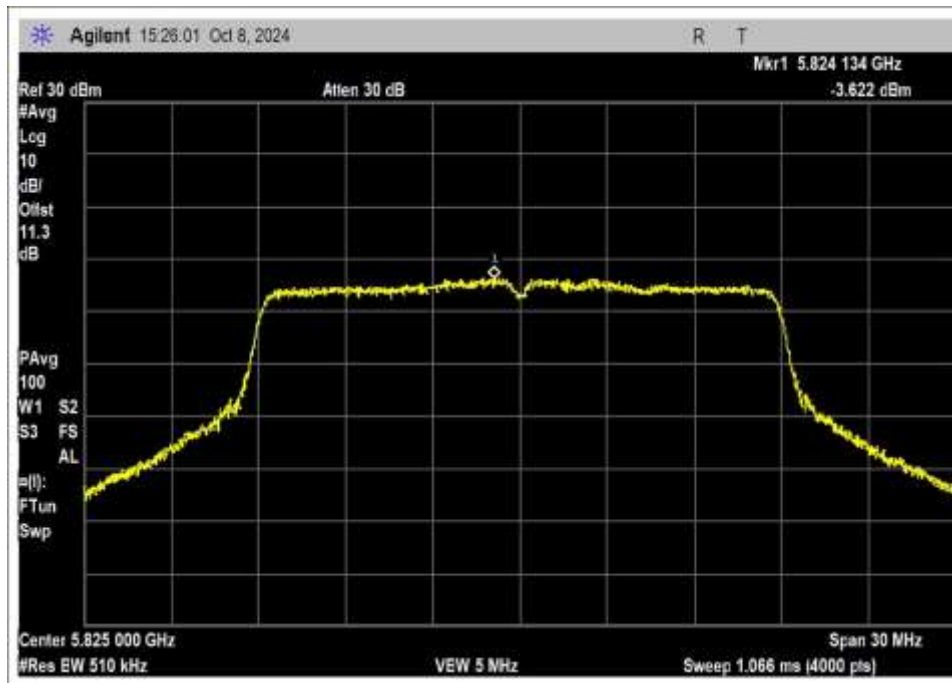


High Channel


802.11ac 20MHz

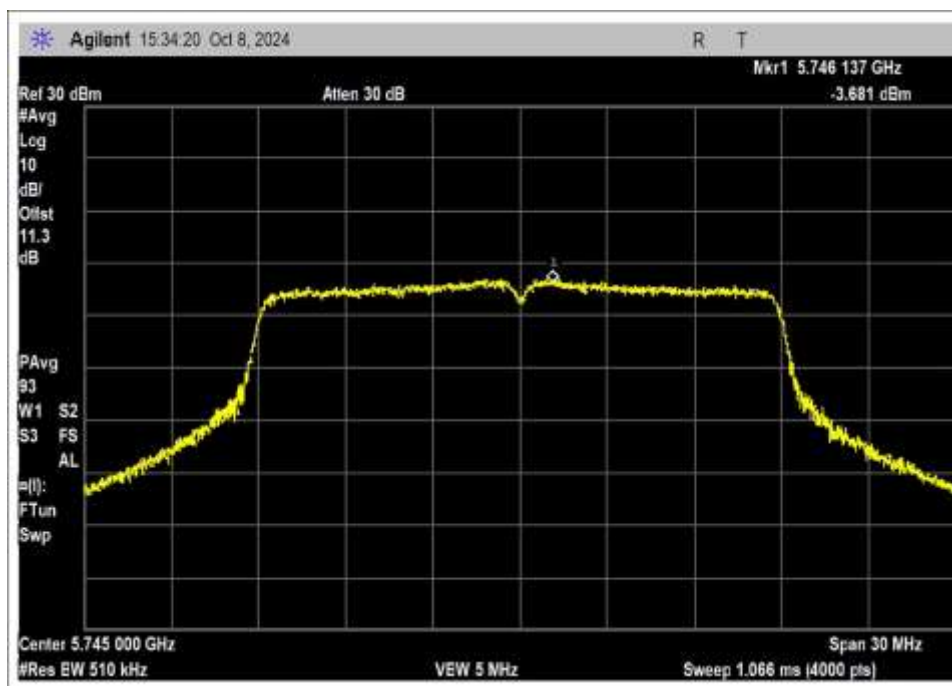

Low Channel

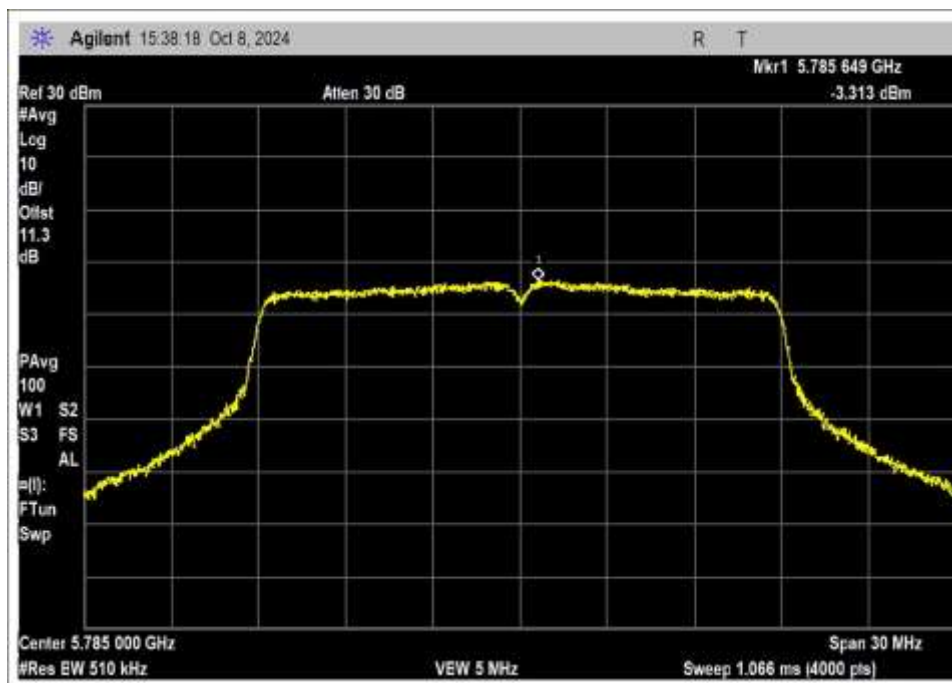


Middle Channel

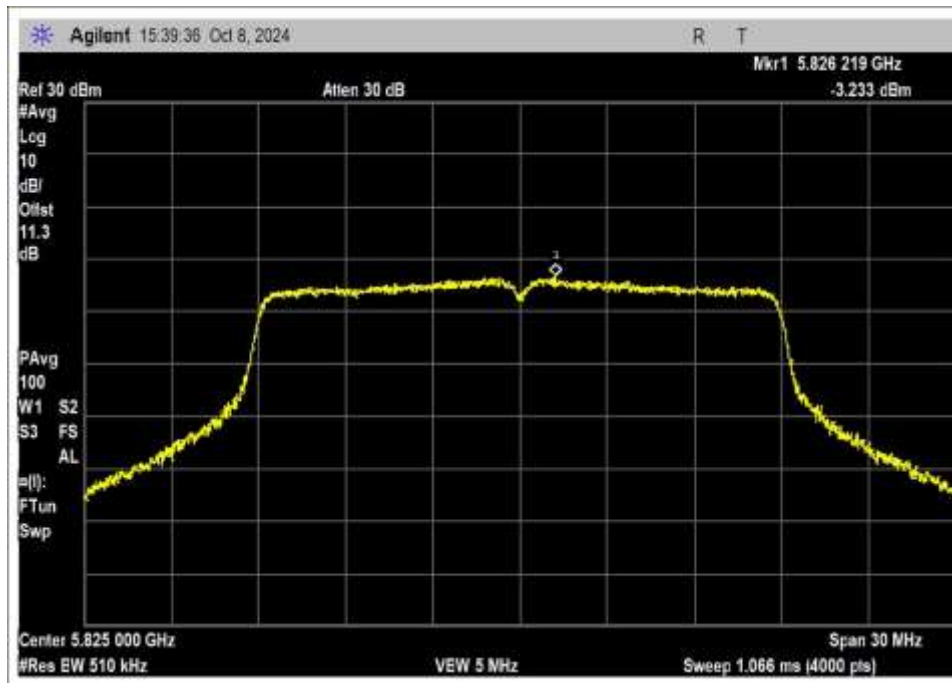


High Channel

802.11 n HT40

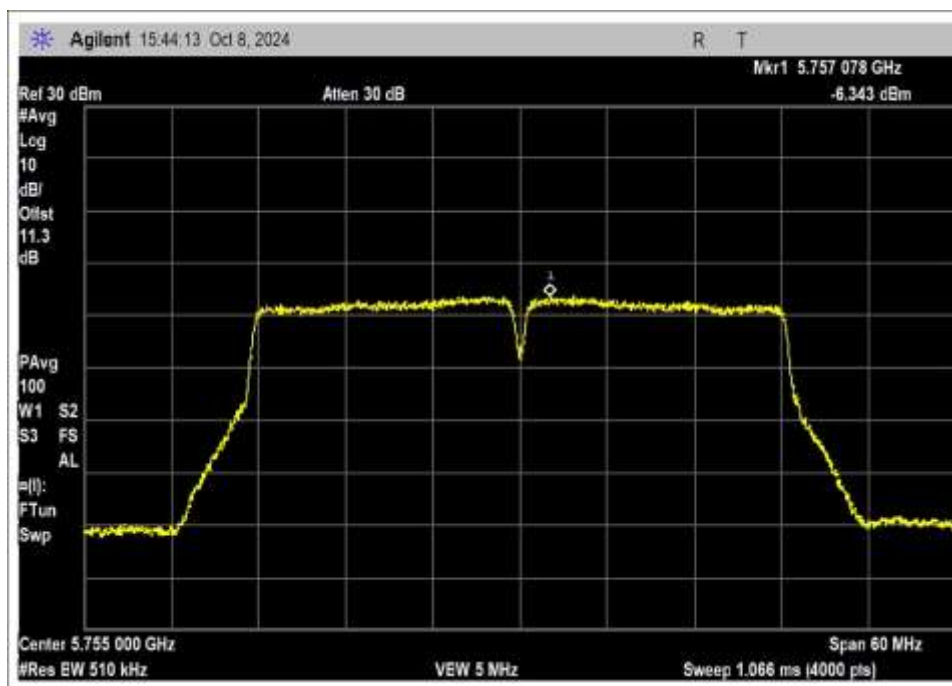


Low Channel

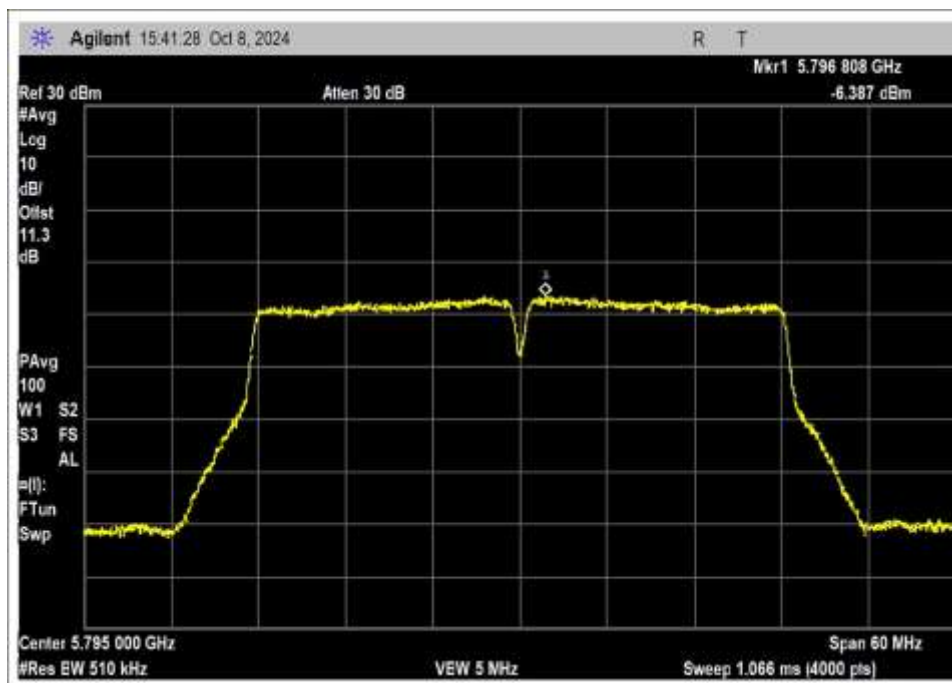


High Channel

802.11ac 40MHz

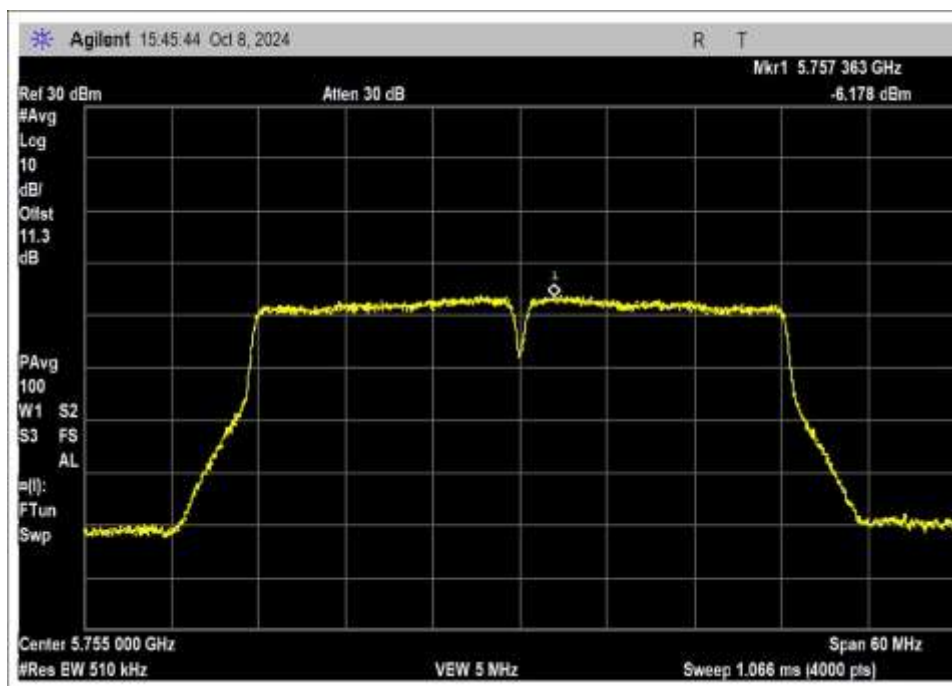


Low Channel

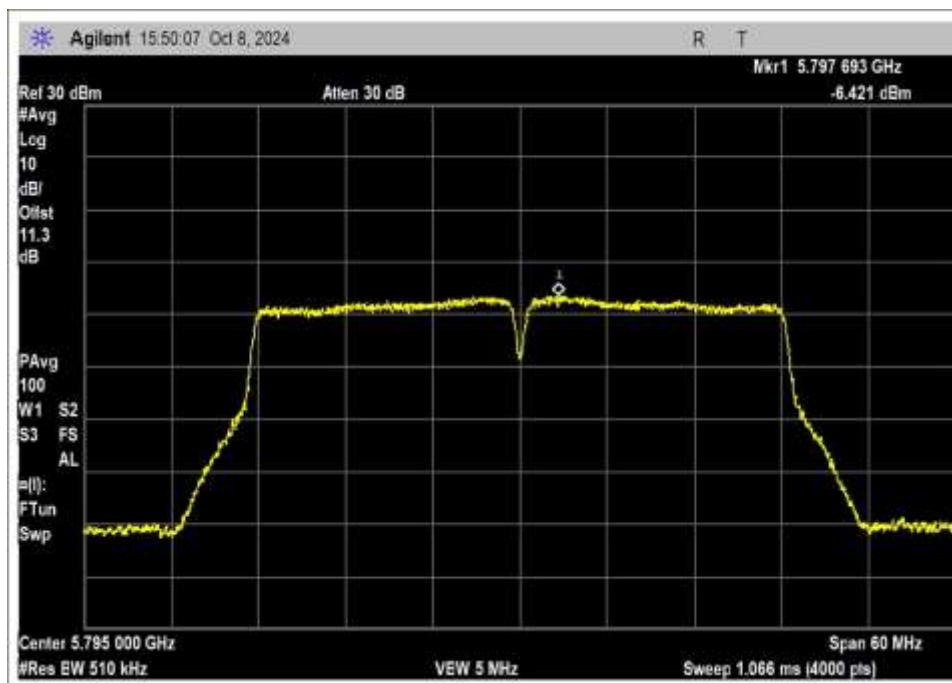

High Channel

802.11ac 80MHz

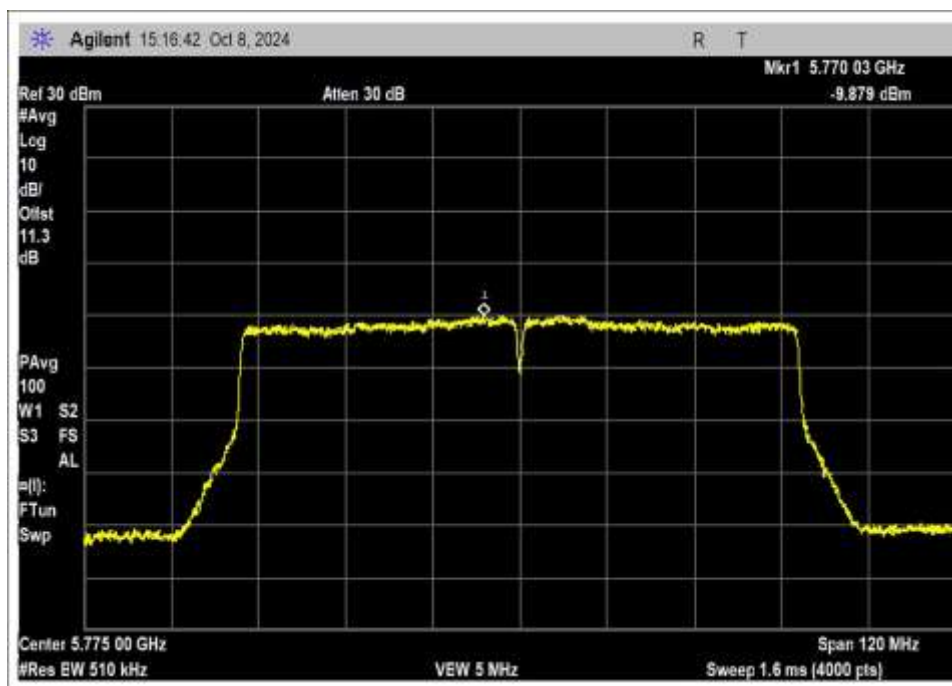

Test Setup Photo(s)



Test Setup



Test Setup, Close View

15.407(b) Radiated Emissions & Band Edge

Test Setup/Conditions			
Test Location:	Fremont Lab C3	Test Engineer:	Hieu Song Nguyenpham
Test Method:	ANSI C63.10 (2020), KDB 789033	Test Date(s):	10/30-31/2024 and 11/01-06/2024
Configuration:	1		
Note	<p>1: Perform Radiated Emission on the Chain 0 only since Chain 0 is the worst case based on the investigation on RF output power for the band edge before measuring Radiated Spurious Emission.</p> <p>2: The maximum emission is measured close to bandedge. The emission at bandedge is below limit as indicated in the plots below.</p>		

Environmental Conditions			
Temperature (°C)	21.3-23.5	Relative Humidity (%):	39-48

Test Data

Test Location: CKC Laboratories, Inc. • 1120 Fulton Pl • Fremont, CA 94539 • (510) 249-1170
 Customer: **Tonal**
 Specification: **15.407(b) / 15.209 Radiated Spurious Emissions**
 Work Order #: **110285** Date: 11/6/2024
 Test Type: **Radiated Scan** Time: 14:24:43
 Tested By: Hieu Song Nguyenpham Sequence#: 146
 Software: EMITest 5.03.20

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Radiated Emission Frequency Range: 9kHz to 1GHz Test Environment Conditions: Temperature: 22.7°C Humidity: 36% Atmospheric Pressure: 101.8kPa Highest Generated Frequency: 5.825GHz Test Method: ANSI C63.10 (2020) The unit is mounted to a floor standing rack as to simulate typical wall mounted setup. One weight line is extended to the floor. Camera is on. WiFi transmitting continuously with modulation type as listed with pattern of 0s and 1s at power level 14 with duty cycle at 100%.

802.11a (18Mbps)-OFDM-5785MHz-Middle Channel

MIMO not enabled, manufacturer declares chain 0 and chain 1 transmit uncorrelated data.


Chain 0

Operational mode is representative of worst case.

No emissions from EUT has been found in 20dB tolerance in the frequency range 9kHz to 30MHz.

Modification #1 was in place during testing.

Total WO#: 110285 Sequence#: 146 Date: 11/6/2024
15.407(b) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

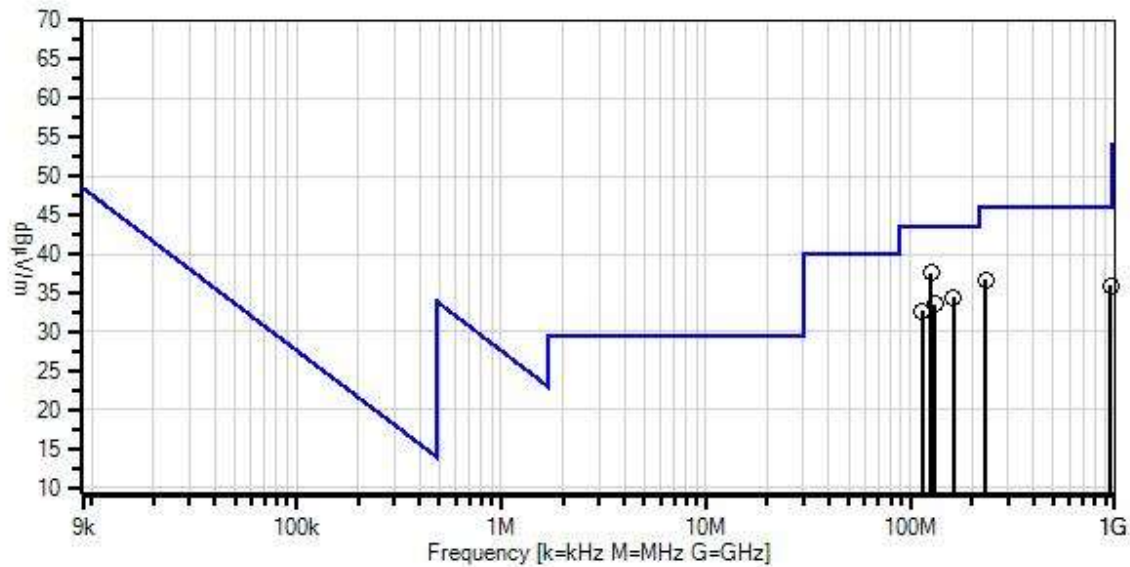

— Readings
× QP Readings
▼ Ambient
— 1 - 15.407(b) / 15.209 Radiated Spurious Emissions
○ Peak Readings
* Average Readings
Software Version: 5.03.20

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP07508	Preamp	310N	4/5/2024	4/5/2026
	AN00432	Loop Antenna	6502	7/10/2023	7/10/2025
T2	AN01995	Biconilog Antenna	CBL6111C	5/16/2024	5/16/2026
T3	ANP00880	Cable	RG214U	3/26/2024	3/26/2026
T4	ANP01187	Cable	CNT-195	7/3/2024	7/3/2026
T5	ANP06691	Cable	PE3062-180	3/20/2024	3/20/2026
	AN02660	Spectrum Analyzer	E4446A	12/6/2022	12/6/2024

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1 T5	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
	MHz	dB μ V	dB	dB	dB	dB	Table	dB μ V/m	dB μ V/m	dB	Ant
1	125.982M	50.2	-32.1 +0.4	+17.7	+1.1	+0.3	+0.0	37.6	43.5	-5.9	Horiz
2	162.014M	48.0	-32.0 +0.4	+16.5	+1.2	+0.3	+0.0	34.4	43.5	-9.1	Vert
3	233.949M	49.5	-32.0 +0.6	+16.7	+1.5	+0.4	+0.0	36.7	46.0	-9.3	Horiz
4	131.948M	46.2	-32.1 +0.4	+17.7	+1.1	+0.3	+0.0	33.6	43.5	-9.9	Horiz
5	953.918M	30.1	-30.9 +1.3	+30.9	+3.5	+1.0	+0.0	35.9	46.0	-10.1	Vert
6	113.966M	45.7	-32.0 +0.4	+17.3	+1.0	+0.3	+0.0	32.7	43.5	-10.8	Vert

Test Location: CKC Laboratories, Inc. • 1120 Fulton Pl • Fremont, CA 94539 • (510) 249-1170
 Customer: **Tonal**
 Specification: **15.407(b)(4) / 15.209 Radiated Spurious Emissions**
 Work Order #: **110285** Date: 11/6/2024
 Test Type: **Radiated Scan** Time: 11:17:29
 Tested By: Hieu Song Nguyenpham Sequence#: 141
 Software: EMITest 5.03.20

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

<p>Radiated Emission Frequency Range: 1GHz to 40GHz</p> <p>Test Environment Conditions: Temperature: 22.7°C Humidity: 36% Atmospheric Pressure: 101.8kPa</p> <p>Highest Generated Frequency: 5.825GHz Test Method: ANSI C63.10 (2020)</p> <p>The unit is mounted to a floor standing rack as to simulate typical wall mounted setup. One weight line is extended to the floor. Camera is on. WiFi transmitting continuously with modulation type as listed with pattern of 0s and 1s at power level 14</p> <p>802.11a-OFDM-5.8GHz Band</p> <p>MIMO not enabled, manufacturer declares chain 0 and chain 1 transmit uncorrelated data.</p> <p>Chain 0</p> <p>Operational mode is representative of worst case.</p> <p>Low Channel</p> <p>Modification #1 was in place during testing.</p>

Total WO#: 110285 Sequence#: 141 Date: 11/6/2024
15.407(b)(4) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

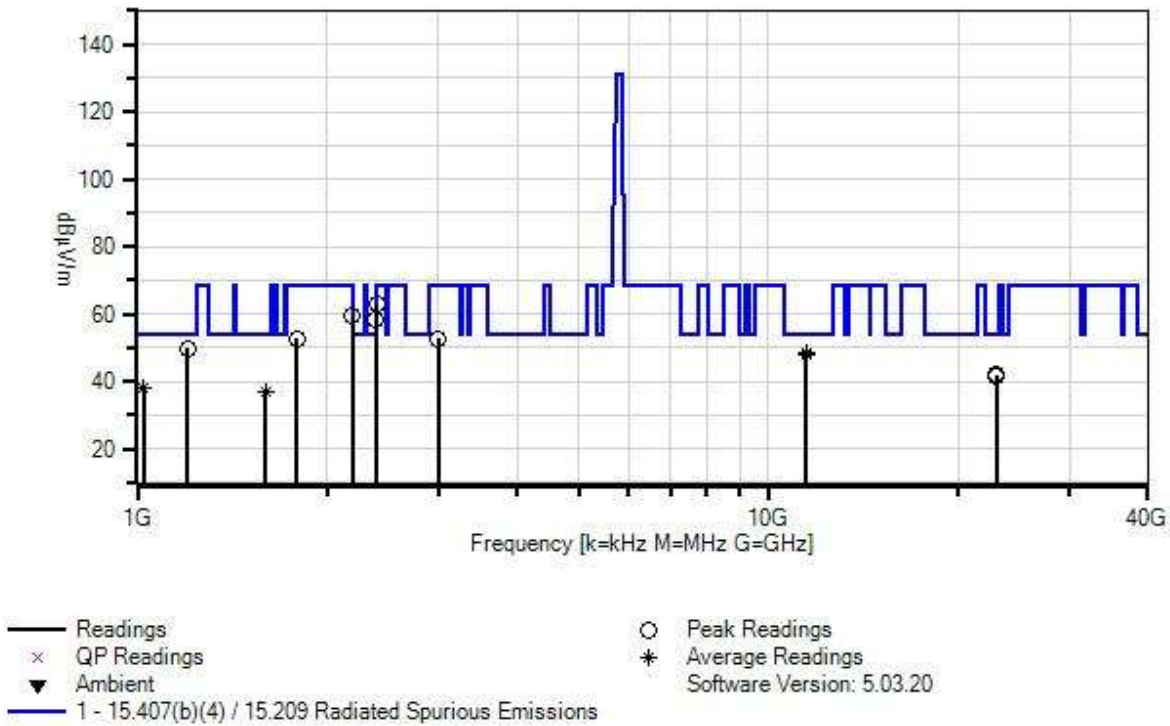

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02157	Horn Antenna-ANSI C63.5	3115	1/11/2023	1/11/2025
T2	AN03302	Cable	32026-29094K-29094K-72TC	1/9/2024	1/9/2026
T3	ANP01210	Cable	FSJ1P-50A-4A	1/9/2024	1/9/2026
	AN02660	Spectrum Analyzer	E4446A	12/6/2022	12/6/2024
T4	AN02810	Preamp	83051A	4/6/2023	4/6/2025
T5	AN03013	Cable	32022-2-2909K-36TC	1/9/2024	1/9/2026
T6	ANP07701	Cable	32022-29094K-29094K-120TC	8/16/2024	8/16/2026
	AN02693	Active Horn Antenna	AMFW-5F-12001800-20-10P	1/9/2024	1/9/2026
T7	AN02694	Horn Antenna	AMFW-5F-18002650-20-10P	1/9/2024	1/9/2026
	ANP00928	Cable	various	1/26/2024	1/26/2026

T8	ANP00929	Cable	various	1/26/2024	1/26/2026
T9	ANP07698	Cable	32022-29094K- 29094K-72TC	8/16/2024	8/16/2026
	AN03011	Cable	32022-2-2909K- 24TC	3/23/2023	3/23/2025
	AN03209	Preamp	83051A	8/22/2023	8/22/2025
	ANP07646	High Pass Filter	11SH10- 6000/T1800- 0/0	11/5/2024	11/5/2026
	AN02695	Active Horn Antenna	AMFW-5F- 260400-33-8P	1/9/2024	1/9/2026
	ANP00930	Cable	various	1/26/2024	1/26/2026
T10	ANP07365	Attenuator	54A-10	5/26/2023	5/26/2025

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1 T5 T9	T2 T6 T10	T3 T7	T4 T8	Dist	Corr	Spec	Margin	Polar
	MHz	dBμV	dB	dB	dB	dB	Table	dBμV/m	dBμV/m	dB	Ant
1	1200.000M	40.3	+24.8 +0.6 +0.0	+0.9 +0.0 +9.9	+1.7 +0.0	-28.5 +0.0	+0.0	49.7	54.0	-4.3	Horiz
2	2400.000M	47.0	+28.3 +0.8 +0.0	+1.4 +0.0 +9.9	+2.5 +0.0	-27.1 +0.0	+0.0	62.8	68.2	-5.4	Vert
3	11490.000 M	17.8	+39.4 +1.7 +0.0	+3.2 +0.0 +10.0	+5.9 +0.0	-29.8 +0.0	+0.0	48.2	54.0	-5.8	Vert
^	11490.000 M	31.2	+39.4 +1.7 +0.0	+3.2 +0.0 +10.0	+5.9 +0.0	-29.8 +0.0	+0.0	61.6	54.0	+7.6	Vert
5	11490.000 M	17.6	+39.4 +1.7 +0.0	+3.2 +0.0 +10.0	+5.9 +0.0	-29.8 +0.0	+0.0	48.0	54.0	-6.0	Horiz
^	11490.000 M	29.9	+39.4 +1.7 +0.0	+3.2 +0.0 +10.0	+5.9 +0.0	-29.8 +0.0	+0.0	60.3	54.0	+6.3	Horiz
7	2192.000M	44.0	+28.2 +0.8 +0.0	+1.3 +0.0 +9.9	+2.4 +0.0	-27.2 +0.0	+0.0	59.4	68.2	-8.8	Vert
8	2392.000M	42.5	+28.3 +0.8 +0.0	+1.3 +0.0 +9.9	+2.5 +0.0	-27.1 +0.0	+0.0	58.2	68.2	-10.0	Horiz
9	22980.000 M	44.7	+0.0 +0.0 +4.2	+0.0 +7.0 +0.0	+0.0 -16.5	+0.0 +2.5	+0.0	41.9	54.0	-12.1	Horiz
10	22980.000 M	44.1	+0.0 +0.0 +4.2	+0.0 +7.0 +0.0	+0.0 -16.5	+0.0 +2.5	+0.0	41.3	54.0	-12.7	Vert
11	1792.000M	39.3	+27.2 +0.7 +0.0	+1.2 +0.0 +9.9	+2.1 +0.0	-27.7 +0.0	+0.0	52.7	68.2	-15.5	Vert
12	3000.000M	34.2	+30.1 +0.9 +0.0	+1.5 +0.0 +9.9	+2.8 +0.0	-26.7 +0.0	+0.0	52.7	68.2	-15.5	Vert

13	1024.000M	29.7	+24.3	+1.0	+1.6	-28.7	+0.0	38.3	54.0	-15.7	Vert
	Ave		+0.6	+0.0	+0.0	+0.0					
			+0.0	+9.8							
^	1024.000M	48.2	+24.3	+1.0	+1.6	-28.7	+0.0	56.8	54.0	+2.8	Vert
			+0.6	+0.0	+0.0	+0.0					
			+0.0	+9.8							
15	1596.000M	25.0	+26.1	+1.1	+2.0	-28.0	+0.0	36.7	54.0	-17.3	Horiz
	Ave		+0.6	+0.0	+0.0	+0.0					
			+0.0	+9.9							
^	1596.000M	42.6	+26.1	+1.1	+2.0	-28.0	+0.0	54.3	54.0	+0.3	Horiz
			+0.6	+0.0	+0.0	+0.0					
			+0.0	+9.9							

Test Location: CKC Laboratories, Inc. • 1120 Fulton Pl • Fremont, CA 94539 • (510) 249-1170
 Customer: **Tonal**
 Specification: **15.407(b)(4) / 15.209 Radiated Spurious Emissions**
 Work Order #: **110285** Date: 11/6/2024
 Test Type: **Radiated Scan** Time: 11:24:30
 Tested By: Hieu Song Nguyenpham Sequence#: 142
 Software: EMITest 5.03.20

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

<p>Radiated Emission Frequency Range: 1GHz to 40GHz</p> <p>Test Environment Conditions: Temperature: 22.7°C Humidity: 36% Atmospheric Pressure: 101.8kPa</p> <p>Highest Generated Frequency: 5.825GHz Test Method: ANSI C63.10 (2020_</p> <p>The unit is mounted to a floor standing rack as to simulate typical wall mounted setup. One weight line is extended to the floor. Camera is on. WiFi transmitting continuously with modulation type as listed with pattern of 0s and 1s at power level 14</p> <p>802.11a-OFDM-5.8GHz Band</p> <p>MIMO not enabled, manufacturer declares chain 0 and chain 1 transmit uncorrelated data.</p> <p>Chain 0</p> <p>Operational mode is representative of worst case.</p> <p>Middle Channel</p> <p>Modification #1 was in place during testing.</p>
--

Tonal WO#: 110285 Sequence#: 142 Date: 11/6/2024
15.407(b)(4) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

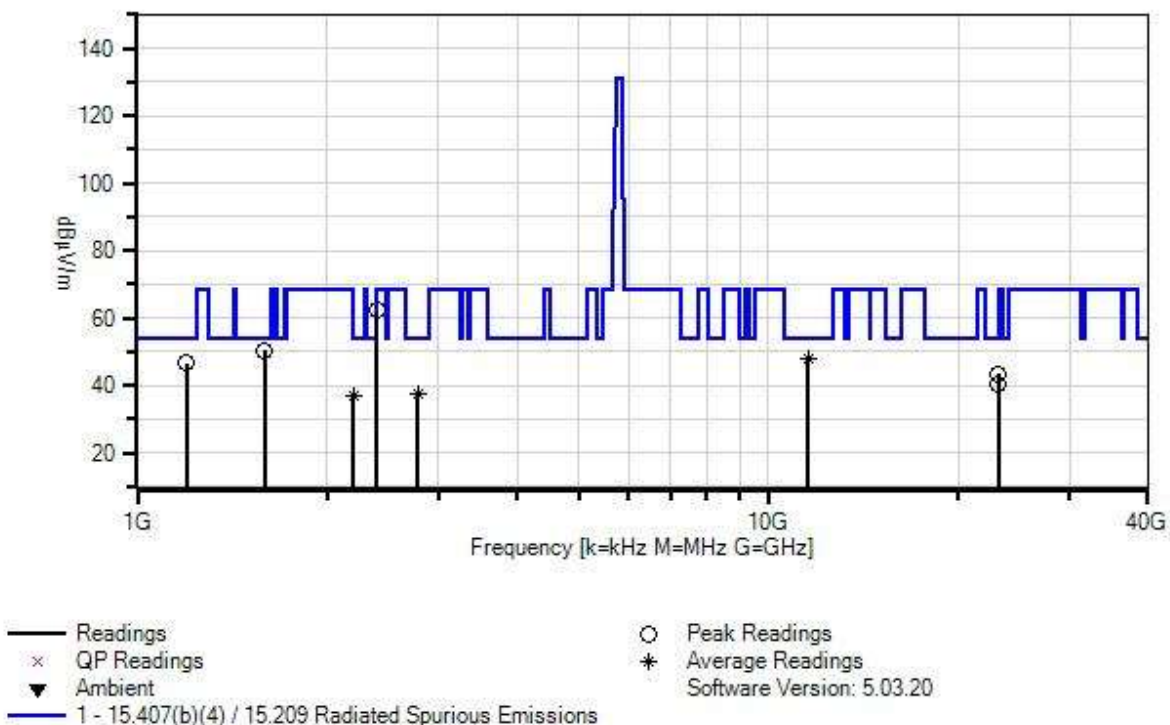

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02157	Horn Antenna-ANSI C63.5	3115	1/11/2023	1/11/2025
T2	AN03302	Cable	32026-29094K-29094K-72TC	1/9/2024	1/9/2026
T3	ANP01210	Cable	FSJ1P-50A-4A	1/9/2024	1/9/2026
	AN02660	Spectrum Analyzer	E4446A	12/6/2022	12/6/2024
T4	AN02810	Preamp	83051A	4/6/2023	4/6/2025
T5	AN03013	Cable	32022-2-2909K-36TC	1/9/2024	1/9/2026
T6	ANP07701	Cable	32022-29094K-29094K-120TC	8/16/2024	8/16/2026
	AN02693	Active Horn Antenna	AMFW-5F-12001800-20-10P	1/9/2024	1/9/2026
T7	AN02694	Horn Antenna	AMFW-5F-18002650-20-10P	1/9/2024	1/9/2026
	ANP00928	Cable	various	1/26/2024	1/26/2026

T8	ANP00929	Cable	various	1/26/2024	1/26/2026
T9	ANP07698	Cable	32022-29094K- 29094K-72TC	8/16/2024	8/16/2026
	AN03011	Cable	32022-2-2909K- 24TC	3/23/2023	3/23/2025
	AN03209	Preamp	83051A	8/22/2023	8/22/2025
	ANP07646	High Pass Filter	11SH10- 6000/T1800- 0/0	11/5/2024	11/5/2026
	AN02695	Active Horn Antenna	AMFW-5F- 260400-33-8P	1/9/2024	1/9/2026
	ANP00930	Cable	various	1/26/2024	1/26/2026
T10	ANP07365	Attenuator	54A-10	5/26/2023	5/26/2025

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1 T5 T9	T2 T6 T10	T3 T7	T4 T8	Dist	Corr	Spec	Margin	Polar
	MHz	dBμV	dB	dB	dB	dB	Table	dBμV/m	dBμV/m	dB	Ant
1	1592.000M	38.5	+26.1 +0.6 +0.0	+1.1 +0.0 +9.9	+2.0 +0.0 +0.0	-28.0 +0.0	+0.0	50.2	54.0	-3.8	Horiz
2	2396.000M	46.6	+28.3 +0.8 +0.0	+1.3 +0.0 +9.9	+2.5 +0.0 +0.0	-27.1 +0.0	+0.0	62.3	68.2	-5.9	Vert
3	11570.200 M	17.6	+39.5 +1.7 +0.0	+3.2 +0.0 +10.0	+5.9 +0.0 +0.0	-29.8 +0.0	+0.0	48.1	54.0	-5.9	Horiz
^	11570.200 M	31.4	+39.5 +1.7 +0.0	+3.2 +0.0 +10.0	+5.9 +0.0 +0.0	-29.8 +0.0	+0.0	61.9	54.0	+7.9	Horiz
5	11570.200 M	17.5	+39.5 +1.7 +0.0	+3.2 +0.0 +10.0	+5.9 +0.0 +0.0	-29.8 +0.0	+0.0	48.0	54.0	-6.0	Vert
^	11570.200 M	31.0	+39.5 +1.7 +0.0	+3.2 +0.0 +10.0	+5.9 +0.0 +0.0	-29.8 +0.0	+0.0	61.5	54.0	+7.5	Vert
7	1196.000M	37.1	+24.8 +0.6 +0.0	+0.9 +0.0 +9.9	+1.7 +0.0 +0.0	-28.5 +0.0	+0.0	46.5	54.0	-7.5	Horiz
8	2788.000M	20.0	+29.4 +0.8 +0.0	+1.5 +0.0 +9.9	+2.7 +0.0 +0.0	-26.8 +0.0	+0.0	37.5	54.0	-16.5	Vert
^	2788.000M	38.3	+29.4 +0.8 +0.0	+1.5 +0.0 +9.9	+2.7 +0.0 +0.0	-26.8 +0.0	+0.0	55.8	54.0	+1.8	Vert
10	2200.000M	21.6	+28.2 +0.8 +0.0	+1.3 +0.0 +9.9	+2.4 +0.0 +0.0	-27.2 +0.0	+0.0	37.0	54.0	-17.0	Vert
^	2200.000M	46.6	+28.2 +0.8 +0.0	+1.3 +0.0 +9.9	+2.4 +0.0 +0.0	-27.2 +0.0	+0.0	62.0	54.0	+8.0	Vert
12	23149.600 M	46.2	+0.0 +0.0 +4.2	+0.0 +7.0 +0.0	+0.0 -16.5 +2.6	+0.0 +2.6	+0.0	43.5	68.2	-24.7	Vert
13	23149.450 M	43.0	+0.0 +0.0 +4.2	+0.0 +7.0 +0.0	+0.0 -16.5 +2.6	+0.0 +2.6	+0.0	40.3	68.2	-27.9	Horiz

Test Location: CKC Laboratories, Inc. • 1120 Fulton Pl • Fremont, CA 94539 • (510) 249-1170
 Customer: **Tonal**
 Specification: **15.407(b)(4) / 15.209 Radiated Spurious Emissions**
 Work Order #: **110285** Date: 11/6/2024
 Test Type: **Radiated Scan** Time: 11:28:44
 Tested By: Hieu Song Nguyenpham Sequence#: 143
 Software: EMITest 5.03.20

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

<p>Radiated Emission Frequency Range: 1GHz to 40GHz</p> <p>Test Environment Conditions: Temperature: 22.7°C Humidity: 36% Atmospheric Pressure: 101.8kPa</p> <p>Highest Generated Frequency: 5.825GHz Test Method: ANSI C63.10 (2020)</p> <p>The unit is mounted to a floor standing rack as to simulate typical wall mounted setup. One weight line is extended to the floor. Camera is on. WiFi transmitting continuously with modulation type as listed with pattern of 0s and 1s at power level 14</p> <p>802.11a-OFDM-5.8GHz Band</p> <p>MIMO not enabled, manufacturer declares chain 0 and chain 1 transmit uncorrelated data.</p> <p>Chain 0</p> <p>Operational mode is representative of worst case.</p> <p>High Channel</p> <p>Modification #1 was in place during testing.</p>
--

Tonal WO#: 110285 Sequence#: 143 Date: 11/6/2024
15.407(b)(4) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

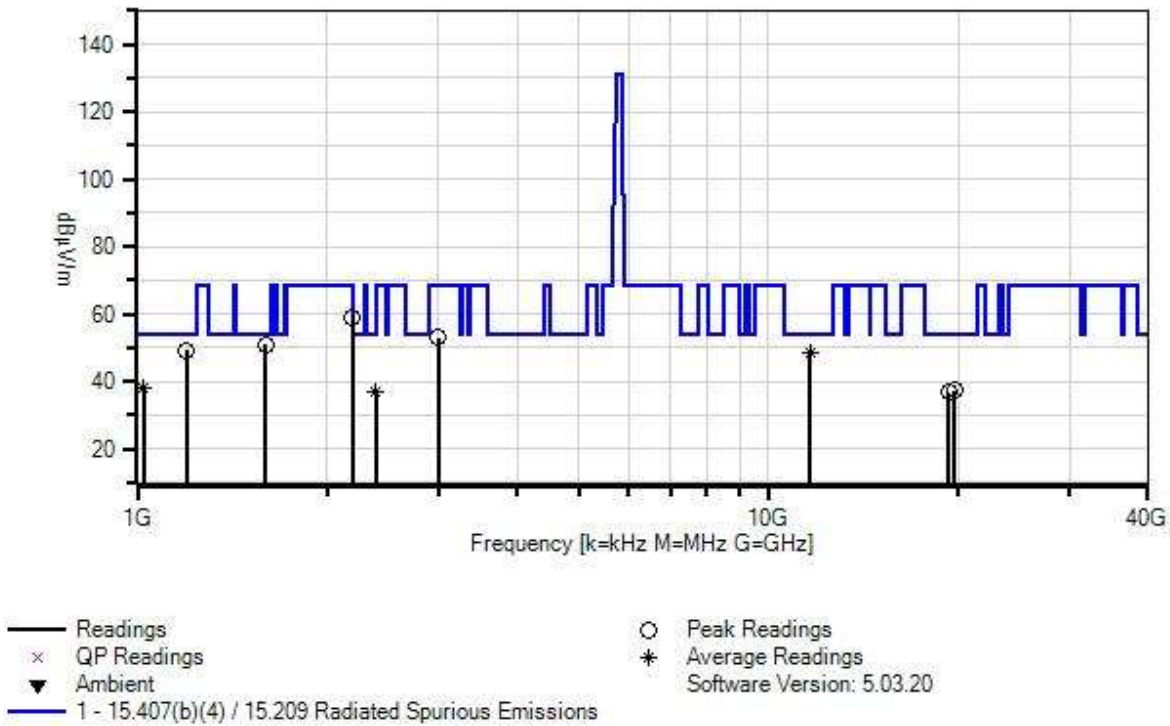

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02157	Horn Antenna-ANSI C63.5	3115	1/11/2023	1/11/2025
T2	AN03302	Cable	32026-29094K-29094K-72TC	1/9/2024	1/9/2026
T3	ANP01210	Cable	FSJ1P-50A-4A	1/9/2024	1/9/2026
	AN02660	Spectrum Analyzer	E4446A	12/6/2022	12/6/2024
T4	AN02810	Preamp	83051A	4/6/2023	4/6/2025
T5	AN03013	Cable	32022-2-2909K-36TC	1/9/2024	1/9/2026
T6	ANP07701	Cable	32022-29094K-29094K-120TC	8/16/2024	8/16/2026
	AN02693	Active Horn Antenna	AMFW-5F-12001800-20-10P	1/9/2024	1/9/2026
T7	AN02694	Horn Antenna	AMFW-5F-18002650-20-10P	1/9/2024	1/9/2026
	ANP00928	Cable	various	1/26/2024	1/26/2026

T8	ANP00929	Cable	various	1/26/2024	1/26/2026
	ANP07698	Cable	32022-29094K- 29094K-72TC	8/16/2024	8/16/2026
	AN03011	Cable	32022-2-2909K- 24TC	3/23/2023	3/23/2025
	AN03209	Preamp	83051A	8/22/2023	8/22/2025
	ANP07646	High Pass Filter	11SH10- 6000/T1800- 0/0	11/5/2024	11/5/2026
	AN02695	Active Horn Antenna	AMFW-5F- 260400-33-8P	1/9/2024	1/9/2026
	ANP00930	Cable	various	1/26/2024	1/26/2026
T9	ANP07365	Attenuator	54A-10	5/26/2023	5/26/2025

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1 T5 T9	T2 T6	T3 T7	T4 T8	Dist	Corr	Spec	Margin	Polar
	MHz	dBμV	dB	dB	dB	dB	Table	dBμV/m	dBμV/m	dB	Ant
1	1600.000M	39.3	+26.1 +0.6 +9.9	+1.1 +0.0	+2.0 +0.0	-28.0 +0.0	+0.0	51.0	54.0	-3.0	Horiz
2	1196.000M	39.9	+24.8 +0.6 +9.9	+0.9 +0.0	+1.7 +0.0	-28.5 +0.0	+0.0	49.3	54.0	-4.7	Horiz
3	11650.000 M	17.6	+39.6 +1.7 +10.0	+3.3 +0.0	+5.9 +0.0	-29.8 +0.0	+0.0	48.3	54.0	-5.7	Vert
^	11650.000 M	30.4	+39.6 +1.7 +10.0	+3.3 +0.0	+5.9 +0.0	-29.8 +0.0	+0.0	61.1	54.0	+7.1	Vert
5	11650.000 M	17.5	+39.6 +1.7 +10.0	+3.3 +0.0	+5.9 +0.0	-29.8 +0.0	+0.0	48.2	54.0	-5.8	Horiz
^	11650.000 M	29.0	+39.6 +1.7 +10.0	+3.3 +0.0	+5.9 +0.0	-29.8 +0.0	+0.0	59.7	54.0	+5.7	Horiz
7	2196.000M	43.6	+28.2 +0.8 +9.9	+1.3 +0.0	+2.4 +0.0	-27.2 +0.0	+0.0	59.0	68.2	-9.2	Vert
8	3000.000M	34.4	+30.1 +0.9 +9.9	+1.5 +0.0	+2.8 +0.0	-26.7 +0.0	+0.0	52.9	68.2	-15.3	Vert
9	1024.000M Ave	29.7	+24.3 +0.6 +9.8	+1.0 +0.0	+1.6 +0.0	-28.7 +0.0	+0.0	38.3	54.0	-15.7	Vert
^	1024.000M	48.3	+24.3 +0.6 +9.8	+1.0 +0.0	+1.6 +0.0	-28.7 +0.0	+0.0	56.9	54.0	+2.9	Vert
11	19700.000 M	43.6	+0.0 +0.0 +0.0	+0.0 +6.3	+0.0 -15.5	+0.0 +2.9	+0.0	37.3	54.0	-16.7	Horiz
12	2389.138M Ave	21.3	+28.3 +0.8 +9.9	+1.3 +0.0	+2.5 +0.0	-27.1 +0.0	+0.0	37.0	54.0	-17.0	Vert
^	2389.138M	45.1	+28.3 +0.8 +9.9	+1.3 +0.0	+2.5 +0.0	-27.1 +0.0	+0.0	60.8	54.0	+6.8	Vert
14	19283.500 M	42.9	+0.0 +0.0 +0.0	+0.0 +6.3	+0.0 -15.5	+0.0 +3.0	+0.0	36.7	54.0	-17.3	Vert

Band Edge

Band Edge Summary-Chain 0							
Frequency (MHz)	Modulation	Ant. Type / Gain (dBi)	Average (dBuV/m @3m)		Peak (dBuV/m @3m)		Results
			Measured	Limit	Measured	Limit	
5460	802.11a	External/4.66	42.0	≤54	52.4	≤74	Pass
5925	802.11a	External/4.66	NA2	NA2	57.0	<68.2	Pass
5460	802.11n HT20	External/4.66	42.1	≤54	52.4	≤74	Pass
5929	802.11n HT20	External/4.66	NA2	NA2	55.6	<68.2	Pass
5460	802.11ac 20MHz	External/4.66	42.2	≤54	53.4	≤74	Pass
5932.3	802.11ac 20MHz	External/4.66	NA2	NA2	55.8	<68.2	Pass
5460	802.11n HT40	External/4.66	53.5	≤54	42.2	≤74	Pass
5925	802.11n HT40	External/4.66	NA2	NA2	54.0	<68.2	Pass
5460	802.11ac 40MHz	External/4.66	42.2	≤54	51.8	≤74	Pass
5925	802.11ac 40MHz	External/4.66	NA2	NA2	53.4	<68.2	Pass
5460	802.11ac 80MHz	External/4.66	42.0	≤54	51.9	≤74	Pass
5926	802.11ac 80MHz	External/4.66	NA2	NA2	53.8	<68.2	Pass

Notes:

NA2	Average limit not applicable when applying -27dBm/MHz limit.
-----	--



Band Edge Summary-Chain 1							
Frequency (MHz)	Modulation	Ant. Type / Gain (dBi)	Average (dBuV/m @3m)		Peak (dBuV/m @3m)		Results
			Measured	Limit	Measured	Limit	
5460	802.11a	External/4.66	42.1	≤54	53.0	≤74	Pass
5925	802.11a	External/4.66	NA2	NA2	54.1	<68.2	Pass
5460	802.11n HT20	External/4.66	42.0	≤54	52.2	≤74	Pass
5925	802.11n HT20	External/4.66	NA2	NA2	53.4	<68.2	Pass
5460	802.11ac 20MHz	External/4.66	42.2	≤54	52.2	≤74	Pass
5925	802.11ac 20MHz	External/4.66	NA2	NA2	53.9	<68.2	Pass
5460	802.11n HT40	External/4.66	42.1	≤54	53.4	≤74	Pass
5925	802.11n HT40	External/4.66	NA2	NA2	53.5	<68.2	Pass
5460	802.11ac 40MHz	External/4.66	42.1	≤54	53.7	≤74	Pass
5925	802.11ac 40MHz	External/4.66	NA2	NA2	53.9	<68.2	Pass
5460	802.11ac 80MHz	External/4.66	42.2	≤54	53.2	≤74	Pass
5925	802.11ac 80MHz	External/4.66	NA2	NA2	53.1	<68.2	Pass


Notes:

NA2	Average limit not applicable when applying -27dBm/MHz limit.
-----	--



Band Edge Plots


Chain 0 802.11a

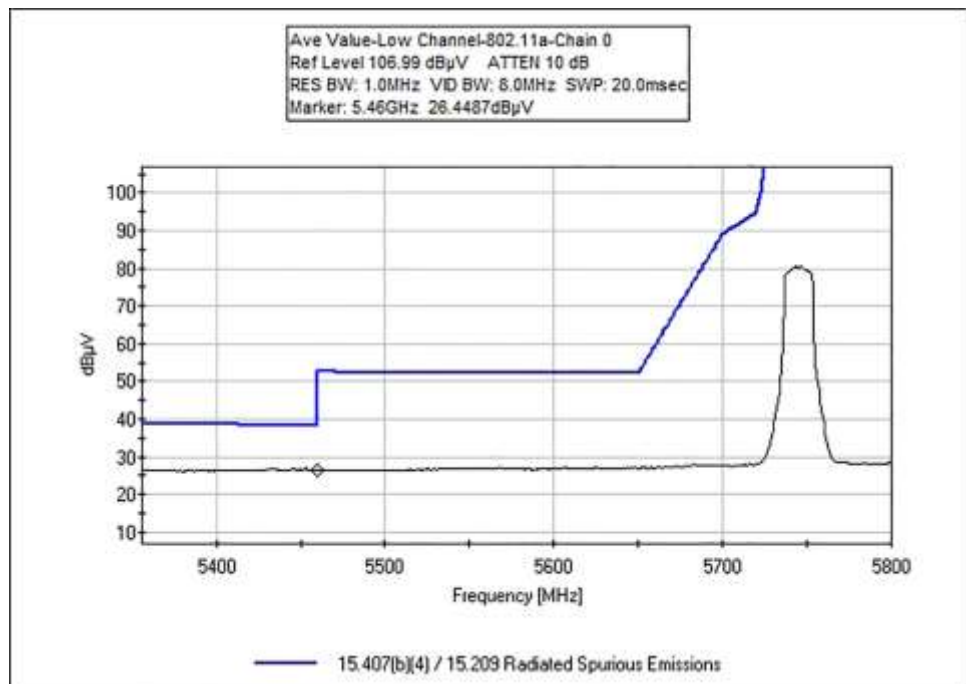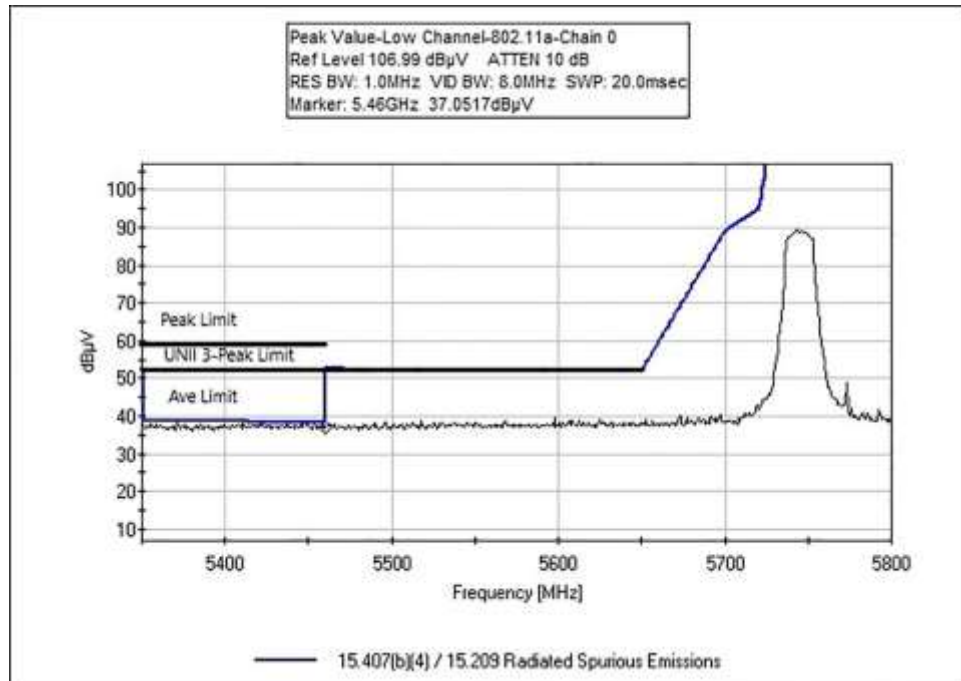


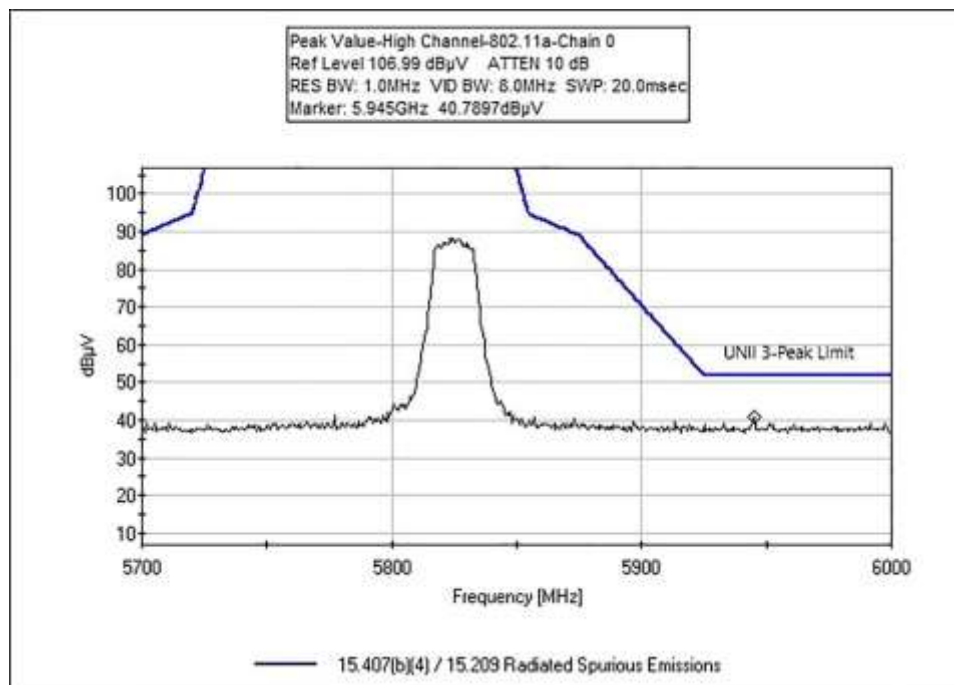



802.11n HT20

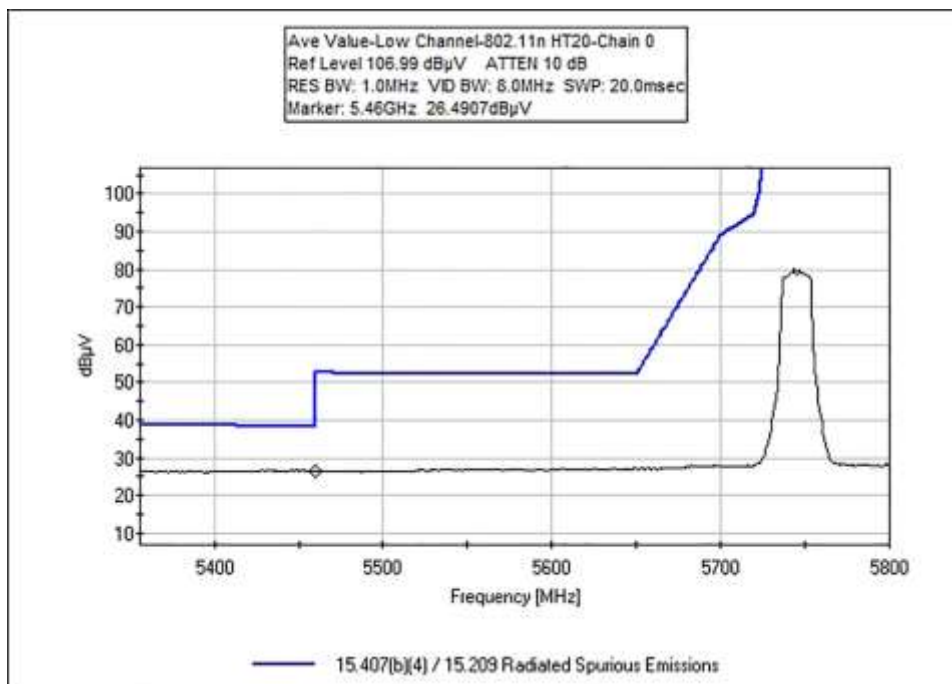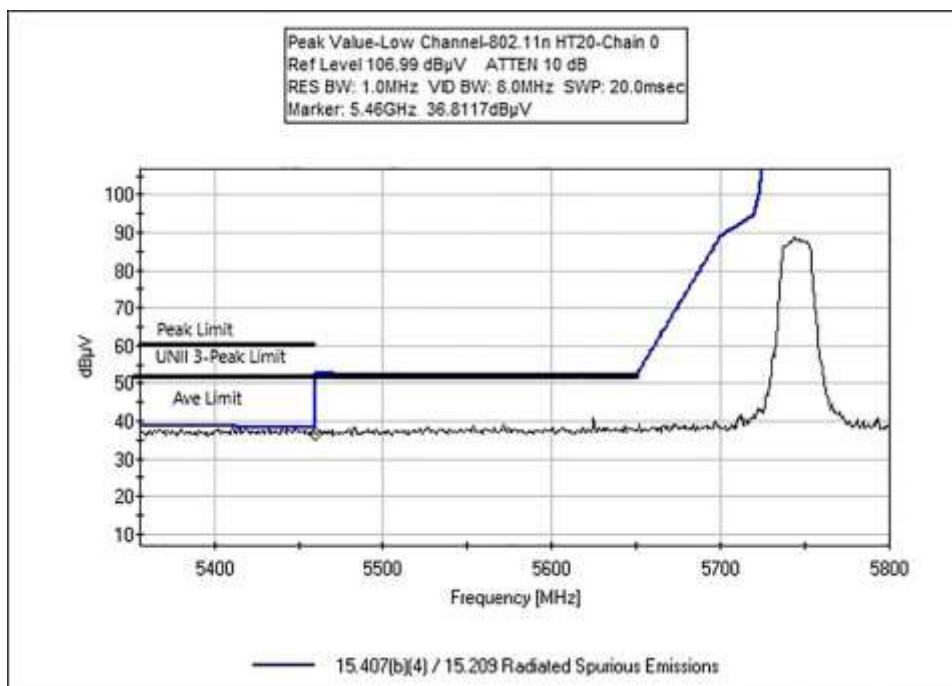


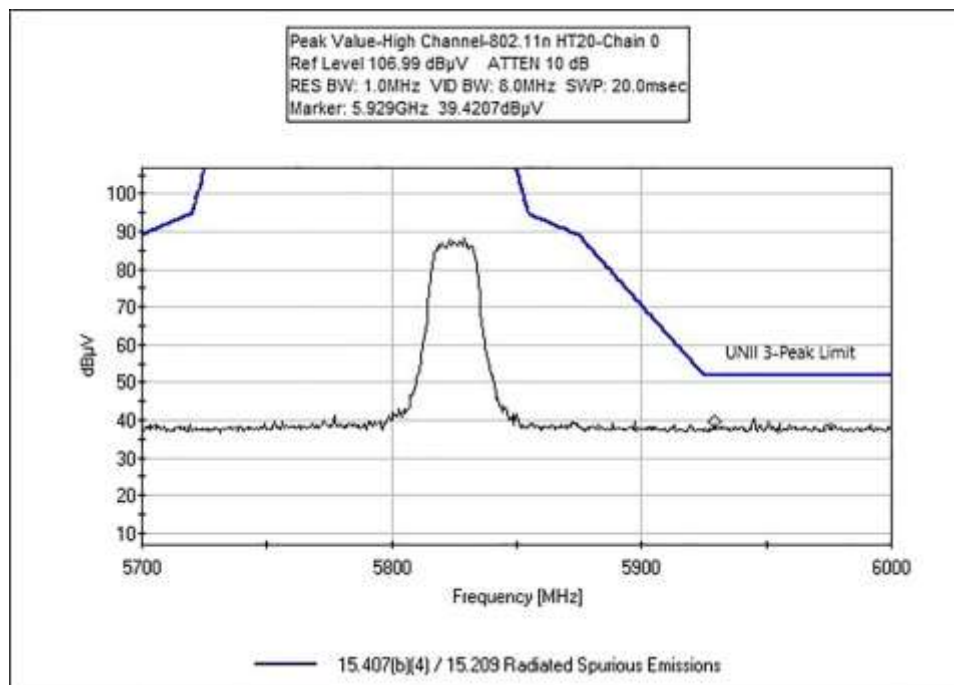



802.11ac 20MHz

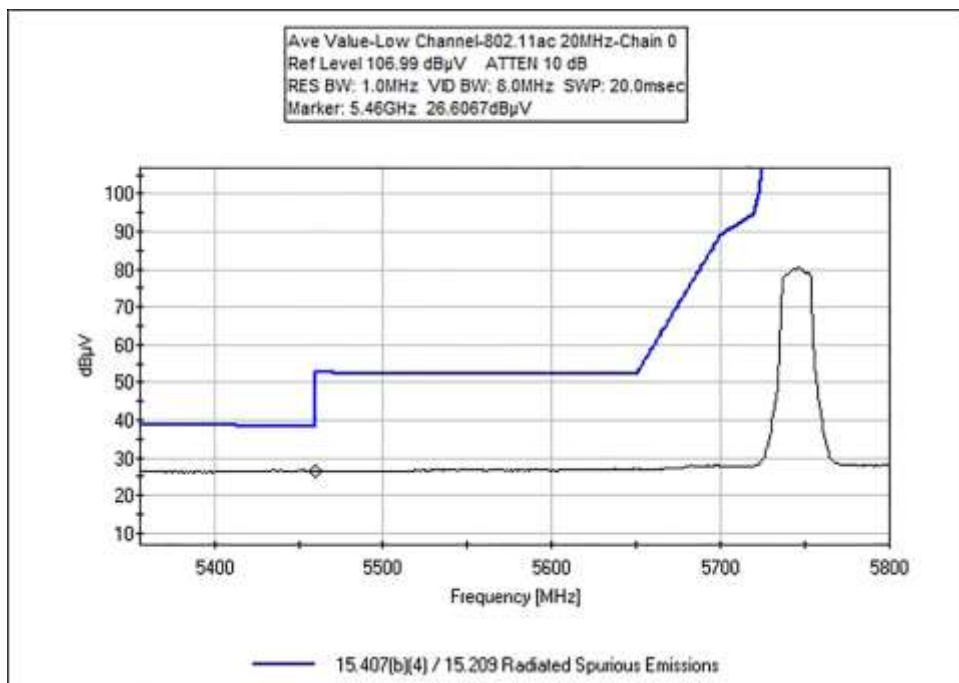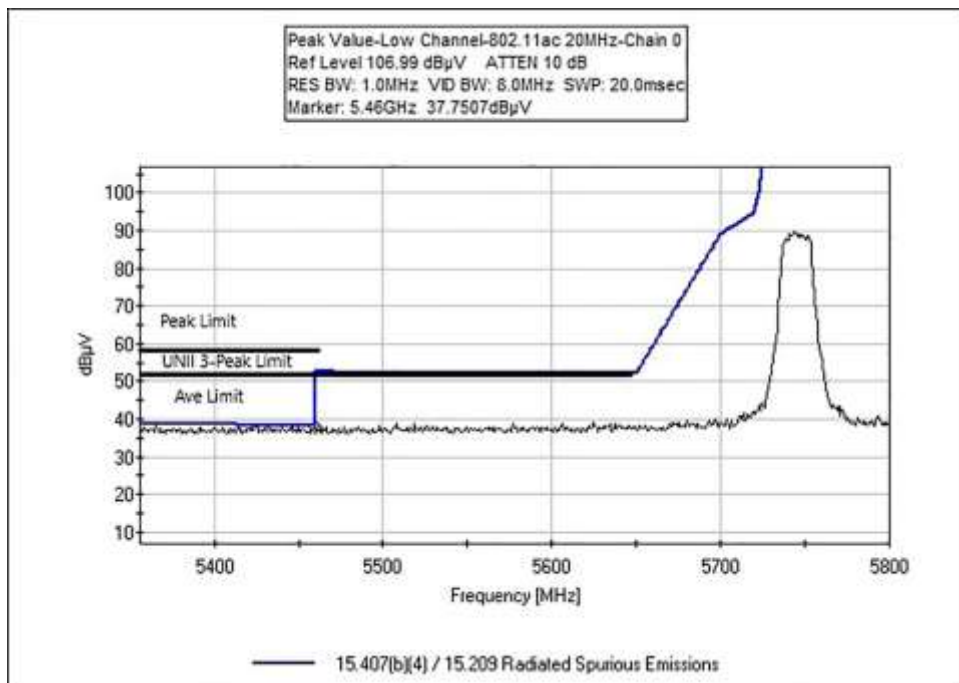


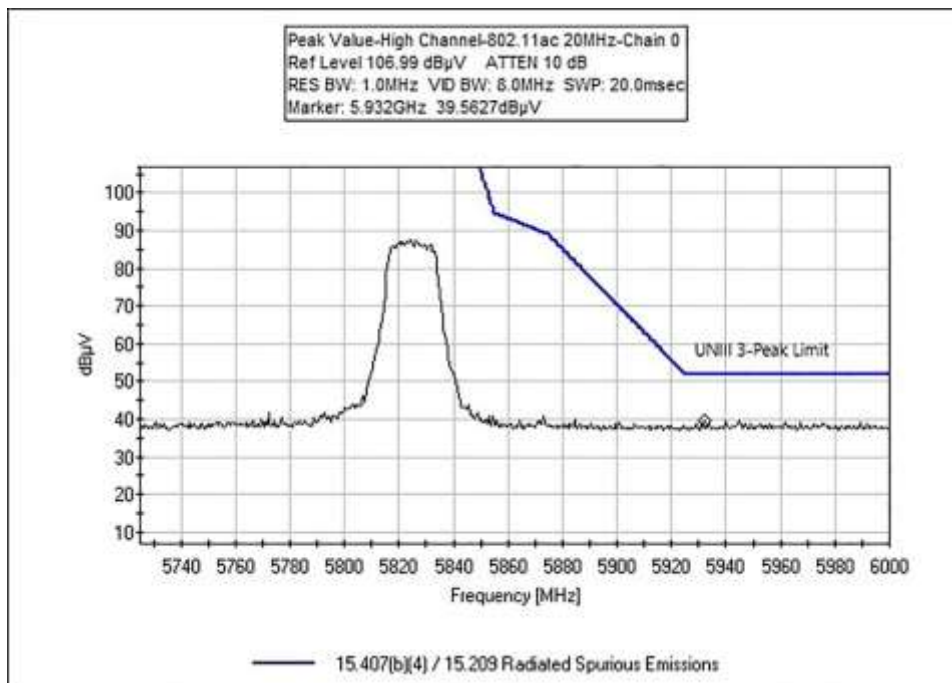



802.11 n HT40

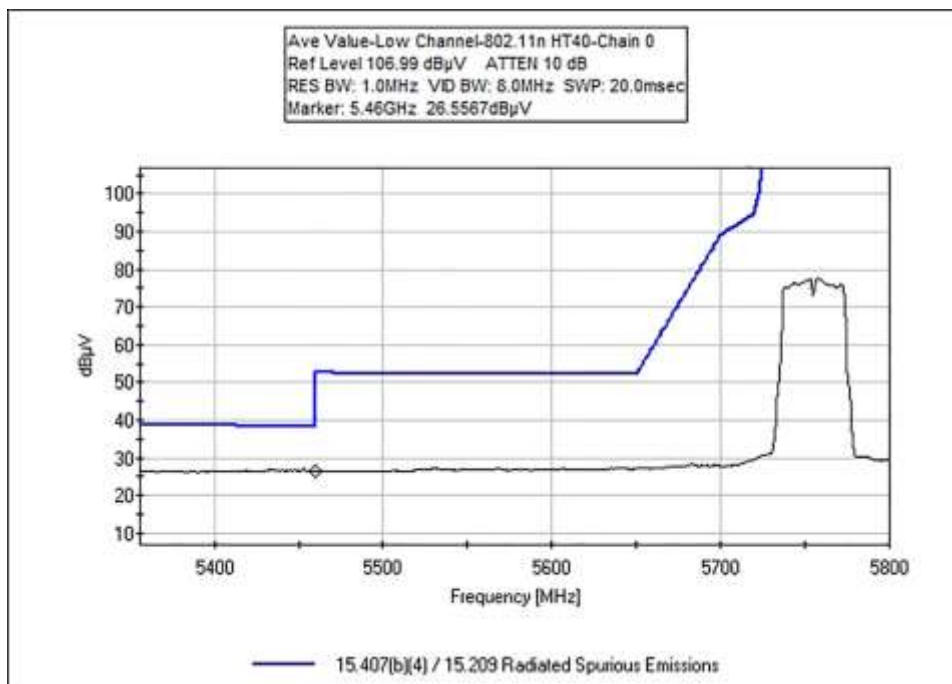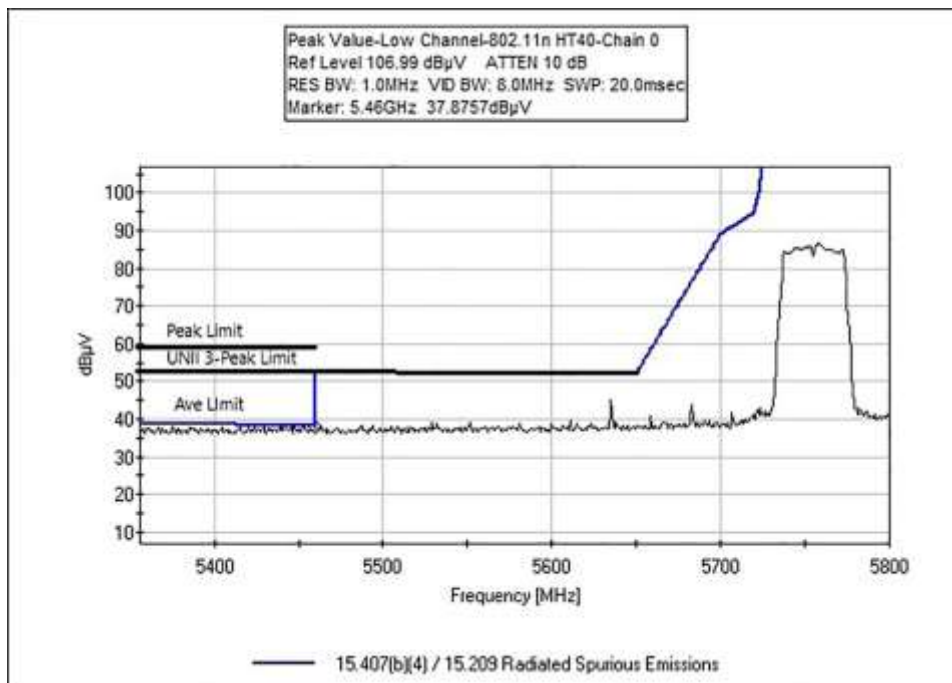


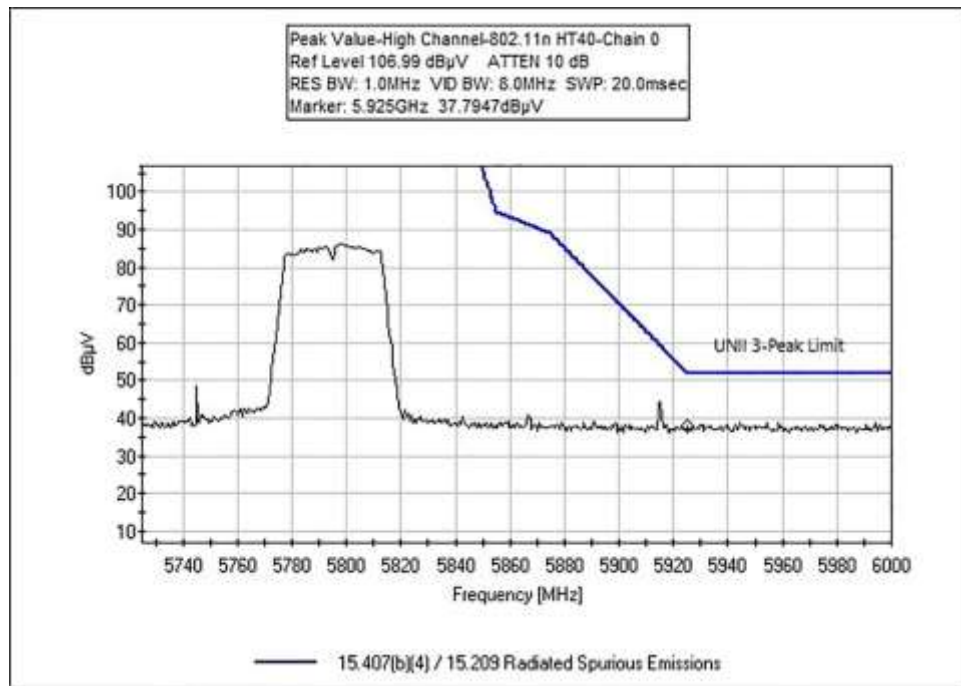



802.11ac 40MHz

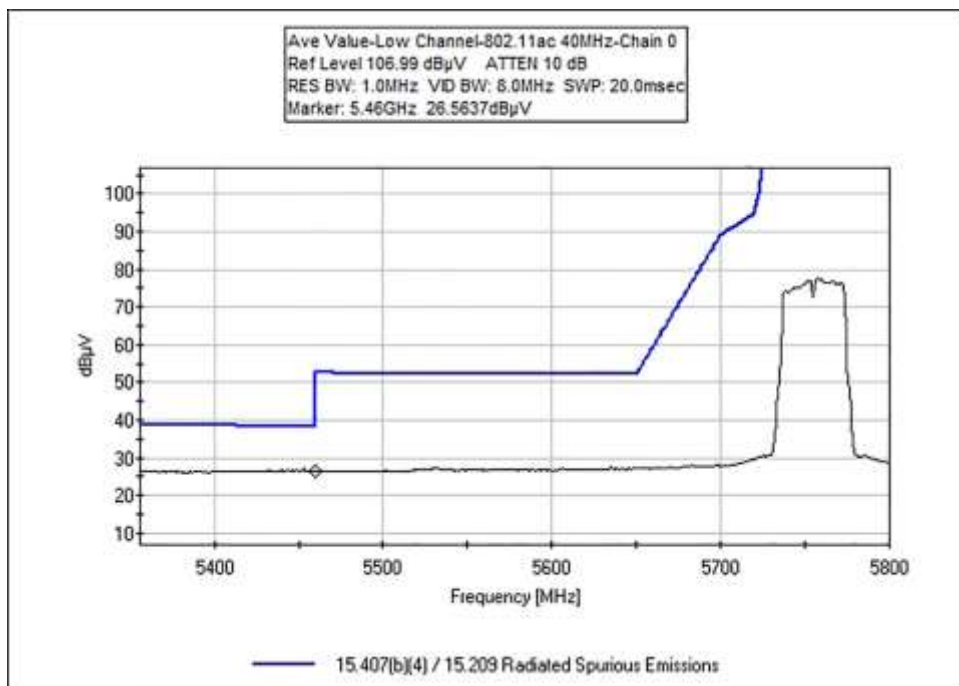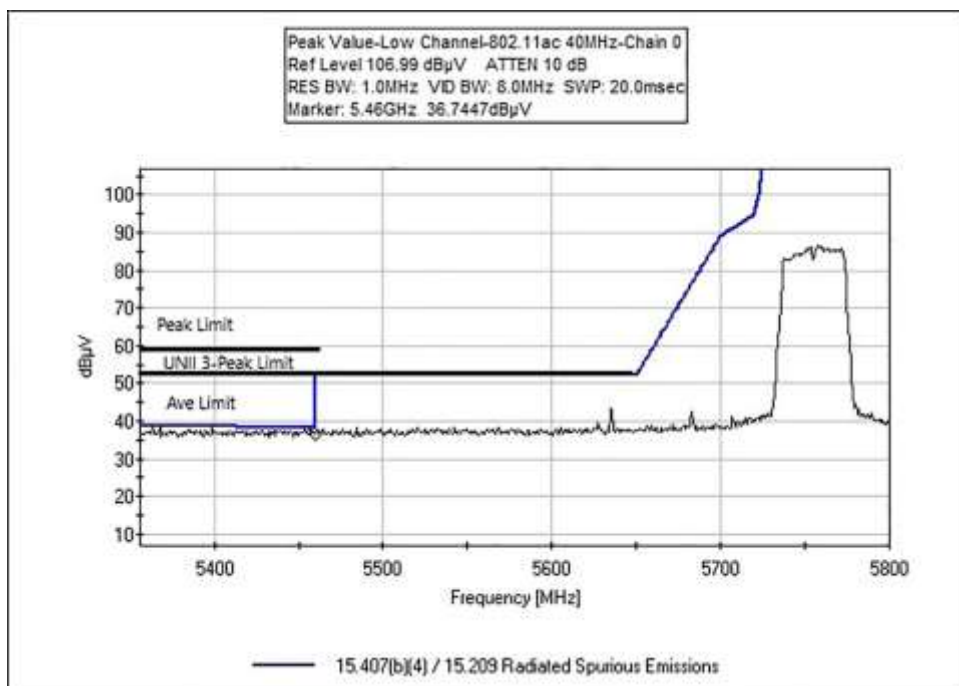


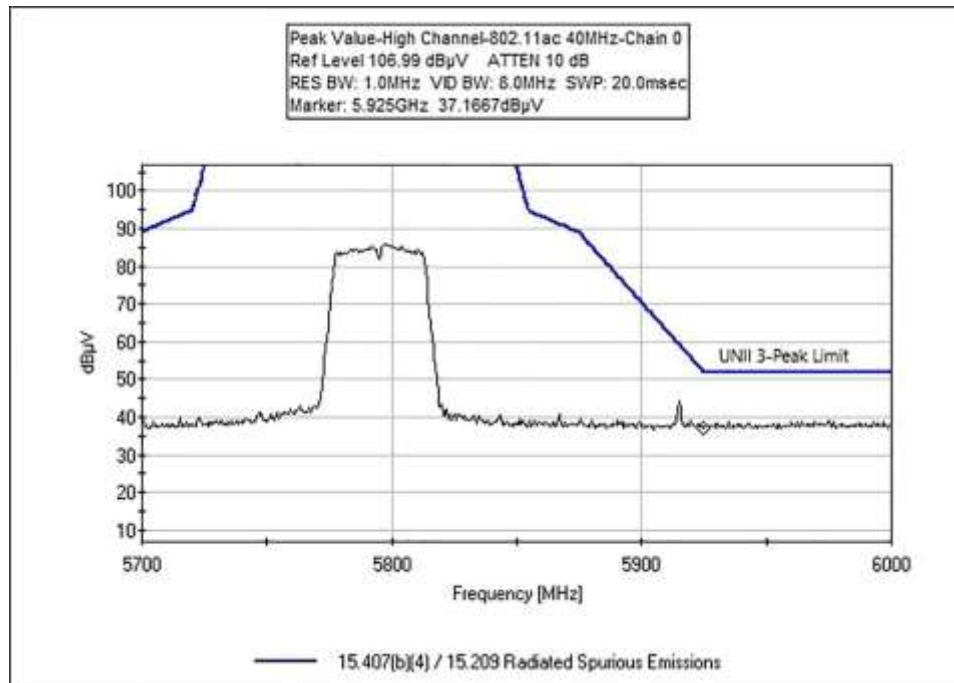



802.11ac 80MHz

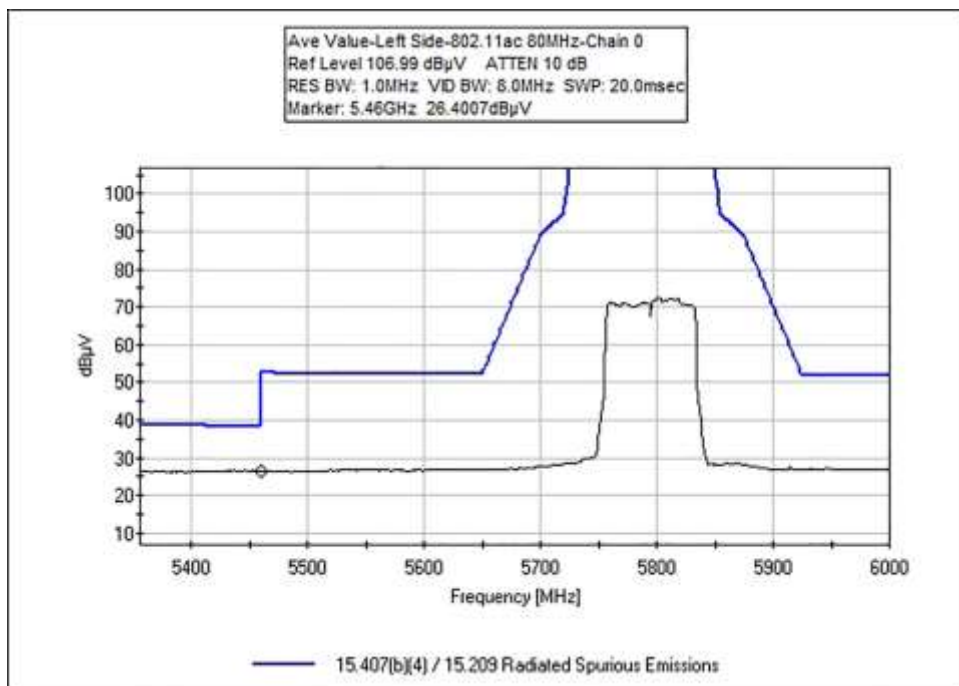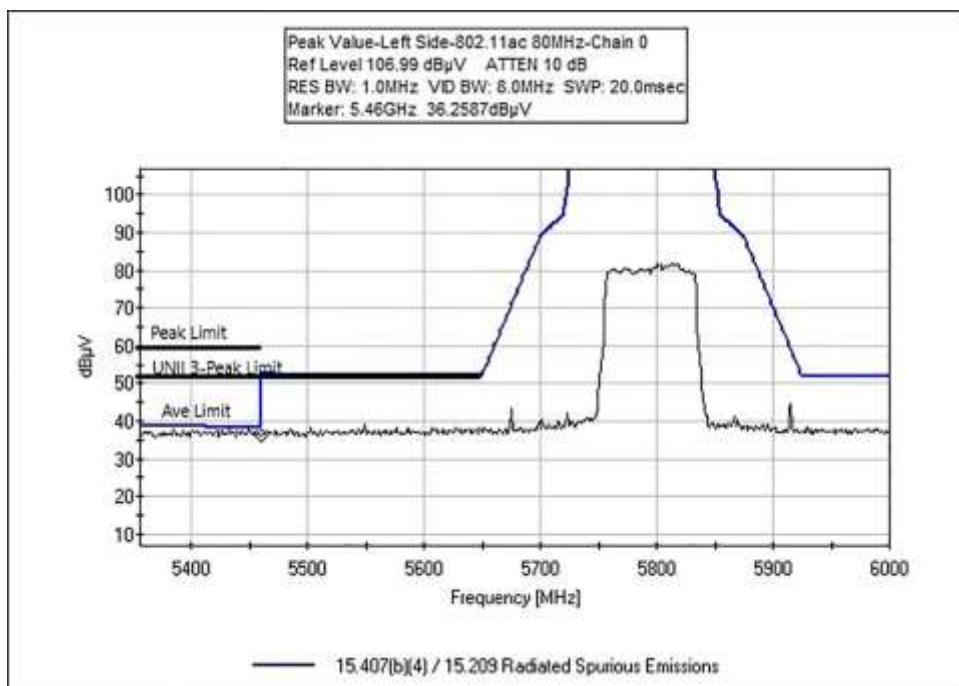


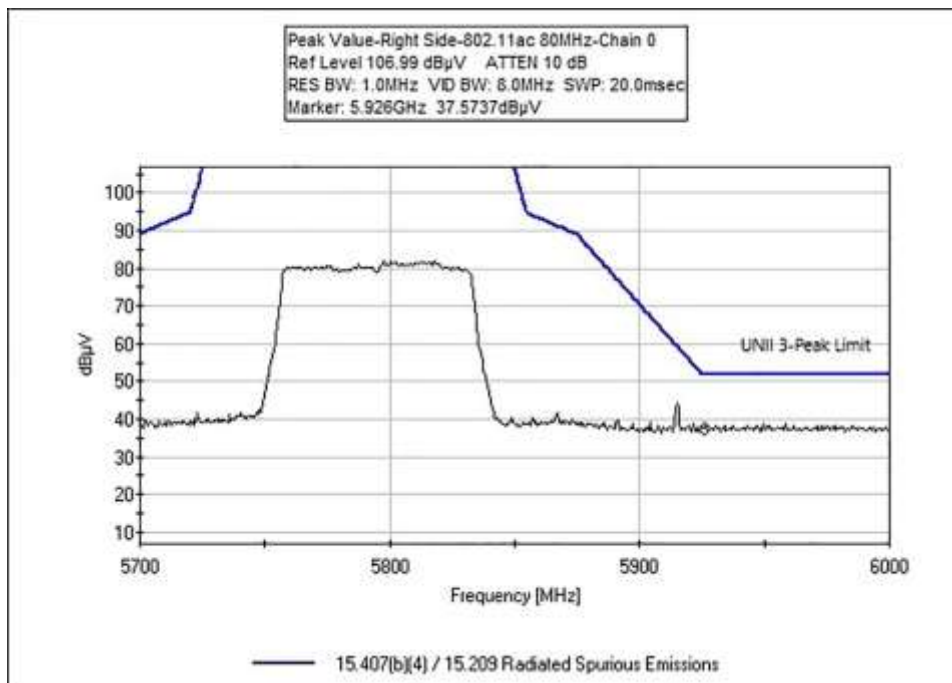



Chain 1
802.11a

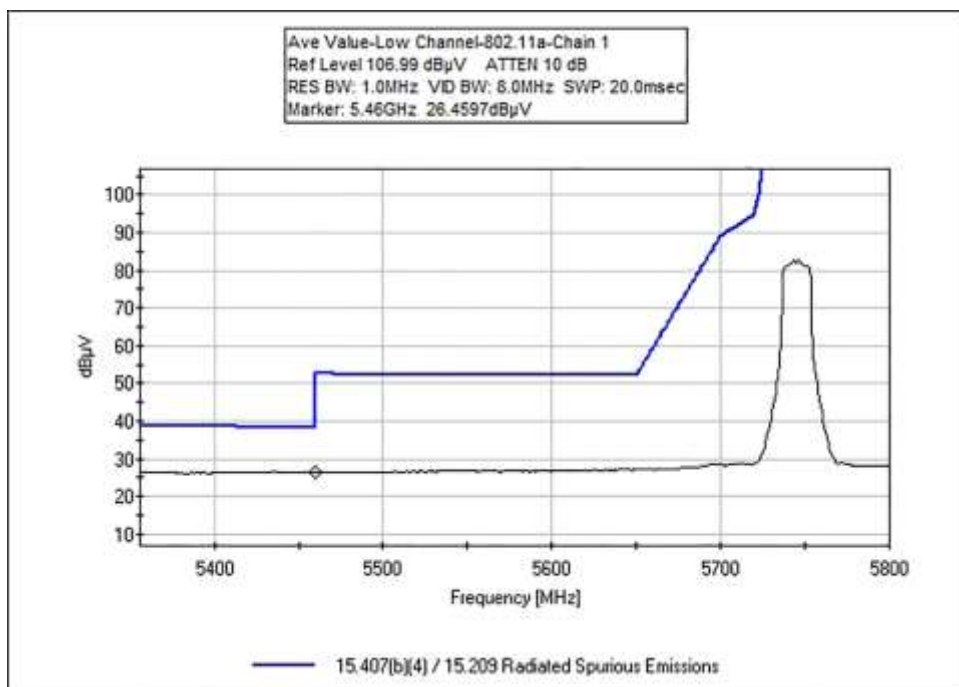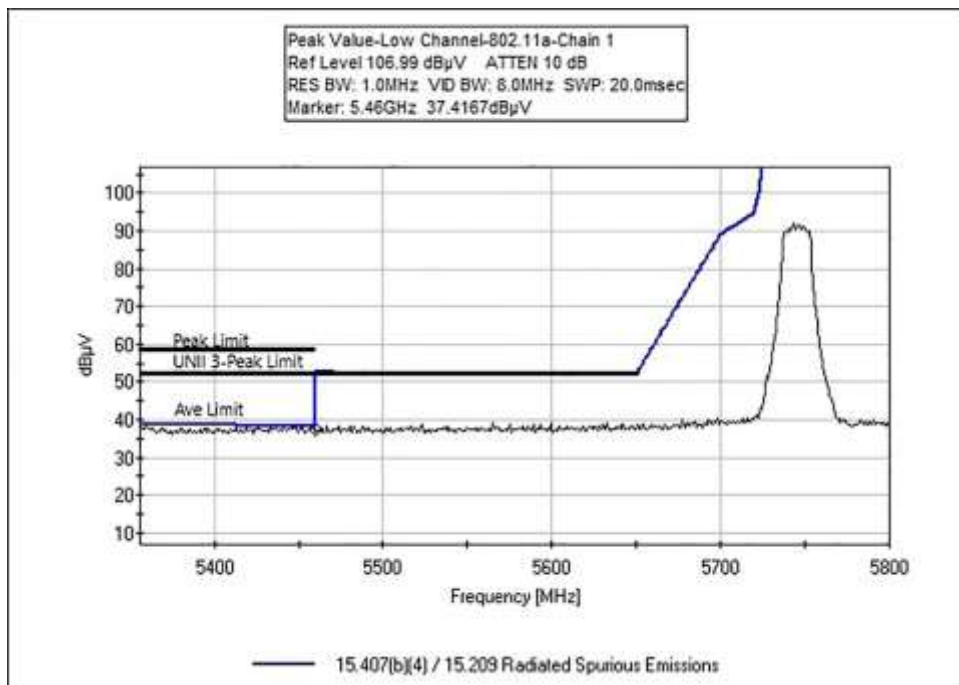


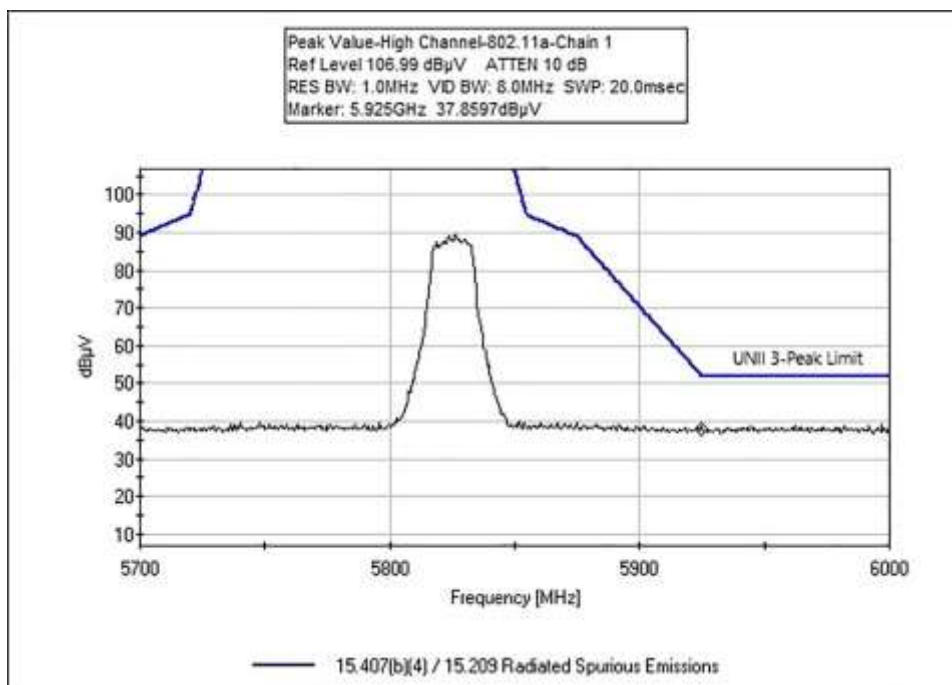



802.11n HT20

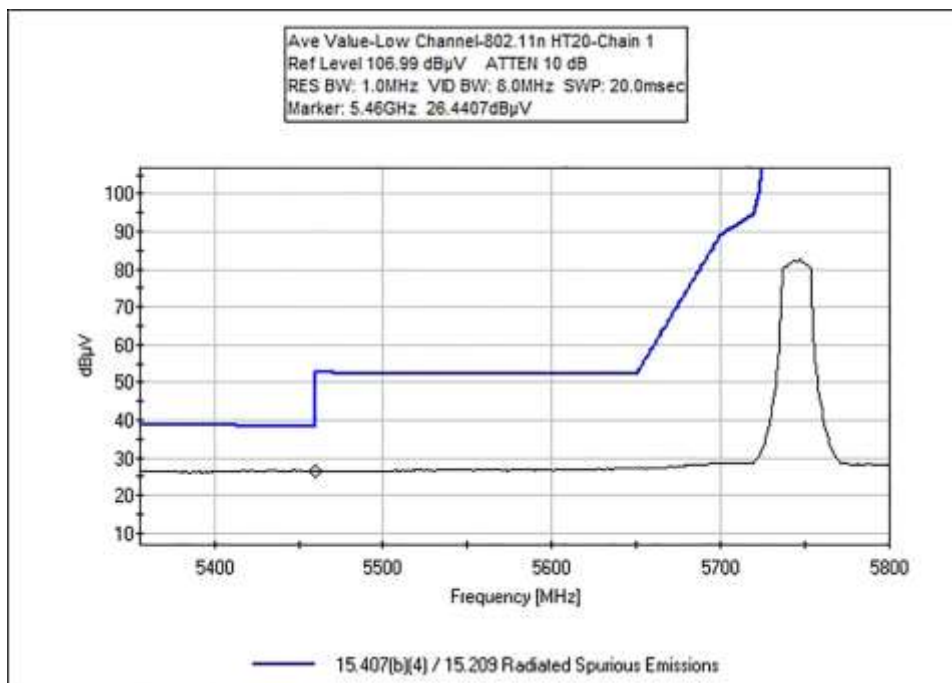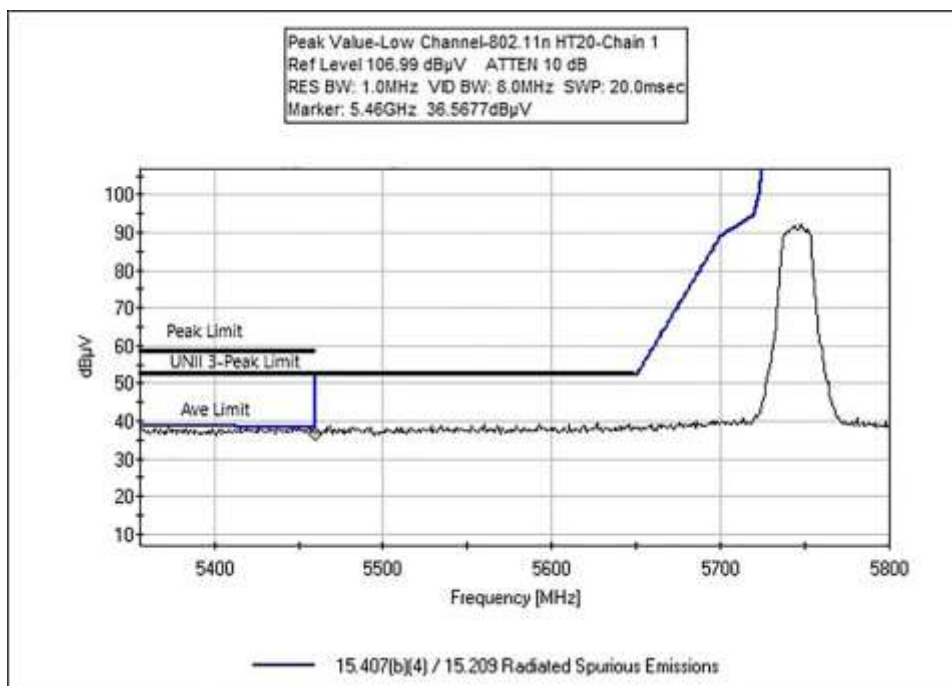


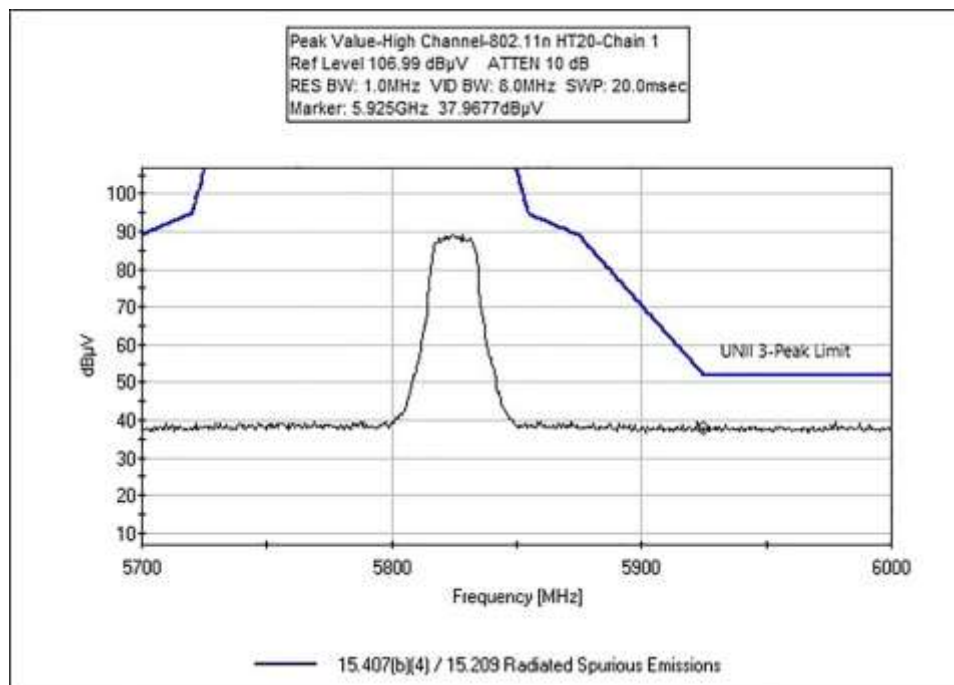



802.11ac 20MHz

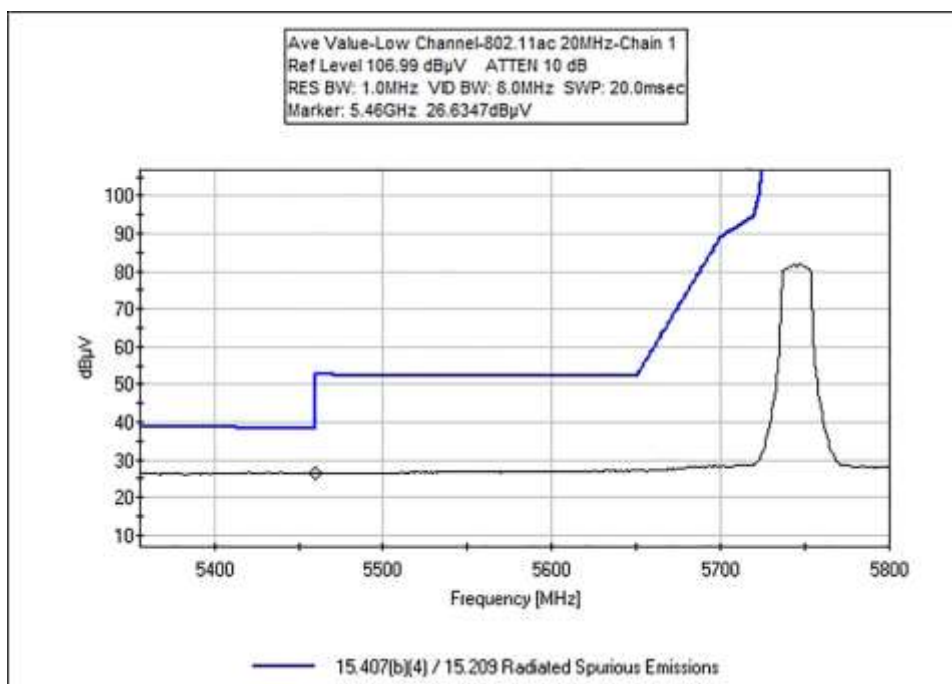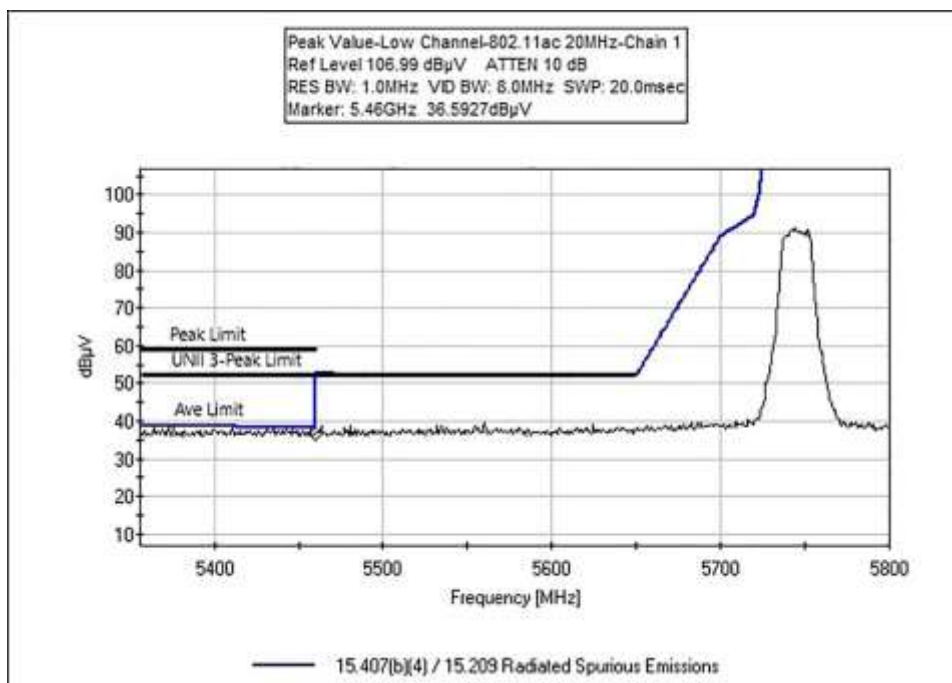


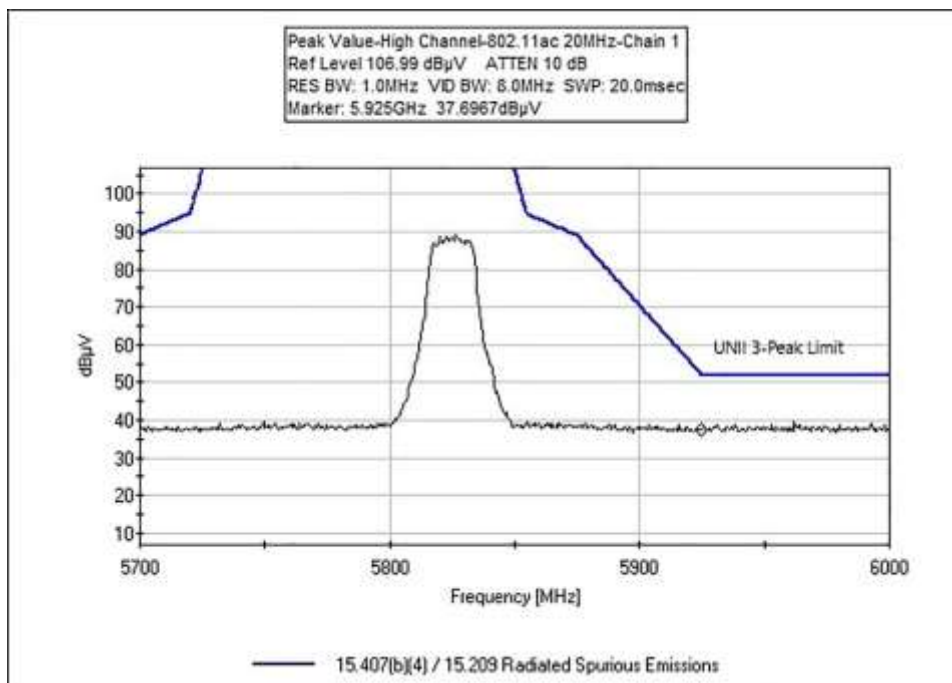



802.11 n HT40

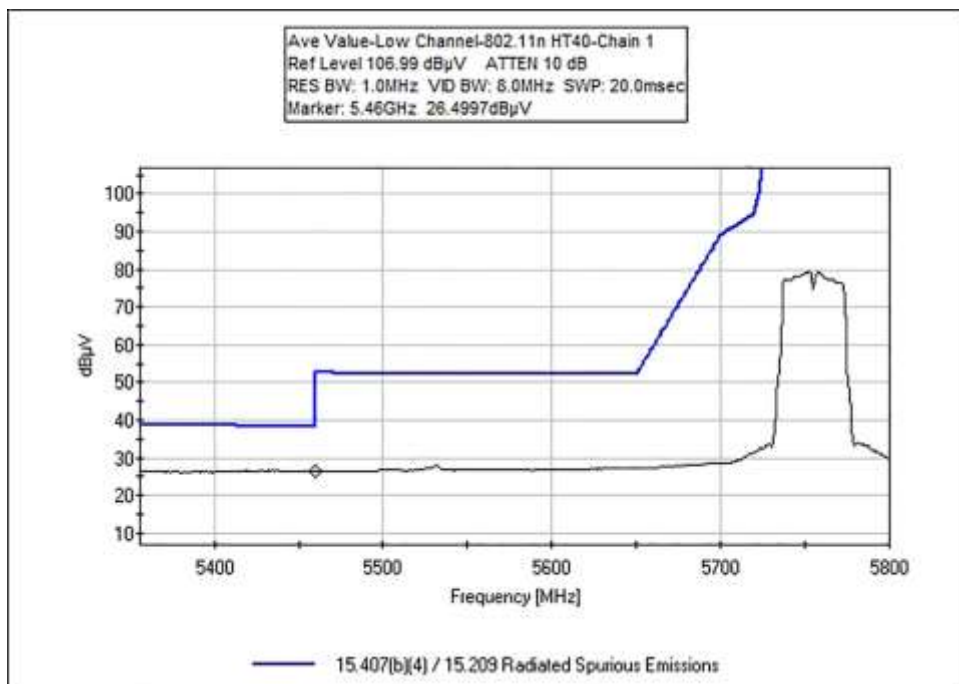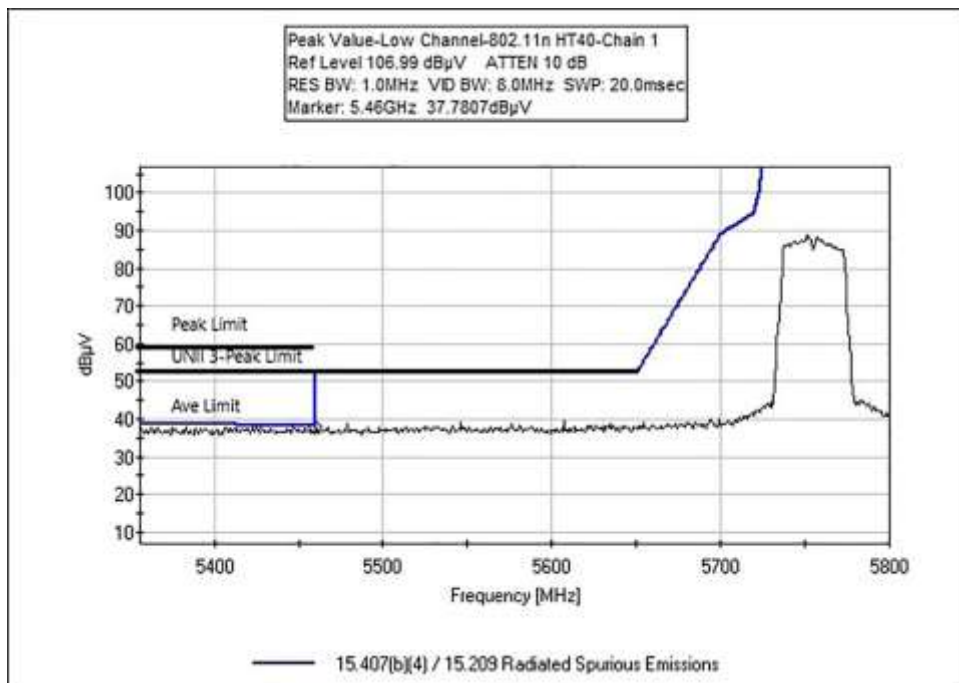


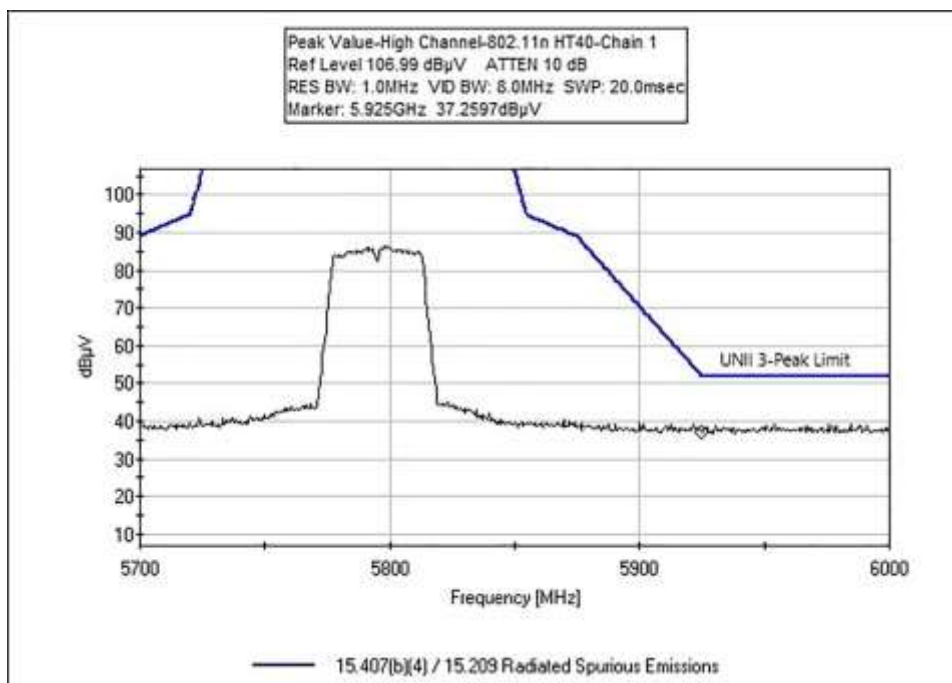



802.11ac 40MHz

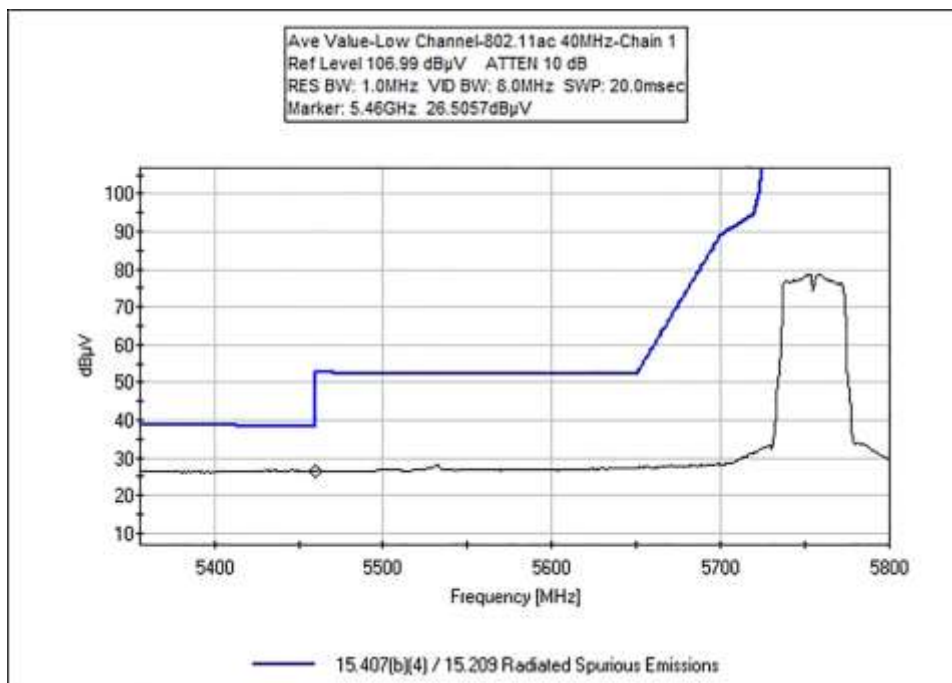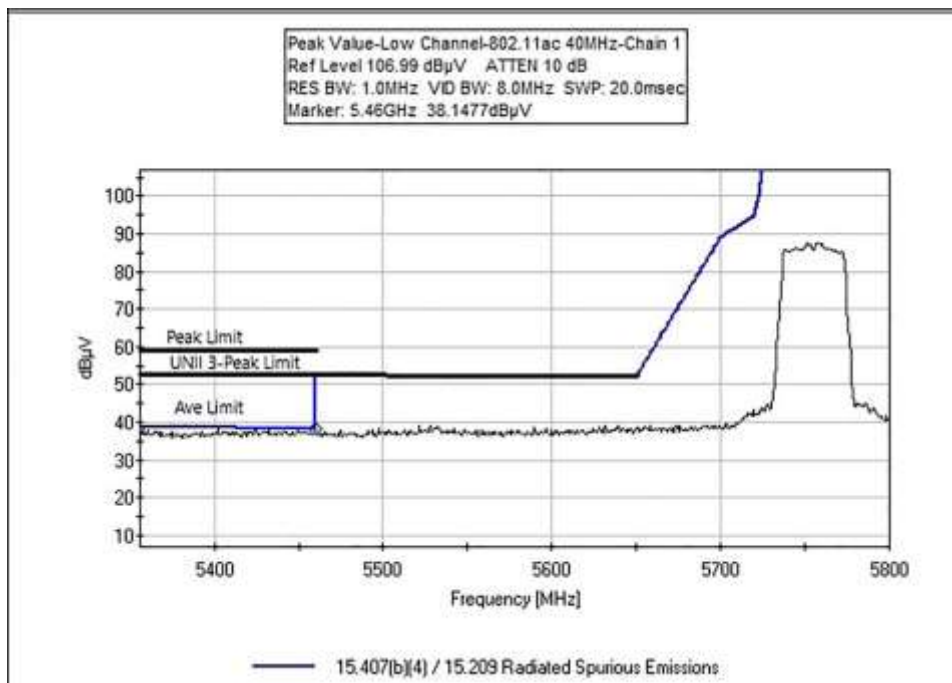

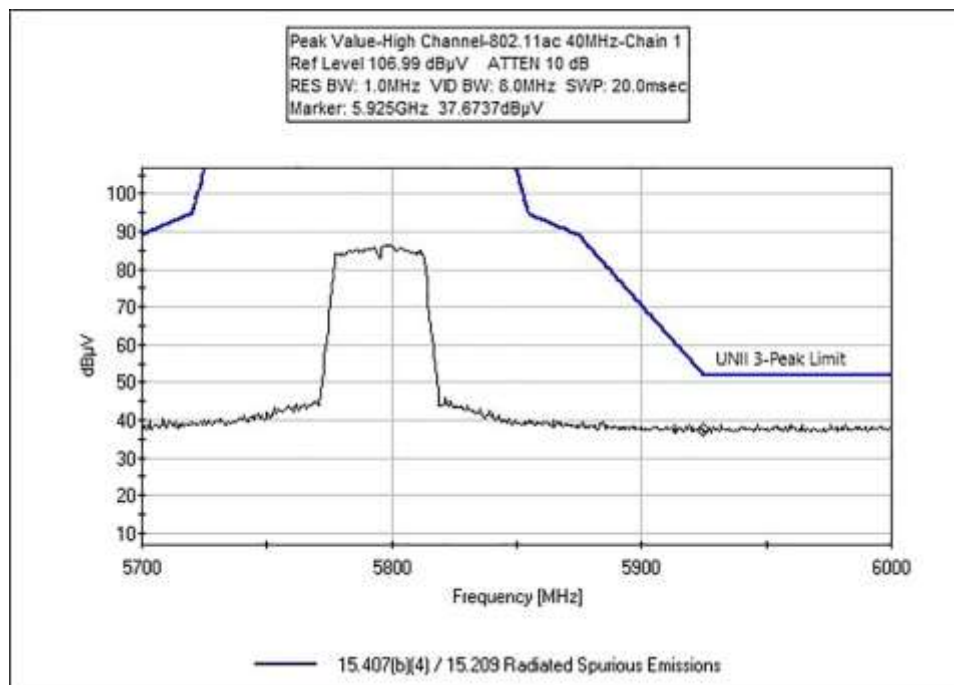

802.11ac 80MHz

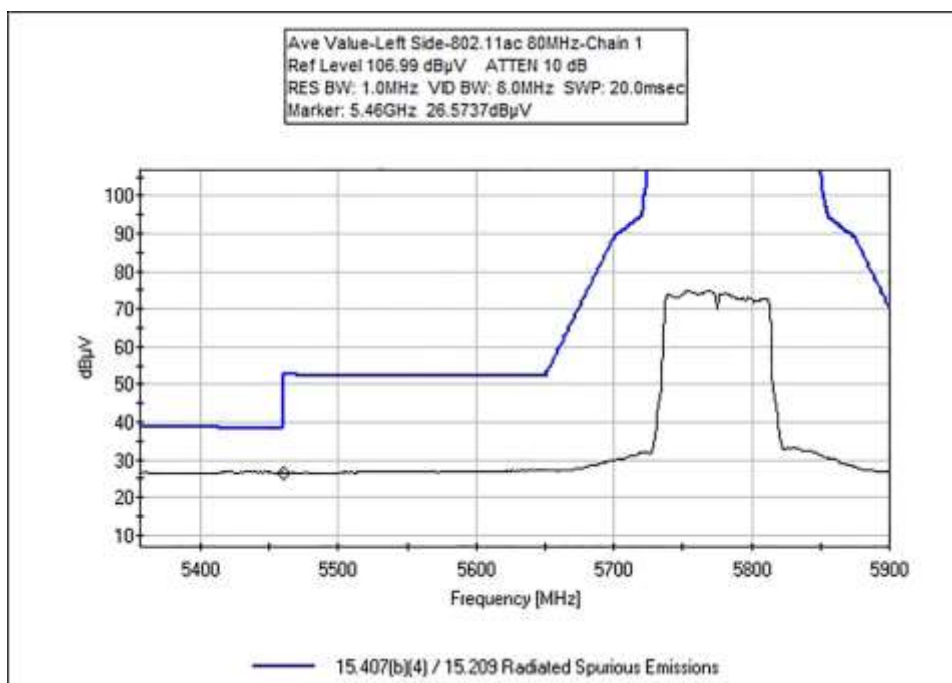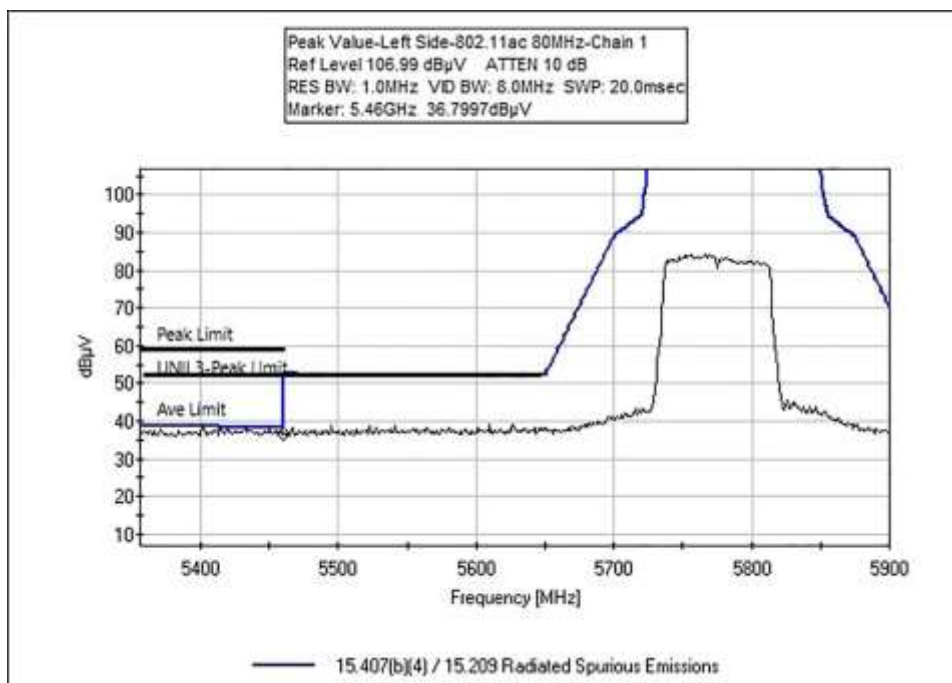

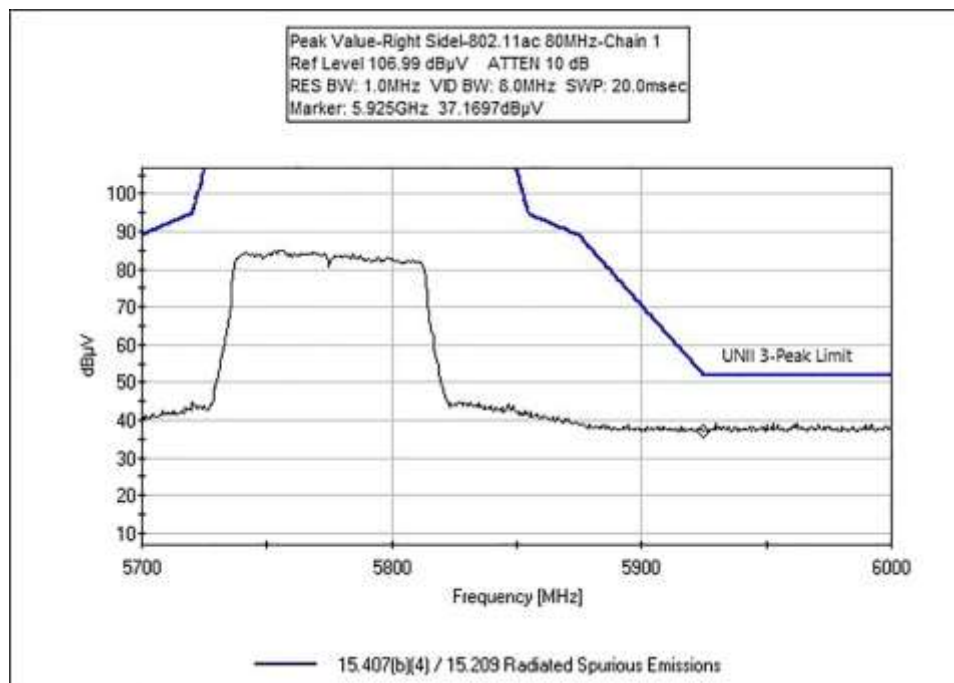

Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 1120 Fulton Pl • Fremont, CA 94539 • (510) 249-1170
 Customer: **Tonal**
 Specification: Band Edge
 Work Order #: **110285** Date: 10/31/2024
 Test Type: **Radiated Scan** Time: 10:47:31
 Tested By: Hieu Song Nguyenpham Sequence#: 17
 Software: EMITest 5.03.20

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Band Edge

Test Environment Conditions:
 Temperature: 21.8°C
 Humidity: 47%
 Atmospheric Pressure: 101.5kPa

Highest Generated Frequency: 5.825GHz
 Test Method: ANSI C63.10 (2020)

The unit is mounted to a floor standing rack as to simulate typical wall mounted setup. One weight line is extended to the floor. Camera is on.

Note:
 Chain 0

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02157	Horn Antenna-ANSI C63.5	3115	1/11/2023	1/11/2025
T2	AN03302	Cable	32026-29094K-29094K-72TC	1/9/2024	1/9/2026
T3	ANP01210	Cable	FSJ1P-50A-4A	1/9/2024	1/9/2026
T4	AN02810	Preamp	83051A	4/6/2023	4/6/2025
T5	AN03013	Cable	32022-2-2909K-36TC	1/9/2024	1/9/2026
	AN02660	Spectrum Analyzer	E4446A	12/6/2022	12/6/2024

Measurement Data:

Reading listed by order taken.

Test Distance: 3 Meters

#	Freq MHz	Rdng dBμV	T1 T5 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	5460.000M	36.8	+34.7 +1.2	+2.2	+3.8	-26.3	+0.0	52.4	54.0 802.11a	-1.6	Horiz
2	5460.000M Ave	26.4	+34.7 +1.2	+2.2	+3.8	-26.3	+0.0	42.0	54.0 802.11a	-12.0	Horiz
3	5945.000M	40.8	+34.9 +1.3	+2.3	+3.9	-26.2	+0.0	57.0	68.2 802.11a	-11.2	Horiz
4	5929.000M	39.4	+34.9 +1.3	+2.3	+3.9	-26.2	+0.0	55.6	68.2 802.11n HT20	-12.6	Horiz
5	5460.000M	36.8	+34.7 +1.2	+2.2	+3.8	-26.3	+0.0	52.4	54.0 802.11n HT20	-1.6	Horiz
6	5460.000M Ave	26.5	+34.7 +1.2	+2.2	+3.8	-26.3	+0.0	42.1	54.0 802.11n HT20	-11.9	Horiz
7	5460.000M	37.8	+34.7 +1.2	+2.2	+3.8	-26.3	+0.0	53.4	54.0 802.11ac 20MHz	-0.6	Horiz
8	5460.000M Ave	26.6	+34.7 +1.2	+2.2	+3.8	-26.3	+0.0	42.2	54.0 802.11ac 20MHz	-11.8	Horiz
9	5932.300M	39.6	+34.9 +1.3	+2.3	+3.9	-26.2	+0.0	55.8	68.2 802.11ac 20MHz	-12.4	Horiz
10	5925.000M	37.8	+34.9 +1.3	+2.3	+3.9	-26.2	+0.0	54.0	68.2 802.11n HT40	-14.2	Horiz
11	5460.000M	37.9	+34.7 +1.2	+2.2	+3.8	-26.3	+0.0	53.5	54.0 802.11n HT40	-0.5	Horiz
12	5460.000M Ave	26.6	+34.7 +1.2	+2.2	+3.8	-26.3	+0.0	42.2	54.0 802.11n HT40	-11.8	Horiz
13	5460.000M	36.2	+34.7 +1.2	+2.2	+3.8	-26.3	+0.0	51.8	54.0 802.11ac 40MHz	-2.2	Horiz
14	5460.000M Ave	26.6	+34.7 +1.2	+2.2	+3.8	-26.3	+0.0	42.2	54.0 802.11ac 40MHz	-11.8	Horiz
15	5925.000M	37.2	+34.9 +1.3	+2.3	+3.9	-26.2	+0.0	53.4	68.2 802.11ac 40MHz	-14.8	Horiz

16	5926.000M	37.6	+34.9 +1.3	+2.3	+3.9	-26.2	+0.0	53.8	68.2	-14.4	Horiz
									802.11ac 80MHz		
17	5460.000M	36.3	+34.7 +1.2	+2.2	+3.8	-26.3	+0.0	51.9	54.0	-2.1	Horiz
									802.11ac 80MHz		
18	5460.000M	26.4	+34.7 +1.2	+2.2	+3.8	-26.3	+0.0	42.0	54.0	-12.0	Horiz
	Ave								802.11ac 80MHz		



Test Location: CKC Laboratories, Inc. • 1120 Fulton Pl • Fremont, CA 94539 • (510) 249-1170
Customer: **Tonal**
Specification: Band Edge
Work Order #: **110285** Date: 10/31/2024
Test Type: **Radiated Scan** Time: 13:16:58
Tested By: Hieu Song Nguyenpham Sequence#: 18
Software: EMITest 5.03.20

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Band Edge
Test Environment Conditions: Temperature: 21.8°C Humidity: 47% Atmospheric Pressure: 101.5kPa
Highest Generated Frequency: 5.825GHz Test Method: ANSI C63.10 (2020)
The unit is mounted to a floor standing rack as to simulate typical wall mounted setup. One weight line is extended to the floor. Camera is on.
Note: Chain 1

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02157	Horn Antenna- ANSI C63.5	3115	1/11/2023	1/11/2025
T2	AN03302	Cable	32026-29094K- 29094K-72TC	1/9/2024	1/9/2026
T3	ANP01210	Cable	FSJ1P-50A-4A	1/9/2024	1/9/2026
T4	AN02810	Preamp	83051A	4/6/2023	4/6/2025
T5	AN03013	Cable	32022-2-2909K- 36TC	1/9/2024	1/9/2026
	AN02660	Spectrum Analyzer	E4446A	12/6/2022	12/6/2024

Measurement Data:

Reading listed by order taken.


Test Distance: 3 Meters

#	Freq MHz	Rdng dBμV	T1 T5 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	5460.000M	37.4	+34.7 +1.2	+2.2	+3.8	-26.3	+0.0	53.0	54.0 802.11a	-1.0	Horiz
2	5460.000M Ave	26.5	+34.7 +1.2	+2.2	+3.8	-26.3	+0.0	42.1	54.0 802.11a	-11.9	Horiz
3	5925.000M	37.9	+34.9 +1.3	+2.3	+3.9	-26.2	+0.0	54.1	68.2 802.11a	-14.1	Horiz
4	5925.000M	37.2	+34.9 +1.3	+2.3	+3.9	-26.2	+0.0	53.4	68.2 802.11n HT20	-14.8	Horiz
5	5460.000M	36.6	+34.7 +1.2	+2.2	+3.8	-26.3	+0.0	52.2	54.0 802.11n HT20	-1.8	Horiz
6	5460.000M Ave	26.4	+34.7 +1.2	+2.2	+3.8	-26.3	+0.0	42.0	54.0 802.11n HT20	-12.0	Horiz
7	5460.000M	36.6	+34.7 +1.2	+2.2	+3.8	-26.3	+0.0	52.2	54.0 802.11ac 20MHz	-1.8	Horiz
8	5460.000M Ave	26.6	+34.7 +1.2	+2.2	+3.8	-26.3	+0.0	42.2	54.0 802.11ac 20MHz	-11.8	Horiz
9	5925.000M	37.7	+34.9 +1.3	+2.3	+3.9	-26.2	+0.0	53.9	68.2 802.11ac 20MHz	-14.3	Horiz
10	5925.000M	37.3	+34.9 +1.3	+2.3	+3.9	-26.2	+0.0	53.5	68.2 802.11n HT40	-14.7	Horiz
11	5460.000M	37.8	+34.7 +1.2	+2.2	+3.8	-26.3	+0.0	53.4	54.0 802.11n HT40	-0.6	Horiz
12	5460.000M Ave	26.5	+34.7 +1.2	+2.2	+3.8	-26.3	+0.0	42.1	54.0 802.11n HT40	-11.9	Horiz
13	5460.000M	38.1	+34.7 +1.2	+2.2	+3.8	-26.3	+0.0	53.7	54.0 802.11ac 40MHz	-0.3	Horiz
14	5460.000M Ave	26.5	+34.7 +1.2	+2.2	+3.8	-26.3	+0.0	42.1	54.0 802.11ac 40MHz	-11.9	Horiz
15	5925.000M	37.7	+34.9 +1.3	+2.3	+3.9	-26.2	+0.0	53.9	68.2 802.11ac 40MHz	-14.3	Horiz


16	5925.000M	36.9	+34.9 +1.3	+2.3	+3.9	-26.2	+0.0	53.1	68.2	-15.1	Horiz
									802.11ac 80MHz		
17	5460.000M	37.6	+34.7 +1.2	+2.2	+3.8	-26.3	+0.0	53.2	54.0	-0.8	Horiz
									802.11ac 80MHz		
18	5460.000M	26.6	+34.7 +1.2	+2.2	+3.8	-26.3	+0.0	42.2	54.0	-11.8	Horiz
	Ave								802.11ac 80MHz		

Test Setup Photo(s)

9kHz-1GHz

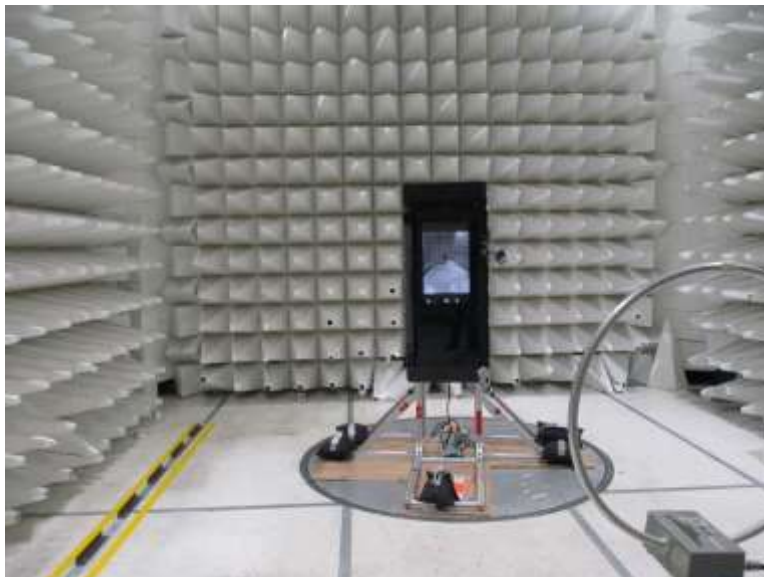


Front View

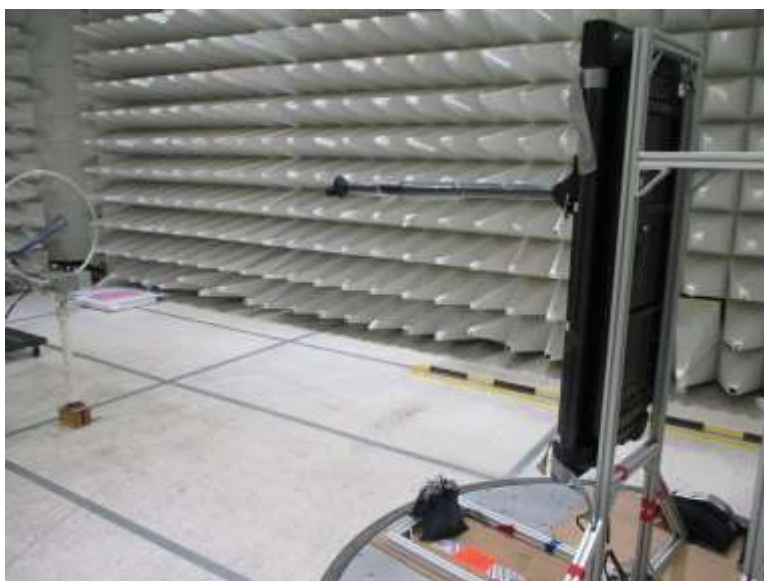

Back View

30MHz-1GHz

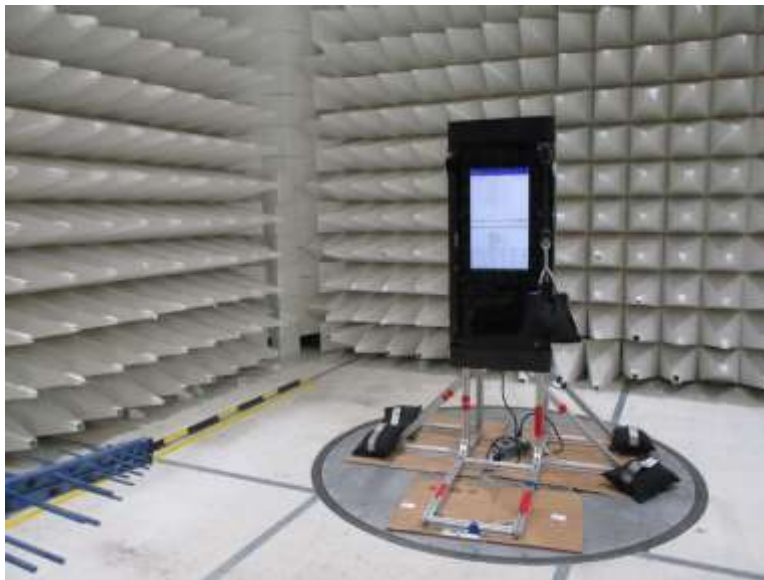


Front View



Back View

1GHz-12GHz

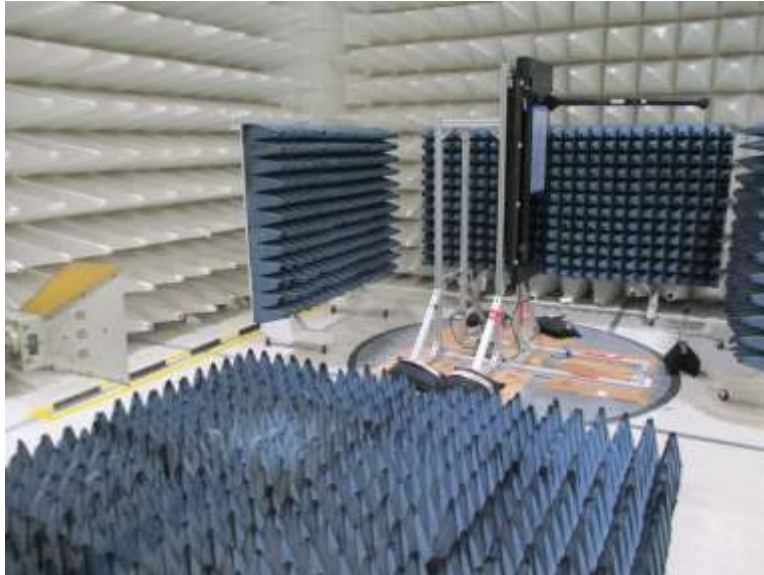


Front View




Back View

12GHz-40GHz

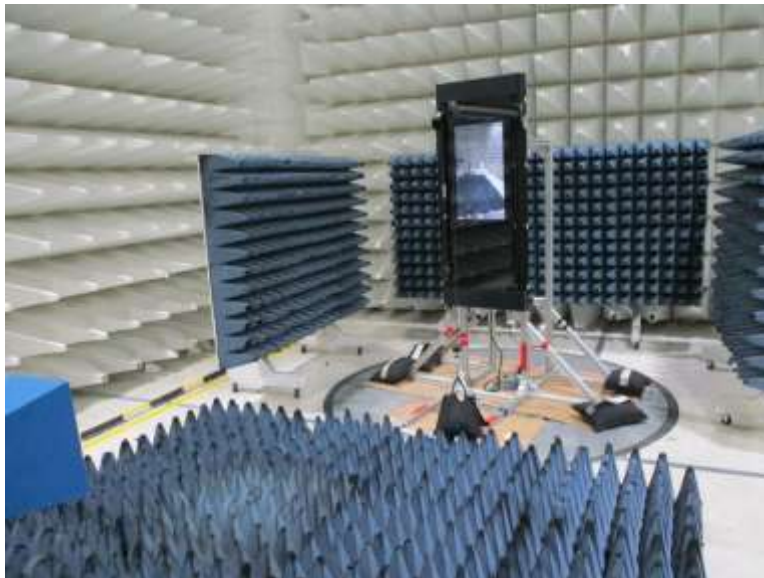

Front View

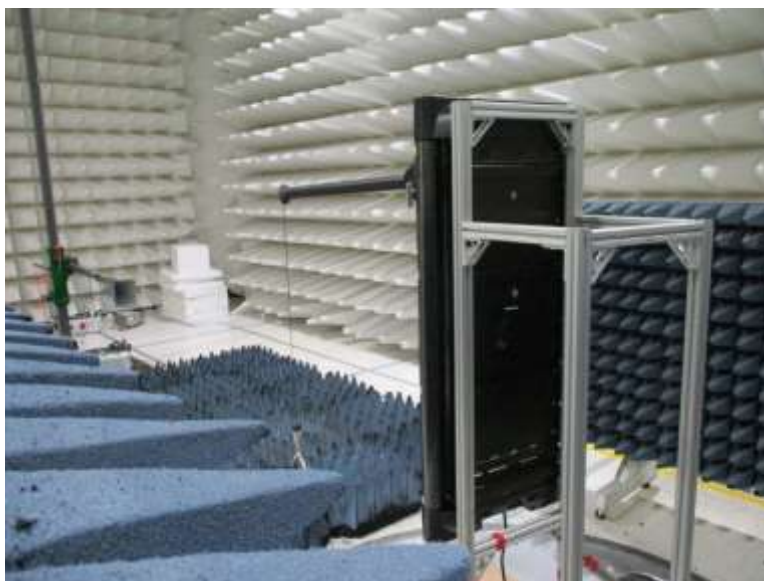

Back View

15.207 AC Conducted Emissions

Test Data

Test Location: CKC Laboratories, Inc. • 1120 Fulton Pl • Fremont, CA 94539 • (510) 249-1170
 Customer: **Tonal**
 Specification: **15.207 AC Mains - Average**
 Work Order #: **110285** Date: 10/17/2024
 Test Type: **Conducted Emissions** Time: 13:46:52
 Tested By: Hieu Song Nguyenpham Sequence#: 170
 Software: EMITest 5.03.20 120V 60Hz

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Conducted Emission
 Frequency Range: 150kHz to 30MHz


 Test Environment Conditions:
 Temperature: 21.6°C
 Humidity: 49%
 Atmospheric Pressure: 101.4kPa

 Highest Generation Frequency: 5.825GHz
 Test Method: ANSI C63.10 (2020)

 The unit is mounted to a floor standing rack as to simulate typical wall mounted setup. It is set in a testing mode, lifting a weight on a loop. Video and Camera are On.
 All WIFI and Bluetooth modules are on.

Modification #1 was in place during testing.

Tonal W/O#: 110285 Sequence#: 170 Date: 11/06/2024
15.207 AC Mains - Average Test Lead: 120V 60Hz Line

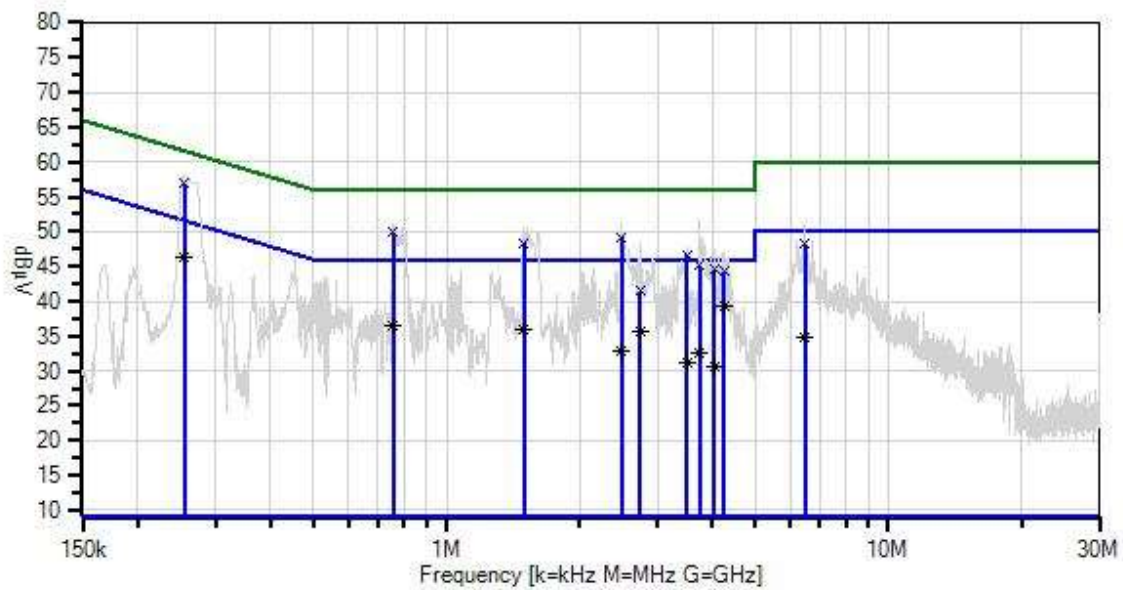

— Sweep Data
x QP Readings
Software Version: 5.03.20
— Readings
* Average Readings
— 1 - 15.207 AC Mains - Average
○ Peak Readings
▼ Ambient
— 2 - 15.207 AC Mains - Quasi-peak

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP01211	Attenuator	23-10-34	12/2/2022	12/2/2024
T2	ANP00880	Cable	RG214U	3/26/2024	3/26/2026
T3	ANP06691	Cable	PE3062-180	3/20/2024	3/20/2026
T4	AN03814	50uH LISN-1PH-Line (dB)	NSLK 8126	1/4/2023	1/4/2025
	AN03814	50uH LISN-1PH-Neutral (dB)	NSLK 8126	1/4/2023	1/4/2025
	AN02660	Spectrum Analyzer	E4446A	12/6/2022	12/6/2024
T5	ANP05258	High Pass Filter	HE9615-150K-50-720B	5/6/2024	5/6/2026

Measurement Data:			Reading listed by margin.					Test Lead: Line			
#	Freq	Rdng	T1 T5	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
	MHz	dBμV	dB	dB	dB	dB	Table	dBμV	dBμV	dB	Ant
1	254.718k	46.8	+9.9 +0.1	+0.1	+0.0	+0.0	+0.0	56.9	61.6	-4.7	Line
2	254.718k	36.2	+9.9 +0.1	+0.1	+0.0	+0.0	+0.0	46.3	51.6	-5.3	Line
^	254.718k	48.1	+9.9 +0.1	+0.1	+0.0	+0.0	+0.0	58.2	51.6	+6.6	Line
4	758.671k	39.7	+9.9 +0.2	+0.1	+0.0	+0.1	+0.0	50.0	56.0	-6.0	Line
5	4.237M	29.0	+9.9 +0.1	+0.2	+0.1	+0.1	+0.0	39.4	46.0	-6.6	Line
6	2.485M	39.0	+9.9 +0.1	+0.1	+0.0	+0.1	+0.0	49.2	56.0	-6.8	Line
7	1.494M	38.2	+9.9 +0.1	+0.1	+0.0	+0.1	+0.0	48.4	56.0	-7.6	Line
8	3.501M	36.2	+9.9 +0.1	+0.2	+0.1	+0.1	+0.0	46.6	56.0	-9.4	Line
9	758.671k	26.2	+9.9 +0.2	+0.1	+0.0	+0.1	+0.0	36.5	46.0	-9.5	Line
^	758.671k	41.9	+9.9 +0.2	+0.1	+0.0	+0.1	+0.0	52.2	46.0	+6.2	Line
11	1.494M	25.7	+9.9 +0.1	+0.1	+0.0	+0.1	+0.0	35.9	46.0	-10.1	Line
^	1.494M	41.0	+9.9 +0.1	+0.1	+0.0	+0.1	+0.0	51.2	46.0	+5.2	Line
13	2.744M	25.6	+9.9 +0.1	+0.1	+0.0	+0.1	+0.0	35.8	46.0	-10.2	Line
14	3.739M	34.7	+9.9 +0.1	+0.2	+0.1	+0.1	+0.0	45.1	56.0	-10.9	Line
15	4.041M	34.1	+9.9 +0.1	+0.2	+0.1	+0.1	+0.0	44.5	56.0	-11.5	Line
16	4.237M	33.9	+9.9 +0.1	+0.2	+0.1	+0.1	+0.0	44.3	56.0	-11.7	Line
^	4.237M	41.2	+9.9 +0.1	+0.2	+0.1	+0.1	+0.0	51.6	46.0	+5.6	Line
18	6.463M	37.8	+9.9 +0.1	+0.2	+0.1	+0.1	+0.0	48.2	60.0	-11.8	Line
19	2.485M	22.7	+9.9 +0.1	+0.1	+0.0	+0.1	+0.0	32.9	46.0	-13.1	Line
^	2.485M	41.1	+9.9 +0.1	+0.1	+0.0	+0.1	+0.0	51.3	46.0	+5.3	Line
21	3.739M	22.2	+9.9 +0.1	+0.2	+0.1	+0.1	+0.0	32.6	46.0	-13.4	Line
^	3.739M	42.0	+9.9 +0.1	+0.2	+0.1	+0.1	+0.0	52.4	46.0	+6.4	Line

23	2.744M	31.3	+9.9 +0.1	+0.1	+0.0	+0.1	+0.0	41.5	56.0	-14.5	Line
^	2.744M	36.6	+9.9 +0.1	+0.1	+0.0	+0.1	+0.0	46.8	46.0	+0.8	Line
25	3.501M	20.9	+9.9 +0.1	+0.2	+0.1	+0.1	+0.0	31.3	46.0	-14.7	Line
^	3.501M	39.8	+9.9 +0.1	+0.2	+0.1	+0.1	+0.0	50.2	46.0	+4.2	Line
27	6.463M	24.3	+9.9 +0.1	+0.2	+0.1	+0.1	+0.0	34.7	50.0	-15.3	Line
^	6.463M	41.7	+9.9 +0.1	+0.2	+0.1	+0.1	+0.0	52.1	50.0	+2.1	Line
29	4.041M	20.2	+9.9 +0.1	+0.2	+0.1	+0.1	+0.0	30.6	46.0	-15.4	Line
^	4.041M	39.1	+9.9 +0.1	+0.2	+0.1	+0.1	+0.0	49.5	46.0	+3.5	Line



Test Location: CKC Laboratories, Inc. • 1120 Fulton Pl • Fremont, CA 94539 • (510) 249-1170
 Customer: **Tonal**
 Specification: **15.207 AC Mains - Average**
 Work Order #: **110285** Date: 10/17/2024
 Test Type: **Conducted Emissions** Time: 14:16:33
 Tested By: Hieu Song Nguyenpham Sequence#: 171
 Software: EMITest 5.03.20 120V 60Hz

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Conducted Emission Frequency Range: 150kHz to 30MHz Test Environment Conditions: Temperature: 21.6°C Humidity: 49% Atmospheric Pressure: 101.4kPa Highest Generation Frequency: 5.825GHz Test Method: ANSI C63.10 (2020) The unit is mounted to a floor standing rack as to simulate typical wall mounted setup. It is set in a testing mode, lifting a weight on a loop. Video and Camera are On. All WIFI and Bluetooth modules are on. Modification #1 was in place during testing.

Total WO#: 110285 Sequence#: 171 Date: 11/06/2024
15.207 AC Mains - Average Test Lead: 120V 60Hz Neutral

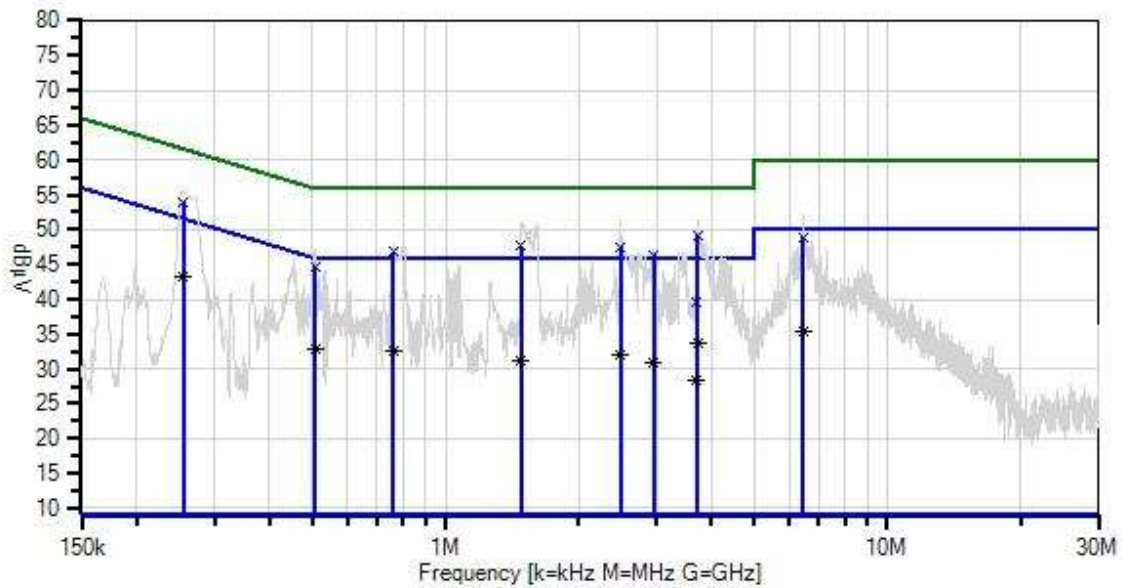

— Sweep Data
x QP Readings
Software Version: 5.03.20
— Readings
* Average Readings
— 1 - 15.207 AC Mains - Average
o Peak Readings
▲ Ambient
— 2 - 15.207 AC Mains - Quasi-peak

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP01211	Attenuator	23-10-34	12/2/2022	12/2/2024
T2	ANP00880	Cable	RG214U	3/26/2024	3/26/2026
T3	ANP06691	Cable	PE3062-180	3/20/2024	3/20/2026
	AN03814	50uH LISN-1PH-Line (dB)	NSLK 8126	1/4/2023	1/4/2025
T4	AN03814	50uH LISN-1PH-Neutral (dB)	NSLK 8126	1/4/2023	1/4/2025
	AN02660	Spectrum Analyzer	E4446A	12/6/2022	12/6/2024
T5	ANP05258	High Pass Filter	HE9615-150K-50-720B	5/6/2024	5/6/2026

Measurement Data:


Reading listed by margin.

Test Lead: Neutral


#	Freq MHz	Rdng dBμV	T1 T5 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	3.722M	38.8	+9.9 +0.1	+0.2	+0.1	+0.1	+0.0	49.2	56.0	-6.8	Neutr
2	255.445k	44.0	+9.8 +0.1	+0.1	+0.0	+0.0	+0.0	54.0	61.6	-7.6	Neutr
3	255.445k	33.3	+9.8 +0.1	+0.1	+0.0	+0.0	+0.0	43.3	51.6	-8.3	Neutr
^	255.445k	44.9	+9.8 +0.1	+0.1	+0.0	+0.0	+0.0	54.9	51.6	+3.3	Neutr
5	1.485M	37.4	+9.9 +0.1	+0.1	+0.0	+0.1	+0.0	47.6	56.0	-8.4	Neutr
6	2.489M	37.3	+9.9 +0.1	+0.1	+0.0	+0.1	+0.0	47.5	56.0	-8.5	Neutr
7	761.580k	36.7	+9.9 +0.2	+0.1	+0.0	+0.0	+0.0	46.9	56.0	-9.1	Neutr
8	2.961M	36.2	+9.9 +0.1	+0.1	+0.0	+0.1	+0.0	46.4	56.0	-9.6	Neutr
9	6.449M	38.5	+9.9 +0.1	+0.2	+0.1	+0.1	+0.0	48.9	60.0	-11.1	Neutr
10	506.032k	34.5	+9.9 +0.2	+0.1	+0.0	+0.0	+0.0	44.7	56.0	-11.3	Neutr
11	3.722M	23.3	+9.9 +0.1	+0.2	+0.1	+0.1	+0.0	33.7	46.0	-12.3	Neutr
^	3.722M	42.2	+9.9 +0.1	+0.2	+0.1	+0.1	+0.0	52.6	46.0	+6.6	Neutr
13	506.032k	22.6	+9.9 +0.2	+0.1	+0.0	+0.0	+0.0	32.8	46.0	-13.2	Neutr
^	506.032k	38.9	+9.9 +0.2	+0.1	+0.0	+0.0	+0.0	49.1	46.0	+3.1	Neutr
15	761.580k	22.4	+9.9 +0.2	+0.1	+0.0	+0.0	+0.0	32.6	46.0	-13.4	Neutr
^	761.580k	39.4	+9.9 +0.2	+0.1	+0.0	+0.0	+0.0	49.6	46.0	+3.6	Neutr
17	2.489M	21.8	+9.9 +0.1	+0.1	+0.0	+0.1	+0.0	32.0	46.0	-14.0	Neutr
^	2.489M	41.5	+9.9 +0.1	+0.1	+0.0	+0.1	+0.0	51.7	46.0	+5.7	Neutr
19	6.449M	25.0	+9.9 +0.1	+0.2	+0.1	+0.1	+0.0	35.4	50.0	-14.6	Neutr
^	6.449M	42.2	+9.9 +0.1	+0.2	+0.1	+0.1	+0.0	52.6	50.0	+2.6	Neutr
21	1.485M	21.0	+9.9 +0.1	+0.1	+0.0	+0.1	+0.0	31.2	46.0	-14.8	Neutr
^	1.485M	41.5	+9.9 +0.1	+0.1	+0.0	+0.1	+0.0	51.7	46.0	+5.7	Neutr

23	2.961M	20.6	+9.9	+0.1	+0.0	+0.1	+0.0	30.8	46.0	-15.2	Neutr
Ave			+0.1								
^	2.961M	38.9	+9.9	+0.1	+0.0	+0.1	+0.0	49.1	46.0	+3.1	Neutr
			+0.1								
25	3.705M	29.2	+9.9	+0.2	+0.1	+0.1	+0.0	39.6	56.0	-16.4	Neutr
QP			+0.1								
26	3.705M	17.9	+9.9	+0.2	+0.1	+0.1	+0.0	28.3	46.0	-17.7	Neutr
Ave			+0.1								
^	3.705M	39.7	+9.9	+0.2	+0.1	+0.1	+0.0	50.1	46.0	+4.1	Neutr
			+0.1								

Test Setup Photo(s)

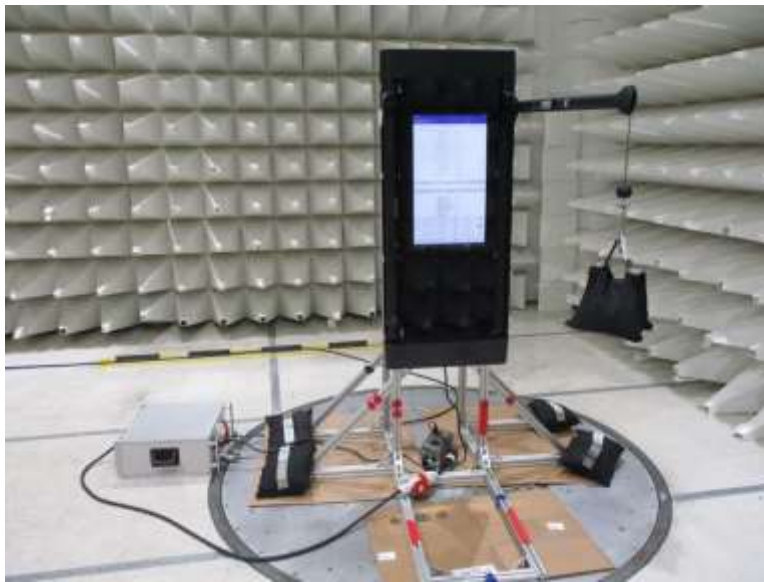

Front View

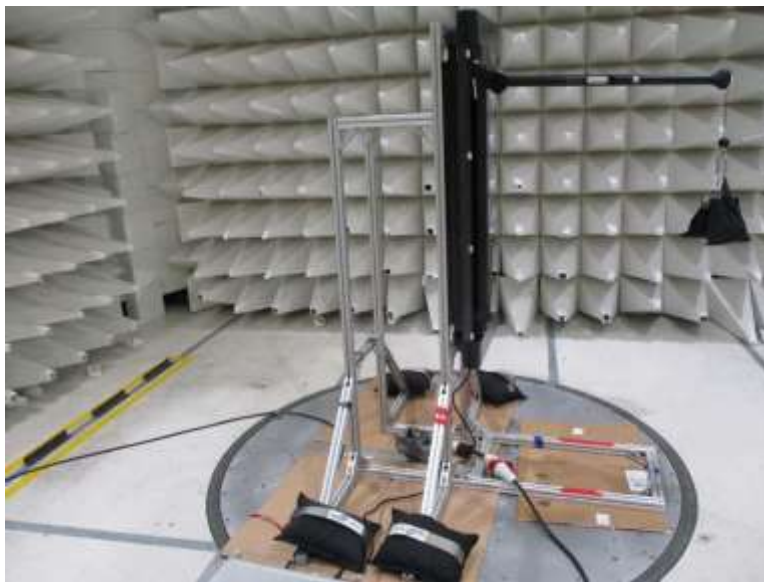

Side View

APPENDIX A: MODIFICATIONS MADE DURING TESTING

This list is a summary of the conditions noted for or modifications made to the equipment during testing.

Summary of Conditions
Modification #1 (Mod#1) = Added a ferrite (Würth: 742 712 21) on lower resistor wire. Green Resistor

Modifications listed above must be incorporated into all production units.



Modification #1

Supplemental Information

Measurement Uncertainty

Uncertainty Value	Parameter
5.77 dB	Radiated Emissions
0.673 dB	RF Conducted Measurements
5.77×10^{-10}	Frequency Deviation
0.00005 s	Time Deviation
3.18 dB	Mains Conducted Emissions

Uncertainties reported are worst case for all CKC Laboratories' sites and represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of $k=2$. Compliance is deemed to occur provided measurements are below the specified limits.

Emissions Test Details

TESTING PARAMETERS

Unless otherwise indicated, the following configuration parameters are used for equipment setup: The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in dB μ V/m, the spectrum analyzer reading in dB μ V was corrected by using the following formula. This reading was then compared to the applicable specification limit. Individual measurements were compared with the displayed limit value in the margin column. The margin was calculated based on subtracting the limit value from the corrected measurement value; a positive margin represents a measurement exceeding the limit, while a negative margin represents a measurement less than the limit.

SAMPLE CALCULATIONS		
	Meter reading	(dB μ V)
+	Antenna Factor	(dB/m)
+	Cable Loss	(dB)
-	Distance Correction	(dB)
-	Preamplifier Gain	(dB)
=	Corrected Reading	(dB μ V/m)

TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. Unless otherwise specified, the following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used.

MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	9 kHz	150 kHz	200 Hz
RADIATED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz
RADIATED EMISSIONS	1000 MHz	>1 GHz	1 MHz

SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "positive peak" detector mode. Whenever a "quasi-peak" or "average" reading was recorded, the measurement was annotated with a "QP" or an "Ave" on the appropriate rows of the data sheets. In cases where quasi-peak or average limits were employed and data exists for multiple measurement types for the same frequency then the peak measurement was retained in the report for reference, however the numbering for the affected row was removed and an arrow or caret ("^") was placed in the far left-hand column indicating that the row above takes precedence for comparison to the limit. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

Peak

In this mode, the spectrum analyzer or receiver recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature called "peak hold," the measurement device had the ability to measure intermittent or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

Quasi-Peak

Quasi-peak measurements were taken using the quasi-peak detector when the true peak values exceeded or were within 2 dB of a quasi-peak specification limit. Additional QP measurements may have been taken at the discretion of the operator.

Average

Average measurements were taken using the average detector when the true peak values exceeded or were within 2 dB of an average specification limit. Additional average measurements may have been taken at the discretion of the operator. If the specification or test procedure requires trace averaging, then the averaging was performed using 100 samples or as required by the specification. All other average measurements are performed using video bandwidth averaging. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point the measuring device is set into the linear mode and the scan time is reduced.

End of Report