



REPORT No.: SZ23070010W03

TEST REPORT

APPLICANT : Shenzhen Xhorse Electronics Co., Ltd.

PRODUCT NAME : MINI OBD TOOL

MODEL NAME : XDMOT

BRAND NAME : Xhorse

FCC ID : 2A14T-XDMOT

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2023-07-20

TEST DATE : 2023-07-25 to 2023-08-24

ISSUE DATE : 2023-09-07



Edited by:

Su Xiaoxian

Su Xiaoxian (Rapporteur)

Approved by:

Shen Junsheng

Shen Junsheng (Supervisor)

NOTE: This document is issued by ShenzhenMorlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

ShenzhenMorlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Summary of Test Result	4
1.1. Testing Applied Standards	5
1.2. Test Equipment List	6
1.3. Measurement Uncertainty	8
1.4. Testing Laboratory	8
2. General Description	9
2.1. Information of Applicant and Manufacturer	9
2.2. Information of EUT	9
2.3. Channel List of EUT	10
2.4. Test Configuration of EUT	11
2.5. Test Conditions	11
2.6. Test Setup Layout Diagram	12
3. Test Results	15
3.1. Antenna Requirement	15
3.2. Duty Cycle of Test Signal	16
3.3. Maximum Peak and Average Conducted Output Power	17
3.4. 6 dB Bandwidth	18
3.5. Conducted Spurious Emissions and Band Edge	19
3.6. Power Spectral Density	20
3.7. Conducted Emission	21
3.8. Restricted Frequency Bands	22
3.9. Radiated Emission	23
Annex A Test Data and Result	25



REPORT No.: SZ23070010W03

Change History		
Version	Date	Reason for change
1.0	2023-09-07	First edition



1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	N/A	Duty Cycle of Test Signal	Jul. 26, 2023	He Yuyang	PASS	No deviation
3	15.247(b)	Maximum Peak Conducted Output Power	Aug. 28, 2023	He Yuyang	PASS	No deviation
4	15.247(b)	Maximum Average Conducted Output Power	Aug. 28, 2023	He Yuyang	PASS	No deviation
5	15.247(a)	Bandwidth	Jul. 26, 2023	He Yuyang	PASS	No deviation
6	15.247(d)	Conducted Spurious Emission and Band Edge	Jul. 26, 2023	He Yuyang	PASS	No deviation
7	15.247(e)	Power Spectral Density	Jul. 26, 2023	He Yuyang	PASS	No deviation
8	15.207	Conducted Emission	Jul. 27, 2023	Fan Zehang	PASS	No deviation
9	15.247(d)	Restricted Frequency Bands	Aug. 13, 2023	Su Zhan	PASS	No deviation
10	15.209, 15.247(d)	Radiated Emission	Aug. 24, 2023	Su Zhan	PASS	No deviation

Note 1: The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013 and KDB558074 D01 v05r02.

Note 2: Additions to, deviation, or exclusions from the method shall be judged in the “method determination” column of add, deviate or exclude from the specific method shall be explained in the “Remark” of the above table.

Note 3: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.



1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C Radio Frequency Devices



1.2. Test Equipment List

1.2.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2023.02.27	2024.02.26
Power Sensor	MY54180008	U2021XA	Agilent	2022.10.11	2023.10.10
Attenuator	MTJ6004-20	VAT-10+	MTJ Cooperation	N/A	N/A
RF Cable (30 MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2023.02.09	2024.02.08
LISN	8127449	NSLK 8127	Schwarzbeck	2023.02.21	2024.02.20
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2023.06.27	2024.06.26
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	N/A	N/A

1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
MorlabEMCR V1.2	Morlab	V1.0
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**1.2.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2023.06.21	2024.06.20
Test Antenna-Bi-Log	9163-519	VULB 9163	Schwarzbeck	2022.05.25	2025.05.24
Test Antenna-Loop	1519-022	FMZB1519	Schwarzbeck	2022.02.11	2025.02.10
Test Antenna-Horn	01774	BBHA 9120D	Schwarzbeck	2022.07.13	2025.07.12
Test Antenna-Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2022.07.14	2025.07.13
Preamplifier (10MHz–6GHz)	46732	S10M100L38 02	LUCIX CORP.	2023.06.26	2024.06.27
Preamplifier (2GHz–18 GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2023.06.26	2024.06.27
Preamplifier (18 GHz–40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18 GHz)	MRE001	PE330	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18 GHz)	MRE002	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18 GHz)	MRE003	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-K K-0.5	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-K KF-2	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18 GHz)	22120181	QA500-18-N N-5	Qualwave	2023.07.04	2024.07.03
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Peak Output Power	± 2.22 dB	Confidence levels of 95%
Power Spectral Density	± 2.22 dB	Confidence levels of 95%
Bandwidth	$\pm 5\%$	Confidence levels of 95%
Conducted Spurious Emission	± 2.77 dB	Confidence levels of 95%
Restricted Frequency Bands	$\pm 5\%$	Confidence levels of 95%
Radiated Emission	± 2.95 dB	Confidence levels of 95%
Conducted Emission	± 2.44 dB	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone	+86 755 36698555
Facsimile	+86 755 36698525
FCC Designation Number	CN1192
FCC Test Firm Registration Number	226174



2. General Description

2.1. Information of Applicant and Manufacturer

Applicant	Shenzhen Xhorse Electronics Co., Ltd.
Applicant Address	Floor 28, Block A, Building NO.6, international innovation Valley, Nanshan District, Shenzhen
Manufacturer	Shenzhen Xhorse Electronics Co., Ltd.
Manufacturer Address	Floor 28, Block A, Building NO.6, international innovation Valley, Nanshan District, Shenzhen

2.2. Information of EUT

Product Name:	MINI OBD TOOL
Sample No.:	5#
Hardware Version:	1.0.2
Software Version:	3.0.9
Modulation Technology:	DSSS, OFDM
Modulation Type:	Refer to section1.3
Wireless Technology:	802.11b, 802.11g, 802.11n(HT20), 802.11n(HT40)
Operating Frequency Range:	2412 MHz–2472 MHz
Antenna Type:	FPC Antenna
Antenna Gain:	1.95dBi

Note 1: We use the dedicated software to control the EUT continuous transmission.

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant.



2.3.Channel List of EUT

Test Mode	Channel	Frequency (MHz)	Channel	Frequency (MHz)
802.11b/g/n(HT20)	1	2412	8	2447
	2	2417	9	2452
	3	2422	10	2457
	4	2427	11	2462
	5	2432	12	2467
	6	2437	13	2472
	7	2442		
Test Mode	Channel	Frequency (MHz)	Channel	Frequency (MHz)
802.11n(HT40)	3	2422	8	2447
	4	2427	9	2452
	5	2432	10	2457
	6	2437	11	2462
	7	2442		

Note 1: The black bold channels were selected for test.

2.4. Test Configuration of EUT

2.4.1. Modulation Type and Data Rate of EUT

Mode	Bandwidth (MHz)	Modulation Technology	Modulation Type	Data Rate	RU Size
802.11b	20	DSSS	DBPSK	1/2/5.5/11Mbps	N/A
			DQPSK		
			CCK		
802.11g	20	OFDM	BPSK	6/9/12/18/24/36/48/54 Mbps	N/A
			QPSK		
			16QAM		
			64QAM		
802.11n	20/40 (HT20/40)	OFDM	BPSK	MCS0~MCS7	N/A
			QPSK		
			16QAM		
			64QAM		

Note1: The worst-case mode(bold face) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.

Note2: The RF signal transmission of EUT is controlled by the build-in engineering mode which is provided by the manufacturer. The recorded power setting value is the maximum that the engineering mode has configuration during testing.


2.5. Test Conditions

Temperature (°C)	15–35
Relative Humidity (%)	30–60
Atmospheric Pressure (kPa)	86–106


2.6. Test Setup Layout Diagram

2.6.1. Conducted Measurement


Power item

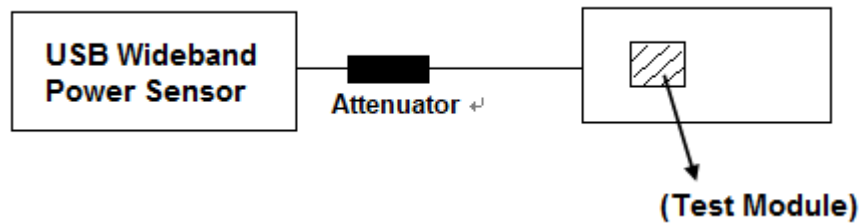

Other items

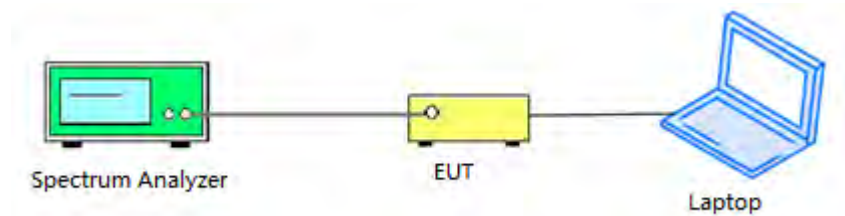


2.6.2. Conducted Emission Measurement

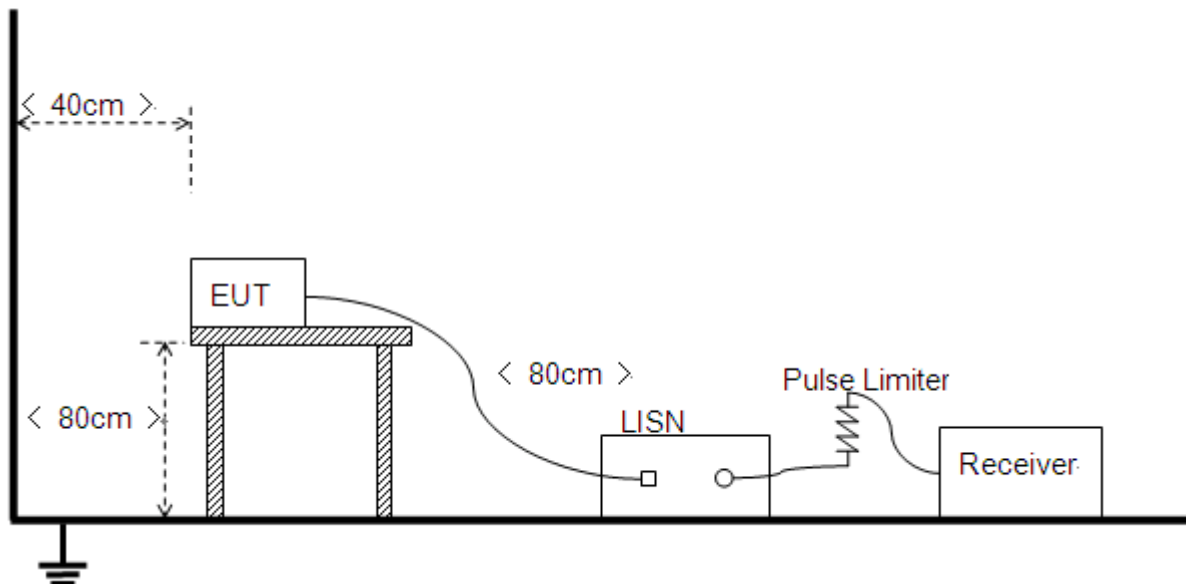


2.6.3.Radiation Measurement


1) For radiated emissions from 9 kHz to 30 MHz

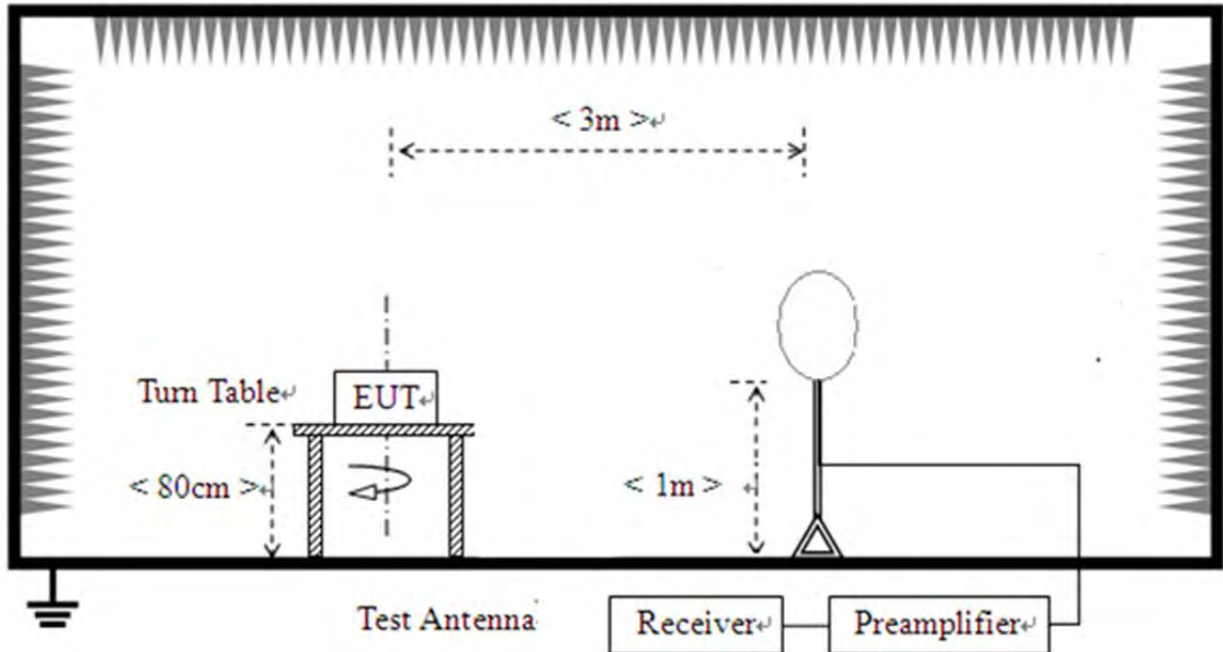

2) For radiated emissions from 30 MHz to 1 GHz

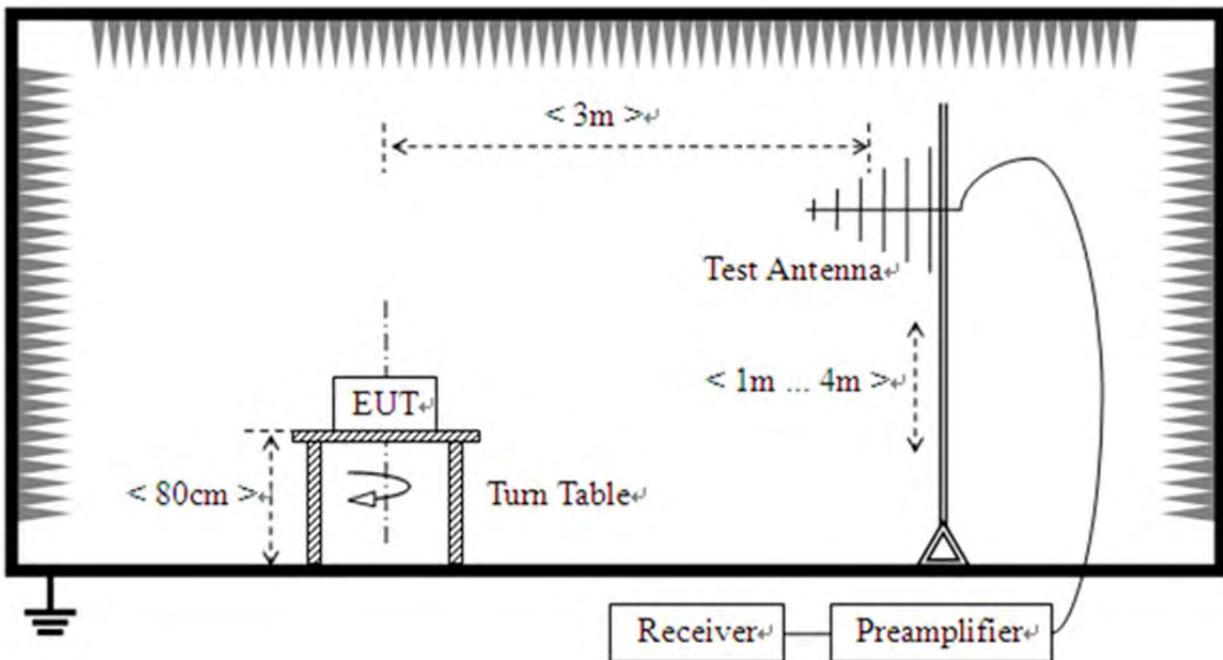

3) For radiated emissions above 1 GHz

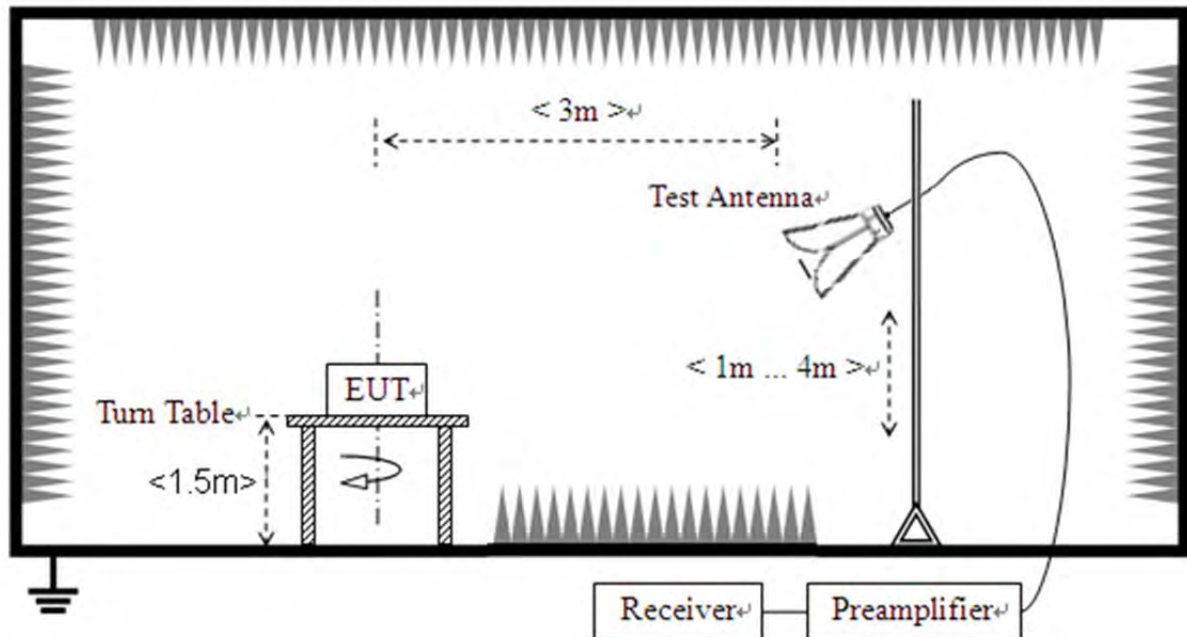



3. Test Results

3.1. Antenna Requirement

3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2. Test Result

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

3.2. Duty Cycle of Test Signal

3.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.2.2. Test Result

Refer to Annex A.1 in this report.



3.3. Maximum Peak and Average Conducted Output Power

3.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: The maximum conducted output power of the intentional radiator shall not exceed 1 Watt.

3.3.2. Test Procedures

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading.

3.3.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4. Test Result

Refer to Annex A.2 and A.3 in this report.



3.4.6 dB Bandwidth

3.4.1.Requirement

According to FCC section 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

3.4.1.Test Procedures

KDB 558074 Section 8.2 was used in order to prove compliance.

3.4.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.4.3.Test Result

Refer to Annex A.4 in this report.



3.5. Conducted Spurious Emissions and Band Edge

3.5.1. Requirement

According to FCC section 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.5.2. Test Procedures

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.

3.5.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.4. Test Result

Refer to Annex A.5 and A.6 in this report.

3.6. Power Spectral Density

3.6.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.6.2. Test Procedures

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to 1.5 times DTS
- c) Set RBW to 30 kHz
- d) Set VBW to 100 kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum amplitude level and recorded as PD
- j) Use below formula to calculate the Conducted PSD value that at specified RBW:

Conducted PSD = PD - 10lg (30 kHz/3 kHz)

3.6.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4. Test Result

Refer to Annex A.7 in this report.

3.7. Conducted Emission

3.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15–0.50	66 to 56	56 to 46
0.50–5	56	46
5–30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15–0.50MHz.

3.7.2. Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8 m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80 cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.7.3. Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.7.4. Test Result

Refer to Annex A.8 in this report.



3.8. Restricted Frequency Bands

3.8.1. Requirement

According to FCC section 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.8.2. Test Procedures

The EUT is located in a 3 m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3 m away from the EUT. Test Antenna height is varied from 1 m to 4 m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

3.8.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.8.4. Test Result

Refer to Annex A.9 in this report.

3.9. Radiated Emission

3.9.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100	3
88–216	150	3
216–960	200	3
Above 960	500	3

Note1: For above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Note2: For above 1000 MHz, limit field strength of harmonics: 54 dBuV/m@3 m (AV) and 74 dBuV/m@3 m (PK). In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).



3.9.2. Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1 GHz; 1.5 m above the ground plane for measurement above 1 GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30 MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9 kHz–90 kHz, 110 kHz–490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, the video band width is set to 3 MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.9.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.9.4. Test Result

Refer to Annex A.10 in this report.



Annex A Test Data and Result


A.1. Duty Cycle of Test Signal

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	Ant1	100	0	0
NVNT	b	2442	Ant1	100	0	0
NVNT	b	2472	Ant1	100	0	0
NVNT	g	2412	Ant1	100	0	0
NVNT	g	2442	Ant1	100	0	0
NVNT	g	2472	Ant1	100	0	0
NVNT	n20	2412	Ant1	100	0	0
NVNT	n20	2442	Ant1	100	0	0
NVNT	n20	2472	Ant1	100	0	0
NVNT	n40	2422	Ant1	100	0	0
NVNT	n40	2442	Ant1	100	0	0
NVNT	n40	2462	Ant1	100	0	0




Test Graphs

Duty Cycle NVNT b 2412 MHz Ant1

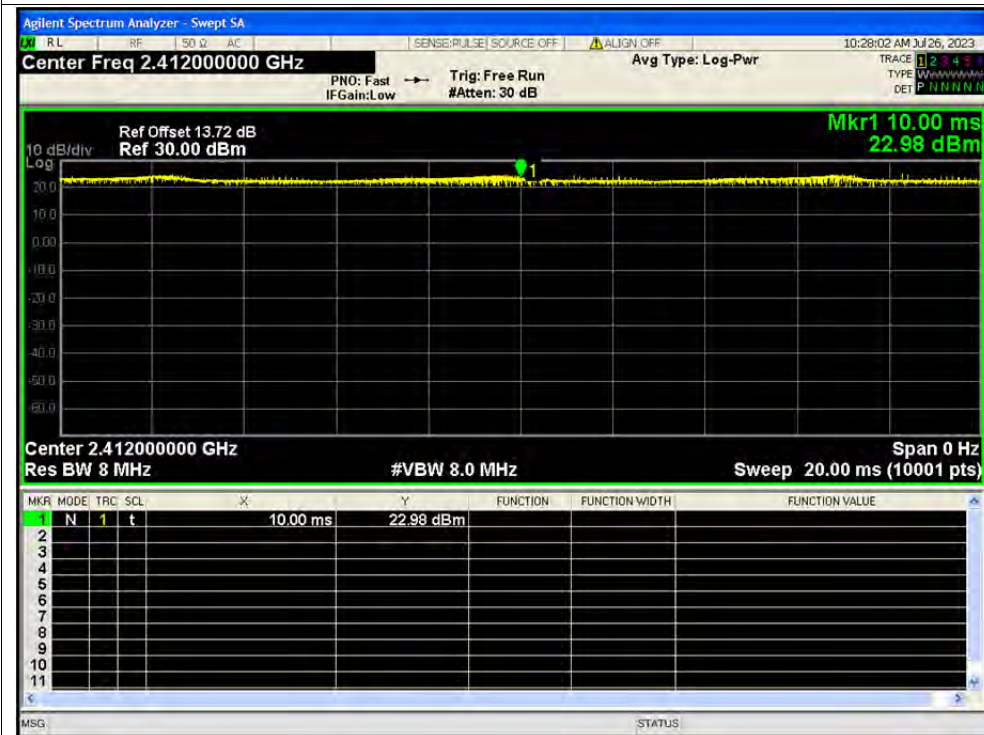


Duty Cycle NVNT b 2442 MHz Ant1

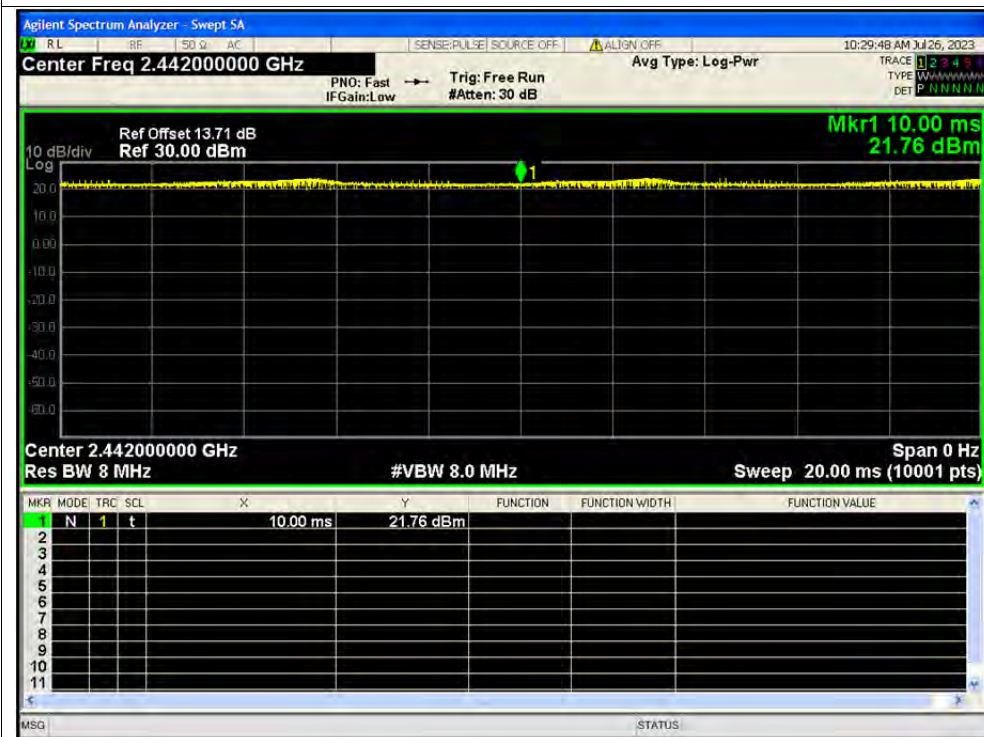




Duty Cycle NVNT b 2472 MHz Ant1

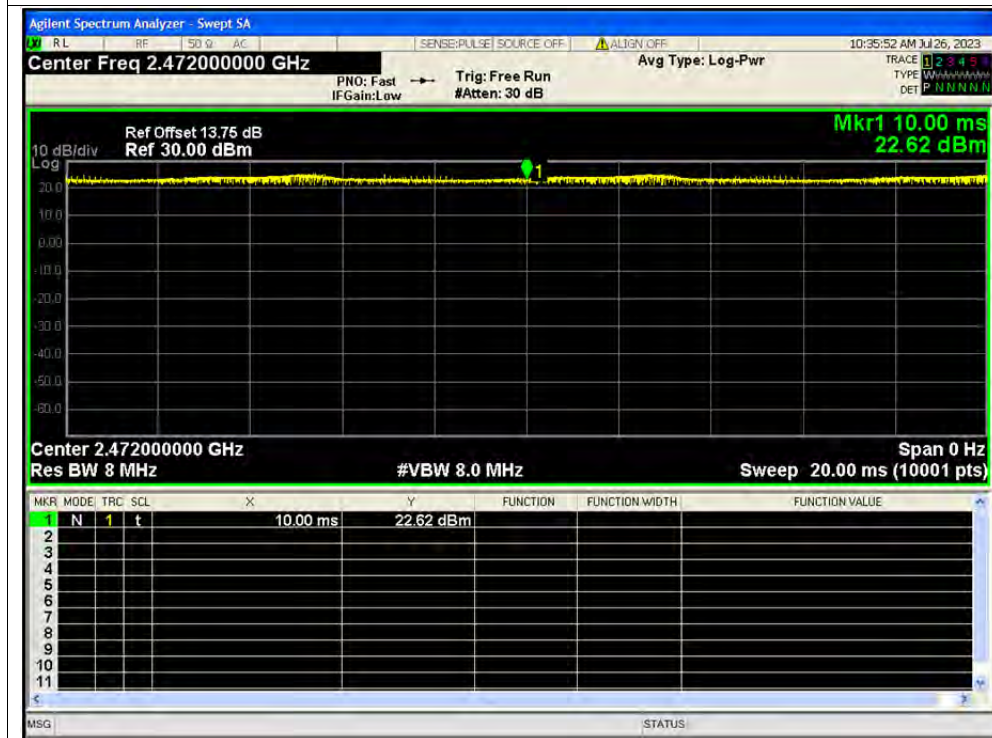


Duty Cycle NVNT g 2412 MHz Ant1

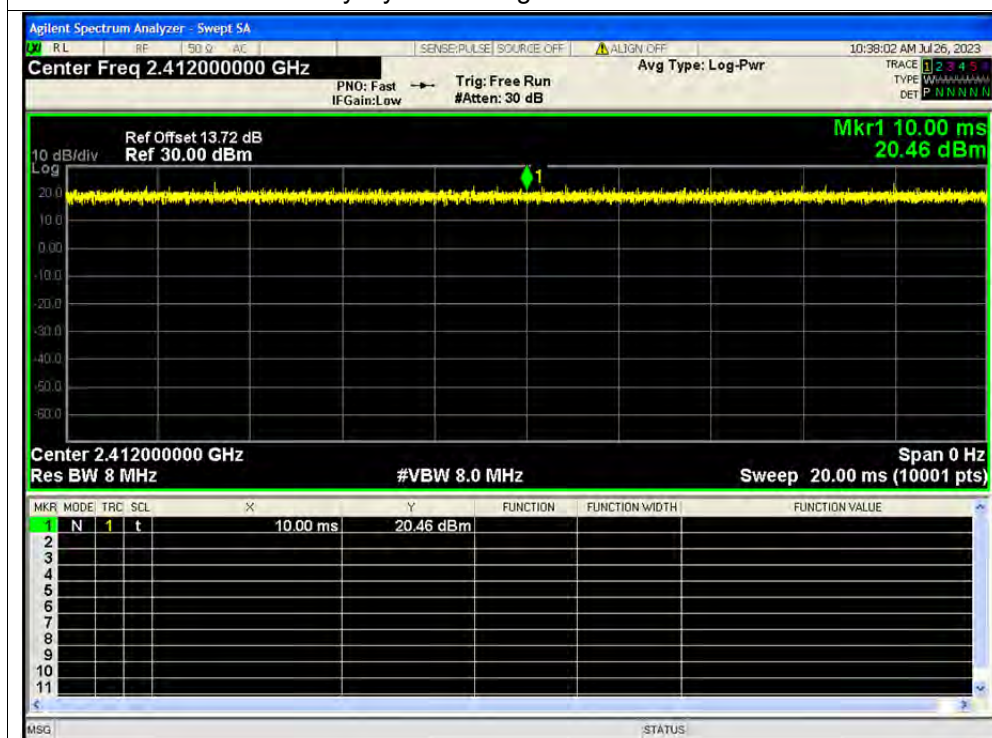




Duty Cycle NVNT g 2442 MHz Ant1

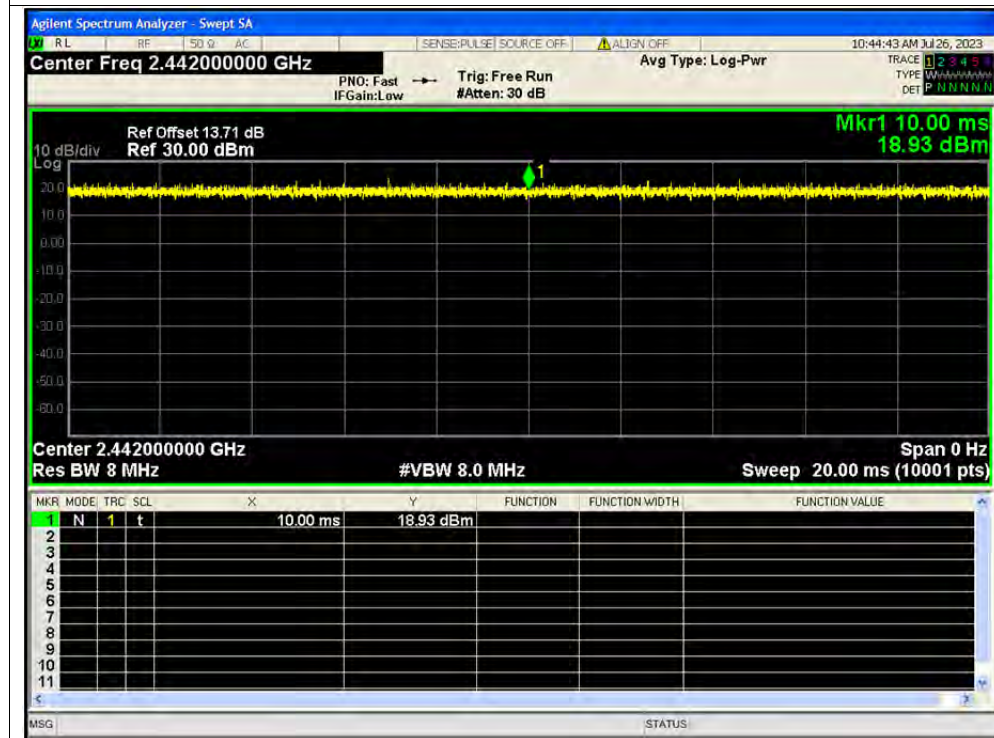


Duty Cycle NVNT g 2472 MHz Ant1

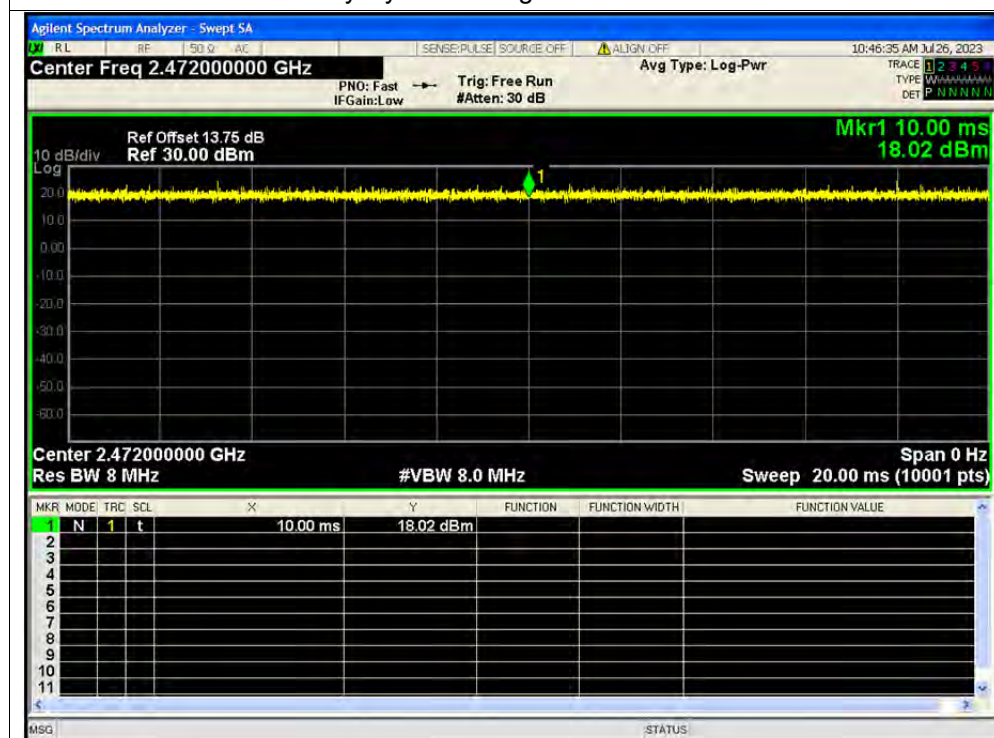




Duty Cycle NVNT n20 2412 MHz Ant1

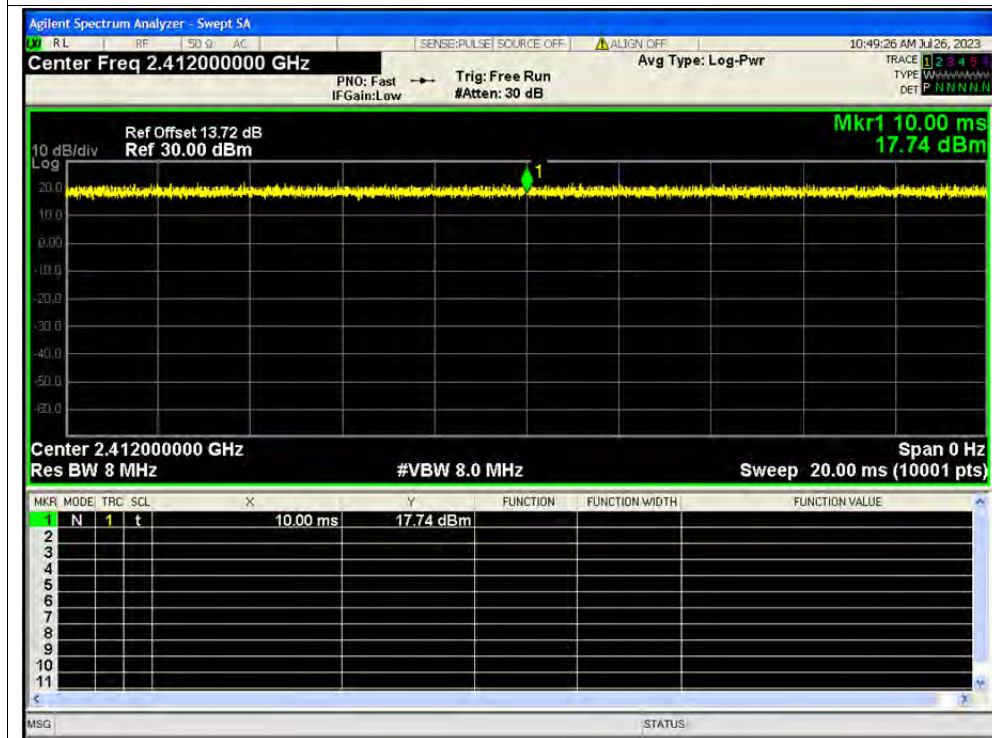


Duty Cycle NVNT n20 2442 MHz Ant1

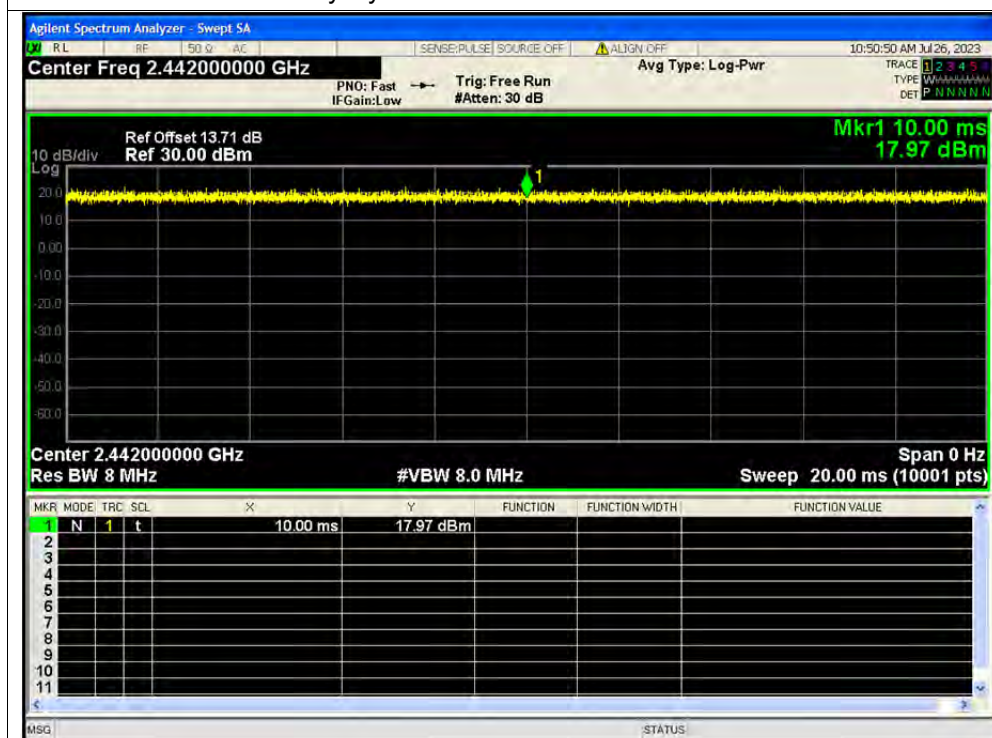




Duty Cycle NVNT n20 2472 MHz Ant1

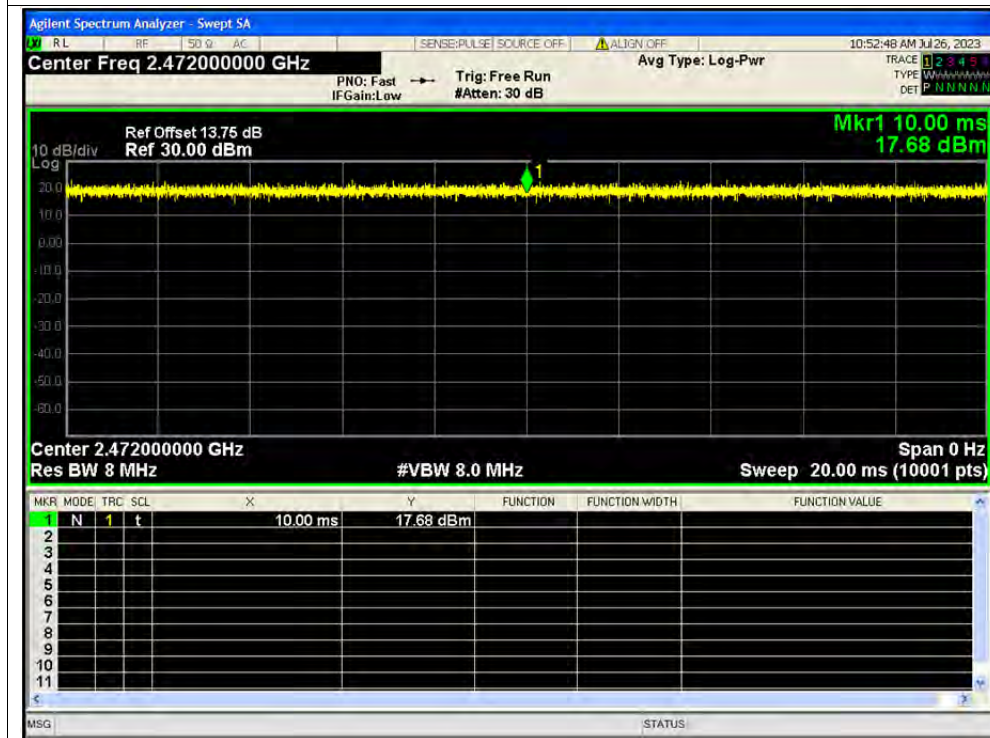


Duty Cycle NVNT n40 2422 MHz Ant1

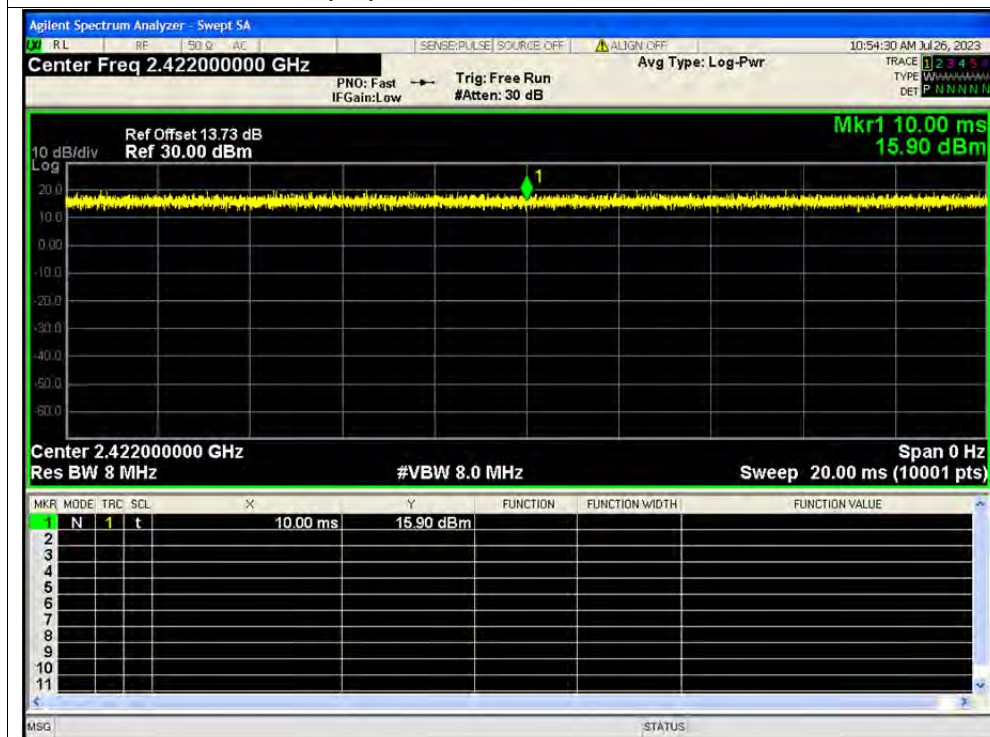




Duty Cycle NVNT n40 2442 MHz Ant1

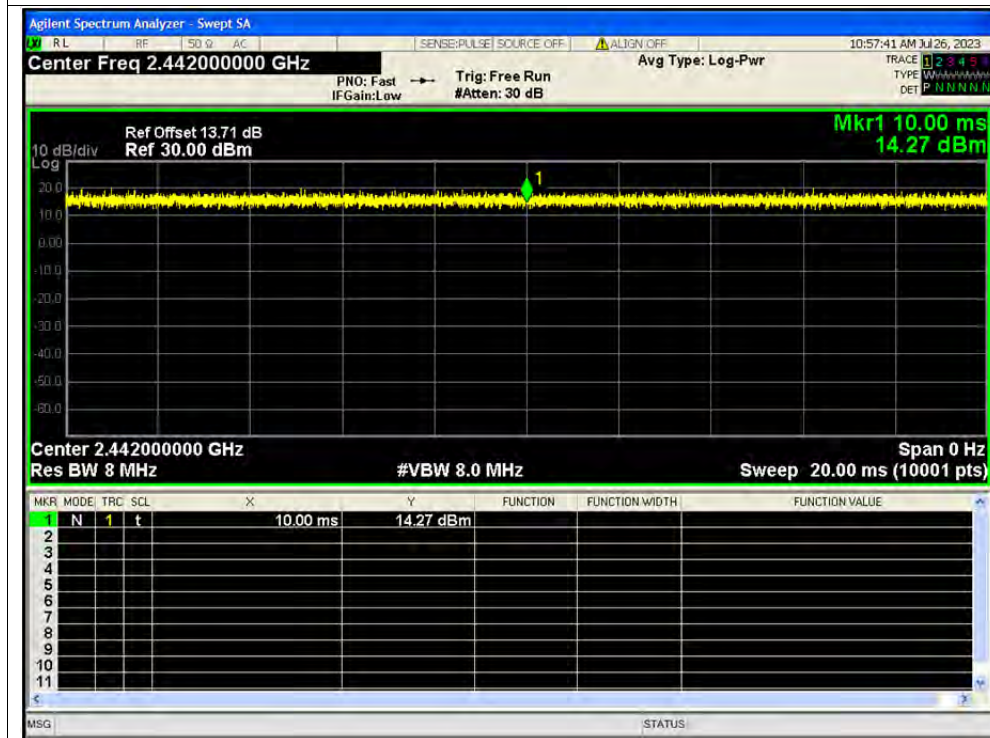

Duty Cycle NVNT n40 2462 MHz Ant1

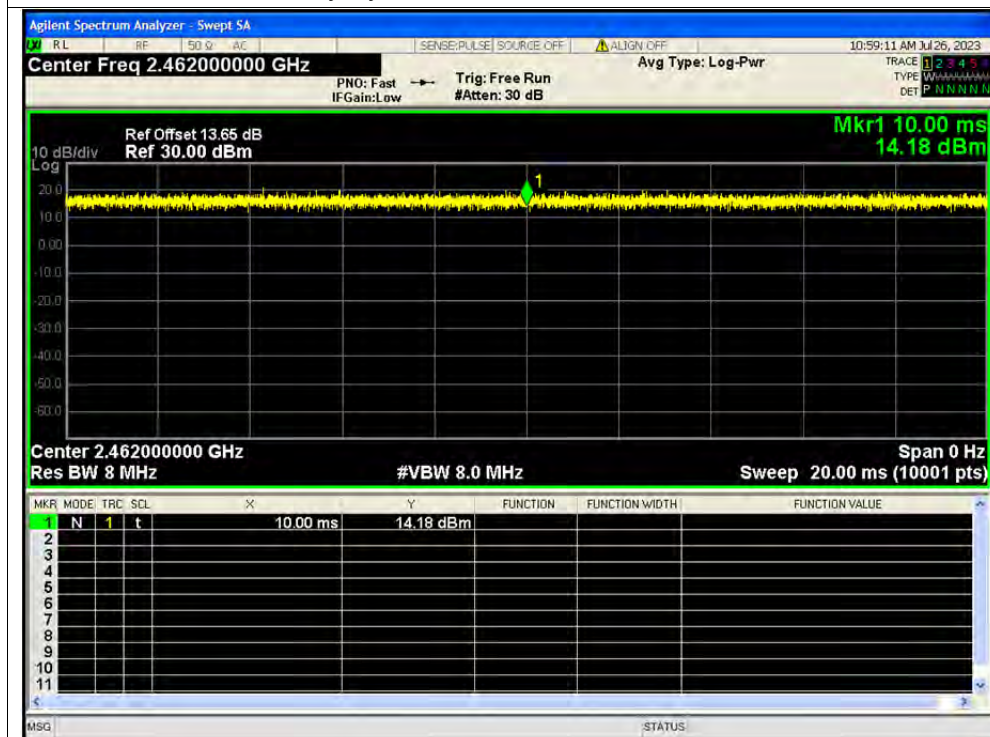


**A.2. Maximum Peak Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	b	2412	Ant1	5.39	0	5.39	0.00346	30	Pass
NVNT	b	2442	Ant1	5.69	0	5.69	0.00371	30	Pass
NVNT	b	2472	Ant1	5.97	0	5.97	0.00395	30	Pass
NVNT	g	2412	Ant1	14.07	0	14.07	0.02553	30	Pass
NVNT	g	2442	Ant1	14.2	0	14.2	0.0263	30	Pass
NVNT	g	2472	Ant1	14.17	0	14.17	0.02612	30	Pass
NVNT	n20	2412	Ant1	14.84	0	14.84	0.03048	30	Pass
NVNT	n20	2442	Ant1	14.92	0	14.92	0.03105	30	Pass
NVNT	n20	2472	Ant1	14.97	0	14.97	0.03141	30	Pass
NVNT	n40	2422	Ant1	17.15	0	17.15	0.05188	30	Pass
NVNT	n40	2442	Ant1	17.14	0	17.14	0.05176	30	Pass
NVNT	n40	2462	Ant1	16.96	0	16.96	0.04966	30	Pass




Test Graphs

Peak Power NVNT b 2412 MHz Ant1

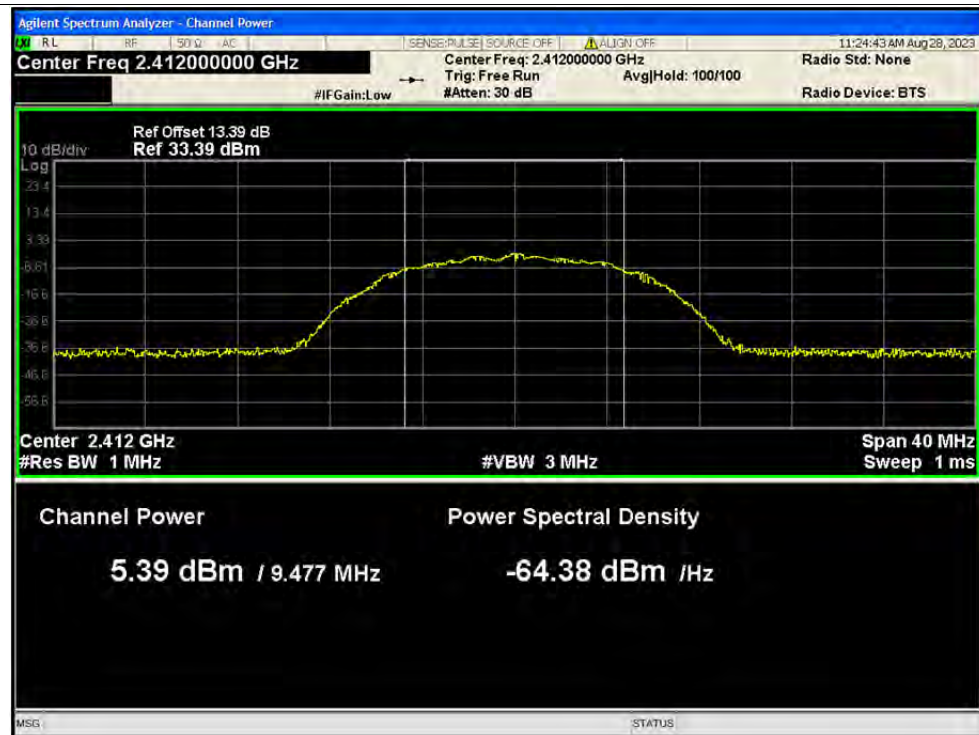


Peak Power NVNT b 2442 MHz Ant1

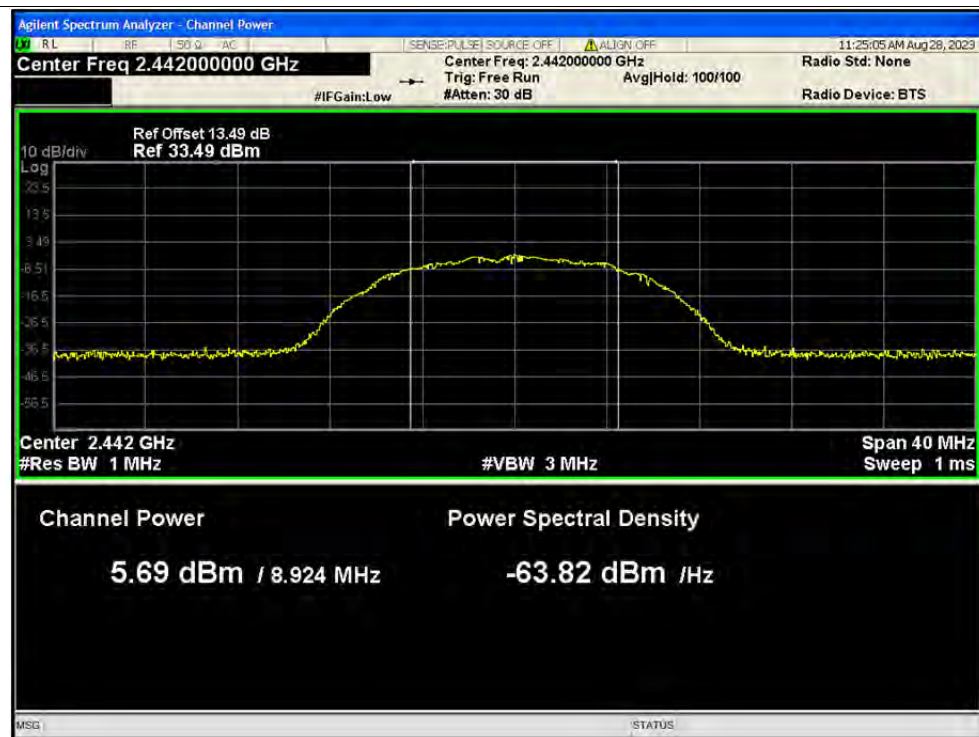





Peak Power NVNT b 2472 MHz Ant1

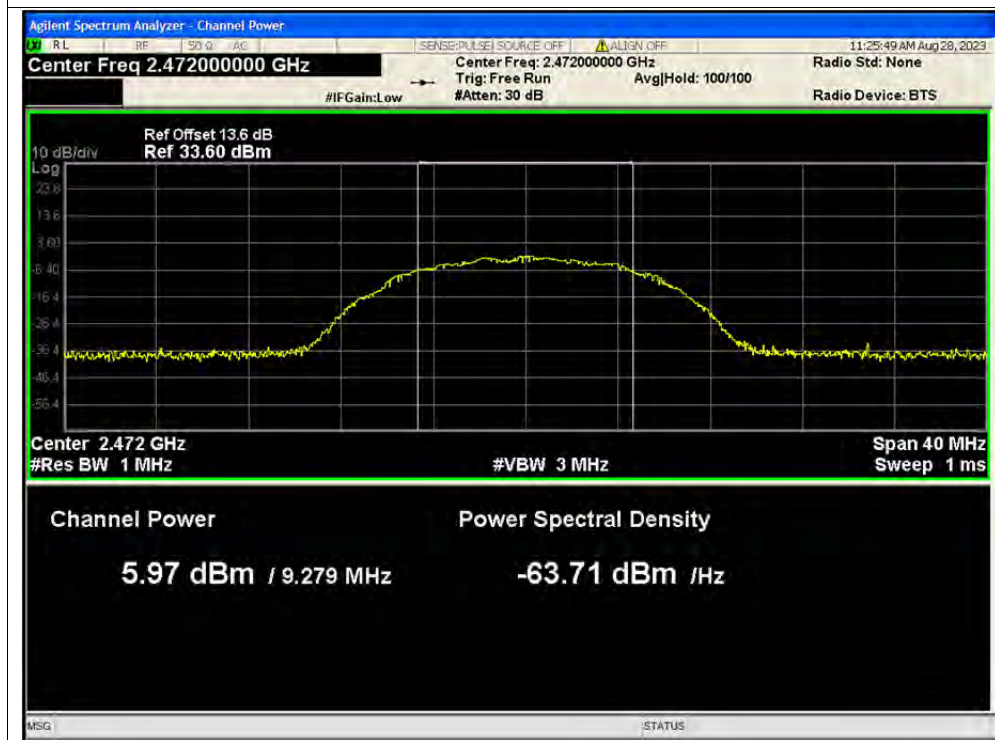


Peak Power NVNT g 2412 MHz Ant1

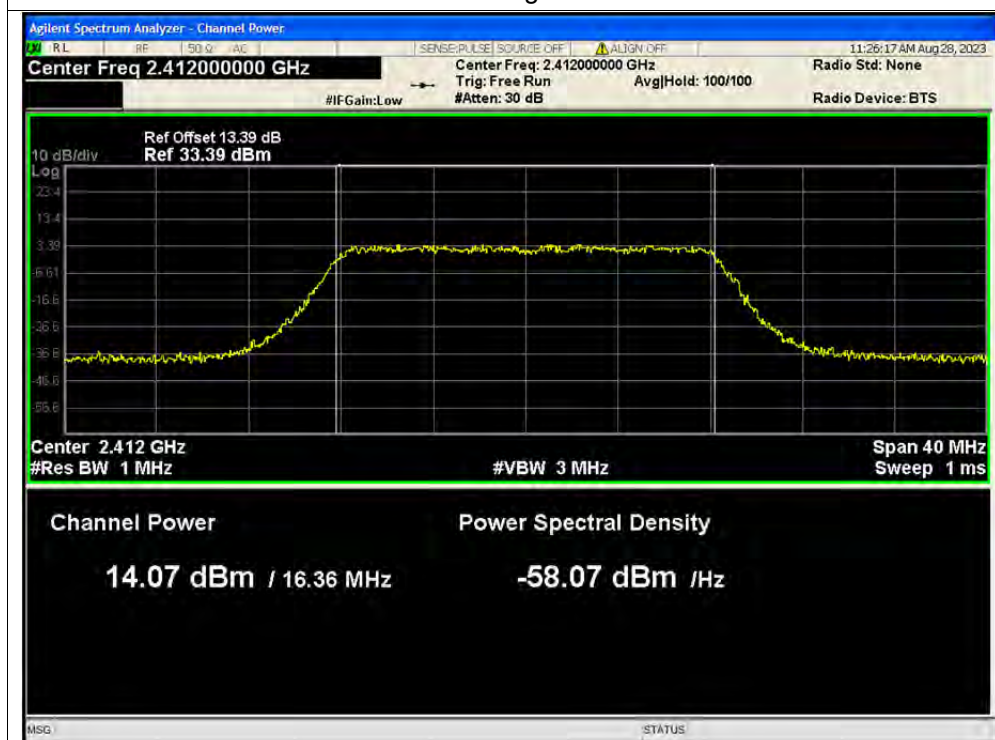


Peak Power NVNT g 2442 MHz Ant1

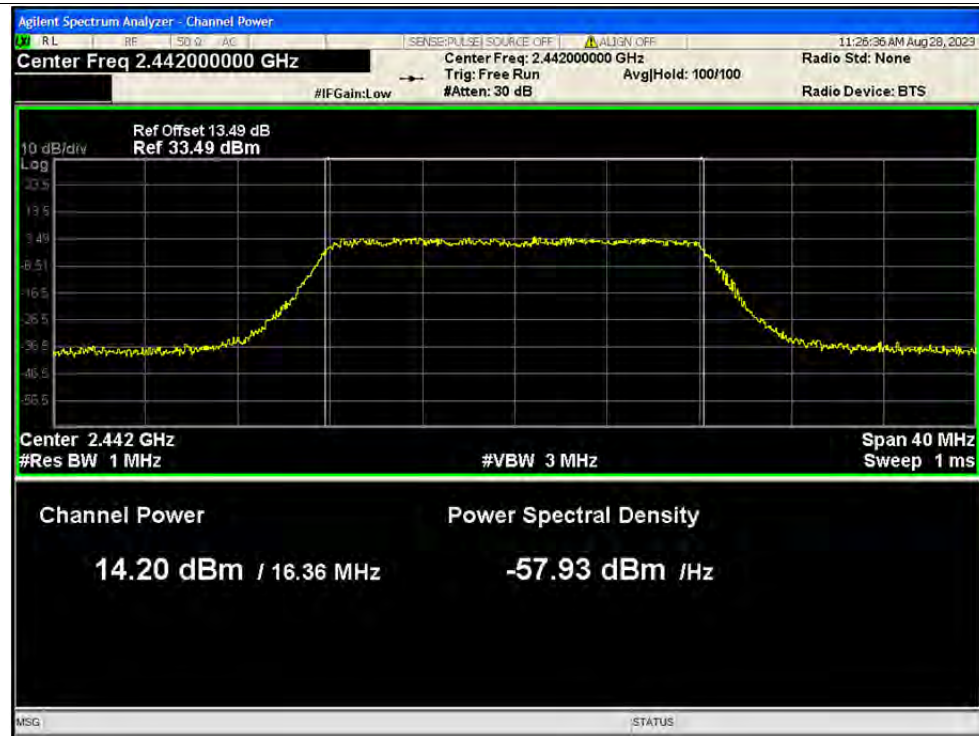


Peak Power NVNT g 2472 MHz Ant1

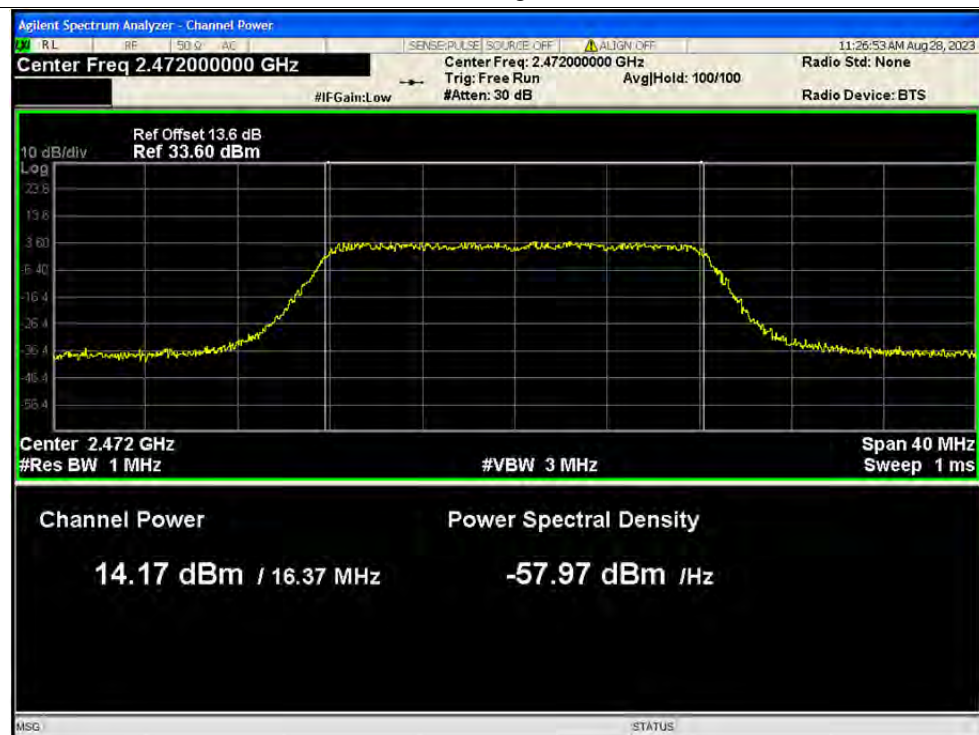


Peak Power NVNT n20 2412 MHz Ant1

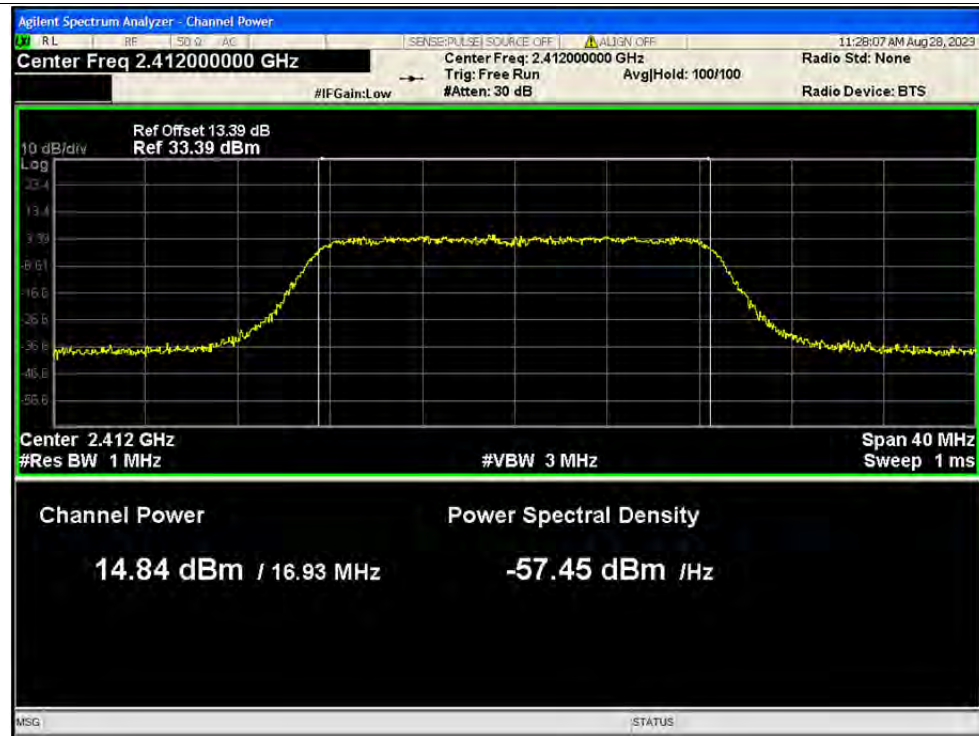


Peak Power NVNT n20 2442 MHz Ant1

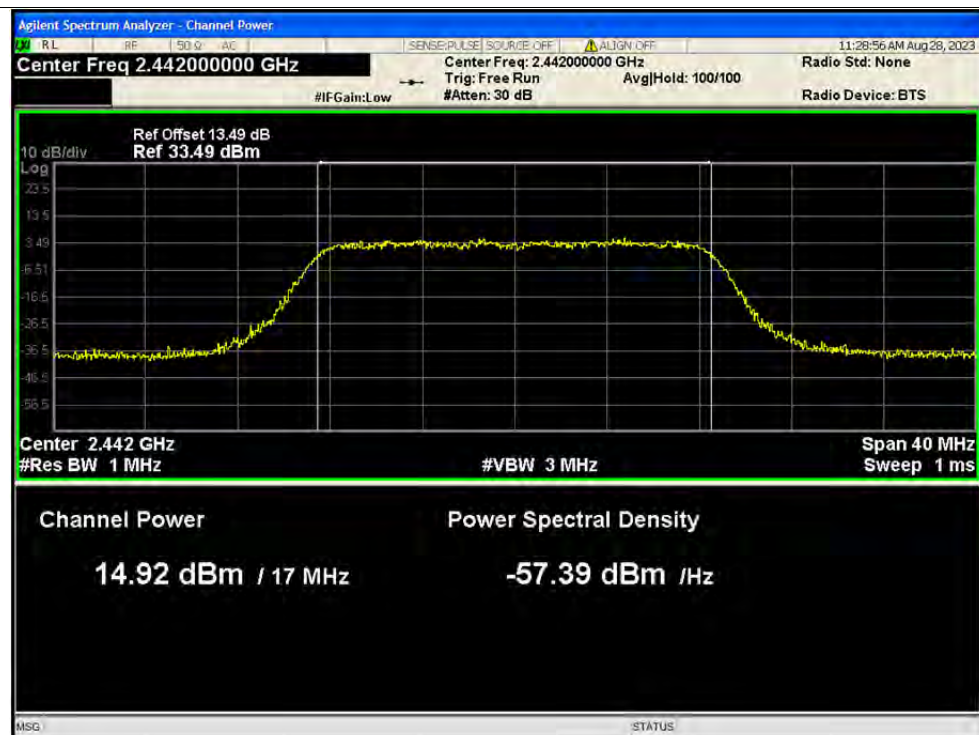


Peak Power NVNT n20 2472 MHz Ant1

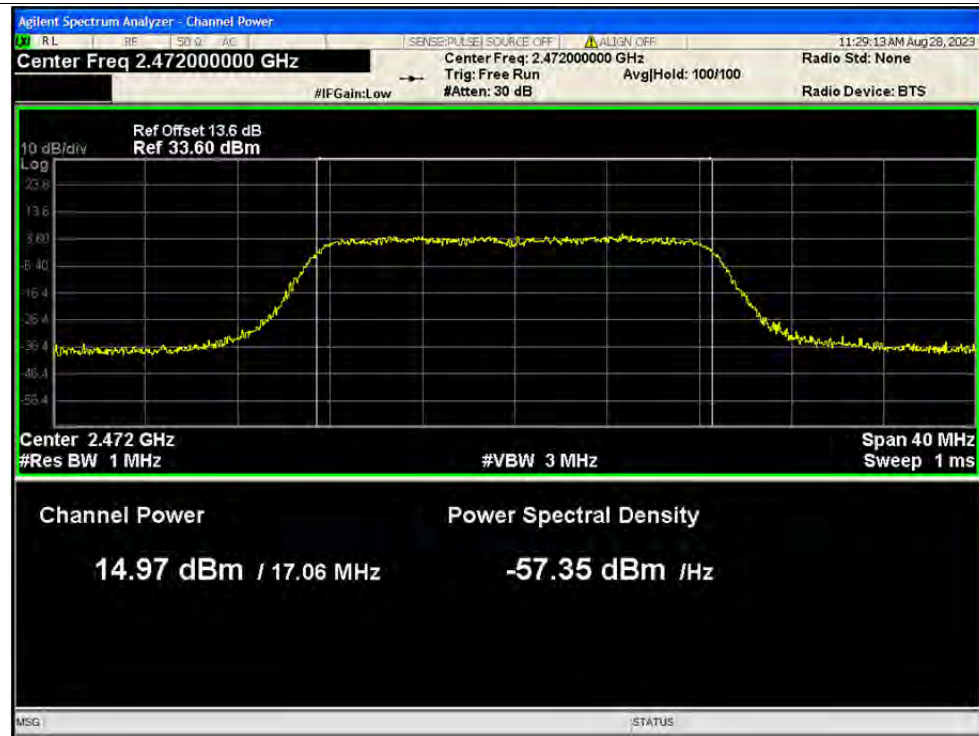


Peak Power NVNT n40 2422 MHz Ant1

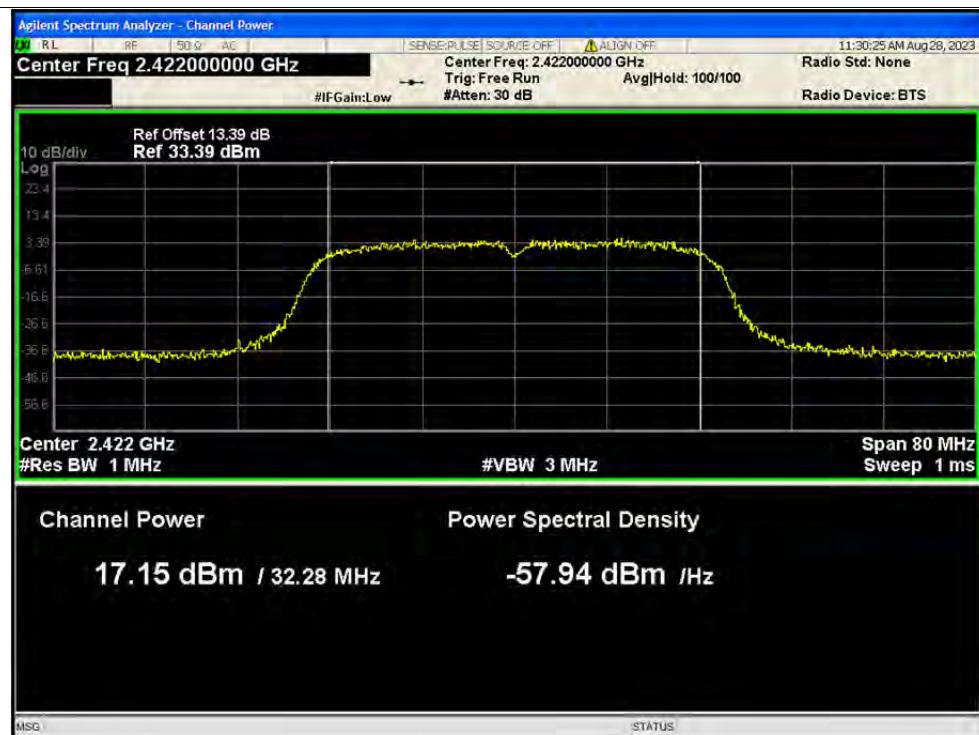

Peak Power NVNT n40 2442 MHz Ant1

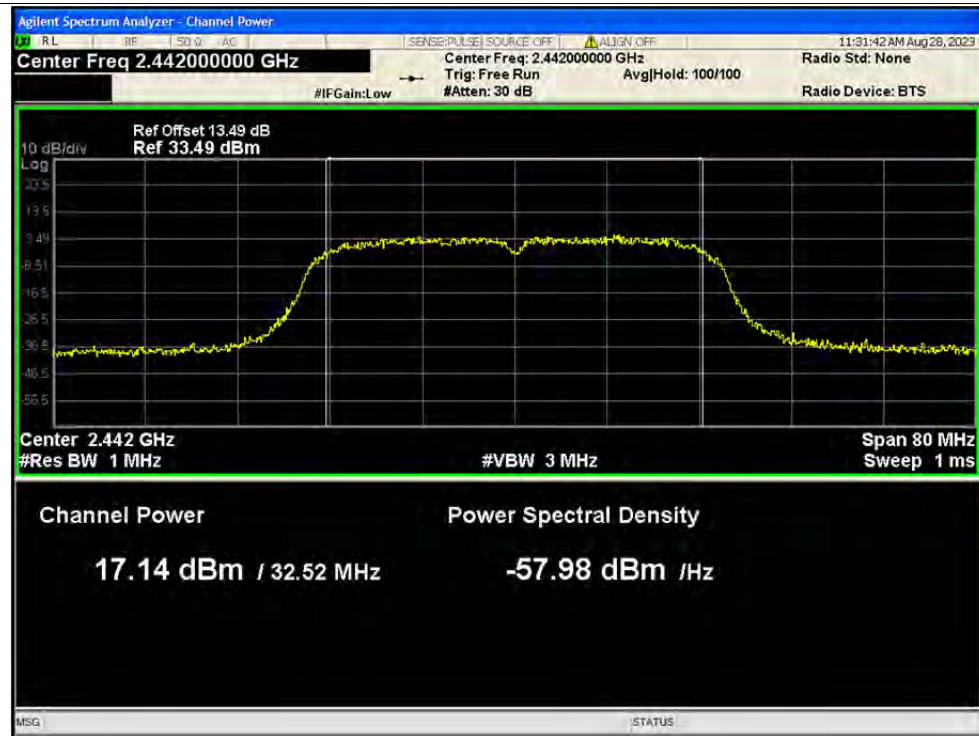

Peak Power NVNT n40 2462 MHz Ant1

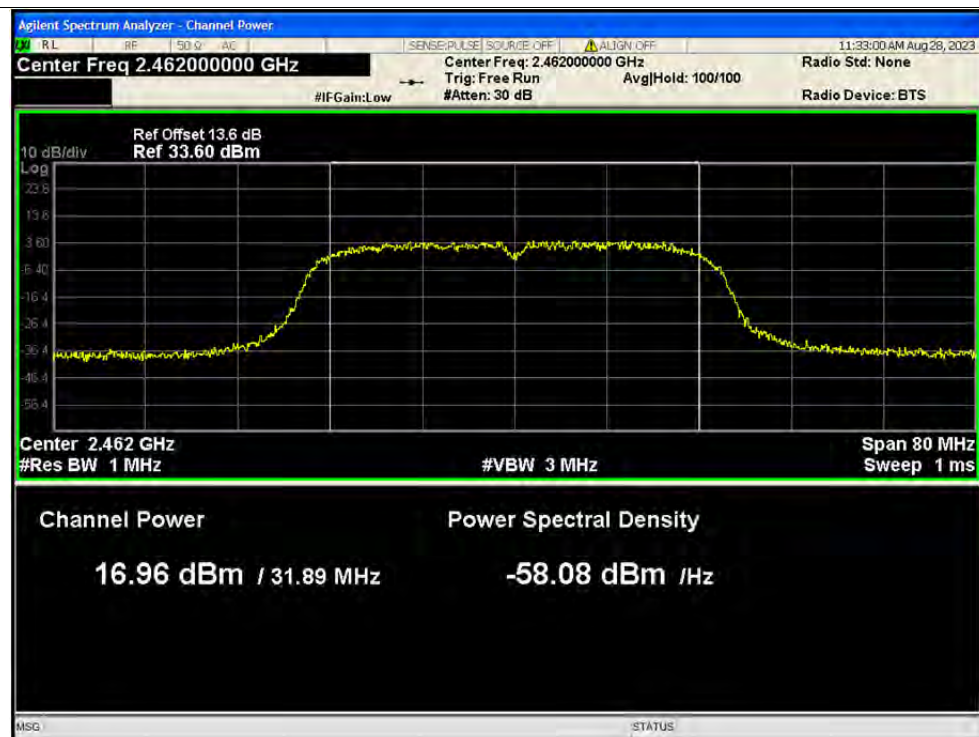


**A.3. Maximum Average Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	b	2412	Ant1	-0.58	0	-0.58	0.00087	30	Pass
NVNT	b	2442	Ant1	-0.1	0	-0.1	0.00098	30	Pass
NVNT	b	2472	Ant1	0.07	0	0.07	0.00102	30	Pass
NVNT	g	2412	Ant1	7.05	0	7.05	0.00507	30	Pass
NVNT	g	2442	Ant1	7.19	0	7.19	0.00524	30	Pass
NVNT	g	2472	Ant1	7.14	0	7.14	0.00518	30	Pass
NVNT	n20	2412	Ant1	7.71	0	7.71	0.0059	30	Pass
NVNT	n20	2442	Ant1	7.82	0	7.82	0.00605	30	Pass
NVNT	n20	2472	Ant1	7.83	0	7.83	0.00607	30	Pass
NVNT	n40	2422	Ant1	9.94	0	9.94	0.00986	30	Pass
NVNT	n40	2442	Ant1	9.96	0	9.96	0.00991	30	Pass
NVNT	n40	2462	Ant1	9.8	0	9.8	0.00955	30	Pass




Test Graphs

Average Power NVNT b 2412 MHz Ant1

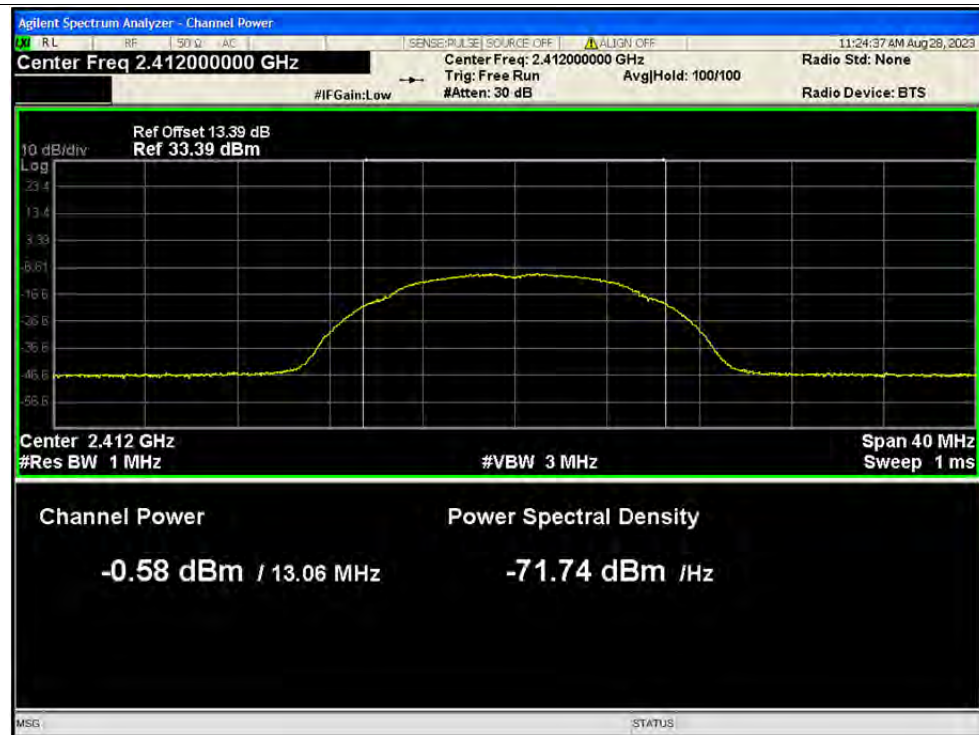


Average Power NVNT b 2442 MHz Ant1

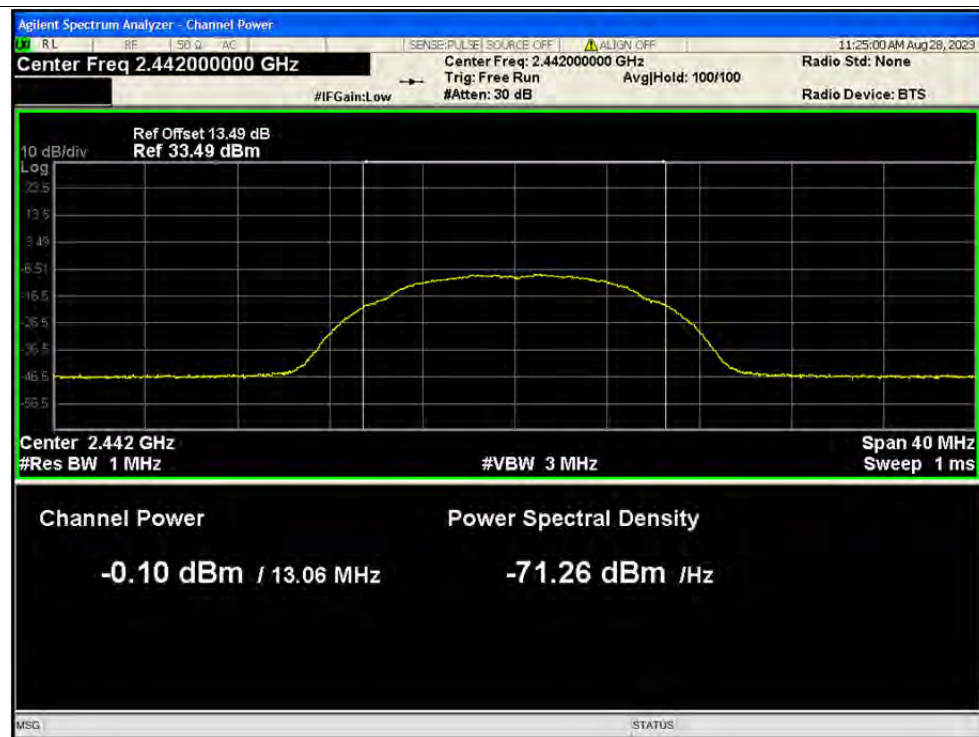




Average Power NVNT b 2472 MHz Ant1

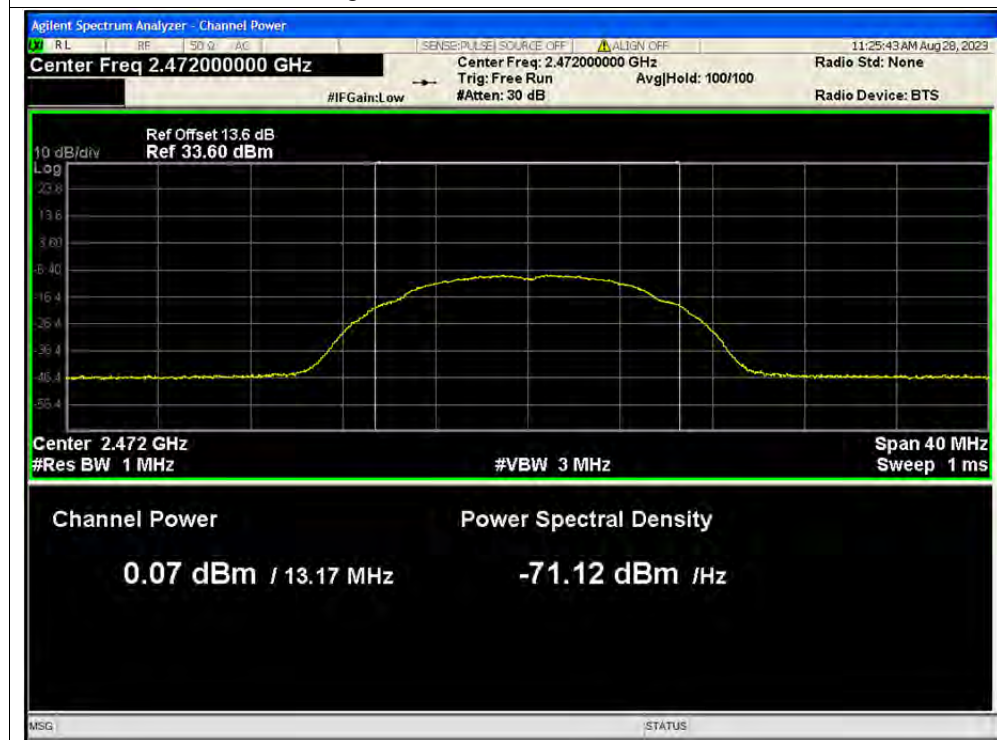


Average Power NVNT g 2412 MHz Ant1

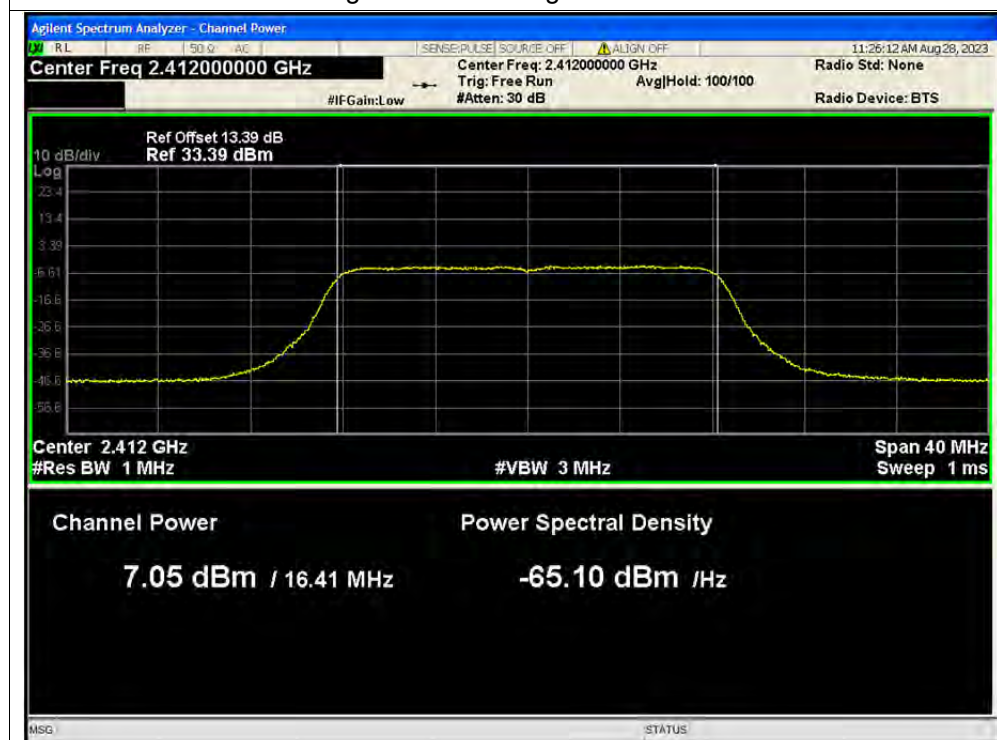




Average Power NVNT g 2442 MHz Ant1

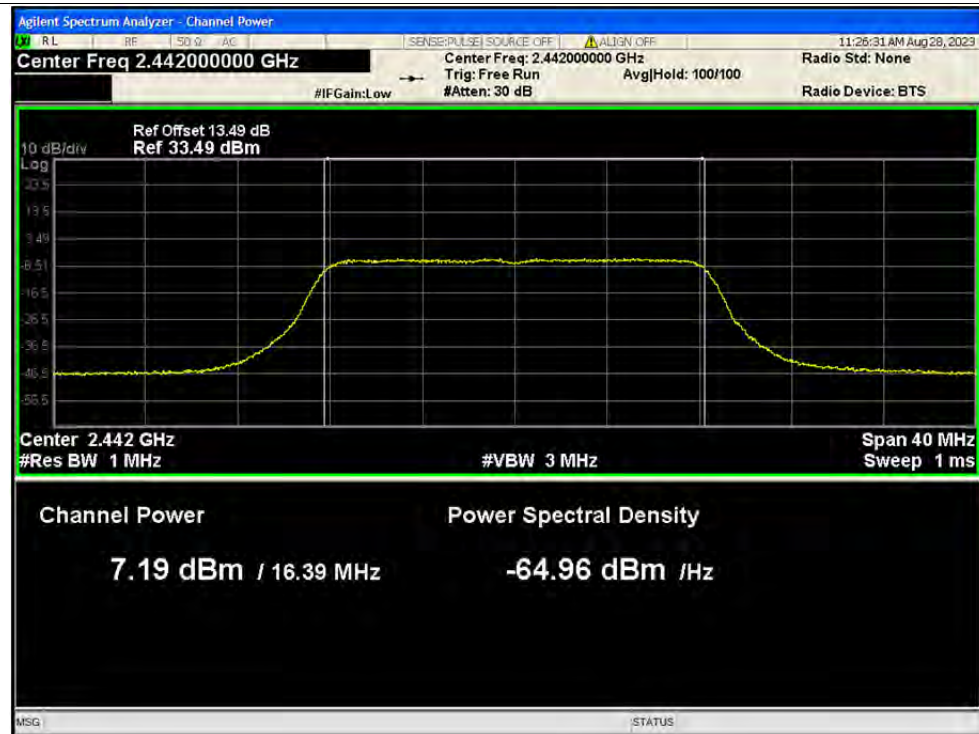


Average Power NVNT g 2472 MHz Ant1

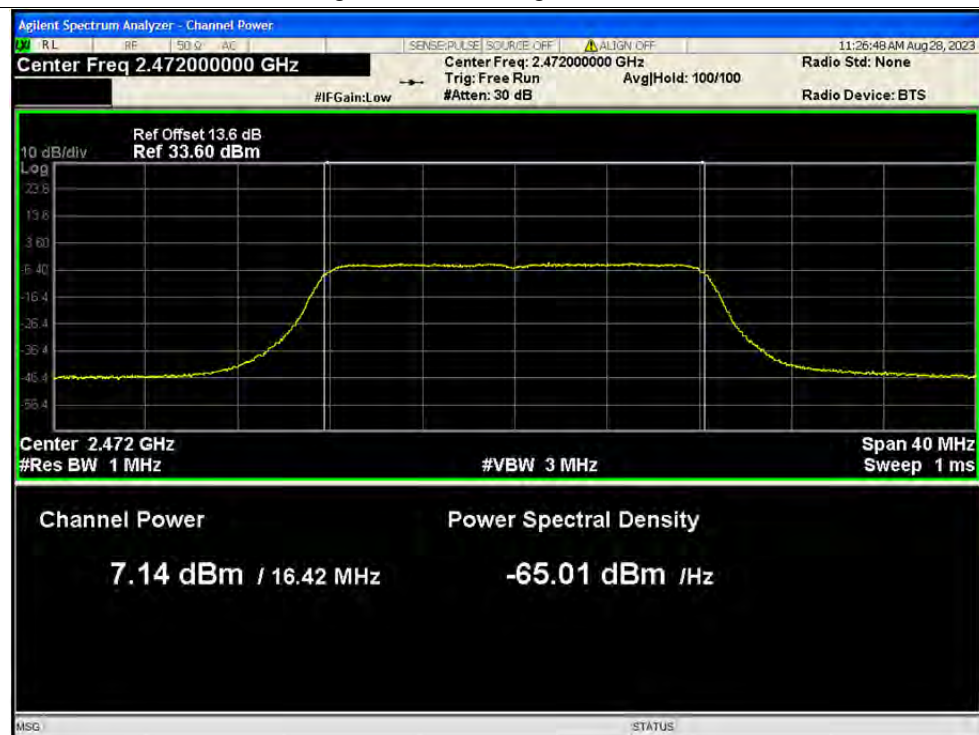






Average Power NVNT n20 2472 MHz Ant1

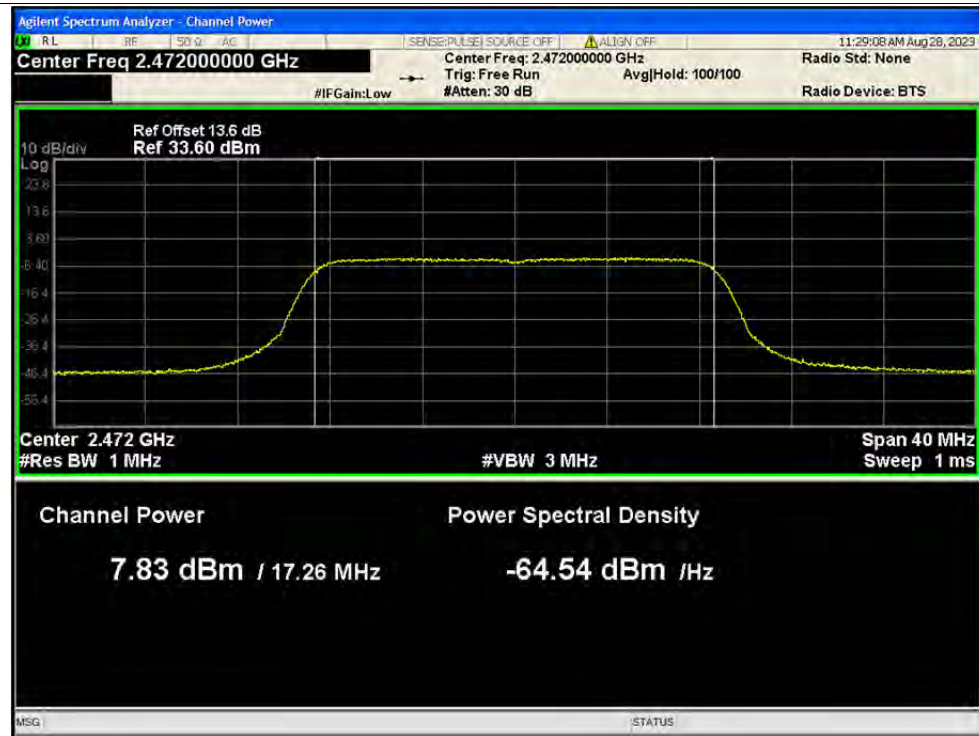


Average Power NVNT n40 2422 MHz Ant1

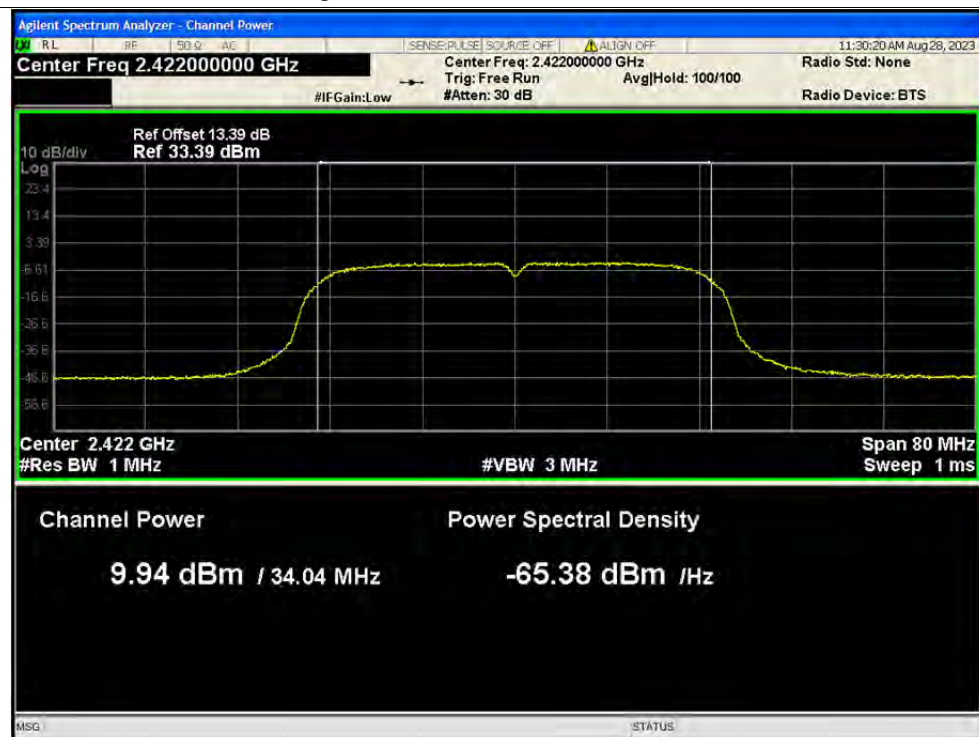




Average Power NVNT n40 2442 MHz Ant1

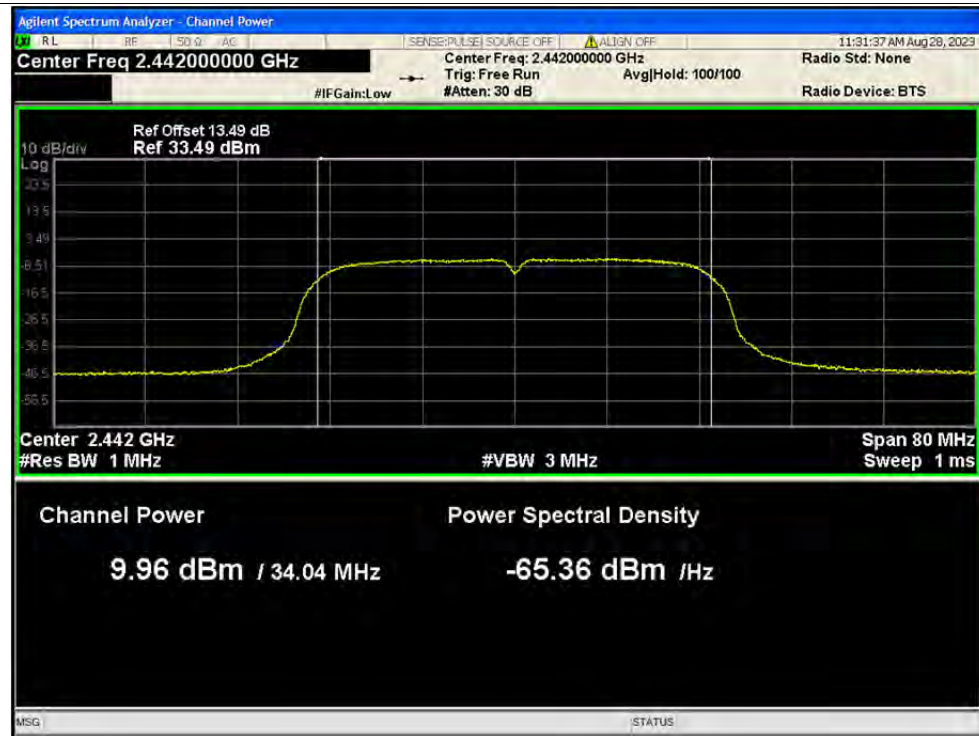

Average Power NVNT n40 2462 MHz Ant1

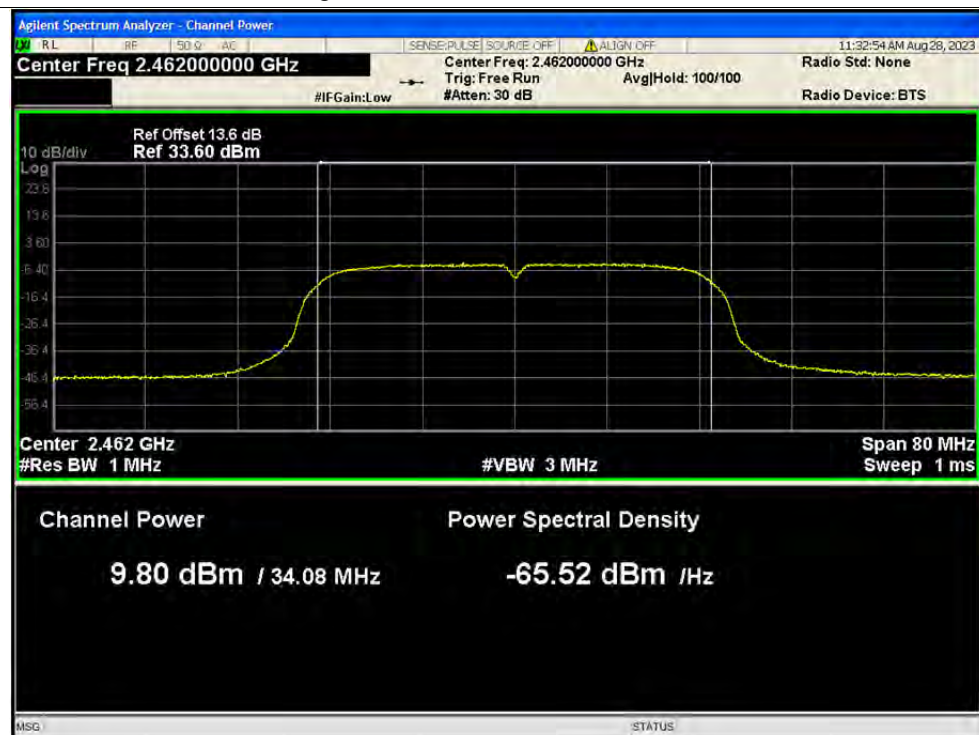


**A.4. 6 dB Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	9.477	0.5	Pass
NVNT	b	2442	Ant1	8.924	0.5	Pass
NVNT	b	2472	Ant1	9.279	0.5	Pass
NVNT	g	2412	Ant1	16.362	0.5	Pass
NVNT	g	2442	Ant1	16.355	0.5	Pass
NVNT	g	2472	Ant1	16.371	0.5	Pass
NVNT	n20	2412	Ant1	16.925	0.5	Pass
NVNT	n20	2442	Ant1	16.999	0.5	Pass
NVNT	n20	2472	Ant1	17.058	0.5	Pass
NVNT	n40	2422	Ant1	32.275	0.5	Pass
NVNT	n40	2442	Ant1	32.52	0.5	Pass
NVNT	n40	2462	Ant1	31.892	0.5	Pass




Test Graphs


-6 dB Bandwidth NVNT b 2412 MHz Ant1

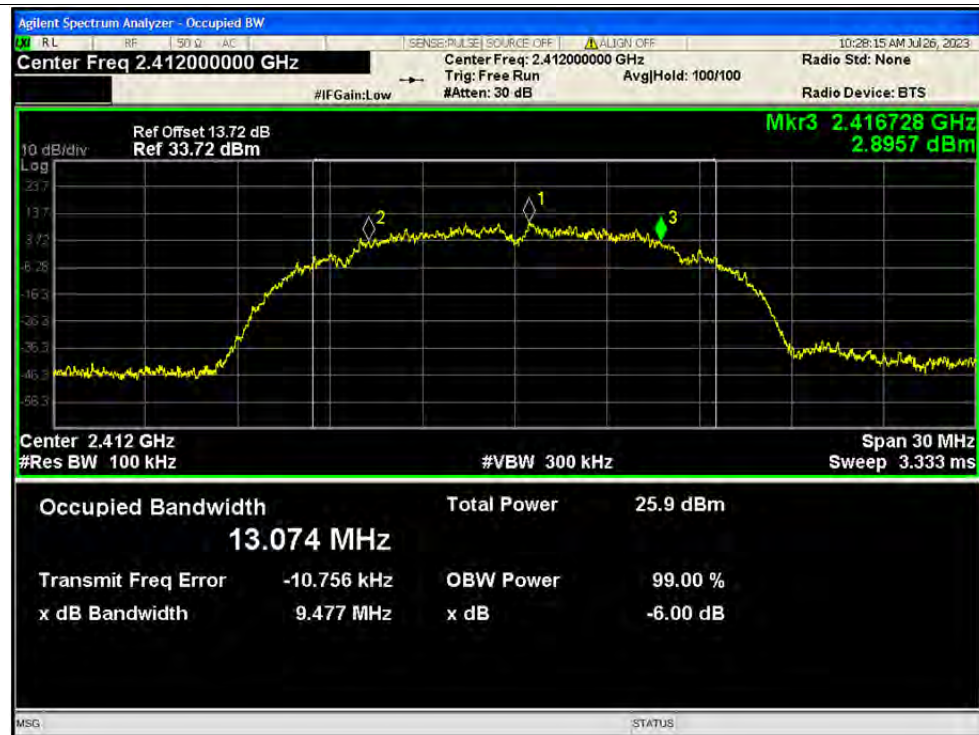


-6 dB Bandwidth NVNT b 2442 MHz Ant1

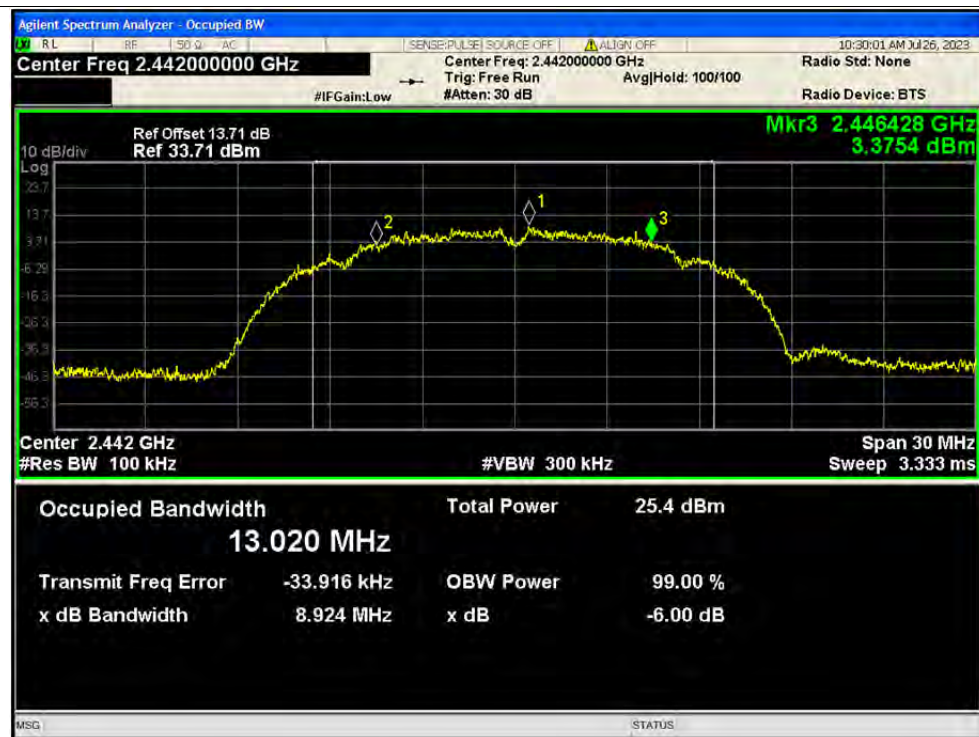

-6 dB Bandwidth NVNT b 2472 MHz Ant1

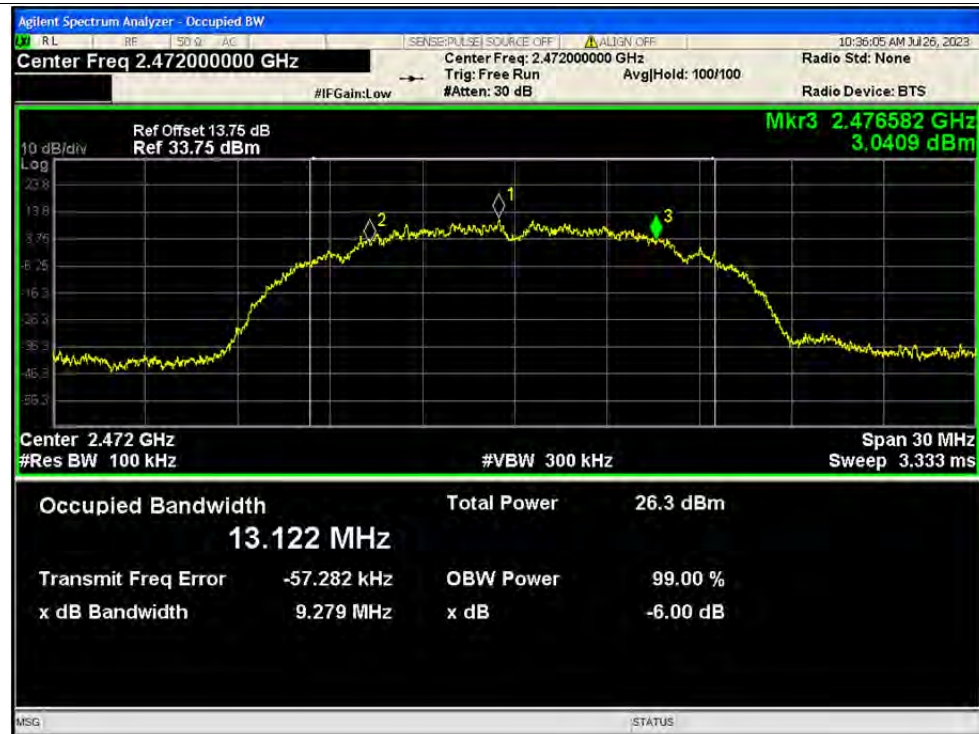


-6 dB Bandwidth NVNT g 2412 MHz Ant1

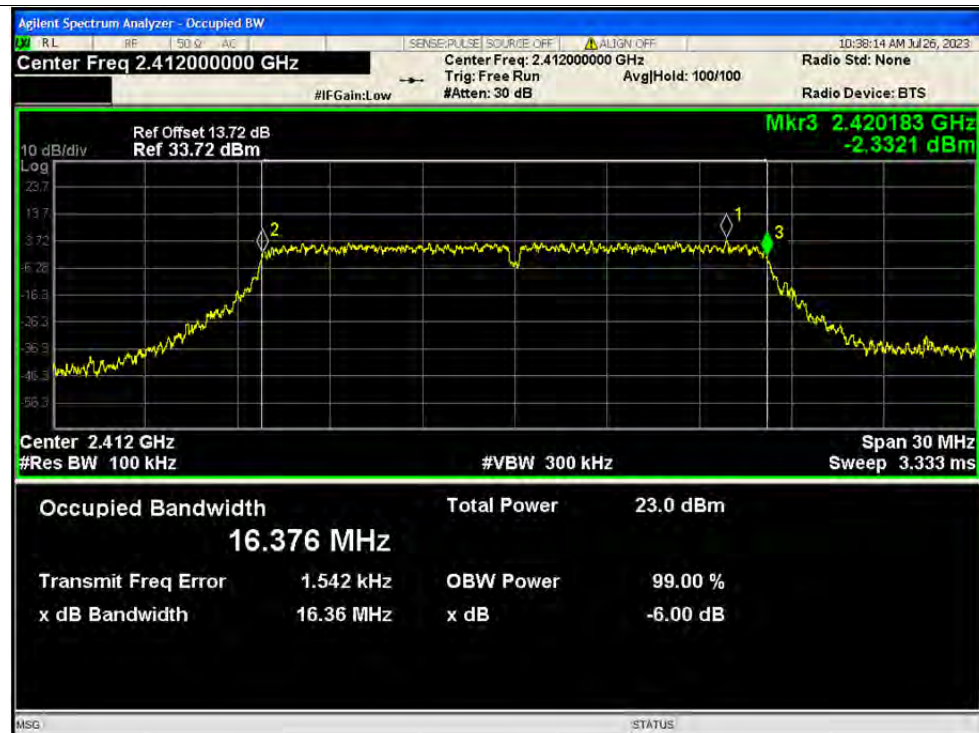




-6 dB Bandwidth NVNT g 2442 MHz Ant1

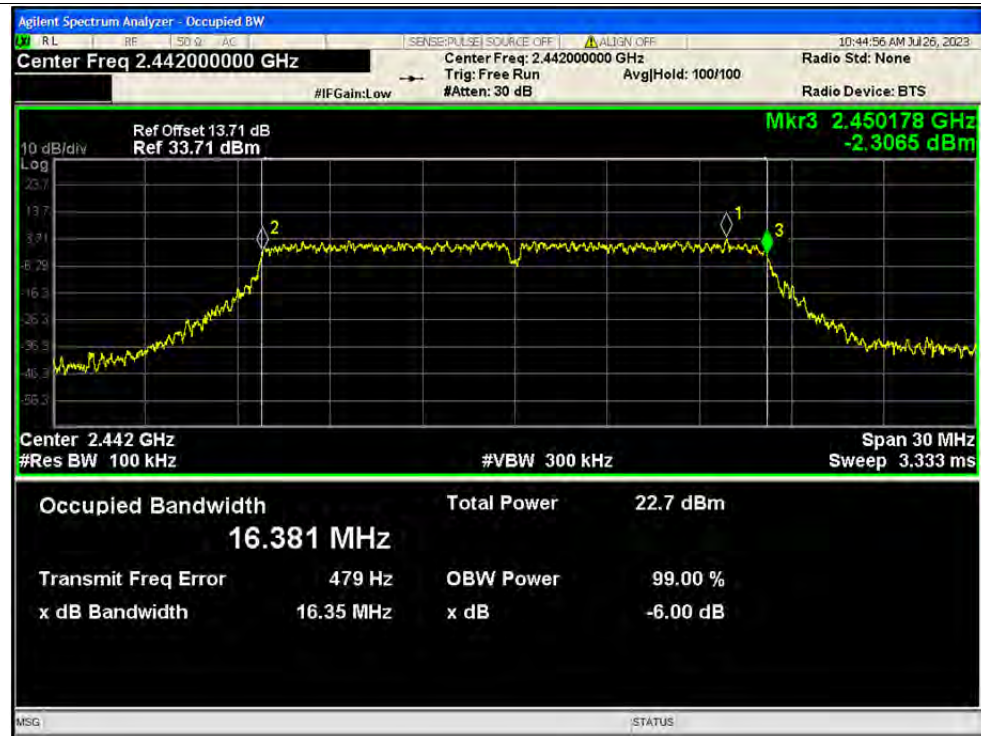


-6 dB Bandwidth NVNT g 2472 MHz Ant1

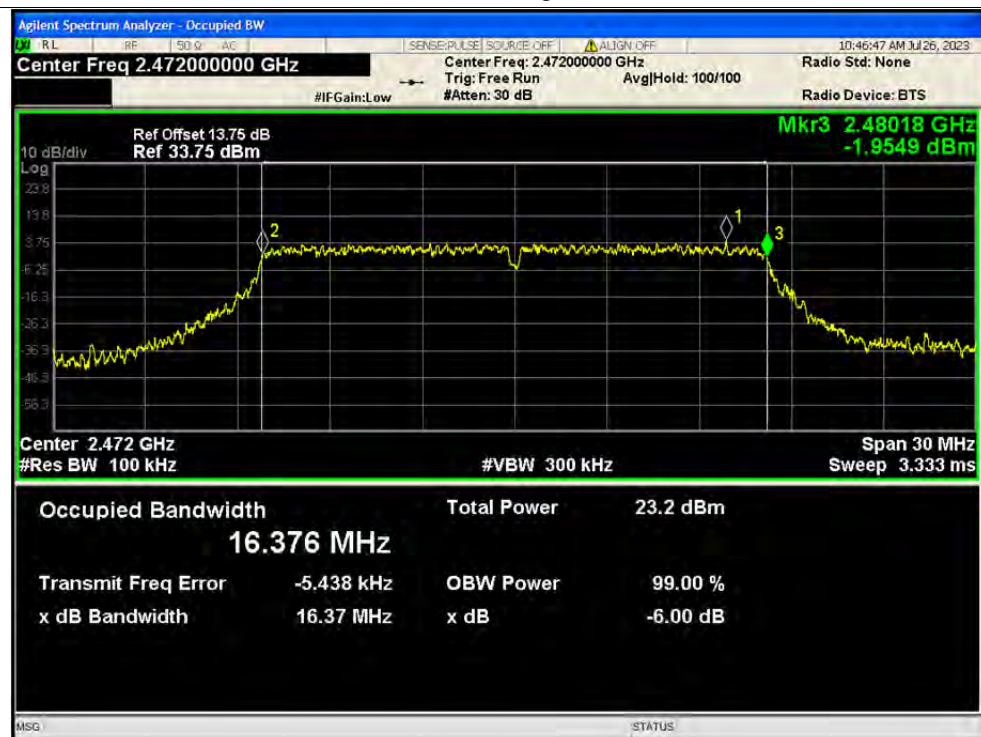




-6 dB Bandwidth NVNT n20 2412 MHz Ant1

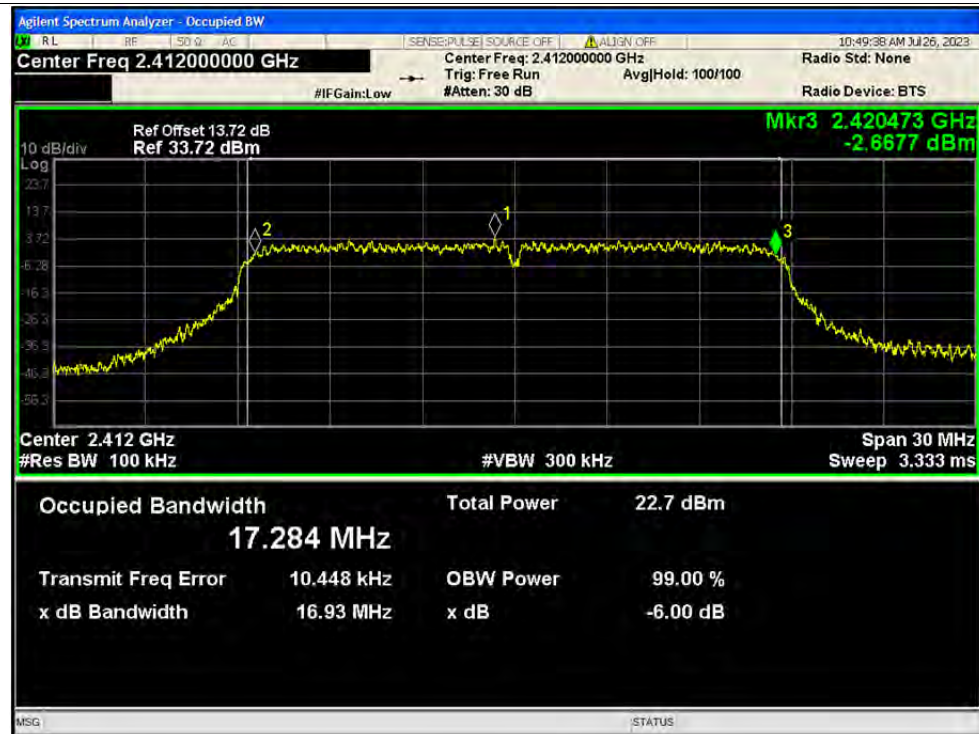


-6 dB Bandwidth NVNT n20 2442 MHz Ant1

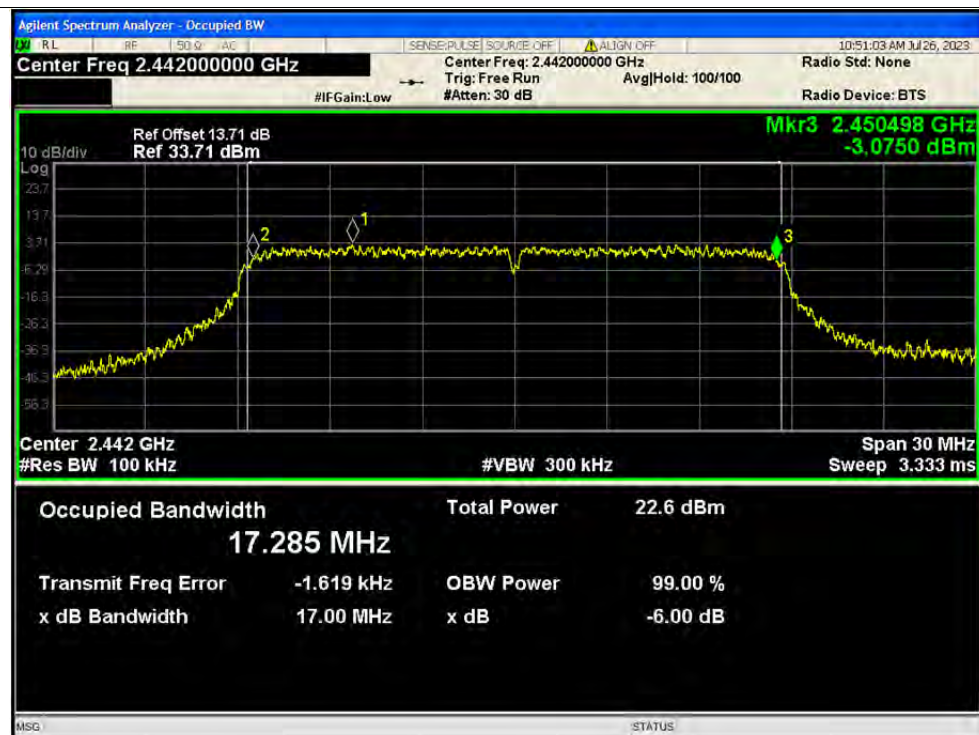




-6 dB Bandwidth NVNT n20 2472 MHz Ant1

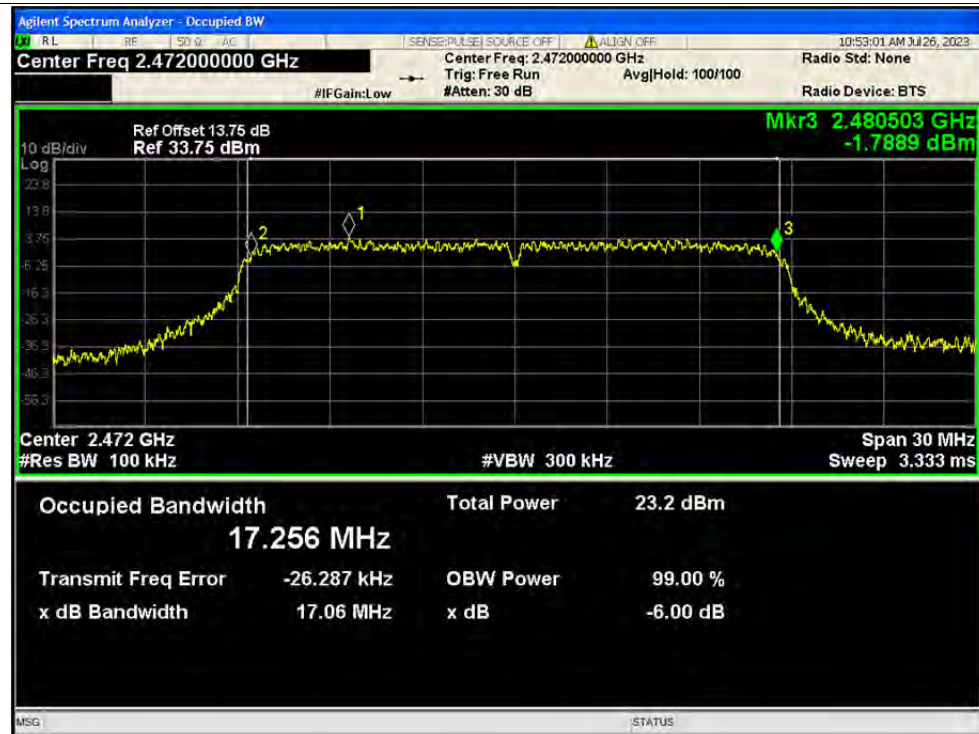


-6 dB Bandwidth NVNT n40 2422 MHz Ant1

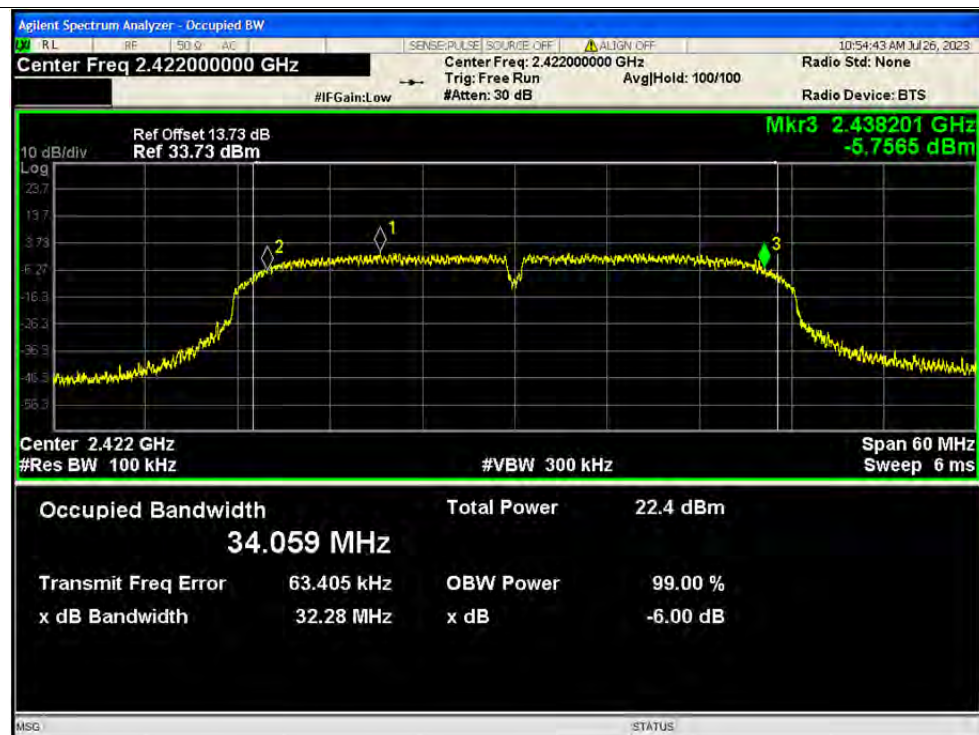




-6 dB Bandwidth NVNT n40 2442 MHz Ant1

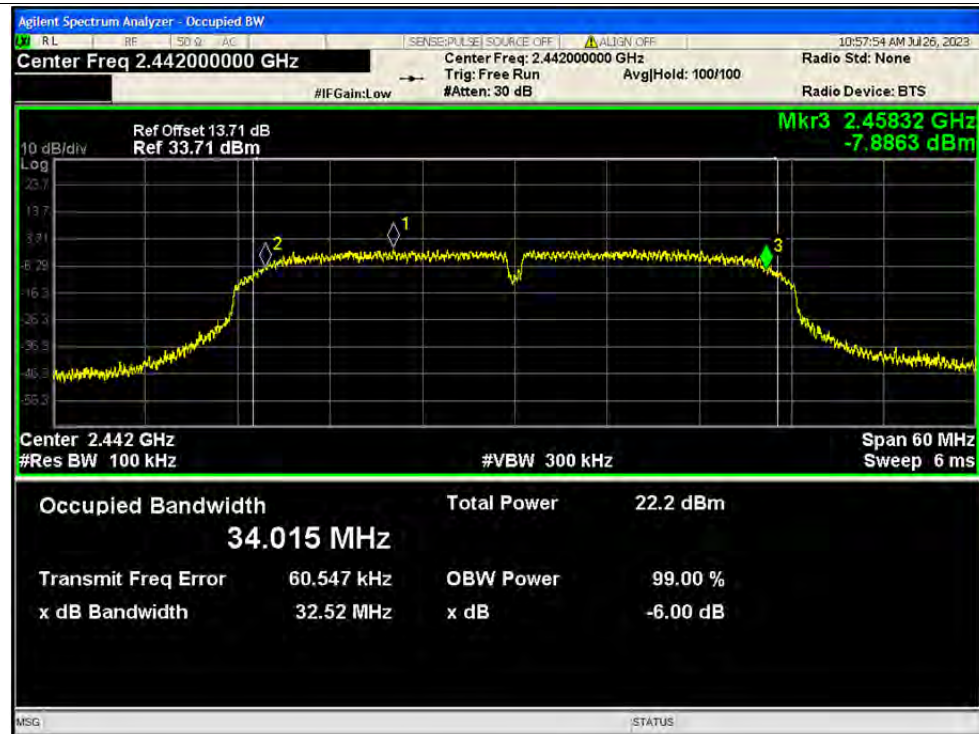

-6 dB Bandwidth NVNT n40 2462 MHz Ant1

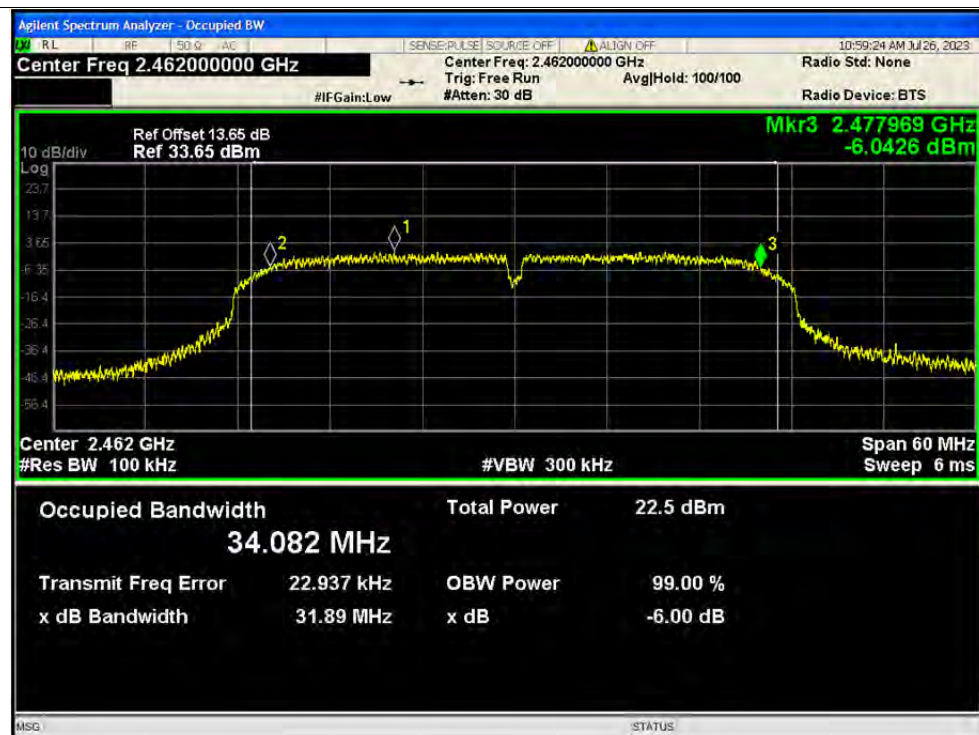

**A.5. Conducted Spurious Emissions**


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-31.81	-20	Pass
NVNT	b	2442	Ant1	-31.89	-20	Pass
NVNT	b	2472	Ant1	-32.65	-20	Pass
NVNT	g	2412	Ant1	-32.36	-20	Pass
NVNT	g	2442	Ant1	-31.75	-20	Pass
NVNT	g	2472	Ant1	-31.63	-20	Pass
NVNT	n20	2412	Ant1	-31.64	-20	Pass
NVNT	n20	2442	Ant1	-32.22	-20	Pass
NVNT	n20	2472	Ant1	-32.05	-20	Pass
NVNT	n40	2422	Ant1	-28.49	-20	Pass
NVNT	n40	2442	Ant1	-28.56	-20	Pass
NVNT	n40	2462	Ant1	-28.77	-20	Pass

Test Graphs

Tx. Spurious NVNT b 2412 MHz Ant1 Ref




Tx. Spurious NVNT b 2412 MHz Ant1 Emission

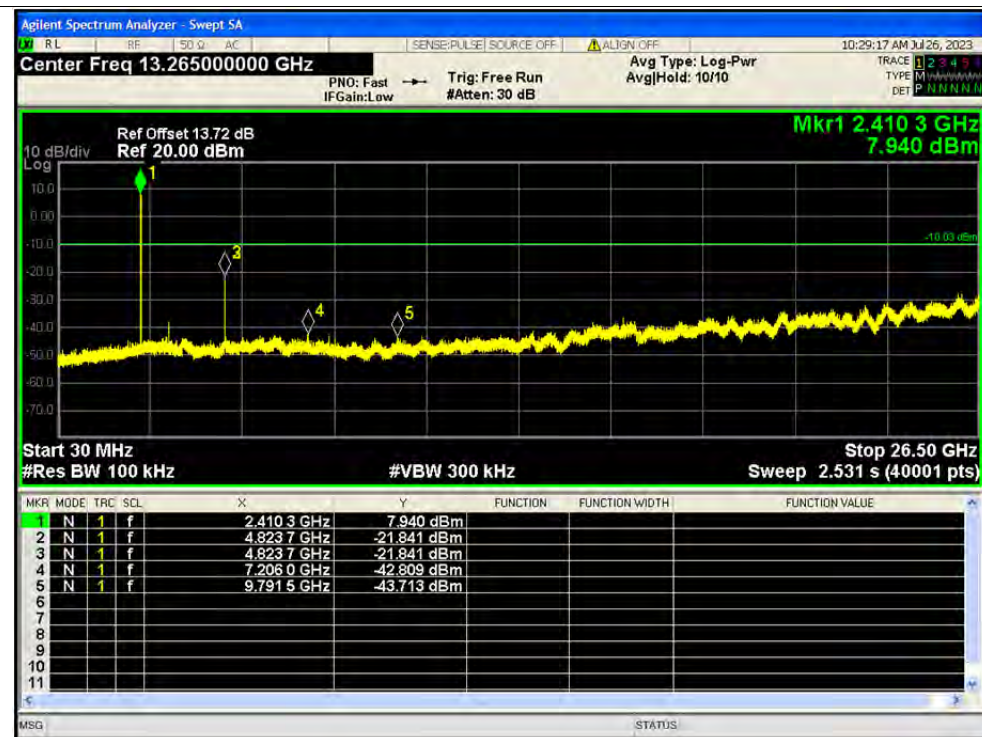

Tx. Spurious NVNT b 2442 MHz Ant1 Ref




Tx. Spurious NVNT b 2442 MHz Ant1 Emission

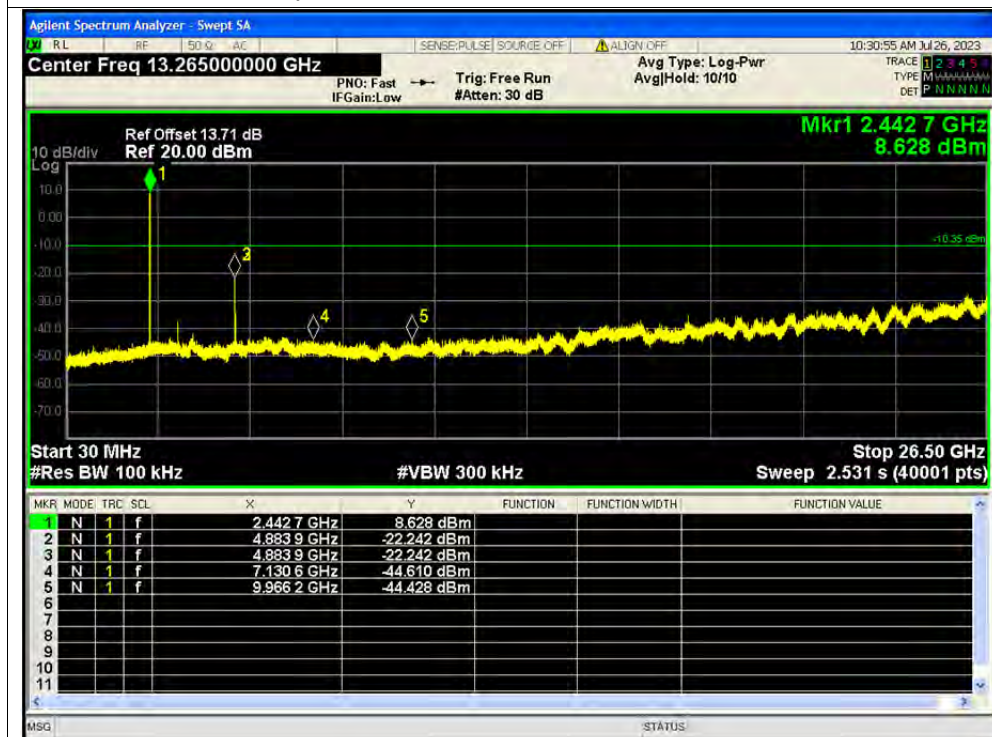

Tx. Spurious NVNT b 2472 MHz Ant1 Ref




Tx. Spurious NVNT b 2472 MHz Ant1 Emission

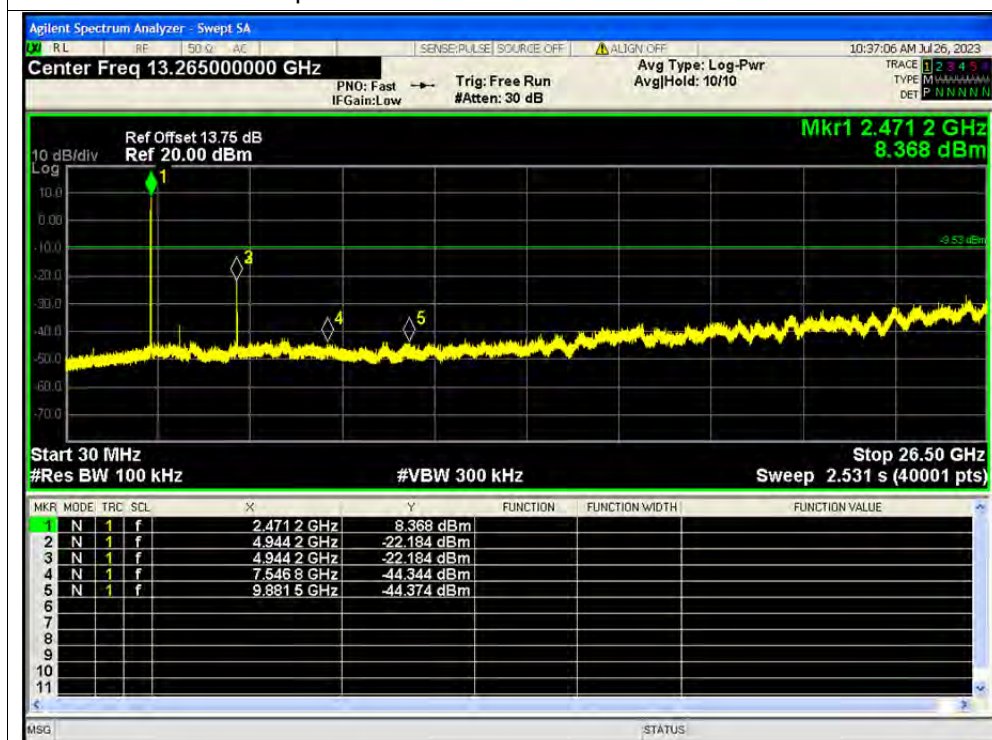

Tx. Spurious NVNT g 2412 MHz Ant1 Ref




Tx. Spurious NVNT g 2412 MHz Ant1 Emission

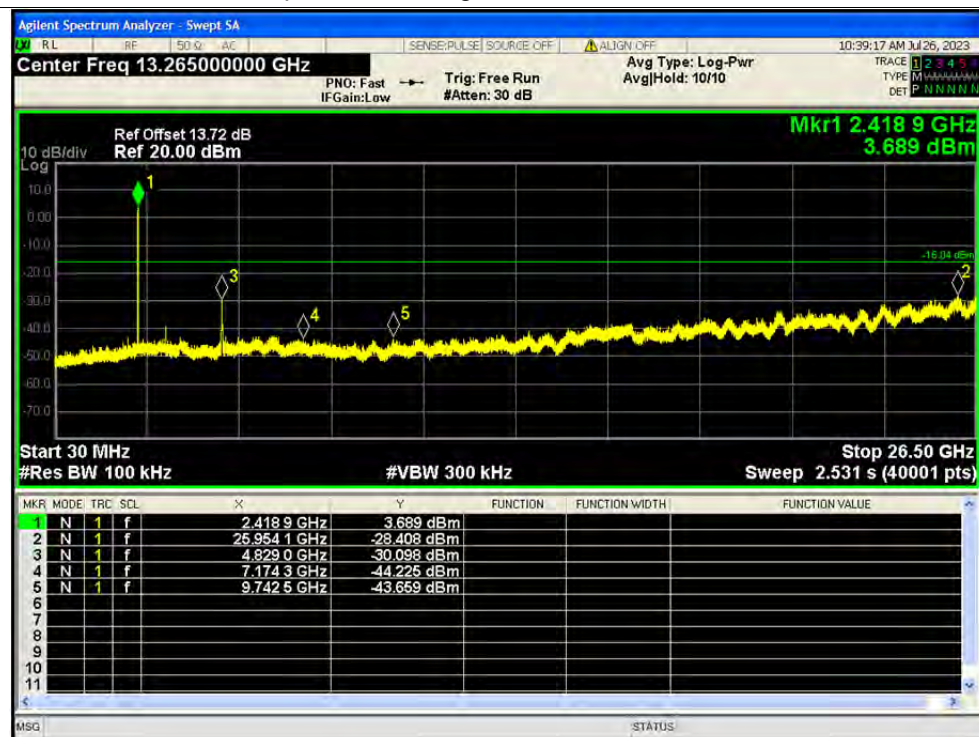

Tx. Spurious NVNT g 2442 MHz Ant1 Ref




Tx. Spurious NVNT g 2442 MHz Ant1 Emission

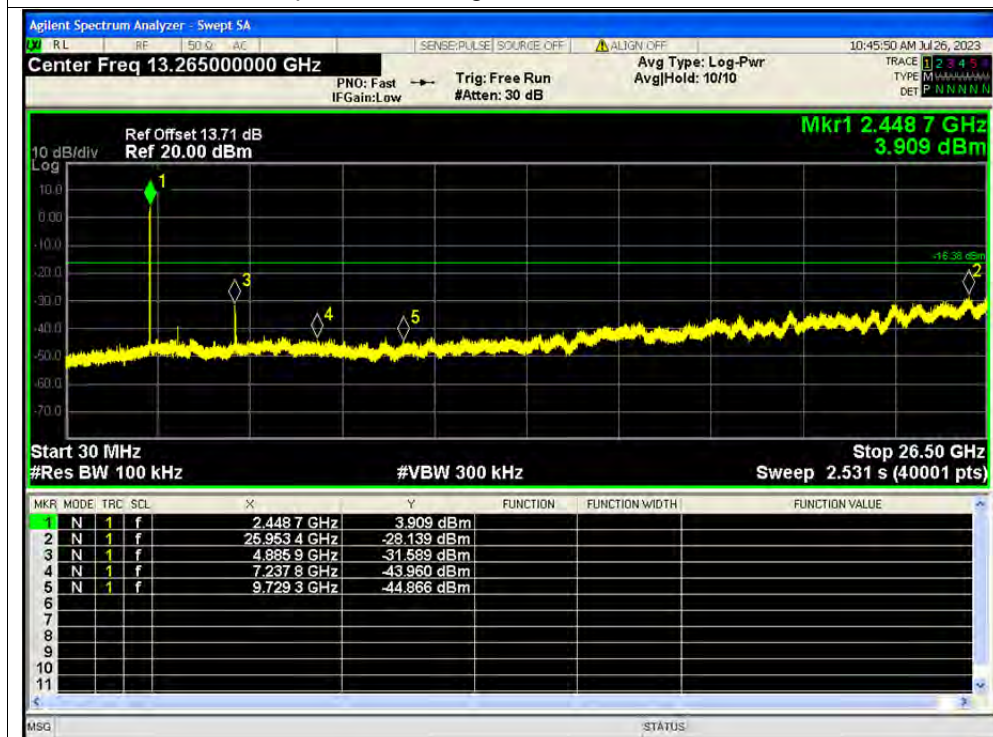


Tx. Spurious NVNT g 2472 MHz Ant1 Ref




Tx. Spurious NVNT g 2472 MHz Ant1 Emission

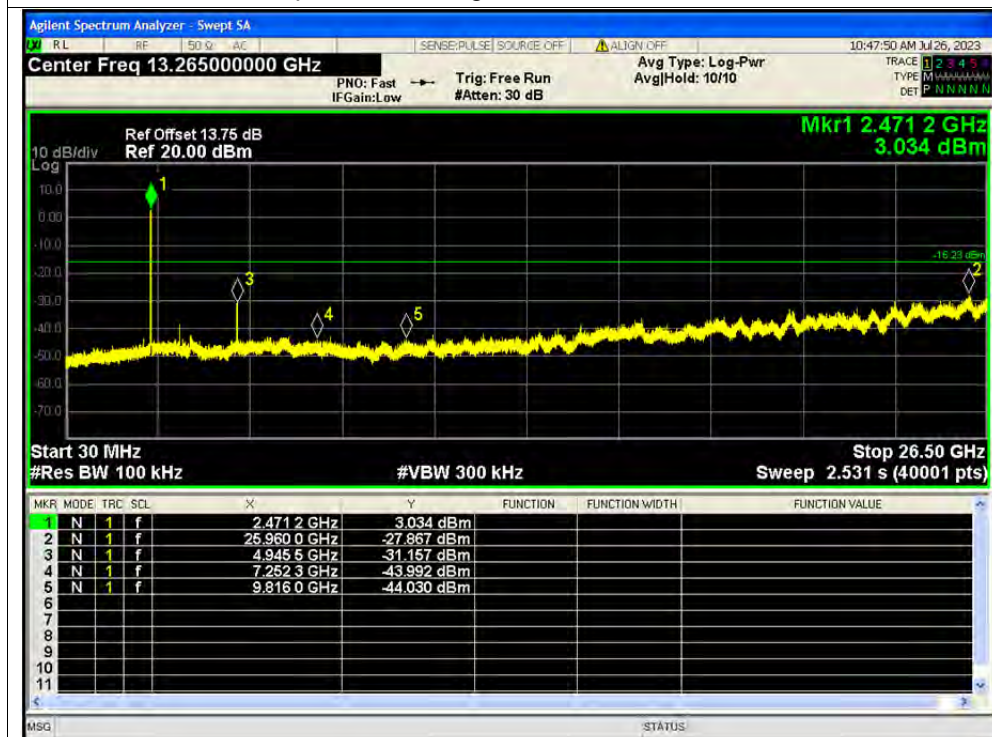

Tx. Spurious NVNT n20 2412 MHz Ant1 Ref

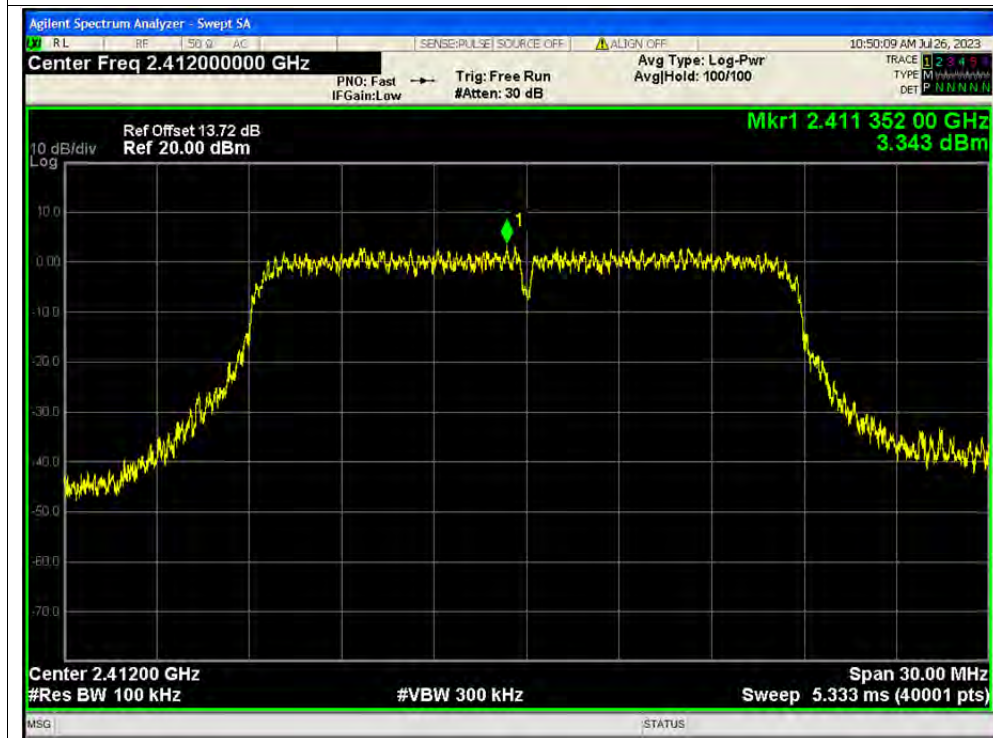


Tx. Spurious NVNT n20 2412 MHz Ant1 Emission

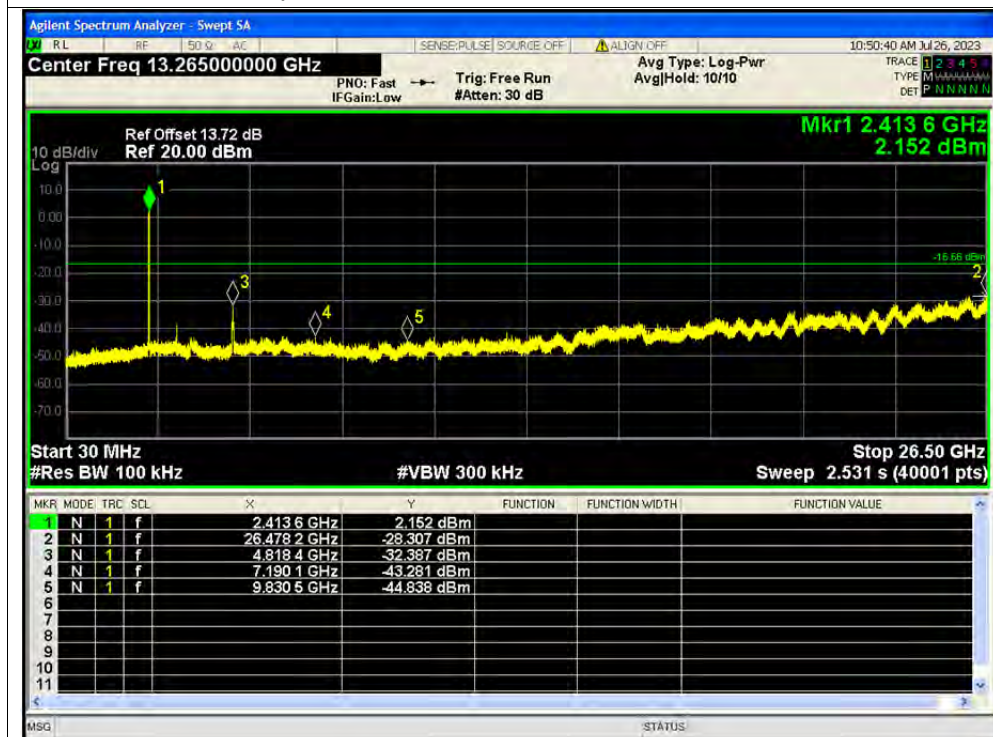

Tx. Spurious NVNT n20 2442 MHz Ant1 Ref




Tx. Spurious NVNT n20 2442 MHz Ant1 Emission

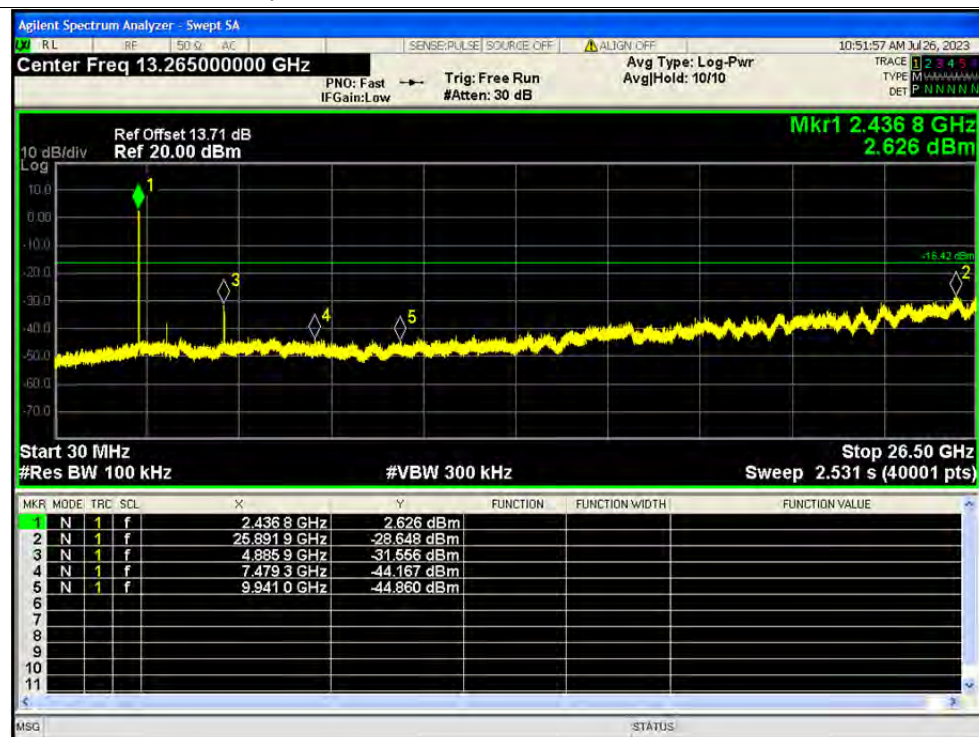

Tx. Spurious NVNT n20 2472 MHz Ant1 Ref




Tx. Spurious NVNT n20 2472 MHz Ant1 Emission

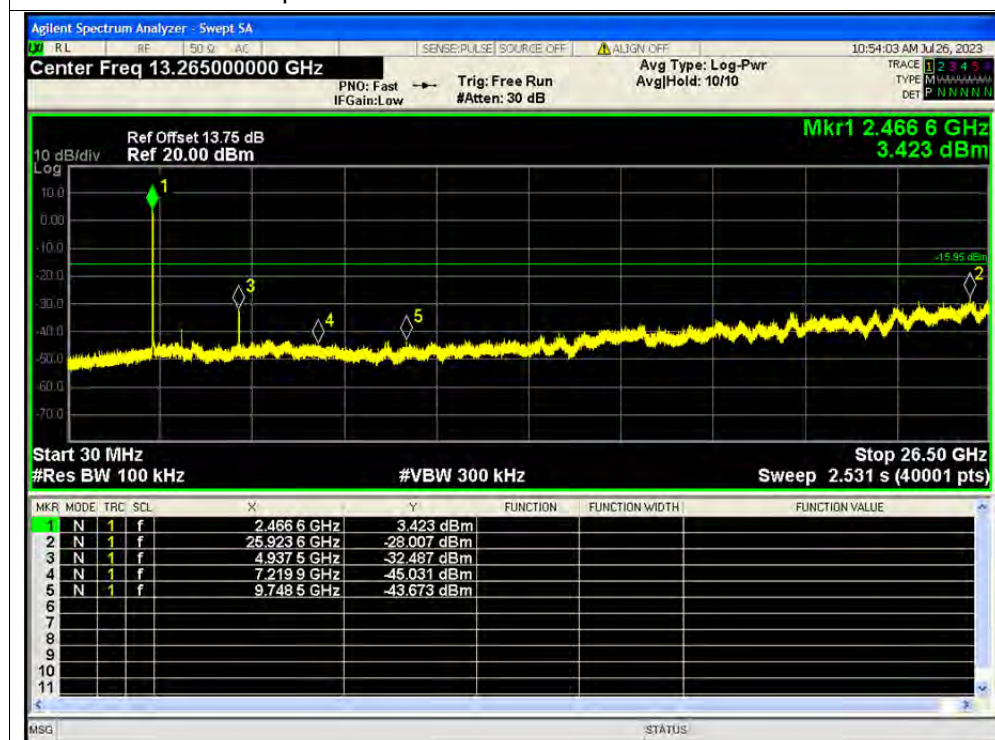

Tx. Spurious NVNT n40 2422 MHz Ant1 Ref




Tx. Spurious NVNT n40 2422 MHz Ant1 Emission

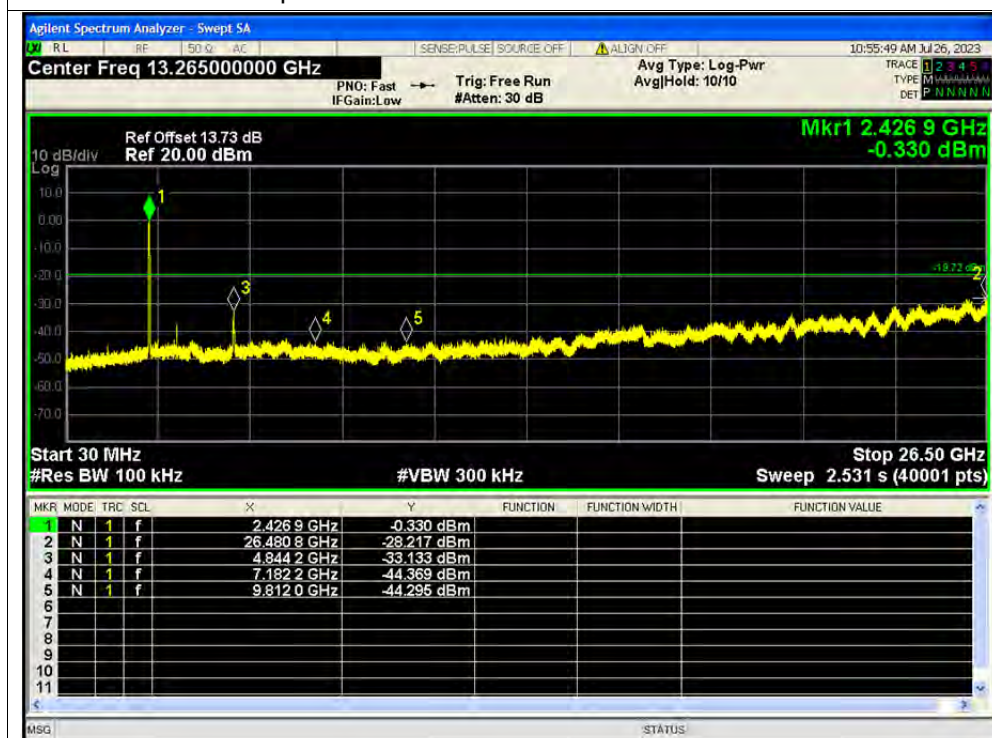

Tx. Spurious NVNT n40 2442 MHz Ant1 Ref




Tx. Spurious NVNT n40 2442 MHz Ant1 Emission

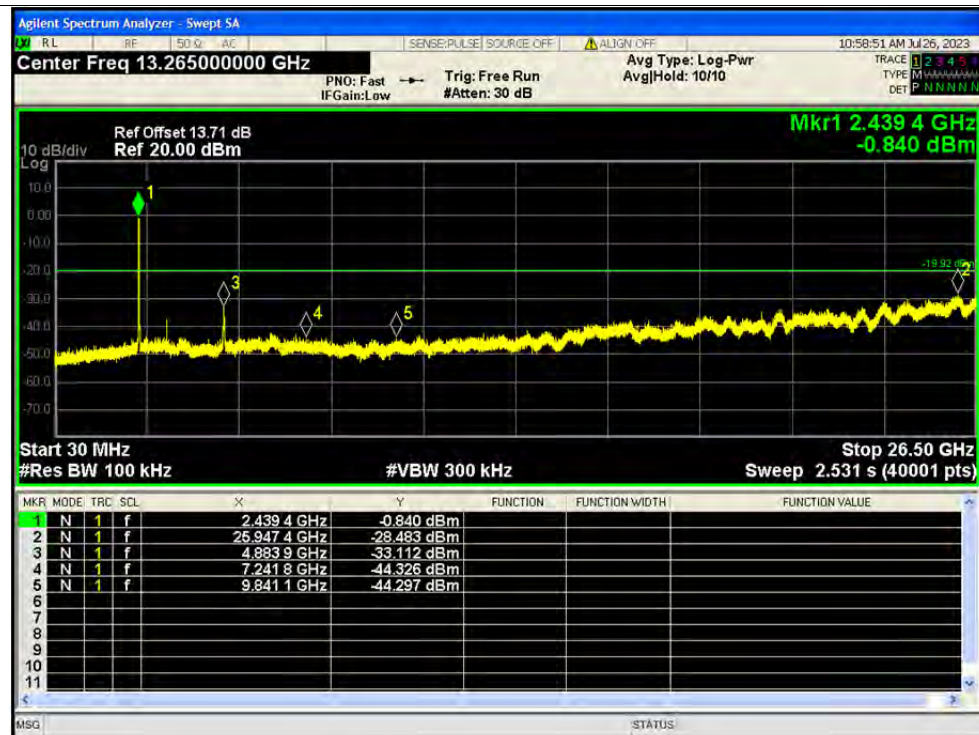

Tx. Spurious NVNT n40 2462 MHz Ant1 Ref



Tx. Spurious NVNT n40 2462 MHz Ant1 Emission

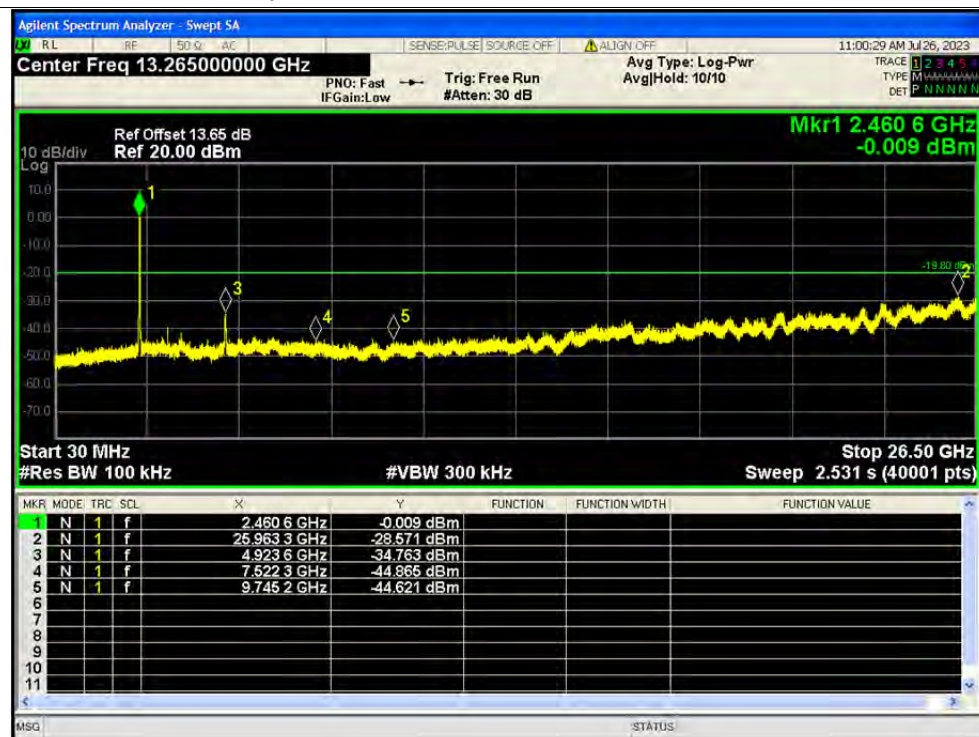



REPORT No.: SZ23070010W03

A.6. Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-51.1	-20	Pass
NVNT	b	2472	Ant1	-45.38	-20	Pass
NVNT	g	2412	Ant1	-40.44	-20	Pass
NVNT	g	2472	Ant1	-34.05	-20	Pass
NVNT	n20	2412	Ant1	-40.2	-20	Pass
NVNT	n20	2472	Ant1	-34.06	-20	Pass
NVNT	n40	2422	Ant1	-37.52	-20	Pass
NVNT	n40	2462	Ant1	-34.01	-20	Pass

Test Graphs

Band Edge NVNT b 2412 MHz Ant1 Ref




Band Edge NVNT b 2412 MHz Ant1 Emission

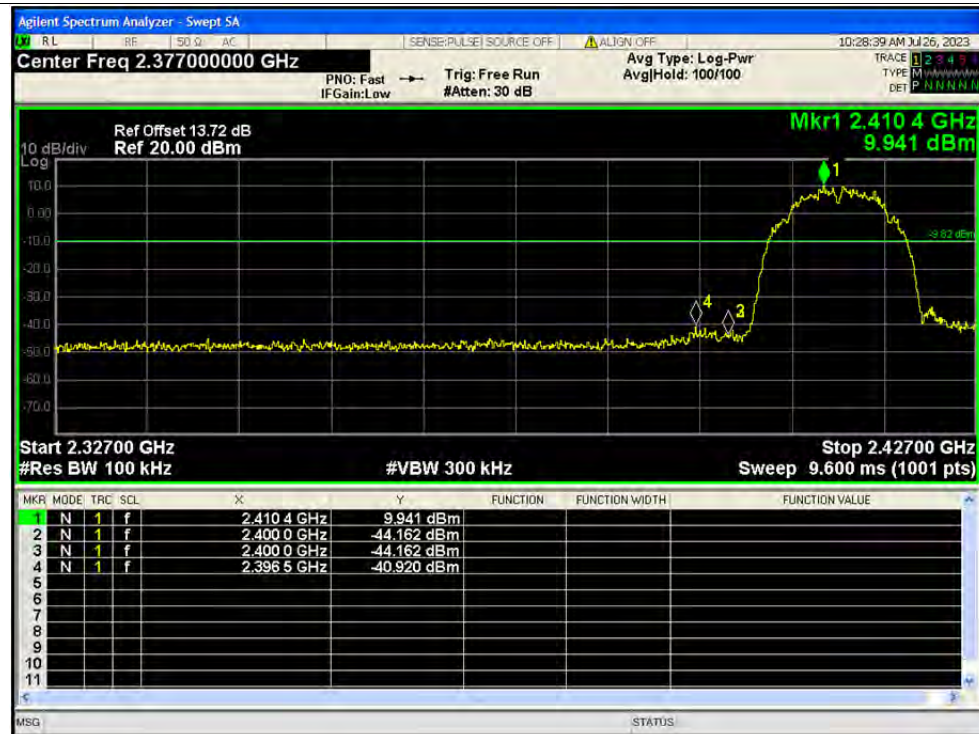

Band Edge NVNT b 2472 MHz Ant1 Ref



Band Edge NVNT b 2472 MHz Ant1 Emission

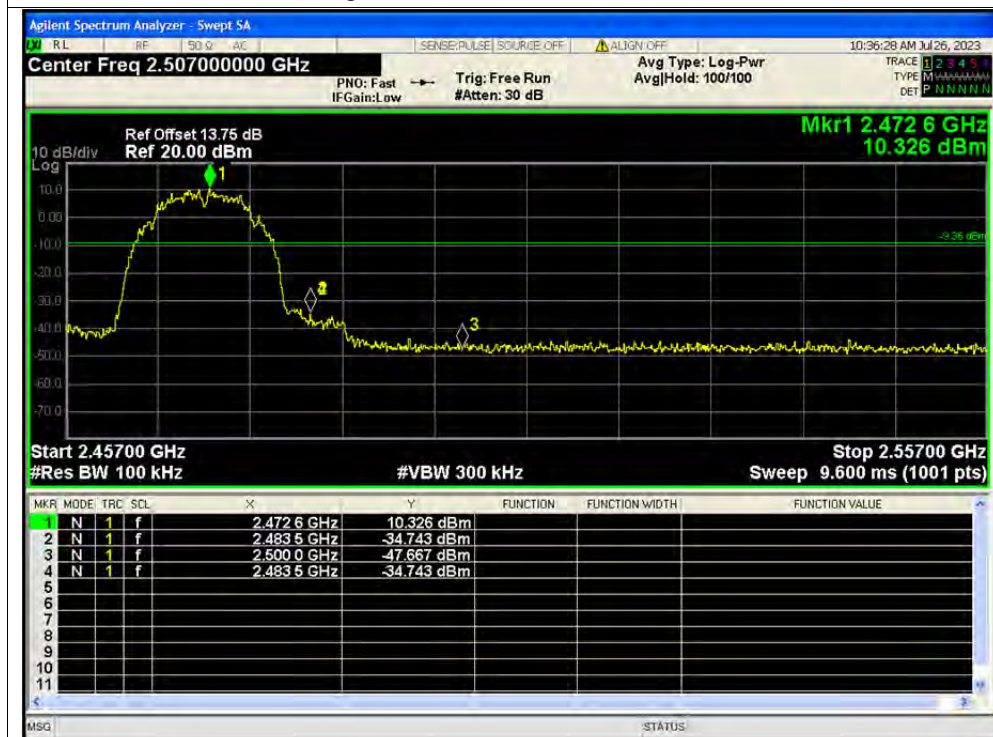




Band Edge NVNT g 2412 MHz Ant1 Ref




Band Edge NVNT g 2412 MHz Ant1 Emission

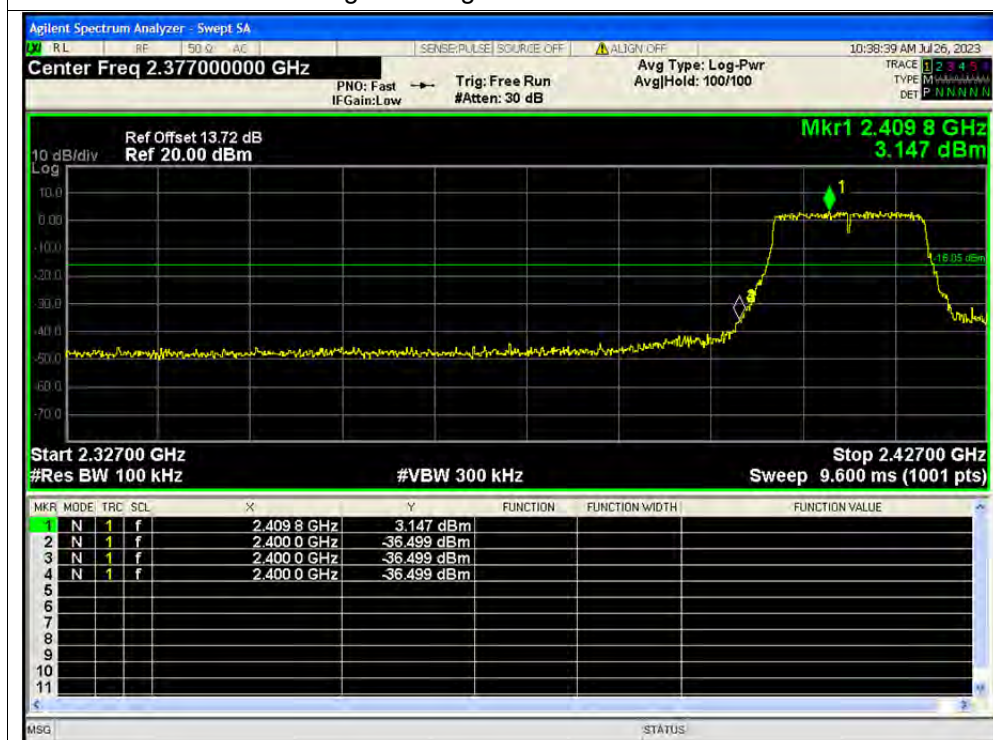

Band Edge NVNT g 2472 MHz Ant1 Ref




Band Edge NVNT g 2472 MHz Ant1 Emission

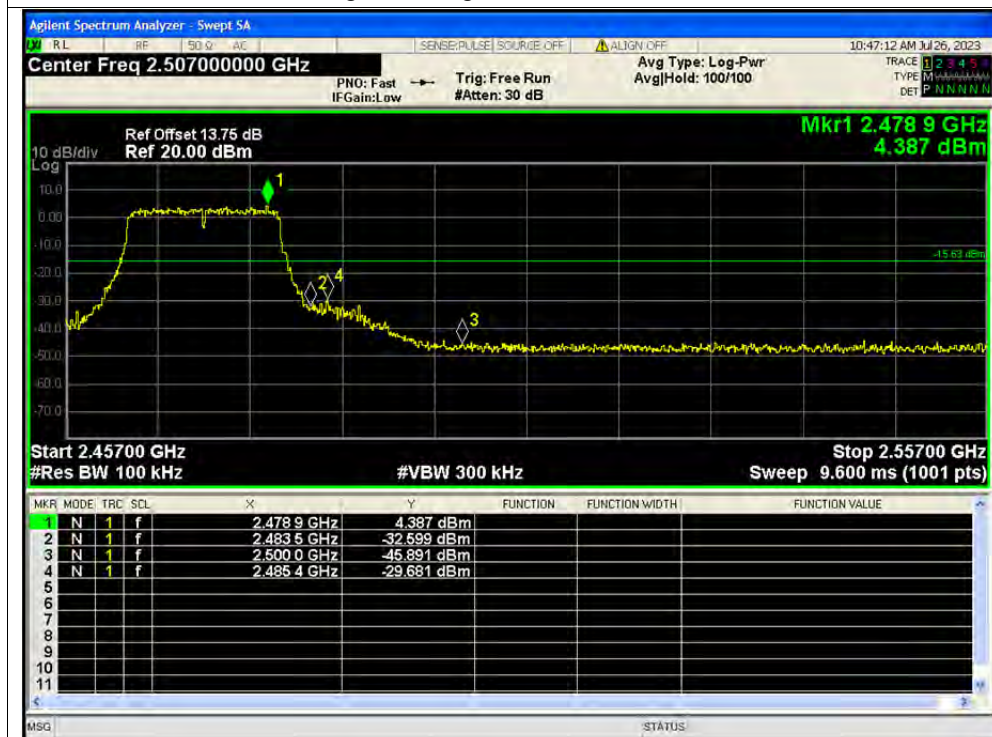

Band Edge NVNT n20 2412 MHz Ant1 Ref




Band Edge NVNT n20 2412 MHz Ant1 Emission

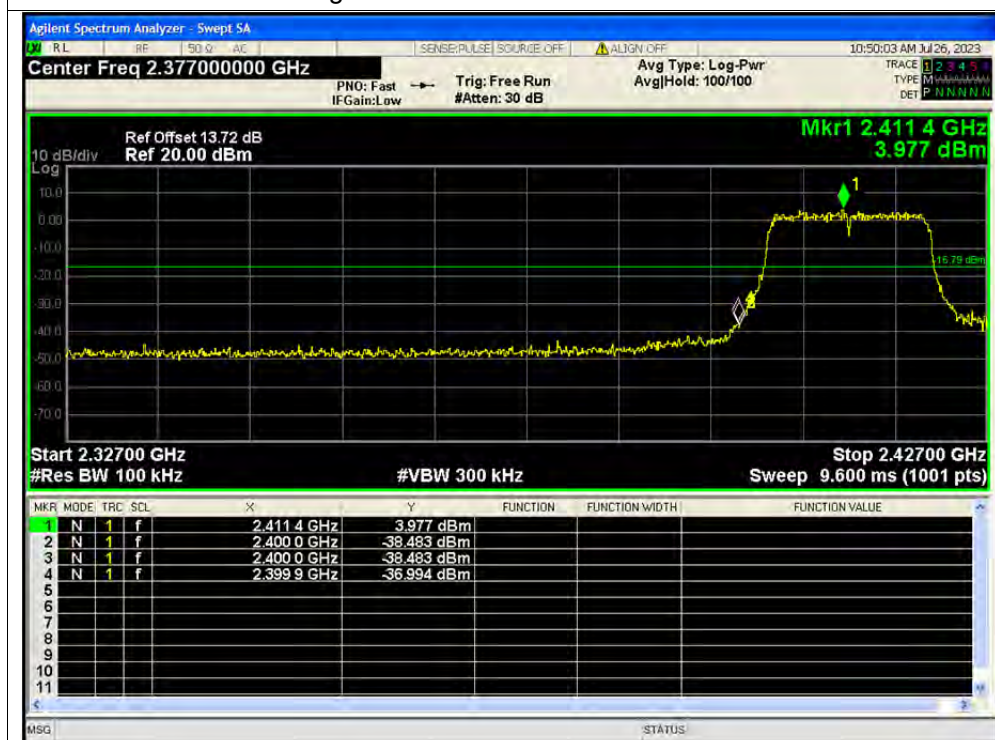

Band Edge NVNT n20 2472 MHz Ant1 Ref




Band Edge NVNT n20 2472 MHz Ant1 Emission

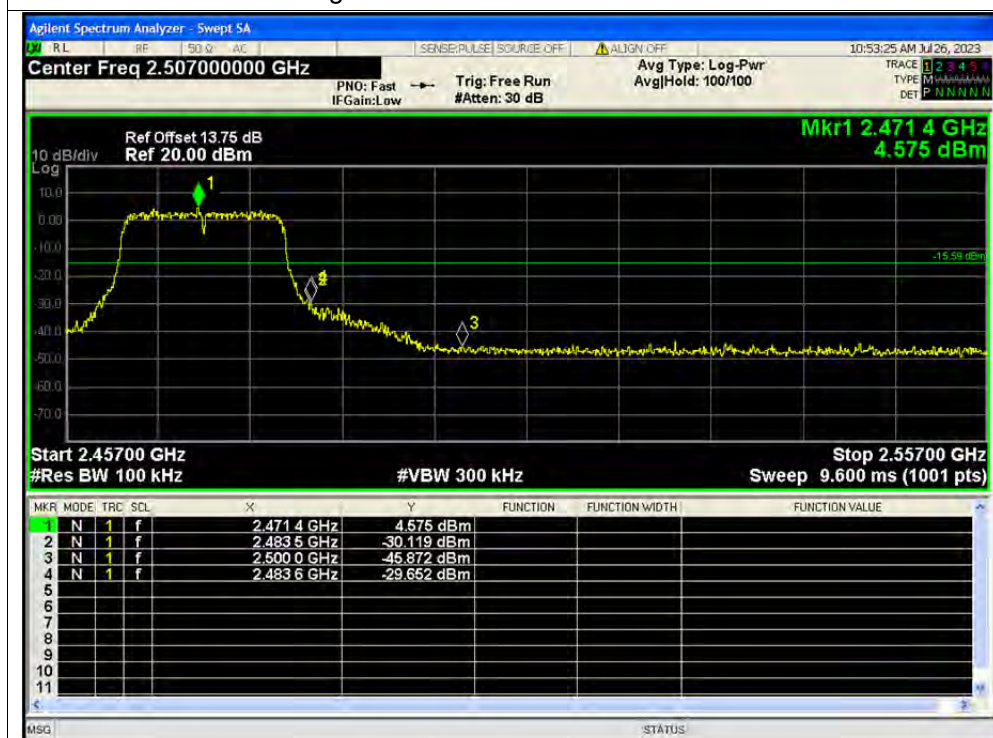

Band Edge NVNT n40 2422 MHz Ant1 Ref



Band Edge NVNT n40 2422 MHz Ant1 Emission

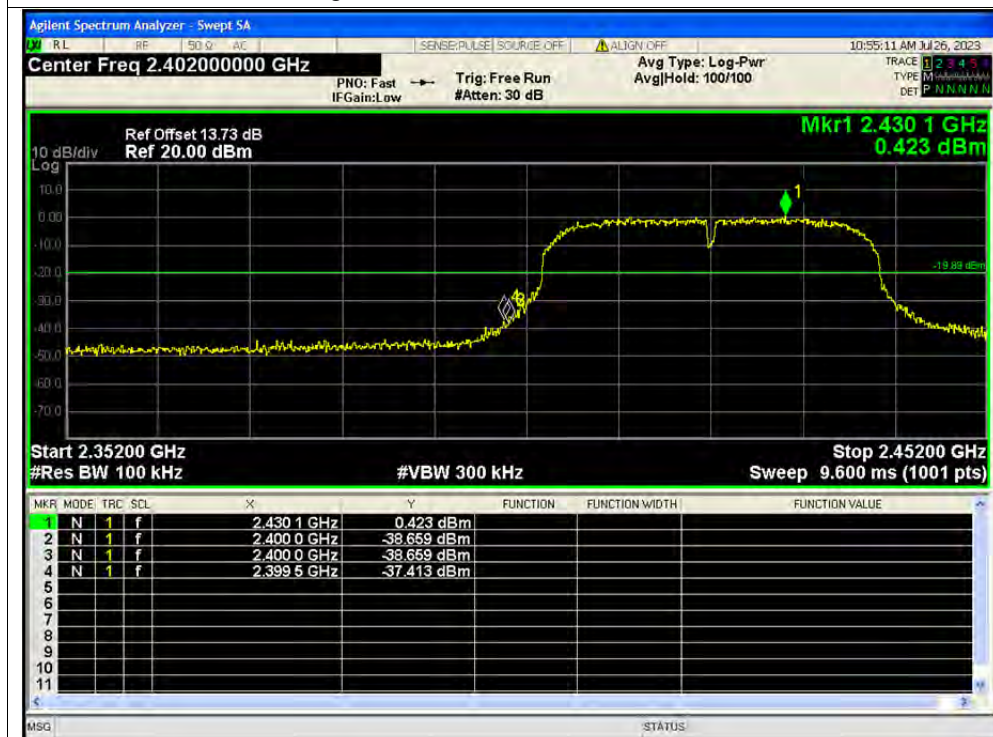

Band Edge NVNT n40 2462 MHz Ant1 Ref



Band Edge NVNT n40 2462 MHz Ant1 Emission



**A.7. Power Spectral Density**

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	Ant1	-5.47	0	-5.47	8	Pass
NVNT	b	2442	Ant1	-5.91	0	-5.91	8	Pass
NVNT	b	2472	Ant1	-5.03	0	-5.03	8	Pass
NVNT	g	2412	Ant1	-9.46	0	-9.46	8	Pass
NVNT	g	2442	Ant1	-9.64	0	-9.64	8	Pass
NVNT	g	2472	Ant1	-9.14	0	-9.14	8	Pass
NVNT	n20	2412	Ant1	-10.2	0	-10.2	8	Pass
NVNT	n20	2442	Ant1	-10.24	0	-10.24	8	Pass
NVNT	n20	2472	Ant1	-9.83	0	-9.83	8	Pass
NVNT	n40	2422	Ant1	-12.47	0	-12.47	8	Pass
NVNT	n40	2442	Ant1	-12.84	0	-12.84	8	Pass
NVNT	n40	2462	Ant1	-12.58	0	-12.58	8	Pass



Test Graphs

PSD NVNT b 2412 MHz Ant1




PSD NVNT b 2442 MHz Ant1



PSD NVNT b 2472 MHz Ant1




PSD NVNT g 2412 MHz Ant1

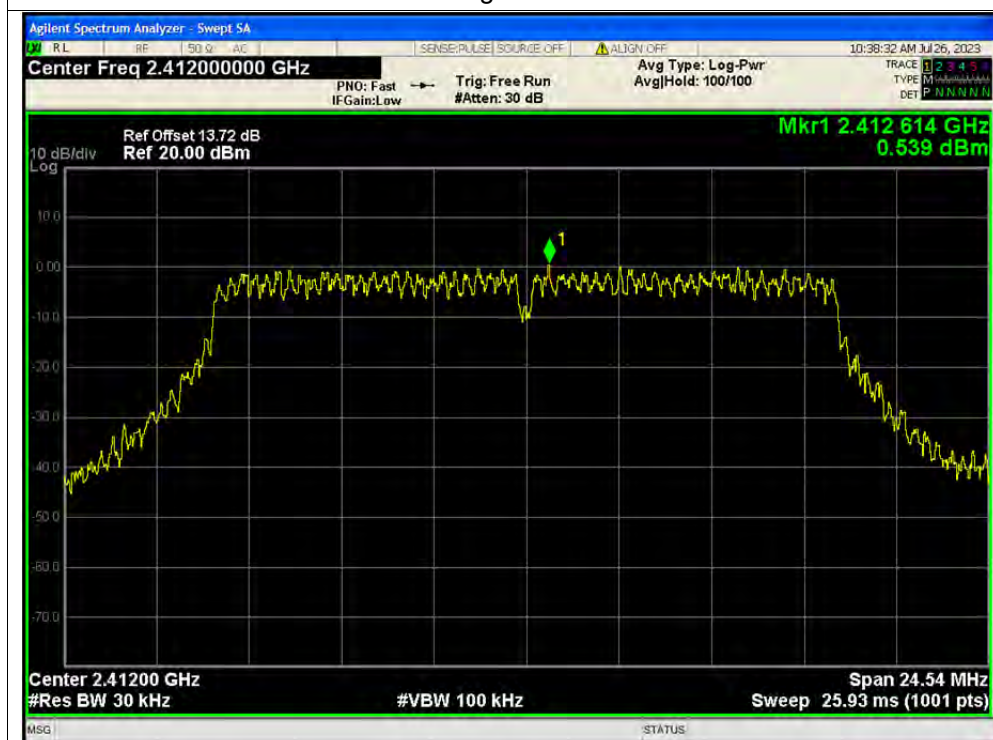



PSD NVNT g 2442 MHz Ant1

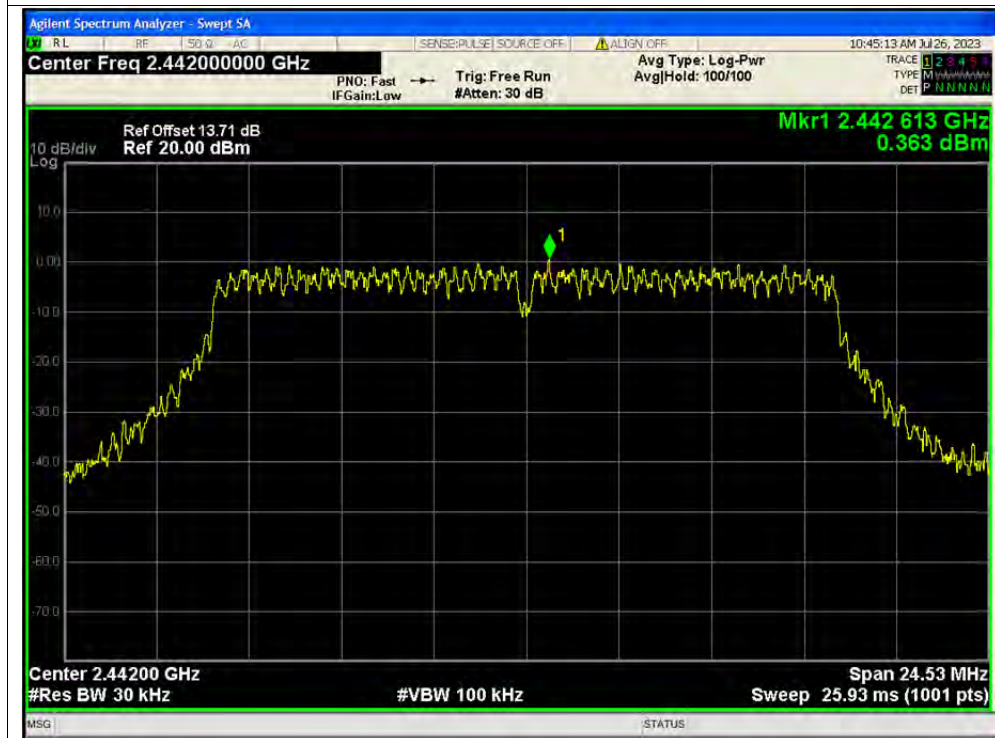

PSD NVNT g 2472 MHz Ant1



PSD NVNT n20 2412 MHz Ant1



PSD NVNT n20 2442 MHz Ant1



PSD NVNT n20 2472 MHz Ant1



PSD NVNT n40 2422 MHz Ant1





PSD NVNT n40 2442 MHz Ant1



PSD NVNT n40 2462 MHz Ant1





A.8. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW = 9 kHz, VBW = 30 kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120 V/60 Hz and AC 230 V/50 Hz were considered and tested respectively, only the results of the worst case AC 120 V/60 Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT + Adapter + PC + PC Adapter + WIFI TX

Test voltage: AC 120 V/60 Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plot:

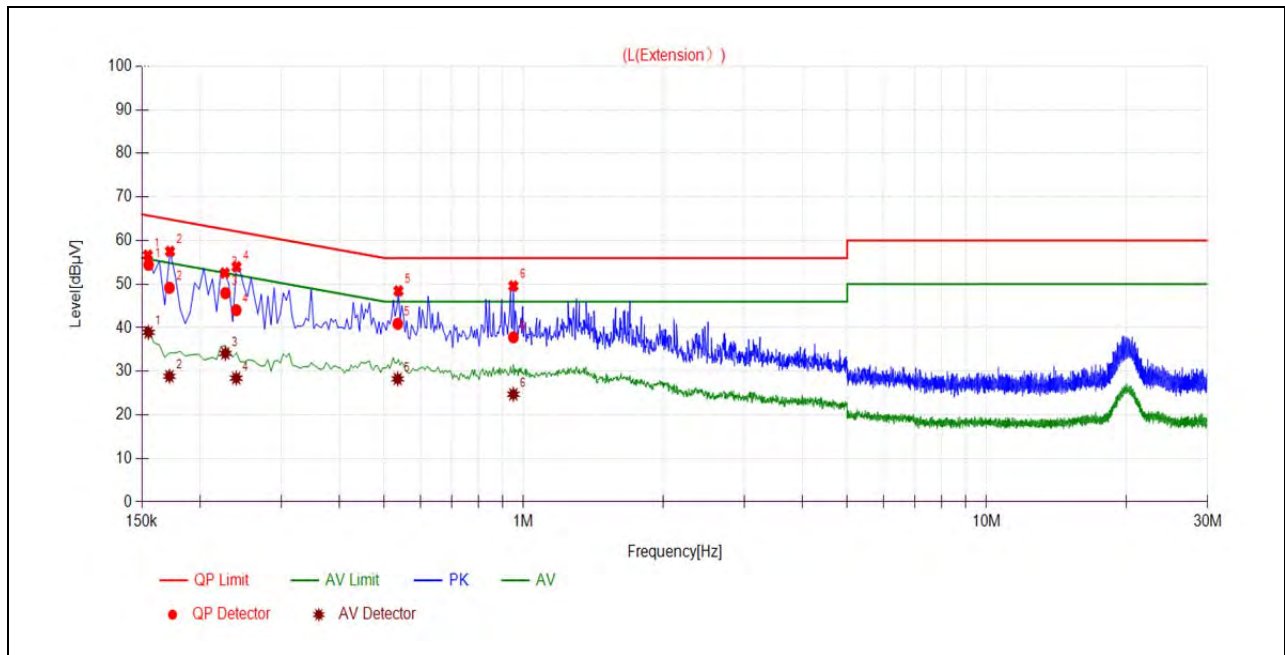

(L Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1550	54.45	38.92	65.73	38.92	Line	PASS
2	0.1720	49.16	28.85	64.86	28.85		PASS
3	0.2271	47.93	34.10	62.55	34.10		PASS
4	0.2397	44.04	28.42	62.11	28.42		PASS
5	0.5350	40.90	28.25	56.00	28.25		PASS
6	0.9510	37.79	24.72	56.00	24.72		PASS

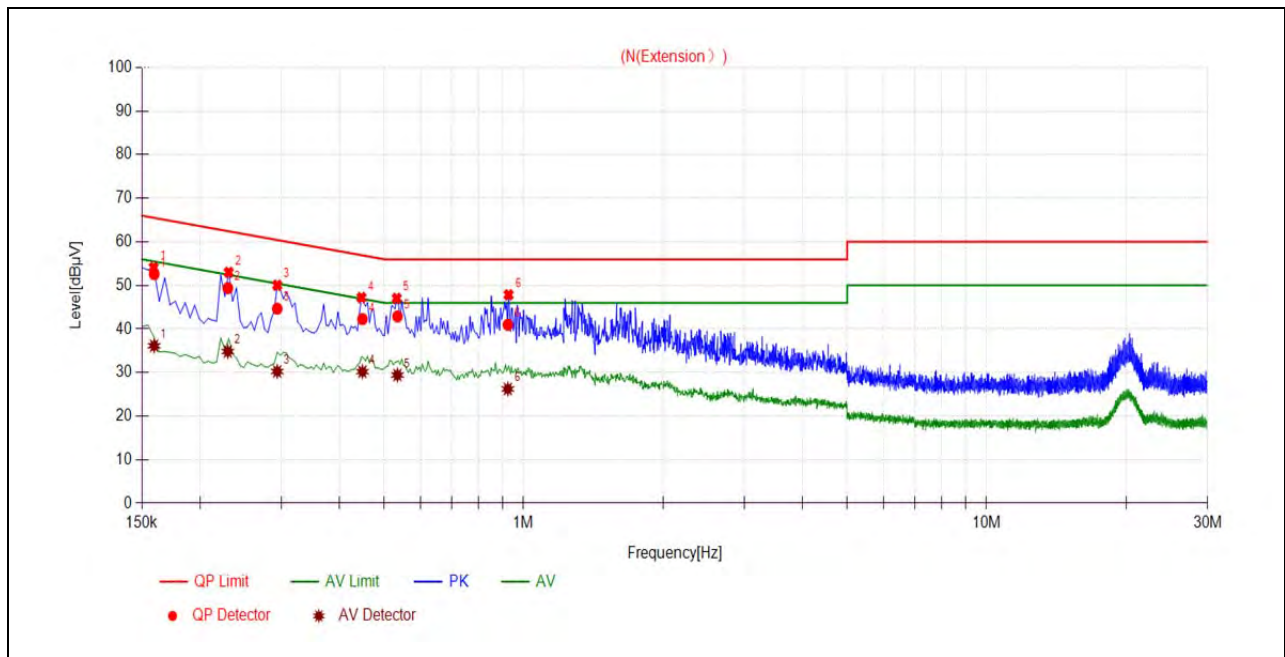

(N Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1594	52.58	36.14	65.50	55.50	Neutral	PASS
2	0.2299	49.37	34.82	62.45	52.45		PASS
3	0.2939	44.66	30.24	60.41	50.41		PASS
4	0.4489	42.27	30.18	56.90	46.90		PASS
5	0.5344	42.88	29.42	56.00	46.00		PASS
6	0.9251	40.97	26.22	56.00	46.00		PASS



A.9. Restricted Frequency Bands

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading


G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3 m


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

802.11b Mode


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
1	2390.00	PK	22.87	6.74	27.20	56.81	74	PASS
1	2390.00	AV	11.52	6.74	27.20	45.46	54	PASS
13	2486.59	PK	26.37	6.74	27.20	60.31	74	PASS
13	2486.05	AV	16.67	6.74	27.20	50.61	54	PASS

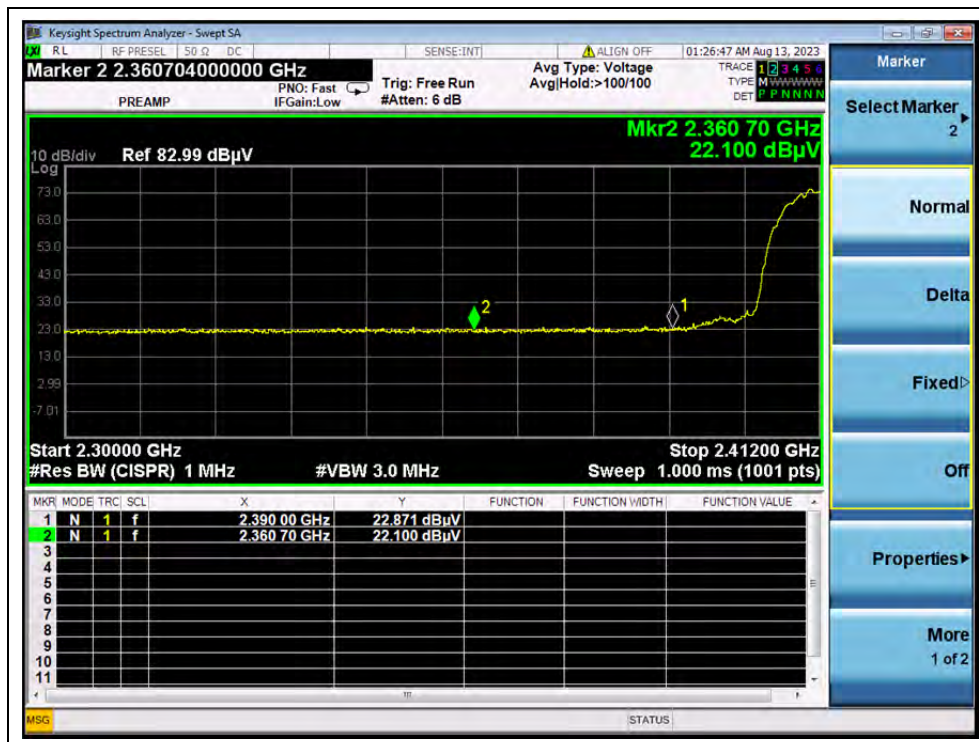

(PEAK, Channel 1, 802.11b)

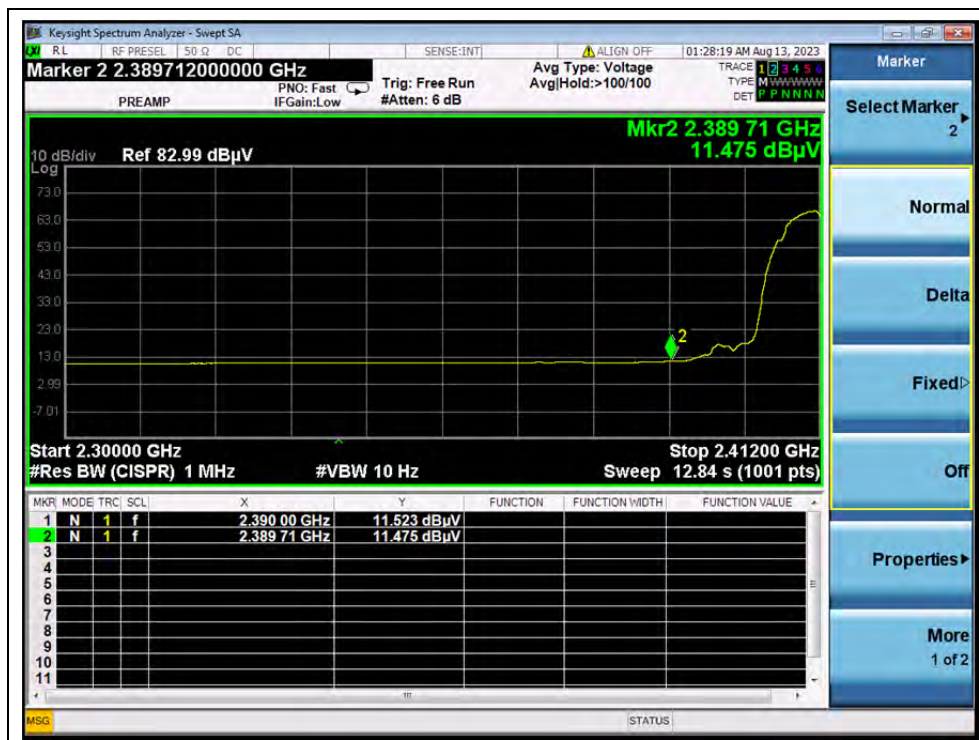

(AVERAGE, Channel 1, 802.11b)

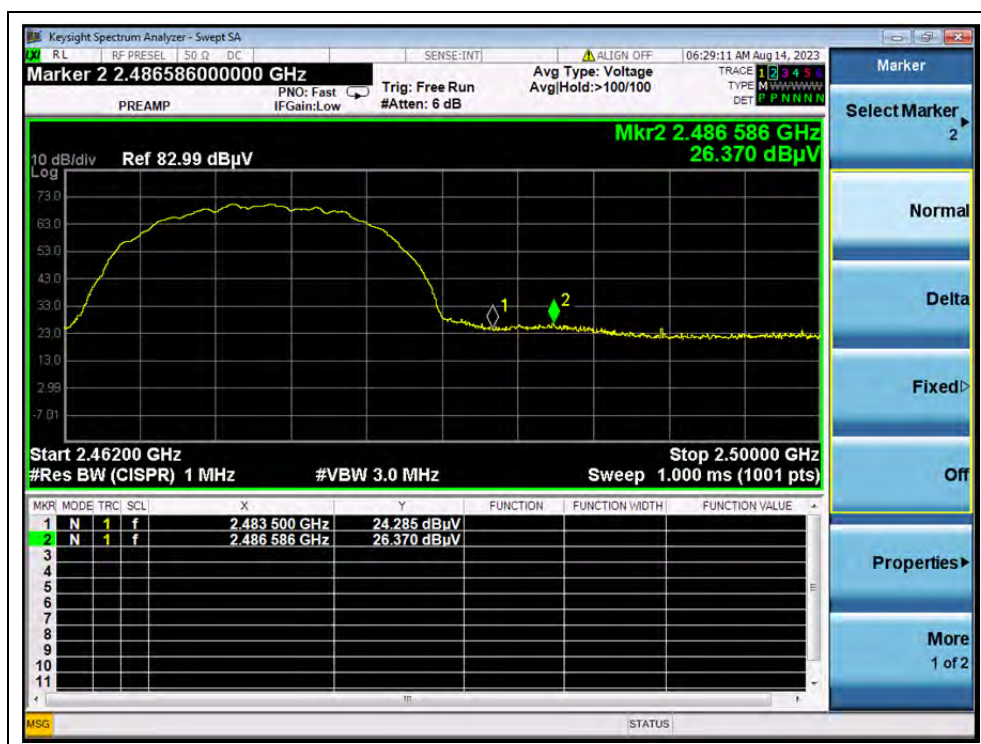

(PEAK, Channel 13, 802.11b)




(AVERAGE, Channel 13, 802.11b)




802.11g Mode


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBμV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
1	2389.94	PK	27.82	6.74	27.20	61.76	74	PASS
1	2390.00	AV	15.34	6.74	27.20	49.28	54	PASS
13	2483.50	PK	28.80	6.74	27.20	62.74	74	PASS
13	2483.50	AV	17.02	6.74	27.20	50.96	54	PASS

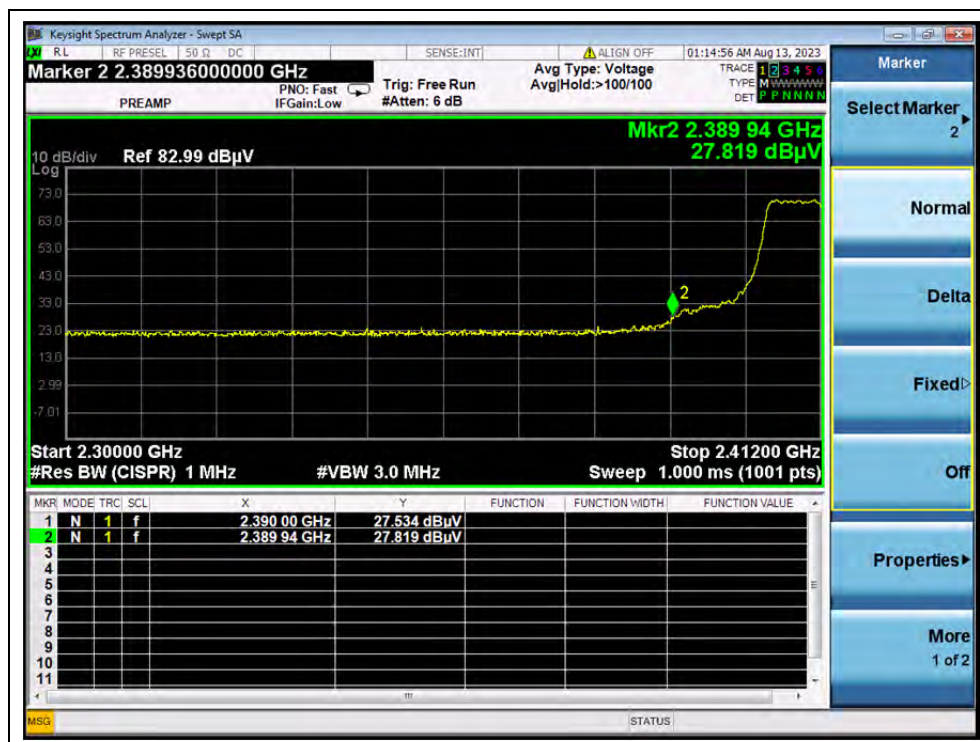


(PEAK, Channel 1, 802.11g)

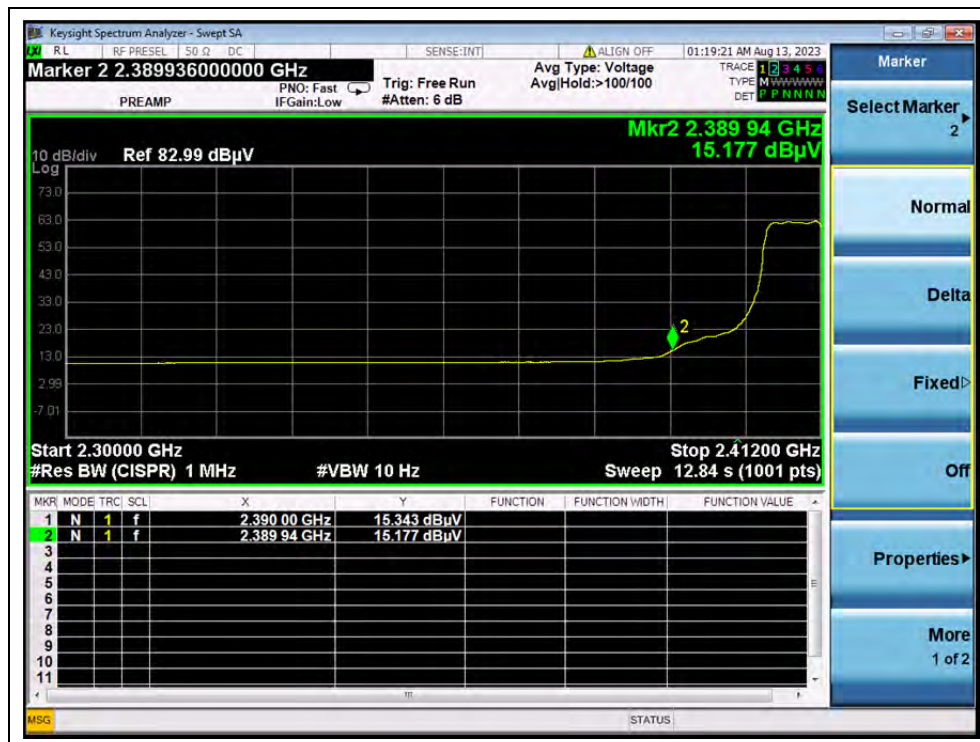

(AVERAGE, Channel 1, 802.11g)

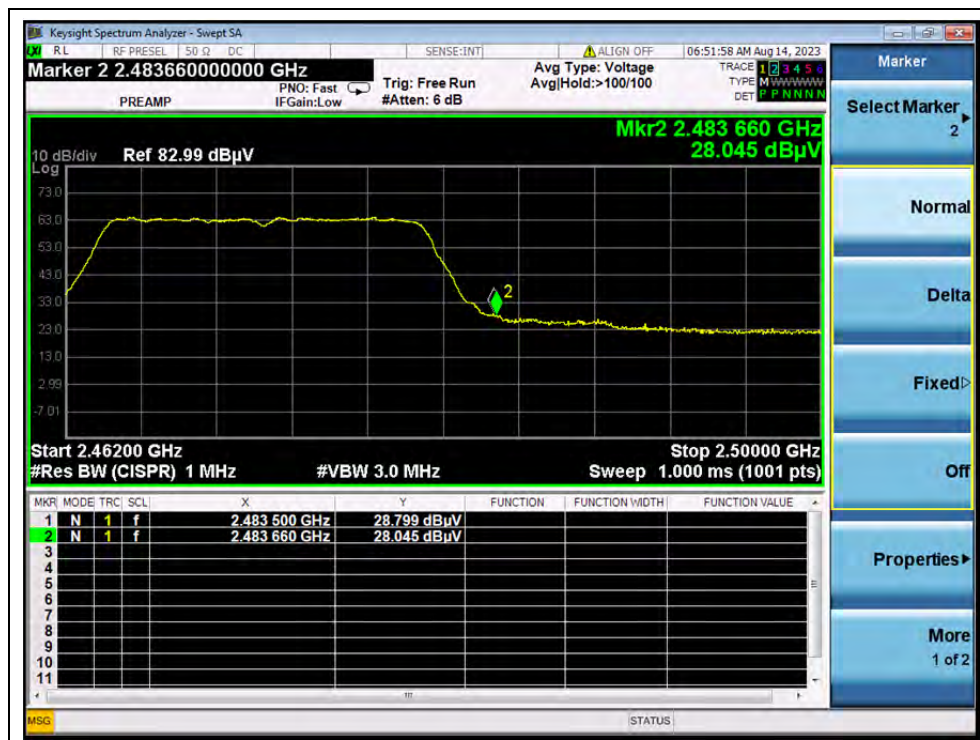

(PEAK, Channel 13, 802.11g)

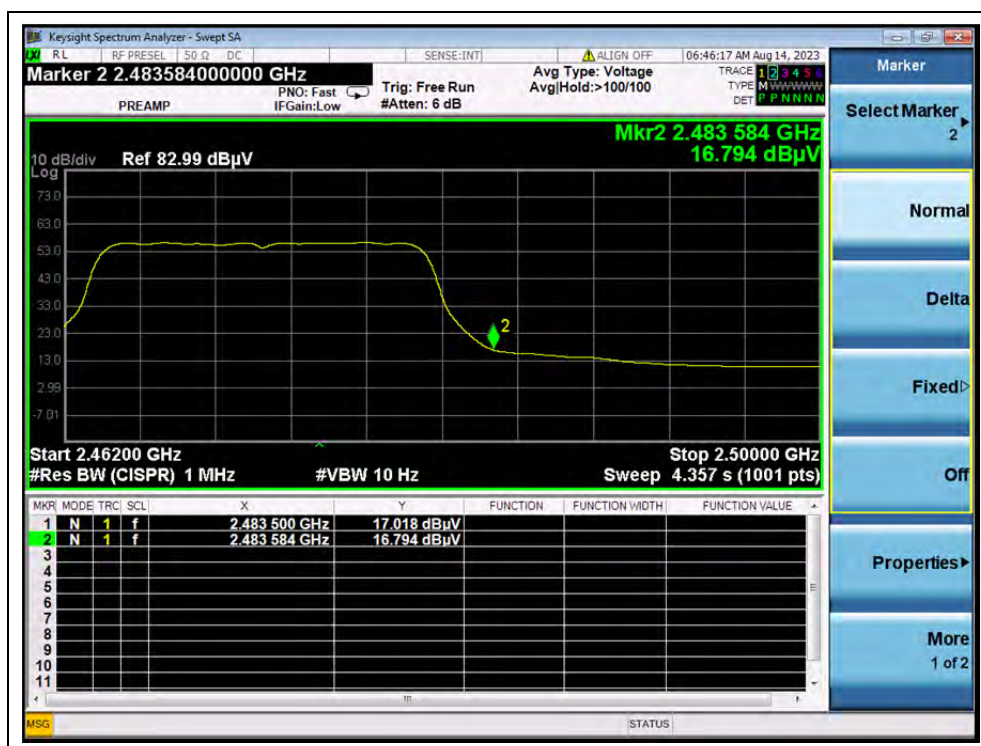


(AVERAGE, Channel 13, 802.11g)




802.11n(HT20) Mode


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBμV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
1	2389.94	PK	28.78	6.74	27.20	62.72	74	PASS
1	2390.00	AV	15.98	6.74	27.20	49.92	54	PASS
13	2483.74	PK	29.79	6.74	27.20	63.73	74	PASS
13	2483.50	AV	16.67	6.74	27.20	50.61	54	PASS

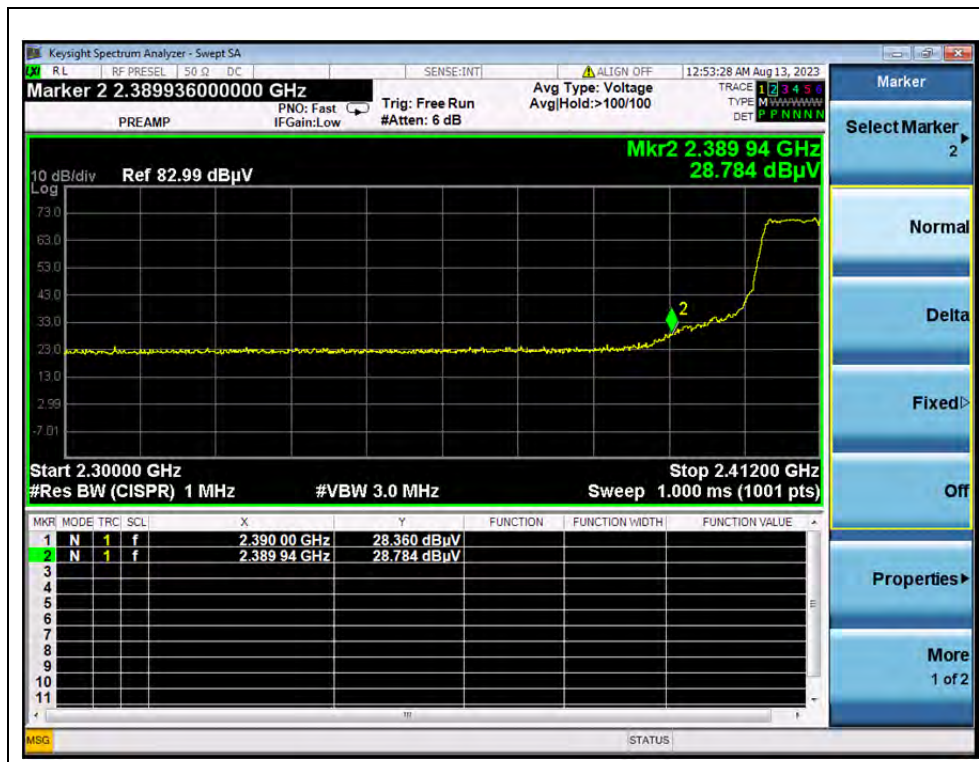


(PEAK, Channel 1, 802.11n(HT20))

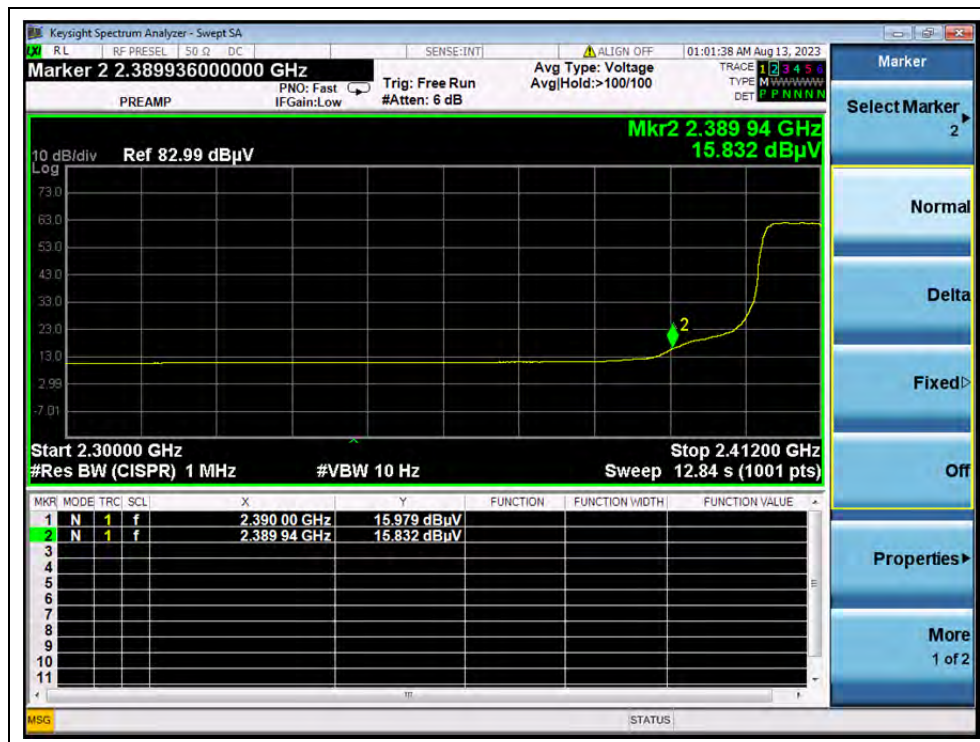

(AVERAGE, Channel 1, 802.11n(HT20))

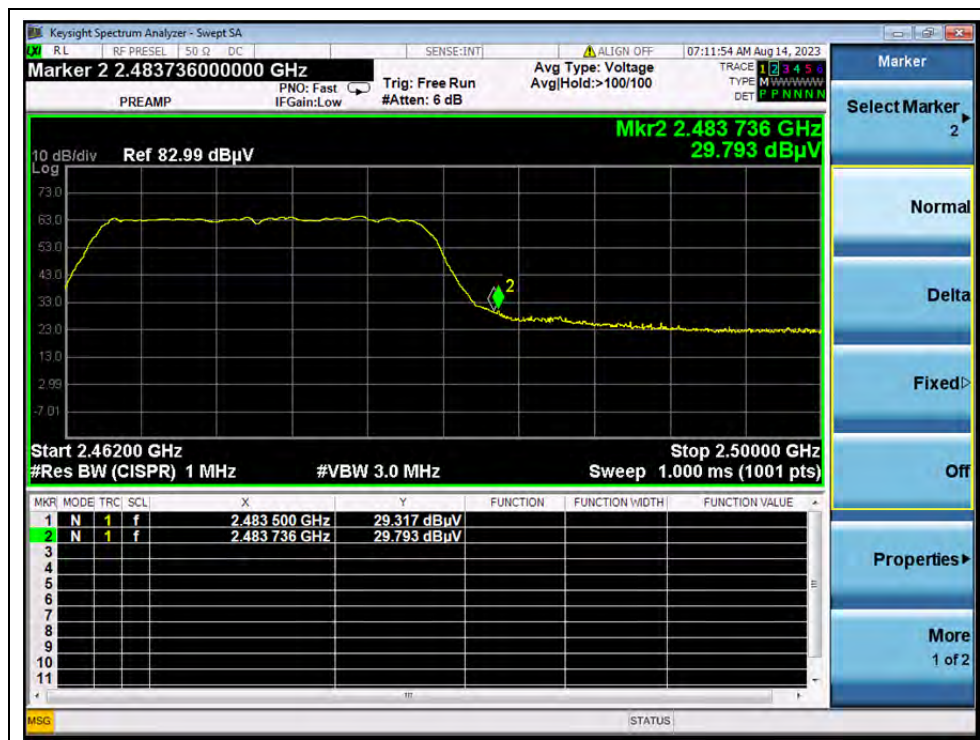

(PEAK, Channel 13, 802.11n(HT20))

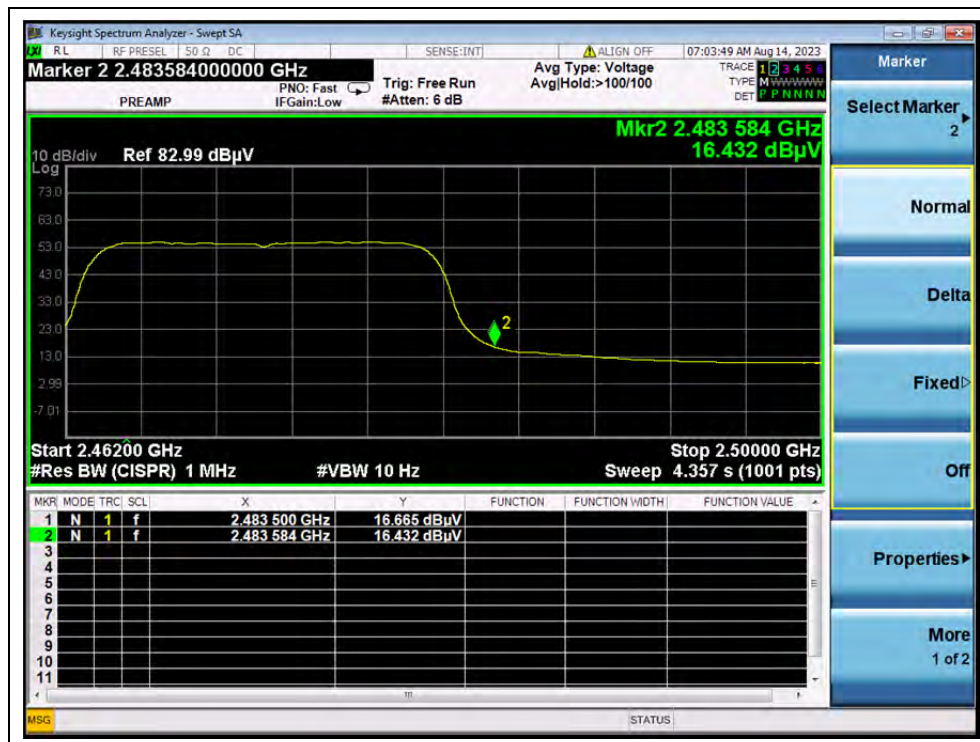


(AVERAGE, Channel 13, 802.11n(HT20))




802.11n(HT40) Mode


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
3	2389.79	PK	27.47	6.74	27.20	61.41	74	PASS
3	2390.00	AV	14.96	6.74	27.20	48.90	54	PASS
11	2483.96	PK	28.43	6.74	27.20	62.37	74	PASS
11	2483.50	AV	16.32	6.74	27.20	50.26	54	PASS

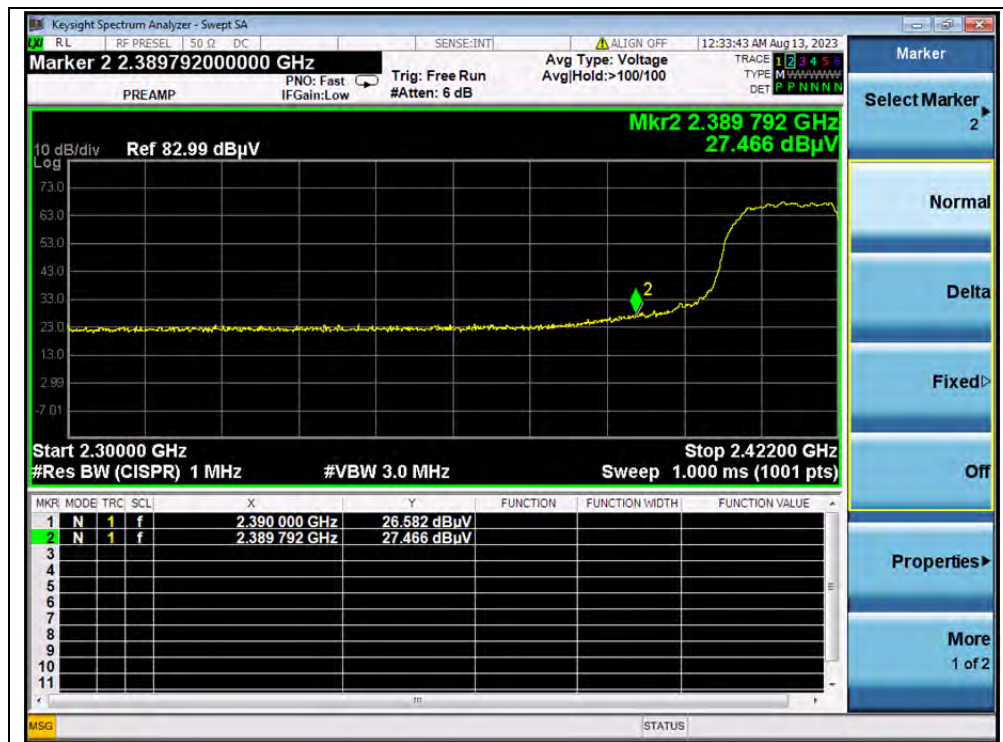


(PEAK, Channel 3, 802.11n(HT40))

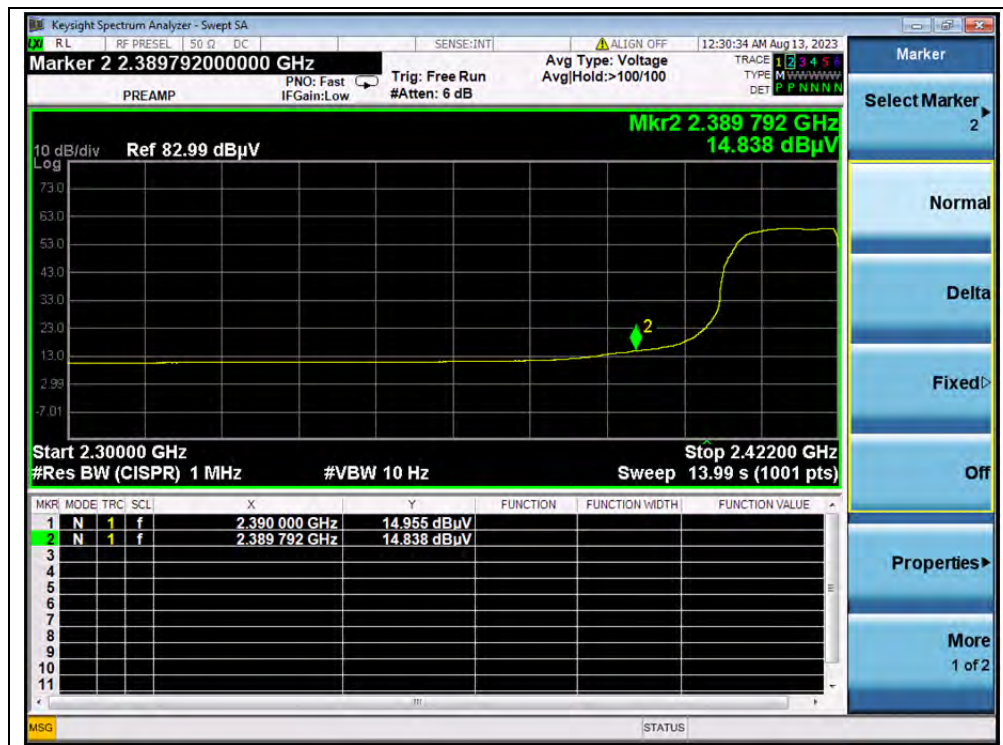

(AVERAGE, Channel 3, 802.11n(HT40))

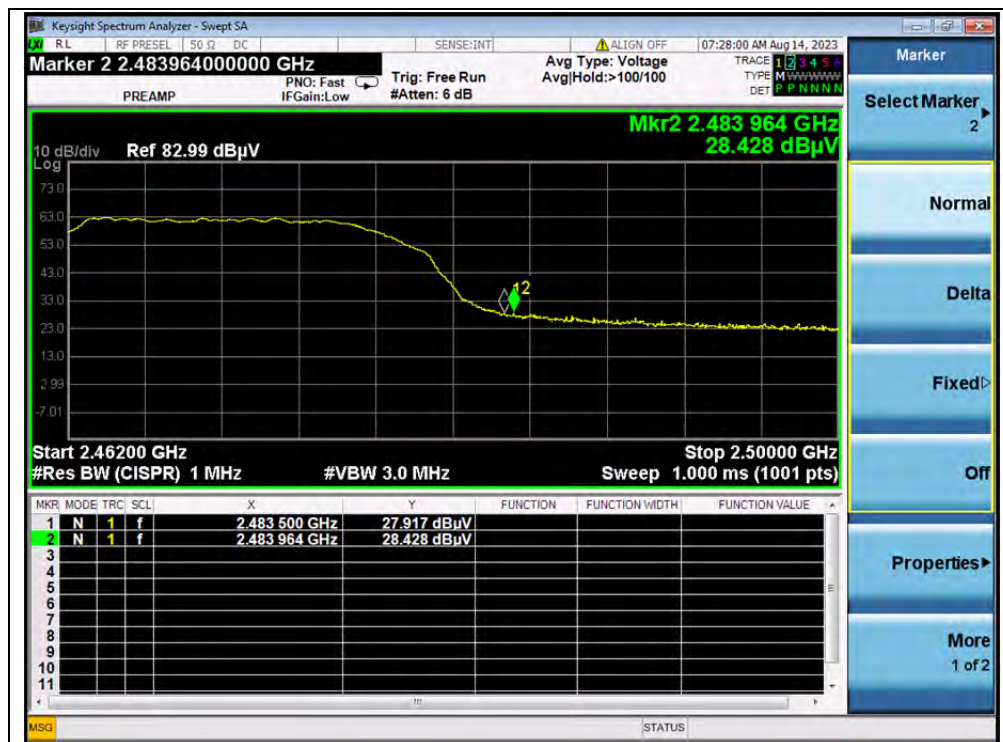

(PEAK, Channel 11, 802.11n(HT40))

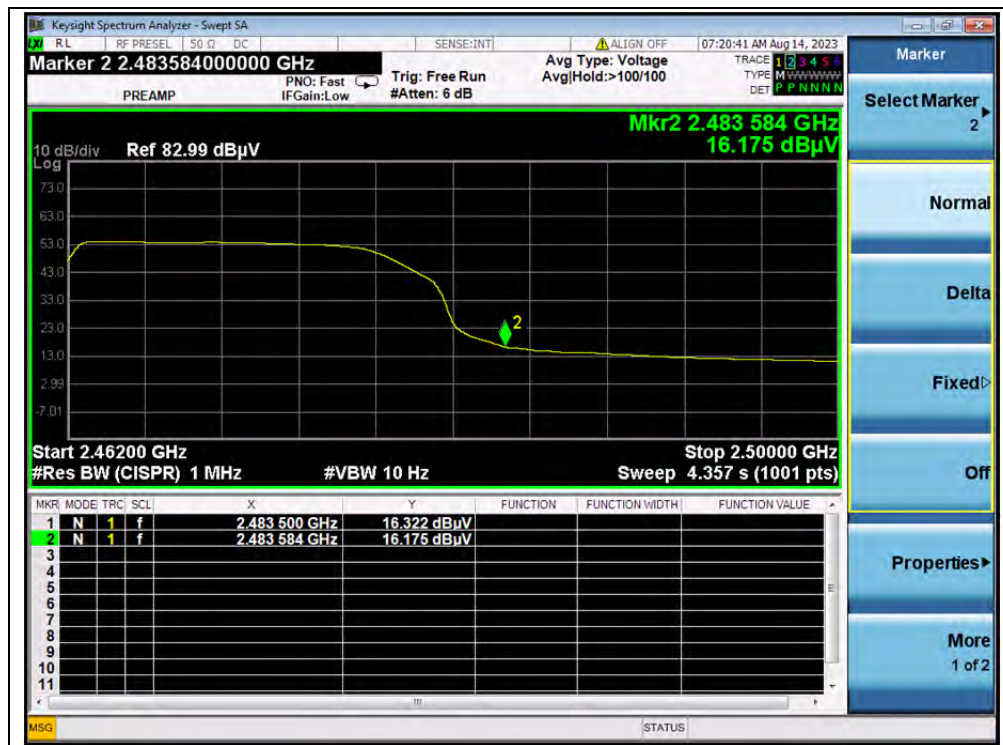

(AVERAGE, Channel 11, 802.11n(HT40))



A.10. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3 m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.


Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18 GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20 dB lower than the limit was not recorded.

**802.11b Mode**

Plot for Channel 1

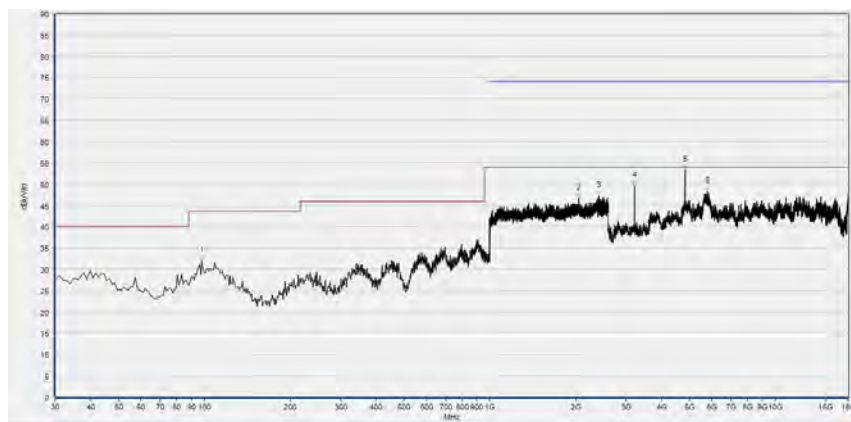

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
97.900	31.93	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2048.000	46.52	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2409.067	47.27	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3216.000	49.63	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4823.760	53.36	N/A	50.13	74.00	N/A	54.00	Horizontal	PASS
5790.880	48.29	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30 MHz to 18 GHz)




Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
108.570	32.68	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1437.333	45.66	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2411.733	47.05	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3216.000	47.32	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4050.680	46.62	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4823.760	51.80	N/A	48.30	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30 MHz to 18 GHz)




Plot for Channel 7

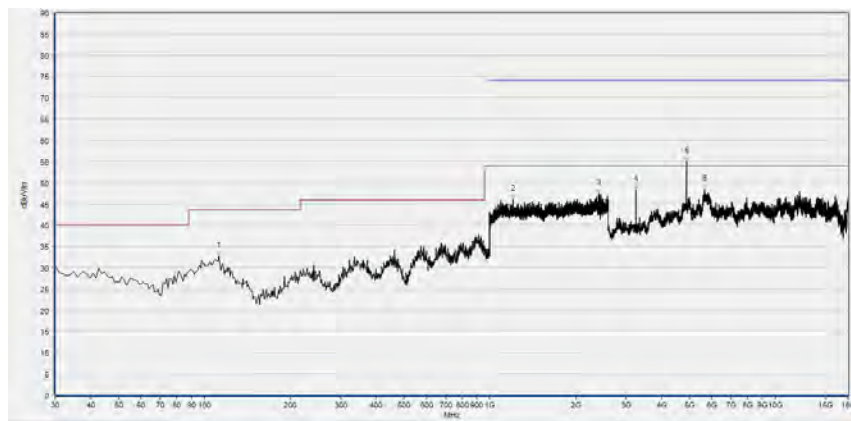

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
112.450	32.76	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1205.333	46.02	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2408.000	47.42	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3256.040	48.19	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4883.946	54.92	N/A	50.37	74.00	N/A	54.00	Horizontal	PASS
5652.280	48.46	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30 MHz to 18 GHz)

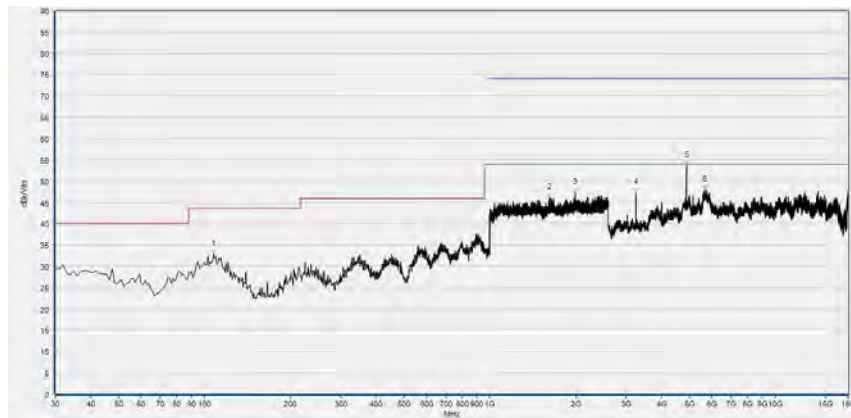


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
107.600	32.67	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1615.467	46.15	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1994.133	47.19	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3256.040	47.31	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4883.816	53.65	N/A	48.41	74.00	N/A	54.00	Vertical	PASS
5655.360	47.93	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30 MHz to 18 GHz)




Plot for Channel 13

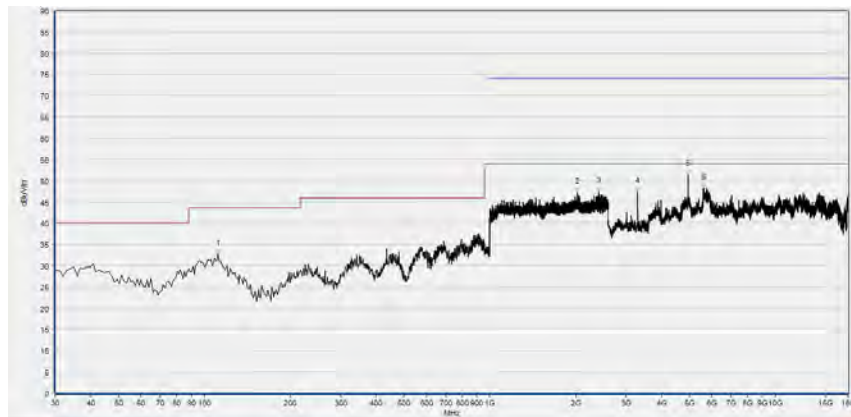

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
111.480	32.64	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2022.400	47.31	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2411.200	47.46	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3296.080	47.41	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4943.984	51.41	N/A	47.15	74.00	N/A	54.00	Horizontal	PASS
5612.240	48.31	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30 MHz to 18 GHz)

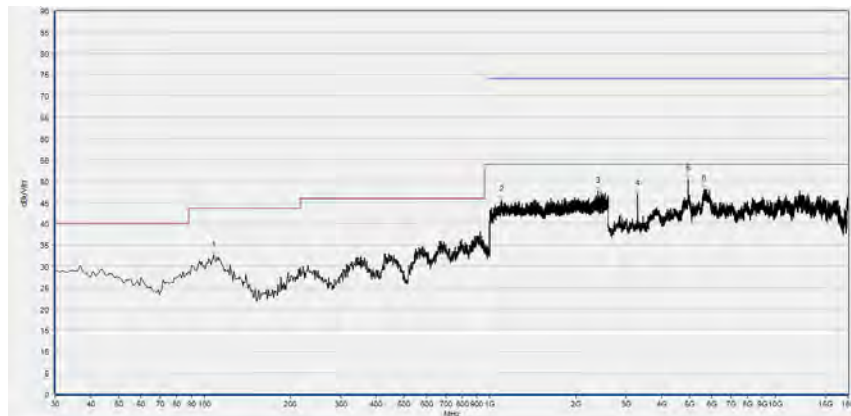


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
107.600	32.52	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1098.133	45.54	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2400.000	47.64	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3296.080	46.97	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4943.880	50.51	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5630.720	48.18	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30 MHz to 18 GHz)

**802.11g Mode**

Plot for Channel1

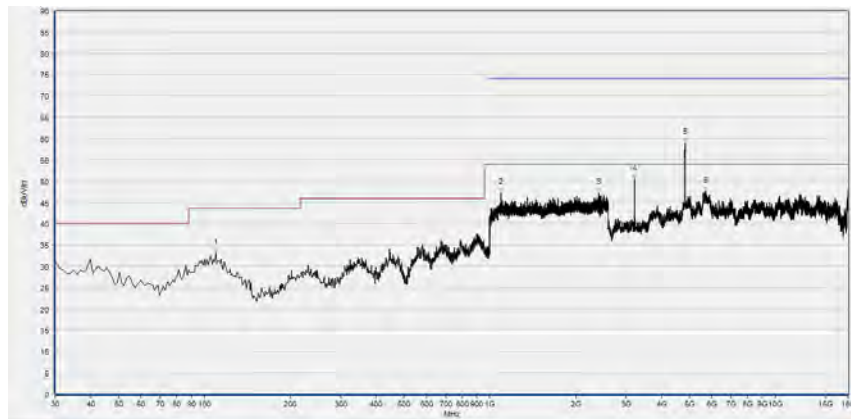

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	33.25	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1093.867	47.29	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2402.133	47.34	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3216.000	50.46	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4824.400	59.06	N/A	50.89	74.00	N/A	54.00	Horizontal	PASS
5704.640	47.60	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30 MHz to 18 GHz)




Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
108.570	31.08	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2019.733	46.71	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3216.000	47.21	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3989.080	47.06	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4833.300	59.01	N/A	48.53	74.00	N/A	54.00	Vertical	PASS
5627.640	48.67	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30 MHz to 18 GHz)




Plot for Channel 7

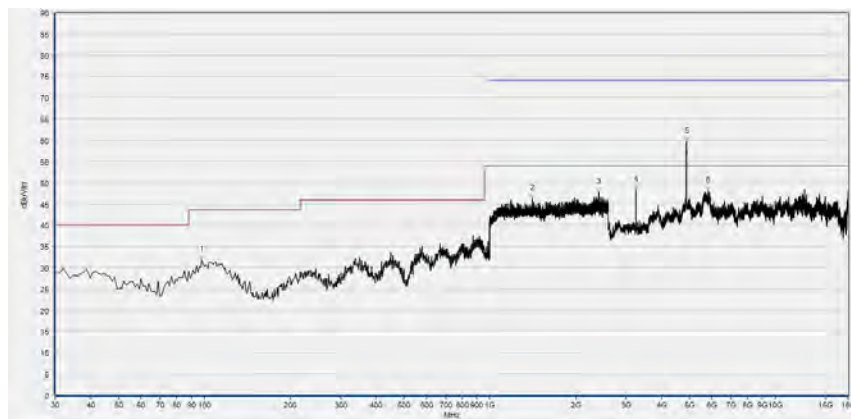

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
97.900	31.82	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1411.733	46.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2406.933	47.68	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3256.040	48.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4884.672	59.66	N/A	50.93	74.00	N/A	54.00	Horizontal	PASS
5809.360	48.11	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30 MHz to 18 GHz)

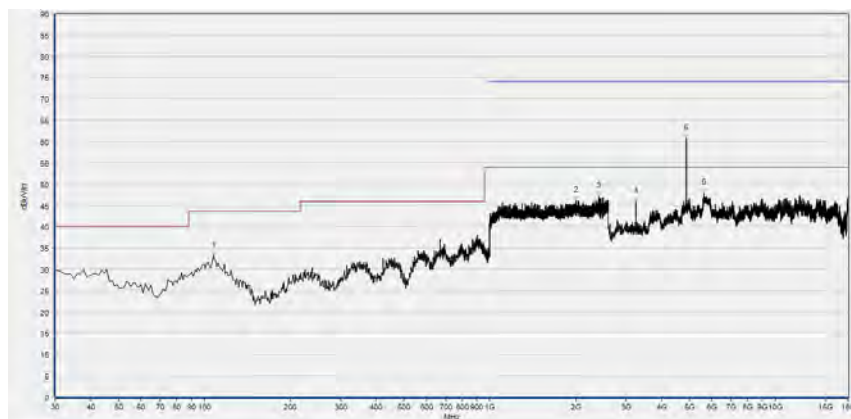


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
107.600	33.18	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2003.200	46.01	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2414.400	47.11	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3256.040	45.94	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4879.200	60.62	N/A	49.95	74.00	N/A	54.00	Vertical	PASS
5633.800	47.98	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30 MHz to 18 GHz)




Plot for Channel 13

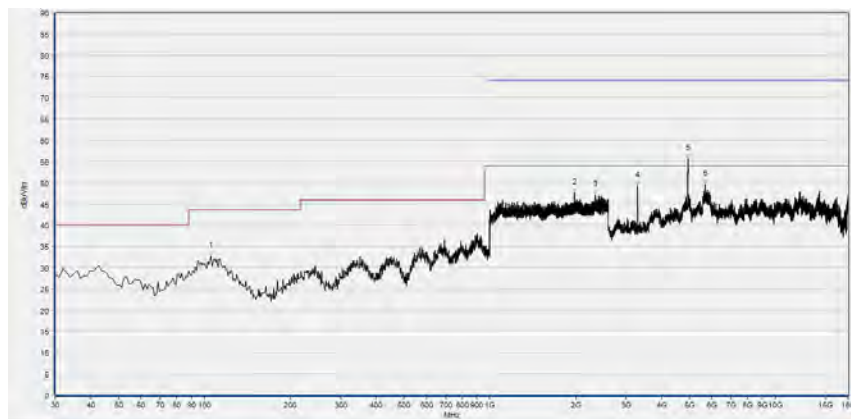

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
105.660	32.73	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1974.400	47.62	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2343.467	47.13	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3296.080	49.23	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4940.237	55.58	N/A	45.76	74.00	N/A	54.00	Horizontal	PASS
5673.840	49.58	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30 MHz to 18 GHz)

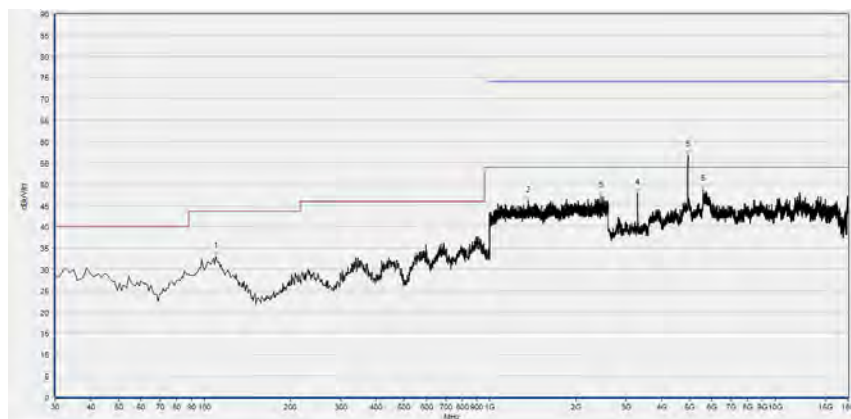


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	32.99	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1362.133	46.16	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2453.333	47.11	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3296.080	47.87	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4944.600	56.81	N/A	48.22	74.00	N/A	54.00	Vertical	PASS
5603.000	48.75	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30 MHz to 18 GHz)




802.11n(HT20) Mode

Plot for Channel 1

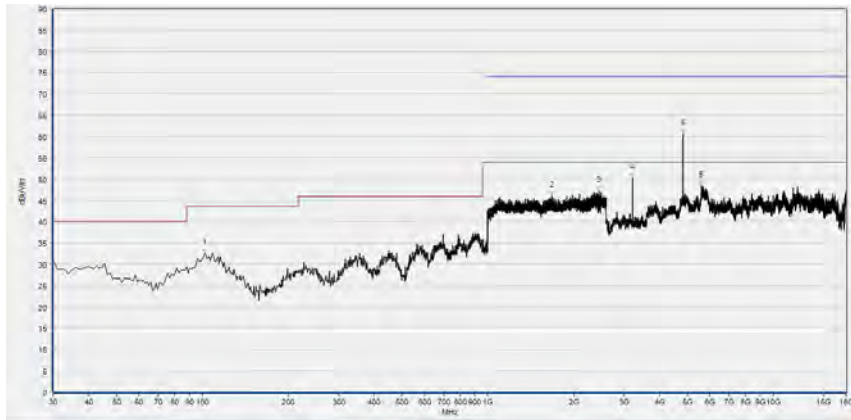

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
101.780	32.52	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1671.467	46.06	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2453.867	47.29	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3216.000	50.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4823.760	60.64	N/A	50.72	74.00	N/A	54.00	Horizontal	PASS
5603.000	48.48	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30 MHz to 18 GHz)

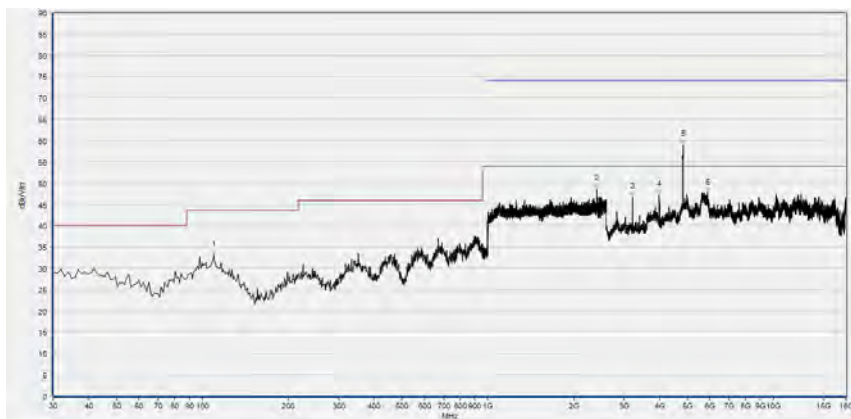


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	33.16	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2412.800	48.60	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3216.000	46.68	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3986.000	47.25	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4826.840	58.92	N/A	48.88	74.00	N/A	54.00	Vertical	PASS
5892.520	47.96	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30 MHz to 18 GHz)




Plot for Channel 7

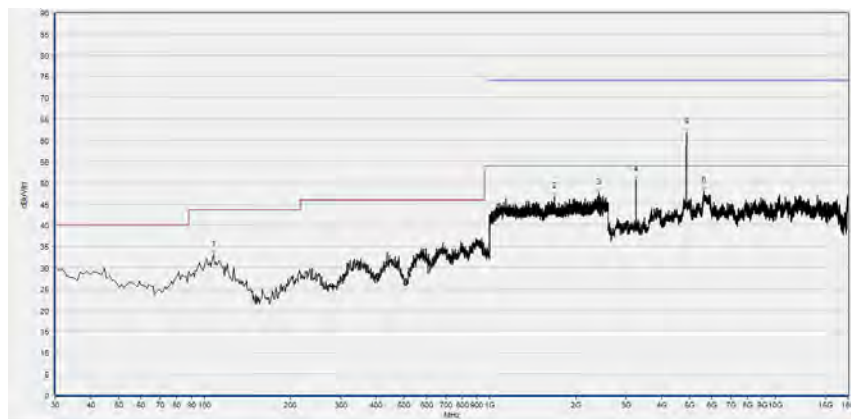

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
107.600	32.93	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1685.867	46.72	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2407.467	47.58	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3256.040	50.57	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4885.360	61.88	N/A	49.68	74.00	N/A	54.00	Horizontal	PASS
5624.560	48.07	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30 MHz to 18 GHz)

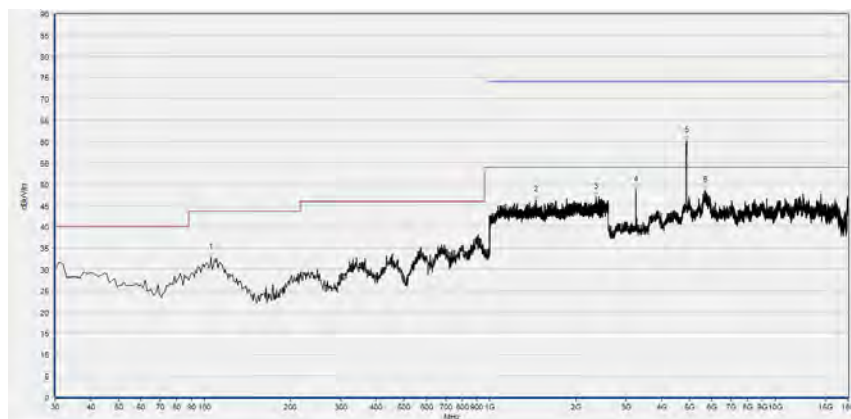


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
105.660	32.64	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1450.133	46.26	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2357.867	46.87	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3256.040	48.69	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4885.360	60.20	N/A	50.27	74.00	N/A	54.00	Vertical	PASS
5670.760	48.47	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30 MHz to 18 GHz)




Plot for Channel 13

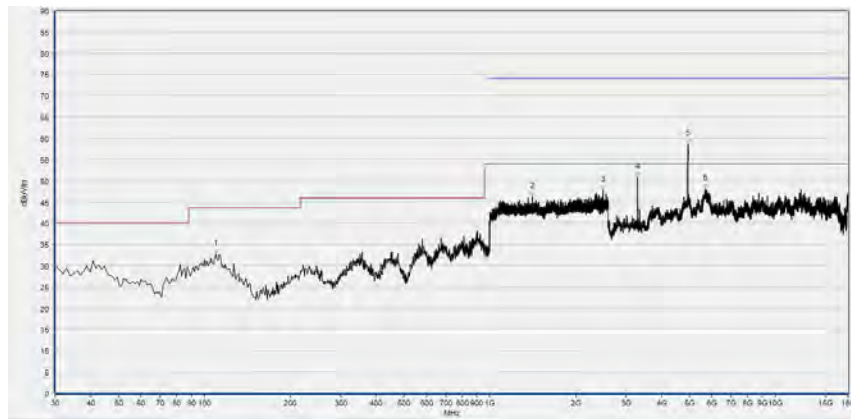

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	32.65	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1412.800	46.25	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2488.000	47.81	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3296.080	50.85	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4946.960	58.62	N/A	47.78	74.00	N/A	54.00	Horizontal	PASS
5670.760	48.11	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30 MHz to 18 GHz)

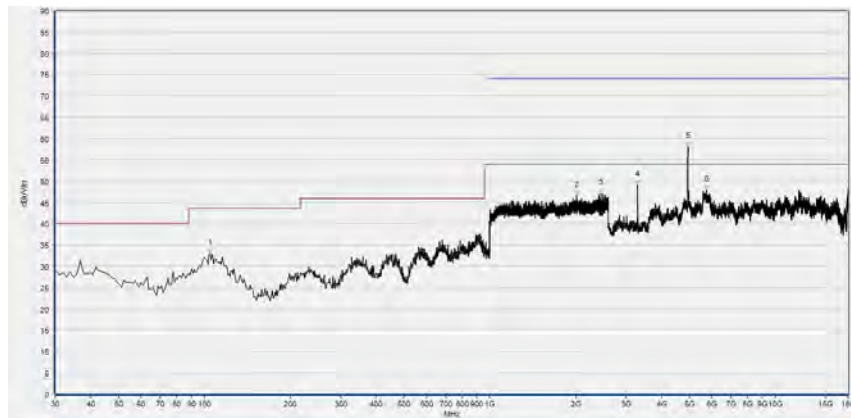


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
104.690	33.01	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2019.733	46.55	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2449.600	47.13	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3296.080	49.17	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4950.040	58.13	N/A	48.16	74.00	N/A	54.00	Vertical	PASS
5757.000	47.94	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30 MHz to 18 GHz)




802.11n(HT40) Mode

Plot for Channel 3

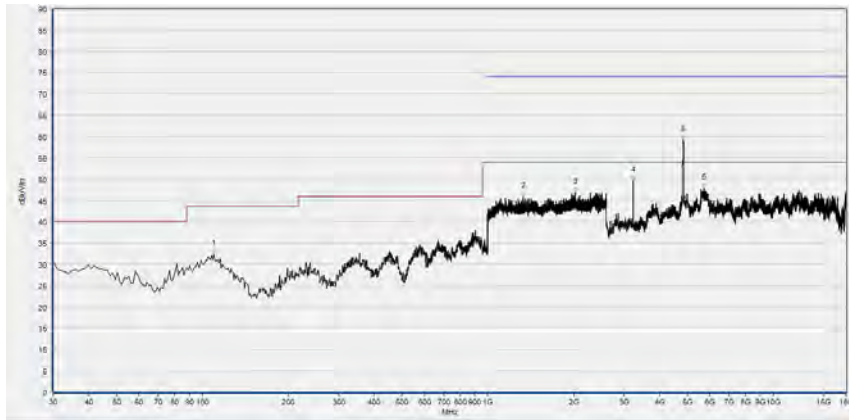

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	32.27	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1333.867	45.96	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2025.600	47.00	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3228.320	49.64	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4839.160	59.09	N/A	50.97	74.00	N/A	54.00	Horizontal	PASS
5716.960	48.01	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30 MHz to 18 GHz)

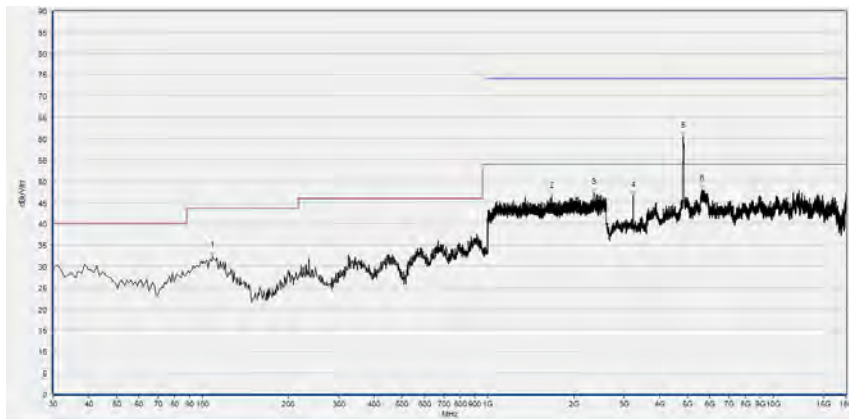

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
108.570	32.33	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1673.067	46.40	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2357.867	47.21	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3228.320	46.67	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4842.240	60.50	N/A	49.88	74.00	N/A	54.00	Vertical	PASS
5627.640	48.11	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30 MHz to 18 GHz)

Plot for Channel 7

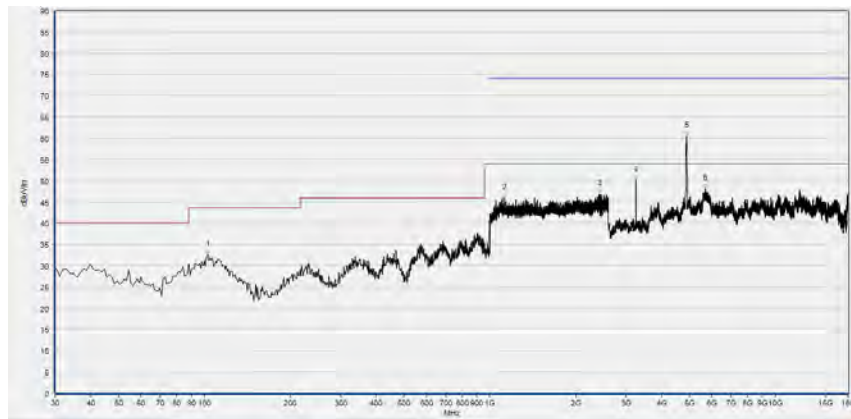

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
102.750	32.47	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1126.933	45.99	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2417.600	46.87	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3256.040	50.08	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4882.280	60.56	N/A	50.28	74.00	N/A	54.00	Horizontal	PASS
5676.920	48.17	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30 MHz to 18 GHz)

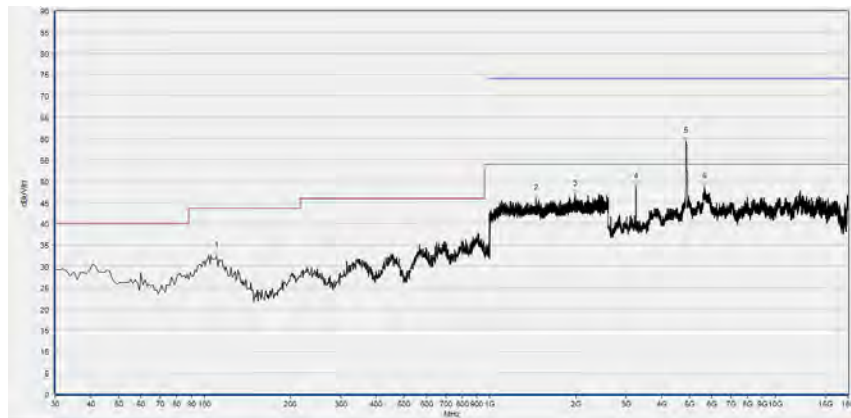


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
110.510	32.31	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1449.067	45.96	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1993.067	47.01	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3256.040	48.53	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4879.200	59.28	N/A	50.10	74.00	N/A	54.00	Vertical	PASS
5646.120	48.60	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30 MHz to 18 GHz)




Plot for Channel 11

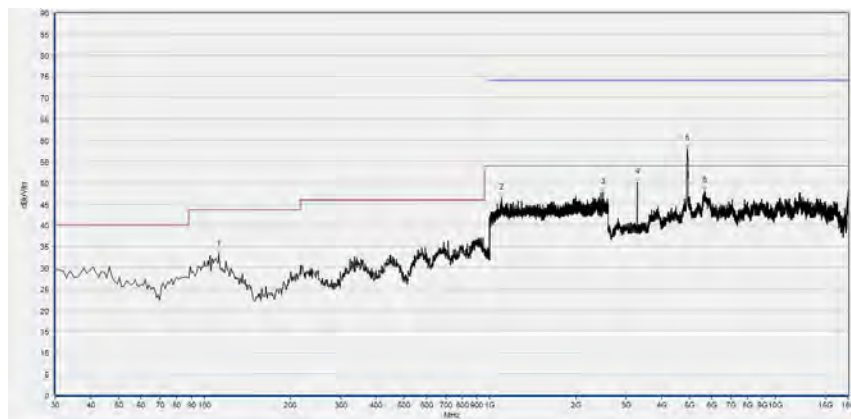

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
112.450	33.11	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1102.400	46.39	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2497.067	47.82	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3283.760	50.06	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4916.160	57.97	N/A	48.25	74.00	N/A	54.00	Horizontal	PASS
5646.120	48.15	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30 MHz to 18 GHz)

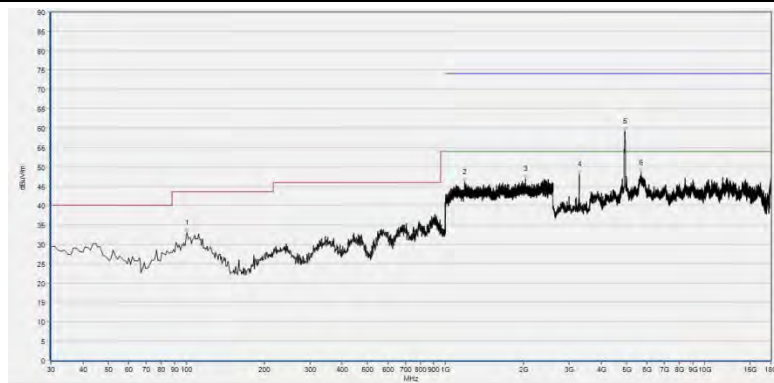

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
100.810	32.95	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1186.133	46.12	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2040.000	46.98	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3283.760	48.18	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4919.240	59.20	N/A	49.21	74.00	N/A	54.00	Vertical	PASS
5686.160	48.38	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30 MHz to 18 GHz)

END OF REPORT