


5.15-5.25GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


5240MHz

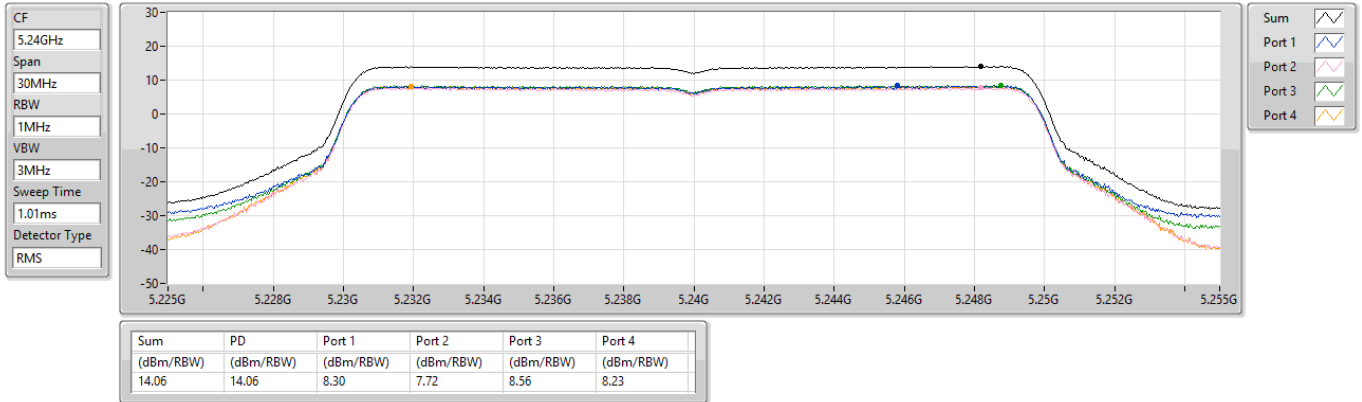

5.25-5.35GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


5260MHz

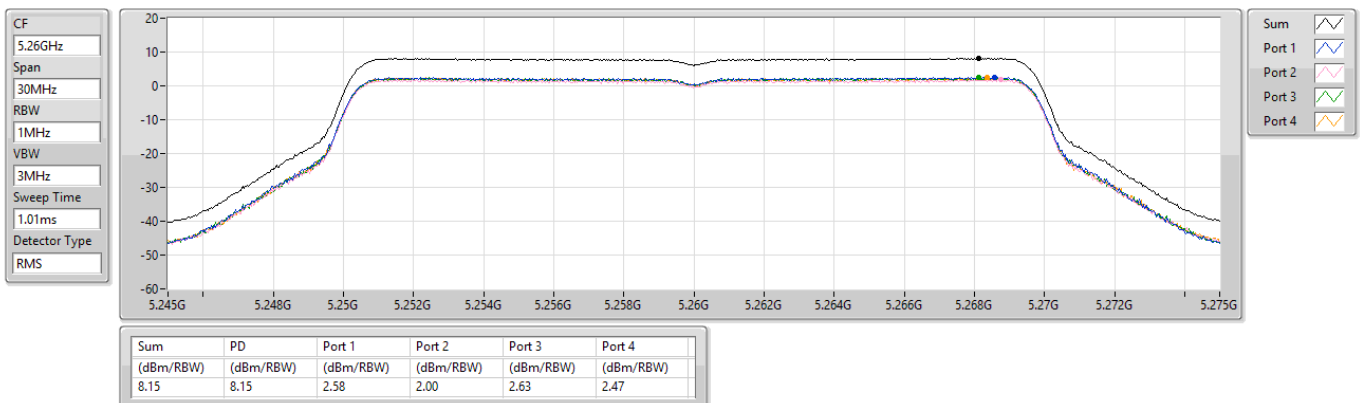

5.25-5.35GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


5300MHz

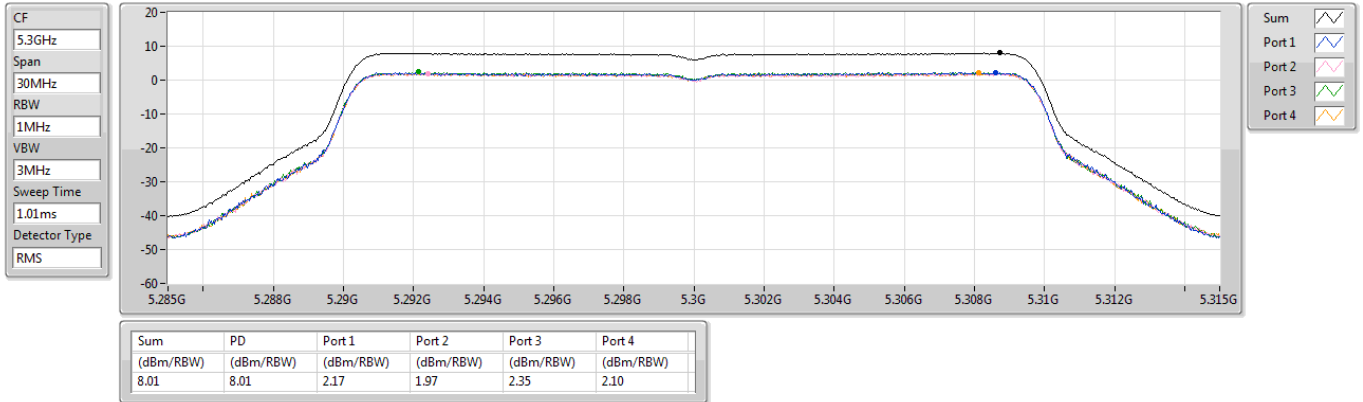

5.25-5.35GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


5320MHz

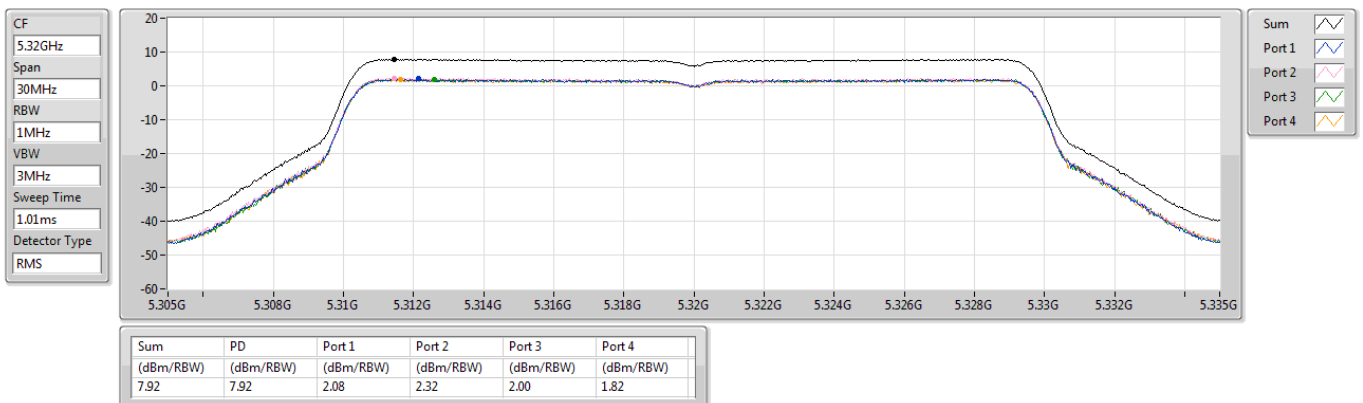

5.47-5.725GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


5500MHz

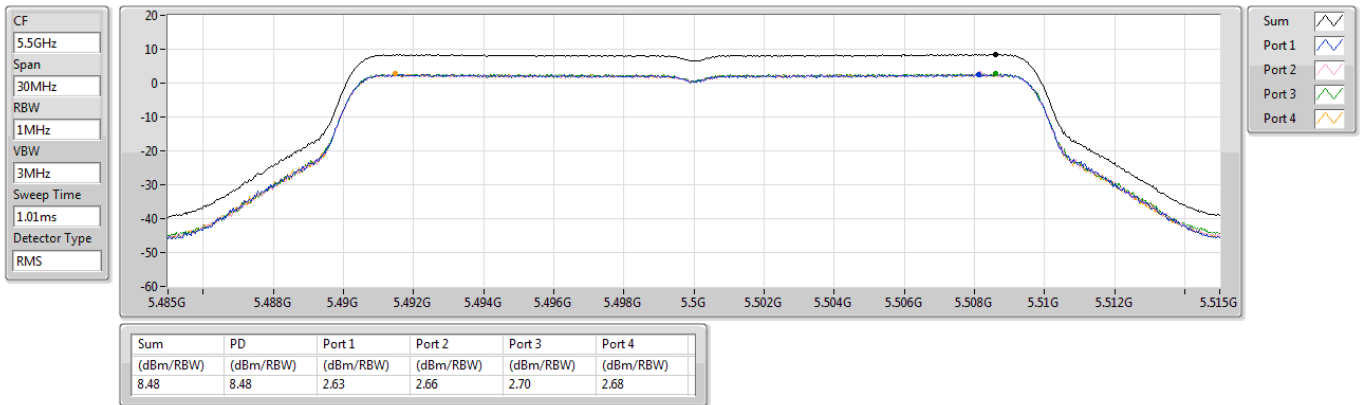

5.47-5.725GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


5580MHz

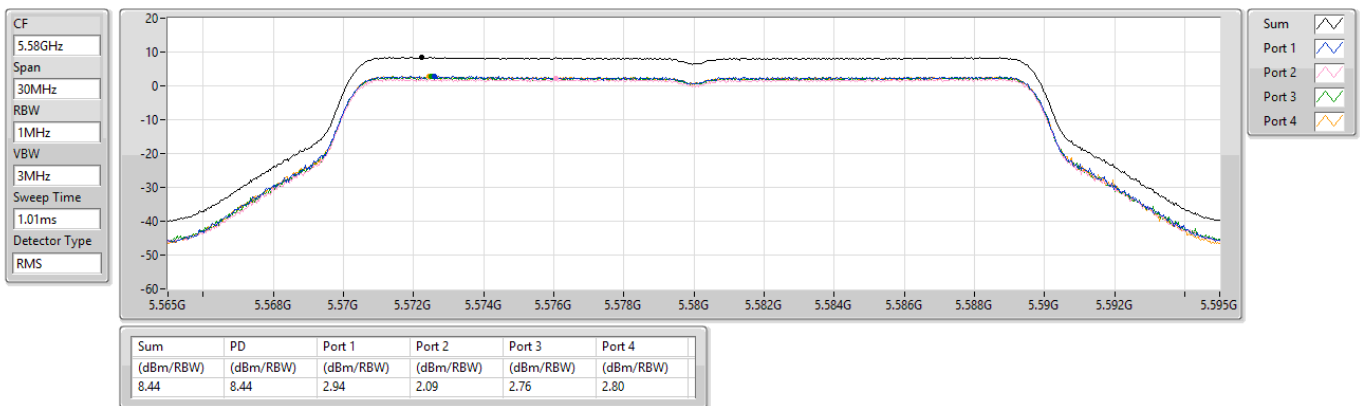

5.47-5.725GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


5700MHz

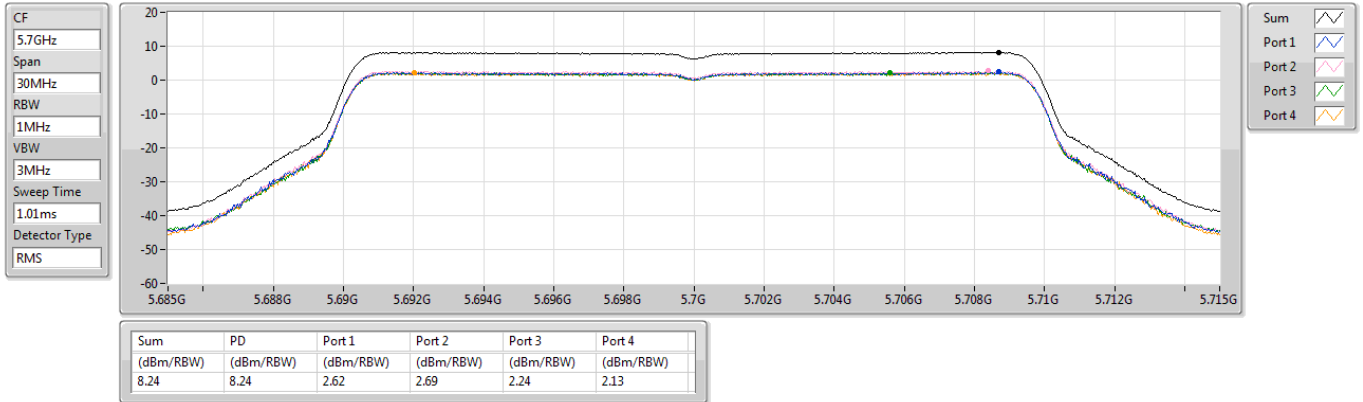

5.47-5.725GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


5720MHz Straddle 5.47-5.725GHz

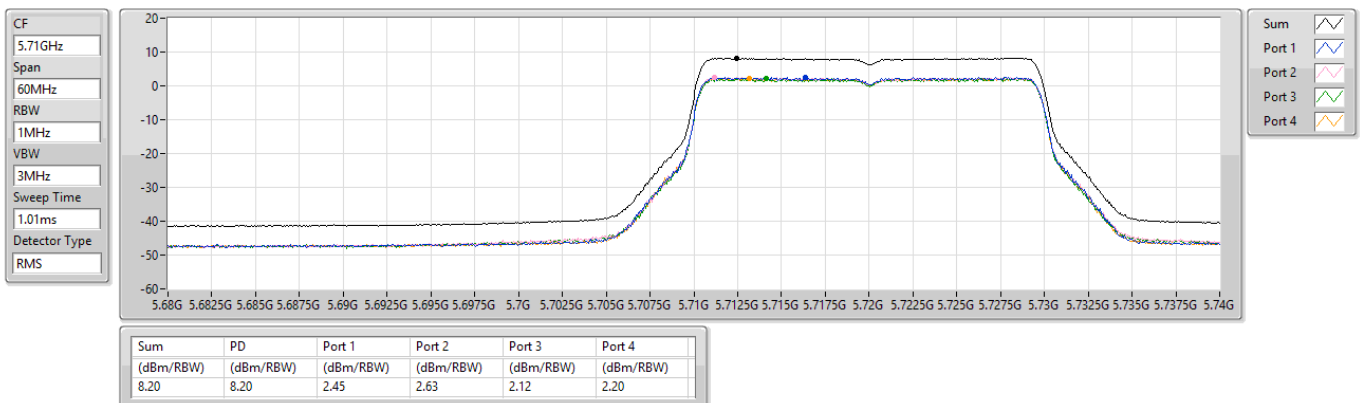

5.725-5.85GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


5720MHz Straddle 5.725-5.85GHz

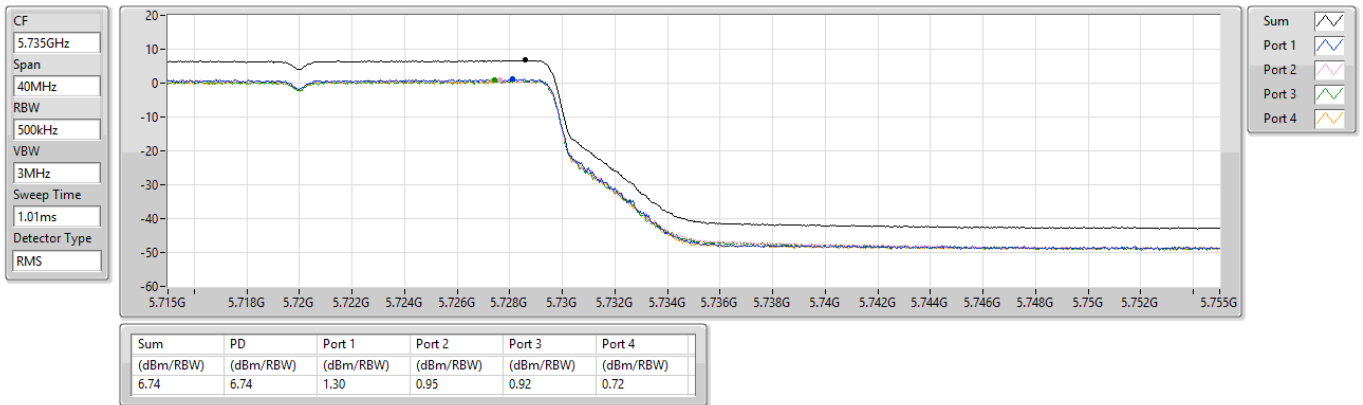

5.725-5.85GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


5745MHz

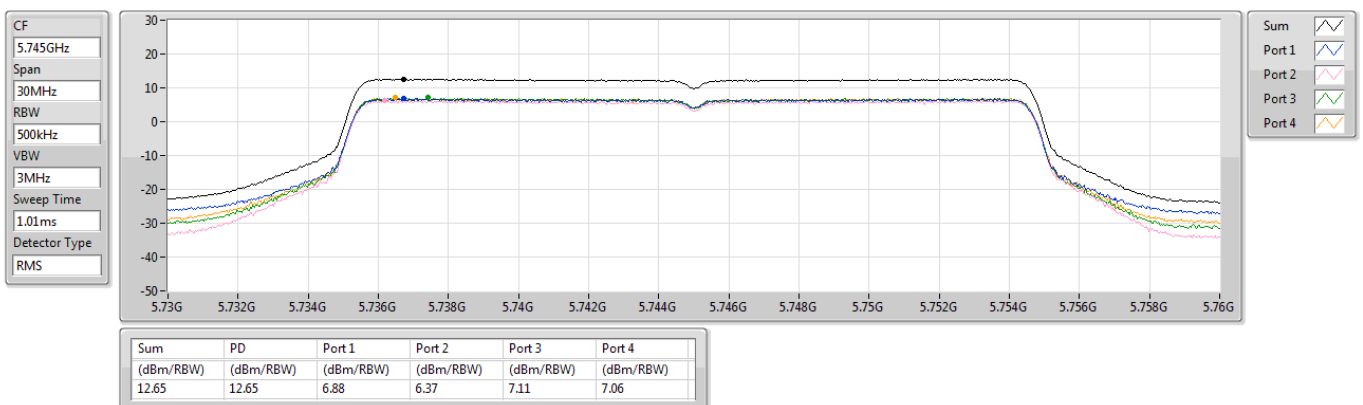

5.725-5.85GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


5785MHz

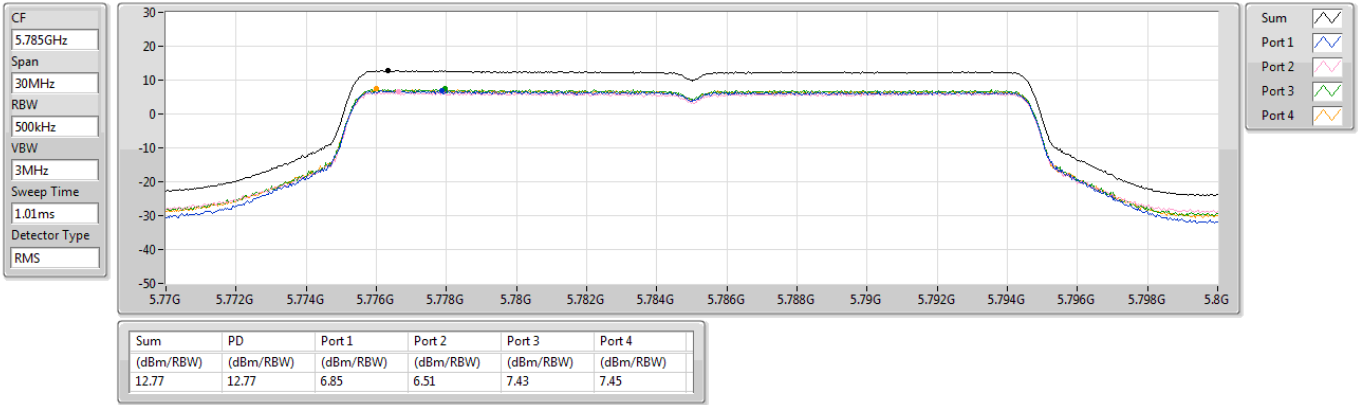

5.725-5.85GHz_802.11be EHT20_Nss4,(MCS0)_4TX

PSD


5825MHz

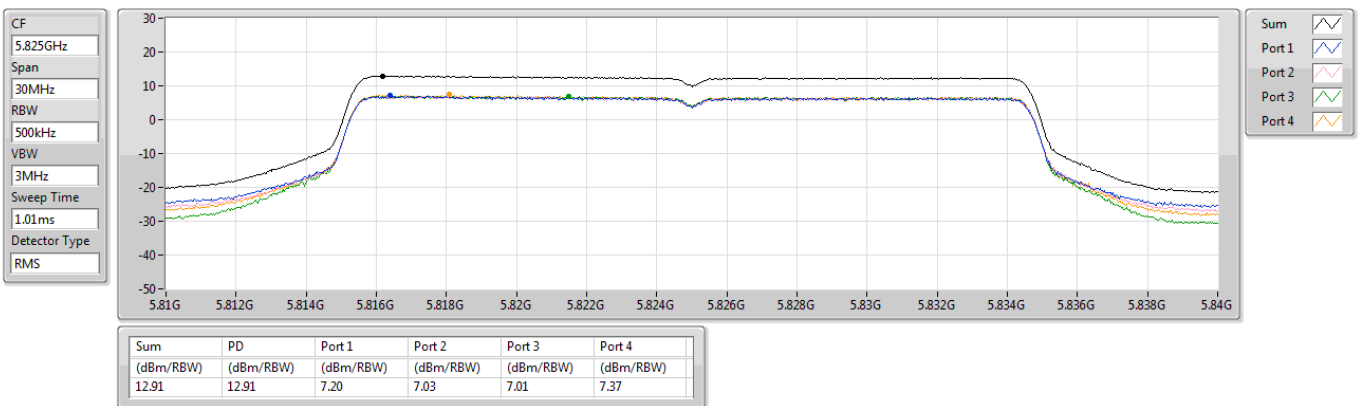

5.15-5.25GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


5190MHz

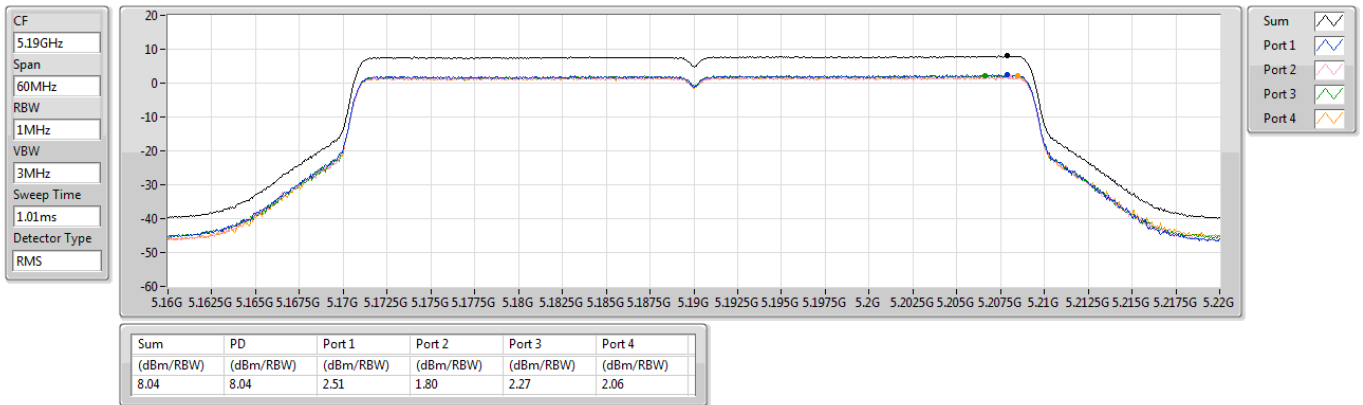

5.15-5.25GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD

5230MHz

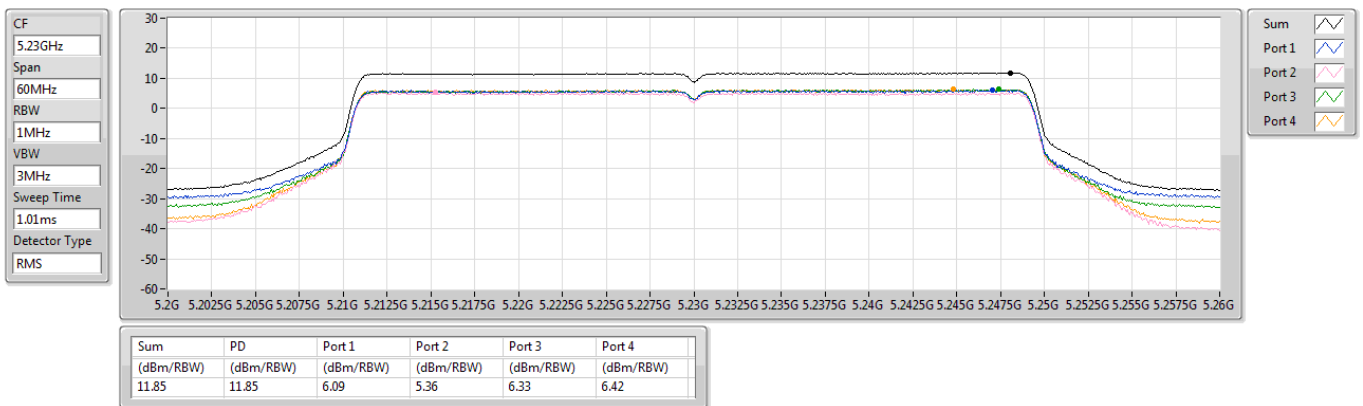


5.25-5.35GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD

5270MHz

CF
5.27GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

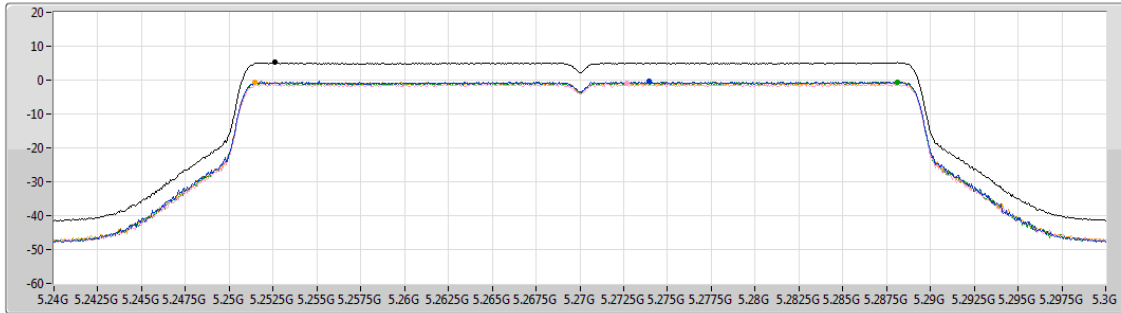


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.23	5.23	-0.41	-1.06	-0.51	-0.50

5.25-5.35GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD

5310MHz

CF
5.31GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

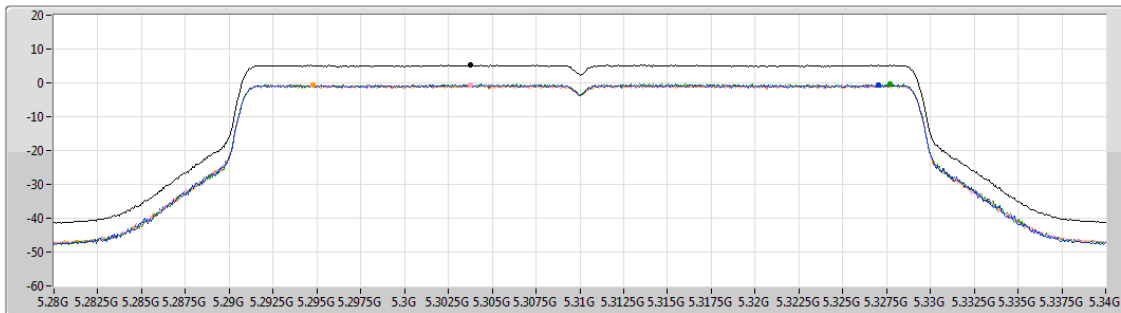


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.27	5.27	-0.47	-0.50	-0.27	-0.70

5.47-5.725GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


5510MHz

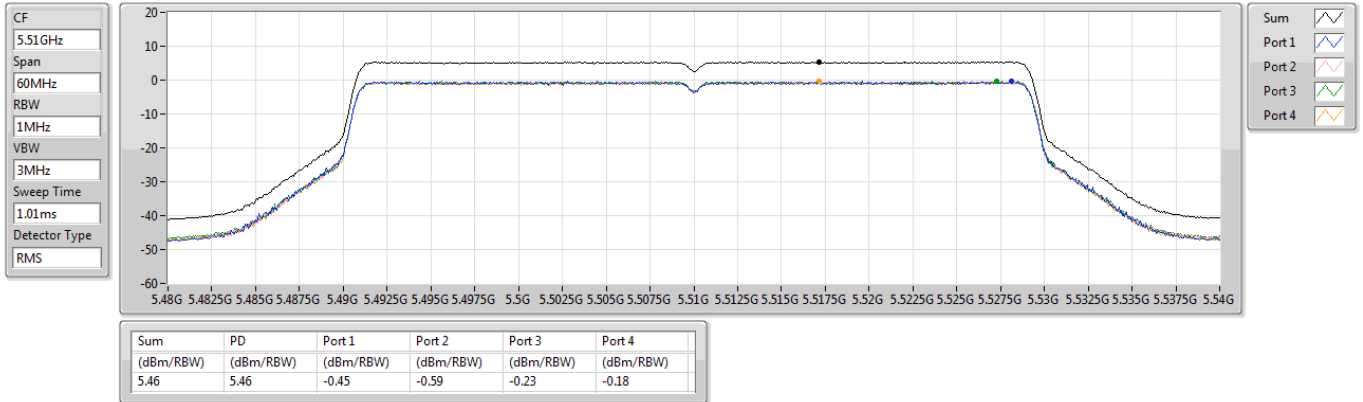

5.47-5.725GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


5590MHz

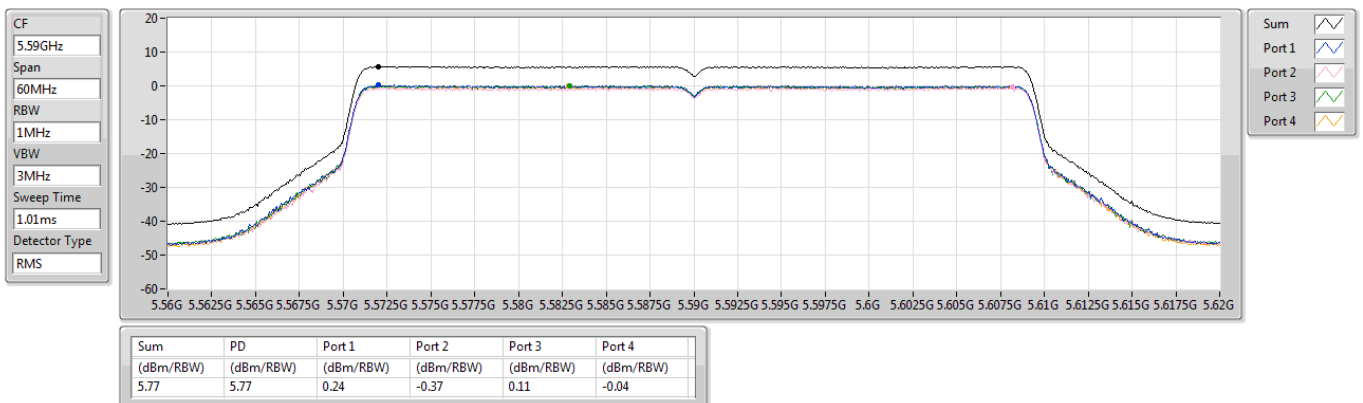

5.47-5.725GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


5670MHz

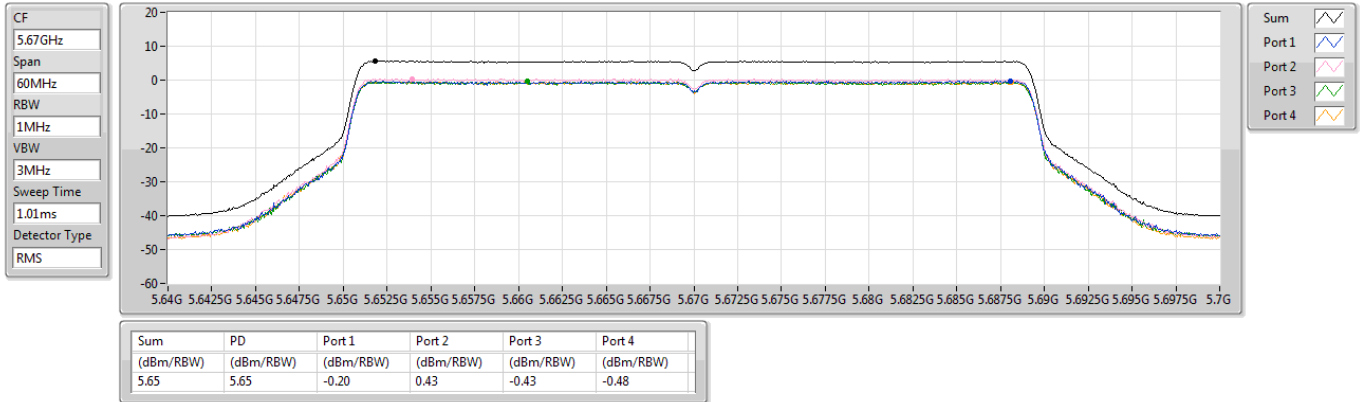

5.47-5.725GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


5710MHz Straddle 5.47-5.725GHz

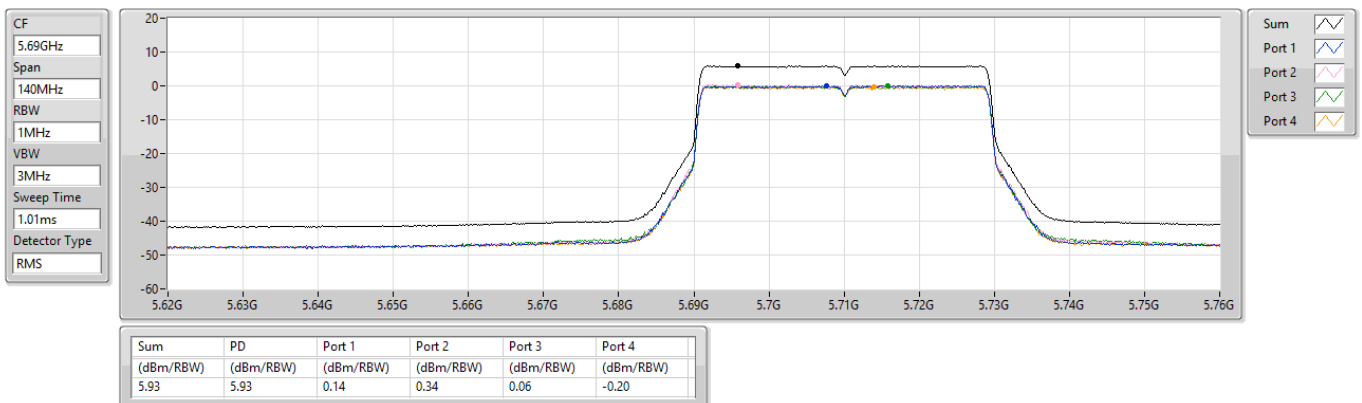

5.725-5.85GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


5710MHz Straddle 5.725-5.85GHz

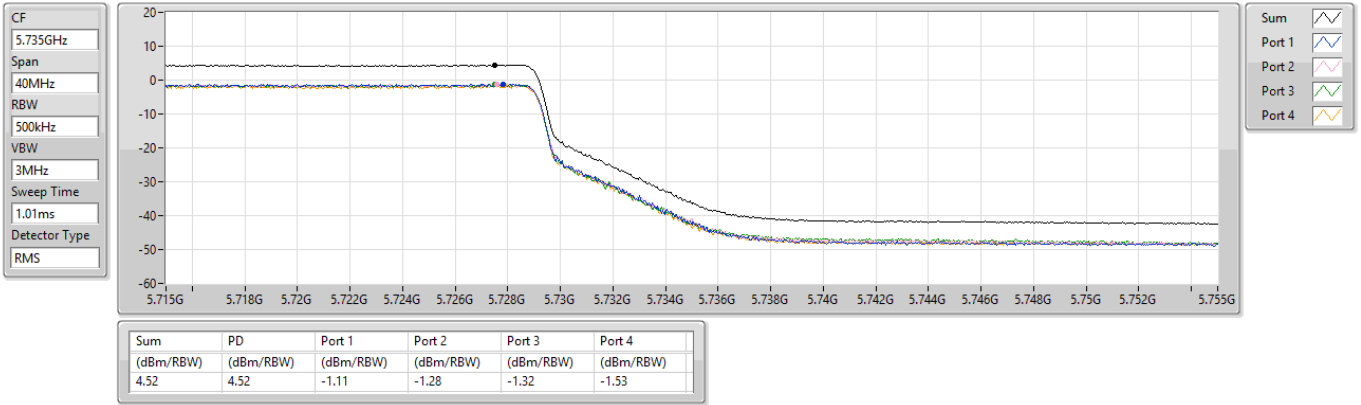

5.725-5.85GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


5755MHz

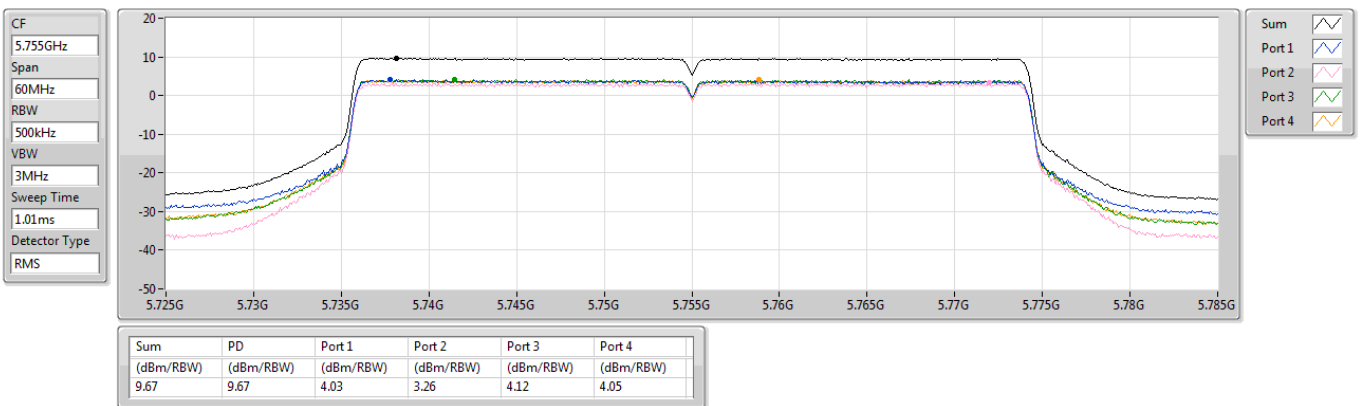

5.725-5.85GHz_802.11be EHT40_Nss4,(MCS0)_4TX

PSD


5795MHz

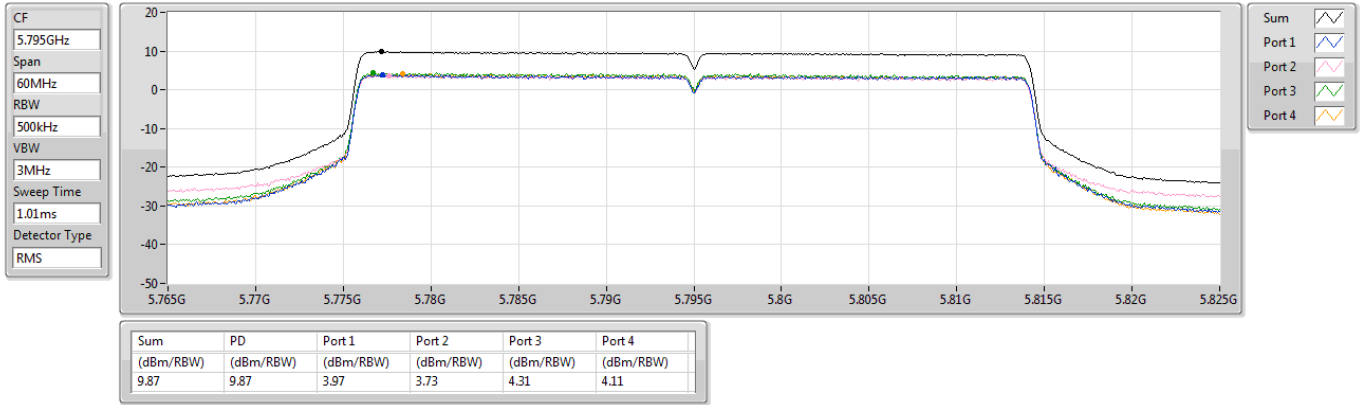

5.15-5.25GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD


5210MHz

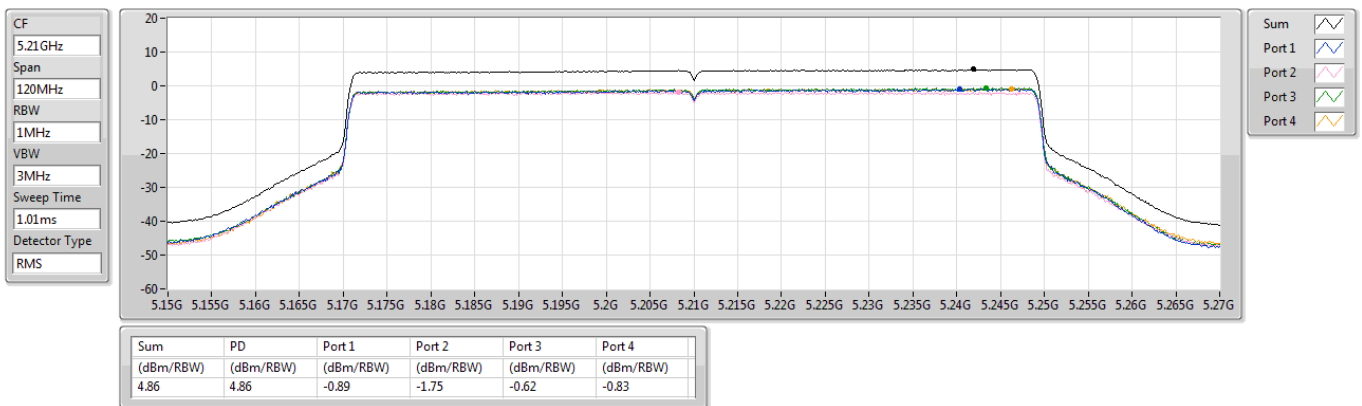

5.25-5.35GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD


5290MHz

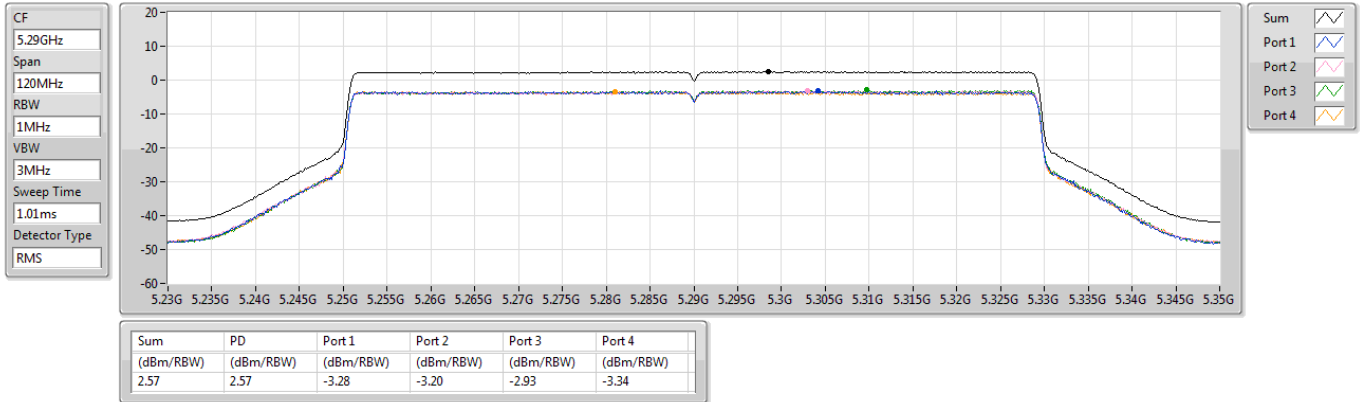

5.47-5.725GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD

5530MHz

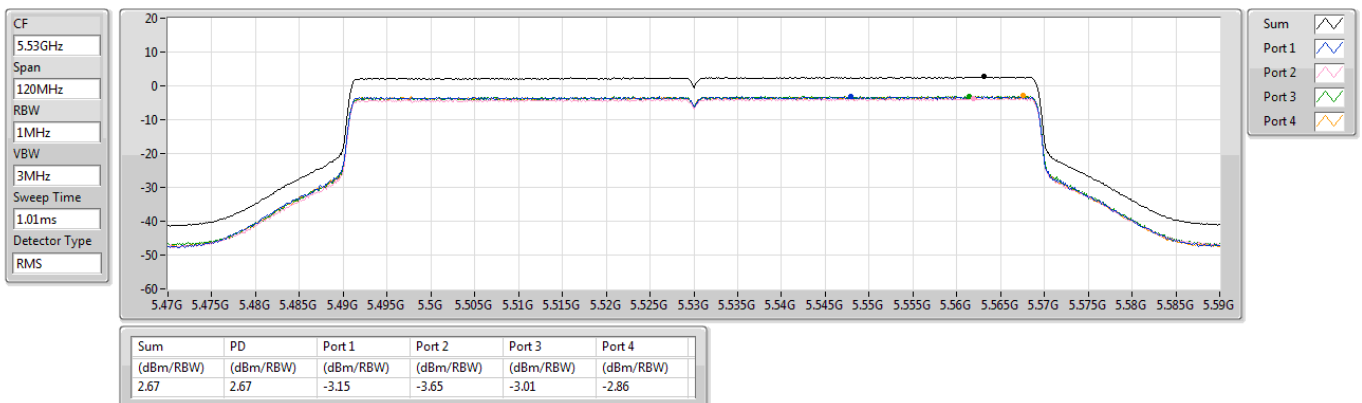




5.47-5.725GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD


5610MHz

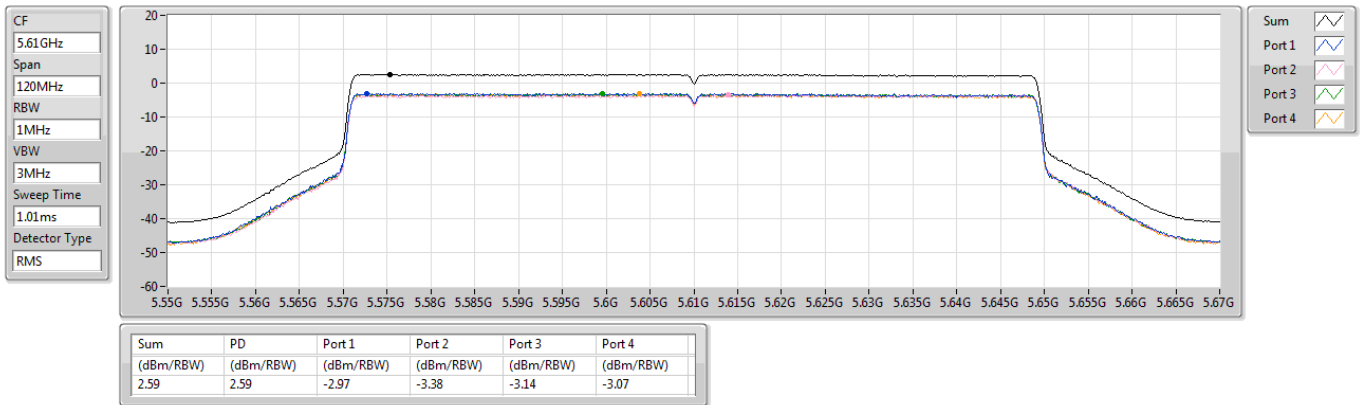

5.47-5.725GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD


5690MHz Straddle 5.47-5.725GHz

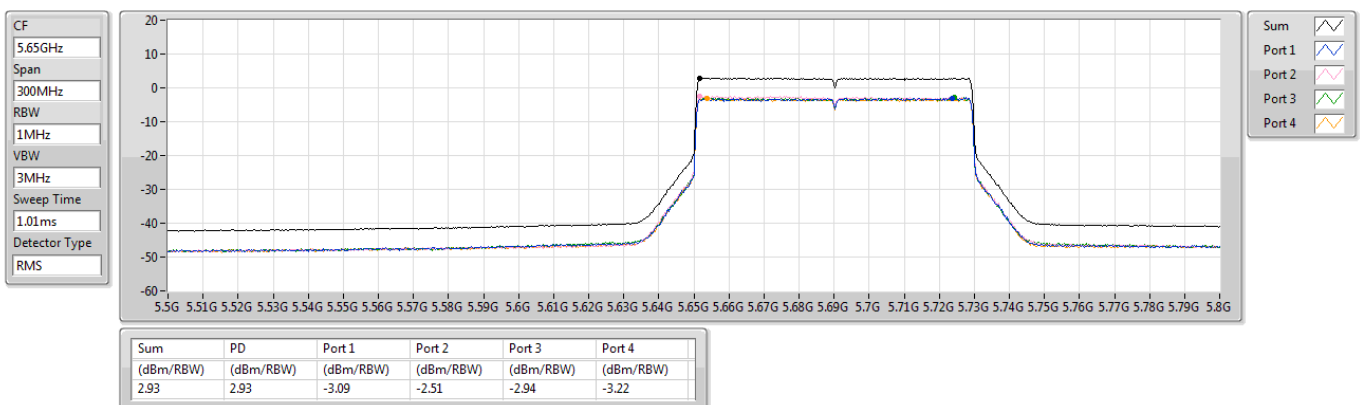

5.725-5.85GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD


5690MHz Straddle 5.725-5.85GHz

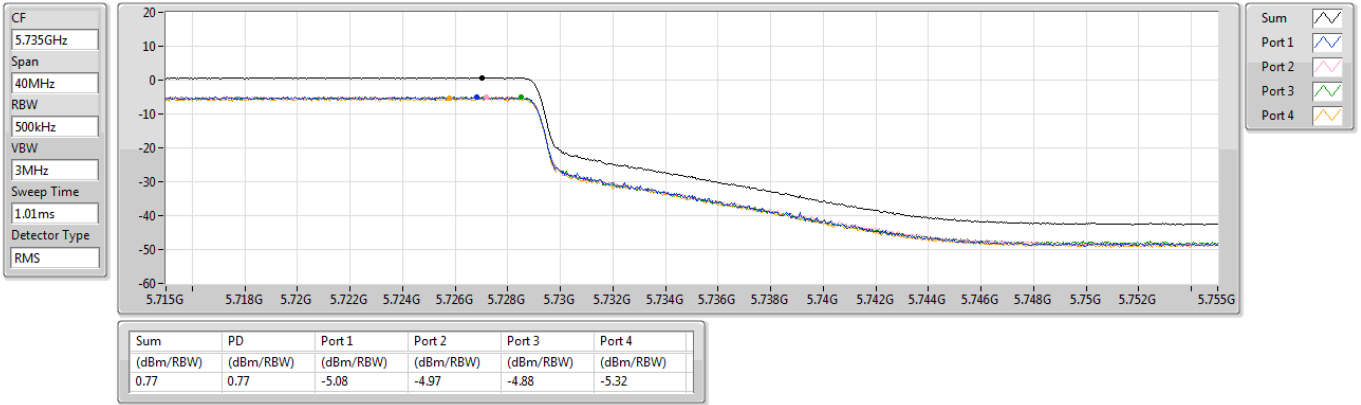

5.725-5.85GHz_802.11be EHT80_Nss4,(MCS0)_4TX

PSD


5775MHz

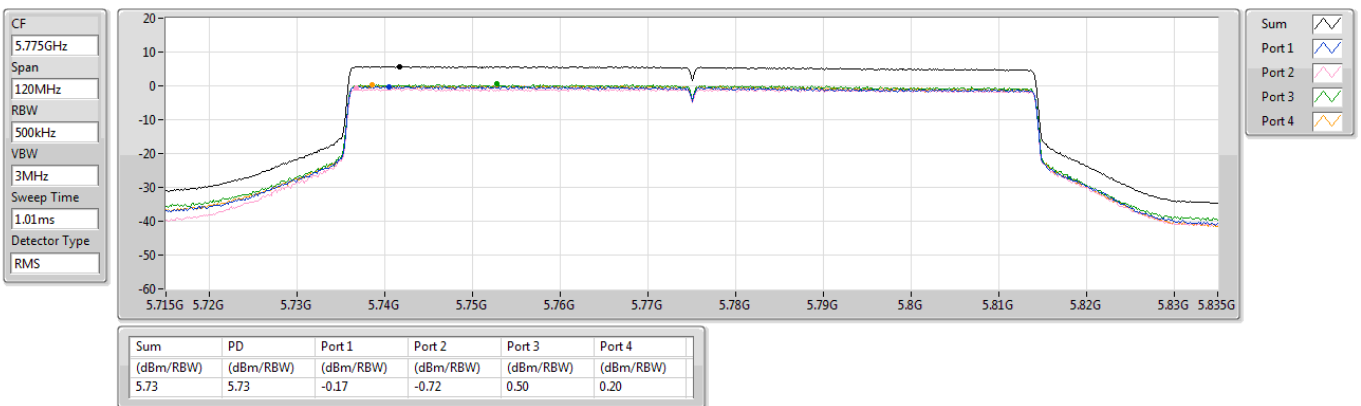

5.15-5.25GHz_802.11be EHT160_Nss4,(MCS0)_4TX

PSD


5250MHz Straddle 5.15-5.25GHz

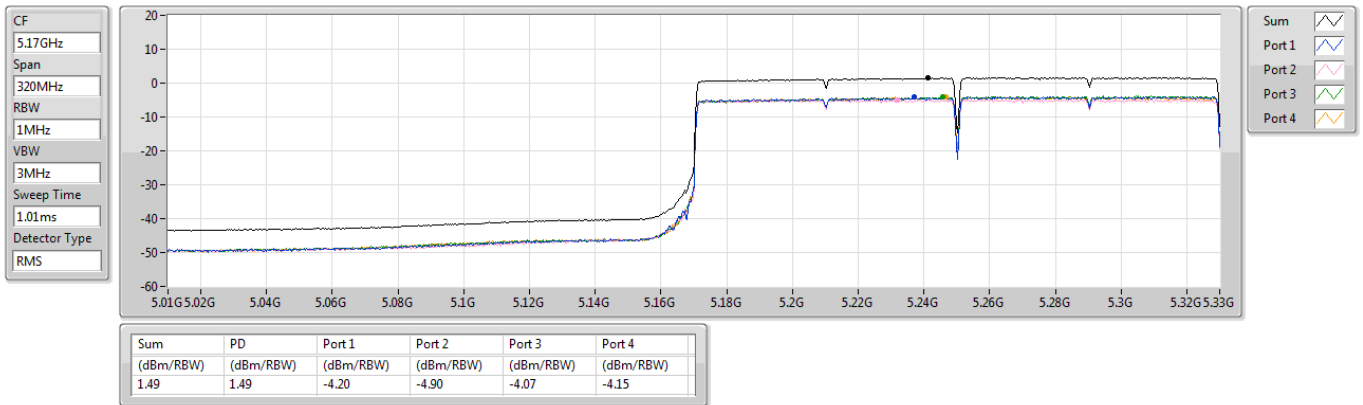

5.25-5.35GHz_802.11be EHT160_Nss4,(MCS0)_4TX

PSD


5250MHz Straddle 5.25-5.35GHz

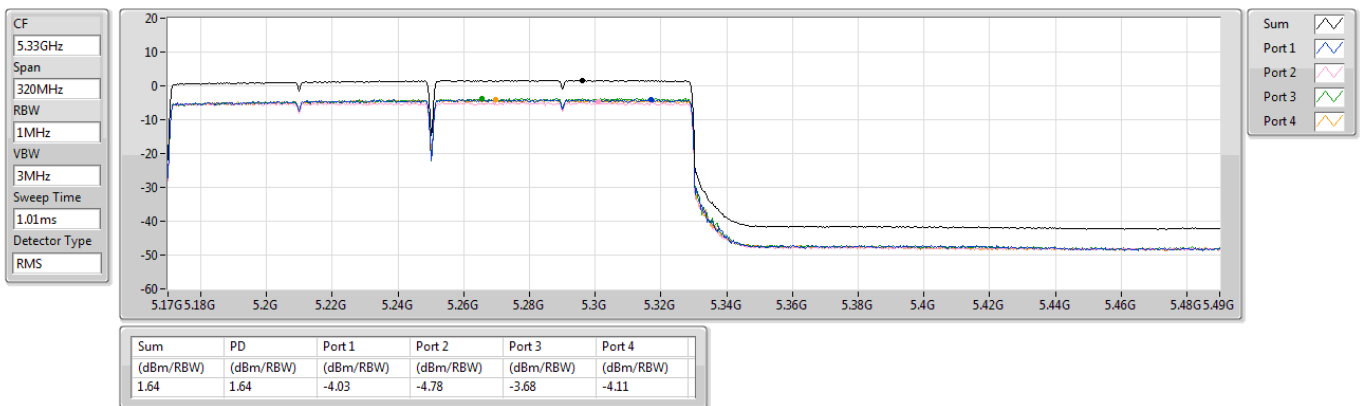

5.47-5.725GHz_802.11be EHT160_Nss4,(MCS0)_4TX

PSD


5570MHz

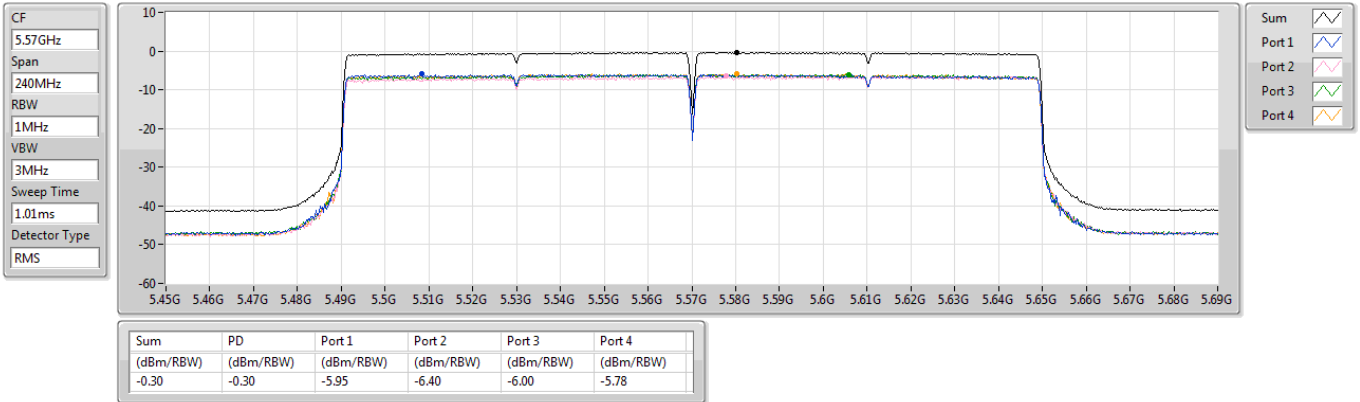

5.47-5.725GHz_be240_240MHz_Nss4,(MCS0)_4TX

PSD

5610MHz Straddle 5.47-5.725GHz

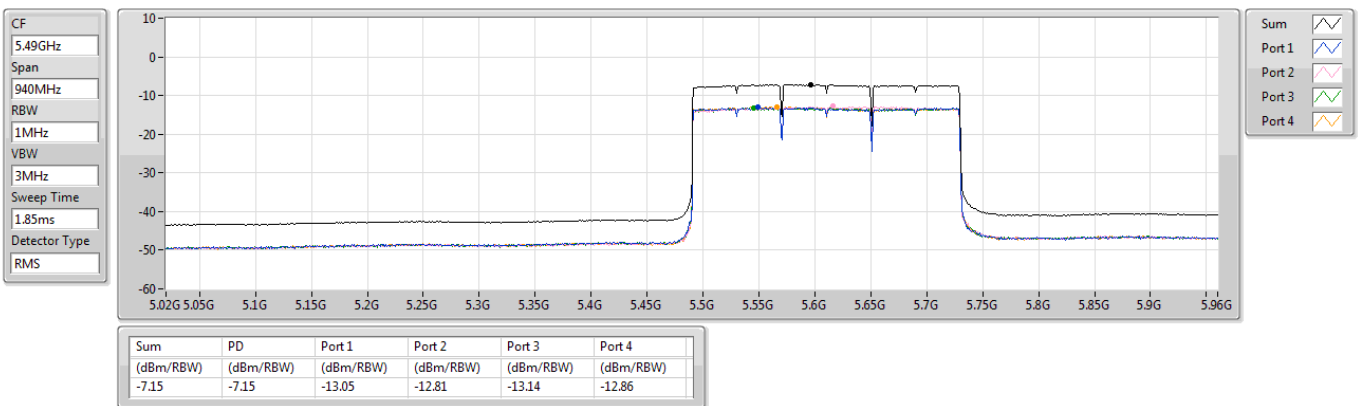




5.725-5.85GHz_be240_240MHz_Nss4,(MCS0)_4TX

PSD


5610MHz Straddle 5.725-5.85GHz

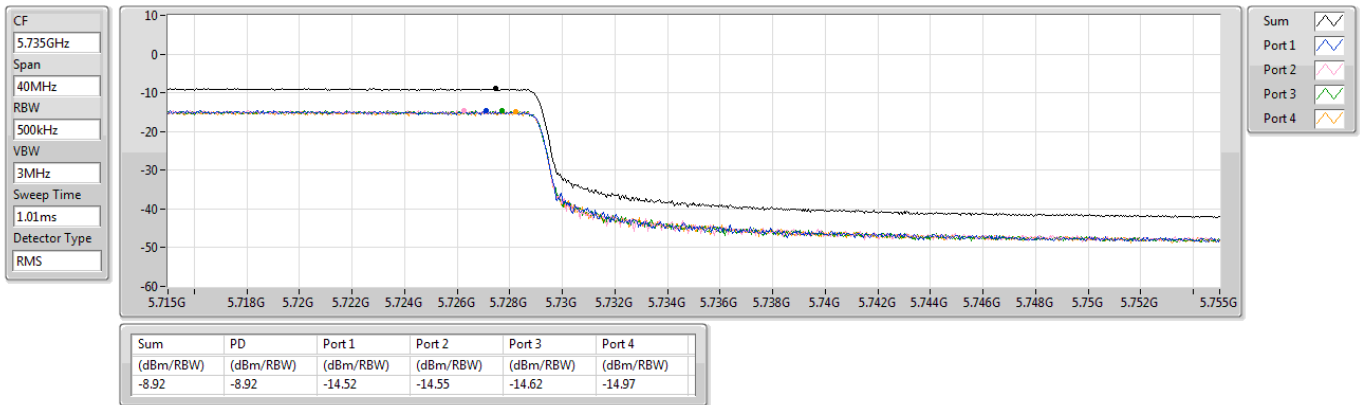



PoE mode

Unwanted Emissions (Below 1GHz)

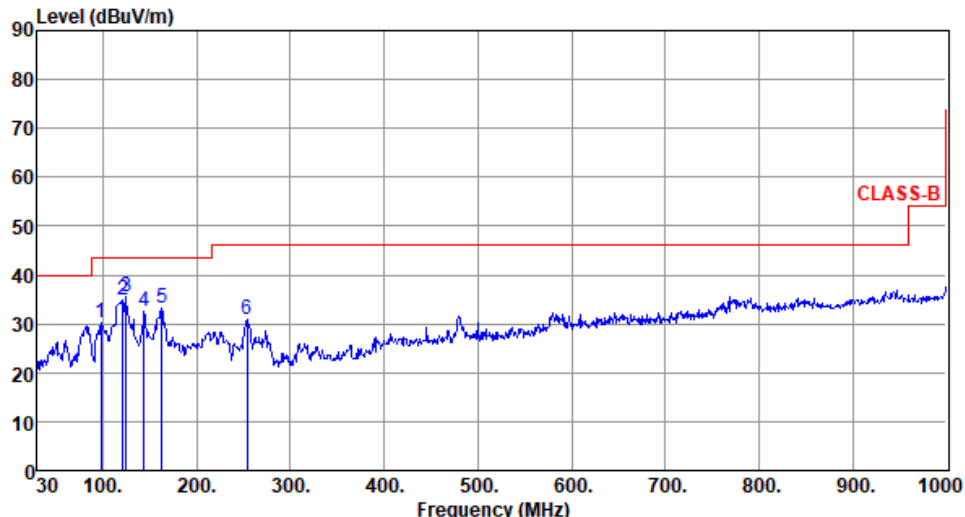Modulation	be EHT20	Test Freq. (MHz)	5200																																																																						
Polarization	Horizontal																																																																								
Test By :Brad Wu Temperature(°C):26 Humidity(%):65																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>97.90</td><td>30.10</td><td>43.50</td><td>-13.40</td><td>43.61</td><td>-13.51</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>121.18</td><td>34.75</td><td>43.50</td><td>-8.75</td><td>45.79</td><td>-11.04</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>125.06</td><td>35.59</td><td>43.50</td><td>-7.91</td><td>46.16</td><td>-10.57</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>143.49</td><td>32.47</td><td>43.50</td><td>-11.03</td><td>41.16</td><td>-8.69</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>162.89</td><td>33.12</td><td>43.50</td><td>-10.38</td><td>41.75</td><td>-8.63</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>254.07</td><td>30.88</td><td>46.00</td><td>-15.12</td><td>40.50</td><td>-9.62</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	97.90	30.10	43.50	-13.40	43.61	-13.51	Peak	---	---	2	121.18	34.75	43.50	-8.75	45.79	-11.04	Peak	---	---	3	125.06	35.59	43.50	-7.91	46.16	-10.57	Peak	---	---	4	143.49	32.47	43.50	-11.03	41.16	-8.69	Peak	---	---	5	162.89	33.12	43.50	-10.38	41.75	-8.63	Peak	---	---	6	254.07	30.88	46.00	-15.12	40.50	-9.62	Peak	---	---
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	97.90	30.10	43.50	-13.40	43.61	-13.51	Peak	---	---																																																																
2	121.18	34.75	43.50	-8.75	45.79	-11.04	Peak	---	---																																																																
3	125.06	35.59	43.50	-7.91	46.16	-10.57	Peak	---	---																																																																
4	143.49	32.47	43.50	-11.03	41.16	-8.69	Peak	---	---																																																																
5	162.89	33.12	43.50	-10.38	41.75	-8.63	Peak	---	---																																																																
6	254.07	30.88	46.00	-15.12	40.50	-9.62	Peak	---	---																																																																




Modulation	be EHT20	Test Freq. (MHz)	5200																																																																						
Polarization	Vertical																																																																								
Test By :Brad Wu Temperature(°C):26 Humidity(%):65																																																																									
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>45.52</td><td>35.54</td><td>40.00</td><td>-4.46</td><td>43.46</td><td>-7.92</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>59.10</td><td>33.72</td><td>40.00</td><td>-6.28</td><td>42.29</td><td>-8.57</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>78.50</td><td>32.58</td><td>40.00</td><td>-7.42</td><td>45.47</td><td>-12.89</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>120.21</td><td>37.40</td><td>43.50</td><td>-6.10</td><td>48.33</td><td>-10.93</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>160.95</td><td>32.23</td><td>43.50</td><td>-11.27</td><td>40.85</td><td>-8.62</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>253.10</td><td>26.50</td><td>46.00</td><td>-19.50</td><td>36.15</td><td>-9.65</td><td>Peak</td><td>---</td><td>---</td></tr></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	45.52	35.54	40.00	-4.46	43.46	-7.92	Peak	---	---	2	59.10	33.72	40.00	-6.28	42.29	-8.57	Peak	---	---	3	78.50	32.58	40.00	-7.42	45.47	-12.89	Peak	---	---	4	120.21	37.40	43.50	-6.10	48.33	-10.93	Peak	---	---	5	160.95	32.23	43.50	-11.27	40.85	-8.62	Peak	---	---	6	253.10	26.50	46.00	-19.50	36.15	-9.65	Peak	---	---
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	45.52	35.54	40.00	-4.46	43.46	-7.92	Peak	---	---																																																																
2	59.10	33.72	40.00	-6.28	42.29	-8.57	Peak	---	---																																																																
3	78.50	32.58	40.00	-7.42	45.47	-12.89	Peak	---	---																																																																
4	120.21	37.40	43.50	-6.10	48.33	-10.93	Peak	---	---																																																																
5	160.95	32.23	43.50	-11.27	40.85	-8.62	Peak	---	---																																																																
6	253.10	26.50	46.00	-19.50	36.15	-9.65	Peak	---	---																																																																



Modulation	be EHT40	Test Freq. (MHz)	5795																																																																						
Polarization	Horizontal																																																																								
Test By :Brad Wu Temperature(°C):26 Humidity(%):65																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>83.35</td><td>29.11</td><td>40.00</td><td>-10.89</td><td>43.23</td><td>-14.12</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>125.06</td><td>37.59</td><td>43.50</td><td>-5.91</td><td>48.16</td><td>-10.57</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>144.46</td><td>31.42</td><td>43.50</td><td>-12.08</td><td>40.10</td><td>-8.68</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>161.92</td><td>33.02</td><td>43.50</td><td>-10.48</td><td>41.73</td><td>-8.71</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>225.94</td><td>29.12</td><td>46.00</td><td>-16.88</td><td>41.12</td><td>-12.00</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>250.19</td><td>32.19</td><td>46.00</td><td>-13.81</td><td>41.91</td><td>-9.72</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	83.35	29.11	40.00	-10.89	43.23	-14.12	Peak	---	---	2	125.06	37.59	43.50	-5.91	48.16	-10.57	Peak	---	---	3	144.46	31.42	43.50	-12.08	40.10	-8.68	Peak	---	---	4	161.92	33.02	43.50	-10.48	41.73	-8.71	Peak	---	---	5	225.94	29.12	46.00	-16.88	41.12	-12.00	Peak	---	---	6	250.19	32.19	46.00	-13.81	41.91	-9.72	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	83.35	29.11	40.00	-10.89	43.23	-14.12	Peak	---	---																																																																
2	125.06	37.59	43.50	-5.91	48.16	-10.57	Peak	---	---																																																																
3	144.46	31.42	43.50	-12.08	40.10	-8.68	Peak	---	---																																																																
4	161.92	33.02	43.50	-10.48	41.73	-8.71	Peak	---	---																																																																
5	225.94	29.12	46.00	-16.88	41.12	-12.00	Peak	---	---																																																																
6	250.19	32.19	46.00	-13.81	41.91	-9.72	Peak	---	---																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																									

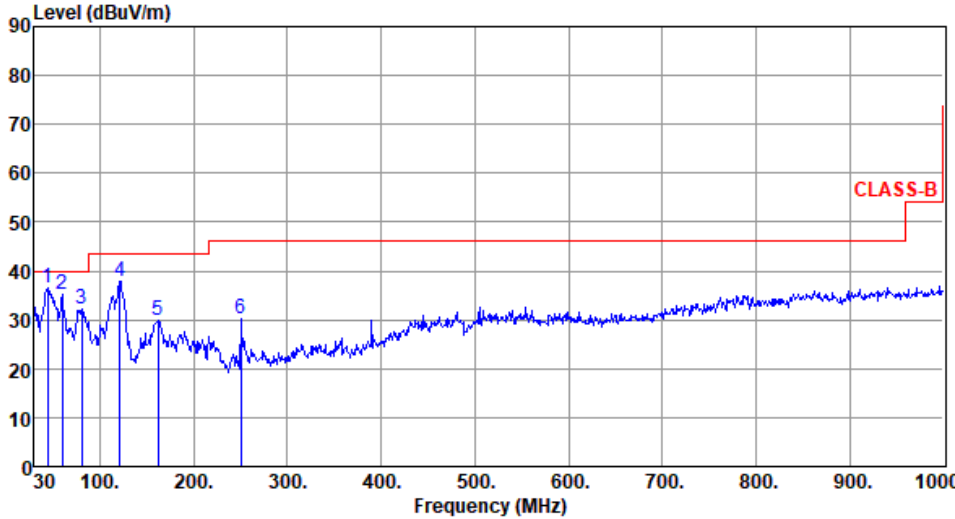


Modulation	be EHT40	Test Freq. (MHz)	5795																																																																						
Polarization	Vertical																																																																								
Test By :Brad Wu Temperature(°C):26 Humidity(%):65																																																																									
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>44.55</td><td>36.40</td><td>40.00</td><td>-3.60</td><td>44.51</td><td>-8.11</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>60.07</td><td>35.04</td><td>40.00</td><td>-4.96</td><td>43.88</td><td>-8.84</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>80.44</td><td>32.33</td><td>40.00</td><td>-7.67</td><td>45.70</td><td>-13.37</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>121.18</td><td>37.92</td><td>43.50</td><td>-5.58</td><td>48.96</td><td>-11.04</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>161.92</td><td>29.85</td><td>43.50</td><td>-13.65</td><td>38.56</td><td>-8.71</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>250.19</td><td>30.24</td><td>46.00</td><td>-15.76</td><td>39.96</td><td>-9.72</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	44.55	36.40	40.00	-3.60	44.51	-8.11	Peak	---	---	2	60.07	35.04	40.00	-4.96	43.88	-8.84	Peak	---	---	3	80.44	32.33	40.00	-7.67	45.70	-13.37	Peak	---	---	4	121.18	37.92	43.50	-5.58	48.96	-11.04	Peak	---	---	5	161.92	29.85	43.50	-13.65	38.56	-8.71	Peak	---	---	6	250.19	30.24	46.00	-15.76	39.96	-9.72	Peak	---	---
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	44.55	36.40	40.00	-3.60	44.51	-8.11	Peak	---	---																																																																
2	60.07	35.04	40.00	-4.96	43.88	-8.84	Peak	---	---																																																																
3	80.44	32.33	40.00	-7.67	45.70	-13.37	Peak	---	---																																																																
4	121.18	37.92	43.50	-5.58	48.96	-11.04	Peak	---	---																																																																
5	161.92	29.85	43.50	-13.65	38.56	-8.71	Peak	---	---																																																																
6	250.19	30.24	46.00	-15.76	39.96	-9.72	Peak	---	---																																																																




Adapter mode


Unwanted Emissions (Below 1GHz)

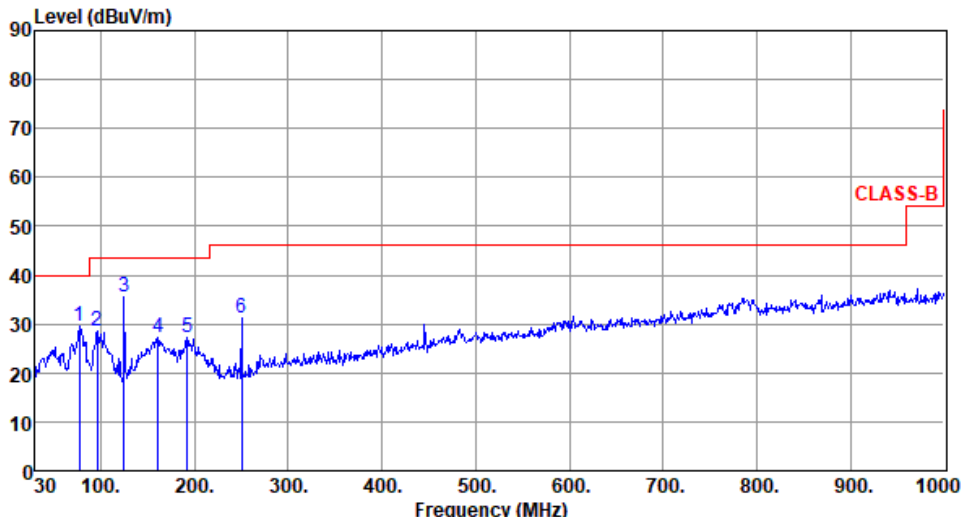Modulation	be EHT20	Test Freq. (MHz)	5200																																																																						
Polarization	Horizontal																																																																								
Test By :Brad Wu Temperature(°C):26 Humidity(%):65																																																																									
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>77.53</td><td>29.48</td><td>40.00</td><td>-10.52</td><td>41.97</td><td>-12.49</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>95.96</td><td>28.64</td><td>43.50</td><td>-14.86</td><td>42.23</td><td>-13.59</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>125.06</td><td>35.46</td><td>43.50</td><td>-8.04</td><td>46.03</td><td>-10.57</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>160.95</td><td>27.29</td><td>43.50</td><td>-16.21</td><td>35.91</td><td>-8.62</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>191.99</td><td>27.33</td><td>43.50</td><td>-16.17</td><td>38.74</td><td>-11.41</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>250.19</td><td>31.11</td><td>46.00</td><td>-14.89</td><td>40.83</td><td>-9.72</td><td>Peak</td><td>---</td><td>---</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	77.53	29.48	40.00	-10.52	41.97	-12.49	Peak	---	---	2	95.96	28.64	43.50	-14.86	42.23	-13.59	Peak	---	---	3	125.06	35.46	43.50	-8.04	46.03	-10.57	Peak	---	---	4	160.95	27.29	43.50	-16.21	35.91	-8.62	Peak	---	---	5	191.99	27.33	43.50	-16.17	38.74	-11.41	Peak	---	---	6	250.19	31.11	46.00	-14.89	40.83	-9.72	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	77.53	29.48	40.00	-10.52	41.97	-12.49	Peak	---	---																																																																
2	95.96	28.64	43.50	-14.86	42.23	-13.59	Peak	---	---																																																																
3	125.06	35.46	43.50	-8.04	46.03	-10.57	Peak	---	---																																																																
4	160.95	27.29	43.50	-16.21	35.91	-8.62	Peak	---	---																																																																
5	191.99	27.33	43.50	-16.17	38.74	-11.41	Peak	---	---																																																																
6	250.19	31.11	46.00	-14.89	40.83	-9.72	Peak	---	---																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																									

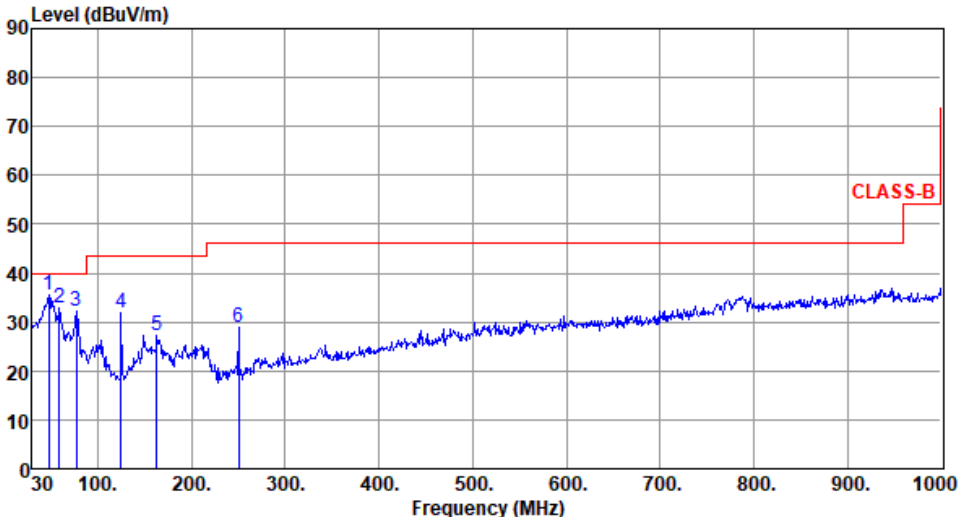

Modulation	be EHT20	Test Freq. (MHz)	5200																																																																						
Polarization	Vertical																																																																								
Test By :Brad Wu Temperature(°C):26 Humidity(%):65																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>47.46</td><td>35.43</td><td>40.00</td><td>-4.57</td><td>43.40</td><td>-7.97</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>59.10</td><td>32.79</td><td>40.00</td><td>-7.21</td><td>41.36</td><td>-8.57</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>77.53</td><td>32.27</td><td>40.00</td><td>-7.73</td><td>44.76</td><td>-12.49</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>125.06</td><td>31.98</td><td>43.50</td><td>-11.52</td><td>42.55</td><td>-10.57</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>162.89</td><td>27.14</td><td>43.50</td><td>-16.36</td><td>35.77</td><td>-8.63</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>250.19</td><td>28.90</td><td>46.00</td><td>-17.10</td><td>38.62</td><td>-9.72</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	47.46	35.43	40.00	-4.57	43.40	-7.97	Peak	---	---	2	59.10	32.79	40.00	-7.21	41.36	-8.57	Peak	---	---	3	77.53	32.27	40.00	-7.73	44.76	-12.49	Peak	---	---	4	125.06	31.98	43.50	-11.52	42.55	-10.57	Peak	---	---	5	162.89	27.14	43.50	-16.36	35.77	-8.63	Peak	---	---	6	250.19	28.90	46.00	-17.10	38.62	-9.72	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	47.46	35.43	40.00	-4.57	43.40	-7.97	Peak	---	---																																																																
2	59.10	32.79	40.00	-7.21	41.36	-8.57	Peak	---	---																																																																
3	77.53	32.27	40.00	-7.73	44.76	-12.49	Peak	---	---																																																																
4	125.06	31.98	43.50	-11.52	42.55	-10.57	Peak	---	---																																																																
5	162.89	27.14	43.50	-16.36	35.77	-8.63	Peak	---	---																																																																
6	250.19	28.90	46.00	-17.10	38.62	-9.72	Peak	---	---																																																																

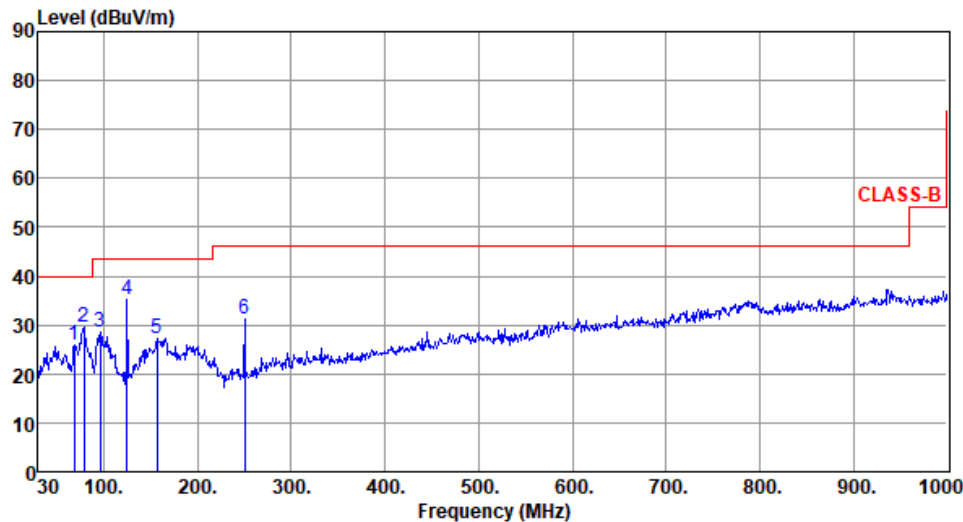

Modulation	be EHT40	Test Freq. (MHz)	5795																																																																						
Polarization	Horizontal																																																																								
Test By :Brad Wu Temperature(°C):26 Humidity(%):65																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>68.80</td><td>25.99</td><td>40.00</td><td>-14.01</td><td>36.41</td><td>-10.42</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>78.50</td><td>29.48</td><td>40.00</td><td>-10.52</td><td>42.37</td><td>-12.89</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>95.96</td><td>28.68</td><td>43.50</td><td>-14.82</td><td>42.27</td><td>-13.59</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>125.06</td><td>35.07</td><td>43.50</td><td>-8.43</td><td>45.64</td><td>-10.57</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>157.07</td><td>27.26</td><td>43.50</td><td>-16.24</td><td>35.80</td><td>-8.54</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>250.19</td><td>31.17</td><td>46.00</td><td>-14.83</td><td>40.89</td><td>-9.72</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	68.80	25.99	40.00	-14.01	36.41	-10.42	Peak	---	---	2	78.50	29.48	40.00	-10.52	42.37	-12.89	Peak	---	---	3	95.96	28.68	43.50	-14.82	42.27	-13.59	Peak	---	---	4	125.06	35.07	43.50	-8.43	45.64	-10.57	Peak	---	---	5	157.07	27.26	43.50	-16.24	35.80	-8.54	Peak	---	---	6	250.19	31.17	46.00	-14.83	40.89	-9.72	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	68.80	25.99	40.00	-14.01	36.41	-10.42	Peak	---	---																																																																
2	78.50	29.48	40.00	-10.52	42.37	-12.89	Peak	---	---																																																																
3	95.96	28.68	43.50	-14.82	42.27	-13.59	Peak	---	---																																																																
4	125.06	35.07	43.50	-8.43	45.64	-10.57	Peak	---	---																																																																
5	157.07	27.26	43.50	-16.24	35.80	-8.54	Peak	---	---																																																																
6	250.19	31.17	46.00	-14.83	40.89	-9.72	Peak	---	---																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																									



Modulation	be EHT40	Test Freq. (MHz)	5795																																																																						
Polarization	Vertical																																																																								
Test By :Brad Wu Temperature(°C):26 Humidity(%):65																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>49.40</td><td>35.36</td><td>40.00</td><td>-4.64</td><td>43.42</td><td>-8.06</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>60.07</td><td>31.64</td><td>40.00</td><td>-8.36</td><td>40.48</td><td>-8.84</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>77.53</td><td>29.46</td><td>40.00</td><td>-10.54</td><td>41.95</td><td>-12.49</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>125.06</td><td>31.85</td><td>43.50</td><td>-11.65</td><td>42.42</td><td>-10.57</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>164.83</td><td>26.60</td><td>43.50</td><td>-16.90</td><td>35.39</td><td>-8.79</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>250.19</td><td>28.58</td><td>46.00</td><td>-17.42</td><td>38.30</td><td>-9.72</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	49.40	35.36	40.00	-4.64	43.42	-8.06	Peak	---	---	2	60.07	31.64	40.00	-8.36	40.48	-8.84	Peak	---	---	3	77.53	29.46	40.00	-10.54	41.95	-12.49	Peak	---	---	4	125.06	31.85	43.50	-11.65	42.42	-10.57	Peak	---	---	5	164.83	26.60	43.50	-16.90	35.39	-8.79	Peak	---	---	6	250.19	28.58	46.00	-17.42	38.30	-9.72	Peak	---	---
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	49.40	35.36	40.00	-4.64	43.42	-8.06	Peak	---	---																																																																
2	60.07	31.64	40.00	-8.36	40.48	-8.84	Peak	---	---																																																																
3	77.53	29.46	40.00	-10.54	41.95	-12.49	Peak	---	---																																																																
4	125.06	31.85	43.50	-11.65	42.42	-10.57	Peak	---	---																																																																
5	164.83	26.60	43.50	-16.90	35.39	-8.79	Peak	---	---																																																																
6	250.19	28.58	46.00	-17.42	38.30	-9.72	Peak	---	---																																																																



Unwanted Emissions (Above 1GHz) for 11a

Modulation	11a	Test Freq. (MHz)	5180						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):23 Humidity(%):65									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	50.19	54.00	-3.81	49.33	0.86	Average	187	353
2	5150.00	64.02	74.00	-9.98	63.16	0.86	Peak	187	353
3 *	5180.00	110.98			110.24	0.74	Average	187	353
4 *	5180.00	121.23			120.49	0.74	Peak	187	353
5	10360.00	56.18	68.20	-12.02	47.66	8.52	Peak	100	149
6	15540.00	42.42	54.00	-11.58	36.37	6.05	Average	100	71
7	15540.00	56.24	74.00	-17.76	50.19	6.05	Peak	100	71
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency									




Modulation	11a	Test Freq. (MHz)	5180
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) </			



Modulation	11a	Test Freq. (MHz)	5200
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):23 Humidity(%):66			
Level (dBuV/m)			

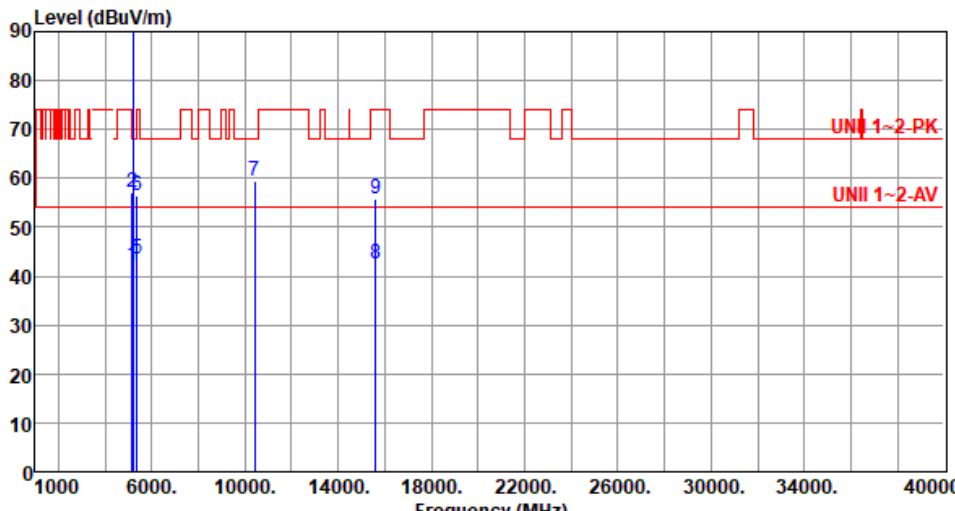

Modulation	11a	Test Freq. (MHz)	5200																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																																							
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>42.26</td><td>54.00</td><td>-11.74</td><td>41.40</td><td>0.86</td><td>Average</td><td>141</td><td>10</td></tr><tr><td>2</td><td>5150.00</td><td>57.00</td><td>74.00</td><td>-17.00</td><td>56.14</td><td>0.86</td><td>Peak</td><td>141</td><td>10</td></tr><tr><td>3 *</td><td>5200.00</td><td>107.50</td><td></td><td></td><td>106.84</td><td>0.66</td><td>Average</td><td>141</td><td>10</td></tr><tr><td>4 *</td><td>5200.00</td><td>117.28</td><td>-----</td><td>-----</td><td>116.62</td><td>0.66</td><td>Peak</td><td>141</td><td>10</td></tr><tr><td>5</td><td>5360.00</td><td>43.63</td><td>54.00</td><td>-10.37</td><td>43.41</td><td>0.22</td><td>Average</td><td>141</td><td>10</td></tr><tr><td>6</td><td>5360.00</td><td>56.30</td><td>74.00</td><td>-17.70</td><td>56.08</td><td>0.22</td><td>Peak</td><td>141</td><td>10</td></tr><tr><td>7</td><td>10400.00</td><td>59.41</td><td>68.20</td><td>-8.79</td><td>50.73</td><td>8.68</td><td>Peak</td><td>106</td><td>359</td></tr><tr><td>8</td><td>15600.00</td><td>42.35</td><td>54.00</td><td>-11.65</td><td>36.53</td><td>5.82</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>9</td><td>15600.00</td><td>55.63</td><td>74.00</td><td>-18.37</td><td>49.81</td><td>5.82</td><td>Peak</td><td>100</td><td>29</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	42.26	54.00	-11.74	41.40	0.86	Average	141	10	2	5150.00	57.00	74.00	-17.00	56.14	0.86	Peak	141	10	3 *	5200.00	107.50			106.84	0.66	Average	141	10	4 *	5200.00	117.28	-----	-----	116.62	0.66	Peak	141	10	5	5360.00	43.63	54.00	-10.37	43.41	0.22	Average	141	10	6	5360.00	56.30	74.00	-17.70	56.08	0.22	Peak	141	10	7	10400.00	59.41	68.20	-8.79	50.73	8.68	Peak	106	359	8	15600.00	42.35	54.00	-11.65	36.53	5.82	Average	100	29	9	15600.00	55.63	74.00	-18.37	49.81	5.82	Peak	100	29
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5150.00	42.26	54.00	-11.74	41.40	0.86	Average	141	10																																																																																														
2	5150.00	57.00	74.00	-17.00	56.14	0.86	Peak	141	10																																																																																														
3 *	5200.00	107.50			106.84	0.66	Average	141	10																																																																																														
4 *	5200.00	117.28	-----	-----	116.62	0.66	Peak	141	10																																																																																														
5	5360.00	43.63	54.00	-10.37	43.41	0.22	Average	141	10																																																																																														
6	5360.00	56.30	74.00	-17.70	56.08	0.22	Peak	141	10																																																																																														
7	10400.00	59.41	68.20	-8.79	50.73	8.68	Peak	106	359																																																																																														
8	15600.00	42.35	54.00	-11.65	36.53	5.82	Average	100	29																																																																																														
9	15600.00	55.63	74.00	-18.37	49.81	5.82	Peak	100	29																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																							



Modulation	11a	Test Freq. (MHz)	5240
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) </			



Modulation	11a	Test Freq. (MHz)	5240
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m)			




Modulation	11a	Test Freq. (MHz)	5260
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):24 Humidity(%):67			
Level (dBuV/m) </			



Modulation	11a	Test Freq. (MHz)	5260
Polarization	Vertical		
Test By :Paul Lin Temperature(°C):24 Humidity(%):67			
Level (dBuV/m)			

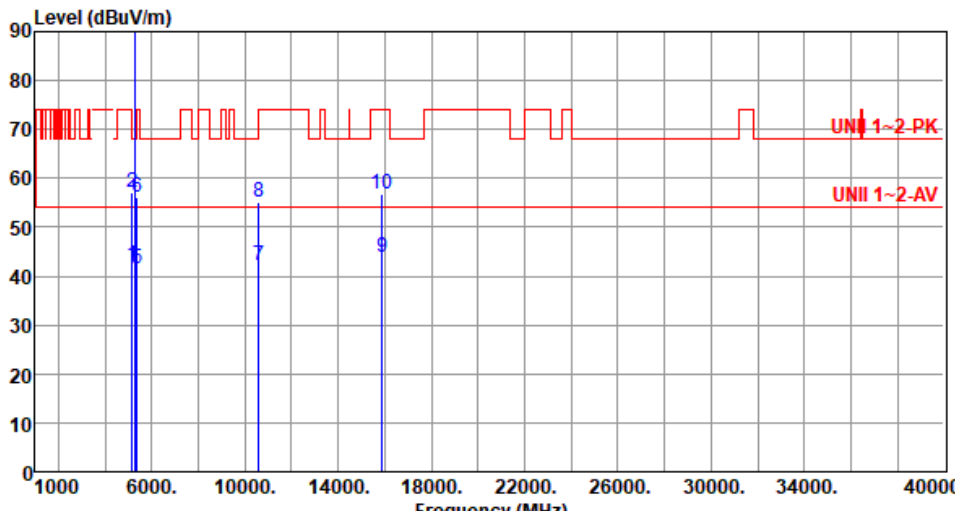

Modulation	11a	Test Freq. (MHz)	5300																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Paul Lin Temperature(°C):24 Humidity(%):67																																																																																																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>42.19</td><td>54.00</td><td>-11.81</td><td>41.33</td><td>0.86</td><td>Average</td><td>180</td><td>359</td></tr><tr><td>2</td><td>5150.00</td><td>56.96</td><td>74.00</td><td>-17.04</td><td>56.10</td><td>0.86</td><td>Peak</td><td>180</td><td>359</td></tr><tr><td>3 *</td><td>5300.00</td><td>106.32</td><td></td><td></td><td>106.25</td><td>0.07</td><td>Average</td><td>180</td><td>359</td></tr><tr><td>4 *</td><td>5300.00</td><td>116.13</td><td></td><td></td><td>116.06</td><td>0.07</td><td>Peak</td><td>180</td><td>359</td></tr><tr><td>5</td><td>5350.00</td><td>41.46</td><td>54.00</td><td>-12.54</td><td>41.29</td><td>0.17</td><td>Average</td><td>180</td><td>359</td></tr><tr><td>6</td><td>5350.00</td><td>56.22</td><td>74.00</td><td>-17.78</td><td>56.05</td><td>0.17</td><td>Peak</td><td>180</td><td>359</td></tr><tr><td>7</td><td>10600.00</td><td>42.06</td><td>54.00</td><td>-11.94</td><td>33.22</td><td>8.84</td><td>Average</td><td>118</td><td>22</td></tr><tr><td>8</td><td>10600.00</td><td>55.29</td><td>74.00</td><td>-18.71</td><td>46.45</td><td>8.84</td><td>Peak</td><td>118</td><td>22</td></tr><tr><td>9</td><td>15900.00</td><td>43.90</td><td>54.00</td><td>-10.10</td><td>38.17</td><td>5.73</td><td>Average</td><td>100</td><td>64</td></tr><tr><td>10</td><td>15900.00</td><td>56.87</td><td>74.00</td><td>-17.13</td><td>51.14</td><td>5.73</td><td>Peak</td><td>100</td><td>64</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	42.19	54.00	-11.81	41.33	0.86	Average	180	359	2	5150.00	56.96	74.00	-17.04	56.10	0.86	Peak	180	359	3 *	5300.00	106.32			106.25	0.07	Average	180	359	4 *	5300.00	116.13			116.06	0.07	Peak	180	359	5	5350.00	41.46	54.00	-12.54	41.29	0.17	Average	180	359	6	5350.00	56.22	74.00	-17.78	56.05	0.17	Peak	180	359	7	10600.00	42.06	54.00	-11.94	33.22	8.84	Average	118	22	8	10600.00	55.29	74.00	-18.71	46.45	8.84	Peak	118	22	9	15900.00	43.90	54.00	-10.10	38.17	5.73	Average	100	64	10	15900.00	56.87	74.00	-17.13	51.14	5.73	Peak	100	64
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	5150.00	42.19	54.00	-11.81	41.33	0.86	Average	180	359																																																																																																								
2	5150.00	56.96	74.00	-17.04	56.10	0.86	Peak	180	359																																																																																																								
3 *	5300.00	106.32			106.25	0.07	Average	180	359																																																																																																								
4 *	5300.00	116.13			116.06	0.07	Peak	180	359																																																																																																								
5	5350.00	41.46	54.00	-12.54	41.29	0.17	Average	180	359																																																																																																								
6	5350.00	56.22	74.00	-17.78	56.05	0.17	Peak	180	359																																																																																																								
7	10600.00	42.06	54.00	-11.94	33.22	8.84	Average	118	22																																																																																																								
8	10600.00	55.29	74.00	-18.71	46.45	8.84	Peak	118	22																																																																																																								
9	15900.00	43.90	54.00	-10.10	38.17	5.73	Average	100	64																																																																																																								
10	15900.00	56.87	74.00	-17.13	51.14	5.73	Peak	100	64																																																																																																								



Modulation	11a	Test Freq. (MHz)	5300
Polarization	Vertical		
Test By :Paul Lin Temperature(°C):24 Humidity(%):67			
Level (dBuV/m)			



Modulation	11a	Test Freq. (MHz)	5320																																																																																																																									
Polarization	Horizontal																																																																																																																											
Test By :Paul Lin Temperature(°C):24 Humidity(%):67																																																																																																																												
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>5320.00</td><td>105.77</td><td></td><td></td><td>105.66</td><td>0.11</td><td>Average</td><td>182</td><td>2</td></tr><tr><td>2</td><td>*</td><td>5320.00</td><td>116.86</td><td></td><td></td><td>116.75</td><td>0.11</td><td>Peak</td><td>182</td><td>2</td></tr><tr><td>3</td><td></td><td>5350.00</td><td>41.12</td><td>54.00</td><td>-12.88</td><td>40.95</td><td>0.17</td><td>Average</td><td>182</td><td>2</td></tr><tr><td>4</td><td></td><td>5350.00</td><td>52.90</td><td>74.00</td><td>-21.10</td><td>52.73</td><td>0.17</td><td>Peak</td><td>182</td><td>2</td></tr><tr><td>5</td><td></td><td>10640.00</td><td>44.09</td><td>54.00</td><td>-9.91</td><td>35.25</td><td>8.84</td><td>Average</td><td>100</td><td>73</td></tr><tr><td>6</td><td></td><td>10640.00</td><td>56.72</td><td>74.00</td><td>-17.28</td><td>47.88</td><td>8.84</td><td>Peak</td><td>100</td><td>73</td></tr><tr><td>7</td><td></td><td>15960.00</td><td>44.66</td><td>54.00</td><td>-9.34</td><td>38.92</td><td>5.74</td><td>Average</td><td>100</td><td>19</td></tr><tr><td>8</td><td></td><td>15960.00</td><td>58.93</td><td>74.00</td><td>-15.07</td><td>53.19</td><td>5.74</td><td>Peak</td><td>100</td><td>19</td></tr></tbody></table>						Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn			MHz	level	dBuV/m	dB	reading	dB/m		High	Table				dBuV/m			dBuV			cm	deg	1	*	5320.00	105.77			105.66	0.11	Average	182	2	2	*	5320.00	116.86			116.75	0.11	Peak	182	2	3		5350.00	41.12	54.00	-12.88	40.95	0.17	Average	182	2	4		5350.00	52.90	74.00	-21.10	52.73	0.17	Peak	182	2	5		10640.00	44.09	54.00	-9.91	35.25	8.84	Average	100	73	6		10640.00	56.72	74.00	-17.28	47.88	8.84	Peak	100	73	7		15960.00	44.66	54.00	-9.34	38.92	5.74	Average	100	19	8		15960.00	58.93	74.00	-15.07	53.19	5.74	Peak	100	19
		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																		
		MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																																		
			dBuV/m			dBuV			cm	deg																																																																																																																		
1	*	5320.00	105.77			105.66	0.11	Average	182	2																																																																																																																		
2	*	5320.00	116.86			116.75	0.11	Peak	182	2																																																																																																																		
3		5350.00	41.12	54.00	-12.88	40.95	0.17	Average	182	2																																																																																																																		
4		5350.00	52.90	74.00	-21.10	52.73	0.17	Peak	182	2																																																																																																																		
5		10640.00	44.09	54.00	-9.91	35.25	8.84	Average	100	73																																																																																																																		
6		10640.00	56.72	74.00	-17.28	47.88	8.84	Peak	100	73																																																																																																																		
7		15960.00	44.66	54.00	-9.34	38.92	5.74	Average	100	19																																																																																																																		
8		15960.00	58.93	74.00	-15.07	53.19	5.74	Peak	100	19																																																																																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																																												



Modulation	11a	Test Freq. (MHz)	5320																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Paul Lin Temperature(°C):24 Humidity(%):67																																																																																																																	
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>5320.00</td><td>102.34</td><td></td><td></td><td>102.23</td><td>0.11</td><td>Average</td><td>139</td><td>14</td></tr><tr><td>2 *</td><td>5320.00</td><td>112.03</td><td></td><td></td><td>111.92</td><td>0.11</td><td>Peak</td><td>139</td><td>14</td></tr><tr><td>3</td><td>5350.00</td><td>41.55</td><td>54.00</td><td>-12.45</td><td>41.38</td><td>0.17</td><td>Average</td><td>139</td><td>14</td></tr><tr><td>4</td><td>5350.00</td><td>56.84</td><td>74.00</td><td>-17.16</td><td>56.67</td><td>0.17</td><td>Peak</td><td>139</td><td>14</td></tr><tr><td>5</td><td>10640.00</td><td>44.01</td><td>54.00</td><td>-9.99</td><td>35.17</td><td>8.84</td><td>Average</td><td>100</td><td>102</td></tr><tr><td>6</td><td>10640.00</td><td>56.55</td><td>74.00</td><td>-17.45</td><td>47.71</td><td>8.84</td><td>Peak</td><td>100</td><td>102</td></tr><tr><td>7</td><td>15960.00</td><td>44.36</td><td>54.00</td><td>-9.64</td><td>38.62</td><td>5.74</td><td>Average</td><td>100</td><td>58</td></tr><tr><td>8</td><td>15960.00</td><td>58.38</td><td>74.00</td><td>-15.62</td><td>52.64</td><td>5.74</td><td>Peak</td><td>100</td><td>58</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table						dBuV			cm	deg	1 *	5320.00	102.34			102.23	0.11	Average	139	14	2 *	5320.00	112.03			111.92	0.11	Peak	139	14	3	5350.00	41.55	54.00	-12.45	41.38	0.17	Average	139	14	4	5350.00	56.84	74.00	-17.16	56.67	0.17	Peak	139	14	5	10640.00	44.01	54.00	-9.99	35.17	8.84	Average	100	102	6	10640.00	56.55	74.00	-17.45	47.71	8.84	Peak	100	102	7	15960.00	44.36	54.00	-9.64	38.62	5.74	Average	100	58	8	15960.00	58.38	74.00	-15.62	52.64	5.74	Peak	100	58
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
					dBuV			cm	deg																																																																																																								
1 *	5320.00	102.34			102.23	0.11	Average	139	14																																																																																																								
2 *	5320.00	112.03			111.92	0.11	Peak	139	14																																																																																																								
3	5350.00	41.55	54.00	-12.45	41.38	0.17	Average	139	14																																																																																																								
4	5350.00	56.84	74.00	-17.16	56.67	0.17	Peak	139	14																																																																																																								
5	10640.00	44.01	54.00	-9.99	35.17	8.84	Average	100	102																																																																																																								
6	10640.00	56.55	74.00	-17.45	47.71	8.84	Peak	100	102																																																																																																								
7	15960.00	44.36	54.00	-9.64	38.62	5.74	Average	100	58																																																																																																								
8	15960.00	58.38	74.00	-15.62	52.64	5.74	Peak	100	58																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	



Modulation	11a	Test Freq. (MHz)	5500																																																																																										
Polarization	Horizontal																																																																																												
Test By :Paul Lin Temperature(°C):24 Humidity(%):67																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>42.14</td><td>54.00</td><td>-11.86</td><td>41.53</td><td>0.61</td><td>Average</td><td>177</td><td>5</td></tr><tr><td>2</td><td>5460.00</td><td>57.15</td><td>74.00</td><td>-16.85</td><td>56.54</td><td>0.61</td><td>Peak</td><td>177</td><td>5</td></tr><tr><td>3</td><td>5470.00</td><td>57.48</td><td>68.20</td><td>-10.72</td><td>56.86</td><td>0.62</td><td>Peak</td><td>177</td><td>5</td></tr><tr><td>4 *</td><td>5500.00</td><td>104.19</td><td></td><td></td><td>103.50</td><td>0.69</td><td>Average</td><td>177</td><td>5</td></tr><tr><td>5 *</td><td>5500.00</td><td>113.95</td><td></td><td></td><td>113.26</td><td>0.69</td><td>Peak</td><td>177</td><td>5</td></tr><tr><td>6</td><td>11000.00</td><td>44.71</td><td>54.00</td><td>-9.29</td><td>35.46</td><td>9.25</td><td>Average</td><td>100</td><td>182</td></tr><tr><td>7</td><td>11000.00</td><td>58.01</td><td>74.00</td><td>-15.99</td><td>48.76</td><td>9.25</td><td>Peak</td><td>100</td><td>182</td></tr><tr><td>8</td><td>16500.00</td><td>60.51</td><td>68.20</td><td>-7.69</td><td>53.36</td><td>7.15</td><td>Peak</td><td>100</td><td>115</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	42.14	54.00	-11.86	41.53	0.61	Average	177	5	2	5460.00	57.15	74.00	-16.85	56.54	0.61	Peak	177	5	3	5470.00	57.48	68.20	-10.72	56.86	0.62	Peak	177	5	4 *	5500.00	104.19			103.50	0.69	Average	177	5	5 *	5500.00	113.95			113.26	0.69	Peak	177	5	6	11000.00	44.71	54.00	-9.29	35.46	9.25	Average	100	182	7	11000.00	58.01	74.00	-15.99	48.76	9.25	Peak	100	182	8	16500.00	60.51	68.20	-7.69	53.36	7.15	Peak	100	115
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5460.00	42.14	54.00	-11.86	41.53	0.61	Average	177	5																																																																																				
2	5460.00	57.15	74.00	-16.85	56.54	0.61	Peak	177	5																																																																																				
3	5470.00	57.48	68.20	-10.72	56.86	0.62	Peak	177	5																																																																																				
4 *	5500.00	104.19			103.50	0.69	Average	177	5																																																																																				
5 *	5500.00	113.95			113.26	0.69	Peak	177	5																																																																																				
6	11000.00	44.71	54.00	-9.29	35.46	9.25	Average	100	182																																																																																				
7	11000.00	58.01	74.00	-15.99	48.76	9.25	Peak	100	182																																																																																				
8	16500.00	60.51	68.20	-7.69	53.36	7.15	Peak	100	115																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																													



Modulation	11a	Test Freq. (MHz)	5500
Polarization	Vertical		
Test By :Paul Lin Temperature(°C):24 Humidity(%):67			
Level (dBuV/m) <			



Modulation	11a	Test Freq. (MHz)	5580
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):24 Humidity(%):67			
Level (dBUV/m) <			



Modulation	11a	Test Freq. (MHz)	5580																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Paul Lin Temperature(°C):24 Humidity(%):67																																																																																																							
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5460.00</td><td>42.24</td><td>54.00</td><td>-11.76</td><td>41.63</td><td>0.61</td><td>Average</td><td>148</td><td>15</td></tr><tr><td>2</td><td>5460.00</td><td>56.96</td><td>74.00</td><td>-17.04</td><td>56.35</td><td>0.61</td><td>Peak</td><td>148</td><td>15</td></tr><tr><td>3</td><td>5470.00</td><td>57.29</td><td>68.20</td><td>-10.91</td><td>56.67</td><td>0.62</td><td>Peak</td><td>148</td><td>15</td></tr><tr><td>4 *</td><td>5580.00</td><td>101.57</td><td></td><td></td><td>100.90</td><td>0.67</td><td>Average</td><td>148</td><td>15</td></tr><tr><td>5 *</td><td>5580.00</td><td>111.42</td><td></td><td></td><td>110.75</td><td>0.67</td><td>Peak</td><td>148</td><td>15</td></tr><tr><td>6</td><td>5725.00</td><td>57.09</td><td>68.20</td><td>-11.11</td><td>56.14</td><td>0.95</td><td>Peak</td><td>148</td><td>15</td></tr><tr><td>7</td><td>11160.00</td><td>42.99</td><td>54.00</td><td>-11.01</td><td>34.21</td><td>8.78</td><td>Average</td><td>122</td><td>355</td></tr><tr><td>8</td><td>11160.00</td><td>55.76</td><td>74.00</td><td>-18.24</td><td>46.98</td><td>8.78</td><td>Peak</td><td>122</td><td>355</td></tr><tr><td>9</td><td>16740.00</td><td>58.22</td><td>68.20</td><td>-9.98</td><td>50.99</td><td>7.23</td><td>Peak</td><td>100</td><td>83</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	42.24	54.00	-11.76	41.63	0.61	Average	148	15	2	5460.00	56.96	74.00	-17.04	56.35	0.61	Peak	148	15	3	5470.00	57.29	68.20	-10.91	56.67	0.62	Peak	148	15	4 *	5580.00	101.57			100.90	0.67	Average	148	15	5 *	5580.00	111.42			110.75	0.67	Peak	148	15	6	5725.00	57.09	68.20	-11.11	56.14	0.95	Peak	148	15	7	11160.00	42.99	54.00	-11.01	34.21	8.78	Average	122	355	8	11160.00	55.76	74.00	-18.24	46.98	8.78	Peak	122	355	9	16740.00	58.22	68.20	-9.98	50.99	7.23	Peak	100	83
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	42.24	54.00	-11.76	41.63	0.61	Average	148	15																																																																																														
2	5460.00	56.96	74.00	-17.04	56.35	0.61	Peak	148	15																																																																																														
3	5470.00	57.29	68.20	-10.91	56.67	0.62	Peak	148	15																																																																																														
4 *	5580.00	101.57			100.90	0.67	Average	148	15																																																																																														
5 *	5580.00	111.42			110.75	0.67	Peak	148	15																																																																																														
6	5725.00	57.09	68.20	-11.11	56.14	0.95	Peak	148	15																																																																																														
7	11160.00	42.99	54.00	-11.01	34.21	8.78	Average	122	355																																																																																														
8	11160.00	55.76	74.00	-18.24	46.98	8.78	Peak	122	355																																																																																														
9	16740.00	58.22	68.20	-9.98	50.99	7.23	Peak	100	83																																																																																														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																							



Modulation	11a	Test Freq. (MHz)	5700																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):67																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1 *</td><td>5700.00</td><td>104.02</td><td></td><td></td><td>103.13</td><td>0.89</td><td>Average</td><td>170</td><td>341</td></tr><tr><td>2 *</td><td>5700.00</td><td>114.04</td><td></td><td></td><td>113.15</td><td>0.89</td><td>Peak</td><td>170</td><td>341</td></tr><tr><td>3</td><td>5725.00</td><td>57.76</td><td>68.20</td><td>-10.44</td><td>56.81</td><td>0.95</td><td>Peak</td><td>170</td><td>341</td></tr><tr><td>4</td><td>11400.00</td><td>43.95</td><td>54.00</td><td>-10.05</td><td>35.34</td><td>8.61</td><td>Average</td><td>100</td><td>156</td></tr><tr><td>5</td><td>11400.00</td><td>57.32</td><td>74.00</td><td>-16.68</td><td>48.71</td><td>8.61</td><td>Peak</td><td>100</td><td>156</td></tr><tr><td>6</td><td>17100.00</td><td>59.67</td><td>68.20</td><td>-8.53</td><td>53.02</td><td>6.65</td><td>Peak</td><td>100</td><td>117</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	5700.00	104.02			103.13	0.89	Average	170	341	2 *	5700.00	114.04			113.15	0.89	Peak	170	341	3	5725.00	57.76	68.20	-10.44	56.81	0.95	Peak	170	341	4	11400.00	43.95	54.00	-10.05	35.34	8.61	Average	100	156	5	11400.00	57.32	74.00	-16.68	48.71	8.61	Peak	100	156	6	17100.00	59.67	68.20	-8.53	53.02	6.65	Peak	100	117
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1 *	5700.00	104.02			103.13	0.89	Average	170	341																																																																
2 *	5700.00	114.04			113.15	0.89	Peak	170	341																																																																
3	5725.00	57.76	68.20	-10.44	56.81	0.95	Peak	170	341																																																																
4	11400.00	43.95	54.00	-10.05	35.34	8.61	Average	100	156																																																																
5	11400.00	57.32	74.00	-16.68	48.71	8.61	Peak	100	156																																																																
6	17100.00	59.67	68.20	-8.53	53.02	6.65	Peak	100	117																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																									



Modulation	11a	Test Freq. (MHz)	5700																																																																																														
Polarization	Vertical																																																																																																
Test By :Paul Lin Temperature(°C):24 Humidity(%):67																																																																																																	
Level (dBUV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>*</td><td>5700.00</td><td>101.62</td><td></td><td>100.73</td><td>0.89</td><td>Average</td><td>137</td><td>17</td></tr><tr><td>2</td><td>*</td><td>5700.00</td><td>111.26</td><td></td><td>110.37</td><td>0.89</td><td>Peak</td><td>137</td><td>17</td></tr><tr><td>3</td><td></td><td>5725.00</td><td>57.52</td><td>68.20</td><td>-10.68</td><td>56.57</td><td>0.95</td><td>Peak</td><td>137</td><td>17</td></tr><tr><td>4</td><td></td><td>11400.00</td><td>44.03</td><td>54.00</td><td>-9.97</td><td>35.42</td><td>8.61</td><td>Average</td><td>100</td><td>86</td></tr><tr><td>5</td><td></td><td>11400.00</td><td>57.26</td><td>74.00</td><td>-16.74</td><td>48.65</td><td>8.61</td><td>Peak</td><td>100</td><td>86</td></tr><tr><td>6</td><td></td><td>17100.00</td><td>59.76</td><td>68.20</td><td>-8.44</td><td>53.11</td><td>6.65</td><td>Peak</td><td>100</td><td>112</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	*	5700.00	101.62		100.73	0.89	Average	137	17	2	*	5700.00	111.26		110.37	0.89	Peak	137	17	3		5725.00	57.52	68.20	-10.68	56.57	0.95	Peak	137	17	4		11400.00	44.03	54.00	-9.97	35.42	8.61	Average	100	86	5		11400.00	57.26	74.00	-16.74	48.65	8.61	Peak	100	86	6		17100.00	59.76	68.20	-8.44	53.11	6.65	Peak	100	112
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																								
1	*	5700.00	101.62		100.73	0.89	Average	137	17																																																																																								
2	*	5700.00	111.26		110.37	0.89	Peak	137	17																																																																																								
3		5725.00	57.52	68.20	-10.68	56.57	0.95	Peak	137	17																																																																																							
4		11400.00	44.03	54.00	-9.97	35.42	8.61	Average	100	86																																																																																							
5		11400.00	57.26	74.00	-16.74	48.65	8.61	Peak	100	86																																																																																							
6		17100.00	59.76	68.20	-8.44	53.11	6.65	Peak	100	112																																																																																							
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																	



Modulation	11a	Test Freq. (MHz)	5720																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Paul Lin Temperature(°C):24 Humidity(%):67																																																																																																							
Level (dBuV/m) 90 80 70 60 50 40 30 20 10 0 1000. 6000. 10000. 14000. 18000. 22000. 26000. 30000. 34000. 40000 Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>42.09</td><td>54.00</td><td>-11.91</td><td>41.48</td><td>0.61</td><td>Average</td><td>172</td><td>345</td></tr><tr><td>2</td><td>5460.00</td><td>56.98</td><td>74.00</td><td>-17.02</td><td>56.37</td><td>0.61</td><td>Peak</td><td>172</td><td>345</td></tr><tr><td>3</td><td>5470.00</td><td>57.25</td><td>68.20</td><td>-10.95</td><td>56.63</td><td>0.62</td><td>Peak</td><td>172</td><td>345</td></tr><tr><td>4 *</td><td>5720.00</td><td>104.28</td><td></td><td></td><td>103.35</td><td>0.93</td><td>Average</td><td>172</td><td>345</td></tr><tr><td>5 *</td><td>5720.00</td><td>114.41</td><td></td><td></td><td>113.48</td><td>0.93</td><td>Peak</td><td>172</td><td>345</td></tr><tr><td>6</td><td>5850.00</td><td>58.40</td><td>68.20</td><td>-9.80</td><td>57.13</td><td>1.27</td><td>Peak</td><td>172</td><td>345</td></tr><tr><td>7</td><td>11440.00</td><td>42.25</td><td>54.00</td><td>-11.75</td><td>33.57</td><td>8.68</td><td>Average</td><td>117</td><td>19</td></tr><tr><td>8</td><td>11440.00</td><td>55.32</td><td>74.00</td><td>-18.68</td><td>46.64</td><td>8.68</td><td>Peak</td><td>117</td><td>19</td></tr><tr><td>9</td><td>17160.00</td><td>58.28</td><td>68.20</td><td>-9.92</td><td>51.77</td><td>6.51</td><td>Peak</td><td>100</td><td>67</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	42.09	54.00	-11.91	41.48	0.61	Average	172	345	2	5460.00	56.98	74.00	-17.02	56.37	0.61	Peak	172	345	3	5470.00	57.25	68.20	-10.95	56.63	0.62	Peak	172	345	4 *	5720.00	104.28			103.35	0.93	Average	172	345	5 *	5720.00	114.41			113.48	0.93	Peak	172	345	6	5850.00	58.40	68.20	-9.80	57.13	1.27	Peak	172	345	7	11440.00	42.25	54.00	-11.75	33.57	8.68	Average	117	19	8	11440.00	55.32	74.00	-18.68	46.64	8.68	Peak	117	19	9	17160.00	58.28	68.20	-9.92	51.77	6.51	Peak	100	67
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	42.09	54.00	-11.91	41.48	0.61	Average	172	345																																																																																														
2	5460.00	56.98	74.00	-17.02	56.37	0.61	Peak	172	345																																																																																														
3	5470.00	57.25	68.20	-10.95	56.63	0.62	Peak	172	345																																																																																														
4 *	5720.00	104.28			103.35	0.93	Average	172	345																																																																																														
5 *	5720.00	114.41			113.48	0.93	Peak	172	345																																																																																														
6	5850.00	58.40	68.20	-9.80	57.13	1.27	Peak	172	345																																																																																														
7	11440.00	42.25	54.00	-11.75	33.57	8.68	Average	117	19																																																																																														
8	11440.00	55.32	74.00	-18.68	46.64	8.68	Peak	117	19																																																																																														
9	17160.00	58.28	68.20	-9.92	51.77	6.51	Peak	100	67																																																																																														



Modulation	11a	Test Freq. (MHz)	5720																																																																																																																								
Polarization	Vertical																																																																																																																										
Test By :Paul Lin Temperature(°C):24 Humidity(%):67																																																																																																																											
Level (dBUV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5460.00</td><td>42.08</td><td>54.00</td><td>-11.92</td><td>41.47</td><td>0.61</td><td>Average</td><td>139</td><td>15</td></tr><tr><td>2</td><td>5460.00</td><td>56.98</td><td>74.00</td><td>-17.02</td><td>56.37</td><td>0.61</td><td>Peak</td><td>139</td><td>15</td></tr><tr><td>3</td><td>5470.00</td><td>57.27</td><td>68.20</td><td>-10.93</td><td>56.65</td><td>0.62</td><td>Peak</td><td>139</td><td>15</td></tr><tr><td>4 *</td><td>5720.00</td><td>101.12</td><td></td><td></td><td>100.19</td><td>0.93</td><td>Average</td><td>139</td><td>15</td></tr><tr><td>5 *</td><td>5720.00</td><td>111.22</td><td></td><td></td><td>110.29</td><td>0.93</td><td>Peak</td><td>139</td><td>15</td></tr><tr><td>6</td><td>5850.00</td><td>58.10</td><td>68.20</td><td>-10.10</td><td>56.83</td><td>1.27</td><td>Peak</td><td>139</td><td>15</td></tr><tr><td>7</td><td>11440.00</td><td>42.36</td><td>54.00</td><td>-11.64</td><td>33.68</td><td>8.68</td><td>Average</td><td>109</td><td>334</td></tr><tr><td>8</td><td>11440.00</td><td>55.35</td><td>74.00</td><td>-18.65</td><td>46.67</td><td>8.68</td><td>Peak</td><td>109</td><td>334</td></tr><tr><td>9</td><td>17160.00</td><td>58.18</td><td>68.20</td><td>-10.02</td><td>51.67</td><td>6.51</td><td>Peak</td><td>100</td><td>91</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table						dBuV			cm	deg	1	5460.00	42.08	54.00	-11.92	41.47	0.61	Average	139	15	2	5460.00	56.98	74.00	-17.02	56.37	0.61	Peak	139	15	3	5470.00	57.27	68.20	-10.93	56.65	0.62	Peak	139	15	4 *	5720.00	101.12			100.19	0.93	Average	139	15	5 *	5720.00	111.22			110.29	0.93	Peak	139	15	6	5850.00	58.10	68.20	-10.10	56.83	1.27	Peak	139	15	7	11440.00	42.36	54.00	-11.64	33.68	8.68	Average	109	334	8	11440.00	55.35	74.00	-18.65	46.67	8.68	Peak	109	334	9	17160.00	58.18	68.20	-10.02	51.67	6.51	Peak	100	91
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																		
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																																																																																		
					dBuV			cm	deg																																																																																																																		
1	5460.00	42.08	54.00	-11.92	41.47	0.61	Average	139	15																																																																																																																		
2	5460.00	56.98	74.00	-17.02	56.37	0.61	Peak	139	15																																																																																																																		
3	5470.00	57.27	68.20	-10.93	56.65	0.62	Peak	139	15																																																																																																																		
4 *	5720.00	101.12			100.19	0.93	Average	139	15																																																																																																																		
5 *	5720.00	111.22			110.29	0.93	Peak	139	15																																																																																																																		
6	5850.00	58.10	68.20	-10.10	56.83	1.27	Peak	139	15																																																																																																																		
7	11440.00	42.36	54.00	-11.64	33.68	8.68	Average	109	334																																																																																																																		
8	11440.00	55.35	74.00	-18.65	46.67	8.68	Peak	109	334																																																																																																																		
9	17160.00	58.18	68.20	-10.02	51.67	6.51	Peak	100	91																																																																																																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																											



Modulation	11a	Test Freq. (MHz)	5745																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																																							
Level (dBUV/m) Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBUV/m dB reading dB/m High Table dBUV/m dB dBUV dB/m cm deg <table><tr><td>1</td><td>5650.00</td><td>56.90</td><td>68.20</td><td>-11.30</td><td>56.34</td><td>0.56</td><td>Peak</td><td>175</td><td>343</td></tr><tr><td>2</td><td>5700.00</td><td>65.27</td><td>105.20</td><td>-39.93</td><td>64.38</td><td>0.89</td><td>Peak</td><td>175</td><td>343</td></tr><tr><td>3</td><td>5720.00</td><td>78.71</td><td>110.80</td><td>-32.09</td><td>77.78</td><td>0.93</td><td>Peak</td><td>175</td><td>343</td></tr><tr><td>4</td><td>5725.00</td><td>91.94</td><td>122.20</td><td>-30.26</td><td>90.99</td><td>0.95</td><td>Peak</td><td>175</td><td>343</td></tr><tr><td>5 *</td><td>5745.00</td><td>112.39</td><td></td><td></td><td>111.39</td><td>1.00</td><td>Average</td><td>175</td><td>343</td></tr><tr><td>6 *</td><td>5745.00</td><td>122.92</td><td></td><td></td><td>121.92</td><td>1.00</td><td>Peak</td><td>175</td><td>343</td></tr><tr><td>7</td><td>5925.00</td><td>57.47</td><td>68.20</td><td>-10.73</td><td>55.96</td><td>1.51</td><td>Peak</td><td>175</td><td>343</td></tr><tr><td>8</td><td>11490.00</td><td>50.11</td><td>54.00</td><td>-3.89</td><td>41.34</td><td>8.77</td><td>Average</td><td>100</td><td>21</td></tr><tr><td>9</td><td>11490.00</td><td>62.67</td><td>74.00</td><td>-11.33</td><td>53.90</td><td>8.77</td><td>Peak</td><td>100</td><td>21</td></tr><tr><td>10</td><td>17235.00</td><td>58.48</td><td>68.20</td><td>-9.72</td><td>52.02</td><td>6.46</td><td>Peak</td><td>100</td><td>55</td></tr></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency				1	5650.00	56.90	68.20	-11.30	56.34	0.56	Peak	175	343	2	5700.00	65.27	105.20	-39.93	64.38	0.89	Peak	175	343	3	5720.00	78.71	110.80	-32.09	77.78	0.93	Peak	175	343	4	5725.00	91.94	122.20	-30.26	90.99	0.95	Peak	175	343	5 *	5745.00	112.39			111.39	1.00	Average	175	343	6 *	5745.00	122.92			121.92	1.00	Peak	175	343	7	5925.00	57.47	68.20	-10.73	55.96	1.51	Peak	175	343	8	11490.00	50.11	54.00	-3.89	41.34	8.77	Average	100	21	9	11490.00	62.67	74.00	-11.33	53.90	8.77	Peak	100	21	10	17235.00	58.48	68.20	-9.72	52.02	6.46	Peak	100	55
1	5650.00	56.90	68.20	-11.30	56.34	0.56	Peak	175	343																																																																																														
2	5700.00	65.27	105.20	-39.93	64.38	0.89	Peak	175	343																																																																																														
3	5720.00	78.71	110.80	-32.09	77.78	0.93	Peak	175	343																																																																																														
4	5725.00	91.94	122.20	-30.26	90.99	0.95	Peak	175	343																																																																																														
5 *	5745.00	112.39			111.39	1.00	Average	175	343																																																																																														
6 *	5745.00	122.92			121.92	1.00	Peak	175	343																																																																																														
7	5925.00	57.47	68.20	-10.73	55.96	1.51	Peak	175	343																																																																																														
8	11490.00	50.11	54.00	-3.89	41.34	8.77	Average	100	21																																																																																														
9	11490.00	62.67	74.00	-11.33	53.90	8.77	Peak	100	21																																																																																														
10	17235.00	58.48	68.20	-9.72	52.02	6.46	Peak	100	55																																																																																														



Modulation	11a	Test Freq. (MHz)	5745																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																																																	
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5650.00</td><td>56.83</td><td>68.20</td><td>-11.37</td><td>56.27</td><td>0.56</td><td>Peak</td><td>100</td><td>342</td></tr><tr><td>2</td><td>5700.00</td><td>63.07</td><td>105.20</td><td>-42.13</td><td>62.18</td><td>0.89</td><td>Peak</td><td>100</td><td>342</td></tr><tr><td>3</td><td>5720.00</td><td>76.28</td><td>110.80</td><td>-34.52</td><td>75.35</td><td>0.93</td><td>Peak</td><td>100</td><td>342</td></tr><tr><td>4</td><td>5725.00</td><td>89.67</td><td>122.20</td><td>-32.53</td><td>88.72</td><td>0.95</td><td>Peak</td><td>100</td><td>342</td></tr><tr><td>5 *</td><td>5745.00</td><td>110.63</td><td></td><td></td><td>109.63</td><td>1.00</td><td>Average</td><td>100</td><td>342</td></tr><tr><td>6 *</td><td>5745.00</td><td>121.17</td><td></td><td></td><td>120.17</td><td>1.00</td><td>Peak</td><td>100</td><td>342</td></tr><tr><td>7</td><td>5925.00</td><td>57.27</td><td>68.20</td><td>-10.93</td><td>55.76</td><td>1.51</td><td>Peak</td><td>100</td><td>342</td></tr><tr><td>8</td><td>11490.00</td><td>50.06</td><td>54.00</td><td>-3.94</td><td>41.29</td><td>8.77</td><td>Average</td><td>183</td><td>344</td></tr><tr><td>9</td><td>11490.00</td><td>62.98</td><td>74.00</td><td>-11.02</td><td>54.21</td><td>8.77</td><td>Peak</td><td>183</td><td>344</td></tr><tr><td>10</td><td>17235.00</td><td>58.29</td><td>68.20</td><td>-9.91</td><td>51.83</td><td>6.46</td><td>Peak</td><td>100</td><td>46</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	56.83	68.20	-11.37	56.27	0.56	Peak	100	342	2	5700.00	63.07	105.20	-42.13	62.18	0.89	Peak	100	342	3	5720.00	76.28	110.80	-34.52	75.35	0.93	Peak	100	342	4	5725.00	89.67	122.20	-32.53	88.72	0.95	Peak	100	342	5 *	5745.00	110.63			109.63	1.00	Average	100	342	6 *	5745.00	121.17			120.17	1.00	Peak	100	342	7	5925.00	57.27	68.20	-10.93	55.76	1.51	Peak	100	342	8	11490.00	50.06	54.00	-3.94	41.29	8.77	Average	183	344	9	11490.00	62.98	74.00	-11.02	54.21	8.77	Peak	183	344	10	17235.00	58.29	68.20	-9.91	51.83	6.46	Peak	100	46
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	5650.00	56.83	68.20	-11.37	56.27	0.56	Peak	100	342																																																																																																								
2	5700.00	63.07	105.20	-42.13	62.18	0.89	Peak	100	342																																																																																																								
3	5720.00	76.28	110.80	-34.52	75.35	0.93	Peak	100	342																																																																																																								
4	5725.00	89.67	122.20	-32.53	88.72	0.95	Peak	100	342																																																																																																								
5 *	5745.00	110.63			109.63	1.00	Average	100	342																																																																																																								
6 *	5745.00	121.17			120.17	1.00	Peak	100	342																																																																																																								
7	5925.00	57.27	68.20	-10.93	55.76	1.51	Peak	100	342																																																																																																								
8	11490.00	50.06	54.00	-3.94	41.29	8.77	Average	183	344																																																																																																								
9	11490.00	62.98	74.00	-11.02	54.21	8.77	Peak	183	344																																																																																																								
10	17235.00	58.29	68.20	-9.91	51.83	6.46	Peak	100	46																																																																																																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	



Modulation	11a	Test Freq. (MHz)	5785																																																																																
Polarization	Horizontal																																																																																		
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																			
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>58.29</td><td>68.20</td><td>-9.91</td><td>57.73</td><td>0.56</td><td>Peak</td><td>176</td><td>340</td></tr><tr><td>2 *</td><td>5785.00</td><td>111.25</td><td></td><td></td><td>110.15</td><td>1.10</td><td>Average</td><td>176</td><td>340</td></tr><tr><td>3 *</td><td>5785.00</td><td>121.92</td><td></td><td></td><td>120.82</td><td>1.10</td><td>Peak</td><td>176</td><td>340</td></tr><tr><td>4</td><td>5925.00</td><td>57.23</td><td>68.20</td><td>-10.97</td><td>55.72</td><td>1.51</td><td>Peak</td><td>176</td><td>340</td></tr><tr><td>5</td><td>11570.00</td><td>50.56</td><td>54.00</td><td>-3.44</td><td>41.91</td><td>8.65</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>6</td><td>11570.00</td><td>63.18</td><td>74.00</td><td>-10.82</td><td>54.53</td><td>8.65</td><td>Peak</td><td>100</td><td>20</td></tr><tr><td>7</td><td>17355.00</td><td>58.79</td><td>68.20</td><td>-9.41</td><td>52.02</td><td>6.77</td><td>Peak</td><td>100</td><td>28</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	58.29	68.20	-9.91	57.73	0.56	Peak	176	340	2 *	5785.00	111.25			110.15	1.10	Average	176	340	3 *	5785.00	121.92			120.82	1.10	Peak	176	340	4	5925.00	57.23	68.20	-10.97	55.72	1.51	Peak	176	340	5	11570.00	50.56	54.00	-3.44	41.91	8.65	Average	100	20	6	11570.00	63.18	74.00	-10.82	54.53	8.65	Peak	100	20	7	17355.00	58.79	68.20	-9.41	52.02	6.77	Peak	100	28
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5650.00	58.29	68.20	-9.91	57.73	0.56	Peak	176	340																																																																										
2 *	5785.00	111.25			110.15	1.10	Average	176	340																																																																										
3 *	5785.00	121.92			120.82	1.10	Peak	176	340																																																																										
4	5925.00	57.23	68.20	-10.97	55.72	1.51	Peak	176	340																																																																										
5	11570.00	50.56	54.00	-3.44	41.91	8.65	Average	100	20																																																																										
6	11570.00	63.18	74.00	-10.82	54.53	8.65	Peak	100	20																																																																										
7	17355.00	58.79	68.20	-9.41	52.02	6.77	Peak	100	28																																																																										



Modulation	11a	Test Freq. (MHz)	5785																																																																																
Polarization	Vertical																																																																																		
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																			
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>57.10</td><td>68.20</td><td>-11.10</td><td>56.54</td><td>0.56</td><td>Peak</td><td>100</td><td>338</td></tr><tr><td>2 *</td><td>5785.00</td><td>109.51</td><td></td><td></td><td>108.41</td><td>1.10</td><td>Average</td><td>100</td><td>338</td></tr><tr><td>3 *</td><td>5785.00</td><td>119.18</td><td></td><td></td><td>118.08</td><td>1.10</td><td>Peak</td><td>100</td><td>338</td></tr><tr><td>4</td><td>5925.00</td><td>57.12</td><td>68.20</td><td>-11.08</td><td>55.61</td><td>1.51</td><td>Peak</td><td>100</td><td>338</td></tr><tr><td>5</td><td>11570.00</td><td>50.30</td><td>54.00</td><td>-3.70</td><td>41.65</td><td>8.65</td><td>Average</td><td>177</td><td>344</td></tr><tr><td>6</td><td>11570.00</td><td>62.68</td><td>74.00</td><td>-11.32</td><td>54.03</td><td>8.65</td><td>Peak</td><td>177</td><td>344</td></tr><tr><td>7</td><td>17355.00</td><td>59.10</td><td>68.20</td><td>-9.10</td><td>52.33</td><td>6.77</td><td>Peak</td><td>100</td><td>14</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	57.10	68.20	-11.10	56.54	0.56	Peak	100	338	2 *	5785.00	109.51			108.41	1.10	Average	100	338	3 *	5785.00	119.18			118.08	1.10	Peak	100	338	4	5925.00	57.12	68.20	-11.08	55.61	1.51	Peak	100	338	5	11570.00	50.30	54.00	-3.70	41.65	8.65	Average	177	344	6	11570.00	62.68	74.00	-11.32	54.03	8.65	Peak	177	344	7	17355.00	59.10	68.20	-9.10	52.33	6.77	Peak	100	14
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5650.00	57.10	68.20	-11.10	56.54	0.56	Peak	100	338																																																																										
2 *	5785.00	109.51			108.41	1.10	Average	100	338																																																																										
3 *	5785.00	119.18			118.08	1.10	Peak	100	338																																																																										
4	5925.00	57.12	68.20	-11.08	55.61	1.51	Peak	100	338																																																																										
5	11570.00	50.30	54.00	-3.70	41.65	8.65	Average	177	344																																																																										
6	11570.00	62.68	74.00	-11.32	54.03	8.65	Peak	177	344																																																																										
7	17355.00	59.10	68.20	-9.10	52.33	6.77	Peak	100	14																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																			



Modulation	11a	Test Freq. (MHz)	5825																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Brad Wu Temperature(°C):23 Humidity(%):66																																																																																																																	
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>57.56</td><td>68.20</td><td>-10.64</td><td>57.00</td><td>0.56</td><td>Peak</td><td>160</td><td>338</td></tr><tr><td>2 *</td><td>5825.00</td><td>110.66</td><td></td><td></td><td>109.46</td><td>1.20</td><td>Average</td><td>160</td><td>338</td></tr><tr><td>3 *</td><td>5825.00</td><td>120.94</td><td></td><td></td><td>119.74</td><td>1.20</td><td>Peak</td><td>160</td><td>338</td></tr><tr><td>4</td><td>5850.00</td><td>76.66</td><td>122.20</td><td>-45.54</td><td>75.39</td><td>1.27</td><td>Peak</td><td>160</td><td>338</td></tr><tr><td>5</td><td>5855.00</td><td>67.72</td><td>110.80</td><td>-43.08</td><td>66.43</td><td>1.29</td><td>Peak</td><td>160</td><td>338</td></tr><tr><td>6</td><td>5875.00</td><td>55.82</td><td>105.20</td><td>-49.38</td><td>54.43</td><td>1.39</td><td>Peak</td><td>160</td><td>338</td></tr><tr><td>7</td><td>5925.00</td><td>57.62</td><td>68.20</td><td>-10.58</td><td>56.11</td><td>1.51</td><td>Peak</td><td>160</td><td>338</td></tr><tr><td>8</td><td>11650.00</td><td>47.84</td><td>54.00</td><td>-6.16</td><td>39.55</td><td>8.29</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>9</td><td>11650.00</td><td>60.88</td><td>74.00</td><td>-13.12</td><td>52.59</td><td>8.29</td><td>Peak</td><td>100</td><td>20</td></tr><tr><td>10</td><td>17475.00</td><td>59.20</td><td>68.20</td><td>-9.00</td><td>51.94</td><td>7.26</td><td>Peak</td><td>100</td><td>29</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	57.56	68.20	-10.64	57.00	0.56	Peak	160	338	2 *	5825.00	110.66			109.46	1.20	Average	160	338	3 *	5825.00	120.94			119.74	1.20	Peak	160	338	4	5850.00	76.66	122.20	-45.54	75.39	1.27	Peak	160	338	5	5855.00	67.72	110.80	-43.08	66.43	1.29	Peak	160	338	6	5875.00	55.82	105.20	-49.38	54.43	1.39	Peak	160	338	7	5925.00	57.62	68.20	-10.58	56.11	1.51	Peak	160	338	8	11650.00	47.84	54.00	-6.16	39.55	8.29	Average	100	20	9	11650.00	60.88	74.00	-13.12	52.59	8.29	Peak	100	20	10	17475.00	59.20	68.20	-9.00	51.94	7.26	Peak	100	29
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	5650.00	57.56	68.20	-10.64	57.00	0.56	Peak	160	338																																																																																																								
2 *	5825.00	110.66			109.46	1.20	Average	160	338																																																																																																								
3 *	5825.00	120.94			119.74	1.20	Peak	160	338																																																																																																								
4	5850.00	76.66	122.20	-45.54	75.39	1.27	Peak	160	338																																																																																																								
5	5855.00	67.72	110.80	-43.08	66.43	1.29	Peak	160	338																																																																																																								
6	5875.00	55.82	105.20	-49.38	54.43	1.39	Peak	160	338																																																																																																								
7	5925.00	57.62	68.20	-10.58	56.11	1.51	Peak	160	338																																																																																																								
8	11650.00	47.84	54.00	-6.16	39.55	8.29	Average	100	20																																																																																																								
9	11650.00	60.88	74.00	-13.12	52.59	8.29	Peak	100	20																																																																																																								
10	17475.00	59.20	68.20	-9.00	51.94	7.26	Peak	100	29																																																																																																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	



Modulation	11a	Test Freq. (MHz)	5825
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):23 Humidity(%):66			
Level (dBuV/m) <			

Unwanted Emissions (Above 1GHz) for be EHT20

Modulation	be EHT20	Test Freq. (MHz)	5180
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBUV/m) <			



Modulation	be EHT20	Test Freq. (MHz)	5180
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBuV/m)			



Modulation	be EHT20	Test Freq. (MHz)	5200																																																																																																																								
Polarization	Horizontal																																																																																																																										
Test By :Akun Chung Temperature(°C):23 Humidity(%):65																																																																																																																											
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5150.00</td><td>52.23</td><td>54.00</td><td>-1.77</td><td>51.37</td><td>0.86</td><td>Average</td><td>182</td><td>350</td></tr><tr><td>2</td><td>5150.00</td><td>56.30</td><td>74.00</td><td>-17.70</td><td>55.44</td><td>0.86</td><td>Peak</td><td>182</td><td>350</td></tr><tr><td>3 *</td><td>5200.00</td><td>110.95</td><td></td><td></td><td>110.29</td><td>0.66</td><td>Average</td><td>182</td><td>350</td></tr><tr><td>4 *</td><td>5200.00</td><td>124.26</td><td></td><td></td><td>123.60</td><td>0.66</td><td>Peak</td><td>182</td><td>350</td></tr><tr><td>5</td><td>5360.00</td><td>51.17</td><td>54.00</td><td>-2.83</td><td>50.95</td><td>0.22</td><td>Average</td><td>182</td><td>350</td></tr><tr><td>6</td><td>5360.00</td><td>64.21</td><td>74.00</td><td>-9.79</td><td>63.99</td><td>0.22</td><td>Peak</td><td>182</td><td>350</td></tr><tr><td>7</td><td>10400.00</td><td>61.05</td><td>68.20</td><td>-7.15</td><td>52.37</td><td>8.68</td><td>Peak</td><td>106</td><td>1</td></tr><tr><td>8</td><td>15600.00</td><td>42.30</td><td>54.00</td><td>-11.70</td><td>36.48</td><td>5.82</td><td>Average</td><td>100</td><td>35</td></tr><tr><td>9</td><td>15600.00</td><td>55.94</td><td>74.00</td><td>-18.06</td><td>50.12</td><td>5.82</td><td>Peak</td><td>100</td><td>35</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5150.00	52.23	54.00	-1.77	51.37	0.86	Average	182	350	2	5150.00	56.30	74.00	-17.70	55.44	0.86	Peak	182	350	3 *	5200.00	110.95			110.29	0.66	Average	182	350	4 *	5200.00	124.26			123.60	0.66	Peak	182	350	5	5360.00	51.17	54.00	-2.83	50.95	0.22	Average	182	350	6	5360.00	64.21	74.00	-9.79	63.99	0.22	Peak	182	350	7	10400.00	61.05	68.20	-7.15	52.37	8.68	Peak	106	1	8	15600.00	42.30	54.00	-11.70	36.48	5.82	Average	100	35	9	15600.00	55.94	74.00	-18.06	50.12	5.82	Peak	100	35
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																		
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																																		
		dBuV/m			dBuV			cm	deg																																																																																																																		
1	5150.00	52.23	54.00	-1.77	51.37	0.86	Average	182	350																																																																																																																		
2	5150.00	56.30	74.00	-17.70	55.44	0.86	Peak	182	350																																																																																																																		
3 *	5200.00	110.95			110.29	0.66	Average	182	350																																																																																																																		
4 *	5200.00	124.26			123.60	0.66	Peak	182	350																																																																																																																		
5	5360.00	51.17	54.00	-2.83	50.95	0.22	Average	182	350																																																																																																																		
6	5360.00	64.21	74.00	-9.79	63.99	0.22	Peak	182	350																																																																																																																		
7	10400.00	61.05	68.20	-7.15	52.37	8.68	Peak	106	1																																																																																																																		
8	15600.00	42.30	54.00	-11.70	36.48	5.82	Average	100	35																																																																																																																		
9	15600.00	55.94	74.00	-18.06	50.12	5.82	Peak	100	35																																																																																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																											

Modulation	be EHT20	Test Freq. (MHz)	5200
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) </			



Modulation	be EHT20	Test Freq. (MHz)	5240
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBuV/m) <			



Modulation	be EHT20	Test Freq. (MHz)	5240																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Brad Wu Temperature(°C):24 Humidity(%):65																																																																																																							
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5150.00</td><td>45.03</td><td>54.00</td><td>-8.97</td><td>44.17</td><td>0.86</td><td>Average</td><td>148</td><td>14</td></tr><tr><td>2</td><td>5150.00</td><td>58.07</td><td>74.00</td><td>-15.93</td><td>57.21</td><td>0.86</td><td>Peak</td><td>148</td><td>14</td></tr><tr><td>3 *</td><td>5240.00</td><td>108.86</td><td></td><td></td><td>108.52</td><td>0.34</td><td>Average</td><td>148</td><td>14</td></tr><tr><td>4 *</td><td>5240.00</td><td>121.93</td><td></td><td></td><td>121.59</td><td>0.34</td><td>Peak</td><td>148</td><td>14</td></tr><tr><td>5</td><td>5386.00</td><td>47.57</td><td>54.00</td><td>-6.43</td><td>47.25</td><td>0.32</td><td>Average</td><td>148</td><td>14</td></tr><tr><td>6</td><td>5386.00</td><td>59.96</td><td>74.00</td><td>-14.04</td><td>59.64</td><td>0.32</td><td>Peak</td><td>148</td><td>14</td></tr><tr><td>7</td><td>10480.00</td><td>62.78</td><td>68.20</td><td>-5.42</td><td>54.05</td><td>8.73</td><td>Peak</td><td>105</td><td>6</td></tr><tr><td>8</td><td>15720.00</td><td>43.63</td><td>54.00</td><td>-10.37</td><td>37.83</td><td>5.80</td><td>Average</td><td>100</td><td>23</td></tr><tr><td>9</td><td>15720.00</td><td>55.56</td><td>74.00</td><td>-18.44</td><td>49.76</td><td>5.80</td><td>Peak</td><td>100</td><td>23</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	45.03	54.00	-8.97	44.17	0.86	Average	148	14	2	5150.00	58.07	74.00	-15.93	57.21	0.86	Peak	148	14	3 *	5240.00	108.86			108.52	0.34	Average	148	14	4 *	5240.00	121.93			121.59	0.34	Peak	148	14	5	5386.00	47.57	54.00	-6.43	47.25	0.32	Average	148	14	6	5386.00	59.96	74.00	-14.04	59.64	0.32	Peak	148	14	7	10480.00	62.78	68.20	-5.42	54.05	8.73	Peak	105	6	8	15720.00	43.63	54.00	-10.37	37.83	5.80	Average	100	23	9	15720.00	55.56	74.00	-18.44	49.76	5.80	Peak	100	23
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5150.00	45.03	54.00	-8.97	44.17	0.86	Average	148	14																																																																																														
2	5150.00	58.07	74.00	-15.93	57.21	0.86	Peak	148	14																																																																																														
3 *	5240.00	108.86			108.52	0.34	Average	148	14																																																																																														
4 *	5240.00	121.93			121.59	0.34	Peak	148	14																																																																																														
5	5386.00	47.57	54.00	-6.43	47.25	0.32	Average	148	14																																																																																														
6	5386.00	59.96	74.00	-14.04	59.64	0.32	Peak	148	14																																																																																														
7	10480.00	62.78	68.20	-5.42	54.05	8.73	Peak	105	6																																																																																														
8	15720.00	43.63	54.00	-10.37	37.83	5.80	Average	100	23																																																																																														
9	15720.00	55.56	74.00	-18.44	49.76	5.80	Peak	100	23																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																							



Modulation	be EHT20	Test Freq. (MHz)	5260
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBuV/m)			



Modulation	be EHT20	Test Freq. (MHz)	5260						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):24 Humidity(%):65									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	43.13	54.00	-10.87	42.27	0.86	Average	147	12
2	5150.00	57.22	74.00	-16.78	56.36	0.86	Peak	147	12
3 *	5260.00	103.76			103.53	0.23	Average	147	12
4 *	5260.00	117.08			116.85	0.23	Peak	147	12
5	10520.00	56.01	68.20	-12.19	47.25	8.76	Peak	100	59
6	15780.00	43.30	54.00	-10.70	37.55	5.75	Average	100	97
7	15780.00	56.88	74.00	-17.12	51.13	5.75	Peak	100	97

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5300						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):24 Humidity(%):65									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	45.28	54.00	-8.72	44.42	0.86	Average	178	6
2	5150.00	57.92	74.00	-16.08	57.06	0.86	Peak	178	6
3 *	5300.00	105.82			105.75	0.07	Average	178	6
4 *	5300.00	119.69			119.62	0.07	Peak	178	6
5	5350.00	46.35	54.00	-7.65	46.18	0.17	Average	178	6
6	5350.00	58.31	74.00	-15.69	58.14	0.17	Peak	178	6
7	10600.00	42.47	54.00	-11.53	33.63	8.84	Average	100	31
8	10600.00	55.46	74.00	-18.54	46.62	8.84	Peak	100	31
9	15900.00	44.07	54.00	-9.93	38.34	5.73	Average	100	102
10	15900.00	57.06	74.00	-16.94	51.33	5.73	Peak	100	102
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency									



Modulation	be EHT20	Test Freq. (MHz)	5300
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBuV/m)			



Modulation	be EHT20	Test Freq. (MHz)	5320							
Polarization	Horizontal									
Test By :Akun Chung Temperature(°C):23 Humidity(%):65										
Level (dBuV/m) Frequency (MHz)										
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	
	MHz	level			reading			High	Table	
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	
1	*	5320.00	105.82		105.71	0.11	Average	182	5	
2	*	5320.00	119.45		119.34	0.11	Peak	182	5	
3		5350.00	47.51	54.00	-6.49	47.34	0.17	Average	182	5
4		5350.00	61.71	74.00	-12.29	61.54	0.17	Peak	182	5
5		10640.00	44.33	54.00	-9.67	35.49	8.84	Average	100	86
6		10640.00	57.07	74.00	-16.93	48.23	8.84	Peak	100	86
7		15960.00	44.89	54.00	-9.11	39.15	5.74	Average	100	22
8		15960.00	59.21	74.00	-14.79	53.47	5.74	Peak	100	22
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency										

Modulation	be EHT20	Test Freq. (MHz)	5320																																																																																																																				
Polarization	Vertical																																																																																																																						
Test By :Akun Chung Temperature(°C):23 Humidity(%):65																																																																																																																							
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>*</td><td>5320.00</td><td>103.24</td><td></td><td>103.13</td><td>0.11</td><td>Average</td><td>143</td><td>16</td></tr><tr><td>2</td><td>*</td><td>5320.00</td><td>118.91</td><td></td><td>118.80</td><td>0.11</td><td>Peak</td><td>143</td><td>16</td></tr><tr><td>3</td><td></td><td>5350.00</td><td>45.06</td><td>54.00</td><td>-8.94</td><td>44.89</td><td>0.17</td><td>Average</td><td>143</td><td>16</td></tr><tr><td>4</td><td></td><td>5350.00</td><td>59.23</td><td>74.00</td><td>-14.77</td><td>59.06</td><td>0.17</td><td>Peak</td><td>143</td><td>16</td></tr><tr><td>5</td><td></td><td>10640.00</td><td>44.10</td><td>54.00</td><td>-9.90</td><td>35.26</td><td>8.84</td><td>Average</td><td>100</td><td>77</td></tr><tr><td>6</td><td></td><td>10640.00</td><td>56.85</td><td>74.00</td><td>-17.15</td><td>48.01</td><td>8.84</td><td>Peak</td><td>100</td><td>77</td></tr><tr><td>7</td><td></td><td>15960.00</td><td>44.60</td><td>54.00</td><td>-9.40</td><td>38.86</td><td>5.74</td><td>Average</td><td>100</td><td>134</td></tr><tr><td>8</td><td></td><td>15960.00</td><td>59.03</td><td>74.00</td><td>-14.97</td><td>53.29</td><td>5.74</td><td>Peak</td><td>100</td><td>134</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	*	5320.00	103.24		103.13	0.11	Average	143	16	2	*	5320.00	118.91		118.80	0.11	Peak	143	16	3		5350.00	45.06	54.00	-8.94	44.89	0.17	Average	143	16	4		5350.00	59.23	74.00	-14.77	59.06	0.17	Peak	143	16	5		10640.00	44.10	54.00	-9.90	35.26	8.84	Average	100	77	6		10640.00	56.85	74.00	-17.15	48.01	8.84	Peak	100	77	7		15960.00	44.60	54.00	-9.40	38.86	5.74	Average	100	134	8		15960.00	59.03	74.00	-14.97	53.29	5.74	Peak	100	134
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																														
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																														
		dBuV/m			dBuV			cm	deg																																																																																																														
1	*	5320.00	103.24		103.13	0.11	Average	143	16																																																																																																														
2	*	5320.00	118.91		118.80	0.11	Peak	143	16																																																																																																														
3		5350.00	45.06	54.00	-8.94	44.89	0.17	Average	143	16																																																																																																													
4		5350.00	59.23	74.00	-14.77	59.06	0.17	Peak	143	16																																																																																																													
5		10640.00	44.10	54.00	-9.90	35.26	8.84	Average	100	77																																																																																																													
6		10640.00	56.85	74.00	-17.15	48.01	8.84	Peak	100	77																																																																																																													
7		15960.00	44.60	54.00	-9.40	38.86	5.74	Average	100	134																																																																																																													
8		15960.00	59.03	74.00	-14.97	53.29	5.74	Peak	100	134																																																																																																													
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																							

Modulation	be EHT20	Test Freq. (MHz)	5500																																																																																										
Polarization	Horizontal																																																																																												
Test By :Akun Chung Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>44.82</td><td>54.00</td><td>-9.18</td><td>44.21</td><td>0.61</td><td>Average</td><td>145</td><td>18</td></tr><tr><td>2</td><td>5460.00</td><td>58.24</td><td>74.00</td><td>-15.76</td><td>57.63</td><td>0.61</td><td>Peak</td><td>145</td><td>18</td></tr><tr><td>3</td><td>5470.00</td><td>52.86</td><td>68.20</td><td>-15.34</td><td>52.24</td><td>0.62</td><td>Peak</td><td>145</td><td>18</td></tr><tr><td>4 *</td><td>5500.00</td><td>103.17</td><td></td><td></td><td>102.48</td><td>0.69</td><td>Average</td><td>145</td><td>18</td></tr><tr><td>5 *</td><td>5500.00</td><td>117.12</td><td></td><td></td><td>116.43</td><td>0.69</td><td>Peak</td><td>145</td><td>18</td></tr><tr><td>6</td><td>11000.00</td><td>44.54</td><td>54.00</td><td>-9.46</td><td>35.29</td><td>9.25</td><td>Average</td><td>100</td><td>149</td></tr><tr><td>7</td><td>11000.00</td><td>57.90</td><td>74.00</td><td>-16.10</td><td>48.65</td><td>9.25</td><td>Peak</td><td>100</td><td>149</td></tr><tr><td>8</td><td>16500.00</td><td>60.11</td><td>68.20</td><td>-8.09</td><td>52.96</td><td>7.15</td><td>Peak</td><td>100</td><td>192</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	44.82	54.00	-9.18	44.21	0.61	Average	145	18	2	5460.00	58.24	74.00	-15.76	57.63	0.61	Peak	145	18	3	5470.00	52.86	68.20	-15.34	52.24	0.62	Peak	145	18	4 *	5500.00	103.17			102.48	0.69	Average	145	18	5 *	5500.00	117.12			116.43	0.69	Peak	145	18	6	11000.00	44.54	54.00	-9.46	35.29	9.25	Average	100	149	7	11000.00	57.90	74.00	-16.10	48.65	9.25	Peak	100	149	8	16500.00	60.11	68.20	-8.09	52.96	7.15	Peak	100	192
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5460.00	44.82	54.00	-9.18	44.21	0.61	Average	145	18																																																																																				
2	5460.00	58.24	74.00	-15.76	57.63	0.61	Peak	145	18																																																																																				
3	5470.00	52.86	68.20	-15.34	52.24	0.62	Peak	145	18																																																																																				
4 *	5500.00	103.17			102.48	0.69	Average	145	18																																																																																				
5 *	5500.00	117.12			116.43	0.69	Peak	145	18																																																																																				
6	11000.00	44.54	54.00	-9.46	35.29	9.25	Average	100	149																																																																																				
7	11000.00	57.90	74.00	-16.10	48.65	9.25	Peak	100	149																																																																																				
8	16500.00	60.11	68.20	-8.09	52.96	7.15	Peak	100	192																																																																																				



Modulation	be EHT20	Test Freq. (MHz)	5500																																																																																										
Polarization	Vertical																																																																																												
Test By :Akun Chung Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5460.00</td><td>47.07</td><td>54.00</td><td>-6.93</td><td>46.46</td><td>0.61</td><td>Average</td><td>171</td><td>9</td></tr><tr><td>2</td><td>5460.00</td><td>60.80</td><td>74.00</td><td>-13.20</td><td>60.19</td><td>0.61</td><td>Peak</td><td>171</td><td>9</td></tr><tr><td>3</td><td>5470.00</td><td>63.31</td><td>68.20</td><td>-4.89</td><td>62.69</td><td>0.62</td><td>Peak</td><td>171</td><td>9</td></tr><tr><td>4 *</td><td>5500.00</td><td>105.69</td><td></td><td></td><td>105.00</td><td>0.69</td><td>Average</td><td>171</td><td>9</td></tr><tr><td>5 *</td><td>5500.00</td><td>119.65</td><td></td><td></td><td>118.96</td><td>0.69</td><td>Peak</td><td>171</td><td>9</td></tr><tr><td>6</td><td>11000.00</td><td>44.79</td><td>54.00</td><td>-9.21</td><td>35.54</td><td>9.25</td><td>Average</td><td>100</td><td>103</td></tr><tr><td>7</td><td>11000.00</td><td>58.12</td><td>74.00</td><td>-15.88</td><td>48.87</td><td>9.25</td><td>Peak</td><td>100</td><td>103</td></tr><tr><td>8</td><td>16500.00</td><td>60.43</td><td>68.20</td><td>-7.77</td><td>53.28</td><td>7.15</td><td>Peak</td><td>100</td><td>131</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	47.07	54.00	-6.93	46.46	0.61	Average	171	9	2	5460.00	60.80	74.00	-13.20	60.19	0.61	Peak	171	9	3	5470.00	63.31	68.20	-4.89	62.69	0.62	Peak	171	9	4 *	5500.00	105.69			105.00	0.69	Average	171	9	5 *	5500.00	119.65			118.96	0.69	Peak	171	9	6	11000.00	44.79	54.00	-9.21	35.54	9.25	Average	100	103	7	11000.00	58.12	74.00	-15.88	48.87	9.25	Peak	100	103	8	16500.00	60.43	68.20	-7.77	53.28	7.15	Peak	100	131
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5460.00	47.07	54.00	-6.93	46.46	0.61	Average	171	9																																																																																				
2	5460.00	60.80	74.00	-13.20	60.19	0.61	Peak	171	9																																																																																				
3	5470.00	63.31	68.20	-4.89	62.69	0.62	Peak	171	9																																																																																				
4 *	5500.00	105.69			105.00	0.69	Average	171	9																																																																																				
5 *	5500.00	119.65			118.96	0.69	Peak	171	9																																																																																				
6	11000.00	44.79	54.00	-9.21	35.54	9.25	Average	100	103																																																																																				
7	11000.00	58.12	74.00	-15.88	48.87	9.25	Peak	100	103																																																																																				
8	16500.00	60.43	68.20	-7.77	53.28	7.15	Peak	100	131																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													



Modulation	be EHT20	Test Freq. (MHz)	5580
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m) <			



Modulation	be EHT20	Test Freq. (MHz)	5580
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m) <			



Modulation	be EHT20	Test Freq. (MHz)	5700
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBuV/m)			



Modulation	be EHT20	Test Freq. (MHz)	5700
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) </			



Modulation	be EHT20	Test Freq. (MHz)	5720
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m)			



Modulation	be EHT20	Test Freq. (MHz)	5720
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m)			




Modulation	be EHT20	Test Freq. (MHz)	5745
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m) </			



Modulation	be EHT20	Test Freq. (MHz)	5745
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m)			

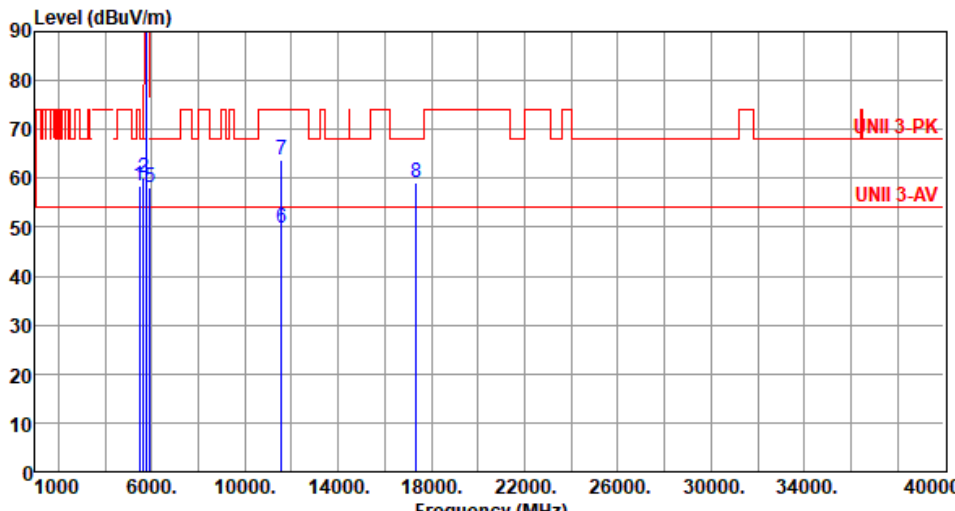

Modulation	be EHT20	Test Freq. (MHz)	5785																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):24 Humidity(%):65																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5480.00</td><td>58.44</td><td>68.20</td><td>-9.76</td><td>57.79</td><td>0.65</td><td>Peak</td><td>189</td><td>342</td></tr><tr><td>2</td><td>5650.00</td><td>60.01</td><td>68.20</td><td>-8.19</td><td>59.45</td><td>0.56</td><td>Peak</td><td>189</td><td>342</td></tr><tr><td>3 *</td><td>5785.00</td><td>109.27</td><td></td><td></td><td>108.17</td><td>1.10</td><td>Average</td><td>189</td><td>342</td></tr><tr><td>4 *</td><td>5785.00</td><td>122.85</td><td></td><td></td><td>121.75</td><td>1.10</td><td>Peak</td><td>189</td><td>342</td></tr><tr><td>5</td><td>5925.00</td><td>58.13</td><td>68.20</td><td>-10.07</td><td>56.62</td><td>1.51</td><td>Peak</td><td>189</td><td>342</td></tr><tr><td>6</td><td>11570.00</td><td>49.65</td><td>54.00</td><td>-4.35</td><td>41.00</td><td>8.65</td><td>Average</td><td>105</td><td>27</td></tr><tr><td>7</td><td>11570.00</td><td>63.85</td><td>74.00</td><td>-10.15</td><td>55.20</td><td>8.65</td><td>Peak</td><td>105</td><td>27</td></tr><tr><td>8</td><td>17355.00</td><td>59.05</td><td>68.20</td><td>-9.15</td><td>52.28</td><td>6.77</td><td>Peak</td><td>100</td><td>39</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5480.00	58.44	68.20	-9.76	57.79	0.65	Peak	189	342	2	5650.00	60.01	68.20	-8.19	59.45	0.56	Peak	189	342	3 *	5785.00	109.27			108.17	1.10	Average	189	342	4 *	5785.00	122.85			121.75	1.10	Peak	189	342	5	5925.00	58.13	68.20	-10.07	56.62	1.51	Peak	189	342	6	11570.00	49.65	54.00	-4.35	41.00	8.65	Average	105	27	7	11570.00	63.85	74.00	-10.15	55.20	8.65	Peak	105	27	8	17355.00	59.05	68.20	-9.15	52.28	6.77	Peak	100	39
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5480.00	58.44	68.20	-9.76	57.79	0.65	Peak	189	342																																																																																				
2	5650.00	60.01	68.20	-8.19	59.45	0.56	Peak	189	342																																																																																				
3 *	5785.00	109.27			108.17	1.10	Average	189	342																																																																																				
4 *	5785.00	122.85			121.75	1.10	Peak	189	342																																																																																				
5	5925.00	58.13	68.20	-10.07	56.62	1.51	Peak	189	342																																																																																				
6	11570.00	49.65	54.00	-4.35	41.00	8.65	Average	105	27																																																																																				
7	11570.00	63.85	74.00	-10.15	55.20	8.65	Peak	105	27																																																																																				
8	17355.00	59.05	68.20	-9.15	52.28	6.77	Peak	100	39																																																																																				




Modulation	be EHT20	Test Freq. (MHz)	5785
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m) </			



Modulation	be EHT20	Test Freq. (MHz)	5825																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Brad Wu Temperature(°C):24 Humidity(%):65																																																																																																																	
Level (dBUV/m) UNII 3-PK UNII 3-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5650.00</td><td>59.26</td><td>68.20</td><td>-8.94</td><td>58.70</td><td>0.56</td><td>Peak</td><td>189</td><td>348</td></tr><tr><td>2 *</td><td>5825.00</td><td>109.66</td><td></td><td></td><td>108.46</td><td>1.20</td><td>Average</td><td>189</td><td>348</td></tr><tr><td>3 *</td><td>5825.00</td><td>122.64</td><td></td><td></td><td>121.44</td><td>1.20</td><td>Peak</td><td>189</td><td>348</td></tr><tr><td>4</td><td>5850.00</td><td>93.27</td><td>122.20</td><td>-28.93</td><td>92.00</td><td>1.27</td><td>Peak</td><td>189</td><td>348</td></tr><tr><td>5</td><td>5855.00</td><td>77.83</td><td>110.80</td><td>-32.97</td><td>76.54</td><td>1.29</td><td>Peak</td><td>189</td><td>348</td></tr><tr><td>6</td><td>5875.00</td><td>67.84</td><td>105.20</td><td>-37.36</td><td>66.45</td><td>1.39</td><td>Peak</td><td>189</td><td>348</td></tr><tr><td>7</td><td>5925.00</td><td>57.76</td><td>68.20</td><td>-10.44</td><td>56.25</td><td>1.51</td><td>Peak</td><td>189</td><td>348</td></tr><tr><td>8</td><td>11650.00</td><td>49.37</td><td>54.00</td><td>-4.63</td><td>41.08</td><td>8.29</td><td>Average</td><td>108</td><td>24</td></tr><tr><td>9</td><td>11650.00</td><td>63.44</td><td>74.00</td><td>-10.56</td><td>55.15</td><td>8.29</td><td>Peak</td><td>108</td><td>24</td></tr><tr><td>10</td><td>17475.00</td><td>59.13</td><td>68.20</td><td>-9.07</td><td>51.87</td><td>7.26</td><td>Peak</td><td>100</td><td>114</td></tr></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	59.26	68.20	-8.94	58.70	0.56	Peak	189	348	2 *	5825.00	109.66			108.46	1.20	Average	189	348	3 *	5825.00	122.64			121.44	1.20	Peak	189	348	4	5850.00	93.27	122.20	-28.93	92.00	1.27	Peak	189	348	5	5855.00	77.83	110.80	-32.97	76.54	1.29	Peak	189	348	6	5875.00	67.84	105.20	-37.36	66.45	1.39	Peak	189	348	7	5925.00	57.76	68.20	-10.44	56.25	1.51	Peak	189	348	8	11650.00	49.37	54.00	-4.63	41.08	8.29	Average	108	24	9	11650.00	63.44	74.00	-10.56	55.15	8.29	Peak	108	24	10	17475.00	59.13	68.20	-9.07	51.87	7.26	Peak	100	114
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	5650.00	59.26	68.20	-8.94	58.70	0.56	Peak	189	348																																																																																																								
2 *	5825.00	109.66			108.46	1.20	Average	189	348																																																																																																								
3 *	5825.00	122.64			121.44	1.20	Peak	189	348																																																																																																								
4	5850.00	93.27	122.20	-28.93	92.00	1.27	Peak	189	348																																																																																																								
5	5855.00	77.83	110.80	-32.97	76.54	1.29	Peak	189	348																																																																																																								
6	5875.00	67.84	105.20	-37.36	66.45	1.39	Peak	189	348																																																																																																								
7	5925.00	57.76	68.20	-10.44	56.25	1.51	Peak	189	348																																																																																																								
8	11650.00	49.37	54.00	-4.63	41.08	8.29	Average	108	24																																																																																																								
9	11650.00	63.44	74.00	-10.56	55.15	8.29	Peak	108	24																																																																																																								
10	17475.00	59.13	68.20	-9.07	51.87	7.26	Peak	100	114																																																																																																								

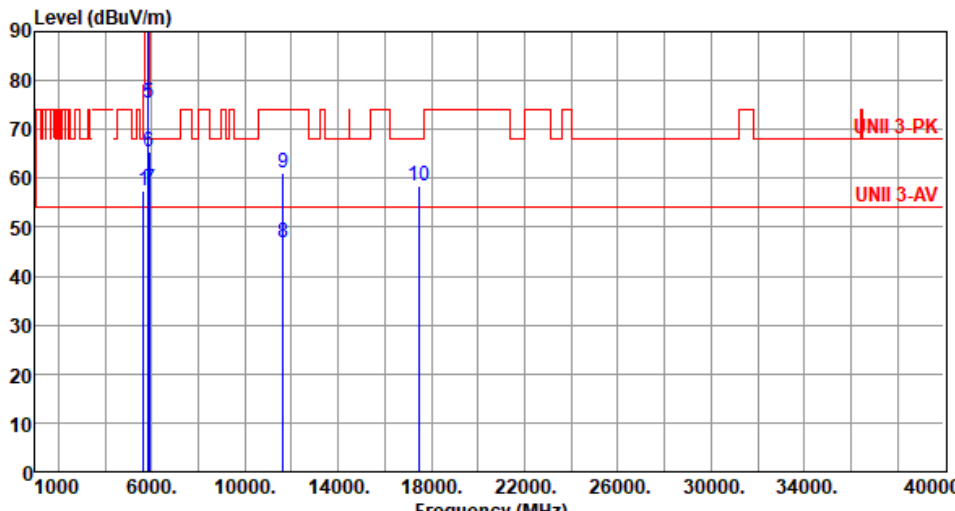

Modulation	be EHT20	Test Freq. (MHz)	5825																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Brad Wu Temperature(°C):24 Humidity(%):65																																																																																																																	
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5650.00</td><td>57.31</td><td>68.20</td><td>-10.89</td><td>56.75</td><td>0.56</td><td>Peak</td><td>144</td><td>18</td></tr><tr><td>2 *</td><td>5825.00</td><td>107.28</td><td></td><td></td><td>106.08</td><td>1.20</td><td>Average</td><td>144</td><td>18</td></tr><tr><td>3 *</td><td>5825.00</td><td>120.33</td><td></td><td></td><td>119.13</td><td>1.20</td><td>Peak</td><td>144</td><td>18</td></tr><tr><td>4</td><td>5850.00</td><td>91.06</td><td>122.20</td><td>-31.14</td><td>89.79</td><td>1.27</td><td>Peak</td><td>144</td><td>18</td></tr><tr><td>5</td><td>5855.00</td><td>75.39</td><td>110.80</td><td>-35.41</td><td>74.10</td><td>1.29</td><td>Peak</td><td>144</td><td>18</td></tr><tr><td>6</td><td>5875.00</td><td>65.48</td><td>105.20</td><td>-39.72</td><td>64.09</td><td>1.39</td><td>Peak</td><td>144</td><td>18</td></tr><tr><td>7</td><td>5925.00</td><td>57.70</td><td>68.20</td><td>-10.50</td><td>56.19</td><td>1.51</td><td>Peak</td><td>144</td><td>18</td></tr><tr><td>8</td><td>11650.00</td><td>46.85</td><td>54.00</td><td>-7.15</td><td>38.56</td><td>8.29</td><td>Average</td><td>100</td><td>46</td></tr><tr><td>9</td><td>11650.00</td><td>61.08</td><td>74.00</td><td>-12.92</td><td>52.79</td><td>8.29</td><td>Peak</td><td>100</td><td>46</td></tr><tr><td>10</td><td>17475.00</td><td>58.50</td><td>68.20</td><td>-9.70</td><td>51.24</td><td>7.26</td><td>Peak</td><td>100</td><td>139</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	57.31	68.20	-10.89	56.75	0.56	Peak	144	18	2 *	5825.00	107.28			106.08	1.20	Average	144	18	3 *	5825.00	120.33			119.13	1.20	Peak	144	18	4	5850.00	91.06	122.20	-31.14	89.79	1.27	Peak	144	18	5	5855.00	75.39	110.80	-35.41	74.10	1.29	Peak	144	18	6	5875.00	65.48	105.20	-39.72	64.09	1.39	Peak	144	18	7	5925.00	57.70	68.20	-10.50	56.19	1.51	Peak	144	18	8	11650.00	46.85	54.00	-7.15	38.56	8.29	Average	100	46	9	11650.00	61.08	74.00	-12.92	52.79	8.29	Peak	100	46	10	17475.00	58.50	68.20	-9.70	51.24	7.26	Peak	100	139
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	5650.00	57.31	68.20	-10.89	56.75	0.56	Peak	144	18																																																																																																								
2 *	5825.00	107.28			106.08	1.20	Average	144	18																																																																																																								
3 *	5825.00	120.33			119.13	1.20	Peak	144	18																																																																																																								
4	5850.00	91.06	122.20	-31.14	89.79	1.27	Peak	144	18																																																																																																								
5	5855.00	75.39	110.80	-35.41	74.10	1.29	Peak	144	18																																																																																																								
6	5875.00	65.48	105.20	-39.72	64.09	1.39	Peak	144	18																																																																																																								
7	5925.00	57.70	68.20	-10.50	56.19	1.51	Peak	144	18																																																																																																								
8	11650.00	46.85	54.00	-7.15	38.56	8.29	Average	100	46																																																																																																								
9	11650.00	61.08	74.00	-12.92	52.79	8.29	Peak	100	46																																																																																																								
10	17475.00	58.50	68.20	-9.70	51.24	7.26	Peak	100	139																																																																																																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	

Unwanted Emissions (Above 1GHz) for be EHT40

Modulation	be EHT40	Test Freq. (MHz)	5190
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) </			



Modulation	be EHT40	Test Freq. (MHz)	5190
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBuV/m)			



Modulation	be EHT40	Test Freq. (MHz)	5230
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) <			

Modulation	be EHT40	Test Freq. (MHz)	5230
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBuV/m)			



Modulation	be EHT40	Test Freq. (MHz)	5270
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBuV/m)			

Modulation	be EHT40	Test Freq. (MHz)	5270
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBuV/m)			

Modulation	be EHT40	Test Freq. (MHz)	5310
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) </			



Modulation	be EHT40	Test Freq. (MHz)	5310
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBuV/m)			



Modulation	be EHT40	Test Freq. (MHz)	5510																																																																																										
Polarization	Horizontal																																																																																												
Test By :Akun Chung Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5460.00</td><td>47.80</td><td>54.00</td><td>-6.20</td><td>47.19</td><td>0.61</td><td>Average</td><td>182</td><td>11</td></tr><tr><td>2</td><td>5460.00</td><td>63.21</td><td>74.00</td><td>-10.79</td><td>62.60</td><td>0.61</td><td>Peak</td><td>182</td><td>11</td></tr><tr><td>3</td><td>5470.00</td><td>65.28</td><td>68.20</td><td>-2.92</td><td>64.66</td><td>0.62</td><td>Peak</td><td>182</td><td>11</td></tr><tr><td>4 *</td><td>5510.00</td><td>102.02</td><td></td><td></td><td>101.32</td><td>0.70</td><td>Average</td><td>182</td><td>11</td></tr><tr><td>5 *</td><td>5510.00</td><td>114.40</td><td></td><td></td><td>113.70</td><td>0.70</td><td>Peak</td><td>182</td><td>11</td></tr><tr><td>6</td><td>11020.00</td><td>44.32</td><td>54.00</td><td>-9.68</td><td>35.14</td><td>9.18</td><td>Average</td><td>100</td><td>72</td></tr><tr><td>7</td><td>11020.00</td><td>57.74</td><td>74.00</td><td>-16.26</td><td>48.56</td><td>9.18</td><td>Peak</td><td>100</td><td>72</td></tr><tr><td>8</td><td>16530.00</td><td>60.31</td><td>68.20</td><td>-7.89</td><td>53.29</td><td>7.02</td><td>Peak</td><td>100</td><td>137</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	47.80	54.00	-6.20	47.19	0.61	Average	182	11	2	5460.00	63.21	74.00	-10.79	62.60	0.61	Peak	182	11	3	5470.00	65.28	68.20	-2.92	64.66	0.62	Peak	182	11	4 *	5510.00	102.02			101.32	0.70	Average	182	11	5 *	5510.00	114.40			113.70	0.70	Peak	182	11	6	11020.00	44.32	54.00	-9.68	35.14	9.18	Average	100	72	7	11020.00	57.74	74.00	-16.26	48.56	9.18	Peak	100	72	8	16530.00	60.31	68.20	-7.89	53.29	7.02	Peak	100	137
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5460.00	47.80	54.00	-6.20	47.19	0.61	Average	182	11																																																																																				
2	5460.00	63.21	74.00	-10.79	62.60	0.61	Peak	182	11																																																																																				
3	5470.00	65.28	68.20	-2.92	64.66	0.62	Peak	182	11																																																																																				
4 *	5510.00	102.02			101.32	0.70	Average	182	11																																																																																				
5 *	5510.00	114.40			113.70	0.70	Peak	182	11																																																																																				
6	11020.00	44.32	54.00	-9.68	35.14	9.18	Average	100	72																																																																																				
7	11020.00	57.74	74.00	-16.26	48.56	9.18	Peak	100	72																																																																																				
8	16530.00	60.31	68.20	-7.89	53.29	7.02	Peak	100	137																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																													



Modulation	be EHT40	Test Freq. (MHz)	5510																																																																																										
Polarization	Vertical																																																																																												
Test By :Akun Chung Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBuV/m) <table><thead><tr><th>Point</th><th>Freq. (MHz)</th><th>Emission level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>SA reading (dBuV)</th><th>Factor (dB/m)</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>45.54</td><td>54.00</td><td>-8.46</td><td>44.93</td><td>0.61</td><td>Average</td><td>187</td><td>16</td></tr><tr><td>2</td><td>5460.00</td><td>59.79</td><td>74.00</td><td>-14.21</td><td>59.18</td><td>0.61</td><td>Peak</td><td>187</td><td>16</td></tr><tr><td>3</td><td>5470.00</td><td>62.18</td><td>68.20</td><td>-6.02</td><td>61.56</td><td>0.62</td><td>Peak</td><td>187</td><td>16</td></tr><tr><td>4 *</td><td>5510.00</td><td>99.00</td><td></td><td></td><td>98.30</td><td>0.70</td><td>Average</td><td>187</td><td>16</td></tr><tr><td>5 *</td><td>5510.00</td><td>111.07</td><td></td><td></td><td>110.37</td><td>0.70</td><td>Peak</td><td>187</td><td>16</td></tr><tr><td>6</td><td>11020.00</td><td>44.64</td><td>54.00</td><td>-9.36</td><td>35.46</td><td>9.18</td><td>Average</td><td>100</td><td>82</td></tr><tr><td>7</td><td>11020.00</td><td>57.93</td><td>74.00</td><td>-16.07</td><td>48.75</td><td>9.18</td><td>Peak</td><td>100</td><td>82</td></tr><tr><td>8</td><td>16530.00</td><td>60.46</td><td>68.20</td><td>-7.74</td><td>53.44</td><td>7.02</td><td>Peak</td><td>100</td><td>61</td></tr></tbody></table>				Point	Freq. (MHz)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	SA reading (dBuV)	Factor (dB/m)	Remark	ANT High cm	Turn Table deg	1	5460.00	45.54	54.00	-8.46	44.93	0.61	Average	187	16	2	5460.00	59.79	74.00	-14.21	59.18	0.61	Peak	187	16	3	5470.00	62.18	68.20	-6.02	61.56	0.62	Peak	187	16	4 *	5510.00	99.00			98.30	0.70	Average	187	16	5 *	5510.00	111.07			110.37	0.70	Peak	187	16	6	11020.00	44.64	54.00	-9.36	35.46	9.18	Average	100	82	7	11020.00	57.93	74.00	-16.07	48.75	9.18	Peak	100	82	8	16530.00	60.46	68.20	-7.74	53.44	7.02	Peak	100	61
Point	Freq. (MHz)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	SA reading (dBuV)	Factor (dB/m)	Remark	ANT High cm	Turn Table deg																																																																																				
1	5460.00	45.54	54.00	-8.46	44.93	0.61	Average	187	16																																																																																				
2	5460.00	59.79	74.00	-14.21	59.18	0.61	Peak	187	16																																																																																				
3	5470.00	62.18	68.20	-6.02	61.56	0.62	Peak	187	16																																																																																				
4 *	5510.00	99.00			98.30	0.70	Average	187	16																																																																																				
5 *	5510.00	111.07			110.37	0.70	Peak	187	16																																																																																				
6	11020.00	44.64	54.00	-9.36	35.46	9.18	Average	100	82																																																																																				
7	11020.00	57.93	74.00	-16.07	48.75	9.18	Peak	100	82																																																																																				
8	16530.00	60.46	68.20	-7.74	53.44	7.02	Peak	100	61																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													

Modulation	be EHT40	Test Freq. (MHz)	5590
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) <			



Modulation	be EHT40	Test Freq. (MHz)	5590
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) <			



Modulation	be EHT40	Test Freq. (MHz)	5670
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBUV/m) </			



Modulation	be EHT40	Test Freq. (MHz)	5670
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) <			



Modulation	be EHT40	Test Freq. (MHz)	5710
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBUV/m) </			

Modulation	be EHT40	Test Freq. (MHz)	5710
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBuV/m)			



Modulation	be EHT40	Test Freq. (MHz)	5755
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBUV/m) <			



Modulation	be EHT40	Test Freq. (MHz)	5755																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Akun Chung Temperature(°C):23 Humidity(%):65																																																																																																																	
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5650.00</td><td>59.79</td><td>68.20</td><td>-8.41</td><td>59.23</td><td>0.56</td><td>Peak</td><td>188</td><td>34</td></tr><tr><td>2</td><td>5700.00</td><td>75.69</td><td>105.20</td><td>-29.51</td><td>74.80</td><td>0.89</td><td>Peak</td><td>188</td><td>34</td></tr><tr><td>3</td><td>5720.00</td><td>88.84</td><td>110.80</td><td>-21.96</td><td>87.91</td><td>0.93</td><td>Peak</td><td>188</td><td>34</td></tr><tr><td>4</td><td>5725.00</td><td>91.24</td><td>122.20</td><td>-30.96</td><td>90.29</td><td>0.95</td><td>Peak</td><td>188</td><td>34</td></tr><tr><td>5 *</td><td>5755.00</td><td>105.91</td><td></td><td></td><td>104.89</td><td>1.02</td><td>Average</td><td>188</td><td>34</td></tr><tr><td>6 *</td><td>5755.00</td><td>118.80</td><td></td><td></td><td>117.78</td><td>1.02</td><td>Peak</td><td>188</td><td>34</td></tr><tr><td>7</td><td>5925.00</td><td>59.44</td><td>68.20</td><td>-8.76</td><td>57.93</td><td>1.51</td><td>Peak</td><td>188</td><td>34</td></tr><tr><td>8</td><td>11550.00</td><td>43.21</td><td>54.00</td><td>-10.79</td><td>34.52</td><td>8.69</td><td>Average</td><td>100</td><td>46</td></tr><tr><td>9</td><td>11550.00</td><td>56.19</td><td>74.00</td><td>-17.81</td><td>47.50</td><td>8.69</td><td>Peak</td><td>100</td><td>46</td></tr><tr><td>10</td><td>17325.00</td><td>59.63</td><td>68.20</td><td>-8.57</td><td>53.00</td><td>6.63</td><td>Peak</td><td>100</td><td>112</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	59.79	68.20	-8.41	59.23	0.56	Peak	188	34	2	5700.00	75.69	105.20	-29.51	74.80	0.89	Peak	188	34	3	5720.00	88.84	110.80	-21.96	87.91	0.93	Peak	188	34	4	5725.00	91.24	122.20	-30.96	90.29	0.95	Peak	188	34	5 *	5755.00	105.91			104.89	1.02	Average	188	34	6 *	5755.00	118.80			117.78	1.02	Peak	188	34	7	5925.00	59.44	68.20	-8.76	57.93	1.51	Peak	188	34	8	11550.00	43.21	54.00	-10.79	34.52	8.69	Average	100	46	9	11550.00	56.19	74.00	-17.81	47.50	8.69	Peak	100	46	10	17325.00	59.63	68.20	-8.57	53.00	6.63	Peak	100	112
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	5650.00	59.79	68.20	-8.41	59.23	0.56	Peak	188	34																																																																																																								
2	5700.00	75.69	105.20	-29.51	74.80	0.89	Peak	188	34																																																																																																								
3	5720.00	88.84	110.80	-21.96	87.91	0.93	Peak	188	34																																																																																																								
4	5725.00	91.24	122.20	-30.96	90.29	0.95	Peak	188	34																																																																																																								
5 *	5755.00	105.91			104.89	1.02	Average	188	34																																																																																																								
6 *	5755.00	118.80			117.78	1.02	Peak	188	34																																																																																																								
7	5925.00	59.44	68.20	-8.76	57.93	1.51	Peak	188	34																																																																																																								
8	11550.00	43.21	54.00	-10.79	34.52	8.69	Average	100	46																																																																																																								
9	11550.00	56.19	74.00	-17.81	47.50	8.69	Peak	100	46																																																																																																								
10	17325.00	59.63	68.20	-8.57	53.00	6.63	Peak	100	112																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	




Modulation	be EHT40	Test Freq. (MHz)	5795
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBUV/m) </			



Modulation	be EHT40	Test Freq. (MHz)	5795
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBUV/m) </			

Unwanted Emissions (Above 1GHz) for be EHT80

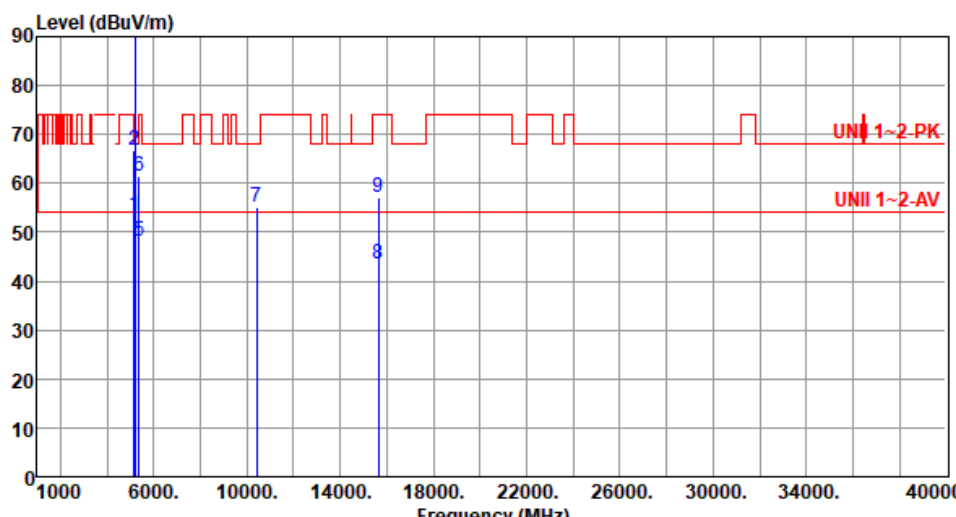Modulation	be EHT80	Test Freq. (MHz)	5210																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Akun Chung Temperature(°C):23 Humidity(%):65																																																																																																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>53.51</td><td>54.00</td><td>-0.49</td><td>52.65</td><td>0.86</td><td>Average</td><td>189</td><td>349</td></tr><tr><td>2</td><td>5150.00</td><td>66.70</td><td>74.00</td><td>-7.30</td><td>65.84</td><td>0.86</td><td>Peak</td><td>189</td><td>349</td></tr><tr><td>3 *</td><td>5210.00</td><td>102.20</td><td></td><td></td><td>101.62</td><td>0.58</td><td>Average</td><td>189</td><td>349</td></tr><tr><td>4 *</td><td>5210.00</td><td>115.49</td><td></td><td></td><td>114.91</td><td>0.58</td><td>Peak</td><td>189</td><td>349</td></tr><tr><td>5</td><td>5350.00</td><td>48.19</td><td>54.00</td><td>-5.81</td><td>48.02</td><td>0.17</td><td>Average</td><td>189</td><td>349</td></tr><tr><td>6</td><td>5350.00</td><td>61.45</td><td>74.00</td><td>-12.55</td><td>61.28</td><td>0.17</td><td>Peak</td><td>189</td><td>349</td></tr><tr><td>7</td><td>10420.00</td><td>55.18</td><td>68.20</td><td>-13.02</td><td>46.49</td><td>8.69</td><td>Peak</td><td>100</td><td>109</td></tr><tr><td>8</td><td>15630.00</td><td>43.49</td><td>54.00</td><td>-10.51</td><td>37.67</td><td>5.82</td><td>Average</td><td>100</td><td>127</td></tr><tr><td>9</td><td>15630.00</td><td>57.16</td><td>74.00</td><td>-16.84</td><td>51.34</td><td>5.82</td><td>Peak</td><td>100</td><td>127</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	53.51	54.00	-0.49	52.65	0.86	Average	189	349	2	5150.00	66.70	74.00	-7.30	65.84	0.86	Peak	189	349	3 *	5210.00	102.20			101.62	0.58	Average	189	349	4 *	5210.00	115.49			114.91	0.58	Peak	189	349	5	5350.00	48.19	54.00	-5.81	48.02	0.17	Average	189	349	6	5350.00	61.45	74.00	-12.55	61.28	0.17	Peak	189	349	7	10420.00	55.18	68.20	-13.02	46.49	8.69	Peak	100	109	8	15630.00	43.49	54.00	-10.51	37.67	5.82	Average	100	127	9	15630.00	57.16	74.00	-16.84	51.34	5.82	Peak	100	127
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5150.00	53.51	54.00	-0.49	52.65	0.86	Average	189	349																																																																																														
2	5150.00	66.70	74.00	-7.30	65.84	0.86	Peak	189	349																																																																																														
3 *	5210.00	102.20			101.62	0.58	Average	189	349																																																																																														
4 *	5210.00	115.49			114.91	0.58	Peak	189	349																																																																																														
5	5350.00	48.19	54.00	-5.81	48.02	0.17	Average	189	349																																																																																														
6	5350.00	61.45	74.00	-12.55	61.28	0.17	Peak	189	349																																																																																														
7	10420.00	55.18	68.20	-13.02	46.49	8.69	Peak	100	109																																																																																														
8	15630.00	43.49	54.00	-10.51	37.67	5.82	Average	100	127																																																																																														
9	15630.00	57.16	74.00	-16.84	51.34	5.82	Peak	100	127																																																																																														

Modulation	be EHT80	Test Freq. (MHz)	5210
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) <			

Modulation	be EHT80	Test Freq. (MHz)	5290
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBuV/m)			

Modulation	be EHT80	Test Freq. (MHz)	5290						
Polarization	Vertical								
Test By :Akun Chung Temperature(°C):23 Humidity(%):65									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	44.33	54.00	-9.67	43.47	0.86	Average	154	13
2	5150.00	56.05	74.00	-17.95	55.19	0.86	Peak	154	13
3 *	5290.00	97.41			97.31	0.10	Average	154	13
4 *	5290.00	111.33			111.23	0.10	Peak	154	13
5	5350.00	46.68	54.00	-7.32	46.51	0.17	Average	154	13
6	5350.00	58.36	74.00	-15.64	58.19	0.17	Peak	154	13
7	10580.00	56.10	68.20	-12.10	47.28	8.82	Peak	100	49
8	15870.00	43.98	54.00	-10.02	38.25	5.73	Average	100	144
9	15870.00	56.12	74.00	-17.88	50.39	5.73	Peak	100	144

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	5530
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBuV/m)			



Modulation	be EHT80	Test Freq. (MHz)	5530
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBuV/m)			

Modulation	be EHT80	Test Freq. (MHz)	5610
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBUV/m) <			

Modulation	be EHT80	Test Freq. (MHz)	5610
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBuV/m)			

Modulation	be EHT80	Test Freq. (MHz)	5690
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBuV/m)			



Modulation	be EHT80	Test Freq. (MHz)	5690
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBUV/m)			



Modulation	be EHT80	Test Freq. (MHz)	5775
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBUV/m) <			



Modulation	be EHT80	Test Freq. (MHz)	5775
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBUV/m)			

Unwanted Emissions (Above 1GHz) for be EHT160

Modulation	be EHT160	Test Freq. (MHz)	5250
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBUV/m)			



Modulation	be EHT160	Test Freq. (MHz)	5250
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) <			




Modulation	be EHT160	Test Freq. (MHz)	5570
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBuV/m)			



Modulation	be EHT160	Test Freq. (MHz)	5570
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65			
Level (dBUV/m)			

Unwanted Emissions (Above 1GHz) for be EHT240

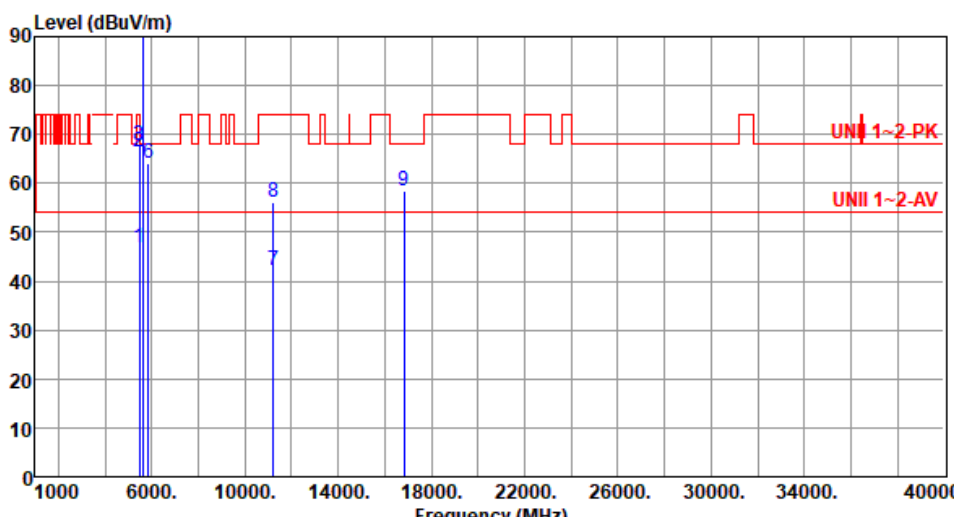Modulation	be EHT240	Test Freq. (MHz)	5610																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Roger Lu Temperature(°C):24 Humidity(%):62																																																																																																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>46.92</td><td>54.00</td><td>-7.08</td><td>46.31</td><td>0.61</td><td>Average</td><td>184</td><td>11</td></tr><tr><td>2</td><td>5460.00</td><td>66.41</td><td>74.00</td><td>-7.59</td><td>65.80</td><td>0.61</td><td>Peak</td><td>184</td><td>11</td></tr><tr><td>3</td><td>5470.00</td><td>67.77</td><td>68.20</td><td>-0.43</td><td>67.15</td><td>0.62</td><td>Peak</td><td>184</td><td>11</td></tr><tr><td>4 *</td><td>5610.00</td><td>89.87</td><td></td><td></td><td>89.24</td><td>0.63</td><td>Average</td><td>184</td><td>11</td></tr><tr><td>5 *</td><td>5610.00</td><td>102.96</td><td></td><td></td><td>102.33</td><td>0.63</td><td>Peak</td><td>184</td><td>11</td></tr><tr><td>6</td><td>5850.00</td><td>64.22</td><td>68.20</td><td>-3.98</td><td>62.95</td><td>1.27</td><td>Peak</td><td>184</td><td>11</td></tr><tr><td>7</td><td>11220.00</td><td>42.22</td><td>54.00</td><td>-11.78</td><td>33.56</td><td>8.66</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>8</td><td>11220.00</td><td>56.22</td><td>74.00</td><td>-17.78</td><td>47.56</td><td>8.66</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>9</td><td>16830.00</td><td>58.55</td><td>68.20</td><td>-9.65</td><td>51.45</td><td>7.10</td><td>Peak</td><td>100</td><td>90</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	46.92	54.00	-7.08	46.31	0.61	Average	184	11	2	5460.00	66.41	74.00	-7.59	65.80	0.61	Peak	184	11	3	5470.00	67.77	68.20	-0.43	67.15	0.62	Peak	184	11	4 *	5610.00	89.87			89.24	0.63	Average	184	11	5 *	5610.00	102.96			102.33	0.63	Peak	184	11	6	5850.00	64.22	68.20	-3.98	62.95	1.27	Peak	184	11	7	11220.00	42.22	54.00	-11.78	33.56	8.66	Average	100	30	8	11220.00	56.22	74.00	-17.78	47.56	8.66	Peak	100	30	9	16830.00	58.55	68.20	-9.65	51.45	7.10	Peak	100	90
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	46.92	54.00	-7.08	46.31	0.61	Average	184	11																																																																																														
2	5460.00	66.41	74.00	-7.59	65.80	0.61	Peak	184	11																																																																																														
3	5470.00	67.77	68.20	-0.43	67.15	0.62	Peak	184	11																																																																																														
4 *	5610.00	89.87			89.24	0.63	Average	184	11																																																																																														
5 *	5610.00	102.96			102.33	0.63	Peak	184	11																																																																																														
6	5850.00	64.22	68.20	-3.98	62.95	1.27	Peak	184	11																																																																																														
7	11220.00	42.22	54.00	-11.78	33.56	8.66	Average	100	30																																																																																														
8	11220.00	56.22	74.00	-17.78	47.56	8.66	Peak	100	30																																																																																														
9	16830.00	58.55	68.20	-9.65	51.45	7.10	Peak	100	90																																																																																														



Modulation	be EHT240	Test Freq. (MHz)	5610
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Frequency: 5300 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	0.91	1.25	0.88	1.14
T20°CVmin	0.96	1.76	1.54	1.46
T45°CVnom	2.38	2.39	2.64	2.79
T40°CVnom	2.13	2.61	2.07	2.43
T30°CVnom	1.68	1.88	1.97	1.47
T20°CVnom	1.06	1.25	1.64	1.92
T10°CVnom	2.47	2.76	2.47	2.41
T0°CVnom	4.81	5.20	4.87	5.71
T-10°CVnom	6.96	7.09	7.13	7.15
T-20°CVnom	10.19	9.80	9.89	10.35
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 45		Tmin [°C]: -20	

Frequency: 5785 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	0.83	1.00	0.58	0.50
T20°CVmin	0.88	0.91	1.30	0.66
T45°CVnom	2.18	2.52	2.74	2.87
T40°CVnom	1.95	1.89	1.81	2.30
T30°CVnom	1.54	1.23	2.36	1.81
T20°CVnom	0.97	1.21	0.86	1.25
T10°CVnom	2.26	1.99	2.36	2.66
T0°CVnom	4.41	5.00	4.12	4.44
T-10°CVnom	6.38	6.35	6.70	6.36
T-20°CVnom	9.01	9.41	9.03	9.45
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 45		Tmin [°C]: -20	




PoE mode

Modulation Mode	be EHT20	Test Freq. (MHz)	5200
Power Phase	Line		

Test by : Joe Liao

Temperature: 24°C

Humidity: 62%

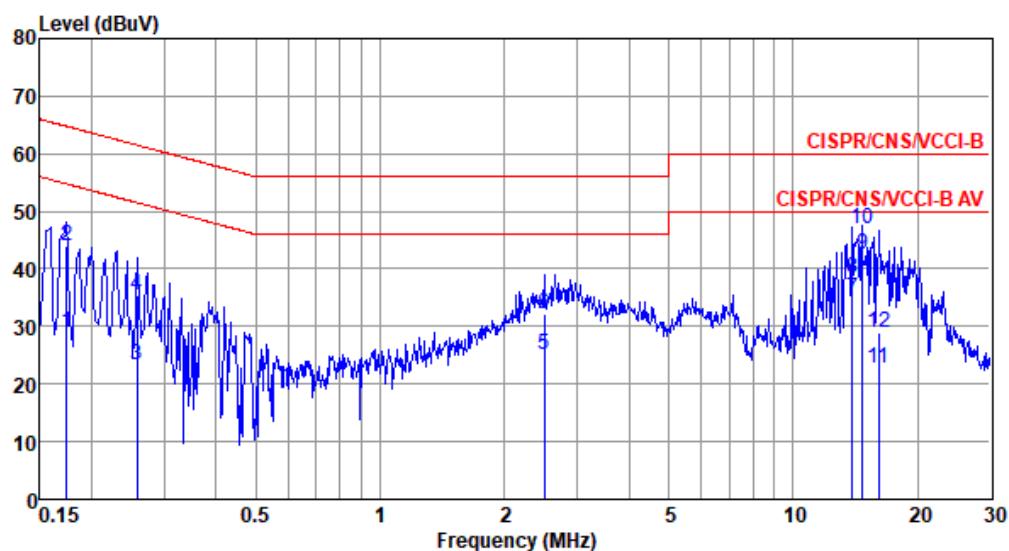

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.174	28.84	54.77	-25.93	19.16	9.62	0.06	0.00	Average
2	0.174	44.01	64.77	-20.76	34.33	9.62	0.06	0.00	QP
3	0.258	23.43	51.51	-28.08	13.75	9.62	0.06	0.00	Average
4	0.258	35.30	61.51	-26.21	25.62	9.62	0.06	0.00	QP
5	2.500	25.18	46.00	-20.82	15.39	9.64	0.15	0.00	Average
6	2.500	32.27	56.00	-23.73	22.48	9.64	0.15	0.00	QP
7	13.915	34.91	50.00	-15.09	24.79	9.69	0.43	0.00	Average
8	13.915	38.45	60.00	-21.55	28.33	9.69	0.43	0.00	QP
9*	14.701	42.62	50.00	-7.38	32.50	9.68	0.44	0.00	Average
10	14.701	46.87	60.00	-13.13	36.75	9.68	0.44	0.00	QP
11	16.140	22.83	50.00	-27.17	12.69	9.68	0.46	0.00	Average
12	16.140	28.89	60.00	-31.11	18.75	9.68	0.46	0.00	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).



Modulation Mode	be EHT20	Test Freq. (MHz)	5200																																																																																																																																																			
Power Phase	Neutral																																																																																																																																																					
Test by : Joe Liao Temperature: 24°C Humidity: 62%																																																																																																																																																						
Level (dBuV) <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Cable</th><th>Aux</th><th></th></tr><tr><th>MHz</th><th>dBuV</th><th>Line</th><th>Limit</th><th>Level</th><th>dB</th><th>loss</th><th>dB</th><th>Remark</th></tr><tr><th></th><th></th><th>dBuV</th><th>dB</th><th>dBuV</th><th></th><th>dB</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>0.153</td><td>29.34</td><td>55.82</td><td>-26.48</td><td>19.65</td><td>9.63</td><td>0.06</td><td>0.00</td><td>Average</td></tr><tr><td>2</td><td>0.153</td><td>46.05</td><td>65.82</td><td>-19.77</td><td>36.36</td><td>9.63</td><td>0.06</td><td>0.00</td><td>QP</td></tr><tr><td>3</td><td>0.180</td><td>25.48</td><td>54.50</td><td>-29.02</td><td>15.79</td><td>9.63</td><td>0.06</td><td>0.00</td><td>Average</td></tr><tr><td>4</td><td>0.180</td><td>42.31</td><td>64.50</td><td>-22.19</td><td>32.62</td><td>9.63</td><td>0.06</td><td>0.00</td><td>QP</td></tr><tr><td>5</td><td>0.267</td><td>22.14</td><td>51.20</td><td>-29.06</td><td>12.45</td><td>9.63</td><td>0.06</td><td>0.00</td><td>Average</td></tr><tr><td>6</td><td>0.267</td><td>34.40</td><td>61.20</td><td>-26.80</td><td>24.71</td><td>9.63</td><td>0.06</td><td>0.00</td><td>QP</td></tr><tr><td>7</td><td>2.664</td><td>19.75</td><td>46.00</td><td>-26.25</td><td>9.96</td><td>9.64</td><td>0.15</td><td>0.00</td><td>Average</td></tr><tr><td>8</td><td>2.664</td><td>29.75</td><td>56.00</td><td>-26.25</td><td>19.96</td><td>9.64</td><td>0.15</td><td>0.00</td><td>QP</td></tr><tr><td>9</td><td>14.288</td><td>37.22</td><td>50.00</td><td>-12.78</td><td>27.03</td><td>9.76</td><td>0.43</td><td>0.00</td><td>Average</td></tr><tr><td>10</td><td>14.288</td><td>40.50</td><td>60.00</td><td>-19.50</td><td>30.31</td><td>9.76</td><td>0.43</td><td>0.00</td><td>QP</td></tr><tr><td>11*</td><td>16.226</td><td>43.39</td><td>50.00</td><td>-6.61</td><td>33.16</td><td>9.77</td><td>0.46</td><td>0.00</td><td>Average</td></tr><tr><td>12</td><td>16.226</td><td>46.06</td><td>60.00</td><td>-13.94</td><td>35.83</td><td>9.77</td><td>0.46</td><td>0.00</td><td>QP</td></tr></tbody></table>				Freq	Level	Limit	Over	Read	Factor	Cable	Aux		MHz	dBuV	Line	Limit	Level	dB	loss	dB	Remark			dBuV	dB	dBuV		dB			1	0.153	29.34	55.82	-26.48	19.65	9.63	0.06	0.00	Average	2	0.153	46.05	65.82	-19.77	36.36	9.63	0.06	0.00	QP	3	0.180	25.48	54.50	-29.02	15.79	9.63	0.06	0.00	Average	4	0.180	42.31	64.50	-22.19	32.62	9.63	0.06	0.00	QP	5	0.267	22.14	51.20	-29.06	12.45	9.63	0.06	0.00	Average	6	0.267	34.40	61.20	-26.80	24.71	9.63	0.06	0.00	QP	7	2.664	19.75	46.00	-26.25	9.96	9.64	0.15	0.00	Average	8	2.664	29.75	56.00	-26.25	19.96	9.64	0.15	0.00	QP	9	14.288	37.22	50.00	-12.78	27.03	9.76	0.43	0.00	Average	10	14.288	40.50	60.00	-19.50	30.31	9.76	0.43	0.00	QP	11*	16.226	43.39	50.00	-6.61	33.16	9.77	0.46	0.00	Average	12	16.226	46.06	60.00	-13.94	35.83	9.77	0.46	0.00	QP
Freq	Level	Limit	Over	Read	Factor	Cable	Aux																																																																																																																																															
MHz	dBuV	Line	Limit	Level	dB	loss	dB	Remark																																																																																																																																														
		dBuV	dB	dBuV		dB																																																																																																																																																
1	0.153	29.34	55.82	-26.48	19.65	9.63	0.06	0.00	Average																																																																																																																																													
2	0.153	46.05	65.82	-19.77	36.36	9.63	0.06	0.00	QP																																																																																																																																													
3	0.180	25.48	54.50	-29.02	15.79	9.63	0.06	0.00	Average																																																																																																																																													
4	0.180	42.31	64.50	-22.19	32.62	9.63	0.06	0.00	QP																																																																																																																																													
5	0.267	22.14	51.20	-29.06	12.45	9.63	0.06	0.00	Average																																																																																																																																													
6	0.267	34.40	61.20	-26.80	24.71	9.63	0.06	0.00	QP																																																																																																																																													
7	2.664	19.75	46.00	-26.25	9.96	9.64	0.15	0.00	Average																																																																																																																																													
8	2.664	29.75	56.00	-26.25	19.96	9.64	0.15	0.00	QP																																																																																																																																													
9	14.288	37.22	50.00	-12.78	27.03	9.76	0.43	0.00	Average																																																																																																																																													
10	14.288	40.50	60.00	-19.50	30.31	9.76	0.43	0.00	QP																																																																																																																																													
11*	16.226	43.39	50.00	-6.61	33.16	9.77	0.46	0.00	Average																																																																																																																																													
12	16.226	46.06	60.00	-13.94	35.83	9.77	0.46	0.00	QP																																																																																																																																													
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).																																																																																																																																																						



Modulation Mode	be EHT40	Test Freq. (MHz)	5795																																																																																																																																		
Power Phase	Line																																																																																																																																				
Test by : Joe Liao Temperature: 24°C Humidity: 62%																																																																																																																																					
Level (dBUV) <table><tr><th></th><th>Freq MHz</th><th>Level dBUV</th><th>Limit Line dBUV</th><th>Over Limit dB</th><th>Read Level dBUV</th><th>Factor dB</th><th>Cable loss dB</th><th>Aux dB</th><th>Remark</th></tr><tr><td>1</td><td>0.153</td><td>30.85</td><td>55.82</td><td>-24.97</td><td>21.16</td><td>9.63</td><td>0.06</td><td>0.00</td><td>Average</td></tr><tr><td>2</td><td>0.153</td><td>46.49</td><td>65.82</td><td>-19.33</td><td>36.80</td><td>9.63</td><td>0.06</td><td>0.00</td><td>QP</td></tr><tr><td>3</td><td>0.211</td><td>23.89</td><td>53.18</td><td>-29.29</td><td>14.21</td><td>9.62</td><td>0.06</td><td>0.00</td><td>Average</td></tr><tr><td>4</td><td>0.211</td><td>37.89</td><td>63.18</td><td>-25.29</td><td>28.21</td><td>9.62</td><td>0.06</td><td>0.00</td><td>QP</td></tr><tr><td>5</td><td>2.396</td><td>22.58</td><td>46.00</td><td>-23.42</td><td>12.80</td><td>9.64</td><td>0.14</td><td>0.00</td><td>Average</td></tr><tr><td>6</td><td>2.396</td><td>31.52</td><td>56.00</td><td>-24.48</td><td>21.74</td><td>9.64</td><td>0.14</td><td>0.00</td><td>QP</td></tr><tr><td>7</td><td>5.805</td><td>21.50</td><td>50.00</td><td>-28.50</td><td>11.58</td><td>9.67</td><td>0.25</td><td>0.00</td><td>Average</td></tr><tr><td>8</td><td>5.805</td><td>28.85</td><td>60.00</td><td>-31.15</td><td>18.93</td><td>9.67</td><td>0.25</td><td>0.00</td><td>QP</td></tr><tr><td>9</td><td>13.915</td><td>35.34</td><td>50.00</td><td>-14.66</td><td>25.22</td><td>9.69</td><td>0.43</td><td>0.00</td><td>Average</td></tr><tr><td>10</td><td>13.915</td><td>38.16</td><td>60.00</td><td>-21.84</td><td>28.04</td><td>9.69</td><td>0.43</td><td>0.00</td><td>QP</td></tr><tr><td>11*</td><td>16.226</td><td>43.23</td><td>50.00</td><td>-6.77</td><td>33.09</td><td>9.68</td><td>0.46</td><td>0.00</td><td>Average</td></tr><tr><td>12</td><td>16.226</td><td>46.02</td><td>60.00</td><td>-13.98</td><td>35.88</td><td>9.68</td><td>0.46</td><td>0.00</td><td>QP</td></tr></table>					Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark	1	0.153	30.85	55.82	-24.97	21.16	9.63	0.06	0.00	Average	2	0.153	46.49	65.82	-19.33	36.80	9.63	0.06	0.00	QP	3	0.211	23.89	53.18	-29.29	14.21	9.62	0.06	0.00	Average	4	0.211	37.89	63.18	-25.29	28.21	9.62	0.06	0.00	QP	5	2.396	22.58	46.00	-23.42	12.80	9.64	0.14	0.00	Average	6	2.396	31.52	56.00	-24.48	21.74	9.64	0.14	0.00	QP	7	5.805	21.50	50.00	-28.50	11.58	9.67	0.25	0.00	Average	8	5.805	28.85	60.00	-31.15	18.93	9.67	0.25	0.00	QP	9	13.915	35.34	50.00	-14.66	25.22	9.69	0.43	0.00	Average	10	13.915	38.16	60.00	-21.84	28.04	9.69	0.43	0.00	QP	11*	16.226	43.23	50.00	-6.77	33.09	9.68	0.46	0.00	Average	12	16.226	46.02	60.00	-13.98	35.88	9.68	0.46	0.00	QP
	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark																																																																																																																												
1	0.153	30.85	55.82	-24.97	21.16	9.63	0.06	0.00	Average																																																																																																																												
2	0.153	46.49	65.82	-19.33	36.80	9.63	0.06	0.00	QP																																																																																																																												
3	0.211	23.89	53.18	-29.29	14.21	9.62	0.06	0.00	Average																																																																																																																												
4	0.211	37.89	63.18	-25.29	28.21	9.62	0.06	0.00	QP																																																																																																																												
5	2.396	22.58	46.00	-23.42	12.80	9.64	0.14	0.00	Average																																																																																																																												
6	2.396	31.52	56.00	-24.48	21.74	9.64	0.14	0.00	QP																																																																																																																												
7	5.805	21.50	50.00	-28.50	11.58	9.67	0.25	0.00	Average																																																																																																																												
8	5.805	28.85	60.00	-31.15	18.93	9.67	0.25	0.00	QP																																																																																																																												
9	13.915	35.34	50.00	-14.66	25.22	9.69	0.43	0.00	Average																																																																																																																												
10	13.915	38.16	60.00	-21.84	28.04	9.69	0.43	0.00	QP																																																																																																																												
11*	16.226	43.23	50.00	-6.77	33.09	9.68	0.46	0.00	Average																																																																																																																												
12	16.226	46.02	60.00	-13.98	35.88	9.68	0.46	0.00	QP																																																																																																																												
Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).																																																																																																																																					




Modulation Mode	be EHT40	Test Freq. (MHz)	5795
Power Phase	Neutral		

Test by : Joe Liao

Temperature: 24°C

Humidity: 62%

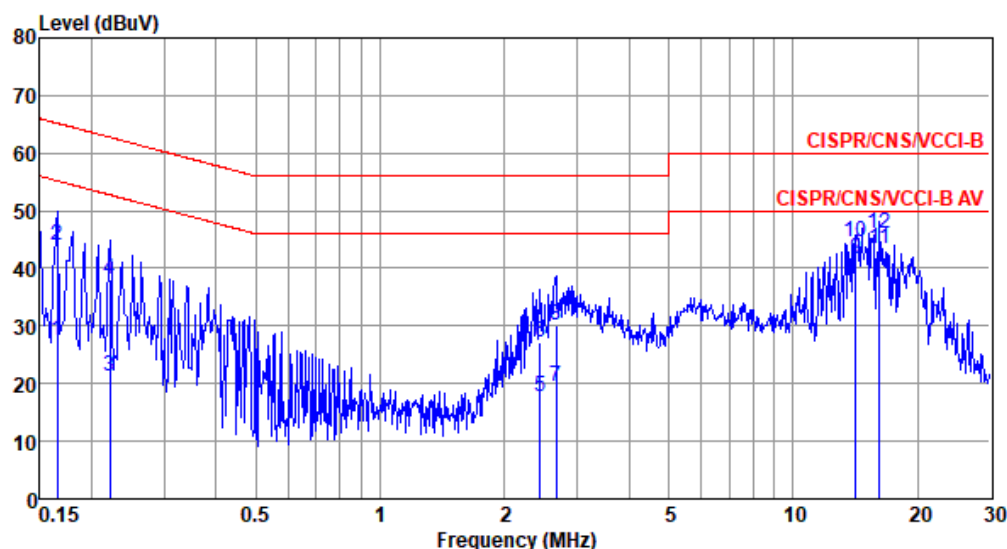

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.165	27.46	55.21	-27.75	17.77	9.63	0.06	0.00	Average
2	0.165	43.89	65.21	-21.32	34.20	9.63	0.06	0.00	QP
3	0.222	21.20	52.74	-31.54	11.51	9.63	0.06	0.00	Average
4	0.222	38.00	62.74	-24.74	28.31	9.63	0.06	0.00	QP
5	2.435	17.80	46.00	-28.20	8.02	9.64	0.14	0.00	Average
6	2.435	27.16	56.00	-28.84	17.38	9.64	0.14	0.00	QP
7	2.664	19.50	46.00	-26.50	9.71	9.64	0.15	0.00	Average
8	2.664	30.21	56.00	-25.79	20.42	9.64	0.15	0.00	QP
9	14.213	41.57	50.00	-8.43	31.38	9.76	0.43	0.00	Average
10	14.213	44.70	60.00	-15.30	34.51	9.76	0.43	0.00	QP
11*	16.226	43.44	50.00	-6.56	33.21	9.77	0.46	0.00	Average
12	16.226	46.03	60.00	-13.97	35.80	9.77	0.46	0.00	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).




Adapter mode

Modulation Mode	be EHT20	Test Freq. (MHz)	5200
Power Phase	Line		

Test by : Joe Liao

Temperature: 24°C

Humidity: 62%

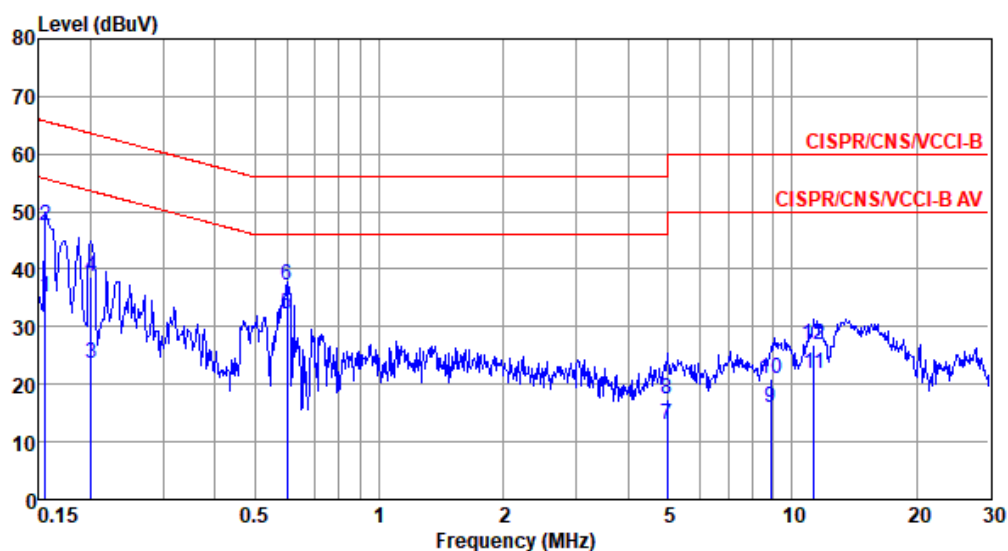

	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	
	MHz	dBuV	Line	Limit	Level	dB	loss	dB	Remark
			dBuV	dB	dBuV				
1	0.156	35.01	55.69	-20.68	25.14	9.63	0.06	0.18	Average
2	0.156	47.40	65.69	-18.29	37.53	9.63	0.06	0.18	QP
3	0.201	23.74	53.58	-29.84	13.87	9.62	0.06	0.19	Average
4	0.201	38.72	63.58	-24.86	28.85	9.62	0.06	0.19	QP
5*	0.598	32.30	46.00	-13.70	22.29	9.62	0.08	0.31	Average
6	0.598	37.33	56.00	-18.67	27.32	9.62	0.08	0.31	QP
7	4.978	12.90	46.00	-33.10	2.60	9.66	0.22	0.42	Average
8	4.978	17.35	56.00	-38.65	7.05	9.66	0.22	0.42	QP
9	8.869	15.90	50.00	-34.10	5.44	9.68	0.34	0.44	Average
10	8.869	21.01	60.00	-38.99	10.55	9.68	0.34	0.44	QP
11	11.317	21.90	50.00	-28.10	11.37	9.69	0.38	0.46	Average
12	11.317	26.76	60.00	-33.24	16.23	9.69	0.38	0.46	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).



Modulation Mode	be EHT20	Test Freq. (MHz)	5200
Power Phase	Neutral		
Test by : Joe Liao Temperature: 24°C Humidity: 62%			
Level (dBUV)			




Modulation Mode	be EHT40	Test Freq. (MHz)	5795
Power Phase	Line		

Test by : Joe Liao

Temperature: 24°C

Humidity: 62%

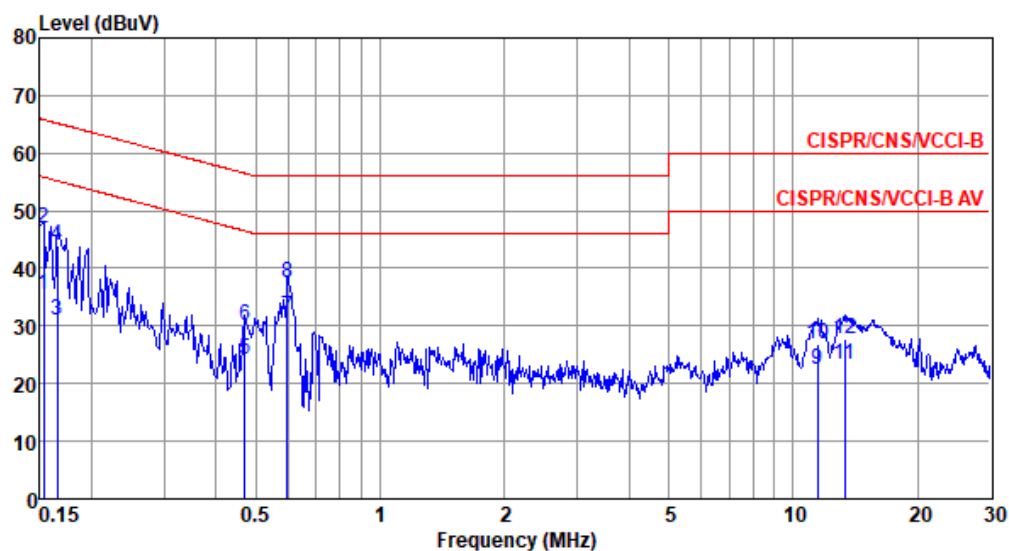

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.153	35.32	55.82	-20.50	25.45	9.63	0.06	0.18	Average
2	0.153	46.90	65.82	-18.92	37.03	9.63	0.06	0.18	QP
3	0.165	31.01	55.21	-24.20	21.14	9.63	0.06	0.18	Average
4	0.165	43.90	65.21	-21.31	34.03	9.63	0.06	0.18	QP
5	0.471	24.28	46.49	-22.21	14.28	9.62	0.07	0.31	Average
6	0.471	30.01	56.49	-26.48	20.01	9.62	0.07	0.31	QP
7*	0.595	31.55	46.00	-14.45	21.54	9.62	0.08	0.31	Average
8	0.595	37.55	56.00	-18.45	27.54	9.62	0.08	0.31	QP
9	11.438	22.37	50.00	-27.63	11.83	9.69	0.39	0.46	Average
10	11.438	26.92	60.00	-33.08	16.38	9.69	0.39	0.46	QP
11	13.337	23.37	50.00	-26.63	12.78	9.69	0.42	0.48	Average
12	13.337	27.83	60.00	-32.17	17.24	9.69	0.42	0.48	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).



Modulation Mode	be EHT40	Test Freq. (MHz)	5795																																																																																																																																		
Power Phase	Neutral																																																																																																																																				
Test by : Joe Liao Temperature: 24°C Humidity: 62%																																																																																																																																					
Level (dBuV) Frequency (MHz) <table><tr><th></th><th>Freq MHz</th><th>Level dBuV</th><th>Limit Line dBuV</th><th>Over Limit dB</th><th>Read Level dBuV</th><th>Factor dB</th><th>Cable loss dB</th><th>Aux dB</th><th>Remark</th></tr><tr><td>1</td><td>0.153</td><td>36.40</td><td>55.82</td><td>-19.42</td><td>26.53</td><td>9.63</td><td>0.06</td><td>0.18</td><td>Average</td></tr><tr><td>2</td><td>0.153</td><td>46.59</td><td>65.82</td><td>-19.23</td><td>36.72</td><td>9.63</td><td>0.06</td><td>0.18</td><td>QP</td></tr><tr><td>3</td><td>0.171</td><td>31.98</td><td>54.90</td><td>-22.92</td><td>22.11</td><td>9.63</td><td>0.06</td><td>0.18</td><td>Average</td></tr><tr><td>4</td><td>0.171</td><td>42.45</td><td>64.90</td><td>-22.45</td><td>32.58</td><td>9.63</td><td>0.06</td><td>0.18</td><td>QP</td></tr><tr><td>5</td><td>0.228</td><td>23.23</td><td>52.52</td><td>-29.29</td><td>13.33</td><td>9.63</td><td>0.06</td><td>0.21</td><td>Average</td></tr><tr><td>6</td><td>0.228</td><td>33.83</td><td>62.52</td><td>-28.69</td><td>23.93</td><td>9.63</td><td>0.06</td><td>0.21</td><td>QP</td></tr><tr><td>7</td><td>0.567</td><td>30.62</td><td>46.00</td><td>-15.38</td><td>20.61</td><td>9.62</td><td>0.08</td><td>0.31</td><td>Average</td></tr><tr><td>8</td><td>0.567</td><td>37.49</td><td>56.00</td><td>-18.51</td><td>27.48</td><td>9.62</td><td>0.08</td><td>0.31</td><td>QP</td></tr><tr><td>9*</td><td>0.630</td><td>30.91</td><td>46.00</td><td>-15.09</td><td>20.90</td><td>9.62</td><td>0.08</td><td>0.31</td><td>Average</td></tr><tr><td>10</td><td>0.630</td><td>34.79</td><td>56.00</td><td>-21.21</td><td>24.78</td><td>9.62</td><td>0.08</td><td>0.31</td><td>QP</td></tr><tr><td>11</td><td>11.438</td><td>24.89</td><td>50.00</td><td>-25.11</td><td>14.31</td><td>9.73</td><td>0.39</td><td>0.46</td><td>Average</td></tr><tr><td>12</td><td>11.438</td><td>29.41</td><td>60.00</td><td>-30.59</td><td>18.83</td><td>9.73</td><td>0.39</td><td>0.46</td><td>QP</td></tr></table>					Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark	1	0.153	36.40	55.82	-19.42	26.53	9.63	0.06	0.18	Average	2	0.153	46.59	65.82	-19.23	36.72	9.63	0.06	0.18	QP	3	0.171	31.98	54.90	-22.92	22.11	9.63	0.06	0.18	Average	4	0.171	42.45	64.90	-22.45	32.58	9.63	0.06	0.18	QP	5	0.228	23.23	52.52	-29.29	13.33	9.63	0.06	0.21	Average	6	0.228	33.83	62.52	-28.69	23.93	9.63	0.06	0.21	QP	7	0.567	30.62	46.00	-15.38	20.61	9.62	0.08	0.31	Average	8	0.567	37.49	56.00	-18.51	27.48	9.62	0.08	0.31	QP	9*	0.630	30.91	46.00	-15.09	20.90	9.62	0.08	0.31	Average	10	0.630	34.79	56.00	-21.21	24.78	9.62	0.08	0.31	QP	11	11.438	24.89	50.00	-25.11	14.31	9.73	0.39	0.46	Average	12	11.438	29.41	60.00	-30.59	18.83	9.73	0.39	0.46	QP
	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark																																																																																																																												
1	0.153	36.40	55.82	-19.42	26.53	9.63	0.06	0.18	Average																																																																																																																												
2	0.153	46.59	65.82	-19.23	36.72	9.63	0.06	0.18	QP																																																																																																																												
3	0.171	31.98	54.90	-22.92	22.11	9.63	0.06	0.18	Average																																																																																																																												
4	0.171	42.45	64.90	-22.45	32.58	9.63	0.06	0.18	QP																																																																																																																												
5	0.228	23.23	52.52	-29.29	13.33	9.63	0.06	0.21	Average																																																																																																																												
6	0.228	33.83	62.52	-28.69	23.93	9.63	0.06	0.21	QP																																																																																																																												
7	0.567	30.62	46.00	-15.38	20.61	9.62	0.08	0.31	Average																																																																																																																												
8	0.567	37.49	56.00	-18.51	27.48	9.62	0.08	0.31	QP																																																																																																																												
9*	0.630	30.91	46.00	-15.09	20.90	9.62	0.08	0.31	Average																																																																																																																												
10	0.630	34.79	56.00	-21.21	24.78	9.62	0.08	0.31	QP																																																																																																																												
11	11.438	24.89	50.00	-25.11	14.31	9.73	0.39	0.46	Average																																																																																																																												
12	11.438	29.41	60.00	-30.59	18.83	9.73	0.39	0.46	QP																																																																																																																												
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).																																																																																																																																					