

## **ATTACHMENT O – SAR TEST PLOTS (1 of 3)**

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA 835 / Antenna : in / Channel 1013

Liquid Temperature : 21.5℃

Date Tested : July 04, 2006

**DUT: TX-215; Type: Folder; Serial: #1**

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 835.89 \text{ MHz}$ ;  $\sigma = 0.876 \text{ mho/m}$ ;  $\epsilon_r = 40.8$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn446; Calibrated: 2006-03-17

- Phantom: SAM 835/900 MHz; Type: SAM

**Left touch 363/Area Scan (51x101x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.779 mW/g

**Left touch 363/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$


Reference Value = 25.4 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 0.939 W/kg

**SAR(1 g) = 0.703 mW/g; SAR(10 g) = 0.495 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.743 mW/g

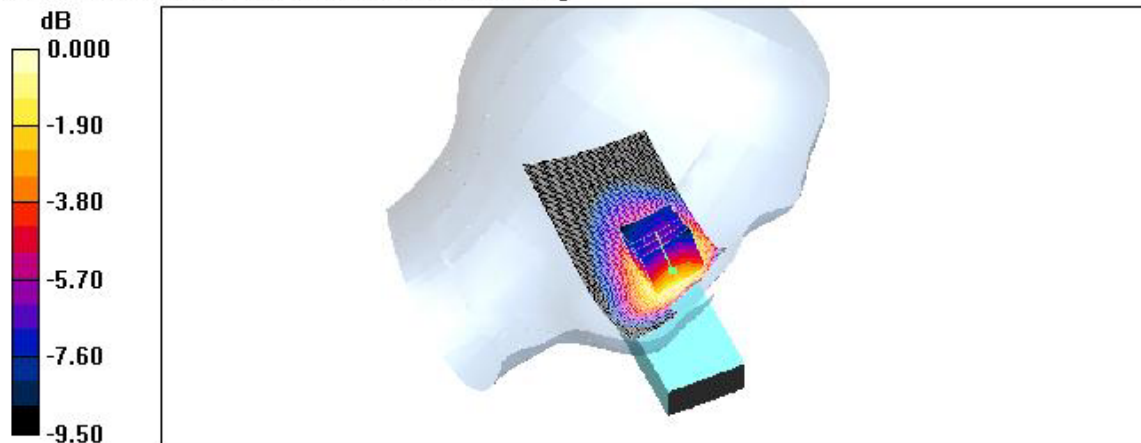

0 dB = 0.743mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA 835 / Antenna : out / Channel 1013

Liquid Temperature : 21.5 °C

Date Tested : July 04, 2006

**DUT: TX-215; Type: Folder; Serial: #1**

Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 825 \text{ MHz}$ ;  $\sigma = 0.865 \text{ mho/m}$ ;  $\epsilon_r = 40.9$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn446; Calibrated: 2006-03-17

- Phantom: SAM 835/900 MHz; Type: SAM

**Left touch 1013/Area Scan (51x101x1):** Measurement grid:  $\Delta x = 15 \text{ mm}$ ,  $\Delta y = 15 \text{ mm}$   
Maximum value of SAR (interpolated) = 0.798 mW/g


**Left touch 1013/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $\Delta x = 8 \text{ mm}$ ,  $\Delta y = 8 \text{ mm}$ ,  $\Delta z = 5 \text{ mm}$

Reference Value = 24.9 V/m; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 1.02 W/kg

**SAR(1 g) = 0.762 mW/g; SAR(10 g) = 0.536 mW/g**

Maximum value of SAR (measured) = 0.813 mW/g

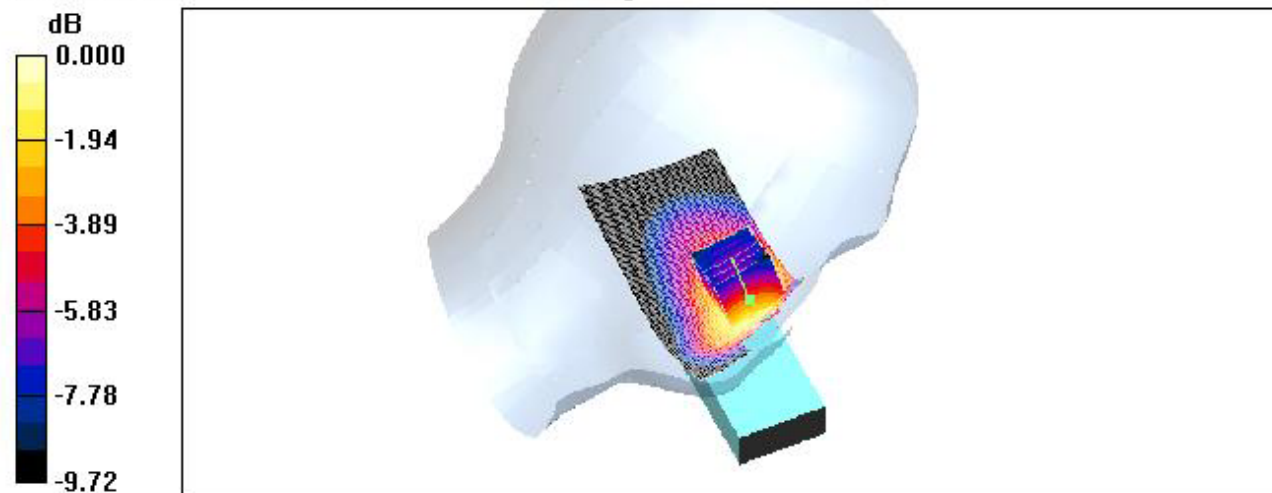

0 dB = 0.813mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.  
Mode : CDMA 835 / Antenna : in / Channel 363  
Liquid Temperature : 21.5°C  
Date Tested : July 04, 2006

**DUT: TX-215; Type: Folder; Serial: #1**

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 835.89 \text{ MHz}$ ;  $\sigma = 0.876 \text{ mho/m}$ ;  $\epsilon_r = 40.8$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

**Left touch 363/Area Scan (51x101x1):** Measurement grid:  $\Delta x = 15\text{mm}$ ,  $\Delta y = 15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.974 mW/g

**Left touch 363/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $\Delta x = 8\text{mm}$ ,  $\Delta y = 8\text{mm}$ ,  $\Delta z = 5\text{mm}$


Reference Value = 26.7 V/m; Power Drift = 0.069 dB

Peak SAR (extrapolated) = 1.20 W/kg

**SAR(1 g) = 0.897 mW/g; SAR(10 g) = 0.629 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.953 mW/g

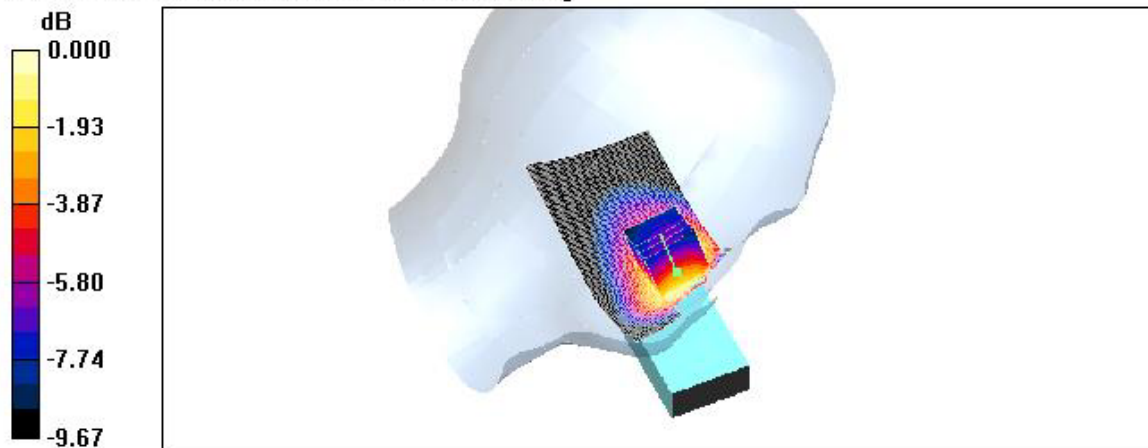

0 dB = 0.953mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA 835 / Antenna :out / Channel :363

Liquid Temperature : 21.5℃

Date Tested : July 04, 2006

**DUT: TX-215; Type: Folder; Serial: #1**

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 835.89$  MHz;  $\sigma = 0.876$  mho/m;  $\epsilon_r = 40.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section ;Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn446; Calibrated: 2006-03-17

- Phantom: SAM 835/900 MHz; Type: SAM

**Left touch 363/Area Scan (51x101x1):** Measurement grid:  $\Delta x = 15$ mm,  $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.05 mW/g

**Left touch 363/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $\Delta x = 8$ mm,  $\Delta y = 8$ mm,  $\Delta z = 5$ mm


Reference Value = 29.4 V/m; Power Drift = -0.191 dB

Peak SAR (extrapolated) = 1.33 W/kg

**SAR(1 g) = 0.996 mW/g; SAR(10 g) = 0.701 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.06 mW/g

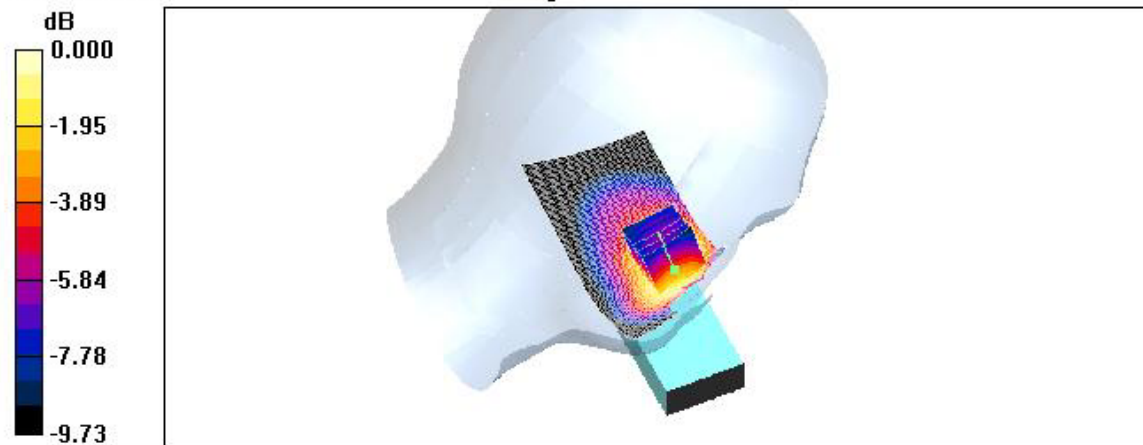

0 dB = 1.06mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.  
Mode : CDMA 835 / Antenna : in / Channel : 777  
Liquid Temperature : 21.5°C  
Date Tested : July 04, 2006

**DUT: TX-215; Type: Folder; Serial: #1**

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 848.31 \text{ MHz}$ ;  $\sigma = 0.886 \text{ mho/m}$ ;  $\epsilon_r = 40.7$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

**Left touch 777/Area Scan (51x101x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.909 mW/g

**Left touch 777/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$


Reference Value = 26.9 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 1.13 W/kg

**SAR(1 g) = 0.847 mW/g; SAR(10 g) = 0.590 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.905 mW/g

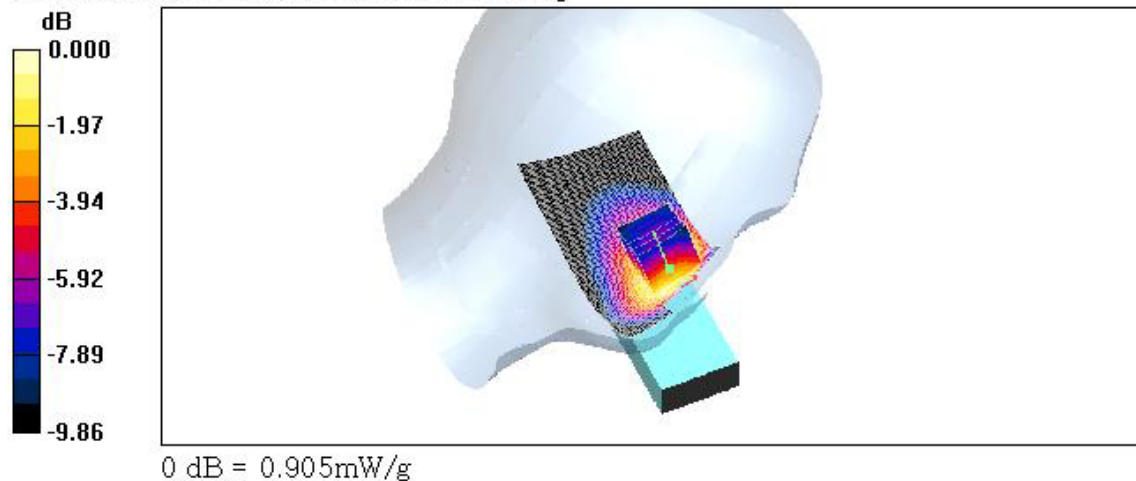

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.  
Mode : CDMA 835 / Antenna : out / Channel:777  
Liquid Temperature : 21.5℃  
Date Tested : July 04, 2006

DUT: TX-215; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 848.31 \text{ MHz}$ ;  $\sigma = 0.886 \text{ mho/m}$ ;  $\epsilon_r = 40.7$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:


- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 777/Area Scan (51x101x1): Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.  
Maximum value of SAR (interpolated) = 1.03 mW/g

Left touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 28.0 V/m; Power Drift = -0.058 dB  
Peak SAR (extrapolated) = 1.30 W/kg  
**SAR(1 g) = 0.971 mW/g; SAR(10 g) = 0.679 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.  
Maximum value of SAR (measured) = 1.04 mW/g

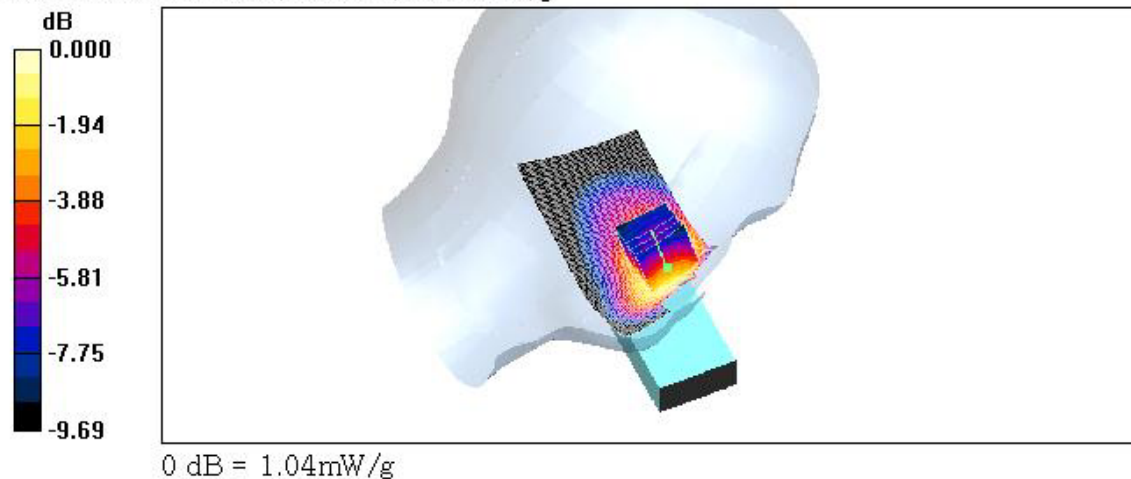

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.  
Mode : CDMA 835 / Antenna : in / Channel:1013  
Liquid Temperature : 21.5℃  
Date Tested : July 04, 2006

**DUT: TX-215; Type: Folder; Serial: #1**


Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 825 \text{ MHz}$ ;  $\sigma = 0.865 \text{ mho/m}$ ;  $\epsilon_r = 40.9$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

**Right touch 1013/Area Scan (51x101x1):** Measurement grid:  $\Delta x = 15\text{mm}$ ,  $\Delta y = 15\text{mm}$   
Maximum value of SAR (interpolated) = 0.774 mW/g

**Right touch 1013/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $\Delta x = 8\text{mm}$ ,  $\Delta y = 8\text{mm}$ ,  $\Delta z = 5\text{mm}$   
Reference Value = 24.4 V/m; Power Drift = -0.199 dB  
Peak SAR (extrapolated) = 0.967 W/kg  
**SAR(1 g) = 0.714 mW/g; SAR(10 g) = 0.492 mW/g**  
Maximum value of SAR (measured) = 0.766 mW/g

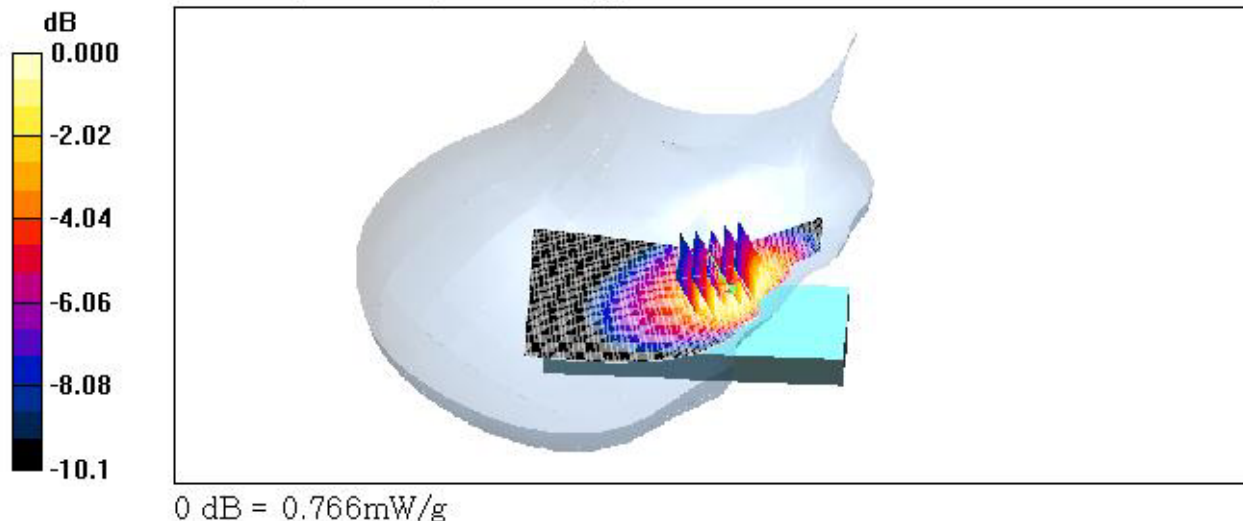

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA 835 / Antenna : out / Channel:1013

Liquid Temperature : 21.5℃

Date Tested : July 04, 2006

**DUT: TX-215; Type: Folder; Serial: #1**

Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 825 \text{ MHz}$ ;  $\sigma = 0.865 \text{ mho/m}$ ;  $\epsilon_r = 40.9$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn446; Calibrated: 2006-03-17

- Phantom: SAM 835/900 MHz; Type: SAM

**Right touch 1013/Area Scan (51x101x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.832 mW/g


**Right touch 1013/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 26.0 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 1.06 W/kg

**SAR(1 g) = 0.770 mW/g; SAR(10 g) = 0.530 mW/g**

Maximum value of SAR (measured) = 0.835 mW/g

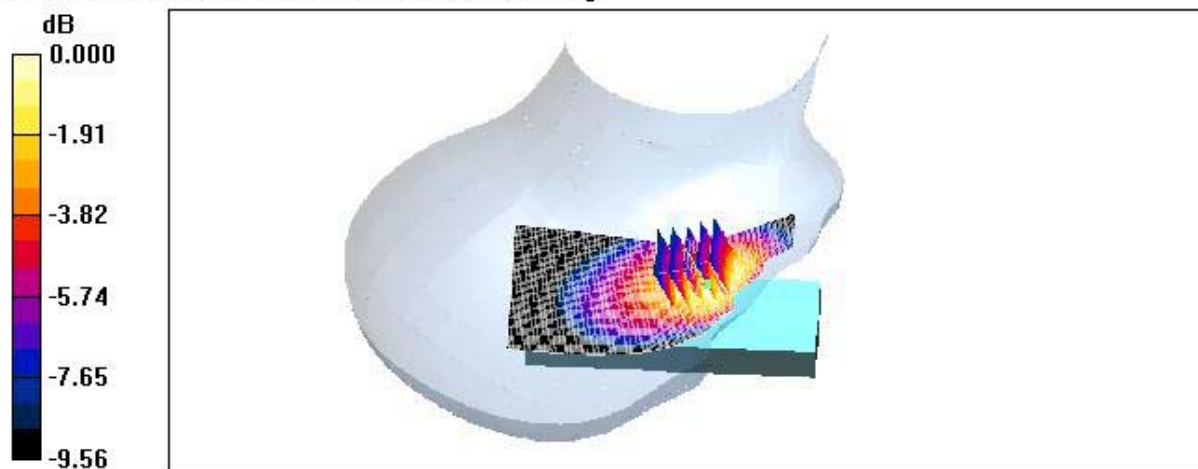

0 dB = 0.835mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.  
Mode : CDMA 835 / Antenna : in / Channel:363  
Liquid Temperature : 21.5 °C  
Date Tested : July 04, 2006

**DUT: TX-215; Type: Folder; Serial: #1**

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 835.89$  MHz;  $\sigma = 0.876$  mho/m;  $\epsilon_r = 40.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

**Right touch 363/Area Scan (51x101x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.920 mW/g

**Right touch 363/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm


Reference Value = 26.0 V/m; Power Drift = 0.054 dB

Peak SAR (extrapolated) = 1.19 W/kg

**SAR(1 g) = 0.874 mW/g; SAR(10 g) = 0.599 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.937 mW/g

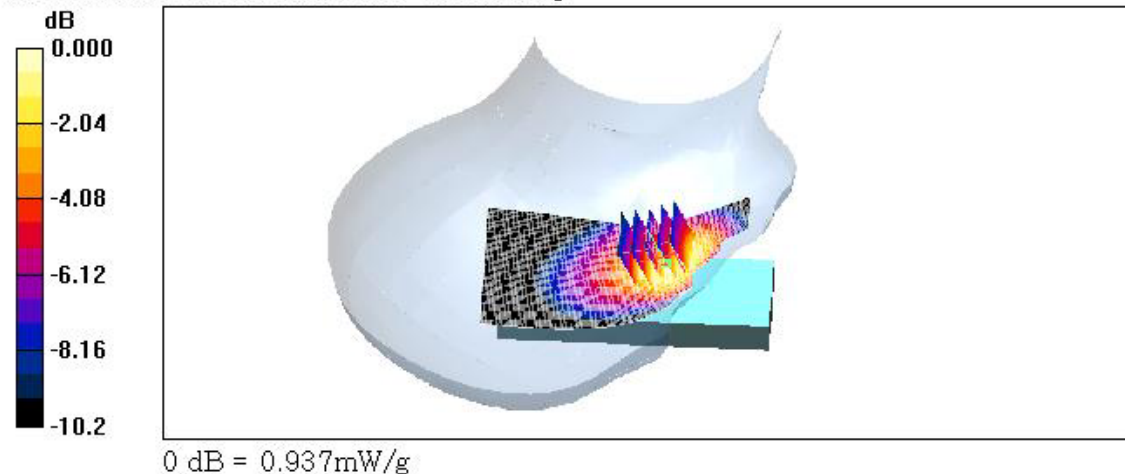

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA 835 / Antenna : out / Channel:363

Liquid Temperature : 21.5°C

Date Tested : July 04, 2006

**DUT: TX-215; Type: Folder; Serial: #1**

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 835.89 \text{ MHz}$ ;  $\sigma = 0.876 \text{ mho/m}$ ;  $\epsilon_r = 40.8$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn446; Calibrated: 2006-03-17

- Phantom: SAM 835/900 MHz; Type: SAM

**Right touch 363/Area Scan (51x101x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.994 mW/g

**Right touch 363/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$


Reference Value = 28.0 V/m; Power Drift = 0.111 dB

Peak SAR (extrapolated) = 1.31 W/kg

**SAR(1 g) = 0.967 mW/g; SAR(10 g) = 0.669 mW/g**

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.03 mW/g

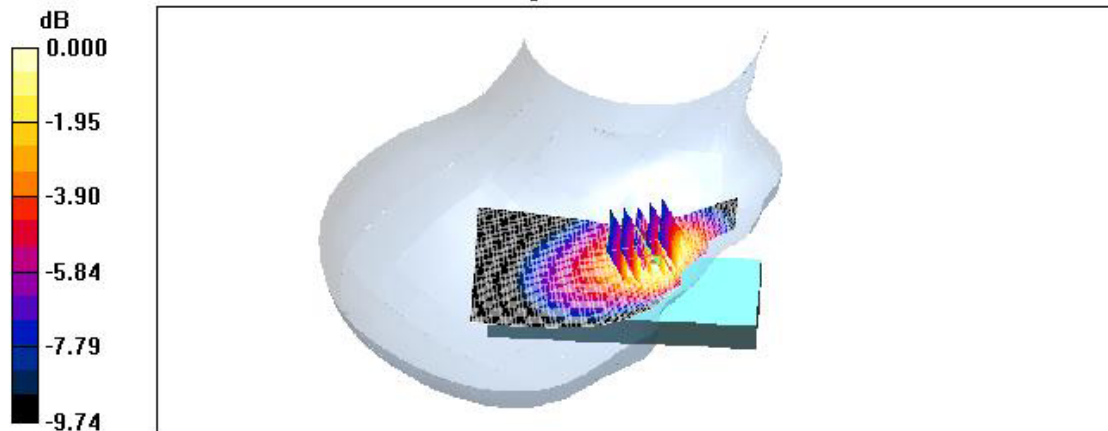

0 dB = 1.03mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.  
Mode : CDMA 835 / Antenna : in / Channel:777  
Liquid Temperature : 21.5℃  
Date Tested : July 04, 2006

**DUT: TX-215; Type: Folder; Serial: #1**

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 848.31$  MHz;  $\sigma = 0.886$  mho/m;  $\epsilon_r = 40.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

**Right touch 777/Area Scan (51x101x1):** Measurement grid:  $\Delta x = 15$ mm,  $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.956 mW/g

**Right touch 777/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $\Delta x = 8$ mm,  $\Delta y = 8$ mm,  $\Delta z = 5$ mm


Reference Value = 26.9 V/m; Power Drift = -0.131 dB

Peak SAR (extrapolated) = 1.21 W/kg

**SAR(1 g) = 0.897 mW/g; SAR(10 g) = 0.617 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.961 mW/g

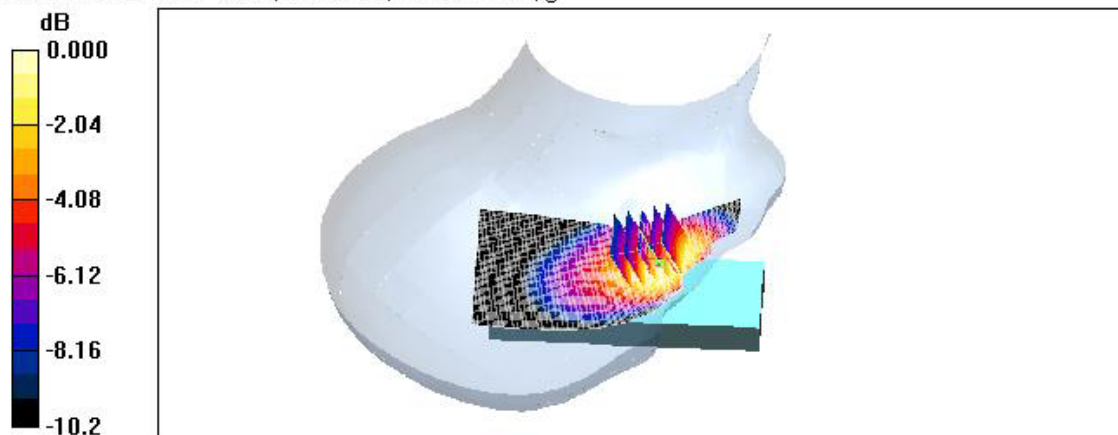

0 dB = 0.961mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA 835 / Antenna : out / Channel:777

Liquid Temperature : 21.5℃

Date Tested : July 04, 2006

DUT: TX-215; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC, Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 848.31 \text{ MHz}$ ;  $\sigma = 0.886 \text{ mho/m}$ ;  $\epsilon_r = 40.7$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn446; Calibrated: 2006-03-17

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 777/Area Scan (51x101x1): Measurement grid:  $\Delta x = 15\text{mm}$ ,  $\Delta y = 15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.19 mW/g

Right touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid:  $\Delta x = 8\text{mm}$ ,  $\Delta y = 8\text{mm}$ ,  $\Delta z = 5\text{mm}$


Reference Value = 28.8 V/m; Power Drift = -0.136 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.761 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.18 mW/g

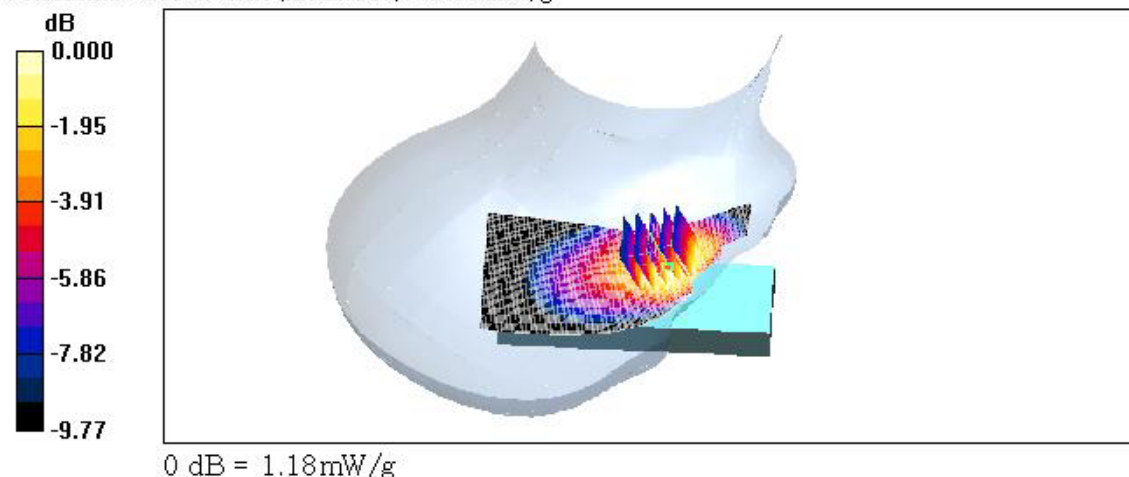

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.  
Mode : CDMA 835 / Antenna : out / Channel:777(E-battery)  
Liquid Temperature : 21.5℃  
Date Tested : July 04, 2006

**DUT: TX-215; Type: Folder; Serial: #1**

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz;Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 848.31$  MHz;  $\sigma = 0.886$  mho/m;  $\epsilon_r = 40.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section ;Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

**Right touch 777/Area Scan (51x101x1):** Measurement grid:  $\Delta x=15$ mm,  $\Delta y=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.13 mW/g

**Right touch 777/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $\Delta x=8$ mm,  $\Delta y=8$ mm,  $\Delta z=5$ mm


Reference Value = 29.5 V/m; Power Drift = -0.054 dB

Peak SAR (extrapolated) = 1.44 W/kg

**SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.730 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.13 mW/g

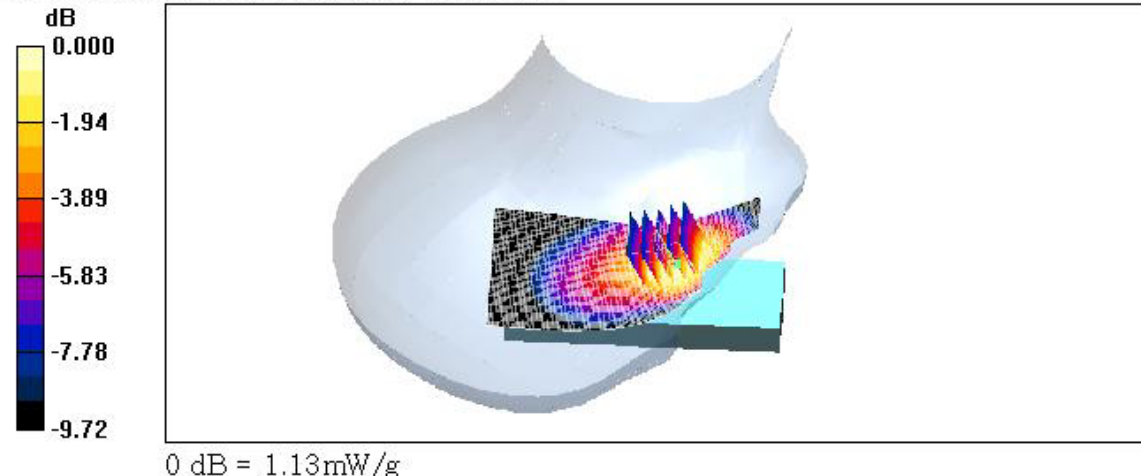

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA 835 / Antenna : in / Channel:363

Liquid Temperature : 21.5℃

Date Tested : July 04, 2006

**DUT: TX-215; Type: Folder; Serial: #1**

Communication System: CDMA 835MHz FCC, Frequency: 835.89 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 835.89 \text{ MHz}$ ;  $\sigma = 0.876 \text{ mho/m}$ ;  $\epsilon_r = 40.8$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ;Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn446; Calibrated: 2006-03-17

- Phantom: SAM 835/900 MHz; Type: SAM

**Left tilt 363/Area Scan (51x101x1):** Measurement grid:  $\Delta x=15\text{mm}$ ,  $\Delta y=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.303 mW/g

**Left tilt 363/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $\Delta x=8\text{mm}$ ,  $\Delta y=8\text{mm}$ ,  $\Delta z=5\text{mm}$


Reference Value = 17.8 V/m; Power Drift = 0.170 dB

Peak SAR (extrapolated) = 0.354 W/kg

**SAR(1 g) = 0.285 mW/g; SAR(10 g) = 0.217 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.301 mW/g

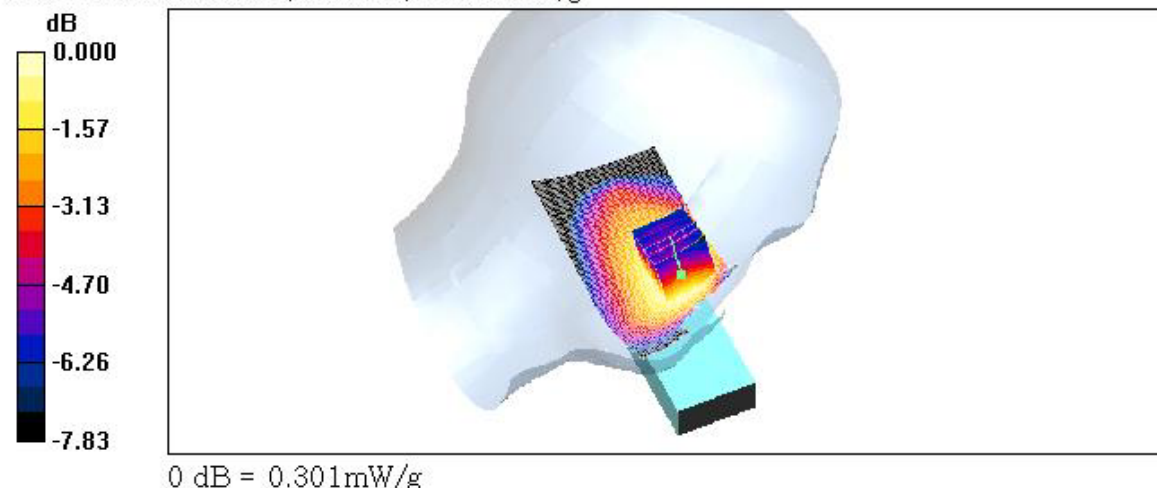

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA 835 / Antenna : out / Channel:363

Liquid Temperature : 21.5℃

Date Tested : July 04, 2006

**DUT: TX-215; Type: Folder; Serial: #1**

Communication System: CDMA 835MHz FCC, Frequency: 835.89 MHz,Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 835.89$  MHz;  $\sigma = 0.876$  mho/m;  $\epsilon_r = 40.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section ,Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn446; Calibrated: 2006-03-17

- Phantom: SAM 835/900 MHz; Type: SAM

**Left tilt 363/Area Scan (51x101x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.306 mW/g

**Left tilt 363/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm


Reference Value = 17.7 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 0.359 W/kg

**SAR(1 g) = 0.288 mW/g; SAR(10 g) = 0.219 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.304 mW/g

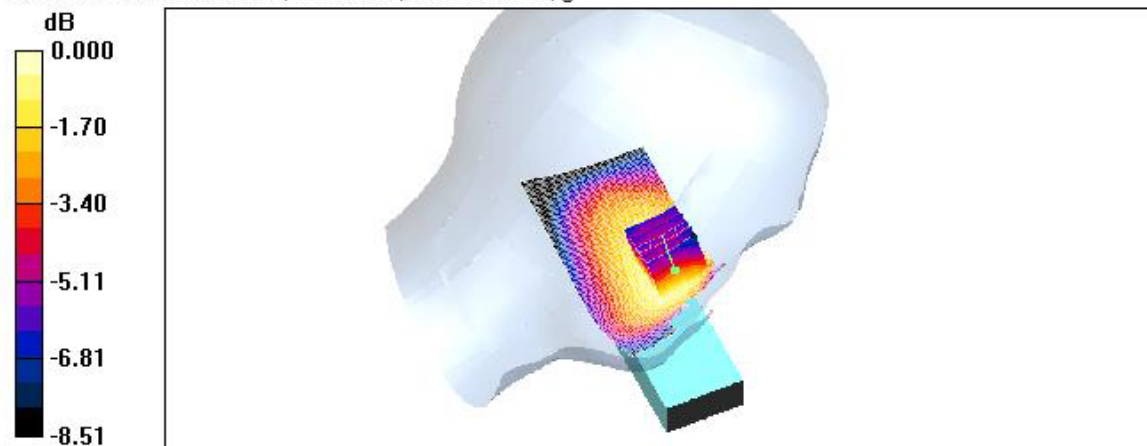

0 dB = 0.304mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.  
Mode : CDMA 835 / Antenna : in / Channel:363  
Liquid Temperature : 21.5℃  
Date Tested : July 04, 2006

DUT: TX-215; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 835.89$  MHz;  $\sigma = 0.876$  mho/m;  $\epsilon_r = 40.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right tilt 363/Area Scan (51x101x1): Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.312 mW/g

Right tilt 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm


Reference Value = 18.2 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 0.372 W/kg

SAR(1 g) = 0.296 mW/g; SAR(10 g) = 0.224 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.314 mW/g

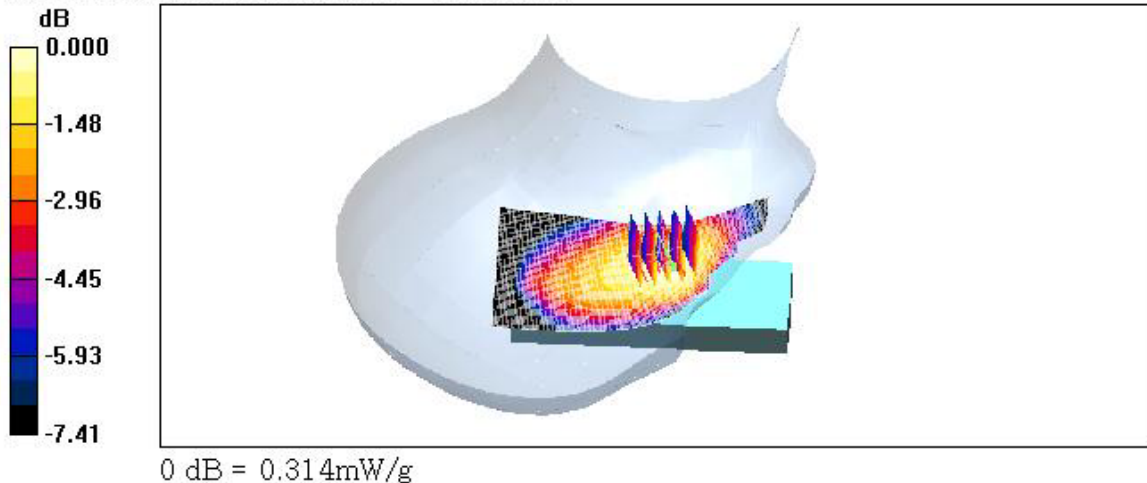

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.  
Mode : CDMA 835 / Antenna : out / Channel:363  
Liquid Temperature : 21.5℃  
Date Tested : July 04, 2006

DUT: TX-215; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 835.89$  MHz;  $\sigma = 0.876$  mho/m;  $\epsilon_r = 40.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

**Right tilt 363/Area Scan (51x101x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.325 mW/g

**Right tilt 363/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 18.4 V/m; Power Drift = -0.093 dB

Peak SAR (extrapolated) = 0.373 W/kg

**SAR(1 g) = 0.301 mW/g; SAR(10 g) = 0.230 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.315 mW/g

