

acknowledgment

Customer name: Shenzhen huakecheng technology co., ltd

Customer data: 19.10.003.07897317

Our model number: RC-G25-7.8UH-3500GS-6MM

Sample delivery date: April 1n, 2025

Supply side: Dongguan Jerice Technology Co. , Ltd.

Draw up	Audit	Permission granted
Wang Liying	Deng xianggui	Lu Rusheng

Client acknowledges:

Qualified	Disqualified	Admit it
Notes		

Dongguan Jerice Technology Co. , Ltd.



Tel: _____

Fax: 86+13632701380

Address: 96 Long Wu Road, Tai Ling Shan, Dongguan (3E, building L, Kam Hung Tat Science and Technology Park)

Customer name	Customer data	Our model number	Version	Date
Hkch	19.10.003.07897317	RC-G25-7.8UH-3500GS-6MM	A0	April 1n, 2025

一、 Floor plan: unit: MM

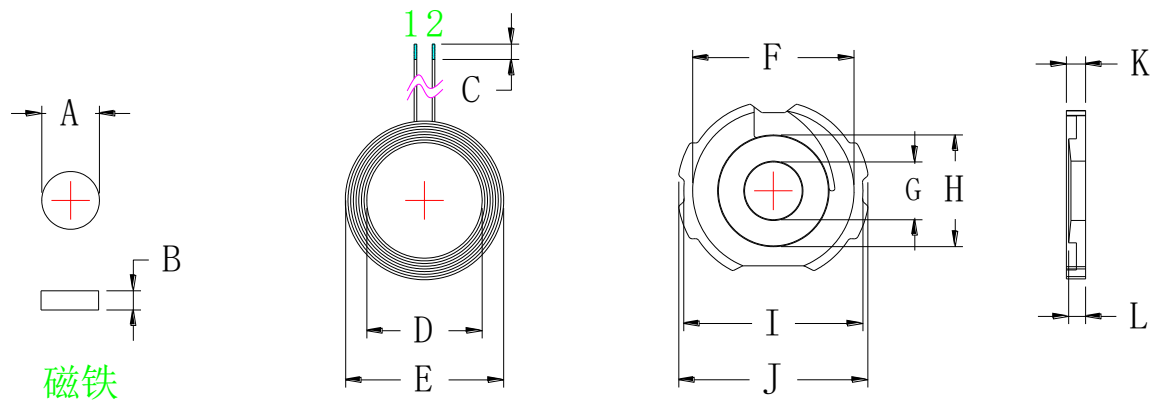

A	7.5 ± 0.1
B	2.3 ± 0.1
C	2.0 ± 1
D	14.0 ± 0.2
E	20.5 ± 0.5
F	21.1 ± 0.2
G	7.5 ± 0.1
H	13.5 ± 0.1
I	23.5 ± 0.2
J	25.0 ± 0.2
K	2.5 ± 0.15
L	2.4 ± 0.1 中柱高度
M	6 ± 0.5

二、 Product parameters:

Feet	Line diameter	Number of turns	Notes
1- 2	0.08*24P	14T	Hot Air Strand

三、 Technical Requirements:

1. Fix the head and tail of the copper wire to prevent loose or broken copper wire.
2. According to customer requirements to cut the head of the excess copper wire, tinned, tinned depth of 1 ~ 3mm.
3. Stick some white glue on the soft magnetic sheet and stick on the copper coil to ensure the clean and tidy surface of the product in the process.
4. Soft magnetic flaky objects have round holes and are not damaged.
5. Additional process (according to customer requirements) : in the finished product in the middle of the round hole loaded with 7.5 x 2.3mm magnet, and in the back of the finished product and then paste a diameter of 14 mm round double-sided adhesive, and finally packaging.



四、 Electrical parameter:

1. Inductance value,

$$\text{PIN } 1 - 2 = 7.8\mu\text{H} \pm 0.2\mu\text{H}$$

$$Q \geq 25$$

The above inductances and Q values are based on Quanhua 1062A instrument and 100KHZ/1.0Vrms as standard or equivalent instrument.

五、 Bill of materials:

NO	Name	Material Quality	Suppliers	Notes
1	Hot Air Strand	0.08X24P	Uyghur or equivalent	
2	Disk	G25 Soft substrate	TX or equivalent	
3	Tin	High temperature environmental protection	Thond Island or equivalent	
4	White glue	BY882	Treasure with or equivalent	
5	Strong magnetism	7.5 * 2.3*3500±100GS	Win-win or equal	Black plating (fixed with glue)
6	Double-sided glue	The diameter is 14 mm	Hung Fai or equivalent	