



Engineering and Testing for EMC and Safety Compliance

CERTIFICATION APPLICATION REPORT
FCC PART 15.247 CERTIFICATION

Test Lab: Rhein Tech Laboratories, Inc. Phone: 703-689-0368 360 Herndon Parkway Fax: 703-689-2056 Suite 1400 Web Site: www.rheintech.com Herndon, VA 20170 E-Mail: ATCBINFO@rheintech.com		Applicant: AEPTEC Microsystems, Inc. / 3e Technologies International, Inc. 700 King Farm Blvd. Phone: 301-944-1410 Rockville, MD 20850 Fax: 301-670-6989 Contact: Frank Li Email: fli@3eti.com	
FCC ID:	QVT-525A	GRANTEE FRN NUMBER:	0008305898
PLAT FORM:	N/A	RTL WORK ORDER NUMBER:	2004121
MODEL(S):	3e-525A	RTL QUOTE NUMBER:	QRTL04-194B
DATE OF TEST REPORT:	September 1, 2004		
American National Standard Institute:	ANSI C63.4: Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz		
FCC Classification:	DSS – Part 15 Spread Spectrum Transmitter		
FCC Rule Part(s):	Part 15.247: Operation within the bands 920-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz Direct Sequence System 97-114: Amendment of Parts 2 and 15 of the Commission's Rules Regarding Spread Spectrum Transmitters; ET Docket No. 96-8		
Digital Interface Information	Digital Interface was found to be compliant		
Receiver Information	Receiver was found to be compliant		
Frequency Range (MHz)	Output Power* (W)	Frequency Tolerance	Emission Designator
2412-2462	0.275	N/A	N/A

* output power is maximum peak conducted

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this test report. No modifications were made to the equipment during testing in order to achieve compliance with these standards. Furthermore, there was no deviation from, additions to, or exclusions from the FCC Part 2, FCC Part 15, FCC 97-114, and ANSI C63.4.

Signature: Desmond A. Fraser

Date: September 1, 2004

Typed/Printed Name: Desmond A. Fraser

Position: President

This report may not be reproduced, except in full, without the written approval of Rhein Tech Laboratories, Inc.

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	6
1.1	Scope	6
1.2	Test Facility	6
1.3	Related Submittal(s)/Grant(s)	6
1.4	Modifications	6
2	TEST INFORMATION	7
2.1	Test Justification.....	7
2.2	Exercising The EUT	7
2.3	Test Result Summary	7
2.4	Test System Details	8
2.5	Configuration of Tested System	9
3	COMPLIANCE WITH FCC §15.31(M).....	10
4	COMPLIANCE WITH FCC §15.203	10
5	COMPLIANCE WITH FCC §15.204	10
6	CONDUCTED LIMITS – FCC §15.207	11
6.1	Conducted Test Data	11
7	COMPLIANCE WITH THE BAND EDGE – FCC §15.247(C), §15.205.....	14
7.1	Test Procedure.....	14
7.2	Band Edge Test Equipment	14
7.3	Restricted Band Edge Plots	15
8	RADIATED EMISSION; SPURIOUS AND HARMONICS – FCC §15.247(C)	27
8.1	Radiated Spurious Emission Limits Test Procedure.....	27
8.2	Radiated Spurious Test Equipment	27
8.3	Radiated Emissions Harmonics/Spurious Test Data.....	28
9	MODULATED BANDWIDTH - §15.247(A)(2).....	32
9.1	Modulated Bandwidth Test Procedure – minimum 6 db bandwidth.....	32
10	PEAK OUTPUT POWER - §15.247(B)(1)	39
10.1	Power Output Test Procedure.....	39
10.2	Power Output Test Equipment	39
10.3	Power Output Test Data	39
11	ANTENNA CONDUCTED SPURIOUS EMISSIONS - §15.247(C).....	40
11.1	Antenna Conducted Spurious Emissions Test Procedures.....	40
11.2	Antenna Conducted Spurious Test Equipment	40
11.3	Antenna Conducted Spurious Emissions (TX Frequency: 2412 MHz); 802.11B Outdoor Antenna Port.....	41
11.4	Antenna Conducted Spurious Emissions (TX Frequency: 2437 MHz); 802.11B Outdoor Antenna Port.....	42
11.5	Antenna Conducted Spurious Emissions (TX Frequency: 2462 MHz); 802.11B Outdoor Antenna Port.....	43
11.6	Antenna Conducted Spurious Emissions (TX Frequency: 2412 MHz); 802.11G Bridge Antenna Port.....	44
11.7	Antenna Conducted Spurious Emissions (TX Frequency: 2437 MHz); 802.11G Bridge Antenna Port.....	45
11.8	Antenna Conducted Spurious Emissions (TX Frequency: 2462 MHz); 802.11G Bridge Antenna Port.....	46
12	POWER SPECTRAL DENSITY - §15.247(D)	47
12.1	Power Spectral Density Test Procedure.....	47
12.2	Power Spectral Density Test Equipment	47
12.3	Power Spectral Density Test Data	47
12.4	power spectral density plots 802.11B Outdoor Antenna Port	48
12.5	power spectral density plots 802.11G Bridge Antenna Port.....	51
13	CONCLUSION	54

FIGURE INDEX

Figure 1:	Worst Case Configuration Of System Under Test	9
-----------	---	---

TABLE INDEX

Table 2-1:	Test Result Summary For FCC Rules and Regulations	7
Table 2-2:	Equipment Under Test (EUT).....	8
Table 6-1:	Conducted Test Data; Mode TX, Channel 1, Neutral Side (Line 1)	11
Table 6-2:	Conducted Test Data; Mode TX, Channel 1 Hot Side (Line 2)	11
Table 6-3:	Conducted Test Data; Mode TX, Channel 6, Neutral Side (Line 1)	12
Table 6-4:	Conducted Test Data; Mode TX, Channel 6 Hot Side (Line 2)	12
Table 6-5:	Conducted Test Data; Mode TX, Channel 11, Neutral Side (Line 1)	13
Table 6-6:	Conducted Test Data; Mode TX, Channel 11 Hot Side (Line 2)	13
Table 7-1:	Band Edge Test Equipment	14
Table 9-1:	Radiated Spurious Emissions Test Equipment.....	27
Table 9-2:	Radiated Emissions Harmonics/Spurious (TX Frequency: 2412 MHz).....	28
Table 9-3:	Radiated Emissions Harmonics/Spurious (TX Frequency: 2437 MHz).....	29
Table 9-4:	Radiated Emissions Harmonics/Spurious (TX Frequency: 2462 MHz).....	29
Table 9-5:	Radiated Emissions Harmonics/Spurious (TX Frequency: 2412 MHz).....	30
Table 9-6:	Radiated Emissions Harmonics/Spurious (TX Frequency: 2437 MHz).....	30
Table 9-7:	Radiated Emissions Harmonics/Spurious (TX Frequency: 2462 MHz).....	31
Table 10-1:	6 dB Bandwidth Test Equipment	32
Table 10-2:	Modulated Bandwidth Test Data 802.11 B Outdoor Antenna Port.....	32
Table 10-3:	Modulated Bandwidth Test Data 802.11G Bridge ANTENNA PORT.....	32
Table 10-1:	Power Output Test Equipment.....	39
Table 10-2:	Power Output Test Data – 802.11B Outdoor Antenna Port	39
Table 10-3:	Power Output Test Data - 802.11G Bridge Antenna Port	39
Table 11-1:	Antenna Conducted Spurious Test Equipment	40
Table 11-2:	Conducted Spurious Emissions (TX Frequency: 2412 MHz)	41
Table 11-3:	Conducted Spurious Emissions (TX Frequency: 2437 MHz)	42
Table 11-4:	Conducted Spurious Emissions (TX Frequency: 927.7695 MHz)	43
Table 11-5:	Conducted Spurious Emissions (TX Frequency: 2412 MHz)	44
Table 11-6:	Conducted Spurious Emissions (TX Frequency: 2437 MHz)	45
Table 11-7:	Conducted Spurious Emissions (TX Frequency: 927.7695 MHz)	46
Table 12-1:	Power Spectral Density Test Equipment.....	47
Table 12-2:	Power Spectral Density test data 802.11B Outdoor Antenna Port	47
Table 12-3:	Power Spectral Density test data 802.11G Bridge Antenna Port	47

PLOT INDEX

Plot 7-1:	Lower Band Edge: Marker-Delta Method (TX Frequency: 2412 MHz).....	15
Plot 7-2:	Lower Band Edge: Average Measurement (TX Frequency: 2412 MHz).....	16
Plot 7-3:	Lower Band Edge: Peak Measurement (TX Frequency: 2412 MHz)	17
Plot 7-4:	Upper Band Edge: Marker-Delta Method (TX Frequency: 2462 MHz)	18
Plot 7-5:	Upper Band Edge: Average measurement (TX Frequency: 2462 MHz)	19
Plot 7-6:	Upper Band Edge: Peak Measurement (TX Frequency: 2462 MHz).....	20
Plot 7-7:	Lower Band Edge: Marker-Delta Method (TX Frequency: 2412 MHz).....	21
Plot 7-8:	Lower Band Edge: Average Measurement (TX Frequency: 2412 MHz).....	22
Plot 7-9:	Lower Band Edge: Peak Measurement (TX Frequency: 2412 MHz)	23
Plot 7-10:	Upper Band Edge: Marker-Delta Method (TX Frequency: 2462 MHz)	24
Plot 7-11:	Upper Band Edge: Average measurement (TX Frequency: 2462 MHz).....	25
Plot 7-12:	Upper Band Edge: Peak measurement (TX Frequency: 2462 MHz)	26
Plot 10-1:	6 dB Bandwidth (TX Frequency: 2412 MHz) 802.11B Antenna Port	33
Plot 10-2:	6 dB Bandwidth (TX Frequency: 2437 MHz) 802.11B Antenna Port	34
Plot 10-3:	6 dB Bandwidth (TX Frequency: 2462 MHz) 802.11B Antenna Port	35
Plot 10-4:	6 dB Bandwidth (TX Frequency: 2412 MHz) 802.11G Antenna Port.....	36
Plot 10-5:	6 dB Bandwidth (TX Frequency: 2437 MHz) 802.11G Antenna Port.....	37
Plot 10-6:	6 dB Bandwidth (TX Frequency: 2462 MHz) 802.11G Antenna Port.....	38
Plot 12-1:	Power Spectral Density: Channel 1	48
Plot 12-2:	Power Spectral Density: Channel 6	49
Plot 12-3:	Power Spectral Density: Channel 11.....	50
Plot 12-4:	Power Spectral Density: Channel 1	51
Plot 12-5:	Power Spectral Density: Channel 6	52
Plot 12-6:	Power Spectral Density: Channel 11.....	53

APPENDIX INDEX

Appendix A:	FCC Part 1.1307, 1.1310, 2.1091, 2.1093 RF Exposure Compliance	55
Appendix B:	Antenna Specifications Per FCC §15.204(c).....	56
Appendix C:	Agency Authorization Letter.....	57
Appendix D:	Confidentiality Request Letter	58
Appendix E:	Technical Operational Description.....	59
Appendix F:	Label and Label Location	60
Appendix G:	Schematics	61
Appendix H:	Block Diagram	62
Appendix I:	Manual.....	63
Appendix J:	Test Photographs	64
Appendix K:	External Photographs	68
Appendix L:	Internal Photographs	73

PHOTOGRAPH INDEX

Photograph 1:	Radiated Testing – Front View	64
Photograph 2:	Radiated Testing – Rear View.....	65
Photograph 3:	Conducted Testing – Front View	66
Photograph 4:	Conducted Testing – Back View.....	67
Photograph 5:	EUT Top View.....	68
Photograph 6:	EUT Bottom View	69
Photograph 7:	EUT Side View Antenna Connections.....	70
Photograph 8:	EUT Left Side View.....	71
Photograph 9:	EUT Right Side View	72
Photograph 10:	Inside View	73
Photograph 11:	802.11B and 802.11G WLAN's Front View.....	74
Photograph 12:	802.11B and 802.11G WLAN's Back View	75
Photograph 13:	802.11B WLAN Top View Unshielded.....	76
Photograph 14:	802.11G WLAN Top View Unshielded.....	77
Photograph 15:	XS Front View	78
Photograph 16:	XS Back WLAN	79
Photograph 17:	XS Back Open.....	80
Photograph 18:	XS Back No Cover.....	81

1 GENERAL INFORMATION

1.1 SCOPE

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz.

A direct sequence (DS) system is a spread spectrum (SS) system in which the carrier has been modulated by a high speed spreading code and an information data stream. The high-speed code sequence dominates the “modulating function” and is the direct cause of the wide spreading of the transmitted signal.

1.2 TEST FACILITY

The open area test site and conducted measurement facility used to collect the radiated data is located at 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4 2001).

1.3 RELATED SUBMITTAL(S)/GRANT(S)

This is an original application for Certification for AEPTEC Microsystems, Inc. / 3e Technologies International, Inc., Model 3e-525A, Wireless Access Point, FCC ID: QVT-525A. The IF, LO and up to the 2nd LO were investigated and tested.

1.4 MODIFICATIONS

No modifications were made to the EUT.

2 TEST INFORMATION

2.1 TEST JUSTIFICATION

The EUT was tested in all three orthogonal planes in order to determine worst-case emissions. Channel 1 at 2412 MHz, channel 6 at 2437 MHz and channel 11 at 2462 MHz were tested and investigated from 9 kHz to 24 GHz. Data for all three channels are presented in this report.

The EUT has three identical antennas (5 dBi). One antenna transmits and receives the 802.11b signals (this is the LAN side of the EUT). The second antenna transmits and receives the 802.11g signals (this is the bridge side of the EUT). The third antenna is used for receive diversity. The two transmit antenna are greater than 20 cm apart.

2.2 EXERCISING THE EUT

The EUT was provided with software to continuously transmit during testing. The carrier was also checked to verify that information was being transmitted. There were no deviations from the test standard(s) and/or methods. The test results reported relate only to the item tested.

2.3 TEST RESULT SUMMARY

TABLE 2-1: TEST RESULT SUMMARY FOR FCC RULES AND REGULATIONS

STANDARD	TEST	PASS/FAIL OR N/A
FCC 15.205	Compliance with the Restricted Band Edge	Pass
FCC 15.207	Conducted Emissions	Pass
FCC 15.209	Radiated Emissions	Pass
FCC 15.247(a)(2)	Modulated Bandwidth	Pass
FCC 15.247(b)	Power Output	Pass
FCC 15.247(c)	Antenna Conducted Spurious Emissions	Pass
FCC 15.247(d)	Power Spectral Density	Pass

2.4 TEST SYSTEM DETAILS

The test sample was received on August 6, 2004. The FCC identifiers for all applicable equipment, plus descriptions of all cables used in the tested system, are identified in Table 2-2.

TABLE 2-2: EQUIPMENT UNDER TEST (EUT)

PART	MANUFACTURER	MODEL	SERIAL NUMBER	FCC ID	CABLE DESCRIPTION	RTL BAR CODE
3e-525A	3e Technologies International	3e525A	3e00957	QVT-525A	1.9m USB unshielded; 2-2.45m RJ45 shielded	016093
5 dBi Antenna	NA	NA	NA	NA	NA	016096
5 dBi Antenna	NA	NA	NA	NA	NA	016095
5 dBi Antenna	NA	NA	NA	NA	NA	016094
Lightning Protectors Reverse Polarity	NA	NA	NA	NA	NA	016113
Lightning Protectors Reverse Polarity	NA	NA	NA	NA	NA	016112
ITE AC Adapter; Power Injector 48 VDC	3Com	CTG#03044	757120030447	NA	1.8m Unshielded power	016098

2.5 CONFIGURATION OF TESTED SYSTEM

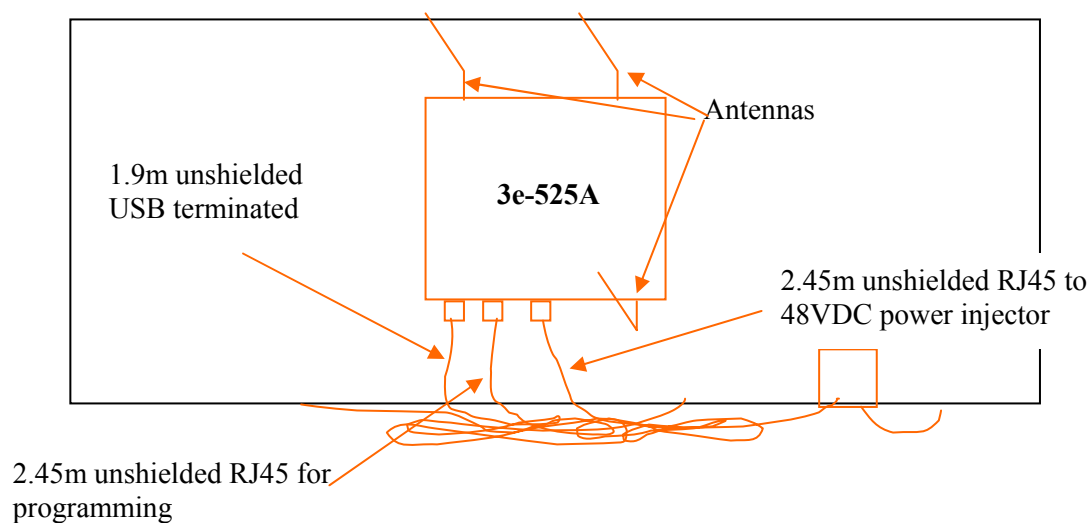


FIGURE 1: WORST CASE CONFIGURATION OF SYSTEM UNDER TEST

3 COMPLIANCE WITH FCC §15.31(M)

In accordance with FCC 15.31(m), and because the EUT utilizes an operating band greater than 10 MHz, three frequencies were investigated. The following frequencies were tested: 2412 MHz, 2437 MHz and 2462 MHz. Both the 802.11b and 802.11g transmissions were investigated and found to be compliant.

4 COMPLIANCE WITH FCC §15.203

The device uses unique antenna connectors not readily available to the public.

5 COMPLIANCE WITH FCC §15.204

Please see Appendix B for antenna specifications.

6 CONDUCTED LIMITS – FCC §15.207

6.1 CONDUCTED TEST DATA

TABLE 6-1: CONDUCTED TEST DATA; MODE TX, CHANNEL 1, NEUTRAL SIDE (LINE 1)


Temperature: 74°F					Humidity: 43%					Pass/ Fail	Comments
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	FCC B QP Limit (dBuV)	FCC B QP Margin (dBuV)	FCC B AV Limit (dBuV)	FCC B AV Margin (dBuV)			
0.165	Pk	46.7	2.0	48.7	65.6	-16.9	55.6	-6.9	Pass		
0.264	Pk	40.0	1.8	41.8	62.7	-20.9	52.7	-10.9	Pass		
0.350	Pk	41.1	1.0	42.1	60.3	-18.2	50.3	-8.2	Pass		
0.702	Pk	42.1	0.9	43	56.0	-13.0	46.0	-3.0	Pass		
4.070	Pk	34.3	1.8	36.1	56.0	-19.9	46.0	-9.9	Pass		
39.350	Pk	43.1	4.5	47.6	60.0	-12.4	50.0	-2.4	Pass		

TABLE 6-2: CONDUCTED TEST DATA; MODE TX, CHANNEL 1 HOT SIDE (LINE 2)

Temperature: 74°F					Humidity: 43%					Pass/ Fail	Comments
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	FCC B QP Limit (dBuV)	FCC B QP Margin (dBuV)	FCC B AV Limit (dBuV)	FCC B AV Margin (dBuV)			
0.174	Pk	44.40	1.9	46.3	65.3	-19.0	55.3	-9.0	Pass		
0.262	Pk	38.90	1.8	40.7	62.8	-22.1	52.8	-12.1	Pass		
0.346	Pk	41.00	1.0	42	60.4	-18.4	50.4	-8.4	Pass		
0.458	Pk	40.90	1.0	41.9	56.0	-14.1	46.0	-4.1	Pass		
4.220	Pk	35.00	1.8	36.8	56.0	-19.2	46.0	-9.2	Pass		
27.281	Pk	33.90	4.5	38.4	60.0	-21.6	50.0	-11.6	Pass		

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer



Signature

August 6, 2004
Date Of Test

TABLE 6-3: CONDUCTED TEST DATA; MODE TX, CHANNEL 6, NEUTRAL SIDE (LINE 1)


Temperature: 74°F					Humidity: 43%					
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	FCC B QP Limit (dBuV)	FCC B QP Margin (dBuV)	FCC B AV Limit (dBuV)	FCC B AV Margin (dBuV)	Pass/ Fail	Comments
0.165	Pk	46.7	2.0	48.7	65.6	-16.9	55.6	-6.9	Pass	
0.264	Pk	40.0	1.8	41.8	62.7	-20.9	52.7	-10.9	Pass	
0.350	Pk	41.1	1.0	42.1	60.3	-18.2	50.3	-8.2	Pass	
0.702	Pk	42.1	0.9	43	56.0	-13.0	46.0	-3.0	Pass	
4.070	Pk	34.3	1.8	36.1	56.0	-19.9	46.0	-9.9	Pass	
29.350	Pk	43.1	4.5	47.6	60.0	-12.4	50.0	-2.4	Pass	

TABLE 6-4: CONDUCTED TEST DATA; MODE TX, CHANNEL 6 HOT SIDE (LINE 2)

Temperature: 74°F					Humidity: 43%					
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	FCC B QP Limit (dBuV)	FCC B QP Margin (dBuV)	FCC B AV Limit (dBuV)	FCC B AV Margin (dBuV)	Pass/ Fail	Comments
0.174	Pk	44.40	1.9	46.3	65.3	-19.0	55.3	-9.0	Pass	
0.262	Pk	38.90	1.8	40.7	62.8	-22.1	52.8	-12.1	Pass	
0.346	Pk	41.00	1.0	42	60.4	-18.4	50.4	-8.4	Pass	
0.458	Pk	40.90	1.0	41.9	56.0	-14.1	46.0	-4.1	Pass	
4.220	Pk	35.00	1.8	36.8	56.0	-19.2	46.0	-9.2	Pass	
27.281	Pk	33.90	4.5	38.4	60.0	-21.6	50.0	-11.6	Pass	

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer



Signature

August 6, 2004
Date Of Test

TABLE 6-5: CONDUCTED TEST DATA; MODE TX, CHANNEL 11, NEUTRAL SIDE (LINE 1)


Temperature: 74°F					Humidity: 43%					
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	FCC B QP Limit (dBuV)	FCC B QP Margin (dBuV)	FCC B AV Limit (dBuV)	FCC B AV Margin (dBuV)	Pass/ Fail	Comments
0.156	Pk	48.8	2.0	50.8	65.8	-15.0	55.8	-5.0	Pass	
0.266	Pk	41.6	1.8	43.4	62.7	-19.3	52.7	-9.3	Pass	
0.354	Pk	41.2	1.0	42.2	60.2	-18.0	50.2	-8.0	Pass	
0.881	Pk	38.3	0.9	39.2	56.0	-16.8	46.0	-6.8	Pass	
4.100	Pk	34.4	1.8	36.2	56.0	-19.8	46.0	-9.8	Pass	
29.320	Pk	42.3	4.5	46.8	60.0	-13.2	50.0	-3.2	Pass	

TABLE 6-6: CONDUCTED TEST DATA; MODE TX, CHANNEL 11 HOT SIDE (LINE 2)

Temperature: 74°F					Humidity: 43%					
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	FCC B QP Limit (dBuV)	FCC B QP Margin (dBuV)	FCC B AV Limit (dBuV)	FCC B AV Margin (dBuV)	Pass/ Fail	Comments
0.175	Pk	49.1	1.9	51	65.3	-14.3	55.3	-4.3	Pass	
0.268	Pk	39.6	1.8	41.4	62.6	-21.2	52.6	-11.2	Pass	
0.356	Pk	40.9	1.0	41.9	60.1	-18.2	50.1	-8.2	Pass	
0.970	Pk	40.4	0.9	41.3	56.0	-14.7	46.0	-4.7	Pass	
4.160	Pk	36.4	1.8	38.2	56.0	-17.8	46.0	-7.8	Pass	
29.350	Pk	42.2	4.5	46.7	60.0	-13.3	50.0	-3.3	Pass	

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer



Signature

August 6, 2004
Date Of Test

7 COMPLIANCE WITH THE BAND EDGE – FCC §15.247(C), §15.205

7.1 TEST PROCEDURE

Compliance with the band edges was performed using the FCC’s “Radiated Measurement at a Band Edge” guidance document. The data taken in this report represents the worst case operation.

7.2 BAND EDGE TEST EQUIPMENT

TABLE 7-1: BAND EDGE TEST EQUIPMENT

RTL ASSET #	MANUFACTURER	MODEL	PART TYPE	SERIAL NUMBER	CALIBRATION DUE DATE
901215	Hewlett Packard	8596EM (9 kHz-12.8 GHz)	EMC Analyzer	3826A00144	8/27/04
900772	EMCO	3161-02	Horn Antenna (2 - 4 GHz)	9804-1044	5/20/07

7.3 RESTRICTED BAND EDGE PLOTS

802.11b AP Outdoor Antenna Port


Calculation of Lower Band Edge

The level 109.4 dBuV/m is the field strength measurement, from which the delta measurement of 57.7 dB is subtracted (reference plots), which is equivalent to a level of 51.7 dB. This level has a margin of 2.3 dB below the limit of 54 dBuV/m.

Calculation: $109.4 \text{ dBuV/m} - 57.7 \text{ dB} - 54 \text{ dBuV/m} = -2.3 \text{ dB}$


Field strength of Lower Band Edge (1 MHz RBW/10 Hz VBW) = 109.4 dBuV/m
 Delta measurement = 55.8 dB

PLOT 7-1: LOWER BAND EDGE: MARKER-DELTA METHOD (TX FREQUENCY: 2412 MHz)

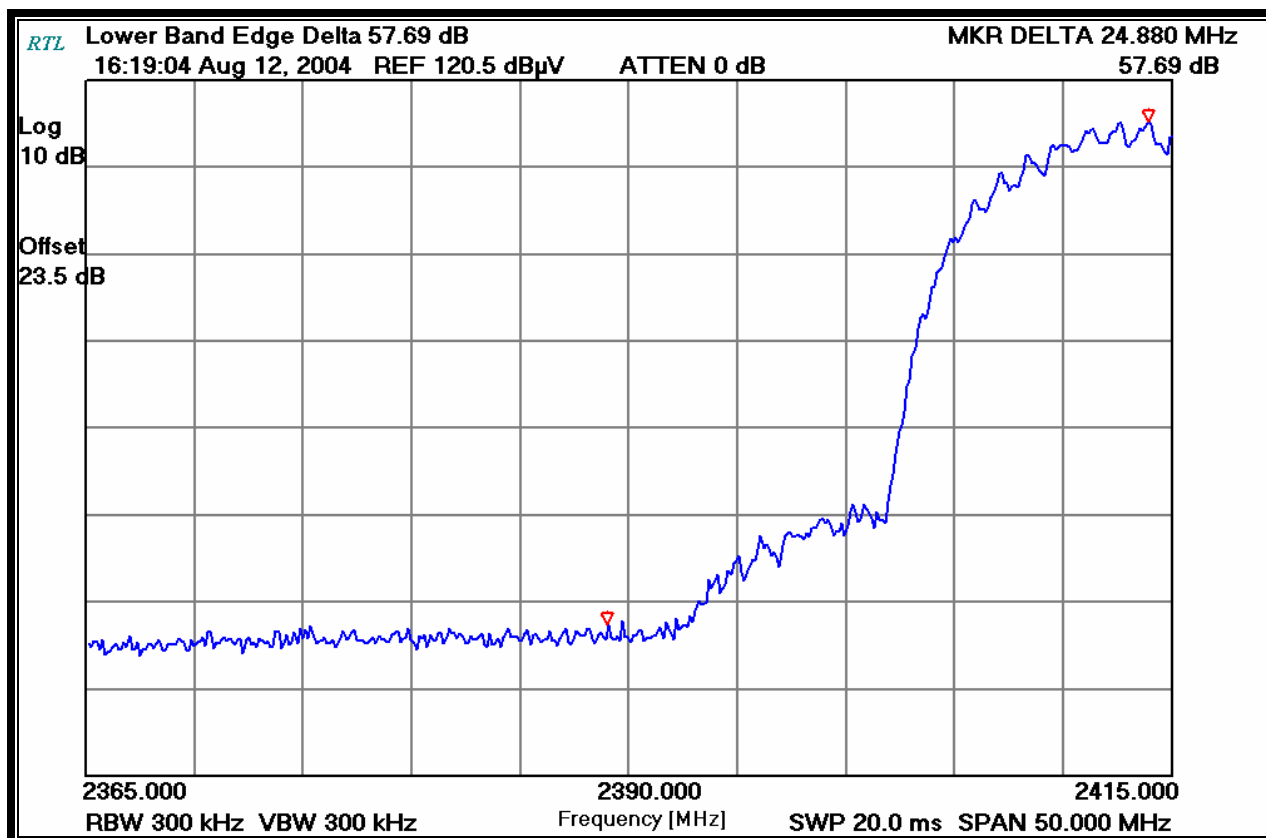


802.11b AP Outdoor Antenna Port

PLOT 7-2: LOWER BAND EDGE: AVERAGE MEASUREMENT (TX FREQUENCY: 2412 MHZ)

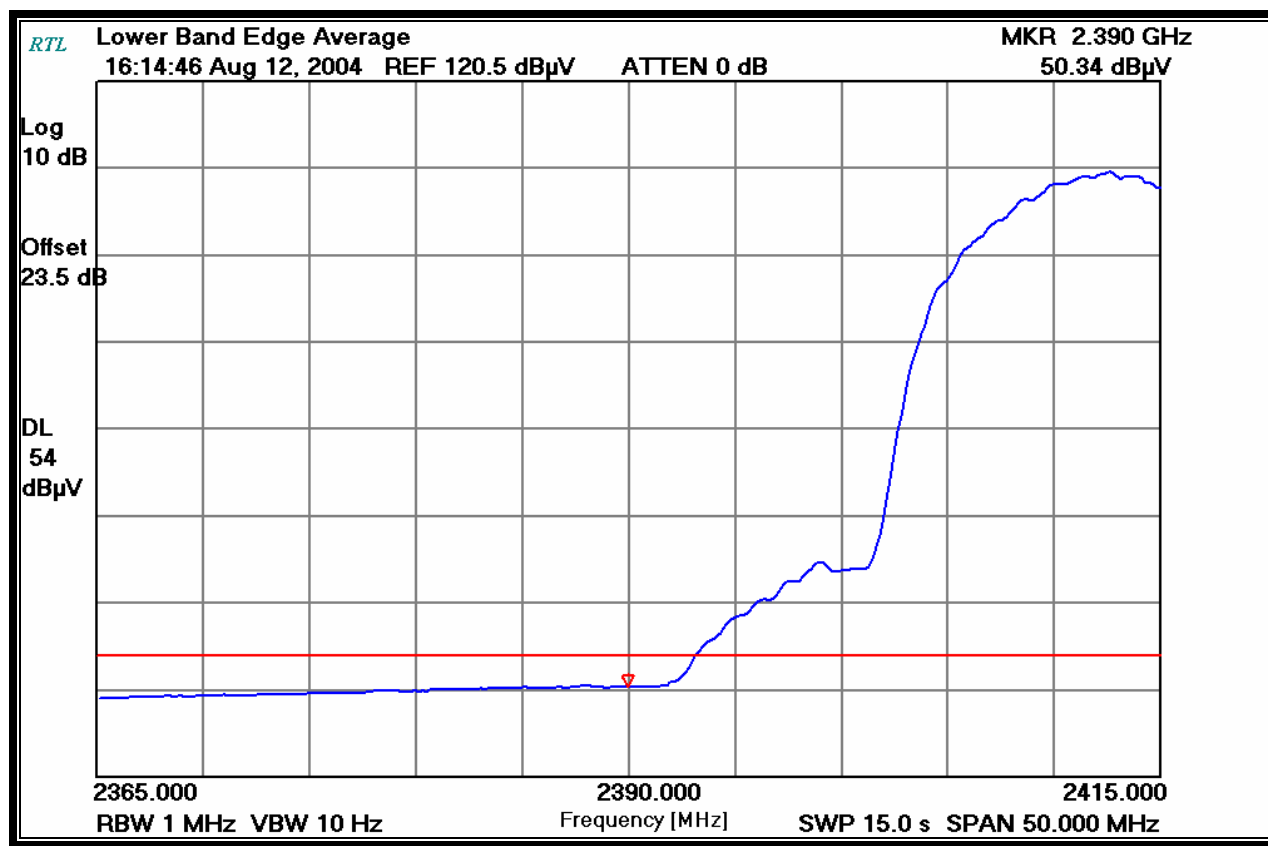

802.11b AP Outdoor Antenna Port

PLOT 7-3: LOWER BAND EDGE: PEAK MEASUREMENT (TX FREQUENCY: 2412 MHZ)

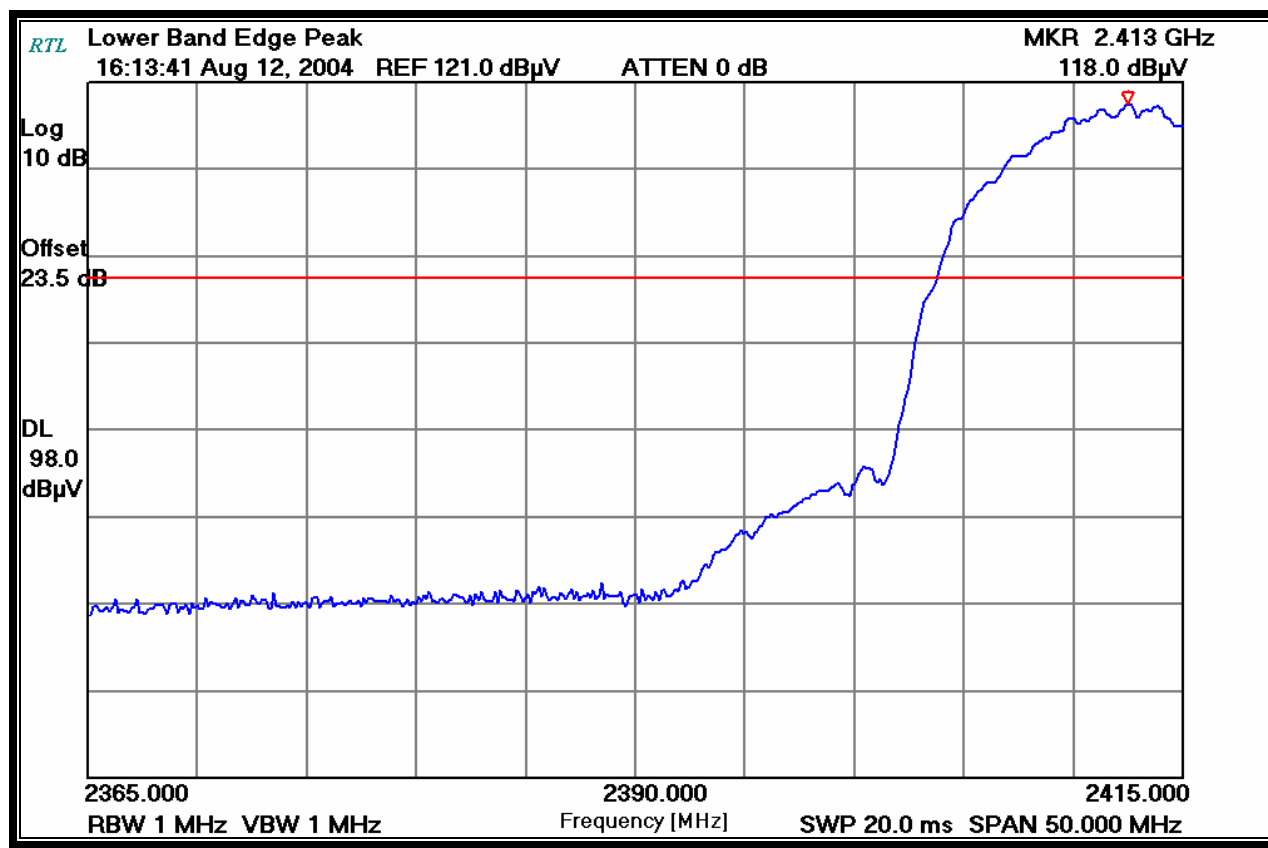

802.11b AP Outdoor Antenna Port

Calculation of Upper Band Edge


The level 106.0 dBuV/m is the field strength measurement, from which the delta measurement of 55.8 dB is subtracted (reference plots), which is equivalent to a level of 50.2 dB. This level has a margin of 3.8 dB below the limit of 54 dBuV/m.

Calculation: $106.0 \text{ dBuV/m} - 55.8 \text{ dB} - 54 \text{ dBuV/m} = -3.8 \text{ dB}$

Field strength of Upper Band Edge (1 MHz RBW/10 Hz VBW) = 106.0 dBuV/m


Delta measurement = 55.8 dB

PLOT 7-4: UPPER BAND EDGE: MARKER-DELTA METHOD (TX FREQUENCY: 2462 MHz)

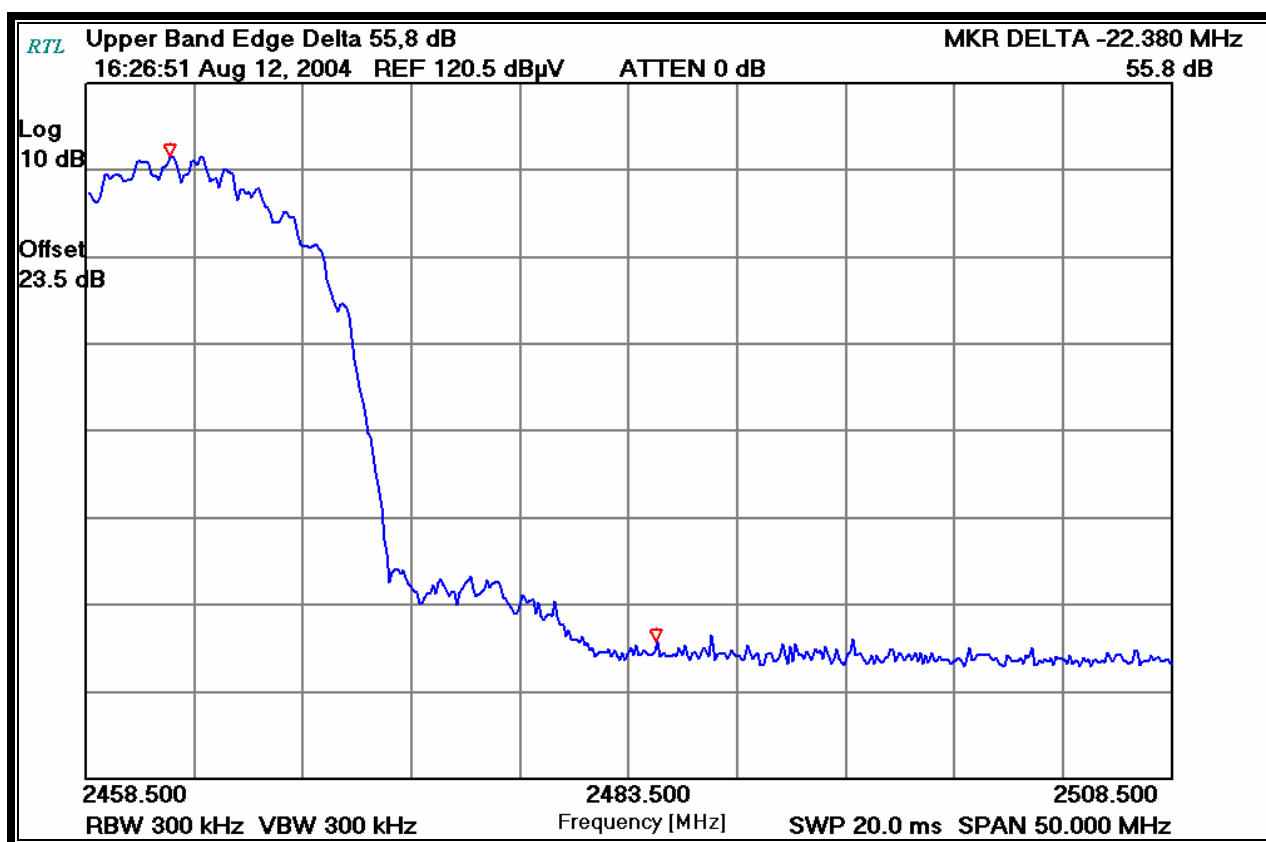


802.11b AP Outdoor Antenna Port

PLOT 7-5: UPPER BAND EDGE: AVERAGE MEASUREMENT (TX FREQUENCY: 2462 MHZ)

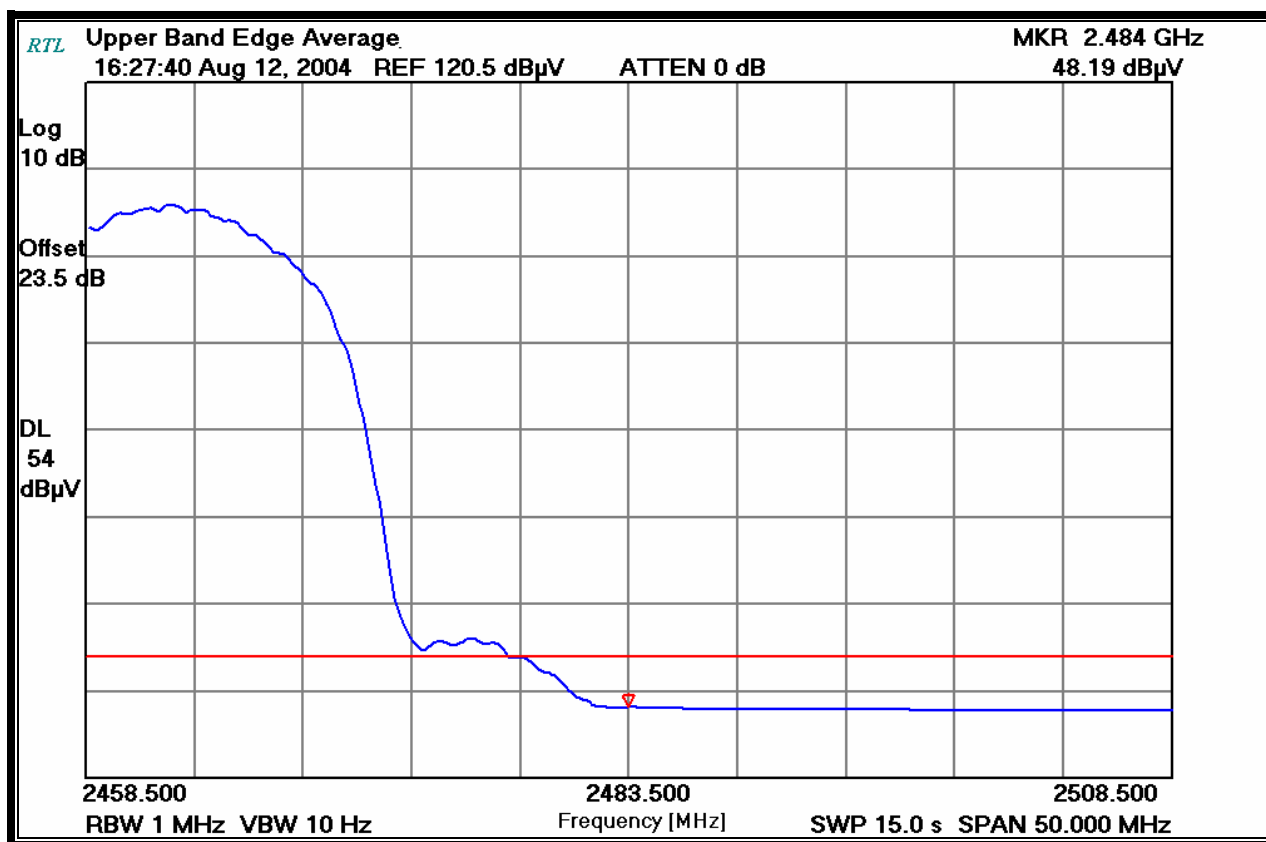

802.11b AP Outdoor Antenna Port

PLOT 7-6: UPPER BAND EDGE: PEAK MEASUREMENT (TX FREQUENCY: 2462 MHZ)

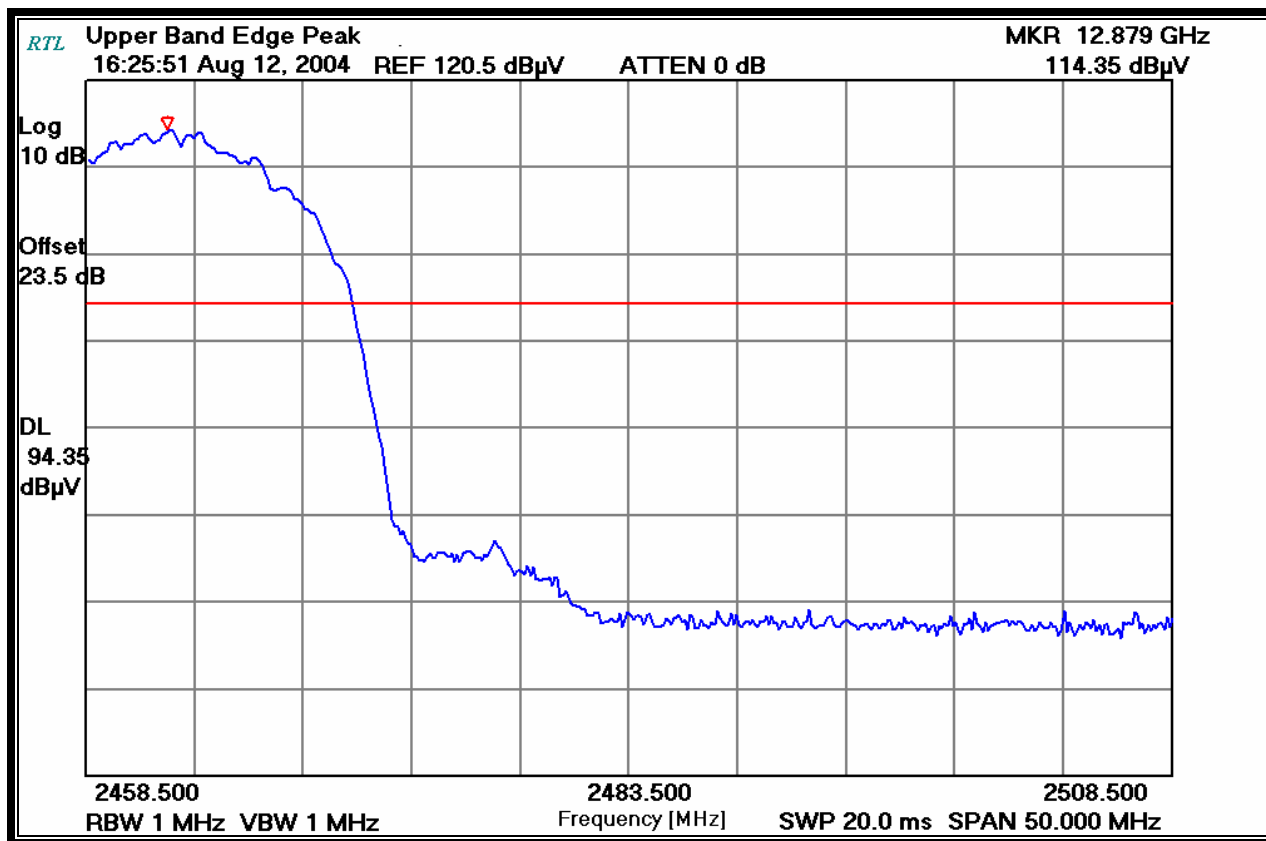

TEST PERSONNEL:

Daniel W. Baltzell
Test Engineer

Signature

August 12, 2004
Dates Of Test

802.11g Bridge Antenna Port

Calculation of Lower Band Edge


The level 93.9 dBuV/m is the field strength measurement, from which the delta measurement of 42 dB is subtracted (reference plots), which is equivalent to a level of 51.9 dB. This level has a margin of 2.1 dB below the limit of 54 dBuV/m.

Calculation: $93.9 \text{ dBuV/m} - 42.0 \text{ dB} - 54 \text{ dBuV/m} = -2.1 \text{ dB}$

Field strength of Lower Band Edge (1 MHz RBW/10 Hz VBW) = 93.9 dBuV/m


Delta measurement = 42.0 dB

PLOT 7-7: LOWER BAND EDGE: MARKER-DELTA METHOD (TX FREQUENCY: 2412 MHZ)

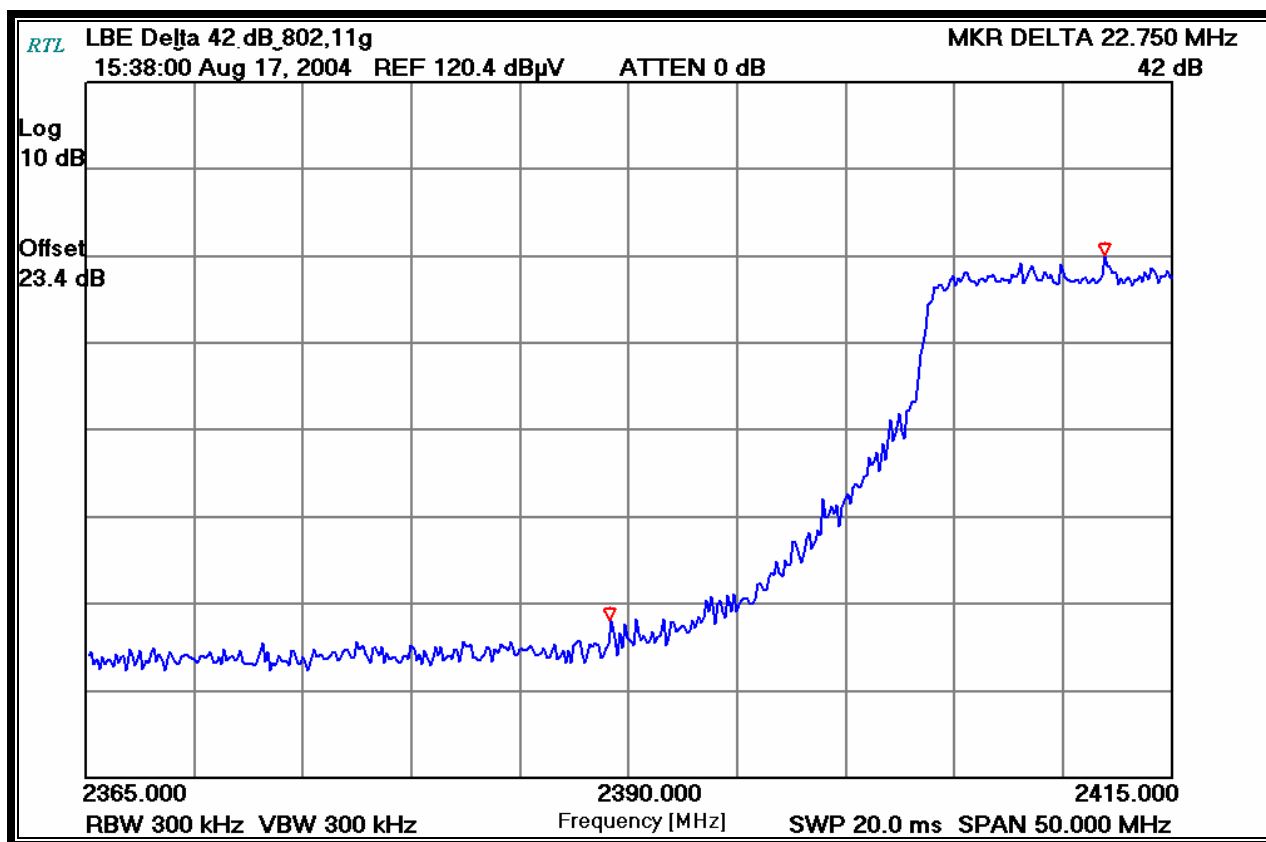


802.11g Bridge Antenna Port

PLOT 7-8: LOWER BAND EDGE: AVERAGE MEASUREMENT (TX FREQUENCY: 2412 MHZ)

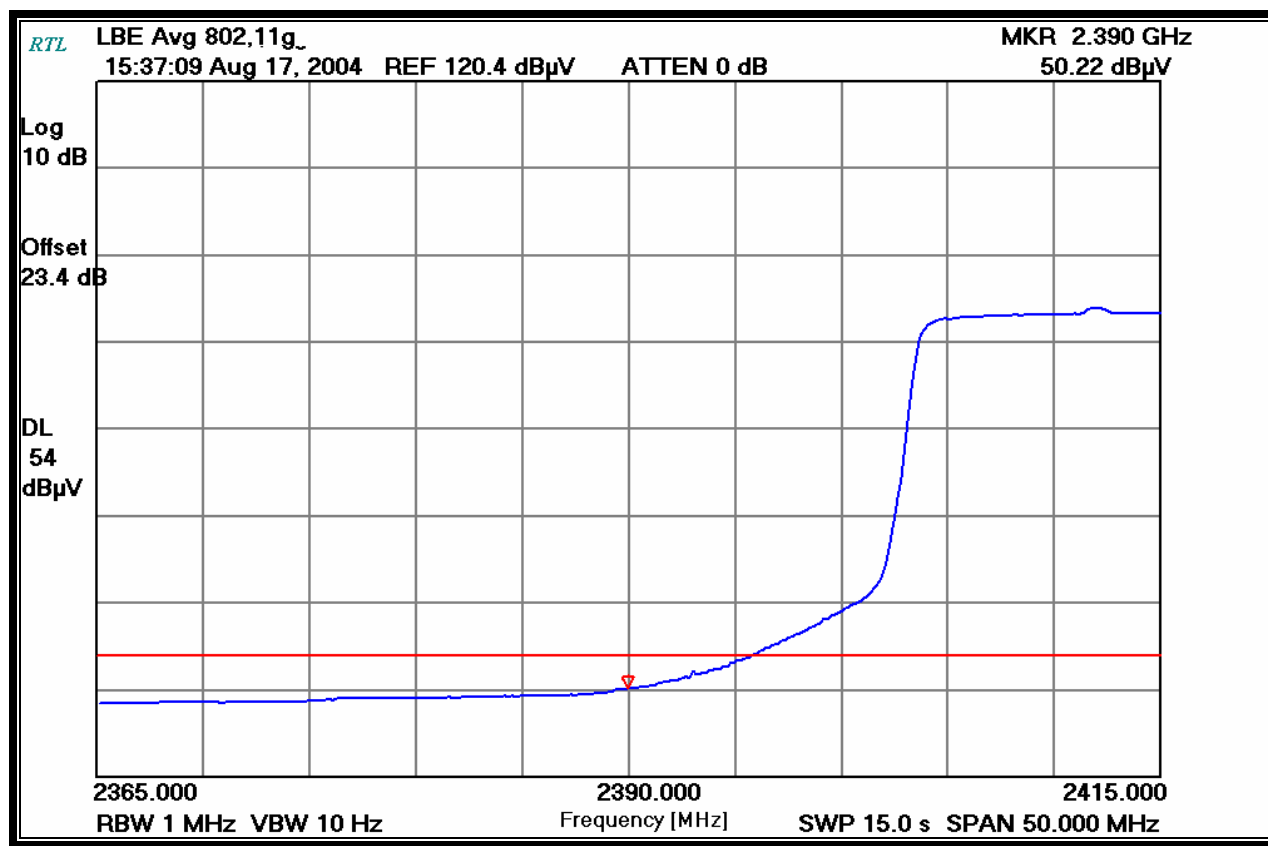

802.11g Bridge Antenna Port

PLOT 7-9: LOWER BAND EDGE: PEAK MEASUREMENT (TX FREQUENCY: 2412 MHZ)

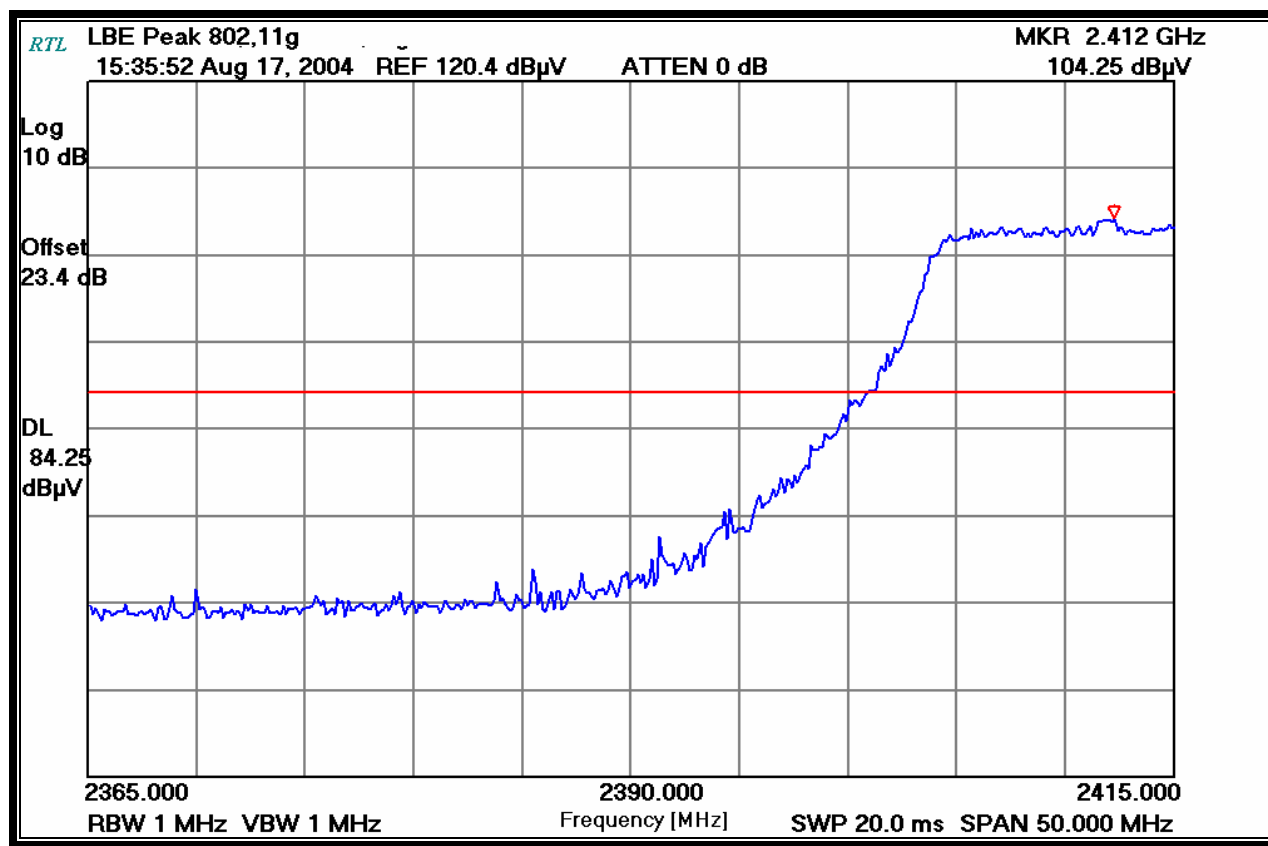

802.11g Bridge Antenna Port

Calculation of Upper Band Edge


The level 96.4 dBuV/m is the field strength measurement, from which the delta measurement of 44.4 dB is subtracted (reference plots), which is equivalent to a level of 52.0 dB. This level has a margin of 2.0 dB below the limit of 54 dBuV/m.

Calculation: $96.4 \text{ dBuV/m} - 44.4 \text{ dB} - 54 \text{ dBuV/m} = -2.0 \text{ dB}$

Field strength of Upper Band Edge (1 MHz RBW/10 Hz VBW) = 96.4 dBuV/m


Delta measurement = 44.4 dB

PLOT 7-10: UPPER BAND EDGE: MARKER-DELTA METHOD (TX FREQUENCY: 2462 MHz)

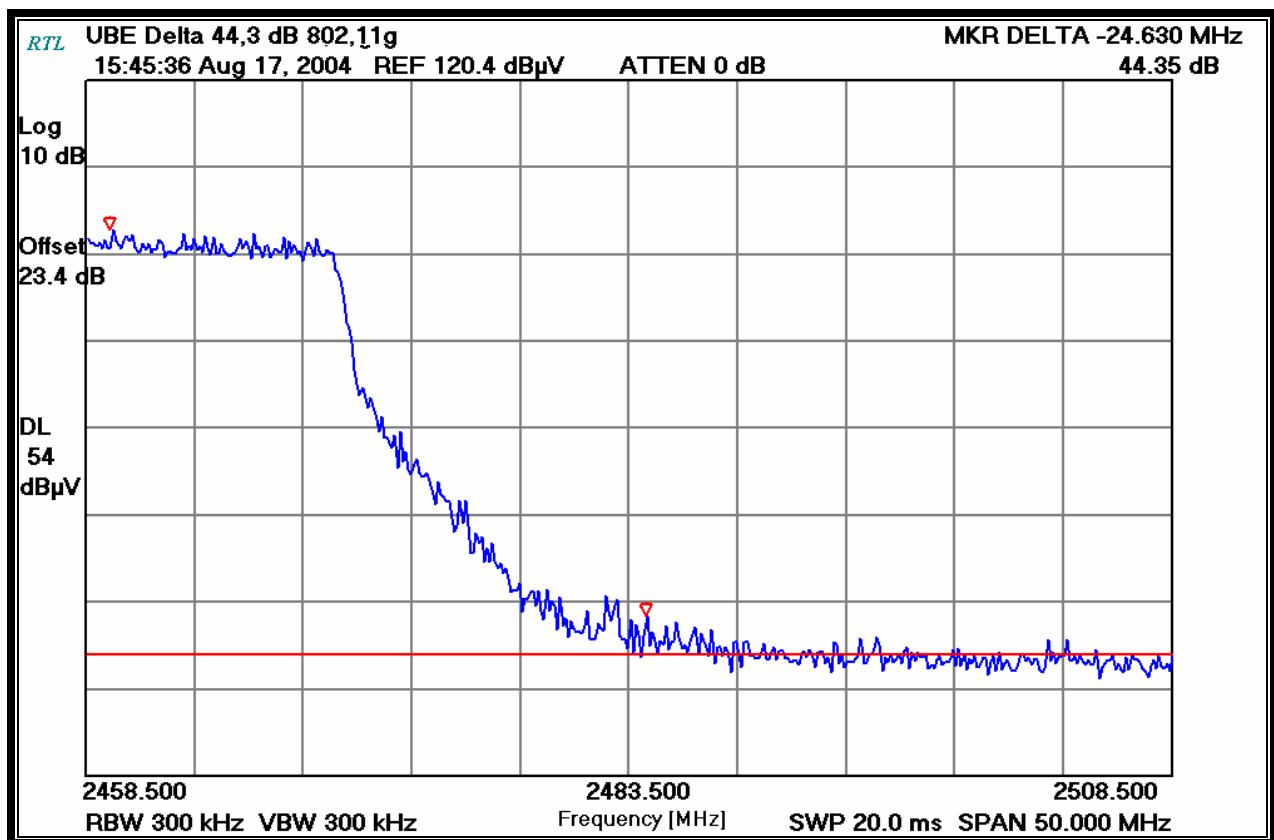


802.11g Bridge Antenna Port

PLOT 7-11: UPPER BAND EDGE: AVERAGE MEASUREMENT (TX FREQUENCY: 2462 MHZ)

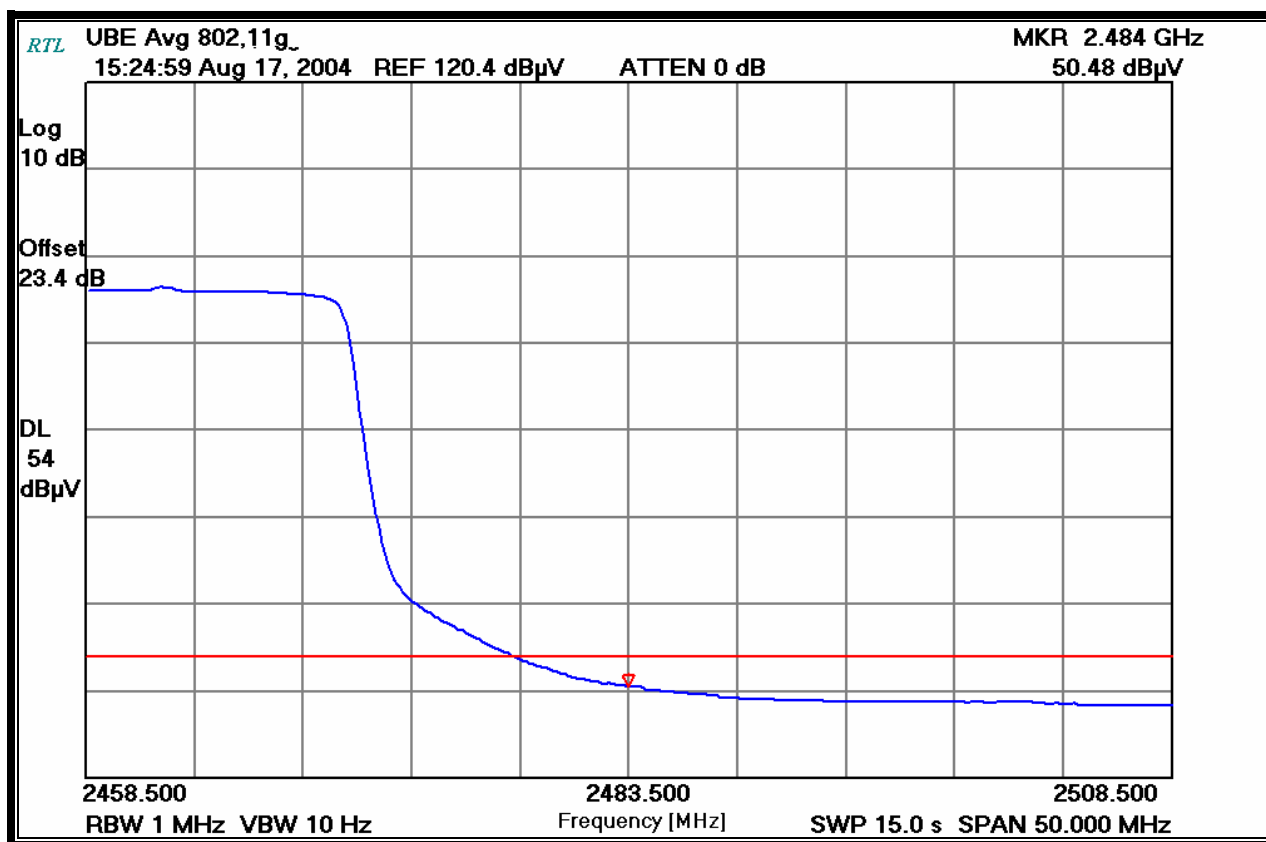

802.11g Bridge Antenna Port

PLOT 7-12: UPPER BAND EDGE: PEAK MEASUREMENT (TX FREQUENCY: 2462 MHZ)

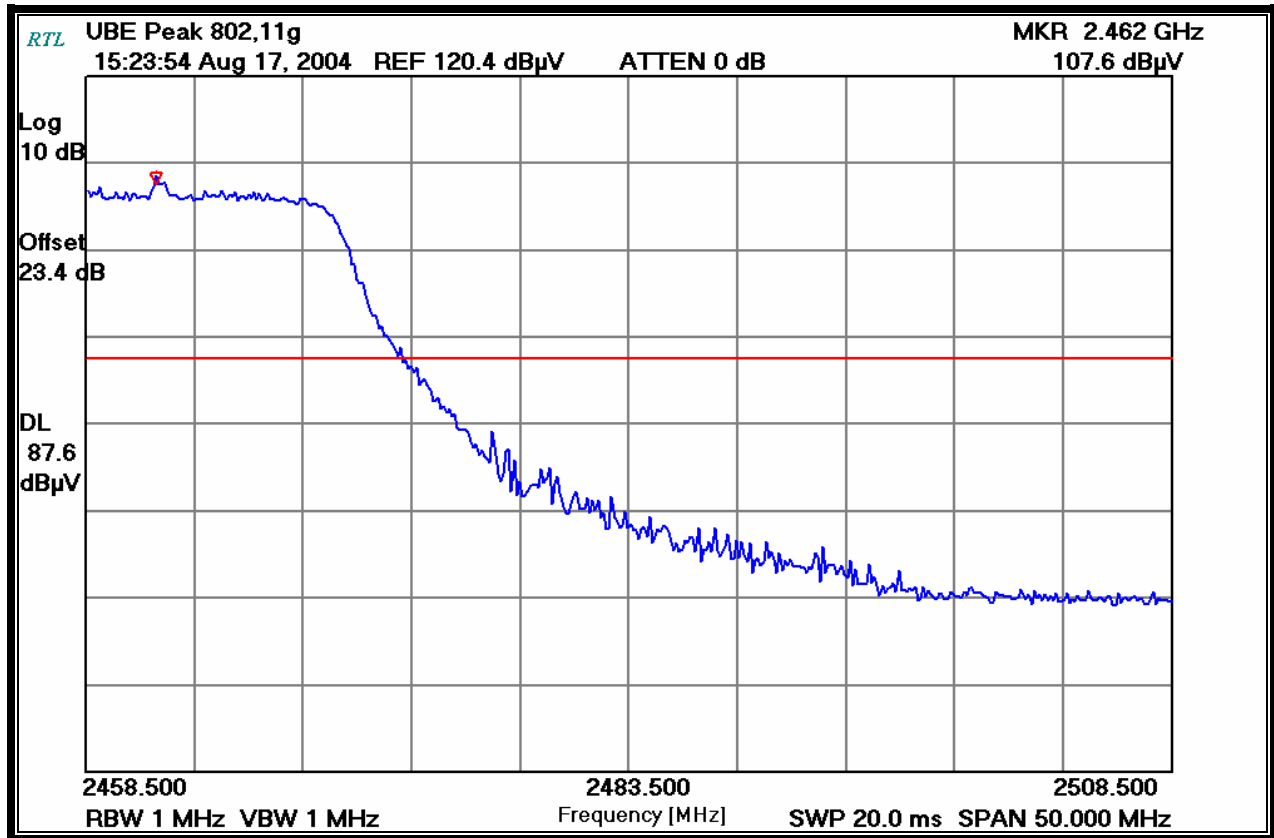

TEST PERSONNEL:

Daniel W. Baltzell
Test Engineer

Signature

August 17, 2004
Dates Of Test

8 RADIATED EMISSION; SPURIOUS AND HARMONICS – FCC §15.247(C)

8.1 RADIATED SPURIOUS EMISSION LIMITS TEST PROCEDURE

Radiated Spurious Emissions applies to harmonics and spurious emissions that fall in the restricted and non-restricted bands. The restricted bands are listed in Part 15.205. The maximum permitted average field strength for the restricted band is listed in Part 15.209. The EUT was tested in the 3 orthogonal planes.

8.2 RADIATED SPURIOUS TEST EQUIPMENT

TABLE 8-1: RADIATED SPURIOUS EMISSIONS TEST EQUIPMENT

RTL ASSET #	MANUFACTURER	MODEL	PART TYPE	SERIAL NUMBER	CALIBRATION DUE DATE
900772	EMCO	3161-02	Horn Antenna (2 - 4 GHz)	9804-1044	5/20/07
900323	EMCO	3160-7	Horn Antennas (8.2 - 12.4 GHz)	9605-1054	5/20/07
900356	EMCO	3160-08	Horn Antennas (12.4 – 18 GHz)	9607-1044	5/20/07
900321	EMCO	3161-03	Horn Antenna (4.0 - 8.2 GHz)	9508-1020	5/20/07
901053	Schaffner & Chase	CBL6112B	Bilog Antenna (20 MHz - 2 GHz)	2648	9/3/04
900932	Hewlett Packard	8449B	Microwave Preamplifier (1 - 26.5 GHz)	3008A00505	5/5/05
901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9 kHz - 40 GHz)	3943A01719	8/11/05
901232	IW Microwave Products	KPW-1503- 2400-KPS	High Frequency RF Cables	240"	9/5/04
901235	IW Microwave Products	KPS-1503-360- KPS	High Frequency RF Cables	36"	9/5/04

8.3 RADIATED EMISSIONS HARMONICS/SPURIOUS TEST DATA

802.11b AP Outdoor Antenna Port

Field Strength = $74.4 - 20 = 67.4$ limit for non-restricted band spurious emissions.

TABLE 8-2: RADIATED EMISSIONS HARMONICS/SPURIOUS (TX FREQUENCY: 2412 MHZ)

Emission Frequency (MHz)	Analyzer Reading (dBuV) Peak	Analyzer Reading (dBuV) Average	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4824.000	32.3	19.3	13.9	33.2	54.0	-20.8
7236.000	39.2	26.3	13.3	39.6	54.4	-14.8
9648.000	26.8	13.8	15.5	29.3	54.4	-25.1
12060.000	27.6	14.6	19.9	34.5	54.0	-19.5
14472.000	24.3	13.4	24.6	38.0	54.0	-16.0
16884.000	23.4	12.2	22.7	34.9	54.4	-19.5
19296.000	25.7	12.7	23.5	36.2	54.0	-17.8
21708.000	25.6	12.6	27.6	40.2	54.4	-14.2
24120.000	26.0	13.0	28.4	41.4	54.4	-13.0

PEAK: RES. =1 MHz, VID= 1MHz; AVERAGE: RES. =1 MHz, VID= 10Hz

802.11b AP Outdoor Antenna Port

Field Strength = $69.1 - 20 = 49.1$ limit for non-restricted band spurious emissions.

TABLE 8-3: RADIATED EMISSIONS HARMONICS/SPURIOUS (TX FREQUENCY: 2437 MHZ)

Emission Frequency (MHz)	Analyzer Reading (dBuV) Peak	Analyzer Reading (dBuV) Average	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4874.000	34.1	19.6	13.2	32.8	54.0	-21.2
7311.000	36.5	23.5	12.4	35.9	54.0	-18.1
9748.000	27.1	14.2	15.5	29.7	49.1	-19.4
12185.000	27.0	14.0	19.1	33.1	54.0	-20.9
14622.000	22.6	10.3	25.5	35.8	49.1	-13.3
17059.000	23.5	11.4	22.5	33.9	49.1	-15.2
19496.000	25.3	12.3	23.6	35.9	54.0	-18.1
21933.000	25.7	12.8	27.7	40.5	49.1	-8.6
24370.000	25.9	12.8	28.5	41.3	49.1	-7.8

PEAK: RES. =1 MHz, VID= 1MHz; AVERAGE: RES. =1 MHz, VID= 10Hz

802.11b AP Outdoor Antenna Port

Field Strength = $71.7 - 20 = 51.7$ limit for non-restricted band spurious emissions.

TABLE 8-4: RADIATED EMISSIONS HARMONICS/SPURIOUS (TX FREQUENCY: 2462 MHZ)

Emission Frequency (MHz)	Analyzer Reading (dBuV) Peak	Analyzer Reading (dBuV) Average	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4924.000	24.4	11.4	13.3	24.7	54.0	-29.3
7386.000	26.2	14.0	14.0	28.0	54.0	-26.0
9848.000	26.7	14.5	16.1	30.6	51.7	-21.2
12310.000	26.0	13.3	19.1	32.4	54.0	-21.6
14772.000	24.3	12.2	26.5	38.7	51.7	-13.0
17234.000	23.4	13.2	22.3	35.5	51.7	-16.2
19696.000	26.2	13.3	23.4	36.7	54.0	-17.3
22158.000	25.9	12.8	27.8	40.6	54.0	-13.4
24620.000	26.9	13.8	28.6	42.4	51.7	-9.3

PEAK: RES. =1 MHz, VID= 1MHz; AVERAGE: RES. =1 MHz, VID= 10Hz

802.11g Bridge Antenna Port

Field Strength = $75.2 - 20 = 55.2$ limit for non-restricted band spurious emissions.

TABLE 8-5: RADIATED EMISSIONS HARMONICS/SPURIOUS (TX FREQUENCY: 2412 MHZ)

Emission Frequency (MHz)	Analyzer Reading (dBuV) Peak	Analyzer Reading (dBuV) Average	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4824.000	24.0	11.0	13.9	24.9	54.0	-29.1
7236.000	24.8	11.8	13.3	25.1	55.2	-30.2
9648.000	26.4	13.4	15.5	28.9	55.2	-26.3
12060.000	27.0	14.0	19.9	33.9	54.0	-20.2
14472.000	20.5	7.5	24.6	32.1	54.0	-21.9
16884.000	20.5	8.2	22.7	30.9	55.2	-24.3
19296.000	26.8	13.8	23.5	37.3	54.0	-16.7
21708.000	25.9	12.9	27.6	40.5	55.2	-14.7
24120.000	25.8	12.8	28.4	41.2	55.2	-14.0

PEAK: RES. =1 MHz, VID= 1MHz; AVERAGE: RES. =1 MHz, VID= 10Hz

802.11g Bridge Antenna Port

Field Strength = $76.8 - 20 = 56.8$ limit for non-restricted band spurious emissions.

TABLE 8-6: RADIATED EMISSIONS HARMONICS/SPURIOUS (TX FREQUENCY: 2437 MHZ)

Emission Frequency (MHz)	Analyzer Reading (dBuV) Peak	Analyzer Reading (dBuV) Average	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4874.000	39.2	26.3	13.2	39.5	54.0	-14.5
7311.000	34.9	21.9	12.4	34.2	54.0	-19.8
9748.000	36.0	23.1	15.5	38.6	56.8	-18.2
12185.000	26.9	13.9	19.1	33.0	54.0	-21.0
14622.000	21.7	8.8	25.5	34.3	56.8	-22.5
17059.000	20.3	9.2	22.5	31.7	56.8	-25.1
19496.000	26.5	13.5	23.6	37.1	54.0	-16.9
21933.000	25.5	12.5	27.7	40.2	56.8	-16.6
24370.000	25.1	12.0	28.5	40.5	56.8	-16.3

PEAK: RES. =1 MHz, VID= 1MHz; AVERAGE: RES. =1 MHz, VID= 10Hz

802.11g Bridge Antenna Port

Field Strength = $75.8 - 20 = 55.8$ limit for non-restricted band spurious emissions.


TABLE 8-7: RADIATED EMISSIONS HARMONICS/SPURIOUS (TX FREQUENCY: 2462 MHZ)

Emission Frequency (MHz)	Analyzer Reading (dBuV) Peak	Analyzer Reading (dBuV) Average	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4924.000	35.3	22.3	13.3	35.6	54.0	-18.4
7386.000	37.3	24.3	14.0	38.3	54.0	-15.7
9848.000	36.8	23.8	16.1	39.9	55.8	-15.9
12310.000	27.0	14.0	19.1	33.1	54.0	-20.9
14772.000	21.6	8.6	26.5	35.1	55.8	-20.7
17234.000	19.3	6.3	22.3	28.6	55.8	-27.2
19696.000	25.2	12.2	23.4	35.6	54.0	-18.4
22158.000	25.8	12.8	27.8	40.6	54.0	-13.4
24620.000	25.8	12.8	28.6	41.4	55.8	-14.4

PEAK: RES. =1 MHz, VID= 1MHZ; AVERAGE: RES. =1 MHz, VID= 10HZ

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer



Signature

August 9, 2004
Date Of Test

9 MODULATED BANDWIDTH - §15.247(A)(2)

9.1 MODULATED BANDWIDTH TEST PROCEDURE – MINIMUM 6 DB BANDWIDTH

The minimum 6 dB bandwidths per FCC 15.247 (a)(2) were measured using a 50 ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at 1 MHz. The device was modulated using the maximum 11 Mbps data rate. The minimum 6 dB bandwidths are presented in Table 10-2.

TABLE 9-1: 6 DB BANDWIDTH TEST EQUIPMENT

RTL ASSET #	MANUFACTURER	MODEL	PART TYPE	SERIAL NUMBER	CALIBRATION DUE DATE
900931	Hewlett Packard	8566B	Spectrum Analyzer (100 Hz – 22 GHz)	3138A07771	6/23/05


TABLE 9-2: MODULATED BANDWIDTH TEST DATA 802.11 B OUTDOOR ANTENNA PORT

Minimum 6 dB bandwidths	
FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)
2412	18.92
2437	19.46
2462	18.66


TABLE 9-3: MODULATED BANDWIDTH TEST DATA 802.11G BRIDGE ANTENNA PORT

Minimum 6 dB bandwidths	
FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)
2412	16.48
2437	16.24
2462	16.52

TEST PERSONNEL:

Daniel W. Baltzell		August 6, 2004
EMC Test Engineer	Signature	Date Of Test

PLOT 9-1: 6 DB BANDWIDTH (TX FREQUENCY: 2412 MHZ) 802.11B ANTENNA PORT

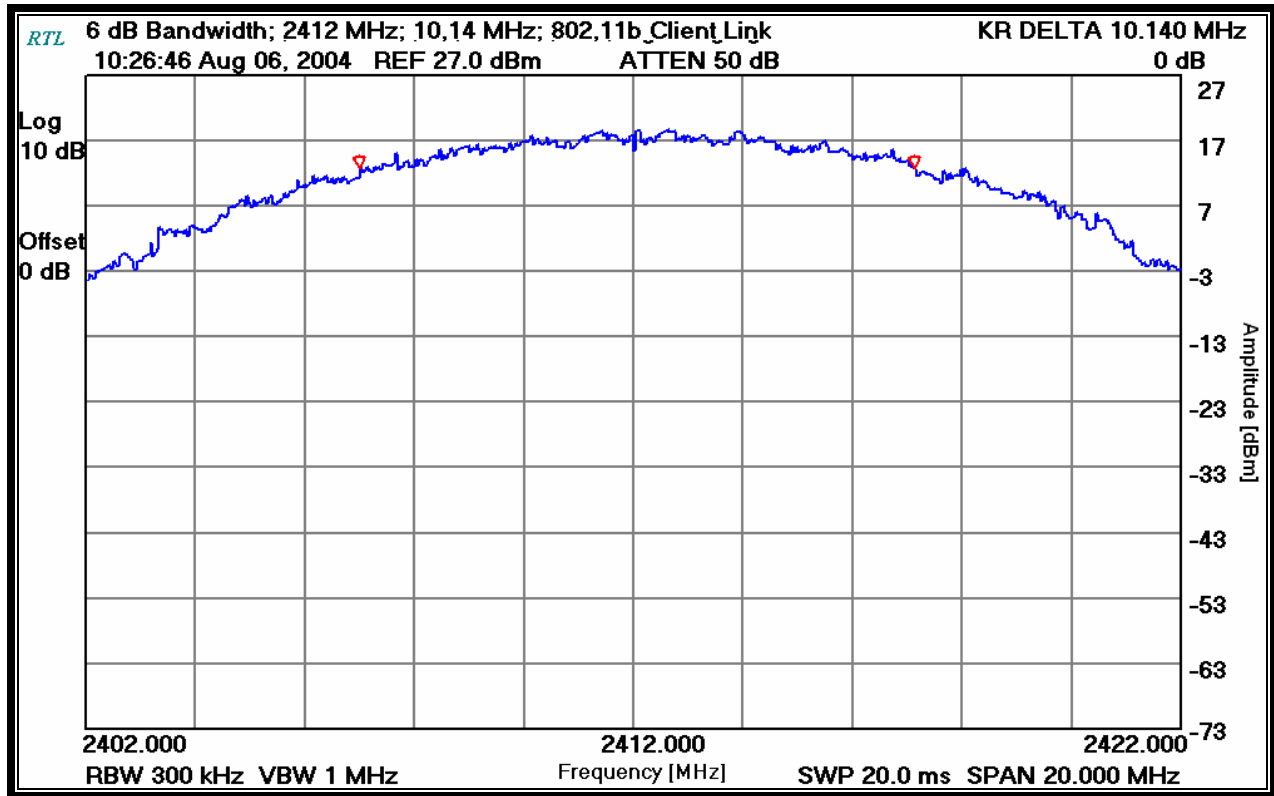


TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer

Signature

August 6, 2004
Date Of Test

PLOT 9-2: 6 DB BANDWIDTH (TX FREQUENCY: 2437 MHZ) 802.11B ANTENNA PORT

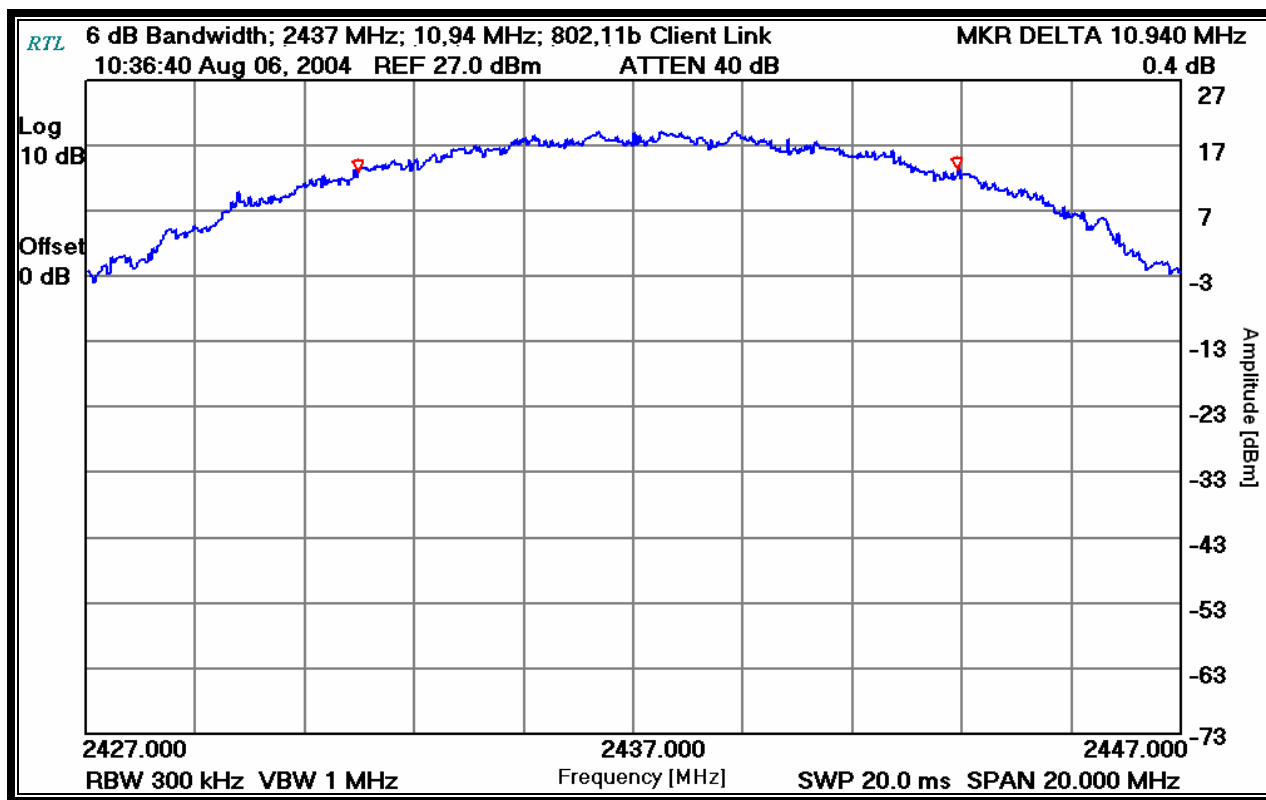


TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer

Signature

August 6, 2004
Date Of Test

PLOT 9-3: 6 DB BANDWIDTH (TX FREQUENCY: 2462 MHZ) 802.11B ANTENNA PORT

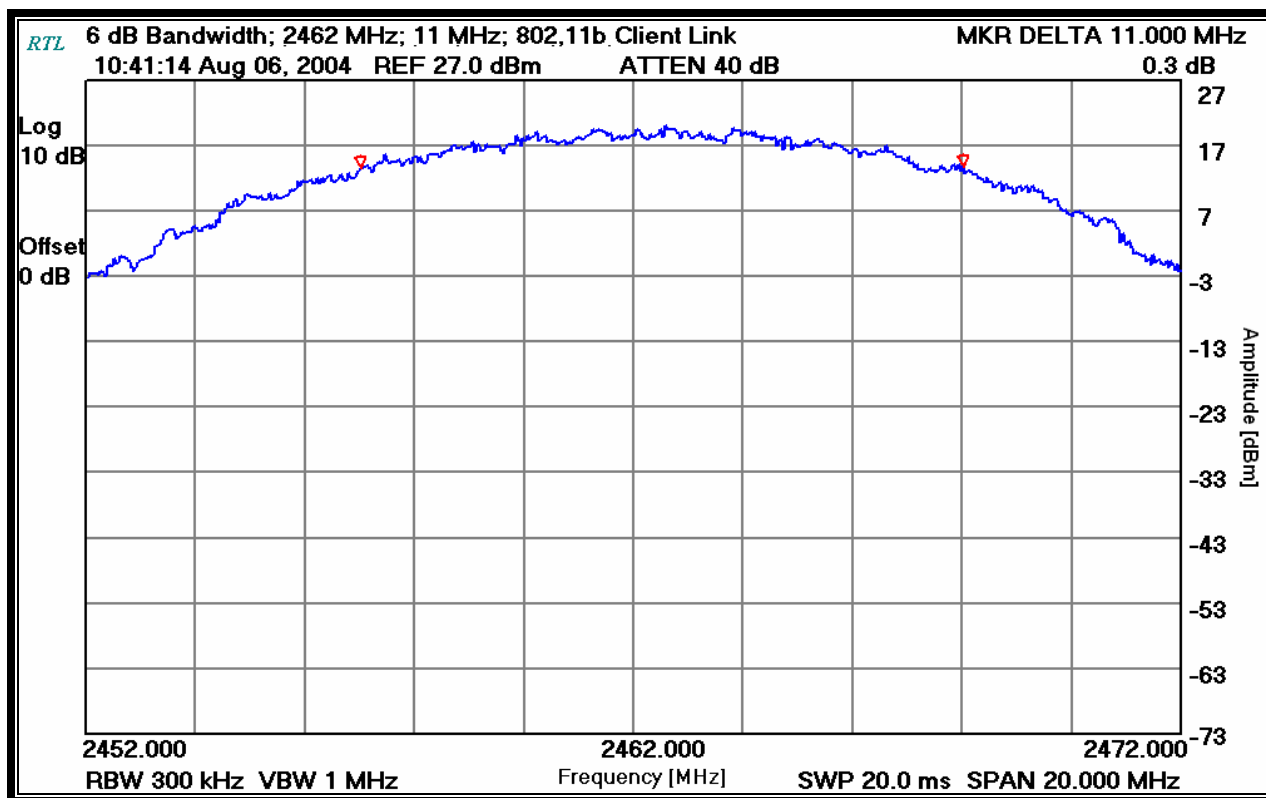

TEST PERSONNEL:


Daniel W. Baltzell
 EMC Test Engineer

Daniel W. Baltzell

Signature

August 6, 2004
 Date Of Test

PLOT 9-4: 6 DB BANDWIDTH (TX FREQUENCY: 2412 MHZ) 802.11G ANTENNA PORT

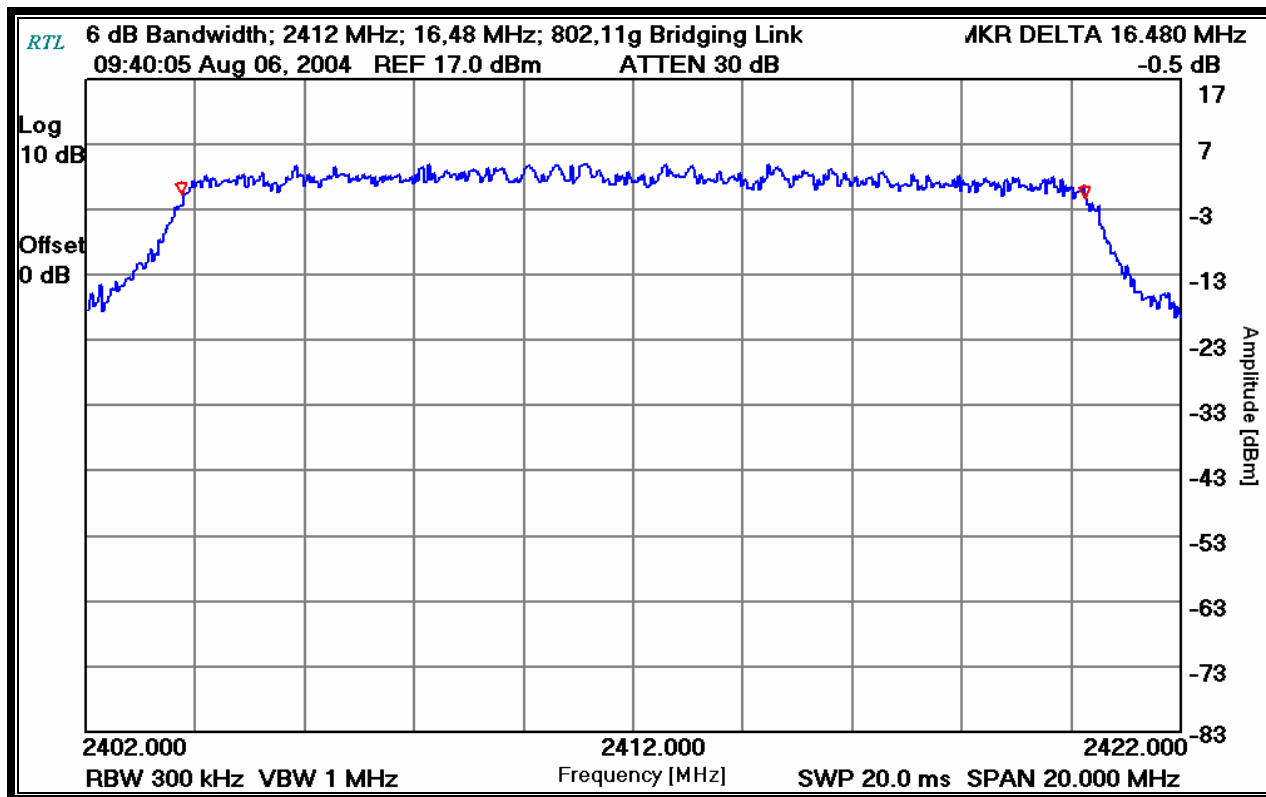


TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Daniel W. Baltzell
 Signature

August 6, 2004
 Date Of Test

PLOT 9-5: 6 DB BANDWIDTH (TX FREQUENCY: 2437 MHZ) 802.11G ANTENNA PORT

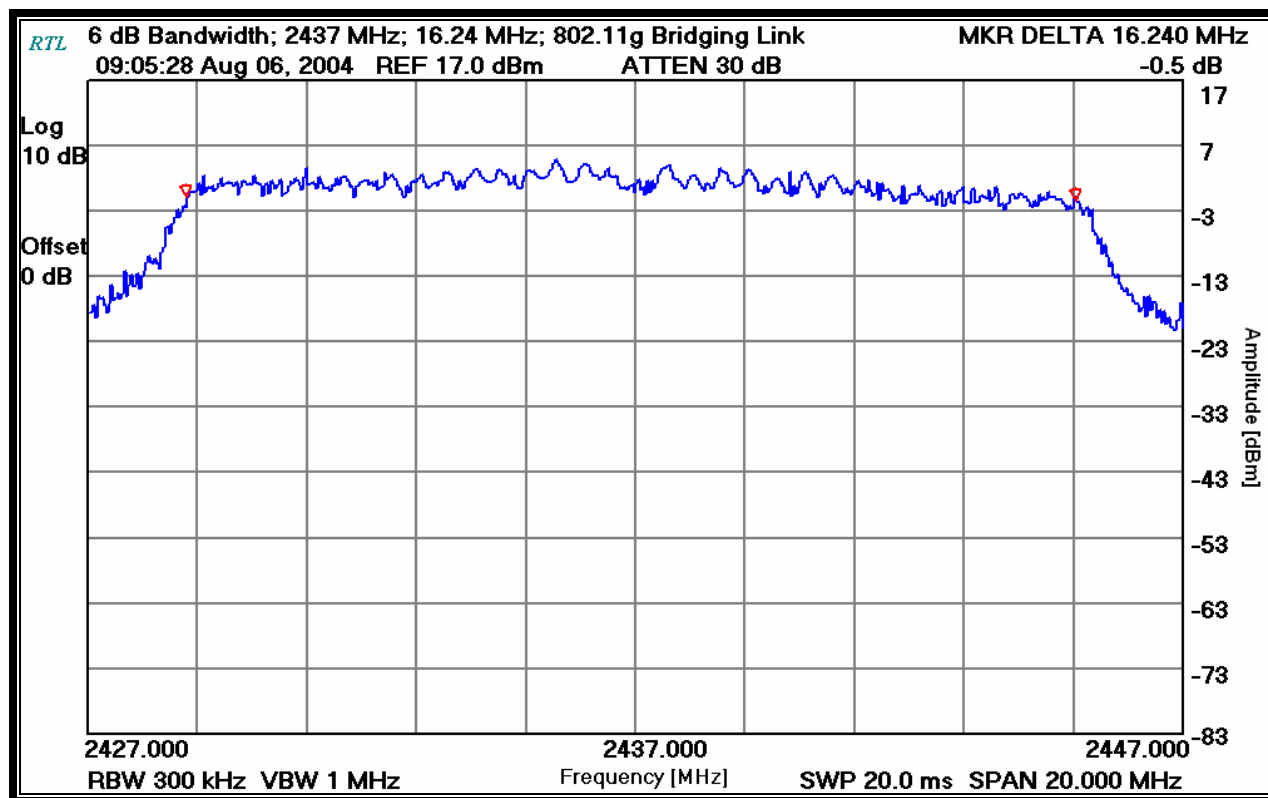


TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Signature

August 6, 2004
 Date Of Test

PLOT 9-6: 6 DB BANDWIDTH (TX FREQUENCY: 2462 MHZ) 802.11G ANTENNA PORT

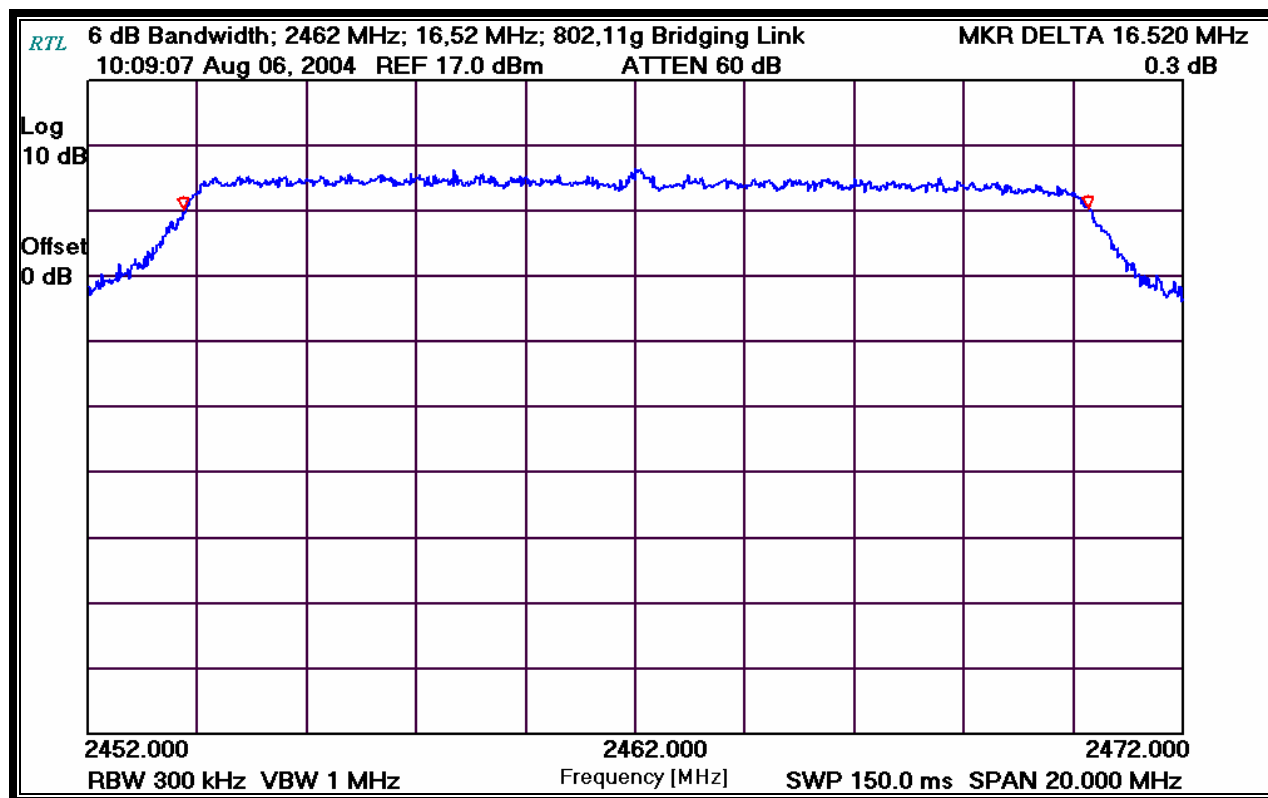

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer

Signature

August 6, 2004
Date Of Test

10 PEAK OUTPUT POWER - §15.247(B)(1)

10.1 POWER OUTPUT TEST PROCEDURE

A conducted power measurement of the EUT was measured using an Agilent 4416A EPM-P Series Power Meter with an E9323A Peak and Average Power Sensor.

10.2 POWER OUTPUT TEST EQUIPMENT

TABLE 10-1: POWER OUTPUT TEST EQUIPMENT

RTL ASSET #	MANUFACTURER	MODEL	PART TYPE	SERIAL NUMBER	CALIBRATION DUE DATE
901186	Agilent Technologies	E9323A	Peak & Avg. Power Sensor (50 MHz - 6 GHz)	US40410380	8/2/05
901184	Agilent Technologies	E4416A	EPM-P Power Meter, Single Channel	GB41050573	8/2/05
901140	Weinschel Corp.	47-10-34 DC-18GHz	Attenuator, 50W 10dB	BK6203	5/13/05

10.3 POWER OUTPUT TEST DATA

TABLE 10-2: POWER OUTPUT TEST DATA – 802.11B OUTDOOR ANTENNA PORT


FREQUENCY (MHZ)	CHANNEL	PEAK POWER CONDUCTED OUTPUT (dBm)
2412	1	24.4
2437	6	23.5
2462	11	22.1

TABLE 10-3: POWER OUTPUT TEST DATA - 802.11G BRIDGE ANTENNA PORT

FREQUENCY (MHZ)	CHANNEL	PEAK POWER CONDUCTED OUTPUT (dBm)
2412	1	18.1
2437	6	18.9
2462	11	18.1

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer



Signature

August 6, 2004
Date Of Test

11 ANTENNA CONDUCTED SPURIOUS EMISSIONS - §15.247(C)

11.1 ANTENNA CONDUCTED SPURIOUS EMISSIONS TEST PROCEDURES

Antenna spurious emission per FCC 15.247(c) was measured from the EUT antenna port using a 50 ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at 300 kHz. The modulated carrier was identified at the following frequencies: 2412 MHz, 2437 MHz and 2462 MHz. No other harmonics or spurs were found within 20 dB of the carrier level from 9 kHz to the carrier 10th harmonic. See the Antenna Conducted Spurious Noise Table. The low, middle, and high frequencies were investigated and tested.

11.2 ANTENNA CONDUCTED SPURIOUS TEST EQUIPMENT

TABLE 11-1: ANTENNA CONDUCTED SPURIOUS TEST EQUIPMENT

RTL ASSET #	MANUFACTURER	MODEL	PART TYPE	SERIAL NUMBER	CALIBRATION DUE DATE
900931	Hewlett Packard	8566B	Spectrum Analyzer (100 Hz – 22 GHz)	3138A07771	6/23/05
901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9 kHz - 40 GHz)	3943A01719	8/11/05

11.3 ANTENNA CONDUCTED SPURIOUS EMISSIONS (TX FREQUENCY: 2412 MHZ); 802.11B OUTDOOR ANTENNA PORT


Operating Frequency (MHz): 2412
Measured Level with 100 kHz RBW (dBm): 16.9
Limit (dBm): -3.1

TABLE 11-2: CONDUCTED SPURIOUS EMISSIONS (TX FREQUENCY: 2412 MHZ)

Frequency (MHz)	Measured Level (dBm)	Measured Level (dBc)	Limit (dBc)	Margin (dB)
4824.000	-25.1	42.0	20.0	-22.0
7236.000	-18.9	35.8	20.0	-15.8
9648.000	-43.9	60.8	20.0	-40.8
12060.000	-34.6	51.5	20.0	-31.5
14472.000	-41.4	58.3	20.0	-38.3
16884.000	-46.9	63.8	20.0	-43.8
19296.000	-68.4	85.3	20.0	-65.3
21708.000	-63.5	80.4	20.0	-60.4

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer



Signature

August 6, 2004
Date Of Test

11.4 ANTENNA CONDUCTED SPURIOUS EMISSIONS (TX FREQUENCY: 2437 MHZ); 802.11B OUTDOOR ANTENNA PORT


Operating Frequency (MHz): 2437
 Measured Level at 100 kHz RBW(dBm): 15.7
 Limit (dBm): -4.3

TABLE 11-3: CONDUCTED SPURIOUS EMISSIONS (TX FREQUENCY: 2437 MHZ)

Frequency (MHz)	Measured Level (dBm)	Measured Level (dBc)	Limit (dBc)	Margin (dB)
4874.000	-24.5	40.2	20.0	-20.2
7311.000	-15.1	30.8	20.0	-10.8
9748.000	-40.4	56.1	20.0	-36.1
12185.222	-29.2	44.9	20.0	-24.9
14622.222	-43.0	58.7	20.0	-38.7
17059.222	-48.7	64.4	20.0	-44.4
19496.222	-57.6	73.3	20.0	-53.3
21933.222	-54.3	70.0	20.0	-50.0

TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer



Signature

August 6, 2004
 Date Of Test

11.5 ANTENNA CONDUCTED SPURIOUS EMISSIONS (TX FREQUENCY: 2462 MHZ); 802.11B OUTDOOR ANTENNA PORT


Operating Frequency (MHz): 2462
Measured Level at 100 kHz RBW (dBm): 17.8
Limit (dBm): -2.2

TABLE 11-4: CONDUCTED SPURIOUS EMISSIONS (TX FREQUENCY: 927.7695 MHZ)

Frequency (MHz)	Measured Level (dBm)	Measured Level (dBc)	Limit (dBc)	Margin (dB)
4924.000	-23.3	41.1	20.0	-21.1
7386.000	-14.1	31.9	20.0	-11.9
9848.000	-35.4	53.2	20.0	-33.2
12310.000	-31.2	49.0	20.0	-29.0
14772.000	-38.6	56.4	20.0	-36.4
17234.000	-48.3	66.1	20.0	-46.1
19696.000	-67.8	85.6	20.0	-65.6
22158.000	-52.0	69.8	20.0	-49.8

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer



Signature

August 6, 2004
Date Of Test

11.6 ANTENNA CONDUCTED SPURIOUS EMISSIONS (TX FREQUENCY: 2412 MHZ); 802.11G BRIDGE ANTENNA PORT


Operating Frequency (MHz): 2412
Measured Level with 100 kHz RBW (dBm): 1.0
Limit (dBm): -19.0

TABLE 11-5: CONDUCTED SPURIOUS EMISSIONS (TX FREQUENCY: 2412 MHZ)

Frequency (MHz)	Measured Level (dBm)	Measured Level (dBc)	Limit (dBc)	Margin (dB)
4824.000	-68.2	-53.1	54.1	20.0
7236.000	-65.9	-58.3	59.3	20.0
9648.000	-70.2	-51.9	52.9	20.0
12060.000	-78.2	-76.3	77.3	20.0
14472.000	-78.4	-72.3	73.3	20.0
16884.000	-75.8	-73.0	74.0	20.0
19296.000	-76.1	-68.4	69.4	20.0
21708.000	-68.6	-65.7	66.7	20.0

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer



Signature

August 6, 2004
Date Of Test

11.7 ANTENNA CONDUCTED SPURIOUS EMISSIONS (TX FREQUENCY: 2437 MHZ); 802.11G BRIDGE ANTENNA PORT


Operating Frequency (MHz): 2437
Measured Level at 100 kHz RBW(dBm): 0.8
Limit (dBm): -19.2

TABLE 11-6: CONDUCTED SPURIOUS EMISSIONS (TX FREQUENCY: 2437 MHZ)

Frequency (MHz)	Measured Level (dBm)	Measured Level (dBc)	Limit (dBc)	Margin (dB)
4874.000	-62.8	-62.8	63.6	20.0
7311.000	-75.5	-75.5	76.3	20.0
9748.000	-70.1	-70.1	70.9	20.0
12185.000	-77.3	-77.3	78.1	20.0
14622.000	-72.3	-72.3	73.1	20.0
17059.000	-74.8	-74.8	75.6	20.0
19496.000	-67.5	-67.5	68.3	20.0
21933.000	-67.2	-67.2	68.0	20.0

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer



Signature

August 6, 2004
Date Of Test

11.8 ANTENNA CONDUCTED SPURIOUS EMISSIONS (TX FREQUENCY: 2462 MHZ); 802.11G BRIDGE ANTENNA PORT


Operating Frequency (MHz): 2462
 Measured Level at 100 kHz RBW (dBm): -0.7
 Limit (dBm): -20.7

TABLE 11-7: CONDUCTED SPURIOUS EMISSIONS (TX FREQUENCY: 927.7695 MHZ)

Frequency (MHz)	Measured Level (dBm)	Measured Level (dBc)	Limit (dBc)	Margin (dB)
2359.999	-47.5	46.8	20.0	-26.8
2688.010	-45.0	44.3	20.0	-24.3
4924.000	-70.5	69.8	20.0	-49.8
7386.000	-61.5	60.8	20.0	-40.8
9848.000	-69.5	68.8	20.0	-48.8
12310.000	-78.9	78.2	20.0	-58.2
14772.000	-71.4	70.7	20.0	-50.7
17234.000	-73.9	73.2	20.0	-53.2
19696.000	-68.3	67.6	20.0	-47.6
22158.000	-67.1	66.4	20.0	-46.4

TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer



Signature

August 6, 2004
 Date Of Test

12 POWER SPECTRAL DENSITY - §15.247(D)

12.1 POWER SPECTRAL DENSITY TEST PROCEDURE

The power spectral density per FCC 15.247(d) was measured using a 50 ohm spectrum analyzer with the resolution bandwidth set at 3 kHz, the video bandwidth set at 10 kHz, and the sweep time set at 1000 seconds. The spectral lines were resolved for the modulated carriers at 2.412GHz, 2.437GHz, and 2.462GHz respectively. These levels are below the +8 dBm limit. See power spectral density table and plots.

12.2 POWER SPECTRAL DENSITY TEST EQUIPMENT

TABLE 12-1: POWER SPECTRAL DENSITY TEST EQUIPMENT

RTL ASSET #	MANUFACTURER	MODEL	PART TYPE	SERIAL NUMBER	CALIBRATION DUE DATE
900931	Hewlett Packard	8566B	Spectrum Analyzer (100Hz – 22 GHz)	3138A07771	6/23/05

12.3 POWER SPECTRAL DENSITY TEST DATA

TABLE 12-2: POWER SPECTRAL DENSITY TEST DATA 802.11B OUTDOOR ANTENNA PORT


CHANNEL	FREQUENCY (MHZ)	POWER SPECTRAL DENSITY LIMIT = +8dBm
1	2412	-0.7
6	2437	-0.3
11	2462	-1.2

TABLE 12-3: POWER SPECTRAL DENSITY TEST DATA 802.11G BRIDGE ANTENNA PORT

CHANNEL	FREQUENCY (MHZ)	POWER SPECTRAL DENSITY LIMIT = +8dBm
1	2412	-12.2
6	2437	-8.8
11	2462	-11.0

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer




Signature

August 5-6, 2004
Date Of Test

12.4 POWER SPECTRAL DENSITY PLOTS 802.11B OUTDOOR ANTENNA PORT

PLOT 12-1: POWER SPECTRAL DENSITY: CHANNEL 1

Operating Frequency (MHz): 2412
Channel: 1
Measured Cond. Pwr. (dBm): 26.9
Bandwidth Resolution (kHz): 3
Bandwidth Video (kHz): 30
Sweep Time (sec.): 500

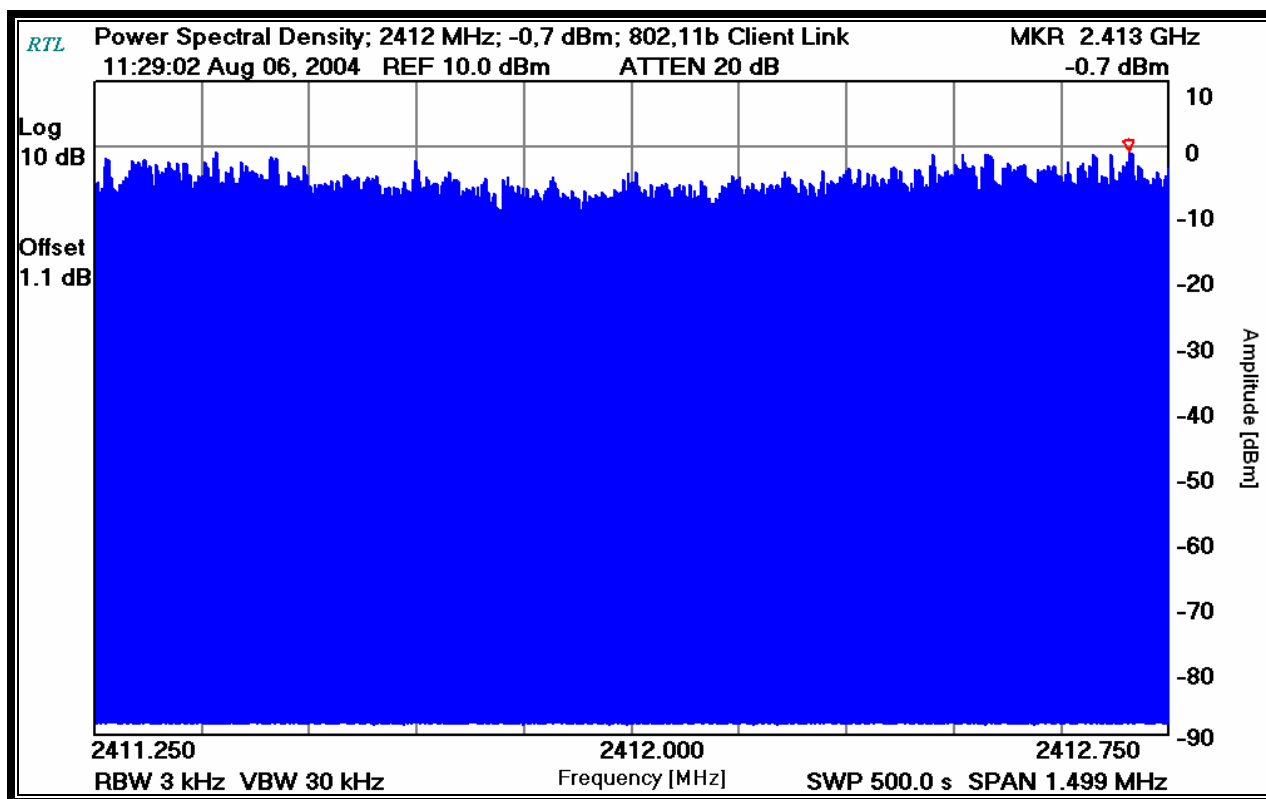

TEST PERSONNEL:


Daniel W. Baltzell
EMC Test Engineer

Signature

August 6, 2004
Date Of Test

PLOT 12-2: POWER SPECTRAL DENSITY: CHANNEL 6

Operating Frequency (MHz): 2437
Channel: 6
Measured Cond. Pwr. (dBm): 26.8
Bandwidth Resolution (kHz): 3
Bandwidth Video (kHz): 30
Sweep Time (sec.): 500.0

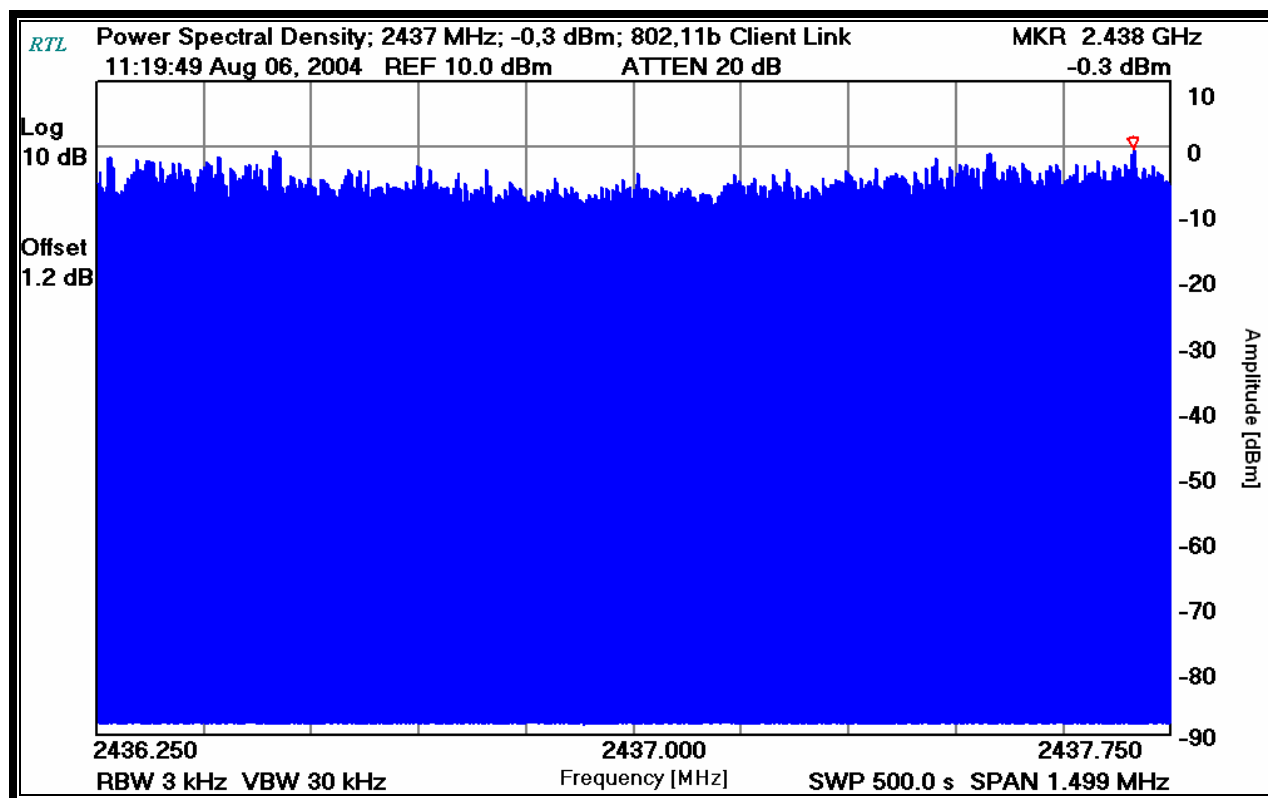

TEST PERSONNEL:


Daniel W. Baltzell
EMC Test Engineer

Signature

August 6, 2004
Date Of Test

PLOT 12-3: POWER SPECTRAL DENSITY: CHANNEL 11

Operating Frequency (MHz): 2462
Channel: 11
Measured Cond. Pwr. (dBm): 26.7
Bandwidth Resolution (kHz): 3
Bandwidth Video (kHz): 30
Sweep Time (sec.): 500.0

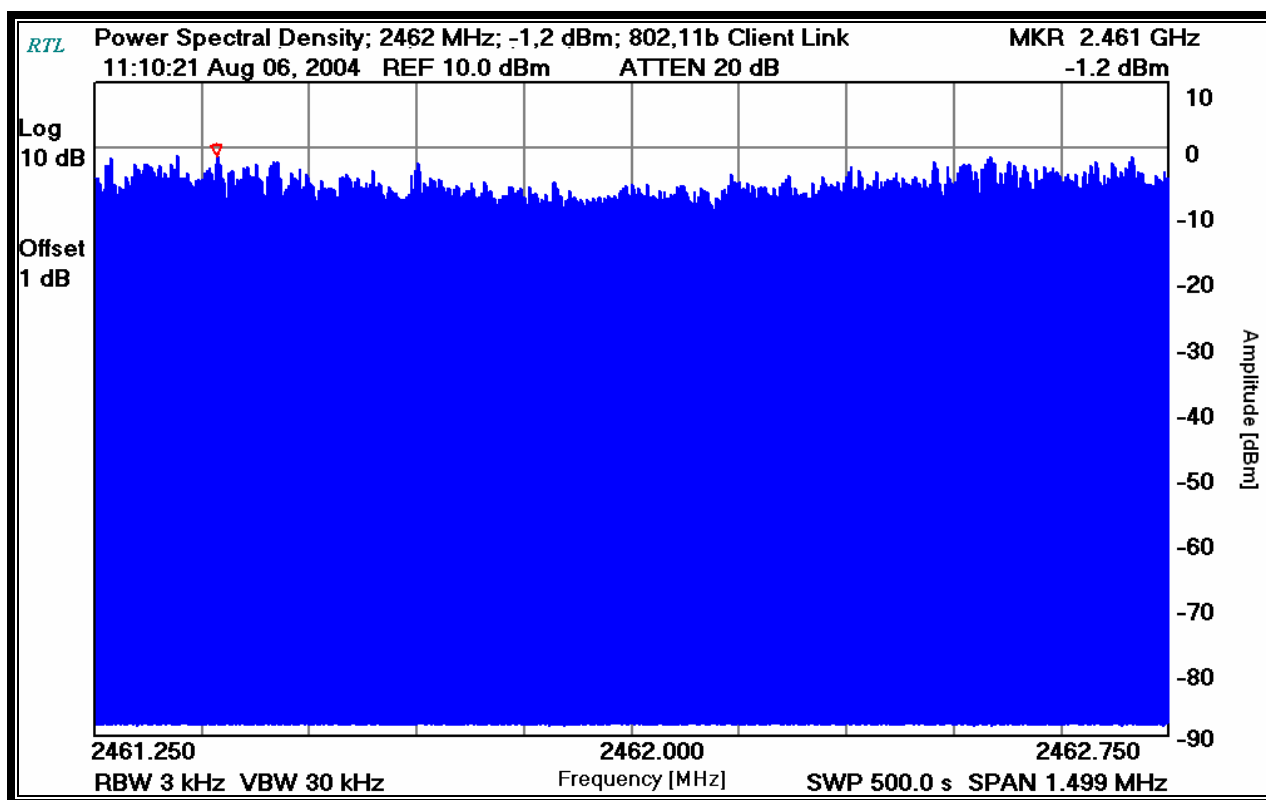

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer


Signature

August 6, 2004
Date Of Test

12.5 POWER SPECTRAL DENSITY PLOTS 802.11G BRIDGE ANTENNA PORT

PLOT 12-4: POWER SPECTRAL DENSITY: CHANNEL 1

Operating Frequency (MHz): 2412
Channel: 1
Measured Cond. Pwr. (dBm): 16.9
Bandwidth Resolution (kHz): 3
Bandwidth Video (kHz): 30
Sweep Time (sec.): 500

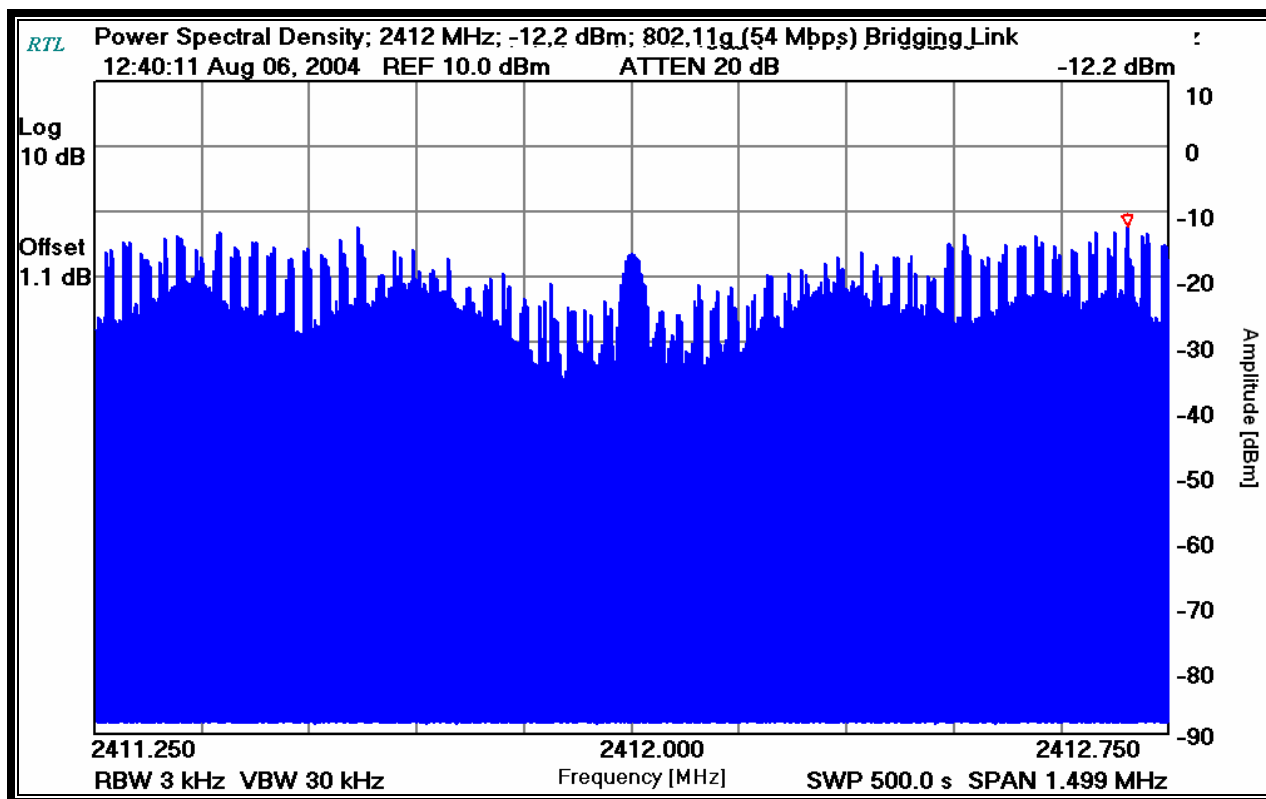

TEST PERSONNEL:


Daniel W. Baltzell
EMC Test Engineer

Signature

August 6, 2004
Date Of Test

PLOT 12-5: POWER SPECTRAL DENSITY: CHANNEL 6

Operating Frequency (MHz): 2437
Channel: 6
Measured Cond. Pwr. (dBm): 16.5
Bandwidth Resolution (kHz): 3
Bandwidth Video (kHz): 30
Sweep Time (sec.): 500.0

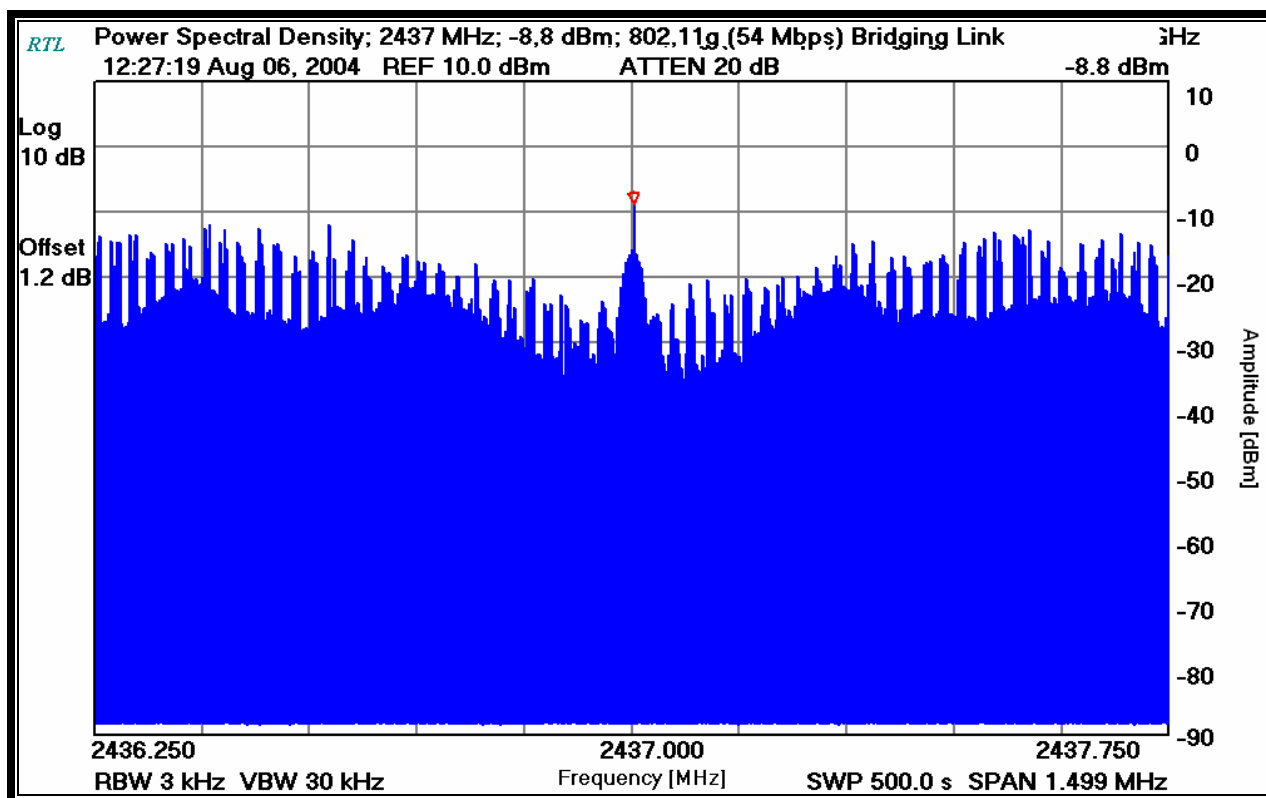

TEST PERSONNEL:


Daniel W. Baltzell
EMC Test Engineer

Signature

August 6, 2004
Date Of Test

PLOT 12-6: POWER SPECTRAL DENSITY: CHANNEL 11

Operating Frequency (MHz): 2462
Channel: 11
Measured Cond. Pwr. (dBm): 15.8
Bandwidth Resolution (kHz): 3
Bandwidth Video (kHz): 30
Sweep Time (sec.): 500.0

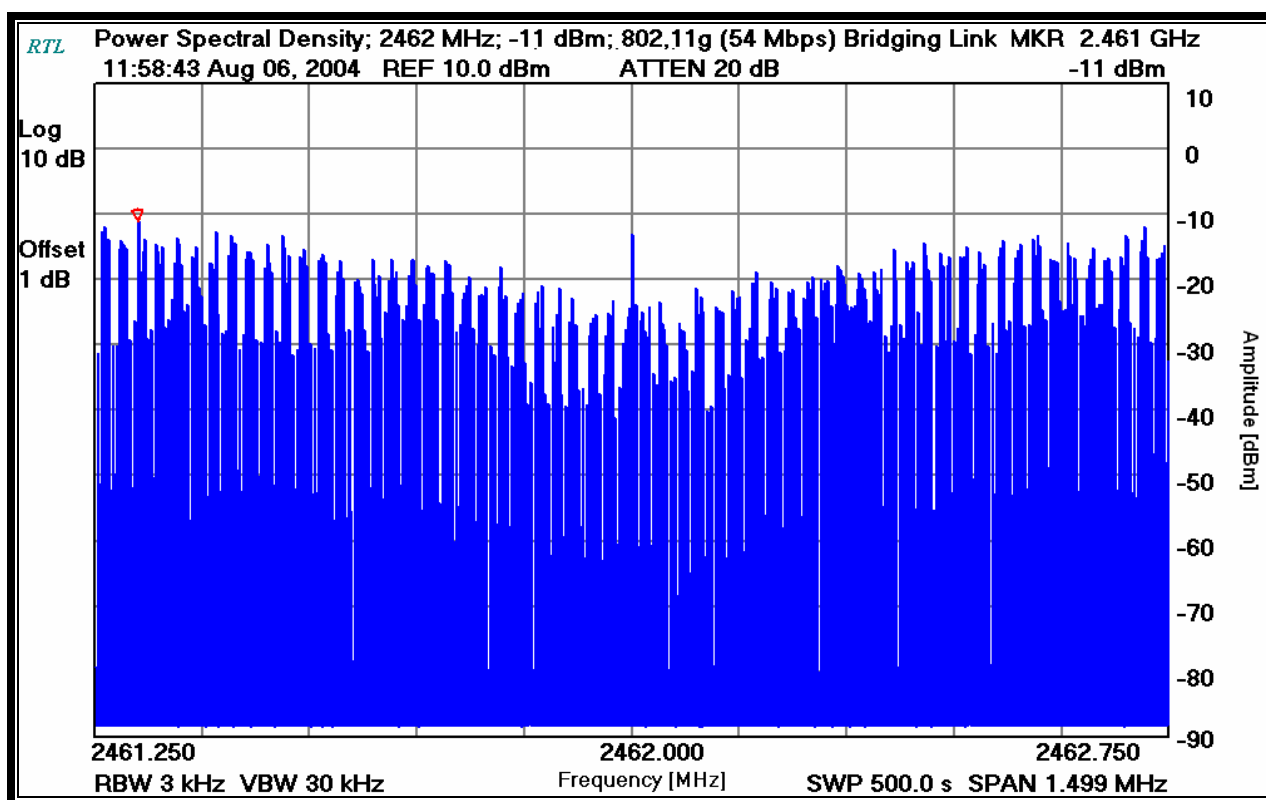

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer

Signature

August 6, 2004
Date Of Test

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: 3e Technologies International Inc.
Model: 3e-525A
Standards FCC 15.247
FCC ID: QVT-525A
Report #: 2004121

13 CONCLUSION

The data in this measurement report shows that the EUT as tested, Model: 3e-525A, FCC ID: QVT-525A, complies with all the applicable requirements of Parts 2 and 15 of the FCC Rules and Regulations.