

# FCC Test Report

## Report No.: AGC16253250101FR01

FCC ID	:	2AOVU-SEI900
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Stick 4K
BRAND NAME	:	N/A
MODEL NAME	:	SEI900
APPLICANT	:	Shenzhen SEI Robotics Co., Ltd.
DATE OF ISSUE	:	Feb. 07, 2025
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
<b>REPORT VERSION</b>	:	V1.0







## **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Feb. 07, 2025	Valid	Initial Release



## **Table of Contents**

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Test Frequency List	6
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	7
2.5 Special Accessories	7
2.6 Equipment Modifications	7
2.7 Antenna Requirement	7
3. Test Environment	
3.1 Address of the Test Laboratory	
3.2 Test Facility	
3.3 Environmental Conditions	9
3.4 Measurement Uncertainty	9
3.5 List of Equipment Use	
4.System Test Configuration	
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of Tested System	
4.4 Equipment Used In Tested System	
4.5 Summary of Test Results	
5. Description of Test Modes	14
6. Duty Cycle Measurement	
7. RF Output Power Measurement	
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Result	
8. 6dB Bandwidth Measurement	
8.1 Provisions Applicable	21
8.2 Measurement Procedure	21
8.3 Measurement Setup (Block Diagram of Configuration)	21
8.4 Measurement Results	
9. Power Spectral Density Measurement	
9.1 Provisions Applicable	
9.2 Measurement Procedure	
9.3 Measurement Setup (Block Diagram of Configuration)	
9.4 Measurement Results	
10. Conducted Band Edge and Out-of-Band Emissions	
10.1 Provisions Applicable	



10.2 Measurement Procedure	
10.3 Measurement Setup (Block Diagram of Configuration)	
10.4 Measurement Results	
11. Radiated Spurious Emission	
11.1 Measurement Limit	
11.2 Measurement Procedure	
11.3 Measurement Setup (Block Diagram of Configuration)	
11.4 Measurement Result	
12. AC Power Line Conducted Emission Test	63
12.1 Measurement Limit	63
12.2 Measurement Setup (Block Diagram of Configuration)	63
12.3 Preliminary Procedure of Line Conducted Emission Test	64
12.4 Final Procedure of Line Conducted Emission Test	
12.5 Measurement Results	64
Appendix I: Photographs of Test Setup	
Appendix II: Photographs of Test EUT	



## **1. General Information**

Applicant	Shenzhen SEI Robotics Co., Ltd.					
Address	11F, Kangtai Innovation Plaza Building A, No. 222 Kefa Road, Yue Hai Sub-district, Nanshan District, Shenzhen 518054, China					
Manufacturer	Shenzhen SEI Robotics Co., Ltd.					
Address	11F, Kangtai Innovation Plaza Building A, No. 222 Kefa Road, Yue Hai Sub-district, Nanshan District, Shenzhen 518054, China					
Factory	SHENZHEN JIADUN GAOSHI NETWORK TECHNOLOGY CO., LTD					
Address	3rd Floor, Building B, No.66 Xinhe Avenue, Buchong Community, Shajing Street, Baoan District, Shenzhen					
Product Designation	Stick 4K					
Brand Name	N/A					
Test Model	SEI900					
Series Model(s)	N/A					
Difference Description	N/A					
Date of receipt of test item	Jan. 02, 2025					
Date of Test	Jan. 02, 2025 to Jan. 24, 2025					
Deviation from Standard	No any deviation from the test method					
Condition of Test Sample	Normal					
Test Result	Pass					
Test Report Form No	AGCER-FCC-BLE-V1					

Note: The test results of this report relate only to the tested sample identified in this report.

AS li Prepared By Cici Li Feb. 07, 2025 (Project Engineer) aprin. **Reviewed By** Calvin Liu Feb. 07, 2025 (Reviewer) Approved By Angela Li Feb. 07, 2025 Authorized Officer



## 2. Product Information

#### 2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2402MHz-2480MHz
Bluetooth Version	V5.2
Modulation Type	BLE GFSK 1Mbps GFSK 2Mbps
Number of channels	40
Carrier Frequency of Each Channel	40 Channels (37 Data channels + 3 advertising channels)
Channel Separation	2 MHz
Maximum Transmitter Power	Bluetooth LE (1Mbps): 6.318dBm Bluetooth LE (2Mbps): 6.705dBm
Hardware Version	Amlogic S905Y5-B
Software Version	v14.9.2012
Antenna Designation	PCB Antenna
Antenna Gain	3.32dBi
Power Supply	DC 5V

## 2.2 Test Frequency List

Frequency Band	Channel Number	Test Frequency			
	0	2402 MHz			
	1	2404 MHz			
2400~2483.5MHz	:	:			
	19	2440MHz			
	:	:			
	38	2478 MHz			
	39	2480 MHz			
Note: f = 2402 + 2*k MHz, k = 0,, 39 f is the operating frequency (MHz); k is the operating channel.					



## 2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: 2AOVU-SEI900, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

#### 2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

#### 2.5 Special Accessories

Not available for this EUT intended for grant.

#### **2.6 Equipment Modifications**

Not available for this EUT intended for grant.

#### 2.7 Antenna Requirement

Standard Requirement

#### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

#### EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 3.32dBi.



## 3. Test Environment

#### 3.1 Address of the Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

#### 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

#### A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

#### IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



#### **3.3 Environmental Conditions**

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 5V

#### 3.4 Measurement Uncertainty

The reported uncertainty of measurement y  $\pm U$ , where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty		
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$		
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$		
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$		
Uncertainty of total RF Power, Conducted	$U_c = \pm 0.8 \text{ dB}$		
Uncertainty of RF Power Density, Conducted	$U_c = \pm 2.6 \text{ dB}$		
Uncertainty of Spurious Emissions, Conducted	$U_c = \pm 2 \%$		
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$		
Uncertainty of Dwell Time	U <sub>c</sub> = ±2 %		



#### 3.5 List of Equipment Use

• R	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
$\boxtimes$	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23	
$\boxtimes$	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31	
$\boxtimes$	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31	
	AGC-ER-A001	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-09-21	2025-09-20	
$\square$	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22	
$\boxtimes$	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A	
$\boxtimes$	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A	
Radiated Spurious Emission								
llsed	Equipment No	Test Equipment	Manufacturer	Model No	Serial No	Last Cal. Date	Next Cal. Date	

Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31
$\boxtimes$	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23
$\boxtimes$	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27
$\boxtimes$	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04
$\boxtimes$	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10
$\boxtimes$	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30
$\boxtimes$	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23
$\boxtimes$	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23
$\boxtimes$	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22
$\boxtimes$	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08

• A	AC Power Line Conducted Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
$\boxtimes$	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27	
$\boxtimes$	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08	
$\square$	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27	



Test Software						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information	
$\boxtimes$	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71	
$\boxtimes$	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A	
	AGC-EM-S004	RE Test System	Tonscend	TS+Ver2.1(JS32-RE)	4.0.0.0	
	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6	
$\boxtimes$	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0	



## **4.System Test Configuration**

#### 4.1 EUT Configuration


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

#### 4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:

EUT	AE

#### 4.4 Equipment Used In Tested System

The following peripheral devices and interface cables were connected during the measurement:

#### Test Accessories Come From The Laboratory

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1					

Test Accessories Come From The Manufacturer

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1					



#### 4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(3)	RF Output Power	Pass
3	§15.247 (a)(2)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density	Pass
5	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
6	§15.209	Radiated Emission& Band Edge	Pass
7	§15.207	AC Power Line Conducted Emission	Pass



## 5. Description of Test Modes

Summary Table of Test Cases				
Test Item	Data Rate / Modulation			
Test tient	Bluetooth–LE(1Mbps/2Mbps)/GFSK			
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps(Powered by AC/DC adapter)			
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps(Powered by AC/DC adapter)			
Radiated & Conducted	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps(Powered by AC/DC adapter)			
Test Cases	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps(Powered by AC/DC adapter)			
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps(Powered by AC/DC adapter)			
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps(Powered by AC/DC adapter)			
AC Conducted Emission	Mode 1: Bluetooth Link + USB Cable (Powered by AC/DC adapter)			

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

	Software Setting Diagram	
om 管理员: C:\Windows\System32\cmd.exe - adb shell		- 🗆 X
> bt_mp_Exebt_mp_SetParam, 18, 0x00 c 40 bt_mp_SetParam 1, 0; 3, 0; 15, 0xff; 16, 1		
bt_mp_Exec 22 bt_mp_Exec[Success:0] > bt_mp_Exec, 40, 0x00 bt_mp_SetParam[Success:0]		
> bt_mp_SetParam, 16, 0x00 bt_mp_Exec[Success:0] > bt_mp_Exec, 22, 0x00		
> bt_mp_Exec 24 bt_mp_Exec[Success:0] > bt_mp_Exec, 24,0x00		
> bt_mp_SetParam 18,1 bt_mp_SetParam[Success:0] > bt_mp_SetParam,18,0x00 bt mp_Exec 40		
bt_mp_SetParam 1, 19;3,0;15,0xff;16,1 bt_mp_Exec 22		
bt_mp_Exec[Success:0] > bt_mp_Exec(40,0x00 bt_mp_SetParam[Success:0] > bt_mp_SetParam, 16,0x00		
bt_mp_Exec[Success:0] > > bt_mp_Exec,22,0x00 >		




## 6. Duty Cycle Measurement

The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	T(µs)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)
BLE_1Mbps	2139	85.46	0.68	0.47
BLE_2Mbps	1079.4	57.59	2.40	0.93

Remark:

- 1. Duty Cycle factor = 10 \* log (1/ Duty cycle)
- 2. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value
- The test plots as follows:

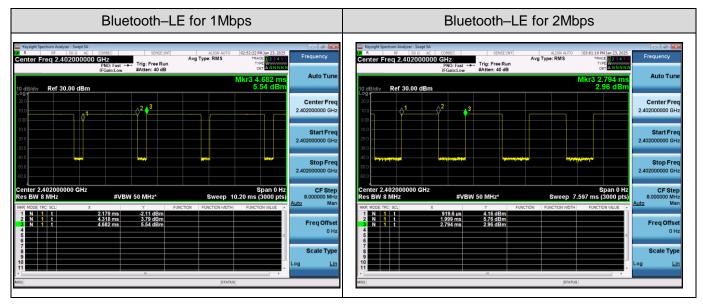



## 7. RF Output Power Measurement

#### 7.1 Provisions Applicable

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.


#### 7.2 Measurement Procedure

For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.1 Method Max peak power:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the RBW≥DTS bandwidth
- 3. Set the VBW≥[3 × RBW].
- 4. Span≥[3 × RBW].
- 5. Sweep= auto couple.
- 6. Detector Function= Peak.
- 7. Trace mode= Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- For Average power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G:
- 1. The RF output of EUT was connected to the power meter by RF cable and attenuator.
- 2. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Measure the conducted output power and record the results in the test report.


#### 7.3 Measurement Setup (Block Diagram of Configuration)

For Average power test setup

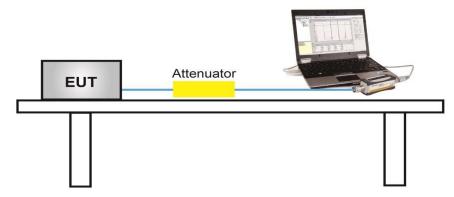




#### For peak power test setup

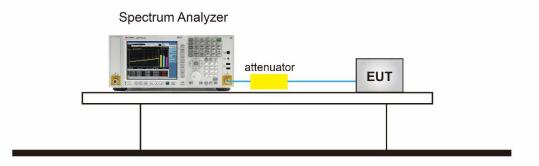

#### 7.4 Measurement Result


Test Data of Conducted Output Power						
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2402	6.318	≪30	Pass		
GFSK_1Mbps	2440	5.694	≪30	Pass		
	2480	5.854	≪30	Pass		
	2402	6.705	≪30	Pass		
GFSK_2Mbps	2440	5.683	≪30	Pass		
	2480	5.917	≪30	Pass		



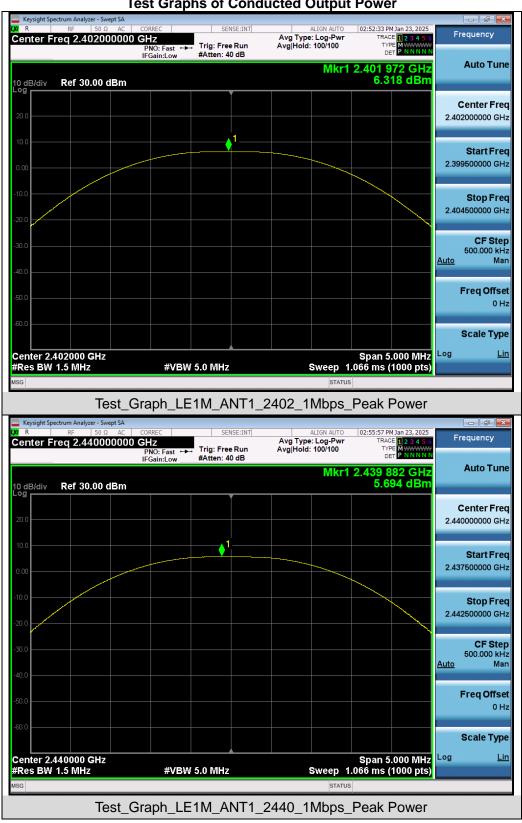


#### **Test Graphs of Conducted Output Power**



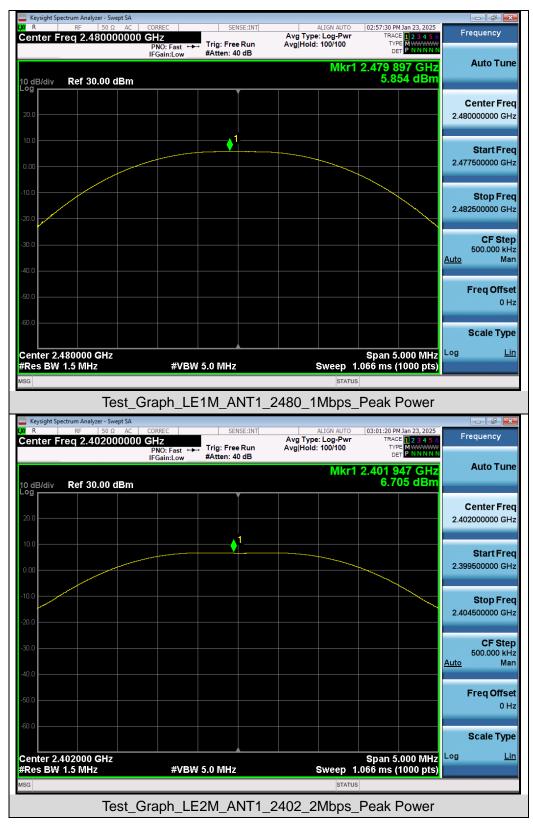



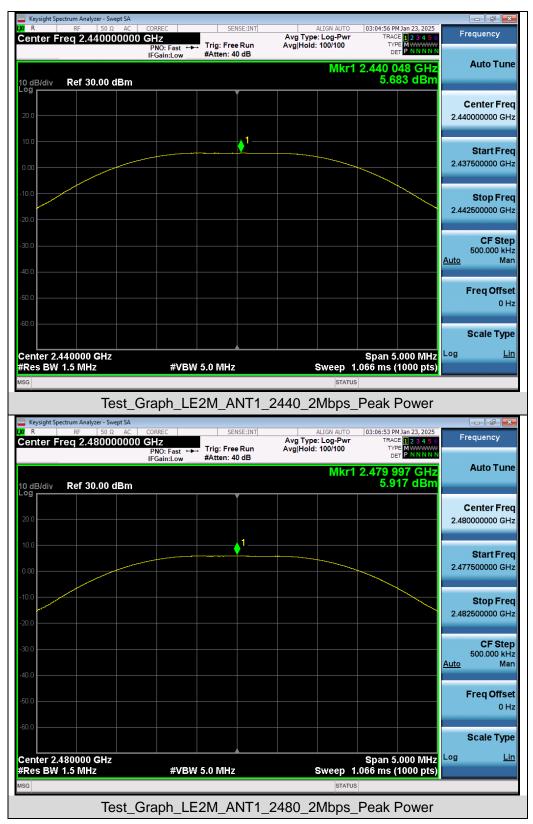



## 8. 6dB Bandwidth Measurement


#### 8.1 Provisions Applicable

The minimum 6dB bandwidth shall be 500 kHz.

#### 8.2 Measurement Procedure

- The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the OBW and set the Video bandwidth (VBW) ≥ 3 \* RBW.
- 5. Measure and record the results in the test report.

#### 8.3 Measurement Setup (Block Diagram of Configuration)

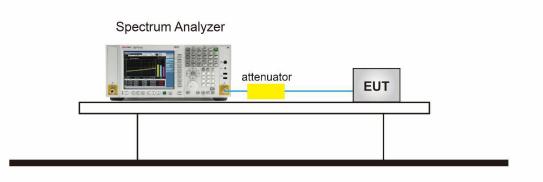




#### **8.4 Measurement Results**

Test Data of Occupied Bandwidth and DTS Bandwidth							
Test Mode	Test Frequency (MHz)	Occupied Bandwidth (MHz)	DTS BW (MHz)	DTS BW Limits	Pass or Fail		
	2402	1.025	0.668	≥0.5	Pass		
GFSK_1Mbps	2440	1.034	0.659	≥0.5	Pass		
	2480	1.042	0.670	≥0.5	Pass		
	2402	2.067	1.174	≥0.5	Pass		
GFSK_2Mbps	2440	2.071	1.158	≥0.5	Pass		
	2480	2.061	1.168	≥0.5	Pass		

#### **Test Graphs of Occupied Bandwidth**

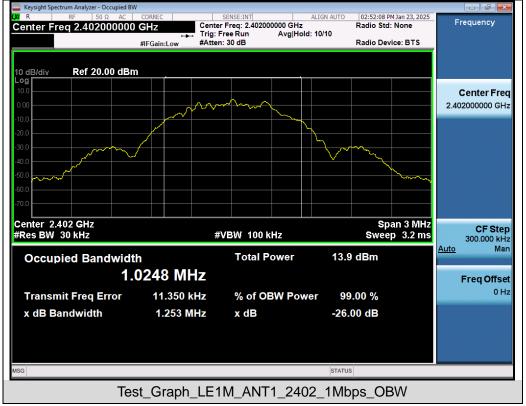





 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd


 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/








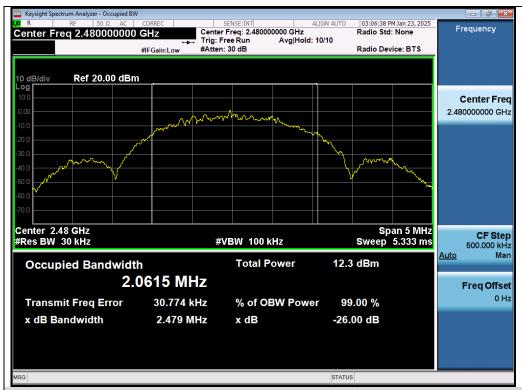


Test\_Graph\_LE2M\_ANT1\_2480\_2Mbps\_OBW


Test Graphs of DTS Bandwidth

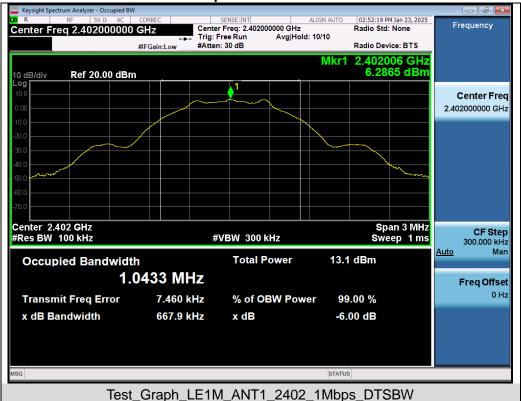



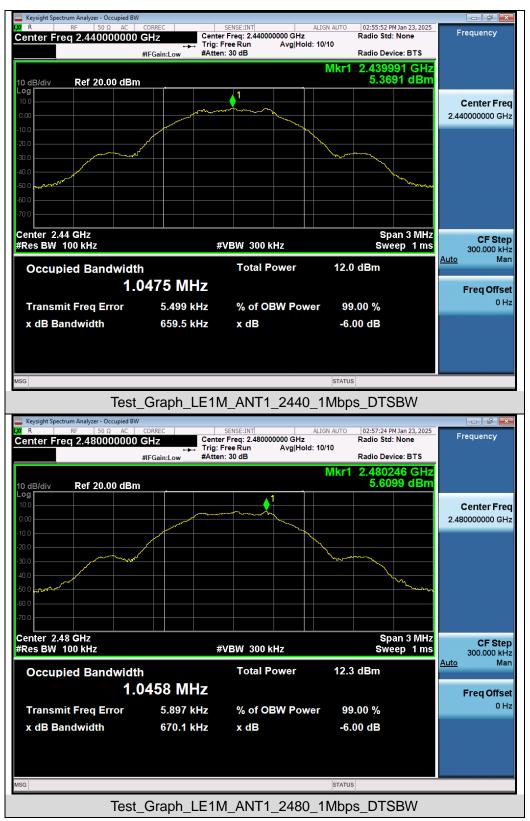



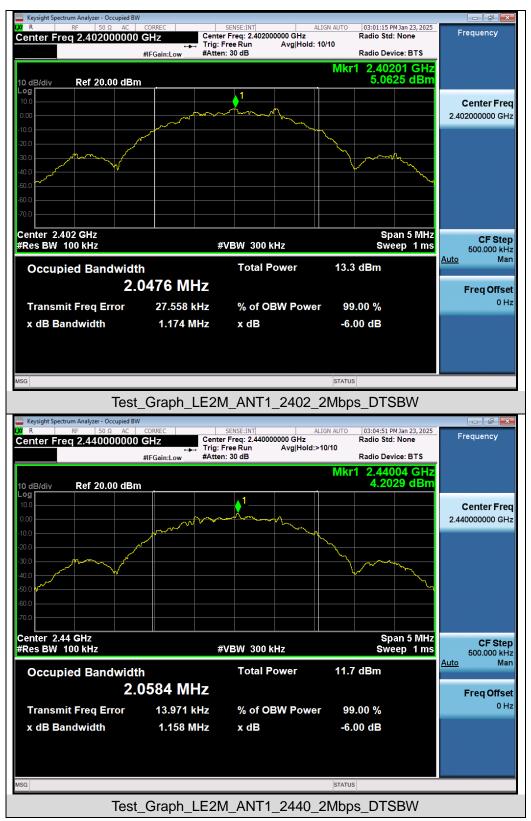







## 9. Power Spectral Density Measurement


#### 9.1 Provisions Applicable

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 9.2 Measurement Procedure

- The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz in order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
- 4. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 5. Measure and record the results in the test report.
- The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 9.3 Measurement Setup (Block Diagram of Configuration)

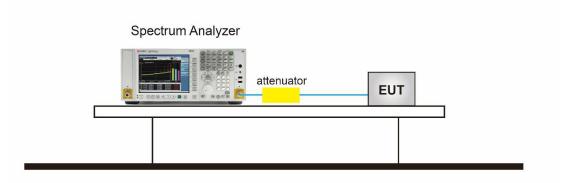



#### 9.4 Measurement Results

Test Data of Conducted Output Power Spectral Density						
Test Mode	Test Frequency (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail		
	2402	-9.989	≪8	Pass		
GFSK_1Mbps	2440	-10.612	≪8	Pass		
	2480	-10.392	≪8	Pass		
	2402	-10.046	≪8	Pass		
GFSK_2Mbps	2440	-11.111	≪8	Pass		
	2480	-10.874	≪8	Pass		


#### Test Graphs of Conducted Output Power Spectral Density





Keysight Spectrum Analyzer - Swept SA				
IX         R         RF         50 Ω         AC         CORREC           Center Freq 2.440000000 GHz	SENSE:INT	ALIGN AUTO 02:5 Avg Type: Log-Pwr	6:10 PM Jan 23, 2025 TRACE 1 2 3 4 5 6	Frequency
PNO: Wide		Avg Hold: 100/100		
IFGain:Lov	v #Atten: 30 dB			Auto Tune
		Mkr1 2.440	026 2 GHZ 0.612 dBm	
10 dB/div Ref 20.00 dBm	0.012 0.611			
				Center Freq
10.0				2.44000000 GHz
				2.440000000 0112
0.00				
	1			Start Freq
-10.0 -20.0	• '			2.439505750 GHz
and property Mpm	www.how www.how how how how how how how how how how	man han han han han han han han han han h		
-20.0			man	
mannan			- www.	Stop Freq
-30.0				2.440494250 GHz
-40.0				CF Step
				98.850 kHz
-50.0			A	<u>uto</u> Man
-60.0				Freq Offset
				0 Hz
-70.0				
				Scale Type
Center 2.4400000 GHz		Sp	an 988.5 kHz 🗳	og <u>Lin</u>
#Res BW 3.0 kHz #V	'BW 10 kHz	Sweep 104.2	ms (1000 pts)	
MSG		STATUS		
Toot Cro		1_2440_1Mbps	DOD	
Test_Gla		1_2440_110bbs_	<u>_</u> F3D	
Keysight Spectrum Analyzer - Swept SA				
XX R RF 50 Ω AC CORREC	SENSE:INT		7:43 PM Jan 23, 2025	Frequency
X         RF         50 Ω         AC         CORREC           Center Freq 2.480000000 GHz         PNO: Wide	Trig: Free Run	ALIGN AUTO 02:5 Avg Type: Log-Pwr Avg Hold: 100/100	TRACE 1 2 3 4 5 6	
R         RF         50 Ω         AC         CORREC         Conter           Center Freq 2.480000000 GHz	Trig: Free Run	Avg Type: Log-Pwr Avg Hold: 100/100	TRACE 123456 TYPE MWWWW DET PNNNNN	Frequency
X R RF 50 Ω AC CORREC Center Freq 2.480000000 GHz PNO: WdG IFGain:Lov	Trig: Free Run	Avg Type: Log-Pwr Avg Hold: 100/100 Mkr1 2.480	TRACE 1 2 3 4 5 6 TYPE MWWWW DET PNNNNN 025 7 GHz	
R RF 50 Ω AC CORREC     Center Freq 2.480000000 GHz     PNO: Wide     IFGain:Low     10 dB/div Ref 20.00 dBm	Trig: Free Run	Avg Type: Log-Pwr Avg Hold: 100/100 Mkr1 2.480	TRACE 123456 TYPE MWWWW DET PNNNNN	Frequency
X R RF 50 Ω AC CORREC Center Freq 2.480000000 GHz PNO: WdG IFGain:Lov	Trig: Free Run	Avg Type: Log-Pwr Avg Hold: 100/100 Mkr1 2.480	TRACE 1 2 3 4 5 6 TYPE MWWWW DET PNNNNN 025 7 GHz	Frequency Auto Tune
RF         50 Ω         AC         CORREC           Center Freq 2.480000000 GHz         PNO: Wide IFGain:Low           10 dB/div         Ref 20.00 dBm	Trig: Free Run	Avg Type: Log-Pwr Avg Hold: 100/100 Mkr1 2.480	TRACE 2 3 4 5 6 TYPE MWWWWW DET P NNNNN 025 7 GHz 0.392 dBm	Frequency Auto Tune Center Freq
R RF 50 Ω AC CORREC     Center Freq 2.480000000 GHz     PNO: Wide     IFGain:Low     10 dB/div Ref 20.00 dBm	Trig: Free Run	Avg Type: Log-Pwr Avg Hold: 100/100 Mkr1 2.480	TRACE 2 3 4 5 6 TYPE MWWWWW DET P NNNNN 025 7 GHz 0.392 dBm	Frequency Auto Tune
Image: Wide state	Trig: Free Run	Avg Type: Log-Pwr Avg Hold: 100/100 Mkr1 2.480	TRACE 2 3 4 5 6 TYPE MWWWWW DET P NNNNN 025 7 GHz 0.392 dBm	Frequency Auto Tune Center Freq
RF         50 Ω         AC         CORREC           Center Freq 2.480000000 GHz         PNO: Wide IFGain:Low           10 dB/div         Ref 20.00 dBm	Trig: Free Run	Avg Type: Log-Pwr Avg Hold: 100/100 Mkr1 2.480	TRACE 2 3 4 5 6 TYPE MWWWWW DET P NNNNN 025 7 GHz 0.392 dBm	Frequency Auto Tune Center Freq
Image: Wide state	Trig: Free Run #Atten: 30 dB	Avg Type: Log-Pwr Avg Hold: 100/100 Mkr1 2.480 -1	ткасе 1 23456 туре мулики ост Р NNNNN 025 7 GHz 0.392 dBm	Frequency Auto Tune Center Freq 2.480000000 GHz
Image: Wide state	Trig: Free Run #Atten: 30 dB	Avg Type: Log-Pwr Avg Hold: 100/100 Mkr1 2.480 -1	ткасе 1 23456 туре мулики ост Р NNNNN 025 7 GHz 0.392 dBm	Frequency Auto Tune Center Freq 2.480000000 GHz Start Freq
Image: Wide state	Trig: Free Run #Atten: 30 dB	Avg Type: Log-Pwr Avg Hold: 100/100 Mkr1 2.480 -1	ткасе 1 23456 туре мулики ост Р NNNNN 025 7 GHz 0.392 dBm	Frequency Auto Tune Center Freq 2.48000000 GHz Start Freq 2.479497500 GHz
Image: Wide state	Trig: Free Run #Atten: 30 dB	Avg Type: Log-Pwr Avg Hold: 100/100 Mkr1 2.480 -1	TRACE 1 2 3 4 5 6 туре М.Ж. ост Р и и и и и 025 7 GHz 0.392 dBm	Frequency Auto Tune Center Freq 2.48000000 GHz Start Freq 2.479497500 GHz Stop Freq
Image: Solution of	Trig: Free Run #Atten: 30 dB	Avg Type: Log-Pwr Avg Hold: 100/100 Mkr1 2.480 -1	TRACE 1 2 3 4 5 6 туре М.Ж. ост Р и и и и и 025 7 GHz 0.392 dBm	Frequency Auto Tune Center Freq 2.48000000 GHz Start Freq 2.479497500 GHz
Image: Wide state	Trig: Free Run #Atten: 30 dB	Avg Type: Log-Pwr Avg Hold: 100/100 Mkr1 2.480 -1	TRACE 1 2 3 4 5 6 туре М.Ж. ост Р и и и и и 025 7 GHz 0.392 dBm	Frequency Auto Tune Center Freq 2.48000000 GHz Start Freq 2.479497500 GHz Stop Freq
Image: Solution of	Trig: Free Run #Atten: 30 dB	Avg Type: Log-Pwr Avg Hold: 100/100 Mkr1 2.480 -1	TRACE 1 2 3 4 5 6 туре М.Ж. ост Р и и и и и 025 7 GHz 0.392 dBm	Frequency Auto Tune Center Freq 2.480000000 GHz Start Freq 2.479497500 GHz Stop Freq 2.480502500 GHz
Image: Solution of	Trig: Free Run #Atten: 30 dB	Avg Type: Log-Pwr Avg Hold: 100/100 Mkr1 2.480 -1	TRACE 1 23 4 5 6 TYPE MWWWW DET P NNNNN 025 7 GHz 0.392 dBm	Frequency Auto Tune Center Freq 2.480000000 GHz Start Freq 2.479497500 GHz Stop Freq 2.480502500 GHz CF Step 100.500 kHz
Image: Solution of the	Trig: Free Run #Atten: 30 dB	Avg Type: Log-Pwr Avg Hold: 100/100 Mkr1 2.480 -1	TRACE 1 23 4 5 6 TYPE MWWWW DET P NNNNN 025 7 GHz 0.392 dBm	Frequency Auto Tune Center Freq 2.480000000 GHz Start Freq 2.479497500 GHz Stop Freq 2.480502500 GHz
Image: Solution of	Trig: Free Run #Atten: 30 dB	Avg Type: Log-Pwr Avg Hold: 100/100 Mkr1 2.480 -1	TRACE 1 23 4 5 6 TYPE MWWWW DET P NNNNN 025 7 GHz 0.392 dBm	Frequency Auto Tune Center Freq 2.48000000 GHz Start Freq 2.479497500 GHz Stop Freq 2.480502500 GHz CF Step 100.500 kHz Man
Image: Solution of the	Trig: Free Run #Atten: 30 dB	Avg Type: Log-Pwr Avg Hold: 100/100 Mkr1 2.480 -1	TRACE 1 23 4 5 6 TYPE MWWWW DET P NNNNN 025 7 GHz 0.392 dBm	Frequency Auto Tune Center Freq 2.480000000 GHz Start Freq 2.479497500 GHz Stop Freq 2.480502500 GHz 2.480502500 GHz 100.500 kHz Man Freq Offset
Image: Solution of Content of Co	Trig: Free Run #Atten: 30 dB	Avg Type: Log-Pwr Avg Hold: 100/100 Mkr1 2.480 -1	TRACE 1 23 4 5 6 TYPE MWWWW DET P NNNNN 025 7 GHz 0.392 dBm	Frequency Auto Tune Center Freq 2.48000000 GHz Start Freq 2.479497500 GHz Stop Freq 2.480502500 GHz CF Step 100.500 kHz Man
Image: Solution of	Trig: Free Run #Atten: 30 dB	Avg Type: Log-Pwr Avg Hold: 100/100 Mkr1 2.480 -1	TRACE 1 23 4 5 6 TYPE MWWWW DET P NNNNN 025 7 GHz 0.392 dBm	Frequency Auto Tune Center Freq 2.480000000 GHz Start Freq 2.479497500 GHz Stop Freq 2.480502500 GHz 2.480502500 GHz 100.500 kHz Man Freq Offset
Image: Solution of the	Trig: Free Run #Atten: 30 dB	Avg Type: Log-Pwr Avg Hold: 100/100 Mkr1 2.480 -1	TRACE 1 23 4 5 6 TYPE MWWWW DET P NNNNN 025 7 GHz 0.392 dBm	Frequency Auto Tune Center Freq 2.480000000 GHz Start Freq 2.479497500 GHz Stop Freq 2.480502500 GHz 100.500 kHz Man Freq Offset 0 Hz
Image: Solution of Content of Co	Trig: Free Run #Atten: 30 dB	Avg Type: Log-Pwr Avg Hold: 100/100 Mkr1 2.480 -1		Frequency Auto Tune Center Freq 2.480000000 GHz Start Freq 2.479497500 GHz 2.480502500 GHz 2.480502500 GHz CF Step 100.500 kHz Man Freq Offset 0 Hz Scale Type
Image: Solution of Content of Co	Trig: Free Run #Atten: 30 dB	Avg Type: Log-Pwr Avg Hold: 100/100 Mkr1 2.480 -1	TRACE 1 2 3 4 5 6 TYPE MWWWWW OET P NNNN 025 7 GHz 0.392 dBm	Frequency Auto Tune Center Freq 2.480000000 GHz Start Freq 2.479497500 GHz 2.480502500 GHz 2.480502500 GHz CF Step 100.500 kHz Man Freq Offset 0 Hz Scale Type
Image: Solution of Content of Co	Trig: Free Run #Atten: 30 dB	Avg Type: Log-Pwr Avg Hold: 100/100 Mkr1 2.480 -1	TRACE 1 2 3 4 5 6 TYPE MWWWWW OET P NNNN 025 7 GHz 0.392 dBm	Frequency Auto Tune Center Freq 2.480000000 GHz Start Freq 2.479497500 GHz 2.480502500 GHz 2.480502500 GHz CF Step 100.500 kHz Man Freq Offset 0 Hz Scale Type
Image: Solution of Content of Co	Trig: Free Run #Atten: 30 dB	Avg Type: Log-Pwr Avg Hold: 100/100 Mkr1 2.480 -1	TRACE 1 2 3 4 5 6 TYPE MWWWWW OET P NNNN 025 7 GHz 0.392 dBm	Frequency Auto Tune Center Freq 2.480000000 GHz Start Freq 2.479497500 GHz 2.480502500 GHz 2.480502500 GHz CF Step 100.500 kHz Man Freq Offset 0 Hz Scale Type
Image: Solution of	Trig: Free Run #Atten: 30 dB	Avg Type: Log-Pwr Avg Hold: 100/100 Mkr1 2.480 -1 -1 	TRACE 1 2 3 4 5 6 TYPE M.WWW OET P.NNNN 025 7 GHz 0.392 dBm '// '// '// '// '// '// '//	Frequency Auto Tune Center Freq 2.480000000 GHz Start Freq 2.479497500 GHz 2.480502500 GHz 2.480502500 GHz CF Step 100.500 kHz Man Freq Offset 0 Hz Scale Type



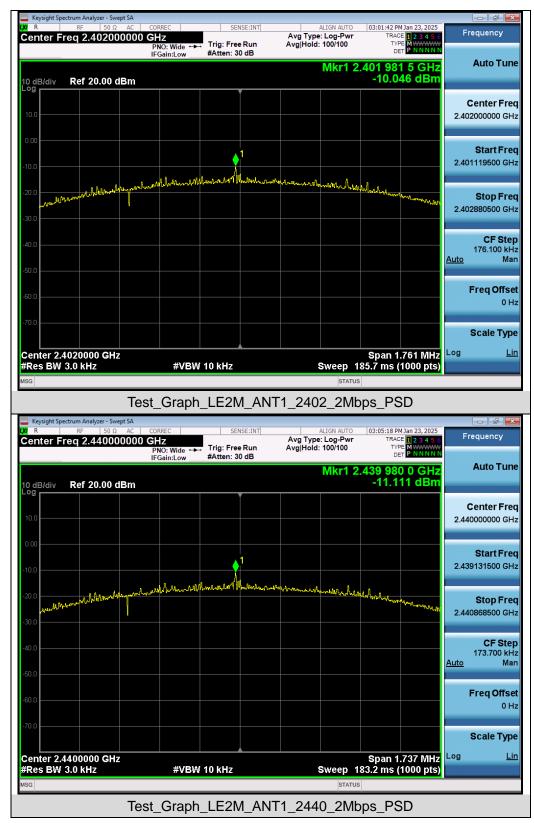



Keysight Spectrum Analyzer - Swept SA							
R         RF         50 Ω         AC           Center Freg 2.480000000	CORREC GH7	SENSE:INT	ALIGN AUTO Avg Type: Log-Pwr	03:07:16 PM Jan 23, 2025 TRACE 1 2 3 4 5 6	Frequency		
10 dB/div Ref 20.00 dBm	PNO: Wide ↔ IFGain:Low	Trig: Free Run #Atten: 30 dB	Avg Hold: 1007100	-10.874 dBm	Auto Tune		
10.0					<b>Center Freq</b> 2.480000000 GHz		
-10.0	n fl an	1 1			Start Fred 2.479124000 GH:		
-20.0 Jun Million Addition Many and	and a failed and a	ראשי (לידוער איז און אוייגערערער איז און אויגערערערערערערערערערערערערערערערערערערער	Morenno le state large	haled the way with the second of the second s	Stop Fred 2.480876000 GH2		
-40.0					CF Step 175.200 kH: <u>Auto</u> Mar		
-60.0					Freq Offse ० म		
					Scale Type		
Center 2.4800000 GHz #Res BW 3.0 kHz <sup>MSG</sup>	#VBW	10 kHz	Sweep 1	Span 1.752 MHz 84.7 ms (1000 pts)	Log <u>Lir</u>		
Test_Graph_LE2M_ANT1_2480_2Mbps_PSD							



## 10. Conducted Band Edge and Out-of-Band Emissions


#### **10.1 Provisions Applicable**

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

#### **10.2 Measurement Procedure**

- Reference level measurement
- 1. Set instrument center frequency to DTS channel center frequency
- 2. Set the span to  $\geq$  1.5 times the DTS bandwidth
- 3. Set the RBW = 100 kHz
- 4. Set the VBW  $\ge$  3 x RBW
- 5. Detector = peak
- 6. Sweep time = auto couple
- 7. Trace mode = max hold
- 8. Allow trace to fully stabilize
- Emission level measurement
- 1. Set the center frequency and span to encompass frequency range to be measured
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep time = auto couple
- 7. The trace was allowed to stabilize

#### 10.3 Measurement Setup (Block Diagram of Configuration)

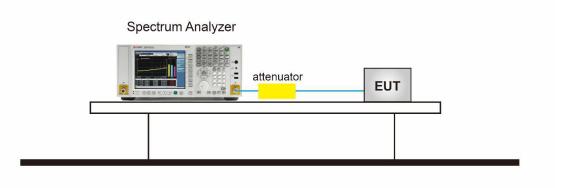




#### **10.4 Measurement Results**




#### Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands




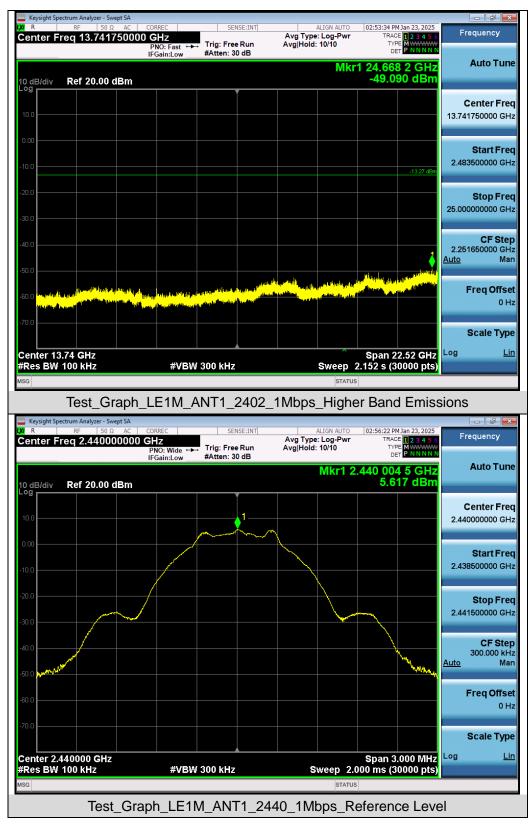




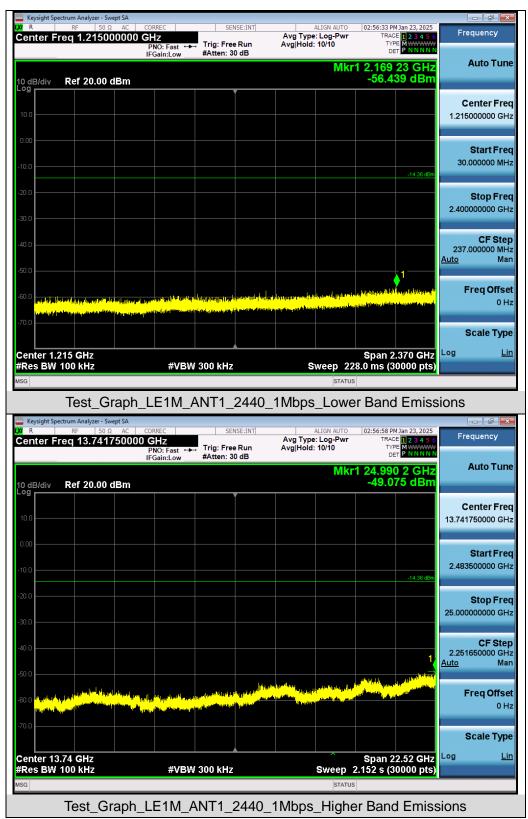




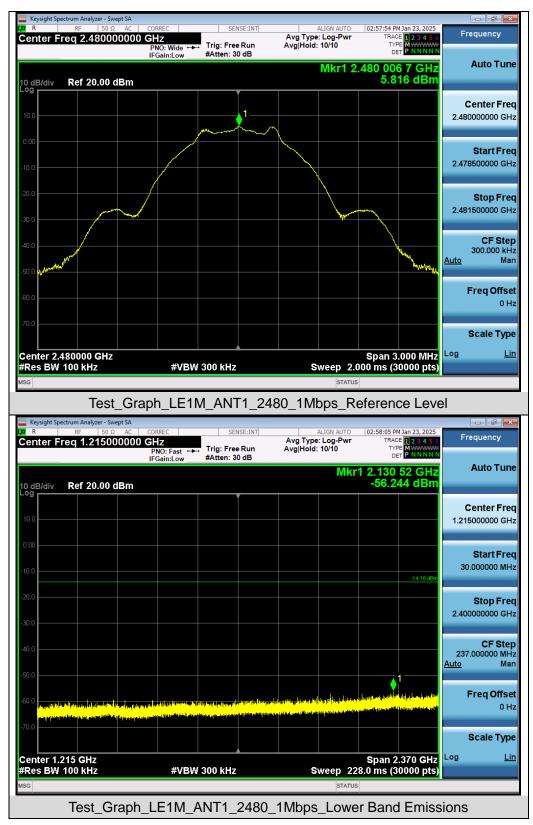



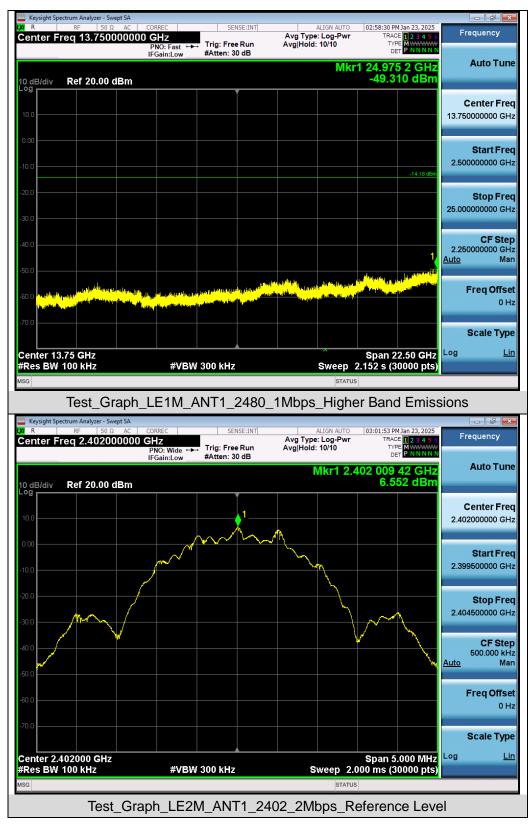




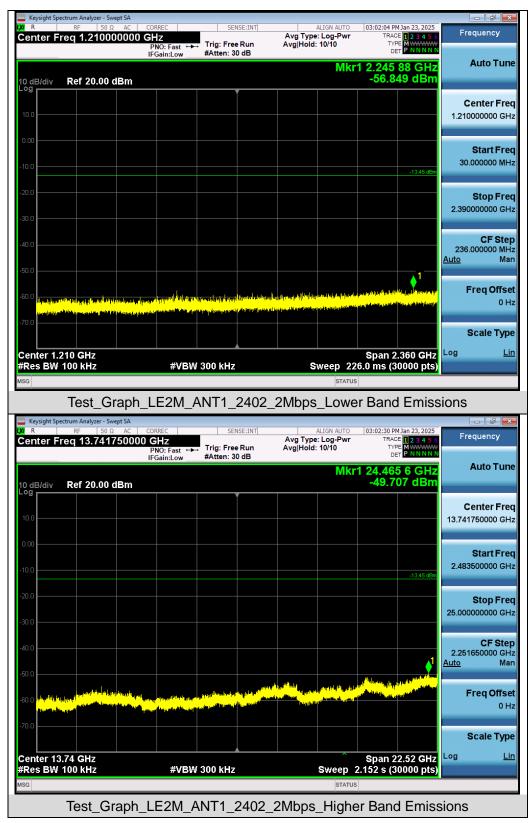









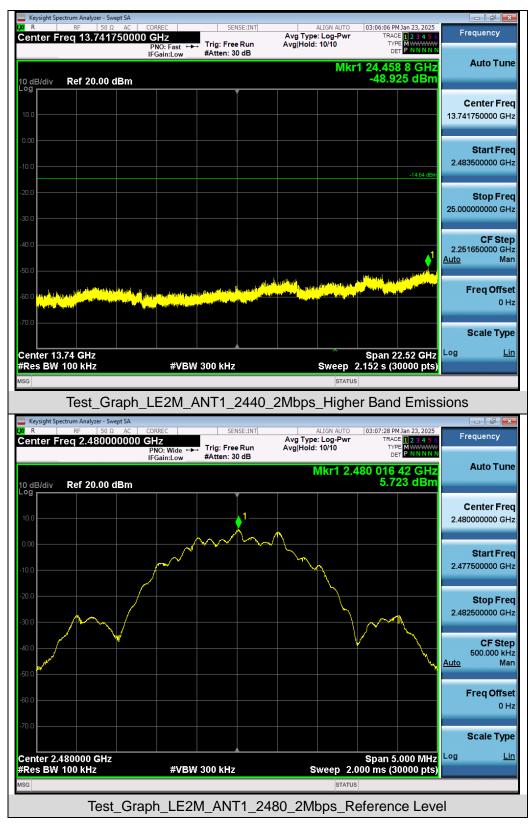




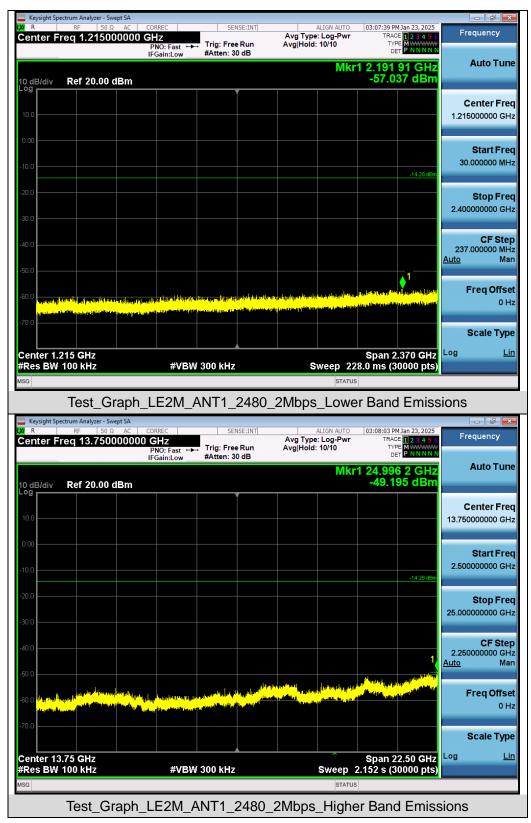

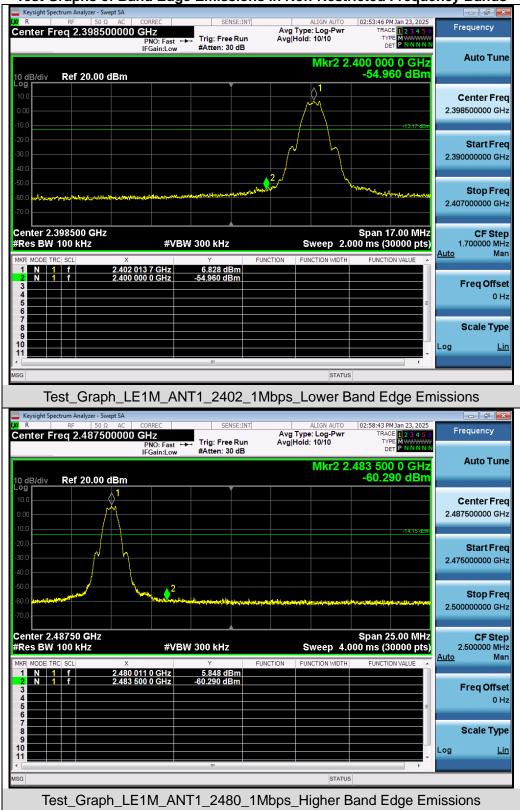

## Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



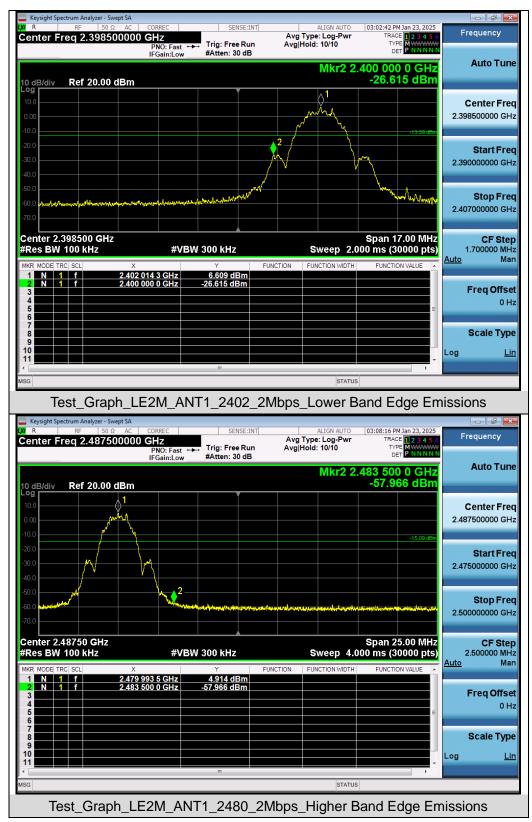



# **11. Radiated Spurious Emission**

#### 11.1 Measurement Limit

• FCC Part 15.209 Limit in the below table to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

#### **11.2 Measurement Procedure**

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.



- 8. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 9. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 10. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 11. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Spectrum ParameterSettingStart ~Stop Frequency9kHz~150kHz/RB 200Hz for QPStart ~Stop Frequency150kHz~30MHz/RB 9kHz for QPStart ~Stop Frequency30MHz~1000MHz/RB 120kHz for QPStart ~Stop Frequency1GHz~26.5GHzStart ~Stop Frequency1MHz/3MHz for Peak, 1MHz/3MHz for Average

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP



## Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

#### • Peak Measurements above 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

## • Average Measurements above 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW ≥ [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10\*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




## 11.3 Measurement Setup (Block Diagram of Configuration)

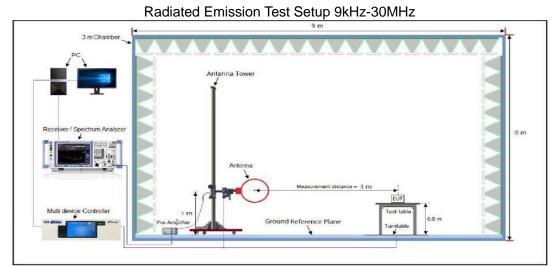

Radiated Emission Test Setup 30MHz-1000MHz

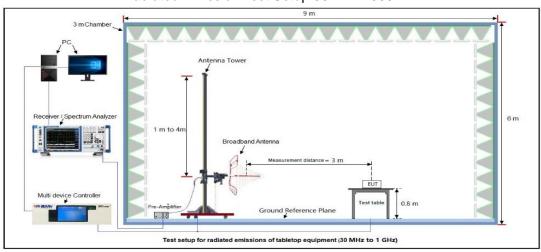

#### Radiated Emission Test Setup Above 1000MHz

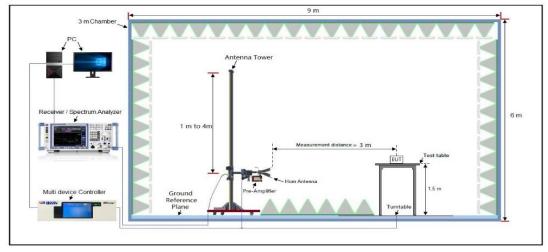



#### **11.4 Measurement Result**

#### Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

				Ra	adia	ted E	miss	ion Test R	esult	s at 3	0MHz	-1GH	lz			
EUT Name	S	Stick 4K							Mod	el Nar	ne		SEI90	0		
Temperature	18	<b>8.4℃</b>	2							Rela	tive H	umic	dity	42.1%	)	
Pressure	96	60hF	Pa							Test	Volta	ge		DC 5V		
Test Mode	Μ	lode	4							Ante	enna F	olari	ity	Horizo	ontal	
72.0	dBuV∕	m														
														Limit: Margin:		
-8 30.00			50				nudby				3	400	500 6	100 700		
_		Mk.		req		Read Lev	-	Correct Factor		asure ient	-	nit	Over			
_			Ν	ИНz		dBu	١V	dB	dB	uV/m	dBu	ıV/m	dB	Dete	ctor	
	1	1	148.4	141(	0	15.	54	13.98	29	9.52	43.	50	-13.98	B pe	ak	
	2		226.8	393(	6	14.0	60	14.74	29	9.34	46.	00	-16.66	b pe	ak	
_	3	1	297.2	224	1	15.	53	16.28	31	1.81	46.	00	-14.19	) pe	ak	
_	4		457.5	5073	3	8.0	06	24.49	32	2.55	46.	00	-13.45	5 pe	ak	
_	5	*	890.7	7278	B	10.1	15	30.64	40	).79	46.	00	-5.21	pe	ak	
_	6		989.5	535	5	12.1	72	29.16	41	1.88	54.	00	-12.12	2 pe	ak	



			Rad	diated E	miss	sion Test R	esults at 3	0MHz-1G	iHz		
EUT Name	Stick	Stick 4K						el Name		SEI900	
Temperature	18.4	18.4°C						tive Hum	idity	42.1%	
Pressure	960h	Pa					Test	Test Voltage			
Test Mode	Mode	e 4					Ante	enna Pola	rity	Vertical	
72.0	dBuV/m										
325	- And				3			/	5	Limit: – Margin: –	
		Maryayati (ghasathi	nin lah s <sup>a</sup> ra	nud Mangdol		under Window					
-8	00 40	50		70 80		(MHz)		300 400	500 60	0 700 1	
30.00 	00 40	50		70 80 Read				300 400	0 500 60 Over	0 700 1	000.000
30.00 		50 50	60	Read	/el	(MHz) Correct	Measure	300 400	Over	0 700 11 Detecto	
30.00 		50 50	60 Treq.	Read Lev	vel uV	(MH2) Correct Factor	Measure	300 400	Over		Dr
30.00 	No. Mk	50 50 50 30.2	60 Treq.	Read Lev dBu 19.3	vel u∨ 22	(MH <sub>2</sub> ) Correct Factor dB	Measure ment dBuV/m	300 400  Limit dBuV/n	Over n dB	Detecto	pr
30.00 	No. Mk	50 50 50 30.2 38.3	60 req. MHz 2111	Read Lev dBu 19.1	vel u∨ 22 92	(MH₂) Correct Factor dB 13.67	Measure ment dBuV/m 32.89	300 400  Limit dBuV/n 40.00	Over dB -7.11	Detecto peak peak	or
30.00 	No. Mk 1 2	50 50 50 30.2 38.3	60 req. MHz 2111 3462 560	Read Lev dBu 19.1 14.1 18.1	vel u∨ 22 92 05	(MH₂) Correct Factor dB 13.67 16.35	Measure ment dBuV/m 32.89 31.27	300 400 Limit dBuV/n 40.00 40.00	Over dB -7.11 -8.73	Detecto peak peak	or
30.00 	No. Mk	50 50 30.2 38.3 97.4	60 req. MHz 2111 3462 560 410	Read Lev dBu 19.1 14.1 18.1 20.1	vel uV 22 92 05 59	(MHz) Correct Factor dB 13.67 16.35 14.54	Measure ment dBuV/m 32.89 31.27 32.59	300 400 → Limit dBuV/n 40.00 40.00 43.50	Over dB -7.11 -8.73 -10.91	Detecto peak peak peak QP	

#### **RESULT: Pass**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. All test modes had been pre-tested. The mode 4 is the worst case and recorded in the report.



## **Radiated Emissions Test Results for Above 1GHz**

EUT Name	Stick 4K		M	odel Name	SEI900	SEI900	
Temperature	Temperature18.4°C			elative Humidity	42.1%		
Pressure	960hPa		Те	est Voltage	DC 5V	DC 5V	
Test Mode	Mode 4		A	ntenna Polarity	Horizont	Horizontal	
			·				
Frequency	Meter Reading	Neter Reading Factor Emission		evel Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4804.000	47.15	0.08	47.23	74	-26.77	peak	
4804.000	38.42	0.08	38.5	54	-15.5	AVG	
7206.000	42.43	2.21	44.64	74	-29.36	peak	
7206.000	31.35	2.21	33.56	54	-20.44	AVG	
Remark:							
·		e Loss – Pre-					
	Stick 4K			odel Name	SE1900	·	
EUT Name			M	odel Name elative Humidity	SEI900 42.1%		
EUT Name Temperature	Stick 4K		M				
EUT Name Temperature Pressure	Stick 4K 18.4°C		M R Te	elative Humidity	42.1%		
EUT Name Temperature Pressure Test Mode	Stick 4K           18.4℃           960hPa           Mode 4		M R Te A	elative Humidity est Voltage ntenna Polarity	42.1% DC 5V Vertical		
EUT Name Temperature Pressure Test Mode	Stick 4K 18.4°C 960hPa Mode 4 Meter Reading	Factor	M R Te Emission Le	elative Humidity est Voltage ntenna Polarity	42.1% DC 5V Vertical	Value Type	
EUT Name Temperature Pressure Test Mode	Stick 4K 18.4°C 960hPa Mode 4 Meter Reading (dBµV)	Factor (dB)	M R Te Emission Le (dBµV/m)	elative Humidity est Voltage ntenna Polarity evel Limits (dBµV/m)	42.1% DC 5V Vertical Margin (dB)		
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000	Stick 4K           18.4 °C           960hPa           Mode 4           Meter Reading           (dBµV)           47.86	Factor (dB) 0.08	М Re Те Етиission Le (dBµV/m) 47.94	elative Humidity est Voltage ntenna Polarity evel Limits (dBµV/m) 74	42.1% DC 5V Vertical Margin (dB) -26.06	peak	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000	Stick 4K           18.4°C           960hPa           Mode 4           Meter Reading           (dBµV)           47.86           38.54	Factor (dB) 0.08 0.08	М R Te Au Emission Le (dBµV/m) 47.94 38.62	elative Humidity est Voltage ntenna Polarity evel Limits (dBµV/m) 74 54	42.1% DC 5V Vertical Margin (dB) -26.06 -15.38	peak AVG	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000 7206.000	Stick 4K           18.4°C           960hPa           Mode 4           Meter Reading           (dBµV)           47.86           38.54           42.36	Factor (dB) 0.08 0.08 2.21	М Rd Te Au Emission Le (dBµV/m) 47.94 38.62 44.57	elative Humidity est Voltage ntenna Polarity evel Limits (dBµV/m) 74 54 74	42.1% DC 5V Vertical Margin (dB) -26.06 -15.38 -29.43	peak AVG peak	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000	Stick 4K           18.4°C           960hPa           Mode 4           Meter Reading           (dBµV)           47.86           38.54	Factor (dB) 0.08 0.08	М R Te Au Emission Le (dBµV/m) 47.94 38.62	elative Humidity est Voltage ntenna Polarity evel Limits (dBµV/m) 74 54	42.1% DC 5V Vertical Margin (dB) -26.06 -15.38	peak AVG	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000 7206.000	Stick 4K           18.4°C           960hPa           Mode 4           Meter Reading           (dBµV)           47.86           38.54           42.36	Factor (dB) 0.08 0.08 2.21	М Rd Te Au Emission Le (dBµV/m) 47.94 38.62 44.57	elative Humidity est Voltage ntenna Polarity evel Limits (dBµV/m) 74 54 74	42.1% DC 5V Vertical Margin (dB) -26.06 -15.38 -29.43	peak AVG peak	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000 7206.000 7206.000	Stick 4K           18.4°C           960hPa           Mode 4           Meter Reading           (dBµV)           47.86           38.54           42.36	Factor (dB) 0.08 0.08 2.21 2.21	М R R R R R A C A A A A A A A A A A A A A	elative Humidity est Voltage ntenna Polarity evel Limits (dBµV/m) 74 54 74	42.1% DC 5V Vertical Margin (dB) -26.06 -15.38 -29.43	peak AVG peak	

## **RESULT: Pass**



## **Radiated Emissions Test Results for Above 1GHz**

EUT Name	Stick 4K		Mod	el Name	SEI900			
Temperature	<b>18.4</b> ℃		Rela	tive Humidity	42.1%	42.1% DC 5V		
Pressure	960hPa		Test	Voltage	DC 5V			
Test Mode	Mode 5		Ante	enna Polarity	Horizont	al		
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin			
(MHz)	(dBµV)	~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~		(dBµV/m)	(dB)	Value Type		
4880.000	46.98	0.14	47.12	74	-26.88	peak		
4880.000	37.84	0.14	37.98	54	-16.02	AVG		
7320.000	41.58	2.36	43.94	74	-30.06	peak		
7320.000	31.96	2.36	34.32	54	-19.68	AVG		
Remark:								
	nna Factor + Cabl	e Loss – Pre-	amplifier.					
	nna Factor + Cabl	e Loss – Pre-		el Name	SEI900			
Factor = Anter		e Loss – Pre-	Mod	el Name Itive Humidity	SEI900 42.1%			
Factor = Anter	Stick 4K	e Loss – Pre-	Mod Rela					
Factor = Anter EUT Name Temperature	Stick 4K 18.4℃	e Loss – Pre-	Mod Rela Test	tive Humidity	42.1%			
Factor = Anter EUT Name Temperature Pressure Test Mode	Stick 4K           18.4 °C           960hPa           Mode 5		Mod Rela Test Ante	tive Humidity Voltage enna Polarity	42.1% DC 5V Vertical			
Factor = Anter	Stick 4K 18.4℃ 960hPa Mode 5 Meter Reading	Factor	Mod Rela Test Ante Emission Level	Voltage enna Polarity Limits	42.1% DC 5V Vertical Margin	Value Type		
Factor = Anter	Stick 4K 18.4°C 960hPa Mode 5 Meter Reading (dBµV)	Factor (dB)	Mod Rela Test Ante Emission Level (dBµV/m)	Voltage enna Polarity Limits (dBµV/m)	42.1% DC 5V Vertical Margin (dB)			
Factor = Anter         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4880.000	Stick 4K           18.4 °C           960hPa           Mode 5           Meter Reading           (dBµV)           47.51	Factor (dB) 0.14	Mod Rela Test Ante Emission Level (dBµV/m) 47.65	Limits         (dBµV/m)         74	42.1% DC 5V Vertical Margin (dB) -26.35	peak		
Factor = Anter         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4880.000         4880.000	Stick 4K           18.4 °C           960hPa           Mode 5           Meter Reading           (dBµV)           47.51           37.65	Factor (dB) 0.14 0.14	Mod Rela Test Ante Emission Level (dBµV/m) 47.65 37.79	Limits         (dBµV/m)         74         54	42.1% DC 5V Vertical Margin (dB) -26.35 -16.21	peak AVG		
Factor = Anter         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4880.000         7320.000	Stick 4K           18.4 °C           960hPa           Mode 5           Meter Reading           (dBµV)           47.51           37.65           42.17	Factor (dB) 0.14 0.14 2.36	Мос Rela Test Ante Emission Level (dBµV/m) 47.65 37.79 44.53	Limits         (dBµV/m)         74         54         74	42.1% DC 5V Vertical Margin (dB) -26.35 -16.21 -29.47	peak AVG peak		
Factor = Anter         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4880.000         4880.000	Stick 4K           18.4 °C           960hPa           Mode 5           Meter Reading           (dBµV)           47.51           37.65	Factor (dB) 0.14 0.14	Mod Rela Test Ante Emission Level (dBµV/m) 47.65 37.79	Limits         (dBµV/m)         74         54	42.1% DC 5V Vertical Margin (dB) -26.35 -16.21	peak AVG		
Factor = Anter         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4880.000         7320.000	Stick 4K           18.4 °C           960hPa           Mode 5           Meter Reading           (dBµV)           47.51           37.65           42.17	Factor (dB) 0.14 0.14 2.36	Мос Rela Test Ante Emission Level (dBµV/m) 47.65 37.79 44.53	Limits         (dBµV/m)         74         54         74	42.1% DC 5V Vertical Margin (dB) -26.35 -16.21 -29.47	peak AVG peak		

## **RESULT: Pass**



## **Radiated Emissions Test Results for Above 1GHz**

EUT Name	Stick 4K	Model Name	SEI900
Temperature	<b>18.4</b> ℃	Relative Humidity	42.1%
Pressure	960hPa	Test Voltage	DC 5V
Test Mode	Mode 6	Antenna Polarity	Horizontal

Value Type	Margin	Limits	Emission Level	Factor	Meter Reading	Frequency
value Type	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(dBµV)	(MHz)
peak	-26.22	74	47.78	0.22	47.56	4960.000
AVG	-16.6	54	37.4	0.22	37.18	4960.000
peak	-28.82	74	45.18	2.64	42.54	7440.000
AVG	-19.67	54	34.33	2.64	31.69	7440.000
						amark:
					na Factor + Cable	emark:

EUT Name	Stick 4K	Model Name	SEI900
Temperature	<b>18.4</b> ℃	Relative Humidity	42.1%
Pressure	960hPa	Test Voltage	DC 5V
Test Mode	Mode 6	Antenna Polarity	Vertical

Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
47.46	0.22	47.68	74	-26.32	peak
37.51	0.22	37.73	54	-16.27	AVG
41.34	2.64	43.98	74	-30.02	peak
32.75	2.64	35.39	54	-18.61	AVG
	(dBµV) 47.46 37.51 41.34	(dBµV)         (dB)           47.46         0.22           37.51         0.22           41.34         2.64	(dBµV)         (dB)         (dBµV/m)           47.46         0.22         47.68           37.51         0.22         37.73           41.34         2.64         43.98	(dBµV)         (dB)         (dBµV/m)         (dBµV/m)           47.46         0.22         47.68         74           37.51         0.22         37.73         54           41.34         2.64         43.98         74	(dBµV)         (dB)         (dBµV/m)         (dBµV/m)         (dB)           47.46         0.22         47.68         74         -26.32           37.51         0.22         37.73         54         -16.27           41.34         2.64         43.98         74         -30.02

## **RESULT: Pass**


Note:

- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.
- 4. All test modes had been pre-tested. The 2Mbps is the worst case and recorded in the report.




EUT Name	Stick 4K	Model Name	SEI900
Temperature	<b>20.8℃</b>	Relative Humidity	47%
Pressure	960hPa	Test Voltage	DC 5V
Test Mode	Mode 1	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

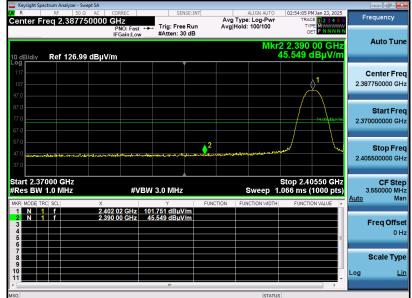

Test Graph for Average Measurement

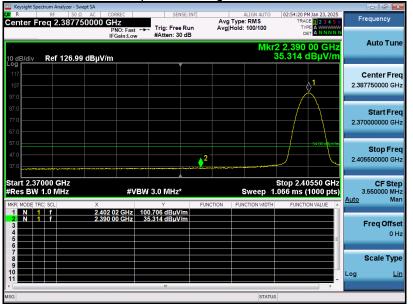


## **RESULT: Pass**




EUT Name	Stick 4K	Model Name	SEI900
Temperature	<b>20.8</b> ℃	Relative Humidity	47%
Pressure	960hPa	Test Voltage	DC 5V
Test Mode	Mode 1	Antenna Polarity	Vertical

Test Graph for Peak Measurement

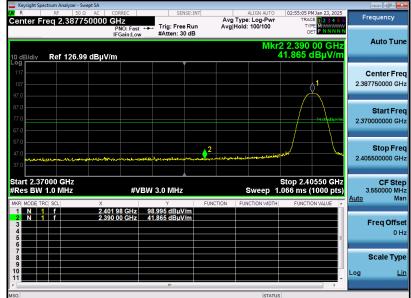

Test Graph for Average Measurement

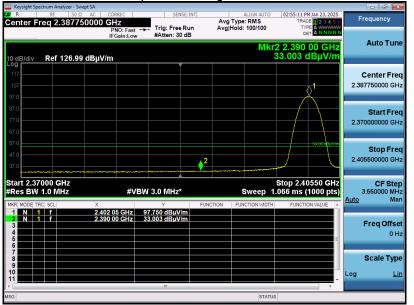


## **RESULT: Pass**




EUT Name	Stick 4K	Model Name	SEI900
Temperature	<b>20.8℃</b>	Relative Humidity	47%
Pressure	960hPa	Test Voltage	DC 5V
Test Mode	Mode 3	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

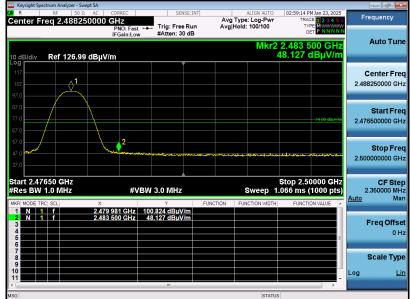

Test Graph for Average Measurement

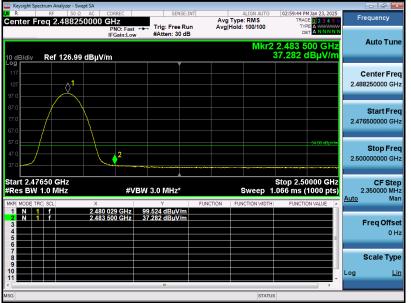


## **RESULT: Pass**



EUT Name	Stick 4K	Model Name	SEI900
Temperature	<b>20.8</b> ℃	Relative Humidity	47%
Pressure	960hPa	Test Voltage	DC 5V
Test Mode	Mode 3	Antenna Polarity	Vertical

Test Graph for Peak Measurement

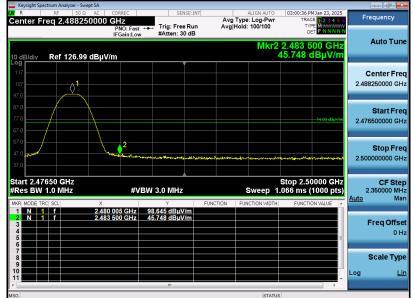

Test Graph for Average Measurement




## **RESULT: Pass**




EUT Name	Stick 4K	Model Name	SEI900
Temperature	<b>20.8℃</b>	Relative Humidity	47%
Pressure	960hPa	Test Voltage	DC 5V
Test Mode	Mode 4	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

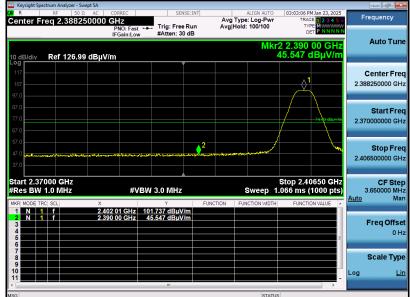

Test Graph for Average Measurement

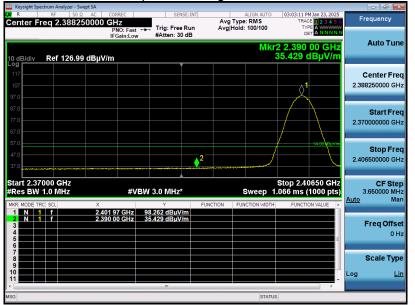


## **RESULT: Pass**




EUT Name	Stick 4K	Model Name	SEI900
Temperature	<b>20.8</b> ℃	Relative Humidity	47%
Pressure	960hPa	Test Voltage	DC 5V
Test Mode	Mode 4	Antenna Polarity	Vertical

Test Graph for Peak Measurement

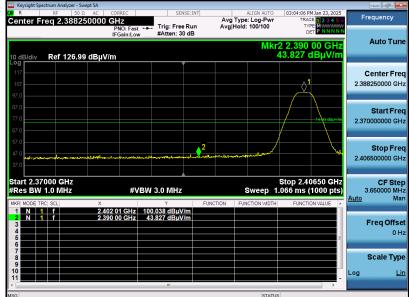

Test Graph for Average Measurement

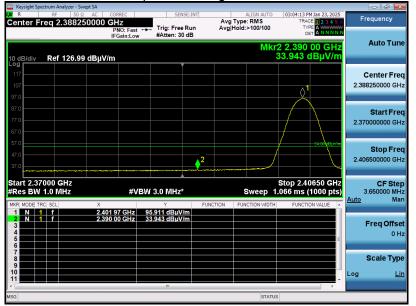


## **RESULT: Pass**



EUT Name	Stick 4K	Model Name	SEI900
Temperature	<b>20.8℃</b>	Relative Humidity	47%
Pressure	960hPa	Test Voltage	DC 5V
Test Mode	Mode 6	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

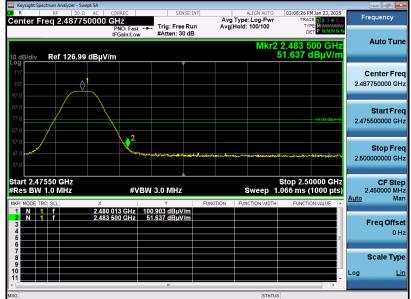

Test Graph for Average Measurement




## **RESULT: Pass**



EUT Name	Stick 4K	Model Name	SE1900
Temperature	<b>20.8</b> ℃	Relative Humidity	47%
Pressure	960hPa	Test Voltage	DC 5V
Test Mode	Mode 6	Antenna Polarity	Vertical

Test Graph for Peak Measurement

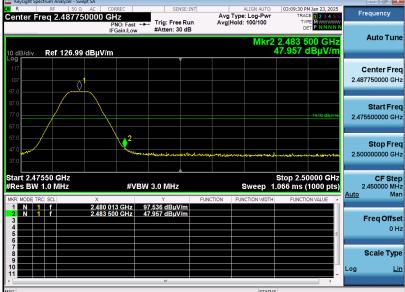

Test Graph for Average Measurement Frequency enter Freq 2.487750000 GHz Avg Type: RMS Avg Hold: 100/100 PNO: Fast IFGain 1 Trig: Free Run #Atten: 30 dB Auto Tune Ref 126.99 dBµV/m Center Freq 2.487750000 GH Start Freq 2.475500000 GH Stop Freq 2 2 50000000 GH; Stop 2.50000 GHz 1.066 ms (1000 pts) Start 2.47550 GHz #Res BW 1.0 MHz CF Step 2.450000 MHz #VBW 3.0 MHz\* Sweep ۹uto Mar 2.479 939 GHz 2.483 500 GHz 93.334 dBµV 36.821 dBuV Freq Offse 0 Hz Scale Type oa Lin

## **RESULT: Pass**

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



# **12. AC Power Line Conducted Emission Test**

## 12.1 Measurement Limit


<b>F</b>	Maximum RF Line Voltage		
Frequency	Q.P. (dBµV)	Average (dBµV)	
150kHz~500kHz	66-56	56-46	
500kHz~5MHz	56	46	
5MHz~30MHz	60	50	

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

## 12.2 Measurement Setup (Block Diagram of Configuration)

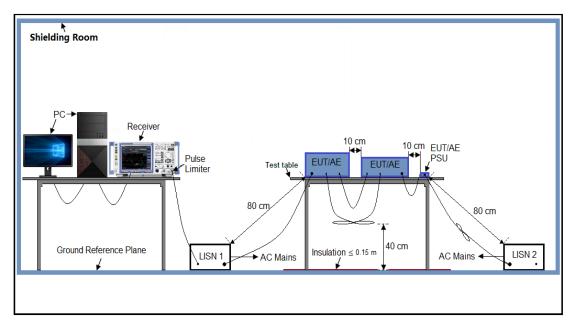



## 12.3 Preliminary Procedure of Line Conducted Emission Test


- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


## 12.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.


## **12.5 Measurement Results**






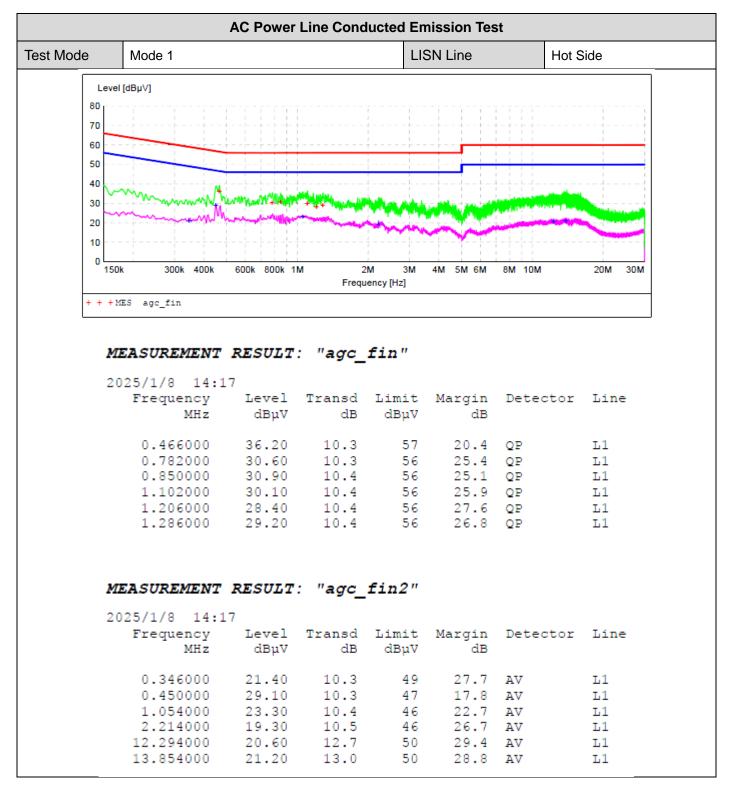

#### **RESULT: Pass**





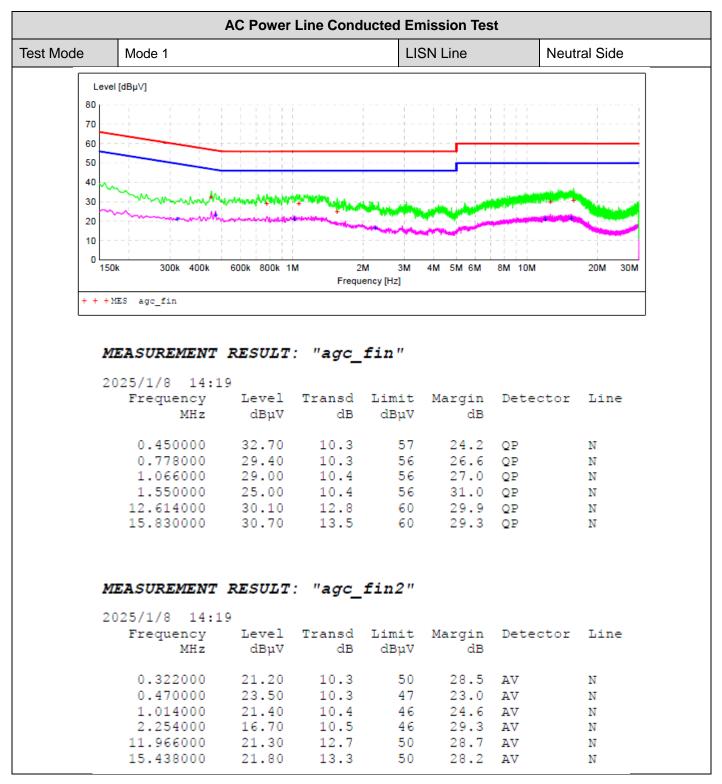

#### **RESULT: PASS**

Report No.: AGC16253250101FR01 Page 67 of 67



# Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC16253250101AP01

# Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC16253250101AP02

-----End of Report-----



## Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.