

FCC Test Report

Report No.: AGC12060221001FE06

FCC ID : 2AY4C-GM05

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Mini PC

BRAND NAME : GEEKOM

MODEL NAME : Mini IT12

APPLICANT: Shenzhen Jiteng Network Technology Co., Ltd

DATE OF ISSUE : Dec. 05, 2022

STANDARD(S) : FCC Part 15 Subpart E §15.407

REPORT VERSION: V1.0

Attestation of Global Explance (Shenzhen) Co., Ltd





Page 2 of 250


REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Dec. 05, 2022	Valid	Initial Release



TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	7
2.3. RELATED SUBMITTAL(S) / GRANT (S)	10
2.4. TEST METHODOLOGY	10
2.5. SPECIAL ACCESSORIES	10
2.6. EQUIPMENT MODIFICATIONS	10
2.7. ANTENNA REQUIREMENT	10
2.8. DESCRIPTION OF AVAILABLE ANTENNAS	11
3. TEST ENVIRONMENT	12
3.1 ADDRESS OF THE TEST LABORATORY	12
3.2 TEST FACILITY	12
3.3 ENVIRONMENTAL CONDITIONS	13
3.4 MEASUREMENT UNCERTAINTY	13
3.5 LIST OF EQUIPMENTS USED	14
4. DESCRIPTION OF TEST MODES	
5. SYSTEM TEST CONFIGURATION	
5.1. CONFIGURATION OF EUT SYSTEM	
5.2. EQUIPMENT USED IN EUT SYSTEM	
5.3. SUMMARY OF TEST RESULTS	
6. RF OUTPUT POWER MEASUREMENT	
6.1 MEASUREMENT LIMITS	
6.2 MEASUREMENT PROCEDURE	
6.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
6.4 MEASUREMENT RESULT	
7. 6DB&26DB BANDWIDTH MEASUREMENT	24
7.1 MEASUREMENT LIMITS	24
7.2 MEASUREMENT PROCEDURE	24
7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	24
7.4 MEASUREMENT RESULTS	
8. POWER SPECTRAL DENSITY MEASUREMENT	89
8.1 MEASUREMENT LIMITS	
8.2 MEASUREMENT PROCEDURE	
8.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	89
8.4 MEASUREMENT RESULT	90





9. CONDUCTED SPURIOUS EMISSION	136
9.1 MEASUREMENT LIMIT	136
9.2 MEASUREMENT PROCEDURE	136
9.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	136
9.4 MEASUREMENT RESULTS	137
10. RADIATED EMISSION	197
10.1 LIMITS OF RADIATED EMISSION TEST	197
10.2 MEASUREMENT PROCEDURE	198
10.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	200
10.4 MEASUREMENT RESULT	201
11. AC POWER LINE CONDUCTED EMISSION TEST	242
11.1. LIMITS OF LINE CONDUCTED EMISSION TEST	242
11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	242
11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	243
11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	243
11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	244
APPENDIX I: PHOTOGRAPHS OF TEST SETUP	250
APPENDIX II: PHOTOGRAPHS OF EUT	250



Page 5 of 250

1. VERIFICATION OF CONFORMITY

Applicant	Shenzhen Jiteng Network Technology Co., Ltd	
Address	No.1202, Bitian Pavilion, Bizhong Garden, No.10 Bibo First Street, Bibo Community, Huangbei Street, Luohu District, Shenzhen City, China.	
Manufacturer	Shenzhen Jiteng Network Technology Co., Ltd	
Address	No.1202, Bitian Pavilion, Bizhong Garden, No.10 Bibo First Street, Bibo Community, Huangbei Street, Luohu District, Shenzhen City, China.	
Product Designation	Mini PC	
Brand Name	GEEKOM	
Test Model	Mini IT12	
Date of receipt of test item	Oct. 26, 2022	
Date of Test	Oct. 28, 2022 –Dec. 02, 2022	
Deviation No any deviation from the test method		
Condition of Test Sample	Normal	
Test Result	Pass	
Report Template	AGCRT-US-BGN/RF	

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with requirement of FCC Part 15 Rules requirement.

Prepared By	Alan Duan	
	Alan Duan (Project Engineer)	Dec. 05, 2022
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Dec. 05, 2022
Approved By	Max Zhang	
	Max Zhang (Authorized Officer)	Dec. 05, 2022



Page 6 of 250

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

Equipment Type	Outdoor access points Indoor access points		
	Fixed P2P access points		
Operation Frequency	☐ U-NII 1:5150MHz~5250MHz ☐ U-NII 2A: 5250MHz~5350MHz		
	☐ U-NII 2C:5470MHz~5725MHz ☐ U-NII 3: 5725MHz~5850MHz		
DFS Design Type	☐ Master ☐ Slave with radar detection ☐ Slave without radar detection		
TPC Function	☐ Yes No		
Hardware Version	NUCAL02		
Software Version	Window 11		
	For 802.11a/n/ax-HT20-VHT20: 5180~5240MHz, 5745~5825MHz		
Test Frequency Range:	For 802.11n/ax-HT40-HE 40: 5190~5230MHz, 5755~5795MHz		
. , ,	For 802.11ac/ax-VHT80-HE80: 5210MHz, 5775MHz		
	IEEE 802.11a(HT20):12.48dBm; IEEE 802.11n(HT20):11.87dBm;		
	IEEE802.11n(HT40):11.66dBm; IEEE 802.11ac(VHT20):11.32dBm;		
Output Power	IEEE802.11ac(VHT40):10.71dBm; IEEE802.11ac(VHT80):10.24dBm;		
•	IEEE802.11ax(HE20):10.42dBm; IEEE802.11ax(HE40):10.19dBm;		
	IEEE802.11ax(HE80):9.54dBm		
	IEEE 802.11nHT(20):14.67dBm;IEEE802.11n(HT40):14.44dBm		
	IEEE 802.11ac(VHT20):14.10dBm; IEEE802.11ac(VHT40):13.54dBm;		
Output Power_MIMO	IEEE802.11ac(VHT80):13.11dBm;IEEE802.11ax(HE20):13.31dBm;		
	IEEE802.11ax(HE40):13.08dBm;IEEE802.11ax(HE80):12.65dBm		
	802.11a/n:(64-QAM, 16-QAM, QPSK, BPSK) OFDM		
Modulation	802.11ac :(256-QAM, 64-QAM, 16-QAM, QPSK, BPSK) OFDM		
	802.11ax :(1024-QAM,256-QAM, 64-QAM, 16-QAM, QPSK, BPSK) OFDMA		
	802.11a: 6/9/12/18/24/36/48/54Mbps;		
Data Data	802.11n: up to 300Mbps;		
Data Rate	802.11ac: up to 866.6Mbps;		
	802.11ax: up to 1201Mbps		
Number of channels	7 channels of U-NII-1 Band		
Number of channels	8 channels of U-NII-3 Band		
Antenna Designation	PIFA Antenna		
Antenna Gain	Refer to Chapter 2.8 of the report.		
Power Supply	DC 19V		



Page 7 of 250

Note: The tested device has 5 adaptors (adapter 1#: BSY065T1903423D, adapter 2#: A653-1903420DI, adapter 3#: A1001-1904740DI, adapter 4#: SOY-1900474-410, adapter 5#: MS-Z6320R190-120D0-E) and 4 CPUs (CPU 1#: I7-12700H, CPU 2#: I7-1260P, CPU 3#: I3-1220P, CPU 4#: I5-1240P) respectively. The radiation part only shows the following 3 adapters (adapter 2#: A653-1903420DI, adapter 3#: A1001-1904740DI, adapter 5#: MS-Z6320R190-120D0-E) and the highest performance CPU: I7-12700H is the worst test result.



Page 8 of 250

Product: Mini PC

Model Number: Mini IT12

NOTE: The following information is for sale collocation, select the highest configuration for matching test

Object/part no.	Manufacturer/ Trademark	Type/Model	Technical Data
CPU	Intel	I7-12700H	4.70 GHz, 6 core
DDR	Crucial	CT32G4SFD832A	32GB*2
Hard disk	Toshiba	ST2000LM015	1TB
SSD	Kingston	OM8PDP3 Series	512GB

Object/part no.	Manufacturer/ Trademark	Type/Model	Technical Data
CPU	Intel	I7-1260P	4.70 GHz, 4 core
DDR	Crucial	CT32G4SFD832A	8GB*2
Hard disk	Toshiba	ST2000LM015	1TB
SSD	Kingston	OM8PDP3 Series	256GB

Object/part no.	Manufacturer/ Trademark	Type/Model	Technical Data
CPU	Intel	I3-1220P	4.70 GHz, 4 core
DDR	Crucial	CT32G4SFD832A	8GB*2
Hard disk	Toshiba	ST2000LM015	1TB
SSD	Kingston	OM8PDP3 Series	256GB

Object/part no.	Manufacturer/ Trademark	Type/Model	Technical Data
CPU	Intel	I5-1240P	4.70 GHz, 4 core
DDR	Crucial	CT32G4SFD832A	8GB*2
Hard disk	Toshiba	ST2000LM015	1TB
SSD	Kingston	OM8PDP3 Series	256GB



Page 9 of 250

2.2. TABLE OF CARRIER FREQUENCYS

For 5180~5240MHz:

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80), 802.11ax (VHT80):

Channel	Frequency	Channel	Frequency
42	5210 MHz		

For 5745~5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
151	5755 MHz	159	5795 MHz

1 channel is provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency	Channel	Frequency
155	5775 MHz		



Page 10 of 250

2.3. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID**: **2AY4C-GM05** filing to comply with the FCC Part 15 requirements.

2.4. TEST METHODOLOGY

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 662911	662911 D01 Multiple Transmitter Output v02r01
5	KDB 789033	789033 D02 General U-NII Test Procedures New Rules v02r01

2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7. ANTENNA REQUIREMENT

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antennathat uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a brokenantenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna refer to Section 2.8 of the report



Page 11 of 250

2.8. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency	TX Bandwidth		Max Peak Gain (dBi)		Max Directional Gain	
Type	Band (MHz)	Paths	(MHz)	Ant 1	Ant 2	(dBi)	
5G WIFI PIFA Antenna List (5GHz 2*2 MIMO)							
PIFA	5150 ~ 5250	2	20,40,80	7.53	7.24	10.54	
Antenna	5725 ~ 5850	2	20,40,80	7.53	7.24	10.54	

Note 1: The EUT supports Cyclic Delay Diversity (CDD) technology for 802.11n/ac/ax mode.

Note 2: The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.

If all antennas have the same gain, Gant, Directional gain = Gant + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on devices:

Array Gain = 10 log (Nant/ Nss) dB = 3.01;

For power measurements on IEEE 802.1devices:

Array Gain = 0 dB for $N_{ANT} \le 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥40 MHz for any NANT;

Array Gain = 5 log(Nant/Nss) dB or 3 dB, whichever is less, for 20 MHz channel widths with Nant ≥ 5.

If antenna gains are not equal, Directional gain may be calculated by using the formulas applicable to equal gain antennas with Gant set equal to the gain of the antenna having the highest gain.



Page 12 of 250

3. TEST ENVIRONMENT

3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 13 of 250

3.3 ENVIRONMENTAL CONDITIONS

	NORMAL CONDITIONS	EXTREME CONDITIONS
Temperature range (°ℂ)	15 - 35	-20 - 50
Relative humidty range	20 % - 75 %	20 % - 75 %
Pressure range (kPa)	86 - 106	86 - 106
Power supply	DC 19.0V	
Note The Edward Towns of the LE		

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	Uc = ±2.7 %
Uncertainty of Occupied Channel Bandwidth	Uc = ±2.7 %



Page 14 of 250


3.5 LIST OF EQUIPMENTS USED

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Aug. 04, 2022	Aug. 03, 2023
LISN	R&S	ESH2-Z5	100086	Jun. 08, 2022	Jun. 07, 2023
Test software	R&S	ES-K1	Ver.V1.71	N/A	N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Aug. 04, 2022	Aug. 03, 2023
EXA Signal Analyzer	KEYSIGHT	N9020B	MY56101792	Aug, 04, 2022	Aug, 03, 2023
Power sensor	Aglient	U2021XA	MY54110007	Mar. 04, 2022	Mar. 02, 2023
5GHz Fliter	EM Electronics	5150-5880MHz	N/A	N/A	N/A
Attenuator	ZHINAN	E-002	N/A	Sep. 01, 2022	Aug. 31, 2023
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2023
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 01, 2022	Aug. 31, 2023
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 08, 2021	Jan. 07, 2023
Test software	Tonscend	JS32-RE	Ver.2.5	N/A	N/A






4. DESCRIPTION OF TEST MODES

Mode	Available channel	Tested channel	Modulation	Date rate (Mbps)
802.11a/n/ac/ax20	36,40,44,48, 149,153,157,161,165	36,40,48, 149,157,165	OFDM/OFDMA	6Mbps/MCS0
802.11n/ac/ax40	38,46,151,159	38,46, 151,159	OFDM/OFDMA	MCS0
802.11ac/ax80	42, 155	42, 155	OFDM/OFDMA	MCS0

Note:

- 1. The EUT has been set to operate continuously on tested channel individually, and the EUT is operating at its maximum duty cycle>or equal 98%.
- 2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.

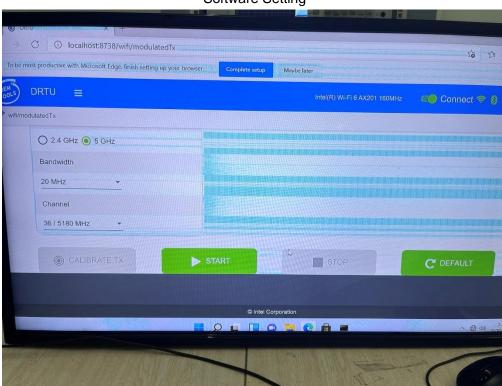


Software Setting



Page 16 of 250

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

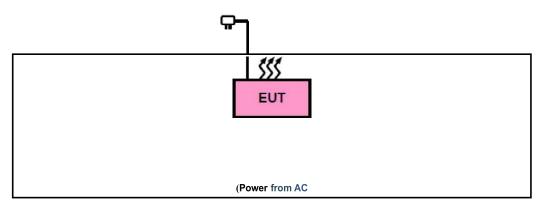

5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Mini PC	Mini IT12	2AY4C-GM05	EUT
2	Bluetooth speaker	SRS-XB01		AE
3	Xiaomi router	R4A		AE
4	Adapter 1	BSY065T1903423D	Input: 100-240V, 50/60Hz, 1.5 A Output: DC 19.0V, 3.42A, 64.98W	AE
5	Adapter 2	A653-1903420DI	Input: 100-240V, 50/60Hz, 1.5 A Output: DC 19.0V, 3.42A, 65W	AE
6	Adapter 3	A1001-1904740DI	Input: 100-240V, 50/60Hz, 2.5A Output: DC 19.0V, 4.74A, 90.0W	AE
7	Adapter 4	SOY-1900474-410	Input: 100-240V, 50/60Hz, 1.8A Output: DC19.04V, 4.74A, 90.06W	AE
8	Adapter 5	MS-Z6320R190-120D0-E	Input: 100-240V, 50/60Hz, 2.0 A Output: DC 19.0V, 6.32A, 120.0W	AE

5.3. SUMMARY OF TEST RESULTS

Item	FCC Rules	Description Of Test	Result
1	§15.203	Antenna Equipment	Pass
2	§15.407(a/1/2/3)	RF Output Power	Pass
3	§15.407(e)	6dB Bandwidth Measurement	Pass
4	§2.1049	26dB bandwidth Measurement	Pass
5	§15.407(a/1/2/3)	Power Spectral Density	Pass
6	§15.407(b)(1/2/3/4/5)	Conducted Spurious Emission	Pass
7	§15.407(b)(1/2/3/4/5)	Radiated Emission& Band Edge	Pass
8	§15.407(b)(6)	AC Power Line Conducted Emission	Pass



Page 17 of 250

6. RF OUTPUT POWER MEASUREMENT

6.1 MEASUREMENT LIMITS


Operation Band	EUT Category		LIMIT	
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p < 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)	
0		Fixed point-to-point Access Point	1 Watt (30 dBm)	
		Indoor Access Point	1 Watt (30 dBm)	
	\boxtimes	Client devices	250mW (23.98 dBm)	
U-NII-2A		/	/ 250mW (23.98 dBm) or 11 dBm+10 log B	
U-NII-2C	/		250mW (23.98 dBm) or 11 dBm+10 log B*	
U-NII-3	/		1 Watt (30 dBm)	

Note: Where B is the 26dB emission bandwidth in MHz.

6.2 MEASUREMENT PROCEDURE


Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:

- 1. The testing follows the ANSI C63.10 Section 12.3.3.1
- 2. Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
- 3. The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 4. At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 5. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 7. Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- 8. Adjust the measurement in dBm by adding [10 log (1 / D)], where D is the duty cycle {e.g., [10 log (1 / 0.25)], if the duty cycle is 25%}.
- 9. Record the test results in the report.






6.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

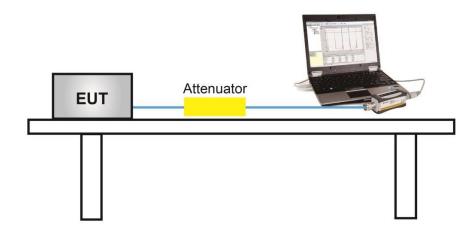


6.4 MEASUREMENT RESULT

Test Data of Conducted Output Power for band 5.15-5.25 GHz-ANT 1					
Test Mode	Mode Test Channel Average Power (MHz) (dBm)		Limits (dBm)	Pass or Fail	
	5180	11.51	22.45	Pass	
802.11a	5200	12.14	22.45	Pass	
	5240	12.48	22.45	Pass	
	5180	11.24	22.45	Pass	
802.11n20	5200	11.54	22.45	Pass	
	5240	11.87	22.45	Pass	
902 44 5 40	5190	11.00	22.45	Pass	
802.11n40	5230	11.66	22.45	Pass	
	5180	10.69	22.45	Pass	
802.11ac20	5200	11.02	22.45	Pass	
	5240	11.32	22.45	Pass	
802.11ac40	5190	10.26	22.45	Pass	
802.11ac40	5230	10.71	22.45	Pass	
802.11ac80	5210	10.24	22.45	Pass	
	5180	9.81	22.45	Pass	
802.11ax20	5200	10.10	22.45	Pass	
	5240	10.42	22.45	Pass	
802.11ax40	5190	9.78	22.45	Pass	
002.11ax40	5230	10.19	22.45	Pass	
802.11ax80	5210	9.54	22.45	Pass	






Test Data of Conducted Output Power for band 5.15-5.25 GHz-ANT 2					
Test Mode	Test Channel (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail	
	5180	11.63	23.74	Pass	
802.11a	5200	11.86	23.74	Pass	
	5240	11.91	23.74	Pass	
	5180	11.25	23.74	Pass	
802.11n20	5200	11.38	23.74	Pass	
	5240	11.43	23.74	Pass	
802.11n40	5190	11.03	23.74	Pass	
802.111140	5230	11.19	23.74	Pass	
	5180	10.65	23.74	Pass	
802.11ac20	5200	10.72	23.74	Pass	
	5240	10.84	23.74	Pass	
802.11ac40	5190	10.27	23.74	Pass	
802.11ac40	5230	10.35	23.74	Pass	
802.11ac80	5210	9.96	23.74	Pass	
	5180	9.94	23.74	Pass	
802.11ax20	5200	10.06	23.74	Pass	
	5240	10.18	23.74	Pass	
000 44 0 40	5190	9.74	23.74	Pass	
802.11ax40	5230	9.95	23.74	Pass	
802.11ax80	5210	9.73	23.74	Pass	






	Test Data of Conducted Output Power for band 5.15-5.25 GHz-MIMO					
Test Mode	Test Channel (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail		
	5180	14.26	22.45	Pass		
802.11n20	5200	14.47	22.45	Pass		
	5240	14.67	22.45	Pass		
802.11n40	5190	14.03	22.45	Pass		
802.111140	5230	14.44	22.45	Pass		
	5180	13.68	22.45	Pass		
802.11ac20	5200	13.88	22.45	Pass		
	5240	14.10	22.45	Pass		
000 44 40	5190	13.28	22.45	Pass		
802.11ac40	5230	13.54	22.45	Pass		
802.11ac80	5210	13.11	22.45	Pass		
	5180	12.89	22.45	Pass		
802.11ax20	5200	13.09	22.45	Pass		
	5240	13.31	22.45	Pass		
802.11ax40	5190	12.77	22.45	Pass		
002.11ax40	5230	13.08	22.45	Pass		
802.11ax80	5210	12.65	22.45	Pass		






Test Data of Conducted Output Power for band 5.725-5.85 GHz-ANT 1					
Test Mode	Test Channel (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail	
	5745	10.62	28.47	Pass	
802.11a	5785	10.48	28.47	Pass	
	5825	10.66	28.47	Pass	
	5745	10.23	28.47	Pass	
802.11n20	5785	9.99	28.47	Pass	
	5825	10.18	28.47	Pass	
802.11n40	5755	9.92	28.47	Pass	
002.111140	5795	9.77	28.47	Pass	
	5745	9.68	28.47	Pass	
802.11ac20	5785	9.41	28.47	Pass	
	5825	9.65	28.47	Pass	
802.11ac40	5755	9.10	28.47	Pass	
802.118040	5795	8.94	28.47	Pass	
802.11ac80	5775	8.54	28.47	Pass	
	5745	9.15	28.47	Pass	
802.11ax20	5785	9.04	28.47	Pass	
	5825	9.26	28.47	Pass	
902 11 2 40	5755	8.91	28.47	Pass	
802.11ax40	5795	8.71	28.47	Pass	
802.11ax80	5775	8.34	28.47	Pass	





Test Data of Conducted Output Power for band 5.725-5.85 GHz-ANT 2					
Test Mode	Test Channel (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail	
	5745	10.58	28.47	Pass	
802.11a	5785	10.72	28.47	Pass	
	5825	10.05	28.47	Pass	
	5745	10.06	28.47	Pass	
802.11n20	5785	10.15	28.47	Pass	
	5825	9.45	28.47	Pass	
802.11n40	5755	9.99	28.47	Pass	
602.111140	5795	9.79	28.47	Pass	
	5745	9.56	28.47	Pass	
802.11ac20	5785	9.55	28.47	Pass	
	5825	8.88	28.47	Pass	
802.11ac40	5755	9.21	28.47	Pass	
802.11ac40	5795	9.00	28.47	Pass	
802.11ac80	5775	8.77	28.47	Pass	
	5745	8.85	28.47	Pass	
802.11ax20	5785	8.73	28.47	Pass	
	5825	8.15	28.47	Pass	
900 11 ov 10	5755	8.46	28.47	Pass	
802.11ax40	5795	8.25	28.47	Pass	
802.11ax80	5775	8.07	28.47	Pass	





	Test Data of Conducted Output Power for band 5.725-5.85 GHz-MIMO						
Test Mode	Test Channel (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail			
	5745	13.16	28.47	Pass			
802.11n20	5785	13.08	28.47	Pass			
	5825	12.84	28.47	Pass			
000 44 = 40	5755	12.97	28.47	Pass			
802.11n40	5795	12.79	28.47	Pass			
	5745	12.63	28.47	Pass			
802.11ac20	5785	12.49	28.47	Pass			
	5825	12.29	28.47	Pass			
000 44 40	5755	12.17	28.47	Pass			
802.11ac40	5795	11.98	28.47	Pass			
802.11ac80	5775	11.67	28.47	Pass			
	5745	12.01	28.47	Pass			
802.11ax20	5785	11.90	28.47	Pass			
	5825	11.75	28.47	Pass			
902 44 0 440	5755	11.70	28.47	Pass			
802.11ax40	5795	11.50	28.47	Pass			
802.11ax80	5775	11.22	28.47	Pass			



Page 24 of 250

7. 6DB&26DB BANDWIDTH MEASUREMENT

7.1 MEASUREMENT LIMITS


The minimum 6dB bandwidth shall be at least 500 kHz.

7.2 MEASUREMENT PROCEDURE

- 7.2.1 -6dB bandwidth (DTS bandwidth) Test setting:
 - 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
 - 2. Set the EUT Work on operation frequency individually.
 - 3. Set RBW = 100kHz.
 - 4. Set the VBW ≥3*RBW. Detector = Peak. Trace mode = max hold.
 - 5. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
- 7.2.2 99% occupied bandwidth test setting:
 - 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
 - 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
 - 3. Set Span = approximately 1.5 to 5 times the OBW, centered on a nominal channel
 The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
 bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
 - 4. Set SPA Trace 1 Max hold, then View.
- 7.2.3 -26dB Bandwidth test setting:
 - 1. Set RBW = approximately 1% of the emission bandwidth.
 - 2. Set the VBW > RBW.
 - 3. Detector = Peak.
 - 4. Trace mode = max hold.
 - 5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Note: The EUT was tested according to KDB 789033 for compliance to FCC 47CFR 15.407 requirements.

7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

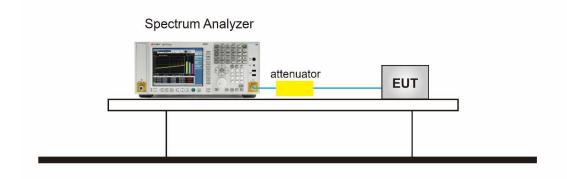




Page 25 of 250


7.4 MEASUREMENT RESULTS

Test Data of Occupied Bandwidth and -26dB Bandwidth for band 5.15-5.25 GHz-ANT 1						
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-26dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail	
	5180	16.509	22.30	N/A	Pass	
802.11a	5200	16.490	22.72	N/A	Pass	
	5240	16.508	22.11	N/A	Pass	
	5180	17.639	22.69	N/A	Pass	
802.11n20	5200	17.637	22.43	N/A	Pass	
	5240	17.632	22.92	N/A	Pass	
802.11n40	5190	35.997	42.22	N/A	Pass	
002.111140	5230	35.983	43.46	N/A	Pass	
	5180	17.641	22.56	N/A	Pass	
802.11ac20	5200	17.644	22.88	N/A	Pass	
	5240	17.640	22.87	N/A	Pass	
802.11ac40	5190	35.957	42.70	N/A	Pass	
802.11ac40	5230	36.016	42.93	N/A	Pass	
802.11ac80	5210	74.992	84.37	N/A	Pass	
	5180	18.798	22.10	N/A	Pass	
802.11ax20	5200	18.884	22.22	N/A	Pass	
	5240	18.859	22.70	N/A	Pass	
802.11ax40	5190	37.492	41.67	N/A	Pass	
ou∠.118X4U	5230	37.496	41.80	N/A	Pass	
802.11ax80	5210	76.480	82.21	N/A	Pass	






Test Data of Occupied Bandwidth and -26dB Bandwidth for band 5.15-5.25 GHz-ANT 2						
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-26dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail	
	5180	16.487	22.54	N/A	Pass	
802.11a	5200	16.489	22.26	N/A	Pass	
	5240	16.466	22.56	N/A	Pass	
	5180	17.637	22.28	N/A	Pass	
802.11n20	5200	17.633	22.82	N/A	Pass	
	5240	17.642	22.73	N/A	Pass	
802.11n40	5190	36.021	42.95	N/A	Pass	
002.111140	5230	36.006	42.97	N/A	Pass	
	5180	17.630	22.22	N/A	Pass	
802.11ac20	5200	17.630	22.41	N/A	Pass	
	5240	17.630	22.49	N/A	Pass	
802.11ac40	5190	36.019	43.16	N/A	Pass	
602.11ac40	5230	36.002	41.82	N/A	Pass	
802.11ac80	5210	75.157	85.28	N/A	Pass	
	5180	18.890	22.47	N/A	Pass	
802.11ax20	5200	18.879	22.85	N/A	Pass	
	5240	18.838	22.93	N/A	Pass	
802.11ax40	5190	37.618	41.51	N/A	Pass	
002.11ax40	5230	37.556	42.78	N/A	Pass	
802.11ax80	5210	76.707	81.44	N/A	Pass	






Test Data of Occupied Bandwidth and DTS Bandwidth for band 5.725-5.85 GHz-ANT 1 DTS Limits **Test Channel** 99% Occupied Test Mode Pass or Fail Bandwidth (MHz) Bandwidth (MHz) (MHz) (MHz) 5745 16.702 16.33 0.5 **Pass** 802.11a 5785 16.676 16.34 0.5 **Pass** 5825 16.684 16.34 0.5 Pass 5745 17.852 17.56 0.5 **Pass** 802.11n20 5785 17.826 17.58 0.5 **Pass** 5825 17.823 17.58 0.5 Pass 5755 36.368 36.35 **Pass** 0.5 802.11n40 5795 **Pass** 36.305 36.33 0.5 5745 17.820 17.57 0.5 **Pass** 17.826 17.56 **Pass** 5785 0.5 802.11ac20 **Pass** 5825 17.849 17.57 0.5 36.339 **Pass** 5755 36.33 0.5 802.11ac40 **Pass** 5795 36.330 36.38 0.5 802.11ac80 5775 75.021 72.52 0.5 **Pass** 5180 18.980 18.48 0.5 **Pass** 802.11ax20 5200 19.003 18.63 0.5 **Pass** 5240 19.011 18.70 0.5 **Pass** 5190 37.836 37.75 0.5 **Pass** 802.11ax40 37.764 37.75 0.5 Pass 5230 5210 76.547 0.5 802.11ax80 72.53 **Pass**






Test Data of Occupied Bandwidth and DTS Bandwidth for band 5.725-5.85 GHz-ANT 2 Test Channel DTS Limits 99% Occupied Test Mode Pass or Fail Bandwidth (MHz) Bandwidth (MHz) (MHz) (MHz) 5745 16.677 16.33 0.5 **Pass** 802.11a 5785 16.700 16.34 0.5 Pass 5825 16.714 16.34 0.5 Pass 5745 17.815 17.59 0.5 Pass 802.11n20 5785 17.824 17.60 0.5 **Pass** 5825 17.831 17.59 0.5 Pass 5755 36.335 36.35 0.5 **Pass** 802.11n40 5795 **Pass** 36.351 36.33 0.5 17.59 5745 17.825 0.5 **Pass** 17.55 5785 17.837 0.5 **Pass** 802.11ac20 17.57 5825 17.825 0.5 **Pass** 36.35 5755 36.309 0.5 **Pass** 802.11ac40 5795 36.34 36.309 0.5 **Pass** 802.11ac80 5775 75.021 63.19 0.5 **Pass** 5180 19.005 18.44 0.5 **Pass** 802.11ax20 5200 18.988 18.13 0.5 **Pass** 5240 19.042 18.82 0.5 **Pass** 5190 37.889 37.85 0.5 **Pass** 802.11ax40 5230 37.893 37.91 0.5 Pass 5210 68.83 0.5 **Pass** 802.11ax80 76.593







Test Graphs of Occupied Bandwidth and -26dB Bandwidth for band 5.15-5.25 GHz

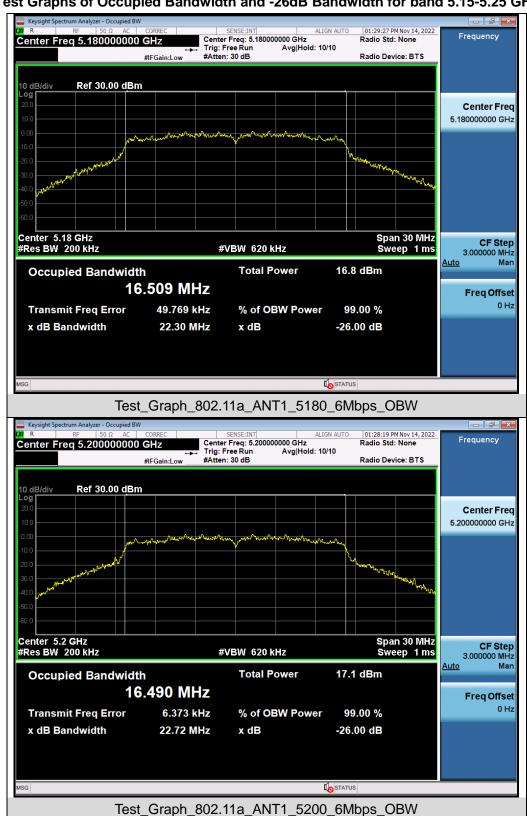


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.







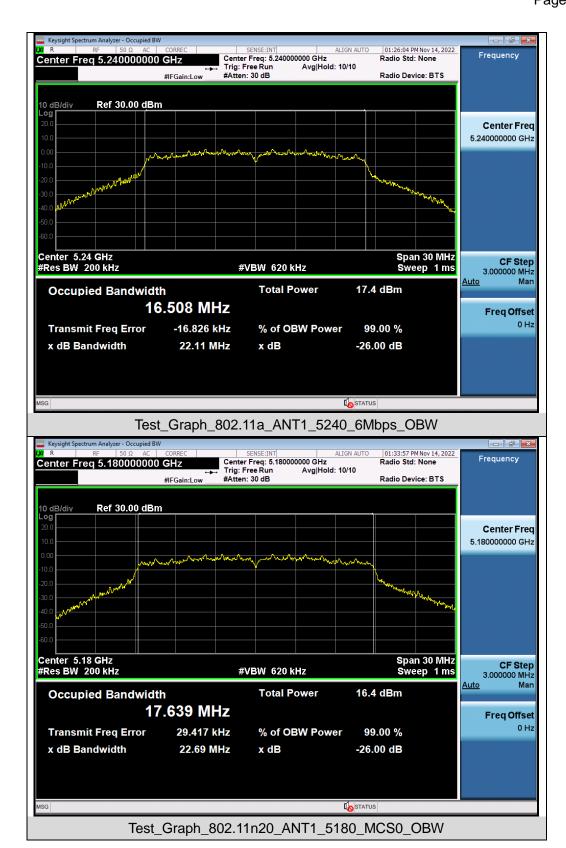







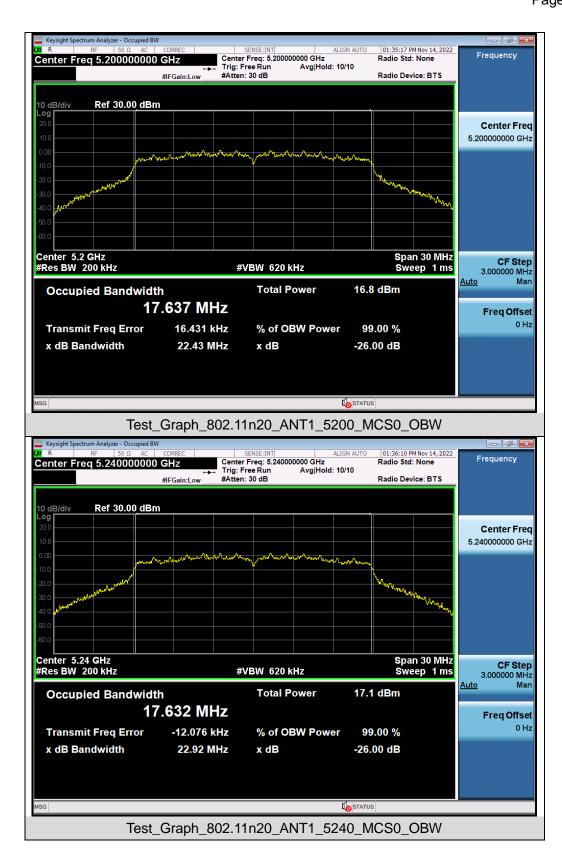







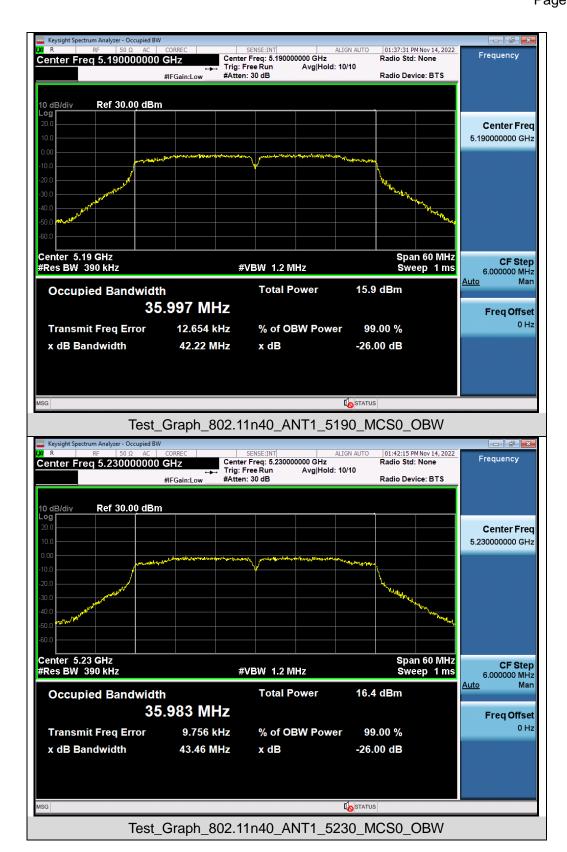







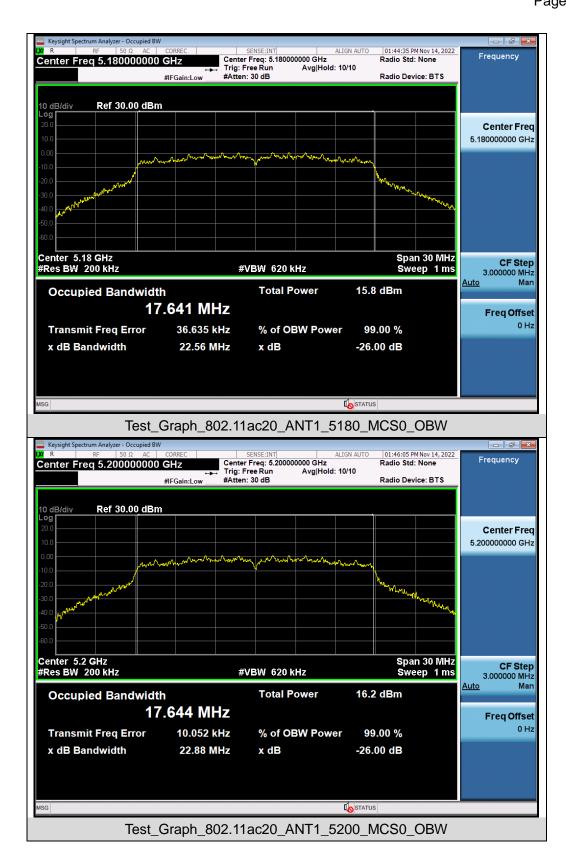







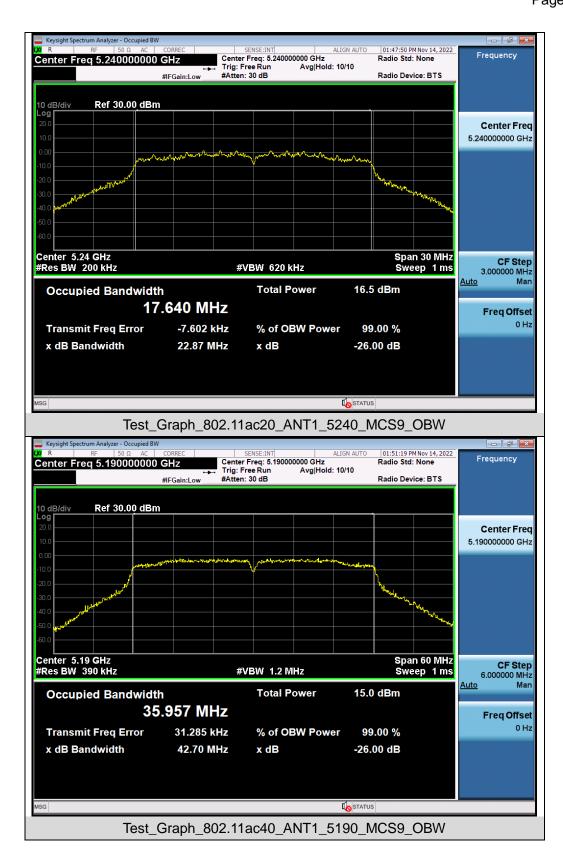







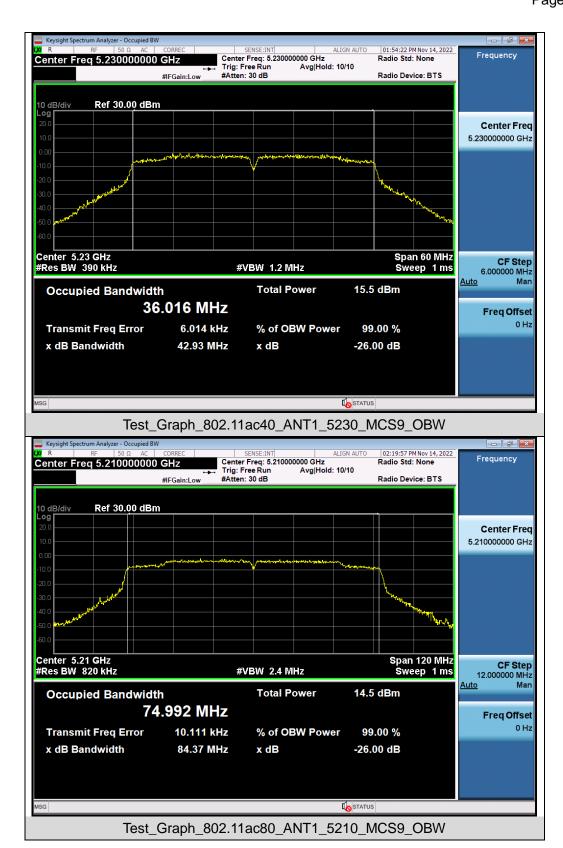







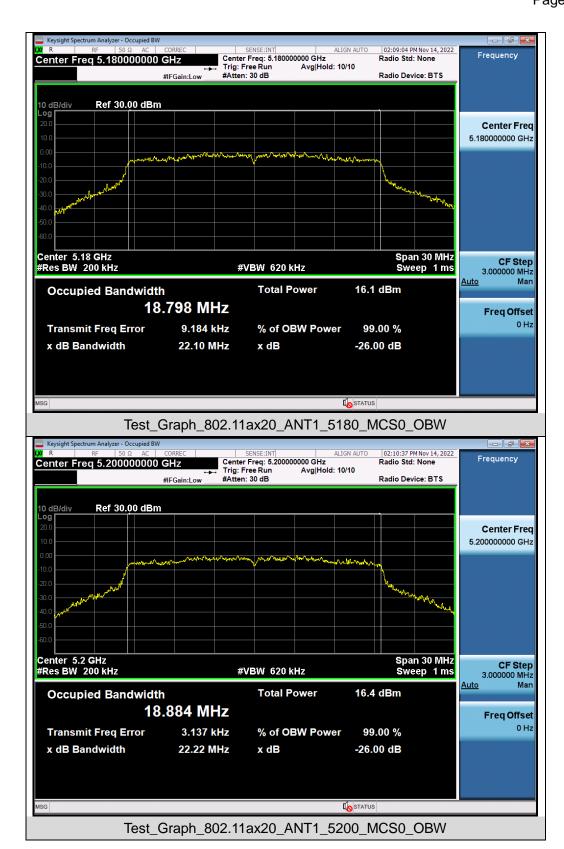







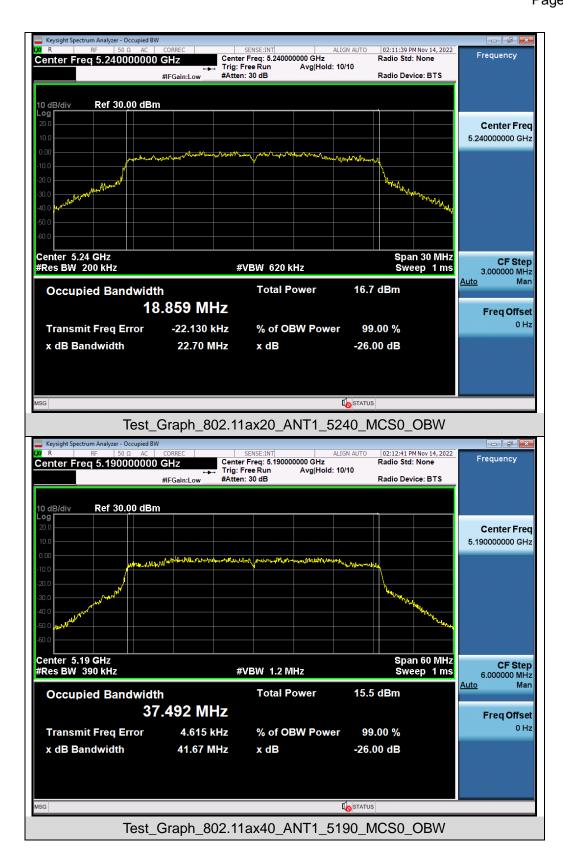







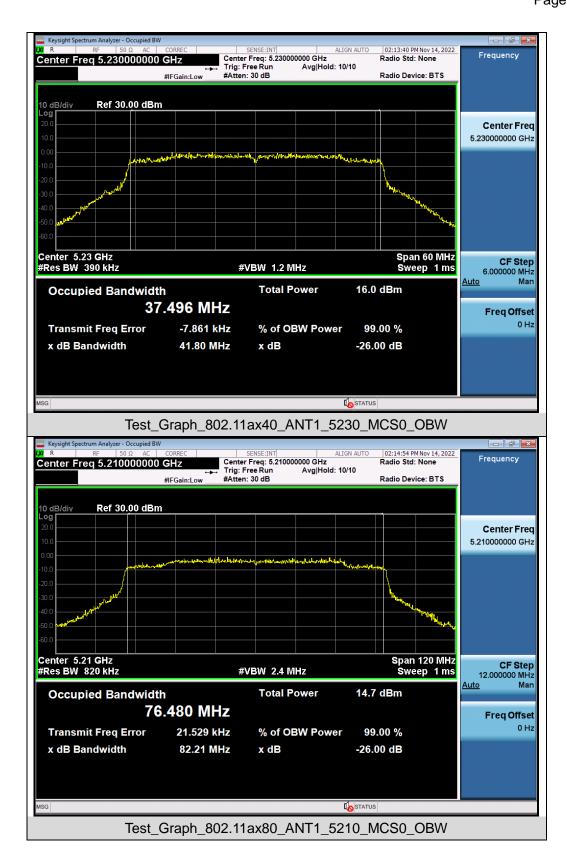







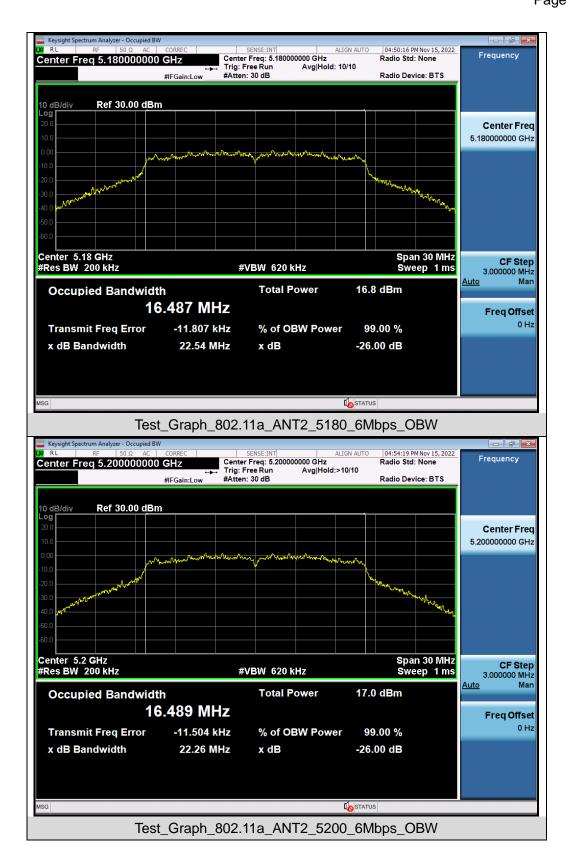






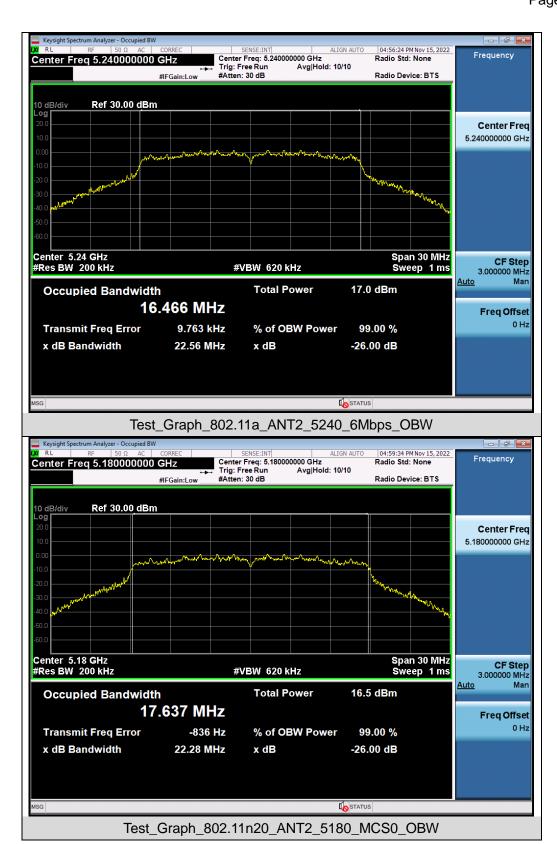















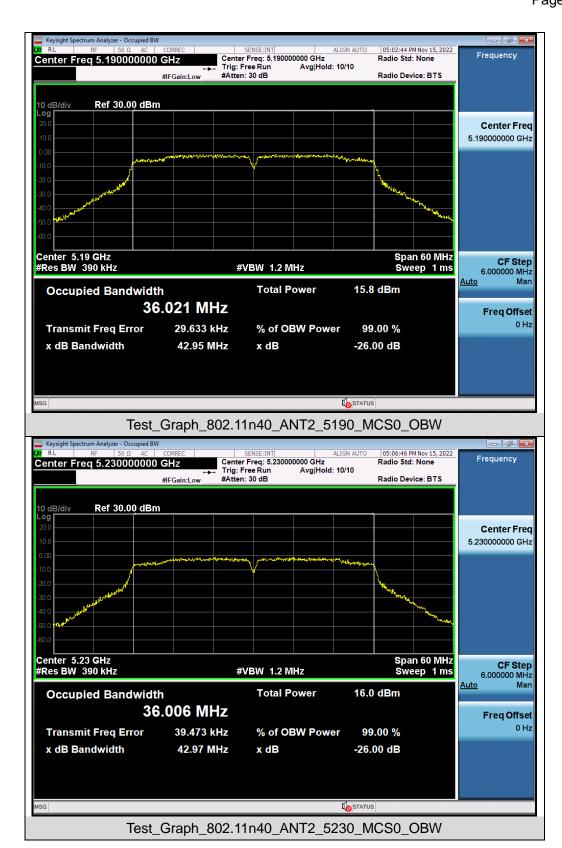







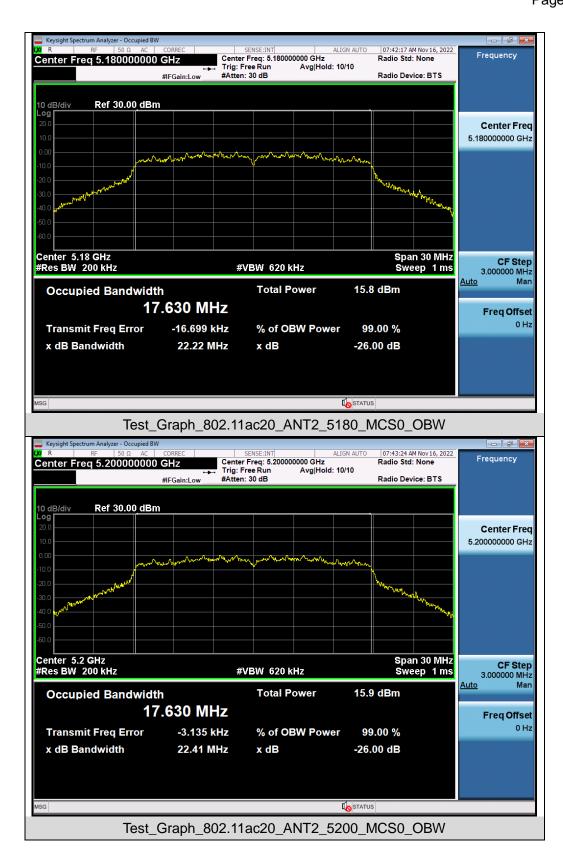







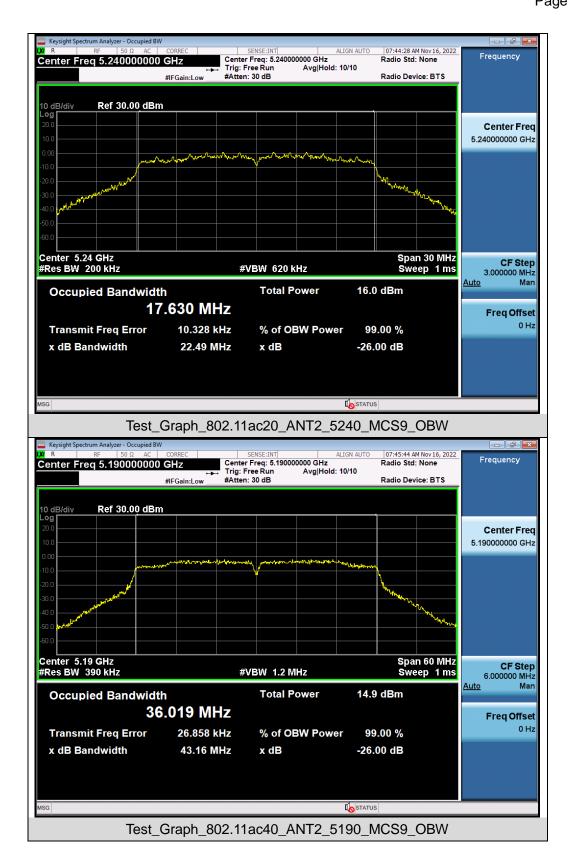







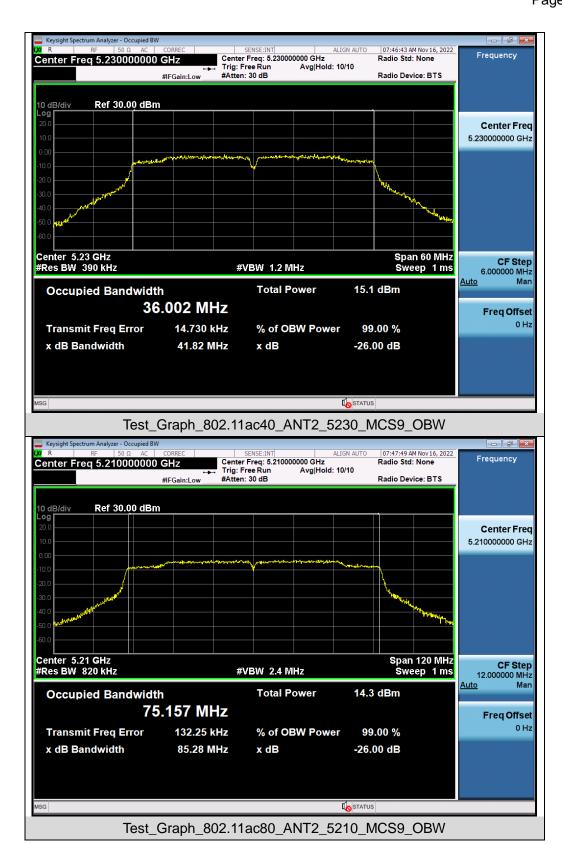







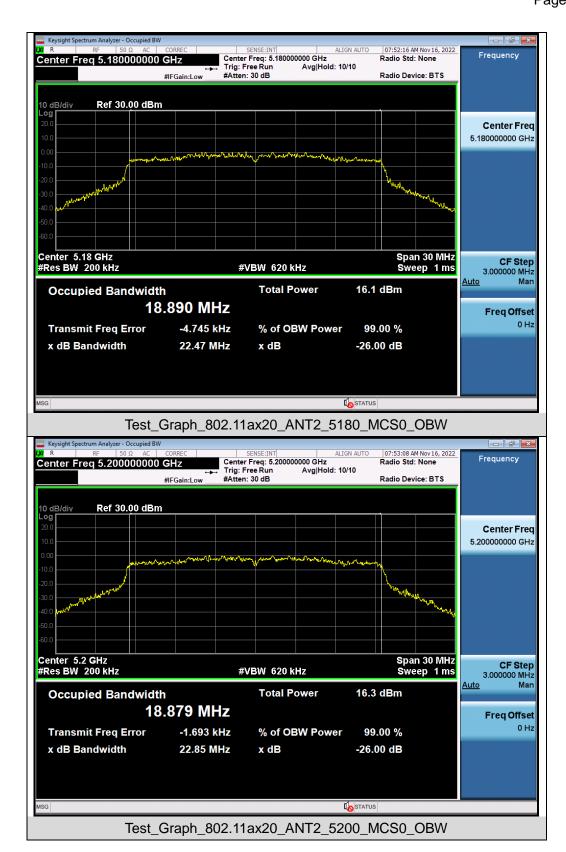







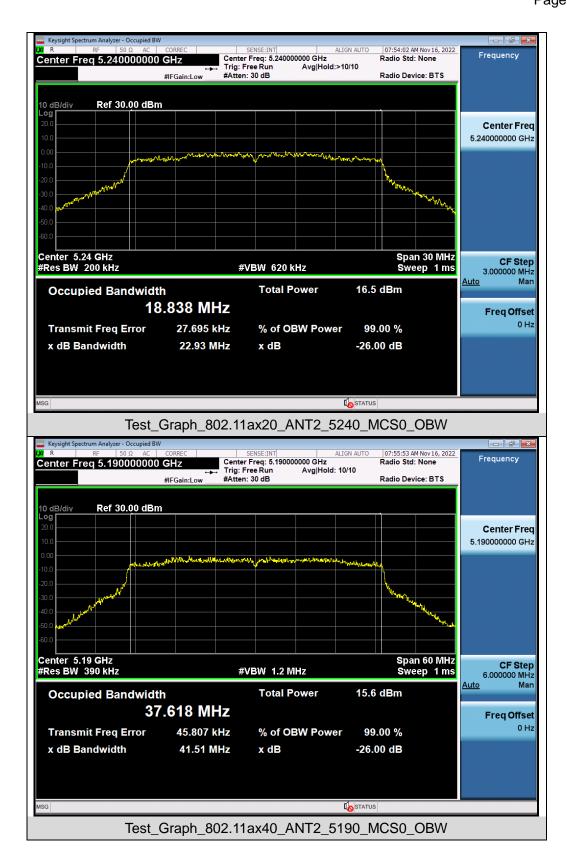





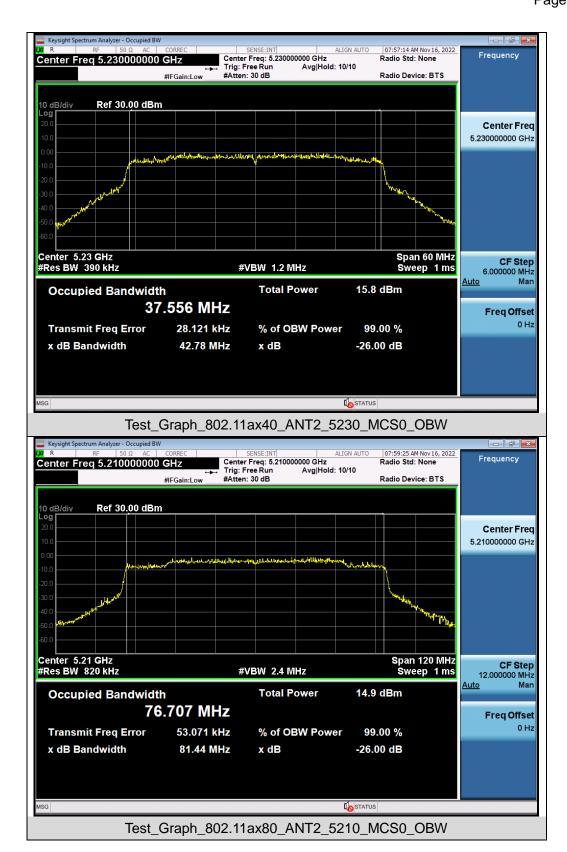





Test Graphs of Occupied Bandwidth for band 5.725-5.85 GHz



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

