

FCC Testing of the  
Shot Scope Technologies Ltd  
GPS Golf Watch, Model: Shot Scope V2  
In accordance with FCC 47 CFR Part 15C

Prepared for: Shot Scope Technologies Ltd  
Unit 27  
Castlebrae Business Centre  
40 Pepper Place  
Edinburgh  
EH16 4BB  
UNITED KINGDOM



Product Service

Choose certainty.  
Add value.

FCC ID: 2AHWR-SS03

## COMMERCIAL-IN-CONFIDENCE

Date: September 2017  
Document Number: 75940057-08 | Issue: 01

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Project Management	Natalie Bennett	26 September 2017	
Authorised Signatory	Nic Forsyth	26 September 2017	

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Product Service document control rules.

### ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15C. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Testing	Mehadi Choudhury	26 September 2017	
Testing	Dan Ralley	26 September 2017	
Testing	Graeme Lawler	26 September 2017	

FCC Accreditation  
90987 Octagon House, Fareham Test Laboratory

### EXECUTIVE SUMMARY

A sample of this product was tested and found to be in compliance with FCC 47 CFR Part 15C: 2016.



### DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD Product Service with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD Product Service. No part of this document may be reproduced without the prior written approval of TÜV SÜD Product Service. © 2017 TÜV SÜD Product Service.

### ACCREDITATION

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

TÜV SÜD Product Service  
is a trading name of TÜV SÜD Ltd  
Registered in Scotland at East Kilbride,  
Glasgow G75 0QF, United Kingdom  
Registered number: SC215164

TÜV SÜD Ltd is a  
TÜV SÜD Group Company

Phone: +44 (0) 1489 558100  
Fax: +44 (0) 1489 558101  
[www.tuv-sud.co.uk](http://www.tuv-sud.co.uk)

TÜV SÜD Product Service  
Octagon House  
Concorde Way  
Fareham  
Hampshire PO15 5RL  
United Kingdom



# Contents

<b>1</b>	<b>Report Summary .....</b>	<b>2</b>
1.1	Report Modification Record.....	2
1.2	Introduction.....	2
1.3	Brief Summary of Results .....	3
1.4	Application Form .....	4
1.5	Product Information .....	10
1.6	Deviations from the Standard.....	10
1.7	EUT Modification Record .....	10
1.8	Test Location.....	10
<b>2</b>	<b>Test Details .....</b>	<b>12</b>
2.1	Emission Bandwidth.....	12
2.2	Maximum Conducted Output Power .....	15
2.3	Spurious Radiated Emissions .....	17
2.4	Restricted Band Edges .....	28
2.5	Authorised Band Edges .....	32
2.6	Power Spectral Density.....	35
<b>3</b>	<b>Measurement Uncertainty .....</b>	<b>37</b>

## 1 Report Summary

### 1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	26 September 2017

**Table 1**

### 1.2 Introduction

Applicant	Shot Scope Technologies Ltd
Manufacturer	Shot Scope Technologies Ltd
Model Number(s)	Shot Scope V2
Serial Number(s)	Not Serialised (75940057-TSR0003) Not Serialised (75940057-TSR0004) Not Serialised (75940057-TSR0007) Not Serialised (75940057-TSR0010)
Hardware Version(s)	1.2
Software Version(s)	1.0
Number of Samples Tested	4
Test Specification/Issue/Date	FCC 47 CFR Part 15C: 2016
Order Number	TUV SUD CE & FCC 001
Date	31-July-2017
Date of Receipt of EUT	29-August-2017 and 07-September-2017
Start of Test	29-August-2017
Finish of Test	13-September-2017
Name of Engineer(s)	Mehadi Choudhury, Dan Ralley and Graeme Lawler
Related Document(s)	ANSI C63.10 (2013)



Product Service

### 1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15C is shown below.

Section	Specification Clause	Test Description	Result	Comments/Base Standard
Configuration: Bluetooth Low Energy				
2.1	15.247 (a)(2)	Emission Bandwidth	Pass	ANSI C63.10
2.2	15.247 (b)(3)	Maximum Conducted Output Power	Pass	ANSI C63.10
2.3	15.247 (d) and 15.205	Spurious Radiated Emissions	Pass	ANSI C63.10
2.4	15.205	Restricted Band Edges	Pass	ANSI C63.10
2.5	15.247 (d)	Authorised Band Edges	Pass	ANSI C63.10
2.6	15.247 (e)	Power Spectral Density	Pass	ANSI C63.10

**Table 2**

## 1.4 Application Form

EQUIPMENT DESCRIPTION	
Model Name/Number	Shot Scope V2
Part Number	SSP-GPS-01
Hardware Version	1.2
Software Version	1.0
FCC ID (if applicable)	
Industry Canada ID (if applicable)	
Technical Description (Please provide a brief description of the intended use of the equipment)	Shot Scope V2 is used by golfers to provide distance information from their position to their target. It also tracks how far each golf shot is hit and what golf club was used.

Types of Modulations used by the Equipment	
<input type="checkbox"/>	FHSS
<input checked="" type="checkbox"/>	Other forms of modulation
In case of FHSS Modulation	
In case of non-Adaptive Frequency Hopping equipment:	
Number of Hopping Frequencies:	
In case of Adaptive Frequency Hopping Equipment:	
Maximum number of Hopping Frequencies:	
Minimum number of Hopping Frequencies:	
Dwell Time:	
Adaptive / non-adaptive equipment:	
<input type="checkbox"/>	non-adaptive Equipment
<input type="checkbox"/>	adaptive Equipment without the possibility to switch to a non-adaptive mode
<input type="checkbox"/>	adaptive Equipment which can also operate in a non-adaptive mode
In case of adaptive equipment:	
The maximum Channel Occupancy Time implemented by the equipment: ms	
<input type="checkbox"/>	The equipment has implemented an LBT based DAA mechanism
In case of equipment using modulation different from FHSS:	
<input type="checkbox"/>	The equipment is Frame Based equipment
<input type="checkbox"/>	The equipment is Load Based equipment
<input type="checkbox"/>	The equipment can switch dynamically between Frame Based and Load Based equipment
The CCA time implemented by the equipment: µs	
<input type="checkbox"/>	The equipment has implemented an non-LBT based DAA mechanism
<input type="checkbox"/>	The equipment can operate in more than one adaptive mode

In case of non-adaptive Equipment:	
The maximum RF Output Power (e.i.r.p.):	dBm
The maximum (corresponding) Duty Cycle:	%
Equipment with dynamic behaviour, that behaviour is described here. (e.g. the different combinations of duty cycle and corresponding power levels to be declared):	
The worst case operational mode for each of the following tests:	
RF Output Power: -10 dBW	
Power Spectral Density: 10 dBm per MHz	
Duty cycle, Tx-Sequence, Tx-gap: BLE	
Accumulated Transmit Time, Frequency Occupation & Hopping Sequence (only for FHSS equipment):	
Hopping Frequency Separation (only for FHSS equipment):	
Medium Utilisation:	
Adaptivity & Receiver Blocking:	
Nominal Channel Bandwidth: 2MHz	
Transmitter unwanted emissions in the OOB domain:	
Transmitter unwanted emissions in the spurious domain:	
Receiver spurious emissions:	
The different transmit operating modes (tick all that apply):	
<input checked="" type="checkbox"/>	Operating mode 1: Single Antenna Equipment
<input checked="" type="checkbox"/>	Equipment with only 1 antenna
<input type="checkbox"/>	Equipment with 2 diversity antennas but only 1 antenna active at any moment in time
<input type="checkbox"/>	Smart Antenna Systems with 2 or more antennas, but operating in a (legacy) mode where only 1 antenna is used. (e.g. IEEE 802.11™ [i.3] legacy mode in smart antenna systems)
<input type="checkbox"/>	Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming
<input type="checkbox"/>	Single spatial stream / Standard throughput / (e.g. IEEE 802.11™ [i.3] legacy mode)
<input type="checkbox"/>	High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 1
<input type="checkbox"/>	High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 2
<input type="checkbox"/>	High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 3
<input type="checkbox"/>	High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 4
<input type="checkbox"/>	High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 5
NOTE: Add more lines if more channel bandwidths are supported.	
<input type="checkbox"/>	Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming
<input type="checkbox"/>	Single spatial stream / Standard throughput (e.g. IEEE 802.11™ [i.3] legacy mode)
<input type="checkbox"/>	High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 1
<input type="checkbox"/>	High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 2
<input type="checkbox"/>	High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 3
<input type="checkbox"/>	High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 4
<input type="checkbox"/>	High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 5
NOTE: Add more lines if more channel bandwidths are supported.	



In case of Smart Antenna Systems:	
The number of Receive chains:	
The number of Transmit chains:	
<input type="checkbox"/>	symmetrical power distribution
<input type="checkbox"/>	asymmetrical power distribution
In case of beam forming, the maximum (additional) beam forming gain:      dB	
<i>NOTE: The additional beam forming gain does not include the basic gain of a single antenna.</i>	
Operating Frequency Range(s) of the equipment:	
Operating Frequency Range 1: 2402 MHz to 2481 MHz	
Operating Frequency Range 2:	MHz to      MHz
Operating Frequency Range 3:	MHz to      MHz
<i>NOTE: Add more lines if more Frequency Ranges are supported.</i>	
Nominal Channel Bandwidth(s):	
Nominal Channel Bandwidth1: 2 MHz	
Nominal Channel Bandwidth2:	MHz
Nominal Channel Bandwidth3:	MHz
Nominal Channel Bandwidth4:	MHz
Nominal Channel Bandwidth5:	MHz
<i>NOTE: Add more lines if more channel bandwidths are supported.</i>	
Type of Equipment (stand-alone, combined, plug-in radio device, etc.):	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined Equipment (Equipment where the radio part is fully integrated within another type of equipment)
<input type="checkbox"/>	Plug-in radio device (Equipment intended for a variety of host systems)
<input type="checkbox"/>	Other
The normal and extreme operating conditions that apply to the equipment:	
Normal operating conditions (if applicable):	
Operating temperature: 20 °C	
Other (please specify if applicable):	
Extreme operating conditions:	
Operating temperature range: Minimum 0 °C to Maximum 85 °C	
Other (please specify if applicable): Minimum      °C to Maximum      °C	
Details provided are for the:	
<input checked="" type="checkbox"/>	stand-alone equipment
<input type="checkbox"/>	combined (or host) equipment
<input type="checkbox"/>	test jig



The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p levels:			
Antenna Type:			
<input checked="" type="checkbox"/> Integral Antenna (information to be provided in case of conducted measurements)			
Antenna Gain: 2.2 dBi			
If applicable, additional beamforming gain (excluding basic antenna gain):      dB			
<input type="checkbox"/> Temporary RF connector provided			
<input type="checkbox"/> No temporary RF connector provided			
<input type="checkbox"/> Dedicated Antennas (equipment with antenna connector)			
<input type="checkbox"/> Single power level with corresponding antenna(s)			
<input type="checkbox"/> Multiple power settings and corresponding antenna(s)			
Number of different Power Levels:			
Power Level 1:      dBm			
Power Level 2:      dBm			
Power Level 3:      dBm			
NOTE 1: Add more lines in case the equipment has more power levels.			
NOTE 2: These power levels are conducted power levels (at antenna connector).			
For each of the Power Levels, provide the intended antenna assemblies, their corresponding gains (G) and the resulting e.i.r.p. levels also taking into account the beamforming gain (Y) if applicable			
Power Level 1:      dBm			
Number of antenna assemblies provided for this power level:			
Assembly #	Gain (dBi)	e.i.r.p (dBm)	Part number or model number
1			
2			
3			
4			
NOTE: Add more rows in case more antenna assemblies are supported for this power level.			
Power Level 2:      dBm			
Number of antenna assemblies provided for this power level:			
Assembly #	Gain (dBi)	e.i.r.p (dBm)	Part number or model number
1			
2			
3			
4			
NOTE: Add more rows in case more antenna assemblies are supported for this power level.			
Power Level 3:      dBm			
Number of antenna assemblies provided for this power level:			
Assembly #	Gain (dBi)	e.i.r.p (dBm)	Part number or model number
1			
2			
3			
4			
NOTE: Add more rows in case more antenna assemblies are supported for this power level.			





<b>The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined (host) equipment or test jig in case of plug-in devices:</b>	
Details provided are for the:	
<input checked="" type="checkbox"/>	stand-alone equipment
<input type="checkbox"/>	combined (or host) equipment
<input type="checkbox"/>	test jig
Supply Voltage	<input type="checkbox"/> AC mains State AC voltage V
	<input checked="" type="checkbox"/> DC State DC voltage 3.0 - 4.2 V
In case of DC, indicate the type of power source	
<input type="checkbox"/>	Internal Power Supply
<input type="checkbox"/>	External Power Supply or AC/DC adapter
<input checked="" type="checkbox"/>	Battery
<input type="checkbox"/>	Other:
<b>Describe the test modes available which can facilitate testing:</b>	
Custom software to enable Packet Error Ratio test between two bands, one in Tx mode, one in Rx mode.	
<b>The equipment type (e.g. Bluetooth®, IEEE 802.11™ [i.3] IEEE 802.15.4™ [i.4], proprietary, etc.):</b>	
<b>If applicable, the statistical analysis referred in clause 5.4.1 q)</b>	
To be provided as separate attachment	
<b>If applicable, the statistical analysis referred in clause 5.4.1 r)</b>	
To be provided as separate attachment	
<b>Geo-location capability supported by the equipment:</b>	
<input type="checkbox"/>	Yes
<input type="checkbox"/>	The geographical location determined by the equipment as defined in clause 4.3.1.13.2 or clause 4.3.2.12.2 is not accessible to the user.
<input type="checkbox"/>	No
<b>Describe the minimum performance criteria that apply to the equipment (see clause 4.3.1.12.3 or 4.3.2.11.3)</b>	
<b>Combination for testing (see clause 5.3.2.3 of EN 300 328 V21.1)</b>	
From all combinations of conducted power settings and intended antenna assembly(ies) specified in clause 5.4.1 m), specify the combination resulting in the highest e.i.r.p. for the radio equipment.	
Unless otherwise specified in ETSI EN 300 328, this power setting is to be used for testing against the requirements of ETSI EN 300 328. In case there is more than one such conducted power setting resulting in the same (highest) e.i.r.p. level, the highest power setting is to be used for testing. See also ETS EN 300 328, clause 5.3.2.3	
Highest overall e.i.r.p. value: 0.2 dBm	
Corresponding Antenna assembly gain: 2.2 dBi	Antenna Assembly #:
Corresponding conducted power setting: -2 dBm (also the power level to be used for testing)	Listed as Power Setting #:
<b>Additional information provided by the applicant</b>	
<b>Modulation</b>	
ITU Class(es) of emission:	
Can the transmitter operate unmodulated? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	



Duty Cycle	
The transmitter is intended for:	
<input type="checkbox"/>	Continuous duty
<input type="checkbox"/>	Intermittent duty
<input checked="" type="checkbox"/>	Continuous operation possible for testing purposes
About the UUT	
<input type="checkbox"/>	The equipment submitted are representative production models
<input checked="" type="checkbox"/>	If not, the equipment submitted are pre-production models?
<input checked="" type="checkbox"/>	If pre-production equipment are submitted, the final production equipment will be identical in all respects with the equipment tested
<input type="checkbox"/>	If not, supply full details
<input type="checkbox"/>	The equipment submitted is CE marked
Additional items and/or supporting equipment provided	
<input type="checkbox"/>	Spare batteries (e.g. for portable equipment)
<input checked="" type="checkbox"/>	Battery charging device
<input type="checkbox"/>	External Power Supply or AC/DC adapter
<input type="checkbox"/>	Test Jig or interface box
<input type="checkbox"/>	RF test fixture (for equipment with integrated antennas)
<input type="checkbox"/>	Host System
Manufacturer	
Model	
Model Name	
<input type="checkbox"/>	Combined equipment
Manufacturer	
Model	
Model Name	
<input checked="" type="checkbox"/>	User Manual
<input checked="" type="checkbox"/>	Technical documentation (Handbook and circuit diagrams)

I hereby declare that the information supplied is correct and complete.

Name: Lewis Allison  
 Date: 28/08/17

Position held:

Chief Technology Officer

## 1.5 Product Information

### 1.5.1 Technical Description

Shot Scope V2 is used by golfers to provide distance information from their position to their target. It also tracks how far each golf shot is hit and what golf club was used.

### 1.6 Deviations from the Standard

No deviations from the applicable test standard were made during testing.

### 1.7 EUT Modification Record

The table below details modifications made to the EUT during the test programme.  
The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Serial Number: Not Serialised (75940057-TSR0003)			
0	As supplied by the customer	Not Applicable	Not Applicable
Serial Number: Not Serialised (75940057-TSR0004)			
0	As supplied by the customer	Not Applicable	Not Applicable
Serial Number: Not Serialised (75940057-TSR0007)			
0	As supplied by the customer	Not Applicable	Not Applicable
Serial Number: Not Serialised (75940057-TSR0010)			
0	As supplied by the customer	Not Applicable	Not Applicable

Table 3

### 1.8 Test Location

TÜV SÜD Product Service conducted the following tests at our Fareham Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration: Bluetooth Low Energy		
Emission Bandwidth	Mehadi Choudhury	UKAS
Maximum Conducted Output Power	Mehadi Choudhury	UKAS
Spurious Radiated Emissions	Graeme Lawler	UKAS
Restricted Band Edges	Graeme Lawler	UKAS
Authorised Band Edges	Graeme Lawler	UKAS
Power Spectral Density	Dan Ralley	UKAS

Table 4



Product Service

Office Address:

Octagon House  
Concorde Way  
Segensworth North  
Fareham  
Hampshire  
PO15 5RL  
United Kingdom

## 2 Test Details

### 2.1 Emission Bandwidth

#### 2.1.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (a)(2)

#### 2.1.2 Equipment Under Test and Modification State

Shot Scope V2, S/N: Not Serialised (75940057-TSR0004) - Modification State 0

#### 2.1.3 Date of Test

04-September-2017

#### 2.1.4 Test Method

The test was performed in accordance with KDB 558074 D01 v04, clause 8.1.

Preliminary checks were performed to determine the data rate with the widest bandwidth.

#### 2.1.5 Environmental Conditions

Ambient Temperature 23.9 °C

Relative Humidity 66.6 %

#### 2.1.6 Test Results

Bluetooth Low Energy

Modulation/Packet Type: GFSK/DH1

Frequency (MHz)	6 dB Bandwidth (kHz)
2402	1050.60
2441	1066.10
2480	1071.80

**Table 5**

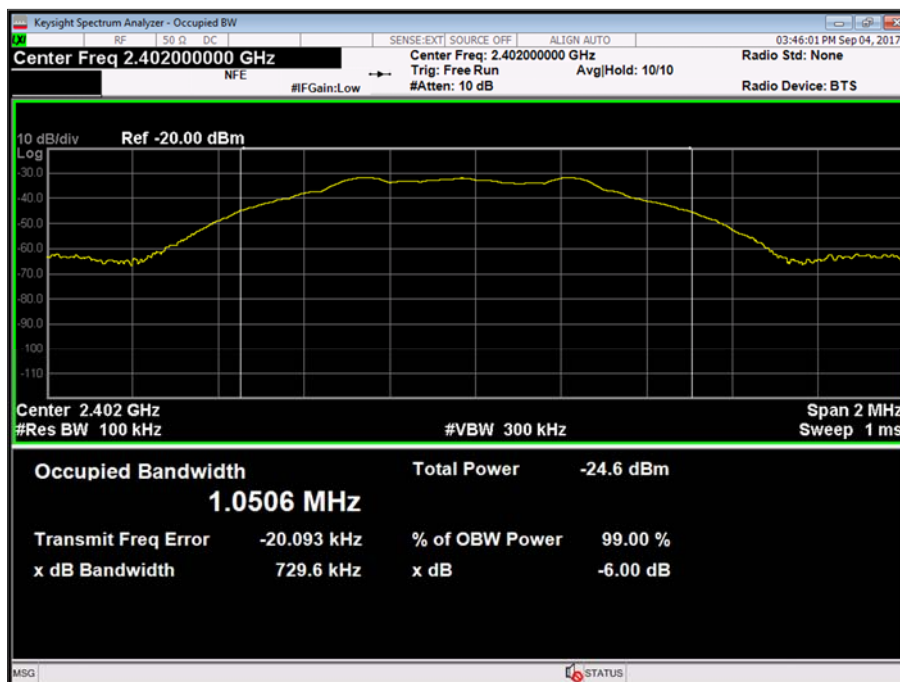


Figure 1 - 2402 MHz

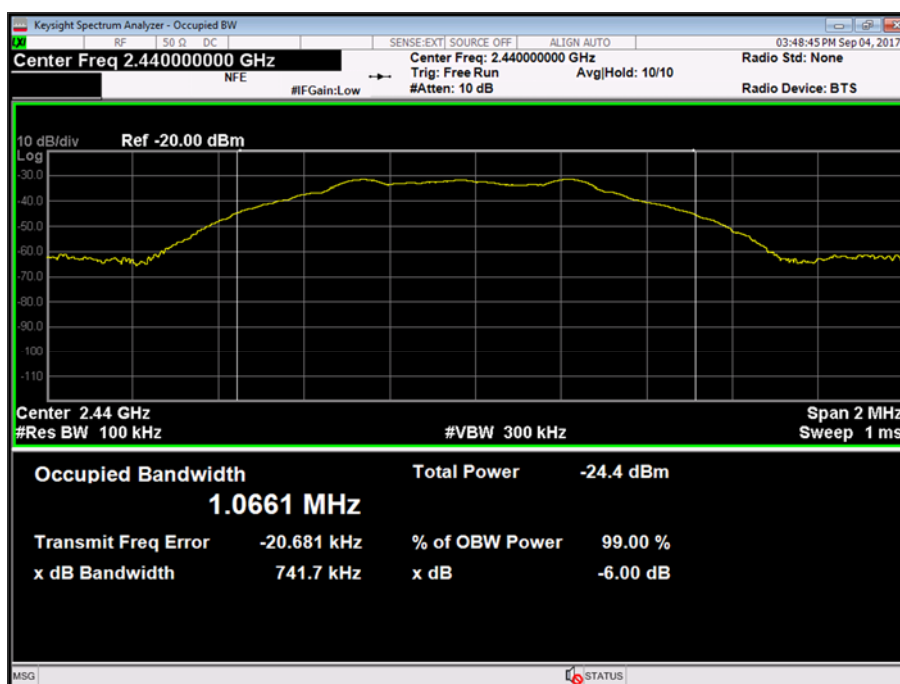


Figure 2 - 2440 MHz

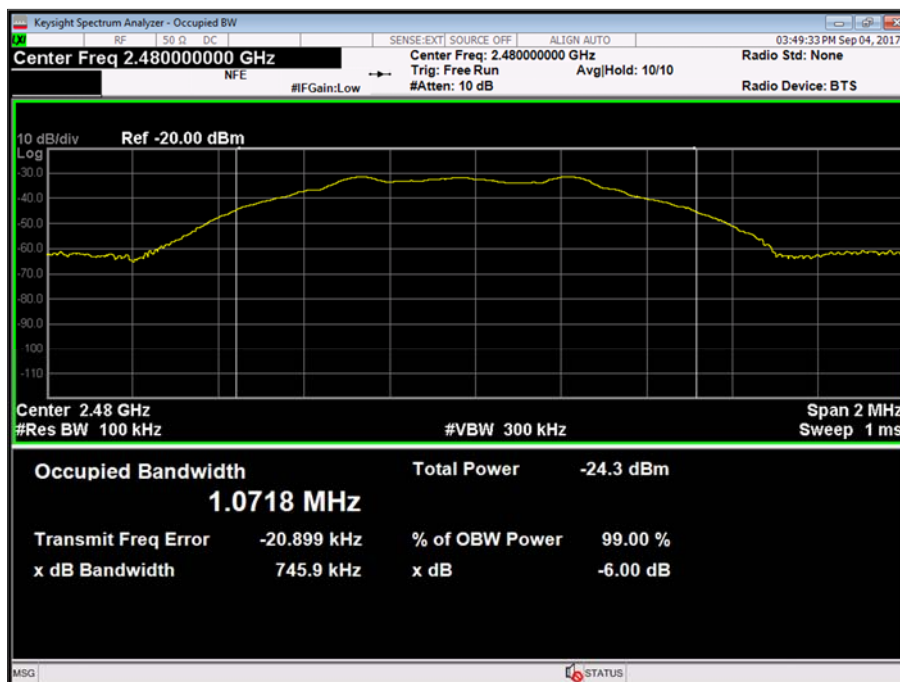


Figure 3 - 2480 MHz

FCC 47 CFR Part 15, Limit Clause 15.247 (a)(2)

The minimum 6 dB Bandwidth shall be at least 500 kHz.

### 2.1.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Attenuator (10dB, 1W)	Sealectro	60-674-1010-89	1224	12	30-Jun-2018
Hygrometer	Rotronic	I-1000	3220	12	30-Aug-2018
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	15-Sep-2017
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	20-Sep-2018
Frequency Standard	Spectracom	Secure Sync 1200-0408-0601	4393	6	09-Sep-2017
PXA Signal Analyser	Keysight Technologies	N9030A	4653	12	12-Jan-2018

Table 6

## 2.2 Maximum Conducted Output Power

### 2.2.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (b)(3)

### 2.2.2 Equipment Under Test and Modification State

Shot Scope V2, S/N: Not Serialised (75940057-TSR0003) - Modification State 0

### 2.2.3 Date of Test

08-September-2017

### 2.2.4 Test Method

The test was performed in accordance with KDB 558074 D01 v03r02, clause 9.1.1.

### 2.2.5 Environmental Conditions

Ambient Temperature 22.3 - 23.8 °C

Relative Humidity 42.7 - 57.9 %

### 2.2.6 Test Results

Bluetooth Low Energy

Frequency (MHz)	Output Power	
	(dBm)	(mW)
2402	-6.18	0.24
2441	-7.41	0.18
2480	-8.31	0.15

**Table 7**

FCC 47 CFR Part 15, Limit Clause 15.247 (b)

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(3) For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.



### 2.2.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Signal Generator	Hewlett Packard	ESG4000A	38	12	31-May-2018
Power Supply Unit	Farnell	LB30-4	158	-	O/P Mon
Attenuator (10dB, 1W)	Sealectro	60-674-1010-89	1224	12	30-Jun-2018
Rubidium Standard	Rohde & Schwarz	XSRM	1316	6	12-Mar-2018
Power Supply	Iso-tech	IPS 2010	2440	-	O/P Mon
Hygrometer	Rotronic	I-1000	3220	12	30-Aug-2018
Signal Analyser	Rohde & Schwarz	FSQ 26	3545	12	09-Oct-2017
TRUE RMS MULTIMETER	Fluke	179	4006	12	13-Dec-2017
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	08-Sep-2017
Frequency Standard	Spectracom	Secure Sync 1200-0408-0601	4393	6	12-Mar-2018
PXA Signal Analyser	Keysight Technologies	N9030A	4653	12	12-Jan-2018
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	15-Sep-2017

**Table 8**

O/P Mon – Output Monitored using calibrated equipment

## 2.3 Spurious Radiated Emissions

### 2.3.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (d) and 15.205

### 2.3.2 Equipment Under Test and Modification State

Shot Scope V2, S/N: Not Serialised (75940057-TSR0007) - Modification State 0

### 2.3.3 Date of Test

29-August-2017 to 30-August-2017

### 2.3.4 Test Method

Testing was performed in accordance with ANSI C63.10-2013 clause 6.3, 6.5 and 6.6.

Plots for average measurements were taken in accordance with ANSI C63.10-2013 clause 4.1.4.2.3 to characterize the EUT. Where emissions were detected, final average measurements were taken in accordance with ANSI C63.10-2013 clause 4.1.4.2.2.

The plots shown are the characterization of the EUT. The limits on the plots represent the most stringent case for restricted bands, (54/74 dBuV/m) when compared to 20 dBc outside restricted bands. The limits shown have been used as a threshold to determine where further measurements are necessary. Where results are within 10 dB of the limits shown on the plots, further investigation was carried out and reported in results tables.

The following conversion can be applied to convert from dBuV/m to uV/m:  
 $10^{(\text{Field Strength in dBuV/m}/20)}$

### 2.3.5 Environmental Conditions

Ambient Temperature 21.2 - 22.7 °C  
Relative Humidity 44.0 - 55.0 %

### 2.3.6 Test Results

#### Bluetooth Low Energy

Frequency (MHz)	QP Level (dBuV/m)	QP Limit (dBuV/m)	QP Margin (dBuV/m)	Angle(Deg)	Height(m)	Polarity
30.886	30.5	40.0	-9.5	0	1.00	Vertical
32.017	29.9	40.0	-10.1	0	1.00	Vertical
34.649	28.6	40.0	-11.4	0	1.00	Vertical
829.427	32.9	46.0	-13.1	0	1.00	Vertical
903.708	33.6	46.0	-12.4	0	1.00	Vertical
960.000	34.2	46.0	-11.8	0	1.00	Vertical

**Table 9 - 2402 MHz - 30 MHz to 1 GHz**

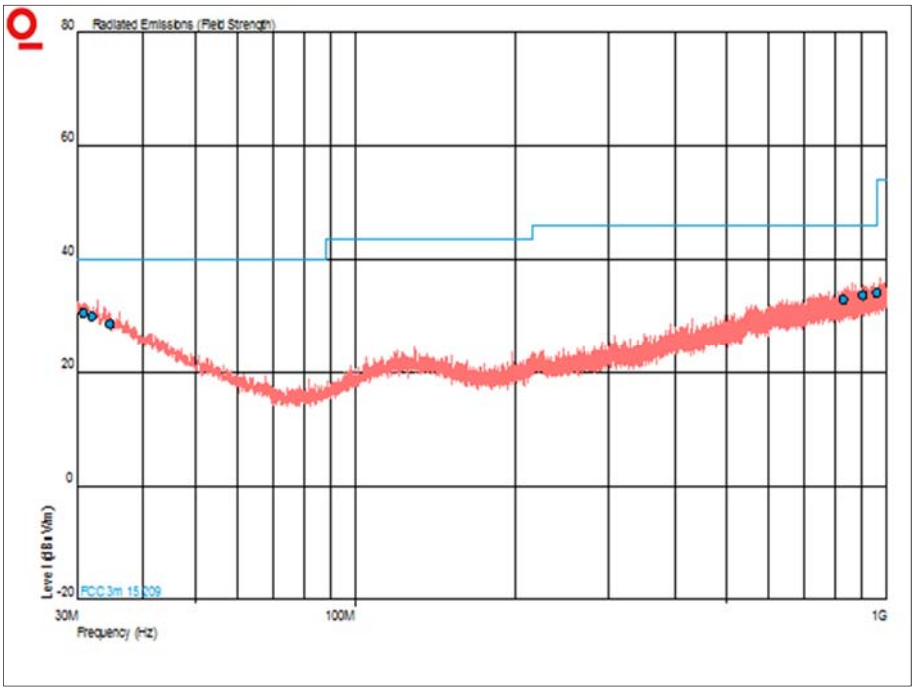


Figure 4 - 2402 MHz - 30 MHz to 1 GHz - Horizontal and Vertical

Frequency (MHz)	Result (dBµV/m)		Limit (dBµV/m)		Margin (dBµV/m)	
	Peak	Average	Peak	Average	Peak	Average
*						

Table 10 - 2402 MHz - 1 GHz to 25 GHz

\*No emissions were detected within 10 dB of the limit.

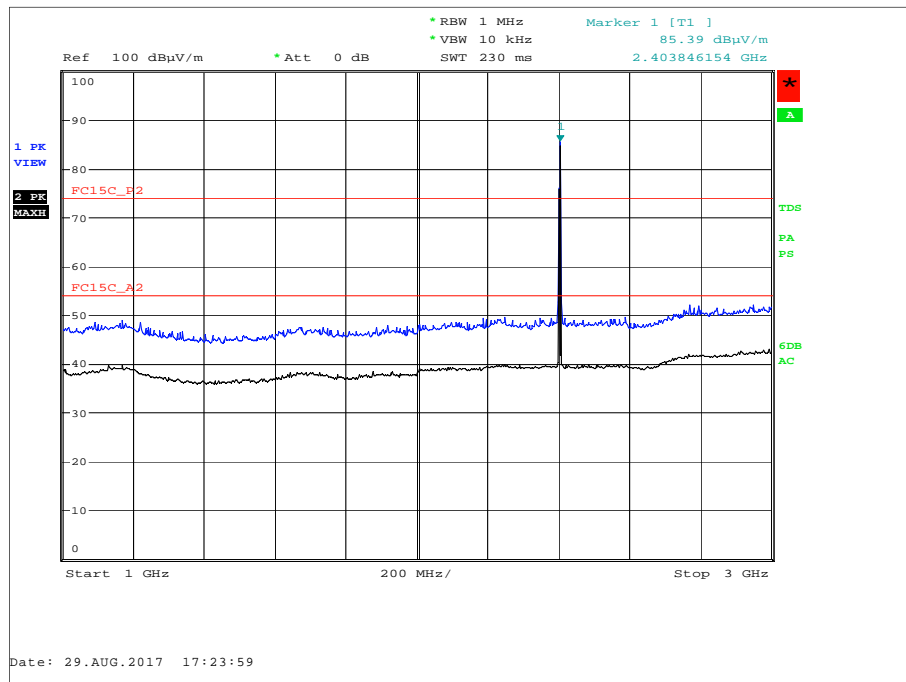


Figure 5 - 2402 MHz - 1 GHz to 3 GHz - Horizontal and Vertical

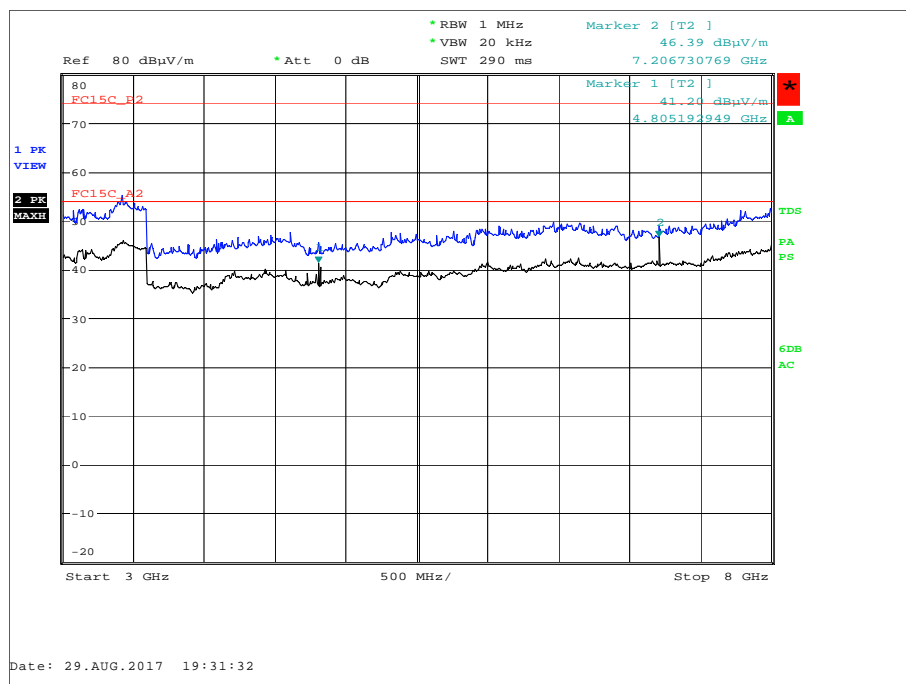


Figure 6 - 2402 MHz - 3 GHz to 8 GHz - Horizontal and Vertical

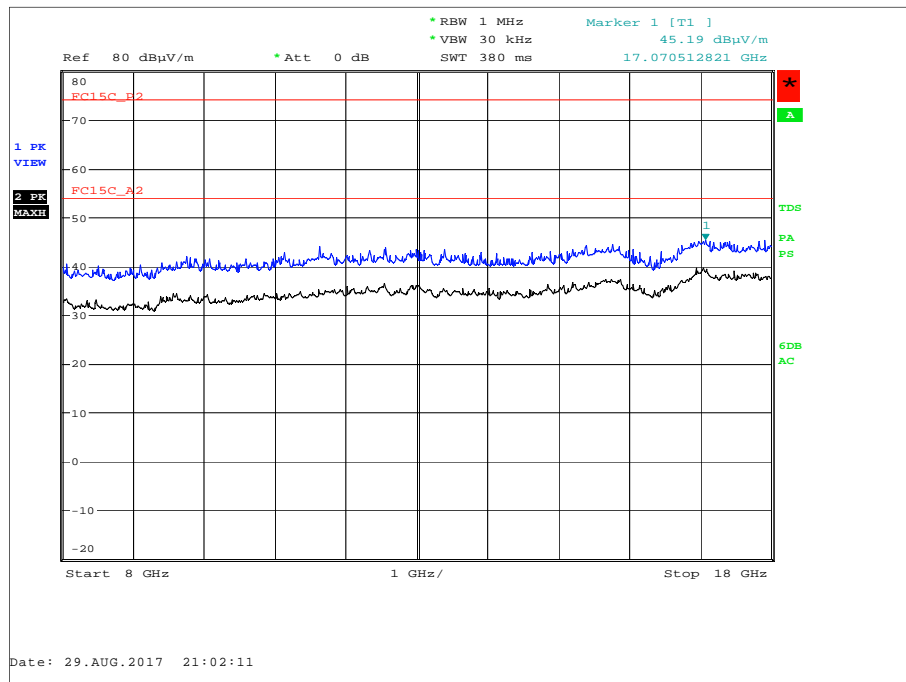


Figure 7 - 2402 MHz - 8 GHz to 18 GHz - Horizontal and Vertical


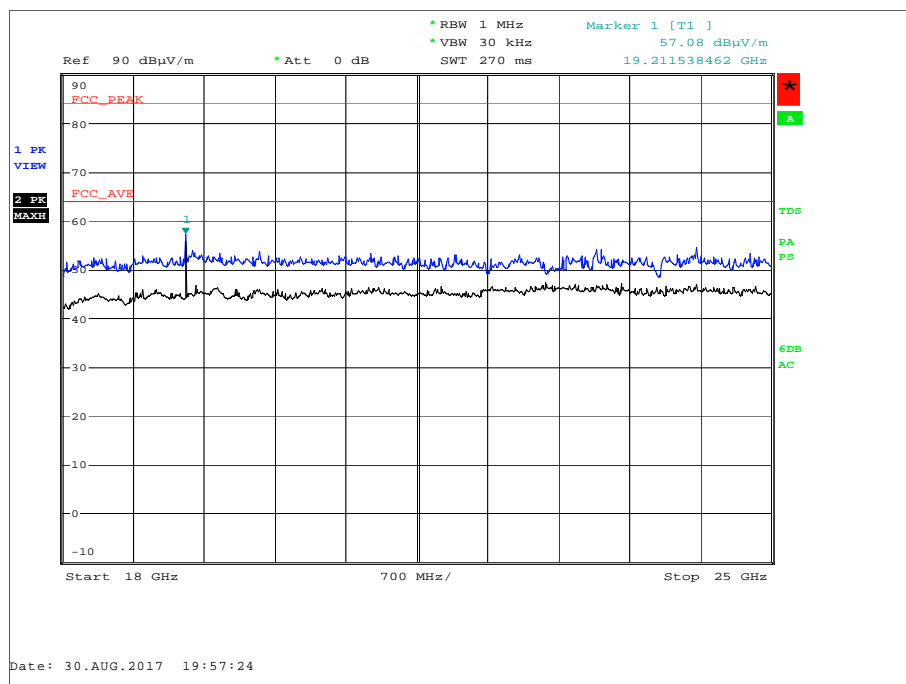


Figure 8 - 2402 MHz - 18 GHz to 25 GHz - Horizontal and Vertical

Frequency (MHz)	QP Level (dBuV/m)	QP Limit (dBuV/m)	QP Margin (dBuV/m)	Angle(Deg)	Height(m)	Polarity
30.376	30.8	40.0	-9.2	0	1.00	Vertical
32.219	29.9	40.0	-10.1	0	1.00	Vertical
34.878	28.5	40.0	-11.5	0	1.00	Vertical
830.301	32.9	46.0	-13.1	0	1.00	Vertical
900.144	33.6	46.0	-12.4	0	1.00	Vertical
960.000	34.2	46.0	-11.8	0	1.00	Vertical

**Table 11 - 2441 MHz - 30 MHz to 1 GHz**

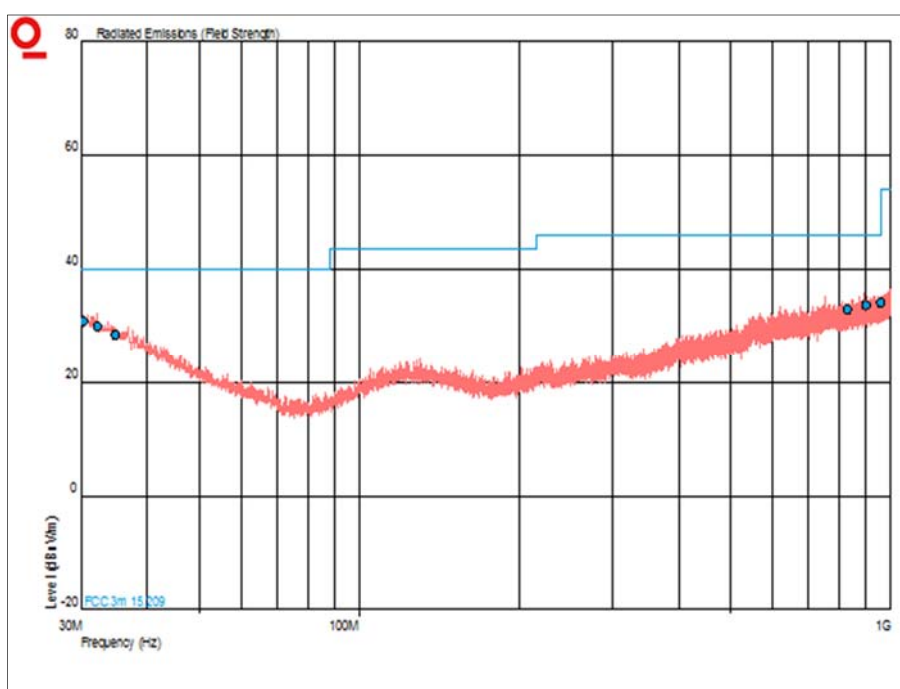

**Figure 9 - 2441 MHz - 30 MHz to 1 GHz - Horizontal and Vertical**

Frequency (MHz)	Result (dBuV/m)		Limit (dBuV/m)		Margin (dBuV/m)	
	Peak	Average	Peak	Average	Peak	Average
*						

**Table 12 - 2441 MHz - 1 GHz to 25 GHz**

\*No emissions were detected within 10 dB of the limit.

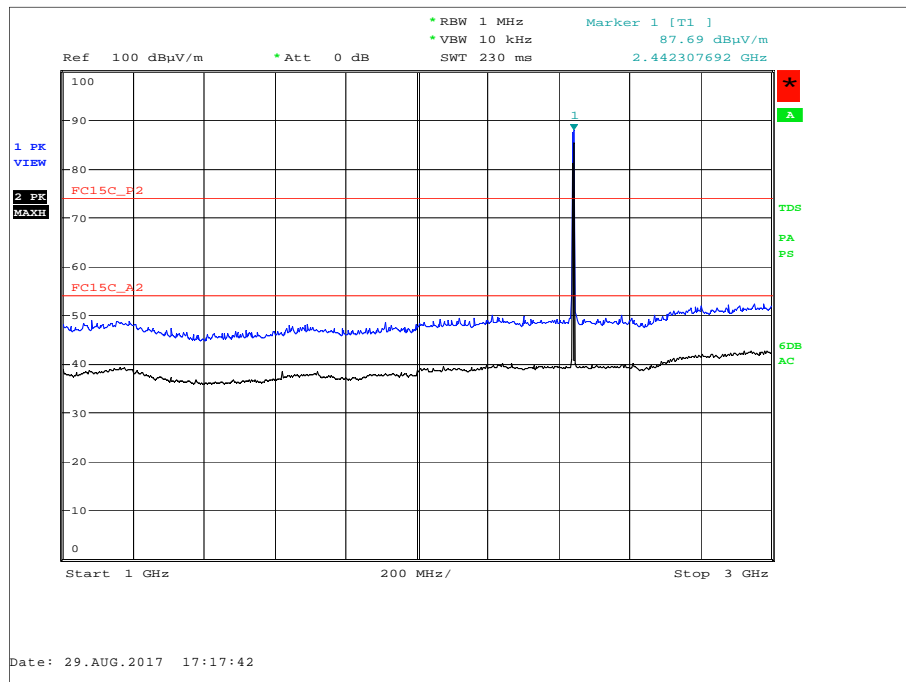


Figure 10 - 2441 MHz - 1 GHz to 3 GHz - Horizontal and Vertical

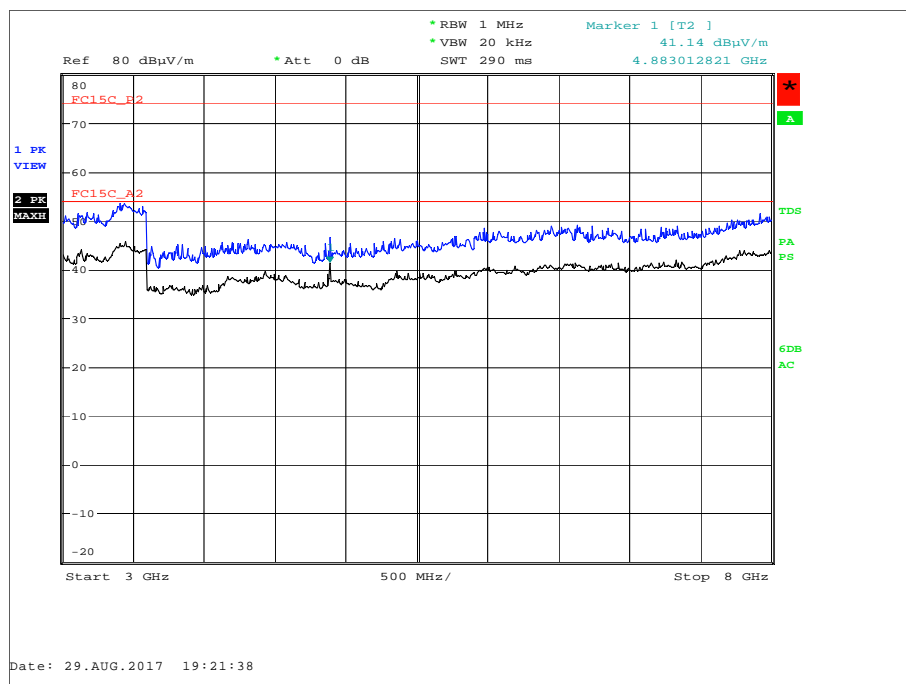


Figure 11 - 2441 MHz - 3 GHz to 8 GHz - Horizontal and Vertical



Product Service

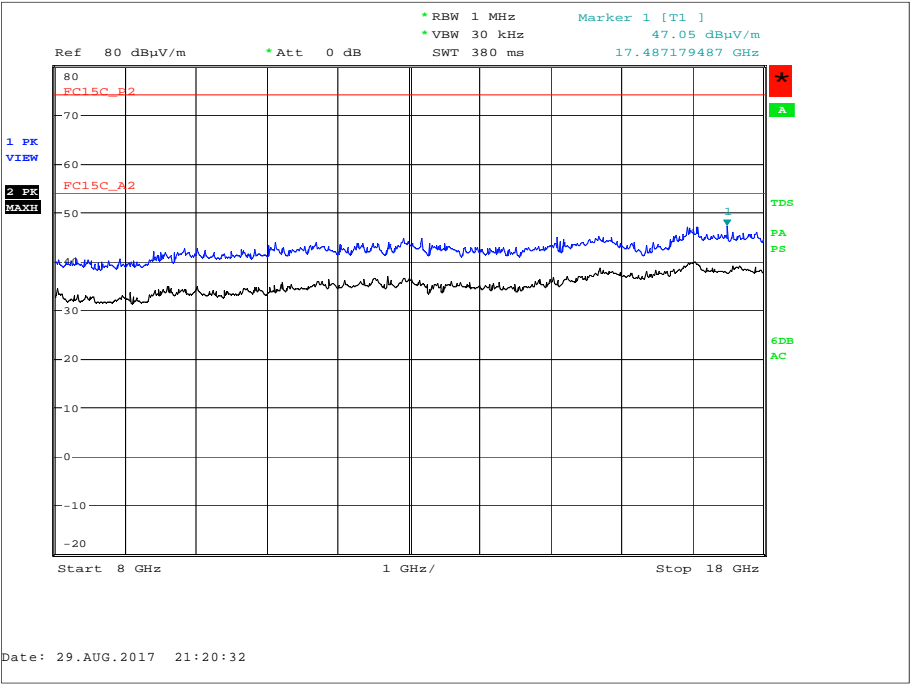


Figure 12 - 2441 MHz - 8 GHz to 18 GHz - Horizontal and Vertical


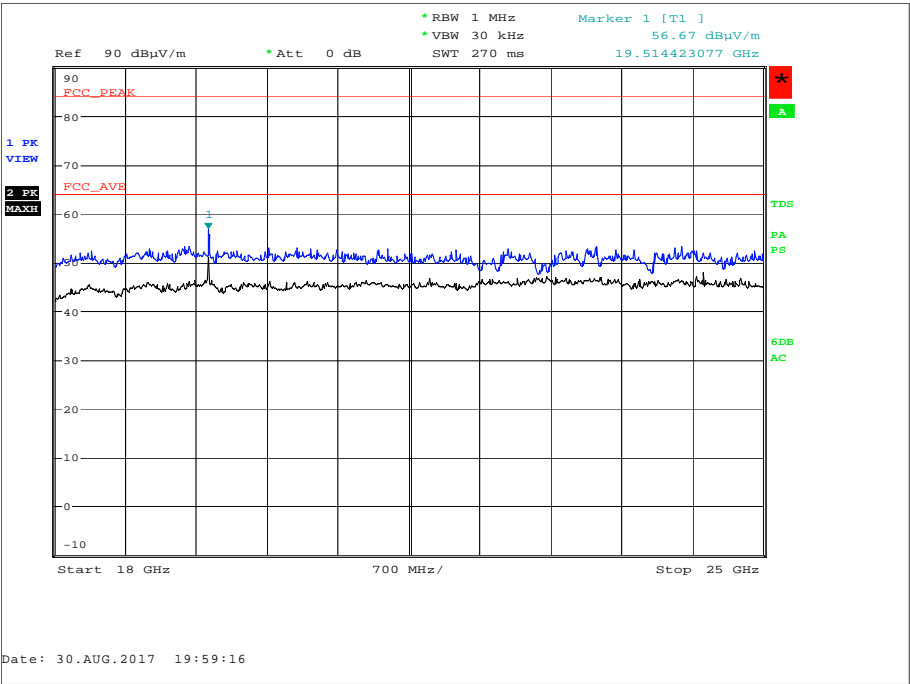


Figure 13 - 2441 MHz - 18 GHz to 25 GHz - Horizontal and Vertical



Frequency (MHz)	QP Level (dBuV/m)	QP Limit (dBuV/m)	QP Margin (dBuV/m)	Angle(Deg)	Height(m)	Polarity
30.034	30.9	40.0	-9.1	0	1.00	Vertical
32.688	29.6	40.0	-10.4	0	1.00	Vertical
35.304	28.4	40.0	-11.6	0	1.00	Vertical
861.383	33.2	46.0	-12.8	0	1.00	Vertical
907.480	33.7	46.0	-12.3	0	1.00	Vertical
956.030	34.1	46.0	-11.9	0	1.00	Vertical

**Table 13 - 2480 MHz - 30 MHz to 1 GHz**

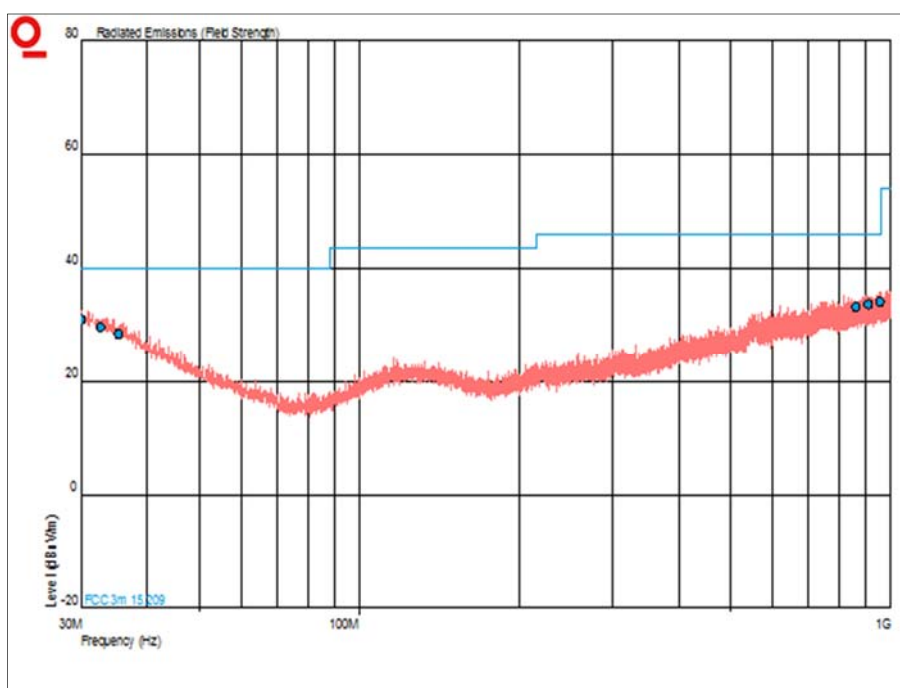

**Figure 14 - 2480 MHz - 30 MHz to 1 GHz - Horizontal and Vertical**

Frequency (MHz)	Result (dBuV/m)		Limit (dBuV/m)		Margin (dBuV/m)	
	Peak	Average	Peak	Average	Peak	Average
*						

**Table 14 - 2480 MHz - 1 GHz to 25 GHz**

\*No emissions were detected within 10 dB of the limit.

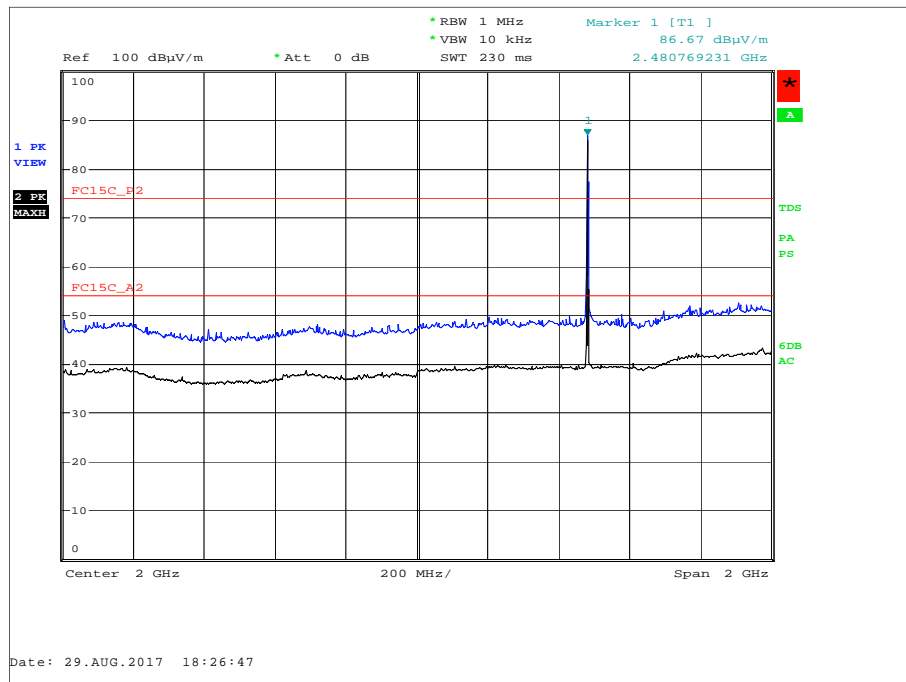


Figure 15 - 2480 MHz - 1 GHz to 3 GHz - Horizontal and Vertical

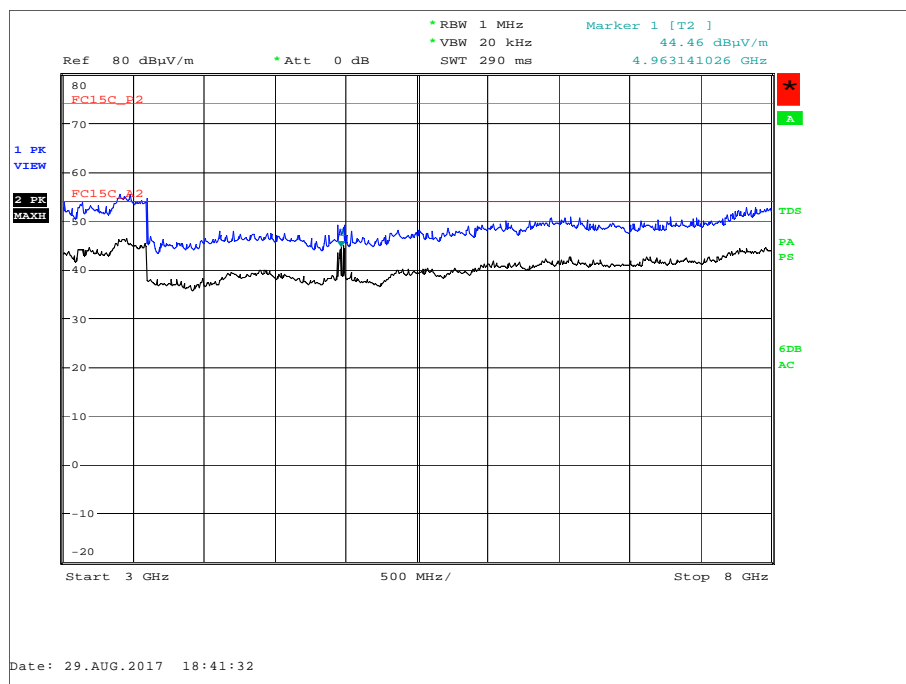


Figure 16 - 2480 MHz - 3 GHz to 8 GHz - Horizontal and Vertical

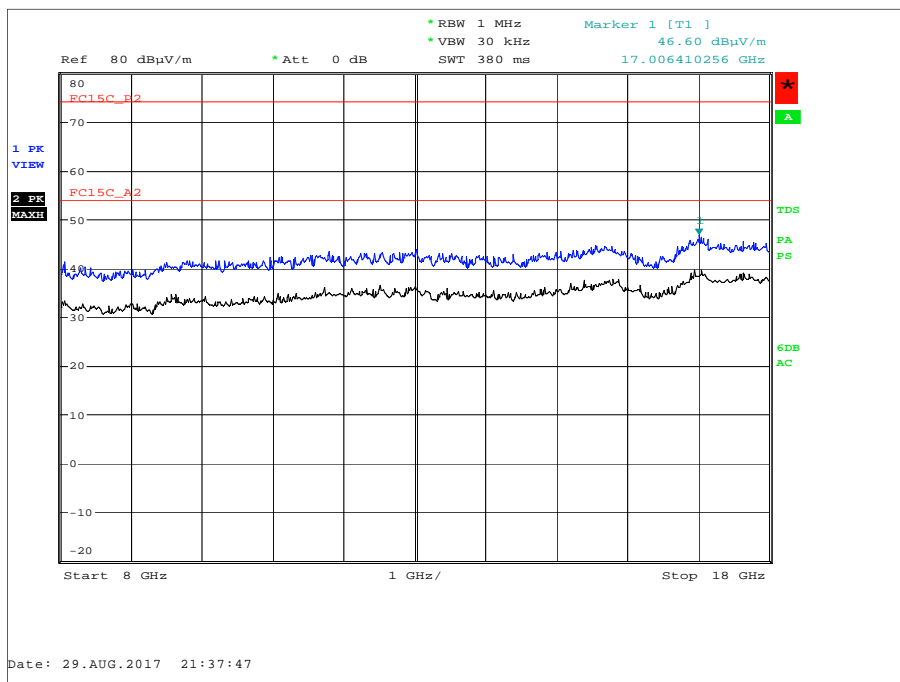


Figure 17 - 2480 MHz - 8 GHz to 18 GHz - Horizontal and Vertical

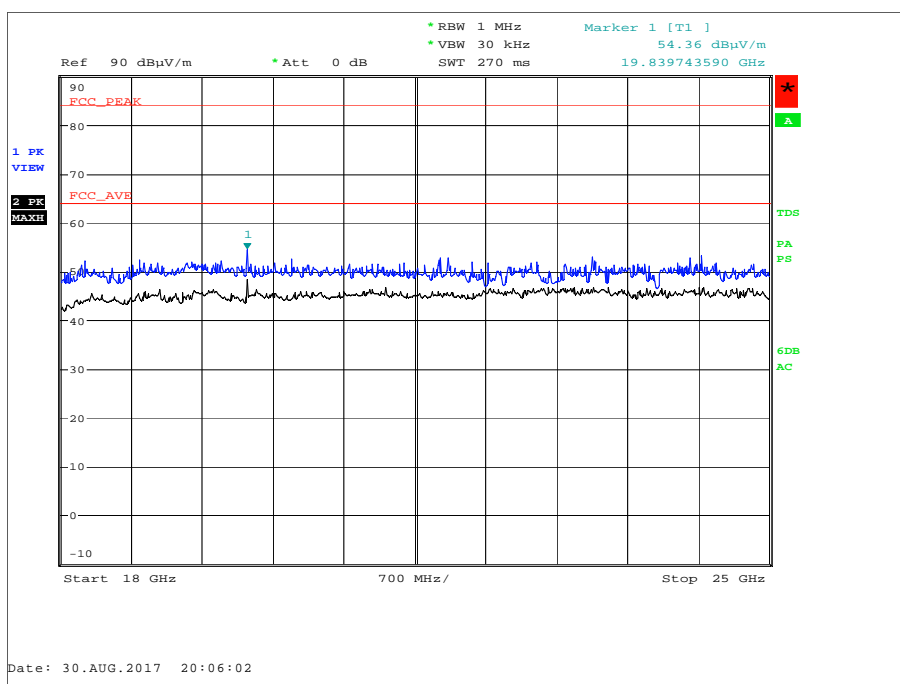


Figure 18 - 2480 MHz - 18 GHz to 25 GHz - Horizontal and Vertical

#### FCC 47 CFR Part 15, Limit Clause 15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

### **2.3.7 Test Location and Test Equipment Used**

This test was carried out in EMC Chamber 5.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Antenna 18-40GHz (Double Ridge Guide)	Link Microtek Ltd	AM180HA-K-TU2	230	24	12-Feb-2018
Antenna (Bilog)	Schaffner	CBL6143	287	24	18-Apr-2018
Pre-Amplifier	Phase One	PS04-0086	1533	12	31-Jul-2018
Screened Room (5)	Rainford	Rainford	1545	36	20-Dec-2017
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Cable (N-N, 8m)	Rhophase	NPS-2302-8000-NPS	3248	12	02-May-2018
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	12-Nov-2017
Tilt Antenna Mast	matur GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	matur GmbH	NCD	3917	-	TU
Cable 1503 2M 2.92(P)m 2.92(P)m	Rhophase	KPS-1503A-2000-KPS	4293	12	23-Jan-2018
Suspended Substrate Highpass Filter	Advance Power Components	11SH10-3000/X18000-O/O	4412	12	03-Apr-2018
Cable (Yellow, Rx, Km-Km 2m)	Scott Cables	KPS-1501-2000-KPS	4527	6	04-Nov-2017
Double Ridged Waveguide Horn Antenna	ETS-Lindgren	3117	4722	12	17-Feb-2018
Double Ridge Broadband Horn Antenna	Schwarzbeck	BBHA 9120 B	4848	12	17-Feb-2018

**Table 15**

TU - Traceability Unscheduled

## 2.4 Restricted Band Edges

### 2.4.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.205

### 2.4.2 Equipment Under Test and Modification State

Shot Scope V2, S/N: Not Serialised (75940057-TSR0007) - Modification State 0

### 2.4.3 Date of Test

29-August-2017

### 2.4.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 6.10.5.

Plots for average measurements were taken in accordance with ANSI C63.10 clause 4.1.4.2.3. These are shown for information purposes and were used to determine the worst-case measurement point. Final average measurements were then taken in accordance with ANSI C63.10 clause 4.1.4.2.2. to obtain the measurement result recorded in the test results tables.

The following conversion can be applied to convert from dBµV/m to µV/m:  
 $10^{(\text{Field Strength in dB}\mu\text{V/m}/20)}$

### 2.4.5 Environmental Conditions

Ambient Temperature 22.7 °C  
Relative Humidity 55.0 %

### 2.4.6 Test Results

#### Bluetooth Low Energy

Modulation	Frequency (MHz)	Measured Frequency (MHz)	Peak Level (dBµV/m)	Average Level (dBµV/m)
GFSK	2402	2390.0	58.37	46.21
GFSK	2480	2483.5	57.04	45.88

**Table 16 - Restricted Band Edge Results**

#### FCC 47 CFR Part 15, Limit Clause 15.205

	Peak (dBµV/m)	Average (dBµV/m)
Restricted Bands of Operation	74	54

**Table 17**

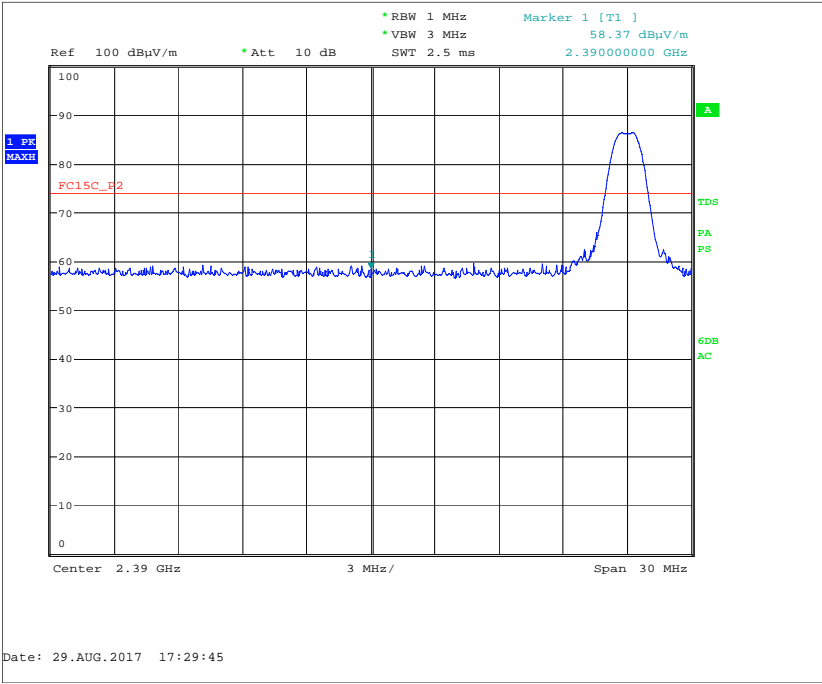


Figure 19 - GFSK - 2402 MHz - Measured Frequency 2390.0 MHz, Peak

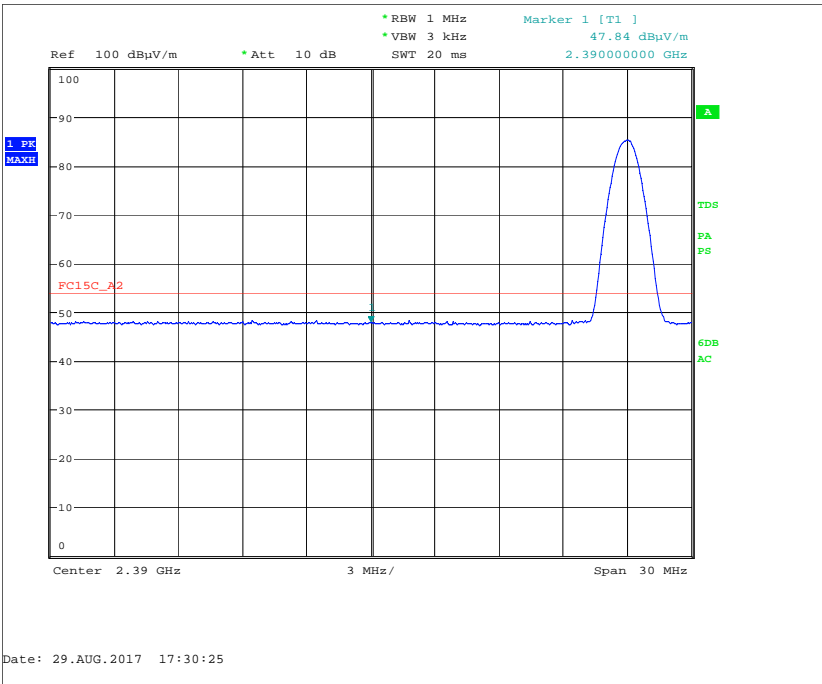


Figure 20 - GFSK - 2402 MHz - Measured Frequency 2390.0 MHz, Average

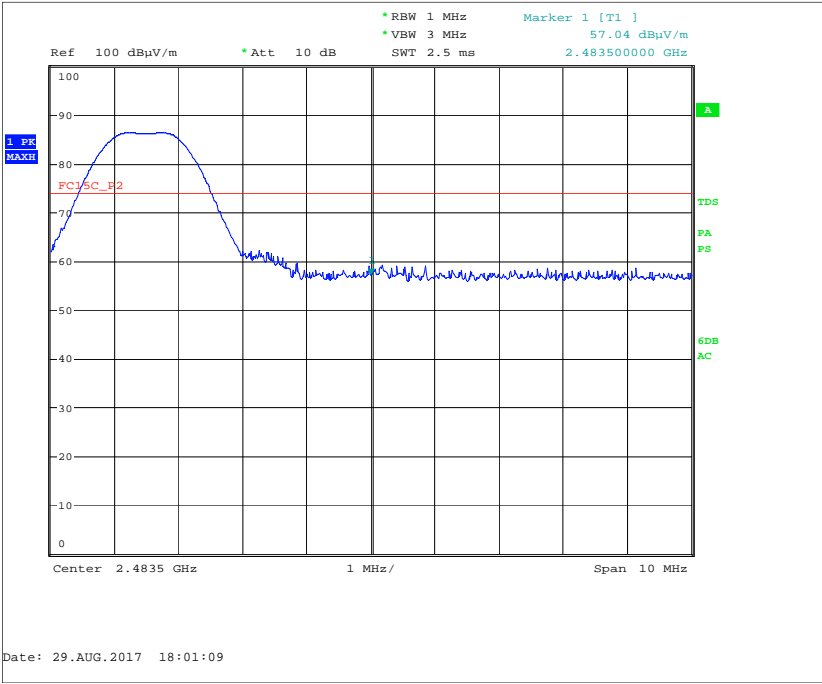


Figure 21 - GFSK - 2480 MHz - Measured Frequency 2483.5 MHz, Peak

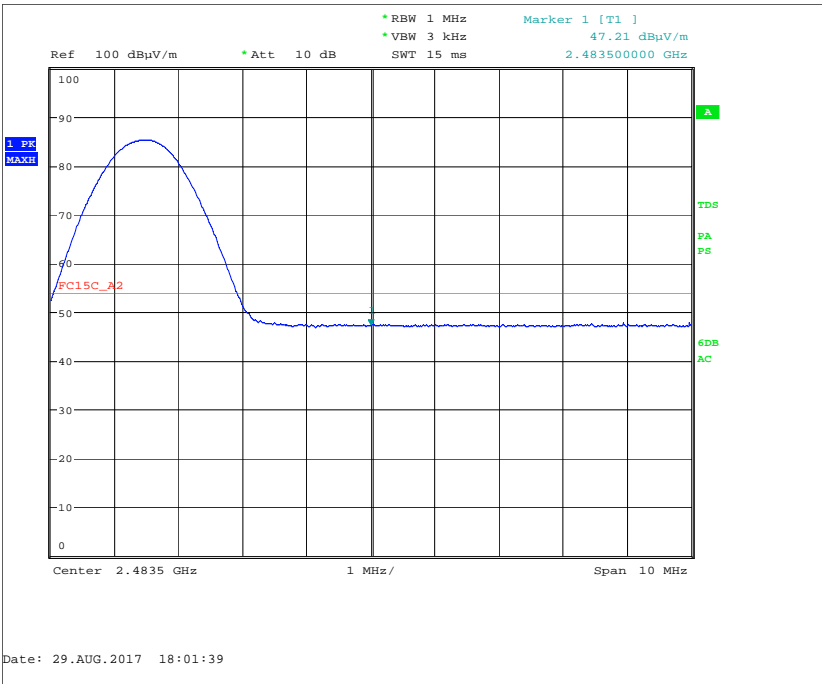


Figure 22 - GFSK - 2480 MHz - Measured Frequency 2483.5 MHz, Average

#### 2.4.7 Test Location and Test Equipment Used

This test was carried out in EMC Chamber 5.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Screened Room (5)	Rainford	Rainford	1545	36	20-Dec-2017
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Cable (N-N, 8m)	Rhophase	NPS-2302-8000-NPS	3248	12	02-May-2018
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	12-Nov-2017
Tilt Antenna Mast	maturo GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	maturo GmbH	NCD	3917	-	TU
Cable (Yellow, Rx, Km-Km 2m)	Scott Cables	KPS-1501-2000-KPS	4527	6	04-Nov-2017
Double Ridge Broadband Horn Antenna	Schwarzbeck	BBHA 9120 B	4848	12	17-Feb-2018

**Table 18**

TU - Traceability Unscheduled





## **2.5 Authorised Band Edges**

### **2.5.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.247 (d)

### **2.5.2 Equipment Under Test and Modification State**

Shot Scope V2, S/N: Not Serialised (75940057-TSR0007) - Modification State 0

### **2.5.3 Date of Test**

29-August-2017

### **2.5.4 Test Method**

The test was performed in accordance with ANSI C63.10, clause 6.10.4.

### **2.5.5 Environmental Conditions**

Ambient Temperature 22.7 °C


Relative Humidity 55.0 %

### **2.5.6 Test Results**


#### Bluetooth Low Energy

Modulation	Frequency (MHz)	Measured Frequency (MHz)	Peak Level (dBµV/m)
GFSK	2402	2400.0	-34.20
GFSK	2480	2483.5	-37.58

**Table 19**

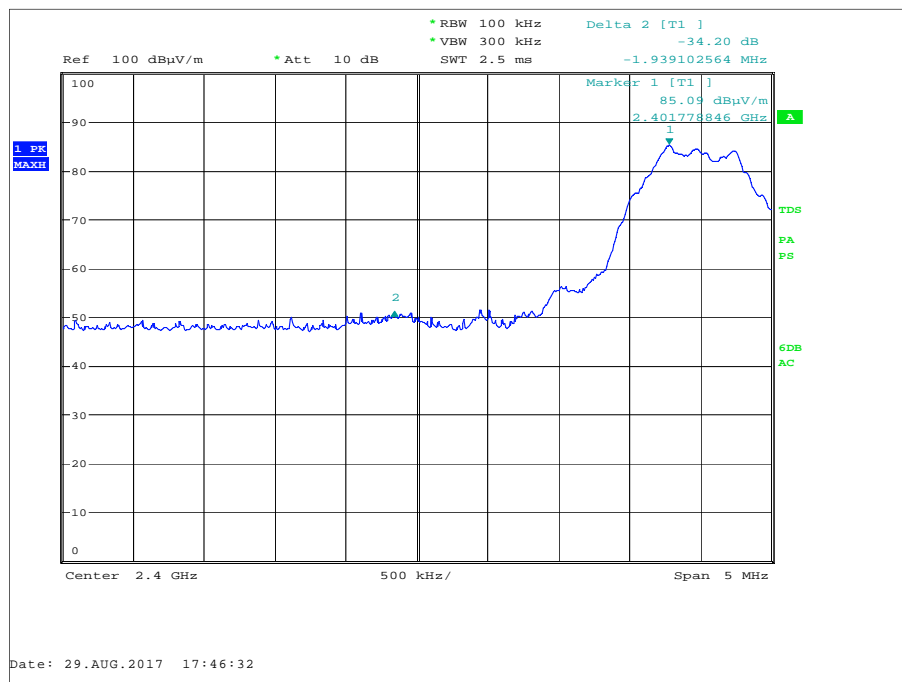

**Figure 23 - GFSK - 2402 MHz - Measured Frequency 2400.0 MHz**

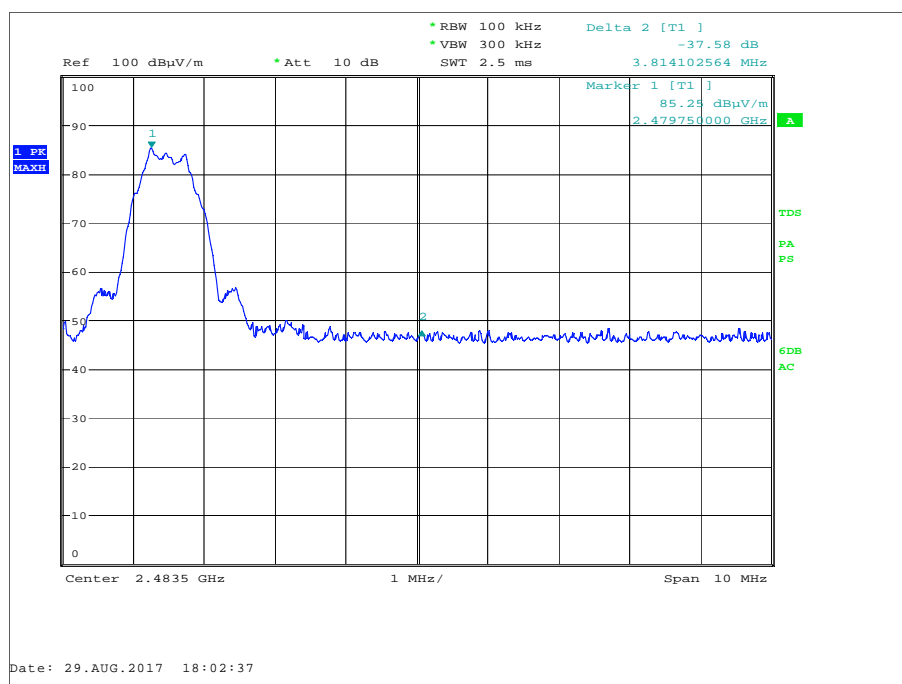

**Figure 24 - GFSK - 2480 MHz - Measured Frequency 2483.5 MHz**

FCC 47 CFR Part 15, Limit Clause 15.247 (d)

20 dB below the fundamental measured in a 100 kHz bandwidth using a peak detector. If the transmitter complies with the conducted power limits, based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB below the fundamental instead of 20 dB.



## 2.5.7 Test Location and Test Equipment Used

This test was carried out in EMC Chamber 5.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Screened Room (5)	Rainford	Rainford	1545	36	20-Dec-2017
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Cable (N-N, 8m)	Rhophase	NPS-2302-8000-NPS	3248	12	02-May-2018
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	12-Nov-2017
Tilt Antenna Mast	maturo GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	maturo GmbH	NCD	3917	-	TU
Cable (Yellow, Rx, Km-Km 2m)	Scott Cables	KPS-1501-2000-KPS	4527	6	04-Nov-2017
Double Ridge Broadband Horn Antenna	Schwarzbeck	BBHA 9120 B	4848	12	17-Feb-2018

**Table 20**

TU - Traceability Unscheduled

## 2.6 Power Spectral Density

### 2.6.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (e)

### 2.6.2 Equipment Under Test and Modification State

Shot Scope V2, S/N: Not Serialised (75940057-TSR0010) - Modification State 0

### 2.6.3 Date of Test

13-September-2017

### 2.6.4 Test Method

The test was performed in accordance with KDB 558074 D01 V03r02, clause 10.2.

### 2.6.5 Environmental Conditions

Ambient Temperature 22.2 - 22.9 °C

Relative Humidity 40.3 - 46.5 %

### 2.6.6 Test Results

Bluetooth Low Energy

Modulation/Packet Type: GFSK/DH1

Frequency (MHz)	Power Spectral Density (dBm)
2441	-32.19
2480	-31.47
2402	-30.99

**Table 21**

FCC 47 CFR Part 15, Limit Clause 15.247 (e)

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

## 2.6.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Signal Generator	Hewlett Packard	ESG4000A	38	12	31-May-2018
Power Supply Unit	Farnell	LB30-4	158	-	O/P Mon
Attenuator 10dB 10W	Weinschel	47-10-34	398	12	20-Oct-2017
Multimeter	Fluke	79 Series III	611	12	14-Sep-2017
Rubidium Standard	Rohde & Schwarz	XSRM	1316	6	12-Mar-2018
Hygrometer	Rotronic	I-1000	2784	12	04-May-2018
Thermocouple Thermometer	Fluke	51	3172	12	16-Nov-2017
Hygrometer	Rotronic	I-1000	3220	12	30-Aug-2018
Signal Analyser	Rohde & Schwarz	FSQ 26	3545	12	09-Oct-2017
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	15-Sep-2017
TRUE RMS MULTIMETER	Fluke	179	4006	12	13-Dec-2017
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	08-Sep-2018
Frequency Standard	Spectracom	Secure Sync 1200-0408-0601	4393	6	12-Mar-2018
PXA Signal Analyser	Agilent Technologies	N9030A PXA	4409	12	09-Aug-2018

**Table 22**

O/P Mon – Output Monitored using calibrated equipment

### 3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Emission Bandwidth	$\pm 33.08$ kHz
Maximum Conducted Output Power	$\pm 0.70$ dB
Spurious Radiated Emissions	30 MHz to 1 GHz: $\pm 5.1$ dB 1 GHz to 40 GHz: $\pm 6.3$ dB
Restricted Band Edges	30 MHz to 1 GHz: $\pm 5.1$ dB 1 GHz to 40 GHz: $\pm 6.3$ dB
Authorised Band Edges	Conducted: $\pm 3.08$ dB Radiated: 30 MHz to 1 GHz: $\pm 5.1$ dB Radiated: 1 GHz to 40 GHz: $\pm 6.3$ dB
Power Spectral Density	$\pm 0.96$ dB

**Table 23**