


|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 13:09 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5500MHz |                          |

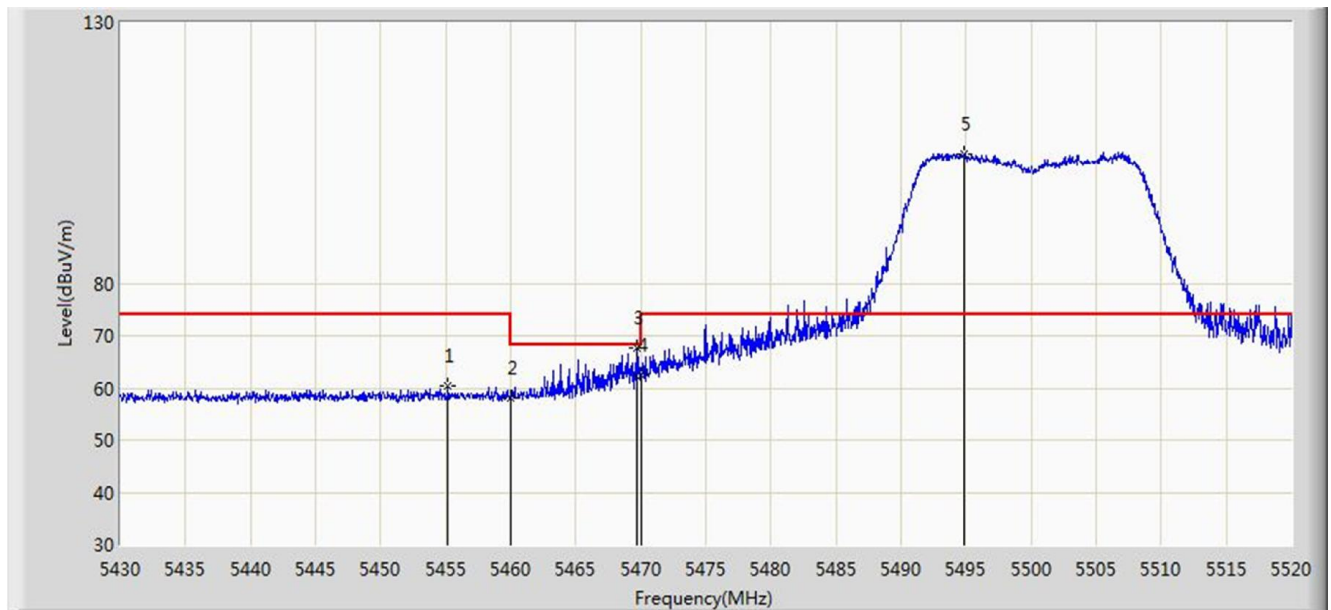

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5455.200        | 60.297                 | 53.516               | -13.703         | 74.000         | 6.781       | PK   |
| 2  |      |      | 5460.000        | 57.986                 | 51.184               | -16.014         | 74.000         | 6.802       | PK   |
| 3  |      |      | 5469.690        | 67.659                 | 60.815               | -0.541          | 68.200         | 6.844       | PK   |
| 4  |      |      | 5470.000        | 62.426                 | 55.581               | -5.774          | 68.200         | 6.845       | PK   |
| 5  |      | *    | 5494.890        | 104.773                | 97.945               | N/A             | N/A            | 6.828       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 13:10 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5500MHz |                          |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 46.537                 | 39.735               | -7.463          | 54.000         | 6.802       | AV   |
| 2  |      | *    | 5506.365        | 96.306                 | 89.495               | N/A             | N/A            | 6.811       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 13:21 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5700MHz |                          |

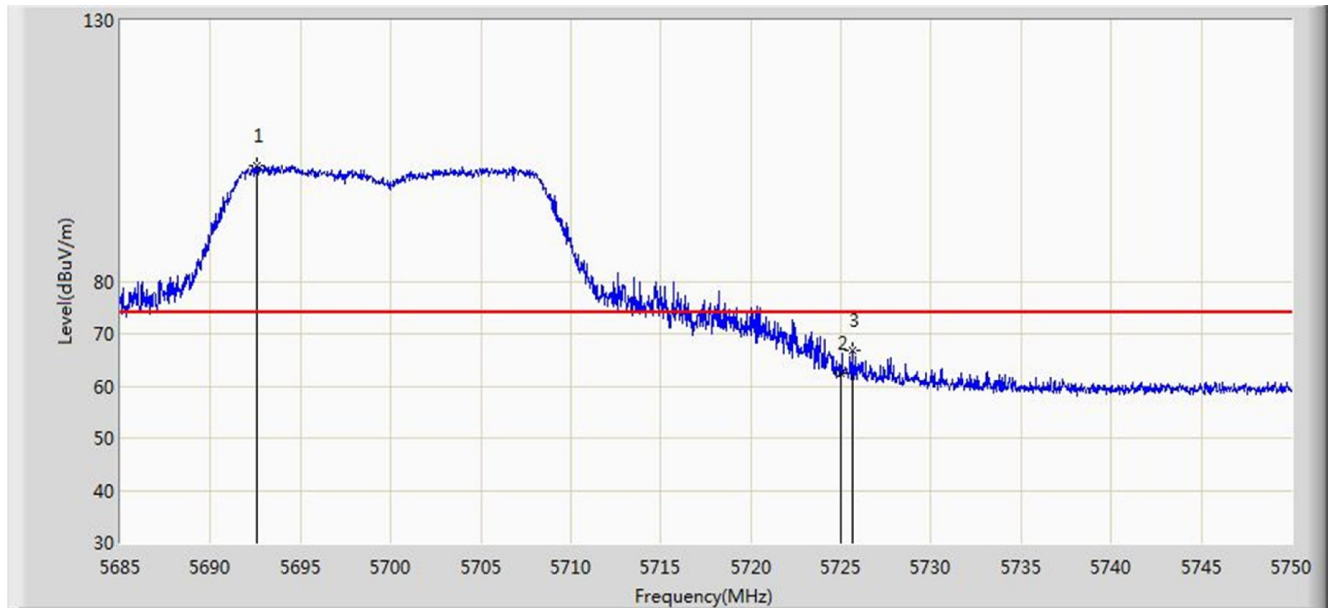


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5692.572        | 102.308                | 95.193               | N/A             | N/A            | 7.116       | PK   |
| 2  |      |      | 5725.000        | 62.442                 | 55.114               | -11.558         | 74.000         | 7.328       | PK   |
| 3  |      |      | 5725.625        | 66.904                 | 59.572               | -7.096          | 74.000         | 7.331       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 13:22 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5700MHz |                          |

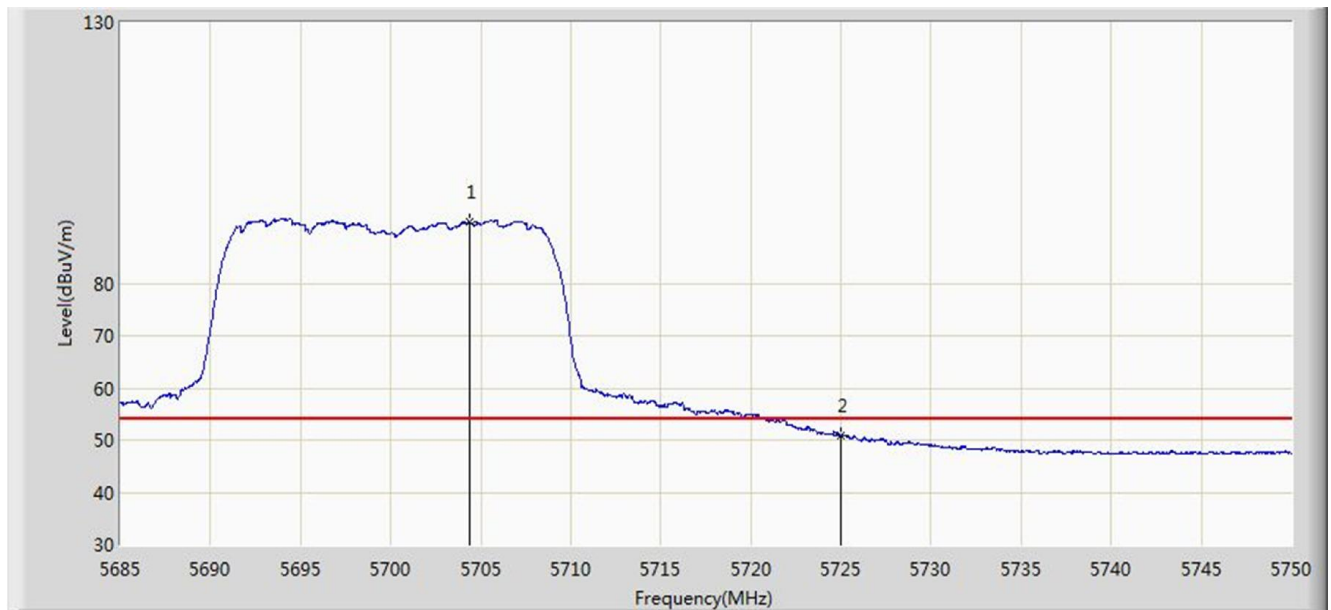


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5704.402        | 91.658                 | 84.460               | N/A             | N/A            | 7.198       | AV   |
| 2  |      |      | 5725.000        | 50.819                 | 43.491               | -3.181          | 54.000         | 7.328       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 13:15 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5700MHz |                          |

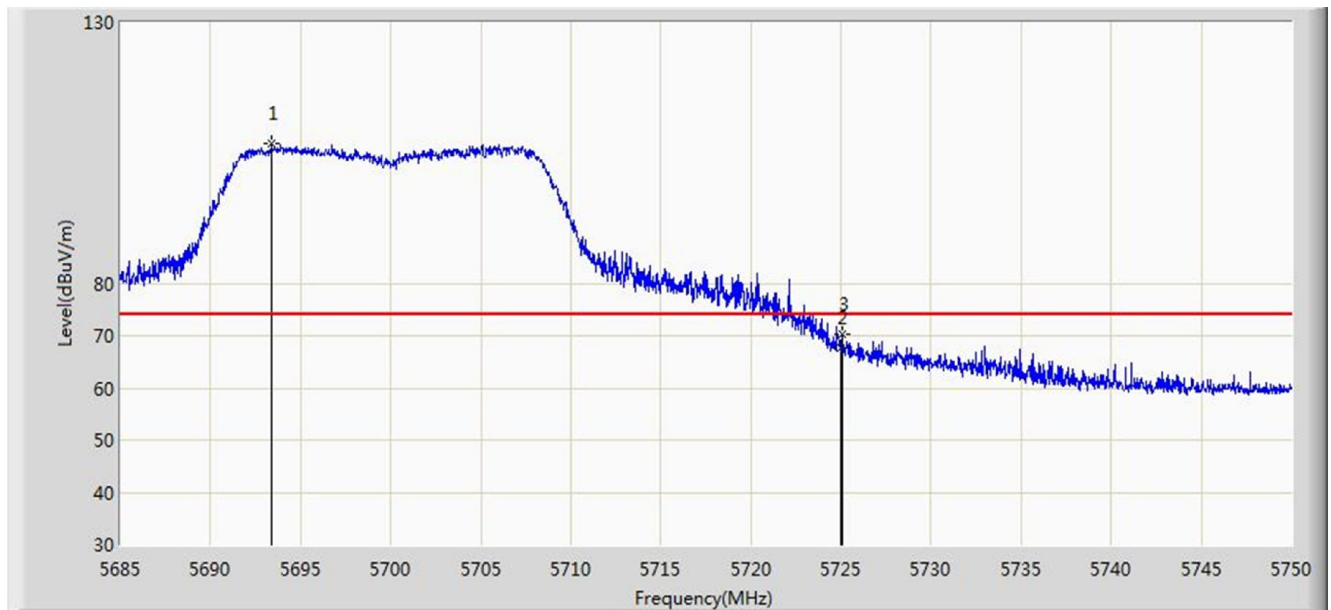


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5693.385        | 106.771                | 99.650               | N/A             | N/A            | 7.121       | PK   |
| 2  |      |      | 5725.000        | 67.762                 | 60.434               | -6.238          | 74.000         | 7.328       | PK   |
| 3  |      |      | 5725.040        | 70.226                 | 62.898               | -3.774          | 74.000         | 7.328       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 13:18 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5700MHz |                          |

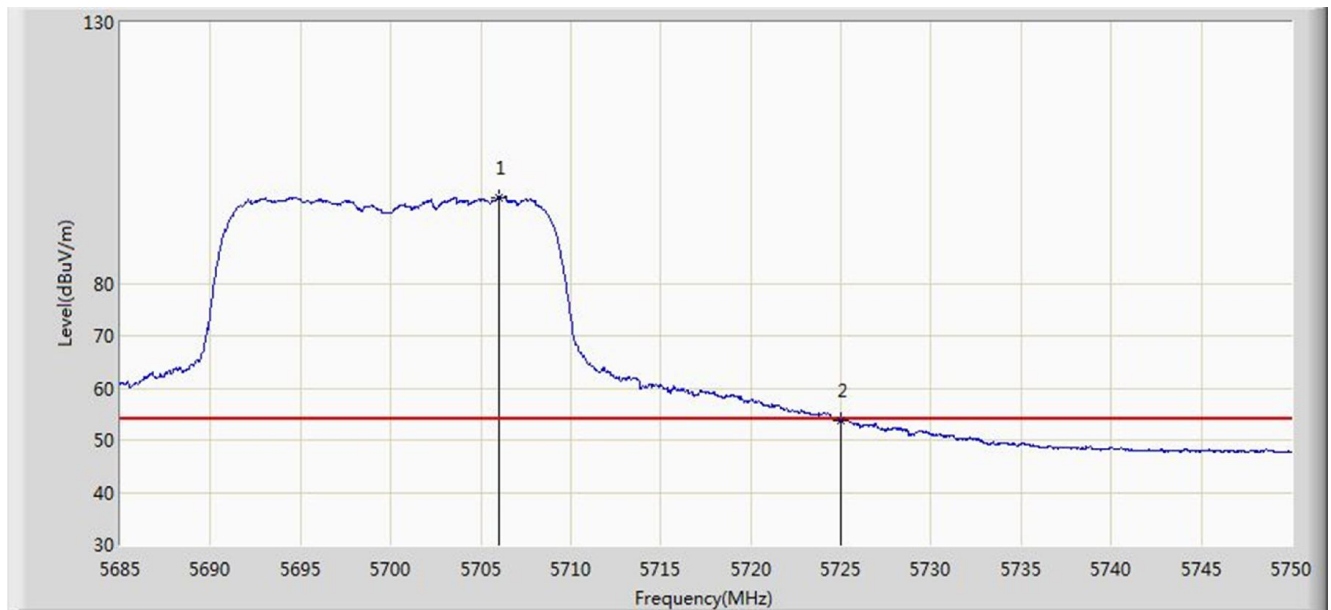


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5705.995        | 96.491                 | 89.280               | N/A             | N/A            | 7.212       | AV   |
| 2  |      |      | 5725.000        | 53.691                 | 46.363               | -0.309          | 54.000         | 7.328       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 13:23 |
| Limit: FCC_Part15.407_RE(3m)_Bandedge                  | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz |                          |

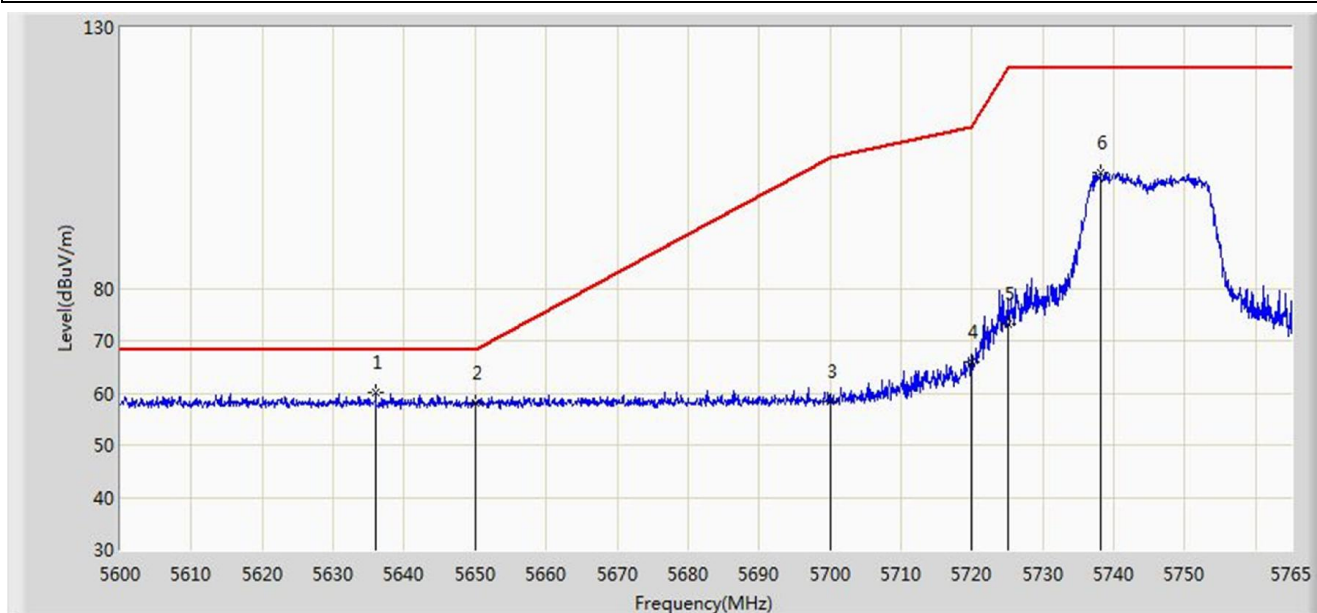


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5635.970        | 60.101                 | 53.107               | -8.099          | 68.200         | 6.994       | PK   |
| 2  |      |      | 5650.000        | 58.147                 | 51.142               | -10.053         | 68.200         | 7.005       | PK   |
| 3  |      |      | 5700.000        | 58.270                 | 51.105               | -46.930         | 105.200        | 7.165       | PK   |
| 4  |      |      | 5720.000        | 65.985                 | 58.686               | -44.815         | 110.800        | 7.299       | PK   |
| 5  |      |      | 5725.000        | 73.175                 | 65.847               | -49.025         | 122.200        | 7.328       | PK   |
| 6  |      |      | 5738.105        | 102.187                | 94.802               | N/A             | N/A            | 7.385       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 13:26 |
| Limit: FCC_Part15.407_RE(3m)_Bandedge                  | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz |                          |

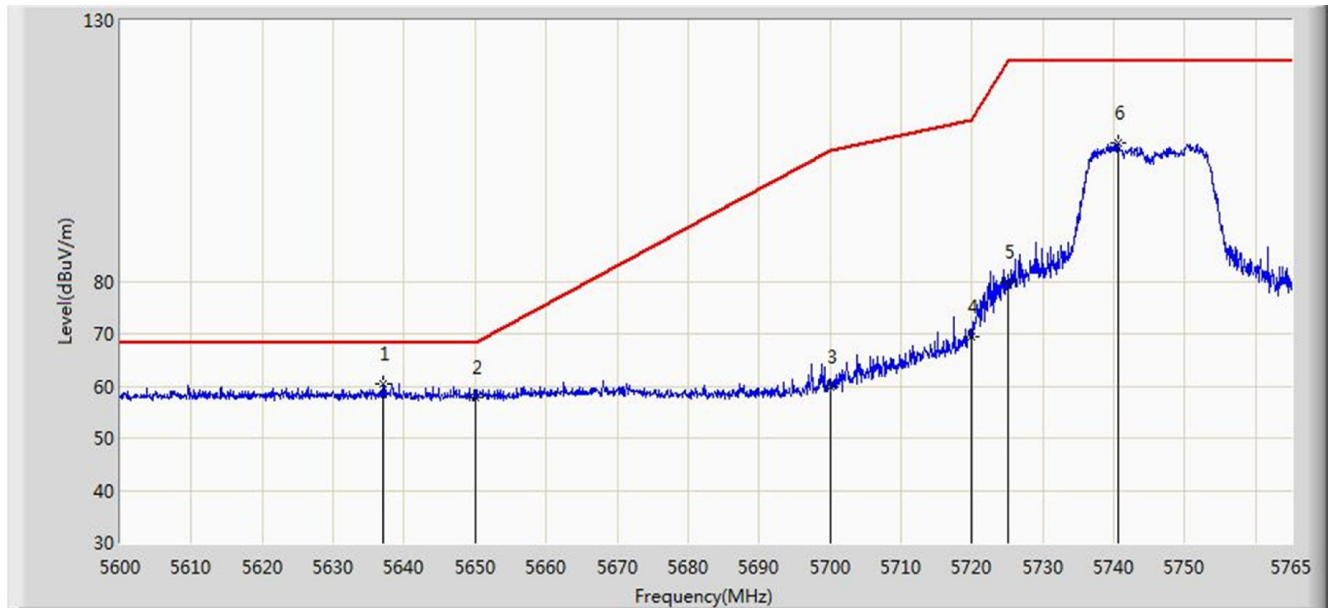


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5636.960        | 60.408                 | 53.416               | -7.792          | 68.200         | 6.992       | PK   |
| 2  |      |      | 5650.000        | 57.814                 | 50.809               | -10.386         | 68.200         | 7.005       | PK   |
| 3  |      |      | 5700.000        | 59.969                 | 52.804               | -45.231         | 105.200        | 7.165       | PK   |
| 4  |      |      | 5720.000        | 69.418                 | 62.119               | -41.382         | 110.800        | 7.299       | PK   |
| 5  |      |      | 5725.000        | 79.830                 | 72.502               | -42.370         | 122.200        | 7.328       | PK   |
| 6  |      |      | 5740.580        | 106.664                | 99.270               | N/A             | N/A            | 7.394       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 13:32 |
| Limit: FCC_Part15.407_RE(3m)_Bandedge                  | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz |                          |

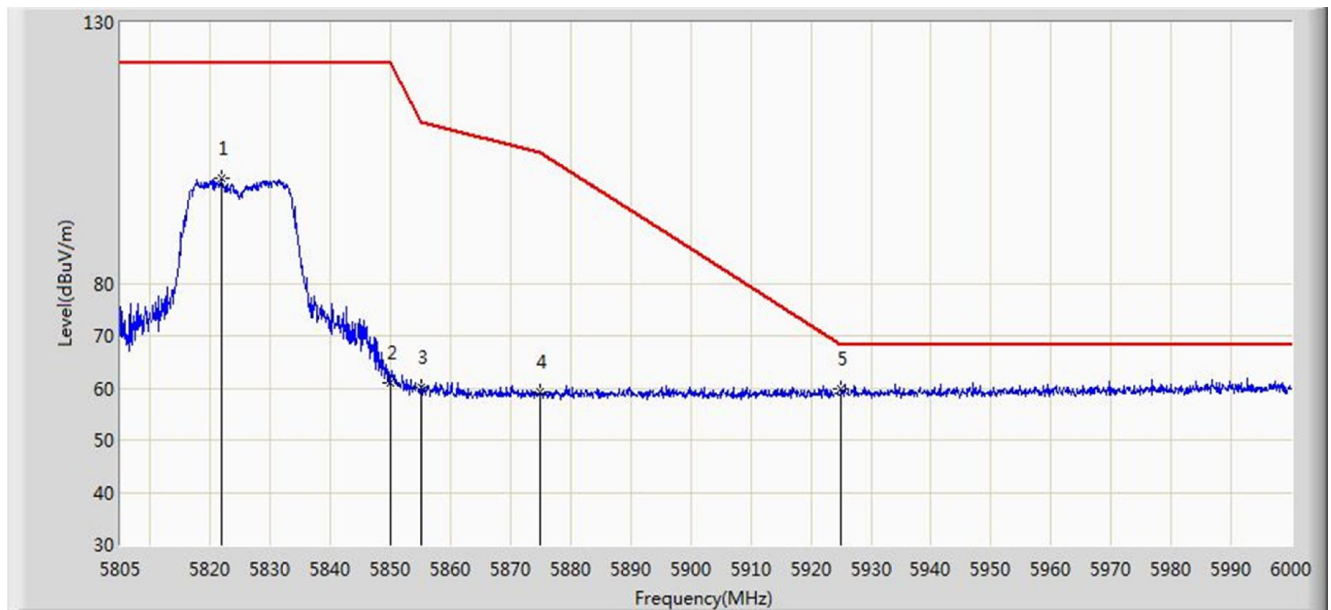


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5821.965        | 100.285                | 92.640               | N/A             | N/A            | 7.645       | PK   |
| 2  |      |      | 5850.000        | 61.117                 | 53.344               | -61.083         | 122.200        | 7.774       | PK   |
| 3  |      |      | 5855.000        | 60.180                 | 52.404               | -50.620         | 110.800        | 7.775       | PK   |
| 4  |      |      | 5875.000        | 59.168                 | 51.350               | -46.032         | 105.200        | 7.818       | PK   |
| 5  |      | *    | 5925.000        | 59.738                 | 51.919               | -8.462          | 68.200         | 7.819       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 13:27 |
| Limit: FCC_Part15.407_RE(3m)_Bandedge                  | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz |                          |

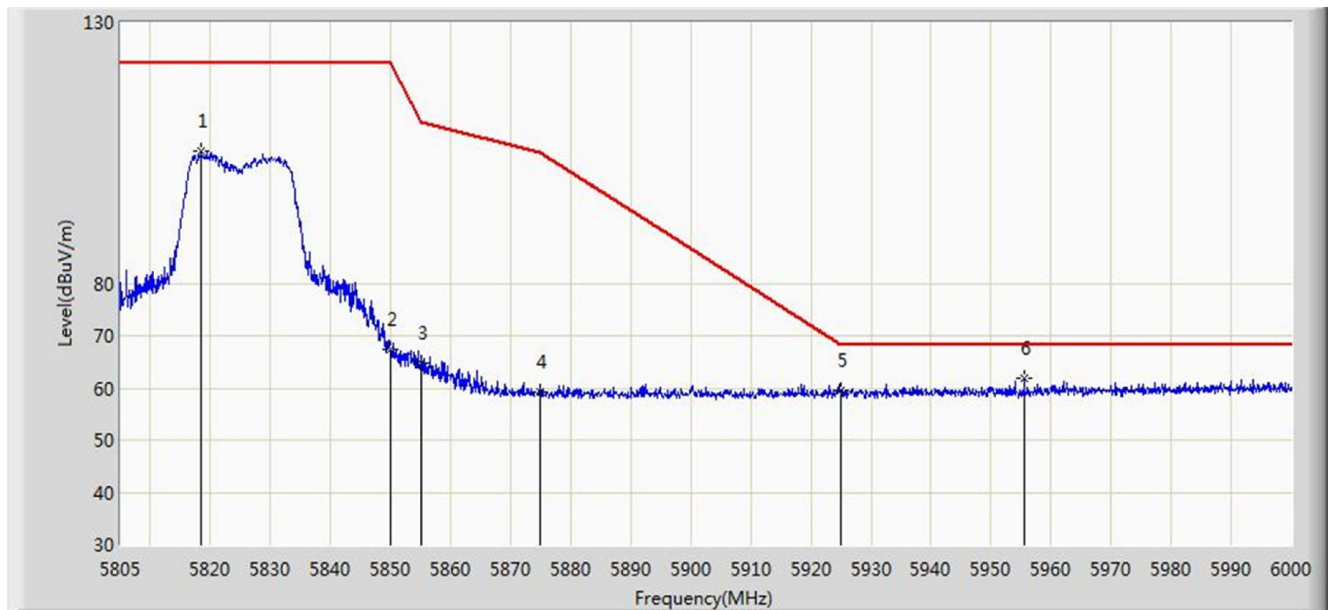


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5818.553        | 105.271                | 97.642               | N/A             | N/A            | 7.629       | PK   |
| 2  |      |      | 5850.000        | 67.372                 | 59.599               | -54.828         | 122.200        | 7.774       | PK   |
| 3  |      |      | 5855.000        | 64.646                 | 56.870               | -46.154         | 110.800        | 7.775       | PK   |
| 4  |      |      | 5875.000        | 59.414                 | 51.596               | -45.786         | 105.200        | 7.818       | PK   |
| 5  |      |      | 5925.000        | 59.590                 | 51.771               | -8.610          | 68.200         | 7.819       | PK   |
| 6  |      | *    | 5955.540        | 61.770                 | 53.920               | -6.430          | 68.200         | 7.850       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 14:21 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz |                          |

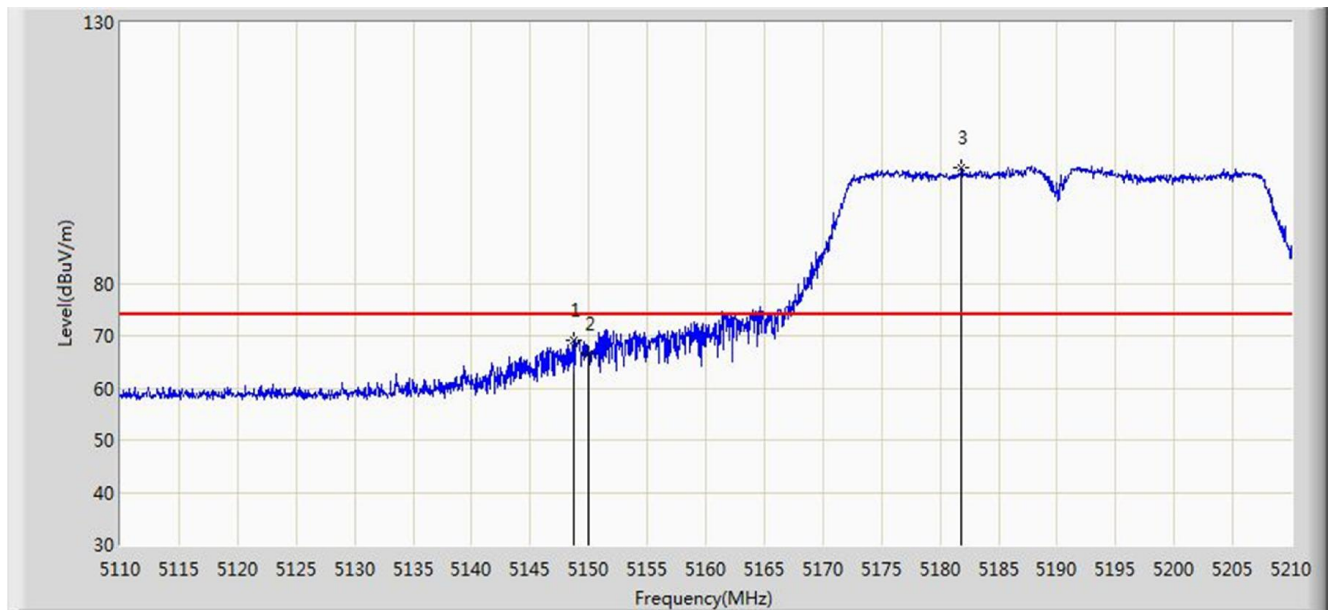


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5148.750        | 69.230                 | 62.670               | -4.770          | 74.000         | 6.560       | PK   |
| 2  |      |      | 5150.000        | 66.645                 | 60.083               | -7.355          | 74.000         | 6.562       | PK   |
| 3  |      | *    | 5181.800        | 102.178                | 95.748               | N/A             | N/A            | 6.429       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 14:22 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz |                          |

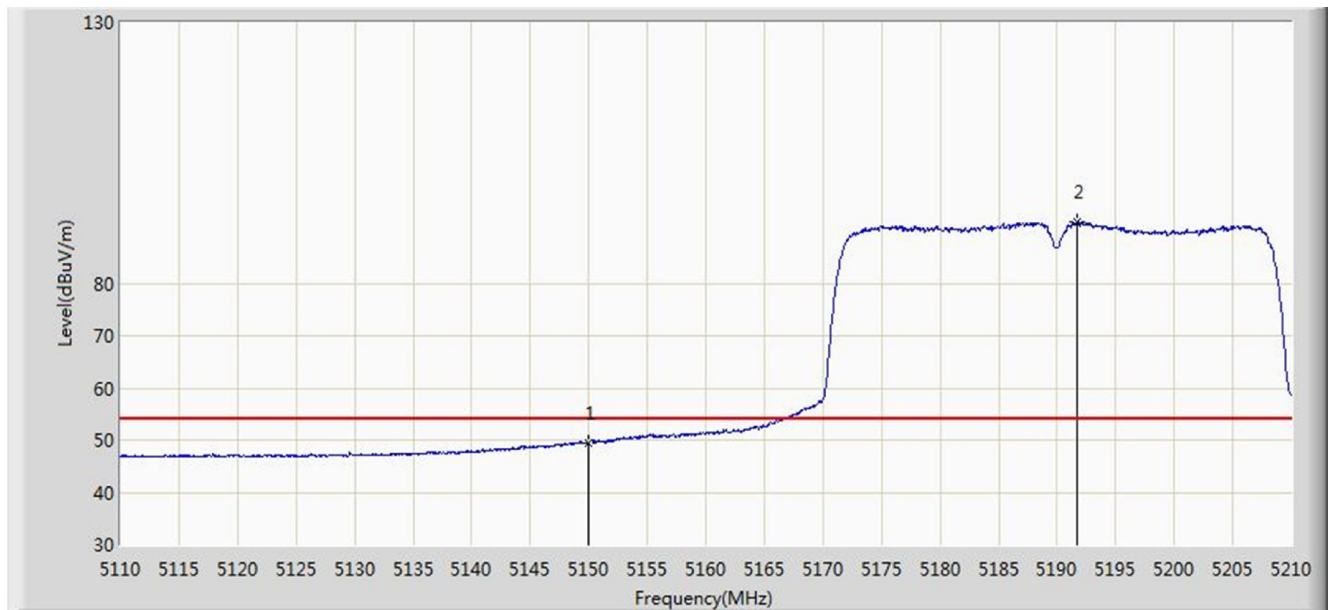


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 49.497                 | 42.935               | -4.503          | 54.000         | 6.562       | AV   |
| 2  |      | *    | 5191.700        | 91.697                 | 85.325               | N/A             | N/A            | 6.372       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 14:19 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz |                          |

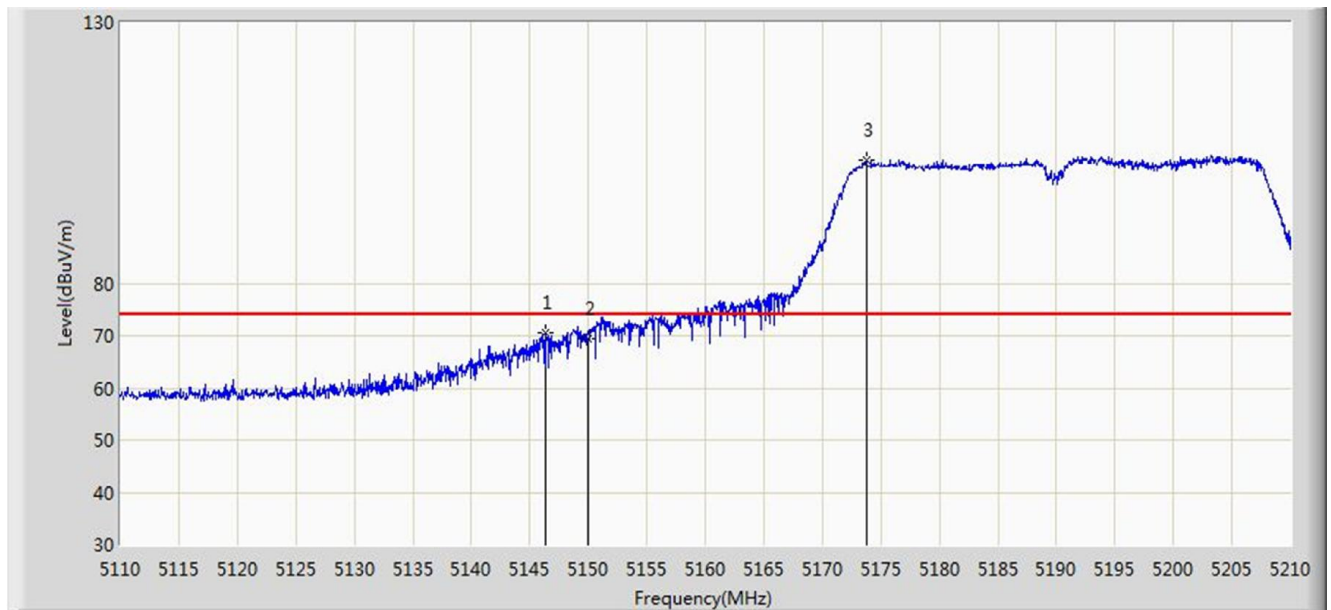


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5146.400        | 70.684                 | 64.116               | -3.316          | 74.000         | 6.568       | PK   |
| 2  |      |      | 5150.000        | 69.425                 | 62.863               | -4.575          | 74.000         | 6.562       | PK   |
| 3  |      | *    | 5173.750        | 103.684                | 97.190               | N/A             | N/A            | 6.494       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 14:20 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz |                          |

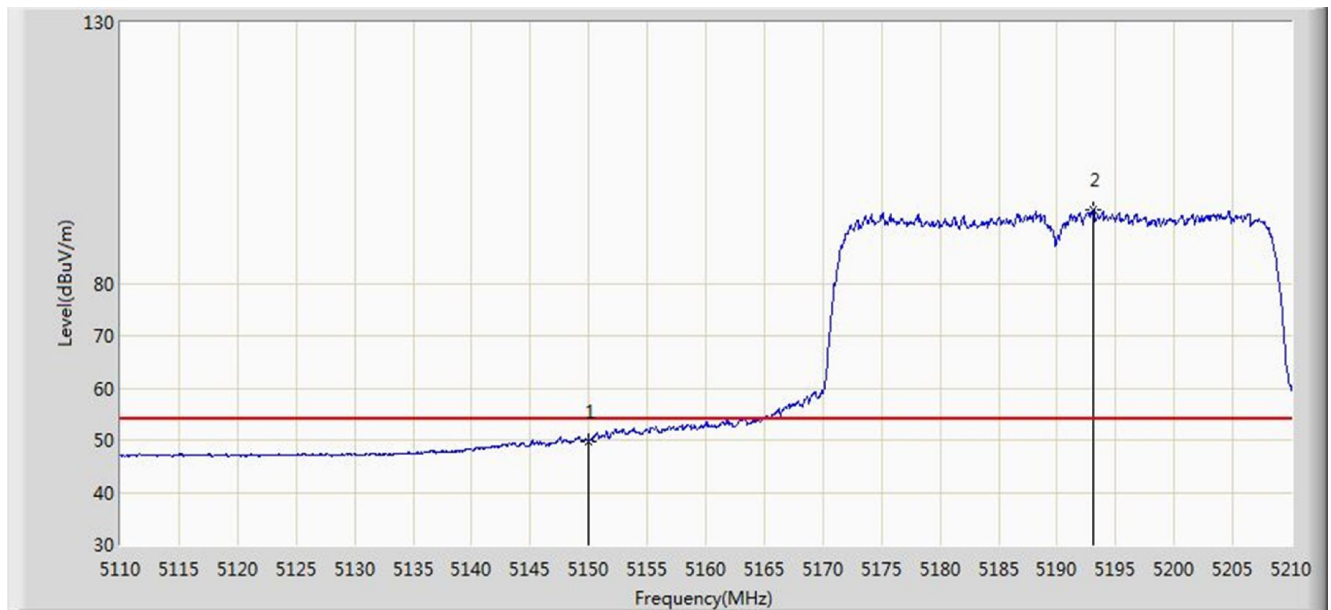


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 49.755                 | 43.193               | -4.245          | 54.000         | 6.562       | AV   |
| 2  |      | *    | 5193.100        | 93.934                 | 87.570               | N/A             | N/A            | 6.364       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 14:27 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz |                          |

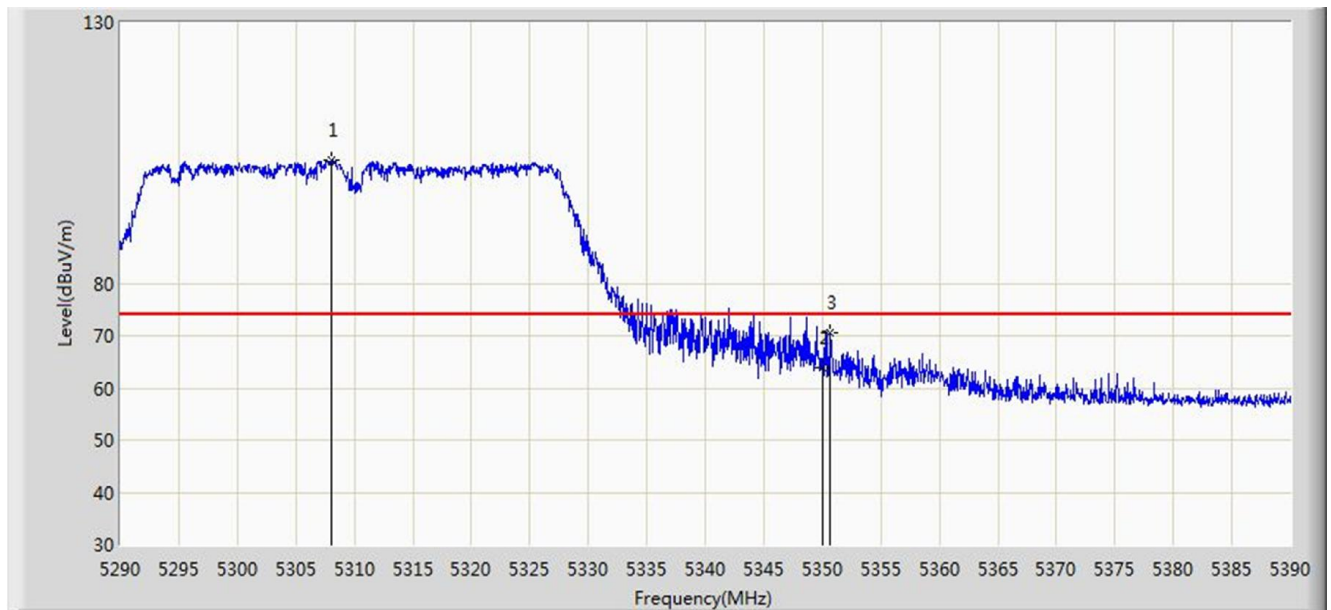


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5308.050        | 103.569                | 97.302               | 29.569          | 74.000         | 6.267       | PK   |
| 2  |      |      | 5350.000        | 63.877                 | 57.417               | -10.123         | 74.000         | 6.460       | PK   |
| 3  |      |      | 5350.700        | 70.438                 | 63.974               | N/A             | N/A            | 6.463       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 14:28 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz |                          |

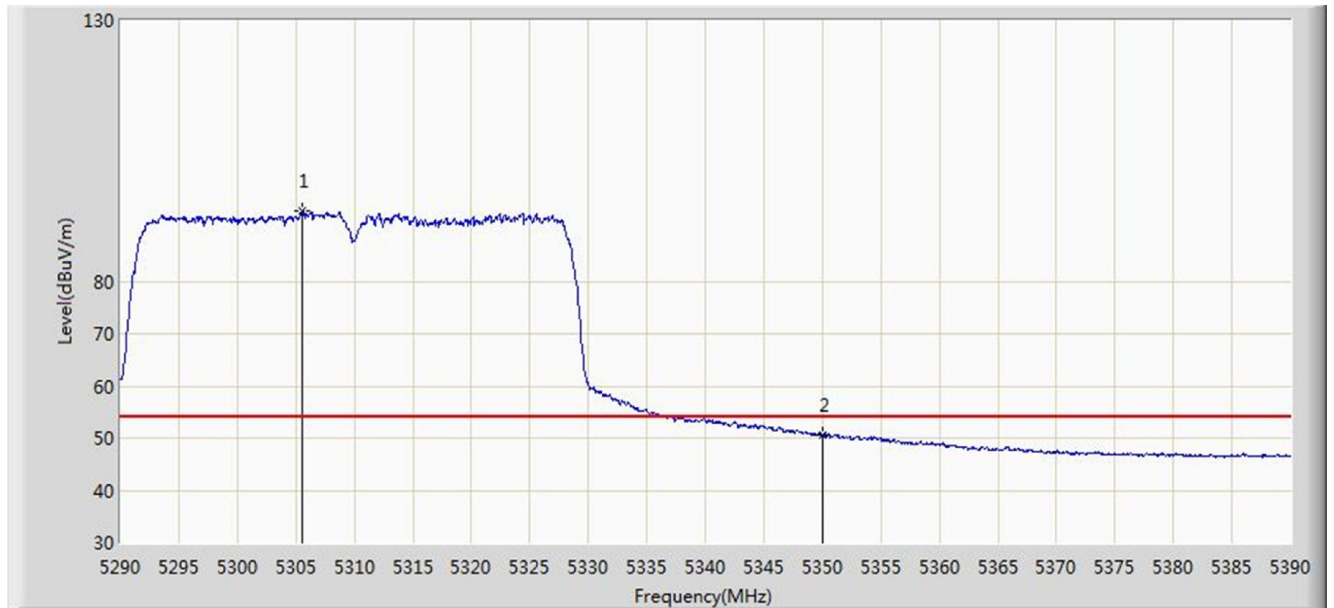


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5305.600        | 93.372                 | 87.108               | 39.372          | 54.000         | 6.264       | AV   |
| 2  |      |      | 5350.000        | 50.677                 | 44.217               | N/A             | N/A            | 6.460       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 14:24 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz |                          |

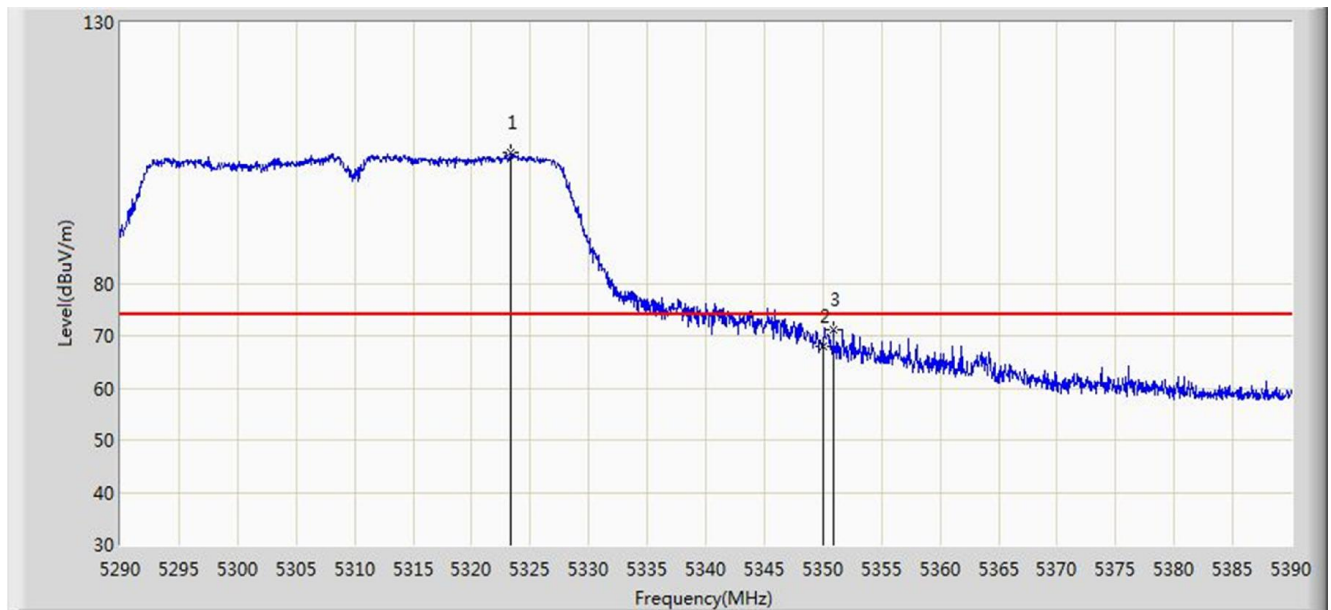


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5323.350        | 105.195                | 98.882               | N/A             | N/A            | 6.313       | PK   |
| 2  |      |      | 5350.000        | 67.845                 | 61.385               | -6.155          | 74.000         | 6.460       | PK   |
| 3  |      |      | 5350.900        | 71.173                 | 64.708               | -2.827          | 74.000         | 6.465       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 14:26 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz |                          |

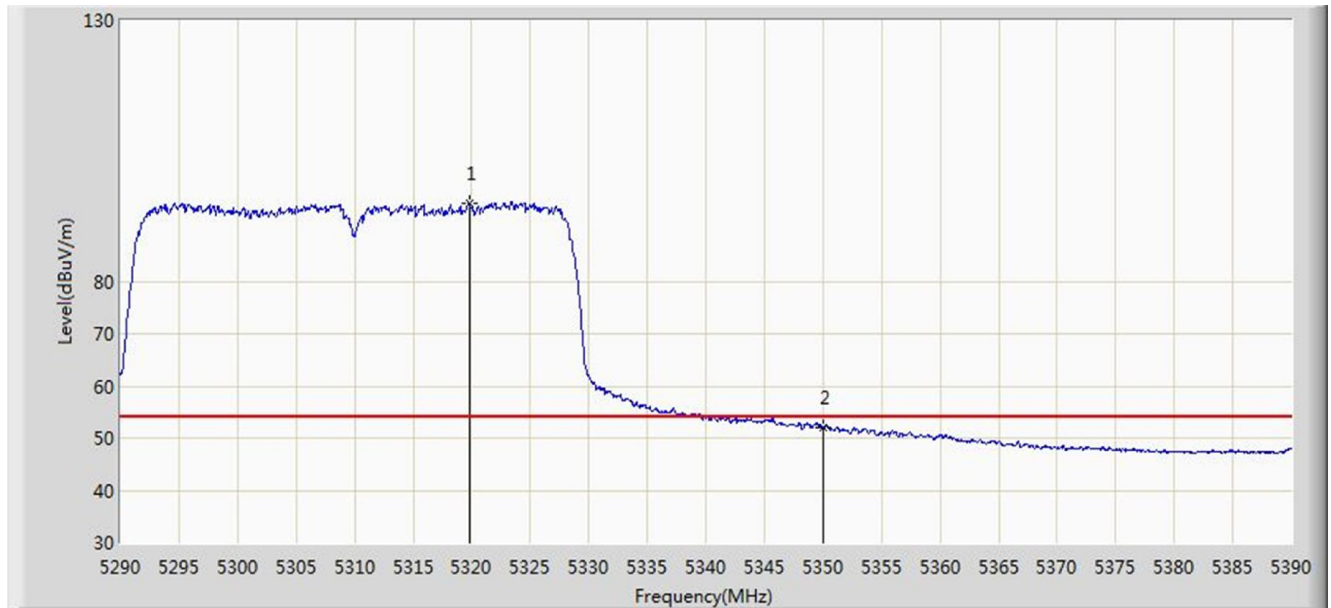


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5319.800        | 95.066                 | 88.774               | N/A             | N/A            | 6.292       | AV   |
| 2  |      |      | 5350.000        | 51.896                 | 45.436               | -2.104          | 54.000         | 6.460       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 14:36 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz |                          |

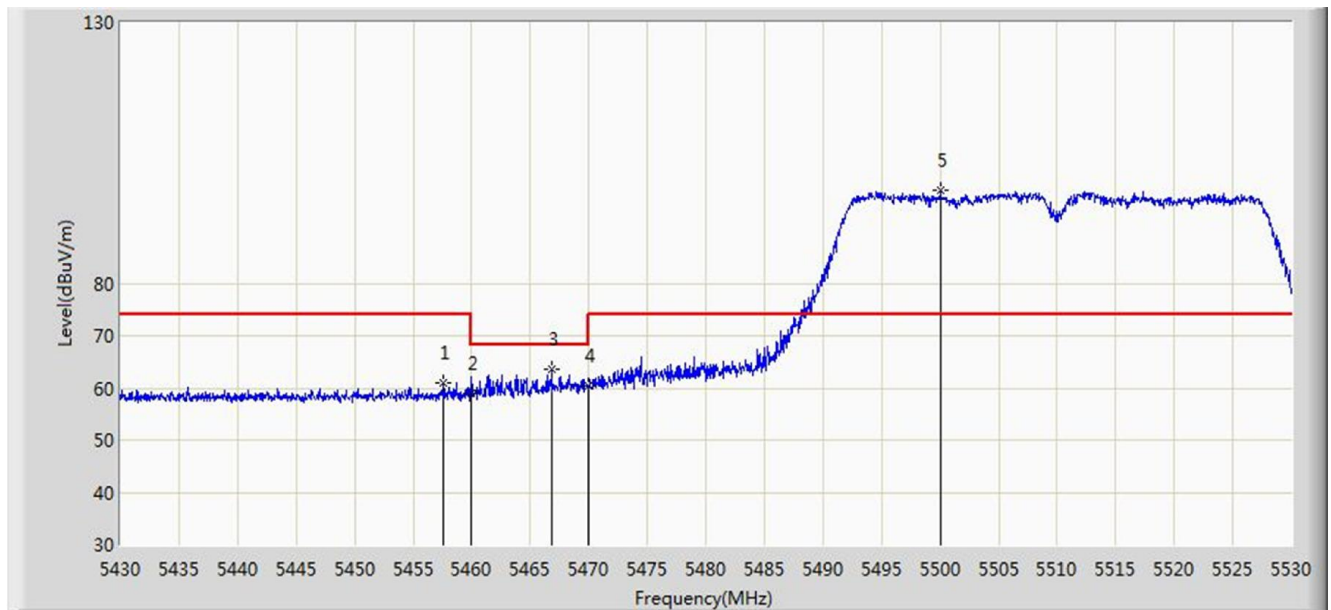


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5457.600        | 60.979                 | 54.188               | -13.021         | 74.000         | 6.791       | PK   |
| 2  |      |      | 5460.000        | 59.039                 | 52.237               | -14.961         | 74.000         | 6.802       | PK   |
| 3  |      |      | 5466.850        | 63.611                 | 56.780               | -4.589          | 68.200         | 6.831       | PK   |
| 4  |      |      | 5470.000        | 60.569                 | 53.724               | -7.631          | 68.200         | 6.845       | PK   |
| 5  |      | *    | 5500.050        | 97.879                 | 91.060               | N/A             | N/A            | 6.820       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 14:38 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz |                          |

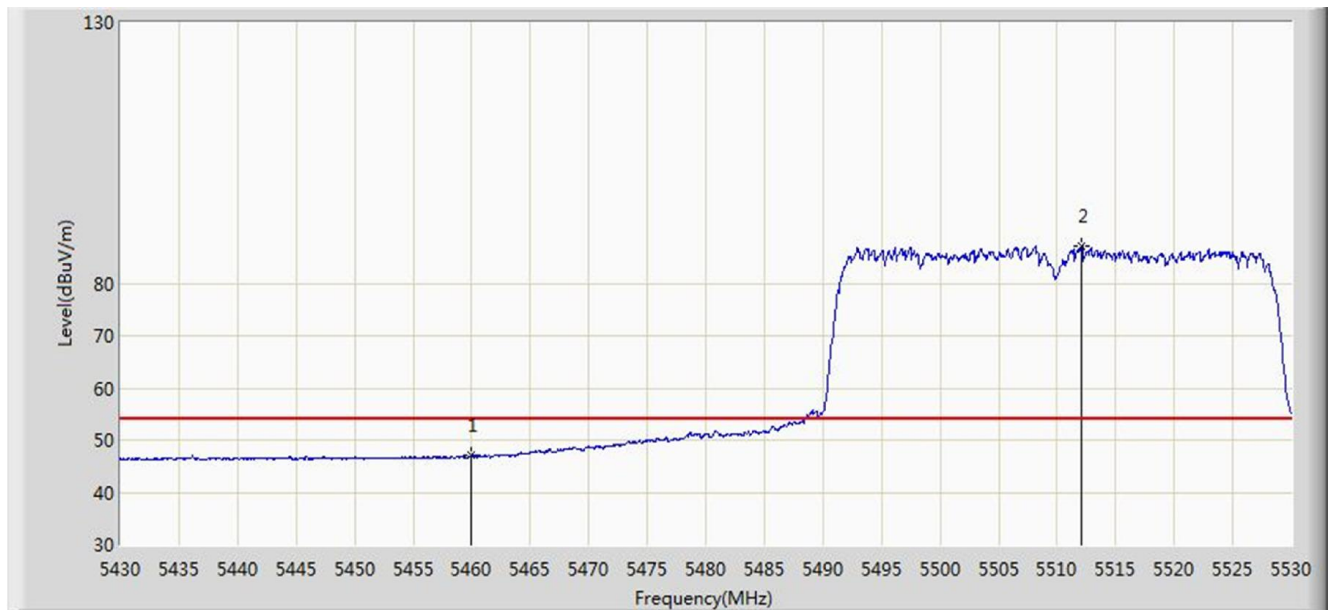


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 46.984                 | 40.182               | -7.016          | 54.000         | 6.802       | AV   |
| 2  |      | *    | 5512.100        | 87.089                 | 80.277               | N/A             | N/A            | 6.812       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 14:33 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz |                          |

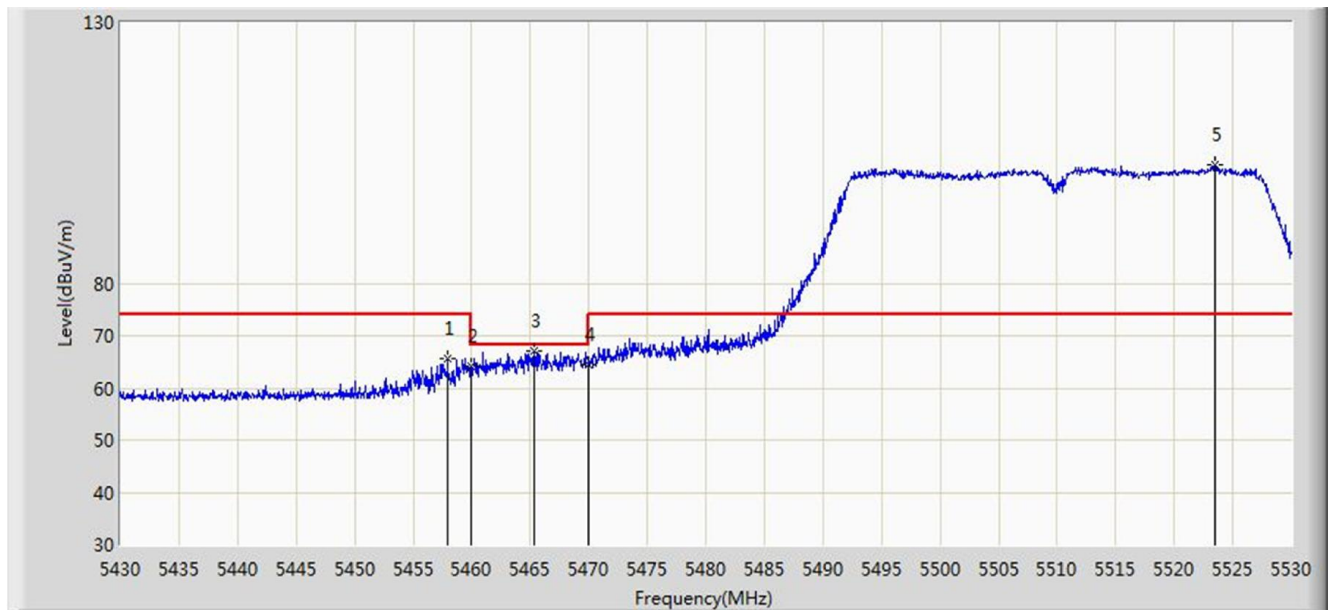


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5457.950        | 65.544                 | 58.751               | -8.456          | 74.000         | 6.793       | PK   |
| 2  |      |      | 5460.000        | 64.258                 | 57.456               | -9.742          | 74.000         | 6.802       | PK   |
| 3  |      |      | 5465.350        | 67.099                 | 60.274               | -1.101          | 68.200         | 6.825       | PK   |
| 4  |      |      | 5470.000        | 64.563                 | 57.718               | -3.637          | 68.200         | 6.845       | PK   |
| 5  |      | *    | 5523.450        | 102.619                | 95.798               | N/A             | N/A            | 6.821       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 14:36 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz |                          |

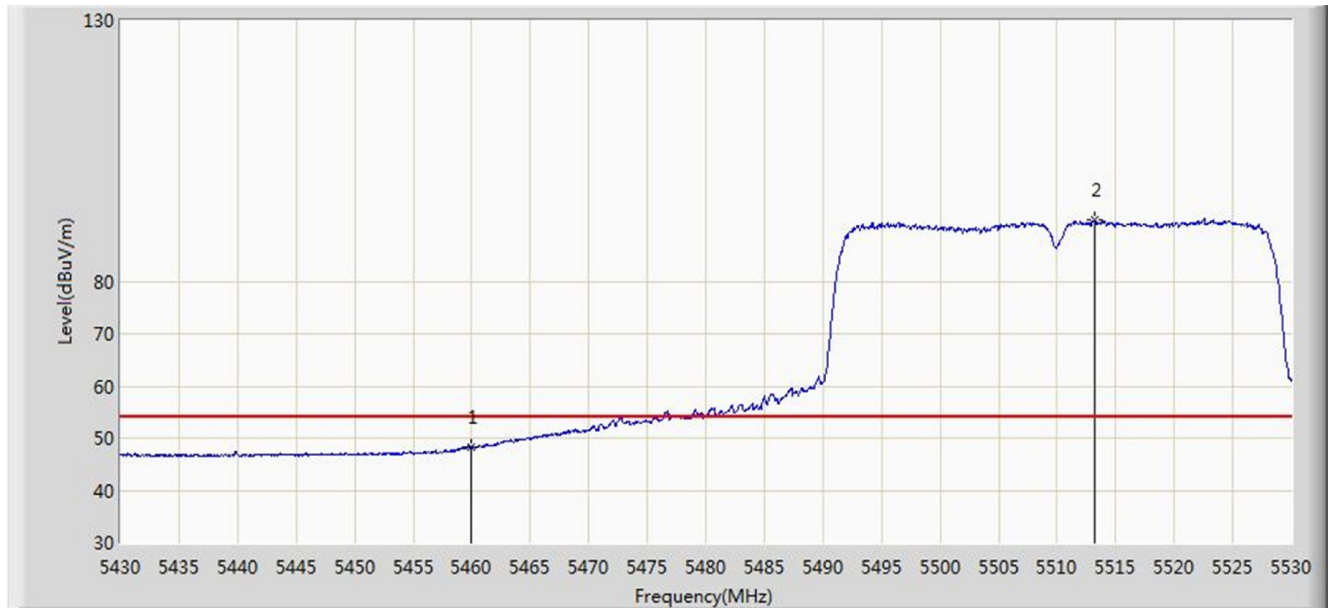


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 48.171                 | 41.369               | -5.829          | 54.000         | 6.802       | AV   |
| 2  |      | *    | 5513.200        | 91.778                 | 84.966               | N/A             | N/A            | 6.812       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 14:46 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz |                          |

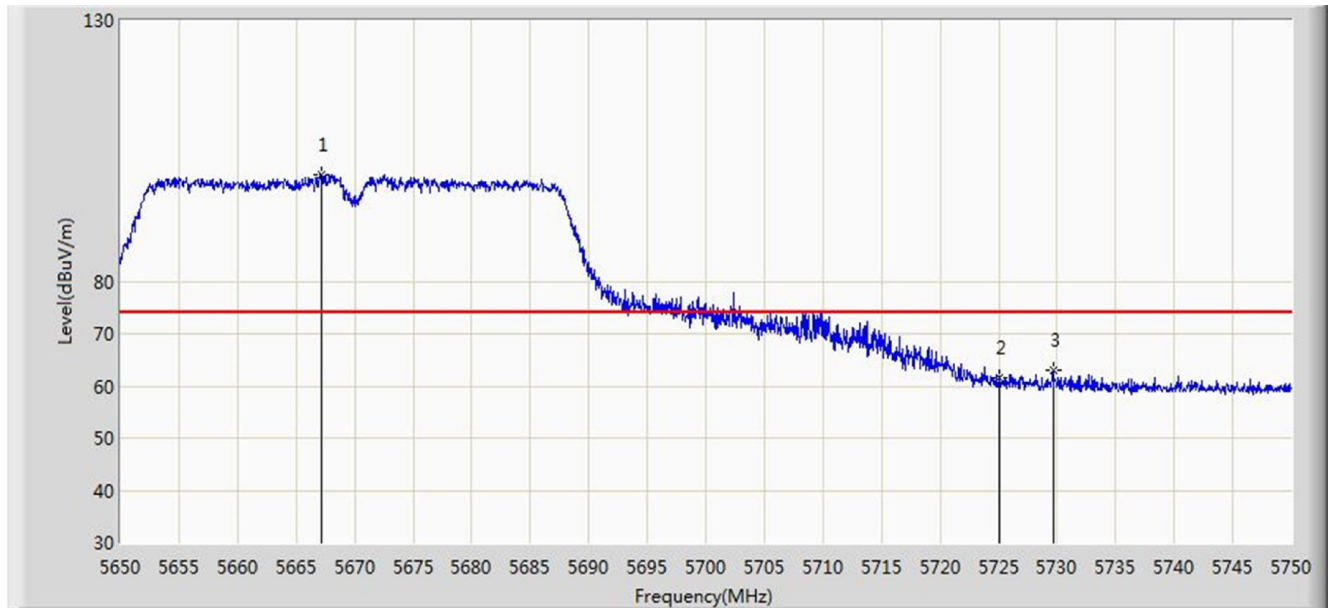


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5667.200        | 100.391                | 93.348               | N/A             | N/A            | 7.044       | PK   |
| 2  |      |      | 5725.000        | 61.727                 | 54.399               | -12.273         | 74.000         | 7.328       | PK   |
| 3  |      |      | 5729.700        | 62.939                 | 55.590               | -11.061         | 74.000         | 7.350       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 14:48 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz |                          |

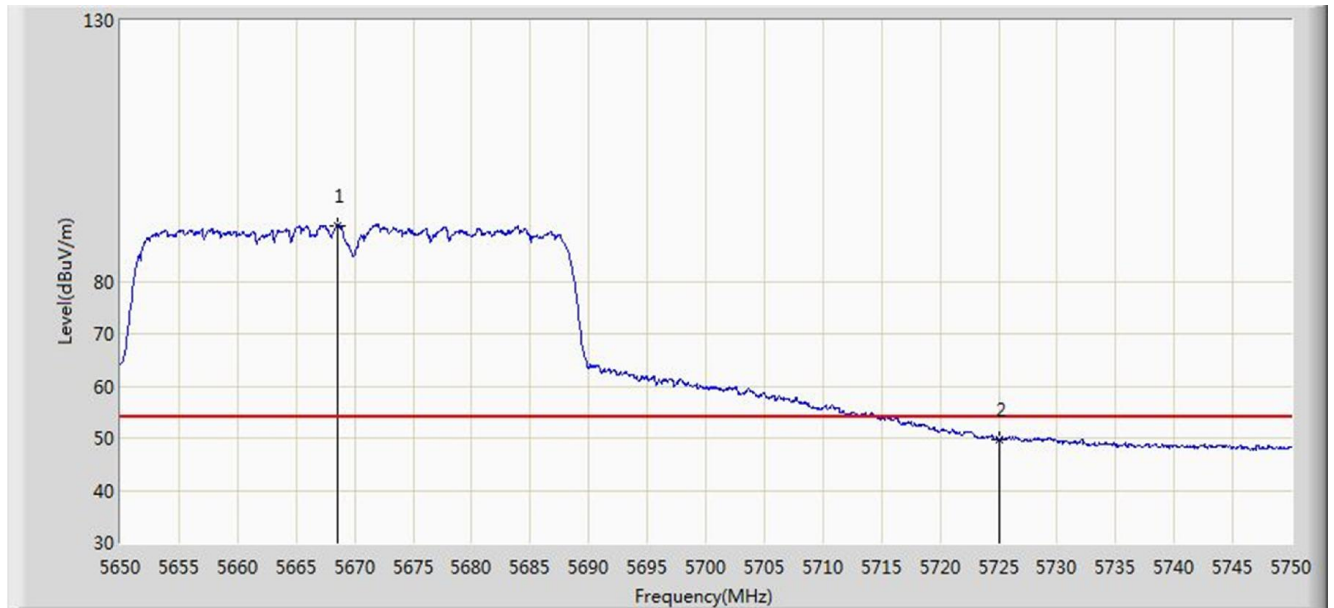


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5668.500        | 90.714                 | 83.669               | N/A             | N/A            | 7.045       | AV   |
| 2  |      |      | 5725.000        | 49.612                 | 42.284               | -4.388          | 54.000         | 7.328       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 14:38 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz |                          |

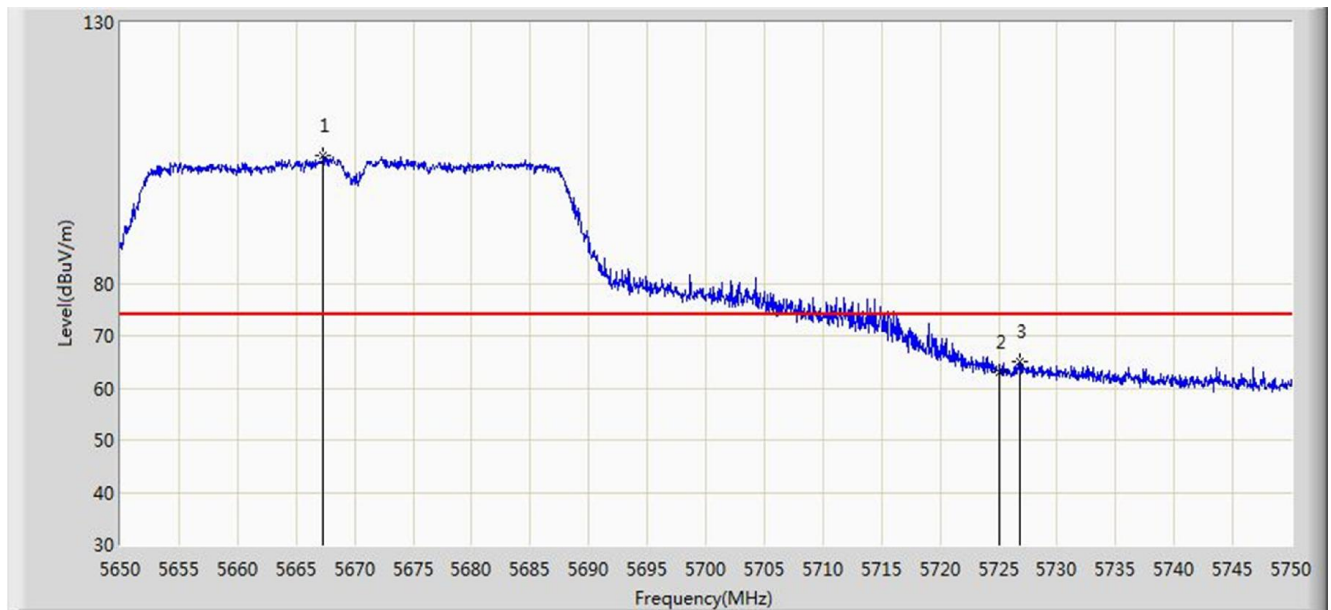

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5667.300        | 104.416                | 97.373               | N/A             | N/A            | 7.044       | PK   |
| 2  |      |      | 5725.000        | 63.055                 | 55.727               | -10.945         | 74.000         | 7.328       | PK   |
| 3  |      |      | 5726.850        | 65.187                 | 57.850               | -8.813          | 74.000         | 7.338       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 14:45 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz |                          |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5667.750        | 94.445                 | 87.401               | N/A             | N/A            | 7.044       | AV   |
| 2  |      |      | 5725.000        | 51.683                 | 44.355               | -2.317          | 54.000         | 7.328       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 14:48 |
| Limit: FCC_Part15.407_RE(3m)_Bandedge                  | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5755MHz |                          |

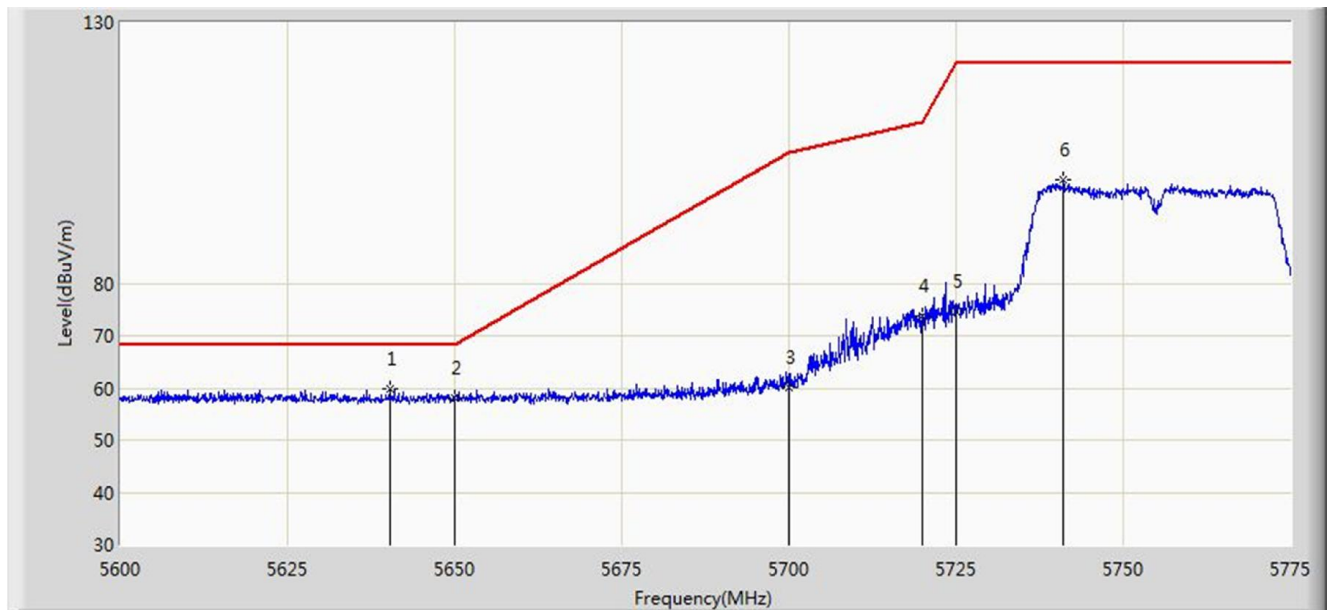


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5640.250        | 59.917                 | 52.931               | -8.283          | 68.200         | 6.986       | PK   |
| 2  |      |      | 5650.000        | 58.126                 | 51.121               | -10.074         | 68.200         | 7.005       | PK   |
| 3  |      |      | 5700.000        | 60.242                 | 53.077               | -44.958         | 105.200        | 7.165       | PK   |
| 4  |      |      | 5720.000        | 73.855                 | 66.556               | -36.945         | 110.800        | 7.299       | PK   |
| 5  |      |      | 5725.000        | 74.554                 | 67.226               | -47.646         | 122.200        | 7.328       | PK   |
| 6  |      |      | 5741.050        | 99.732                 | 92.336               | N/A             | N/A            | 7.396       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 14:50 |
| Limit: FCC_Part15.407_RE(3m)_Bandedge                  | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5755MHz |                          |

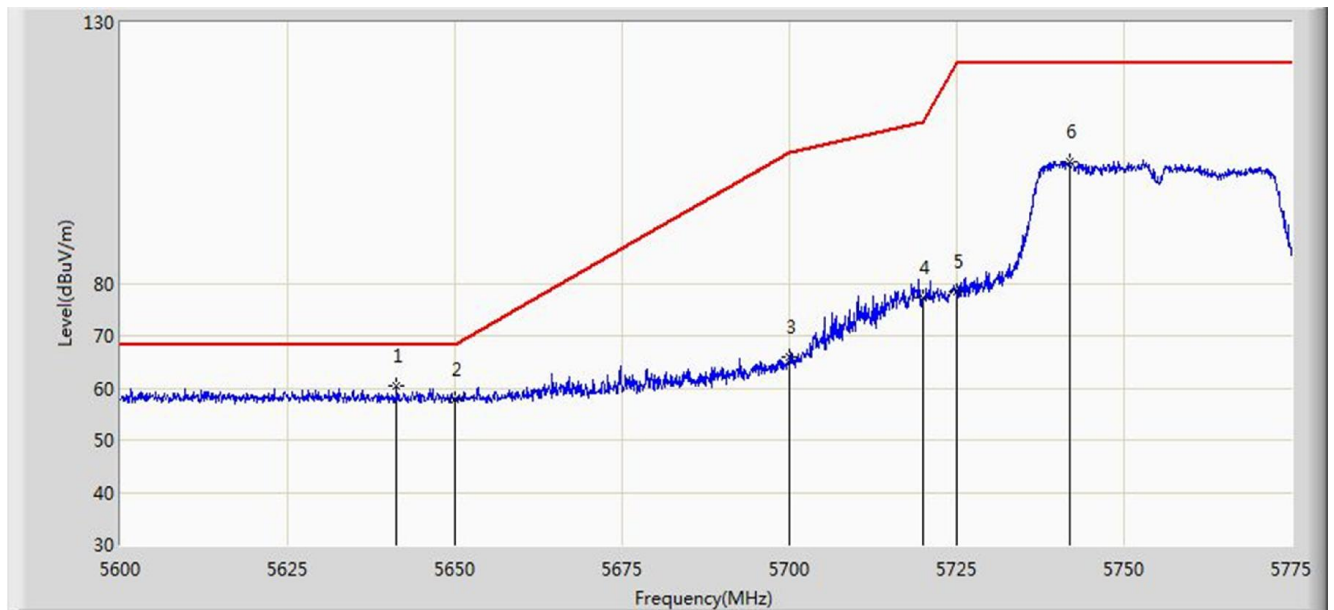


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5641.300        | 60.325                 | 53.339               | -7.875          | 68.200         | 6.986       | PK   |
| 2  |      |      | 5650.000        | 57.943                 | 50.938               | -10.257         | 68.200         | 7.005       | PK   |
| 3  |      |      | 5700.000        | 66.019                 | 58.854               | -39.181         | 105.200        | 7.165       | PK   |
| 4  |      |      | 5720.000        | 77.256                 | 69.957               | -33.544         | 110.800        | 7.299       | PK   |
| 5  |      |      | 5725.000        | 78.399                 | 71.071               | -43.801         | 122.200        | 7.328       | PK   |
| 6  |      |      | 5741.837        | 103.247                | 95.848               | N/A             | N/A            | 7.398       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 14:53 |
| Limit: FCC_Part15.407_RE(3m)_Bandedge                  | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5795MHz |                          |

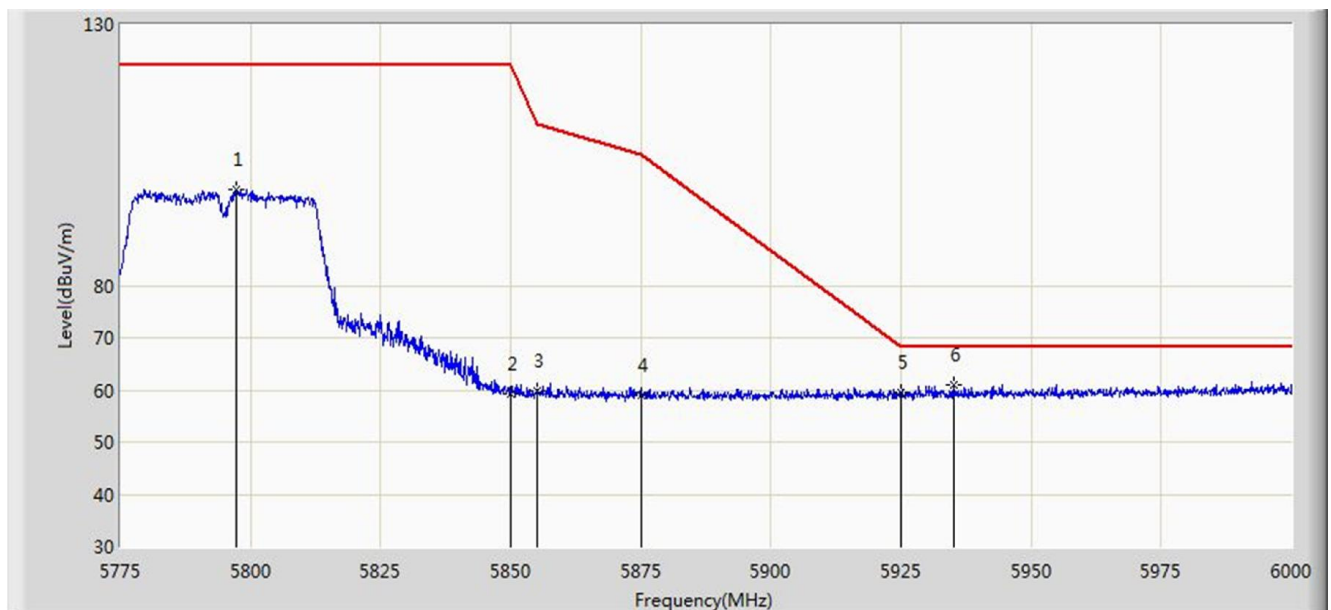


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5797.163        | 98.455                 | 90.907               | N/A             | N/A            | 7.548       | PK   |
| 2  |      |      | 5850.000        | 59.258                 | 51.485               | -62.942         | 122.200        | 7.774       | PK   |
| 3  |      |      | 5855.000        | 59.848                 | 52.072               | -50.952         | 110.800        | 7.775       | PK   |
| 4  |      |      | 5875.000        | 58.873                 | 51.055               | -46.327         | 105.200        | 7.818       | PK   |
| 5  |      |      | 5925.000        | 59.530                 | 51.711               | -8.670          | 68.200         | 7.819       | PK   |
| 6  |      | *    | 5935.200        | 60.996                 | 53.167               | -7.204          | 68.200         | 7.830       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2018/11/17 - 14:51 |
| Limit: FCC_Part15.407_RE(3m)_Bandedge                  | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5795MHz |                          |

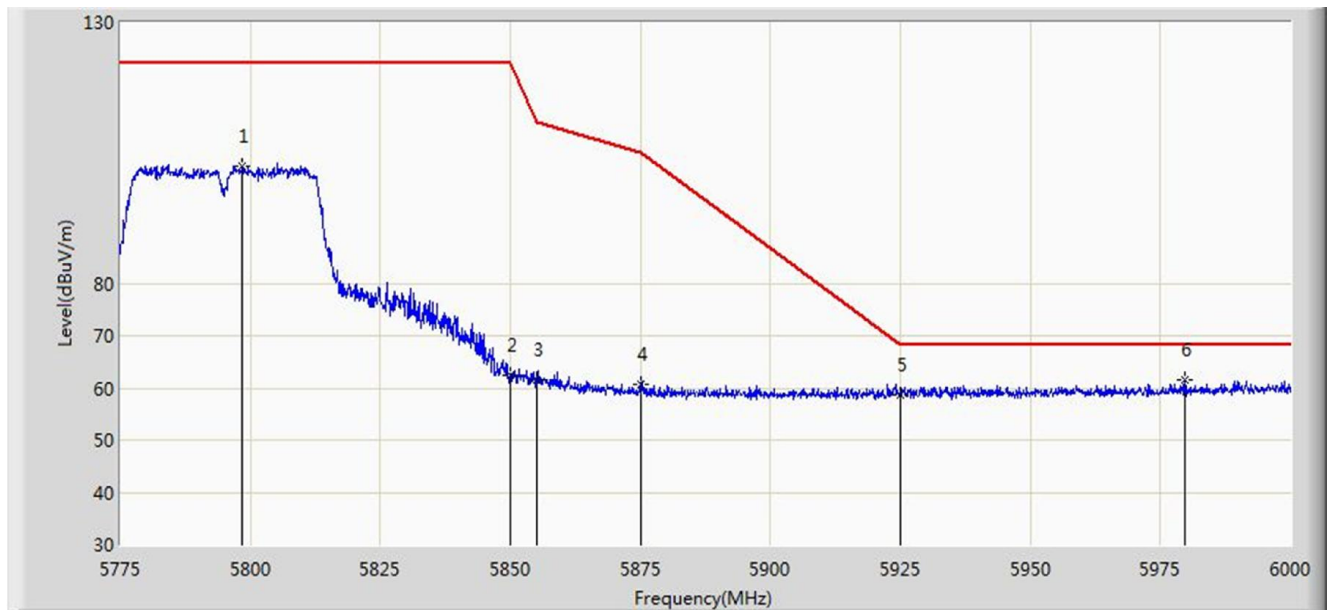


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5798.513        | 102.380                | 94.828               | N/A             | N/A            | 7.552       | PK   |
| 2  |      |      | 5850.000        | 62.524                 | 54.751               | -59.676         | 122.200        | 7.774       | PK   |
| 3  |      |      | 5855.000        | 61.496                 | 53.720               | -49.304         | 110.800        | 7.775       | PK   |
| 4  |      |      | 5875.000        | 60.867                 | 53.049               | -44.333         | 105.200        | 7.818       | PK   |
| 5  |      |      | 5925.000        | 58.693                 | 50.874               | -9.507          | 68.200         | 7.819       | PK   |
| 6  |      | *    | 5979.750        | 61.454                 | 53.566               | -6.746          | 68.200         | 7.889       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:01 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz |                          |

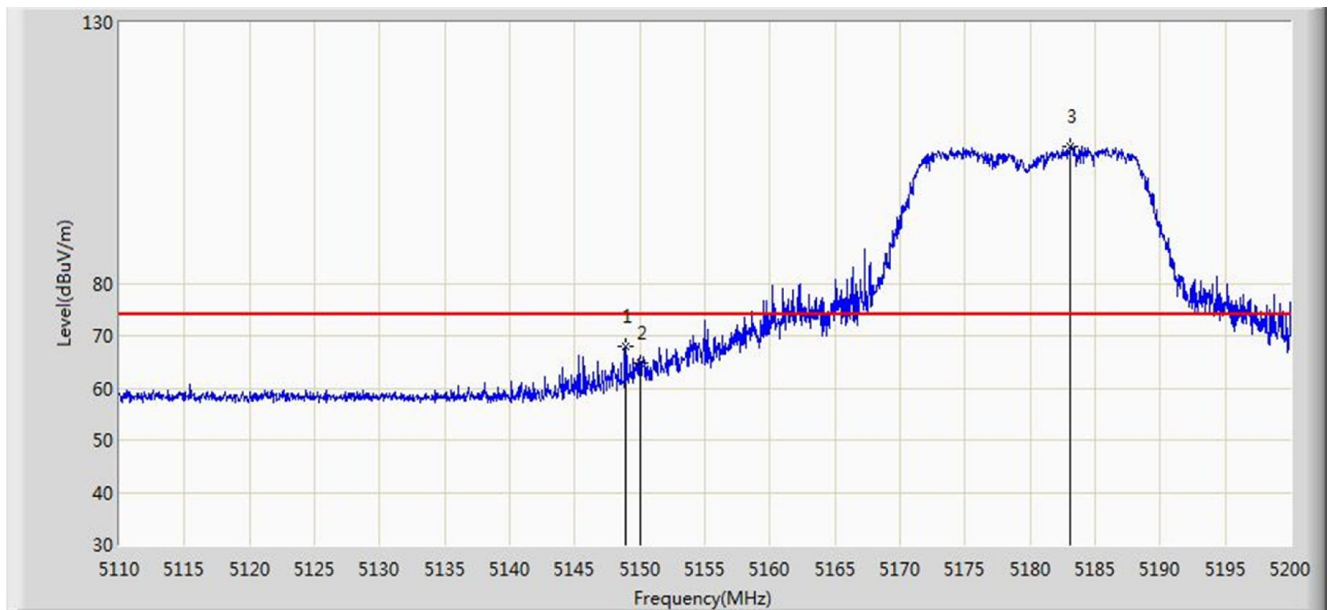


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5148.925        | 67.955                 | 61.395               | -6.045          | 74.000         | 6.560       | PK   |
| 2  |      |      | 5150.000        | 64.824                 | 58.262               | -9.176          | 74.000         | 6.562       | PK   |
| 3  |      | *    | 5183.125        | 106.152                | 99.730               | N/A             | N/A            | 6.421       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:03 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz |                          |

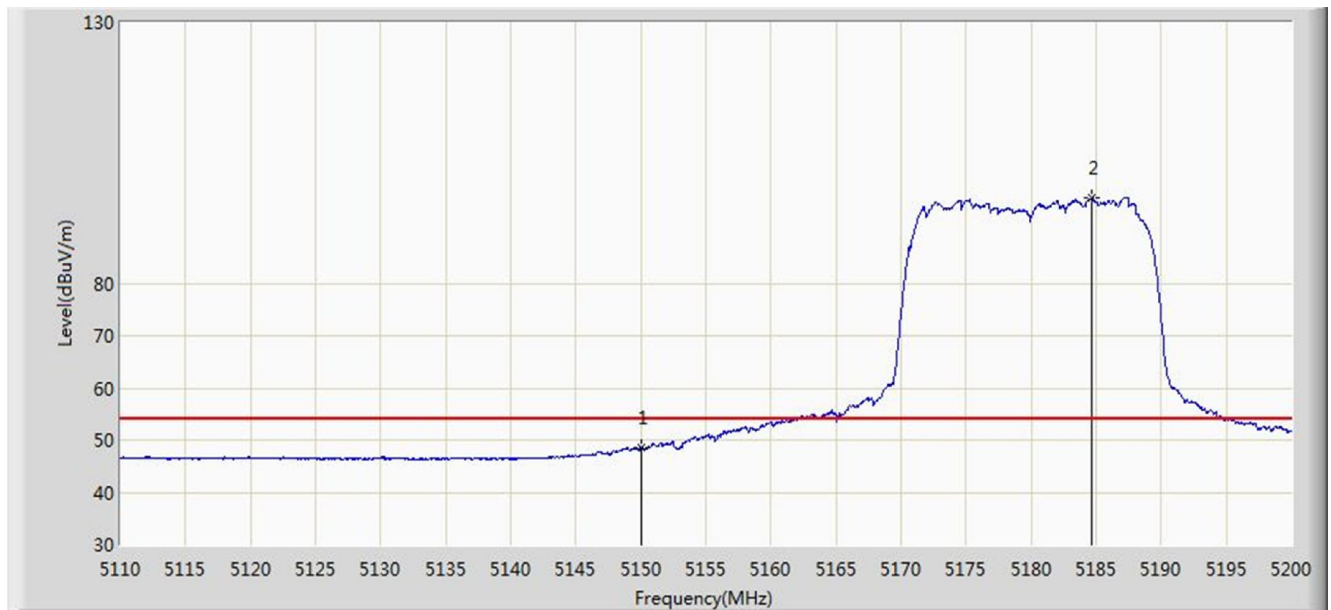


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 48.573                 | 42.011               | -5.427          | 54.000         | 6.562       | AV   |
| 2  |      | *    | 5184.655        | 96.332                 | 89.919               | N/A             | N/A            | 6.413       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 14:54 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz |                          |

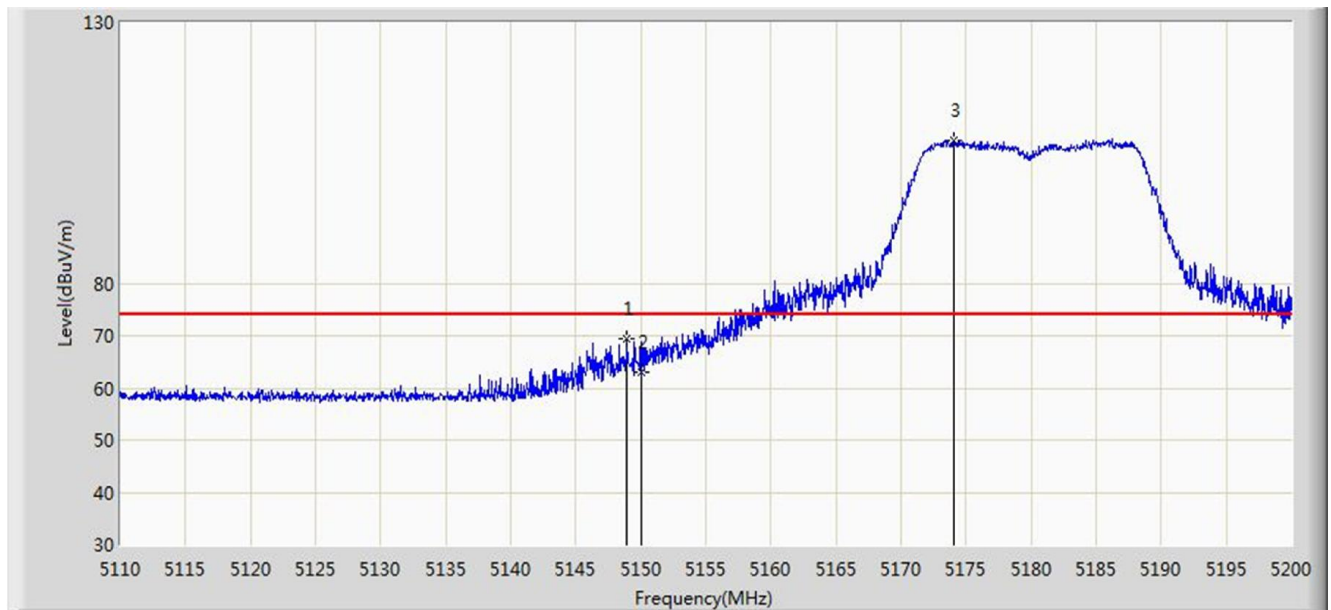


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5148.925        | 69.422                 | 62.862               | -4.578          | 74.000         | 6.560       | PK   |
| 2  |      |      | 5150.000        | 62.909                 | 56.347               | -11.091         | 74.000         | 6.562       | PK   |
| 3  |      | *    | 5174.035        | 107.423                | 100.931              | N/A             | N/A            | 6.492       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 14:58 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz |                          |

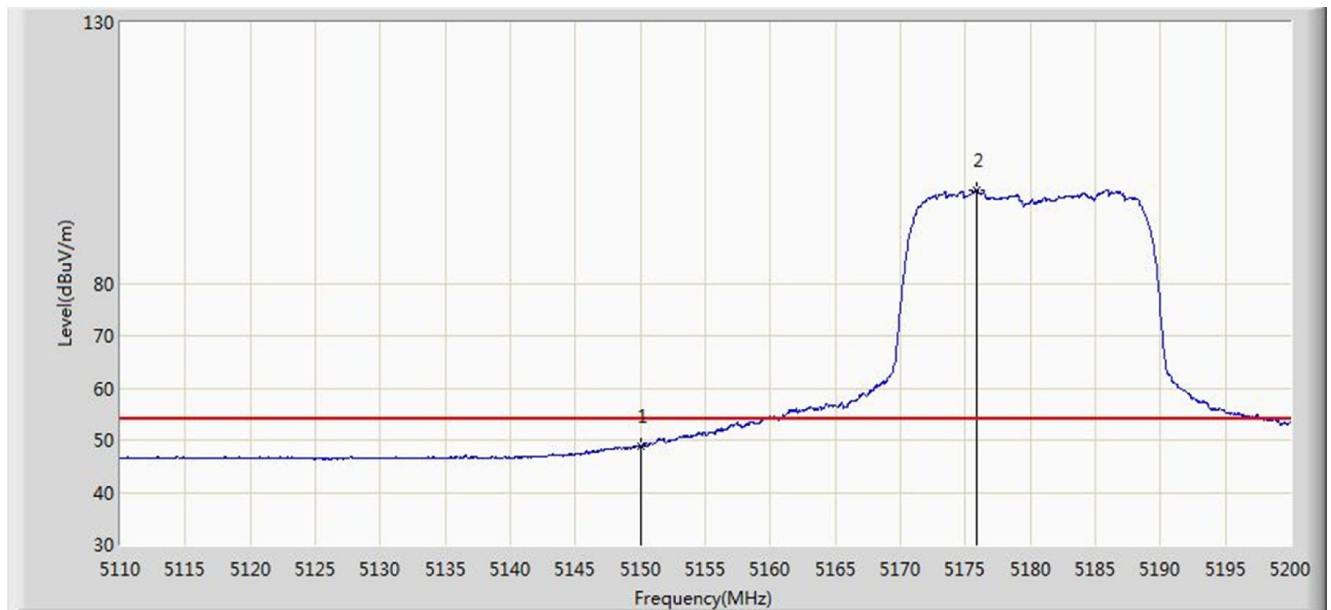


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 48.965                 | 42.403               | -5.035          | 54.000         | 6.562       | AV   |
| 2  |      | *    | 5175.880        | 97.860                 | 91.383               | N/A             | N/A            | 6.477       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:08 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz |                          |

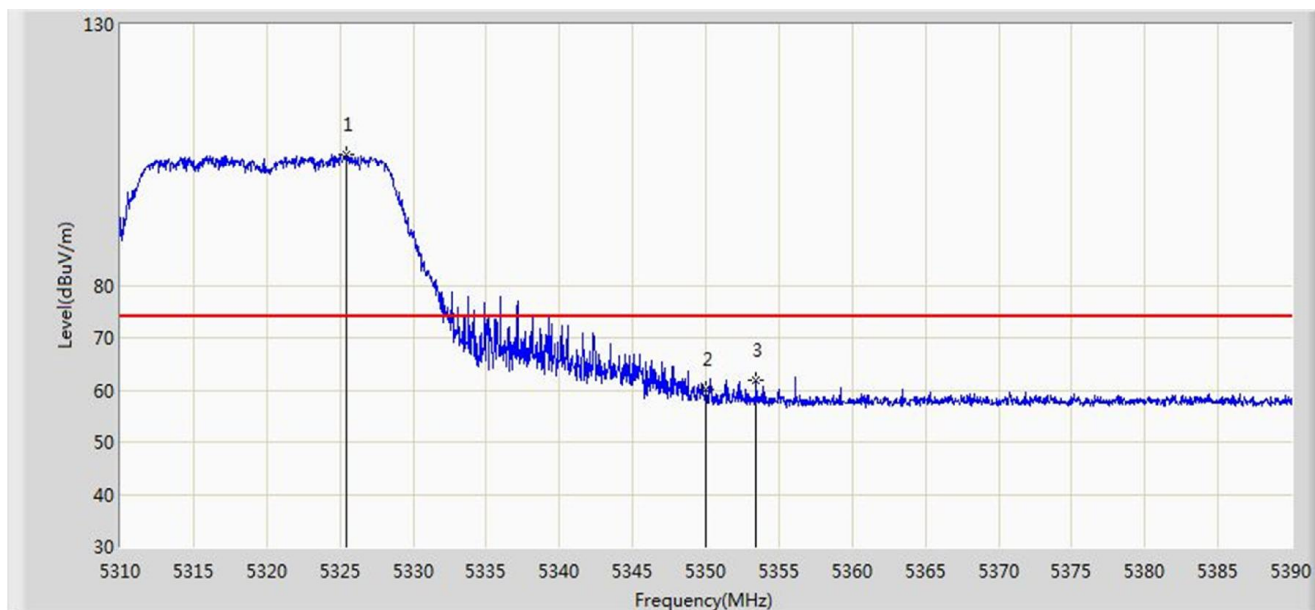


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5325.400        | 105.115                | 98.791               | N/A             | N/A            | 6.325       | PK   |
| 2  |      |      | 5350.000        | 60.241                 | 53.781               | -13.759         | 74.000         | 6.460       | PK   |
| 3  |      |      | 5353.440        | 61.906                 | 55.430               | -12.094         | 74.000         | 6.475       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:09 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz |                          |

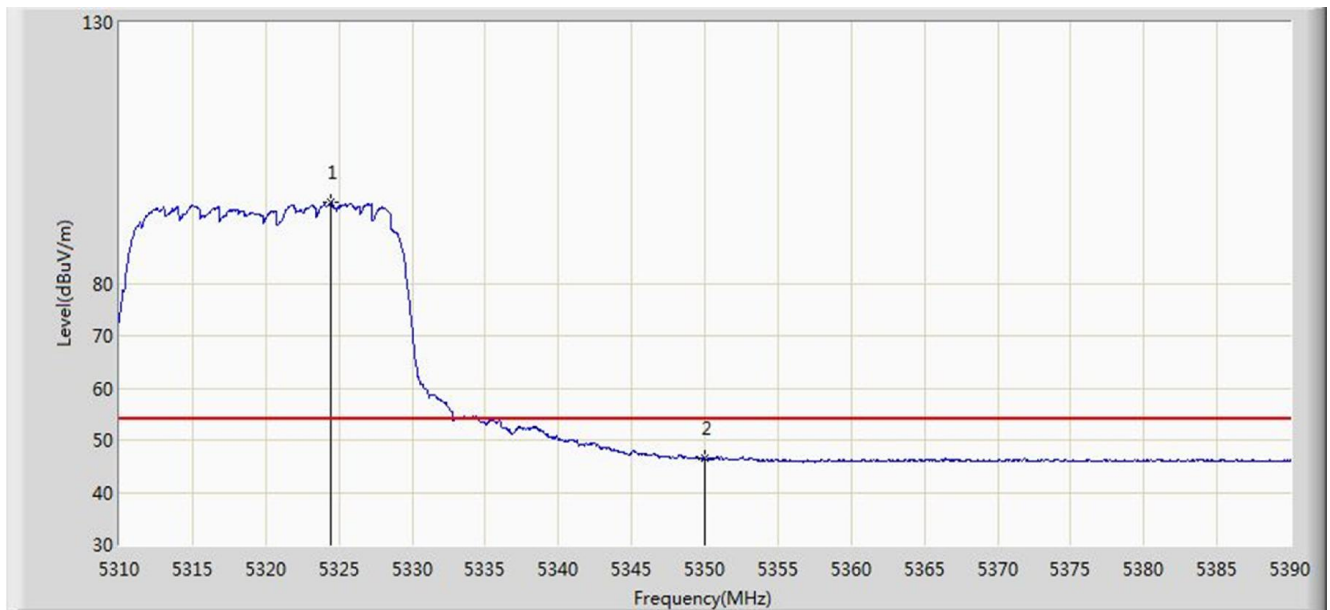


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5324.480        | 95.426                 | 89.107               | N/A             | N/A            | 6.319       | AV   |
| 2  |      |      | 5350.000        | 46.390                 | 39.930               | -7.610          | 54.000         | 6.460       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:03 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz |                          |

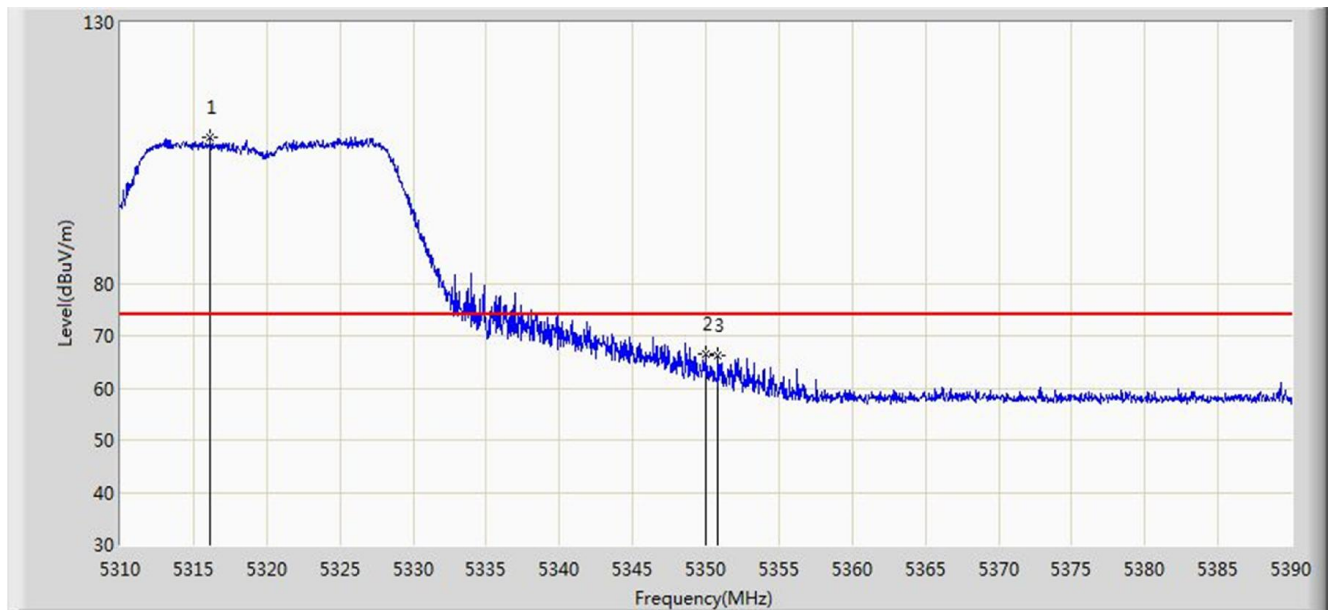


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5316.160        | 108.065                | 101.786              | N/A             | N/A            | 6.279       | PK   |
| 2  |      |      | 5350.000        | 66.606                 | 60.146               | -7.394          | 74.000         | 6.460       | PK   |
| 3  |      |      | 5350.840        | 66.353                 | 59.889               | -7.647          | 74.000         | 6.465       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:07 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz |                          |

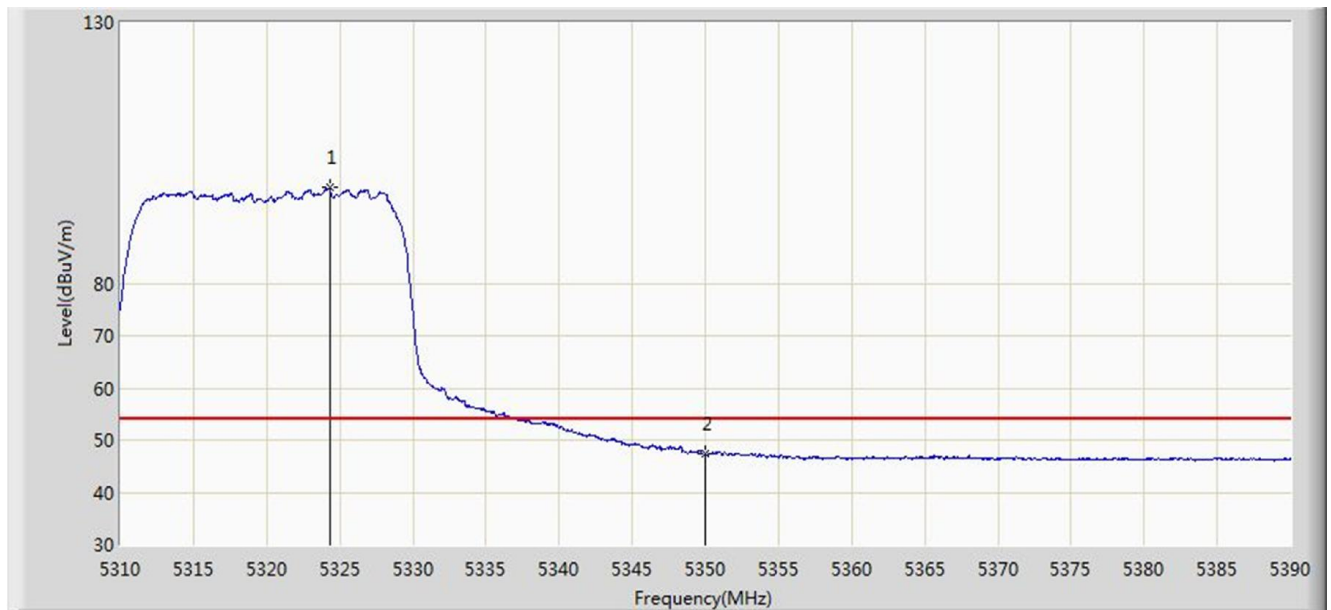


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5324.320        | 98.301                 | 91.983               | N/A             | N/A            | 6.319       | AV   |
| 2  |      |      | 5350.000        | 47.353                 | 40.893               | -6.647          | 54.000         | 6.460       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:15 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz |                          |

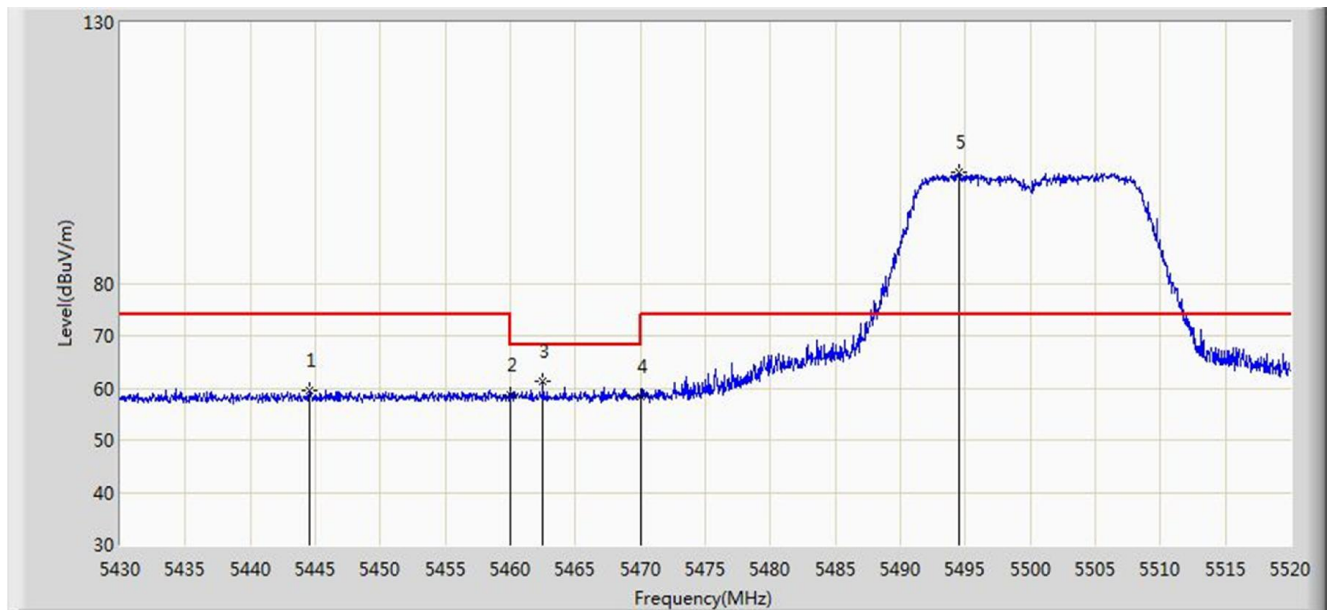


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5444.535        | 59.685                 | 52.982               | -14.315         | 74.000         | 6.702       | PK   |
| 2  |      |      | 5460.000        | 58.673                 | 51.871               | -15.327         | 74.000         | 6.802       | PK   |
| 3  |      |      | 5462.535        | 61.319                 | 54.506               | -6.881          | 68.200         | 6.813       | PK   |
| 4  |      |      | 5470.000        | 58.390                 | 51.545               | -9.810          | 68.200         | 6.845       | PK   |
| 5  |      | *    | 5494.530        | 101.360                | 94.532               | N/A             | N/A            | 6.828       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:16 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz |                          |

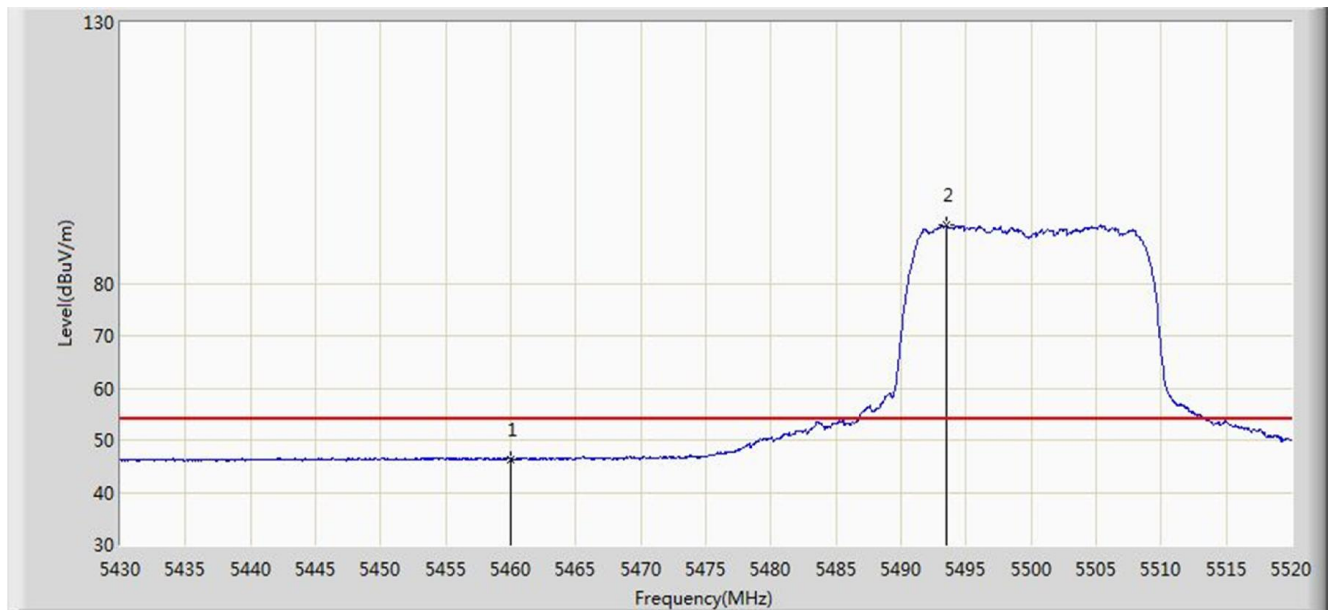


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 46.360                 | 39.558               | -7.640          | 54.000         | 6.802       | AV   |
| 2  |      | *    | 5493.450        | 91.044                 | 84.214               | N/A             | N/A            | 6.830       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:12 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz |                          |

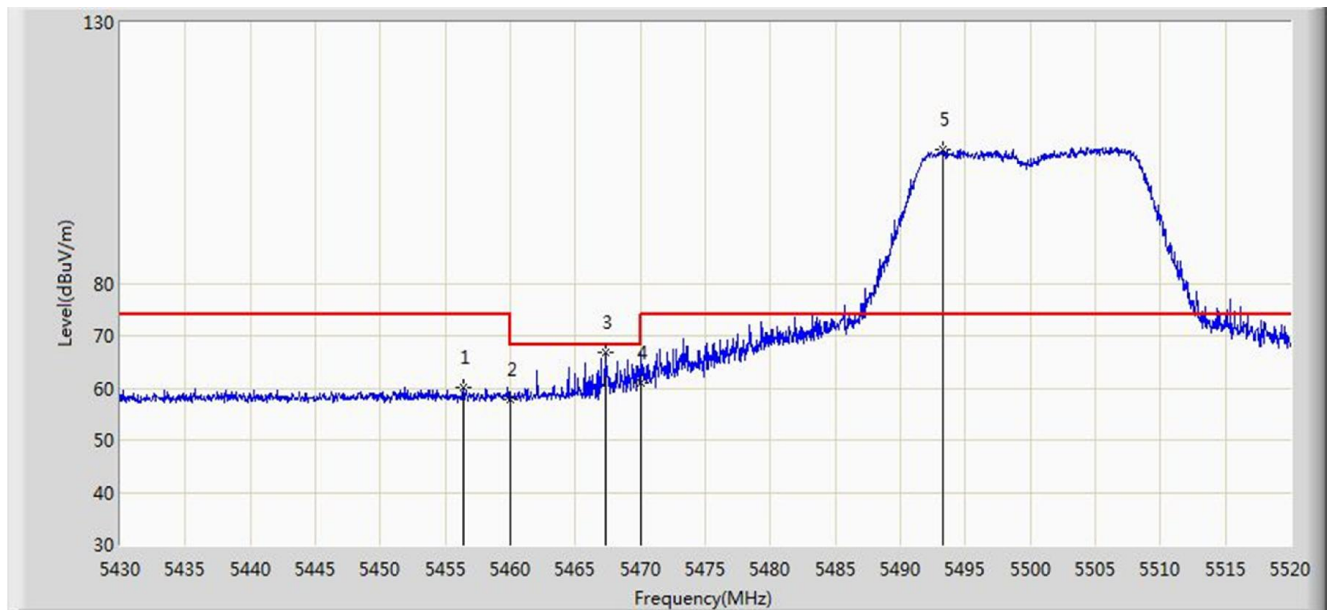

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5456.370        | 60.036                 | 53.250               | -13.964         | 74.000         | 6.786       | PK   |
| 2  |      |      | 5460.000        | 57.936                 | 51.134               | -16.064         | 74.000         | 6.802       | PK   |
| 3  |      |      | 5467.305        | 66.940                 | 60.107               | -1.260          | 68.200         | 6.833       | PK   |
| 4  |      |      | 5470.000        | 61.010                 | 54.165               | -7.190          | 68.200         | 6.845       | PK   |
| 5  |      | *    | 5493.270        | 105.757                | 98.926               | N/A             | N/A            | 6.831       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:13 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz |                          |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 46.639                 | 39.837               | -7.361          | 54.000         | 6.802       | AV   |
| 2  |      | *    | 5503.980        | 95.693                 | 88.881               | N/A             | N/A            | 6.813       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:20 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz |                          |

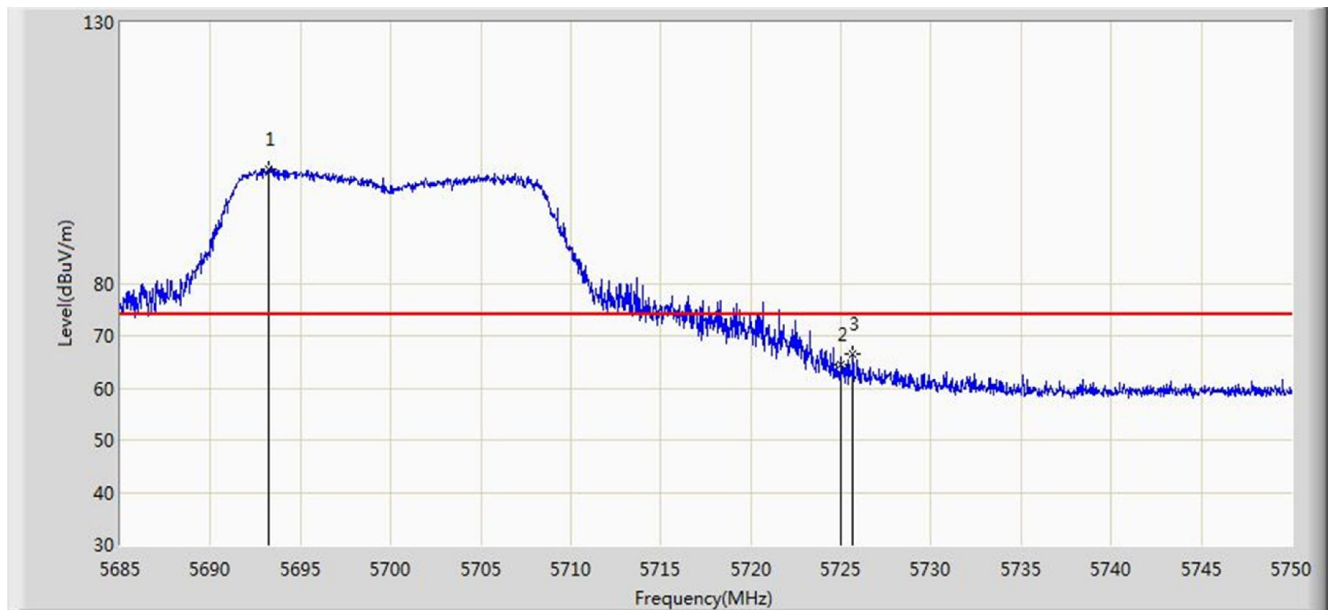


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5693.223        | 102.016                | 94.896               | N/A             | N/A            | 7.120       | PK   |
| 2  |      |      | 5725.000        | 64.479                 | 57.151               | -9.521          | 74.000         | 7.328       | PK   |
| 3  |      |      | 5725.658        | 66.621                 | 59.289               | -7.379          | 74.000         | 7.331       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:22 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz |                          |

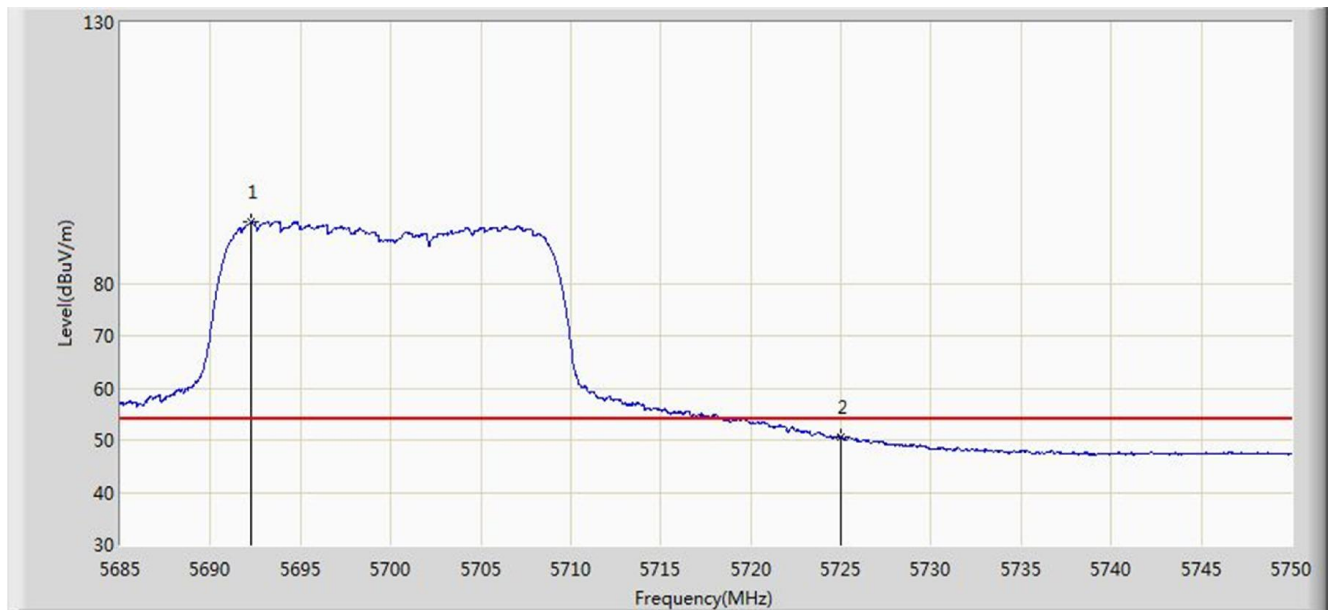


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5692.280        | 91.694                 | 84.581               | N/A             | N/A            | 7.113       | AV   |
| 2  |      |      | 5725.000        | 50.440                 | 43.112               | -3.560          | 54.000         | 7.328       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:16 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz |                          |

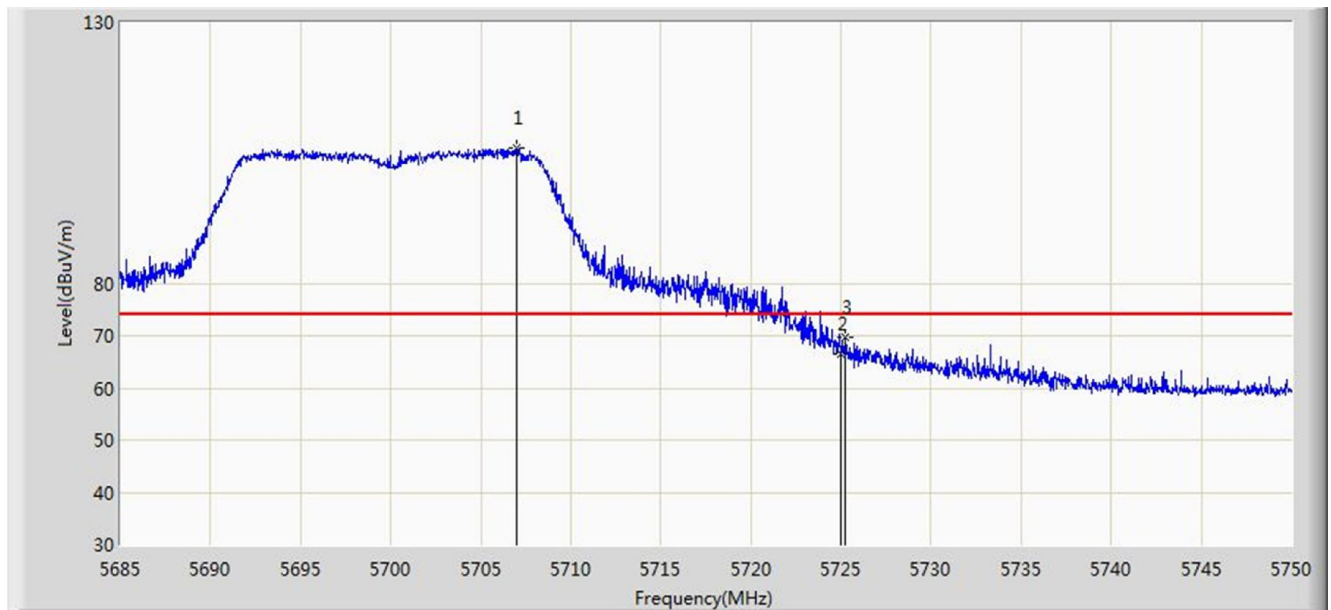


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5706.970        | 105.961                | 98.741               | N/A             | N/A            | 7.219       | PK   |
| 2  |      |      | 5725.000        | 66.591                 | 59.263               | -7.409          | 74.000         | 7.328       | PK   |
| 3  |      |      | 5725.268        | 69.815                 | 62.485               | -4.185          | 74.000         | 7.329       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:19 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz |                          |

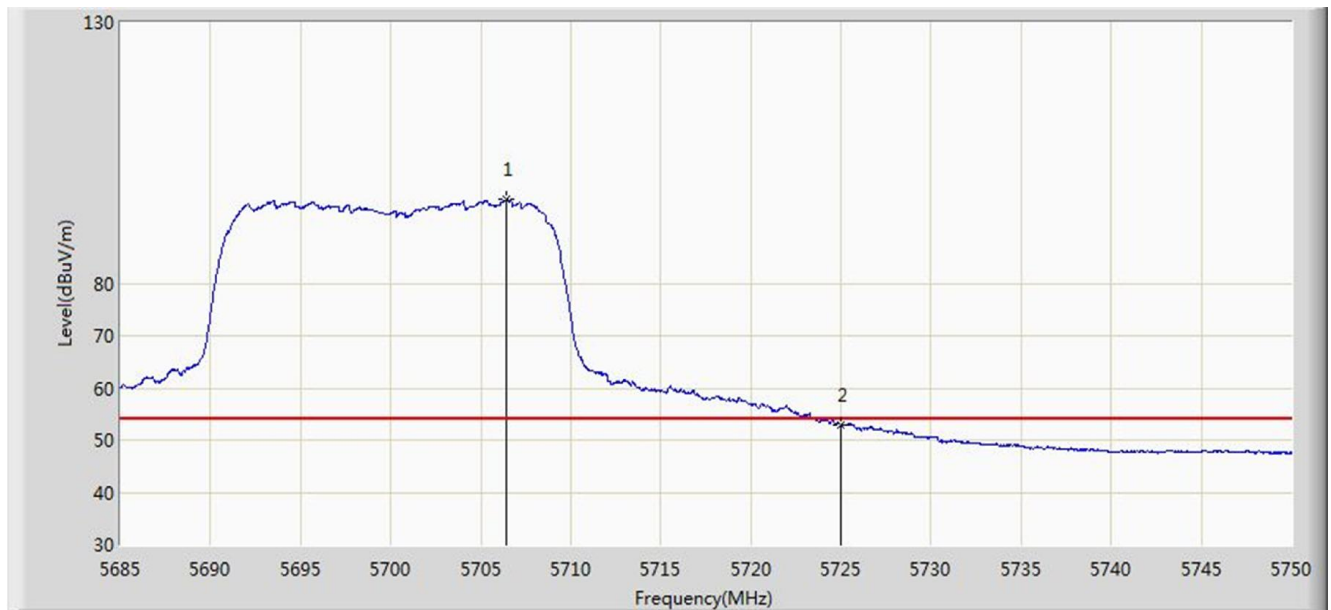


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5706.450        | 96.076                 | 88.861               | N/A             | N/A            | 7.215       | AV   |
| 2  |      |      | 5725.000        | 52.996                 | 45.668               | -1.004          | 54.000         | 7.328       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:22 |
| Limit: FCC_Part15.407_RE(3m)_Bandedge                    | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz |                          |

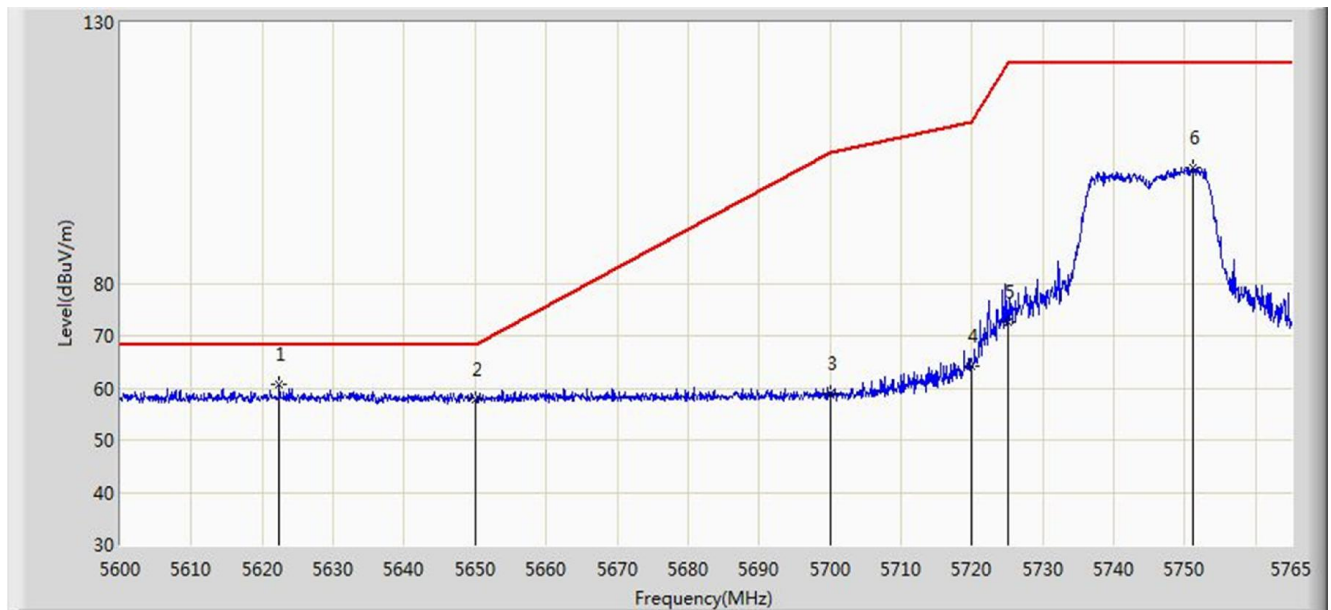


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5622.357        | 60.677                 | 53.666               | -7.523          | 68.200         | 7.011       | PK   |
| 2  |      |      | 5650.000        | 57.811                 | 50.806               | -10.389         | 68.200         | 7.005       | PK   |
| 3  |      |      | 5700.000        | 58.892                 | 51.727               | -46.308         | 105.200        | 7.165       | PK   |
| 4  |      |      | 5720.000        | 64.144                 | 56.845               | -46.656         | 110.800        | 7.299       | PK   |
| 5  |      |      | 5725.000        | 72.578                 | 65.250               | -49.622         | 122.200        | 7.328       | PK   |
| 6  |      |      | 5751.223        | 102.034                | 94.625               | N/A             | N/A            | 7.410       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:25 |
| Limit: FCC_Part15.407_RE(3m)_Bandedge                    | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz |                          |

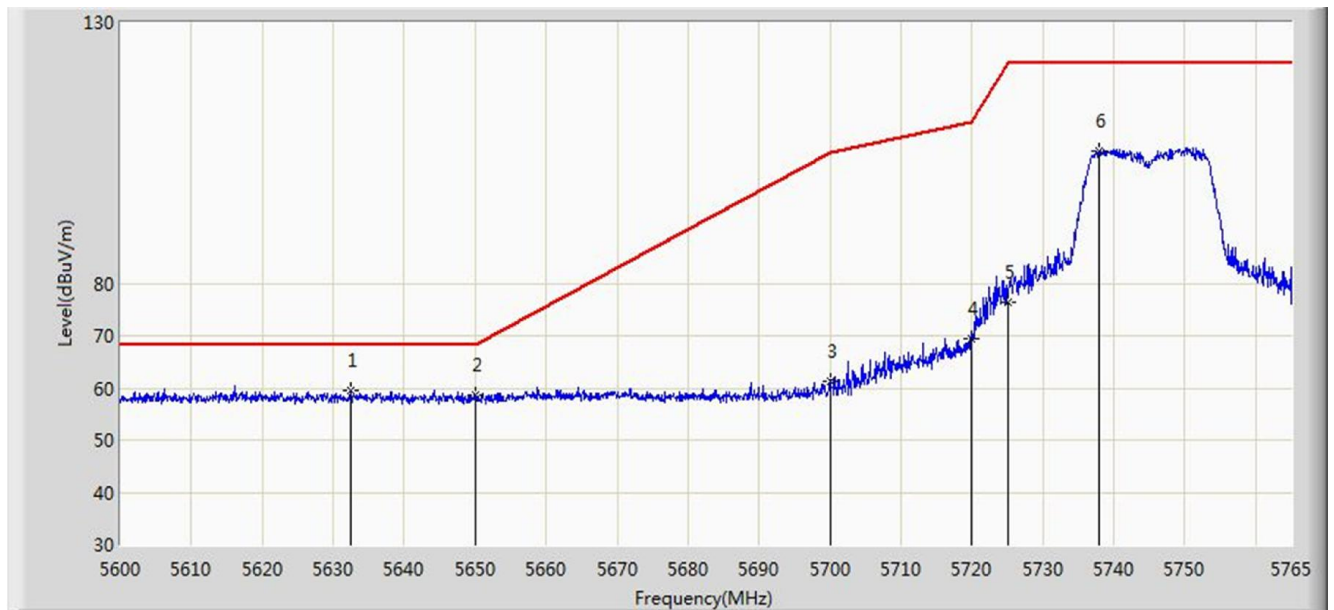


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5632.422        | 59.481                 | 52.481               | -8.719          | 68.200         | 6.999       | PK   |
| 2  |      |      | 5650.000        | 58.635                 | 51.630               | -9.565          | 68.200         | 7.005       | PK   |
| 3  |      |      | 5700.000        | 61.403                 | 54.238               | -43.797         | 105.200        | 7.165       | PK   |
| 4  |      |      | 5720.000        | 69.459                 | 62.160               | -41.341         | 110.800        | 7.299       | PK   |
| 5  |      |      | 5725.000        | 76.512                 | 69.184               | -45.688         | 122.200        | 7.328       | PK   |
| 6  |      |      | 5737.857        | 105.453                | 98.070               | N/A             | N/A            | 7.383       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:28 |
| Limit: FCC_Part15.407_RE(3m)_Bandedge                    | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz |                          |

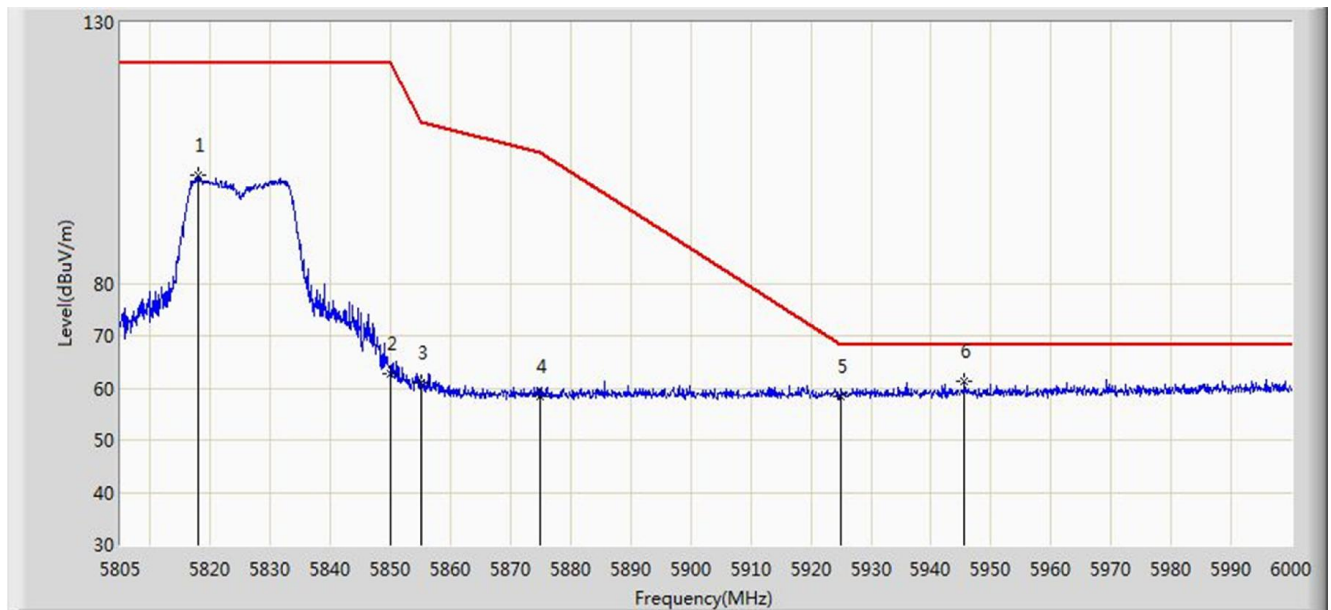


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5817.967        | 100.748                | 93.122               | N/A             | N/A            | 7.626       | PK   |
| 2  |      |      | 5850.000        | 62.755                 | 54.982               | -59.445         | 122.200        | 7.774       | PK   |
| 3  |      |      | 5855.000        | 60.990                 | 53.214               | -49.810         | 110.800        | 7.775       | PK   |
| 4  |      |      | 5875.000        | 58.530                 | 50.712               | -46.670         | 105.200        | 7.818       | PK   |
| 5  |      |      | 5925.000        | 58.503                 | 50.684               | -9.697          | 68.200         | 7.819       | PK   |
| 6  |      | *    | 5945.498        | 61.164                 | 53.321               | -7.036          | 68.200         | 7.844       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:25 |
| Limit: FCC_Part15.407_RE(3m)_Bandedge                    | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz |                          |

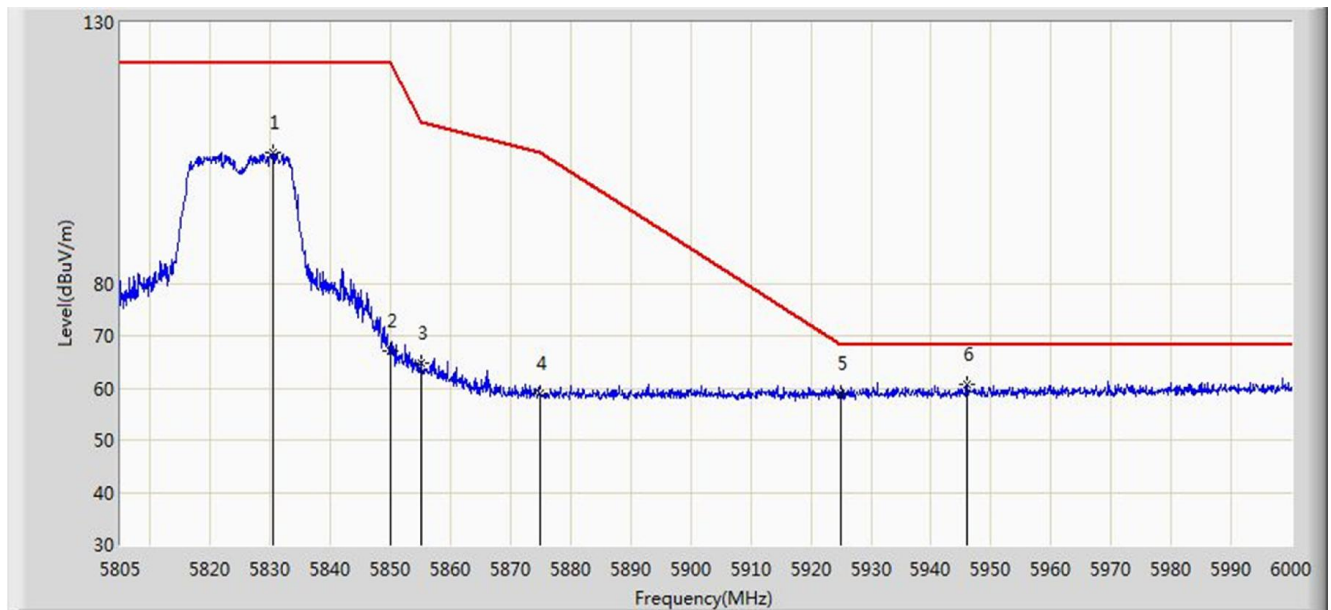


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5830.350        | 105.185                | 97.499               | N/A             | N/A            | 7.686       | PK   |
| 2  |      |      | 5850.000        | 67.173                 | 59.400               | -55.027         | 122.200        | 7.774       | PK   |
| 3  |      |      | 5855.000        | 64.639                 | 56.863               | -46.161         | 110.800        | 7.775       | PK   |
| 4  |      |      | 5875.000        | 59.075                 | 51.257               | -46.125         | 105.200        | 7.818       | PK   |
| 5  |      |      | 5925.000        | 59.096                 | 51.277               | -9.104          | 68.200         | 7.819       | PK   |
| 6  |      | *    | 5945.888        | 60.601                 | 52.758               | -7.599          | 68.200         | 7.843       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:37 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz |                          |

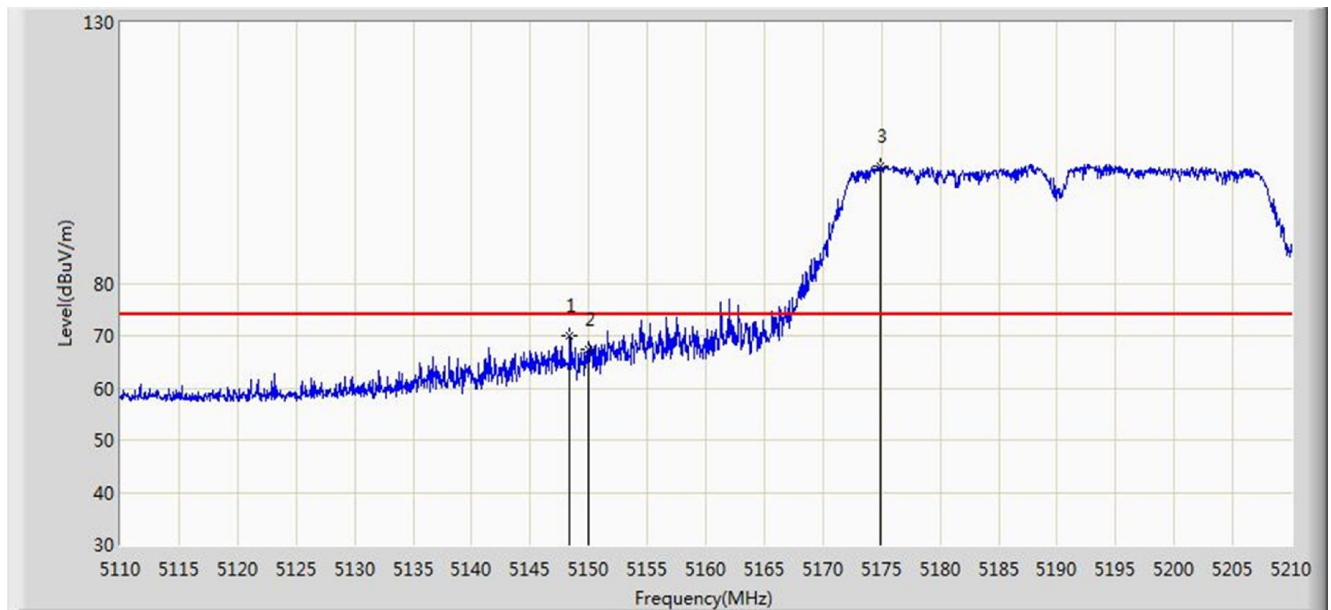


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5148.400        | 69.896                 | 63.337               | -4.104          | 74.000         | 6.559       | PK   |
| 2  |      |      | 5150.000        | 67.441                 | 60.879               | -6.559          | 74.000         | 6.562       | PK   |
| 3  |      | *    | 5174.950        | 102.562                | 96.078               | N/A             | N/A            | 6.484       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:39 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz |                          |

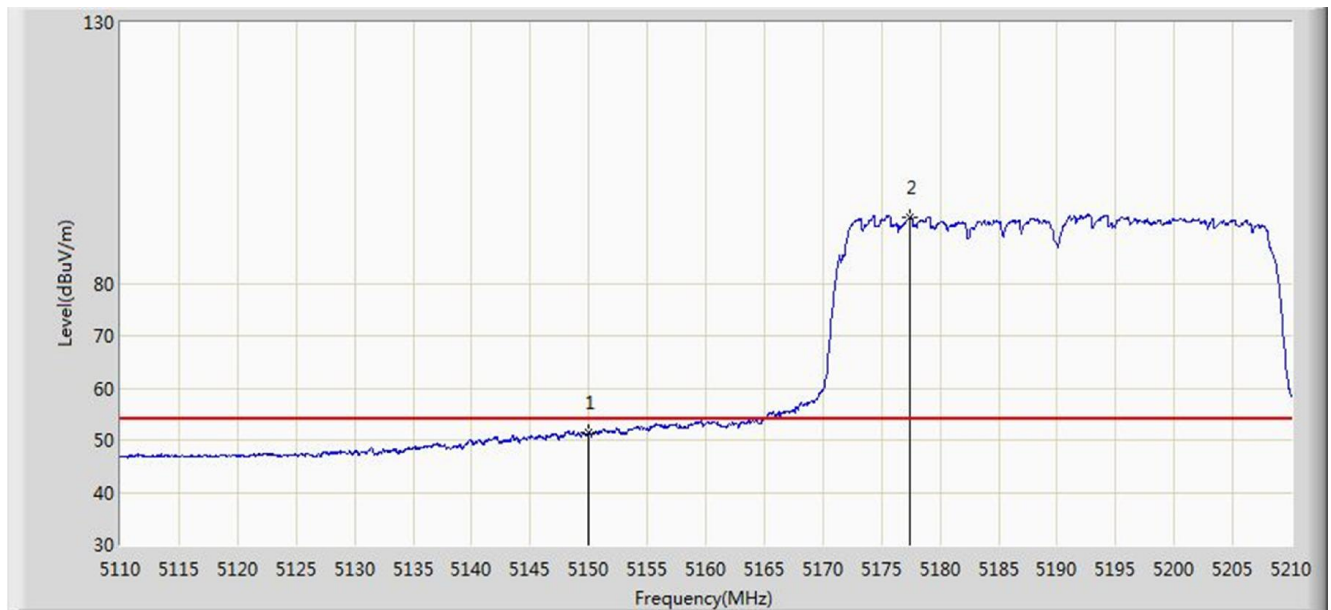


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 51.520                 | 44.958               | -2.480          | 54.000         | 6.562       | AV   |
| 2  |      | *    | 5177.450        | 92.598                 | 86.134               | N/A             | N/A            | 6.464       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:33 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz |                          |

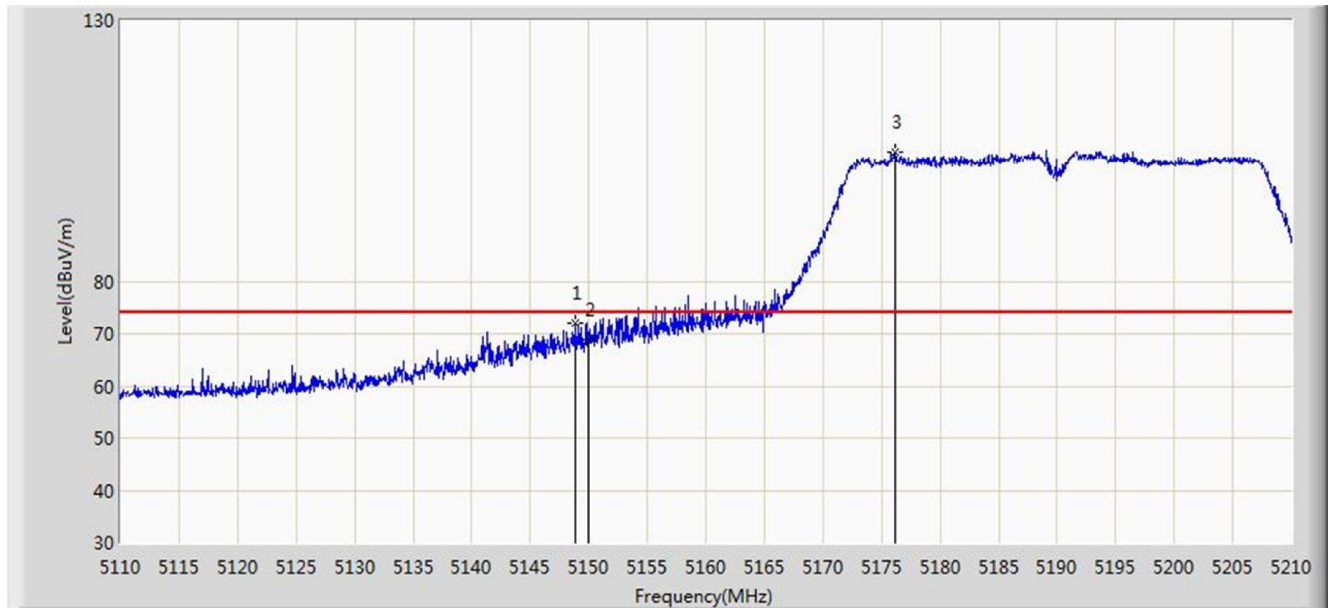


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5148.900        | 72.148                 | 65.588               | -1.852          | 74.000         | 6.560       | PK   |
| 2  |      |      | 5150.000        | 68.866                 | 62.304               | -5.134          | 74.000         | 6.562       | PK   |
| 3  |      | *    | 5176.150        | 104.710                | 98.235               | N/A             | N/A            | 6.474       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:36 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz |                          |

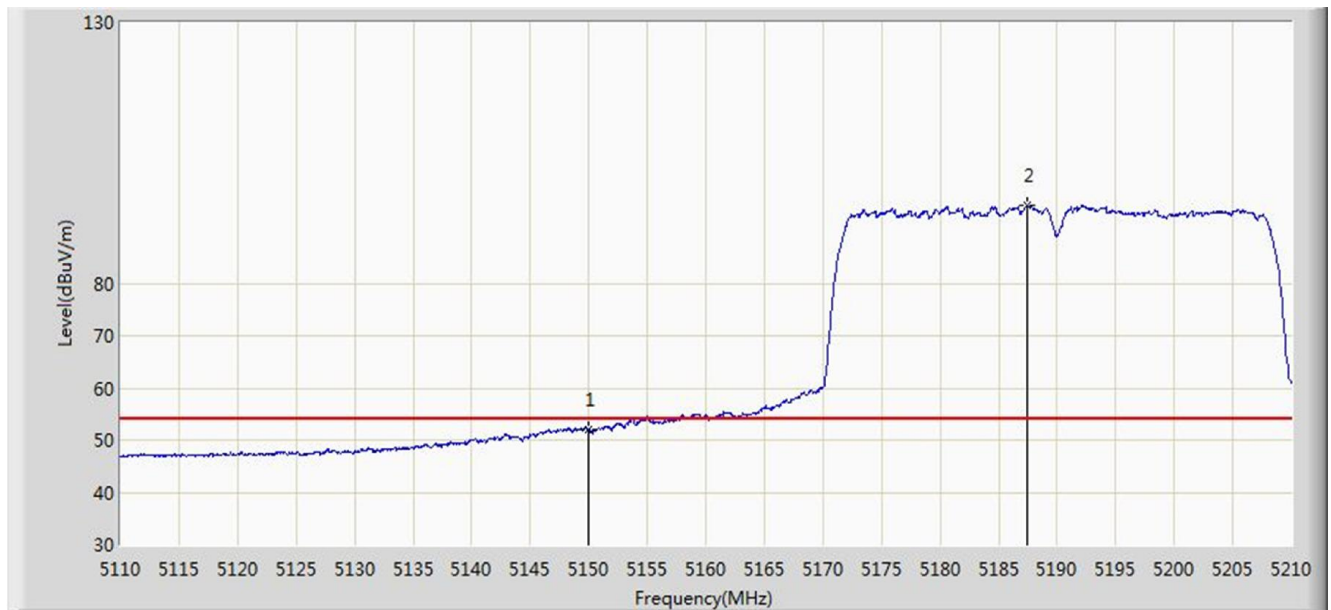


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 52.052                 | 45.490               | -1.948          | 54.000         | 6.562       | AV   |
| 2  |      | *    | 5187.400        | 94.785                 | 88.388               | N/A             | N/A            | 6.397       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:45 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz |                          |

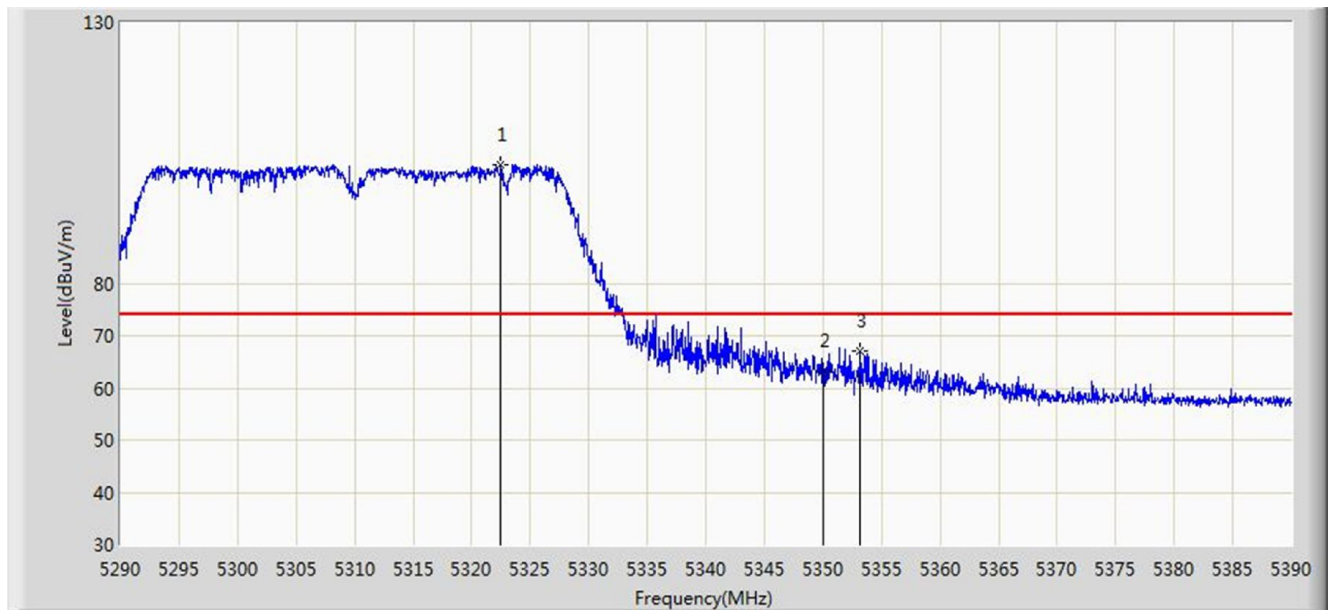


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5322.500        | 102.834                | 96.526               | N/A             | N/A            | 6.307       | PK   |
| 2  |      |      | 5350.000        | 63.356                 | 56.896               | -10.644         | 74.000         | 6.460       | PK   |
| 3  |      |      | 5353.100        | 66.958                 | 60.484               | -7.042          | 74.000         | 6.475       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:46 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz |                          |

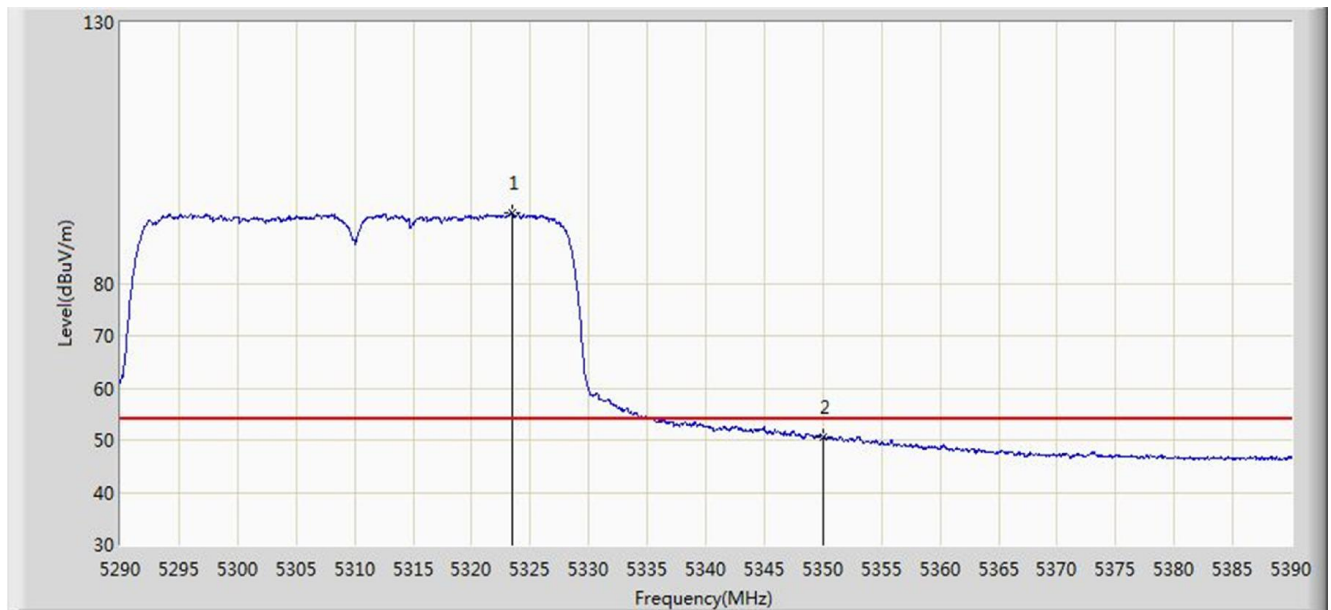


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5323.450        | 93.549                 | 87.236               | N/A             | N/A            | 6.313       | AV   |
| 2  |      |      | 5350.000        | 50.582                 | 44.122               | -3.418          | 54.000         | 6.460       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:42 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz |                          |

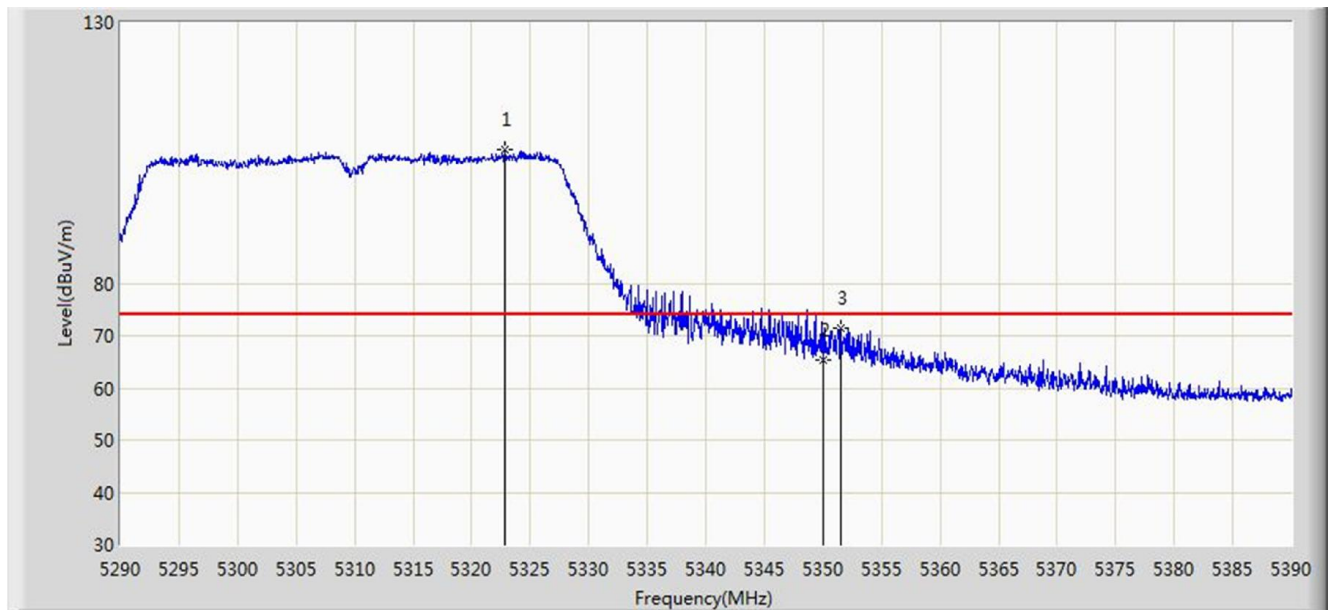


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5322.850        | 105.675                | 99.365               | N/A             | N/A            | 6.310       | PK   |
| 2  |      |      | 5350.000        | 65.470                 | 59.010               | -8.530          | 74.000         | 6.460       | PK   |
| 3  |      |      | 5351.550        | 71.462                 | 64.994               | -2.538          | 74.000         | 6.469       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:44 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz |                          |

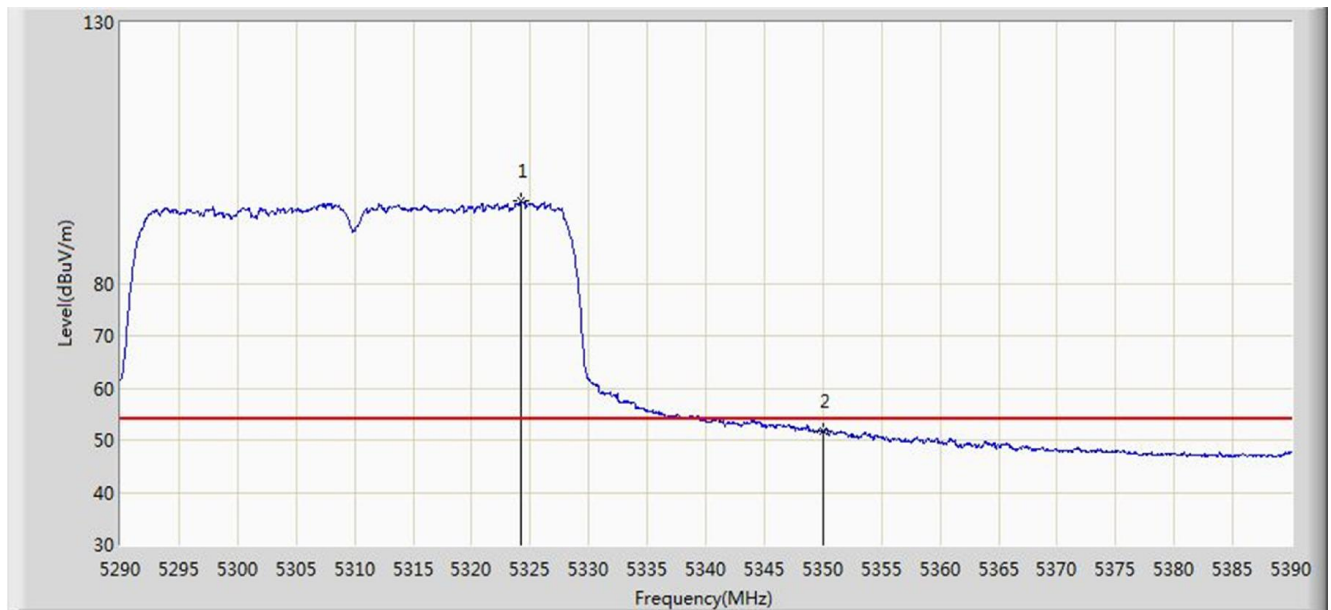


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5324.250        | 95.694                 | 89.376               | N/A             | N/A            | 6.318       | AV   |
| 2  |      |      | 5350.000        | 51.714                 | 45.254               | -2.286          | 54.000         | 6.460       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:55 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz |                          |

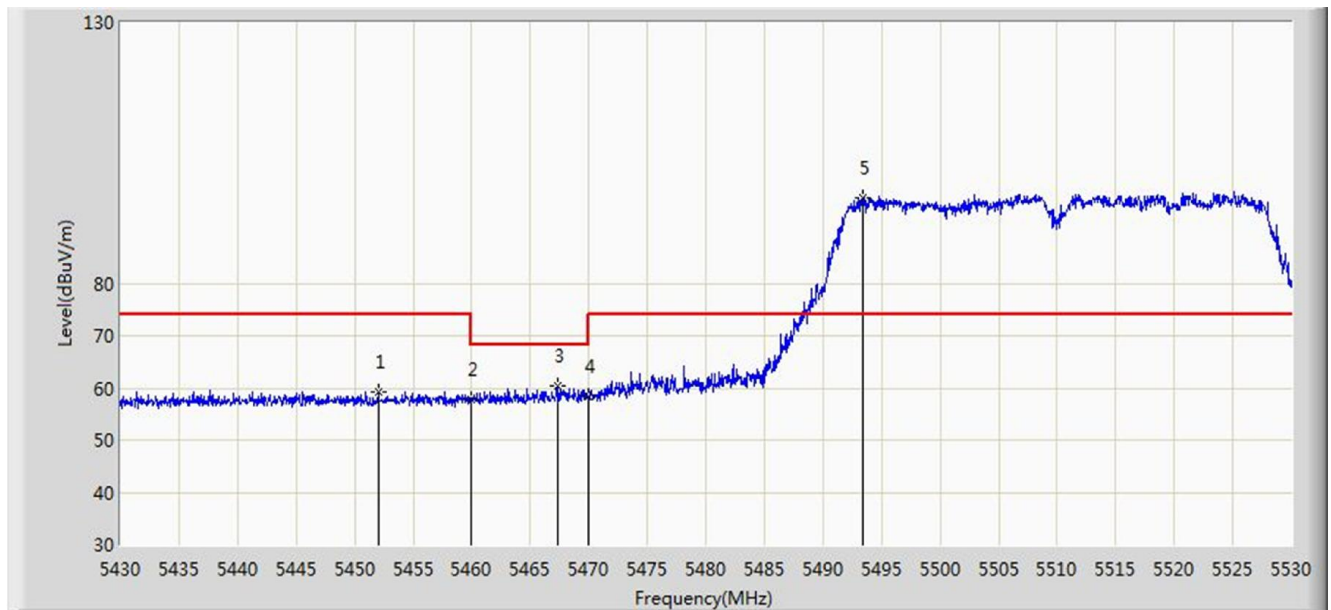


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5452.000        | 59.391                 | 52.631               | -14.609         | 74.000         | 6.760       | PK   |
| 2  |      |      | 5460.000        | 57.811                 | 51.009               | -16.189         | 74.000         | 6.802       | PK   |
| 3  |      |      | 5467.300        | 60.346                 | 53.513               | -7.854          | 68.200         | 6.833       | PK   |
| 4  |      |      | 5470.000        | 58.463                 | 51.618               | -9.737          | 68.200         | 6.845       | PK   |
| 5  |      | *    | 5493.400        | 96.318                 | 89.488               | 22.318          | N/A            | N/A         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:57 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz |                          |

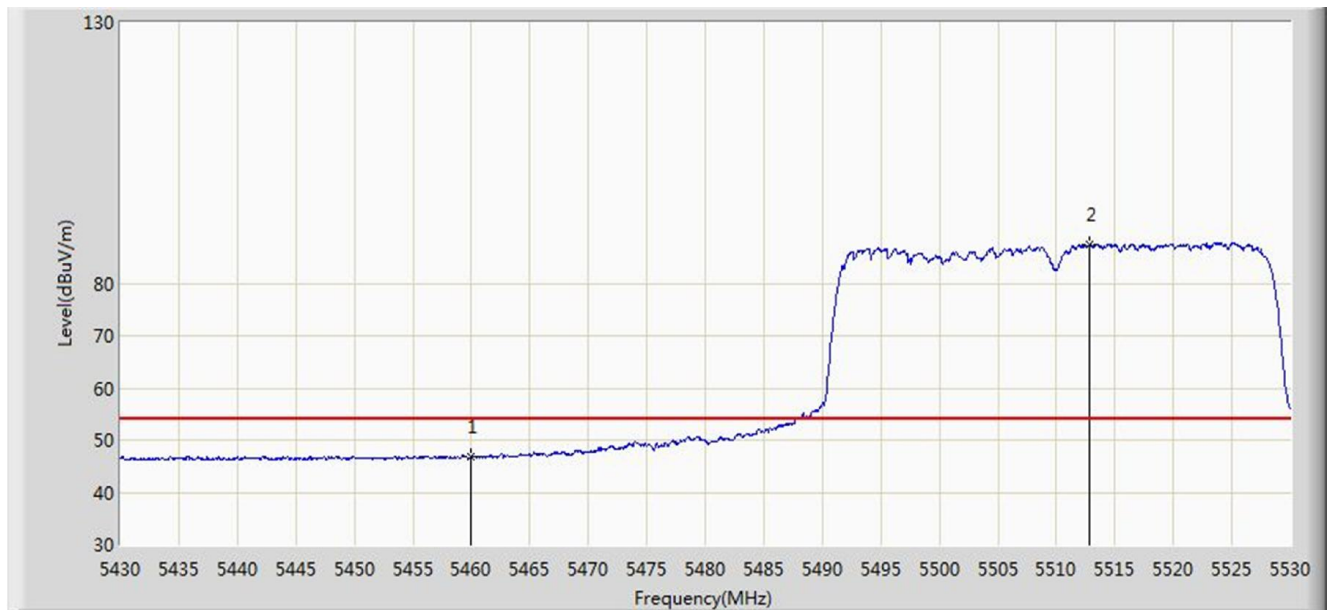


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 46.676                 | 39.874               | -7.324          | 54.000         | 6.802       | AV   |
| 2  |      | *    | 5512.850        | 87.420                 | 80.608               | N/A             | N/A            | 6.813       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:53 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz |                          |

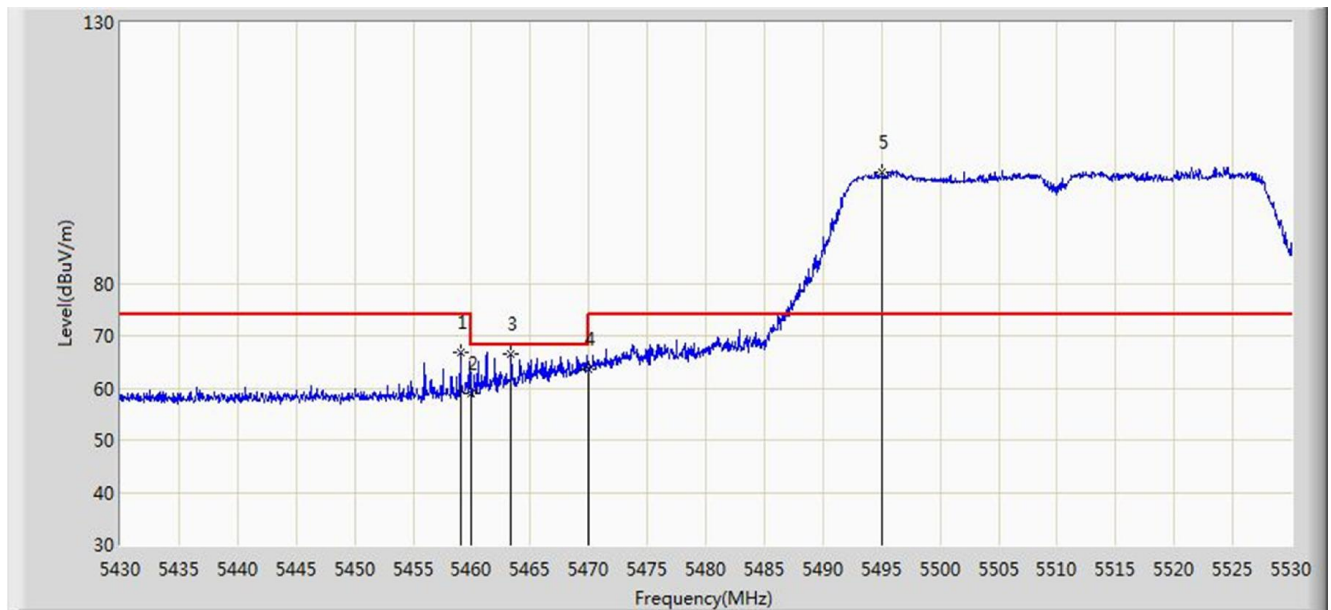


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5459.050        | 66.773                 | 59.975               | -7.227          | 74.000         | 6.798       | PK   |
| 2  |      |      | 5460.000        | 58.984                 | 52.182               | -15.016         | 74.000         | 6.802       | PK   |
| 3  |      |      | 5463.350        | 66.577                 | 59.761               | -1.623          | 68.200         | 6.816       | PK   |
| 4  |      |      | 5470.000        | 63.643                 | 56.798               | -4.557          | 68.200         | 6.845       | PK   |
| 5  |      | *    | 5495.050        | 101.275                | 94.447               | N/A             | N/A            | 6.828       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:55 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz |                          |

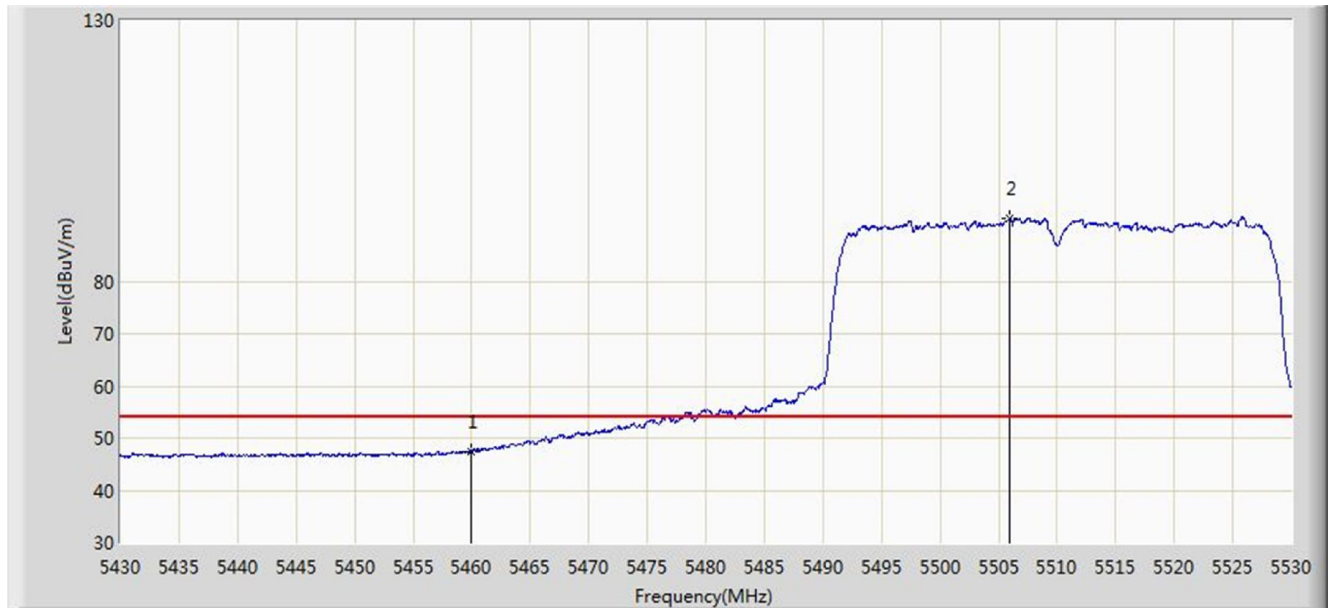


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 47.434                 | 40.632               | -6.566          | 54.000         | 6.802       | AV   |
| 2  |      | *    | 5506.000        | 92.030                 | 85.219               | N/A             | N/A            | 6.811       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 16:04 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5670MHz |                          |

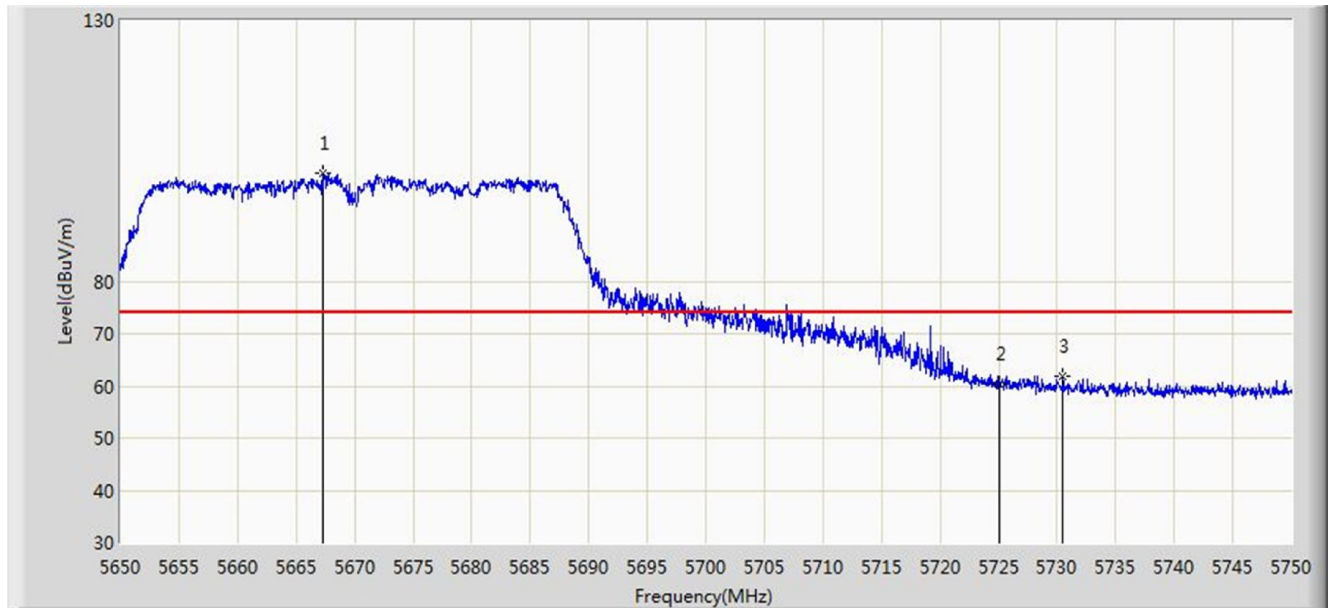


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5667.300        | 100.594                | 93.551               | N/A             | N/A            | 7.044       | PK   |
| 2  |      |      | 5725.000        | 60.545                 | 53.217               | -13.455         | 74.000         | 7.328       | PK   |
| 3  |      |      | 5730.500        | 61.868                 | 54.515               | -12.132         | 74.000         | 7.352       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 16:04 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5670MHz |                          |

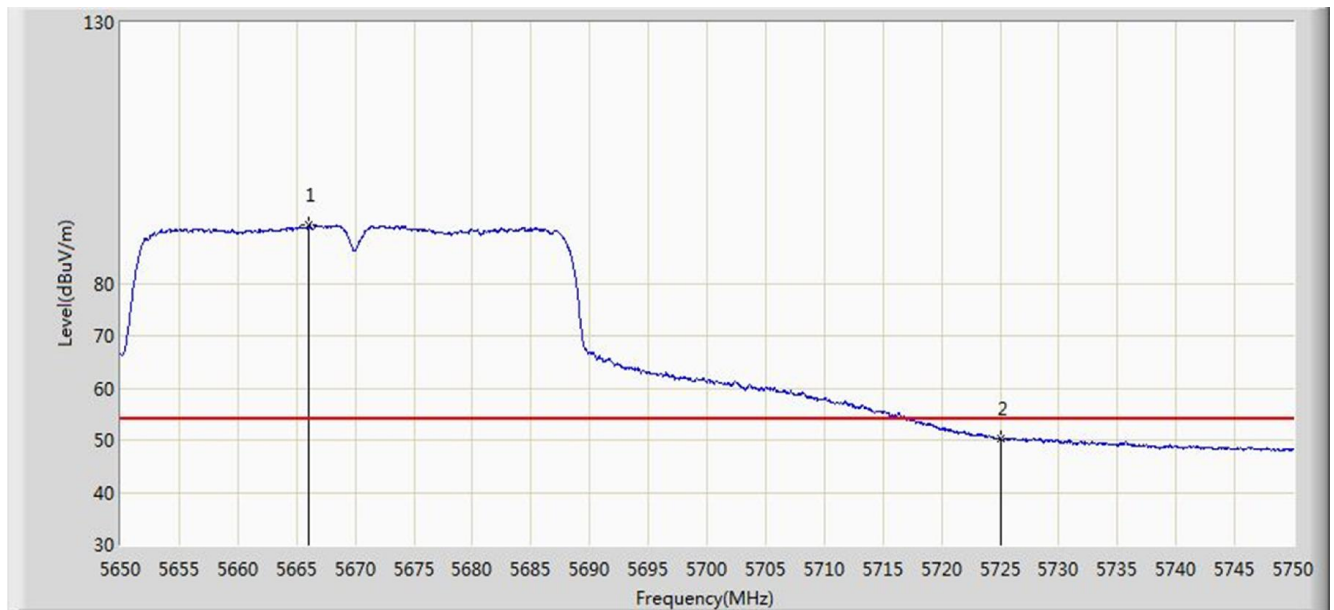


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5666.100        | 91.028                 | 83.987               | N/A             | N/A            | 7.041       | AV   |
| 2  |      |      | 5725.000        | 50.358                 | 43.030               | -3.642          | 54.000         | 7.328       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 15:57 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5670MHz |                          |

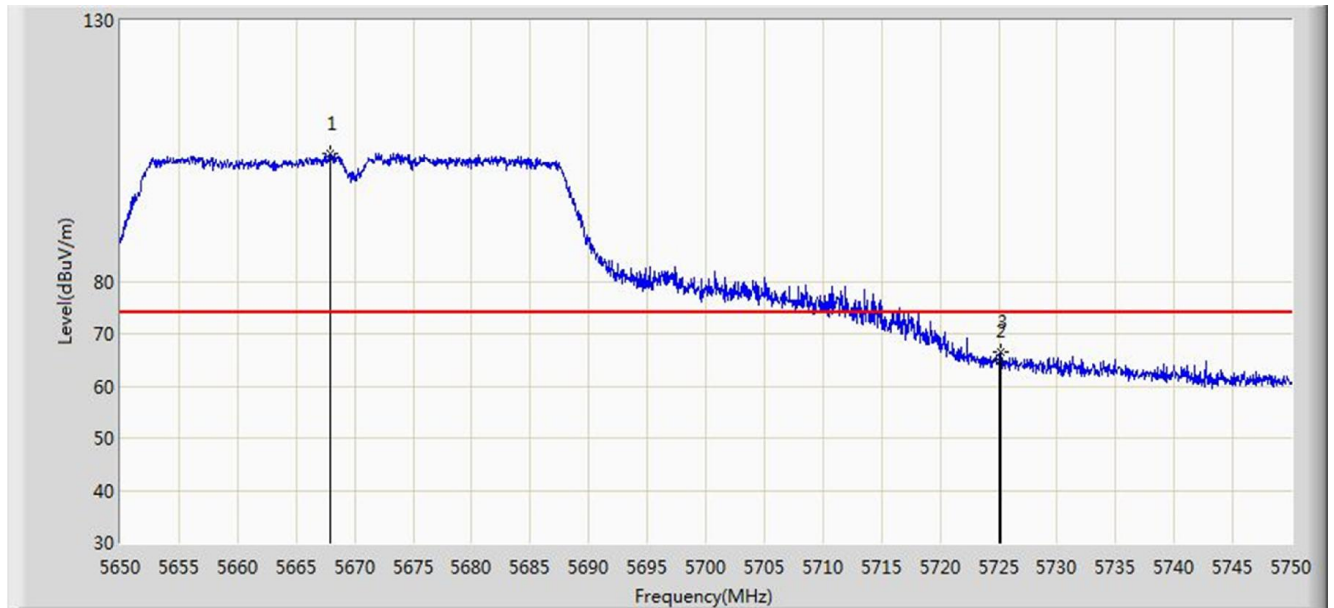


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5667.900        | 104.409                | 97.365               | N/A             | N/A            | 7.045       | PK   |
| 2  |      |      | 5725.000        | 64.732                 | 57.404               | -9.268          | 74.000         | 7.328       | PK   |
| 3  |      |      | 5725.200        | 66.589                 | 59.260               | -7.411          | 74.000         | 7.329       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 16:03 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5670MHz |                          |

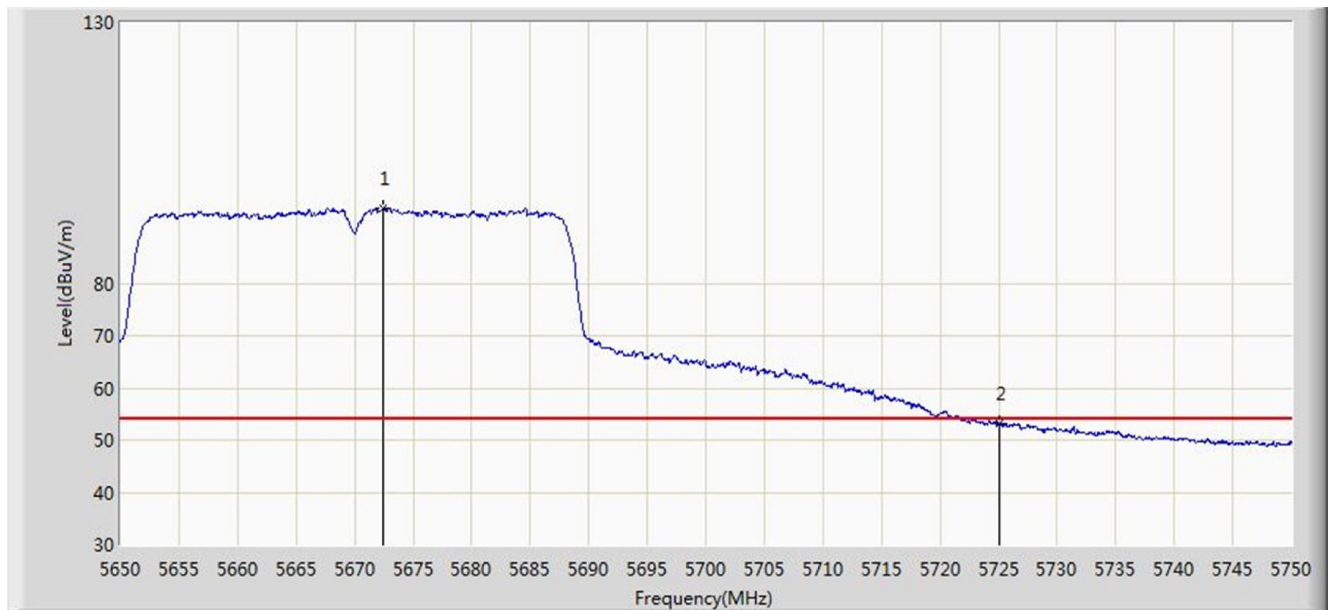


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5672.450        | 94.488                 | 87.436               | N/A             | N/A            | 7.052       | AV   |
| 2  |      |      | 5725.000        | 53.058                 | 45.730               | -0.942          | 54.000         | 7.328       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 16:06 |
| Limit: FCC_Part15.407_RE(3m)_Bandedge                    | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz |                          |

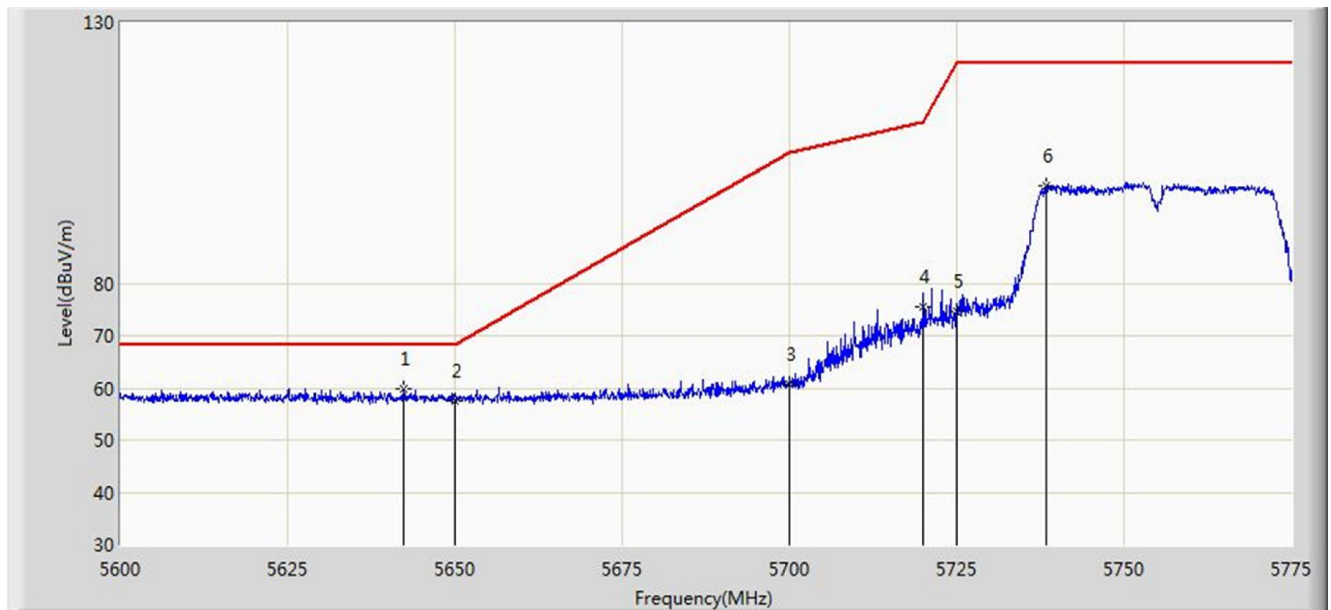


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5642.350        | 59.733                 | 52.745               | -8.467          | 68.200         | 6.987       | PK   |
| 2  |      |      | 5650.000        | 57.661                 | 50.656               | -10.539         | 68.200         | 7.005       | PK   |
| 3  |      |      | 5700.000        | 60.776                 | 53.611               | -44.424         | 105.200        | 7.165       | PK   |
| 4  |      |      | 5720.000        | 75.462                 | 68.163               | -35.338         | 110.800        | 7.299       | PK   |
| 5  |      |      | 5725.000        | 74.742                 | 67.414               | -47.458         | 122.200        | 7.328       | PK   |
| 6  |      |      | 5738.337        | 98.676                 | 91.291               | N/A             | N/A            | 7.386       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 16:08 |
| Limit: FCC_Part15.407_RE(3m)_Bandedge                    | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz |                          |

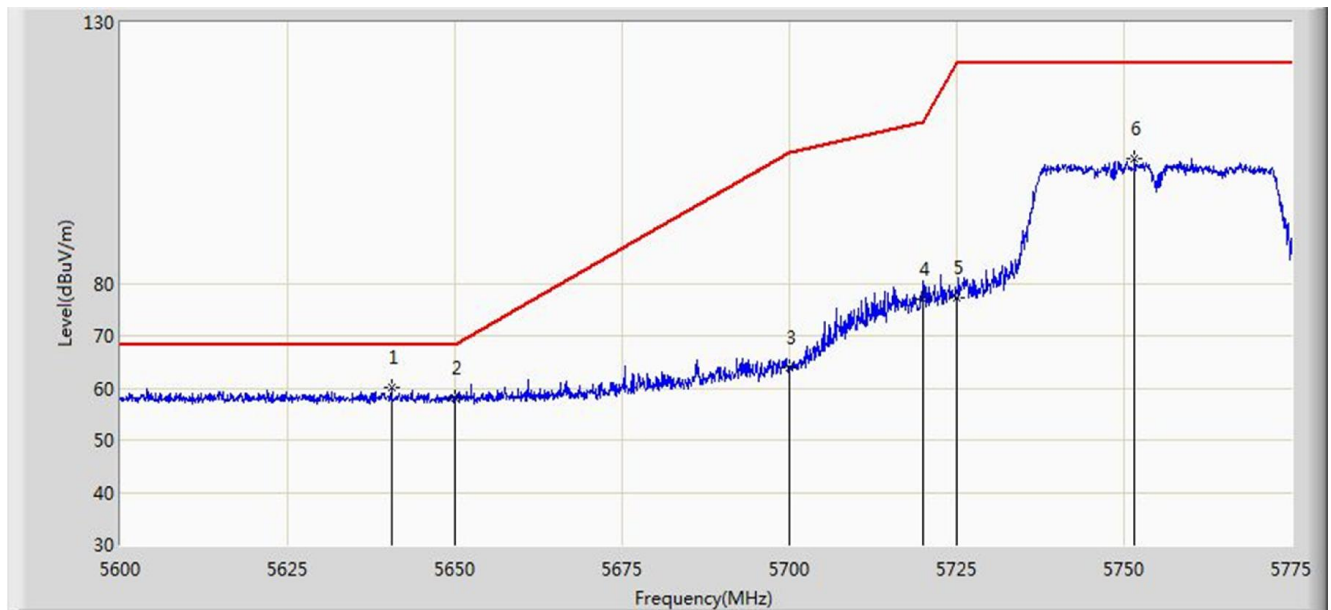


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5640.513        | 60.103                 | 53.117               | -8.097          | 68.200         | 6.987       | PK   |
| 2  |      |      | 5650.000        | 58.118                 | 51.113               | -10.082         | 68.200         | 7.005       | PK   |
| 3  |      |      | 5700.000        | 64.023                 | 56.858               | -41.177         | 105.200        | 7.165       | PK   |
| 4  |      |      | 5720.000        | 77.088                 | 69.789               | -33.712         | 110.800        | 7.299       | PK   |
| 5  |      |      | 5725.000        | 77.205                 | 69.877               | -44.995         | 122.200        | 7.328       | PK   |
| 6  |      |      | 5751.638        | 103.865                | 96.455               | N/A             | N/A            | 7.410       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 16:12 |
| Limit: FCC_Part15.407_RE(3m)_Bandedge                    | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz |                          |

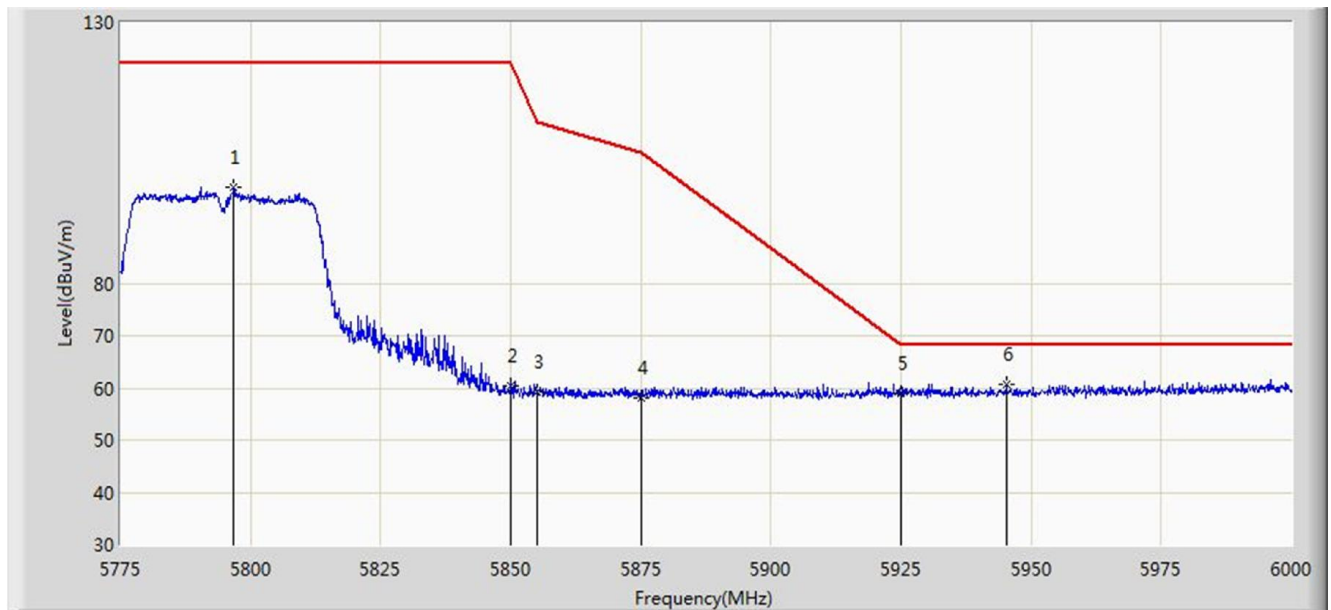


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5796.825        | 98.523                 | 90.976               | N/A             | N/A            | 7.546       | PK   |
| 2  |      |      | 5850.000        | 60.460                 | 52.687               | -61.740         | 122.200        | 7.774       | PK   |
| 3  |      |      | 5855.000        | 59.420                 | 51.644               | -51.380         | 110.800        | 7.775       | PK   |
| 4  |      |      | 5875.000        | 58.255                 | 50.437               | -46.945         | 105.200        | 7.818       | PK   |
| 5  |      |      | 5925.000        | 58.995                 | 51.176               | -9.205          | 68.200         | 7.819       | PK   |
| 6  |      | *    | 5945.325        | 60.767                 | 52.924               | -7.433          | 68.200         | 7.843       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 16:09 |
| Limit: FCC_Part15.407_RE(3m)_Bandedge                    | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz |                          |

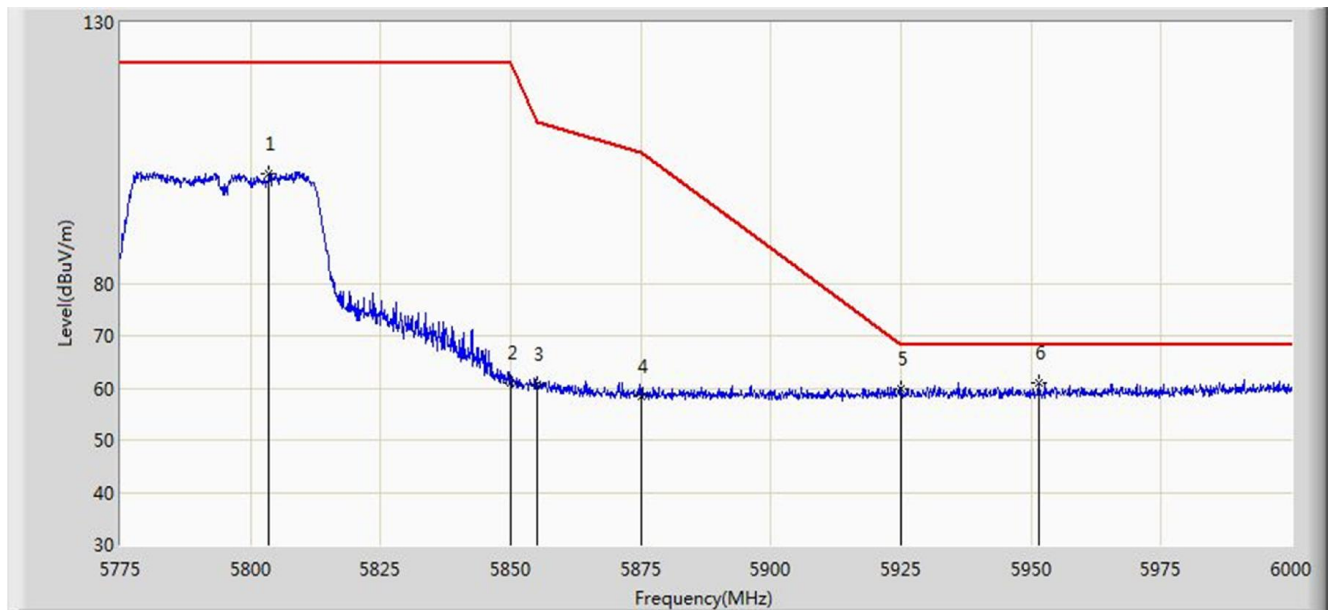


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5803.462        | 100.994                | 93.425               | N/A             | N/A            | 7.568       | PK   |
| 2  |      |      | 5850.000        | 61.127                 | 53.354               | -61.073         | 122.200        | 7.774       | PK   |
| 3  |      |      | 5855.000        | 60.817                 | 53.041               | -49.983         | 110.800        | 7.775       | PK   |
| 4  |      |      | 5875.000        | 58.496                 | 50.678               | -46.704         | 105.200        | 7.818       | PK   |
| 5  |      |      | 5925.000        | 59.791                 | 51.972               | -8.409          | 68.200         | 7.819       | PK   |
| 6  |      | *    | 5951.625        | 60.916                 | 53.072               | -7.284          | 68.200         | 7.844       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 16:26 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz |                          |

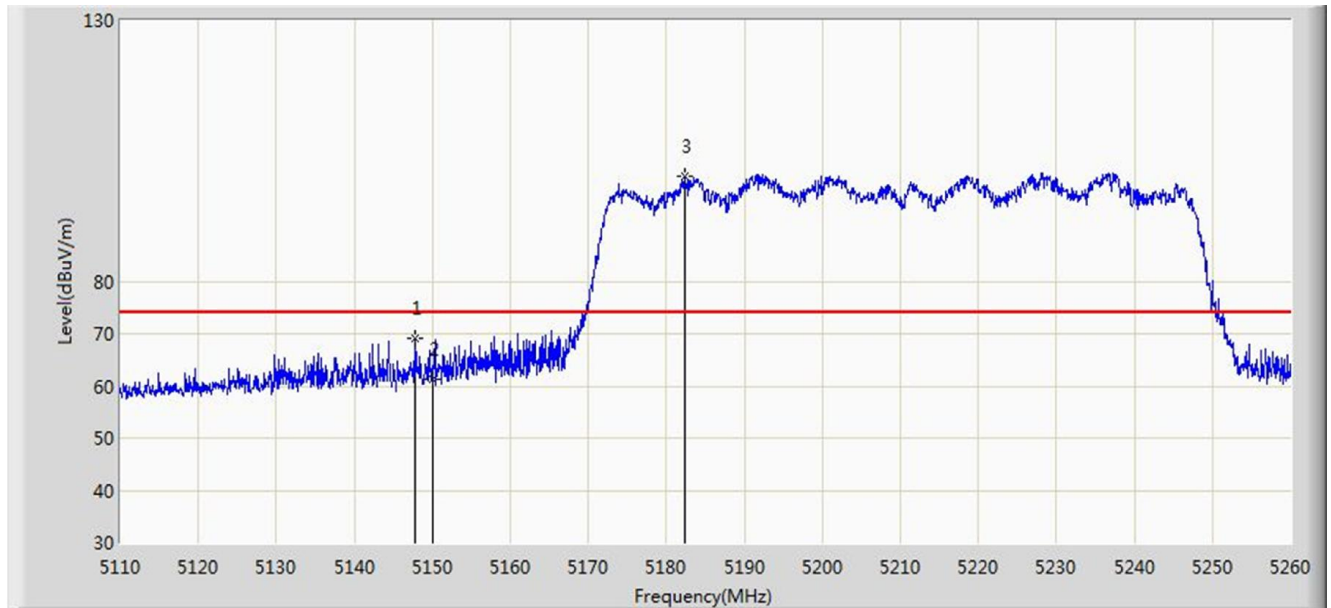


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5147.875        | 69.075                 | 62.516               | -4.925          | 74.000         | 6.559       | PK   |
| 2  |      |      | 5150.000        | 61.271                 | 54.709               | -12.729         | 74.000         | 6.562       | PK   |
| 3  |      | *    | 5182.300        | 100.148                | 93.722               | N/A             | N/A            | 6.427       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 16:27 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz |                          |

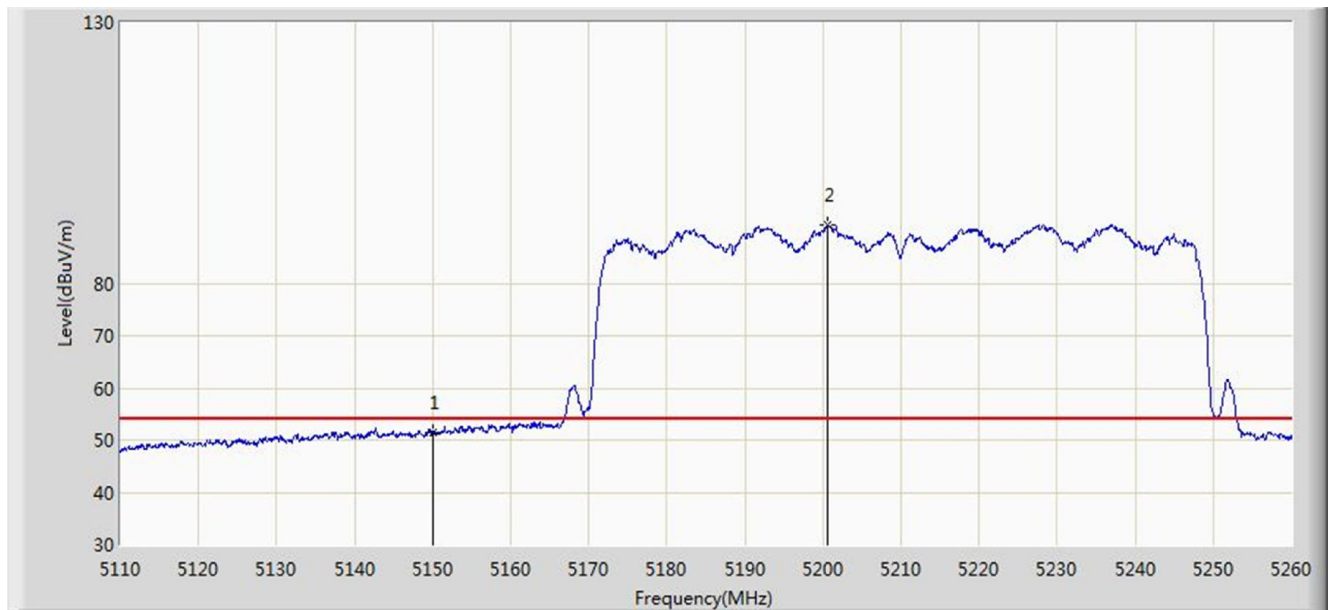


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 51.524                 | 44.962               | -2.476          | 54.000         | 6.562       | AV   |
| 2  |      | *    | 5200.675        | 91.043                 | 84.707               | N/A             | N/A            | 6.336       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 16:21 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz |                          |

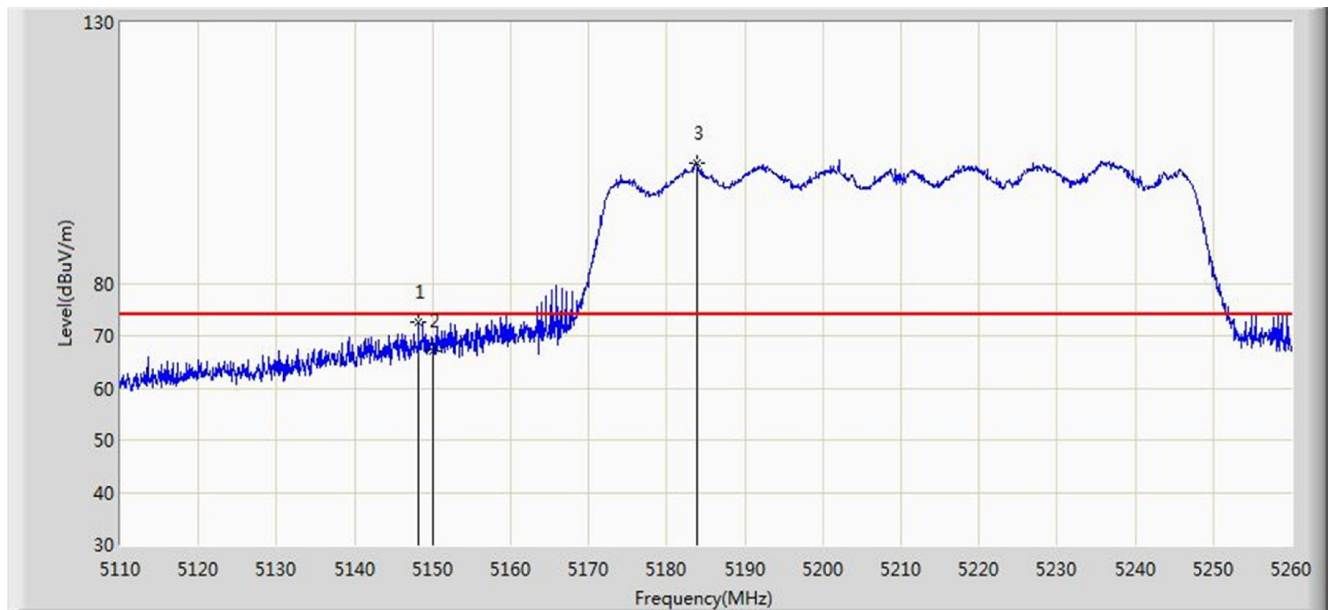


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5148.175        | 72.670                 | 66.111               | -1.330          | 74.000         | 6.560       | PK   |
| 2  |      |      | 5150.000        | 67.073                 | 60.511               | -6.927          | 74.000         | 6.562       | PK   |
| 3  |      | *    | 5183.800        | 103.145                | 96.727               | N/A             | N/A            | 6.418       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 16:24 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz |                          |

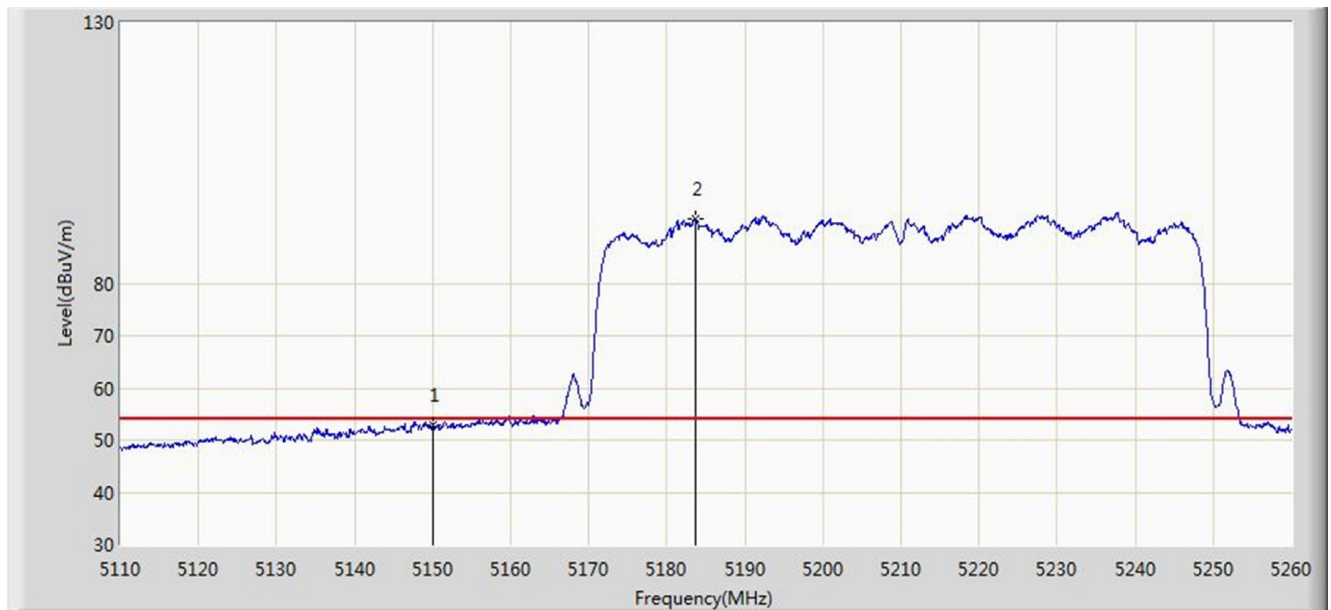


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 52.904                 | 46.342               | -1.096          | 54.000         | 6.562       | AV   |
| 2  |      | *    | 5183.725        | 92.288                 | 85.870               | N/A             | N/A            | 6.418       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 16:31 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz |                          |

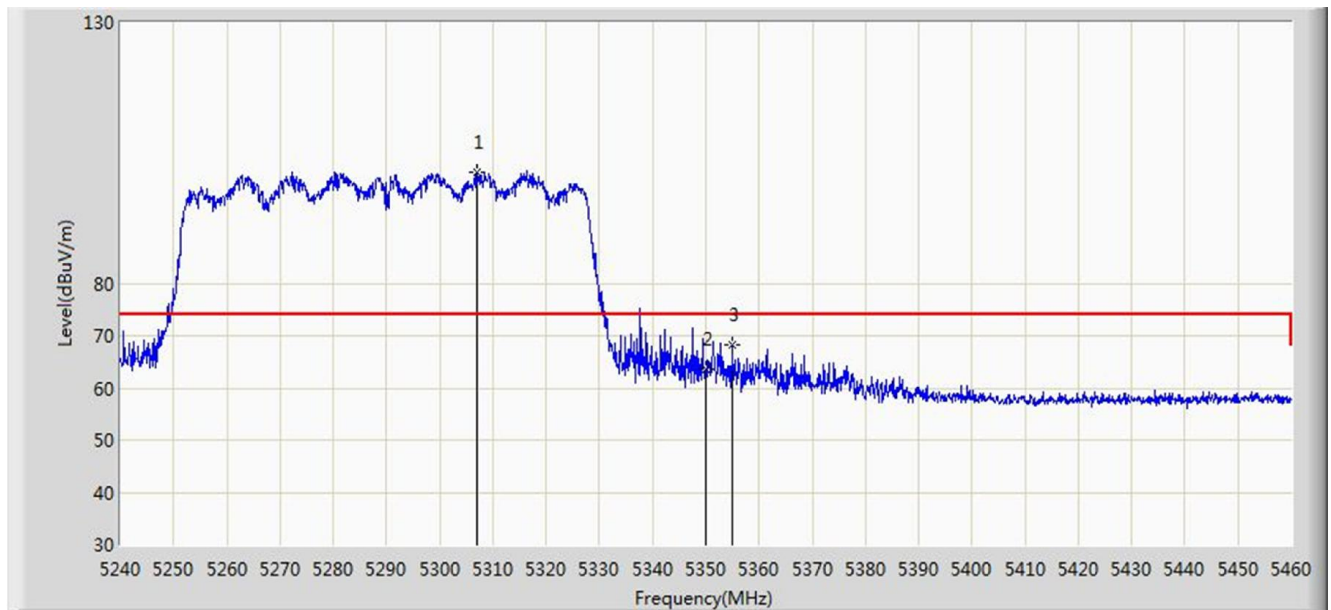


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5307.100        | 101.435                | 95.169               | N/A             | N/A            | 6.266       | PK   |
| 2  |      |      | 5350.000        | 63.541                 | 57.081               | -10.459         | 74.000         | 6.460       | PK   |
| 3  |      |      | 5354.840        | 68.368                 | 61.887               | -5.632          | 74.000         | 6.481       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 16:32 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Horizontal     |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz |                          |

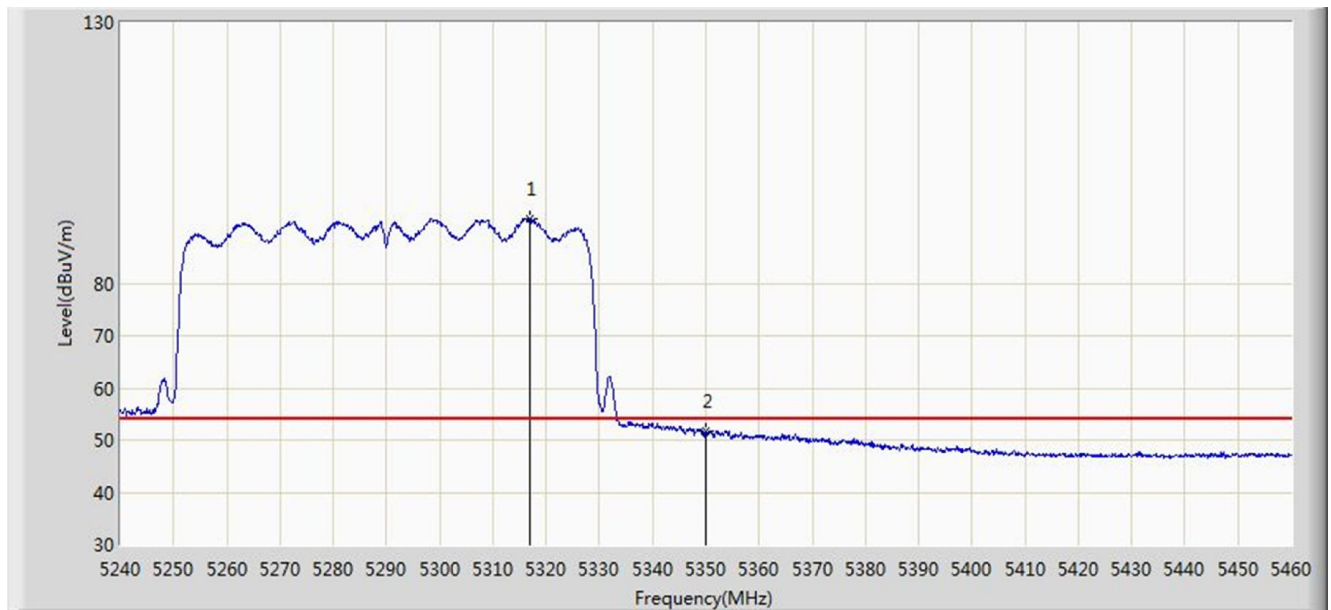


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5317.000        | 92.429                 | 86.149               | N/A             | N/A            | 6.280       | AV   |
| 2  |      |      | 5350.000        | 51.701                 | 45.241               | -2.299          | 54.000         | 6.460       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 16:28 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz |                          |

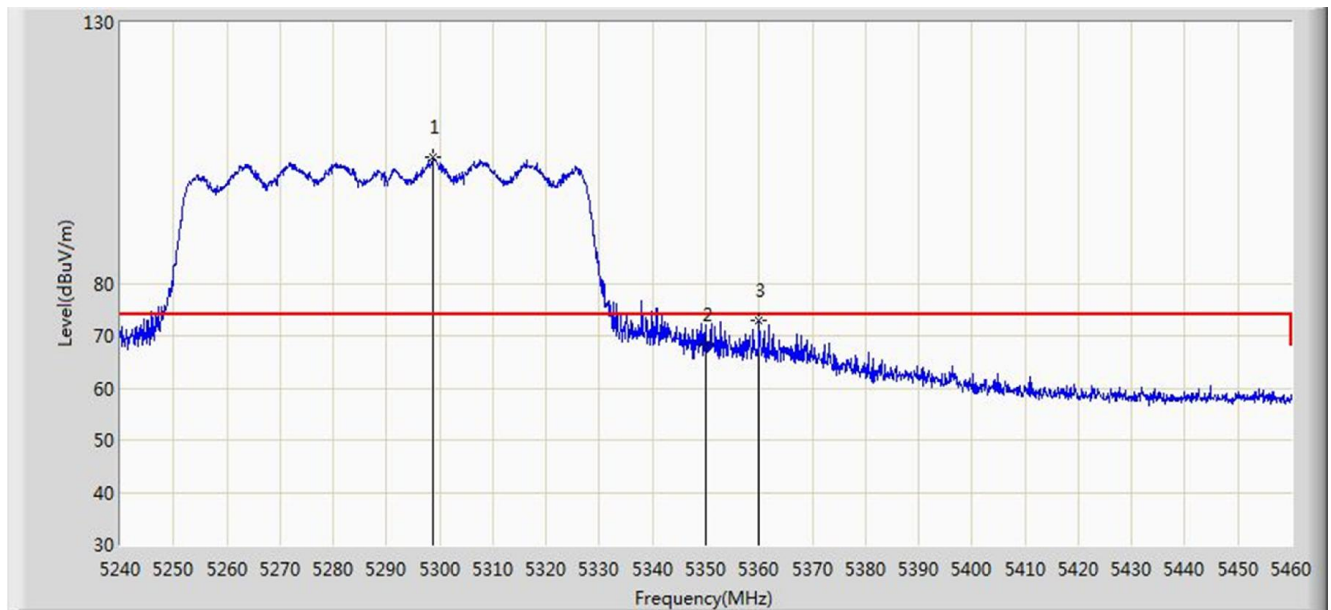


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5298.850        | 104.163                | 97.905               | N/A             | N/A            | 6.258       | PK   |
| 2  |      |      | 5350.000        | 68.320                 | 61.860               | -5.680          | 74.000         | 6.460       | PK   |
| 3  |      |      | 5360.010        | 72.904                 | 66.405               | -1.096          | 74.000         | 6.498       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/11/17 - 16:31 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                 | Polarity: Vertical       |
| EUT: AC1200 Wireless Dual Band PCI Express Adapter       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz |                          |

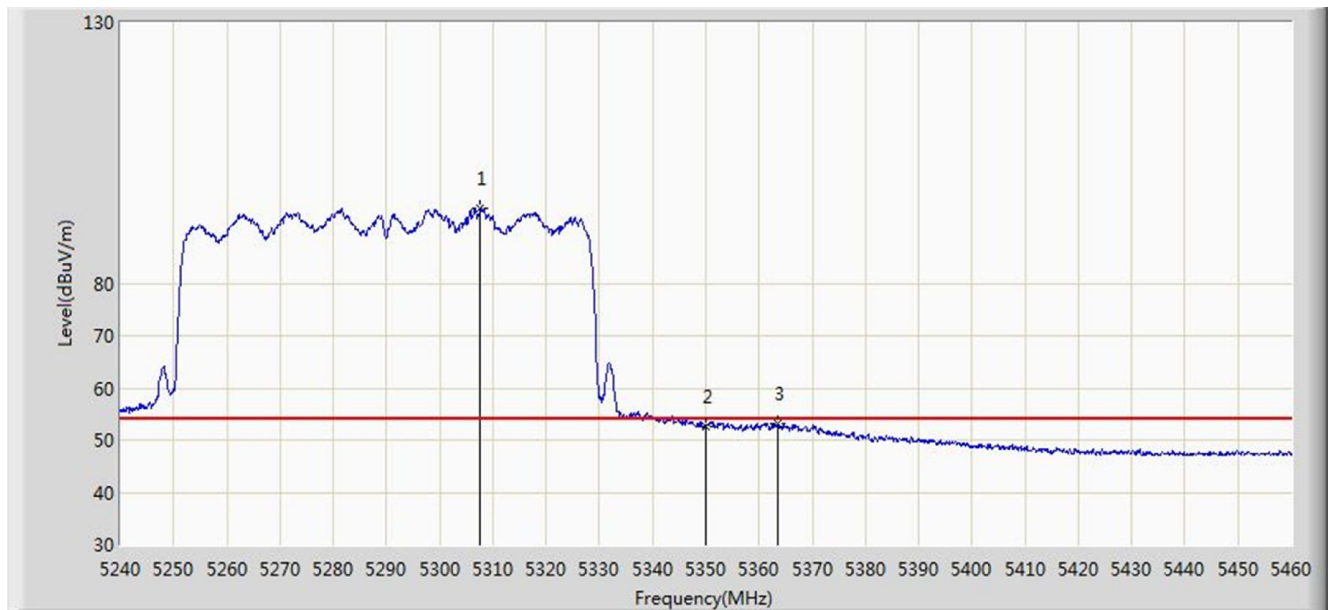

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5307.650        | 94.347                 | 88.080               | N/A             | N/A            | 6.267       | AV   |
| 2  |      |      | 5350.000        | 52.751                 | 46.291               | -1.249          | 54.000         | 6.460       | AV   |
| 3  |      |      | 5363.530        | 53.181                 | 46.670               | -0.819          | 54.000         | 6.511       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)