


RF TEST REPORT

Report No.: Q200102S012 -FCC-R1

Supersede Report No.: N/A

Applicant	ZTE Corporation
Product Name	3G Smart Feature Phone
Model No.	Z2317
Serial No.	N/A
Test Standard	FCC Part 22(H) ;FCC Part 24(E); FCC Part 27 ; ANSI/TIA-603-E: 2016
Test Date	Sep. 02, 2019 to Jan. 21, 2020
Issue Date	Jan. 21, 2020
Test Result	☒ Pass ☐ Fail
Equipment complied with the specification	☒
Equipment did not comply with the specification	☐
	
Aaron Liang Test Engineer	David Huang Checked By
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only	

Issued by:

BUREAU VERITAS (SHENZHEN) CONSUMER PRODUCTS SERVICES CO., LTD

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn



Test Report No.	Q200102S012 -FCC-R1
Page	2 of 91

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	4
2. CUSTOMER INFORMATION	4
3. TEST SITE INFORMATION	4
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	5
5. TEST SUMMARY	9
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	10
6.1 RF OUTPUT POWER	10
6.2 PEAK-AVERAGE RATIO.....	23
6.3 OCCUPIED BANDWIDTH	27
6.4 SPURIOUS EMISSIONS AT ANTENNA TERMINALS	41
6.5 SPURIOUS RADIATED EMISSIONS	57
6.6 BAND EDGE.....	67
6.7 FREQUENCY STABILITY	81
ANNEX A. TEST INSTRUMENT	86
ANNEX B. TEST SETUP AND SUPPORTING EQUIPMENT	89
ANNEX C. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST/ DECLARATION OF SIMILARITY.....	91



Test Report No.	Q200102S012 -FCC-R1
Page	4 of 91

1. Report Revision History

Report No.	Report Version	Description	Issue Date
Q200102S012 -FCC-R1	NONE	Original	Jan. 21, 2020

2. Customer information

Applicant Name	ZTE Corporation
Applicant Add	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R. China
Manufacturer	ZTE Corporation
Manufacturer Add	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R. China

3. Test site information

Lab performing tests	BUREAU VERITAS (SHENZHEN) CONSUMER PRODUCTS SERVICES CO., LTD
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	535293
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0



Test Report No.	Q200102S012 -FCC-R1
Page	5 of 91

4. Equipment under Test (EUT) Information

Description of EUT: 3G Smart Feature Phone

Main Model: Z2317

Serial Model: N/A

Date EUT received: Aug 28, 2019

Test Date(s): Sep. 02, 2019 to Jan. 21, 2020

Equipment Category : PCE

Antenna Gain: GSM850: -1dBi
PCS1900: -1.5dBi
UMTS-FDD Band V: -1dBi
UMTS-FDD Band II: -1.5dBi
UMTS-FDD Band IV: -1.5dBi
WIFI: 0dBi
Bluetooth/BLE: 0dBi

Antenna Type: PIFA antenna

Type of Modulation: GSM / GPRS: GMSK
EGPRS: GMSK
UMTS-FDD: QPSK
802.11b/g/n: DSSS, OFDM
Bluetooth: GFSK, π /4DQPSK, 8DPSK
BLE: GFSK
GPS: BPSK

	GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz
	PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz
	UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz
	UMTS-FDD Band II TX:1852.4 ~ 1907.6 MHz;
	RX: 1932.4 ~ 1987.6 MHz
RF Operating Frequency (ies):	UMTS-FDD Band IVTX:1712.4 ~ 1752.6 MHz;
	RX : 2112.4 ~ 2152.6 MHz
	WIFI: 802.11b/g/n(20M): 2412-2462 MHz
	WIFI: 802.11n(40M): 2422-2452 MHz
	Bluetooth& BLE: 2402-2480 MHz
	GPS: 1575.42 MHz
	GSM Voce:GSM850: 32.48 dBm
	PCS1900: 29.27 dBm
	GPRS:GSM850: 32.67 dBm
	PCS1900: 29.86 dBm
	EGPRS(MSC1):GSM850: 32.56 dBm
	PCS1900: 29.33 dBm
Maximum Conducted	RMC:UMTS-FDD Band V: 22.97 dBm
AV Power to Antenna:	UMTS-FDD Band II: 21.72 dBm
	UMTS-FDD Band IV:22.69 dBm
	HSUPA:UMTS-FDD Band V: 22.27 dBm
	UMTS-FDD Band II: 21.13 dBm
	UMTS-FDD Band IV: 22.09 dBm
	HSDPA:UMTS-FDD Band V: 22.44 dBm
	UMTS-FDD Band II: 21.12 dBm
	UMTS-FDD Band IV: 22.1 dBm
	GSM Voce:GSM850: 29.21 dBm / ERP
	PCS1900: 29.65 dBm / EIRP
	GPRS:GSM850: 29.74 dBm / ERP
	PCS1900: 29.61 dBm / EIRP
ERP/EIRP:	EGPRS(MCS1):GSM850: 29.85 dBm / ERP
	PCS1900: 29.46 dBm / EIRP
	RMC:UMTS-FDD Band V: 22.58dBm / ERP
	UMTS-FDD Band II: 22.78 dBm / EIRP
	UMTS-FDD Band IV: 23.45 dBm / EIRP



Test Report No.	Q200102S012 -FCC-R1
Page	7 of 91

HSUPA:UMTS-FDD Band V: 22.52 dBm / ERP
UMTS-FDD Band II: 22.63 dBm / EIRP
UMTS-FDD Band IV: 23.49 dBm / EIRP
HSDPA:UMTS-FDD Band V: 22.74 dBm / ERP
UMTS-FDD Band II: 22.63 dBm / EIRP
UMTS-FDD Band IV: 23.45 dBm / EIRP

Number of Channels:

GSM 850: 124CH
PCS1900: 299CH
UMTS-FDD Band V: 102CH
UMTS-FDD Band II: 277CH
UMTS-FDD Band IV: 202CH
WIFI :802.11b/g/n(20M): 11CH
WIFI :802.11n(40M): 7CH
Bluetooth: 79CH
BLE: 40CH
GPS:1CH

Port:

Please refer to the user's manual

Input Power:

Adapter 1:
Model: TPA-97050050U01
Input: AC100-240V~50/60Hz,0.15A
Output: DC 5.0V, 500mA

Adapter 2:
Model: 50.069MX03
Input: AC100-240V~50/60Hz,0.2A
Output: DC 5.0V, 500mA

Battery :
Model: 5C1001
Spec: 3.7V, 1000mAh/3.7Wh
Limited charge voltage: 4.2

Trade Name :

ZTE



Test Report No.	Q200102S012 -FCC-R1
Page	8 of 91

GPRS/ EGPRS Multi-slot class 8/10/11/12

FCC ID: SRQ-ZTEZ2317

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§ 1.1307; § 2.1093	RF Exposure (SAR)	Compliance
§2.1046; § 22.913(a); § 24.232(c); § 27.50(c.10) ;	RF Output Power	Compliance
§ 24.232 (d) ;	Peak-Average Ratio	Compliance
§ 2.1049; § 22.905; § 22.917; § 24.238;	99% & -26 dB Occupied Bandwidth	Compliance
§ 2.1051; § 22.917(a); § 24.238(a);	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917(a); § 24.238(a);	Field Strength of Spurious Radiation	Compliance
§ 22.917(a); § 24.238(a);	Out of band emission, Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235;	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

Note: Testing was performed by configuring EUT to maximum output power status, the declared output power class for different

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-


6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS

6.1 RF Output Power

Temperature	26 °C
Relative Humidity	56%
Atmospheric Pressure	1023mbar
Test date :	Sep. 5,2019
Tested By :	Aaron Liang

Requirement(s):

Spec	Item	Requirement	Applicable
§22.913 (a)	a)	ERP:38.45dBm	☒
§24.232 (c)	b)	EIRP:33dBm	☒
§27.50 (c)	c)	EIRP: 30dBm	☒

Test Setup	 Base Station EUT
Test Procedure	For Conducted Power: - The transmitter output port was connected to base station. - Set EUT at maximum power through base station. - Select lowest, middle, and highest channels for each band and different test mode. For ERP/EIRP: According with KDB 971168 v02r02 - The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable. - The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was



Test Report No.	Q200102S012 -FCC-R1
Page	11 of 91

	performed by placing the EUT on 3-orthogonal axis. - The frequency range up to tenth harmonic of the fundamental frequency was investigated. - Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution. - Spurious emissions in dB = $10 \log (\text{TX power in Watts}/0.001)$ – the absolute level - Spurious attenuation limit in dB = $43 + 10 \text{ Log}_{10} (\text{power out in Watts})$.
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

Conducted Power

GSM Mode:

Burst Average Power (dBm);								
Band	GSM850				PCS1900			
Channel	128	190	251	Tune up Power tolerant	512	661	810	Tune up Power tolerant
Frequency (MHz)	824.2	836.6	848.8	/	1850.2	1880	1909.8	/
GSM Voice (1 uplink), GMSK	31.79	31.52	31.52	31.5±1	29.27	29.23	28.98	29±1
GPRS Multi-Slot Class 8 (1 uplink), GMSK	31.39	31.52	31.56	31.5±1	29.31	29.21	29.86	29±1
GPRS Multi-Slot Class 10 (2 uplink) GMSK	30.85	31.16	30.98	30.5±1	28.35	28.56	28.44	28±1
GPRS Multi-Slot Class 11 (3 uplink) GMSK	29.01	29.21	29.32	28.5±1	26.52	26.82	26.97	26±1
GPRS Multi-Slot Class 12 (4 uplink) GMSK	28.05	28.01	27.9	27.2±1	25.44	25.76	25.99	25±1
EGPRS Multi-Slot Class 8 (1 uplink) GMSK MCS1	31.59	31.46	31.78	31.5±1	29.33	29.12	28.99	29±1
EGPRS Multi-Slot Class 10 (2 uplink) GMSK MCS1	31.07	31.05	30.97	30.5±1	28.39	28.47	28.47	28±1
EGPRS Multi-Slot Class 11 (3 uplink) GMSK MCS1	29.1	28.99	29.04	28.5±1	26.44	26.79	26.91	26±1
EGPRS Multi-Slot Class 12 (4 uplink) GMSK MCS1	28.03	27.84	27.99	27.5±1	25.47	25.59	25.87	25±1

Remark :

GPRS, CS1 coding scheme.

EGPRS, MCS1 coding scheme.

Multi-Slot Class 8 , Support Max 4 downlink, 1 uplink , 5 working link



Test Report No.	Q200102S012 -FCC-R1
Page	13 of 91

Multi-Slot Class 10 , Support Max 4 downlink, 2 uplink , 5 working link

Multi-Slot Class 11 , Support Max 4 downlink, 2 uplink , 5 working link

Multi-Slot Class 12 , Support Max 4 downlink, 4 uplink , 5 working link

UMTS Mode:

UMTS-FDD Band V

Band/ Time Slot configuration	Channel	Frequency	Average power (dBm)	Tune up Power tolerant
RMC 12.2kbps	4132	826.4	22.97	22±1
	4175	835	22.77	22±1
	4233	846.6	22.79	22±1
HSDPA Subtest1	4132	826.4	22.24	22±1
	4175	835	22.14	22±1
	4233	846.6	22.18	22±1
HSDPA Subtest2	4132	826.4	22.44	22±1
	4175	835	22.16	22±1
	4233	846.6	22.21	22±1
HSDPA Subtest3	4132	826.4	22.26	22±1
	4175	835	22.04	22±1
	4233	846.6	22.01	22±1
HSDPA Subtest4	4132	826.4	22.24	22±1
	4175	835	22.08	22±1
	4233	846.6	22.2	22±1
HSUPA Subtest1	4132	826.4	22.2	22±1
	4175	835	22.06	22±1
	4233	846.6	22.13	22±1
HSUPA Subtest2	4132	826.4	22.15	22±1
	4175	835	22.12	22±1
	4233	846.6	21.88	22±1
HSUPA Subtest3	4132	826.4	22.23	22±1
	4175	835	22.09	22±1
	4233	846.6	22.05	22±1
HSUPA Subtest4	4132	826.4	22	22±1
	4175	835	21.97	22±1
	4233	846.6	21.88	22±1
HSUPA Subtest5	4132	826.4	22.25	22±1
	4175	835	22.27	22±1
	4233	846.6	22.1	22±1

UMTS-FDD Band II

Band/ Time Slot configuration	Channel	Frequency	Average power (dBm)	Tune up Power tolerant
RMC 12.2kbps	9262	1852.4	21.64	21±1
	9400	1880	21.64	21±1
	9538	1907.6	21.81	21±1
HSDPA Subtest1	9262	1852.4	20.74	21±1
	9400	1880	20.86	21±1
	9538	1907.6	20.88	21±1
HSDPA Subtest2	9262	1852.4	20.64	21±1
	9400	1880	20.84	21±1
	9538	1907.6	20.88	21±1
HSDPA Subtest3	9262	1852.4	20.96	21±1
	9400	1880	20.95	21±1
	9538	1907.6	20.69	21±1
HSDPA Subtest4	9262	1852.4	20.88	21±1
	9400	1880	20.64	21±1
	9538	1907.6	20.67	21±1
HSUPA Subtest1	9262	1852.4	20.98	20±1
	9400	1880	20.73	20±1
	9538	1907.6	20.86	20±1
HSUPA Subtest2	9262	1852.4	20.82	20±1
	9400	1880	20.77	20±1
	9538	1907.6	20.94	20±1
HSUPA Subtest3	9262	1852.4	20.64	21±1
	9400	1880	20.83	21±1
	9538	1907.6	20.95	21±1
HSUPA Subtest4	9262	1852.4	20.69	20±1
	9400	1880	20.66	20±1
	9538	1907.6	20.97	20±1
HSUPA Subtest5	9262	1852.4	20.68	21±1
	9400	1880	20.94	21±1
	9538	1907.6	20.83	21±1

UMTS-FDD Band IV

Band/ Time Slot configuration	Channel	Frequency	Average power (dBm)	Tune up Power tolerant
RMC 12.2kbps	1313	1712.6	21.19	21±1
	1413	1732.6	21.27	21±1
	1512	1752.4	21.23	21±1
HSDPA Subtest1	1313	1712.6	20.27	20±1
	1413	1732.6	20.47	20±1
	1512	1752.4	20.53	20±1
HSDPA Subtest2	1313	1712.6	20.52	20±1
	1413	1732.6	20.51	20±1
	1512	1752.4	20.36	20±1
HSDPA Subtest3	1313	1712.6	20.3	20±1
	1413	1732.6	20.52	20±1
	1512	1752.4	20.65	20±1
HSDPA Subtest4	1313	1712.6	20.28	20±1
	1413	1732.6	20.63	20±1
	1512	1752.4	20.47	20±1
HSUPA Subtest1	1313	1712.6	20.32	20±1
	1413	1732.6	20.4	20±1
	1512	1752.4	20.45	20±1
HSUPA Subtest2	1313	1712.6	20.42	20±1
	1413	1732.6	20.47	20±1
	1512	1752.4	20.36	20±1
HSUPA Subtest3	1313	1712.6	20.39	20±1
	1413	1732.6	20.66	20±1
	1512	1752.4	20.57	20±1
HSUPA Subtest4	1313	1712.6	20.47	20±1
	1413	1732.6	20.49	20±1
	1512	1752.4	20.41	20±1
HSUPA Subtest5	1313	1712.6	20.43	20±1
	1413	1732.6	20.68	20±1
	1512	1752.4	20.51	20±1

ERP & EIRP

GSM Voice

ERP for Cellular Band (Part 22H)

Frequency (MHz)	Antenna Polarization (H/V)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
824.2	V	29.21	38.45	-9.24
824.2	H	29.14	38.45	-9.31
836.6	V	29.05	38.45	-9.4
836.6	H	29.01	38.45	-9.44
848.8	V	28.97	38.45	-9.48
848.8	H	28.95	38.45	-9.5

EIRP for PCS Band (Part 24E)

Frequency (MHz)	Antenna Polarization (H/V)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
1850.2	V	29.65	38.45	-8.8
1850.2	H	29.33	38.45	-9.12
1880	V	29.47	38.45	-8.98
1880	H	29.26	38.45	-9.19
1909.8	V	29.13	38.45	-9.32
1909.8	H	29.05	38.45	-9.4

GPRS:

ERP for Cellular Band (Part 22H)

Frequency (MHz)	Antenna Polarization (H/V)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
824.2	V	29.74	38.45	-8.71
824.2	H	29.31	38.45	-9.14
836.6	V	29.65	38.45	-8.8
836.6	H	29.44	38.45	-9.01
848.8	V	29.05	38.45	-9.4
848.8	H	28.91	38.45	-9.54

EIRP for PCS Band (Part 24E)

Frequency (MHz)	Antenna Polarization (H/V)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
1850.2	V	29.61	38.45	-8.84
1850.2	H	29.58	38.45	-8.87
1880	V	29.16	38.45	-9.29
1880	H	29.33	38.45	-9.12
1909.8	V	29.17	38.45	-9.28
1909.8	H	29.58	38.45	-8.87

EGPRS (MCS1):

ERP for Cellular Band (Part 22H)

Frequency (MHz)	Antenna Polarization (H/V)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
824.2	V	29.85	38.45	-8.6
824.2	H	29.16	38.45	-9.29
836.6	V	29.84	38.45	-8.61
836.6	H	29.33	38.45	-9.12
848.8	V	29.05	38.45	-9.4
848.8	H	28.93	38.45	-9.52

EIRP for PCS Band (Part 24E)

Frequency (MHz)	Antenna Polarization (H/V)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
1850.2	V	29.26	38.45	-9.19
1850.2	H	28.99	38.45	-9.46
1880	V	29.46	38.45	-8.99
1880	H	29.05	38.45	-9.4
1909.8	V	29.18	38.45	-9.27
1909.8	H	28.87	38.45	-9.58

RMC

ERP for UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Antenna Polarization (H/V)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
826.4	V	22.01	38.45	-16.44
826.4	H	21.86	38.45	-16.59
835	V	22.36	38.45	-16.09
835	H	21.97	38.45	-16.48
846.6	V	22.41	38.45	-16.04
846.6	H	22.58	38.45	-15.87

EIRP for UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Antenna Polarization (H/V)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
1852.4	V	22.65	33	-10.35
1852.4	H	22.41	33	-10.59
1880	V	22.78	33	-10.22
1880	H	22.75	33	-10.25
1907.6	V	22.69	33	-10.31
1907.6	H	22.05	33	-10.95

EIRP for UMTS-FDD Band IV (Part 27H)

Frequency (MHz)	Antenna Polarization (H/V)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
1711.8	V	23.41	30	-6.59
1711.7	H	23.31	30	-6.69
1731.7	V	23.35	30	-6.65
1731.7	H	23.21	30	-6.79
1751.7	V	23.32	30	-6.68
1721.7	H	23.45	30	-6.55

HSDPA

ERP for UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Antenna Polarization (H/V)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
826.4	V	22.56	38.45	-15.89
826.4	H	22.31	38.45	-16.14
835	V	22.74	38.45	-15.71
835	H	22.03	38.45	-16.42
846.6	V	22.42	38.45	-16.03
846.6	H	21.99	38.45	-16.46

EIRP for UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Antenna Polarization (H/V)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
1852.4	V	22.58	33	-10.42
1852.4	H	22.11	33	-10.89
1880	V	22.63	33	-10.37
1880	H	22.19	33	-10.81
1907.6	V	22.47	33	-10.53
1907.6	H	21.95	33	-11.05

EIRP for UMTS-FDD Band IV (Part 27H)

Frequency (MHz)	Antenna Polarization (H/V)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
1711.8	V	23.25	30	-6.75
1711.7	H	23.18	30	-6.82
1731.7	V	23.49	30	-6.51
1731.7	H	23.32	30	-6.68
1751.7	V	23.22	30	-6.78
1721.7	H	23.18	30	-6.82

HSUPA

ERP for UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Antenna Polarization (H/V)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
826.4	V	22.52	38.45	-15.93
826.4	H	21.96	38.45	-16.49
835	V	22.03	38.45	-16.42
835	H	21.91	38.45	-16.54
846.6	V	22.32	38.45	-16.13
846.6	H	21.87	38.45	-16.58

EIRP for UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Antenna Polarization (H/V)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
1852.4	V	22.51	33	-10.49
1852.4	H	22.03	33	-10.97
1880	V	22.46	33	-10.54
1880	H	21.86	33	-11.14
1907.6	V	22.63	33	-10.37
1907.6	H	22.08	33	-10.92

EIRP for UMTS-FDD Band IV (Part 27H)


Frequency (MHz)	Antenna Polarization (H/V)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
1711.8	V	23.31	30	-6.69
1711.7	H	23.22	30	-6.78
1731.7	V	23.24	30	-6.76
1731.7	H	23.29	30	-6.71
1751.7	V	23.45	30	-6.55
1721.7	H	23.31	30	-6.69

6.2 Peak-Average Ratio

Temperature	26 °C
Relative Humidity	56%
Atmospheric Pressure	1023mbar
Test date :	Sep. 5,2019
Tested By :	Aaron Liang

Requirement(s):

Spec	Item	Requirement	Applicable
§24.232(d)	a)	The peak-to-average ratio (PAR) of the transmission may not exceed 13dB.	☒

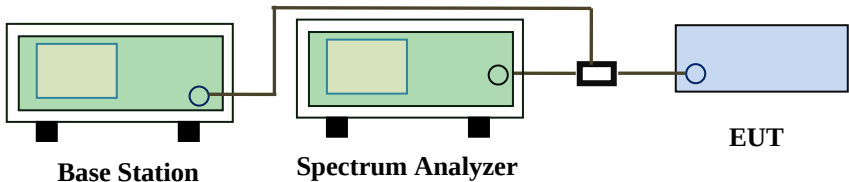Test Setup	 Base Station Spectrum Analyzer EUT
------------	---

Test Procedure	According with KDB 971168 v02r02 5.7.2 Alternate procedure for PAPR 5.1.2 Peak power measurements with a peak power meter The total peak output power may be measured using a broadband peak RF power meter. The power meter must have a video bandwidth that is greater than or equal to the emission bandwidth and utilize a fast-responding diode detector. 5.2.3 Average power measurement with average power meter As an alternative to the use of a spectrum/signal analyzer or EMI receiver to perform a measurement of the total in-band average output power, a wideband RF average power meter with a thermocouple detector or equivalent can be used under certain conditions If the EUT can be configured to transmit continuously (i.e., the burst duty cycle $\geq 98\%$) and at all times the EUT is transmitting at its maximum output
----------------	---



Test Report No.	Q200102S012 -FCC-R1
Page	24 of 91

	power level, then a conventional wide-band RF power meter can be used. If the EUT cannot be configured to transmit continuously (i.e., the burst duty cycle < 98%), then there are two options for the use of an average power meter. First, a gated average power meter can be used to perform the measurement if the gating parameters can be adjusted such that the power is measured only over active transmission bursts at maximum output power levels. A conventional average power meter can also be used if the measured burst duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent) by performing the measurement over the on/off burst cycles and then correcting (increasing) the measured level by a factor equal to $10\log(1/\text{duty cycle})$
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

GSM : GSM 1900 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1850.2	30.34	29.27	1.07
1880	30.48	29.23	1.25
1909.8	30.17	28.98	1.19

GPRS 1900 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1850.2	30.53	29.31	1.22
1880	30.51	29.21	1.3
1909.8	30.91	29.86	1.05

EGPRS (MSC1) 1900 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1850.2	30.51	29.33	1.18
1880	30.37	29.12	1.25
1909.8	30.08	28.99	1.09

RMC : UMTS-FDD Band 2 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1852.4	22.82	21.64	1.18
1880	22.55	21.46	1.09
1907.6	22.95	21.72	1.23

RMC : UMTS-FDD Band 4 PK-AV POWER (Part 27H)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1712.6	23.81	22.61	1.2
1732.6	24.1	22.71	1.39
1752.4	24.03	22.69	1.34

HSDPA : UMTS-FDD Band 2 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1852.4	21.94	20.94	1
1880	21.72	20.69	1.03
1907.6	22.05	20.97	1.08

HSDPA : UMTS-FDD Band 4 PK-AV POWER (Part 27H)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1712.6	23.05	21.81	1.24
1732.6	23.04	21.91	1.13
1752.4	23.27	21.99	1.28

HSUPA : UMTS-FDD Band 2 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1852.4	22.02	20.99	1.03
1880	21.99	20.76	1.23
1907.6	22.25	20.95	1.3


HSUPA : UMTS-FDD Band 4 PK-AV POWER (Part 27H)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1712.6	23.12	21.85	1.27
1732.6	23.16	21.98	1.18
1752.4	23.08	21.98	1.1

6.3 Occupied Bandwidth

Temperature	26 °C
Relative Humidity	56%
Atmospheric Pressure	1023mbar
Test date :	Sep. 07,2019 to Jan. 20,2020
Tested By :	Aaron Liang

Requirement(s):

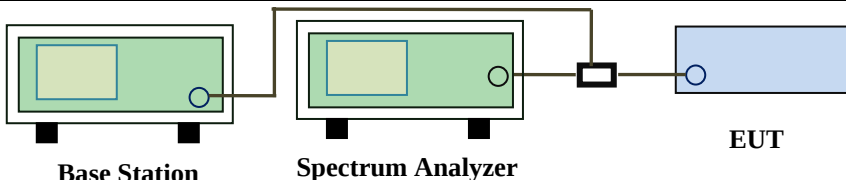Spec	Item	Requirement	Applicable
§2.1049, §22.917, §22.905 §24.238 §27.53(a)	a)	99% Occupied Bandwidth(kHz)	☒
	b)	26 dB Bandwidth(kHz)	☒
Test Setup			
Test Procedure	- The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers.		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

GSM Voice:

Cellular Band (Part 22H) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	245.52	317.6
190	836.6	247.67	318.4
251	848.8	245.95	317.7

PCS Band (Part 24E) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850	240.50	313.2
661	1880	245.23	317.1
810	1910	247.24	317.9

GPRS:

Cellular Band (Part 22H) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	243.84	317.3
190	836.6	248.71	318.4
251	848.8	245.60	319.8

PCS Band (Part 24E) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850	241.93	314.1
661	1880	249.88	315.5
810	1910	247.57	317.9

EGPRS (MSC 1):

Cellular Band (Part 22H) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	246.67	316.4
190	836.6	244.04	313.3
251	848.8	245.48	317.3

PCS Band (Part 24E) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850	242.36	317.5
661	1880	245.14	317.2
810	1910	245.23	317.9

RMC:

UMTS-FDD Band V (Part 22H)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
4132	826.6	4.1624	4.681
4175	835.0	4.1420	4.66
4233	846.4	4.1553	4.682

UMTS-FDD Band II (Part 24E)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1853	4.1706	4.704
9400	1880	4.1792	4.732
9538	1907	4.1732	4.737

UMTS-FDD Band IV (Part 27H)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
1313	1713	4.1611	4.689
1413	1733	4.1554	4.679
1512	1752	4.1547	4.674

HSDPA:

UMTS-FDD Band V (Part 22H)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
4132	826.6	4.1602	4.678
4175	835.0	4.1307	4.664
4233	846.4	4.1658	4.673

UMTS-FDD Band II (Part 24E)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1853	4.1807	4.716
9400	1880	4.1781	4.731
9538	1907	4.1742	4.714

UMTS-FDD Band IV (Part 27H)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
1313	1713	4.1591	4.674
1413	1733	4.1609	4.686
1512	1752	4.1678	4.668

HSUPA:

UMTS-FDD Band V (Part 22H)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
4132	826.6	4.1621	4.682
4175	835.0	4.1249	4.666
4233	846.4	4.1582	4.678

UMTS-FDD Band II (Part 24E)


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1853	4.1788	4.719
9400	1880	4.1761	4.714
9538	1907	4.1693	4.708

UMTS-FDD Band IV (Part 27H)


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
1313	1713	4.1666	4.683
1413	1733	4.1567	4.693
1512	1752	4.1596	4.676

Test Plots


GSM Voice:

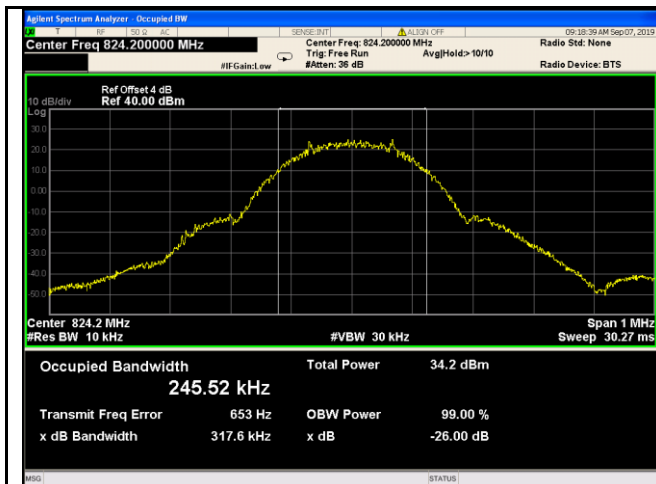


GSM 850 BW - Low CH 824.2MHz

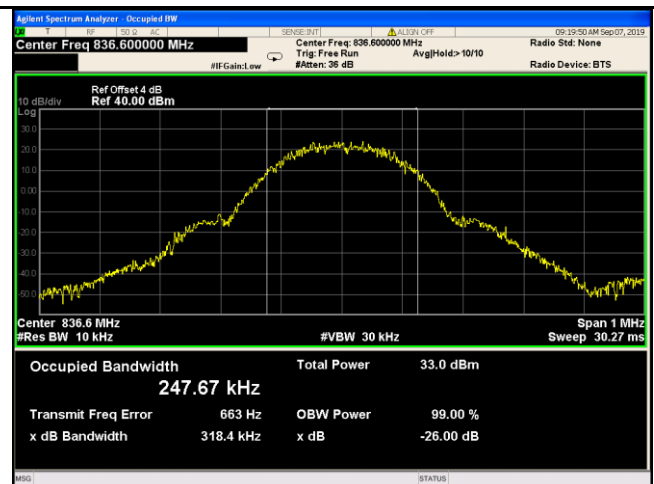


GSM 850 BW - Mid CH 836.6MHz

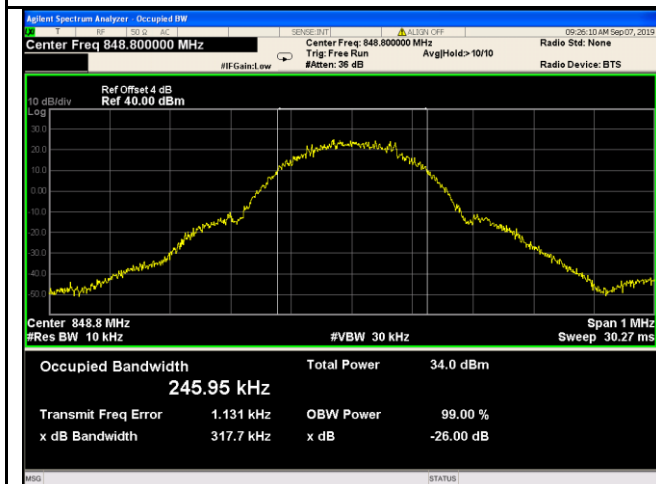


GSM 850 BW - High CH 848.8MHz

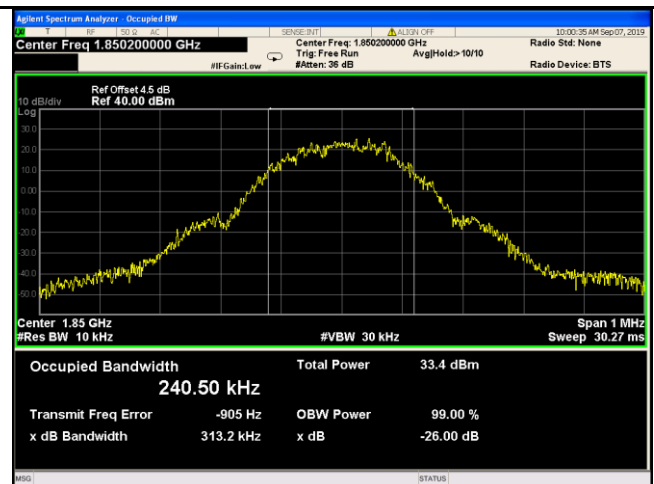

PCS 1900 BW - Low CH 1850MHz

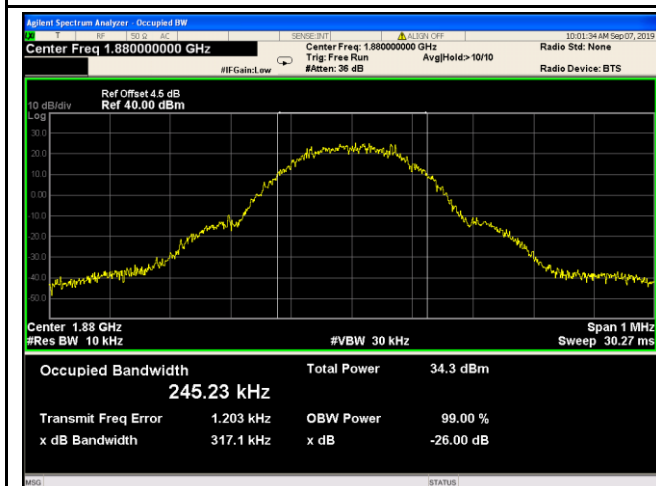


PCS 1900 BW - Mid CH 1880MHz

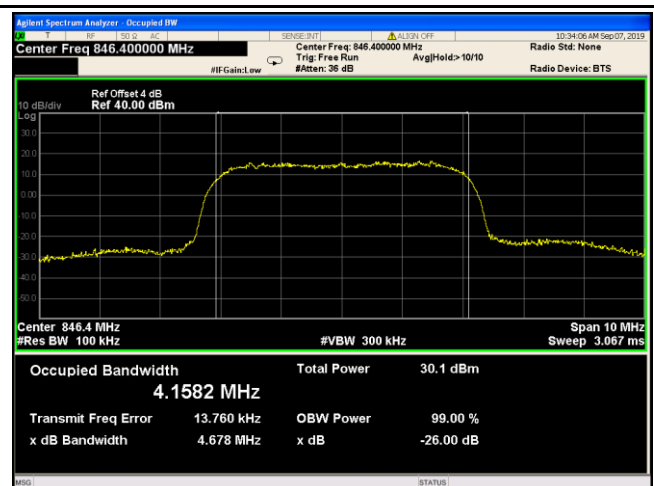


PCS 1900 BW - High CH 1910MHz




GPRS:

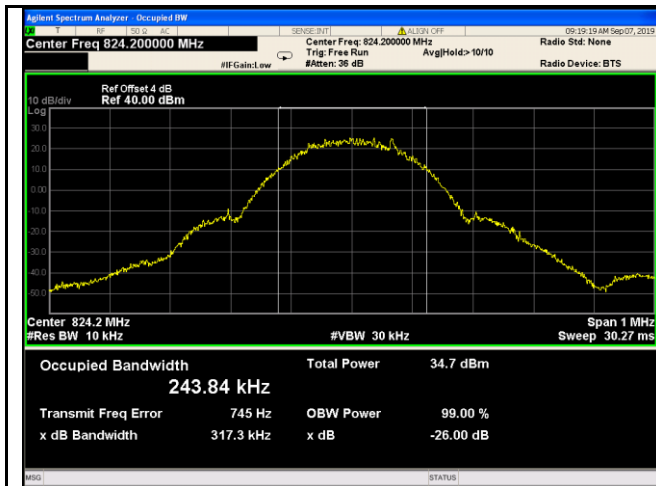


GSM 850 BW - Low CH 824.2MHz

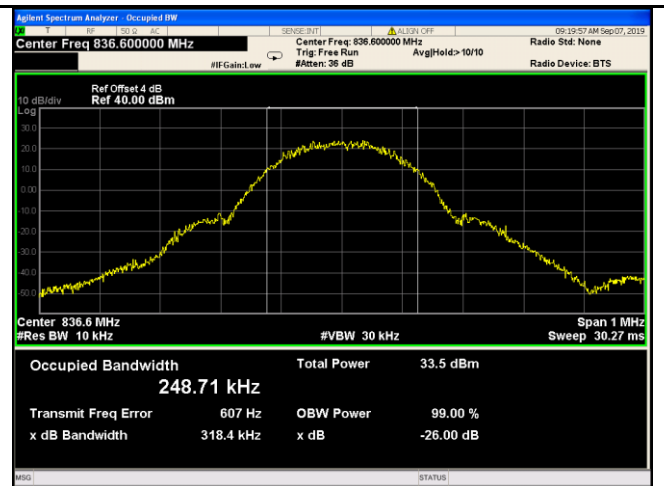


GSM 850 BW - Mid CH 836.6MHz

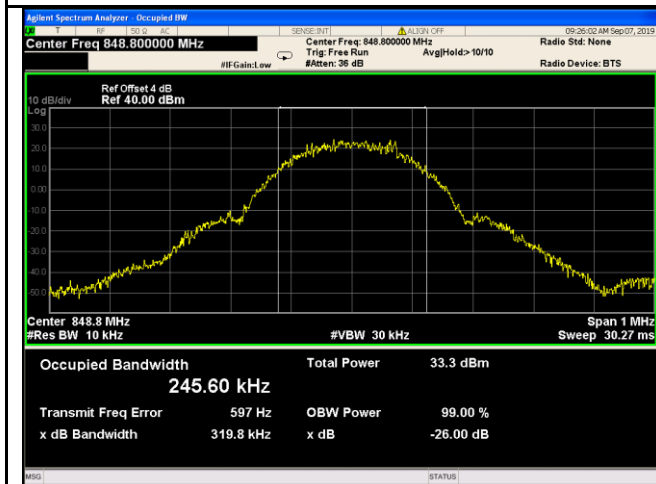


GSM 850 BW - High CH 848.8MHz

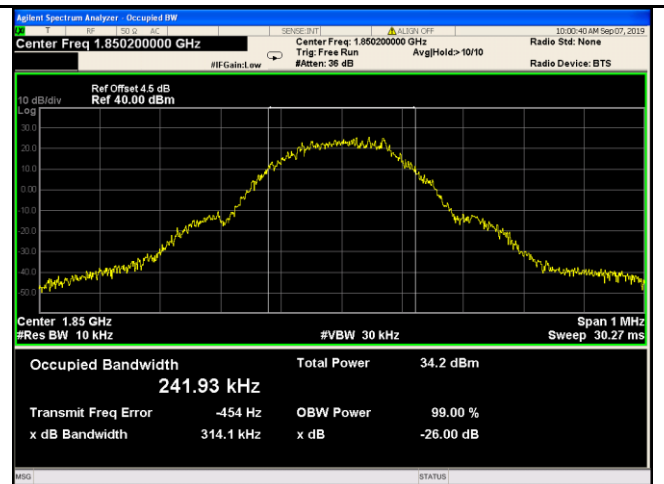

PCS 1900 BW - Low CH 1850MHz

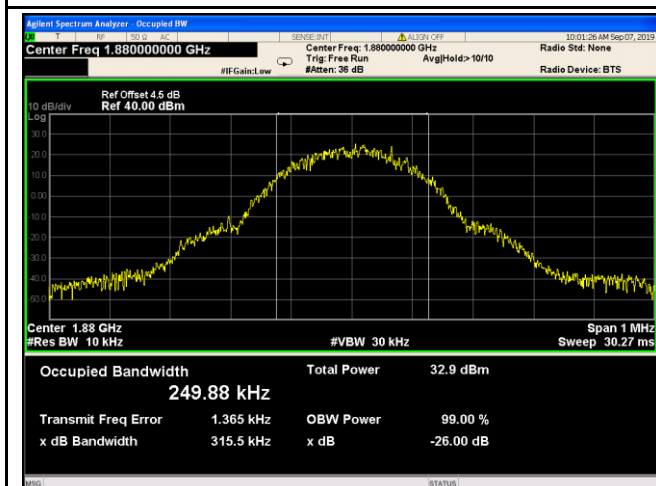


PCS 1900 BW - Mid CH 1880MHz

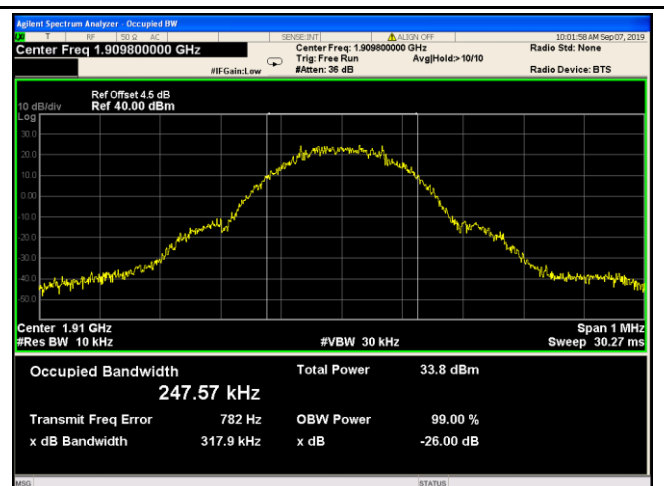


PCS 1900 BW - High CH 1910MHz




EGPRS (MCS1):

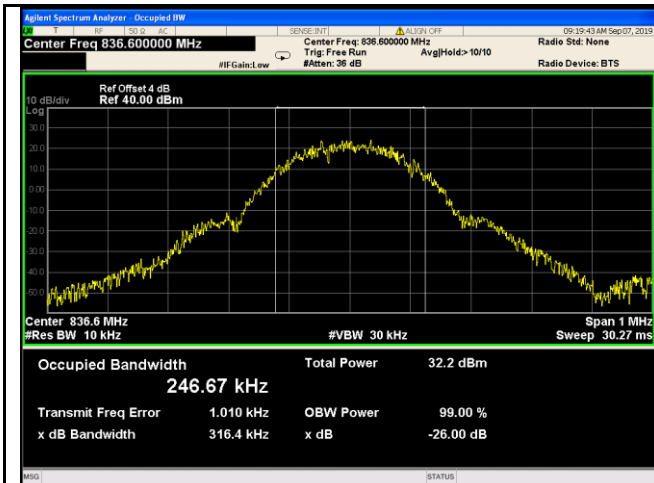


GSM 850 BW - Low CH 824.2MHz

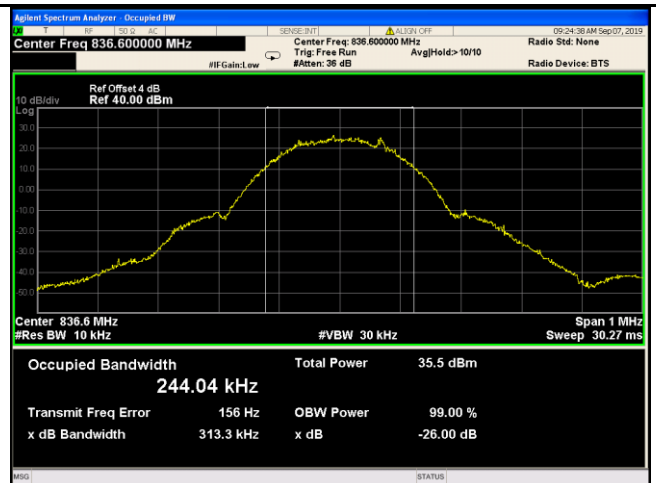


GSM 850 BW - Mid CH 836.6MHz

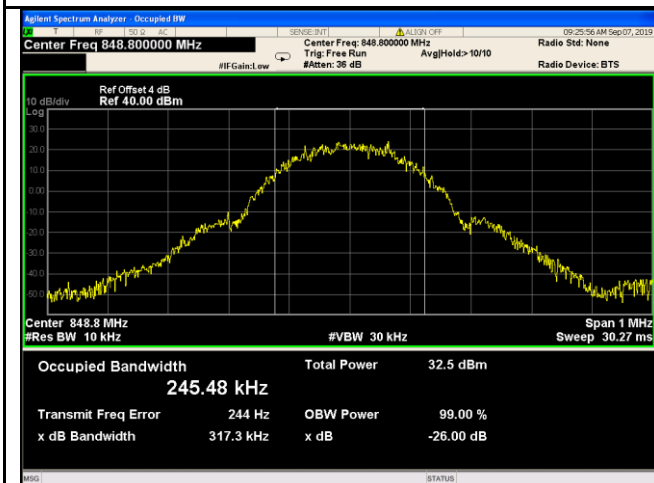


GSM 850 BW - High CH 848.8MHz

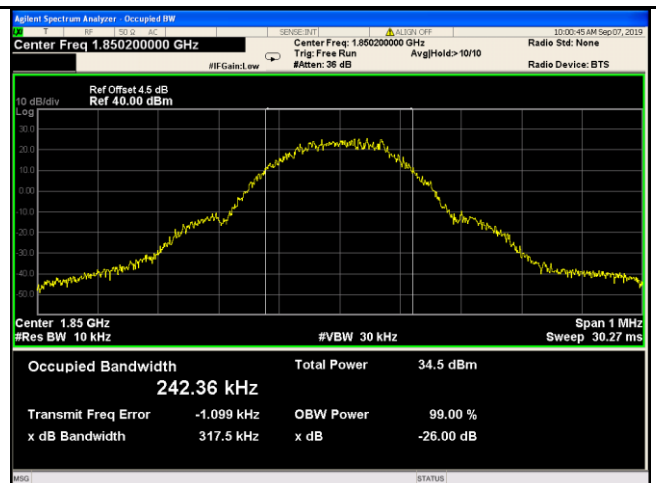

PCS 1900 BW - Low CH 1850MHz

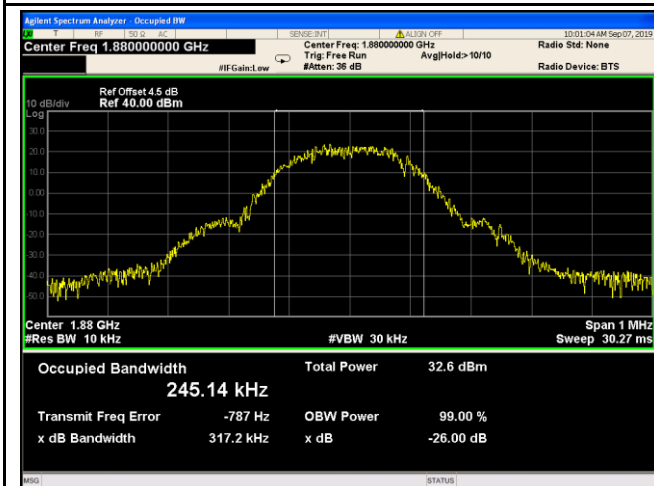


PCS 1900 BW - Mid CH 1880MHz

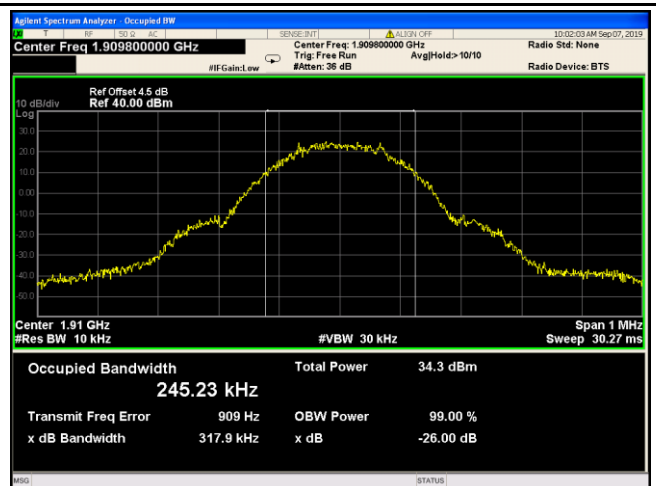


PCS 1900 BW - High CH 1910MHz




RMC:

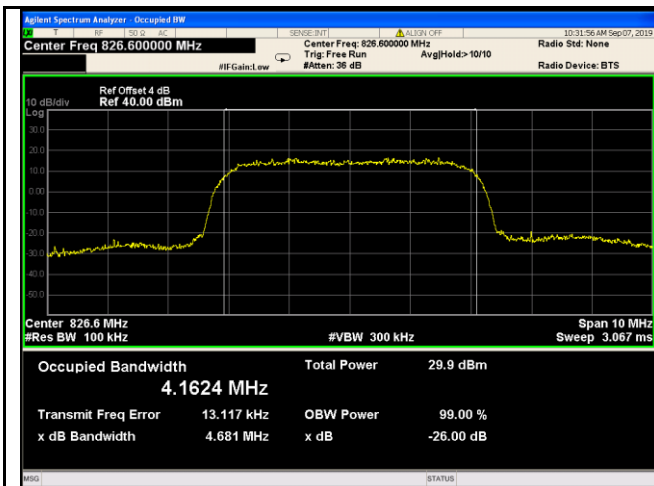


Band V BW - Low CH 826.6 MHz

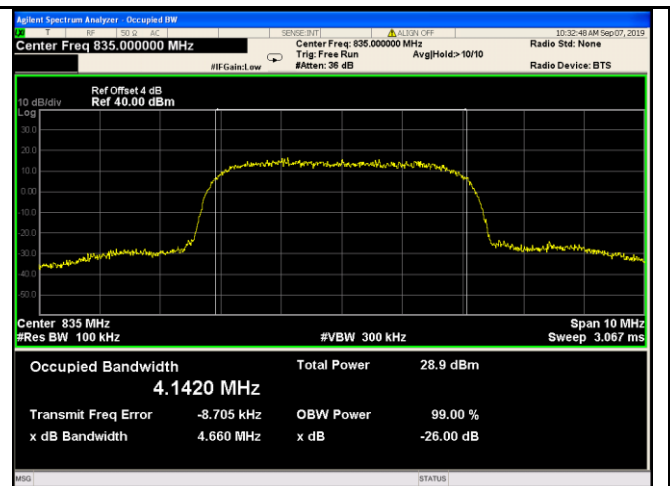


Band V BW - Mid CH 835.0 MHz

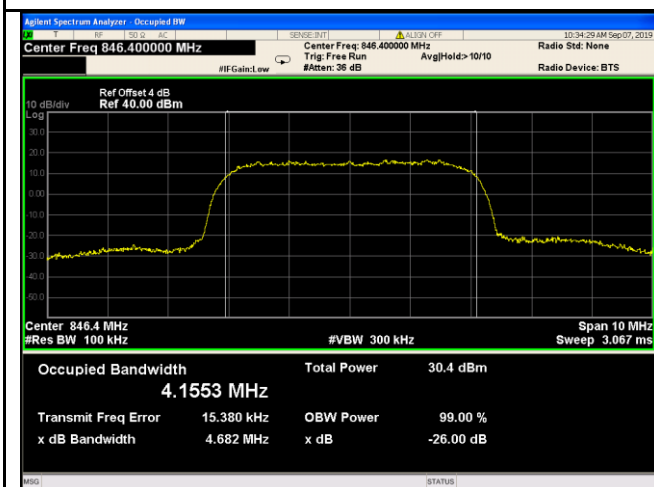


Band V BW - High CH 846.4 MHz

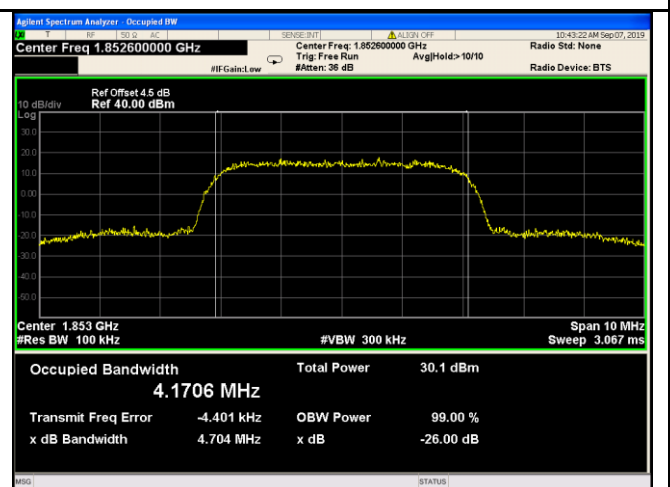

Band II BW - Low CH 1853MHz

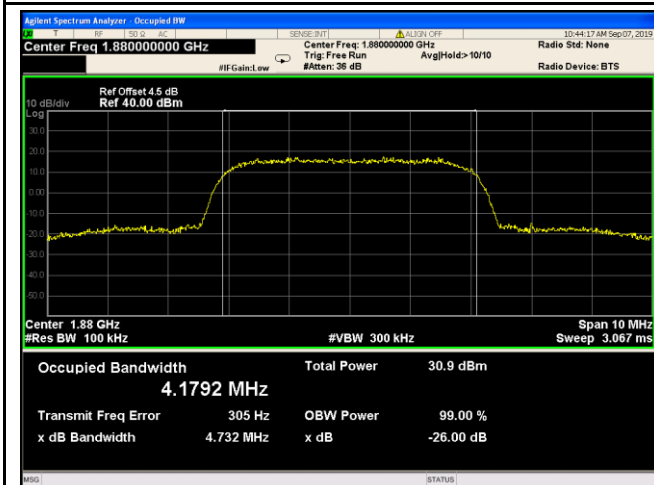

Band II BW - Mid CH 1880MHz

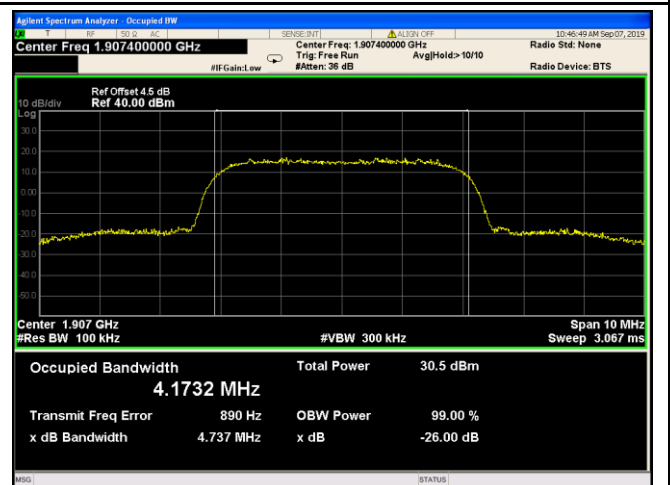

Band II BW - High CH 1907MHz




Test Report No.


Q200102S012 -FCC-R1

Page


36 of 91

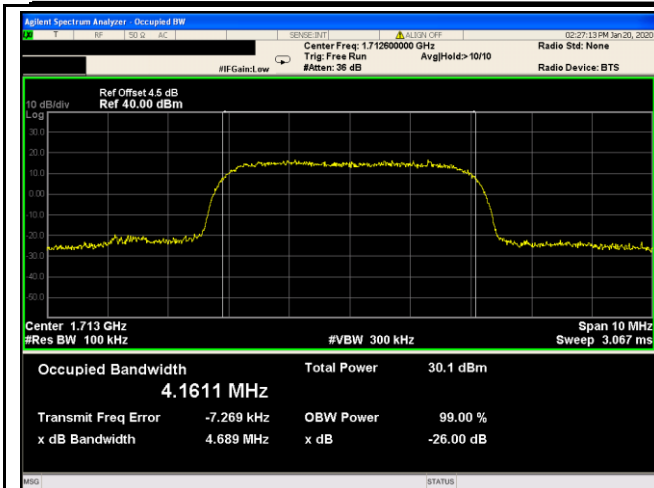

Band IV BW - Low CH 1713MHz

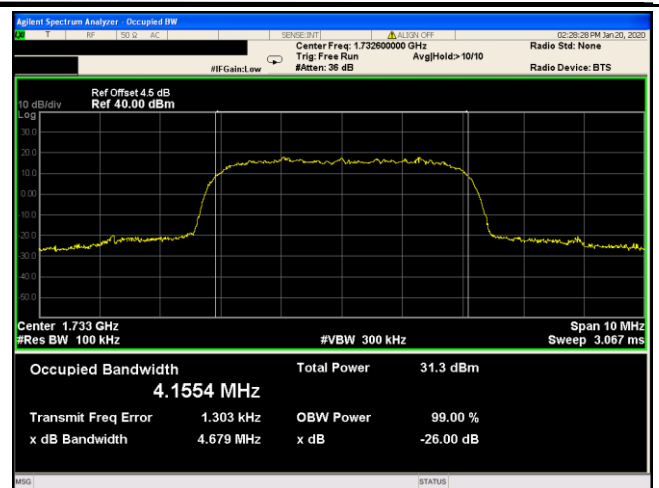


Band IVBW - Mid CH 1733MHz

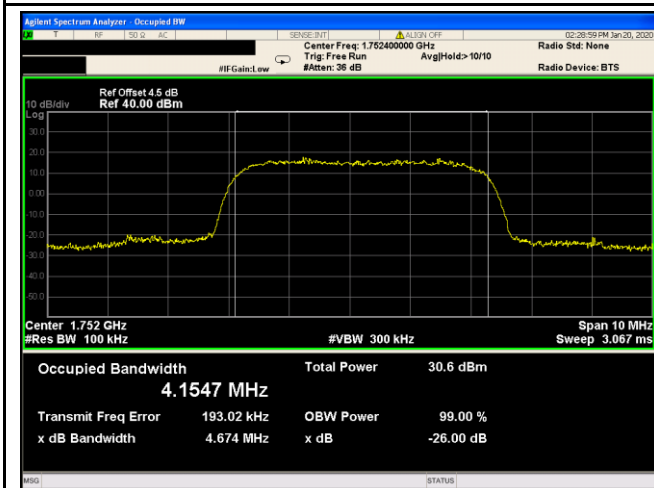


Band IV BW - High CH 1752MHz




HSDPA:

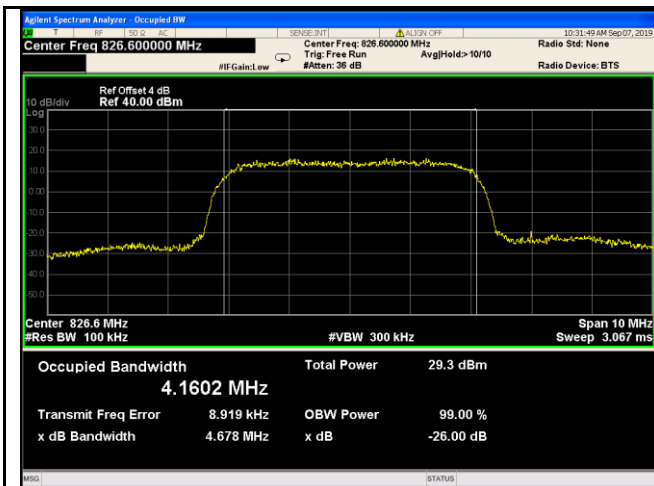


Band V BW - Low CH 826.6 MHz

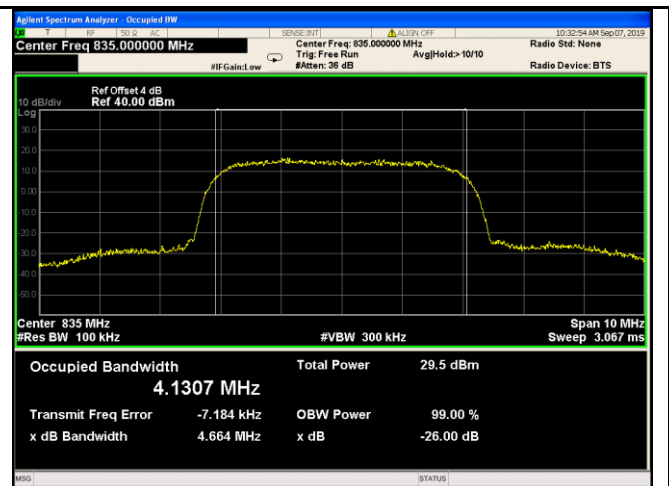


Band V BW - Mid CH 835.0 MHz

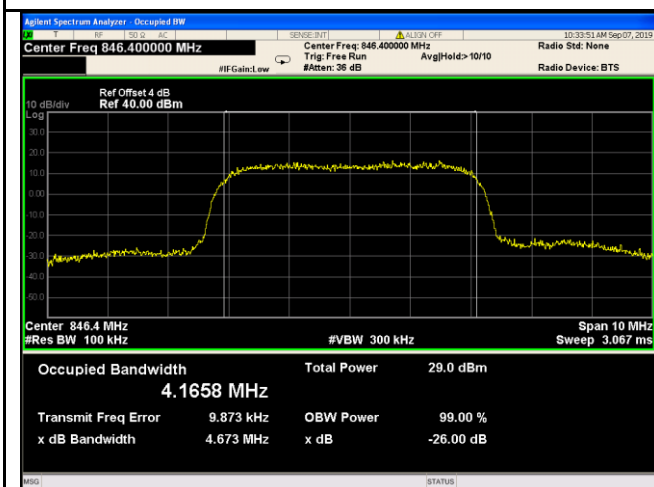


Band V BW - High CH 846.4 MHz

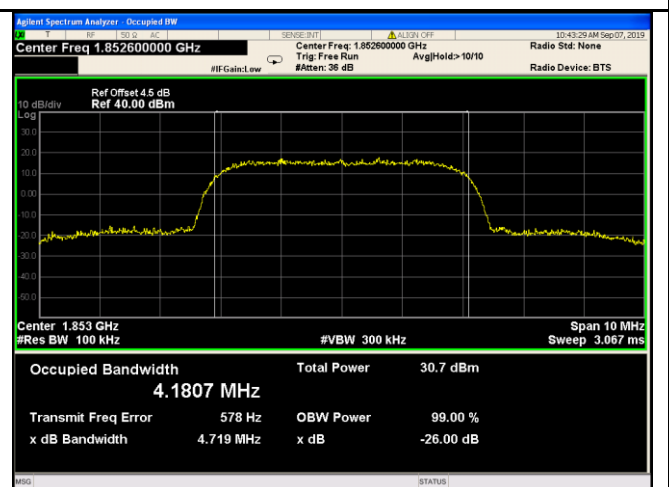

Band II BW - Low CH 1853MHz

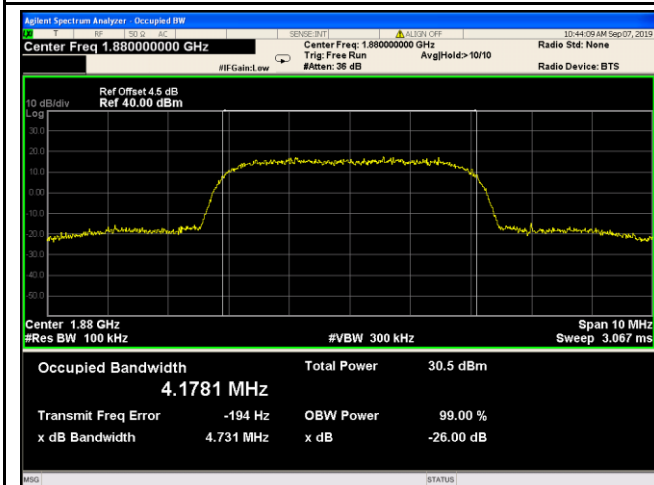

Band II BW - Mid CH 1880MHz

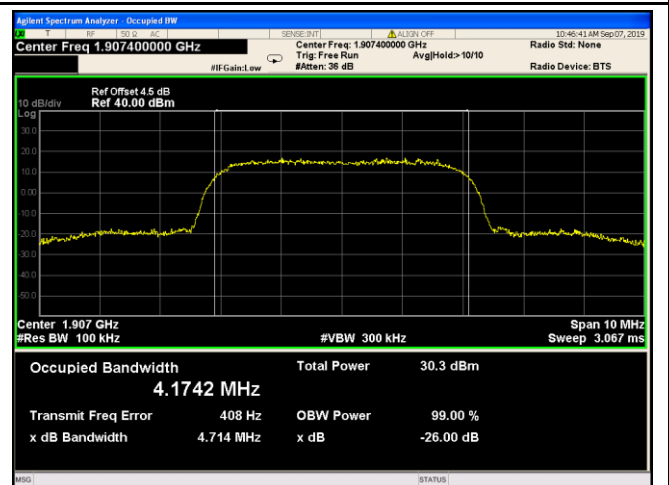

Band II BW - High CH 1907MHz




Test Report No.


Q200102S012 -FCC-R1

Page


38 of 91

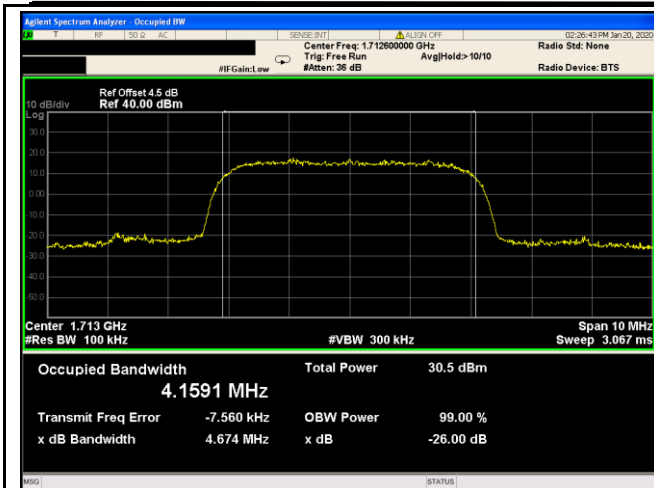

Band IV BW - Low CH 1713MHz

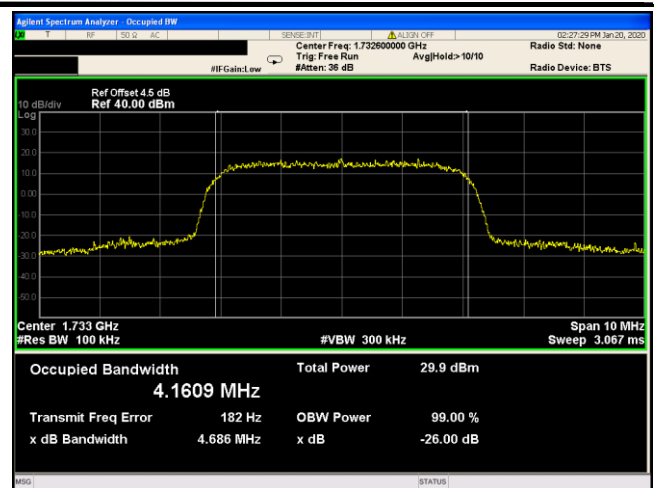


Band IVBW - Mid CH 1733MHz

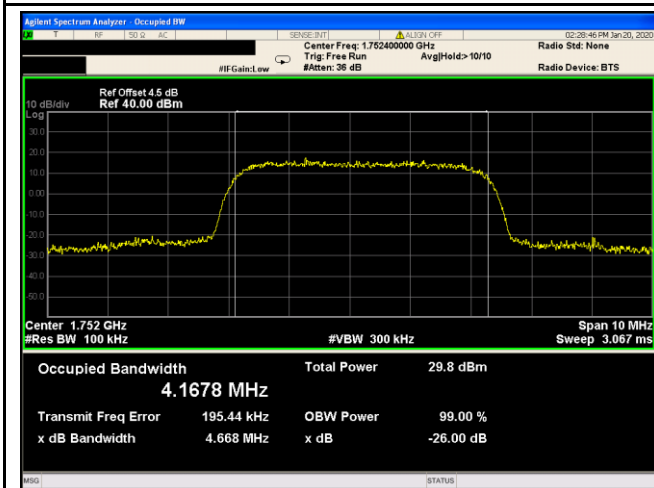


Band IV BW - High CH 1752MHz




HSUPA:

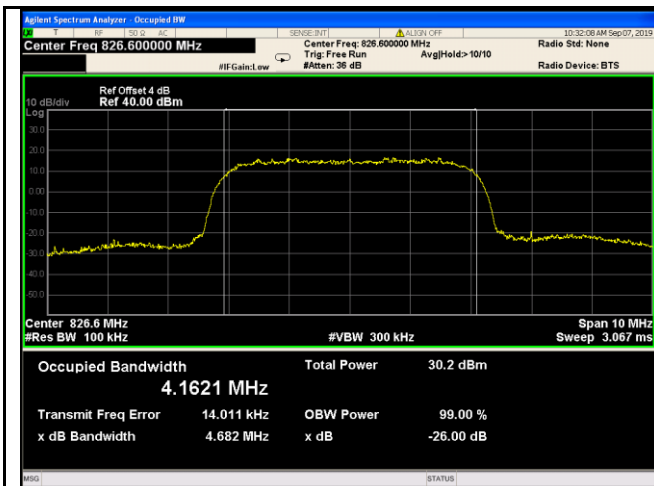


Band V BW - Low CH 826.6 MHz

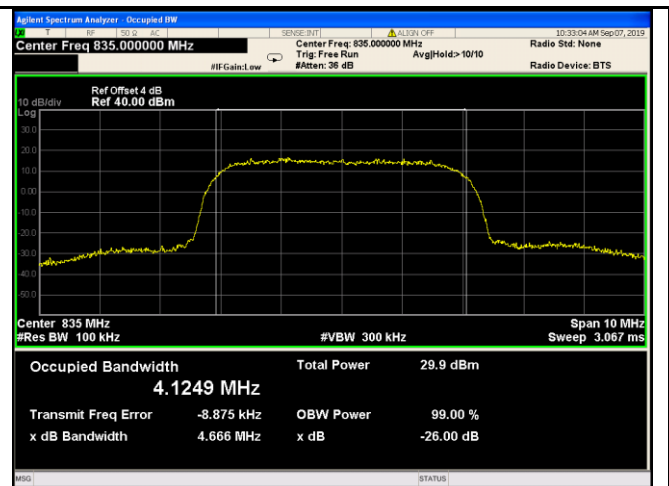


Band V BW - Mid CH 835.0 MHz

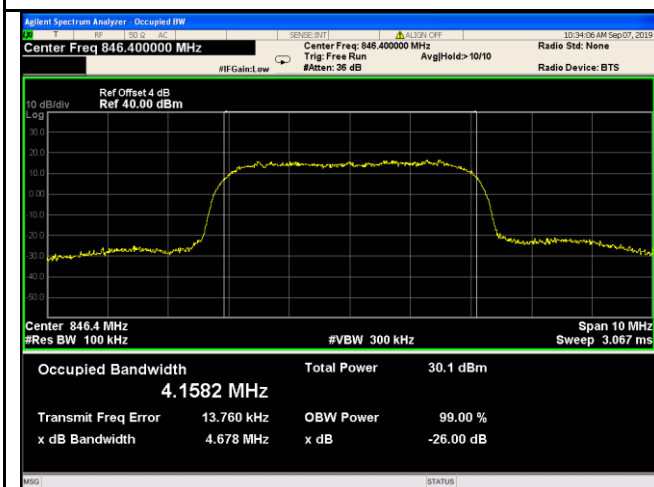


Band V BW - High CH 846.4 MHz

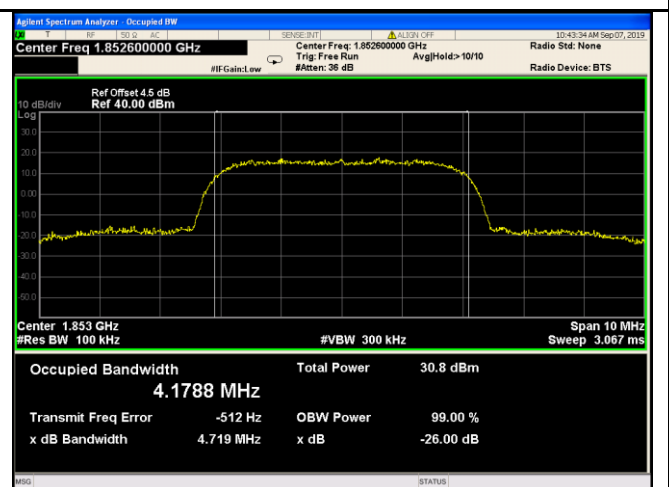

Band II BW - Low CH 1853MHz

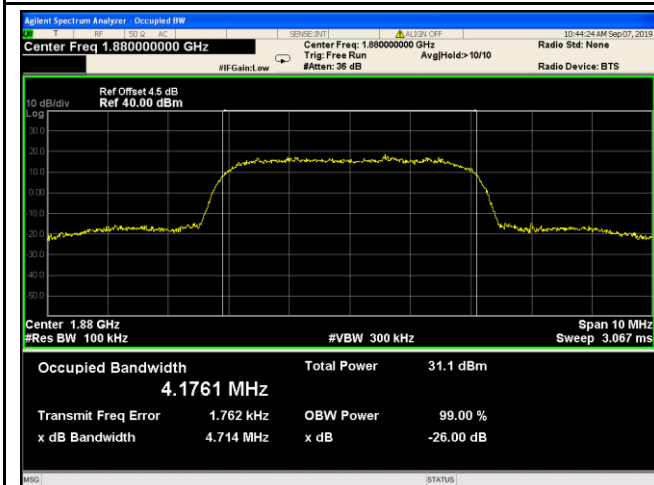

Band II BW - Mid CH 1880MHz

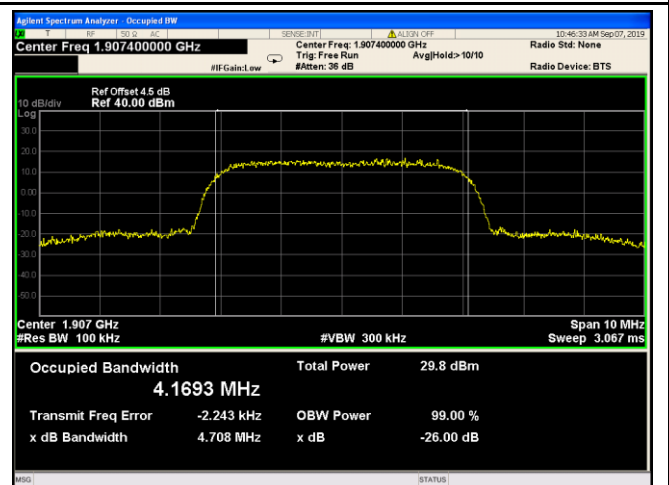

Band II BW - High CH 1907MHz




Test Report No.


Q200102S012 -FCC-R1

Page


40 of 91

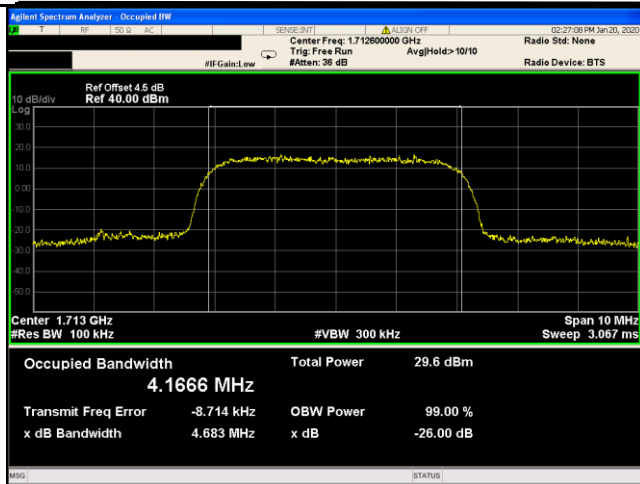

Band IV BW - Low CH 1713MHz

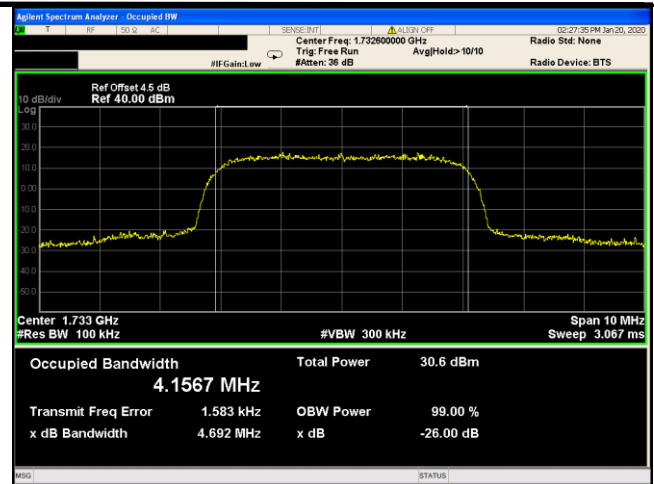

Band IVBW - Mid CH 1733MHz

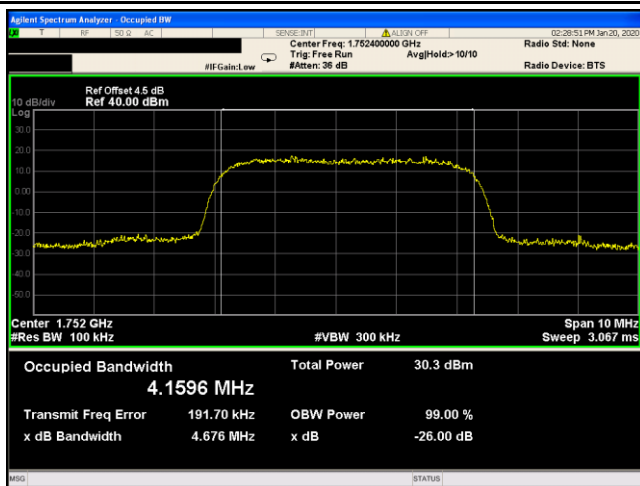


Band IV BW - High CH 1752MHz

6.4 Spurious Emissions at Antenna Terminals

Temperature	26 °C
Relative Humidity	56%
Atmospheric Pressure	1023mbar
Test date :	Sep. 07,2019 to Jan. 21,2020
Tested By :	Aaron Liang

Requirement(s):

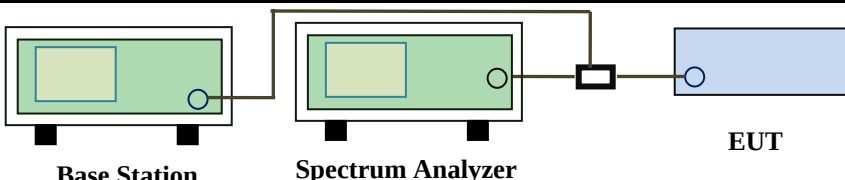
Spec	Item	Requirement	Applicable
§2.1051, §22.917(a)& §24.238(a) § 27.53(h)	a)	The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB	☒
Test Setup	 Base Station Spectrum Analyzer EUT		
Test Procedure	- The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The Band Edges of low and high channels for the highest RF powers were measured. - Setting RBW as roughly BW/100.		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☐ Yes ☒ N/A
 Test Plot ☒ Yes (See below) ☐ N/A


Test Plots

GSM Voice:


Cellular Band (Part 22H) result

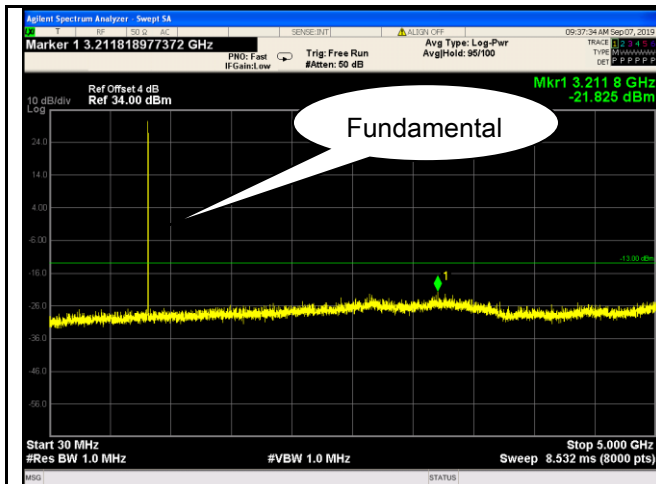


GSM 850 - Low Channel

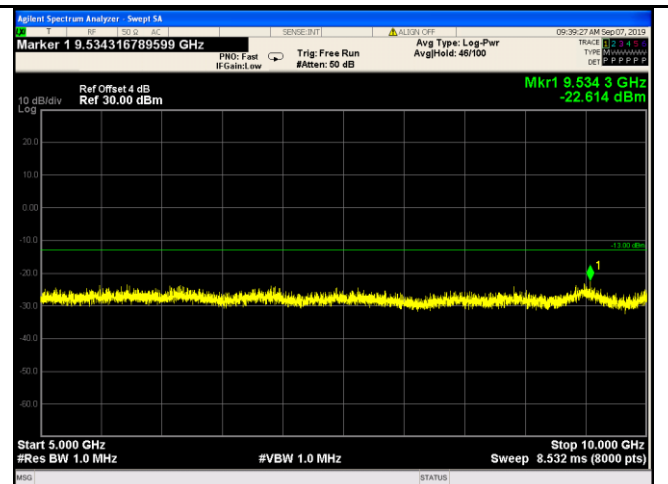


GSM 850 - Low Channel-1

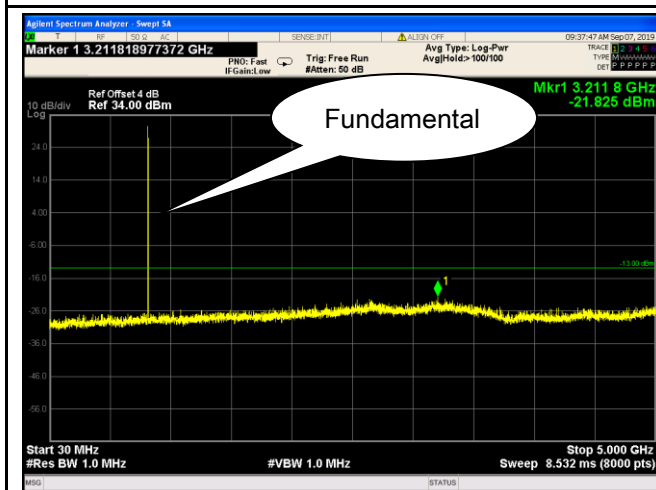


GSM 850 Middle Channel

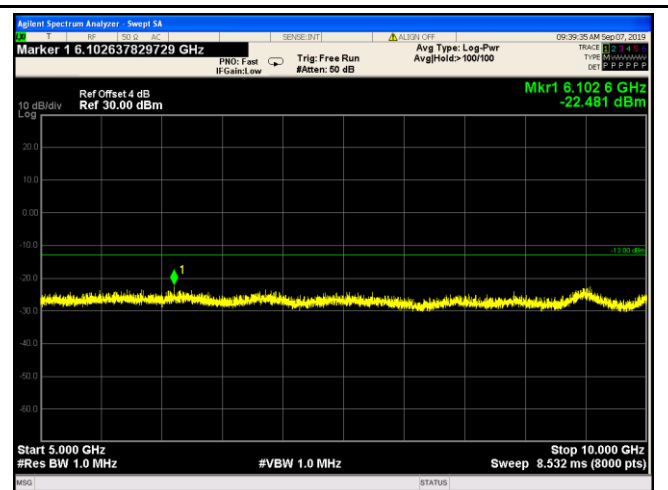

GSM 850 Middle Channel-1

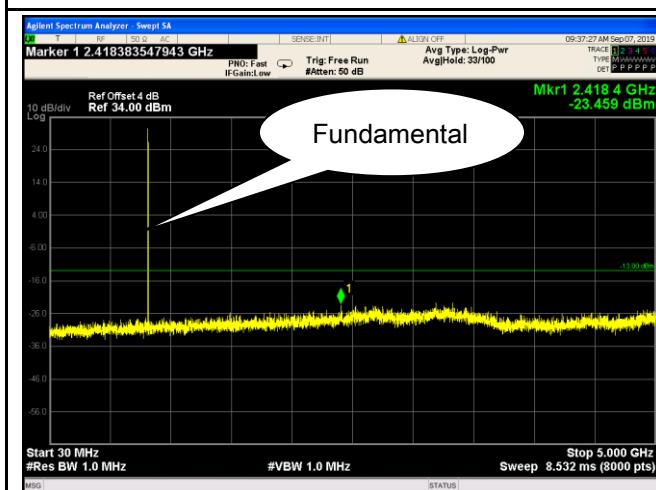


GSM 850 - High Channel

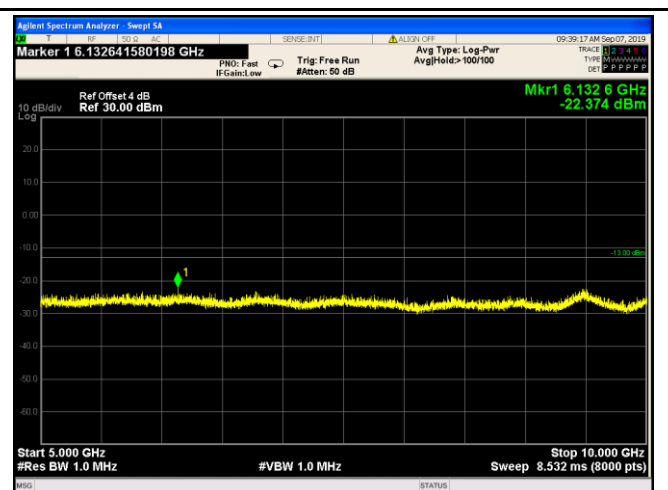


GSM 850 - High Channel-1


PCS Band (Part24E) result

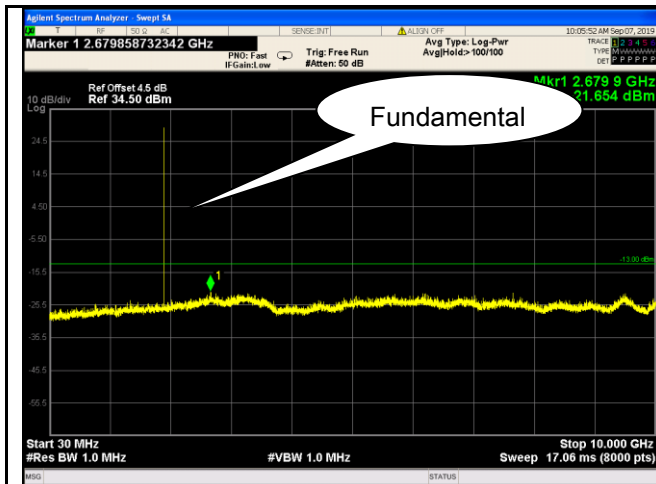


PCS1900 - Low Channel

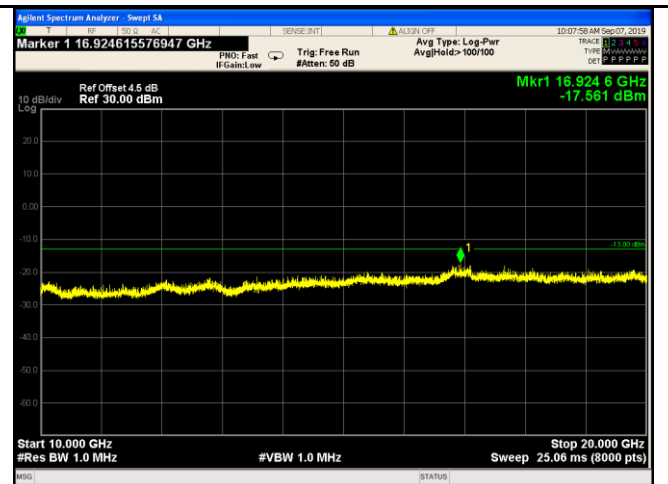


PCS1900 - Low Channel-1

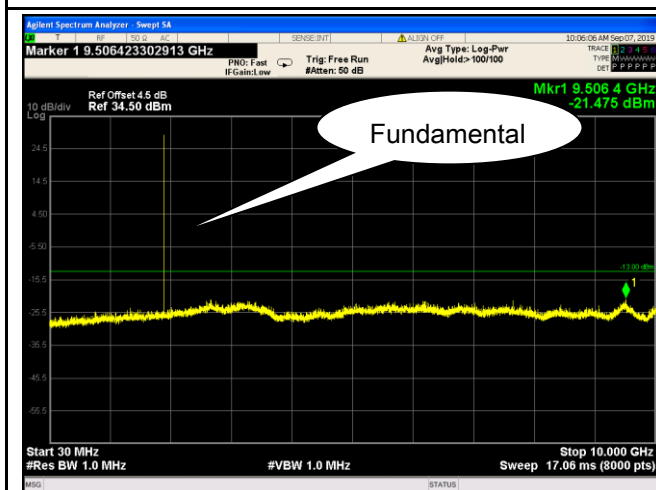


PCS1900 - Middle Channel-1

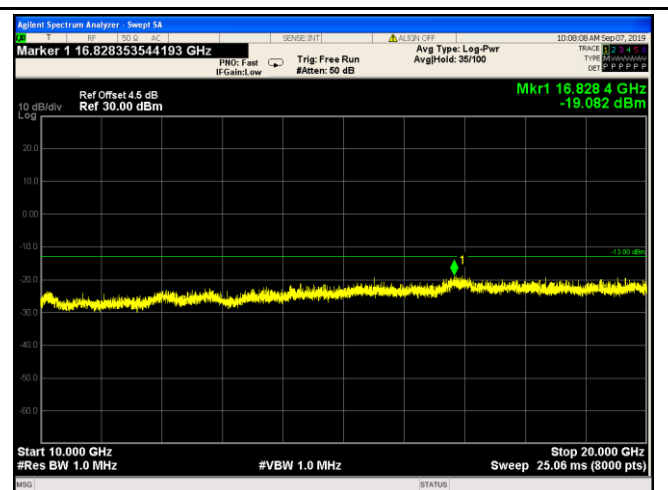

PCS1900 - Middle Channel-1-1

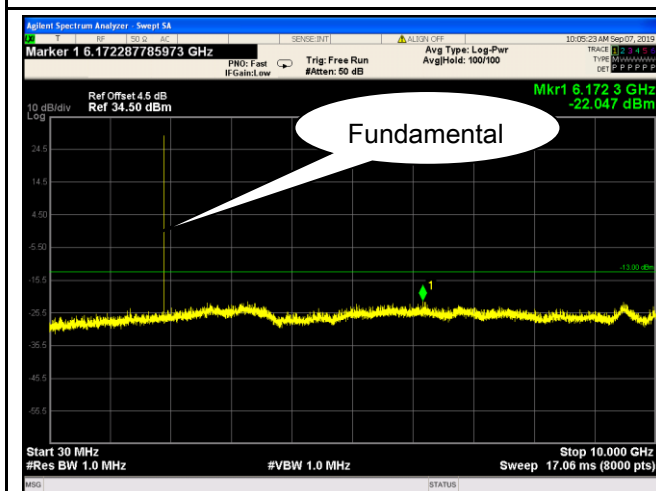


PCS1900 - High Channel

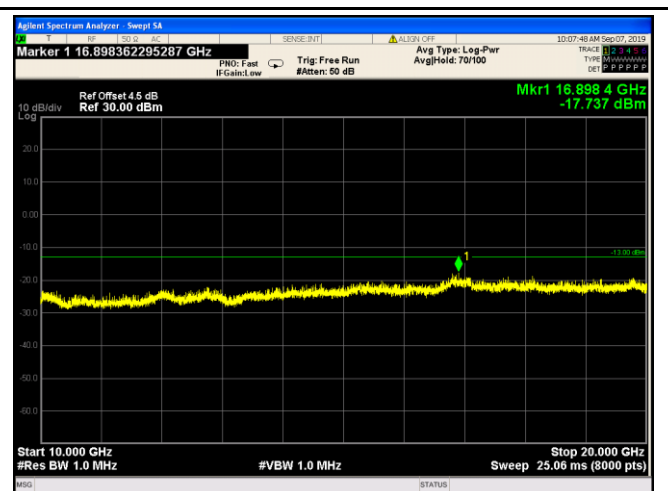


PCS1900 - High Channel-1

GPRS:


Cellular Band (Part 22H) result

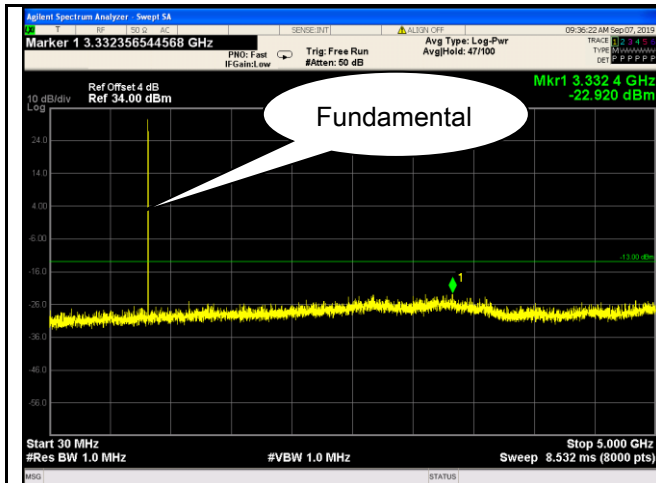


GSM 850 - Low Channel

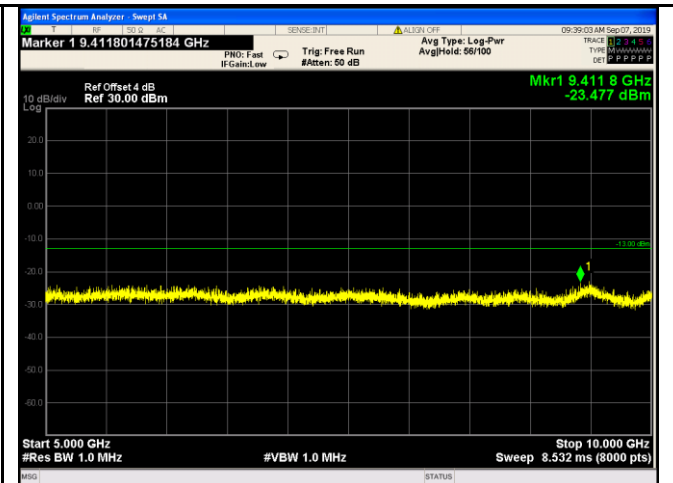


GSM 850 - Low Channel-1

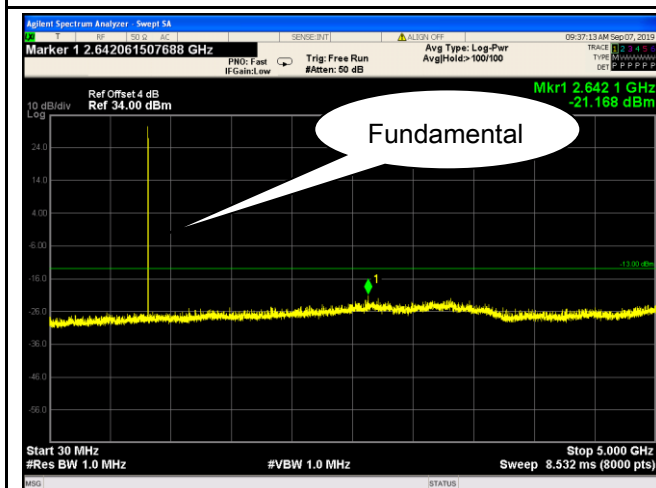


GSM 850 Middle Channel

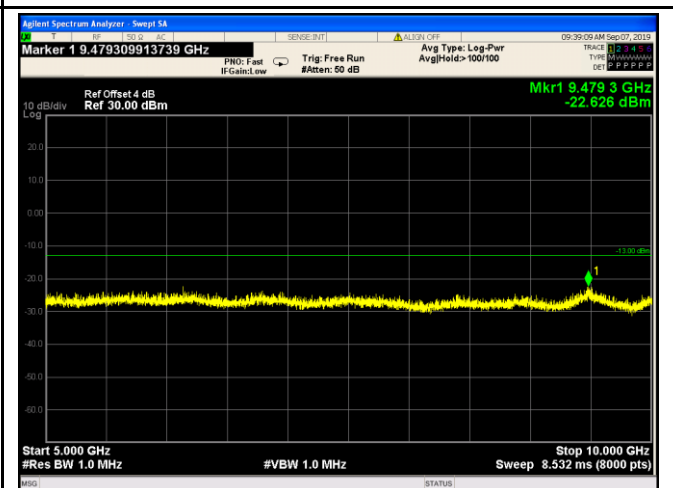

GSM 850 Middle Channel-1

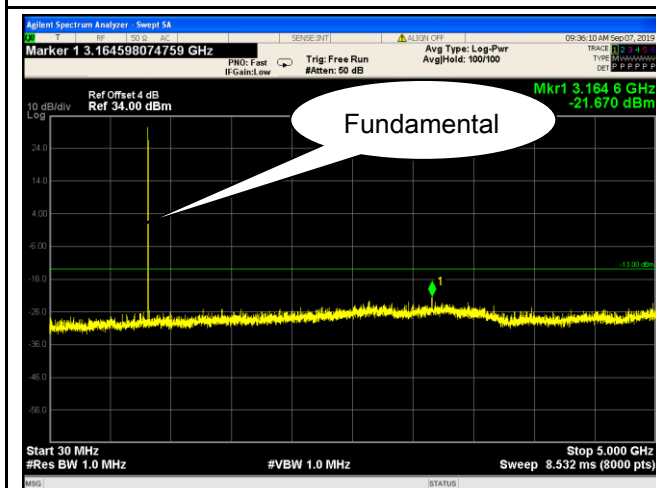


GSM 850 - High Channel

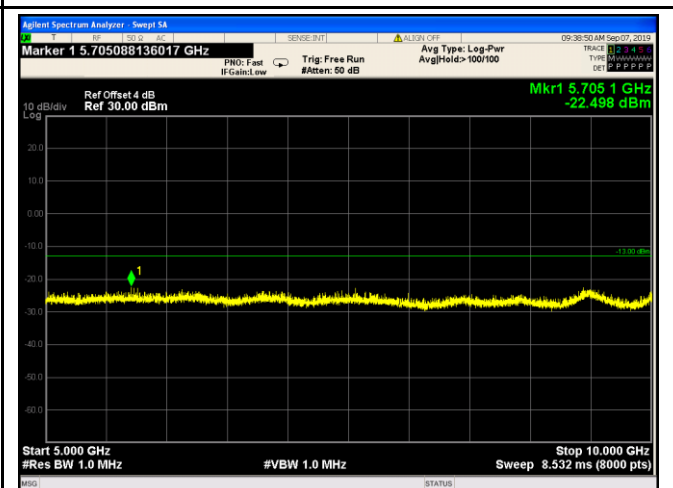


GSM 850 - High Channel-1


PCS Band (Part24E) result

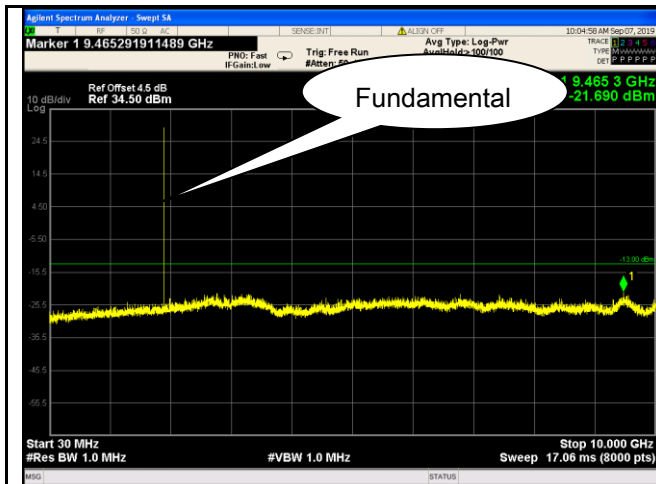


PCS1900 - Low Channel

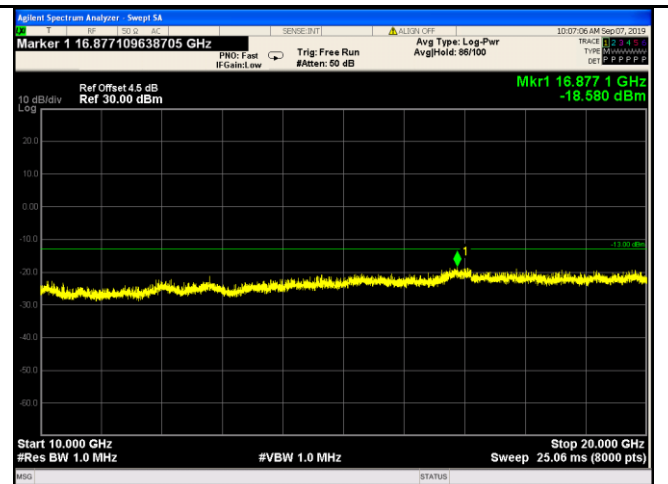


PCS1900 - Low Channel-1

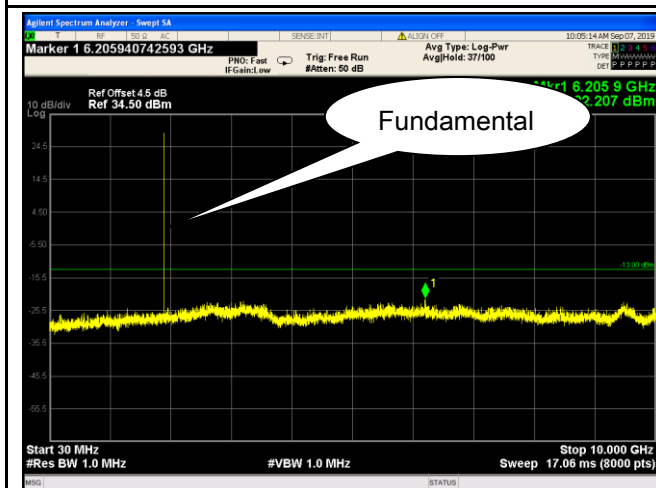


PCS1900 - Middle Channel

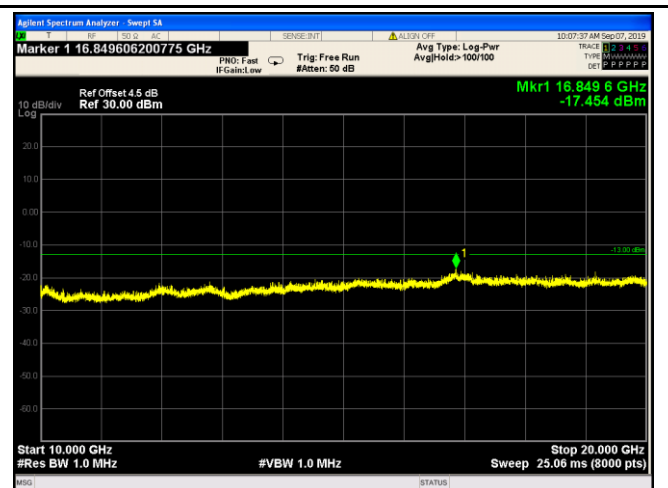

PCS1900 - Middle Channel-1

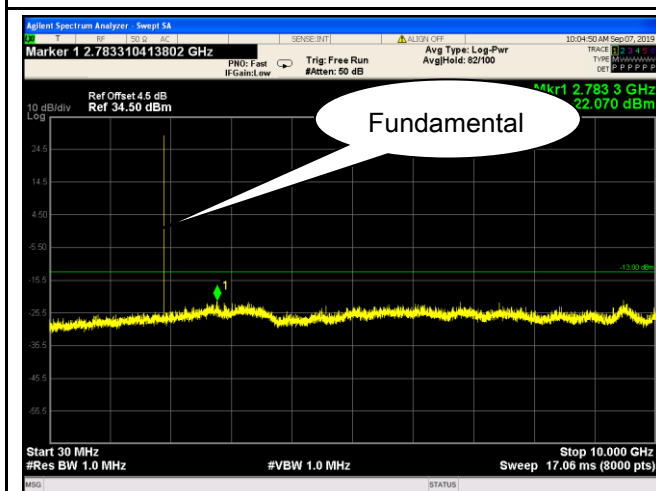

PCS1900 - High Channel

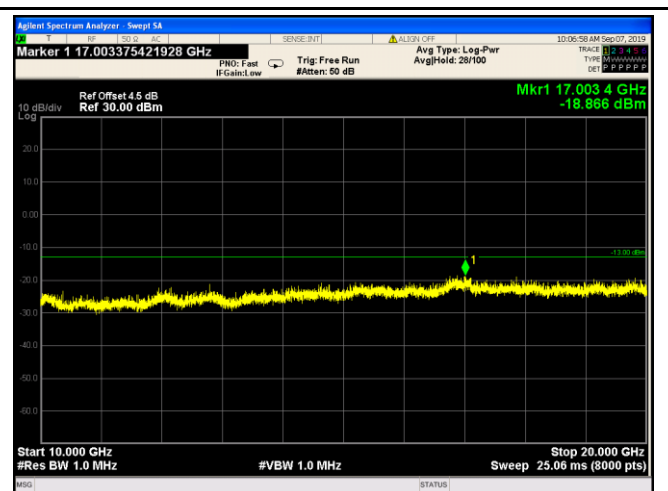

PCS1900 - High Channel-1