

# FCC PART 15.247 TEST REPORT

For

## Circus World Displays Ltd.

4080 Montrose Rd, Niagara Falls, Ontario, Canada

**FCC ID: SMH-32201**

<b>Report Type:</b> Original Report	<b>Product Type:</b> 2.4GHz Video Baby Monitor (Camera unit)
<b>Test Engineer:</b> Simon Wang	<i>Simon Wang</i>
<b>Report Number:</b> RSZ151023006-00TX	
<b>Report Date:</b> 2015-12-14	
<b>Reviewed By:</b> RF Engineer	<i>Candy Li</i>
<b>Prepared By:</b>	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**Note:** This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EUT EXERCISE SOFTWARE .....	6
EQUIPMENT MODIFICATIONS .....	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP .....	6
<b>SUMMARY OF TEST RESULTS .....</b>	<b>7</b>
<b>FCC §15.247 (i) &amp; §1.1307 (b) (1) &amp; §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....</b>	<b>8</b>
APPLICABLE STANDARD .....	8
RESULT .....	8
<b>FCC §15.203 – ANTENNA REQUIREMENT .....</b>	<b>9</b>
APPLICABLE STANDARD .....	9
ANTENNA CONNECTOR CONSTRUCTION .....	9
<b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>10</b>
APPLICABLE STANDARD .....	10
MEASUREMENT UNCERTAINTY.....	10
EUT SETUP.....	10
EMI TEST RECEIVER SETUP.....	11
TEST PROCEDURE .....	11
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST RESULTS SUMMARY .....	11
TEST DATA .....	12
<b>FCC §15.209, §15.205 &amp; §15.247(d) - SPURIOUS EMISSIONS.....</b>	<b>14</b>
APPLICABLE STANDARD .....	14
MEASUREMENT UNCERTAINTY.....	14
EUT SETUP .....	14
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	15
TEST PROCEDURE .....	15
TEST EQUIPMENT LIST AND DETAILS.....	16
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	17
TEST RESULTS SUMMARY .....	17
TEST DATA .....	17
<b>FCC §15.247(a) (1)-CHANNEL SEPARATION .....</b>	<b>20</b>
APPLICABLE STANDARD .....	20
TEST PROCEDURE .....	20
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST DATA .....	20
<b>FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....</b>	<b>23</b>

APPLICABLE STANDARD .....	23
TEST PROCEDURE .....	23
TEST EQUIPMENT LIST AND DETAILS.....	23
TEST DATA .....	23
<b>FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL .....</b>	<b>26</b>
APPLICABLE STANDARD .....	26
TEST PROCEDURE .....	26
TEST EQUIPMENT LIST AND DETAILS.....	26
TEST DATA .....	26
<b>FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME).....</b>	<b>28</b>
APPLICABLE STANDARD .....	28
TEST PROCEDURE .....	28
TEST EQUIPMENT LIST AND DETAILS.....	28
TEST DATA .....	28
<b>FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT .....</b>	<b>31</b>
APPLICABLE STANDARD .....	31
TEST PROCEDURE .....	31
TEST EQUIPMENT LIST AND DETAILS.....	31
TEST DATA .....	31
<b>FCC §15.247(d) - BAND EDGES .....</b>	<b>34</b>
APPLICABLE STANDARD .....	34
TEST PROCEDURE .....	34
TEST EQUIPMENT LIST AND DETAILS.....	34
TEST DATA .....	34
<b>PRODUCT SIMILARITY DECLARATION LETTER.....</b>	<b>36</b>

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The *Circus World Displays Ltd.*'s product, model number: 32201 (FCC ID: SMH-32201) (the "EUT") in this report was a camera unit of 2.4GHz Video Baby Monitor, which was measured approximately: 7.98 cm (L) x 7.98 cm (W) x 9.01 cm (H), rated with input voltage: DC 5.9V from adapter.

#### Adapter Information:

Model: HX-AD059080-U06

Input: AC 100-240V, 50/60Hz, 0.15A

Output: DC 5.9V, 0.8A

*Note: This product, model 32209, 32206, 32203, 32211 and 32201, they are identical schematics, the difference between them is explained in the attached product similarity declaration letter. Model 32201 was selected for full test.*

*\* All measurement and test data in this report was gathered from production sample serial number: 1506881 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2015-10-23.*

### Objective

This report is prepared on behalf of *Circus World Displays Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

The monitor unit of a system with FCC ID: SMH-35052.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.91 dB for 30MHz-1GHz and 4.92 dB for above 1GHz, 1.95dB for conducted measurement.

## **Test Facility**

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on October 31, 2013. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.10-2013.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in an engineering mode which was selected by manufacturer.

### EUT Exercise Software

No exercise software was used.

### Equipment Modifications


No modification was made to the EUT tested.

### External I/O Cable

Cable Description	Length (m)	From/Port	To
Un-shielding Un-detachable DC Power Cable	2.8	EUT	Adapter

### Block Diagram of Test Setup

For Conducted Emission:

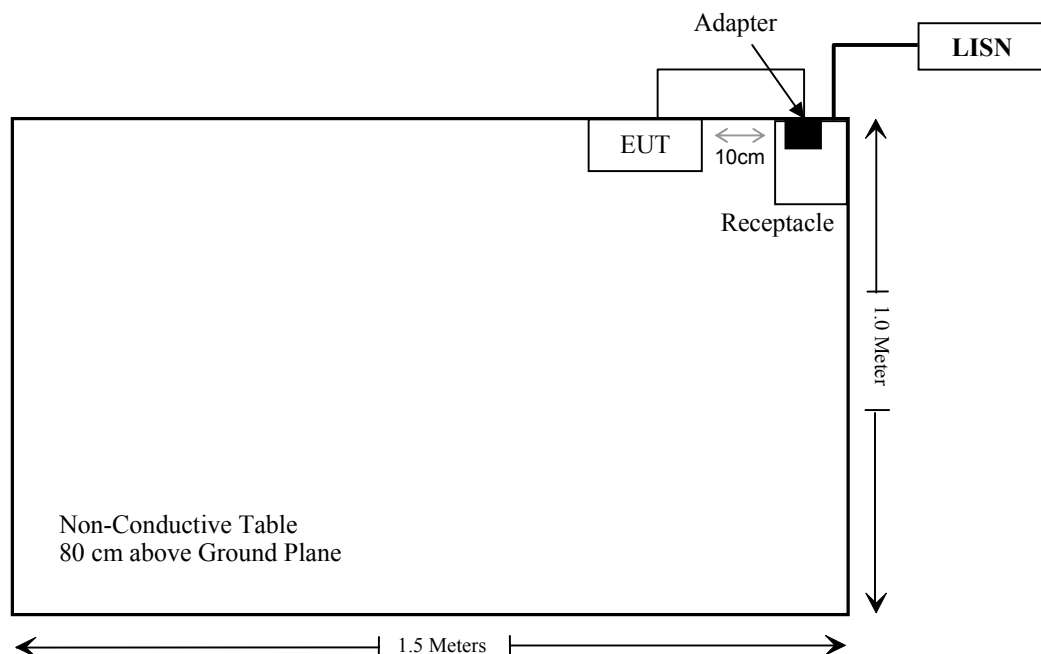

**SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b)(1), §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance
§15.247 (a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

## FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

### Applicable Standard

According to subpart 15.247 (i) and subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

#### Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

### Result

#### Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm<sup>2</sup>)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )
	(dBi)	(numeric)	(dBm)	(mW)			
2410.875	2	1.58	16.49	44.57	20	0.014	1.0

Note: To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

### Result: Compliance



---

## **FCC §15.203 – ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **Antenna Connector Construction**

The EUT has one integrated antenna arrangement, which was permanently attached and the antenna gain is 2.0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

**Result:** Compliance.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC §15.207


### Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements maybe receiver reading, attenuation of the connection between AMN/ISN and receiver, AMN/ISN voltage division factor, AMN/ISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report.

Port	Measurement uncertainty
AC Mains	3.26 dB (k=2, 95% level of confidence)
CAT 3	3.70 dB (k=2, 95% level of confidence)
CAT 5	3.86 dB (k=2, 95% level of confidence)
CAT 6	4.64 dB (k=2, 95% level of confidence)

### EUT Setup

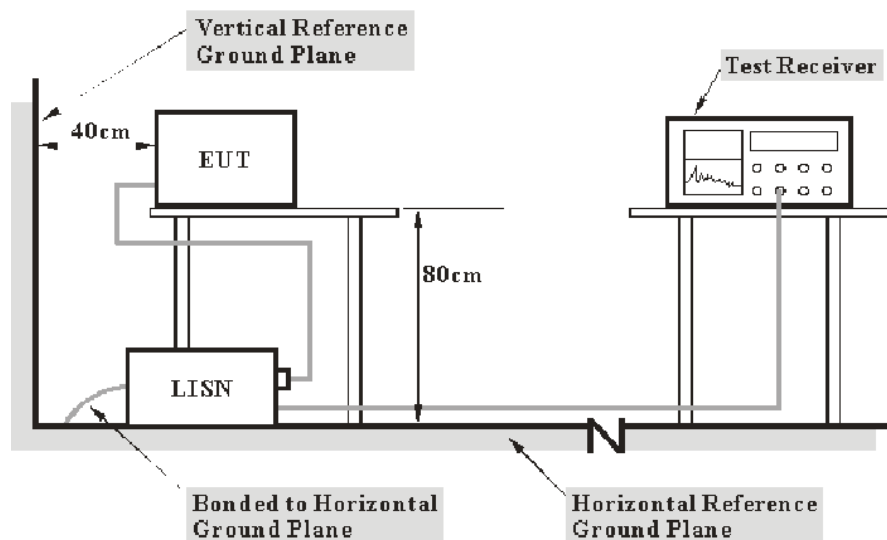

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

## EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

## Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Schwarz	EMI Test Receiver	ESCI	101122	2015-06-03	2016-06-02
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2014-12-01	2015-12-01
Rohde & Schwarz	Transient limiter	ESH3Z2	DE25985	2015-05-14	2016-05-13
Rohde & Schwarz	CE Test software	EMC 32	V8.53	NCR	NCR

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, the worst margin reading as bellow:

**10.4 dB at 24.002030 MHz in the Neutral conducted mode**

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level compliance with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL.,  $U_{(Lm)}$  is less than  $U_{cispr}$ , if  $L_m$  is less than  $L_{lim}$ , it implies that the EUT complies with the limit.

**Test Data****Environmental Conditions**


<b>Temperature:</b>	26 °C
<b>Relative Humidity:</b>	51 %
<b>ATM Pressure:</b>	101.5 kPa

The testing was performed by Simon Wang on 2015-10-28.

Test Mode: Transmitting

AC 120 V, 60 Hz, Line:


EMI Auto Test L

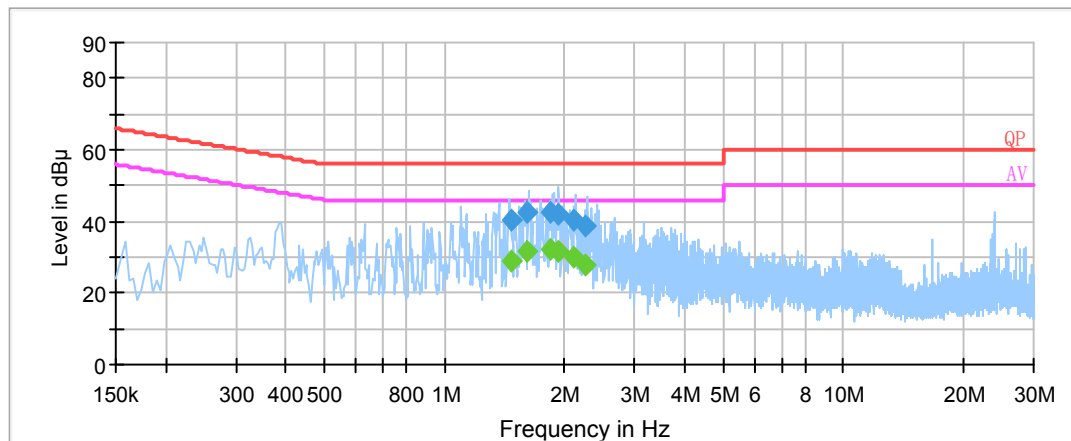

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/QP/Ave.)
1.464250	40.1	20.0	56.0	15.9	QP
1.464250	28.8	20.0	46.0	17.2	Ave.
1.605610	42.6	20.0	56.0	13.4	QP
1.605610	31.6	20.0	46.0	14.4	Ave.
1.849830	42.4	20.0	56.0	13.6	QP
1.849830	32.0	20.0	46.0	14.0	Ave.
1.928930	42.2	20.0	56.0	13.8	QP
1.928930	31.4	20.0	46.0	14.6	Ave.
2.110110	40.6	20.0	56.0	15.4	QP
2.110110	30.0	20.0	46.0	16.0	Ave.
2.247770	38.6	20.0	56.0	17.4	QP
2.247770	28.1	20.0	46.0	17.9	Ave.

**AC 120V, 60 Hz, Neutral:**

EMI Auto Test N

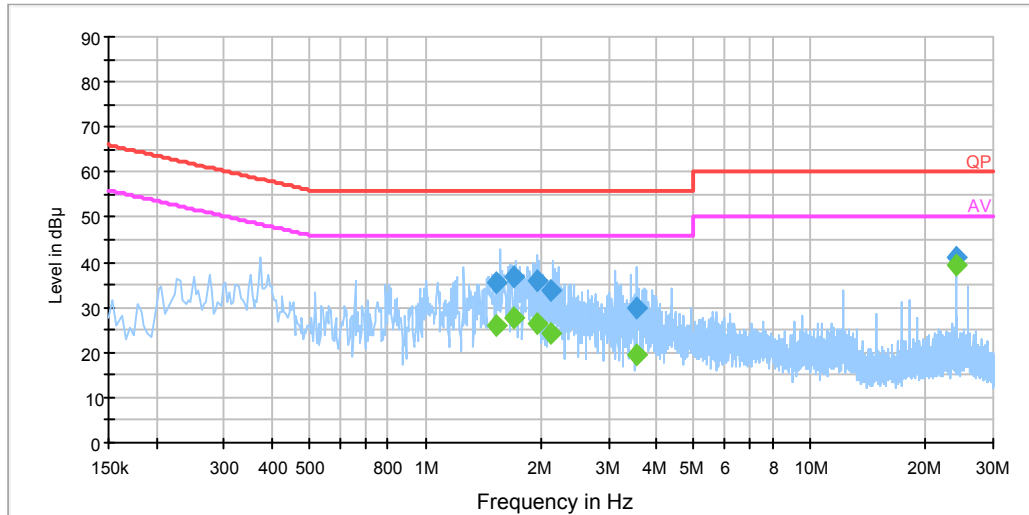

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/QP/Ave.)
1.538570	35.6	20.0	56.0	20.4	QP
1.538570	26.0	20.0	46.0	20.0	Ave.
1.692230	37.0	20.0	56.0	19.0	QP
1.692230	27.6	20.0	46.0	18.4	Ave.
1.952630	35.9	20.0	56.0	20.1	QP
1.952630	26.2	20.0	46.0	19.8	Ave.
2.125870	33.9	20.0	56.0	22.1	QP
2.125870	24.3	20.0	46.0	21.7	Ave.
3.564630	29.9	20.0	56.0	26.1	QP
3.564630	19.3	20.0	46.0	26.7	Ave.
24.002030	41.1	20.1	60.0	18.9	QP
24.002030	39.6	20.1	50.0	10.4	Ave.

**Note:**

- 1) Corrected Amplitude = Reading + Correction Factor
- 2) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss
- 3) Margin = Limit – Corrected Amplitude

## **FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**

### **Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;


### **Measurement Uncertainty**


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is 5.91 dB for 30MHz-1GHz and 4.92 dB for above 1GHz. And the uncertainty will not be taken into consideration for the test data recorded in the report

### **EUT Setup**

**Below 1 GHz:**

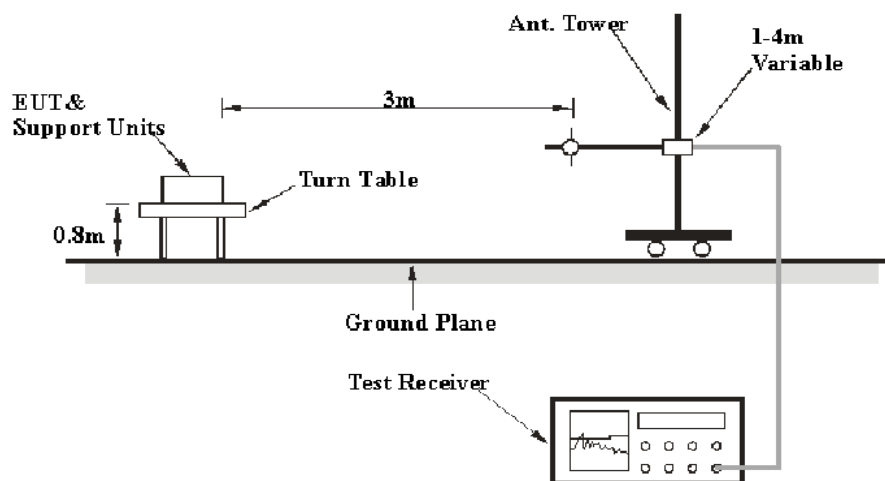

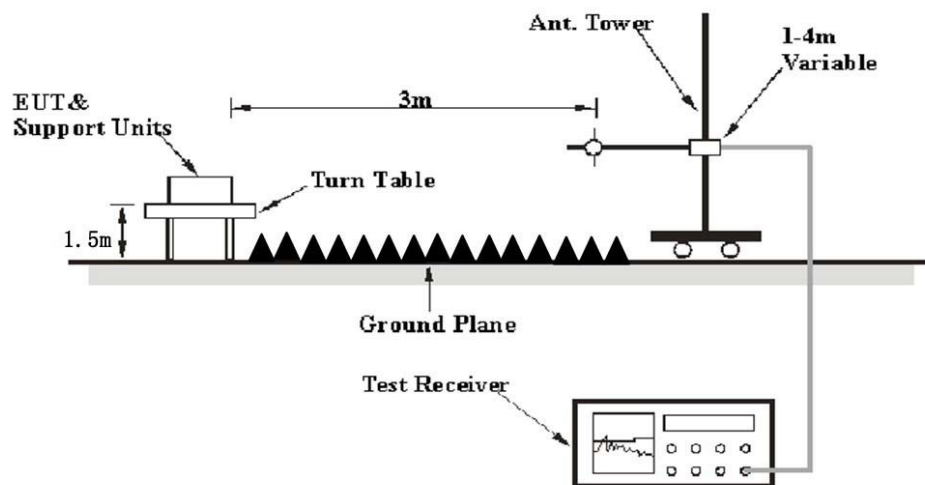**Above 1GHz:**

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

**EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

**Test Procedure**

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz to 1GHz and peak and Average detection modes for frequencies above 1GHz.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447E	1937A01046	2015-05-06	2016-05-05
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2015-11-03	2016-11-03
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2014-12-07	2017-12-06
Mini	Amplifier	ZVA-183-S+	5969001149	2015-04-23	2016-04-22
A.H. System	Horn Antenna	SAS-200/571	135	2015-02-10	2016-02-10
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2014-12-11	2015-12-11
the electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2013-10-14	2016-10-13
TDK	Chamber	Chamber A	2#	2015-10-15	2018-10-15
TDK	Chamber	Chamber B	1#	2015-07-22	2016-07-22
DUCOMMUN	Pre-amplifier	ALN-22093530-01	991373-01	2015-08-03	2016-08-03
R&S	Auto test Software	EMC32	V9.10	NCR	NCR

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).



## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247, the worst margin reading as bellow:

**0.47 dB at 2485.58 MHz in the Vertical polarization for High Channel**

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level compliance with the limit if

$$L_m + U_{(L_m)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BACL.,  $U_{(L_m)}$  is less than  $+U_{\text{cispr}}$ , if  $L_m$  is less than  $L_{\text{lim}}$ , it implies that the EUT complies with the limit.

## Test Data

### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	49 %
<b>ATM Pressure:</b>	101.5 kPa

*The testing was performed by Simon Wang on 2015-11-06.*

**30 MHz -25 GHz:***Test Mode: Transmitting*

Frequency (MHz)	Receiver		Turn table Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
Low Channel (2410.875MHz)									
119.56	47.81	QP	63	1.1	H	-14.6	33.21	43.5	10.29
2410.88	97.39	PK	274	1.2	H	5.43	102.82	/	/
2410.88	89.14	Ave.	274	1.2	H	5.43	94.57	/	/
2410.88	107.26	PK	26	1.9	V	5.43	112.69	/	/
2410.88	101.72	Ave.	26	1.9	V	5.43	107.15	/	/
2388.88	62.54	PK	247	1.5	V	5.43	67.97	74	6.03
2388.88	41.08	Ave.	247	1.5	V	5.43	46.51	54	7.49
2382.79	60.68	PK	334	2.4	V	5.43	66.11	74	7.89
2382.79	41.46	Ave.	334	2.4	V	5.43	46.89	54	7.11
2494.34	36.54	PK	337	2.2	V	6.29	42.83	74	31.17
2494.34	20.43	Ave.	337	2.2	V	6.29	26.72	54	27.28
4821.75	33.69	PK	165	1.4	V	16.92	50.61	74	23.39
4821.75	17.25	Ave.	165	1.4	V	16.92	34.17	54	19.83
7232.63	35.36	PK	214	2.5	V	19.08	54.44	74	19.56
7232.63	17.52	Ave.	214	2.5	V	19.08	36.60	54	17.40
Middle Channel (2441.25MHz)									
119.56	47.75	QP	96	1.1	H	-14.6	33.15	43.5	10.35
2441.25	94.95	PK	71	1.2	H	4.97	99.92	/	/
2441.25	86.61	Ave.	71	1.2	H	4.97	91.58	/	/
2441.25	101.60	PK	217	1.7	V	4.97	106.57	/	/
2441.25	93.69	Ave.	217	1.7	V	4.97	98.66	/	/
2389.68	42.43	PK	130	1.1	V	4.97	47.40	74	26.60
2389.68	28.67	Ave.	130	1.1	V	4.97	33.64	54	20.36
2488.00	52.72	PK	44	2.4	V	6.29	59.01	74	14.99
2488.00	41.52	Ave.	44	2.4	V	6.29	47.81	54	6.19
2492.38	50.26	PK	325	1.9	V	6.29	56.55	74	17.45
2492.38	40.23	Ave.	325	1.9	V	6.29	46.52	54	7.48
4882.50	35.26	PK	219	1.6	V	16.91	52.17	74	21.83
4882.50	18.34	Ave.	219	1.6	V	16.91	35.25	54	18.75
7323.75	33.24	PK	157	2.1	V	19.40	52.64	74	21.36
7323.75	15.41	Ave.	157	2.1	V	19.40	34.81	54	19.19

Frequency (MHz)	Receiver		Turn table Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2471.625 MHz)									
119.56	47.89	QP	98	1.1	H	-14.6	33.29	43.5	10.21
2471.63	94.68	PK	327	1.0	H	6.29	100.97	/	/
2471.63	86.75	Ave.	327	1.0	H	6.29	93.04	/	/
2471.63	106.32	PK	182	1.6	V	6.29	112.61	/	/
2471.63	98.52	Ave.	182	1.6	V	6.29	104.81	/	/
2382.48	36.45	PK	262	1.1	V	4.97	41.42	74	32.58
2382.48	22.34	Ave.	262	1.1	V	4.97	27.31	54	26.69
2484.13	66.52	PK	247	1.4	V	6.29	72.81	74	1.19
2484.13	46.71	Ave.	247	1.4	V	6.29	53.00	54	1.00
2485.58	67.24	PK	96	1.3	V	6.29	73.53	74	0.47
2485.58	46.56	Ave.	96	1.3	V	6.29	52.85	54	1.15
4943.25	34.96	PK	301	2.0	V	16.91	51.87	74	22.13
4943.25	16.52	Ave.	301	2.0	V	16.91	33.43	54	20.57
7414.88	32.68	PK	180	1.9	V	18.34	51.02	74	22.98
7414.88	13.48	Ave.	180	1.9	V	18.34	31.82	54	22.18

**Note:**

1. Corrected Factor=Antenna factor (RX) +cable loss – amplifier factor
2. Corrected Amplitude = Corrected Factor + Receiver Reading
3. Margin = Limit- Corrected Amplitude

**FCC §15.247(a) (1)-CHANNEL SEPARATION****Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

**Test Procedure**

1. Set the EUT in operating mode, RBW was set at 100 kHz, VBW  $\geq$  3RBW maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace
3. Measure the channel separation.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2015-06-13	2016-06-13

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	51 %
ATM Pressure:	101.5 kPa

*The testing was performed by Simon Wang on 205-10-26.*

**Test Result:** Compliance.


Please refer to following table and plots

Test Mode: Transmitting

Channel	Channel Frequency (MHz)	Channel Separation (MHz)	≥ Limit (MHz)
Low	2410.875	3.372	2.345
Adjacent	2414.250		
Middle	2441.250	3.372	2.345
Adjacent	2444.625		
High	2471.625	3.372	2.345
Adjacent	2468.250		


Note: limit =2/3 of 20 dB bandwidth

### Low Channel

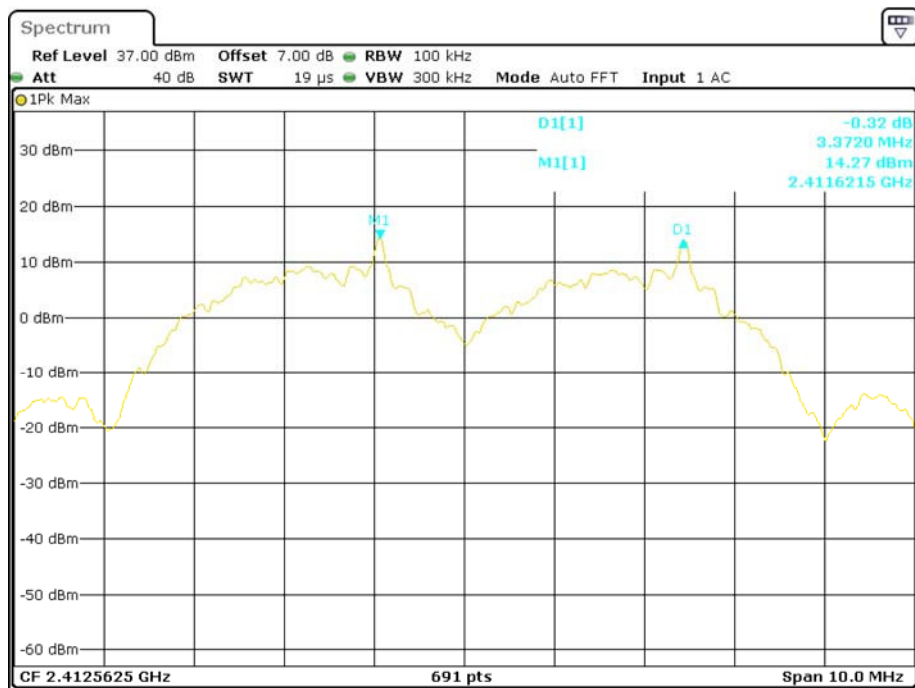


Date: 26.OCT.2015 15:48:24

### Middle Channel

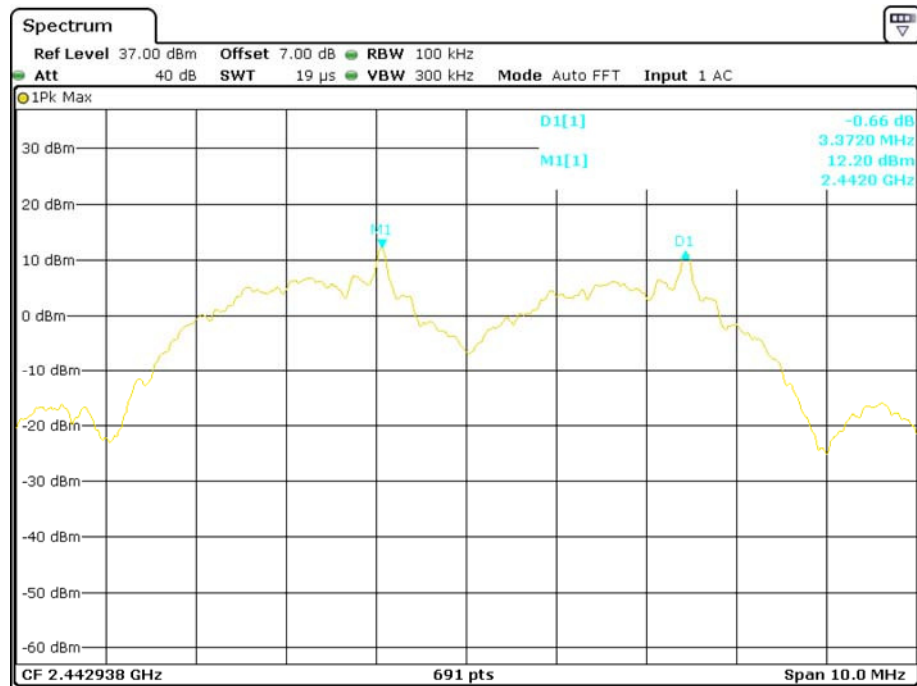

Date: 26.OCT.2015 15:56:36

### High Channel

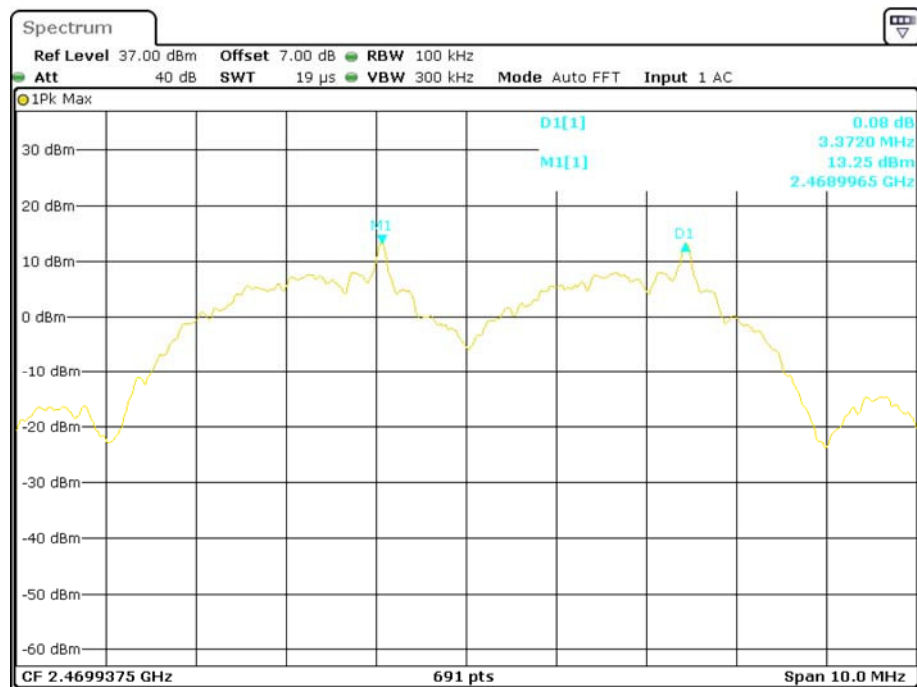

Date: 26.OCT.2015 15:46:02

**FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH****Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

**Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
3. Repeat above procedures until all frequencies measured were complete.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2015-06-13	2016-06-13

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	51 %
ATM Pressure:	101.5 kPa

*The testing was performed by Simon Wang on 2015-10-26.*


**Test Result:** Compliance.

Please refer to following tables and plots

Test Mode: Transmitting

Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2410.875	3.531	3.546
Middle	2441.250	3.517	3.575
High	2471.625	3.517	3.517


### Low Channel

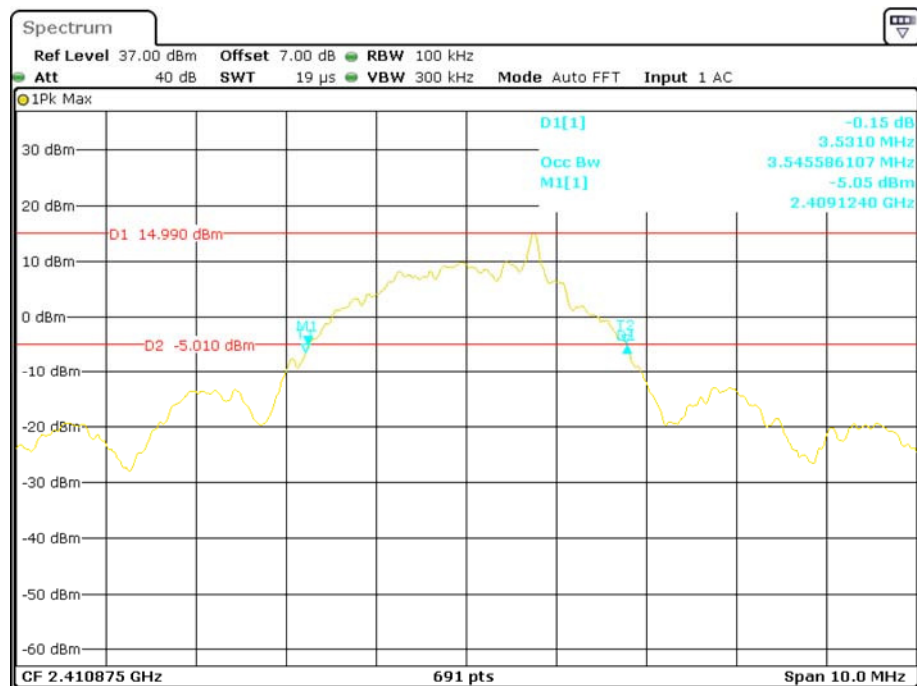

Date: 26.OCT.2015 15:30:40




### Middle Channel

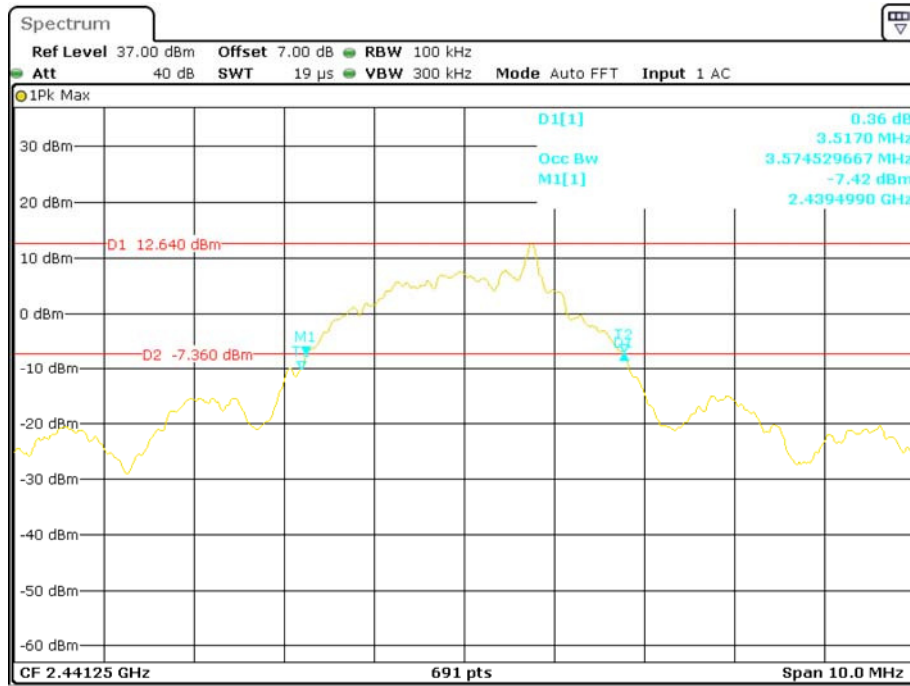

Date: 26.OCT.2015 15:35:38

### High Channel

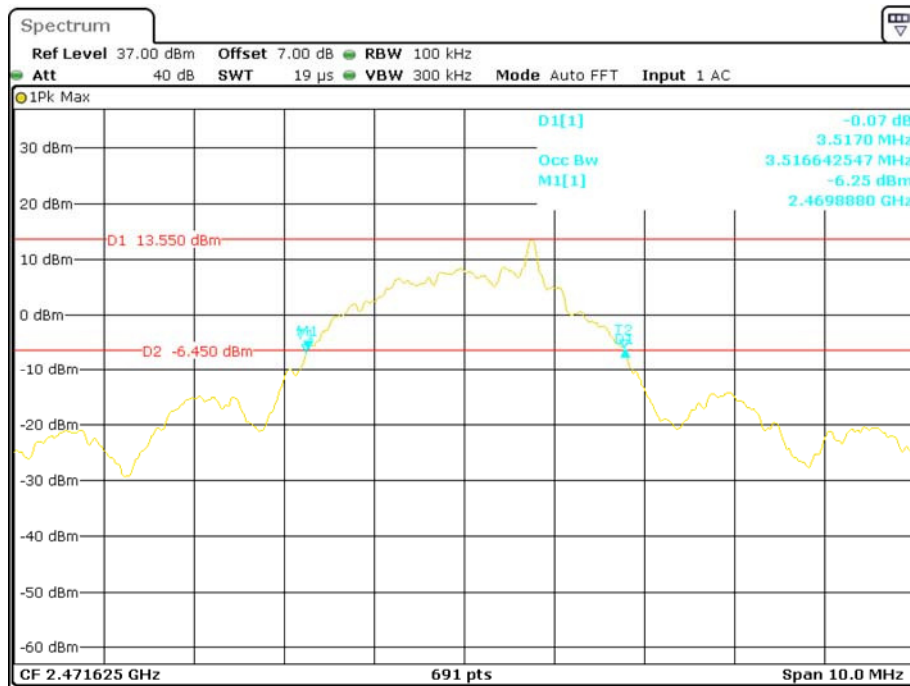

Date: 26.OCT.2015 15:39:58

**FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL****Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2015-06-13	2016-06-13

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

Temperature:	27 °C
Relative Humidity:	50 %
ATM Pressure:	101.5 kPa


*The testing was performed by Simon Wang on 2015-10-27.*

**Test Result:** Compliance.

Please refer to following table and plot.

*Test Mode: Transmitting*

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400 ~ 2483.50	19	$\geq 15$

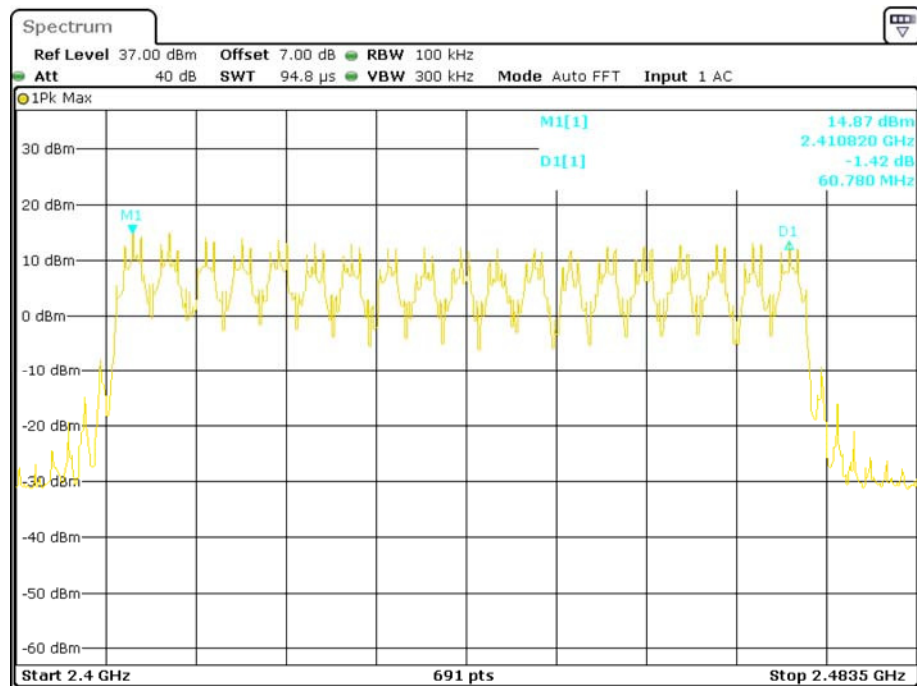**Number of Hopping Channels**

Date: 27.OCT.2015 14:02:00

**FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME)****Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

The EUT was worked in channel hopping; spectrum span was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= Pulse time (ms) \* hope rate/ number of hopping channels \* hopping No.\*0.4 s

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2015-06-13	2016-06-13

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

Temperature:	27 °C
Relative Humidity:	50 %
ATM Pressure:	101.5 kPa

*The testing was performed by Simon Wang on 2015-10-27.*


**Test Result:** Compliance.

Please refer to following table and plots

Test Mode: Transmitting


Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result
Low	2.145	0.069	0.4	Pass
Middle	2.094	0.068	0.4	Pass
High	2.152	0.070	0.4	Pass
Note: Dwell time=Pulse time (ms) × (81/19) × 19*0.4 S Hopping rate =81 times per second				

### Low Channel

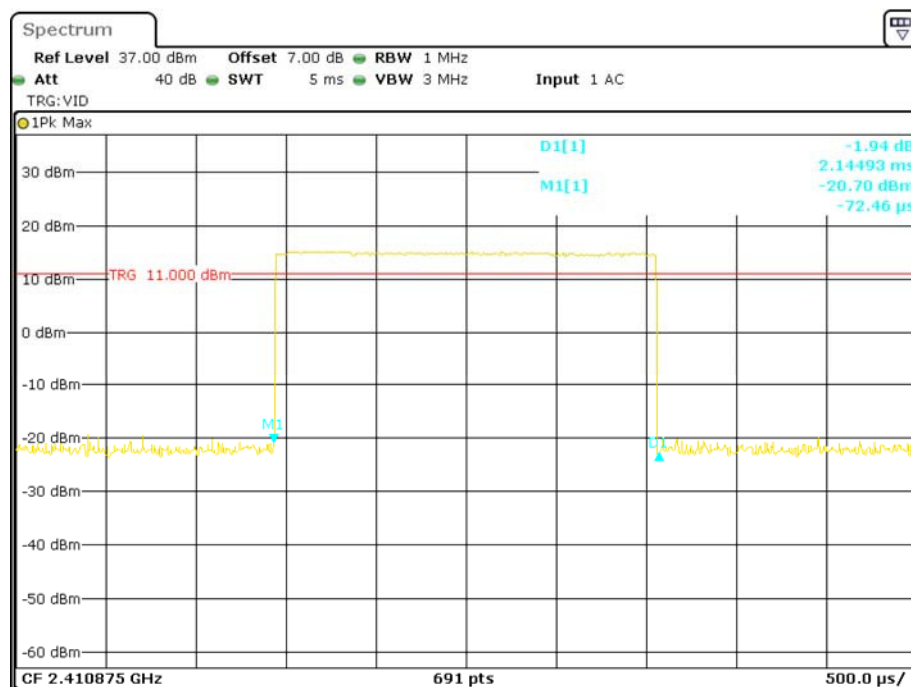


Date: 27.OCT.2015 14:36:48

## Middle Channel

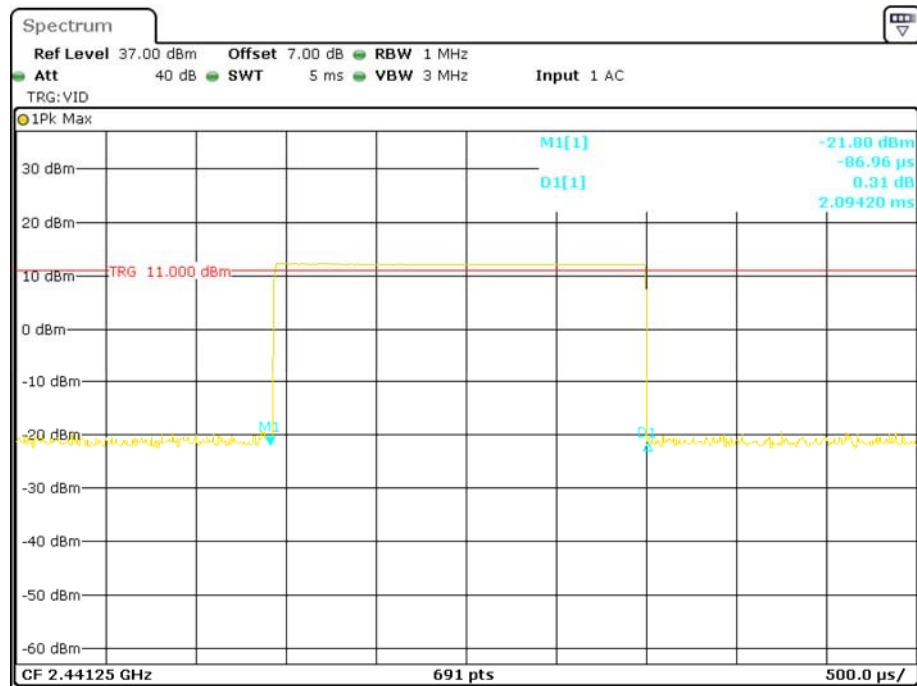

Date: 27.OCT.2015 14:34:53

## High Channel

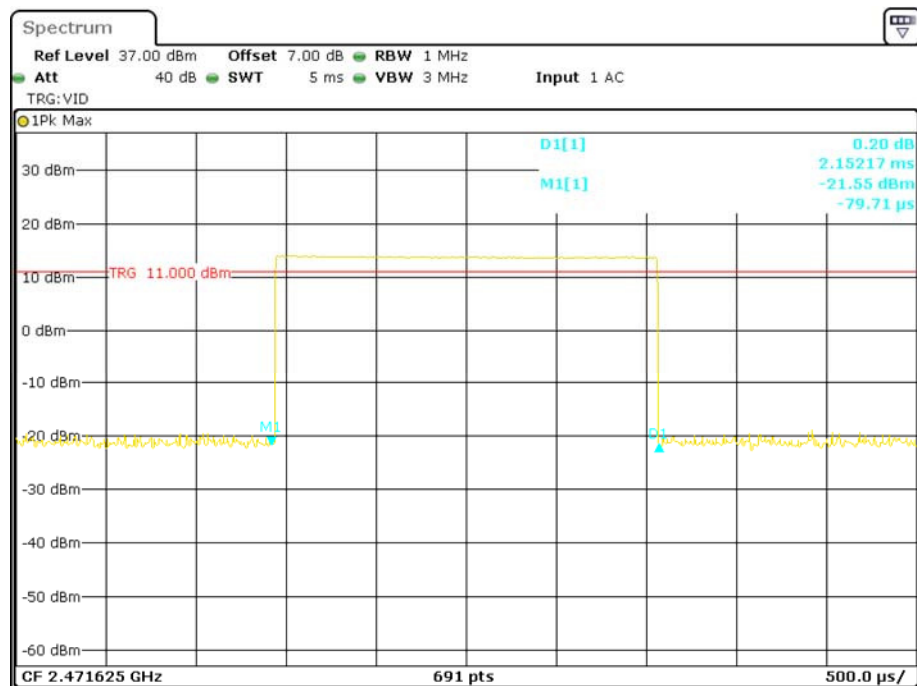

Date: 27.OCT.2015 14:33:36

**FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT****Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

**Test Procedure**

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI Test Receiver.
3. Add a correction factor to the display.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2015-06-13	2016-06-13

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**


Temperature:	26 °C
Relative Humidity:	51 %
ATM Pressure:	101.5 kPa

*The testing was performed by Simon Wang on 2015-10-28.*

**Test Result:** Compliance.


*Test Mode: Transmitting*

Channel	Channel Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
Low	2410.875	16.49	21
Middle	2441.250	13.38	21
High	2471.625	14.64	21

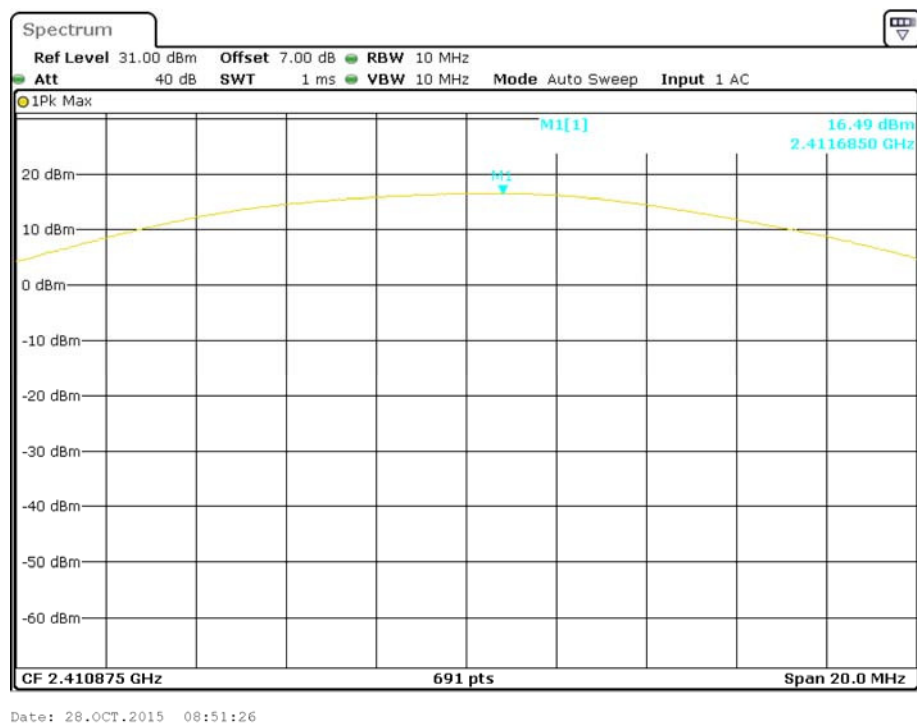**Low Channel**




### Middle Channel

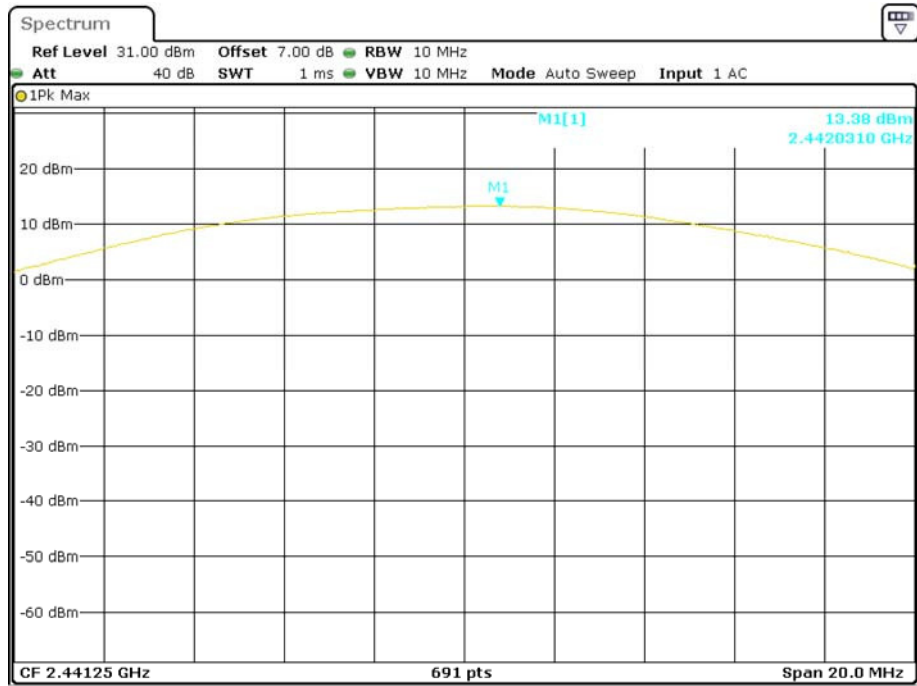

Date: 28.OCT.2015 08:52:20

### High Channel

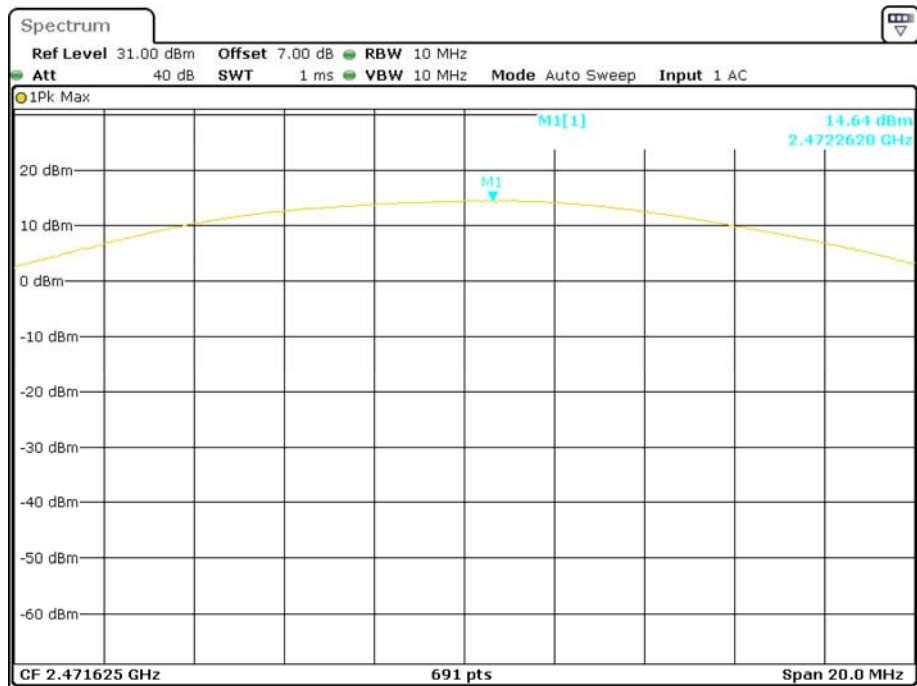

Date: 28.OCT.2015 08:53:15

## FCC §15.247(d) - BAND EDGES

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
3. Repeat above procedures until all measured frequencies were complete.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2015-06-13	2016-06-13

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

Temperature:	26 °C
Relative Humidity:	51 %
ATM Pressure:	101.5 kPa


*The testing was performed by Simon Wang on 2015-10-29.*

**Test Result:** Compliance.

*Test Mode: Transmitting*


Please refer to follow plots:

### Band Edge: Left Side

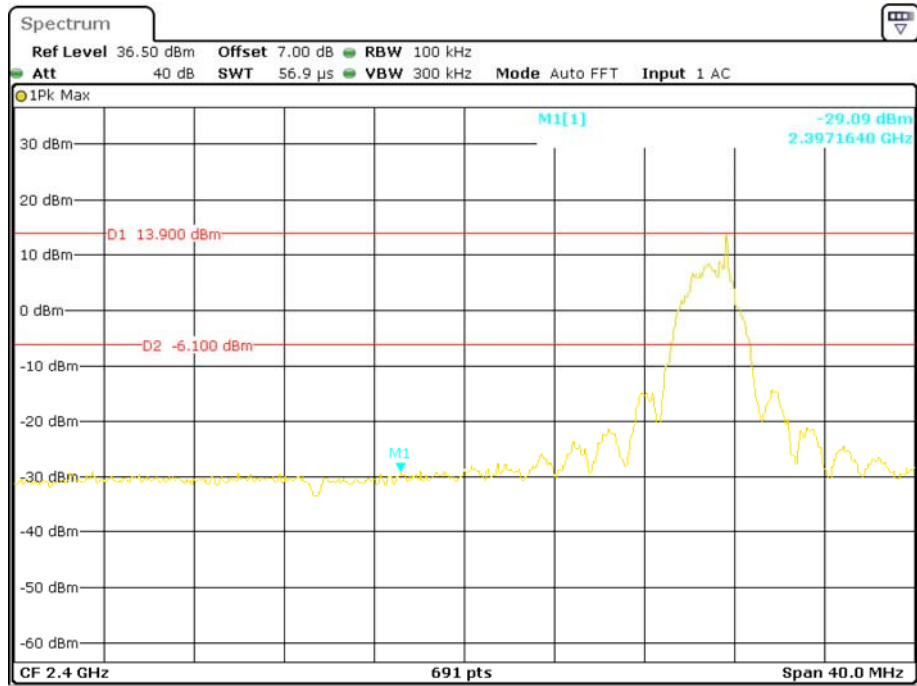

Date: 29.OCT.2015 07:59:07

### Band Edge: Right Side

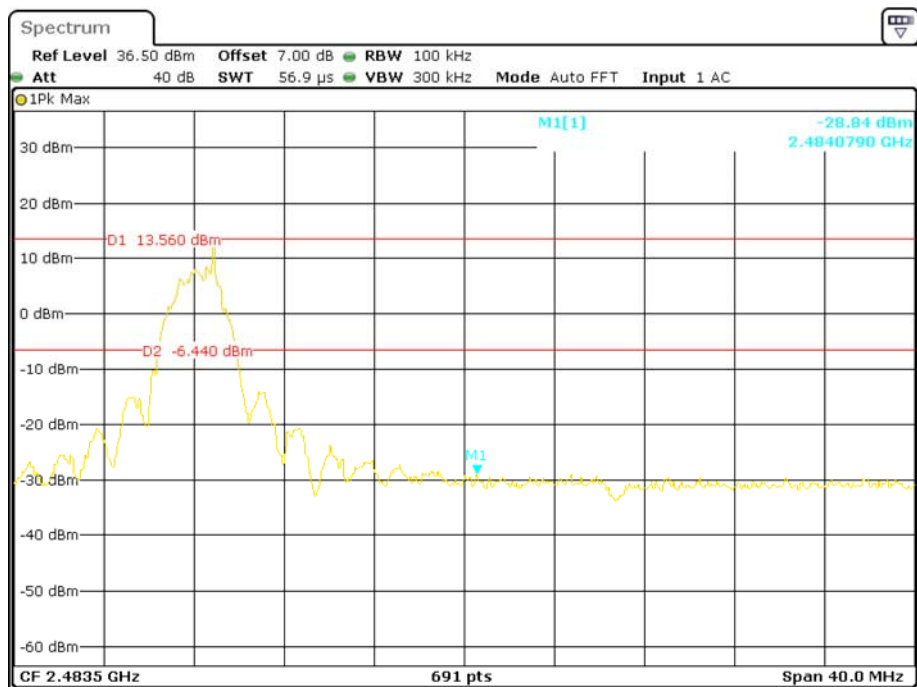

Date: 29.OCT.2015 07:56:00

**PRODUCT SIMILARITY DECLARATION LETTER**

Date: 2015-12-14

**Product Similarity Declaration**

To Whom It May Concern,

We, Circus World Displays Ltd., hereby declare that we have a product named as 2.4GHz Video Baby Monitor (Camera unit) (Model number: 32201) was tested by BACL, meanwhile, for our marketing purpose, we would like to list a series models (32209, 32206, 32203, 32211) on reports and certificate, all the models are identical schematics. Only named differently due to different combination, for details as below:

Model No	Model description
32201	1 Monitor Unit + 1 Camera Unit
32209	1 Monitor Unit + 2 Camera Unit
32206	Additional Camera Unit
32203	1 Monitor Unit + 1 Camera Unit
32211	1 Monitor Unit + 2 Camera Unit

No other changes are made to them.

We confirm that all information above is true, and we'll be responsible for all the consequences. Please contact me if you have any question.

Sincerely,

Signature:

A handwritten signature in blue ink, appearing to be 'Raj Jain'.

Raj Jain  
President

**\*\*\*\*\* END OF REPORT \*\*\*\*\***