



# FCC PART 15C TEST REPORT No.25T04Z100116-005

for

**Guangdong OPPO Mobile Telecommunications Corp., Ltd.**

**Mobile Phone**

**CPH2735**

**FCC ID:R9C-OP24314**

with

**Hardware Version: 11**

**Software Version: ColorOS 15.0**

**Issued Date: 2025-02-24**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

**Test Laboratory:**

**CTTL-Telecommunication Technology Labs, CAICT**

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)

## **REPORT HISTORY**

Report Number	Revision	Description	Issue Date
25T04Z100116-005	Rev.0	1st edition	2025-02-24

Note: the latest revision of the test report supersedes all previous version.

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>5</b>
1.1. INTRODUCTION & ACCREDITATION .....	5
1.2. TESTING LOCATION .....	5
1.3. TESTING ENVIRONMENT .....	6
1.4. PROJECT DATE .....	6
1.5. SIGNATURE .....	6
<b>2. CLIENT INFORMATION .....</b>	<b>7</b>
2.1. APPLICANT INFORMATION .....	7
2.2. MANUFACTURER INFORMATION .....	7
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>8</b>
3.1. ABOUT EUT .....	8
3.2. INTERNAL IDENTIFICATION OF EUT .....	8
3.3. INTERNAL IDENTIFICATION OF AE .....	8
3.4. GENERAL DESCRIPTION .....	9
3.5. INTERPRETATION OF THE TEST ENVIRONMENT .....	9
<b>4. REFERENCE DOCUMENTS .....</b>	<b>9</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	9
4.2. REFERENCE DOCUMENTS FOR TESTING .....	9
<b>5. LABORATORY ENVIRONMENT .....</b>	<b>10</b>
<b>6. TEST RESULTS .....</b>	<b>10</b>
6.1. SUMMARY OF TEST RESULTS .....	10
6.2. STATEMENTS .....	10
6.3. TEST CONDITIONS .....	10
<b>7. TEST FACILITIES UTILIZED .....</b>	<b>11</b>
<b>8. MEASUREMENT UNCERTAINTY .....</b>	<b>12</b>
8.1. MAXIMUM OUTPUT POWER .....	12
8.2. PEAK POWER SPECTRAL DENSITY .....	12
8.3. DTS 6-DB SIGNAL BANDWIDTH .....	12
8.4. BAND EDGES COMPLIANCE .....	12
8.5. TRANSMITTER SPURIOUS EMISSION .....	12
8.6. RADIATED UNWANTED EMISSION .....	12
8.7. AC POWER-LINE CONDUCTED EMISSION .....	12
<b>ANNEX A: DETAILED TEST RESULTS .....</b>	<b>13</b>
<b>A.1. MEASUREMENT METHOD .....</b>	<b>13</b>
<b>A.2. MAXIMUM OUTPUT POWER .....</b>	<b>14</b>

A.2.1 ANTENNA GAIN .....	14
A.2.2. PEAK OUTPUT POWER-CONDUCTED .....	14
<b>A.3. PEAK POWER SPECTRAL DENSITY .....</b>	<b>16</b>
<b>A.4. DTS 6-DB SIGNAL BANDWIDTH .....</b>	<b>23</b>
<b>A.5. BAND EDGES COMPLIANCE .....</b>	<b>30</b>
<b>A.6. TRANSMITTER SPURIOUS EMISSION .....</b>	<b>35</b>
A.6.1 TRANSMITTER SPURIOUS EMISSION – CONDUCTED .....	35
<b>A.7. RADIATED UNWANTED EMISSION .....</b>	<b>55</b>
<b>A.8. AC POWER-LINE CONDUCTED EMISSION .....</b>	<b>69</b>
<b>A.9. ANTENNA REQUIREMENT .....</b>	<b>73</b>
<b>ANNEX B: EUT PARAMETERS .....</b>	<b>73</b>
<b>ANNEX C: ACCREDITATION CERTIFICATE .....</b>	<b>73</b>

## **1. Test Laboratory**

### **1.1.Introduction & Accreditation**

**Telecommunication Technology Labs, CAICT** is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website.

### **1.2.Testing Location**

Location 1:CTTL(Huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191

Location 2:CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
100191, P. R. China

### **1.3. Testing Environment**

Normal Temperature: 15-35°C  
Relative Humidity: 20-75%

### **1.4. Project date**


Testing Start Date: 2025-01-20  
Testing End Date: 2025-02-24

### **1.5. Signature**



---

Yao Xingyu  
(Prepared this test report)



---

Zheng Wei  
(Reviewed this test report)



---

Pang Shuai  
(Approved this test report)

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: Guangdong OPPO Mobile Telecommunications Corp., Ltd.  
Address: NO.18 HaiBin Road, Wusha Village, Chang'an Town, DongGuan City,  
Guangdong Province, P.R. China  
City: DongGuan  
Postal Code: /  
Country: China  
Telephone: (86)76986076999  
Fax: /

### **2.2. Manufacturer Information**

Company Name: Guangdong OPPO Mobile Telecommunications Corp., Ltd.  
Address: NO.18 HaiBin Road, Wusha Village, Chang'an Town, DongGuan City,  
Guangdong Province, P.R. China  
City: DongGuan  
Postal Code: /  
Country: China  
Telephone: (86)76986076999  
Fax: /

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	Mobile Phone
Model name	CPH2735
FCC ID	R9C-OP24314
With WLAN Function	Yes
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation	DSSS/CCK/OFDM
Number of Channels	11
Antenna	Integral Antenna
MAX Conducted Power	25.42dBm
Normal Voltage	3.92V
Extreme High Voltage	4.54V
Extreme Low Voltage	3.41V

#### **3.2. Internal Identification of EUT**

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
UT08a	862170070019813/ 862170070019805	11	ColorOS 15.0	2025-01-22
UT03a	862170070019656/ 862170070019649	11	ColorOS 15.0	2025-01-20
UT04a	862170070019631/ 862170070019623	11	ColorOS 15.0	2025-01-20

\*EUT ID: is used to identify the test sample in the lab internally.

UT08a is used for Conduction test, UT03a and UT04a is used for Radiation test.

#### **3.3. Internal Identification of AE**

AE ID*	Description	Model	Manufacturer
AE1	Battery1	BLPC21	Dongguan NVT Technology Co., Ltd
AE2	Battery2	BLPC21	SUNWODA Electronic Co.,Ltd.
AE3	Charger1	VCB4JAUH	Huizhou Golden Lake Industrial Co., Ltd.
AE4	USB Cable1	DL154	Guangdong OPPO Mobile Telecommunications Corp., Ltd.

\*AE ID: is used to identify the test sample in the lab internally.



### **3.4. General Description**

The Equipment under Test (EUT) is a model of Mobile Phone with integrated antenna and inbuilt battery.

It consists of normal options: travel charger, USB cable.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

### **3.5. Interpretation of the Test Environment**

For the test methods, the test environment uncertainty figures correspond to an expansion factor  $k=2$ .

Measurement Uncertainty

Parameter	Uncertainty
temperature	0.48°C
humidity	2 %
DC voltages	0.003V

## **4. Reference Documents**

### **4.1. Documents supplied by applicant**

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

### **4.2. Reference Documents for testing**

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C:	2021
	15.205 Restricted bands of operation;	
	15.209 Radiated emission limits, general requirements;	
ANSI C63.10	15.247 Operation within the bands 902-928MHz, 2400-2483.5 MHz, and 5725-5850 MHz.	2013
	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	
	Federal Communications Commission Office of Engineering and Technology Laboratory Division	
KDB 558074 D01	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES	2019

Note: KDB 558074 D01 is not in the scope of ISO/IEC 17025 accreditation by A2LA.

## 5. LABORATORY ENVIRONMENT

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

## 6. Test Results

### 6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247 (b)	/	P
Peak Power Spectral Density	15.247 (e)	/	P
DTS 6-dB Signal Bandwidth	15.247 (a)	/	P
Band Edges Compliance	15.247 (d)	/	P
Transmitter Spurious Emission - Conducted	15.247 (d)	/	P
Radiated Unwanted Emission	15.247, 15.205, 15.209	/	P
AC Powerline Conducted Emission	15.107, 15.207	/	P

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NP	Not Perform, The test was not performed by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

### 6.2. Statements

CTTL has evaluated the test cases as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.

This report only deals with the WLAN function among the features described in section 3.

### 6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	26°C
Voltage	3.92V
Humidity	44%

## 7. Test Facilities Utilized

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2025-08-11
2	Vector Signal Analyzer	FSW67	104051	Rohde & Schwarz	1 year	2025-04-30
3	LISN	ENV216	101200	Rohde & Schwarz	1 year	2025-05-16
4	Test Receiver	ESCI	100344	Rohde & Schwarz	1 year	2025-04-01
5	Attenuator	10dB/2W	/	Rosenberger	/	/
6	Shielding Room	S81	/	ETS-Lindgren	/	/
7	Data Acquisition Unit	U2531A	TW54433522	Agilent	/	/
8	Power Sensor	U2021XA	MY54460006	Agilent	1 year	2025-06-15

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESW44	103023	Rohde & Schwarz	1 year	2025-06-06
2	EMI Antenna	VULB9163	01222	Schwarzbeck	1 year	2025-09-11
3	EMI Antenna	3115	00167250	ETS-Lindgren	1 year	2025-04-11
4	EMI Antenna	3116	2663	ETS-Lindgren	1 year	2025-02-21

### Test Software

Test Item	Test Software and Version	Software Vendor
Radiated Continuous Emission	EMC32 V10.60.20	R&S
Conducted Emission	EMC32 V8.53.0	R&S

## 8. Measurement Uncertainty

### 8.1. Maximum Output Power

Measurement Uncertainty: 0.387dB,k=1.96

### 8.2. Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

### 8.3. DTS 6-dB Signal Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

### 8.4. Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

### 8.5. Transmitter Spurious Emission

Conducted (k=1.96)

Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

### 8.6. Radiated Unwanted Emission

Frequency Range	Uncertainty(dB) k=2
9kHz-30MHz	4.92
$30\text{MHz} \leq f \leq 1\text{GHz}$	4.72
$1\text{GHz} \leq f \leq 18\text{GHz}$	4.84
$18\text{GHz} \leq f \leq 40\text{GHz}$	5.12

### 8.7. AC Power-line Conducted Emission

Measurement Uncertainty : 3.08dB,k=2

## **ANNEX A: Detailed Test Results**

### **A.1. Measurement Method**

#### **A.1.1. Conducted Measurements**


Connect the EUT to the test system as Fig.A.1.1.1 shows.

Set the EUT to the required work mode.

Set the EUT to the required channel.

Set the Vector Signal Analyzer and start measurement.

Record the values. Vector Signal Analyzer

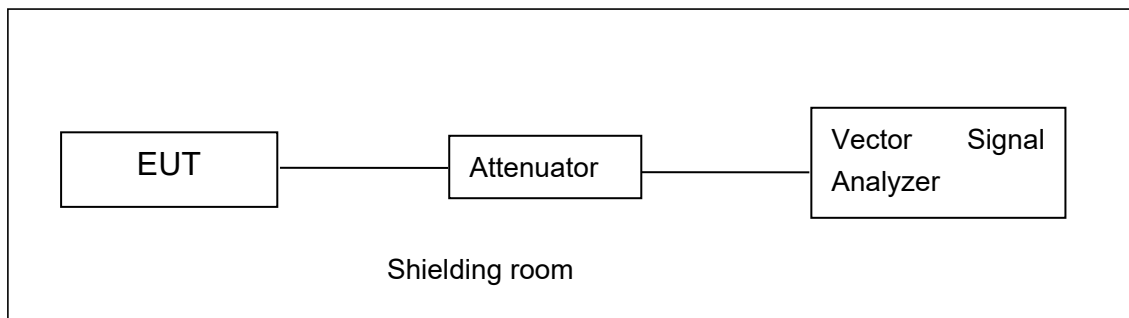

**Fig.A.1.1.1: Test Setup Diagram for Conducted Measurements**

#### **A.1.2. Radiated Emission Measurements**

The measurement is made according to ANSI C63.10

The radiated emission test is performed in semi-anechoic chamber. The EUT was placed on a non-conductive table with 80cm above the ground plane for measurement below 1GHz and 1.5m above the ground plane for measurement above 1GHz. The measurement antenna was placed at a distance of 3 meters from the EUT. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated from 0° to 360° and the measurement antenna is moved from 1m to 4m to get the maximization result. The maximization process was repeated with the EUT positioned in each of its three orthogonal orientations

## **A.2. Maximum Output Power**

**Method of Measurement: See ANSI C63.10-2013-clause 11.9.1.3**

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

**Measurement Limit:**

Standard	Limit (dBm)
FCC CRF Part 15.247(b)	< 30

### **A.2.1 Antenna Gain**

Antenna gain is 0.3dBi and the value is supplied by the applicant or manufacturer.

### **A.2.2. Peak Output Power-conducted**

**EUT ID: UT08a**

**Measurement Results:**

**802.11b/g mode**

Mode	Data Rate (Mbps)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11b	1	20.21	19.96	20.50
802.11g	6	24.63	25.41	24.47

The data rate 1Mbps and 6Mbps are selected as worst condition, and the following cases are performed with this condition.

**802.11n-HT20 mode**

Mode	Data Rate (Index)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11n (20MHz)	MCS0	23.87	25.38	23.66

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

### 802.11n-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		2422MHz (Ch3)	2437MHz (Ch6)	2452 MHz (Ch9)
802.11n (40MHz)	MCS0	22.86	25.42	22.91

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

The duty cycle of all mode

TestMode	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11B	2412	8.39	8.41	99.76
	2437	8.39	8.42	99.64
	2462	8.39	8.41	99.76
11G	2412	1.39	1.43	97.20
	2437	1.39	1.42	97.89
	2462	1.39	1.43	97.20
11N20SISO	2412	1.30	1.34	97.01
	2437	1.30	1.34	97.01
	2462	1.30	1.33	97.74
11N40SISO	2422	0.63	0.67	94.03
	2437	0.64	0.68	94.12
	2452	0.64	0.67	95.52



### Duty cycle

**Conclusion: Pass**

### **A.3. Peak Power Spectral Density**

**Method of Measurement: See ANSI C63.10-2013-clause 11.10.2**

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to RBW = 3 kHz.
- d) Set the VBW = 10 kHz.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.

**Measurement Limit:**

Standard	Limit
FCC CRF Part 15.247(e)	< 8 dBm/3 kHz

**EUT ID: UT08a**

**Measurement Results:**

TestMode	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	2412	-4.00	≤8.00	PASS
	2437	-4.73	≤8.00	PASS
	2462	-4.33	≤8.00	PASS
11G	2412	-9.67	≤8.00	PASS
	2437	-7.72	≤8.00	PASS
	2462	-10.00	≤8.00	PASS
11N20SISO	2412	-10.93	≤8.00	PASS
	2437	-7.61	≤8.00	PASS
	2462	-10.93	≤8.00	PASS
11N40SISO	2422	-15.86	≤8.00	PASS
	2437	-10.51	≤8.00	PASS
	2452	-15.27	≤8.00	PASS



Test graphs as below:

11B\_2412



11B\_2437




11B\_2462




16:47:29 22.01.2025

11G\_2412

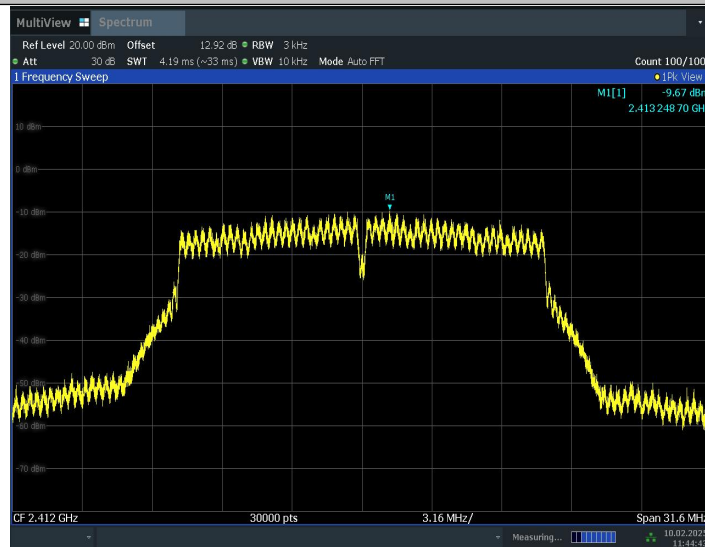


11:44:44 10.02.2025

11G\_2437

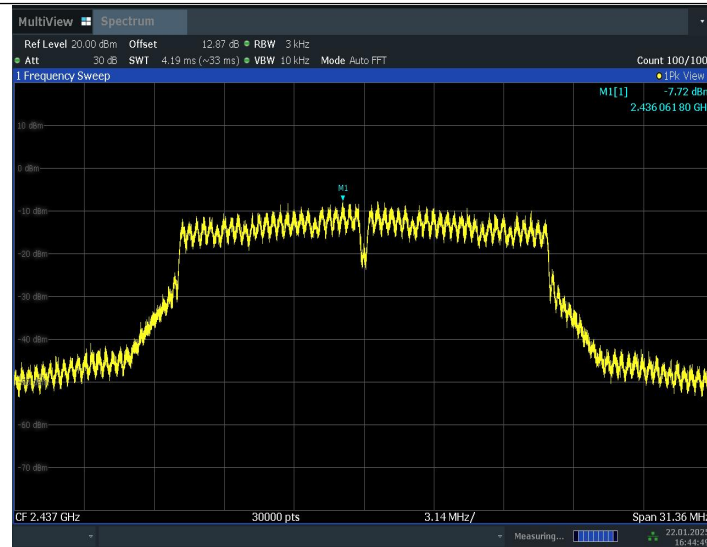


16:44:50 22.01.2025

11G\_2462

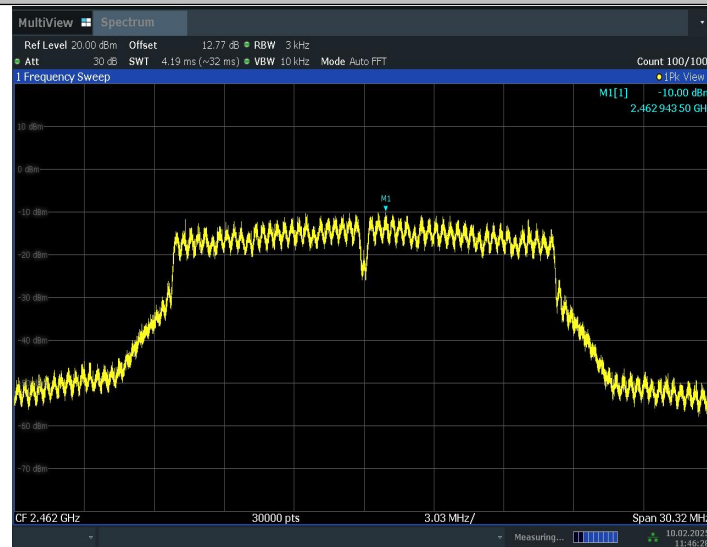


11:46:28 10.02.2025

11N20SISO\_2412

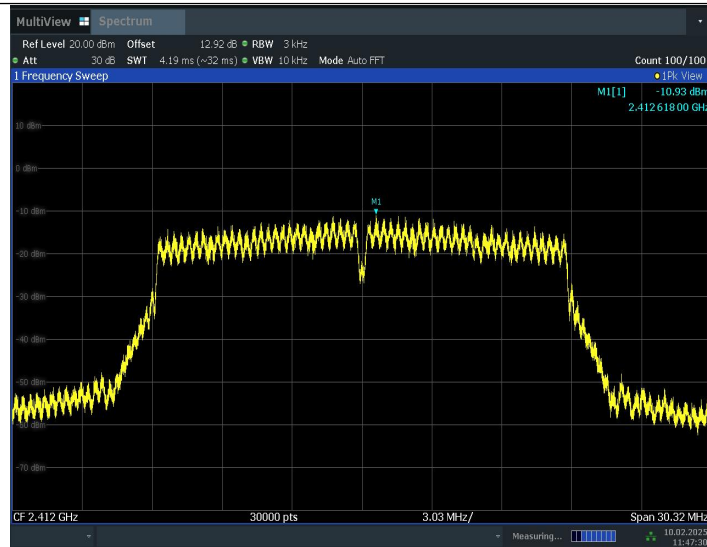


11:47:30 10.02.2025

11N20SISO\_2437

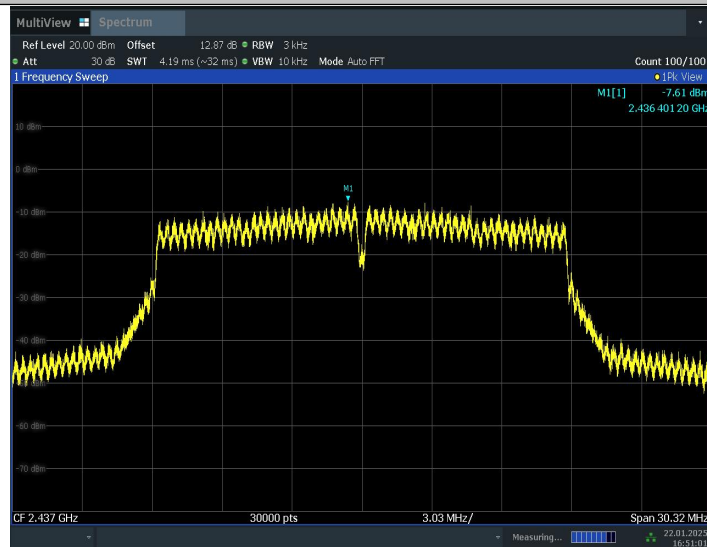


16:51:02 22.01.2025

11N20SISO\_2462

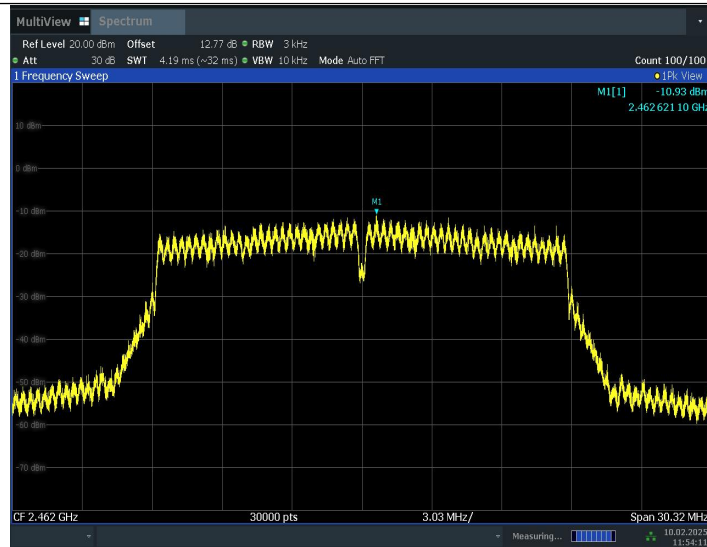


11:54:11 10.02.2025

11N40SISO\_2422

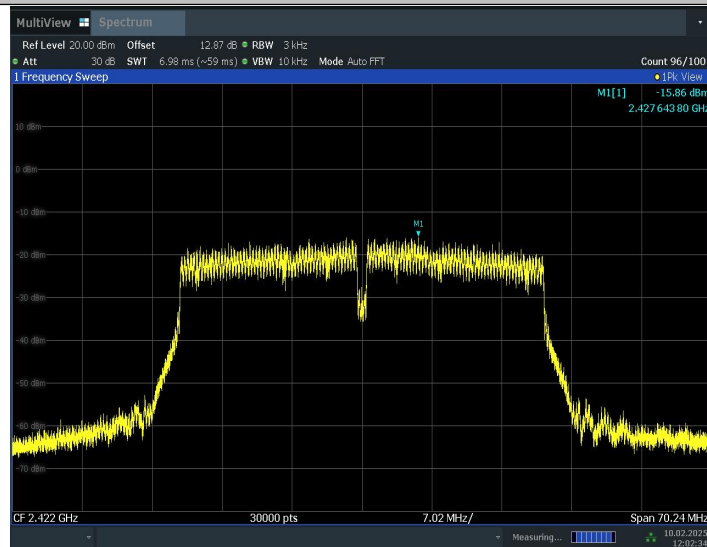


12:02:35 10.02.2025

11N40SISO\_2437

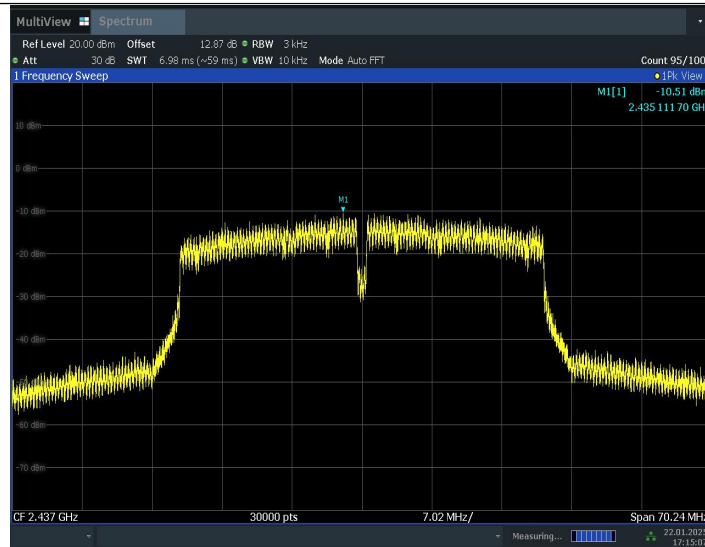

17:15:08 22.01.2025

11N40SISO\_2452

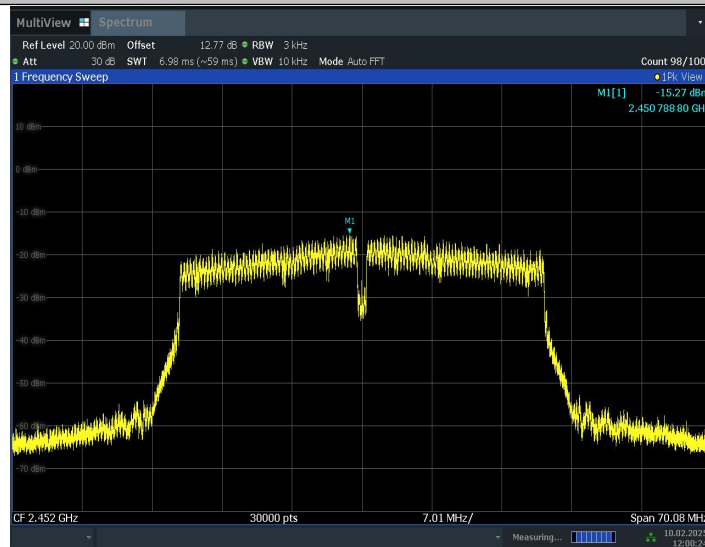

12:00:25 10.02.2025

Conclusion: Pass

#### **A.4. DTS 6-dB Signal Bandwidth**

**Method of Measurement: See ANSI C63.10-2013 section 11.8.1.**

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) = 300 kHz.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**Measurement Limit:**

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	≥ 500

**EUT ID: UT08a**

**Measurement Result:**

TestMode	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	2412	8.04	2407.48	2415.52	0.5	PASS
	2437	8.04	2432.96	2441.00	0.5	PASS
	2462	8.52	2457.48	2466.00	0.5	PASS
11G	2412	15.80	2404.08	2419.88	0.5	PASS
	2437	15.68	2429.08	2444.76	0.5	PASS
	2462	15.16	2454.40	2469.56	0.5	PASS
11N20SISO	2412	15.16	2404.40	2419.56	0.5	PASS
	2437	15.16	2429.40	2444.56	0.5	PASS
	2462	15.16	2454.40	2469.56	0.5	PASS
11N40SISO	2422	35.12	2404.40	2439.52	0.5	PASS
	2437	35.12	2419.40	2454.52	0.5	PASS
	2452	35.04	2434.48	2469.52	0.5	PASS

Test graphs as below:

11B\_2412



16:41:08 22.01.2025

11B\_2437



16:37:27 22.01.2025

11B\_2462






16:39:19 22.01.2025

11G\_2412




11:40:54 10.02.2025

11G\_2437

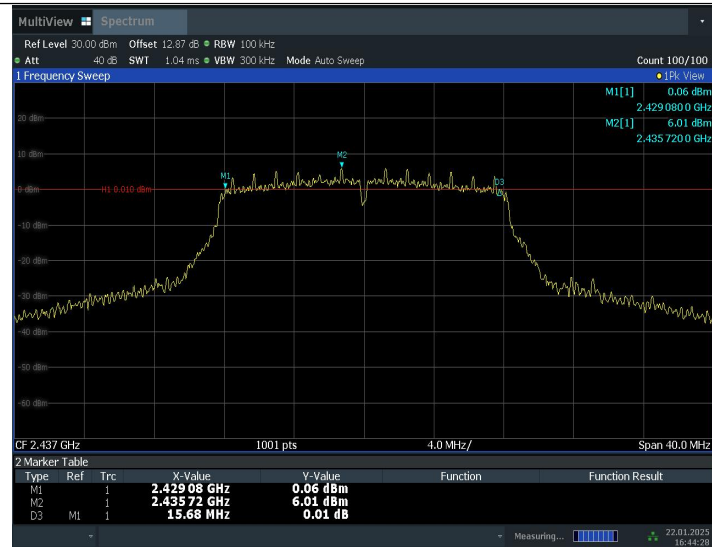


16:44:29 22.01.2025

11G\_2462

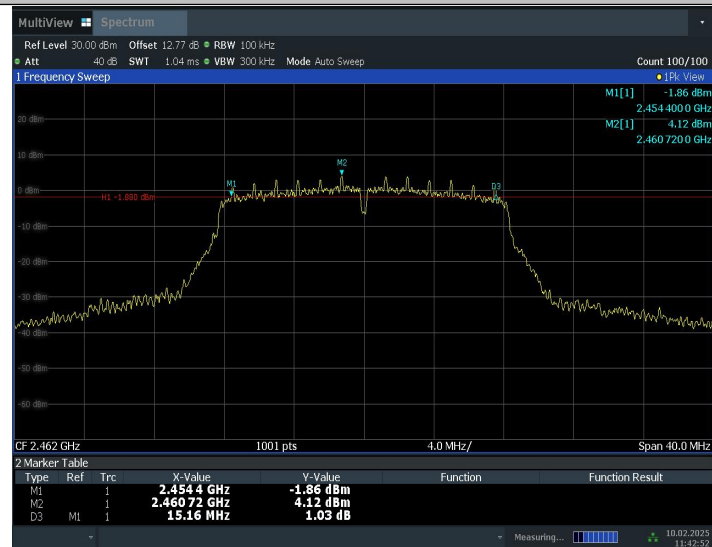


11:42:53 10.02.2025

11N20SISO\_2412

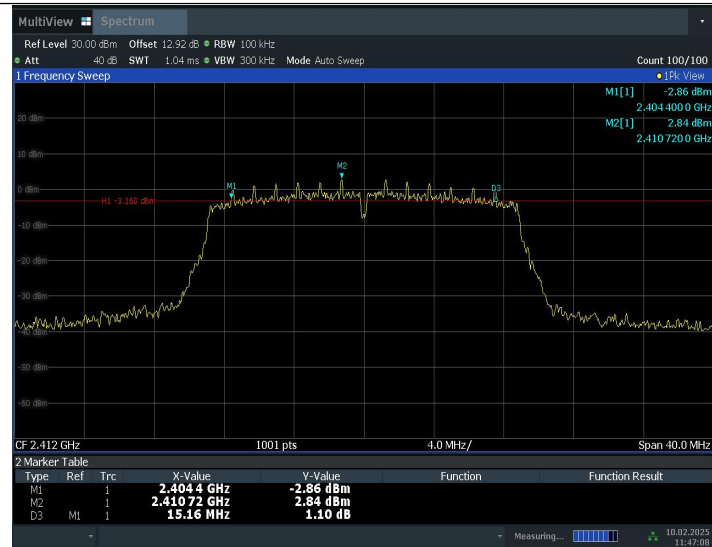


11:47:09 10.02.2025

11N20SISO\_2437

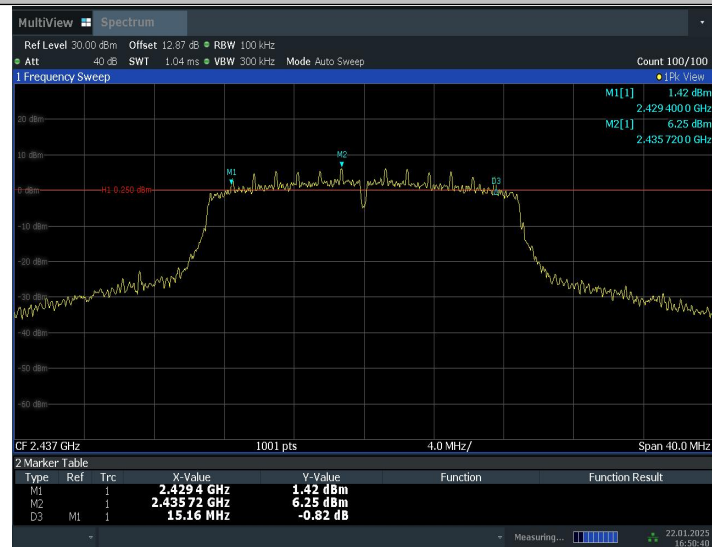


16:50:41 22.01.2025

11N20SISO\_2462

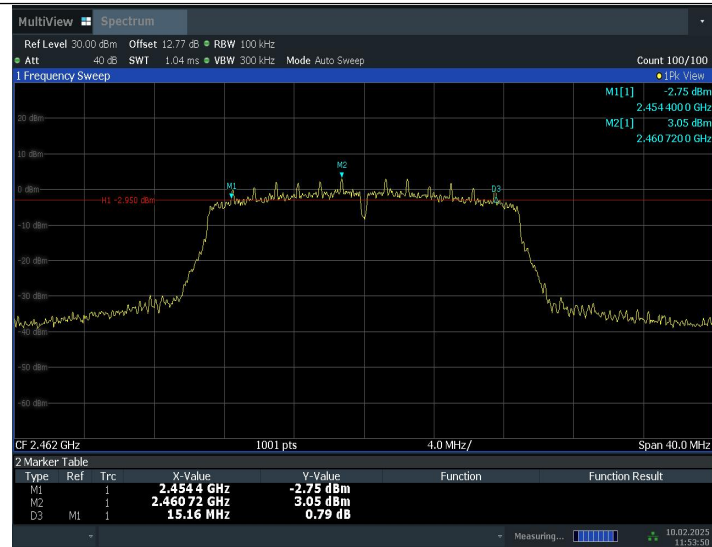


11:53:50 10.02.2025

11N40SISO\_2422

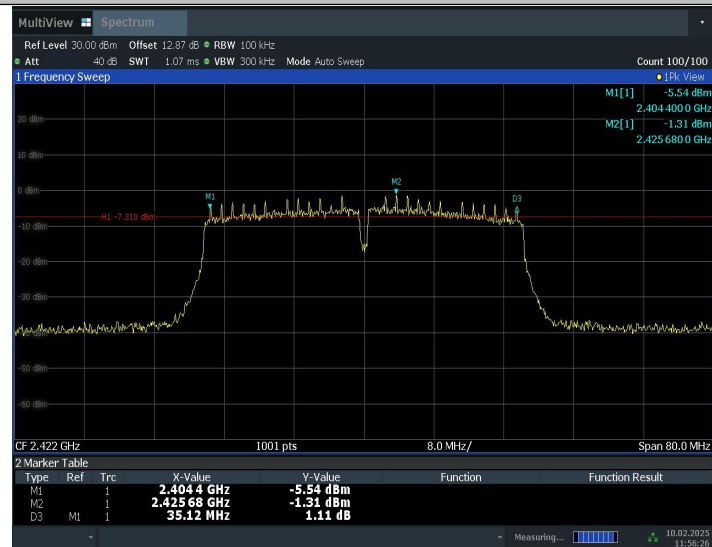

11:56:27 10.02.2025

11N40SISO\_2437

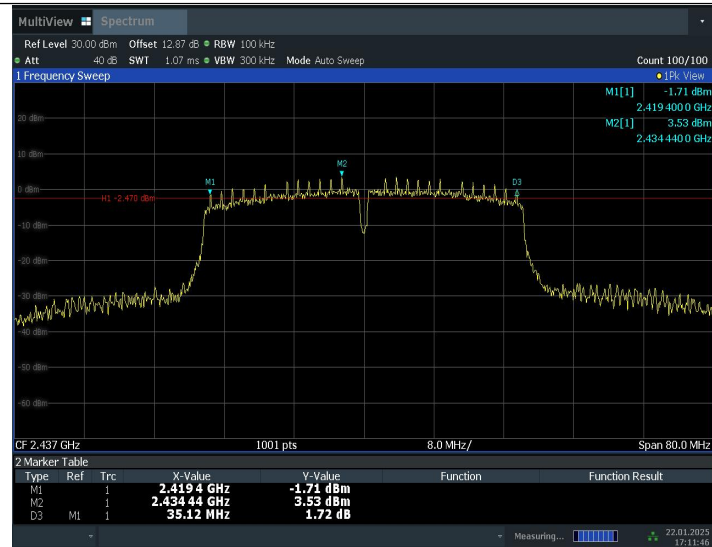

17:11:46 22.01.2025

11N40SISO\_2452



12:00:04 10.02.2025

Conclusion: Pass

## A.5. Band Edges Compliance

### Method of Measurement: See ANSI C63.10-2013-clause 6.10.4

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below.

- a) Set Span = 100MHz
- b) Sweep Time: coupled
- c) Set the RBW= 100 kHz
- c) Set the VBW= 300 kHz
- d) Detector: Peak
- e) Trace: Max hold

### Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

EUT ID: UT08a

### Measurement Result:

TestMode	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Low	2412	9.27	-36.3	≤-10.73	PASS
	High	2462	9.41	-46.38	≤-10.59	PASS
11G	Low	2412	3.62	-31.51	≤-16.38	PASS
	High	2462	3.93	-44.64	≤-16.07	PASS
11N20SISO	Low	2412	2.71	-30.53	≤-17.29	PASS
	High	2462	3.02	-44.95	≤-16.98	PASS
11N40SISO	Low	2422	-1.28	-38.62	≤-21.28	PASS
	High	2452	-0.24	-41.89	≤-20.24	PASS


Test graphs as below:

11B_Low_2412
--------------



16:35:57 22.01.2025

## 11B\_High\_2462

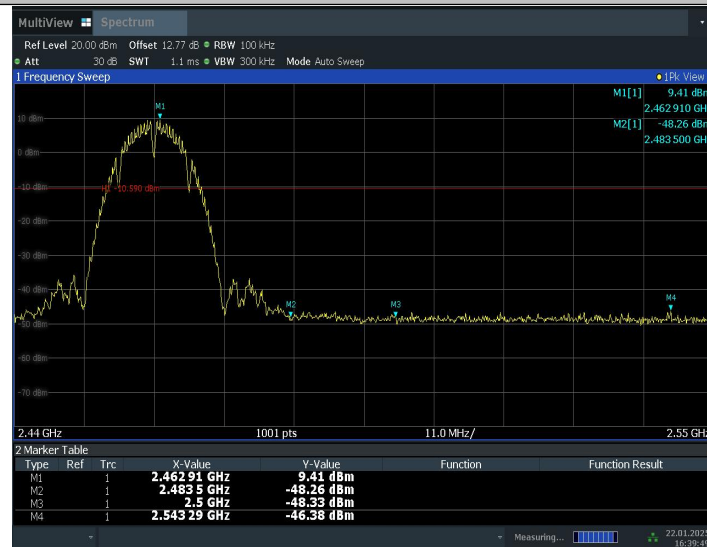


16:39:50 22.01.2025

## 11G\_Low\_2412



11:41:25 10.02.2025

### 11G\_High\_2462

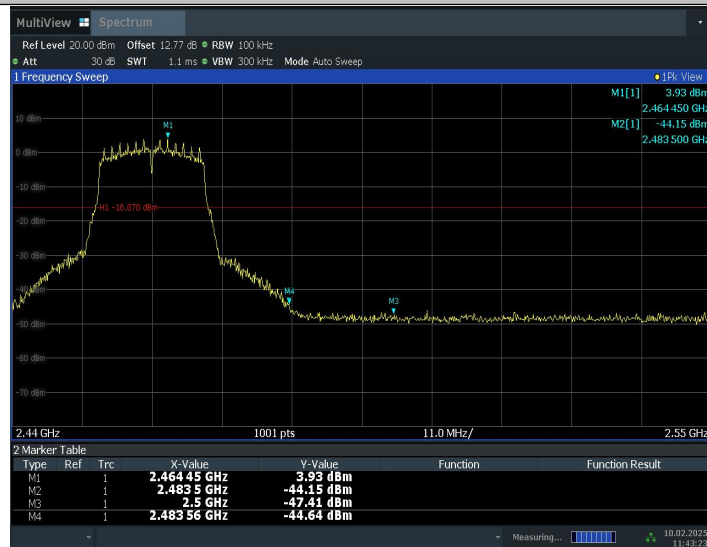

11:43:24 10.02.2025

### 11N20SISO\_Low\_2412





11:47:40 10.02.2025

## 11N20SISO\_High\_2462



11:54:21 10.02.2025

## 11N40SISO\_Low\_2422



11:56:58 10.02.2025

### 11N40SISO\_High\_2452



12:00:35 10.02.2025

**Conclusion: Pass**

## **A.6. Transmitter Spurious Emission**

### **A.6.1 Transmitter Spurious Emission – Conducted**

#### **Method of Measurement: See ANSI C63.10-2013-clause 11.11**

Establish a reference level by using the following procedure:

- Set instrument center frequency to DTS channel center frequency
- Set the span to  $\geq 1.5$  times the DTS bandwidth
- Set the RBW= 100 kHz
- Set the VBW= 300 kHz
- Detector = Peak
- Sweep time = auto couple
- Trace mode = max hold
- Allow trace to fully stabilize
- Use the peak marker function to determine the maximum PSD level

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Establish an emission level by using the following procedure:

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW = 300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

#### **Measurement Limit:**

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

#### **EUT ID: UT08a**


#### **Measurement Results:**

TestMode	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	2412	Reference	9.87	9.87	---	PASS
		30~1000	9.87	-56.1	$\leq -10.13$	PASS
		1000~26500	9.87	-40.14	$\leq -10.13$	PASS
	2437	Reference	9.15	9.15	---	PASS
		30~1000	9.15	-56.75	$\leq -10.85$	PASS


	2462	1000~26500	9.15	-42.79	$\leq -10.85$	PASS
		Reference	9.47	9.47	---	PASS
		30~1000	9.47	-56.91	$\leq -10.53$	PASS
		1000~26500	9.47	-41.39	$\leq -10.53$	PASS
11G	2412	Reference	4.25	4.25	---	PASS
		30~1000	4.25	-54.23	$\leq -15.75$	PASS
		1000~26500	4.25	-44.45	$\leq -15.75$	PASS
	2437	Reference	6.65	6.65	---	PASS
		30~1000	6.65	-56.82	$\leq -13.35$	PASS
		1000~26500	6.65	-43.89	$\leq -13.35$	PASS
	2462	Reference	4.19	4.19	---	PASS
		30~1000	4.19	-56.55	$\leq -15.81$	PASS
		1000~26500	4.19	-43.76	$\leq -15.81$	PASS
11N20SISO	2412	Reference	3.29	3.29	---	PASS
		30~1000	3.29	-57	$\leq -16.71$	PASS
		1000~26500	3.29	-43.72	$\leq -16.71$	PASS
	2437	Reference	6.37	6.37	---	PASS
		30~1000	6.37	-56.75	$\leq -13.63$	PASS
		1000~26500	6.37	-44.32	$\leq -13.63$	PASS
	2462	Reference	3.16	3.16	---	PASS
		30~1000	3.16	-56.43	$\leq -16.84$	PASS
		1000~26500	3.16	-44.01	$\leq -16.84$	PASS
11N40SISO	2422	Reference	-1.31	-1.31	---	PASS
		30~1000	-1.31	-56.68	$\leq -21.31$	PASS
		1000~26500	-1.31	-44.21	$\leq -21.31$	PASS
	2437	Reference	3.77	3.77	---	PASS
		30~1000	3.77	-56.77	$\leq -16.23$	PASS
		1000~26500	3.77	-43.31	$\leq -16.23$	PASS
	2452	Reference	-0.24	-0.24	---	PASS
		30~1000	-0.24	-55.48	$\leq -20.24$	PASS
		1000~26500	-0.24	-44.12	$\leq -20.24$	PASS

Test graphs as below:


11B\_2412\_0~Reference

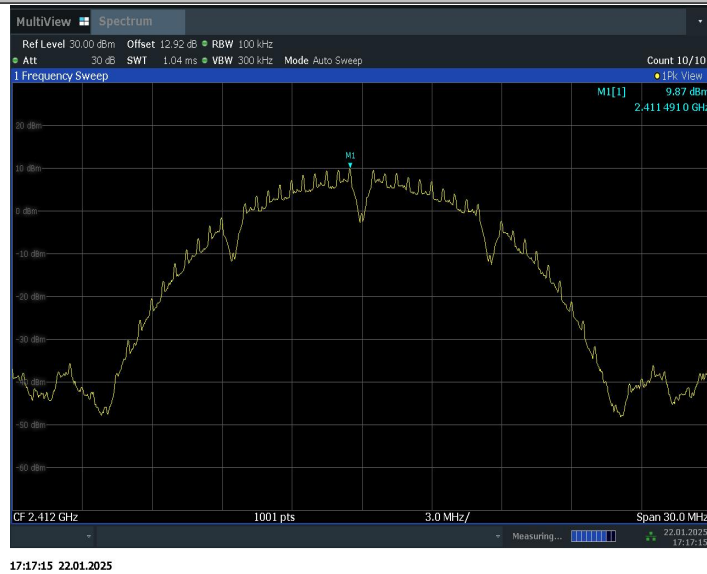

11B\_2412\_30~1000

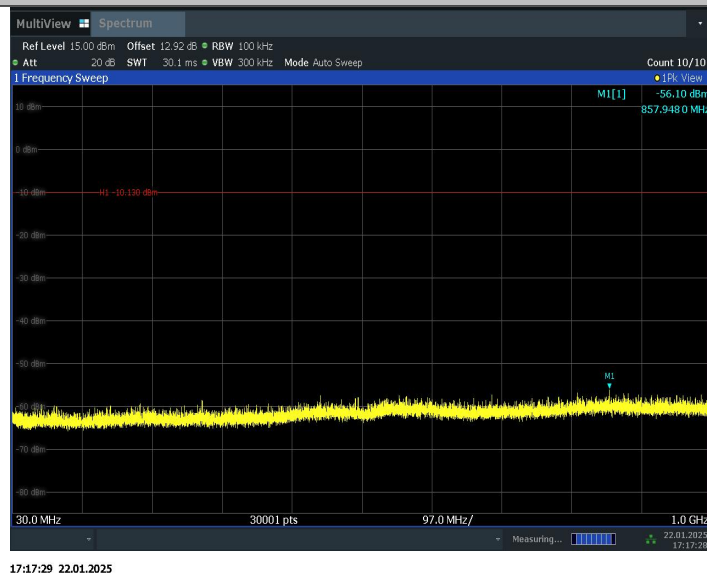


11B\_2412\_1000~26500

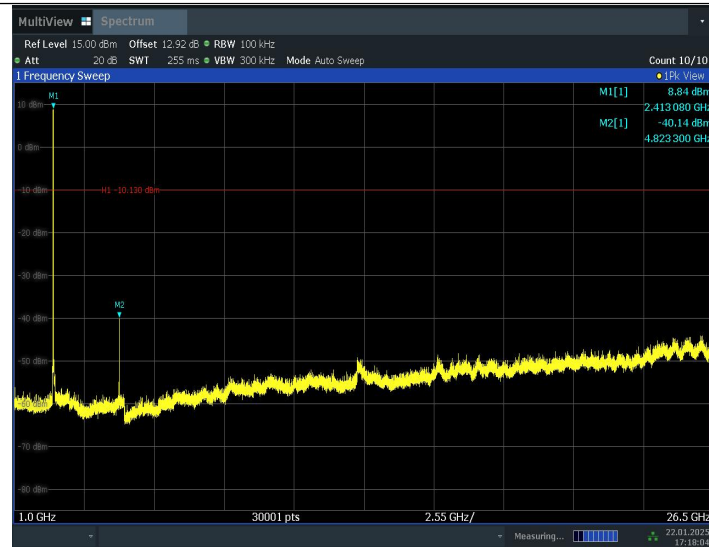


17:18:05 22.01.2025

11B\_2437\_0~Reference

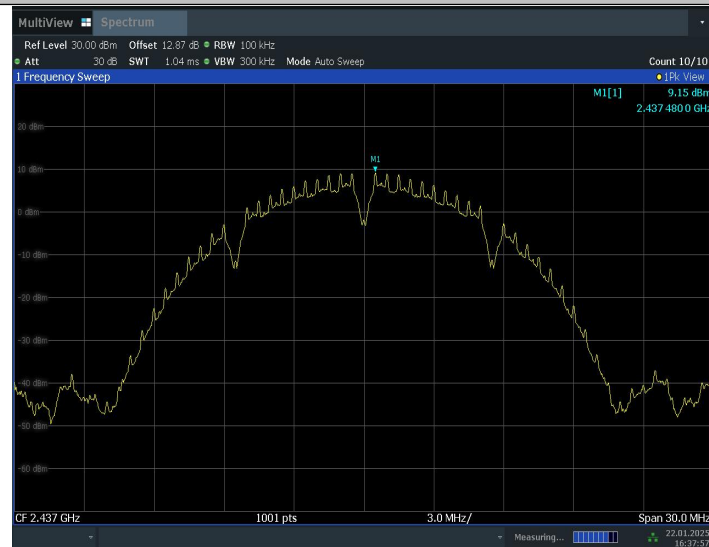


16:37:57 22.01.2025

11B\_2437\_30~1000

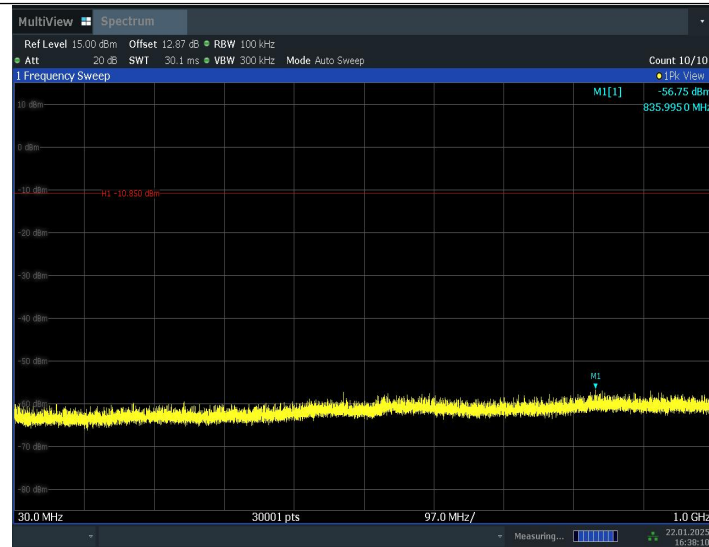


16:38:10 22.01.2025

11B\_2437\_1000~26500

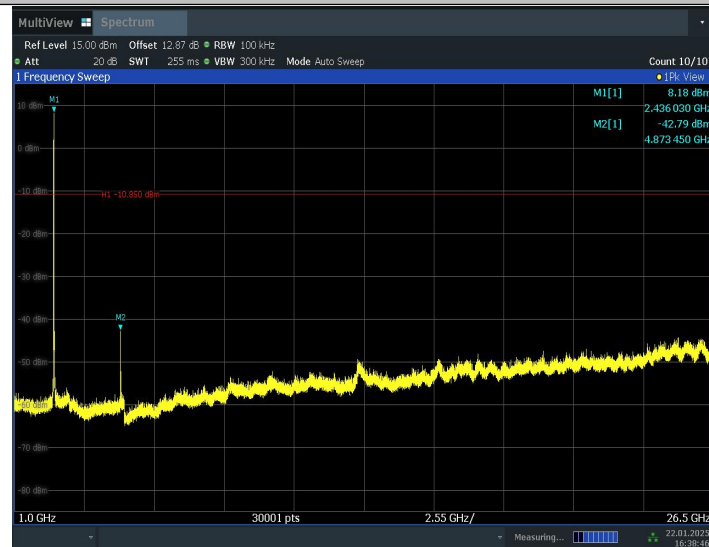


16:38:47 22.01.2025

11B\_2462\_0~Reference

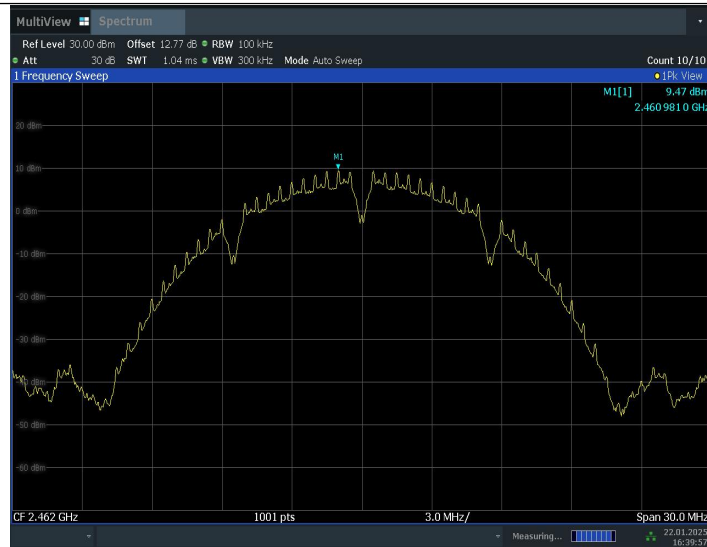

16:39:58 22.01.2025

11B\_2462\_30~1000

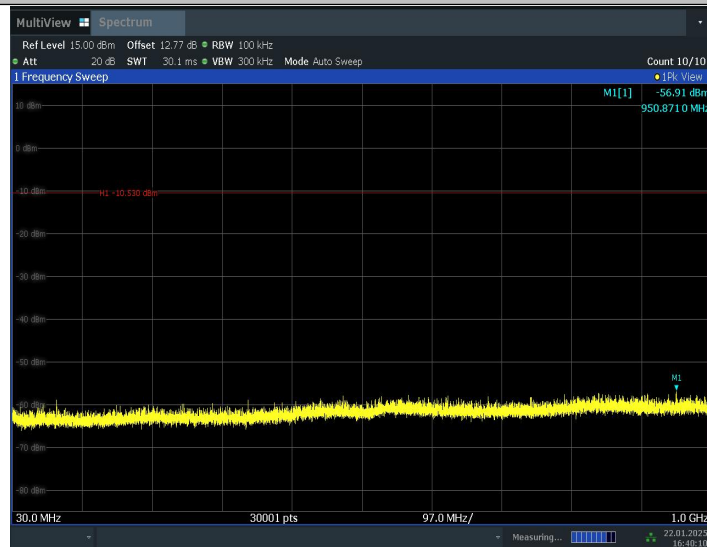

16:40:11 22.01.2025

11B\_2462\_1000~26500