



EMC TEST REPORT

Report No. : EME-021514
Model No. : LM-WP210RB
Issued Date : Jan. 10, 2003

Applicant : DELTA NETWORKS, INC.
252, Shang Ying Road, Kuei San Taoyuan Hsien 333,
Taiwan, R.O.C.

Test By : Intertek Testing Services Taiwan Ltd.
No. 11, Ko-Tze-Nan Chia-Tung Li, Shiang-Shan District,
Hsinchu, Taiwan, R.O.C.

This test report consists of 37 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of ITS Laboratory. The test result in this report only applies to the tested sample.

Project Engineer

Jerry Liu

Reviewed By

Elton Chen



Table of Contents

Summary of Tests	4
1. General information.....	5
1.1 Identification of the EUT.....	5
1.2 Additional information about the EUT.....	5
1.3 Antenna description.....	6
1.4 Peripherals equipment	6
2. Test specifications.....	7
2.1 Test standard	7
2.2 Operation mode	7
2.4 Test equipment.....	8
3. Minimum 6dB Bandwidth test	9
3.1 Operating environment.....	9
3.2 Test setup & procedure	9
3.3 Measured data of Minimum 6dB Bandwidth test results	9
4. Maximum Output Power test.....	10
4.1 Operating environment.....	10
4.2 Test setup & procedure	10
4.3 Measured data of Maximum Output Power test results	10
5. RF Antenna Conducted Spurious test.....	11
5.1 Operating environment.....	11
5.2 Test setup & procedure	11
5.3 Measured data of the highest RF Antenna Conducted Spurious test result.....	11
6. Radiated Emission test	12
6.1 Operating environment.....	12
6.2 Test setup & procedure	12
6.3 Emission limits	13
6.4 Radiated spurious emission test data	14
6.4.1 Measurement results: frequencies equal to or less than 1 GHz.....	14
6.4.2 Measurement results: frequency above 1GHz.....	20
7. Power Spectrum Density test.....	32
7.1 Operating environment.....	32
7.2 Test setup & procedure	32



Intertek Testing Services

ETL SEMKO

FCC ID. : PD5LMWP210RB

Report No.: EME-021514

Page 3 of 37

7.3 Measured data of Power Spectrum Density test results	32
8. Emission on the band edge §FCC 15.247(C)	33
9. Power Line Conducted Emission test §FCC 15.207	34
9.1 Operating environment	34
9.2 Test setup & procedure	34
9.3 Power Line Conducted Emission test data	35



Intertek Testing Services

ETL SEMKO

FCC ID. : PD5LMWP210RB

Report No.: EME-021514

Page 4 of 37

Summary of Tests

Wireless PCMCIA card-Model: LM-WP210RB

FCC ID: PD5LMWP210RB

Test	Reference	Results
Minimum 6dB Bandwidth test	15.247(a)(2)	Complies
Maximum Output Power test	15.247(b)	Complies
RF Antenna Conducted Spurious test	15.247(c)	Complies
Radiated Spurious Emission test	15.205, 15.209	Complies
Power Spectrum Density test	15.247(d)	Complies
Power Line Conducted Emission test	15.207	Complies



Intertek Testing Services

ETL SEMKO

FCC ID. : PD5LMWP210RB

Report No.: EME-021514

Page 5 of 37

1. General information

1.1 Identification of the EUT

Manufacturer	: DELTA NETWORKS, INC.
Product	: Wireless PCMCIA card
Model No.	: LM-WP210RB
FCC ID.	: PD5LMWP210RB
Frequency Range	: 2412MHz to 2462MHz
Channel Number	: 11
Frequency of Each Channel	: 2412MHz, 2417MHz, 2422MHz, 2427MHz, 2432MHz, 2437MHz, 2442MHz, 2447MHz, 2452MHz, 2457MHz, 2462MHz
Type of Modulation	: CCK (11Mbps, 5.5Mbps), DQPSK (2Mbps), DBPSK (1Mbps)
Power Supply	: 5Vdc from Notebook
Power Cord	: N/A
Sample Received	: Dec. 16, 2002
Test Date(s)	: Dec. 19, 2002 to Jan. 3, 2003

A FCC DoC report has been generated for the client.

1.2 Additional information about the EUT

The Wireless PCMCIA card helps user create a wireless network for sharing user's broadband cable or DSL internet access among multiple PCs in and around user's home or office. It is 16-bit PCMCIA and 32-bit CardBus compatible and works in any available PCMCIA or CardBus slot. Its auto-sensing capability allows packet transfer in 11Mbps for maximum throughput, or speed reduction to the lower 1Mbps speed for distance or working in a noisy environment.

The EUT meets special requirements for full modular approval on FCC Public Notice DA 00-1407 and the device is only for OEM integrator, please refer the test result in this report.

For more detail features, please refer to User's manual as file name "Installation guide.pdf"



Intertek Testing Services

ETL SEMKO

FCC ID. : PD5LMWP210RB

Report No.: EME-021514

Page 6 of 37

The EUT, applied for module approval, can be equipped with two set of antenna. The tests are based on the module with antenna separated. And the two combinations are listed as below:

Type of EUT

Single antenna

A set of two antennas

(please refer to External photo as file name "External photo.pdf")

Definition in this report

LM-WP210RB (with antenna A)

LM-WP210RB (with antenna B)

We only measured the Band-edge test and Radiated Spurious test for two sets of antenna and recorded the measurements in this report individually for each antenna.

1.3 Antenna description

The antenna description of these two antennas are the same and listed as below:

The antenna is affixed to the EUT using a unique connector, which allows for replacement of a broken antenna, but DOES NOT use a standard antenna jack or electrical connector.

Antenna A:

Antenna Gain : 3dBi

Antenna Type : fixed $1/2\lambda$ helical antenna

Connector Type : MMCX JACK FEMALE

Antenna B:

Antenna Gain : 2.4dBi (Tx, long cable), 1.1dBi (Rx, short cable)

Antenna Type : helical antenna

Connector Type : MMCX JACK FEMALE

1.4 Peripherals equipment

Peripherals	Manufacturer	Product No.	Serial No.	FCC ID
Notebook	HP	XE ₃	TW20705468	FCC DoC Approved
Printer	HP	C2642A	TH86K1N2ZB	FCC DoC Approved
Modem	Dynalink	V1456VQE	00V230A00051494	FCC DoC Approved



2. Test specifications

2.1 Test standard

The EUT was performed according to the procedures in FCC Part 15 Subpart C Section §15.205, §15.207, §15.209, §15.247 and ANSI C63.4/1992.

The AC power conducted emissions was investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz. (15.207 paragraph)

Radiated emissions were investigated cover the frequency range from 30MHz to 1000MHz using a receiver RBW of 120kHz record QP reading, and the frequency over 1GHz using a spectrum analyzer RBW of 1MHz and 10Hz VBW record Average reading. (15.209 paragraph), the Peak reading recorded also on the report.

The test of radiated measurements according to FCC Part15 Section 15.33(a) had been conducted and the field strength of this frequency band were all meet limit requirement, thus we evaluate the EUT pass the specified test.

The EUT setup configurations please refer to the photo of test configuration in item.

2.2 Operation mode

Plug the EUT into Notebook via PCMCIA interface extend card, run the program “PRISM test Utility” provided by manufacturer under Windows OS.

The EUT was continuously transmit during the test.



Intertek Testing Services

ETL SEMKO

FCC ID. : PD5LMWP210RB

Report No.: EME-021514

Page 8 of 37

2.4 Test equipment

Equipment	Brand	Frequency range	Model No.	Series No.	Last Cal.Date
EMI Test Receiver	Rohde & Schwarz	9kHz~2.75GHz	ESCS 30	825788/014	May 24, 2002
EMI Test Receiver	Rohde & Schwarz	20Hz~26.5GHz	ESMI	825428/005	June 10, 2002
Spectrum Analyzer	Rohde & Schwarz	9kHz~30GHz	FSP 30	100137	July 10, 2002
Spectrum Analyzer	Rohde & Schwarz	20Hz~40GHz	FSEK 30	100186	Oct. 9, 2002
Horn Antenna	EMCO	1GHz~18GHz	3115	9906-5890	Sep. 19, 2002
Horn Antenna	SCHWARZBECK	14GHz~40GHz	BBHA 9170	159	June 20, 2002
Bilog Antenna	SCHWARZBECK	25MHz~1.7GHz	VULB 9160	3111	June 20, 2002
Turn Table	HDGmbH	N/A	DS 420S	420/669/01	N/A
Antenna Tower	HDGmbH	N/A	MA 240	240/573	N/A
Microwave Amplifier	Agilent	2GHz~26.5GHz	8348A	3111A00567	Dec. 20, 2002
RF Power Meter	Boonton	10kHz~100GHz	4231A	79401	May 22, 2002
Power Sensor	Boonton	30MHz~8GHz	51011-EMC	32482	May 25, 2002

Note:

1. The calibration interval of the above instruments is 12 months.



3. Minimum 6dB Bandwidth test

3.1 Operating environment

Temperature: 23
Relative Humidity: 58 %
Atmospheric Pressure 1023 hPa

3.2 Test setup & procedure

The minimum 6dB bandwidth per FCC §15.247(a)(2) was measured using a 50 ohm spectrum analyzer with the resolutions bandwidth set at 1MHz, the video bandwidth set at 3MHz, and the SPAN>>RBW. The test was performed at 3 channels (lowest, middle and highest channel). The minimum 6-dB modulation bandwidth is in the following Table.

See Minimum 6dB Bandwidth plot as file name “Minimum 6dB Bandwidth plot.pdf”

3.3 Measured data of Minimum 6dB Bandwidth test results

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit
Low	2412	10.3	> 500kHz
Middle	2437	10.2	> 500kHz
High	2462	10.2	> 500kHz



4. Maximum Output Power test

4.1 Operating environment

Temperature: 22
Relative Humidity: 60 %
Atmospheric Pressure 1023 hPa

4.2 Test setup & procedure

The power output per FCC §15.247(b) was measured on the EUT using a 50 ohm SMA cable connected to power meter via power sensor. Power was read directly and cable loss correction (1dB) was added to the reading to obtain power at the EUT antenna terminals. The test was performed at 3 channels (lowest, middle and highest channel).

4.3 Measured data of Maximum Output Power test results

Channel	Frequency (MHz)	C.B.L. (dB)	Reading (dBm)	Power Output		Limit (W)
				(dBm)	(mW)	
Lowest	2412	1	15.20	16.2	41.69	1
Middle	2437	1	15.68	16.68	46.56	1
Highest	2462	1	15.99	16.99	50.00	1



5. RF Antenna Conducted Spurious test

5.1 Operating environment

Temperature: 23
Relative Humidity: 58 %
Atmospheric Pressure 1023 hPa

5.2 Test setup & procedure

The measurements were performed from 30MHz to 25GHz RF antenna conducted per FCC 15.247 (c) was measured from the EUT antenna port using a 50ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at 300 kHz.

Harmonics and spurious noise must be at least 20dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. The table below is the results from the highest emission for each channel within the authorized band. This table was used to determine the spurious limits for each channel.

See RF Antenna Conducted plot as file name “RF Antenna Conducted plot.pdf”

5.3 Measured data of the highest RF Antenna Conducted Spurious test result

Channel	Max Spurious level at Frequency (MHz)	Spurious Emission level (dBuV)	Limit (dBuV)
Low	674.64	68.52	90.21
Middle	698.34	66.55	90.3
High	722.04	66.3	89.86

Note: 1. Limit = peak power output (in 100kHz RBW) – 20dB
2. All the other emissions were very low the limit.


6. Radiated Emission test

6.1 Operating environment

Temperature: 23
 Relative Humidity: 58 %
 Atmospheric Pressure 1023 hPa

6.2 Test setup & procedure

The Diagram below shows the test setup, which is utilized to make these measurements.

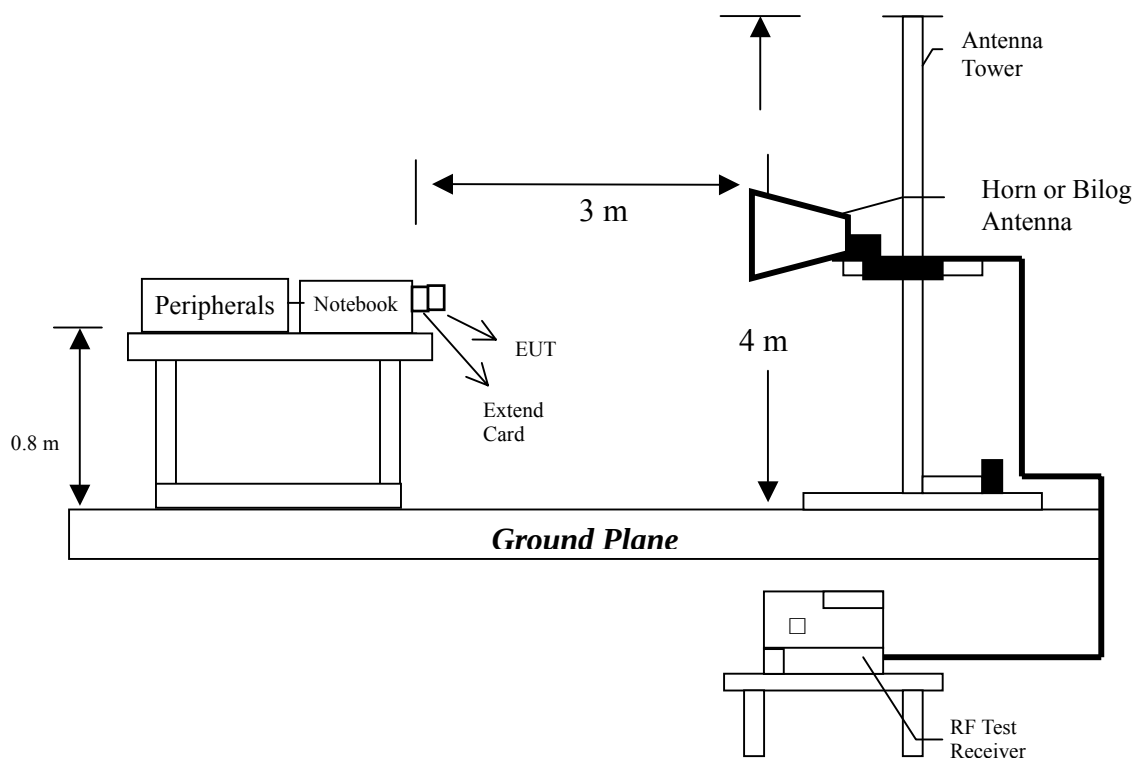

Radiated emission measurements were performed from 30MHz to 25GHz. Spectrum Analyzer Resolution Bandwidth is 100kHz or greater for frequencies 30MHz to 1GHz, 1MHz – for frequencies above 1GHz.

The EUT for testing is arranged on a wooden turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meters and down to 1 meter.

The measurement for radiated emission will be done at the distance of three meters unless the signal level is too low to measure at that distance. In the case of the reading under noise floor, a pre-amplifier is used and/or the test is conducted at a closer distance. And then all readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance.



6.3 Emission limits

The spurious Emission shall test through the 10th harmonic. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Frequency (MHz)	Limits (dB μ V/m@3m)
30-88	40
88-216	43.5
216-960	46
Above 960	54

Remark:

1. In the above table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

Uncertainty was calculated in accordance with NAMAS NIS 81.

Expanded uncertainty (k=2) of radiated emission measurement is ± 3.078 dB.

Expanded uncertainty (k=2) of conducted emission measurement is ± 2.02 dB.



6.4 Radiated spurious emission test data

6.4.1 Measurement results: frequencies equal to or less than 1 GHz

EUT : LM-WP210RB (with antenna A)

Test Condition : Tx at low channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
132.80000	QP	V	9.73	18.97	28.70	43.50	-14.80
398.60000	QP	V	19.53	12.27	31.80	46.00	-14.20
528.60000	QP	V	22.91	11.69	34.60	46.00	-11.40
559.60000	QP	V	22.19	10.91	33.10	46.00	-12.90
573.20000	QP	V	23.19	13.62	36.80	46.00	-9.20
596.50000	QP	V	23.17	10.43	33.60	46.00	-12.40
198.80000	QP	H	12.59	15.11	27.70	43.50	-15.80
266.70000	QP	H	14.80	17.10	31.90	46.00	-14.10
332.60000	QP	H	17.56	13.14	30.70	46.00	-15.30
365.60000	QP	H	19.53	10.77	30.30	46.00	-15.70
400.50000	QP	H	19.46	19.54	39.00	46.00	-7.00
433.50000	QP	H	20.30	11.30	31.60	46.00	-14.40

Remark:

1. Corrected Level = Reading Level + Correction Factor
2. Correction Factor = Antenna Factor + Cable Loss
3. “-” means the emission is below the noise floor.



Intertek Testing Services

ETL SEMKO

FCC ID. : PD5LMWP210RB

Report No.: EME-021514

Page 15 of 37

EUT : LM-WP210RB (with antenna A)

Test Condition : Tx at middle channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
132.80000	QP	V	9.73	20.17	29.90	43.50	-13.60
233.70000	QP	V	14.25	13.95	28.20	46.00	-17.80
398.60000	QP	V	19.53	10.77	30.30	46.00	-15.70
532.50000	QP	V	22.91	10.10	33.00	46.00	-13.00
577.10000	QP	V	23.18	11.02	34.20	46.00	-11.80
596.50000	QP	V	23.17	12.43	35.60	46.00	-10.40
196.80000	QP	H	12.59	16.51	29.10	43.50	-14.40
260.90000	QP	H	14.77	15.93	30.70	46.00	-15.30
332.60000	QP	H	17.56	13.44	31.00	46.00	-15.00
400.50000	QP	H	19.46	16.44	35.90	46.00	-10.10
433.50000	QP	H	20.30	12.80	33.10	46.00	-12.90
567.40000	QP	H	23.19	10.61	33.80	46.00	-12.20

Remark:

1. Corrected Level = Reading Level + Correction Factor
2. Correction Factor = Antenna Factor + Cable Loss
3. “-” means the emission is below the noise floor.



Intertek Testing Services

ETL SEMKO

FCC ID. : PD5LMWP210RB

Report No.: EME-021514

Page 16 of 37

EUT : LM-WP210RB (with antenna A)

Test Condition : Tx at high channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
132.80000	QP	V	9.73	19.77	29.50	43.50	-14.00
198.80000	QP	V	12.59	14.21	26.80	43.50	-16.70
398.60000	QP	V	19.53	15.07	34.60	46.00	-11.40
530.50000	QP	V	22.91	11.80	34.70	46.00	-11.30
544.10000	QP	V	22.90	10.90	33.80	46.00	-12.20
577.10000	QP	V	23.18	14.82	38.00	46.00	-8.00
266.70000	QP	H	14.80	15.90	30.70	46.00	-15.30
398.60000	QP	H	19.53	19.77	39.30	46.00	-6.70
532.50000	QP	H	22.91	9.10	32.00	46.00	-14.00
563.50000	QP	H	23.19	10.81	34.00	46.00	-12.00
577.10000	QP	H	23.18	10.92	34.10	46.00	-11.90
625.60000	QP	H	23.94	7.16	31.10	46.00	-14.90

Remark:

1. Corrected Level = Reading Level + Correction Factor
2. Correction Factor = Antenna Factor + Cable Loss
3. “-” means the emission is below the noise floor.



Intertek Testing Services

ETL SEMKO

FCC ID. : PD5LMWP210RB

Report No.: EME-021514

Page 17 of 37

EUT : LM-WP210RB (with antenna B)

Test Condition : Tx at low channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
88.20000	QP	V	7.94	20.26	28.20	43.50	-15.30
132.80000	QP	V	9.73	22.77	32.50	43.50	-11.00
198.80000	QP	V	12.59	19.61	32.20	43.50	-11.30
233.70000	QP	V	14.25	18.35	32.60	46.00	-13.40
561.60000	QP	V	23.19	13.21	36.40	46.00	-9.60
596.50000	QP	V	23.17	11.23	34.40	46.00	-11.60
198.80000	QP	H	12.59	23.01	35.60	43.50	-7.90
233.70000	QP	H	14.25	19.75	34.00	46.00	-12.00
264.70000	QP	H	14.77	14.33	29.10	46.00	-16.90
400.50000	QP	H	19.46	11.84	31.30	46.00	-14.70
433.50000	QP	H	20.30	13.40	33.70	46.00	-12.30
569.30000	QP	H	23.19	8.31	31.50	46.00	-14.50

Remark:

1. Corrected Level = Reading Level + Correction Factor
2. Correction Factor = Antenna Factor + Cable Loss
3. “-” means the emission is below the noise floor.



Intertek Testing Services

ETL SEMKO

FCC ID. : PD5LMWP210RB

Report No.: EME-021514

Page 18 of 37

EUT : LM-WP210RB (with antenna B)

Test Condition : Tx at middle channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
88.20000	QP	V	7.94	21.66	29.60	43.50	-13.90
132.80000	QP	V	9.73	23.47	33.20	43.50	-10.30
198.80000	QP	V	12.59	18.81	31.40	43.50	-12.10
231.80000	QP	V	14.25	19.15	33.40	46.00	-12.60
561.60000	QP	V	23.19	16.31	39.50	46.00	-6.50
579.00000	QP	V	23.18	15.72	38.90	46.00	-7.10
198.80000	QP	H	12.59	21.91	34.50	43.50	-9.00
233.70000	QP	H	14.25	19.65	33.90	46.00	-12.10
262.80000	QP	H	14.77	15.53	30.30	46.00	-15.70
398.60000	QP	H	19.53	13.37	32.90	46.00	-13.10
433.50000	QP	H	20.30	13.30	33.60	46.00	-12.40
565.40000	QP	H	23.19	10.81	34.00	46.00	-12.00

Remark:

1. Corrected Level = Reading Level + Correction Factor
2. Correction Factor = Antenna Factor + Cable Loss
3. “-” means the emission is below the noise floor.



Intertek Testing Services

ETL SEMKO

FCC ID. : PD5LMWP210RB

Report No.: EME-021514

Page 19 of 37

EUT : LM-WP210RB (with antenna B)

Test Condition : Tx at high channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
132.80000	QP	V	9.73	23.57	33.30	43.50	-10.20
198.80000	QP	V	12.59	20.11	32.70	43.50	-10.80
233.70000	QP	V	14.25	19.05	33.30	46.00	-12.70
400.50000	QP	V	19.46	10.04	29.50	46.00	-16.50
567.40000	QP	V	23.19	9.81	33.00	46.00	-13.00
600.40000	QP	V	23.52	9.78	33.30	46.00	-12.70
80.40000	QP	H	8.67	16.03	24.70	40.00	-15.30
198.80000	QP	H	12.59	22.51	35.10	43.50	-8.40
233.70000	QP	H	14.25	19.65	33.90	46.00	-12.10
262.80000	QP	H	14.77	15.63	30.40	46.00	-15.60
398.60000	QP	H	19.53	15.47	35.00	46.00	-11.00
433.50000	QP	H	20.30	13.50	33.80	46.00	-12.20

Remark:

1. Corrected Level = Reading Level + Correction Factor
2. Correction Factor = Antenna Factor + Cable Loss
3. “-” means the emission is below the noise floor.



6.4.2 Measurement results: frequency above 1GHz

EUT : LM-WP210RB (with antenna A)

Test Condition : Tx at low channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamplifier (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
2038	PK	V	0	29.36	24.63	53.99	74	-20.01
2038	AV	V	0	29.36	17.8	47.16	54	-6.84
4076	PK	V	28.02	34.59	42.26	48.83	74	-25.17
4076	AV	V	28.02	34.59	32.25	38.82	54	-15.18
6114	PK	V	28.02	37.74	42.48	52.2	74	-21.8
6114	AV	V	28.02	37.74	31.11	40.83	54	-13.17
8152	PK	V	28.02	40.05	46.19	58.22	74	-15.78
8152	AV	V	28.02	40.05	38.88	50.91	54	-3.09
10190	PK	V	28.02	41.99	-	-	74	-
10190	AV	V	28.02	41.99	-	-	54	-
4824	PK	V	28.02	35.47	-	-	74	-
4824	AV	V	28.02	35.47	-	-	54	-
7236	PK	V	28.02	38.42	47.73	58.13	74	-15.87
7236	AV	V	28.02	38.42	35.95	46.35	54	-7.65
9648	PK	V	28.02	41.35	-	-	74	-
9648	AV	V	28.02	41.35	-	-	54	-
12060	PK	V	28.02	43.38	-	-	74	-
12060	AV	V	28.02	43.38	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor - Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-” means the emission is below the noise floor.



Intertek Testing Services

ETL SEMKO

FCC ID. : PD5LMWP210RB

Report No.: EME-021514

Page 21 of 37

EUT : LM-WP210RB (with antenna A)

Test Condition : Tx at low channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamplifier (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
2038	PK	H	0	29.36	24.28	53.64	74	-20.36
2038	AV	H	0	29.36	15.75	45.11	54	-8.89
4076	PK	H	28.02	34.59	-	-	74	-
4076	AV	H	28.02	34.59	-	-	54	-
6114	PK	H	28.02	37.74	-	-	74	-
6114	AV	H	28.02	37.74	-	-	54	-
8152	PK	H	28.02	40.05	44.5	56.53	74	-17.47
8152	AV	H	28.02	40.05	34.5	46.53	54	-7.47
10190	PK	H	28.02	41.99	-	-	74	-
10190	AV	H	28.02	41.99	-	-	54	-
4824	PK	H	28.02	35.47	-	-	74	-
4824	AV	H	28.02	35.47	-	-	54	-
7236	PK	H	28.02	38.42	43.02	53.42	74	-20.58
7236	AV	H	28.02	38.42	30.91	41.31	54	-12.69
9648	PK	H	28.02	41.35	-	-	74	-
9648	AV	H	28.02	41.35	-	-	54	-
12060	PK	H	28.02	43.38	-	-	74	-
12060	AV	H	28.02	43.38	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor - Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-” means the emission is below the noise floor.



Intertek Testing Services

ETL SEMKO

FCC ID. : PD5LMWP210RB

Report No.: EME-021514

Page 22 of 37

EUT : LM-WP210RB (with antenna A)

Test Condition : Tx at middle channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamplifier (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
2063	PK	V	0	29.36	25.23	54.59	74	-19.41
2063	AV	V	0	29.36	18.27	47.63	54	-6.37
4126	PK	V	28.02	34.59	39.67	46.24	74	-27.76
4126	AV	V	28.02	34.59	28.43	35	54	-19
6189	PK	V	28.02	37.74	43.37	53.09	74	-20.91
6189	AV	V	28.02	37.74	31.88	41.6	54	-12.4
8252	PK	V	28.02	39.97	47.06	59.01	74	-14.99
8252	AV	V	28.02	39.97	37.91	49.86	54	-4.14
10315	PK	V	28.02	42.06	-	-	74	-
10315	AV	V	28.02	42.06	-	-	54	-
4874	PK	V	28.02	35.47	-	-	74	-
4874	AV	V	28.02	35.47	-	-	54	-
7311	PK	V	28.02	38.42	49.39	59.79	74	-14.21
7311	AV	V	28.02	38.42	37.47	47.87	54	-6.13
9748	PK	V	28.02	41.35	-	-	74	-
9748	AV	V	28.02	41.35	-	-	54	-
12185	PK	V	28.02	43.38	-	-	74	-
12185	AV	V	28.02	43.38	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor - Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-” means the emission is below the noise floor.



Intertek Testing Services

ETL SEMKO

FCC ID. : PD5LMWP210RB

Report No.: EME-021514

Page 23 of 37

EUT : LM-WP210RB (with antenna A)

Test Condition : Tx at middle channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamplifier (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
2063	PK	H	0	29.36	24.89	54.25	74	-19.75
2063	AV	H	0	29.36	16.49	45.85	54	-8.15
4126	PK	H	28.02	34.59	-	-	74	-
4126	AV	H	28.02	34.59	-	-	54	-
6189	PK	H	28.02	37.74	-	-	74	-
6189	AV	H	28.02	37.74	-	-	54	-
8252	PK	H	28.02	39.97	45.53	57.48	74	-16.52
8252	AV	H	28.02	39.97	33.92	45.87	54	-8.13
10315	PK	H	28.02	42.06	-	-	74	-
10315	AV	H	28.02	42.06	-	-	54	-
4874	PK	H	28.02	35.47	-	-	74	-
4874	AV	H	28.02	35.47	-	-	54	-
7311	PK	H	28.02	38.42	42.92	53.32	74	-20.68
7311	AV	H	28.02	38.42	31.72	42.12	54	-11.88
9748	PK	H	28.02	41.35	-	-	74	-
9748	AV	H	28.02	41.35	-	-	54	-
12185	PK	H	28.02	43.38	-	-	74	-
12185	AV	H	28.02	43.38	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor - Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-” means the emission is below the noise floor.



Intertek Testing Services

ETL SEMKO

FCC ID. : PD5LMWP210RB

Report No.: EME-021514

Page 24 of 37

The radiated spurious emissions at

Frequency(MHz)	Margin
8352	-2.38

are less than uncertainty. This is within the stated measurement uncertainty, this may affect compliance determined in other test arrangements.

EUT : LM-WP210RB (with antenna A)

Test Condition : Tx at high channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamplifier (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
2088	PK	V	0	29.36	25.21	54.57	74	-19.43
2088	AV	V	0	29.36	17.47	46.83	54	-7.17
4176	PK	V	28.02	34.59	41.46	48.03	74	-25.97
4176	AV	V	28.02	34.59	28.4	34.97	54	-19.03
6264	PK	V	28.02	37.74	42.86	52.58	74	-21.42
6264	AV	V	28.02	37.74	31.11	40.83	54	-13.17
8352	PK	V	28.02	39.97	47.34	59.29	74	-14.71
8352	AV	V	28.02	39.97	39.67	51.62	54	-2.38
10440	PK	V	28.02	42.21	-	-	74	-
10440	AV	V	28.02	42.21	-	-	54	-
4924	PK	V	28.02	35.47	-	-	74	-
4924	AV	V	28.02	35.47	-	-	54	-
7386	PK	V	28.02	38.42	50.48	60.88	74	-13.12
7386	AV	V	28.02	38.42	38.94	49.34	54	-4.66
9848	PK	V	28.02	41.55	-	-	74	-
9848	AV	V	28.02	41.55	-	-	54	-
12310	PK	V	28.02	43.75	-	-	74	-
12310	AV	V	28.02	43.75	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor - Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-” means the emission is below the noise floor.



Intertek Testing Services

ETL SEMKO

FCC ID. : PD5LMWP210RB

Report No.: EME-021514

Page 25 of 37

EUT : LM-WP210RB (with antenna A)

Test Condition : Tx at high channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamplifier (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
2088	PK	H	0	29.36	24.62	53.98	74	-20.02
2088	AV	H	0	29.36	15.89	45.25	54	-8.75
4176	PK	H	28.02	34.59	-	-	74	-
4176	AV	H	28.02	34.59	-	-	54	-
6264	PK	H	28.02	37.74	-	-	74	-
6264	AV	H	28.02	37.74	-	-	54	-
8352	PK	H	28.02	39.97	44.93	56.88	74	-17.12
8352	AV	H	28.02	39.97	33.7	45.65	54	-8.35
10440	PK	H	28.02	42.21	-	-	74	-
10440	AV	H	28.02	42.21	-	-	54	-
4924	PK	H	28.02	35.47	-	-	74	-
4924	AV	H	28.02	35.47	-	-	54	-
7386	PK	H	28.02	38.42	43.93	54.33	74	-19.67
7386	AV	H	28.02	38.42	31.55	41.95	54	-12.05
9848	PK	H	28.02	41.55	-	-	74	-
9848	AV	H	28.02	41.55	-	-	54	-
12310	PK	H	28.02	43.75	-	-	74	-
12310	AV	H	28.02	43.75	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor - Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-” means the emission is below the noise floor.



Intertek Testing Services

ETL SEMKO

FCC ID. : PD5LMWP210RB

Report No.: EME-021514

Page 26 of 37

EUT : LM-WP210RB (with antenna B)

Test Condition : Tx at low channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamplifier (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
2038	PK	V	0	29.36	26.97	56.33	74	-17.67
2038	AV	V	0	29.36	19.48	48.84	54	-5.16
4076	PK	V	28.02	34.59	43.7	50.27	74	-23.73
4076	AV	V	28.02	34.59	30.87	37.44	54	-16.56
6114	PK	V	28.02	37.74	42.99	52.71	74	-21.29
6114	AV	V	28.02	37.74	31.38	41.1	54	-12.9
8152	PK	V	28.02	40.05	46.69	58.72	74	-15.28
8152	AV	V	28.02	40.05	38.63	50.66	54	-3.34
10190	PK	V	28.02	41.99	-	-	74	-
10190	AV	V	28.02	41.99	-	-	54	-
4824	PK	V	28.02	35.47	-	-	74	-
4824	AV	V	28.02	35.47	-	-	54	-
7236	PK	V	28.02	38.42	45.93	56.33	74	-17.67
7236	AV	V	28.02	38.42	34.45	44.85	54	-9.15
9648	PK	V	28.02	41.35	-	-	74	-
9648	AV	V	28.02	41.35	-	-	54	-
12060	PK	V	28.02	43.38	-	-	74	-
12060	AV	V	28.02	43.38	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor - Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-” means the emission is below the noise floor.



Intertek Testing Services

ETL SEMKO

FCC ID. : PD5LMWP210RB

Report No.: EME-021514

Page 27 of 37

EUT : LM-WP210RB (with antenna B)

Test Condition : Tx at low channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamplifier (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
2038	PK	H	0	29.36	25.04	54.4	74	-19.6
2038	AV	H	0	29.36	16.09	45.45	54	-8.55
4076	PK	H	28.02	34.59	-	-	74	-
4076	AV	H	28.02	34.59	-	-	54	-
6114	PK	H	28.02	37.74	-	-	74	-
6114	AV	H	28.02	37.74	-	-	54	-
8152	PK	H	28.02	40.05	45.49	57.52	74	-16.48
8152	AV	H	28.02	40.05	36.3	48.33	54	-5.67
10190	PK	H	28.02	41.99	-	-	74	-
10190	AV	H	28.02	41.99	-	-	54	-
4824	PK	H	28.02	35.47	-	-	74	-
4824	AV	H	28.02	35.47	-	-	54	-
7236	PK	H	28.02	38.42	43.9	54.3	74	-19.7
7236	AV	H	28.02	38.42	31.62	42.02	54	-11.98
9648	PK	H	28.02	41.35	-	-	74	-
9648	AV	H	28.02	41.35	-	-	54	-
12060	PK	H	28.02	43.38	-	-	74	-
12060	AV	H	28.02	43.38	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor - Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-” means the emission is below the noise floor.



Intertek Testing Services

ETL SEMKO

FCC ID. : PD5LMWP210RB

Report No.: EME-021514

Page 28 of 37

EUT : LM-WP210RB (with antenna B)

Test Condition : Tx at middle channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamplifier (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
2063	PK	V	0	29.36	26.37	55.73	74	-18.27
2063	AV	V	0	29.36	19.43	48.79	54	-5.21
4126	PK	V	28.02	34.59	39.42	45.99	74	-28.01
4126	AV	V	28.02	34.59	28.7	35.27	54	-18.73
6189	PK	V	28.02	37.74	44.02	53.74	74	-20.26
6189	AV	V	28.02	37.74	31.52	41.24	54	-12.76
8252	PK	V	28.02	39.97	45.47	57.42	74	-16.58
8252	AV	V	28.02	39.97	37.13	49.08	54	-4.92
10315	PK	V	28.02	42.06	-	-	74	-
10315	AV	V	28.02	42.06	-	-	54	-
4874	PK	V	28.02	35.47	-	-	74	-
4874	AV	V	28.02	35.47	-	-	54	-
7311	PK	V	28.02	38.42	49.08	59.48	74	-14.52
7311	AV	V	28.02	38.42	37.13	47.53	54	-6.47
9748	PK	V	28.02	41.35	-	-	74	-
9748	AV	V	28.02	41.35	-	-	54	-
12185	PK	V	28.02	43.38	-	-	74	-
12185	AV	V	28.02	43.38	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor - Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-” means the emission is below the noise floor.



Intertek Testing Services

ETL SEMKO

FCC ID. : PD5LMWP210RB

Report No.: EME-021514

Page 29 of 37

EUT : LM-WP210RB (with antenna B)

Test Condition : Tx at middle channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamplifier (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
2063	PK	H	0	29.36	25.42	54.78	74	-19.22
2063	AV	H	0	29.36	17.68	47.04	54	-6.96
4126	PK	H	28.02	34.59	-	-	74	-
4126	AV	H	28.02	34.59	-	-	54	-
6189	PK	H	28.02	37.74	-	-	74	-
6189	AV	H	28.02	37.74	-	-	54	-
8252	PK	H	28.02	39.97	45.32	57.27	74	-16.73
8252	AV	H	28.02	39.97	35.4	47.35	54	-6.65
10315	PK	H	28.02	42.06	-	-	74	-
10315	AV	H	28.02	42.06	-	-	54	-
4874	PK	H	28.02	35.47	-	-	74	-
4874	AV	H	28.02	35.47	-	-	54	-
7311	PK	H	28.02	38.42	45.71	56.11	74	-17.89
7311	AV	H	28.02	38.42	34.45	44.85	54	-9.15
9748	PK	H	28.02	41.35	-	-	74	-
9748	AV	H	28.02	41.35	-	-	54	-
12185	PK	H	28.02	43.38	-	-	74	-
12185	AV	H	28.02	43.38	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor - Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-” means the emission is below the noise floor.



Intertek Testing Services

ETL SEMKO

FCC ID. : PD5LMWP210RB

Report No.: EME-021514

Page 30 of 37

The radiated spurious emissions at

Frequency(MHz)	Margin
8352	-1.62

are less than uncertainty. This is within the stated measurement uncertainty, this may affect compliance determined in other test arrangements.

EUT : LM-WP210RB (with antenna B)

Test Condition : Tx at high channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamplifier (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
2088	PK	V	0	29.36	26.08	55.44	74	-18.56
2088	AV	V	0	29.36	20.78	50.14	54	-3.86
4176	PK	V	28.02	34.59	43.21	49.78	74	-24.22
4176	AV	V	28.02	34.59	32.31	38.88	54	-15.12
6264	PK	V	28.02	37.74	42.83	52.55	74	-21.45
6264	AV	V	28.02	37.74	31.61	41.33	54	-12.67
8352	PK	V	28.02	39.97	47.66	59.61	74	-14.39
8352	AV	V	28.02	39.97	40.43	52.38	54	-1.62
10440	PK	V	28.02	42.21	-	-	74	-
10440	AV	V	28.02	42.21	-	-	54	-
4924	PK	V	28.02	35.47	-	-	74	-
4924	AV	V	28.02	35.47	-	-	54	-
7386	PK	V	28.02	38.42	48.99	59.39	74	-14.61
7386	AV	V	28.02	38.42	37.94	48.34	54	-5.66
9848	PK	V	28.02	41.55	-	-	74	-
9848	AV	V	28.02	41.55	-	-	54	-
12310	PK	V	28.02	43.75	-	-	74	-
12310	AV	V	28.02	43.75	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor - Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-” means the emission is below the noise floor.



Intertek Testing Services

ETL SEMKO

FCC ID. : PD5LMWP210RB

Report No.: EME-021514

Page 31 of 37

EUT : LM-WP210RB (with antenna B)

Test Condition : Tx at high channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamplifier (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
2088	PK	H	0	29.36	25.76	55.12	74	-18.88
2088	AV	H	0	29.36	18.71	48.07	54	-5.93
4176	PK	H	28.02	34.59	-	-	74	-
4176	AV	H	28.02	34.59	-	-	54	-
6264	PK	H	28.02	37.74	-	-	74	-
6264	AV	H	28.02	37.74	-	-	54	-
8352	PK	H	28.02	39.97	45.49	57.44	74	-16.56
8352	AV	H	28.02	39.97	36.3	48.25	54	-5.75
10440	PK	H	28.02	42.21	-	-	74	-
10440	AV	H	28.02	42.21	-	-	54	-
4924	PK	H	28.02	35.47	-	-	74	-
4924	AV	H	28.02	35.47	-	-	54	-
7386	PK	H	28.02	38.42	46.19	56.59	74	-17.41
7386	AV	H	28.02	38.42	35.38	45.78	54	-8.22
9848	PK	H	28.02	41.55	-	-	74	-
9848	AV	H	28.02	41.55	-	-	54	-
12310	PK	H	28.02	43.75	-	-	74	-
12310	AV	H	28.02	43.75	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor - Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-” means the emission is below the noise floor.



7. Power Spectrum Density test

7.1 Operating environment

Temperature: 23
Relative Humidity: 58 %
Atmospheric Pressure 1023 hPa

7.2 Test setup & procedure

The power spectrum density per FCC §15.247(d) was measured from the antenna port of the EUT using a 50ohm spectrum analyzer with the resolution bandwidth set at 3kHz, the video bandwidth set at 10kHz, a span of 1.5 MHz, and the sweep time set at 500 seconds. Power Density was read directly and cable loss (1dB) correction was added to the reading to obtain power at the EUT antenna terminals. The test was performed at 3 channels (lowest, middle and highest channel). The Power Spectral Density measured result is in the following table.

See Power Spectrum Density plot as file name “Power Spectrum Density plot.pdf”

7.3 Measured data of Power Spectrum Density test results

Channel	Frequency (MHz)	Measured level (dBm)	Limit (dBm)
Low	2412.977	-10.93	8
Middle	2437.977	-10.82	8
High	2462.977	-11.10	8



8. Emission on the band edge §FCC 15.247(C)

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.


See band-edge plot as file name “Band-edge plot.pdf”.

9. Power Line Conducted Emission test §FCC 15.207

9.1 Operating environment

Temperature: 24
 Relative Humidity: 64 %
 Atmospheric Pressure 1023 hPa

9.2 Test setup & procedure

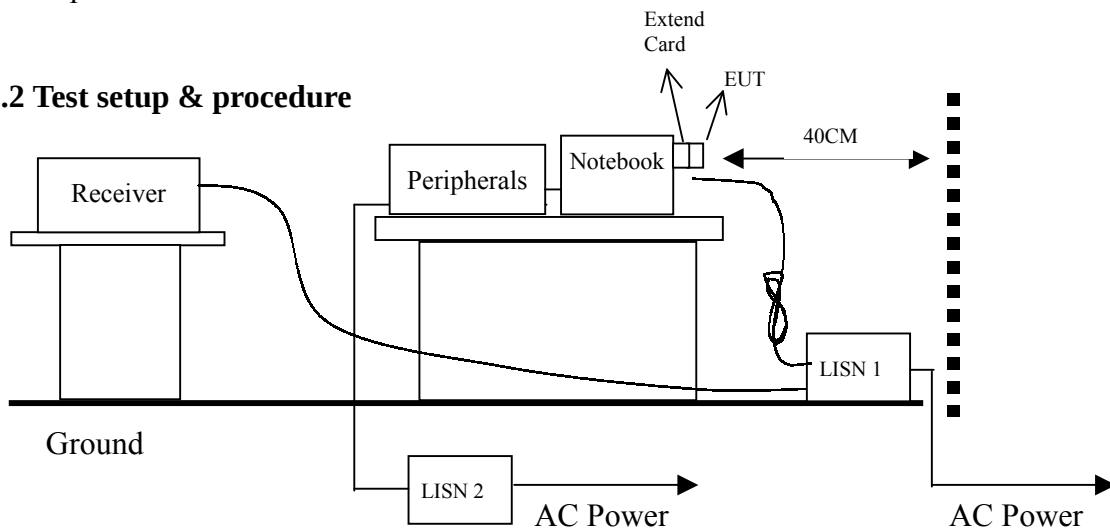

The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a 50 ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4/1992 on conducted measurement. The bandwidth of the field strength meter (R & S Test Receiver ESCS 30) is set at 9kHz.

See Power Line Conducted Emission plot as file name “Power Line Conducted Emission plot.pdf”.

Emission Limit

Freq. (MHz)	Maximum RF Line Voltage			
	Class A (dB μ V)		Class B (dB μ V)	
	Q.P.	Ave.	Q.P.	Ave.
0.15~0.50	79	66	66~56	56~46
0.50~5.00	73	60	56	46
5.00~30.0	73	60	60	50



9.3 Power Line Conducted Emission test data

(1) Line

EUT : LM-WP210RB
Test Condition : Tx at low channel

Freq. (MHz)	Reading (dB μ V) QP	Limit (dB μ V) QP	Reading (dB μ V) AV	Limit (dB μ V) AV	Margin (dB)	
					QP	AV
0.20600	48.8	63.37	36.0	53.37	-14.57	-17.37
0.40600	35.6	57.73	27.9	47.73	-22.13	-19.83
0.54200	29.1	56.00	25.7	46.00	-26.90	-20.30
1.22200	26.6	56.00	25.2	46.00	-29.40	-20.80
2.64600	26.7	56.00	22.8	46.00	-29.30	-23.20
3.19000	27.0	56.00	23.8	46.00	-29.00	-22.20

(2) Neutral

EUT : LM-WP210RB
Test Condition : Tx at low channel

Freq. (MHz)	Reading (dB μ V) QP	Limit (dB μ V) QP	Reading (dB μ V) AV	Limit (dB μ V) AV	Margin (dB)	
					QP	AV
0.20600	49.8	63.37	26.7	53.37	-13.57	-26.67
0.27000	42.4	61.12	32.0	51.12	-18.72	-19.12
0.40600	35.8	57.73	29.3	47.73	-21.93	-18.43
0.54200	29.8	56.00	28.0	46.00	-26.20	-18.00
2.78200	25.6	56.00	22.6	46.00	-30.40	-23.40
24.57400	26.0	60.00	25.3	50.00	-34.00	-24.70

Remark:

1. The reading value included cable loss and LISN factor.
2. Uncertainty was calculated in accordance with NAMAS NIS 81.

Expanded uncertainty (k=2) of conducted emission measurement is ± 2.6 dB.



Intertek Testing Services

ETL SEMKO

FCC ID. : PD5LMWP210RB

Report No.: EME-021514

Page 36 of 37

(1) Line

EUT : LM-WP210RB

Test Condition : Tx at middle channel

Freq. (MHz)	Reading (dB μ V) QP	Limit (dB μ V) QP	Reading (dB μ V) AV	Limit (dB μ V) AV	Margin (dB)	
					QP	AV
0.40600	35.1	57.73	28.0	47.73	-22.63	-19.73
0.54200	29.0	56.00	25.7	46.00	-27.00	-20.30
1.22200	26.7	56.00	25.2	46.00	-29.30	-20.80
2.64600	27.1	56.00	23.3	46.00	-28.90	-22.70
3.05400	27.9	56.00	23.0	46.00	-28.10	-23.00
24.57400	25.2	60.00	24.3	50.00	-34.80	-25.70

(2) Neutral

EUT : LM-WP210RB

Test Condition : Tx at middle channel

Freq. (MHz)	Reading (dB μ V) QP	Limit (dB μ V) QP	Reading (dB μ V) AV	Limit (dB μ V) AV	Margin (dB)	
					QP	AV
0.40600	34.6	57.73	29.3	47.73	-23.13	-18.43
0.54200	29.6	56.00	28.3	46.00	-26.40	-17.70
1.22200	26.6	56.00	25.2	46.00	-29.40	-20.80
2.64600	26.5	56.00	22.6	46.00	-29.50	-23.40
3.05400	27.0	56.00	22.3	46.00	-29.00	-23.70
4.57400	25.2	56.00	24.4	46.00	-30.80	-21.60

Remark:

1. The reading value included cable loss and LISN factor.
2. Uncertainty was calculated in accordance with NAMAS NIS 81.

Expanded uncertainty (k=2) of conducted emission measurement is ± 2.6 dB.



Intertek Testing Services

ETL SEMKO

FCC ID. : PD5LMWP210RB

Report No.: EME-021514

Page 37 of 37

(1) Line

EUT : LM-WP210RB

Test Condition : Tx at high channel

Freq. (MHz)	Reading (dB μ V) QP	Limit (dB μ V) QP	Reading (dB μ V) AV	Limit (dB μ V) AV	Margin (dB)	
					QP	AV
0.40600	34.4	57.73	28.1	47.73	-23.33	-19.63
0.54200	28.3	56.00	25.6	46.00	-27.70	-20.40
0.81400	24.4	56.00	23.1	46.00	-31.60	-22.90
2.64600	27.1	56.00	23.6	46.00	-28.90	-22.40
3.25400	27.1	56.00	21.9	46.00	-28.90	-24.10
24.57400	25.3	60.00	24.4	50.00	-34.70	-25.60

(2) Neutral

EUT : LM-WP210RB

Test Condition : Tx at high channel

Freq. (MHz)	Reading (dB μ V) QP	Limit (dB μ V) QP	Reading (dB μ V) AV	Limit (dB μ V) AV	Margin (dB)	
					QP	AV
0.27000	40.2	61.12	30.8	51.12	-20.92	-20.32
0.54200	29.9	56.00	28.6	46.00	-26.10	-17.40
0.95000	26.3	56.00	24.7	46.00	-29.70	-21.30
2.64600	26.8	56.00	23.0	46.00	-29.20	-23.00
3.05400	26.5	56.00	22.0	46.00	-29.50	-24.00
4.57400	25.0	56.00	24.0	46.00	-31.00	-22.00

Remark:

1. The reading value included cable loss and LISN factor.
2. Uncertainty was calculated in accordance with NAMAS NIS 81.

Expanded uncertainty (k=2) of conducted emission measurement is ± 2.6 dB.