

RF Exposure Report

Report No.: AGC00210180607FH03

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION: LED BEDSIDE LAMP

BRAND NAME : TaoTronics

MODEL NAME : TT-CL009

CLIENT: SUNVALLEYTEK INTERNATIONAL, INC.

DATE OF ISSUE : Jun. 11, 2018

STANDARD(S) : KDB 680106 D01 RF Exposure LED BEDSIDE LAMP App

v03

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.

Attestation of Global Complianc

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



Page 2 of 13

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	TO W	Jun. 11, 2018	Valid	Initial Release

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Report No.: AGC00210180607FH03 Page 3 of 13

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	»"			<u> </u>
2. GENERAL INFORMATION	15L 1700		<u> </u>	The Branch
2.1. PRODUCT DESCRIPTION	The South	© Spring debute		
3. DESCRIPTION OF TEST MODES				
4. SYSTEM TEST CONFIGURATION		A A Compliance	E Elland Communication	<u>G</u>
5. TEST FACILITY	S		*	
6. RADIO FREQUENCY (RF) EXPOSURE TEST		The state of the s	© The Honor Globald	
6.1. LIMITS	J.GC	G	地 淵	
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	T. T	ce Same	J Clobal Colff	The surface of Goods

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.cett.com.



Report No.: AGC00210180607FH03 Page 4 of 13

1. VERIFICATION OF CONFORMITY

TERMATIONIAL INC.
TERNATIONAL, INC.
, Fremont, CA 94538
oress Technology Development Company Limited
ilianda Industrial Park, Building 1, Bantian, Longgang District,
OF THE PROPERTY OF THE PROPERT
GO SOO PE
不是那 不是那 《 集 弄 。
11, 2018
a final comment of the comment of th

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in KDB 680106 D01.

The results of testing in this report apply to the product/system which was tested only.



The results spowfil this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 40°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 5 of 13

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	146.9KHz
Maximum field strength	59.02dBuV/m(Peak)@3m
Modulation	FSK
Number of channels	1 2 4 1
Antenna Designation	Integrated Antenna (Met 15.203 Antenna requirement)
Hardware Version	S61_V0.1.0
Software Version	V1.0
Power Supply	DC 9V by adaptor
Adaptor	Model: VSL1000300HU Input: 100-240V 20/60Hz 1.5A Output: DC10V 3A

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 6 of 13

3. DESCRIPTION OF TEST MODES

11	The plants @ Mar.	Wireless charging Mode at 10V (Full load)	
2	3 A John of College	Wireless charging Mode at 10V (Half load)	授訓
3	Atto	Wireless charging Mode at 10V (Null load)	O F 30 Colobal Color

4. SYSTEM TEST CONFIGURATION

Item	Equipment Model		ID or Specification	Remark		
10	LED BEDSIDE LAMP	TT-CL009	2AFDGTT-CL009	EUT		
2	Wireless electronic Load	THE THE THE SECONDARY OF SECOND	Maximum power 12W	Support		
3	Resistance Load	FCC	5Ω	Support		

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 7 of 13

5. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2F., Bldg.2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District B112-B113, Bldg.12, Baoan Bldg Materials Center, No.1 of Xixiang Inner Ring Road, Baoan District, Shenzhen 518012
NVLAP LAB CODE	600153-0
Designation Number	CN5028
FCC Test Firm Registration Number	682566
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by National Voluntary Laboratory Accreditation program, NVLAP Code 600153-0

TEST EQUIPMENT LIST

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Broadband Field Meter	Narda Safety Test Solutions GmbH	NBM-550	J-0004	June 15, 2017	June 14, 2018
Probe FHP	Narda Safety Test Solutions GmbH	EHP-50F	J-0015	June 15, 2017	June 14, 2018

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.cett.com.




Report No.: AGC00210180607FH03 Page 8 of 13

6. RADIO FREQUENCY (RF) EXPOSURE TEST

6.1. LIMITS

For devices designed for typical desktop applications, such a wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 15 cm. E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m.

6.2. TEST SETUP

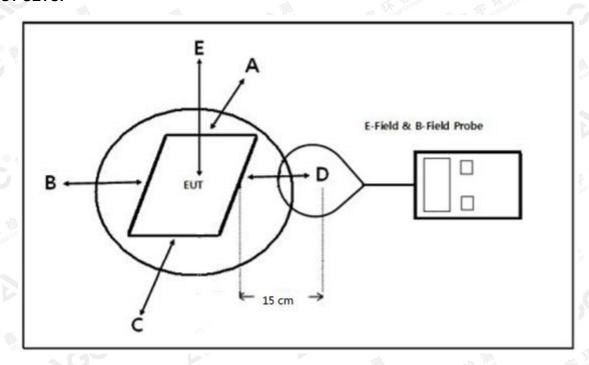

Note: Position A: Front of EUT; Position B: Left of EUT; Position C: back of EUT; Position D: Right of EUT; Position E: Top of EUT(20 cm measure distance);

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Report No.: AGC00210180607FH03 Page 9 of 13

6.3. TEST PROCEDURE

The EUT was placed on a non-conductive table top and the ancillary equipment (e.g. mobile phone) was placed on the EUT for charging.

Maximum E-field and H-field measurements were tested 15cm from each side of the EUT. For top side the measure distance is 20cm.

Along the side of the EUT to center of E-field probe and H-field probe were positioned at the location to search maximum field strength.

6.4. TEST RESULT

Test condition: Mode 1

E-field strength test result:

Frequency	Probe	Probe	Probe	Probe	Probe	Limit
Range	Position A	Position B	Position C	Position D	Position E	(V/m)
	(V/m)	(V/m)	(V/m)	(V/m)	(V/m)	
146.9kHz	0.21	0.20	0.15	0.16	2.34	614

H-field strength test result:

Frequency	Probe	Probe	Probe	Probe	Probe	Limit
Range	Position A	Position B	Position C	Position D	Position E	(A/m)
	(A/m)	(A/m)	(A/m)	(A/m)	(A/m)	
146.9kHz	0.05	0.08	0.06	0.09	0.67	1.63

Test condition: Mode 2
E-field strength test result:

Frequency	Probe	Probe	Probe	Probe	Probe	Limit
Range	Position A	Position B	Position C	Position D	Position E	(V/m)
	(V/m)	(V/m)	(V/m)	(V/m)	(V/m)	
146.9kHz	0.12	0.13	0.10	0.11	0.91	614

H-field strength test result:

Frequency	Probe	Probe	Probe	Probe	Probe	Limit
Range	Position A	Position B	Position C	Position D	Position E	(A/m)
	(A/m)	(A/m)	(A/m)	(A/m)	(A/m)	
146.9kHz	0.10	0.11	0.09	0.11	0.72	1.63

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 10 of 13

Test condition: Mode 3 E-field strength test result:

Frequency	Probe	Probe	Probe	Probe	Probe	Limit
Range	Position A	Position B	Position C	Position D	Position E	(V/m)
	(V/m)	(V/m)	(V/m)	(V/m)	(V/m)	
146.9kHz	0.11	0.12	0.13	0.10	0.95	614

H-field strength test result:

Frequency	Probe	Probe	Probe	Probe	Probe	Limit
Range	Position A	Position B	Position C	Position D	Position E	(A/m)
	(A/m)	(A/m)	(A/m)	(A/m)	(A/m)	
146.9kHz	0.09	0.11	0.12	0.11	0.69	1.63

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Position E



Position A



The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Attestation of Global Compliance


Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



Position B



Position C

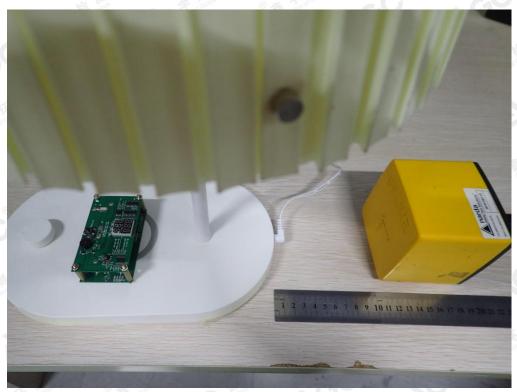

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China





Position D



----FND OF REPORT----

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (60°, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.