



- NOTES:
- 1.Surface Material:50# Mylar
 - 2.Surface Material tolerance:0.050±0.005mm
 - 3.Surface Material color:white
 - 4.printing color is as color defined in artwork
 - 5.Adhesive:Acrylic
 - 6.Adhesive thickness:0.024+/-0.003mm
 - 7.Adhesion to steel(180°磨钢粘着力):1.6±0.3 kg/25mm
 - 8.Initial Tack (初期力) :1↑ #/boll
 - 9.Release Power(90°剥离力):5-25 g/25mm
 - 10.Holding Power(持粘力测试法):8↑ hr/kg/20mm²
 - 11.Package Style:Reel or sheet
 - 12.This part must comply with ROHs and HF.




CNC:C-14869

Century Gothic Bold Arial




SCALE:1:1

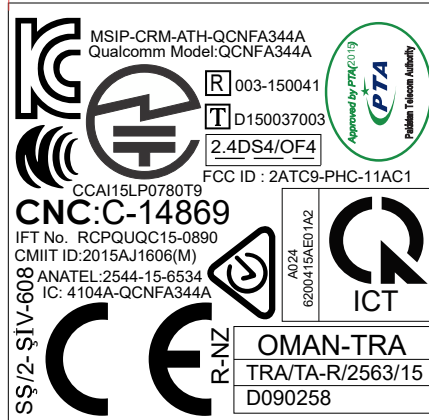

SCALE:3:1

18.5mm

19mm

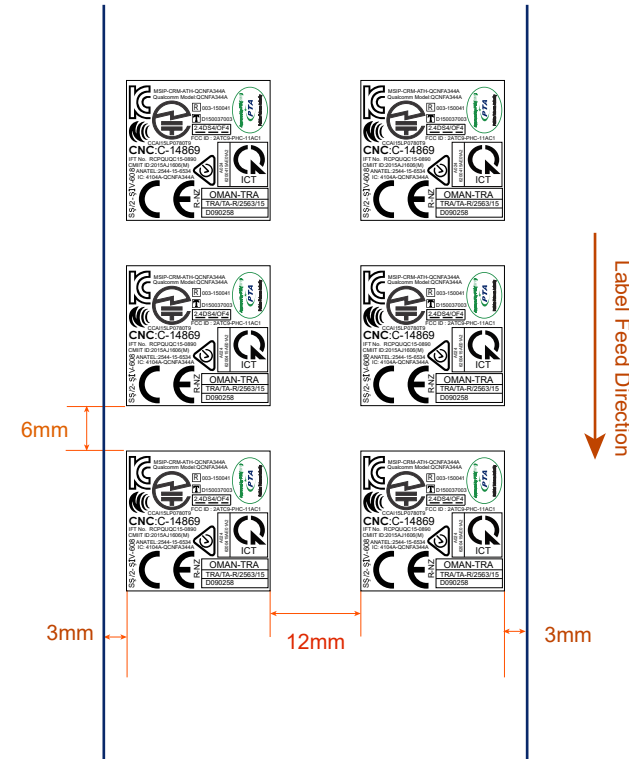

MATERIAL (SPEC.)										SCALE	FOXCONN HON HAI PRECISION IND. CO., LTD. CNSBG				
FINISH										SHEET 1/1					
Select								V		UNIT	PART NAME				
Dim./Col.	A	B	C	EPS	EPE	BAG	CTN	Label	USR	MM	PTT label				
0~6	0.05	0.05	0.10					0.20			MODEL T77H644.09	PART NO. 500.02208.XXX	DESIGNED Bin		
6~30	0.10	0.15	0.20	0.50	0.50	3.00		0.20		SIZE A4					
30~120	0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25			CUSTOMER MODEL	CUSTOMER PART NO.	APPROVED		
120~300	0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30							
300~450	0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50							
450~600	0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80							
DRAFT TOLERANCE ±0.2°															
CRITICAL DIM. MARK *															