



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Big Blue 100

Model: AD107A4BKA

Brand: Brookstone

Test Report Number:

C170111Z03-RP1-1

Issued for

Zylux Acoustic Corporation

3F, 22, Lane 35, Jihu Road, Neihu Technology Park, Taipei 114 Taiwan

Issued by:

COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC.

No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd.,
Guan Lan Town, Baoan District, Shenzhen China

TEL: 86-755-28055000

FAX: 86-755-28055221

E-Mail: service@ccssz.com

Issued Date: January 23, 2017



中国认可
国际互认
检测
TESTING
CNAS L4818



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc. This document may be altered or revised by Compliance Certification Services (Shenzhen) Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST, CNAS or any government agencies. The test result of this report relate only to the tested sample identified in this report.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	January 23, 2017	Initial Issue	ALL	Sabrina Wang



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	4
2. EUT DESCRIPTION	5
3. TEST METHODOLOGY	6
3.1 DESCRIPTION OF TEST MODES	6
4. FACILITIES AND ACCREDITATIONS	7
4.1 FACILITIES	7
4.2 ACCREDITATIONS	7
4.3 MEASUREMENT UNCERTAINTY	7
5. SETUP OF EQUIPMENT UNDER TEST	8
5.1 SETUP CONFIGURATION OF EUT	8
5.2 SUPPORT EQUIPMENT	8
6. FCC PART 15.247 REQUIREMENTS	9
6.1 20DB BANDWIDTH	9
6.2 ANTENNA GAIN	16
6.3 PEAK POWER	18
6.4 PEAK POWER SPECTRAL DENSITY	21
6.5 BAND EDGES MEASUREMENT	22
6.6 FREQUENCY SEPARATION	40
6.7 NUMBER OF HOPPING FREQUENCY	46
6.8 TIME OF OCCUPANCY (DWEIL TIME)	49
6.9 SPURIOUS EMISSIONS	62
6.10 POWERLINE CONDUCTED EMISSIONS	100



1. TEST RESULT CERTIFICATION

Product	Big Blue 100
Model	AD107A4BKA
Brand	Brookstone
Tested	January 11~23, 2017
Applicant	Zylux Acoustic Corporation 3F, 22, Lane 35, Jihu Road, Neihu Technology Park, Taipei 114 Taiwan
Manufacturer	Zylux Acoustic Corporation 3F, 22, Lane 35, Jihu Road, Neihu Technology Park, Taipei 114 Taiwan

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services (Shenzhen) Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207, 15.209 and 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Sunday Hu
Supervisor of EMC Dept.
Compliance Certification Services (Shenzhen)
Inc.

Reviewed by:

Ruby Zhang
Supervisor of Report Dept.
Compliance Certification Services (Shenzhen)
Inc.



2. EUT DESCRIPTION

Product	Big Blue 100
Model Number	AD107A4BKA
Brand	Brookstone
Model Discrepancy	N/A
Identify Number	C170111Z03-RP1-1
Received Date	January 11, 2017
Power Supply	DC 16V supplied by adapter
Adapter Manufacturer / Model No.	Brookstone / DYS624-160180W-1 Input: 100-240V ~ 50/60Hz 0.8A MAX Output: DC16V 1.8A DC Output Cable: Unshielded 1.80m
Frequency Range	2402 ~ 2480 MHz
Transmit Power	Antenna 1: GFSK: 0.81dBm $\pi/4$ -DQPSK: 1.25dBm 8DPSK: 1.26dBm Antenna 2: GFSK: 1.20dBm $\pi/4$ -DQPSK: 1.57dBm 8DPSK: 1.91dBm
Modulation Technique	FHSS (GFSK for 1Mbps, $\pi/4$ -DQPSK for 2Mbps, 8DPSK for 3Mbps)
Number of Channels	79 Channels
Antenna Specification	Embedded Antenna with 3.24dBi gain (Max)
Temperature Range	0°C ~ +45°C
Hardware Version	B
Software Version	ns-mmi-FS5332-0000-0025_1.0.47-10

Note: This submittal(s) (test report) is intended for FCC ID: XN6-AD107A4BKA filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

3.1 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Test Item	Test mode	Worse mode
Conducted Emission	Mode 1: TX(AC120V/60Hz)	☒
	Mode 2: TX(AC240V/50Hz)	☒
Radiated Emission	Mode 1: TX	☒

Note:

1. Channel Low (2402MHz), Mid (2441MHz) and High (2480MHz) were chosen for pre-testing for GFSK, $\pi/4$ -DQPSK and 8DPSK, GFSK and 8DPSK were the worse case and print in the report.
2. Radiated band edges were tested with both fixed and hopping mode, the fixed mode was the worse case and recorded in the report.
3. For $\pi/4$ QPSK its same modulation type with 8-DPSK, and based exploratory test, there is no significant difference of that two types test result, so except output power, all other items final test were only performed with the worst case 8-DPSK and GFSK.



4. FACILITIES AND ACCREDITATIONS

4.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☒ **No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd.,
Guan Lan Town, Baoan District, Shenzhen, China**

The sites are constructed in conformance with the requirements of ANSI C63.10:2013, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

4.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA	A2LA
China	CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	FCC
Japan	VCCI(C-4815, R-4320, T-2317, G-10624)
Canada	INDUSTRY CANADA

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccssz.com>

4.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Uncertainty
Radiated Emission, 30 to 200 MHz Test Site : 966(2)	+/-3.6880dB
Radiated Emission, 200 to 1000 MHz Test Site : 966(2)	+/-3.6695dB
Radiated Emission, 1 to 8 GHz	+/-5.1782dB
Radiated Emission, 8 to 18 GHz	+/-5.2173dB
Conducted Emissions	+/-3.6836dB
Band Width	178kHz
Peak Output Power MU	+/-1.906dB
Band Edge MU	+/-0.182dB
Channel Separation MU	416.178Hz
Duty Cycle MU	0.054ms
Frequency Stability MU	226Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



5. SETUP OF EQUIPMENT UNDER TEST

5.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

5.2 SUPPORT EQUIPMENT

No.	Equipment	Model No.	Serial No.	FCC	Brand	Data Cable	Power Cord
1	Notebook	Probook 5310M	N/A	DoC	HP	Unshielded 1.80m	Shielded 1.80m (AC cable) Unshielded 1.70m (DC cable)

Notes:

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



6. FCC PART 15.247 REQUIREMENTS

6.1 20DB BANDWIDTH


None; for reporting purpose only.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2016	02/20/2017

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT, then connect a low loss RF cable from antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=30 kHz, VBW=100 kHz, Span=3MHz, Sweep = auto.
4. Mark the peak frequency and 20dB (upper and lower) frequency.
5. Repeat until all the test channels are investigated.

TEST RESULTS

No non-compliance noted



Test plot

Antenna 1

GFSK

20dB Bandwidth(CH Low)



20dB Bandwidth (CH Mid)






20dB Bandwidth (CH High)



8DPSK

20dB Bandwidth (CH Low)

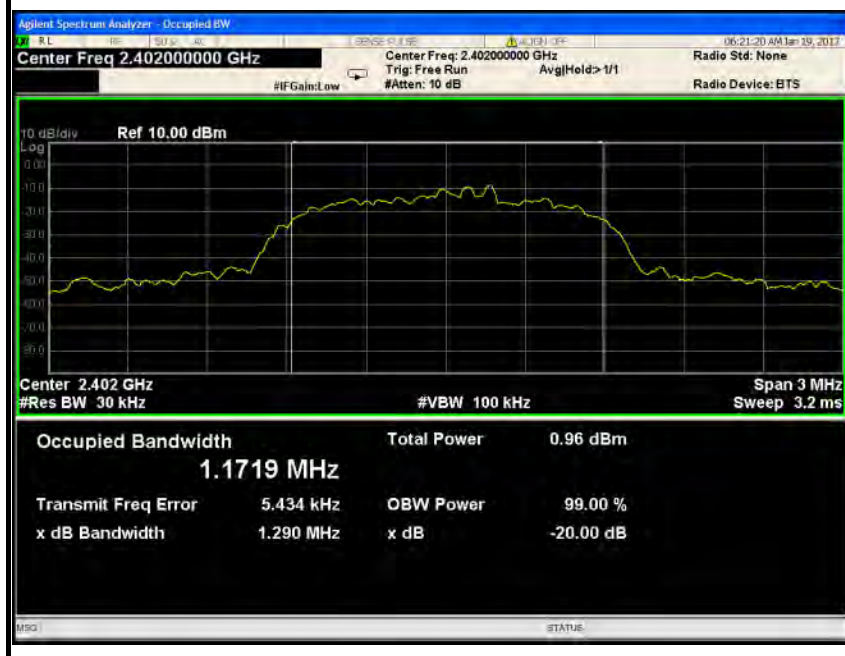




20dB Bandwidth (CH Mid)



20dB Bandwidth (CH High)

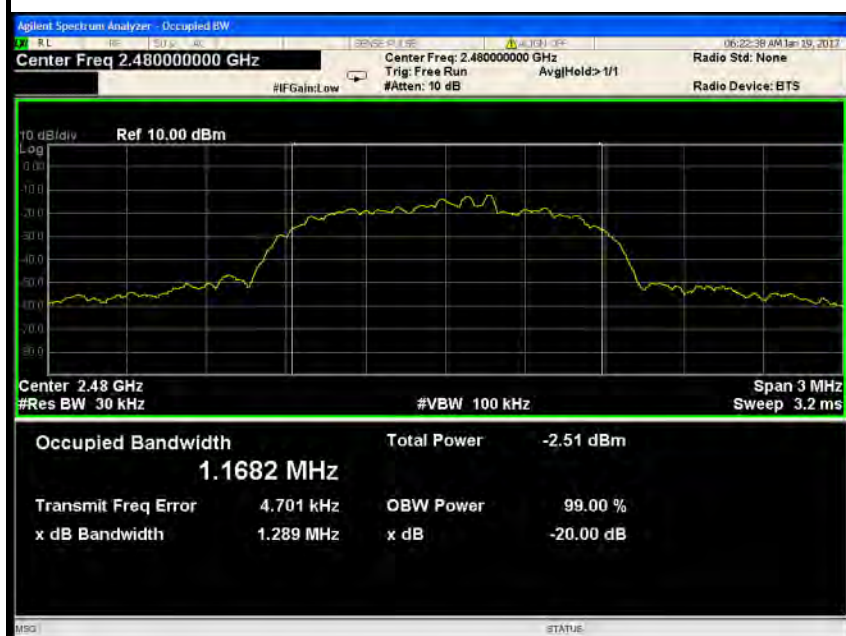



Antenna 2

GFSK

20dB Bandwidth(CH Low)



20dB Bandwidth (CH Mid)






20dB Bandwidth (CH High)



8DPSK

20dB Bandwidth (CH Low)

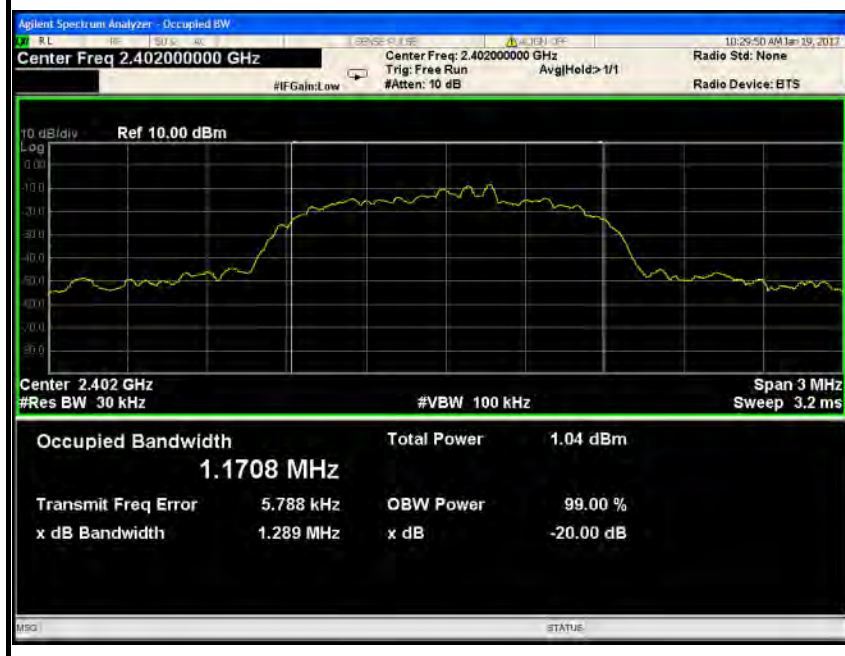




20dB Bandwidth (CH Mid)



20dB Bandwidth (CH High)

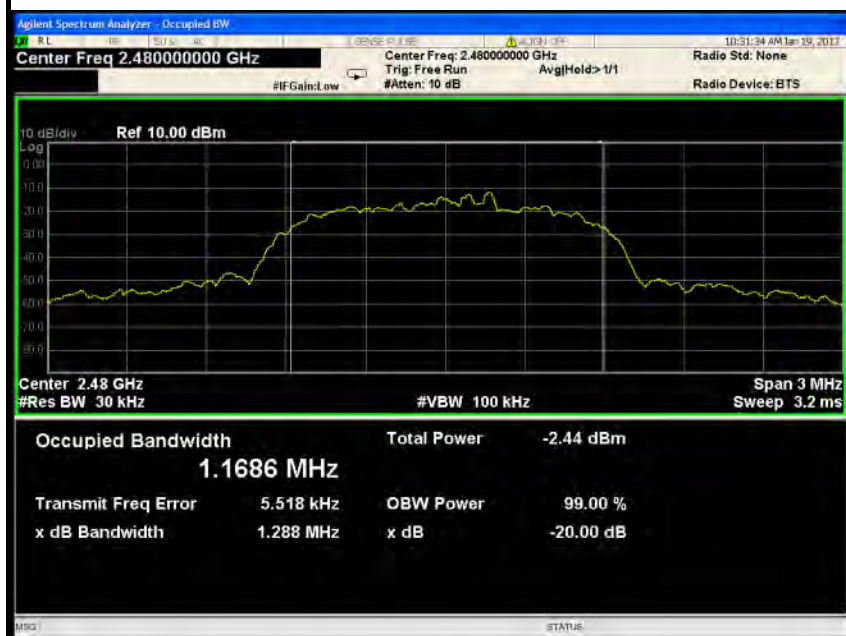



6.2 ANTENNA GAIN

MEASUREMENT

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal BT devices, the GFSK mode is used.

MEASUREMENT PARAMETERS

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	3 MHz
Video bandwidth	3 MHz
Trace-Mode	Max hold

LIMITS

FCC	IC
Antenna Gain	
6 dBi	

TEST RESULTS

Antenna 1

GFSK

T _{nom}	V _{nom}	Lowest channel 2402MHz	Middle channel 2441MHz	Highest channel 2480MHz
Conducted power [dBm] Measured with GFSK modulation		0.81	0.34	-0.20
Radiated power [dBm] Measured with GFSK modulation		3.88	3.51	2.95
Gain [dBi] Calculated		3.07	3.17	3.15
Measurement uncertainty		± 1.5 dB (cond.) / ± 3 dB (rad.)		

**8DPSK**

T _{nom}	V _{nom}	Lowest channel 2402MHz	Middle channel 2441MHz	Highest channel 2480MHz
Conducted power [dBm] Measured with 8DPSK modulation		1.26	0.84	0.36
Radiated power [dBm] Measured with 8DPSK modulation		4.23	3.89	3.57
Gain [dBi] Calculated		2.97	3.05	3.21
Measurement uncertainty		± 1.5 dB (cond.) / ± 3 dB (rad.)		

Antenna 2**GFSK**

T _{nom}	V _{nom}	Lowest channel 2402MHz	Middle channel 2441MHz	Highest channel 2480MHz
Conducted power [dBm] Measured with GFSK modulation		1.20	0.71	0.17
Radiated power [dBm] Measured with GFSK modulation		4.19	3.58	3.21
Gain [dBi] Calculated		2.99	2.87	3.04
Measurement uncertainty		± 1.5 dB (cond.) / ± 3 dB (rad.)		

8DPSK

T _{nom}	V _{nom}	Lowest channel 2402MHz	Middle channel 2441MHz	Highest channel 2480MHz
Conducted power [dBm] Measured with 8DPSK modulation		1.91	1.51	0.94
Radiated power [dBm] Measured with 8DPSK modulation		4.97	4.47	4.10
Gain [dBi] Calculated		3.06	2.96	3.16
Measurement uncertainty		± 1.5 dB (cond.) / ± 3 dB (rad.)		



6.3 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:


1. For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.
3. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Power Meter	Anritsu	ML2495A	1204003	02/21/2016	02/20/2017
Power Sensor	Anritsu	MA2411B	1126150	02/21/2016	02/20/2017

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.



TEST RESULTS

No non-compliance noted

Test Data

Antenna 1

GFSK

Channel	Frequency (MHz)	Reading Power (dBm)	Cable loss (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Peak /AVG	Result
Low	2402	-2.69	3.50	0.81	0.00121	0.125	peak	PASS
Mid	2441	-3.16	3.50	0.34	0.00108			PASS
High	2480	-3.70	3.50	-0.20	0.00095			PASS
Low	2402	-8.72	3.50	-5.22	0.00030	0.125	AVG	PASS
Mid	2441	-9.50	3.50	-6.00	0.00025			PASS
High	2480	-10.63	3.50	-7.13	0.00019			PASS

$\pi/4$ -DQPSK

Channel	Frequency (MHz)	Reading Power (dBm)	Cable loss (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Peak /AVG	Result
Low	2402	-2.25	3.50	1.25	0.00133	0.125	peak	PASS
Mid	2441	-2.68	3.50	0.82	0.00121			PASS
High	2480	-3.15	3.50	0.35	0.00108			PASS
Low	2402	-7.88	3.50	-4.38	0.00036	0.125	AVG	PASS
Mid	2441	-9.09	3.50	-5.59	0.00028			PASS
High	2480	-10.56	3.50	-7.06	0.00020			PASS

8DPSK

Channel	Frequency (MHz)	Reading Power (dBm)	Cable loss (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Peak /AVG	Result
Low	2402	-2.24	3.50	1.26	0.00134	0.125	peak	PASS
Mid	2441	-2.66	3.50	0.84	0.00121			PASS
High	2480	-3.14	3.50	0.36	0.00109			PASS
Low	2402	-8.12	3.50	-4.62	0.00035	0.125	AVG	PASS
Mid	2441	-9.55	3.50	-6.05	0.00025			PASS
High	2480	-10.36	3.50	-6.86	0.00021			PASS

**Antenna 2****GFSK**

Channel	Frequency (MHz)	Reading Power (dBm)	Cable loss (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Peak /AVG	Result
Low	2402	-2.30	3.50	1.20	0.00132	0.125	peak	PASS
Mid	2441	-2.79	3.50	0.71	0.00118			PASS
High	2480	-3.33	3.50	0.17	0.00104			PASS
Low	2402	-6.82	3.50	-3.32	0.00047	0.125	AVG	PASS
Mid	2441	-7.59	3.50	-4.09	0.00039			PASS
High	2480	-8.78	3.50	-5.28	0.00030			PASS

 $\pi/4$ -DQPSK

Channel	Frequency (MHz)	Reading Power (dBm)	Cable loss (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Peak /AVG	Result
Low	2402	-1.93	3.50	1.57	0.00144	0.125	peak	PASS
Mid	2441	-2.36	3.50	1.14	0.00130			PASS
High	2480	-2.84	3.50	0.66	0.00116			PASS
Low	2402	-6.39	3.50	-2.89	0.00051	0.125	AVG	PASS
Mid	2441	-7.56	3.50	-4.06	0.00039			PASS
High	2480	-9.32	3.50	-5.82	0.00026			PASS

8DPSK

Channel	Frequency (MHz)	Reading Power (dBm)	Cable loss (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Peak /AVG	Result
Low	2402	-1.59	3.50	1.91	0.00155	0.125	peak	PASS
Mid	2441	-1.99	3.50	1.51	0.00142			PASS
High	2480	-2.56	3.50	0.94	0.00124			PASS
Low	2402	-6.21	3.50	-2.71	0.00054	0.125	AVG	PASS
Mid	2441	-7.83	3.50	-4.33	0.00037			PASS
High	2480	-8.54	3.50	-5.04	0.00031			PASS



6.4 PEAK POWER SPECTRAL DENSITY

LIMIT


1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2016	02/20/2017

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST RESULTS

Not applicable. Since EUT is the Bluetooth device.



6.5 BAND EDGES MEASUREMENT


LIMIT

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

MEASUREMENT EQUIPMENT USED

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2016	02/20/2017
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/21/2016	02/20/2017
Amplifier	EMEC	EM330	060661	03/18/2016	03/17/2017
High Noise Amplifier	Agilent	8449B	3008A01838	02/21/2016	02/20/2017
Loop Antenna	COM-POWER	AL-130	121044	09/25/2016	09/24/2017
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/21/2016	02/20/2017
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/28/2016	02/27/2017
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	02/28/2016	02/27/2017
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/21/2016	02/20/2017
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

Test Configuration

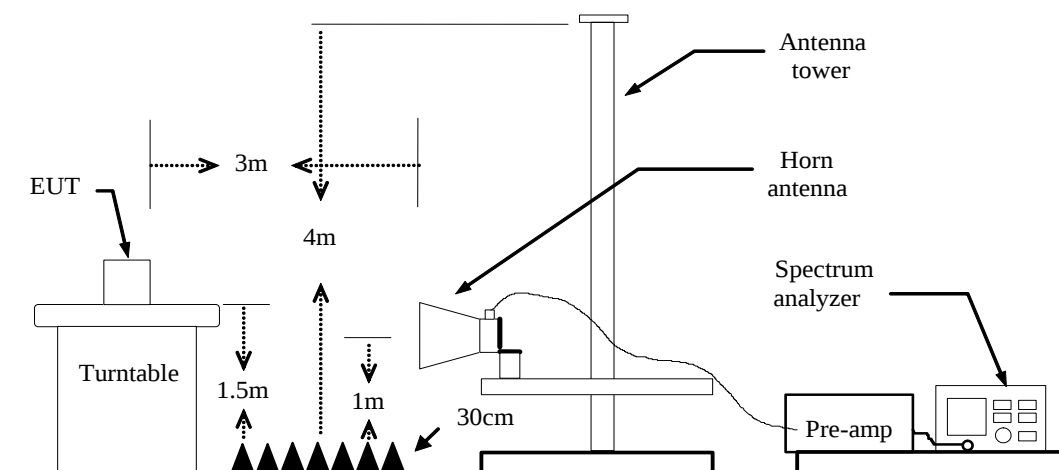



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=330Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS


Refer to attach spectrum analyzer data chart.




Antenna 1
Test Data (GFSK)

Band Edges (CH-Low)


Detector mode: Peak **Polarity: Vertical**

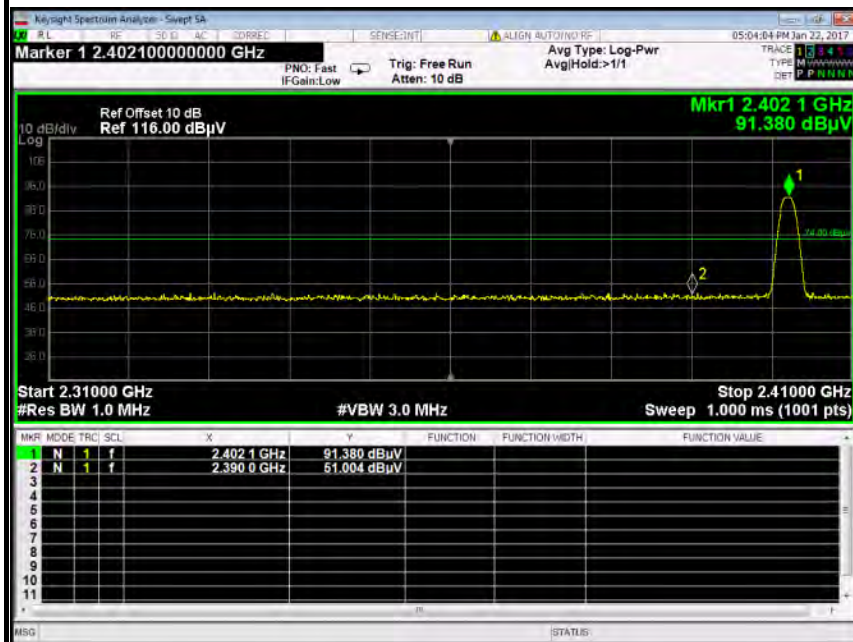

Detector mode: Average **Polarity: Vertical**

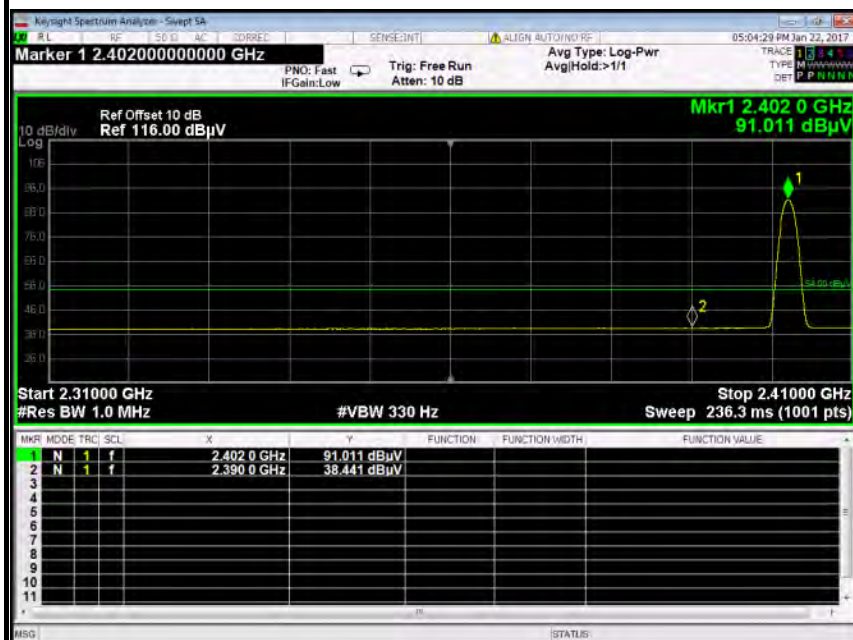

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	44.40	-6.60	51.00	74.00	-23.00	Peak	Vertical
2	2390.0000	31.84	-6.60	38.44	54.00	-15.56	Average	Vertical

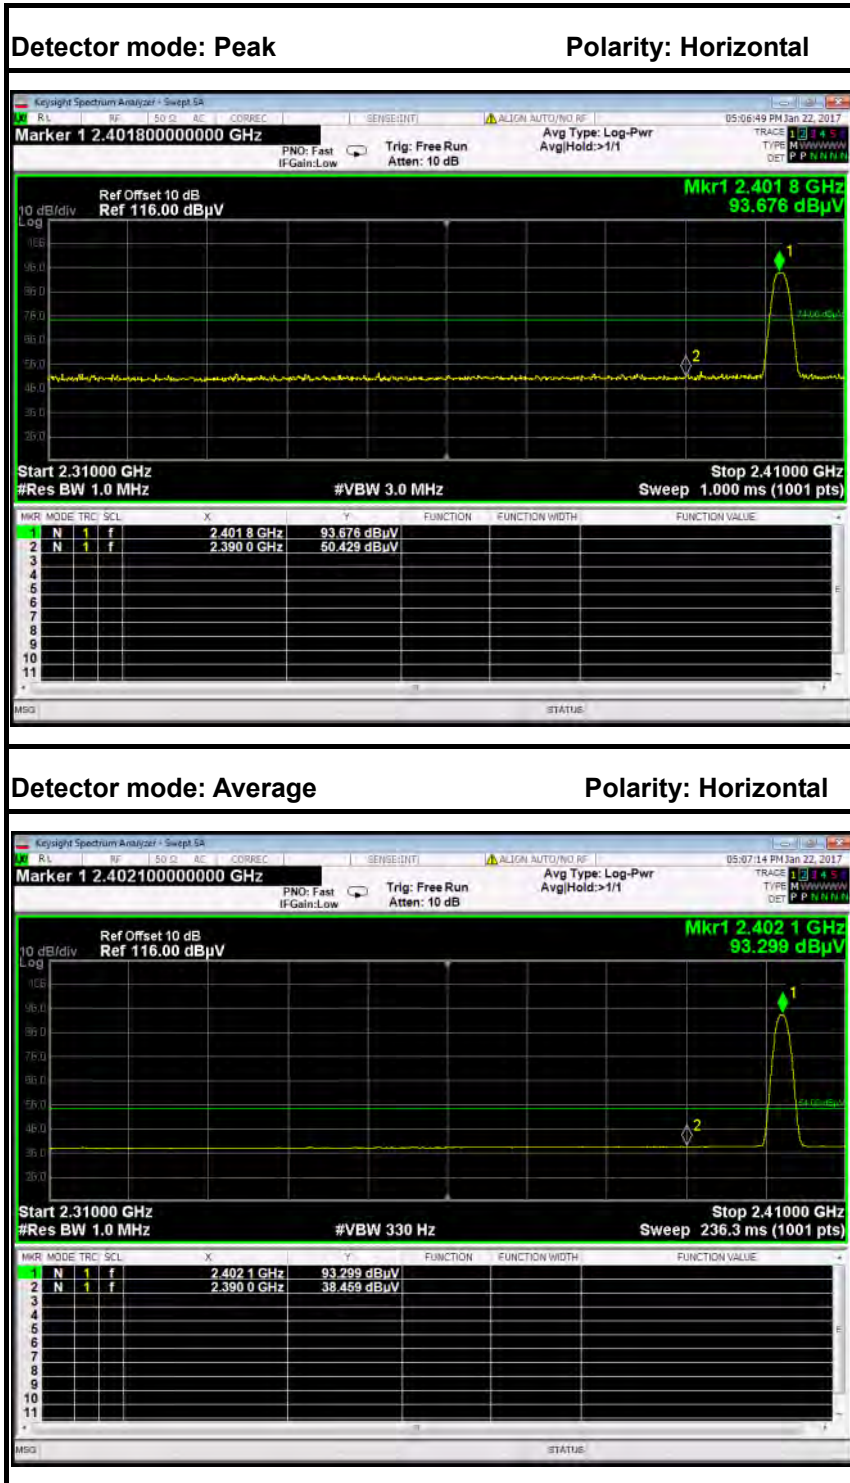


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	43.83	-6.60	50.43	74.00	-23.57	Peak	Horizontal
2	2390.0000	31.86	-6.60	38.46	54.00	-15.54	Average	Horizontal



Band Edges (CH-High)

Detector mode: Peak

Polarity: Vertical

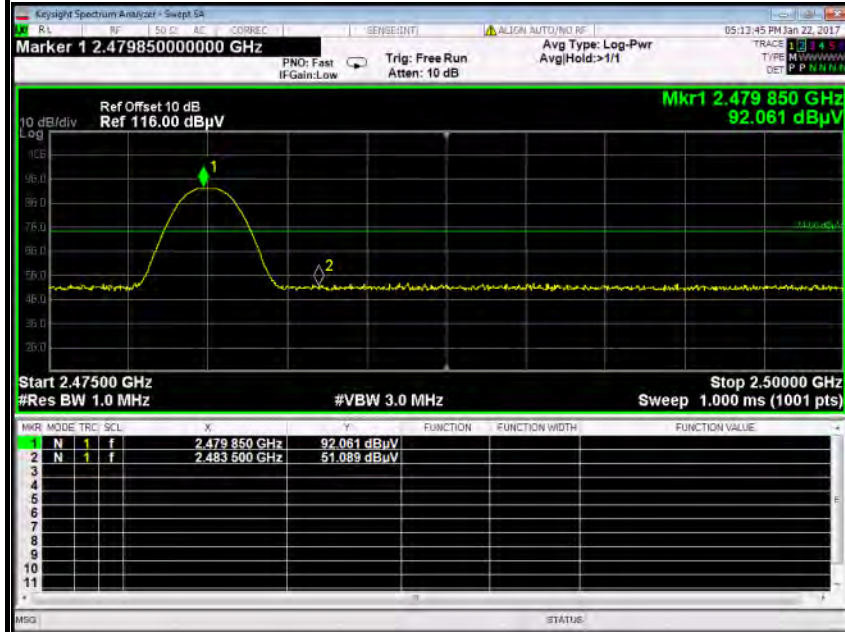


Detector mode: Average

Polarity: Vertical



No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	44.85	-6.24	51.09	74.00	-22.91	Peak	Vertical
2	2483.5000	32.95	-6.24	39.19	54.00	-14.81	Average	Vertical

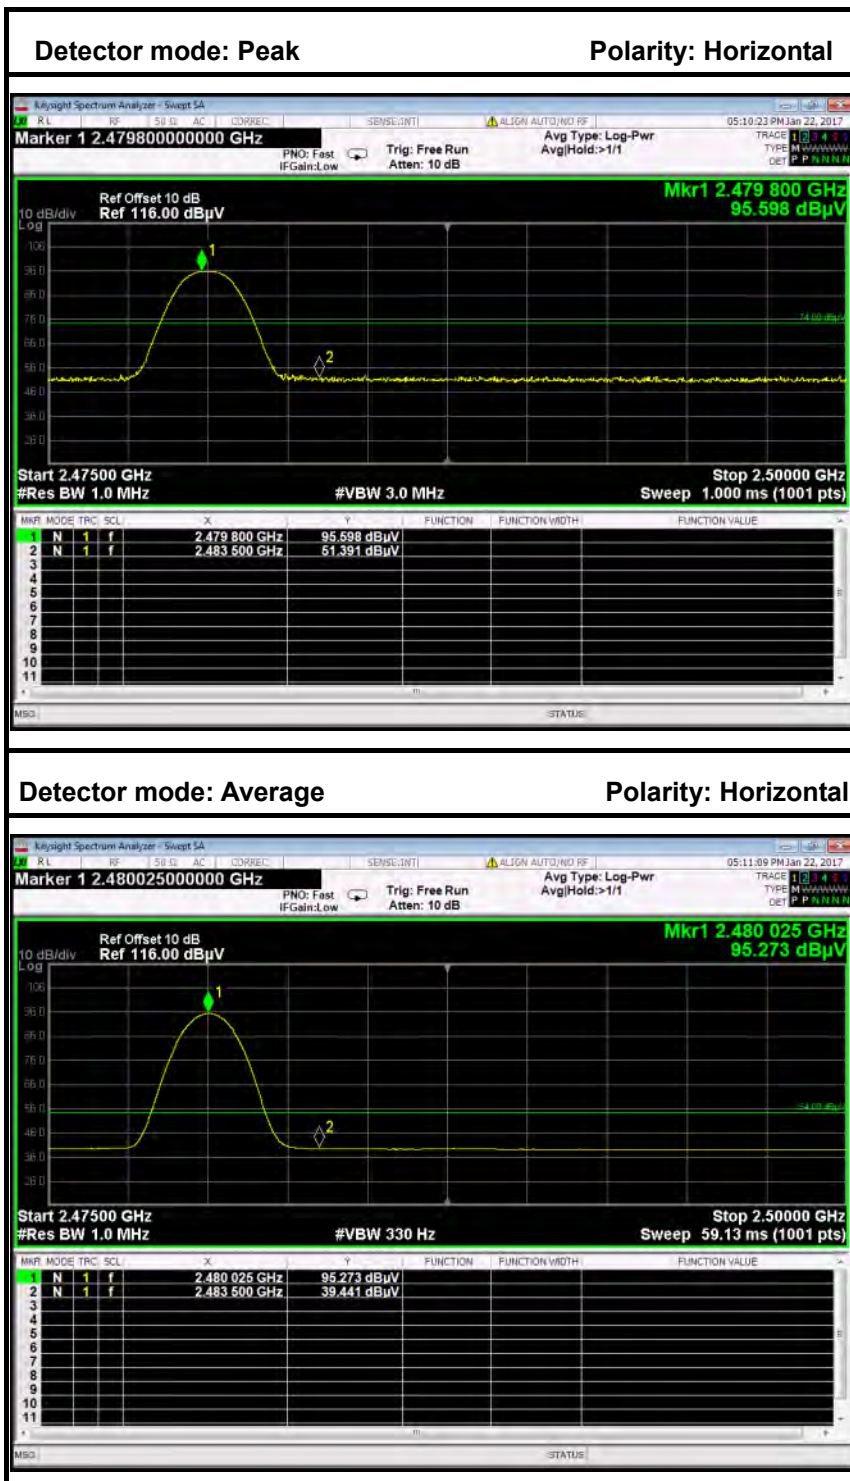


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	45.15	-6.24	51.39	74.00	-22.61	Peak	Horizontal
2	2483.5000	33.20	-6.24	39.44	54.00	-14.56	Average	Horizontal



8DPSK

Band Edges (CH-Low)

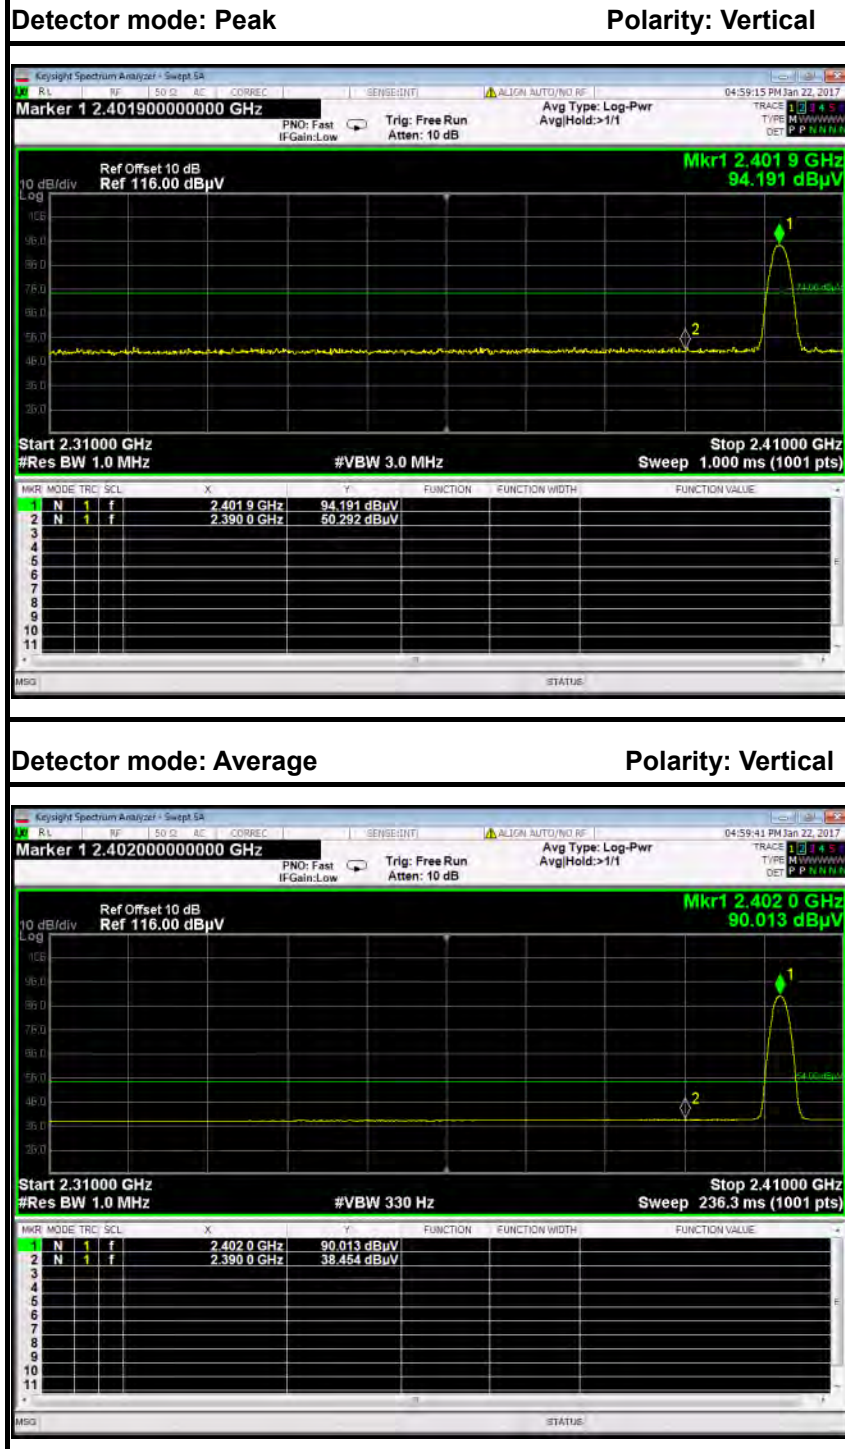


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	43.69	-6.60	50.29	74.00	-23.71	Peak	Vertical
2	2390.0000	31.85	-6.60	38.45	54.00	-15.55	Average	Vertical




Detector mode: Peak

Polarity: Horizontal

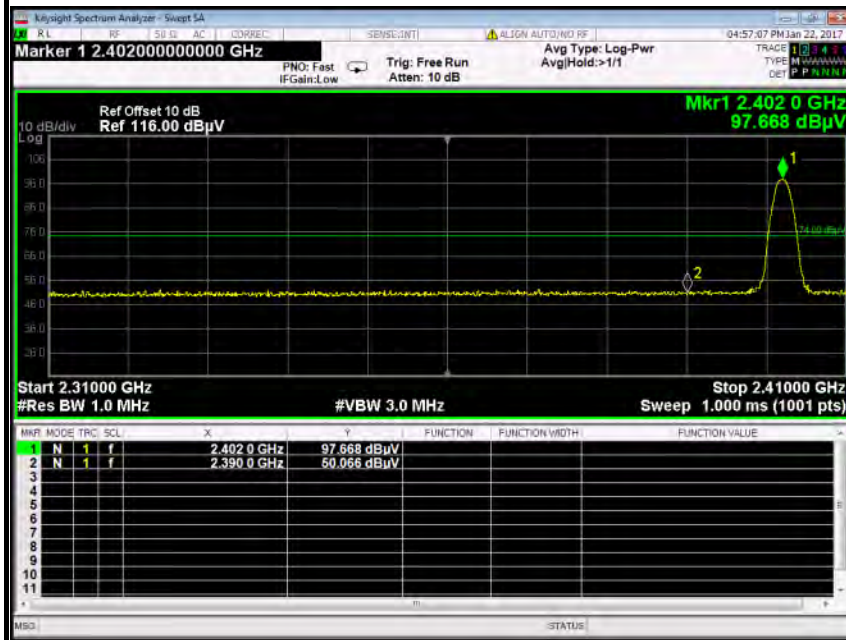

Detector mode: Average

Polarity: Horizontal

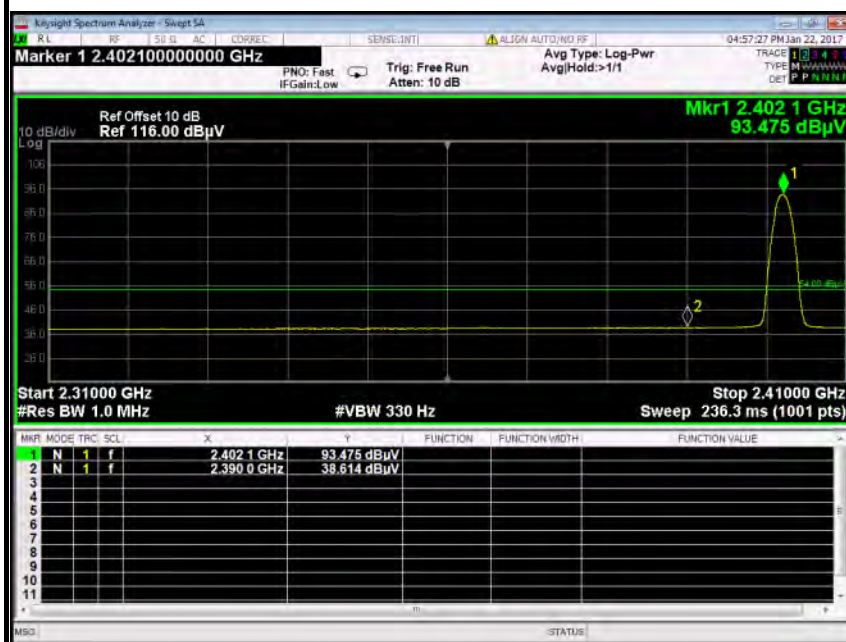


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	43.47	-6.60	50.07	74.00	-23.93	Peak	Horizontal
2	2390.0000	32.01	-6.60	38.61	54.00	-15.39	Average	Horizontal



Band Edges (CH-High)

Detector mode: Peak

Polarity: Vertical

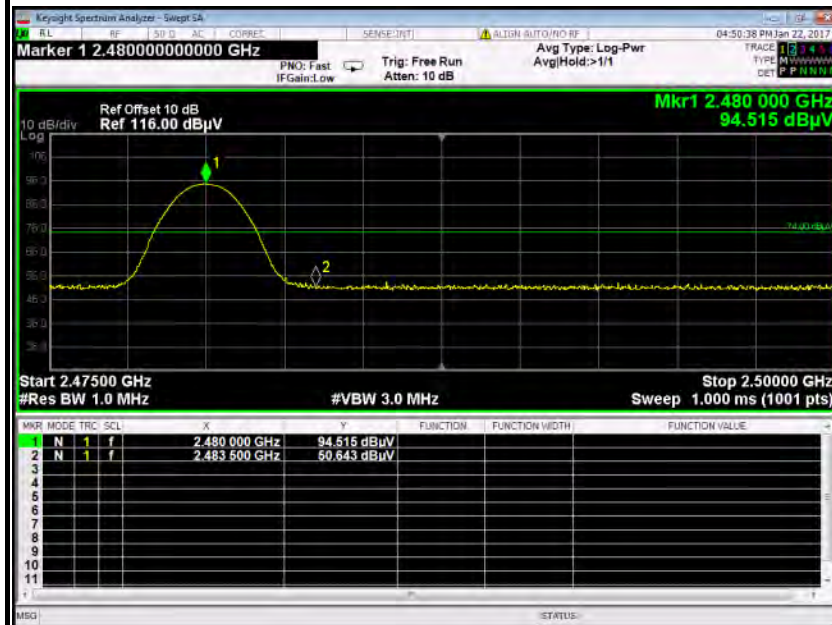

Detector mode: Average

Polarity: Vertical




No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	44.40	-6.24	50.64	74.00	-23.36	Peak	Vertical
2	2483.5000	33.12	-6.24	39.36	54.00	-14.64	Average	Vertical



Detector mode: Peak

Polarity: Horizontal

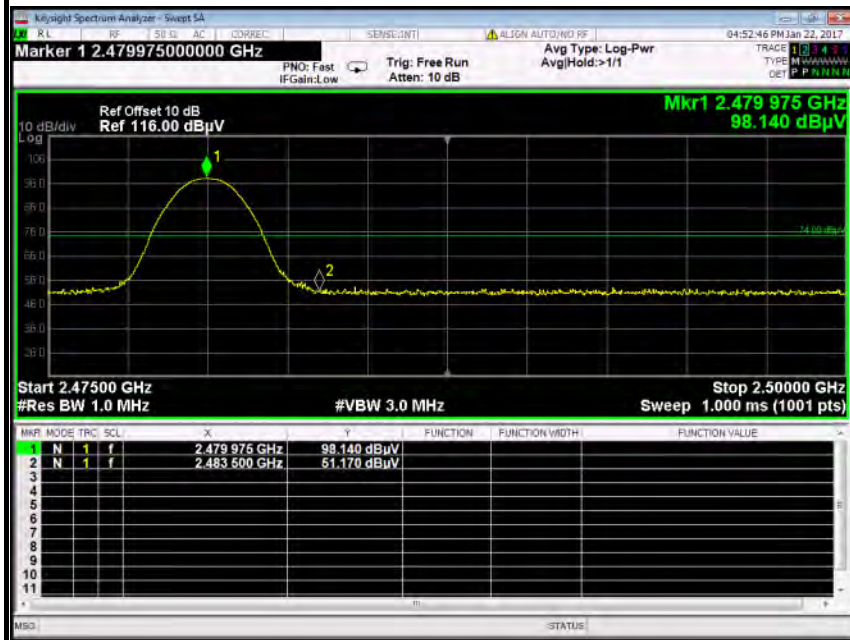

Detector mode: Average

Polarity: Horizontal




No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	44.93	-6.24	51.17	74.00	-22.83	Peak	Horizontal
2	2483.5000	33.54	-6.24	39.78	54.00	-14.22	Average	Horizontal




Antenna 2
Test Data (GFSK)

Band Edges (CH-Low)

Detector mode: Peak **Polarity: Vertical**

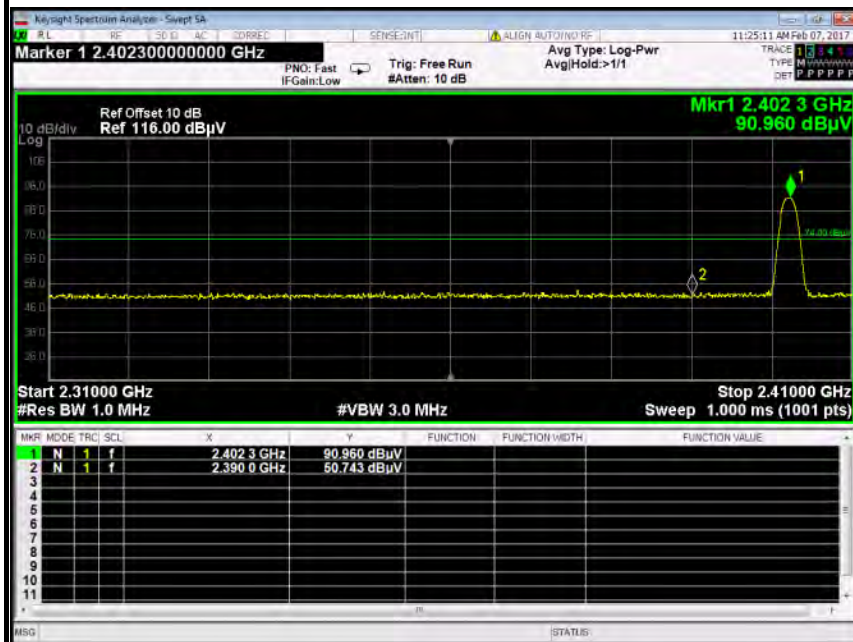

Detector mode: Average **Polarity: Vertical**

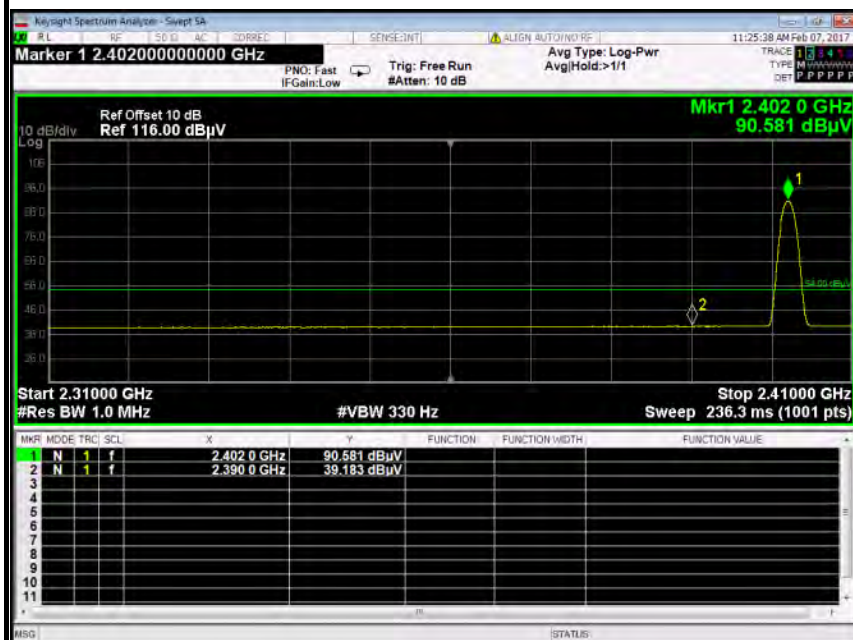


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	44.14	-6.60	50.74	74.00	-23.26	Peak	Vertical
2	2390.0000	32.58	-6.60	39.18	54.00	-14.82	Average	Vertical




Detector mode: Peak

Polarity: Horizontal

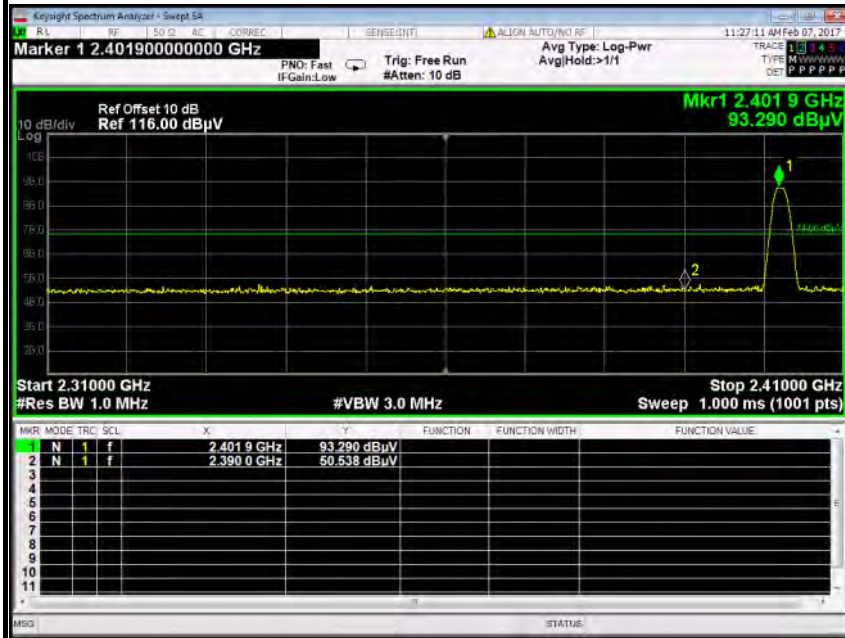

Detector mode: Average

Polarity: Horizontal

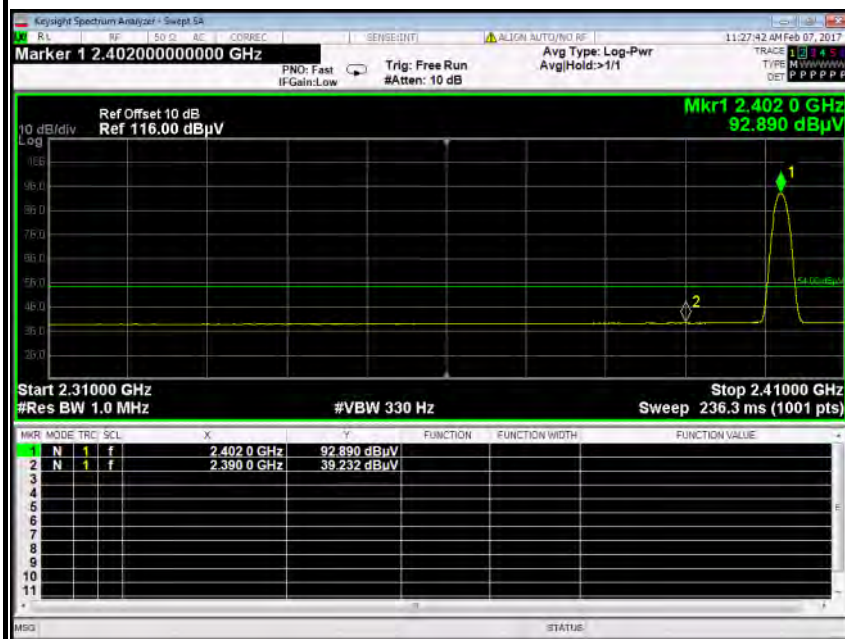


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	43.94	-6.60	50.54	74.00	-23.46	Peak	Horizontal
2	2390.0000	32.63	-6.60	39.23	54.00	-14.77	Average	Horizontal



Band Edges (CH-High)


Detector mode: Peak

Polarity: Vertical

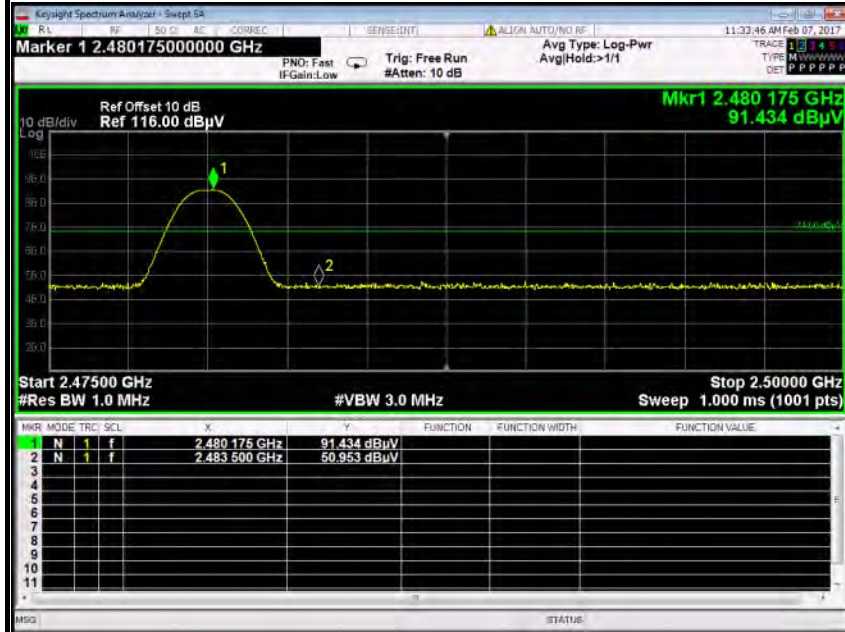


Detector mode: Average

Polarity: Vertical

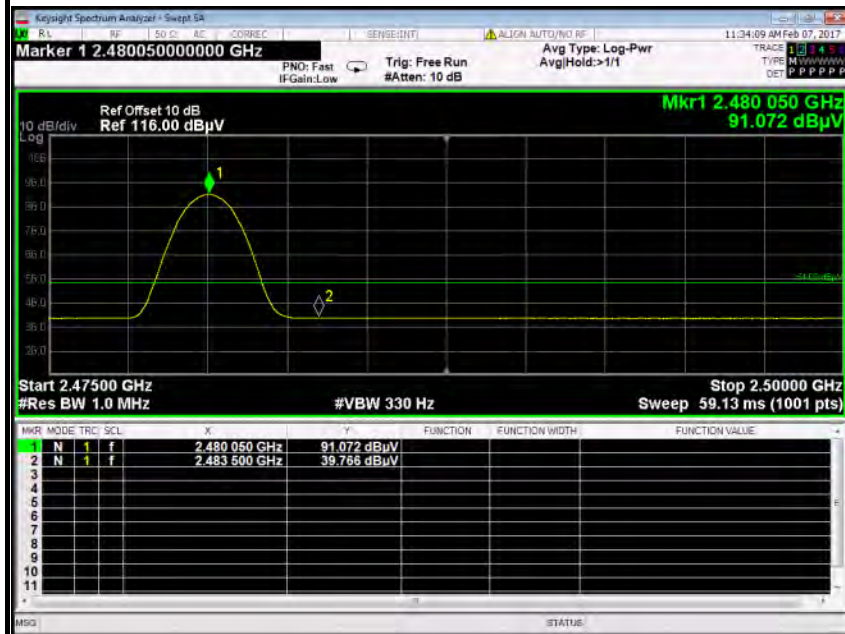

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	44.71	-6.24	50.95	74.00	-23.05	Peak	Vertical
2	2483.5000	33.53	-6.24	39.77	54.00	-14.23	Average	Vertical

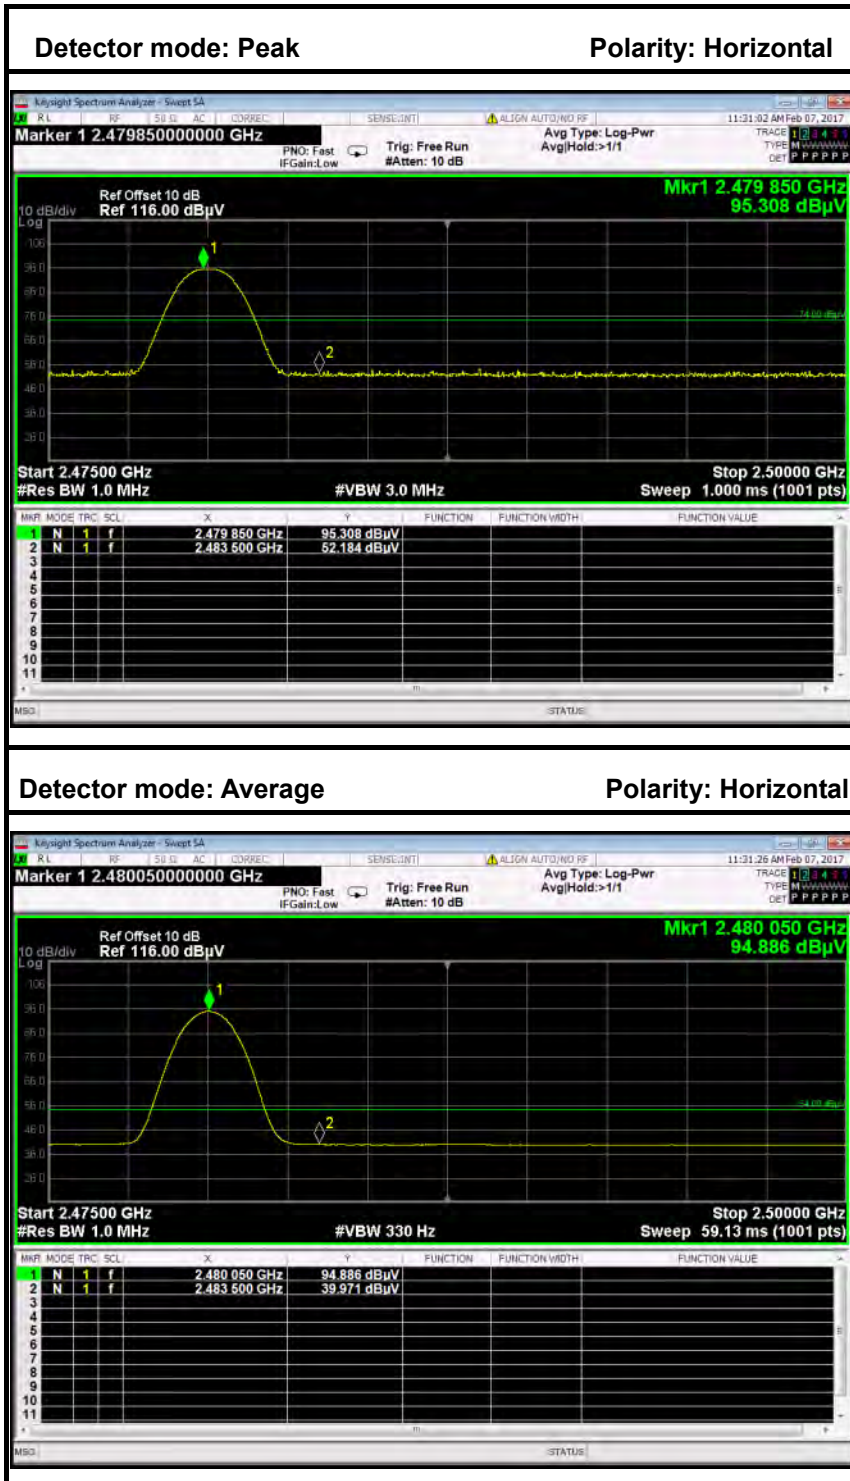


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	45.94	-6.24	52.18	74.00	-21.82	Peak	Horizontal
2	2483.5000	33.73	-6.24	39.97	54.00	-14.03	Average	Horizontal



8DPSK

Band Edges (CH-Low)

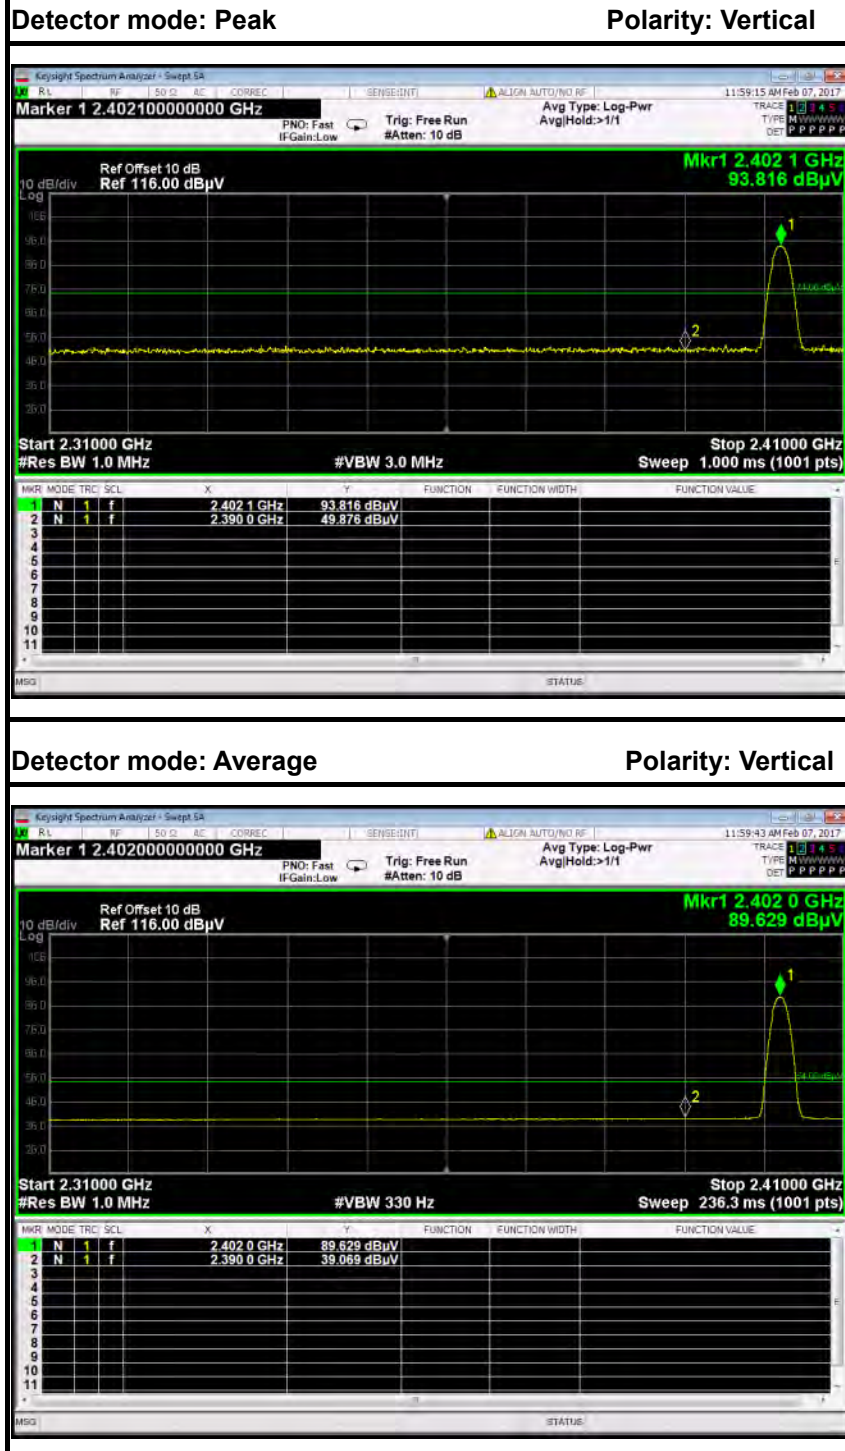


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	43.28	-6.60	49.88	74.00	-24.12	Peak	Vertical
2	2390.0000	32.47	-6.60	39.07	54.00	-14.93	Average	Vertical




Detector mode: Peak

Polarity: Horizontal

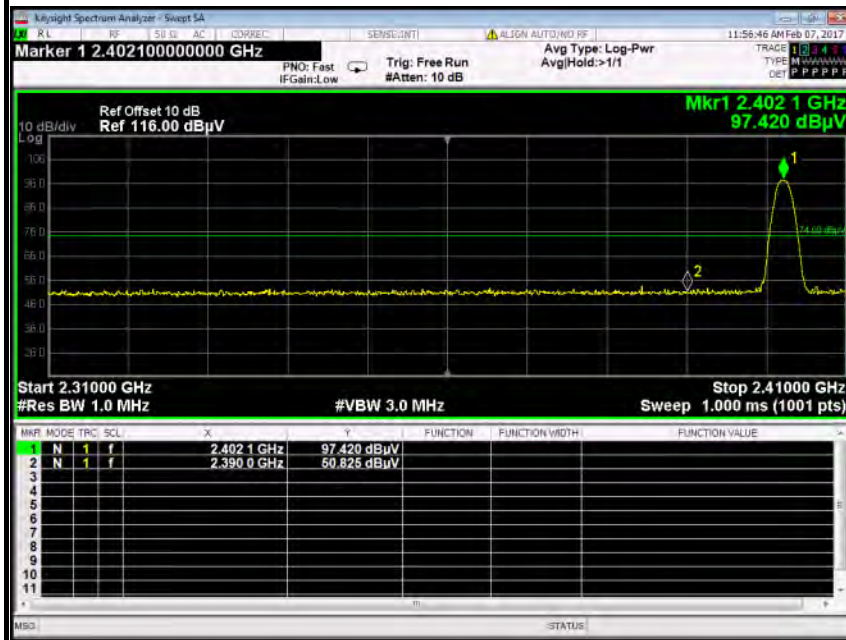

Detector mode: Average

Polarity: Horizontal

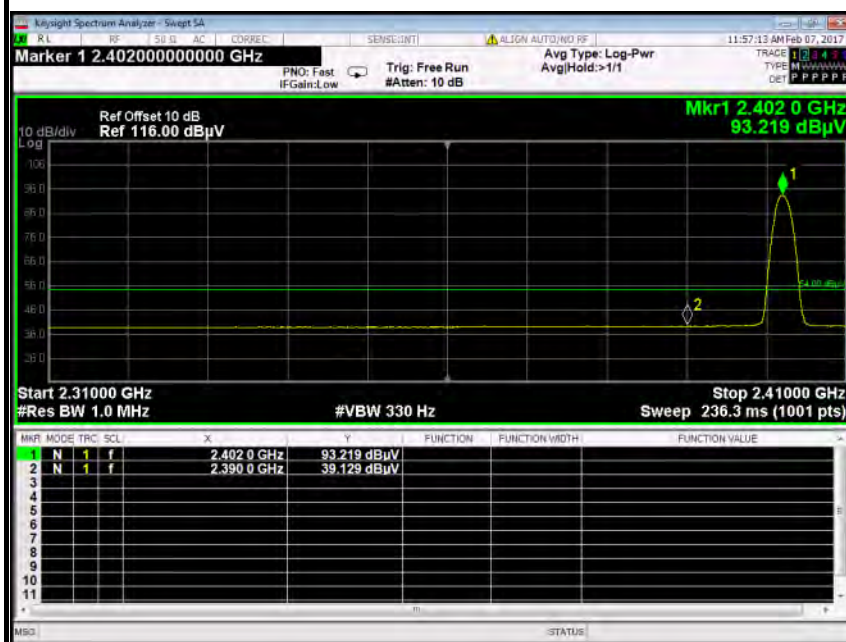


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	44.23	-6.60	50.83	74.00	-23.18	Peak	Horizontal
2	2390.0000	32.53	-6.60	39.13	54.00	-14.87	Average	Horizontal



Band Edges (CH-High)


Detector mode: Peak

Polarity: Vertical

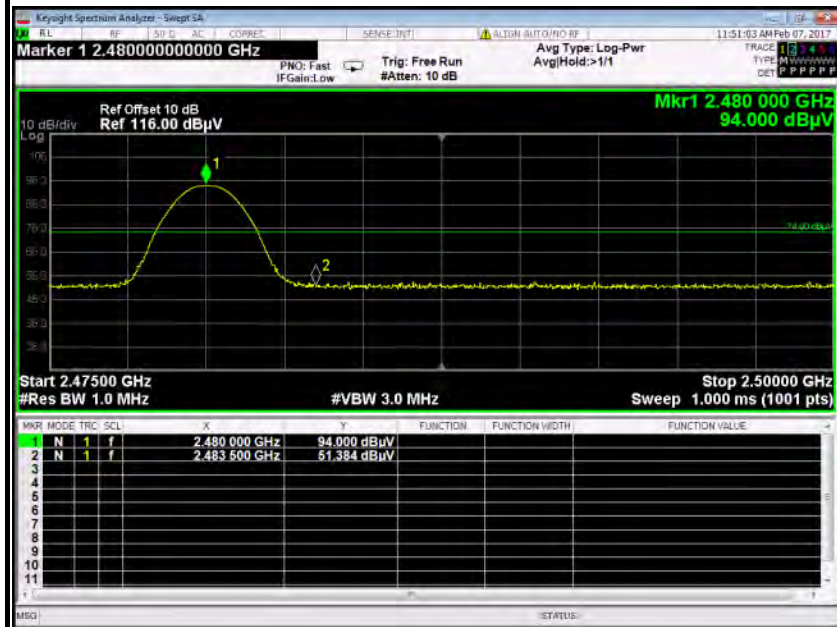

Detector mode: Average

Polarity: Vertical

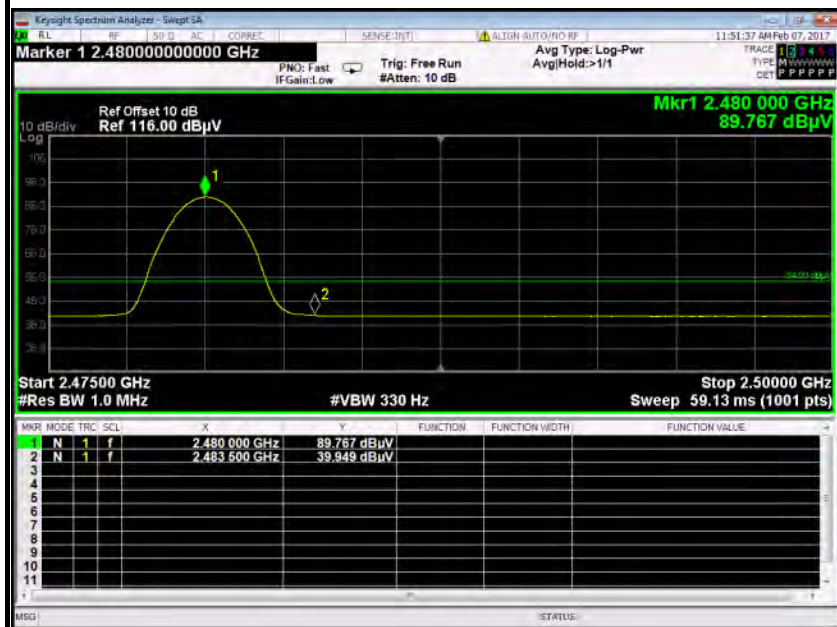


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	45.14	-6.24	51.38	74.00	-22.62	Peak	Vertical
2	2483.5000	33.71	-6.24	39.95	54.00	-14.05	Average	Vertical




Detector mode: Peak

Polarity: Horizontal

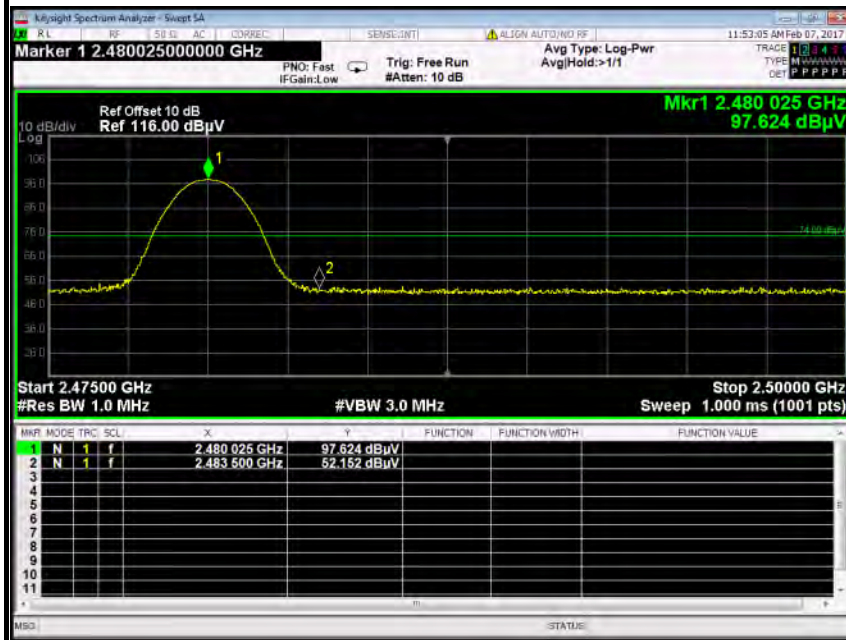

Detector mode: Average

Polarity: Horizontal

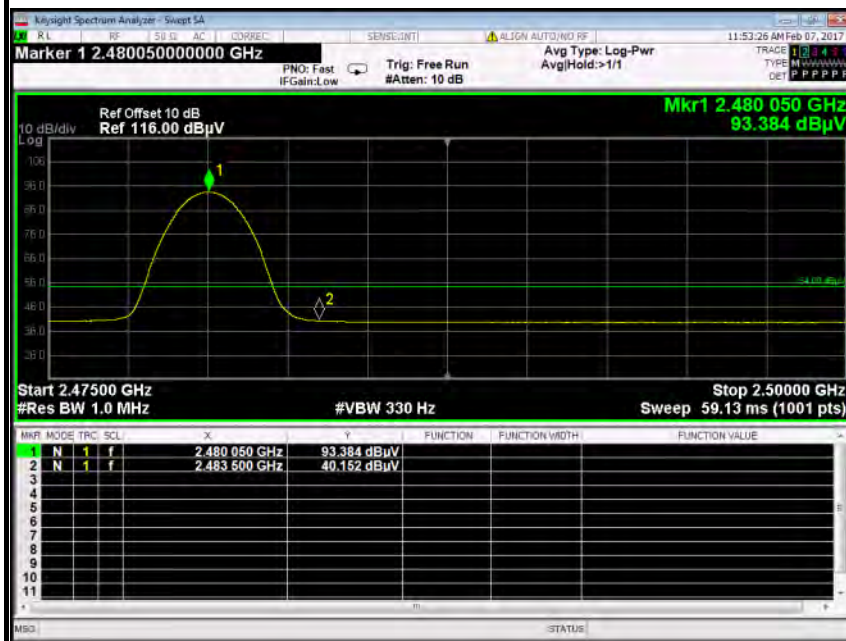

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	45.91	-6.24	52.15	74.00	-21.85	Peak	Horizontal
2	2483.5000	33.91	-6.24	40.15	54.00	-13.85	Average	Horizontal



6.6 FREQUENCY SEPARATION

LIMIT


According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2016	02/20/2017

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW=30kHz, VBW=30kHz, Adjust Span to 4 MHz, Sweep = auto.
5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

TEST RESULTS

No non-compliance noted

**Test Data****Antenna 1****GFSK**

Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.000	681.333	> Two-thirds of the 20 dB Bandwidth	Pass

8DPSK

Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.000	860.000	> Two-thirds of the 20 dB Bandwidth	Pass

Antenna 2**GFSK**

Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.000	636.200	> Two-thirds of the 20 dB Bandwidth	Pass

8DPSK

Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.000	862.667	> Two-thirds of the 20 dB Bandwidth	Pass



Antenna 1

GFSK

Test Plot

Measurement of Channel Separation



20 dB bandwidth(CH High)






8DPSK

Test Plot

Measurement of Channel Separation



20 dB bandwidth(CH Low)

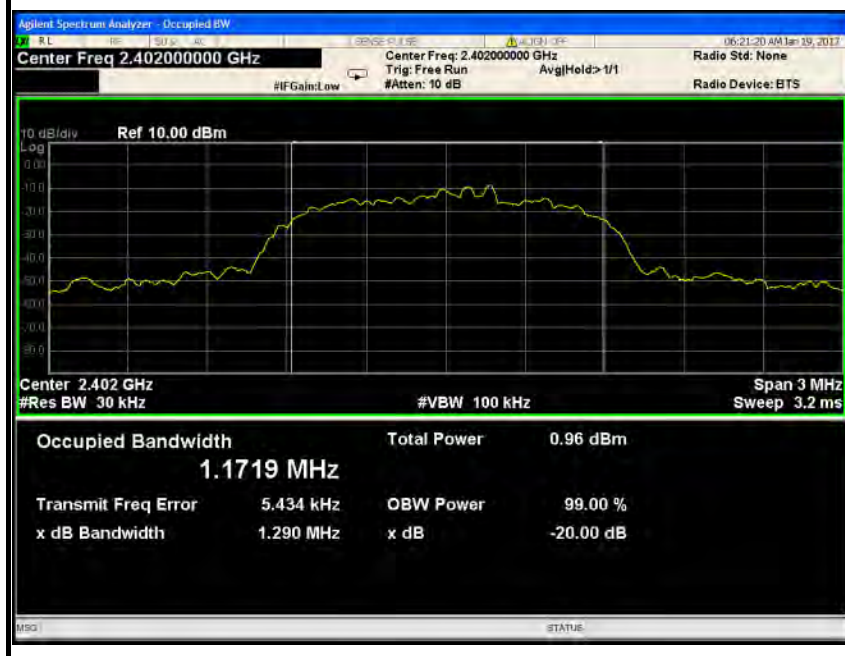



Antenna 2

GFSK

Test Plot

Measurement of Channel Separation



20 dB bandwidth(CH Mid)





8DPSK

Test Plot

Measurement of Channel Separation



20 dB bandwidth(CH Mid)





6.7 NUMBER OF HOPPING FREQUENCY

LIMIT


According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2016	02/20/2017

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = 1ms.
4. Set the spectrum analyzer as RBW, VBW=300kHz,
5. Max hold, view and count how many channel in the band.

TEST RESULTS

No non-compliance noted

Test Data

Antenna 1

Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS

Antenna 2

Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS




Antenna 1 Test Plot

Channel Number


GFSK

2.400 GHz – 2.4835 GHz

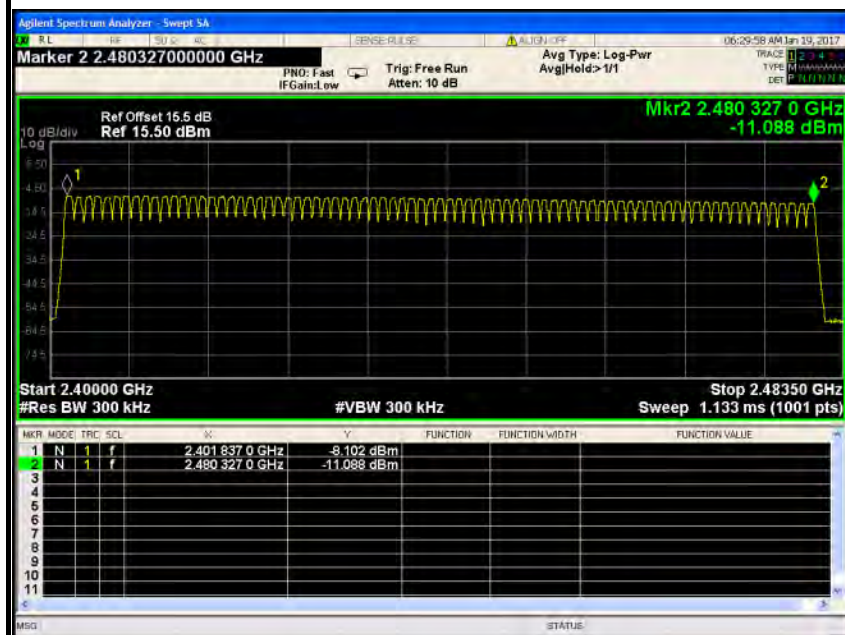

8DPSK

2.400 GHz – 2.4835 GHz

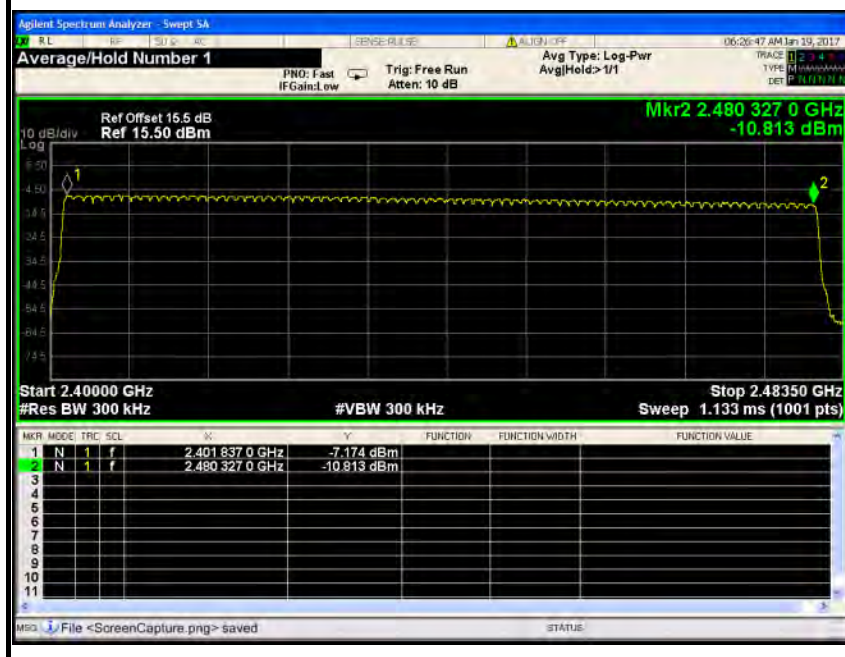




Antenna 2 Test Plot

Channel Number


GFSK

2.400 GHz – 2.4835 GHz

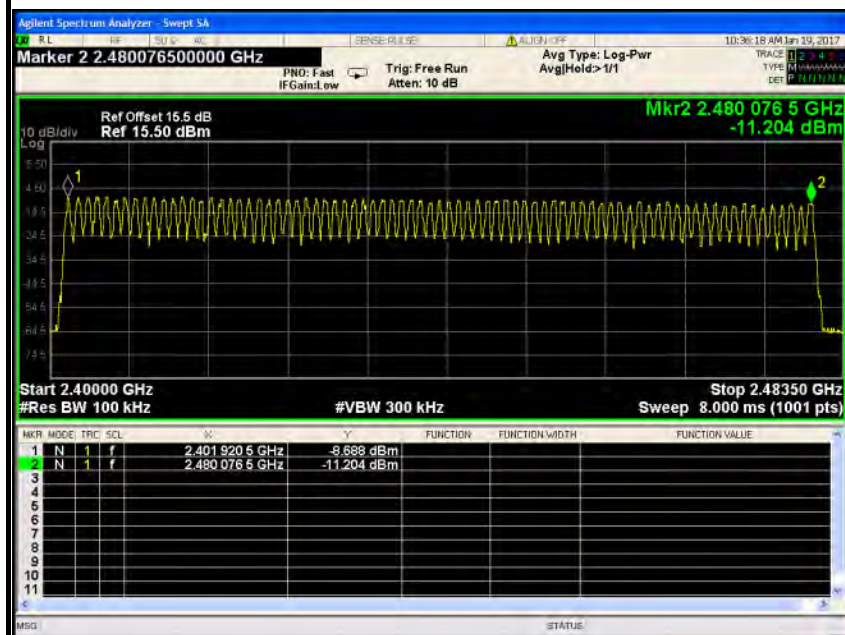

8DPSK

2.400 GHz – 2.4835 GHz

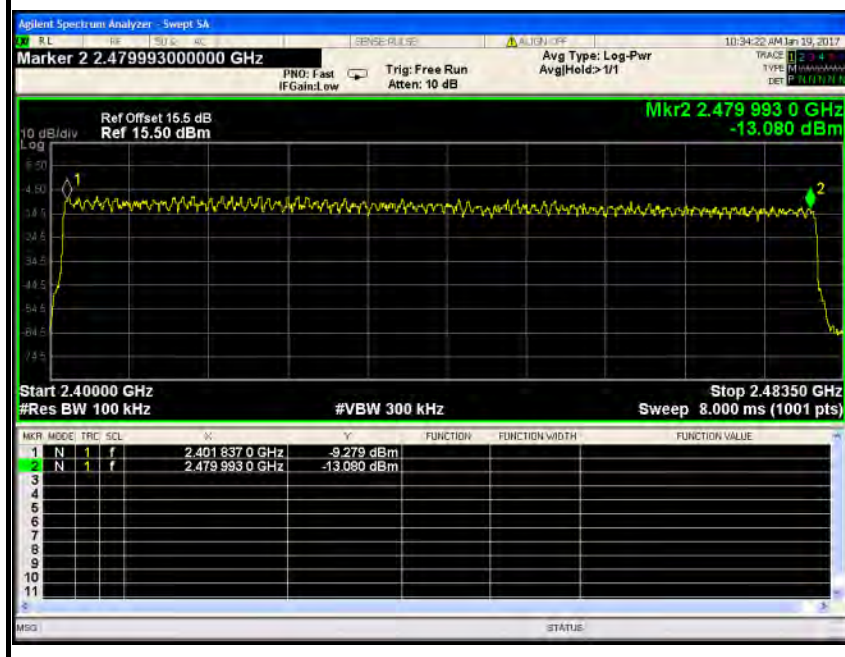



6.8 TIME OF OCCUPANCY (DWELL TIME)

LIMIT


According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4s multiplied by the number of hopping channels employed.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2016	02/20/2017

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
5. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

No non-compliance noted

Antenna 1 Test Data

GFSK

DH 1

CH Mid: $0.410 * (1600/2)/79 * 31.6 = 131.200(\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.410	131.200	31.60	400.00	PASS

DH 3

CH Mid: $1.668 * (1600/4)/79 * 31.6 = 266.880 (\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.668	266.880	31.60	400.00	PASS

DH 5

CH Mid: $2.924 * (1600/6)/79 * 31.6 = 311.893(\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	2.924	311.893	31.60	400.00	PASS

**8DPSK****DH 1**CH Mid: $0.404 * (1600/2)/79 * 31.6 = 129.280$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.404	129.280	31.60	400.00	PASS

DH 3CH Mid: $1.662 * (1600/4)/79 * 31.6 = 265.920$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.662	265.920	31.60	400.00	PASS

DH 5CH Mid: $2.916 * (1600/6)/79 * 31.6 = 311.040$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	2.916	311.040	31.60	400.00	PASS

**Antenna 2 Test Data****GFSK****DH 1**

CH Mid: $0.408 * (1600/2)/79 * 31.6 = 130.560(\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.408	130.560	31.60	400.00	PASS

DH 3

CH Mid: $1.668 * (1600/4)/79 * 31.6 = 266.880 (\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.668	266.880	31.60	400.00	PASS

DH 5

CH Mid: $2.932 * (1600/6)/79 * 31.6 = 312.747(\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	2.932	312.747	31.60	400.00	PASS

**8DPSK****DH 1**CH Mid: $0.408 * (1600/2)/79 * 31.6 = 130.560$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.408	130.560	31.60	400.00	PASS

DH 3CH Mid: $1.664 * (1600/4)/79 * 31.6 = 266.240$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.664	266.240	31.60	400.00	PASS

DH 5CH Mid: $2.920 * (1600/6)/79 * 31.6 = 311.467$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	2.920	311.467	31.60	400.00	PASS




Antenna 1 Test Plot

GFSK


DH 1

CH Mid

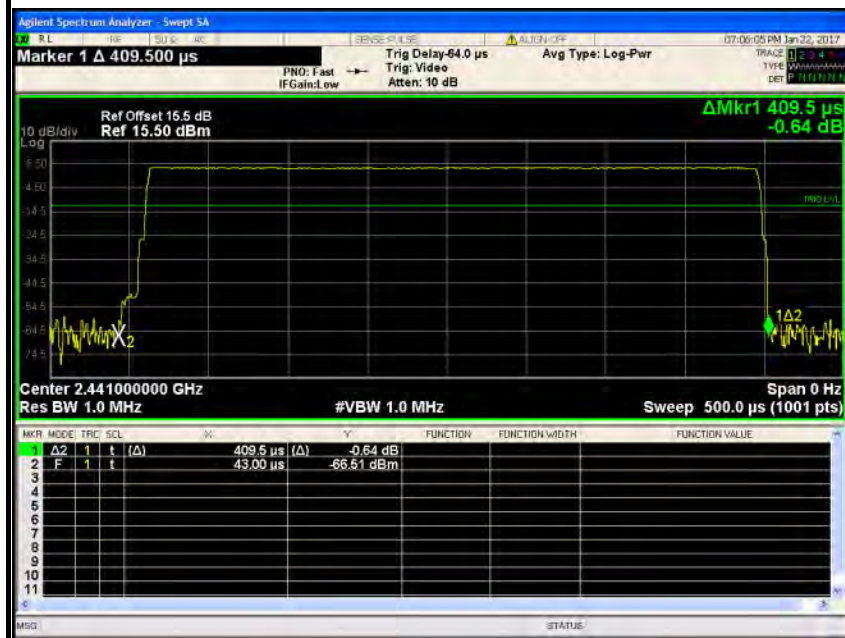

DH 3


CH Mid

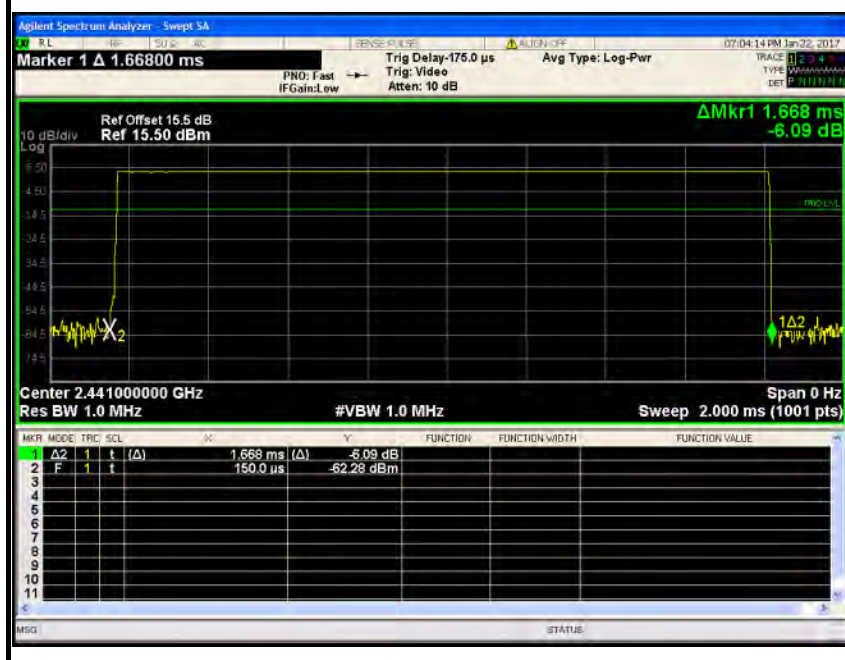



DH 5

CH Mid

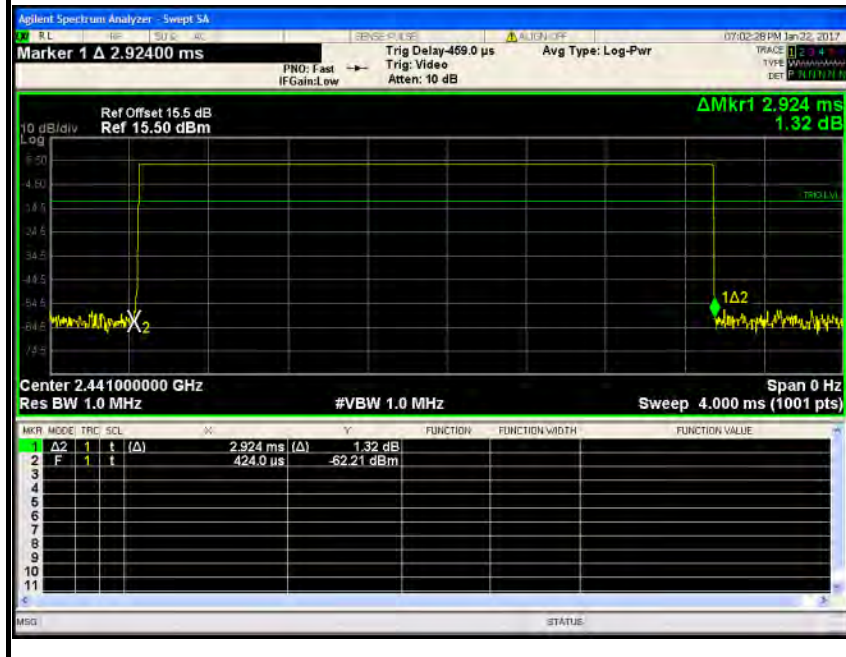




8DPSK


DH 1

CH Mid

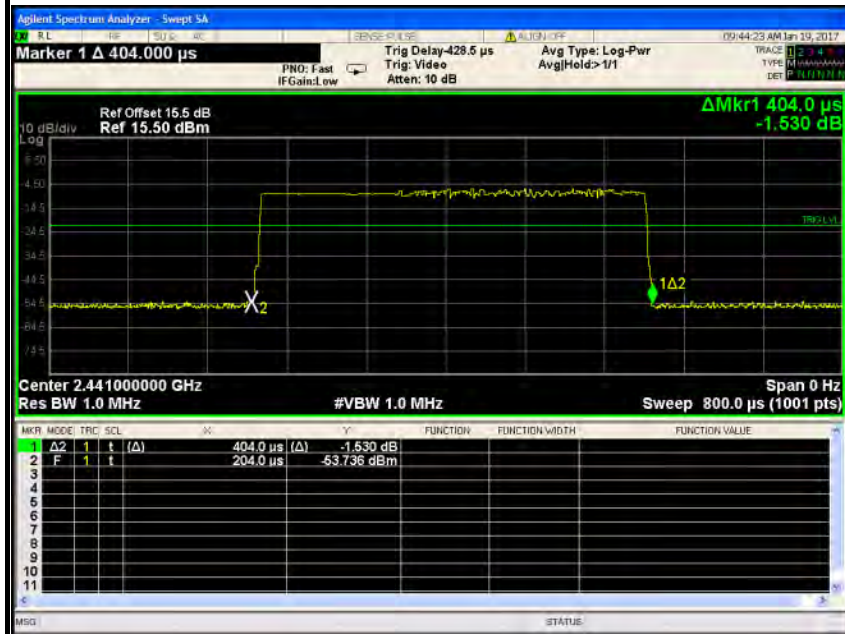

DH 3


CH Mid

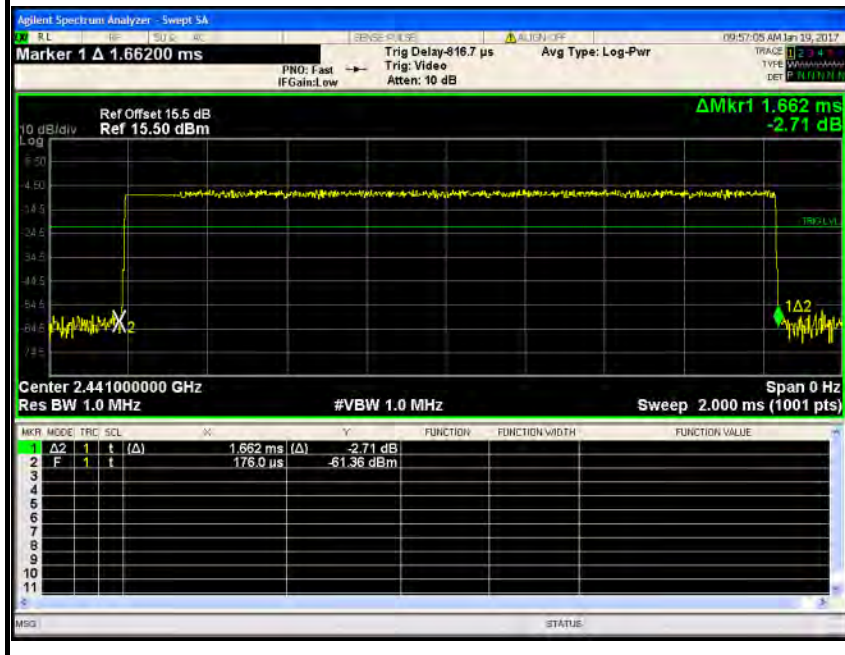



DH 5

CH Mid

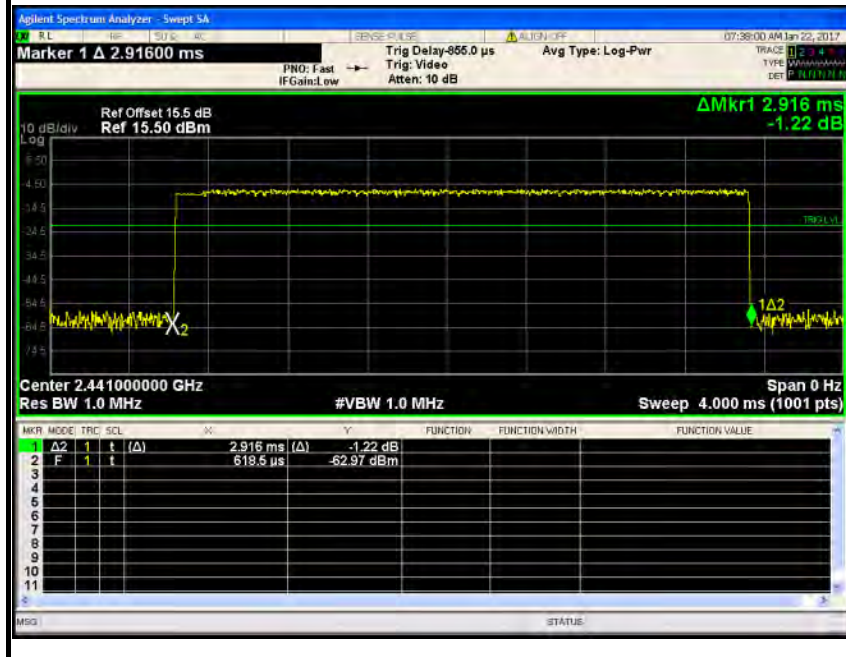




Antenna 2 Test Plot

GFSK


DH 1

CH Mid

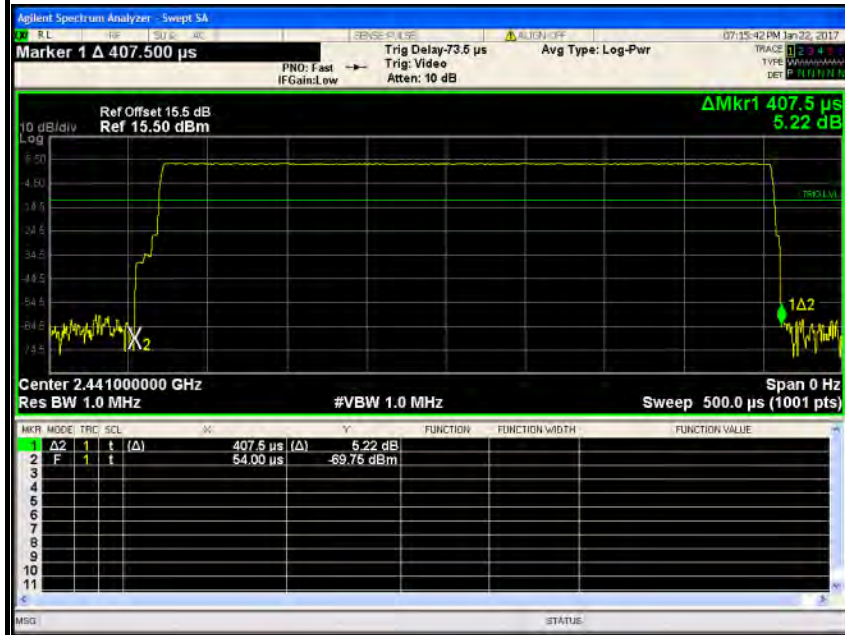

DH 3


CH Mid

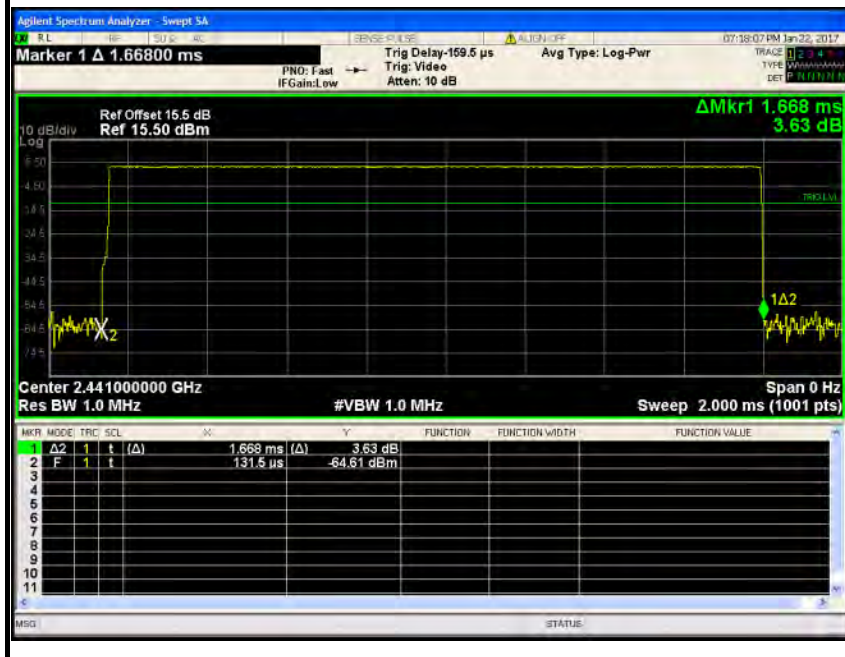



DH 5

CH Mid

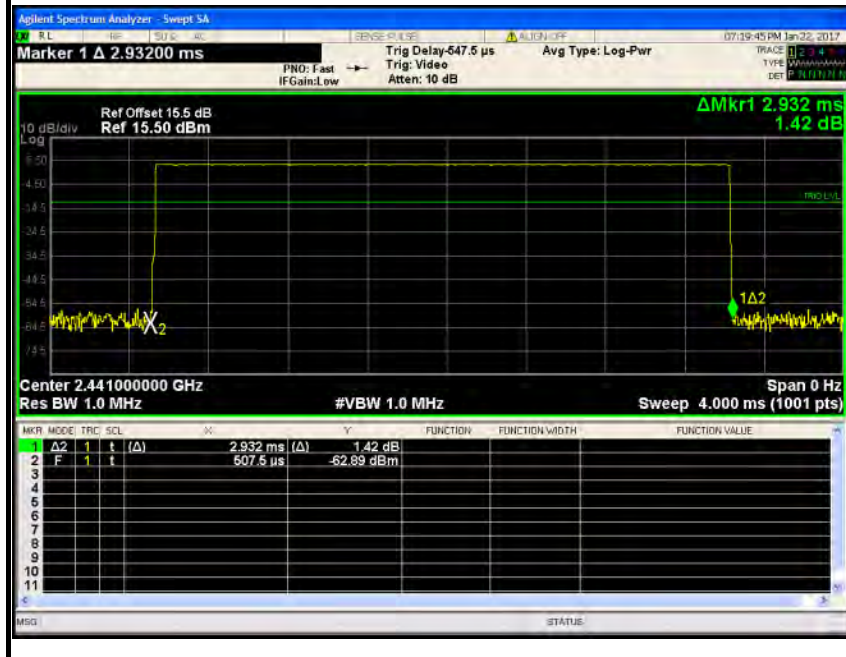



8DPSK


DH 1

CH Mid



DH 3


CH Mid

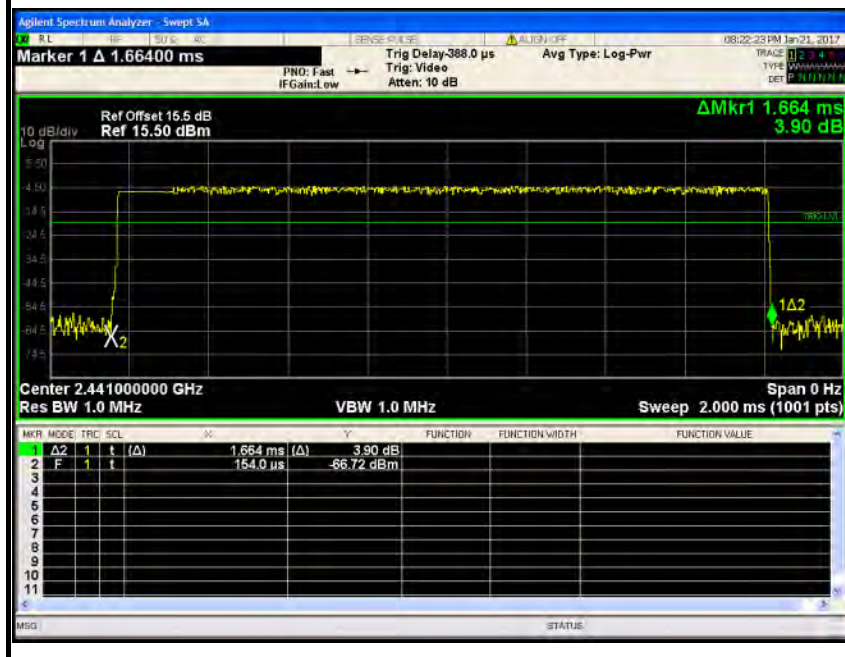



DH 5

CH Mid

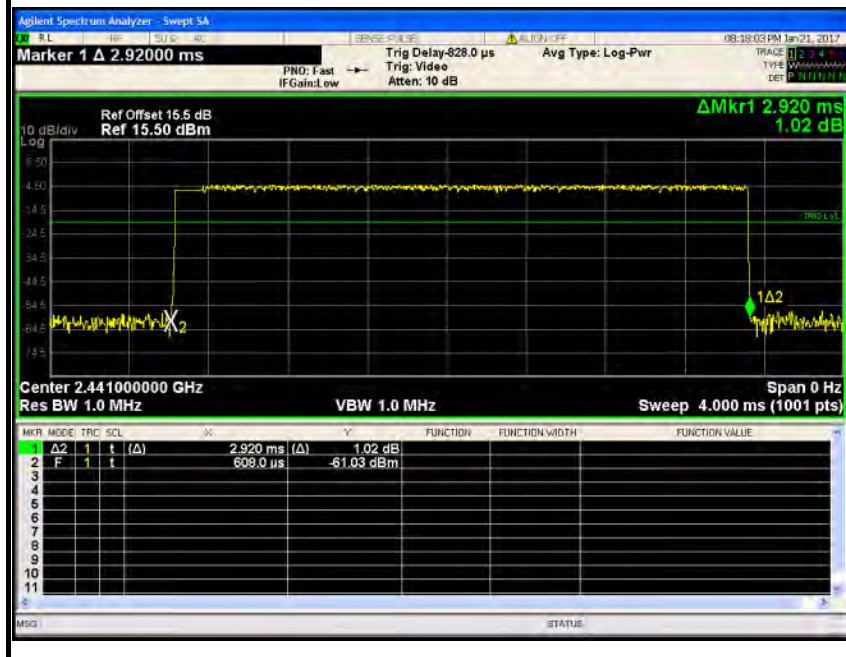



6.9 SPURIOUS EMISSIONS

6.9.1. CONDUCTED MEASUREMENT

LIMIT


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2016	02/20/2017

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 10MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels, and highest channels. No emission found between lowest internal used/generated frequency to 10MHz , it is only recorded 10MHz to 26GHz.

TEST RESULTS

No non-compliance noted

Remark: The hopping on mode and hopping off mode were chosen for pre-test and the hopping off mode was the worse case and print in the report.




Hopping Off


Antenna 1 Test Plot

GFSK

CH Low (10MHz ~26.5GHz)


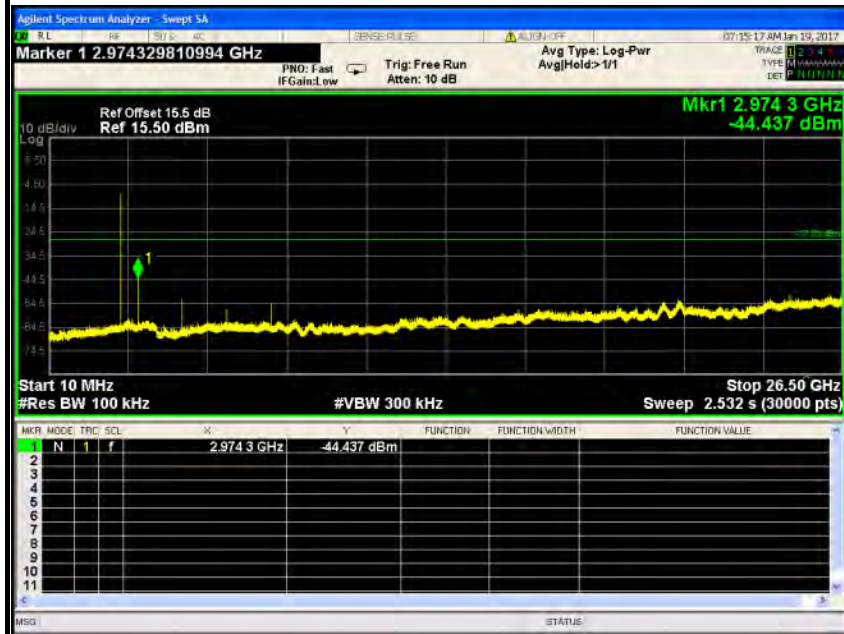


CH Low (2.31GHz ~2.41GHz)

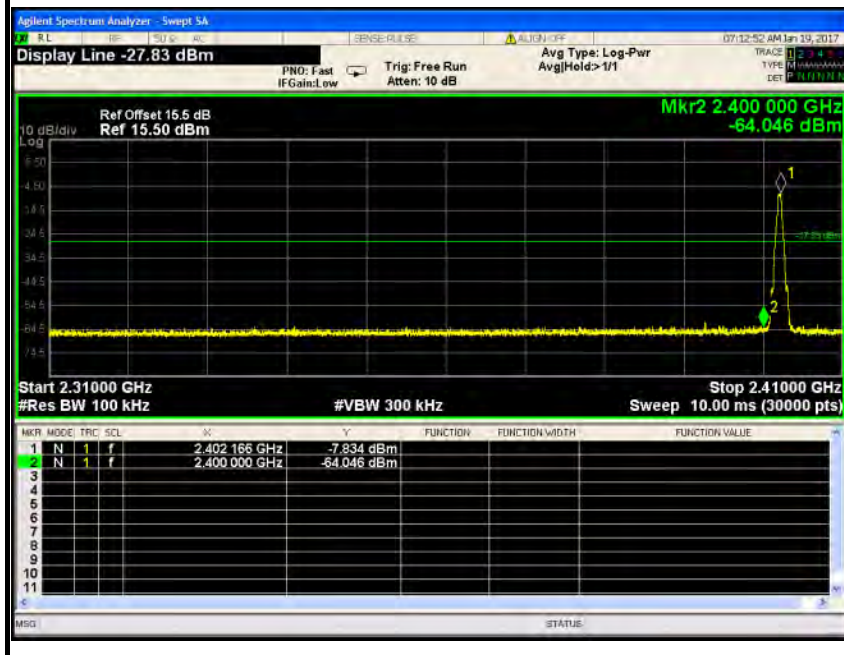




CH Mid (10MHz ~26.5GHz)

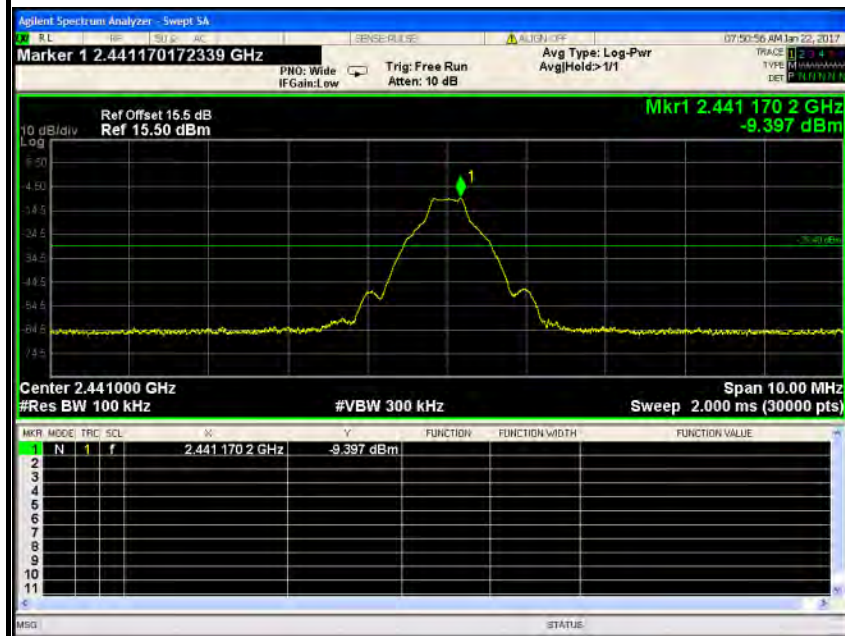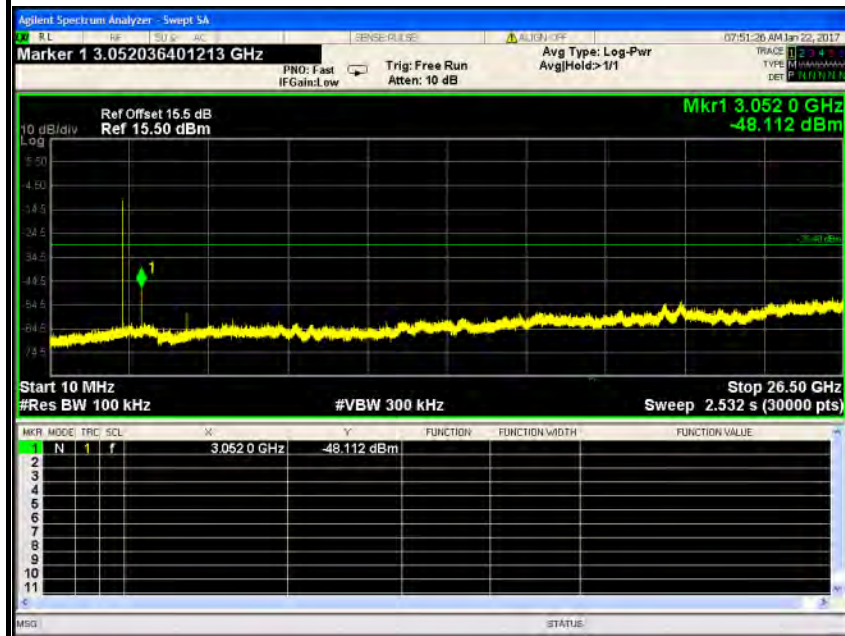




CH High (10MHz ~26.5GHz)

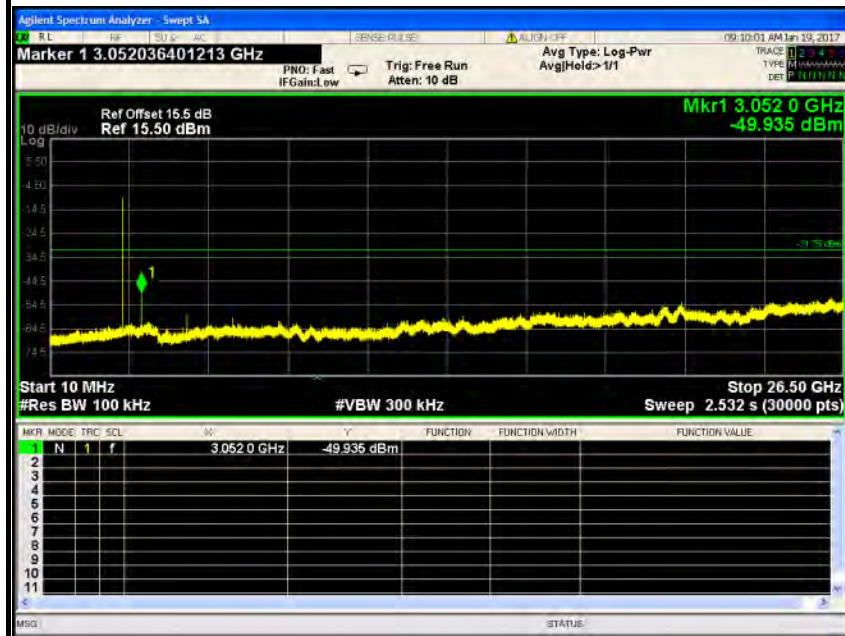


CH High (2.475GHz ~ 2.5GHz)

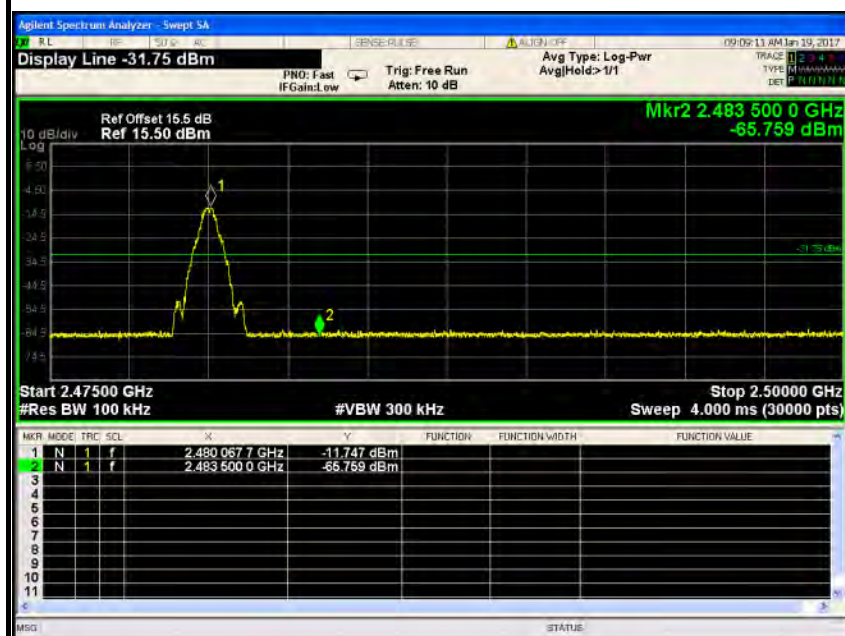




8DPSK

CH Low (10MHz ~26.5GHz)


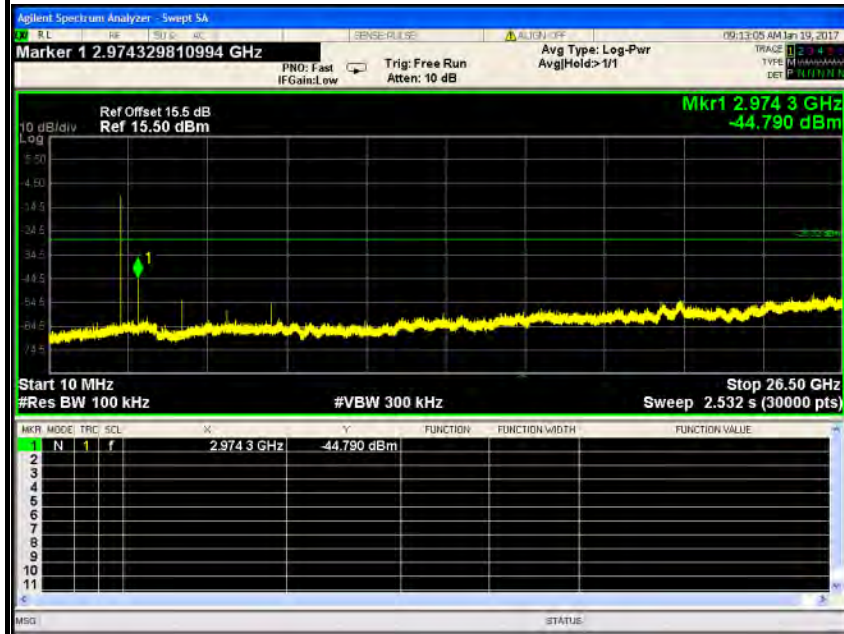


CH Low (2.31GHz ~2.41GHz)

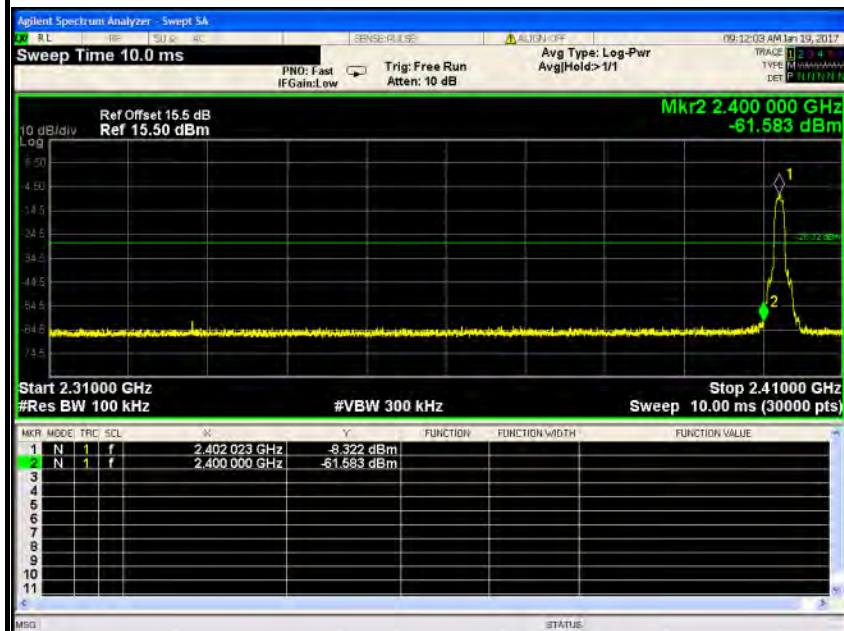




CH Mid (10MHz ~26.5GHz)

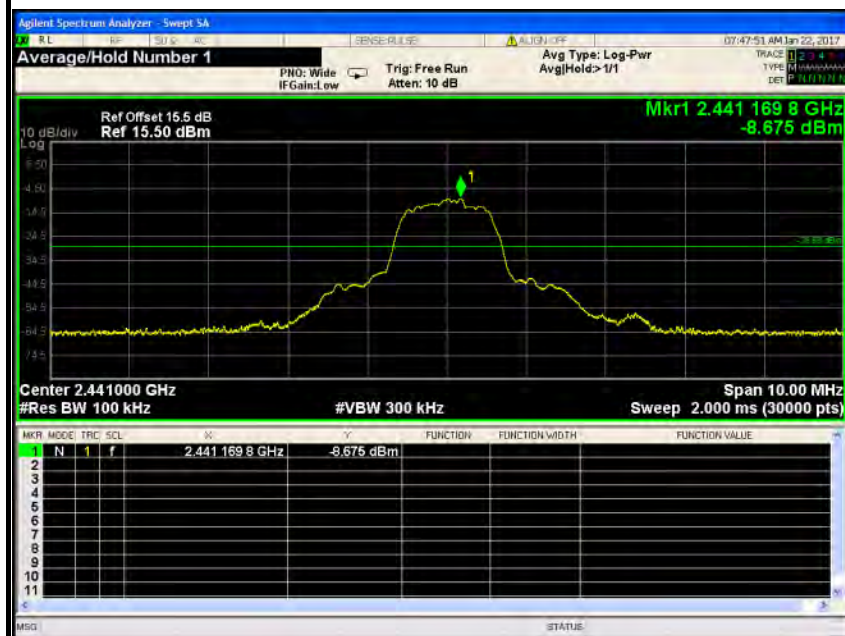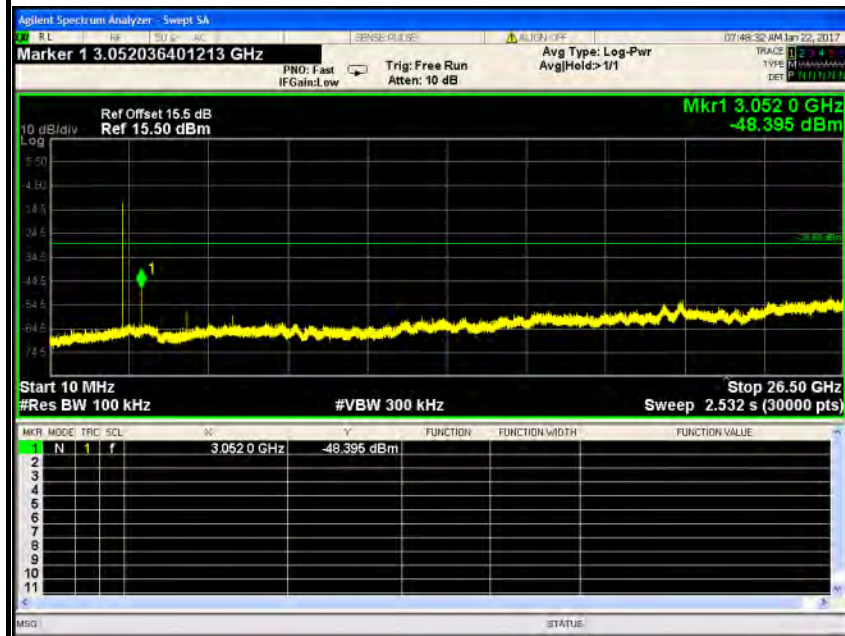




CH High (10MHz ~26.5GHz)

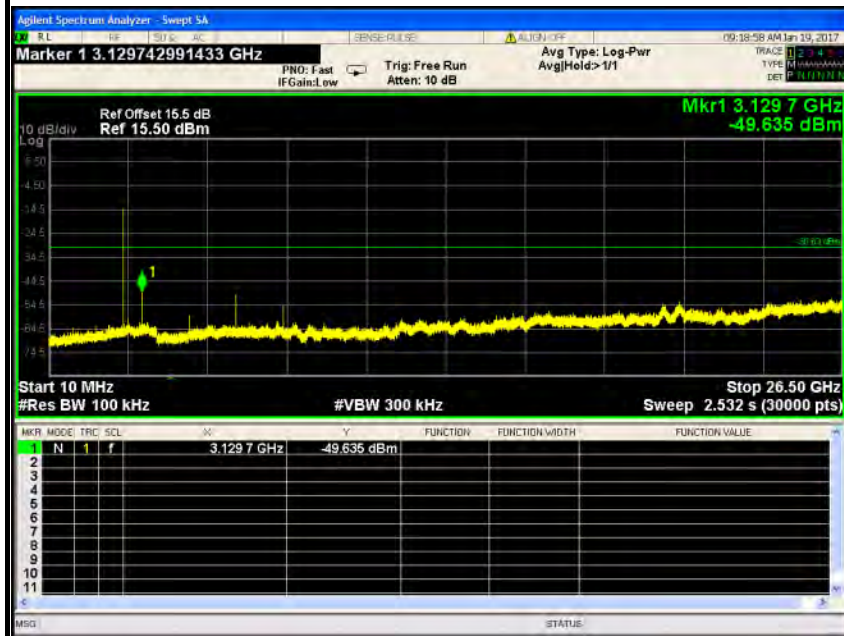

CH High (2.475GHz ~ 2.5GHz)

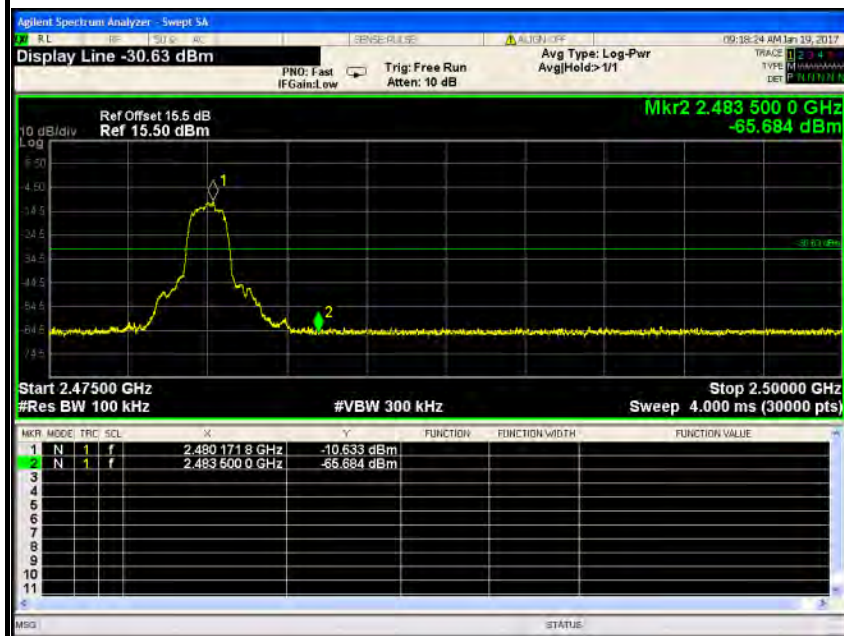





Antenna 2 Test Plot

GFSK

CH Low (10MHz ~26.5GHz)


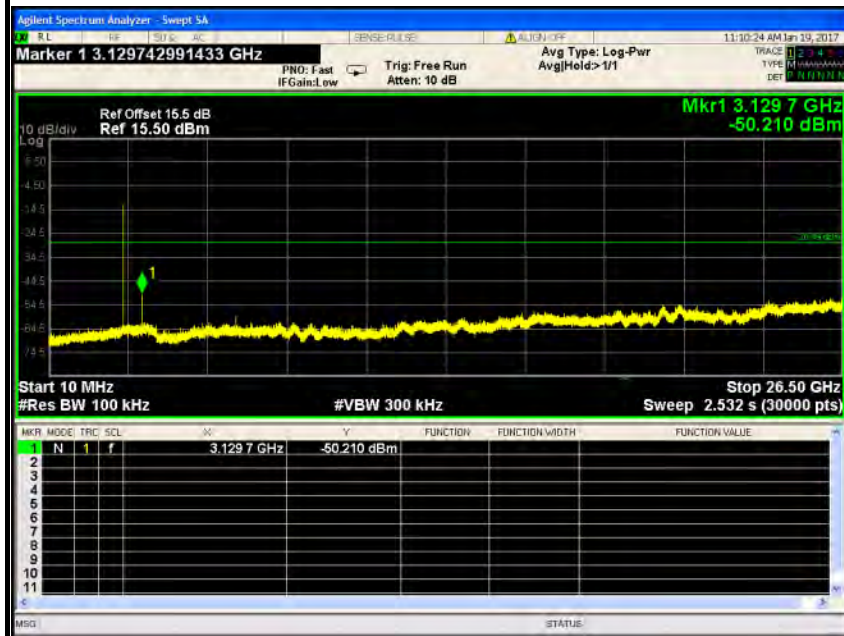


CH Low (2.31GHz ~2.41GHz)

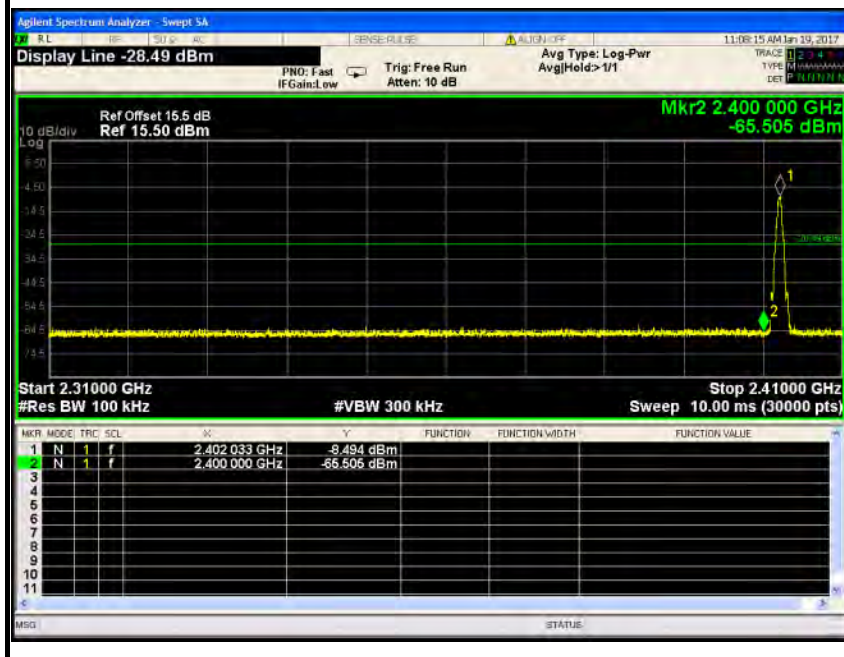




CH Mid (10MHz ~26.5GHz)

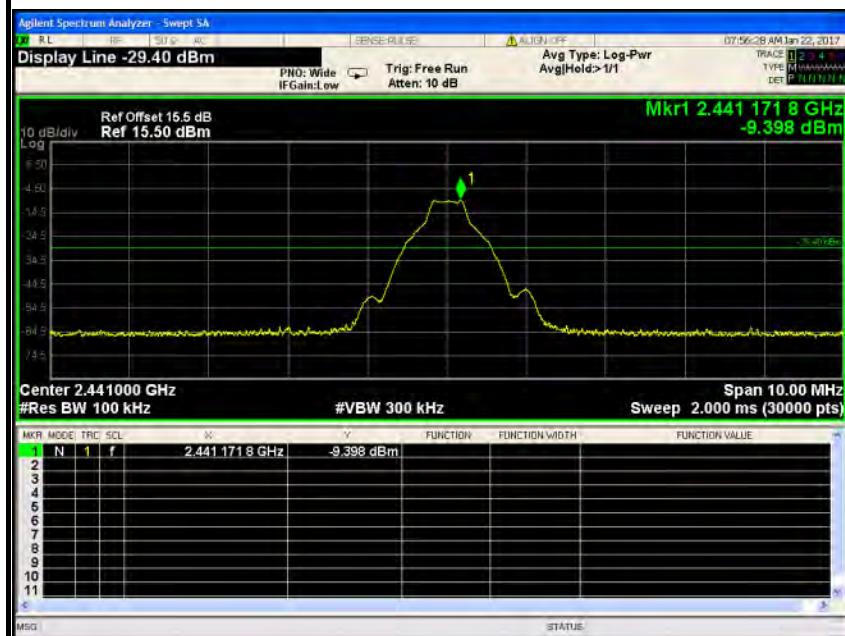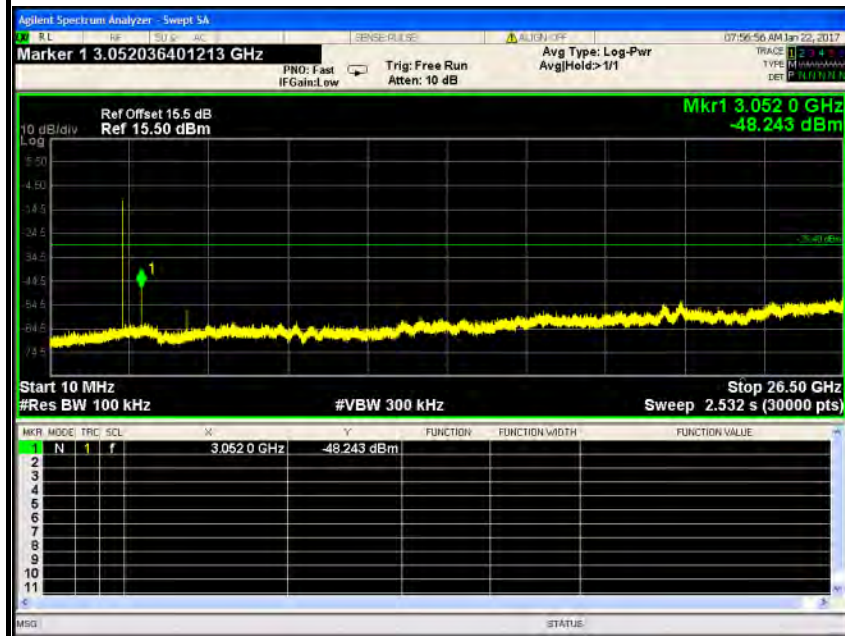




CH High (10MHz ~26.5GHz)

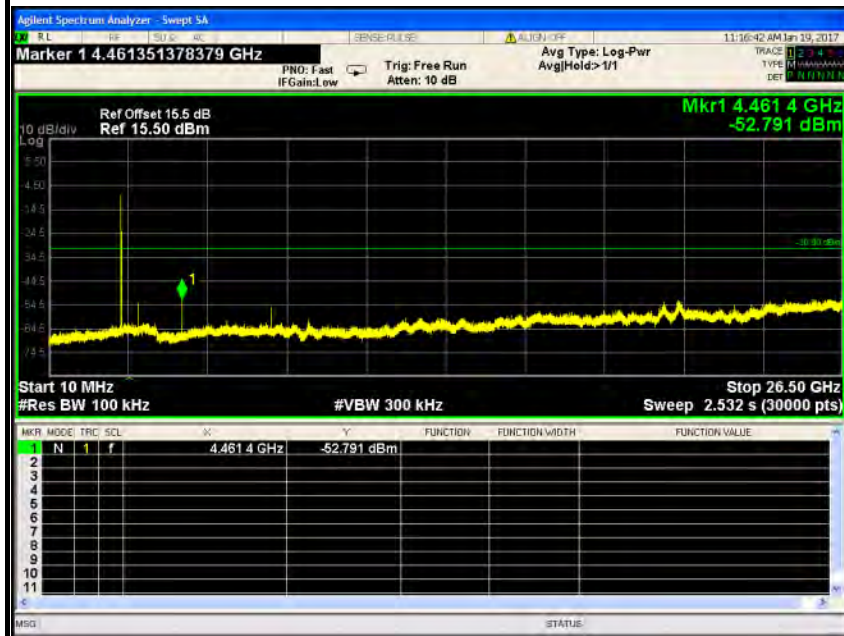


CH High (2.475GHz ~ 2.5GHz)

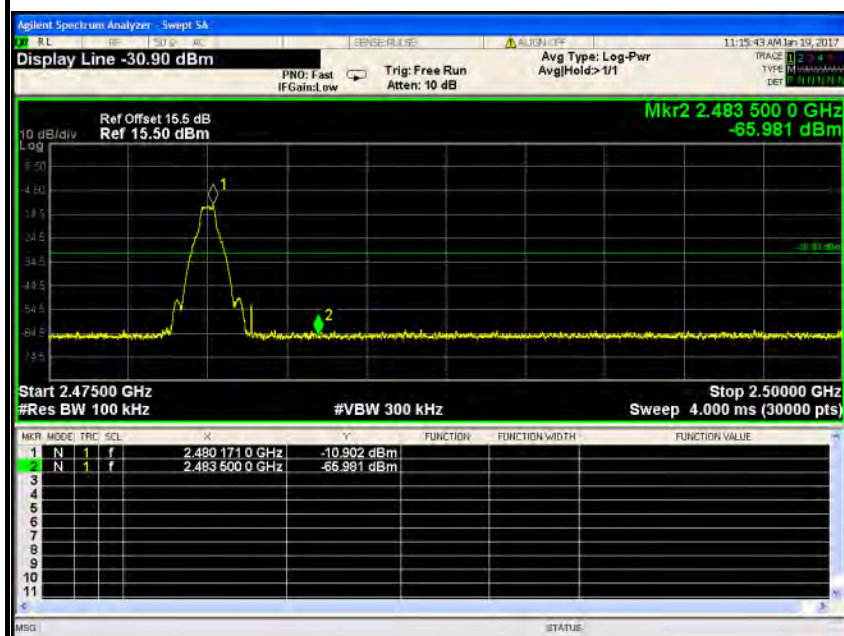




8DPSK

CH Low (10MHz ~26.5GHz)


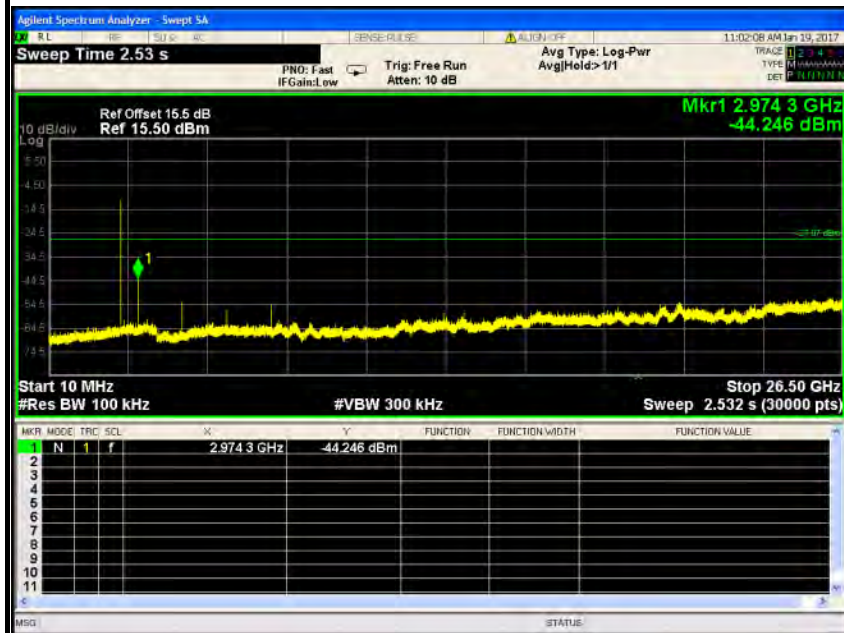


CH Low (2.31GHz ~2.41GHz)

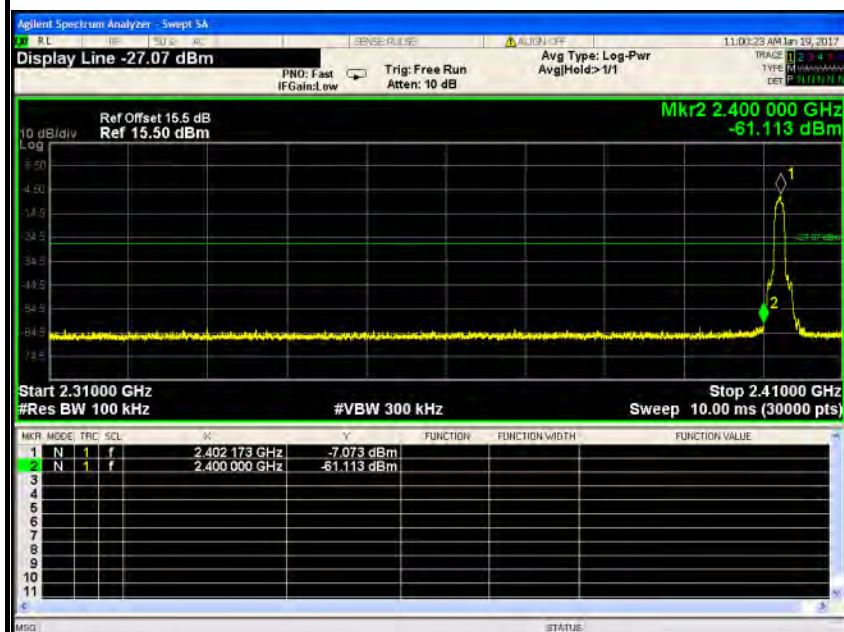




CH Mid (10MHz ~26.5GHz)

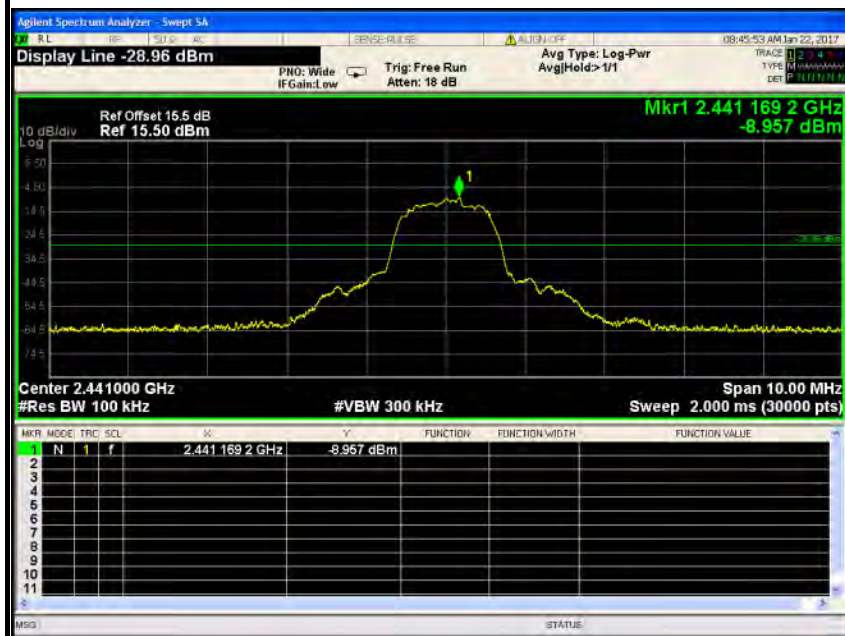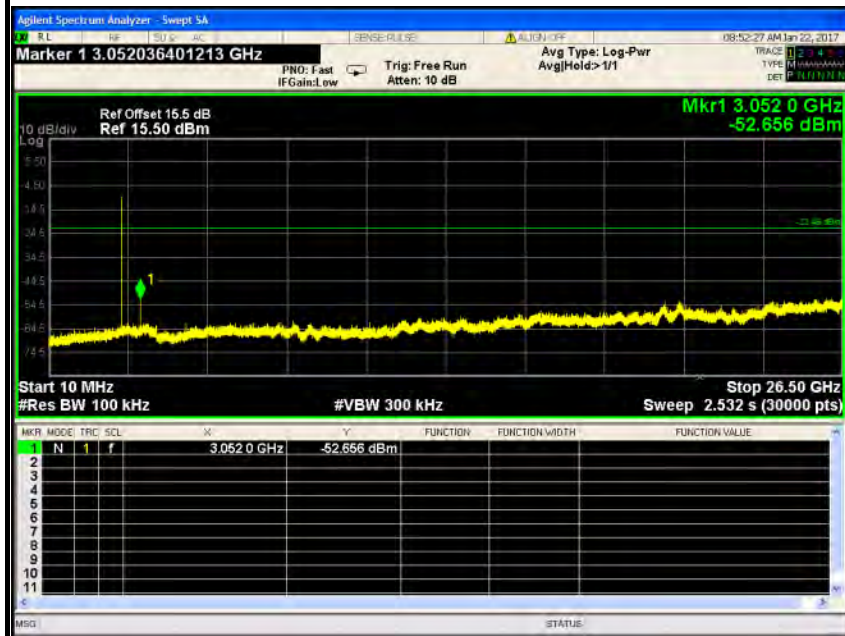




CH High (10MHz ~26.5GHz)

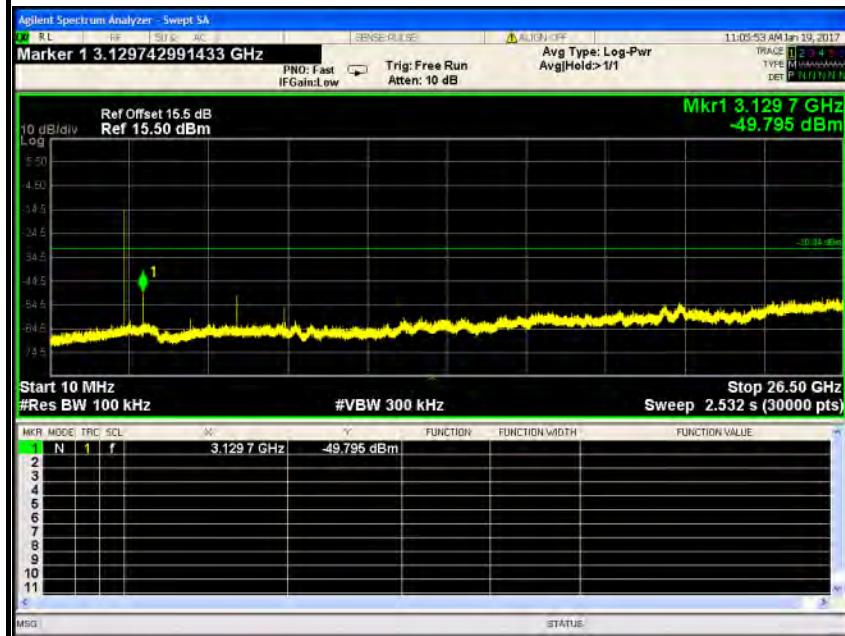

CH High (2.475GHz ~ 2.5GHz)

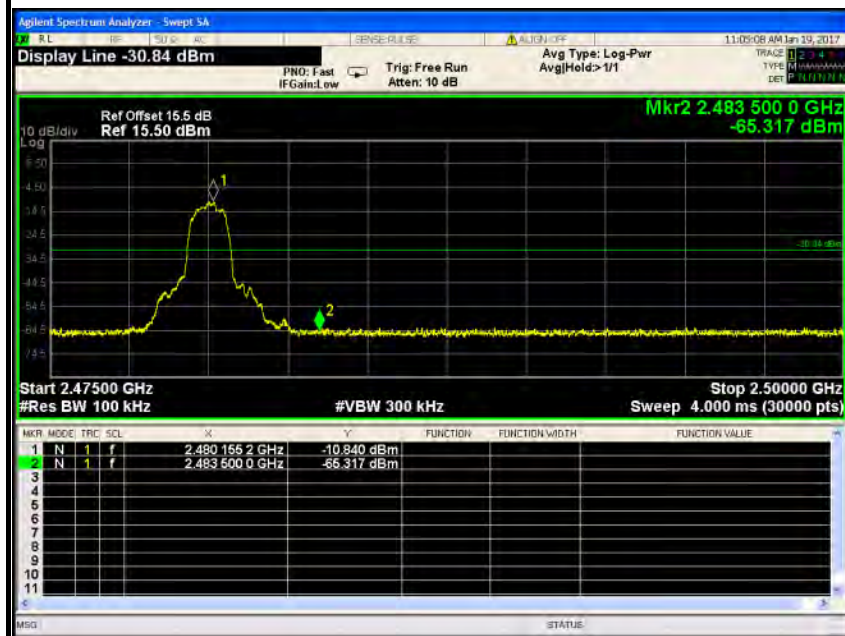




Hopping On

Antenna 1 Test Data


GFSK

CH Low (2.31GHz ~2.5GHz)

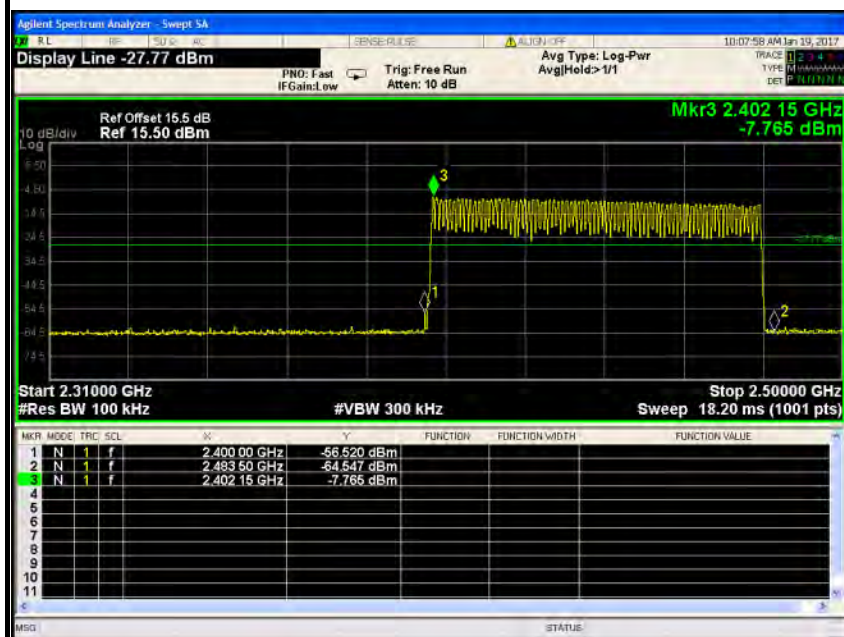

8DPSK

CH Low (2.31GHz ~2.5GHz)

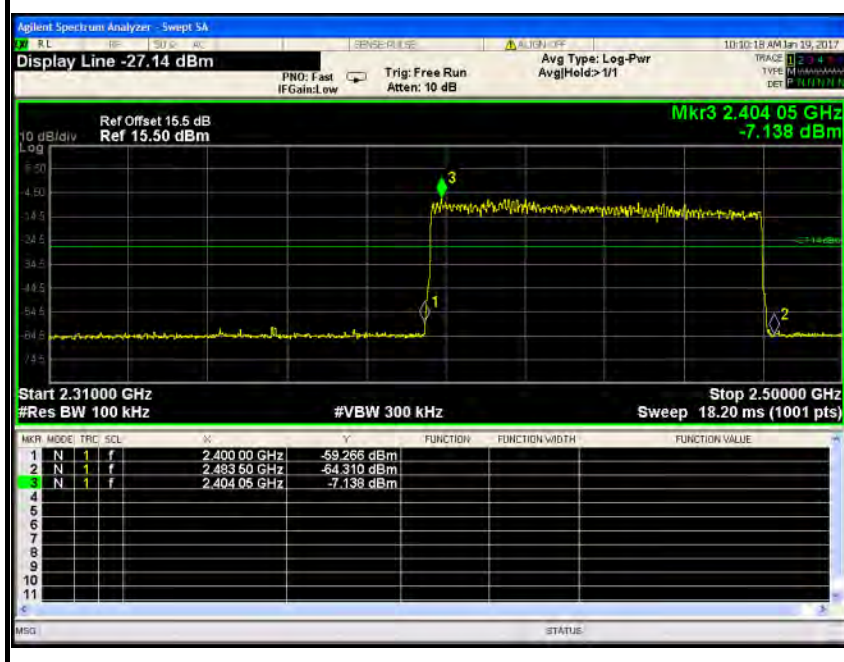




Antenna 2 Test Data


GFSK

CH Low (2.31GHz ~2.5GHz)

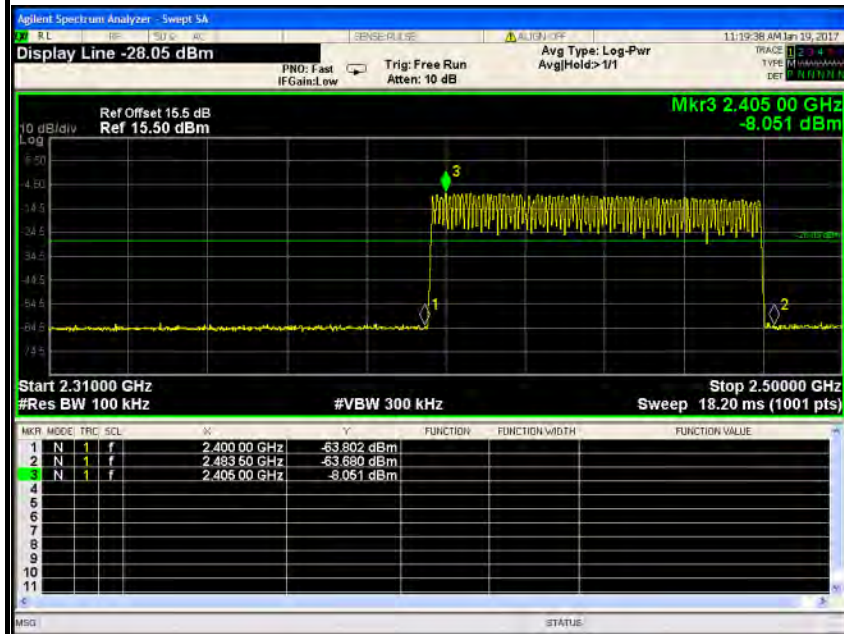

8DPSK

CH Low (2.31GHz ~2.5GHz)

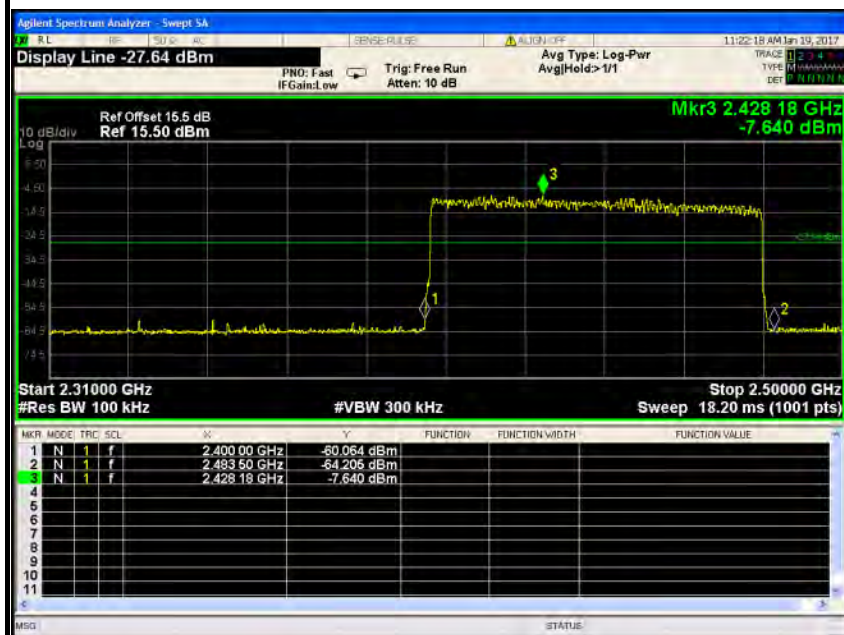



6.9.2. Radiated Emissions

LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Note: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

**MEASUREMENT EQUIPMENT USED**


Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2016	02/20/2017
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/21/2016	02/20/2017
Amplifier	EMEC	EM330	060661	03/18/2016	03/17/2017
High Noise Amplifier	Agilent	8449B	3008A01838	02/21/2016	02/20/2017
Loop Antenna	COM-POWER	AL-130	121044	09/25/2016	09/24/2017
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/21/2016	02/20/2017
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/28/2016	02/27/2017
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	02/28/2016	02/27/2017
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/21/2016	02/20/2017
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

Remark: Each piece of equipment is scheduled for calibration once a year.

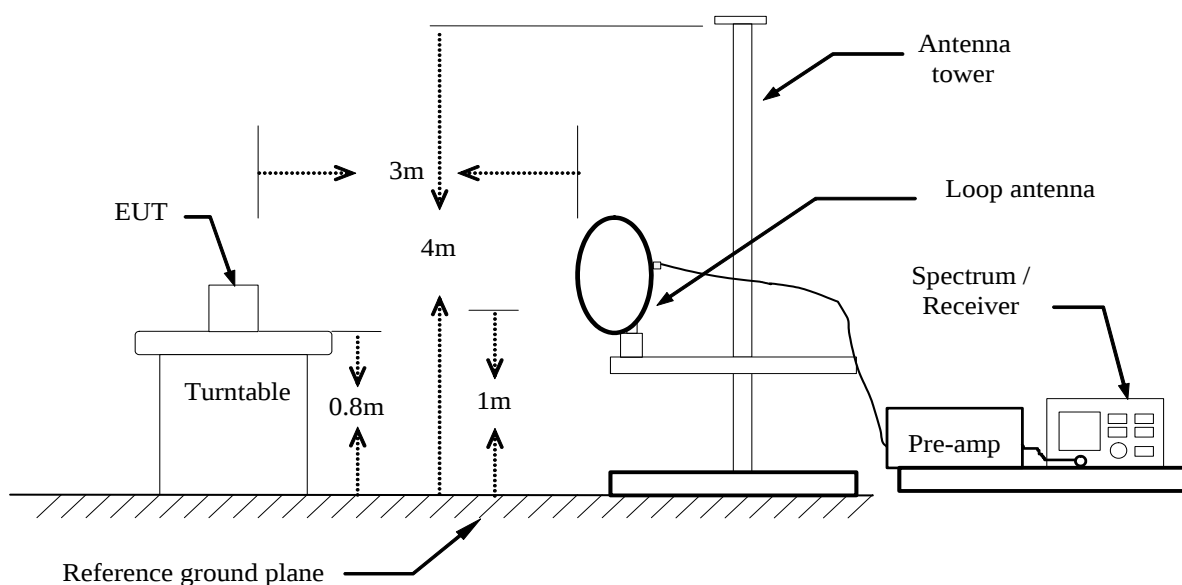
Test Configuration**Below 30MHz**



Below 1 GHz

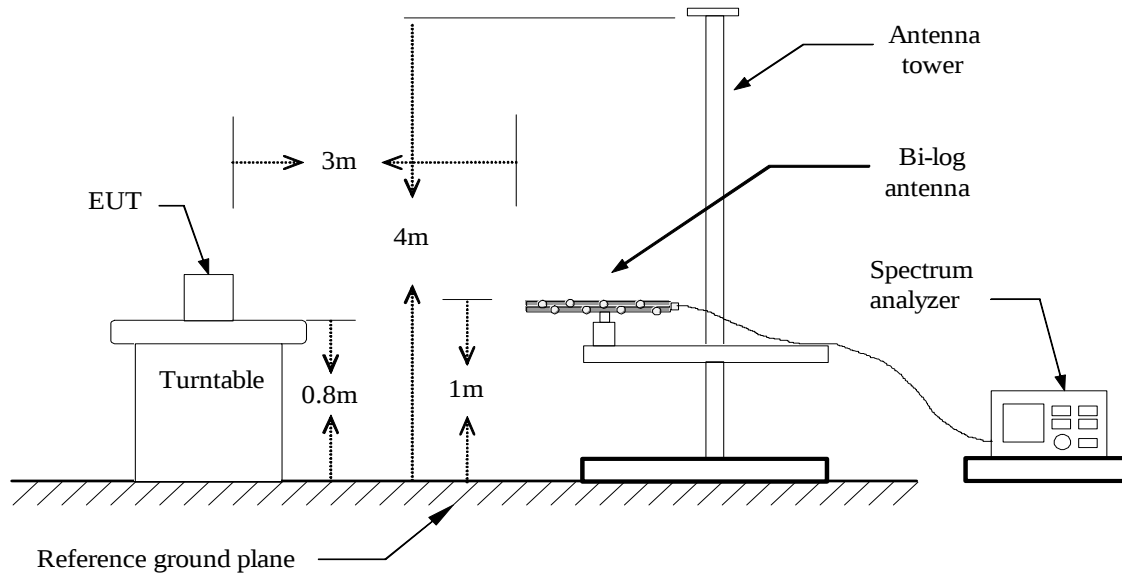

Above 1 GHz

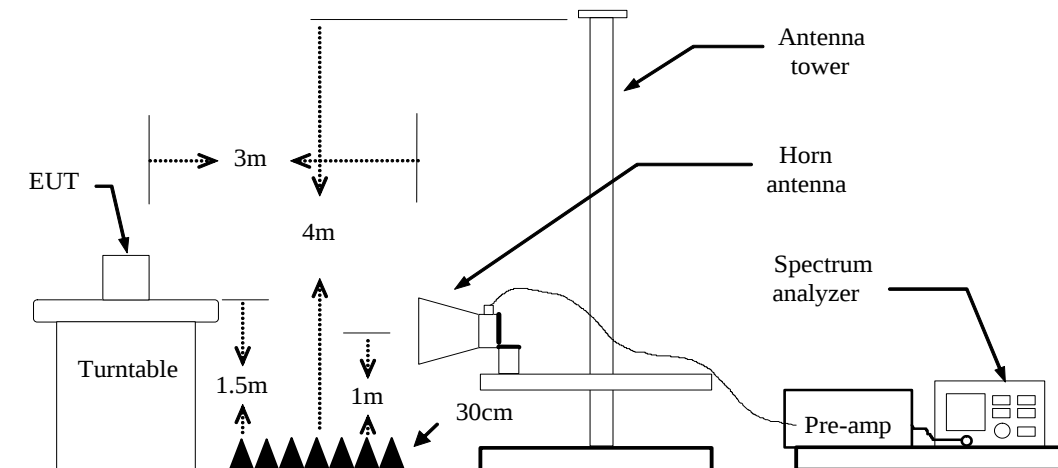



MEASURING SETTING

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB 100kHz for QP

TEST PROCEDURE

1) Sequence of testing 9 kHz to 30 MHz

Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.

--- If the EUT is a floor standing device, it is placed on the ground.

--- Auxiliary equipment and cables were positioned to simulate normal operation conditions.

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 3 meter.

--- The EUT was set into operation.

Pre measurement:

--- The turntable rotates from 0° to 315° using 45° steps.

--- The antenna height is 0.8 meter.

--- At each turntable position the analyzer sweeps with peak detection to find the



maximum of all emissions

Final measurement:

--- Identified emissions during the pre measurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).

--- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Auxiliary equipment and cables were positioned to simulate normal operation conditions

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 3 meter.

--- The EUT was set into operation.

Pre measurement:

--- The turntable rotates from 0° to 315° using 45° steps.

--- The antenna is polarized vertical and horizontal.

--- The antenna height changes from 1 to 3 meter.

--- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.



Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Pre measurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.



Final measurement:

--- The final measurement will be performed with minimum the six highest peaks.

--- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.

--- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Auxiliary equipment and cables were positioned to simulate normal operation conditions

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 1 meter.

--- The EUT was set into operation.

Pre measurement:

--- The antenna is moved spherical over the EUT in different polarisations of the antenna.

Final measurement:

--- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.

--- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

**TEST RESULTS****Below 1 GHz****Antenna 1****Test Mode:** TX**Tested by:** Jackson Luo**Ambient temperature:** 24°C **Relative humidity:** 52% RH **Date:** January 22, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
37.7600	37.82	-15.48	22.34	40.00	-17.66	V	QP
104.6900	43.30	-22.81	20.49	43.50	-23.01	V	QP
270.5600	42.55	-20.49	22.06	46.00	-23.94	V	QP
418.0000	47.23	-15.46	31.77	46.00	-14.23	V	QP
810.8500	37.61	-10.73	26.88	46.00	-19.12	V	QP
960.2300	40.90	-8.69	32.21	54.00	-21.79	V	QP
120.2100	50.14	-21.13	29.01	43.50	-14.49	H	QP
221.0900	51.69	-20.51	31.18	46.00	-14.82	H	QP
263.7700	52.18	-20.13	32.05	46.00	-13.95	H	QP
312.2700	50.69	-19.12	31.57	46.00	-14.43	H	QP
418.0000	47.62	-15.46	32.16	46.00	-13.84	H	QP
960.2300	36.32	-8.69	27.63	54.00	-26.37	H	QP

****Remark:** 1. No emission found between lowest internal used/generated frequency to 30MHz.
 2. Pre-scan all mode and recorded the worst case results in this report (TX-Low Channel(1Mbps)).


Notes:

1. Measuring frequencies from 9kHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30MHz to 1GHz were made with an instrument using Peak/Quasi-peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 120kHz.
5.


Frequency (MHz).	= Emission frequency in MHz
Reading (dBuV)	= Receiver reading
Correction Factor(dB/m)	= Antenna factor + Cable loss – Amplifier gain
Actual FS (dBuV/m)	= Reading (dBuV) + Corr. Factor (dB/m)
Limit (dBuV/m)	= Limit stated in standard
Margin(dB)	= Measured (dBuV/m) – Limits (dBuV/m)
Antenna Pole(V/H)	= Current carrying line of reading



Vertical

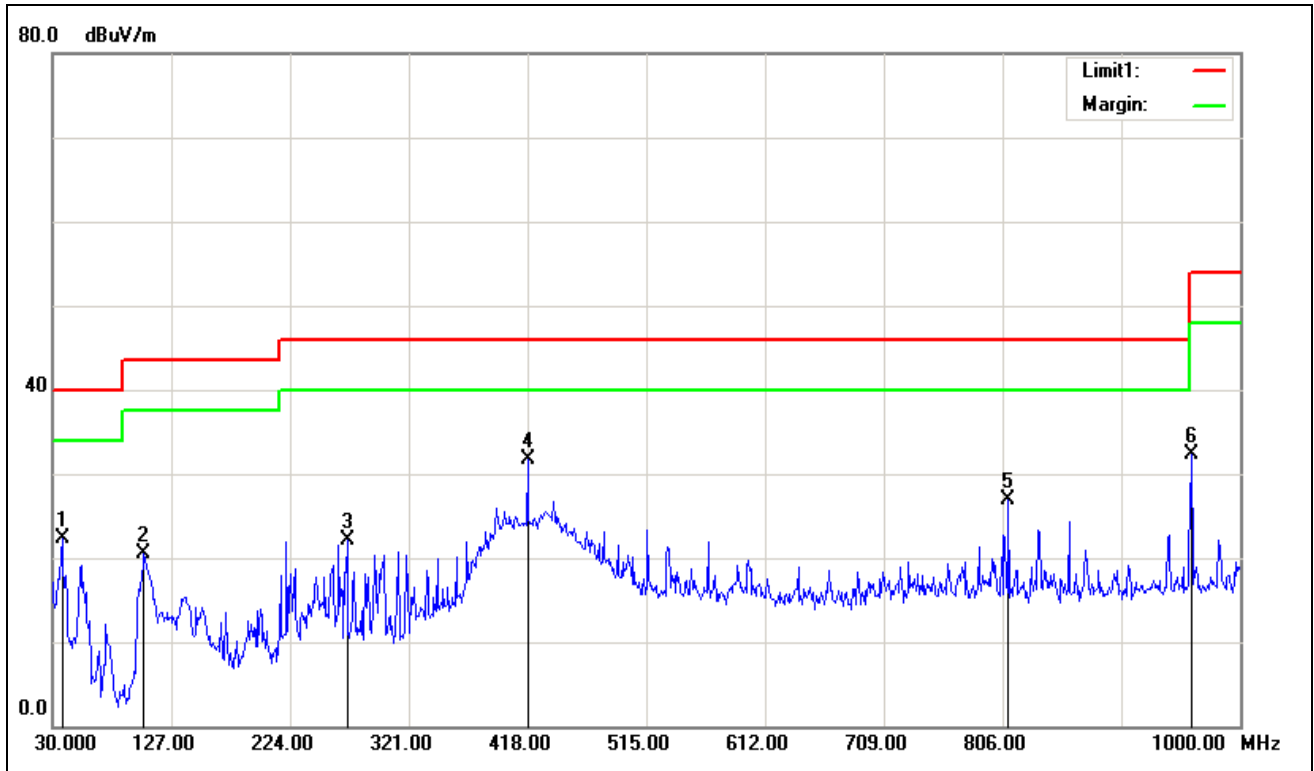

Horizontal

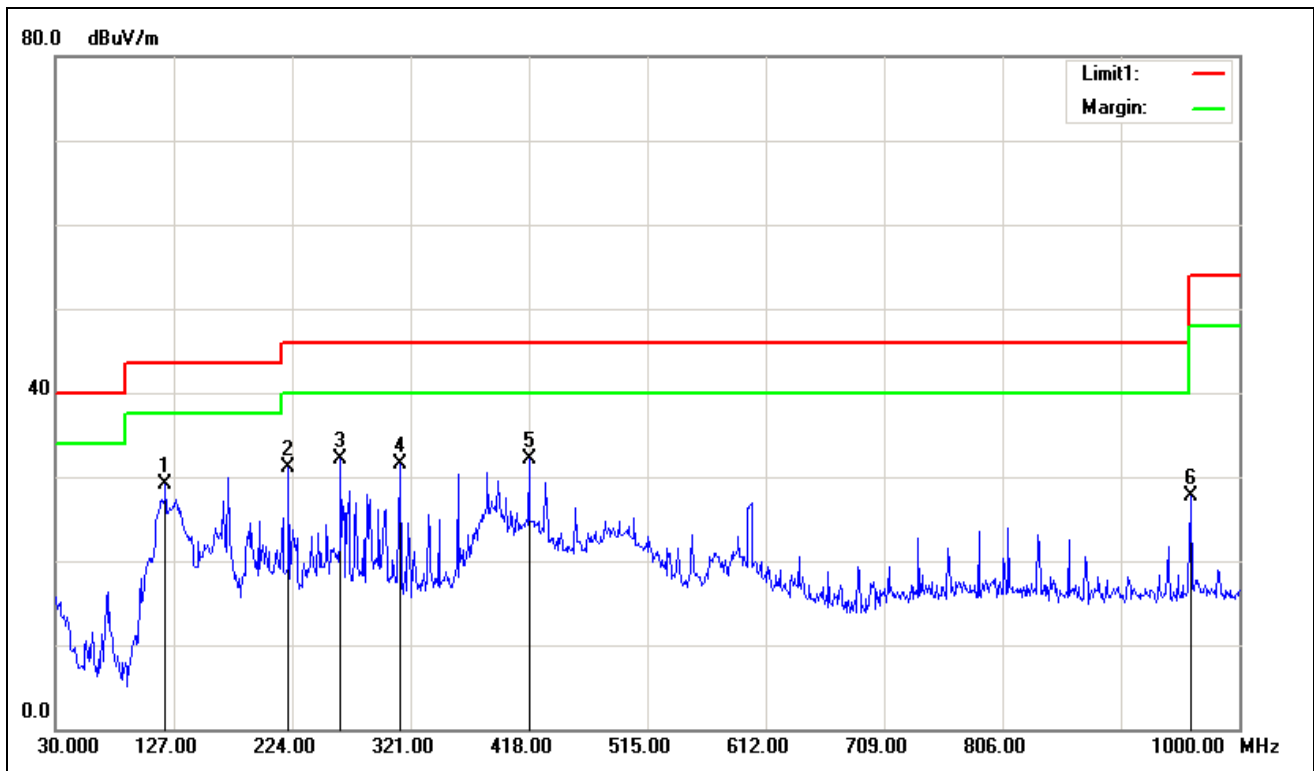

**Antenna 2****Test Mode:** TX**Tested by:** Jacksan Luo**Ambient temperature:** 24°C **Relative humidity:** 52% RH **Date:** January 22, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
37.7600	38.82	-15.48	23.34	40.00	-16.66	V	QP
104.6900	44.30	-22.81	21.49	43.50	-22.01	V	QP
270.5600	42.55	-20.49	22.06	46.00	-23.94	V	QP
418.0000	46.23	-15.46	30.77	46.00	-15.23	V	QP
810.8500	36.61	-10.73	25.88	46.00	-20.12	V	QP
960.2300	37.90	-8.69	29.21	54.00	-24.79	V	QP
120.2100	50.64	-21.13	29.51	43.50	-13.99	H	QP
263.7700	51.68	-20.13	31.55	46.00	-14.45	H	QP
312.2700	49.69	-19.12	30.57	46.00	-15.43	H	QP
418.0000	46.62	-15.46	31.16	46.00	-14.84	H	QP
600.3600	40.26	-12.86	27.40	46.00	-18.60	H	QP
960.2300	35.32	-8.69	26.63	54.00	-27.37	H	QP

****Remark:** 1. No emission found between lowest internal used/generated frequency to 30MHz.
 2. Pre-scan all mode and recorded the worst case results in this report (TX-Low Channel(1Mbps)).


Notes:

1. Measuring frequencies from 9kHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30MHz to 1GHz were made with an instrument using Peak/Quasi-peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 120kHz.
5.


Frequency (MHz).	= Emission frequency in MHz
Reading (dBuV)	= Receiver reading
Correction Factor(dB/m)	= Antenna factor + Cable loss – Amplifier gain
Actual FS (dBuV/m)	= Reading (dBuV) + Corr. Factor (dB/m)
Limit (dBuV/m)	= Limit stated in standard
Margin(dB)	= Measured (dBuV/m) – Limits (dBuV/m)
Antenna Pole(V/H)	= Current carrying line of reading



Vertical

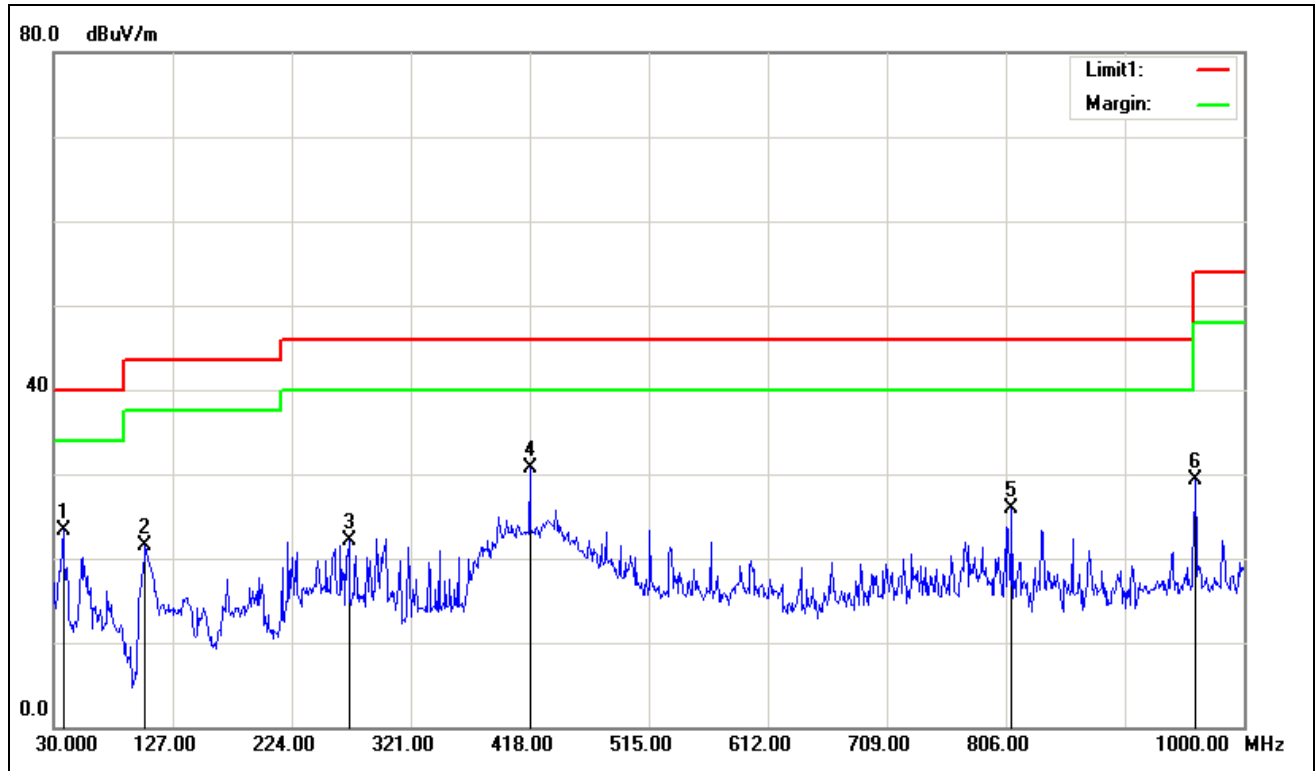

Horizontal

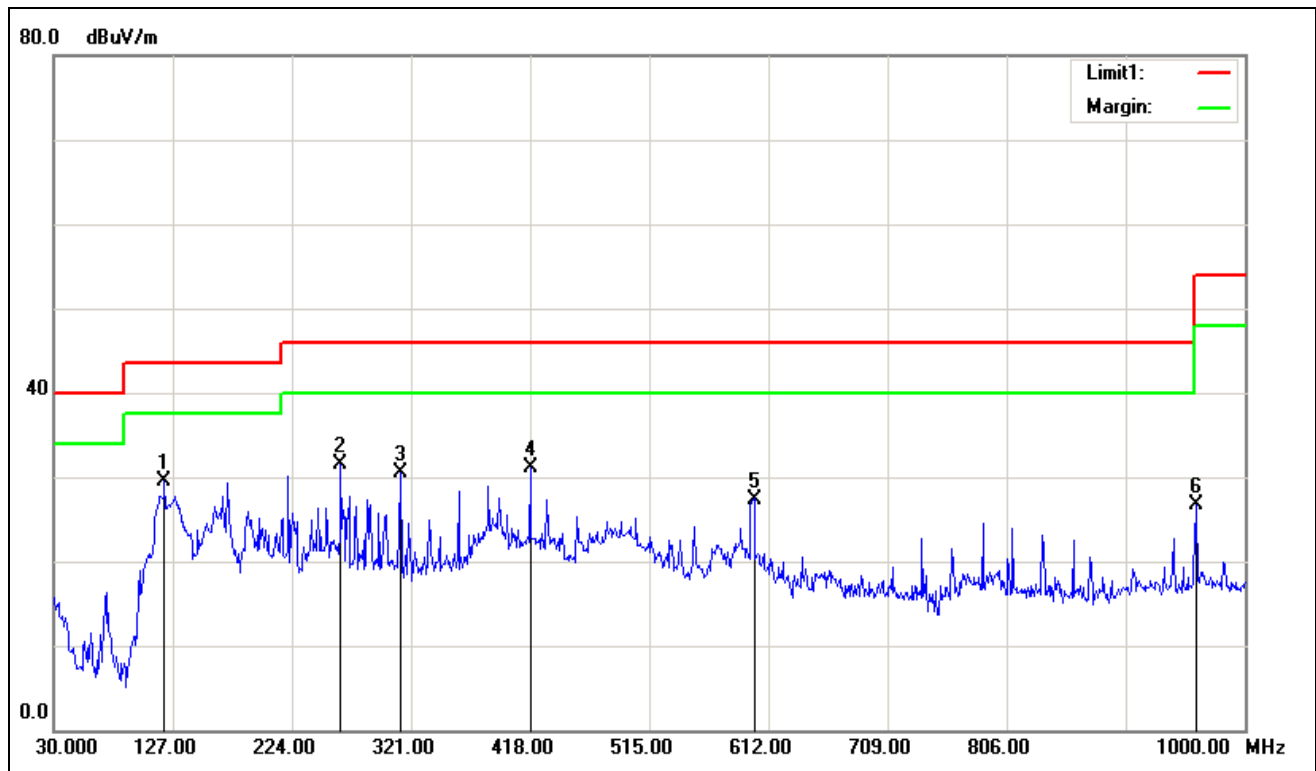

**Above 1 GHz****Antenna 1****GFSK****Test Mode:** TX(CH Low)**Tested by:** Jackson Luo**Ambient temperature:** 24°C **Relative humidity:** 52% RH**Date:** January 22, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1198.000	49.70	-7.80	41.90	74.00	-32.10	V	peak
1594.000	45.37	-6.71	38.66	74.00	-35.34	V	peak
2566.000	44.30	-2.14	42.16	74.00	-31.84	V	peak
2971.000	45.08	-1.41	43.67	74.00	-30.33	V	peak
3583.000	41.42	-0.17	41.25	74.00	-32.75	V	peak
4798.000	40.08	4.32	44.40	74.00	-29.60	V	peak
1198.000	48.72	-7.80	40.92	74.00	-33.08	H	Peak
1819.000	44.31	-6.15	38.16	74.00	-35.84	H	Peak
2557.000	43.97	-2.16	41.81	74.00	-32.19	H	Peak
2971.000	48.71	-1.41	47.30	74.00	-26.70	H	peak
4465.000	41.45	3.23	44.68	74.00	-29.32	H	peak
5284.000	40.09	5.49	45.58	74.00	-28.42	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 360Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz

Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading

Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain

Limit (dBuV/m) = Limit stated in standard

Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)

Pk = Peak Reading

AV = Average Reading

Remark = Mark Peak Reading or Average Reading

Test Mode: TX(CH Mid)Tested by: Jacksan LuoAmbient temperature: 24°CRelative humidity: 52% RHDate: January 22, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1198.000	50.54	-7.80	42.74	74.00	-31.26	V	peak
1594.000	45.74	-6.71	39.03	74.00	-34.97	V	peak
2143.000	44.30	-4.22	40.08	74.00	-33.92	V	peak
2521.000	43.86	-2.22	41.64	74.00	-32.36	V	peak
3196.000	42.89	-1.03	41.86	74.00	-32.14	V	peak
4978.000	39.40	4.91	44.31	74.00	-29.69	V	peak
1054.000	48.92	-8.35	40.57	74.00	-33.43	H	Peak
1198.000	49.71	-7.80	41.91	74.00	-32.09	H	Peak
2224.000	43.22	-3.77	39.45	74.00	-34.55	H	Peak
2521.000	44.00	-2.22	41.78	74.00	-32.22	H	peak
3052.000	45.02	-1.27	43.75	74.00	-30.25	H	peak
4933.000	39.62	4.76	44.38	74.00	-29.62	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 360Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)
 Pk = Peak Reading
 AV = Average Reading
 Remark = Mark Peak Reading or Average Reading

Test Mode: TX(CH High)Tested by: Jacksan LuoAmbient temperature: 24°C Relative humidity: 52% RHDate: January 22, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1198.000	48.72	-7.80	40.92	74.00	-33.08	V	peak
2170.000	44.56	-4.07	40.49	74.00	-33.51	V	peak
2557.000	43.61	-2.16	41.45	74.00	-32.55	V	peak
3133.000	43.34	-1.14	42.20	74.00	-31.80	V	peak
4276.000	39.84	2.56	42.40	74.00	-31.60	V	peak
5617.000	40.31	5.92	46.23	74.00	-27.77	V	peak
1198.000	48.84	-7.80	41.04	74.00	-32.96	H	Peak
1603.000	47.42	-6.69	40.73	74.00	-33.27	H	Peak
2134.000	44.74	-4.27	40.47	74.00	-33.53	H	Peak
3196.000	43.12	-1.03	42.09	74.00	-31.91	H	peak
3817.000	42.17	0.82	42.99	74.00	-31.01	H	peak
5338.000	39.52	5.58	45.10	74.00	-28.90	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 360Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)
 Pk = Peak Reading
 AV = Average Reading
 Remark = Mark Peak Reading or Average Reading

**8DPSK****Test Mode:** TX(CH Low)**Tested by:** Jackson Luo**Ambient temperature:** 24°C **Relative humidity:** 52% RH**Date:** January 22, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1198.000	49.85	-7.80	42.05	74.00	-31.95	V	peak
2584.000	44.02	-2.11	41.91	74.00	-32.09	V	peak
2971.000	44.51	-1.41	43.10	74.00	-30.90	V	peak
3898.000	39.93	1.16	41.09	74.00	-32.91	V	peak
4753.000	40.75	4.17	44.92	74.00	-29.08	V	peak
5851.000	38.83	6.02	44.85	74.00	-29.15	V	peak
1198.000	47.79	-7.80	39.99	74.00	-34.01	H	Peak
1891.000	45.55	-5.69	39.86	74.00	-34.14	H	Peak
2602.000	43.36	-2.08	41.28	74.00	-32.72	H	Peak
2971.000	48.54	-1.41	47.13	74.00	-26.87	H	peak
4465.000	40.86	3.23	44.09	74.00	-29.91	H	peak
5239.000	39.79	5.41	45.20	74.00	-28.80	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 360Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)
 Pk = Peak Reading
 AV = Average Reading
 Remark = Mark Peak Reading or Average Reading

Test Mode: TX(CH Mid)Tested by: Jacksan LuoAmbient temperature: 24°C Relative humidity: 52% RHDate: January 22, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1198.000	49.30	-7.80	41.50	74.00	-32.50	V	peak
2530.000	43.82	-2.21	41.61	74.00	-32.39	V	peak
3052.000	43.47	-1.27	42.20	74.00	-31.80	V	peak
4141.000	40.53	2.09	42.62	74.00	-31.38	V	peak
4888.000	39.96	4.61	44.57	74.00	-29.43	V	peak
5590.000	40.07	5.91	45.98	74.00	-28.02	V	peak
1198.000	48.55	-7.80	40.75	74.00	-33.25	H	Peak
1333.000	49.74	-7.30	42.44	74.00	-31.56	H	Peak
2476.000	44.64	-2.39	42.25	74.00	-31.75	H	Peak
3052.000	45.45	-1.27	44.18	74.00	-29.82	H	peak
4600.000	39.89	3.68	43.57	74.00	-30.43	H	peak
5428.000	40.05	5.74	45.79	74.00	-28.21	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 360Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)
 Pk = Peak Reading
 AV = Average Reading
 Remark = Mark Peak Reading or Average Reading

Test Mode: TX(CH High)Tested by: Jacksan LuoAmbient temperature: 24°C Relative humidity: 52% RHDate: January 22, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1198.000	49.24	-7.80	41.44	74.00	-32.56	V	peak
1594.000	48.10	-6.71	41.39	74.00	-32.61	V	peak
2827.000	43.51	-1.67	41.84	74.00	-32.16	V	peak
3133.000	43.42	-1.14	42.28	74.00	-31.72	V	peak
4618.000	40.56	3.73	44.29	74.00	-29.71	V	peak
5581.000	39.58	5.90	45.48	74.00	-28.52	V	peak
1099.000	50.75	-8.18	42.57	74.00	-31.43	H	Peak
1351.000	47.42	-7.24	40.18	74.00	-33.82	H	Peak
2134.000	43.97	-4.27	39.70	74.00	-34.30	H	Peak
2521.000	43.17	-2.22	40.95	74.00	-33.05	H	peak
3196.000	42.62	-1.03	41.59	74.00	-32.41	H	peak
4618.000	40.13	3.73	43.86	74.00	-30.14	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 360Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)
 Pk = Peak Reading
 AV = Average Reading
 Remark = Mark Peak Reading or Average Reading

**Antenna 2****GFSK****Test Mode:** TX(CH Low)**Tested by:** Jacksan Luo**Ambient temperature:** 24°C **Relative humidity:** 52% RH**Date:** January 22, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1198.000	49.52	-7.80	41.72	74.00	-32.28	V	peak
1594.000	50.27	-6.71	43.56	74.00	-30.44	V	peak
2557.000	44.32	-2.16	42.16	74.00	-31.84	V	peak
2971.000	44.64	-1.41	43.23	74.00	-30.77	V	peak
3817.000	41.28	0.82	42.10	74.00	-31.90	V	peak
4834.000	40.53	4.44	44.97	74.00	-29.03	V	peak
1198.000	48.45	-7.80	40.65	74.00	-33.35	H	Peak
2539.000	43.48	-2.19	41.29	74.00	-32.71	H	Peak
2971.000	48.83	-1.41	47.42	74.00	-26.58	H	Peak
4465.000	40.47	3.23	43.70	74.00	-30.30	H	peak
4933.000	40.52	4.76	45.28	74.00	-28.72	H	peak
5617.000	40.27	5.92	46.19	74.00	-27.81	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 360Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz

Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading

Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain

Limit (dBuV/m) = Limit stated in standard

Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)

Pk = Peak Reading

AV = Average Reading

Remark = Mark Peak Reading or Average Reading

Test Mode: TX(CH Mid)Tested by: Jacksan LuoAmbient temperature: 24°C Relative humidity: 52% RHDate: January 22, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1198.000	49.72	-7.80	41.92	74.00	-32.08	V	peak
1594.000	46.31	-6.71	39.60	74.00	-34.40	V	peak
2575.000	44.36	-2.12	42.24	74.00	-31.76	V	peak
3052.000	43.97	-1.27	42.70	74.00	-31.30	V	peak
3970.000	40.02	1.46	41.48	74.00	-32.52	V	peak
5230.000	39.50	5.39	44.89	74.00	-29.11	V	peak
1198.000	48.44	-7.80	40.64	74.00	-33.36	H	Peak
1351.000	47.26	-7.24	40.02	74.00	-33.98	H	Peak
2098.000	44.89	-4.46	40.43	74.00	-33.57	H	Peak
2566.000	43.98	-2.14	41.84	74.00	-32.16	H	peak
3052.000	44.25	-1.27	42.98	74.00	-31.02	H	peak
4735.000	40.26	4.12	44.38	74.00	-29.62	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
 4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 360Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
- Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
- Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
- Limit (dBuV/m) = Limit stated in standard
- Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)
- Pk = Peak Reading
- AV = Average Reading
- Remark = Mark Peak Reading or Average Reading

Test Mode: TX(CH High)Tested by: Jacksan LuoAmbient temperature: 24°CRelative humidity: 52% RHDate: January 22, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1198.000	49.00	-7.80	41.20	74.00	-32.80	V	peak
1603.000	47.31	-6.69	40.62	74.00	-33.38	V	peak
2602.000	43.98	-2.08	41.90	74.00	-32.10	V	peak
3133.000	43.02	-1.14	41.88	74.00	-32.12	V	peak
4699.000	40.20	4.00	44.20	74.00	-29.80	V	peak
5626.000	39.69	5.92	45.61	74.00	-28.39	V	peak
1198.000	49.89	-7.80	42.09	74.00	-31.91	H	Peak
2548.000	44.00	-2.17	41.83	74.00	-32.17	H	Peak
3133.000	43.81	-1.14	42.67	74.00	-31.33	H	Peak
4150.000	39.77	2.12	41.89	74.00	-32.11	H	peak
4987.000	39.61	4.94	44.55	74.00	-29.45	H	peak
6256.000	40.20	6.49	46.69	74.00	-27.31	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 360Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss - Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)
 Pk = Peak Reading
 AV = Average Reading
 Remark = Mark Peak Reading or Average Reading

**8DPSK****Test Mode:** TX(CH Low)**Tested by:** Jackson Luo**Ambient temperature:** 24°C **Relative humidity:** 52% RH**Date:** January 22, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1198.000	51.58	-7.80	43.78	74.00	-30.22	V	peak
2125.000	44.48	-4.31	40.17	74.00	-33.83	V	peak
2584.000	43.90	-2.11	41.79	74.00	-32.21	V	peak
2971.000	45.11	-1.41	43.70	74.00	-30.30	V	peak
4393.000	39.61	2.97	42.58	74.00	-31.42	V	peak
5320.000	39.78	5.55	45.33	74.00	-28.67	V	peak
1198.000	47.94	-7.80	40.14	74.00	-33.86	H	Peak
2125.000	44.11	-4.31	39.80	74.00	-34.20	H	Peak
2530.000	45.38	-2.21	43.17	74.00	-30.83	H	Peak
2971.000	47.83	-1.41	46.42	74.00	-27.58	H	peak
4258.000	39.77	2.50	42.27	74.00	-31.73	H	peak
5284.000	39.19	5.49	44.68	74.00	-29.32	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 360Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)
 Pk = Peak Reading
 AV = Average Reading
 Remark = Mark Peak Reading or Average Reading

Test Mode: TX(CH Mid)Tested by: Jacksan LuoAmbient temperature: 24°C Relative humidity: 52% RHDate: January 22, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1198.000	49.76	-7.80	41.96	74.00	-32.04	V	peak
1594.000	49.89	-6.71	43.18	74.00	-30.82	V	peak
2530.000	44.38	-2.21	42.17	74.00	-31.83	V	peak
3052.000	44.51	-1.27	43.24	74.00	-30.76	V	peak
4159.000	41.11	2.15	43.26	74.00	-30.74	V	peak
4879.000	40.17	4.59	44.76	74.00	-29.24	V	peak
1198.000	48.61	-7.80	40.81	74.00	-33.19	H	Peak
1612.000	46.36	-6.67	39.69	74.00	-34.31	H	Peak
2125.000	44.46	-4.31	40.15	74.00	-33.85	H	Peak
2521.000	44.84	-2.22	42.62	74.00	-31.38	H	peak
3052.000	45.46	-1.27	44.19	74.00	-29.81	H	peak
4933.000	40.28	4.76	45.04	74.00	-28.96	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 360Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)
 Pk = Peak Reading
 AV = Average Reading
 Remark = Mark Peak Reading or Average Reading

Test Mode: TX(CH High)Tested by: Jacksan LuoAmbient temperature: 24°C Relative humidity: 52% RHDate: January 22, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1198.000	49.93	-7.80	42.13	74.00	-31.87	V	peak
1594.000	47.01	-6.71	40.30	74.00	-33.70	V	peak
2098.000	45.10	-4.46	40.64	74.00	-33.36	V	peak
2584.000	44.94	-2.11	42.83	74.00	-31.17	V	peak
3574.000	41.79	-0.21	41.58	74.00	-32.42	V	peak
5212.000	39.99	5.36	45.35	74.00	-28.65	V	peak
1198.000	49.27	-7.80	41.47	74.00	-32.53	H	Peak
2143.000	44.39	-4.22	40.17	74.00	-33.83	H	Peak
2566.000	44.38	-2.14	42.24	74.00	-31.76	H	Peak
3133.000	43.43	-1.14	42.29	74.00	-31.71	H	peak
4159.000	40.65	2.15	42.80	74.00	-31.20	H	peak
4627.000	40.74	3.76	44.50	74.00	-29.50	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 360Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)
 Pk = Peak Reading
 AV = Average Reading
 Remark = Mark Peak Reading or Average Reading



6.10 POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.


MEASUREMENT EQUIPMENT USED

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/21/2016	02/20/2017
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	02/21/2016	02/20/2017
LISN	EMCO	3825/2	8901-1459	02/21/2016	02/20/2017
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	02/21/2016	02/20/2017
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

Remark: Each piece of equipment is scheduled for calibration once a year.



Test Configuration

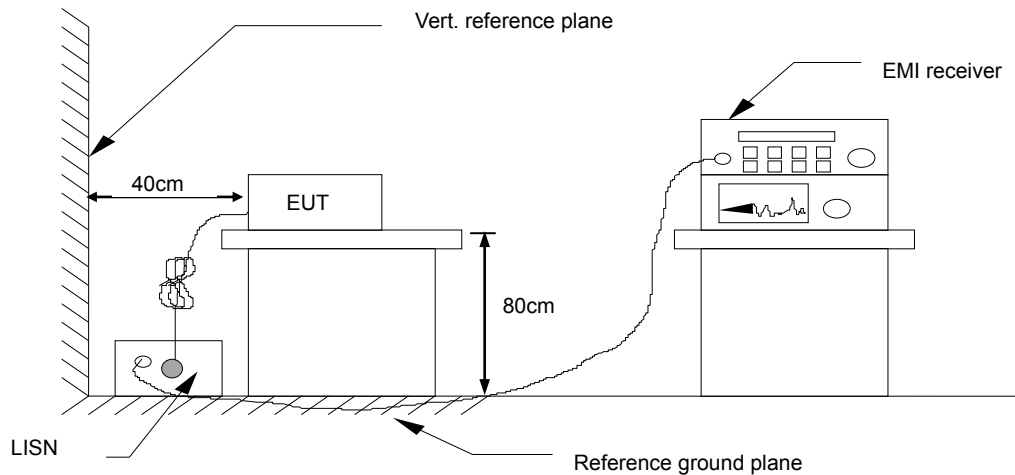

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.


TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.



Test Data

Model No.	AD107A4BKA	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 1
Tested by	Jacksan Luo	Line	L1
Test Date	January 22, 2016		

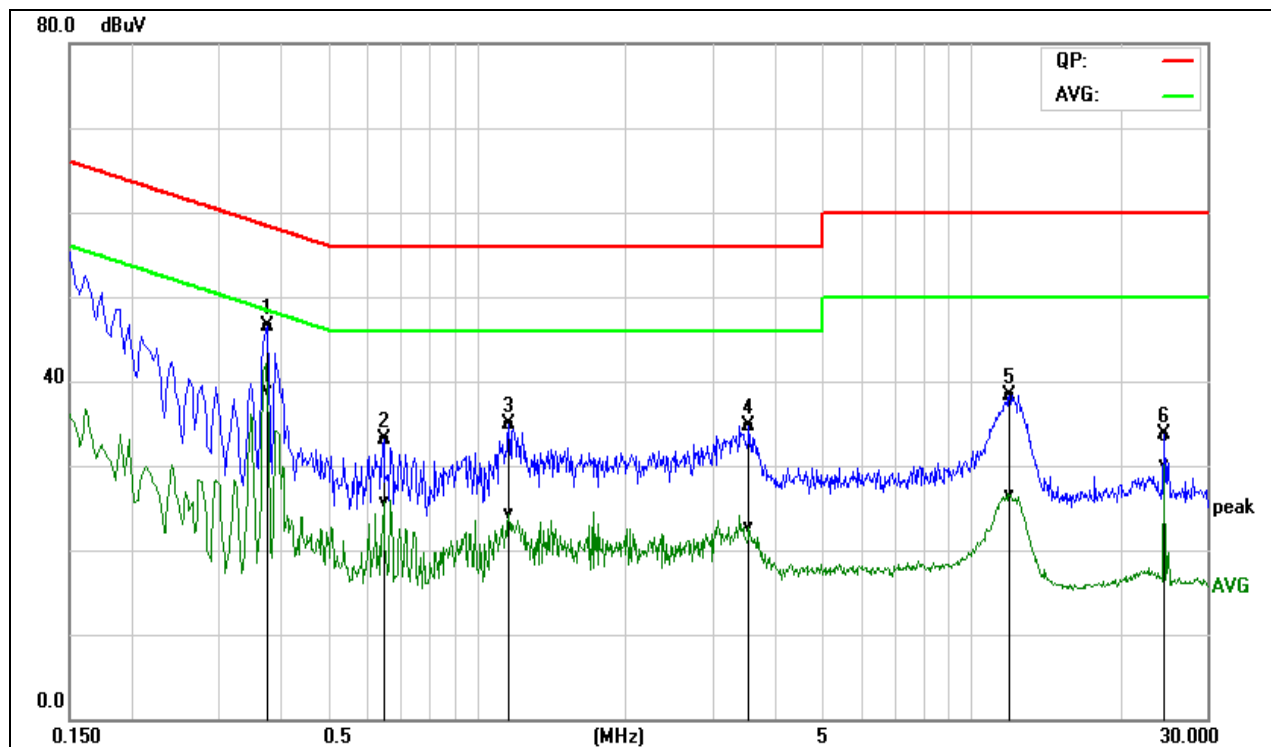


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.3780	26.78	19.29	19.63	46.41	38.92	58.32	48.32	-11.91	-9.40	Pass
0.6500	13.40	6.03	19.76	33.16	25.79	56.00	46.00	-22.84	-20.21	Pass
1.1620	15.20	4.66	19.66	34.86	24.32	56.00	46.00	-21.14	-21.68	Pass
3.5620	14.95	3.09	19.68	34.63	22.77	56.00	46.00	-21.37	-23.23	Pass
11.9379	18.30	6.50	20.06	38.36	26.56	60.00	50.00	-21.64	-23.44	Pass
24.5780	13.66	10.24	19.94	33.60	30.18	60.00	50.00	-26.40	-19.82	Pass

REMARKS: L1 = Line One (Live Line)



Model No.	AD107A4BKA	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 1
Tested by	Jackson Luo	Line	L2
Test Date	January 22, 2016		

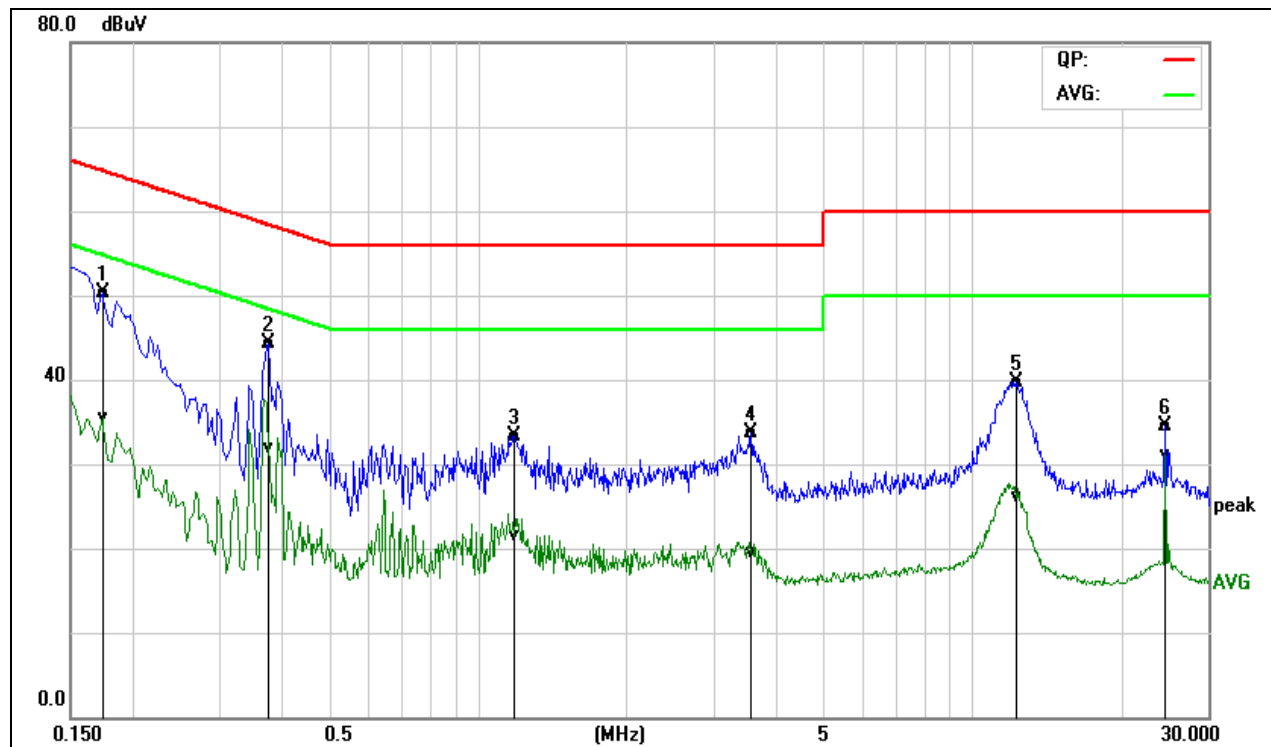


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1740	30.64	15.83	19.73	50.37	35.56	64.76	54.77	-14.39	-19.21	Pass
0.3780	24.54	12.16	19.67	44.21	31.83	58.32	48.32	-14.11	-16.49	Pass
1.1860	13.64	1.68	19.74	33.38	21.42	56.00	46.00	-22.62	-24.58	Pass
3.5780	14.04	-0.20	19.73	33.77	19.53	56.00	46.00	-22.23	-26.47	Pass
12.2820	19.75	6.21	19.95	39.70	26.16	60.00	50.00	-20.30	-23.84	Pass
24.5740	14.64	11.24	19.84	34.48	31.08	60.00	50.00	-25.52	-18.92	Pass

REMARKS: L2 = Line Two (Neutral Line)



Model No.	AD107A4BKA	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 2
Tested by	Jackson Luo	Line	L1
Test Date	January 22, 2016		

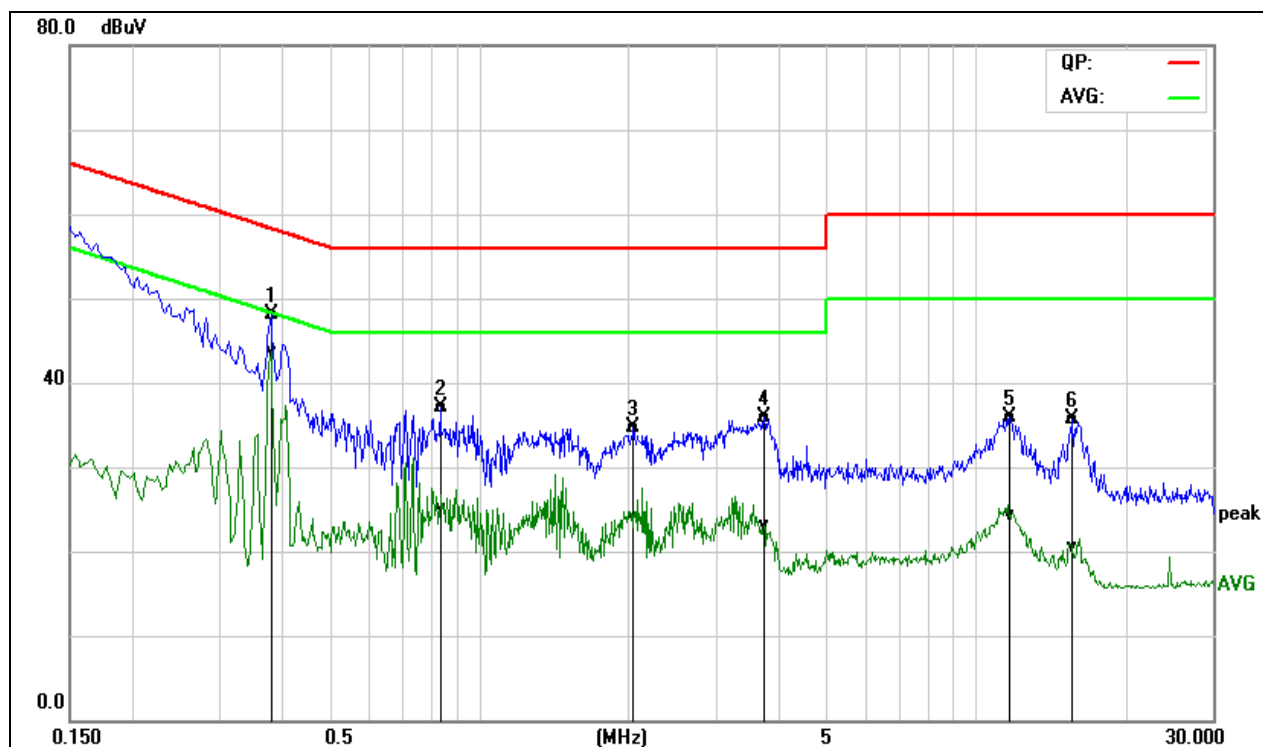


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.3820	28.39	24.00	19.63	48.02	43.63	58.23	48.24	-10.21	-4.61	Pass
0.8380	17.32	5.39	19.73	37.05	25.12	56.00	46.00	-18.95	-20.88	Pass
2.0500	14.96	4.36	19.72	34.68	24.08	56.00	46.00	-21.32	-21.92	Pass
3.7580	16.20	3.50	19.67	35.87	23.17	56.00	46.00	-20.13	-22.83	Pass
11.7020	15.84	4.30	20.07	35.91	24.37	60.00	50.00	-24.09	-25.63	Pass
15.6900	15.83	0.64	19.92	35.75	20.56	60.00	50.00	-24.25	-29.44	Pass

REMARKS: L1 = Line One (Live Line)



Model No.	AD107A4BKA	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 2
Tested by	Jacksan Luo	Line	L2
Test Date	January 22, 2016		

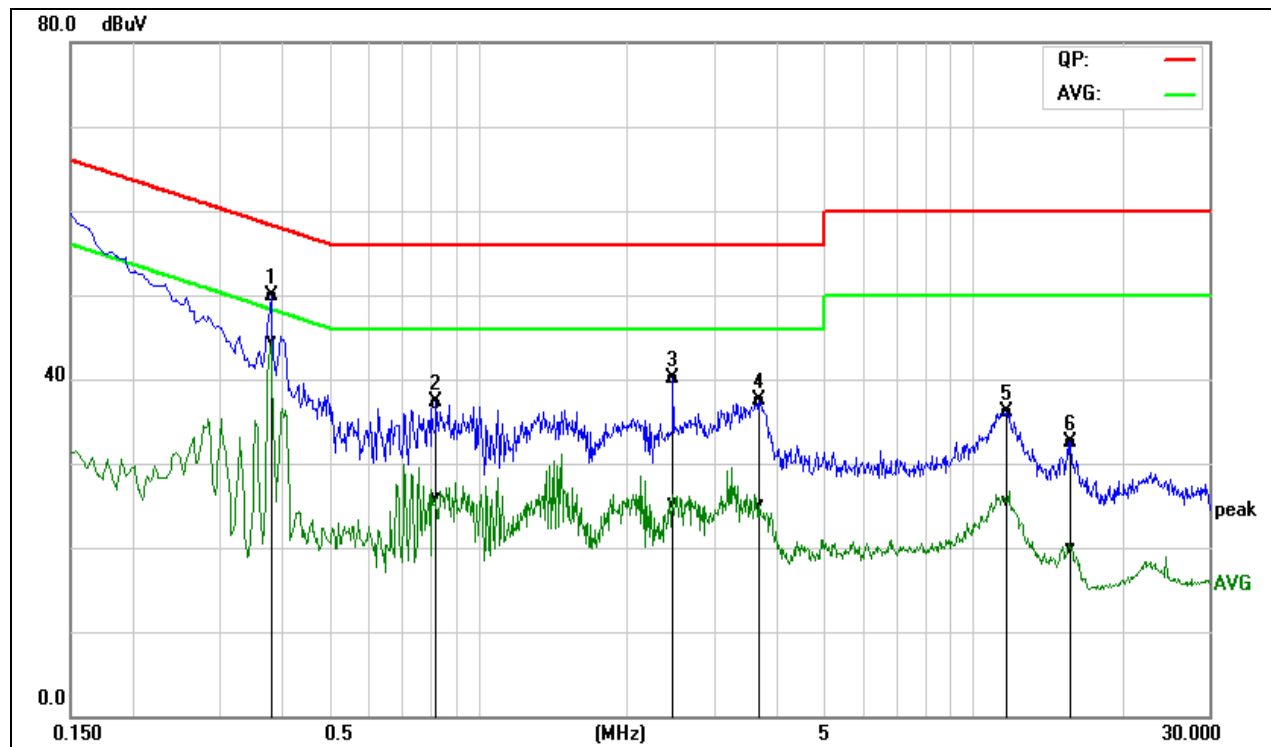

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.3820	30.26	24.91	19.67	49.93	44.58	58.23	48.24	-8.30	-3.66	Pass
0.8260	17.48	6.20	19.72	37.20	25.92	56.00	46.00	-18.80	-20.08	Pass
2.4860	20.45	5.66	19.72	40.17	25.38	56.00	46.00	-15.83	-20.62	Pass
3.7020	17.70	5.41	19.73	37.43	25.14	56.00	46.00	-18.57	-20.86	Pass
11.6980	16.15	5.58	20.00	36.15	25.58	60.00	50.00	-23.85	-24.42	Pass
15.7380	12.76	0.19	19.73	32.49	19.92	60.00	50.00	-27.51	-30.08	Pass

REMARKS: L2 = Line Two (Neutral Line)