



**DATE: 9 December 2013**

**I.T.L. (PRODUCT TESTING) LTD.**

# **FCC Radio Test Report**


for


## **Corning Optical Communication Wireless**


**Equipment under test:**

**Mobile AccessHX High-Power DAS Remote Unit  
MIMO**

**HX-C85P19L70MA17M-AC-A  
(AWS Section)**

Written by:   
R. Pinchuck, Documentation

Approved by:   
A. Sharabi, Test Engineer

Approved by:   
I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written  
permission of I.T.L. (Product Testing) Ltd.  
This report relates only to items tested.



## Measurement/Technical Report for Corning Optical Communication Wireless

Mobile AccessHX High-Power DAS Remote Unit MIMO

### (AWS Section)

HX-C85P19L70MA17M-AC-A

**FCC ID: OJFHXCPL70MAM**

This report concerns:      Original Grant:  
   Class II change: X  
   Class I change:

Equipment type:              PCS Licensed Transmitter

Limits used:                  47CFR Parts 2; 27

Measurement procedure used is ANSI C63.4-2003.

Substitution Method used as in ANSI/TIA-603-C: 2004

Application for Certification  
prepared by:

R. Pinchuck  
ITL (Product Testing) Ltd.  
1 Bat Sheva St.  
Lod 7120101  
Israel  
e-mail rpinchuck@itl.co.il

Applicant for this device:

(different from "prepared by")

Habib Riazi  
Corning Optical Communication Wireless  
13221 Woodland Park Rd., Suite #400  
Herndon, VA. 20171  
U.S.A.  
Tel: +1-541-758-2880  
Fax: +1-703-848-0260  
e-mail: RiaziH@corning.com



## TABLE OF CONTENTS

<b>1.</b>	<b>GENERAL INFORMATION -----</b>	<b>4</b>
1.1	Administrative Information .....	4
1.2	List of Accreditations .....	5
1.3	Product Description .....	6
1.4	Test Methodology .....	7
1.5	Test Facility .....	8
1.6	Measurement Uncertainty .....	8
<b>2.</b>	<b>SYSTEM TEST CONFIGURATION-----</b>	<b>9</b>
2.1	Justification .....	9
2.2	EUT Exercise Software .....	9
2.3	Special Accessories .....	9
2.4	Equipment Modifications .....	9
2.5	Configuration of Tested System .....	10
<b>3.</b>	<b>MEASUREMENT TEST SET-UPS PHOTOS -----</b>	<b>11</b>
<b>4.</b>	<b>RF POWER OUTPUT AWS -----</b>	<b>14</b>
4.1	Test Specification .....	14
4.2	Test procedure .....	14
4.3	Results.....	19
4.4	Test Equipment Used.....	20
<b>5.</b>	<b>OCCUPIED BANDWIDTH AWS-----</b>	<b>21</b>
5.1	Test Specification .....	21
5.2	Test Procedure .....	21
5.3	Results.....	31
5.4	Test Equipment Used.....	32
<b>6.</b>	<b>SPURIOUS EMISSIONS AT ANTENNA TERMINALS AWS -----</b>	<b>33</b>
6.1	Test Specification .....	33
6.2	Test procedure .....	33
6.3	Results.....	33
6.4	Test Equipment Used.....	37
<b>7.</b>	<b>BAND EDGE SPECTRUM AWS -----</b>	<b>38</b>
7.1	Test Specification .....	38
7.2	Test procedure .....	38
7.3	Results.....	41
7.4	Test Equipment Used.....	42
<b>8.</b>	<b>SPURIOUS RADIATED EMISSION AWS -----</b>	<b>43</b>
8.1	Test Specification – .....	43
8.2	Test Procedure .....	43
8.3	Test Results.....	43
8.4	Test Instrumentation Used, Radiated Measurements AWS .....	45
<b>9.</b>	<b>APPENDIX A - CORRECTION FACTORS -----</b>	<b>46</b>
9.1	Correction factors for CABLE .....	46
9.2	Correction factors for CABLE .....	47
9.3	Correction factors for CABLE .....	48
9.4	Correction factors for LOG PERIODIC ANTENNA .....	49
9.5	Correction factors for Double-Ridged Waveguide Horn.....	50



# 1. General Information

## 1.1 Administrative Information

Manufacturer: Corning Optical Communication Wireless

Manufacturer's Address: 13221 Woodland Park Rd., Suite #400  
Herndon, VA. 20171  
Vienna, VA 22182  
U.S.A.  
Tel: +1-541-758-2880  
Fax: +1-703-848-0260

Manufacturer's Representative: Habib Riazi

Equipment Under Test (E.U.T): Mobile AccessHX High-Power DAS Remote Unit MIMO

Equipment Model No.: HX-C85P19L70MA17M-AC-A

Equipment Serial No.: 0B422A0

Date of Receipt of E.U.T: 12.11.13

Start of Test: 12.11.13

End of Test: 14.11.13

Test Laboratory Location: I.T.L (Product Testing) Ltd.  
Kfar Bin Nun,  
ISRAEL 99780

Test Specifications: FCC Parts 2; 27



## **1.2 List of Accreditations**

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025B-1.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

### 1.3 **Product Description**

MobileAccess**HX** is a high power, remote solution for the MobileAccess**1000** (MA1000) and MobileAccess**2000** (MA2000) Distributed Antenna Systems. It is a fiber-fed, compact and scalable multi-service platform designed to complement the MA1000 and MA2000 and provide complete RF open space coverage for large-scale public venues, such as campuses, stadiums, convention centers, hotels, airports, and train stations. The solution can be deployed in new sites or alongside existing MA1000 and MA2000 systems, sharing a common head-end and element management system (EMS).

MobileAccess**HX** will support multiple wireless technologies and operator services over a single broadband infrastructure. Using low loss fiber optic cabling, remote units can cover distances of up to 2Km from the BTS signal sources at the head-end.

Alongside MA1000 and MA2000 deployments, MobileAccess**HX** provides a comprehensive indoor and outdoor coverage solution for varying site requirements, supporting everything from high-rise buildings and campus topologies, to stadiums and airports.

#### **Features & Benefits:**

**Multi-Service Platform:** Accommodates GSM, UMTS, HSPA, LTE, EDGE, EV-DO, AWS, and more. Provides MIMO configuration for LTE700, AWS and UMTS band.

**Cost-Effective High Power:** Optimizes and reduces the number of antennas required to cover open areas by offering 33dBm (2W) composite power per frequency band.

**Indoor Models:** Supports either SISO or MIMO service in a single compact enclosure.

**Outdoor Models:** Outdoor enclosures are compliant to IP65/NEMA standard.

**Carrier-Grade Operation:** Advanced signal handling and management ensures carrier-grade performance in multi-operator deployments.

**Design and Deployment Flexibility:** Remote unit supports both SM and MM fiber connections and are available in AC or DC power supply options. Antenna splitting schemes are possible due to the higher power output capability.

**Backwards Compatible:** Connects to an existing MobileAccess**1000** or MobileAccess**2000** deployment (Shares a common head-end and EMS in a single deployment).

## System Architecture

MobileAccess**HX** provides a complete solution consisting of HX remote units at the remote locations, and head-end elements that are shared with any MA1000 or MA2000 system that is either installed or being installed at the site.

In the downlink, at the head-end, the BTS or BDA signal is conditioned by the **RIU**, ensuring a constant RF level. The conditioned signal is then converted by the Base Unit to an optical signal for transport over single or multi-mode fiber to the HX remote units, which are located at the remote locations. In the uplink, the process is reversed. The **SC-450 Controller** enables local and remote management, as well as controls all MA1000, MA2000, and HX elements from a single, centralized location.

The **MobileAccessHX Remote Unit** (indoor-SISO/MIMO and outdoor-SISO models) consists of a compact enclosure that houses the RF module, power elements, and the required interfaces. The RF module supports three bands (GSM, DCS, and UMTS) and two types of quad bands (Type 1: LTE700, CELL, PCS, and AWS or Type 2: CELL, EGSM, DCS, or UMTS) All mobile services are combined and distributed through a single antenna port over antennas installed at the remote locations.

### 1.4 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.



### **1.5 Test Facility**

Both conducted and radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing September 3, 2009).

I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

### **1.6 Measurement Uncertainty**

#### **Radiated Emission**

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) for open site 30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

$\pm 4.96$  dB



## 2. System Test Configuration

### 2.1 *Justification*

A FCC Grant was issued for the E.U.T. on 2/15/2012. The LTE modulation has been added to the CELL, PCS and AWS band requiring a C2PC. The following tests were performed:

RF power output

Occupied bandwidth

Spurious emissions at antenna terminals

Band edge spectrum

Spurious radiated emissions

### 2.2 *EUT Exercise Software*

The Element Management System EngGUI ver. 1.00 build 10 used for commands delivery.

These commands are used to enable / disable of EUT transmission.

EUT Embedded SW version 01.00 build 14


### 2.3 *Special Accessories*

No special accessories were needed in order to achieve compliance.

### 2.4 *Equipment Modifications*

No modifications were necessary in order to achieve compliance.


## 2.5 Configuration of Tested System

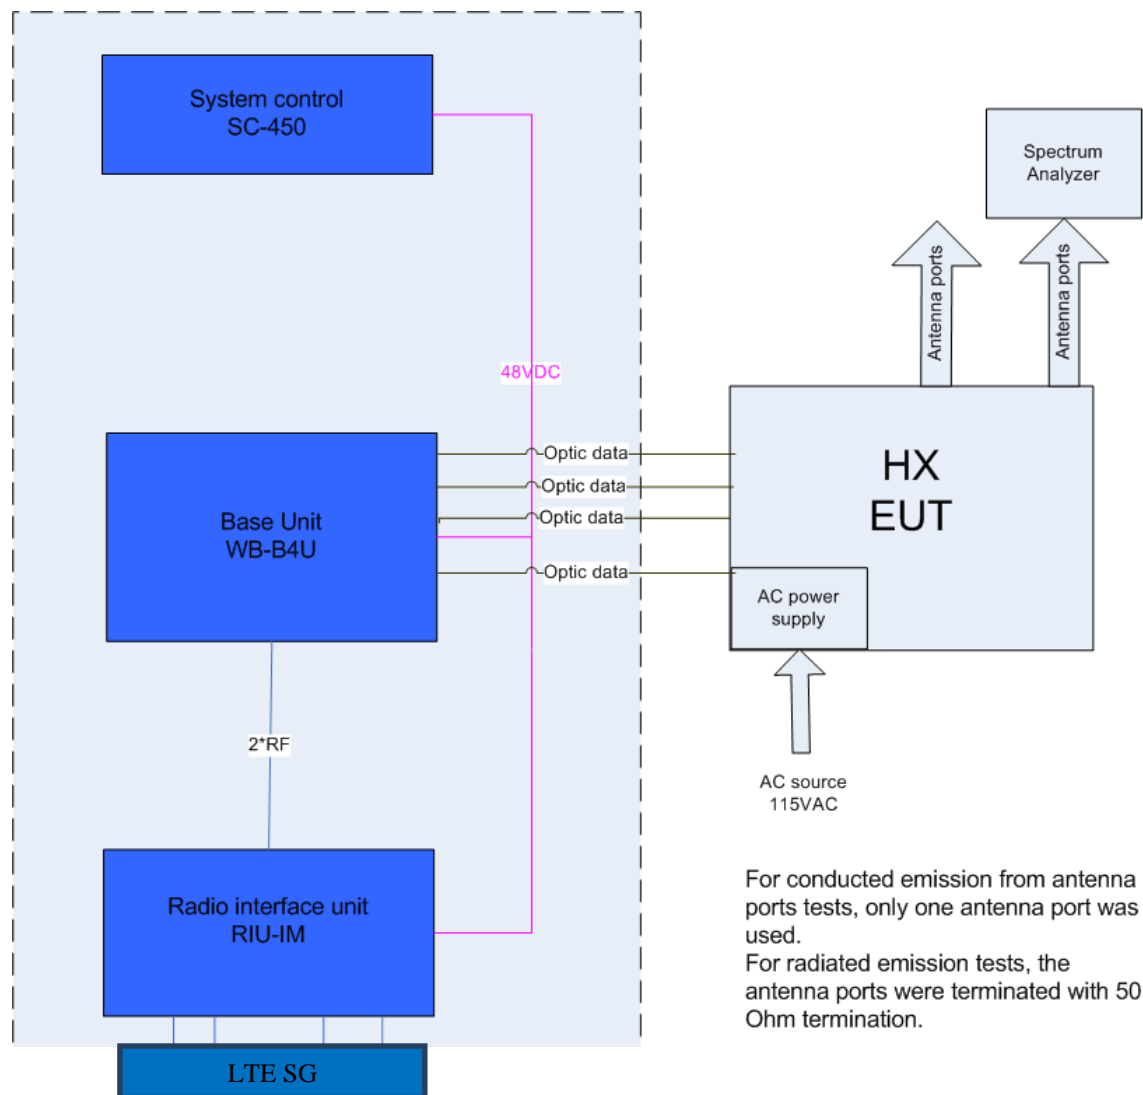

**Figure 1. Test Set-up**

Unit	Model	S.N
HX MIMO	702A047111	0012430001E
BTSE	RV-BDAC-AWS	0AS120A
BU	WB—B8U	0B09SC0
SC-450	SC-450	0A429SE
RIU	RIU-IM	0B10A8S

### 3. Measurement Test Set-ups Photos

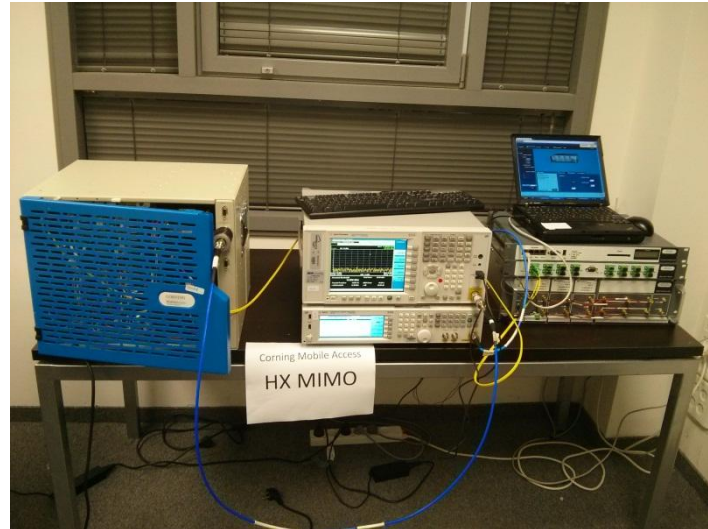

**Figure 2. Conducted Emission From Antenna Ports Tests**



**Figure 3. Radiated Emission Test**



**Figure 4. Radiated Emission Test**



**Figure 5. Radiated Emission Test**



**Figure 6. Radiated Emission Test**

## 4. RF Power Output AWS

### 4.1 Test Specification

FCC Part 27, Subpart C (27.50(d))

### 4.2 Test procedure

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator (30 dB) and an appropriate coaxial cable (1 dB). The E.U.T. RF output was modulated as follows:

LTE at 10 MHz BW channels (2115.0 MHz, 2135.0 MHz and 2150.0 MHz)

Special attention was taken to prevent Spectrum Analyzer RF input overload.

Signal generator input level 1dBm.

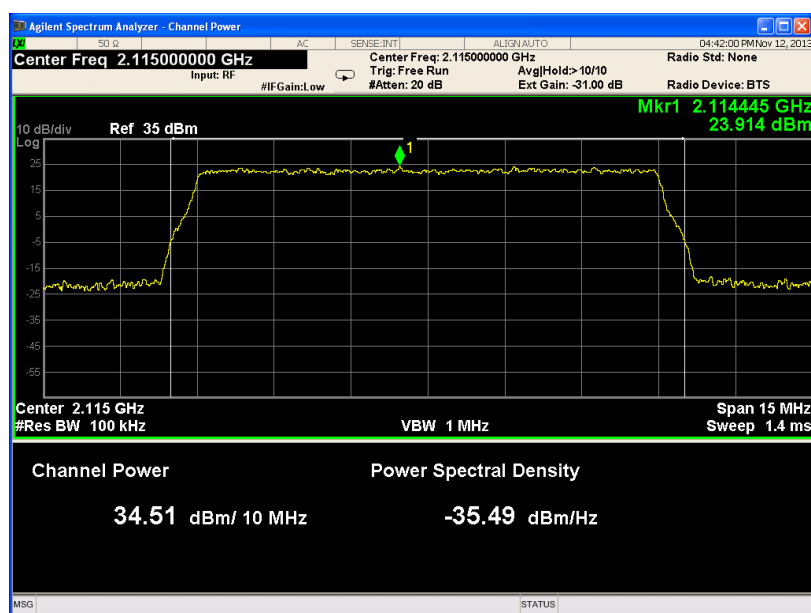


Figure 7 - 16QAM (LOW)

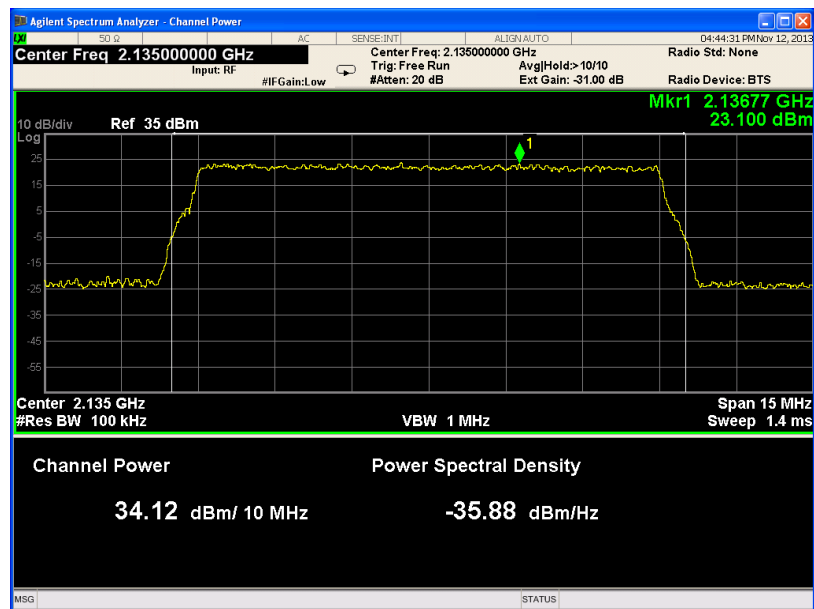


Figure 8 - 16QAM (MID)

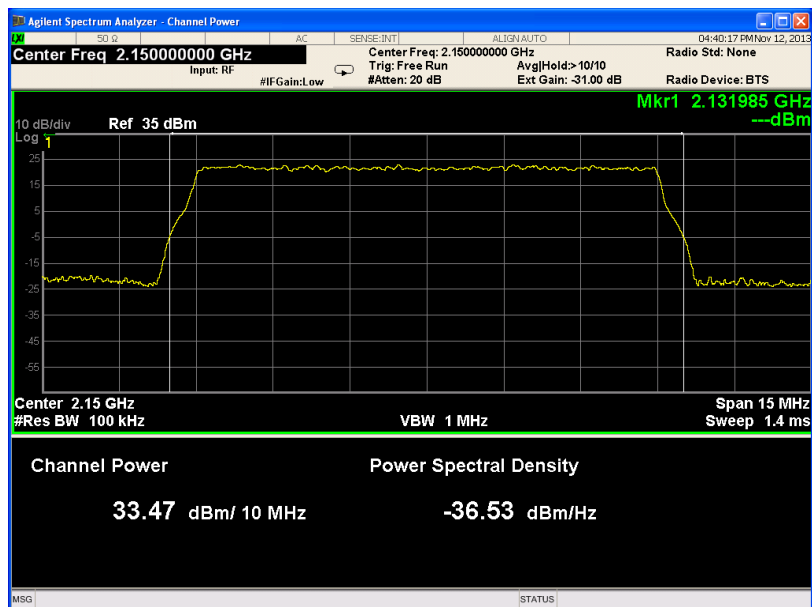


Figure 9 - 16QAM (HIGH)

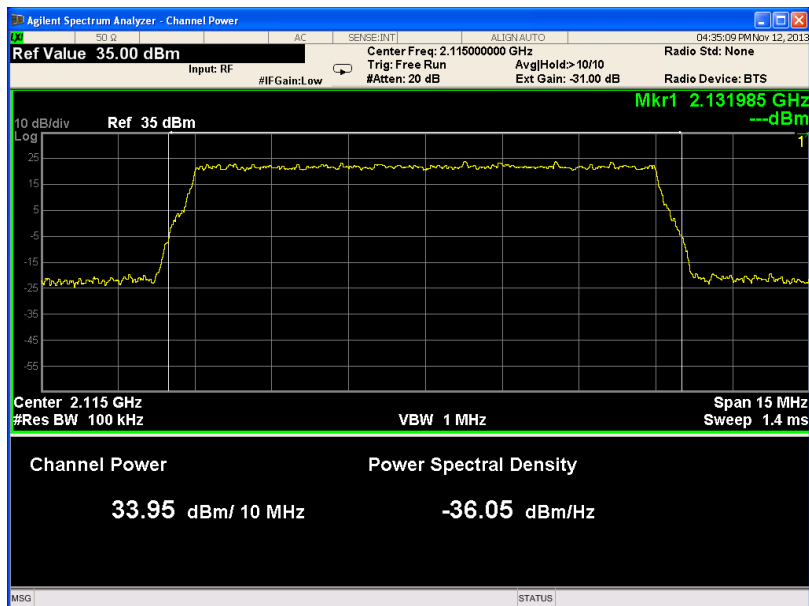


Figure 10 - 64QAM (LOW)

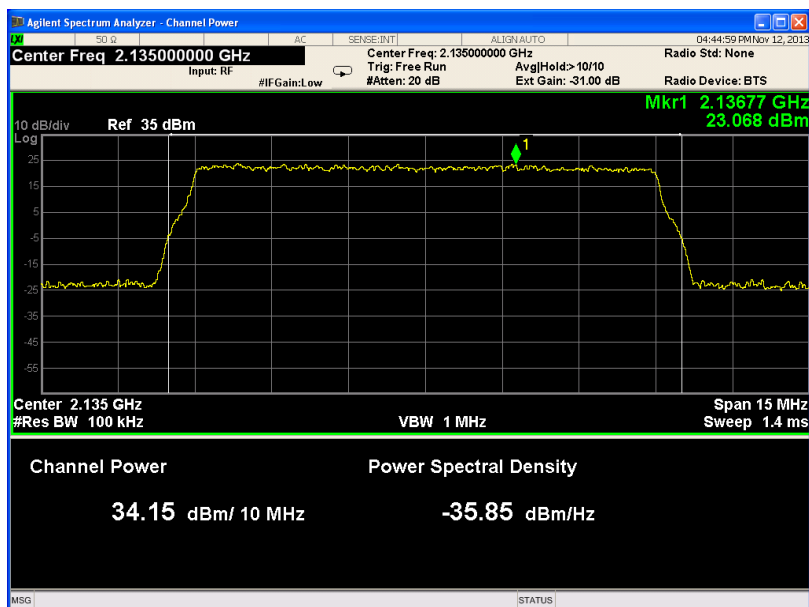


Figure 11 - 64QAM (MID)



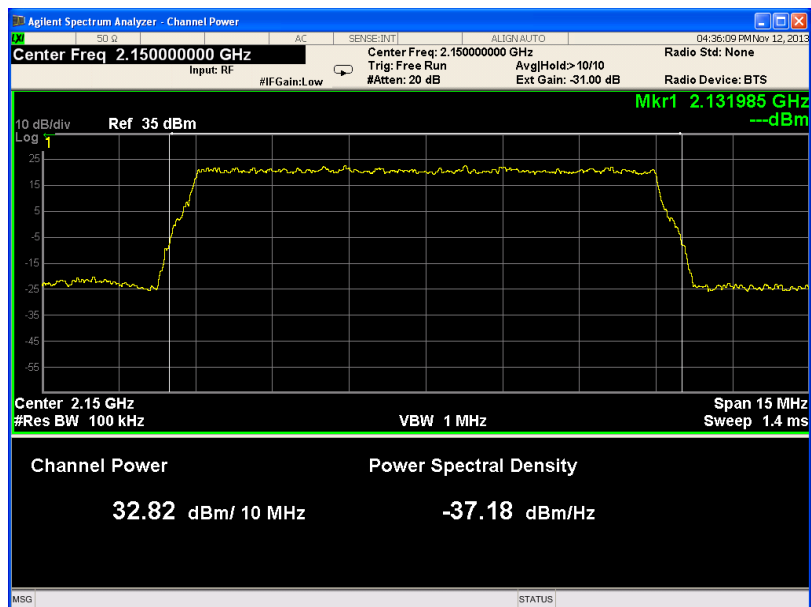


Figure 12 - 64QAM (HIGH)

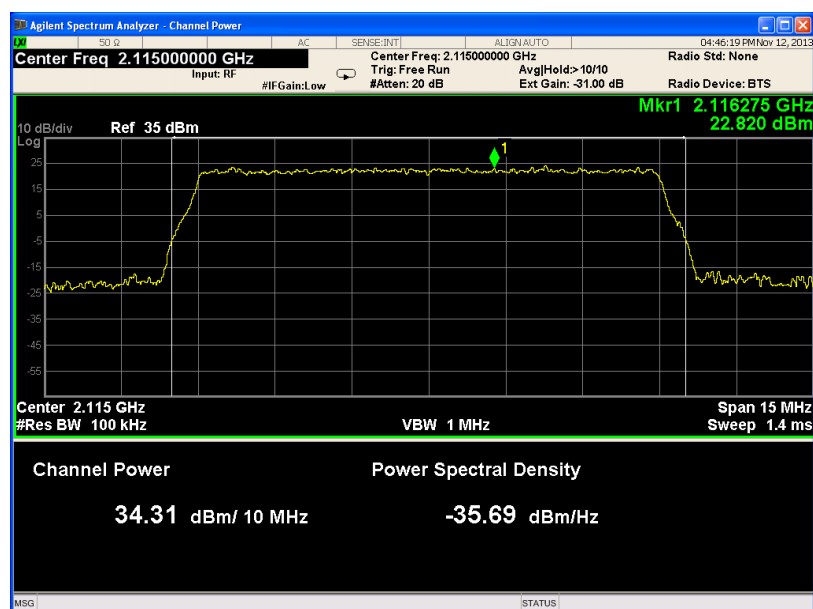


Figure 13 - QPSK (LOW)

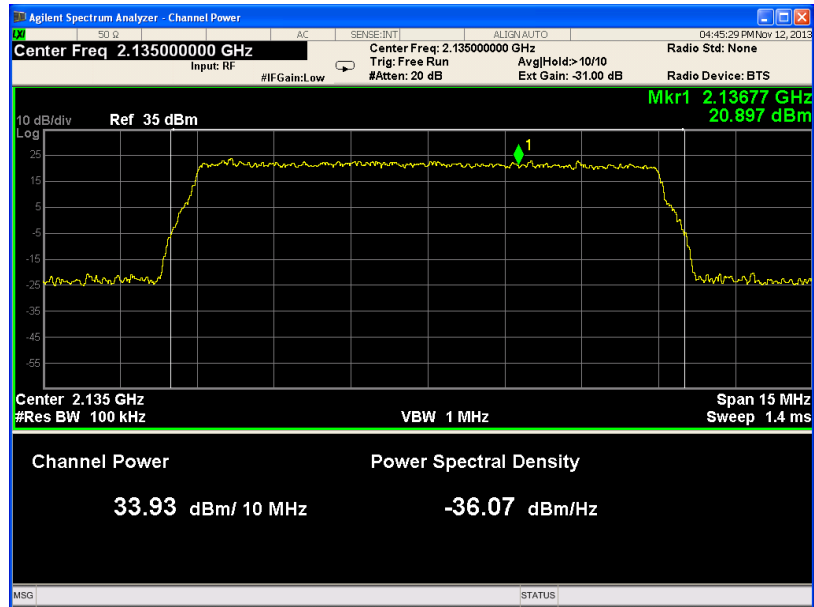


Figure 14 - QPSK (MID)

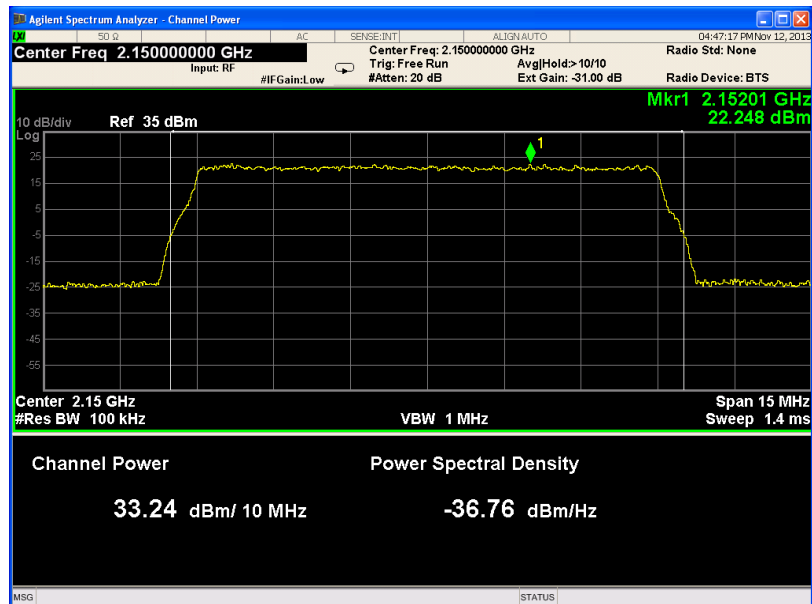


Figure 15 - QPSK (HIGH)



### 4.3 Results

E.U.T. Description: Mobile AccessHX High-Power DAS Remote Unit MIMO

Model No.: HX-C85P19L70MA17M-AC-A


Serial Number: 0B422A0

Specification: FCC Part 27, Subpart C, Section 27.50 (d)

Modulation	Operation Frequency  (MHz)	Reading  (dBm)	2 Ports MIMO (dBm)
16 QAM	Low	34.51	37.51
16 QAM	Mid	34.12	37.12
16 QAM	High	33.47	36.47
64 QAM	Low	33.95	36.95
64 QAM	Mid	34.15	37.15
64 QAM	High	32.82	35.82
QPSK	Low	34.31	37.31
QPSK	Mid	33.93	36.93
QPSK	High	33.24	36.24

Figure 16 RF Power Output AWS

TEST PERSONNEL:

Tester Signature: 

Date: 10.12.13

Typed/Printed Name: A. Sharabi



#### 4.4 Test Equipment Used.

##### RF Power Output AWS

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Period
Spectrum Analyzer	Agilent	N9010A EXA	MY49061070	July 28, 2013	1 year
Spectrum Analyzer	HP	8564E	3313U00346	February 28, 2013	1 year
Signal Generator	Agilent	N5172B EXG	MY51350549	December 28, 2012	1 year
Attenuator	MCE	46-30-34	BN4927	November 12, 2013	1 year
Cable	Mini-Circuits	30091	-	November 12, 2013	1 year

Figure 17 Test Equipment Used

## 5. Occupied Bandwidth AWS

### 5.1 Test Specification

FCC Part 2, Section 1049

### 5.2 Test Procedure

The E.U.T. was set to the applicable test frequency and modulation. The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (at the output test) and an appropriate coaxial cable. The spectrum analyzer was set to proper resolution B.W.

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limit, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.

Occupied bandwidth measured was repeated in the input terminal of the E.U.T.

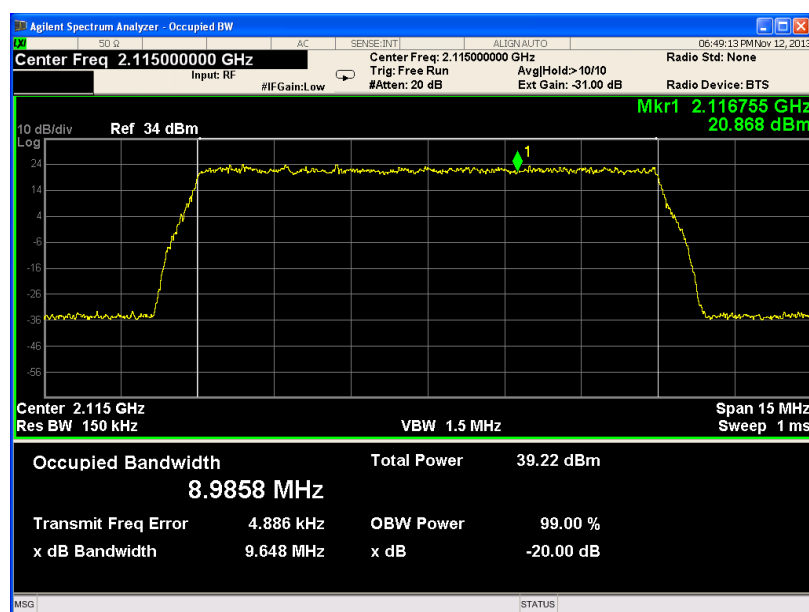


Figure 18.— 16QAM (LOW) IN

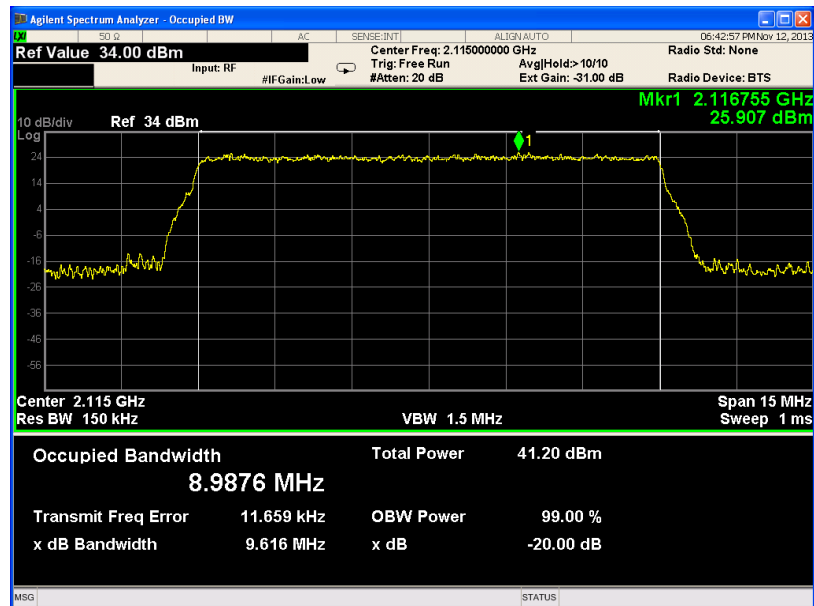


Figure 19.— 16QAM (LOW) OUT

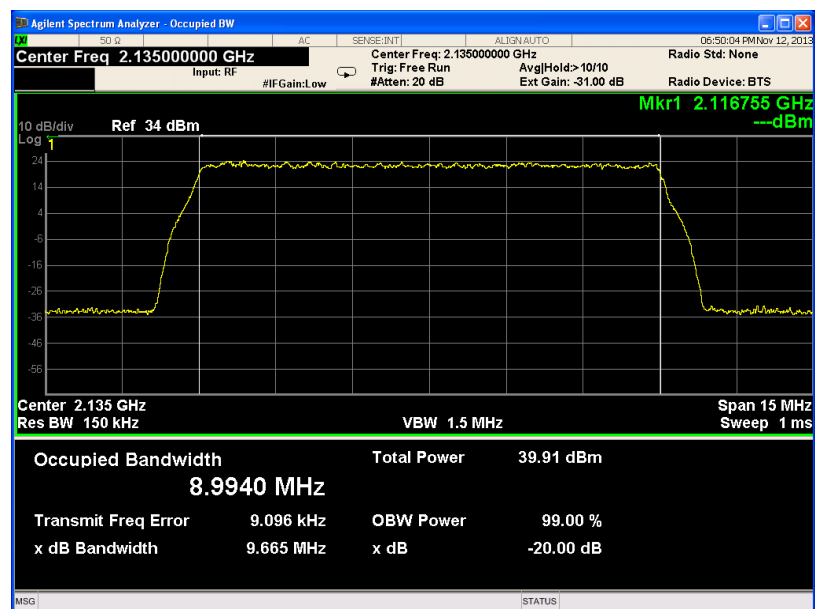


Figure 20.— 16QAM (MID) IN

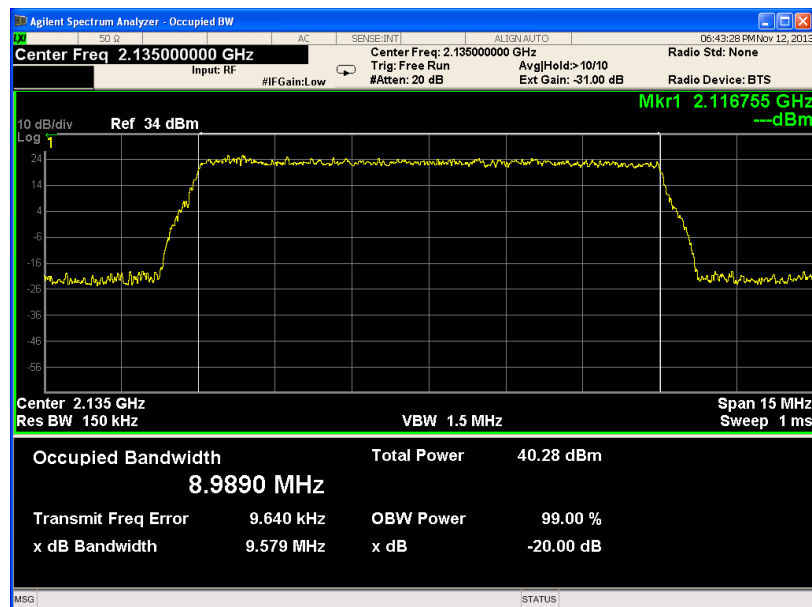


Figure 21.— 16QAM (MID) OUT

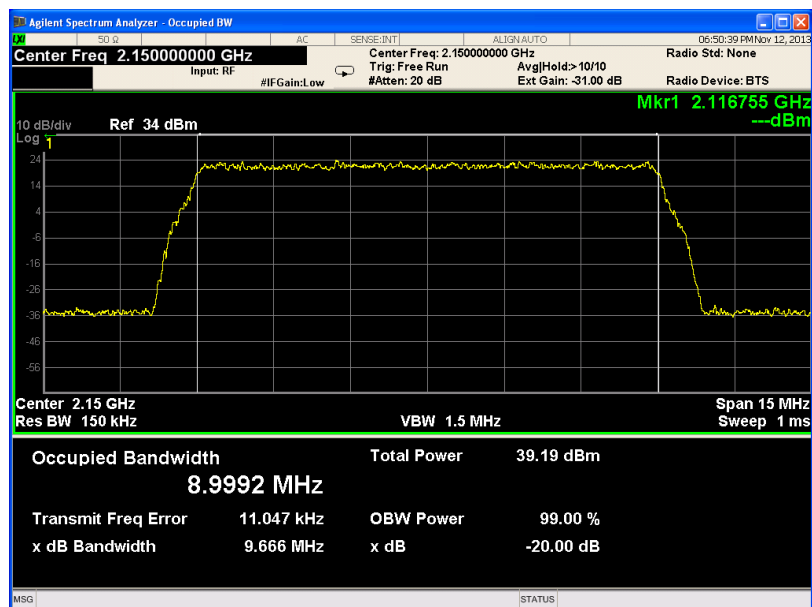


Figure 22.— 16QAM (HIGH) IN

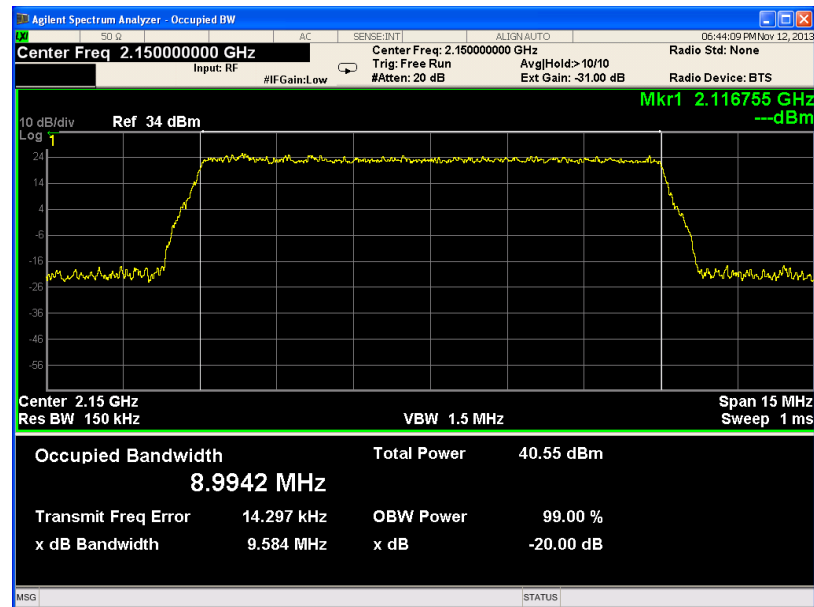


Figure 23.— 16QAM (HIGH) OUT

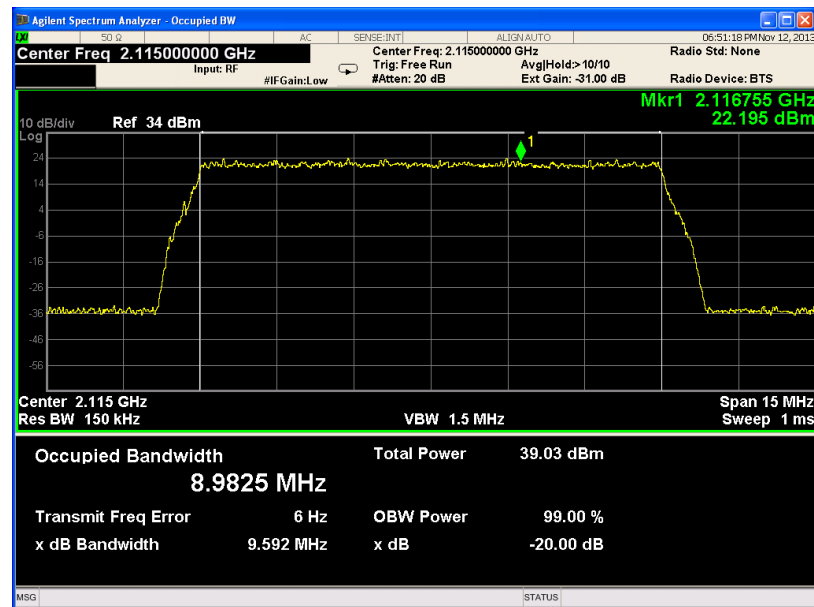


Figure 24.— 64QAM (LOW) IN



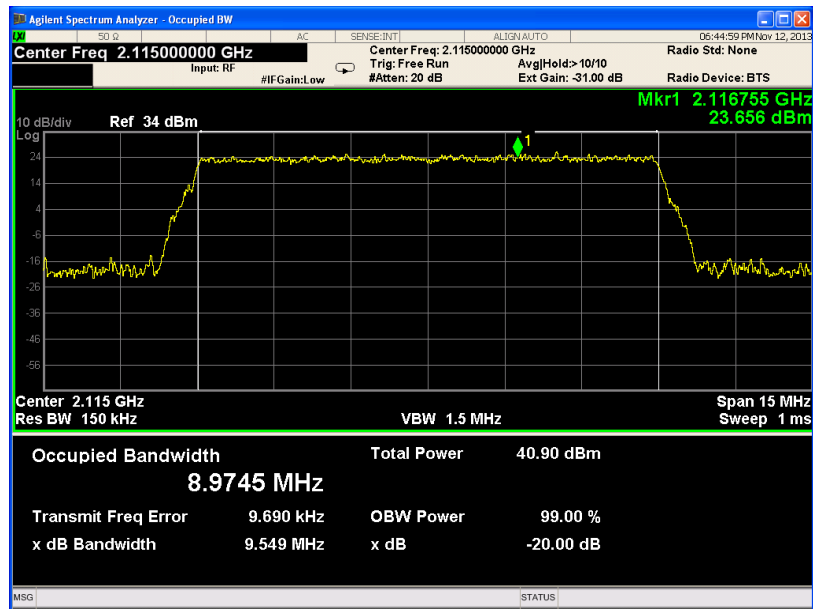


Figure 25.— 64QAM (LOW) OUT

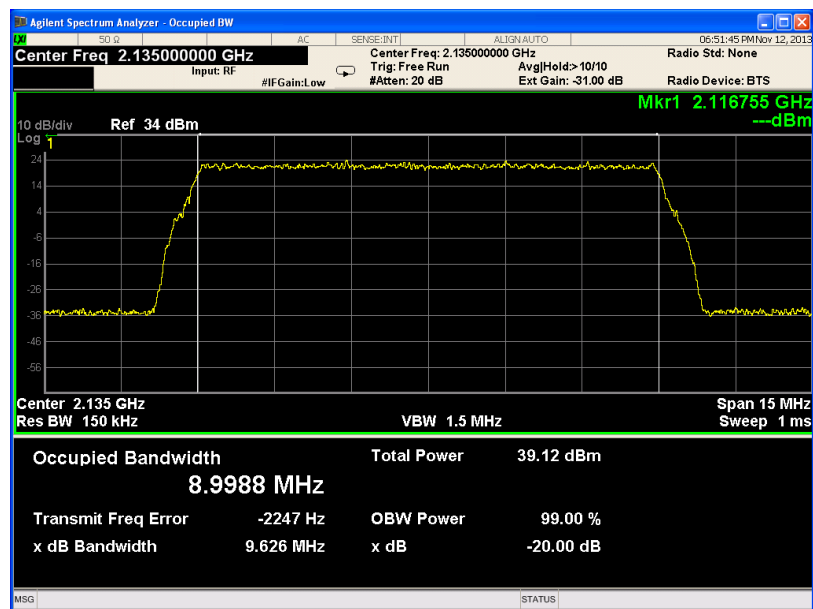


Figure 26.— 64QAM (MID) IN

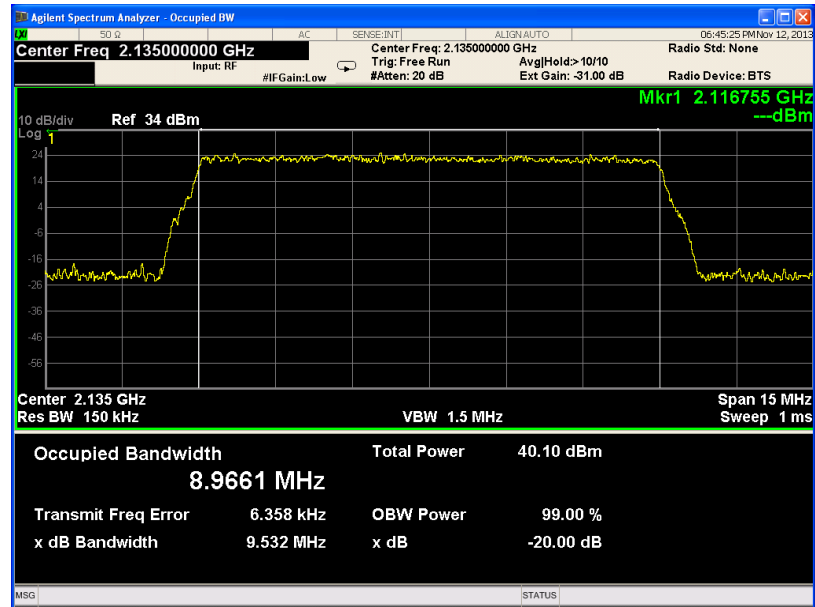


Figure 27.— 64QAM (MID) OUT

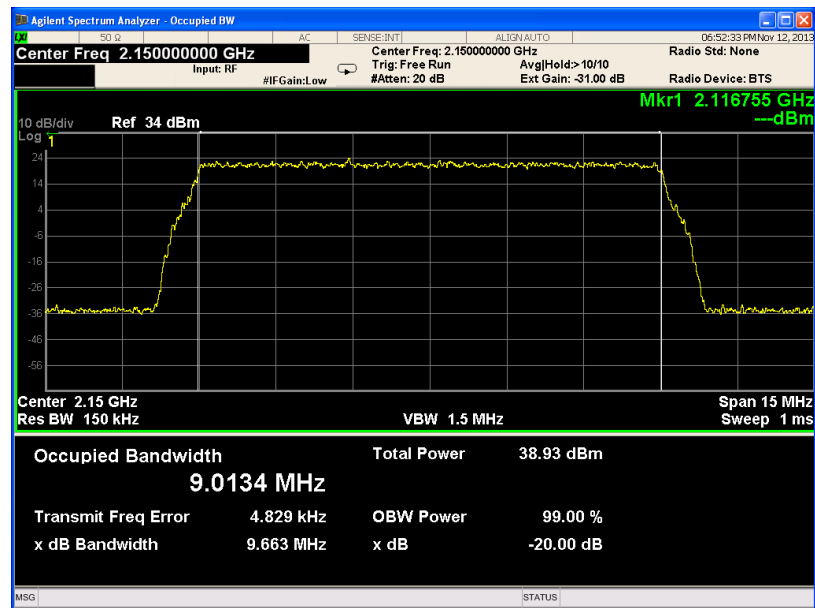


Figure 28.— 64QAM (HIGH) IN

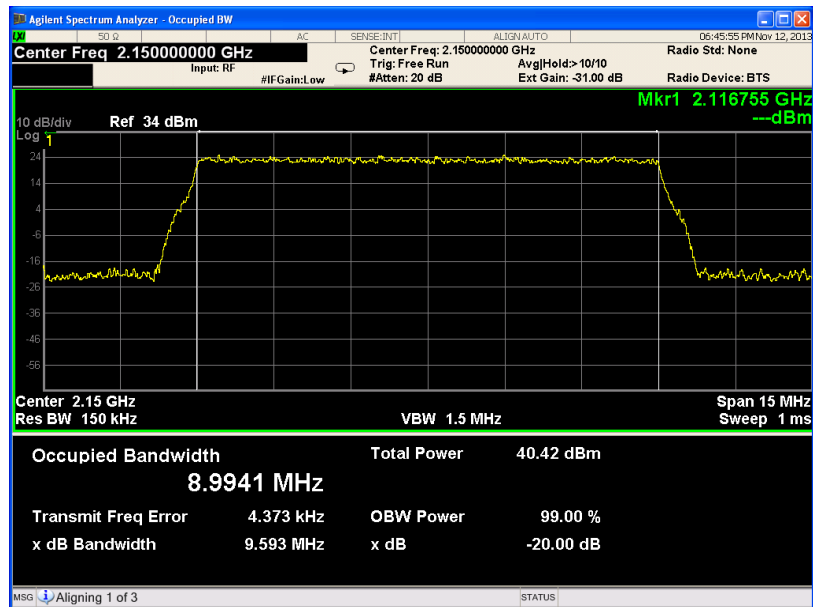


Figure 29.— 64QAM (HIGH) OUT

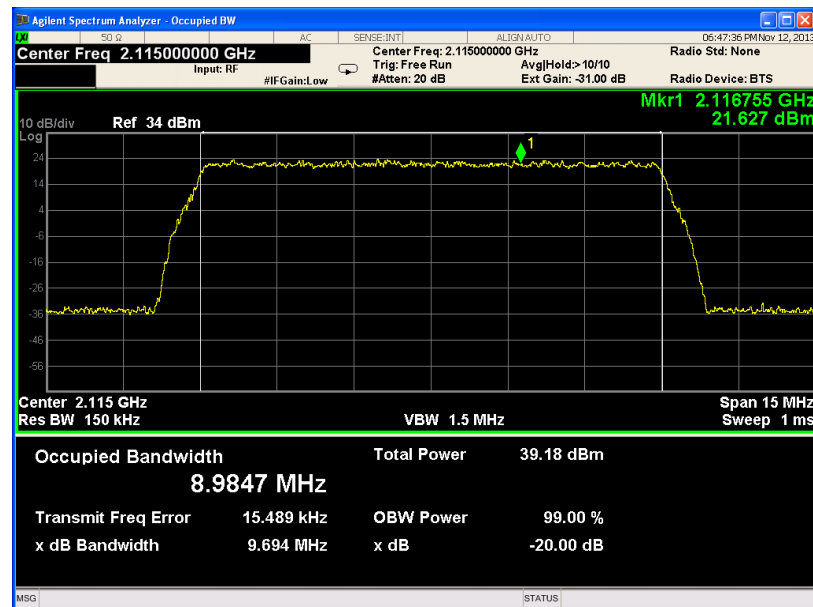


Figure 30.— QPSK (LOW) IN

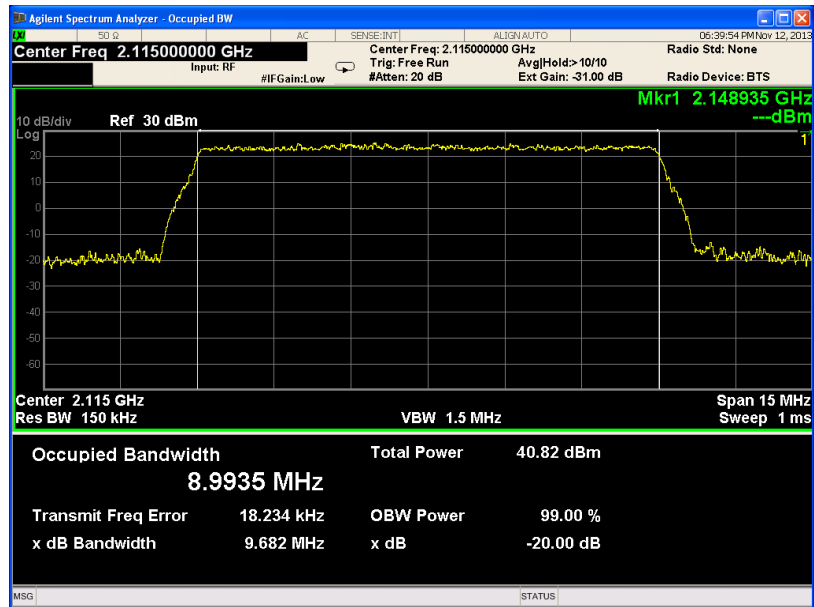


Figure 31.— QPSK (LOW) OUT

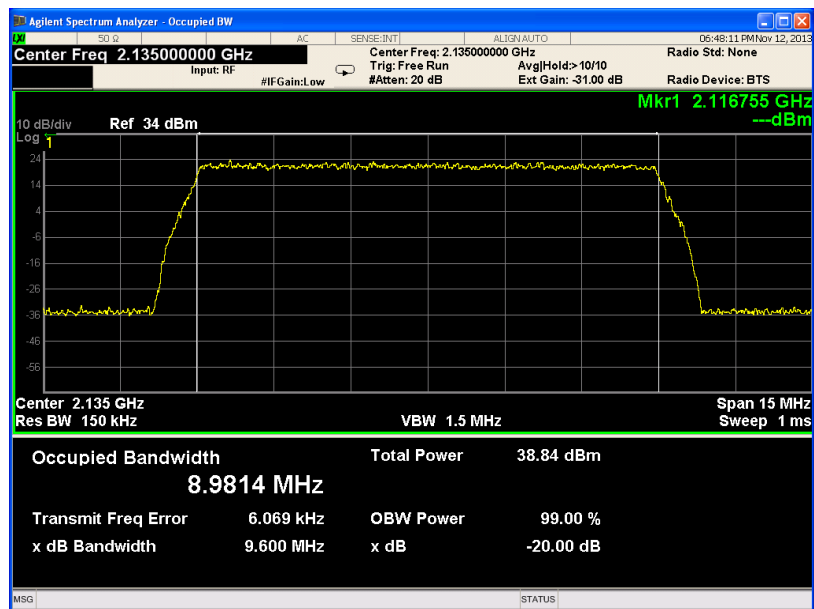


Figure 32.— QPSK (MID) IN

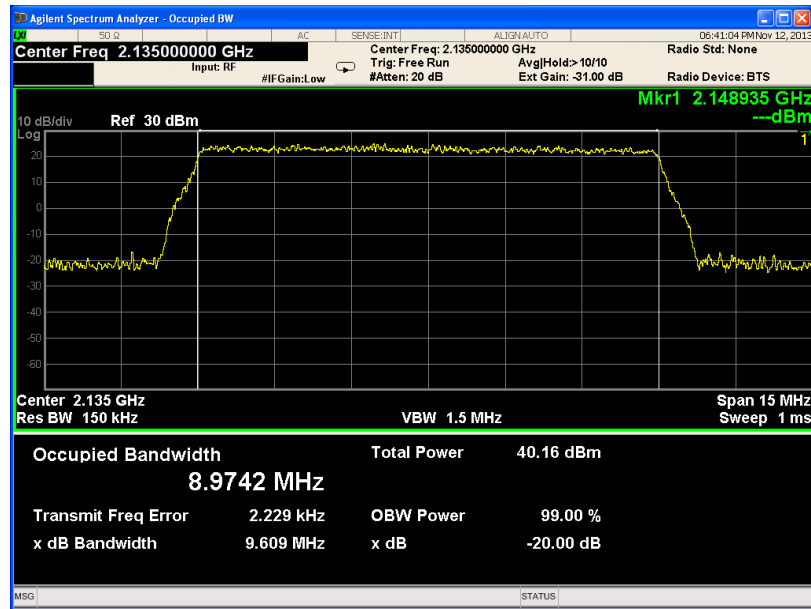


Figure 33.— QPSK (MID) OUT

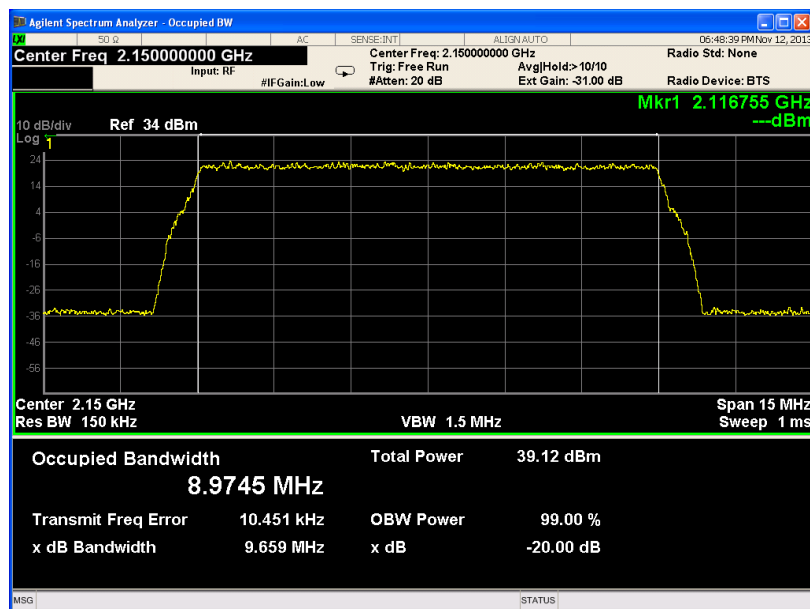


Figure 34.— QPSK (HIGH) IN

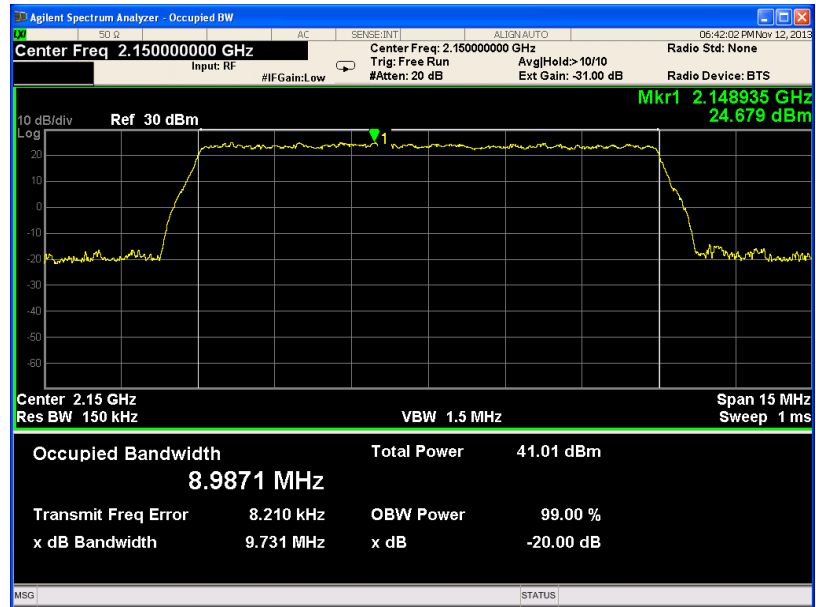


Figure 35.— QPSK (HIGH) OUT

### 5.3 Results

E.U.T. Description: Mobile AccessHX High-Power DAS Remote Unit MIMO

Model No.: HX-C85P19L70MA17M-AC-A

Serial Number: 0B422A0


Specification: FCC Part 2, Section 1049

Modulation		Operating Frequency (MHz)	Reading (MHz)
LTE-16QAM	Input	Low	8.9858
	Output	Low	8.9876
	Input	Mid	8.9940
	Output	Mid	8.9890
	Input	High	8.9992
	Output	High	8.9942
LTE-64QAM	Input	Low	8.9825
	Output	Low	8.9745
	Input	Mid	8.9988
	Output	Mid	8.9661
	Input	High	9.0134
	Output	High	8.9941
LTE-QPSK	Input	Low	8.9847
	Output	Low	8.9935
	Input	Mid	8.9814
	Output	Mid	8.9742
	Input	High	8.9745
	Output	High	8.9871

**Figure 36 Occupied Bandwidth AWS**

JUDGEMENT: Passed

TEST PERSONNEL:

Tester Signature: 

Date: 10.12.13

Typed/Printed Name: A. Sharabi



#### 5.4 Test Equipment Used; Occupied Bandwidth

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Period
Spectrum Analyzer	Agilent	N9010A EXA	MY49061070	July 28, 2013	1 year
Spectrum Analyzer	HP	8564E	3313U00346	February 28, 2013	1 year
Signal Generator	Agilent	N5172B EXG	MY51350549	December 28, 2012	1 year
Attenuator	MCE	46-30-34	BN4927	November 12, 2013	1 year
Cable	Mini-Circuits	30091	-	November 12, 2013	1 year

**Figure 37 Test Equipment Used**





## 6. Spurious Emissions at Antenna Terminals AWS

### 6.1 Test Specification

FCC Part 27, Subpart C, Section 27.53 (g)

### 6.2 Test procedure


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + \log(P)$  dB, yielding  $-13\text{dBm}$ .

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (31.0 dB).

### 6.3 Results

JUDGEMENT: Passed

TEST PERSONNEL:

Tester Signature: 

Date: 10.12.13

Typed/Printed Name: A. Sharabi

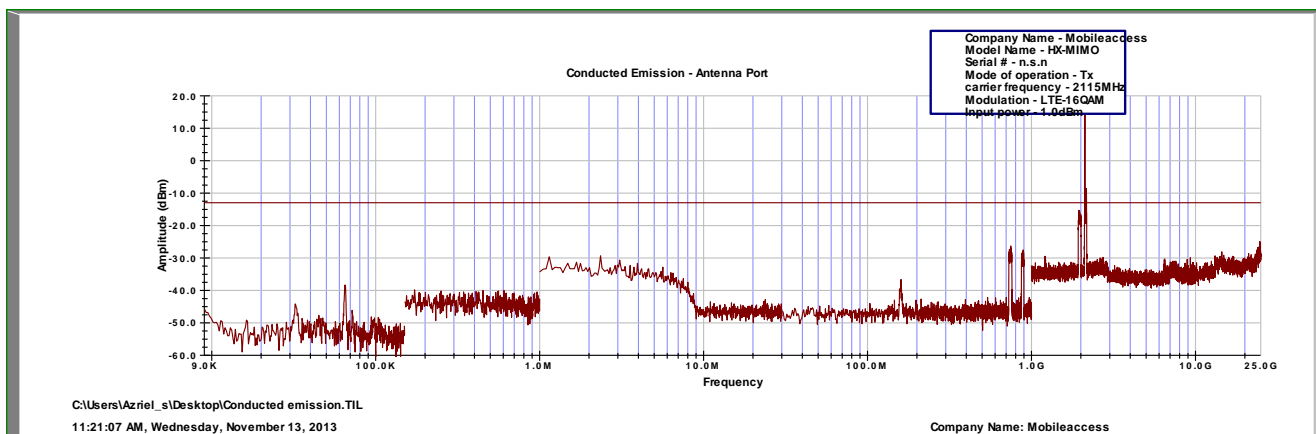


Figure 38.— 16QAM (Low)

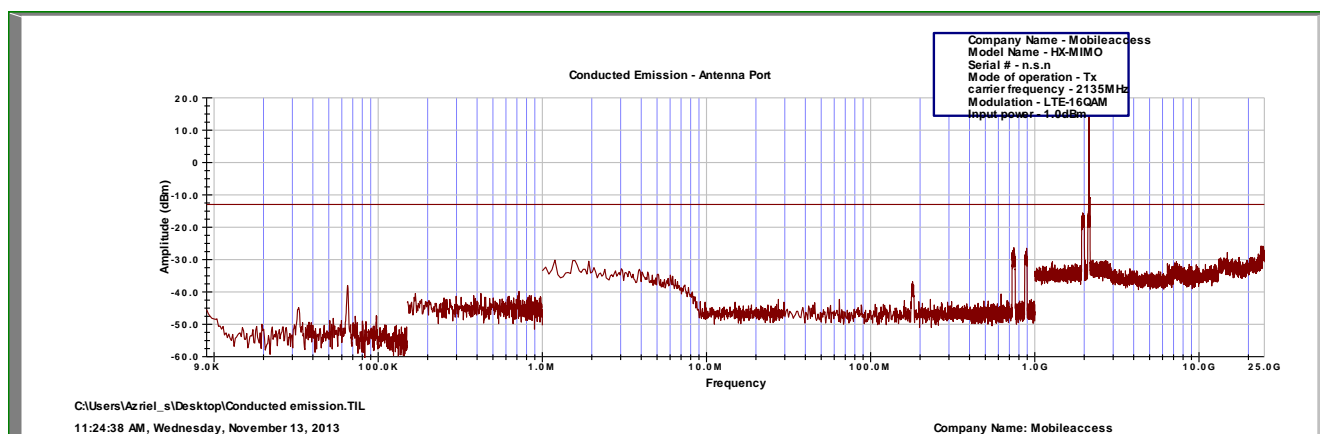


Figure 39.— 16QAM (Mid)

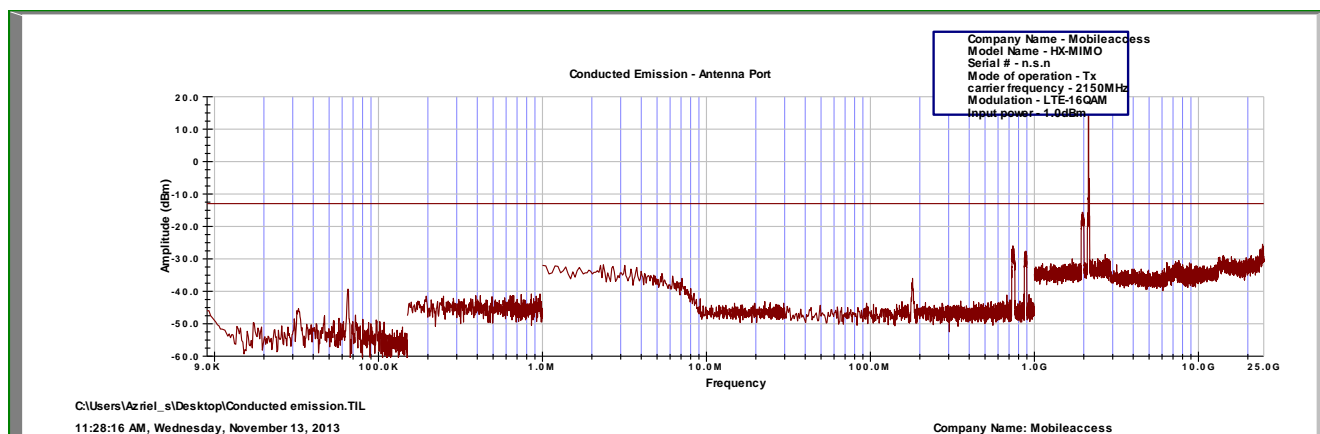


Figure 40.— 16QAM (High)

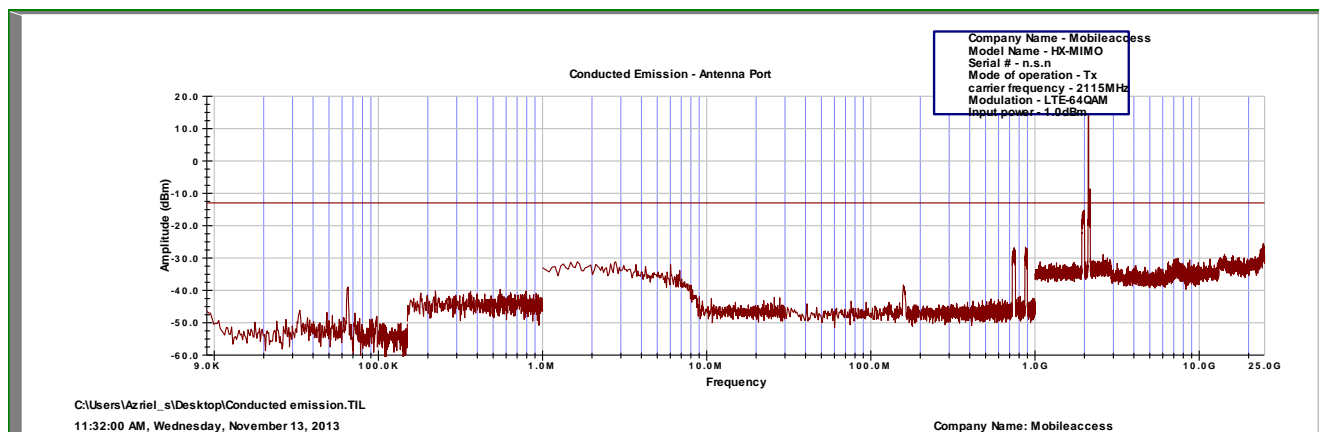


Figure 41.— 64QAM (Low)

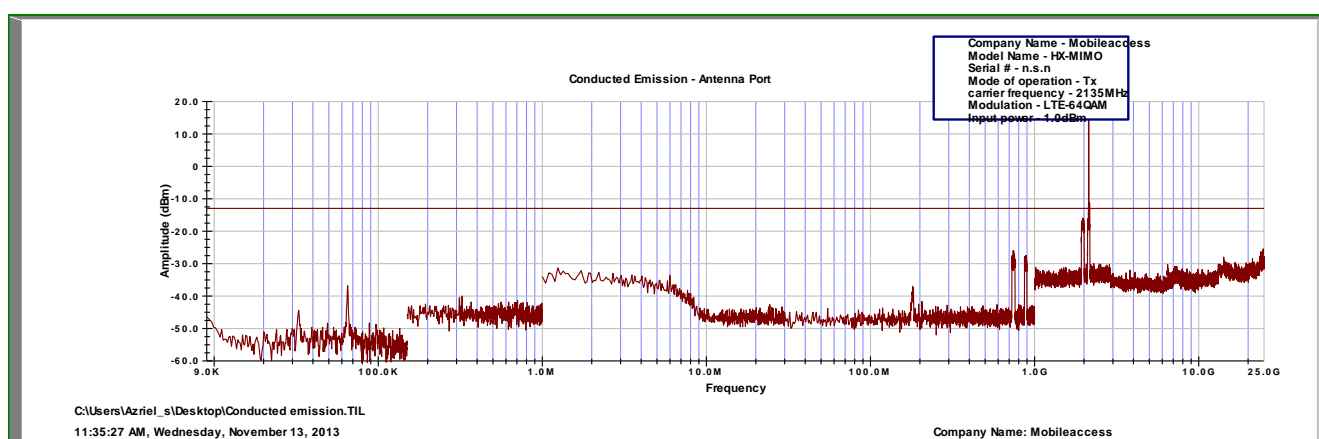


Figure 42.— 64QAM (Mid)

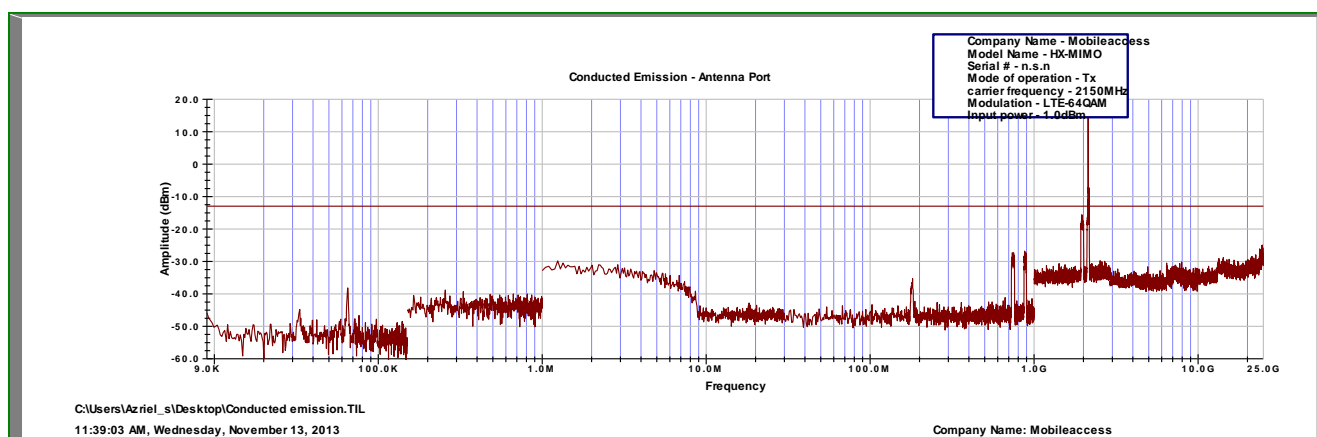


Figure 43.— 64QAM (High)

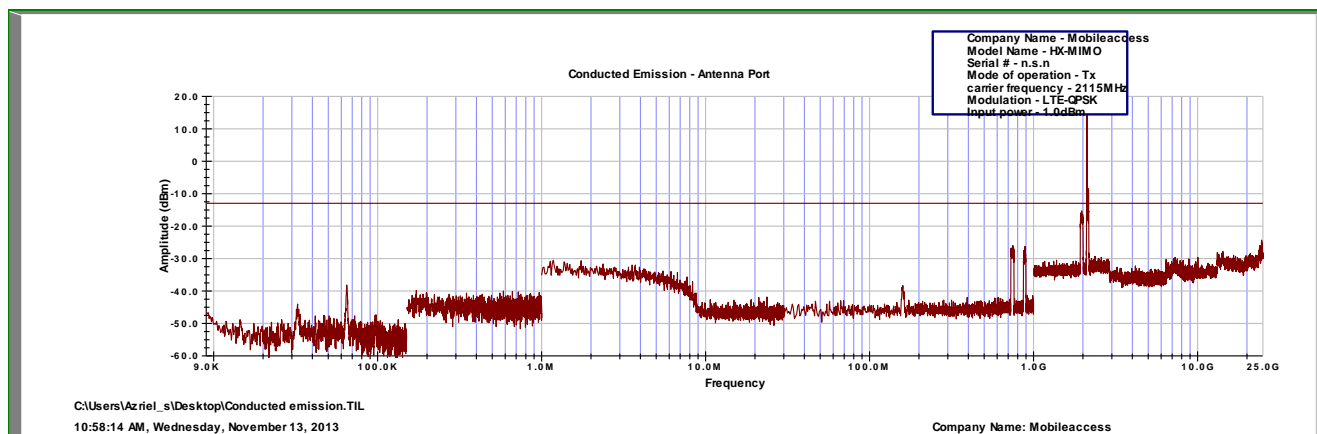


Figure 44.— QPSK (Low)

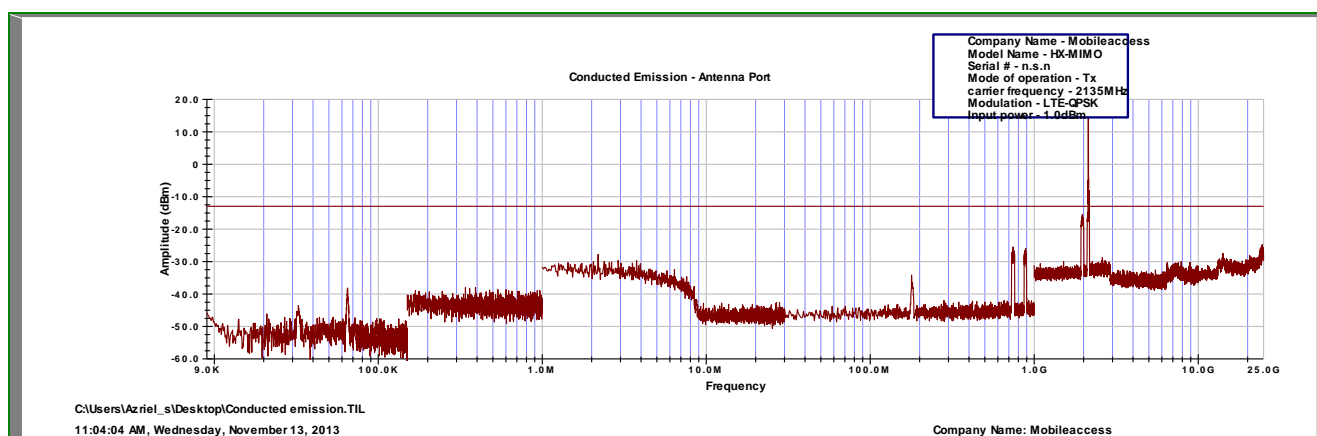


Figure 45.— QPSK (Mid)

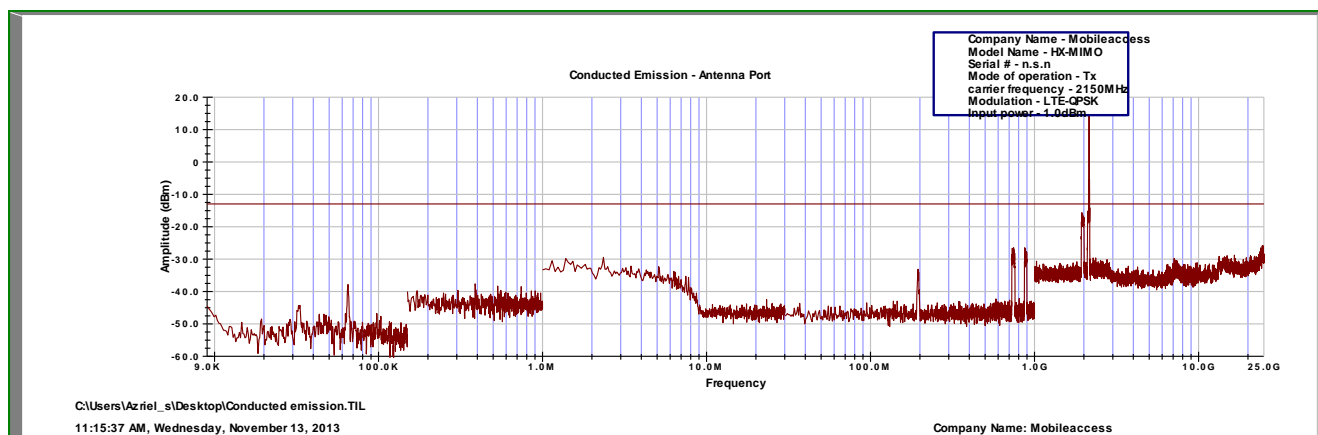


Figure 46.— QPSK (High)



#### 6.4 Test Equipment Used; Spurious Emissions at Antenna Terminals AWS

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Period
Spectrum Analyzer	Agilent	N9010A EXA	MY49061070	July 28, 2013	1 year
Spectrum Analyzer	HP	8564E	3313U00346	February 28, 2013	1 year
Signal Generator	Agilent	N5172B EXG	MY51350549	December 28, 2012	1 year
Attenuator	MCE	46-30-34	BN4927	November12, 2013	1 year
Cable	Mini-Circuits	30091	-	November 12, 2013	1 year

Figure 47 Test Equipment Used

## 7. Band Edge Spectrum AWS

### 7.1 Test Specification

FCC Part 27, Subpart C, Section 27.53 (m 4-6)

### 7.2 Test procedure

Enclosed are spectrum analyzer plots for the lowest operation frequency and the highest operation frequency in which the E.U.T. is planned to be used.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + \log(P)$  dB, yielding -13dBm.

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (31.0 dB).

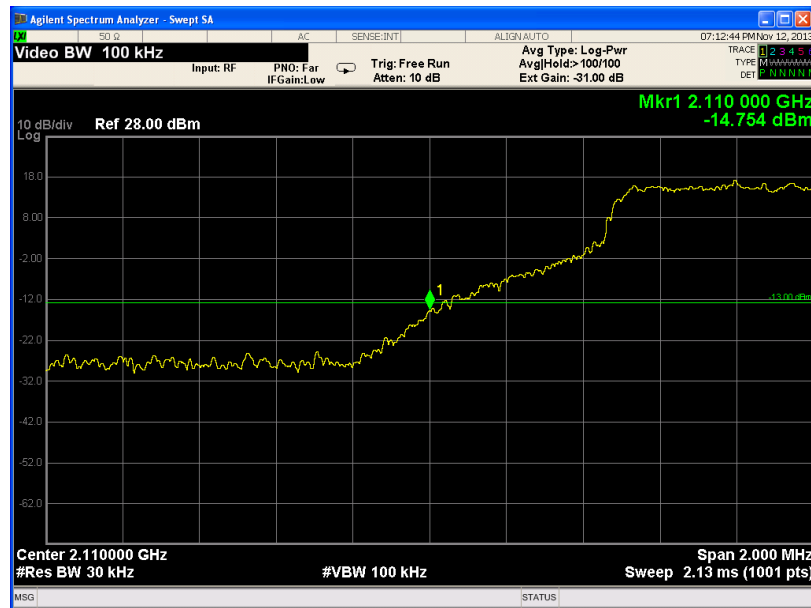


Figure 48.— 16QAM - LOW



Figure 49.— 16QAM HIGH

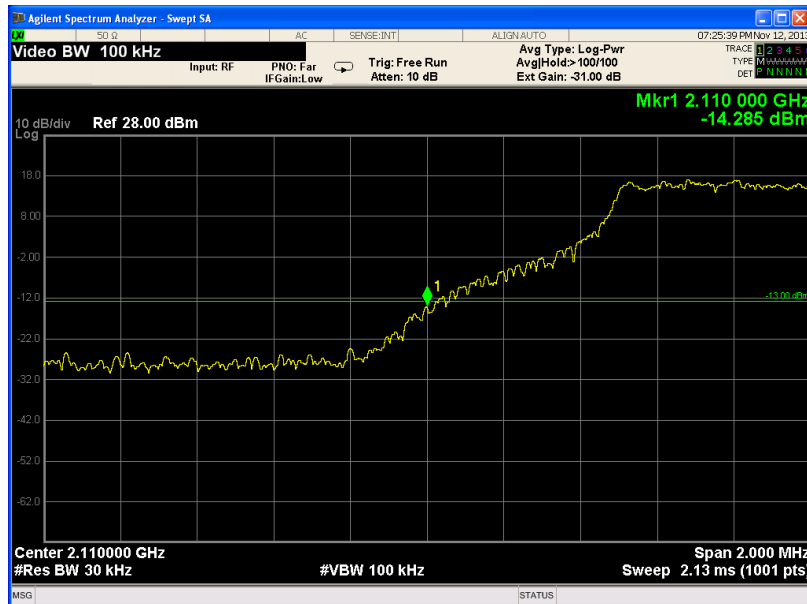


Figure 50.— 64QAM LOW



Figure 51.— 64QAM HIGH

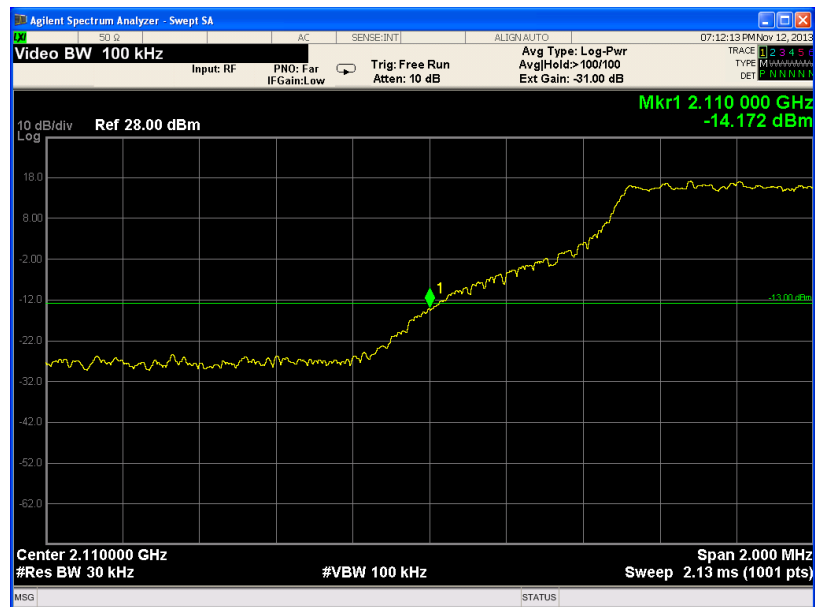


Figure 52.— QPSK LOW





Figure 53.— QPSK HIGH

### 7.3 Results


E.U.T. Description: Mobile AccessHX High-Power DAS Remote Unit MIMO  
Model No.: HX-C85P19L70MA17M-AC-A  
Serial Number: 0B422A0  
Specification: FCC Part 27, Subpart C, Section 27.53 (m 4-6)

Modulation	Operation Frequency (MHz)	Band Edge Frequency (MHz)	Reading (dBm)	Specification (dBm)
16QAM	2110.00	2110.0	-14.754	-13.0
16QAM	2155.00	2155.0	-16.649	-13.0
64QAM	2110.00	2110.0	-14.285	-13.0
64QAM	2155.00	2155.0	-14.278	-13.0
QPSK	2110.00	2110.0	-14.172	-13.0
QPSK	2155.00	2155.0	-15.372	-13.0

Figure 54 Band Edge Spectrum Results AWS

JUDGEMENT: Passed

TEST PERSONNEL:

Tester Signature: 

Date: 10.12.13

Typed/Printed Name: A. Sharabi



#### 7.4 Test Equipment Used; Band Edge Spectrum AWS

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Period
Spectrum Analyzer	Agilent	N9010A EXA	MY49061070	July 28, 2013	1 year
Spectrum Analyzer	HP	8564E	3313U00346	February 28, 2013	1 year
Signal Generator	Agilent	N5172B EXG	MY51350549	December 28, 2012	1 year
Attenuator	MCE	46-30-34	BN4927	November12, 2013	1 year
Cable	Mini-Circuits	30091	-	November12, 2013	1 year

**Figure 55 Test Equipment Used**

## 8. Spurious Radiated Emission AWS

### 8.1 Test Specification –

FCC, Part 27, Subpart C Section 27.53 (g)

### 8.2 Test Procedure

The test method was based on ANSI/TIA-603-C: 2004, Section 2.2.12

Unwanted Emissions: Radiated Spurious.

The power of any emission outside of the authorized operating frequency ranges (2110-2155 MHz) must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB, yielding  $-13\text{dBm}$ .

(a) The E.U.T. operation mode and test set-up are as described in Section 2.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1.

The frequency range 9 kHz-20 GHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

The emissions were measured at a distance of 3 meters.

(b) The E.U.T. was replaced by a substitution antenna (dipole 30MHz-1GHz, Horn Antenna above 1GHz) driven by a signal generator. The height was readjusted for maximum reading. The signal generator level was adjusted to obtain the same reading on the EMI receiver as in step (a).

The signals observed in step (a) were converted to radiated power using:

$$P_d(\text{dBm}) = P_g(\text{dBm}) - \text{Cable Loss (dB)} + \text{Substitution Antenna Gain (dB)}$$

$P_d$  = Dipole equivalent power (result).


$P_g$  = Signal generator output level.

### 8.3 Test Results

JUDGEMENT: Passed by 37.29 dB

The E.U.T met the requirements of the FCC, Part 27, Subpart C, Section 27.53 (g) specifications.

TEST PERSONNEL:

Tester Signature:  Date: 10.12.13

Typed/Printed Name: A. Sharabi



Carrier Channel (MHz)	Freq. (MHz)	Antenna Pol.	Maximum Peak Level (dB $\mu$ V/m)	Signal Generator RF Output (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Effective Radiated Power Level (dBm)	Spec. (dBm)	Margin (dB)
2115.0	4230.0	V	47.9	-55.49	4.45	9.12	-50.82	-13.0	-37.82
2115.0	4230.0	H	47.9	-55.25	4.45	9.12	-50.58	-13.0	-37.58
2135.0	4270.0	V	47.8	-56.27	4.45	9.38	-51.34	-13.0	-38.34
2135.0	4270.0	H	46.9	-56.71	4.45	9.38	-51.78	-13.0	-38.78
2150.0	4300.0	V	46.7	-57.37	4.45	9.38	-50.29	-13.0	-37.29
2150.0	4300.0	H	46.9	-56.71	4.45	9.38	-51.78	-13.0	-38.78

**Figure 56 Out of Band Emission (Radiated) AWS**



#### 8.4 Test Instrumentation Used, Radiated Measurements AWS

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 Year
RF Filter Section	HP	85420E	3705A00248	February 26, 2013	1 Year
Antenna Biconical	EMCO	3104	2606	August 30, 2013	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 Year
Double Ridged Waveguide Horn Antenna	EMCO	3115	29845	March 14, 2012	2 Years
Horn Antenna	ARA	SWH-28	1007	January 26, 2011	3 Years
Horn Antenna	ETS	3115	29845	March 14, 2012	2 Years
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	August 21, 2013	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 28, 2013	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2013	1 Year
Spectrum Analyzer	HP	8564E	3442A00275	February 28, 2013	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

## 9. APPENDIX A - CORRECTION FACTORS

### 9.1 Correction factors for CABLE

from EMI receiver  
to test antenna  
at 3 meter range.

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

#### NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

**9.2 Correction factors for CABLE**  
**from EMI receiver**  
**to test antenna**  
**at 3 meter range.**

FREQUENCY	CORRECTION
(GHz)	FACTOR
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

**NOTES:**

- 1. The cable type is RG-8.*
- 2. The overall length of the cable is 10 meters.*

**9.3 Correction factors for CABLE**  
**from spectrum analyzer**  
**to test antenna above 2.9 GHz**

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

**NOTES:**

- 1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.*
- 2. The cable is used for measurements above 2.9 GHz.*
- 3. The overall length of the cable is 10 meters.*





#### 9.4 Correction factors for

#### LOG PERIODIC ANTENNA

**Type SAS-200/511  
at 3 meter range.**

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

#### NOTES:

1. Antenna serial number is 253.
2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
3. The files mentioned above are located on the disk marked "Antenna Factors".



**9.5 Correction factors for Double-Ridged Waveguide Horn**

**Model: 3115, S/N 29845  
at 3 meter range.**

FREQUENCY	ANTENNA	ANTENN	FREQUENCY	ANTENNA	ANTENNA
(GHz)	FACTOR	A Gain	(GHz)	FACTOR	Gain
	(dB 1/m)	(dBi)		(dB 1/m)	(dBi)
1.0	24.8	5.4	10.0	38.8	11.4
1.5	26.1	7.6	10.5	38.9	11.8
2.0	28.6	7.7	11.0	39.0	12.1
2.5	29.8	8.4	11.5	39.6	11.8
3.0	31.4	8.4	12.0	39.8	12.0
3.5	32.4	8.7	12.5	39.6	12.5
4.0	33.7	8.6	13.0	40.0	12.5
4.5	33.4	9.9	13.5	39.8	13.0
5.0	34.5	9.7	14.0	40.2	13.0
5.5	35.1	9.9	14.5	40.6	12.9
6.0	35.4	10.4	15.0	41.3	12.4
6.5	35.6	10.8	15.5	39.5	14.6
7.0	36.2	10.9	16.0	38.8	15.5
7.5	37.3	10.4	16.5	40.0	14.6
8.0	37.7	10.6	17.0	41.4	13.4
8.5	38.3	10.5	17.5	44.8	10.3
9.0	38.5	10.8	18.0	47.2	8.1
9.5	38.7	11.1			