



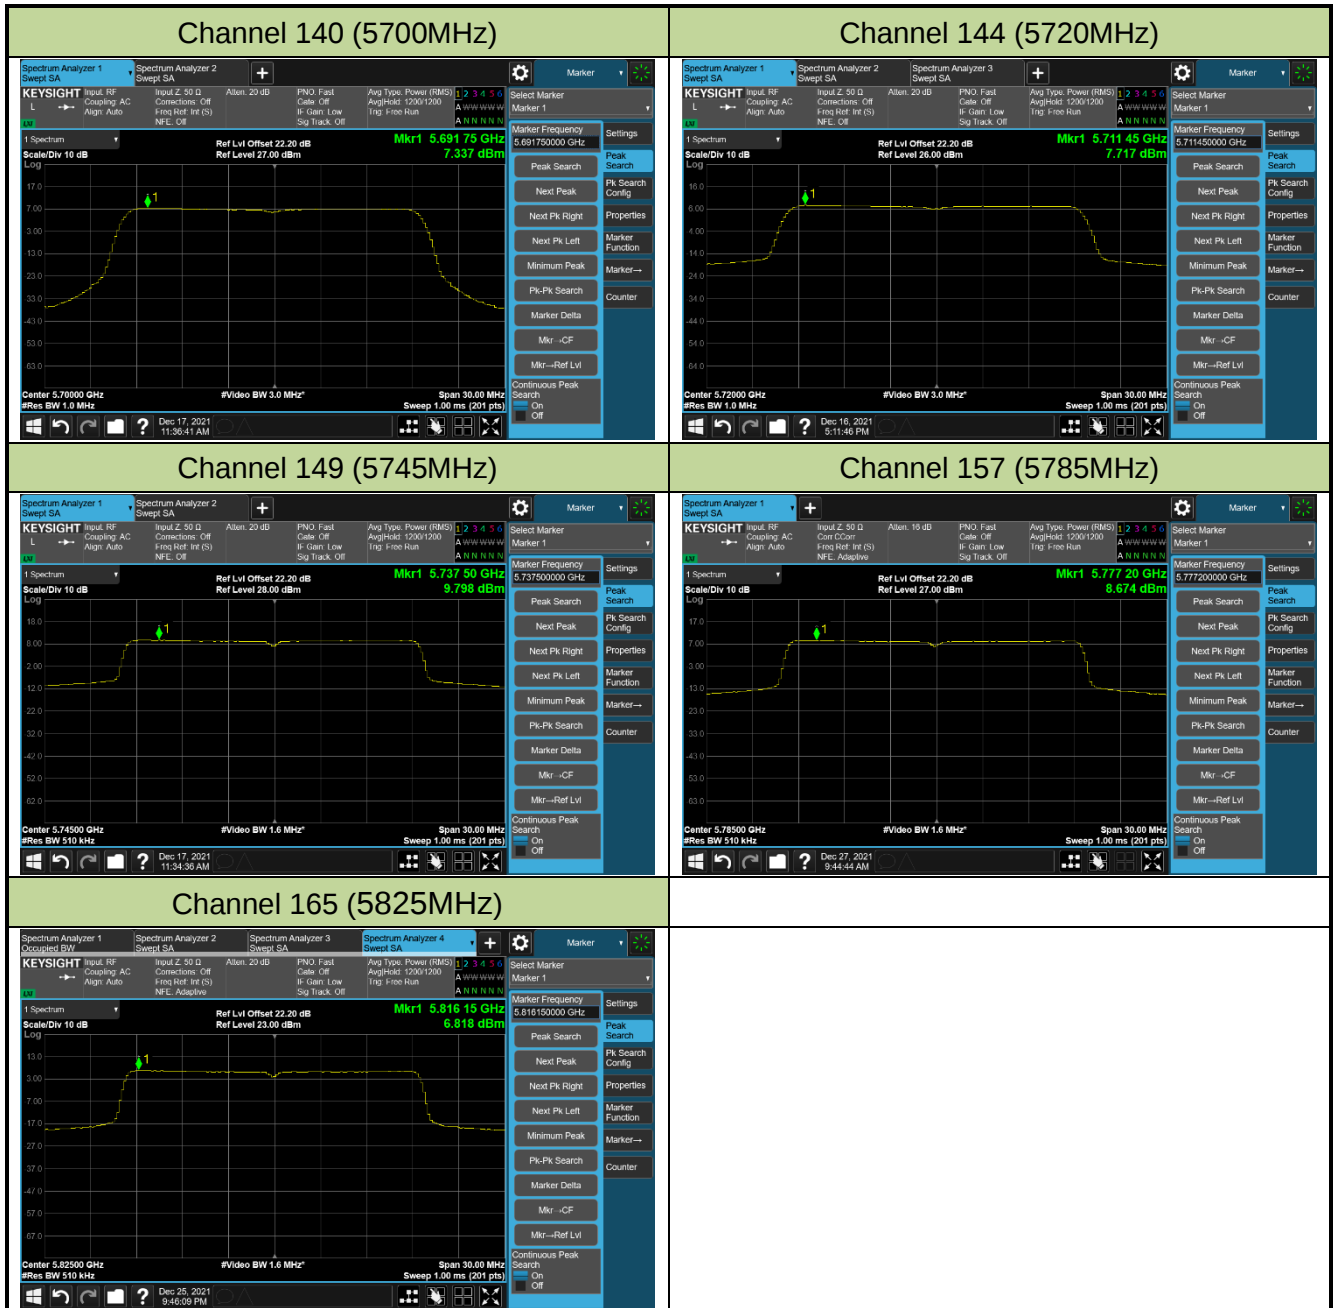

802.11ax-HE40 Power Spectral Density - Ant 1


Channel 38 (5190MHz)

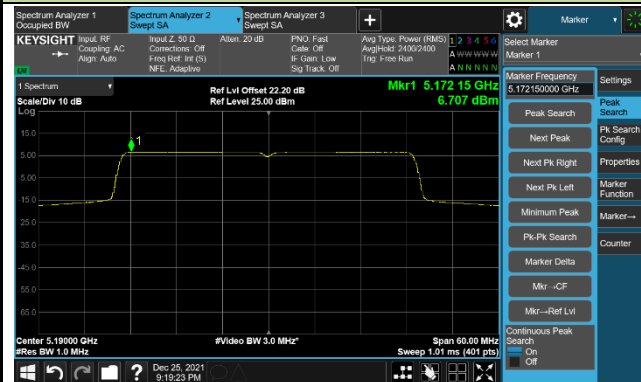

Channel 46 (5230MHz)




Channel 54 (5270MHz)

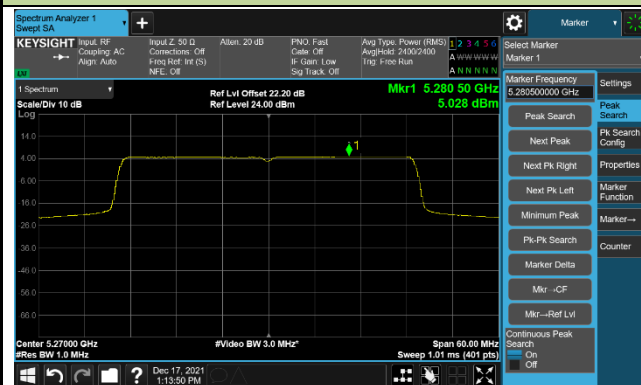


Channel 62 (5310MHz)




Channel 102 (5510MHz)

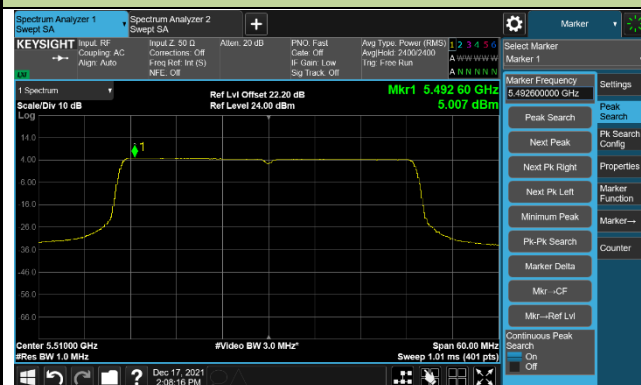


Channel 110 (5550MHz)

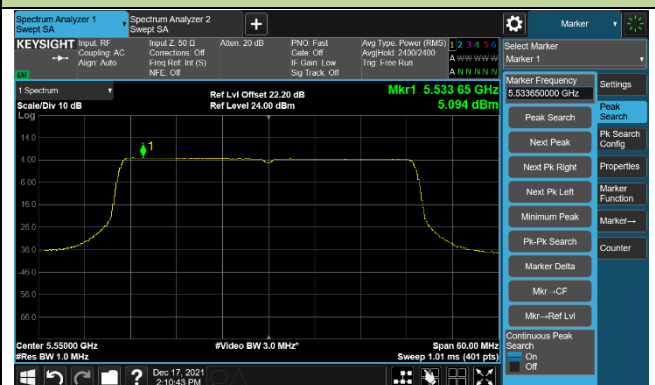


Channel 134 (5670MHz)

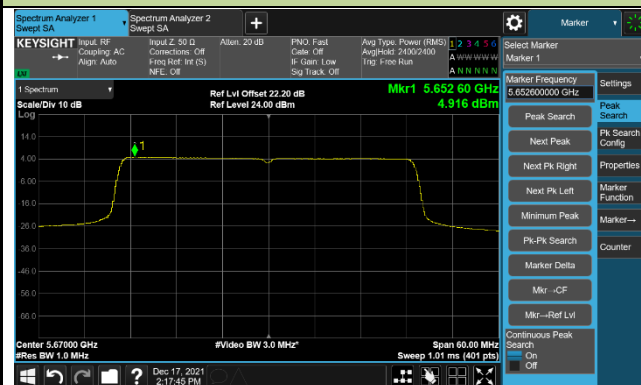


Channel 142 (5710MHz)

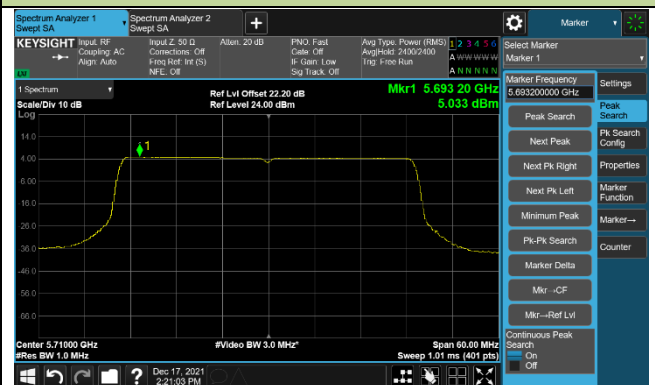

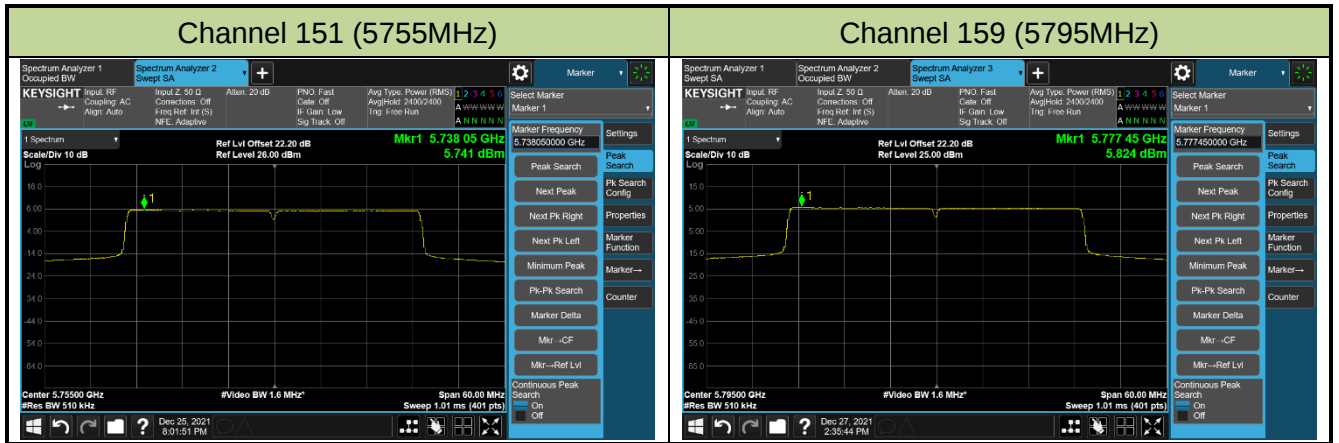


802.11ax-HE80 Power Spectral Density - Ant 1


Channel 42 (5210MHz)

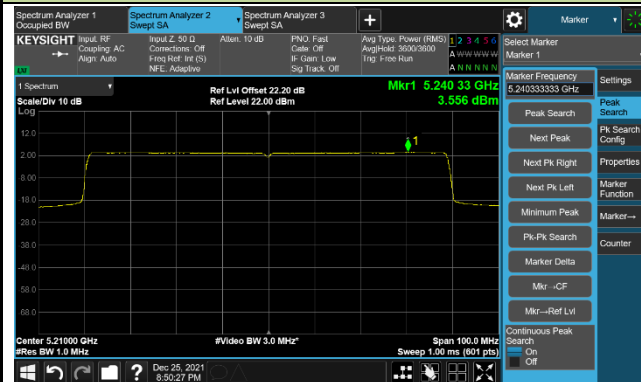


Channel 58 (5290MHz)

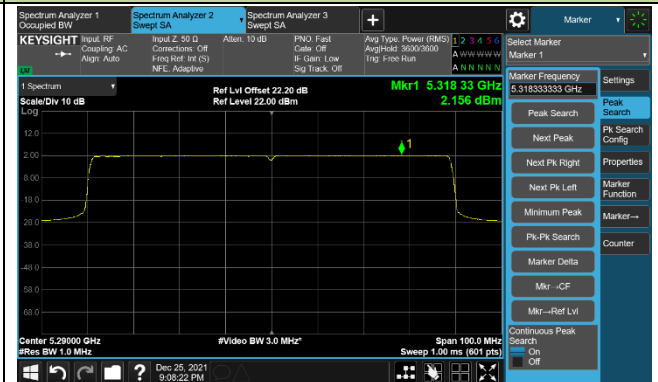


Channel 106 (5530MHz)

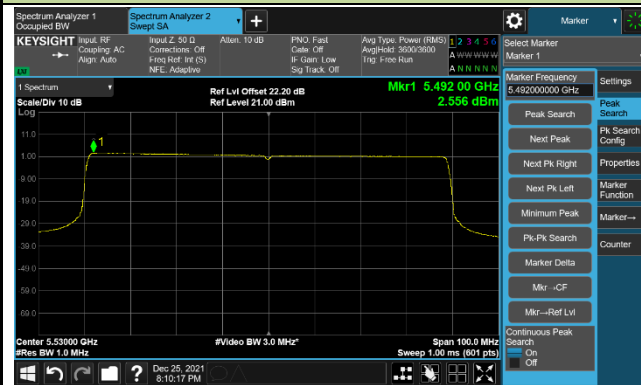


Channel 122 (5610MHz)

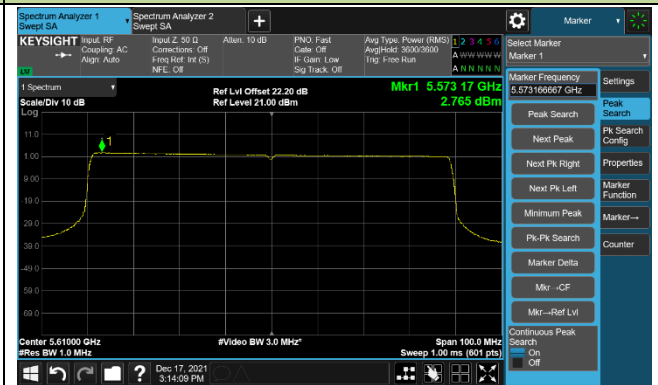

Channel 138 (5690MHz)

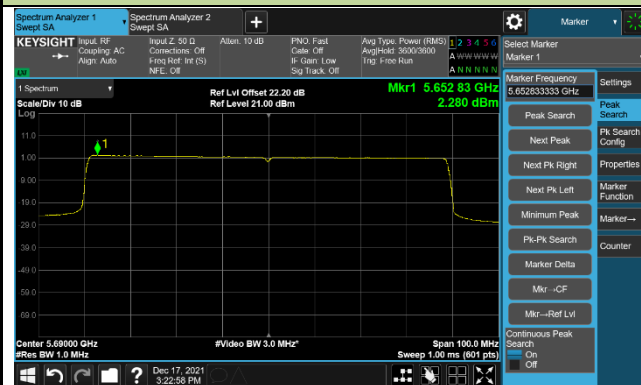


Channel 155 (5775MHz)

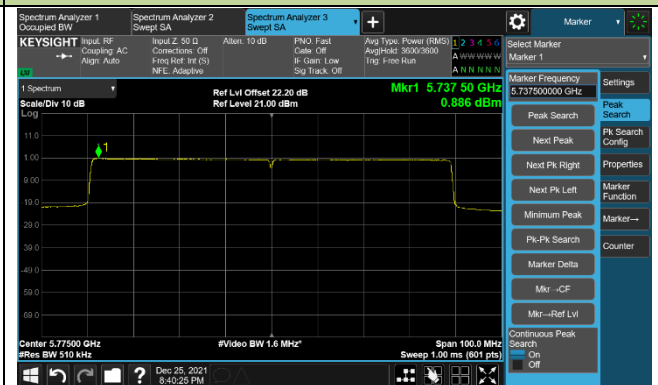


802.11ax-HE160 Power Spectral Density - Ant 1

Channel 50 (5250MHz)

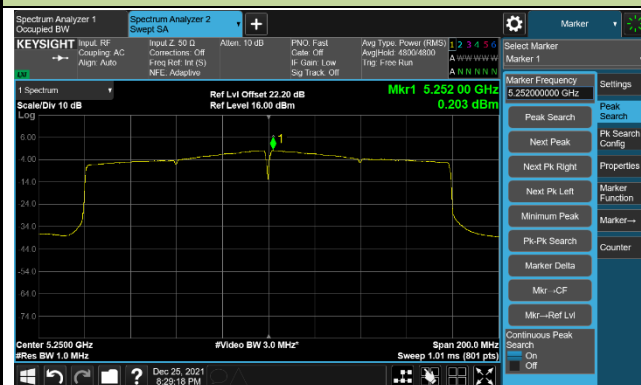

Channel 114 (5570MHz)

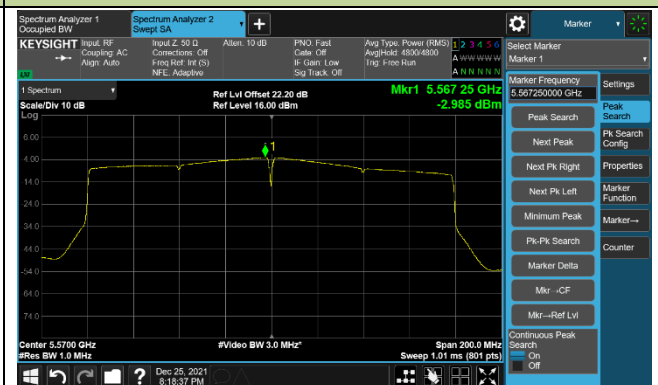

7.7. Frequency Stability Measurement

7.7.1. Test Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.7.2. Test Limit

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

7.7.3. Test Setup

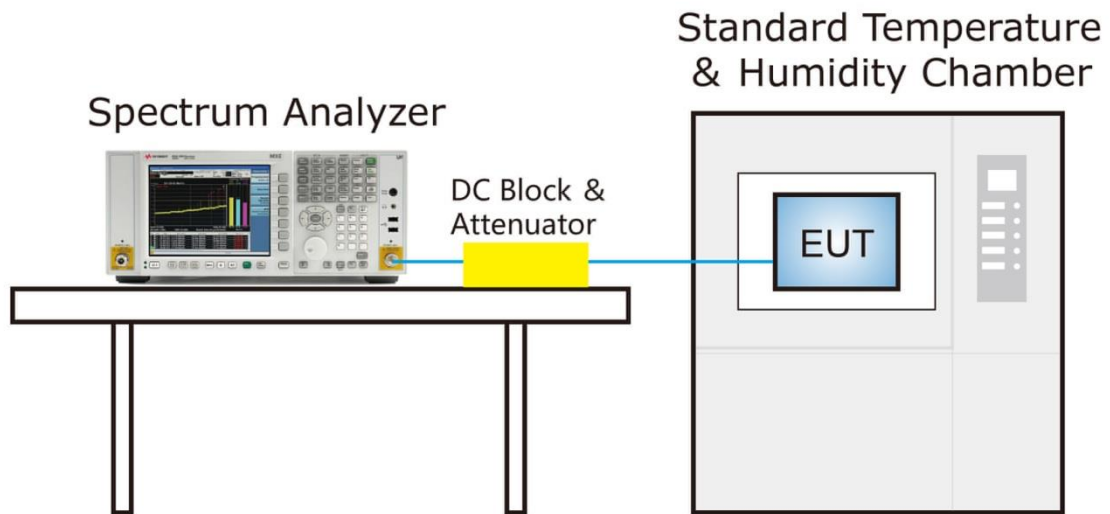

7.7.4. Test Result

Grantee ensure that the product meets e-CFR Title 47 section 15.407(g) and KDB 789033 D02v02r01 frequency stability such that the emissions are maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.8. Radiated Spurious Emission Measurement

7.8.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.8.2. Test Procedure Used

KDB 789033 D02v02r01- Section G

7.8.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
>1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.8.4. Test Setup

Below 1GHz Test Setup:

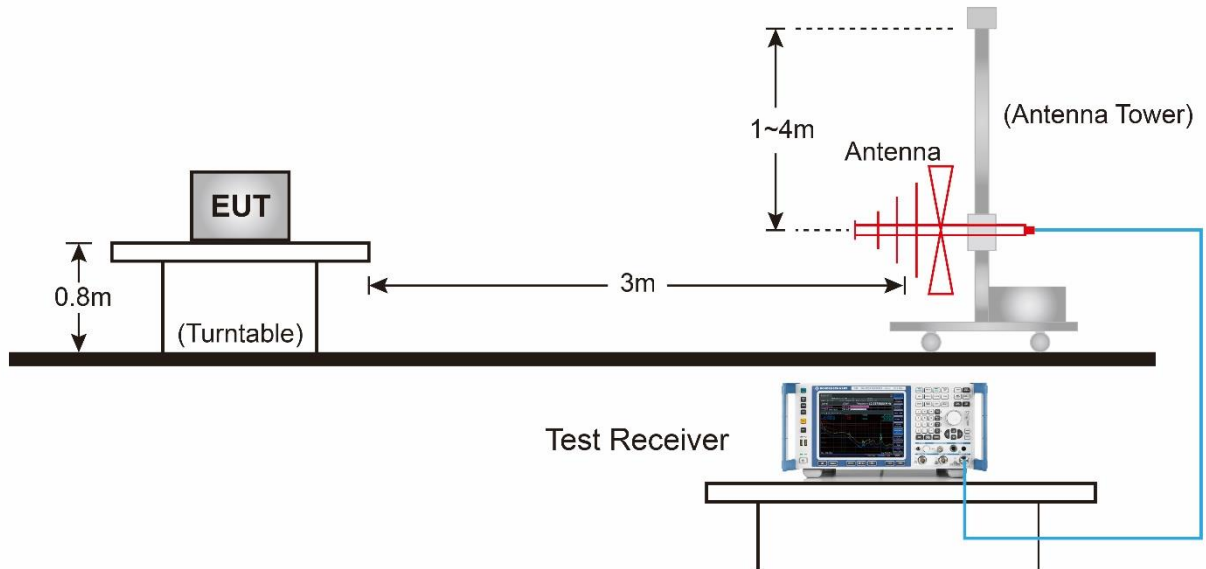


Above 1GHz Test Setup:

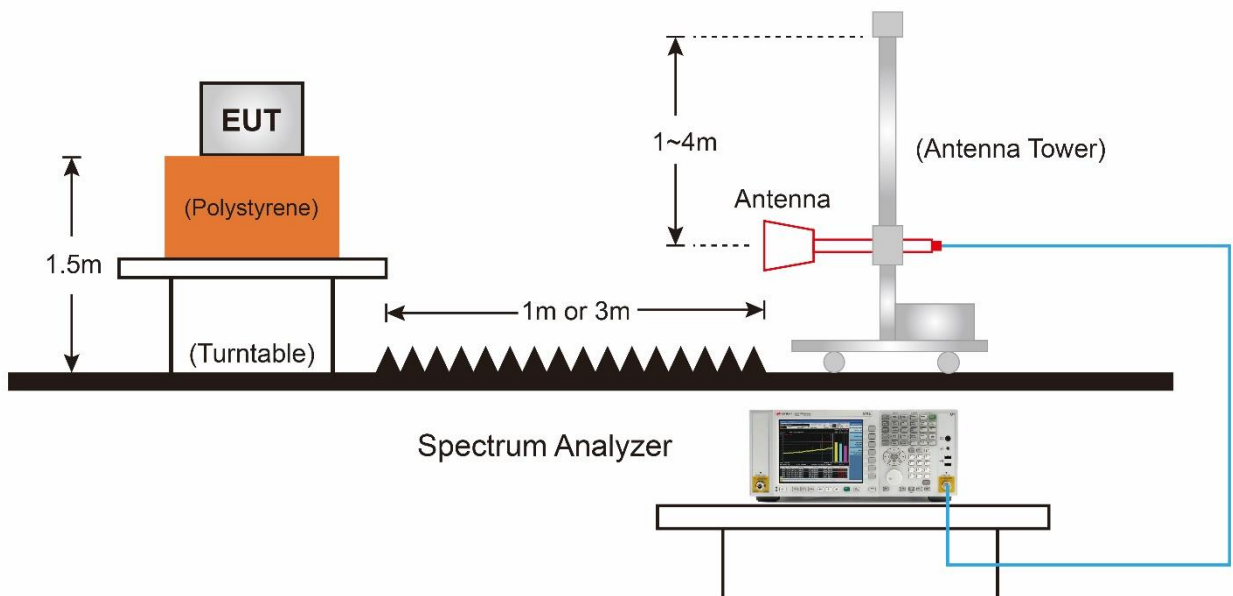

7.8.5. Test Result

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-11
Factor	VULB 9162	Temp. / Humidity	24°C /69%
Polarity	Horizontal	Site / Test Engineer	AC1 / Dio
Test Mode	802.11ac-VHT20_TX_Band1_CH 40_ANT 0	Test Voltage	AC 120V/60Hz

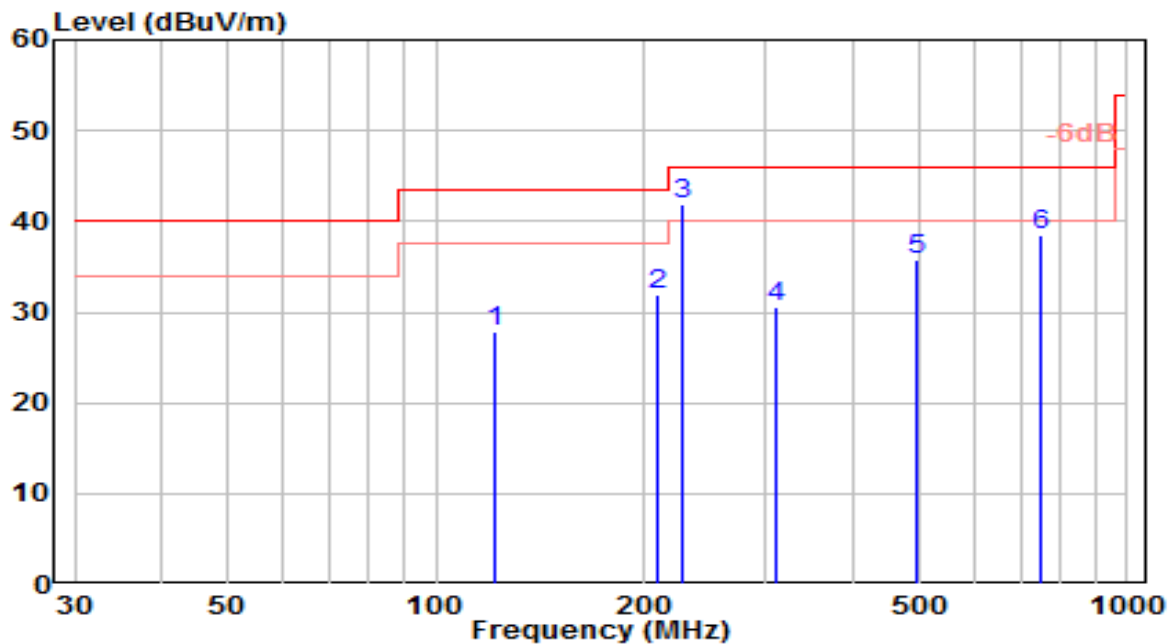


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	121.720	11.07	16.71	27.78	-15.72	43.50	200	358	QP
2	209.064	13.91	17.92	31.83	-11.67	43.50	150	28	QP
3	* 226.704	22.99	18.95	41.94	-4.06	46.00	100	0	QP
4	309.142	9.54	21.10	30.65	-15.35	46.00	100	0	QP
5	497.418	10.62	25.23	35.84	-10.16	46.00	200	18	QP
6	751.378	9.12	29.41	38.52	-7.48	46.00	100	104	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-11
Factor	VULB 9162	Temp. / Humidity	24°C /69%
Polarity	Vertical	Site / Test Engineer	AC1 / Dio
Test Mode	802.11ac-VHT20_TX_Band1_CH 40_ANT 0	Test Voltage	AC 120V/60Hz

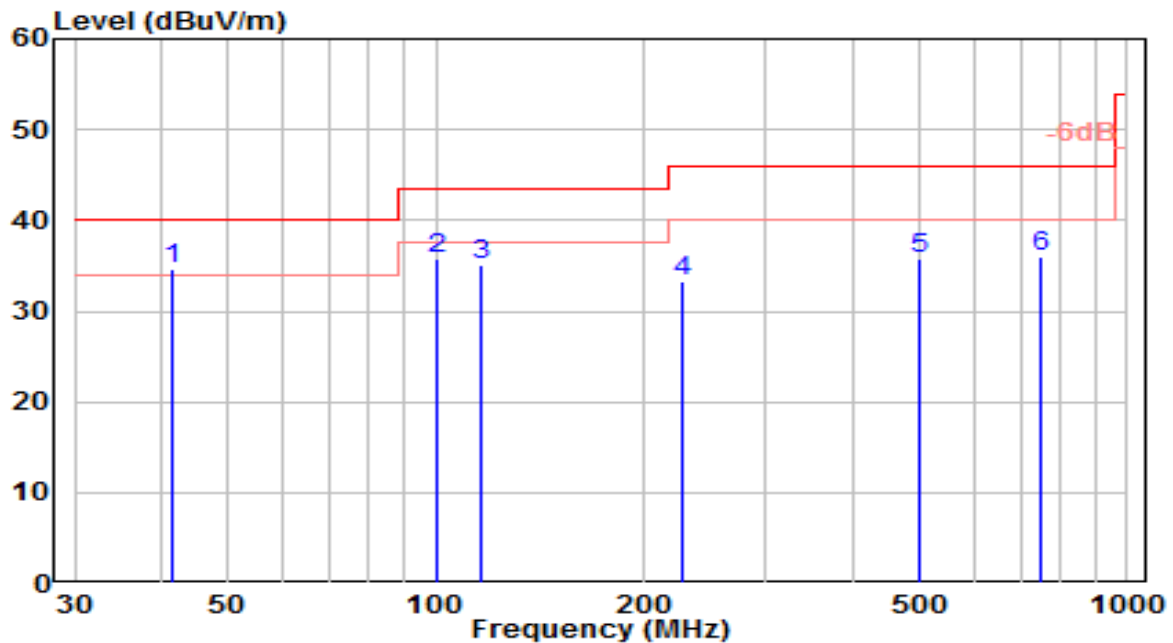


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	41.385	14.58	20.02	34.60	-5.40	40.00	100	215	QP
2		100.506	17.26	18.49	35.75	-7.75	43.50	100	84	QP
3		115.848	17.47	17.63	35.10	-8.40	43.50	100	2	QP
4		226.976	14.31	18.97	33.28	-12.72	46.00	200	256	QP
5		499.101	10.41	25.27	35.68	-10.32	46.00	150	326	QP
6		749.556	6.63	29.39	36.02	-9.98	46.00	150	240	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180 MHz	Test Voltage	AC 120V/60Hz

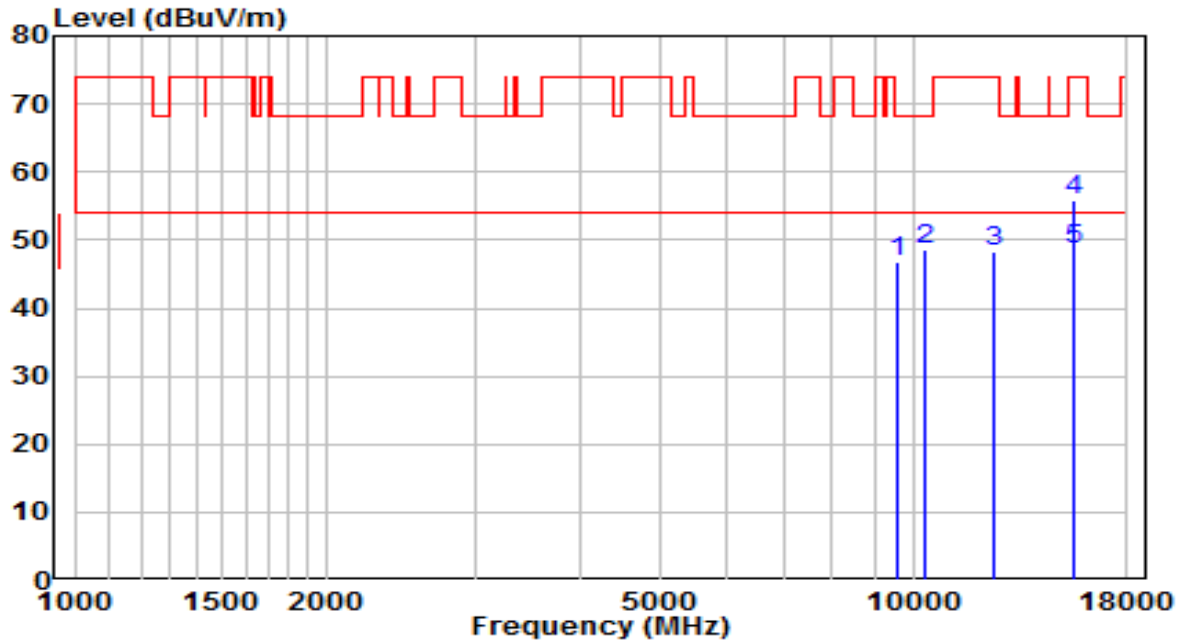


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9610.500	30.80	15.91	46.71	-21.49	68.20	Peak
2	10358.500	30.61	18.00	48.61	-19.59	68.20	Peak
3	12492.000	29.93	18.41	48.34	-25.66	74.00	Peak
4	15543.500	34.52	21.24	55.76	-18.24	74.00	Peak
5	* 15543.500	27.27	21.24	48.51	-5.49	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180 MHz	Test Voltage	AC 120V/60Hz

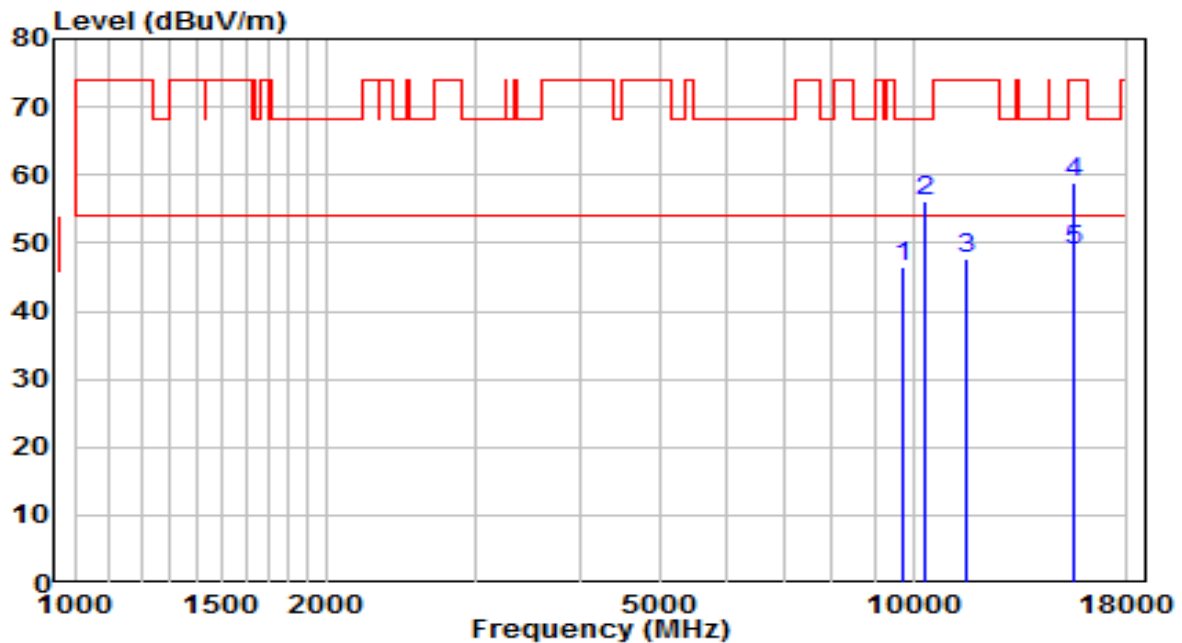


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9738.000	30.48	16.12	46.60	-21.60	68.20	Peak
2	10358.500	38.14	18.00	56.14	-12.06	68.20	Peak
3	11591.000	27.98	19.84	47.82	-26.18	74.00	Peak
4	15543.500	37.55	21.24	58.79	-15.21	74.00	Peak
5	* 15543.500	27.64	21.24	48.88	-5.12	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5220 MHz	Test Voltage	AC 120V/60Hz

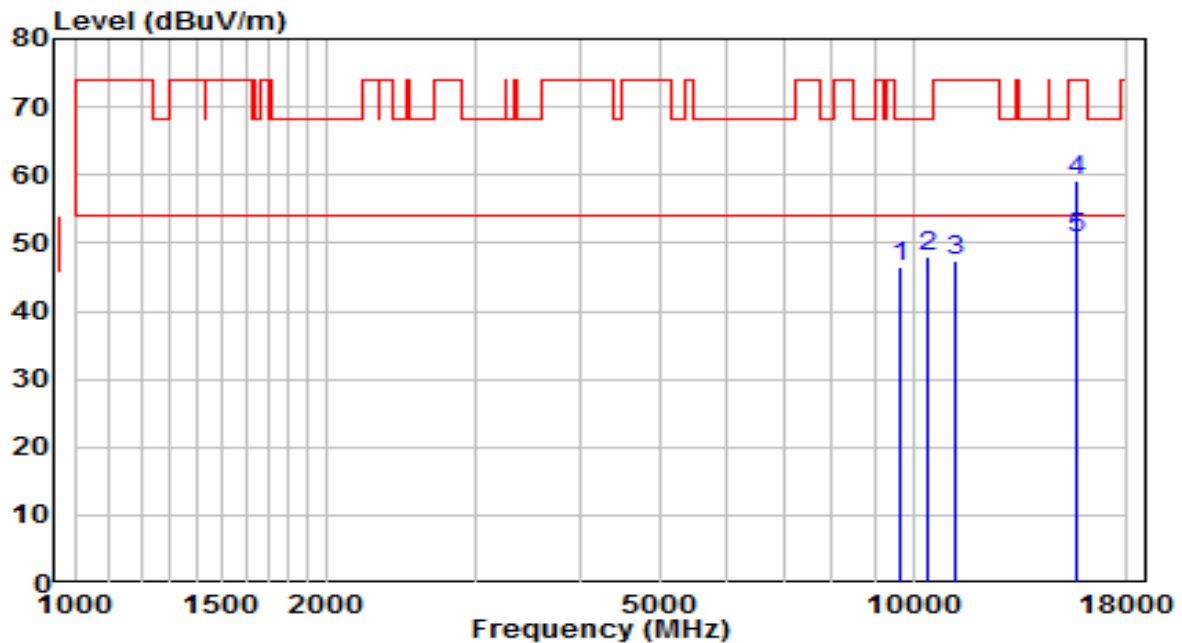


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9653.000	30.53	15.98	46.50	-21.70	68.20	Peak
2	10443.500	29.67	18.34	48.01	-20.19	68.20	Peak
3	11225.500	27.69	19.63	47.32	-26.68	74.00	Peak
4	15662.500	38.16	20.95	59.11	-14.89	74.00	Peak
5	* 15662.500	29.76	20.95	50.71	-3.29	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5220 MHz	Test Voltage	AC 120V/60Hz

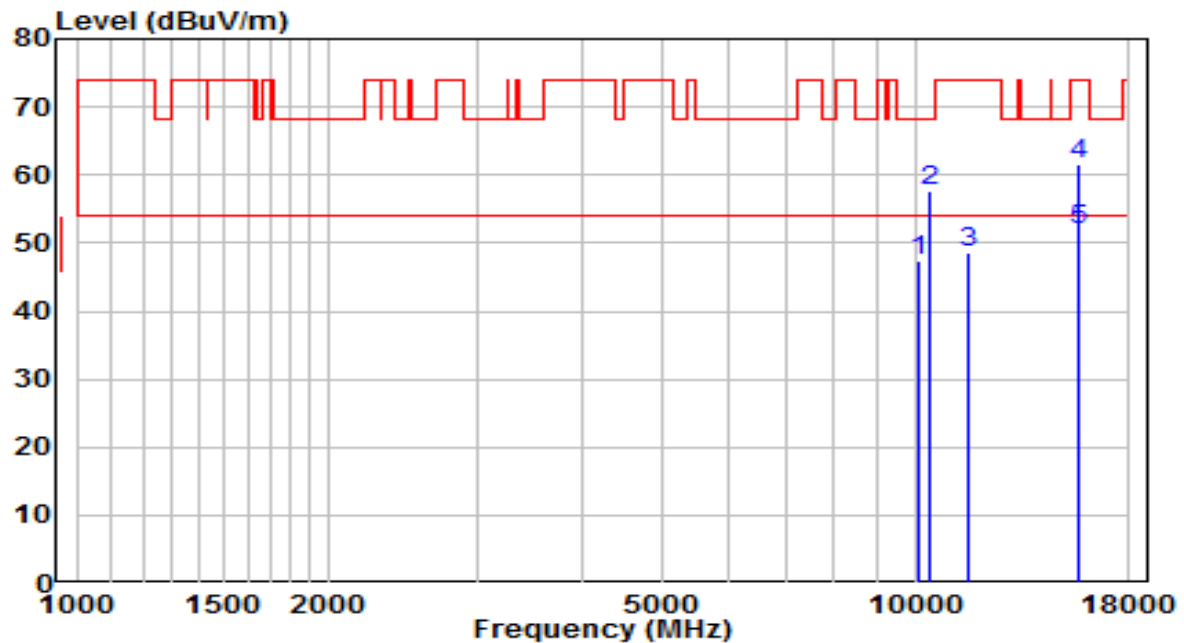


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	10129.000	30.24	17.08	47.32	-20.88	68.20	Peak
2	10443.500	39.17	18.34	57.51	-10.69	68.20	Peak
3	11565.500	28.72	19.90	48.62	-25.38	74.00	Peak
4	15654.000	40.61	20.97	61.58	-12.42	74.00	Peak
5	* 15654.000	31.06	20.97	52.03	-1.97	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5240 MHz	Test Voltage	AC 120V/60Hz

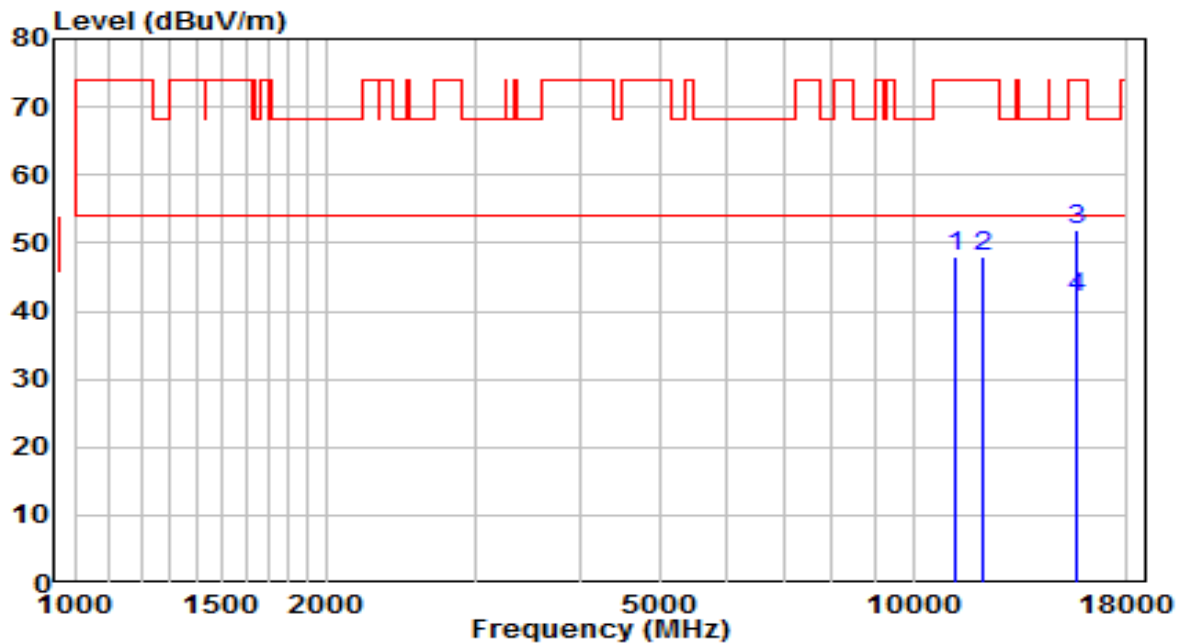


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	11242.500	28.37	19.65	48.02	-25.98	74.00	Peak
2	12118.000	29.32	18.80	48.12	-25.88	74.00	Peak
3	15722.000	31.14	20.80	51.94	-22.06	74.00	Peak
4	* 15722.000	21.24	20.80	42.04	-11.96	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5240 MHz	Test Voltage	AC 120V/60Hz

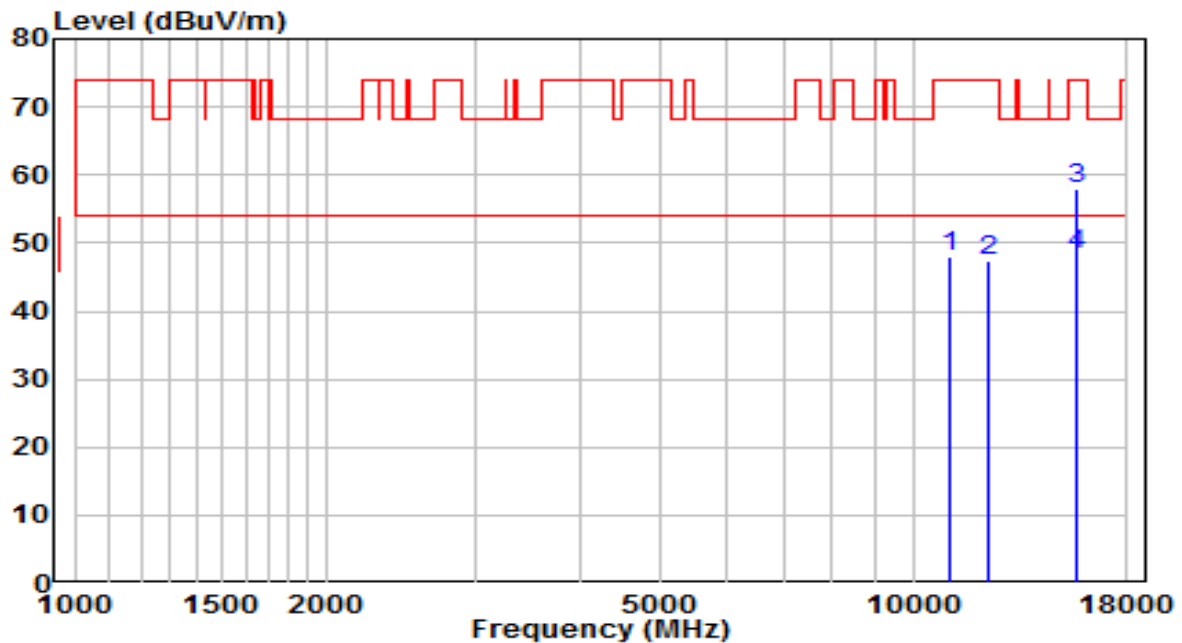


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	11047.000	28.60	19.35	47.95	-26.05	74.00	Peak
2	12271.000	28.89	18.64	47.53	-26.47	74.00	Peak
3	15722.000	37.15	20.80	57.95	-16.05	74.00	Peak
4	* 15722.000	27.46	20.80	48.26	-5.74	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5260 MHz	Test Voltage	AC 120V/60Hz

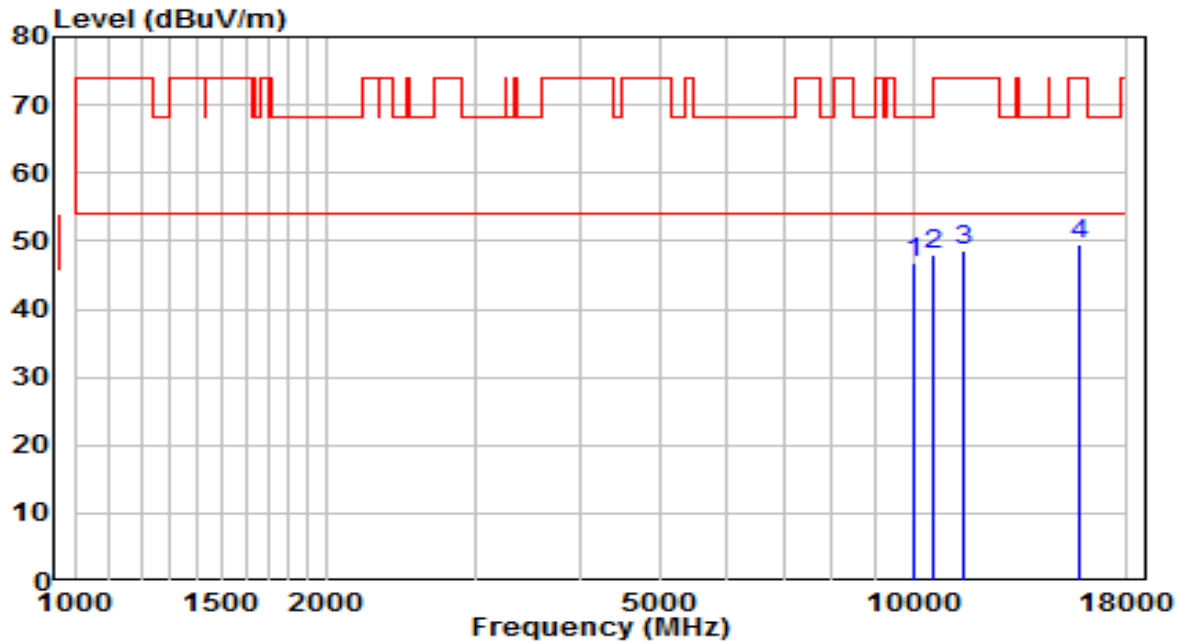


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10035.500	30.03	16.70	46.73	-21.47	68.20	Peak
2	* 10596.500	29.40	18.71	48.11	-20.09	68.20	Peak
3	11523.000	28.74	20.00	48.74	-25.26	74.00	Peak
4	15798.500	28.75	20.61	49.36	-24.64	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5260 MHz	Test Voltage	AC 120V/60Hz

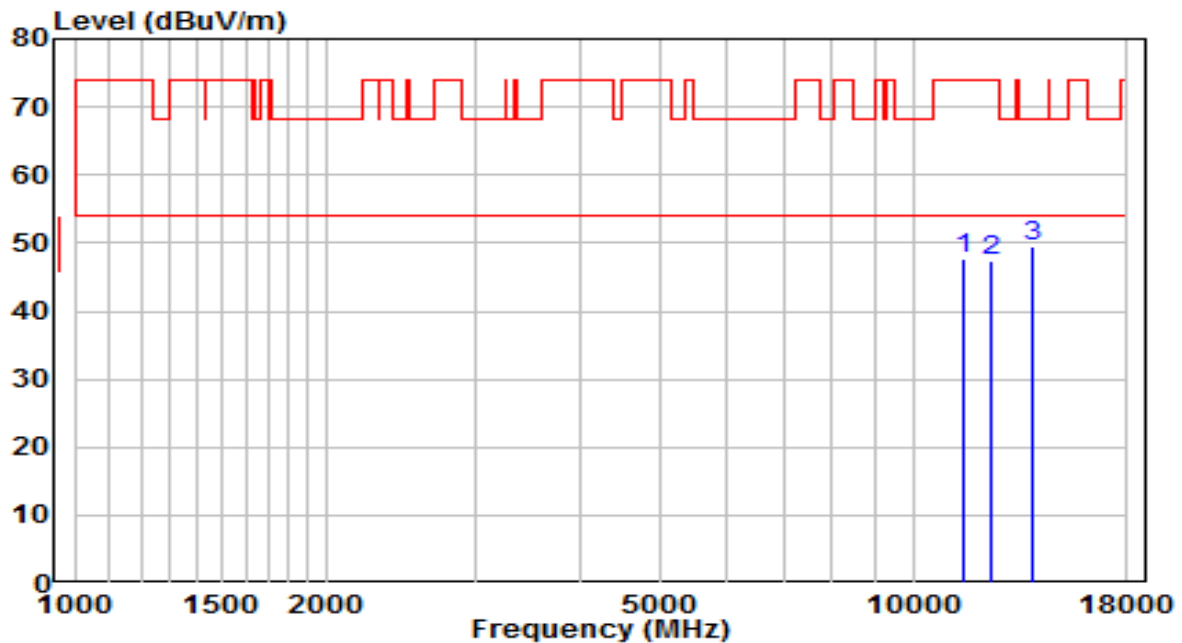


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	11523.000	27.56	20.00	47.55	-26.45	74.00	Peak
2	12398.500	28.95	18.51	47.46	-26.54	74.00	Peak
3	* 13877.500	27.08	22.28	49.36	-18.84	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5300 MHz	Test Voltage	AC 120V/60Hz

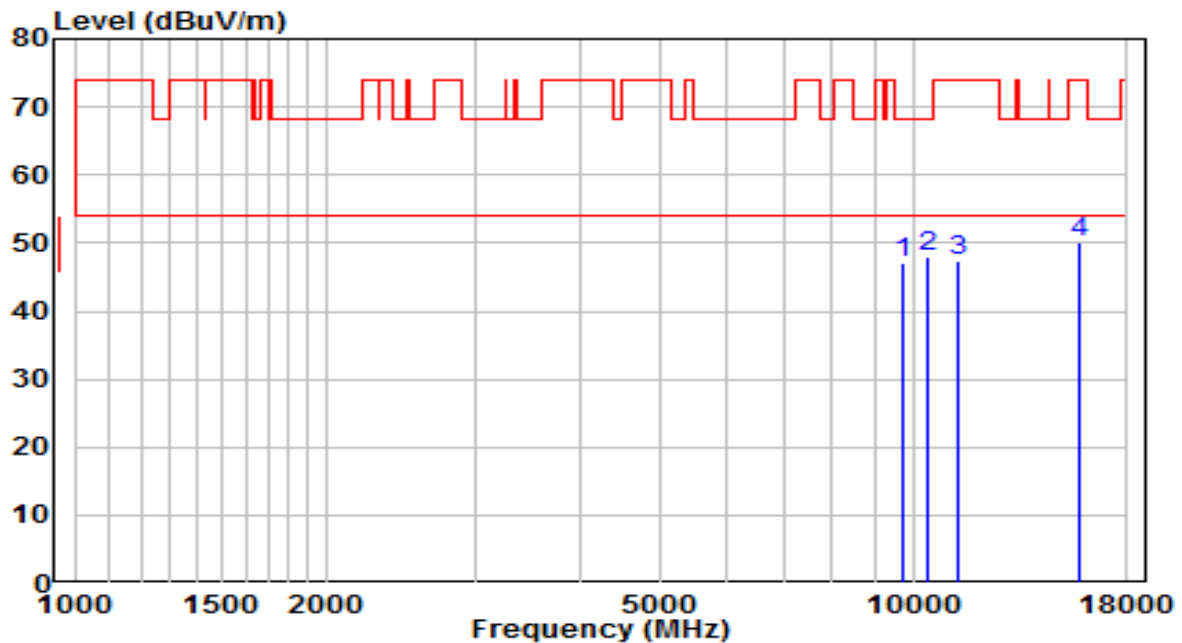


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9729.500	30.92	16.11	47.03	-21.17	68.20	Peak
2	* 10375.500	29.96	18.07	48.03	-20.17	68.20	Peak
3	11285.000	27.78	19.72	47.50	-26.50	74.00	Peak
4	15798.500	29.60	20.61	50.21	-23.79	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5300 MHz	Test Voltage	AC 120V/60Hz

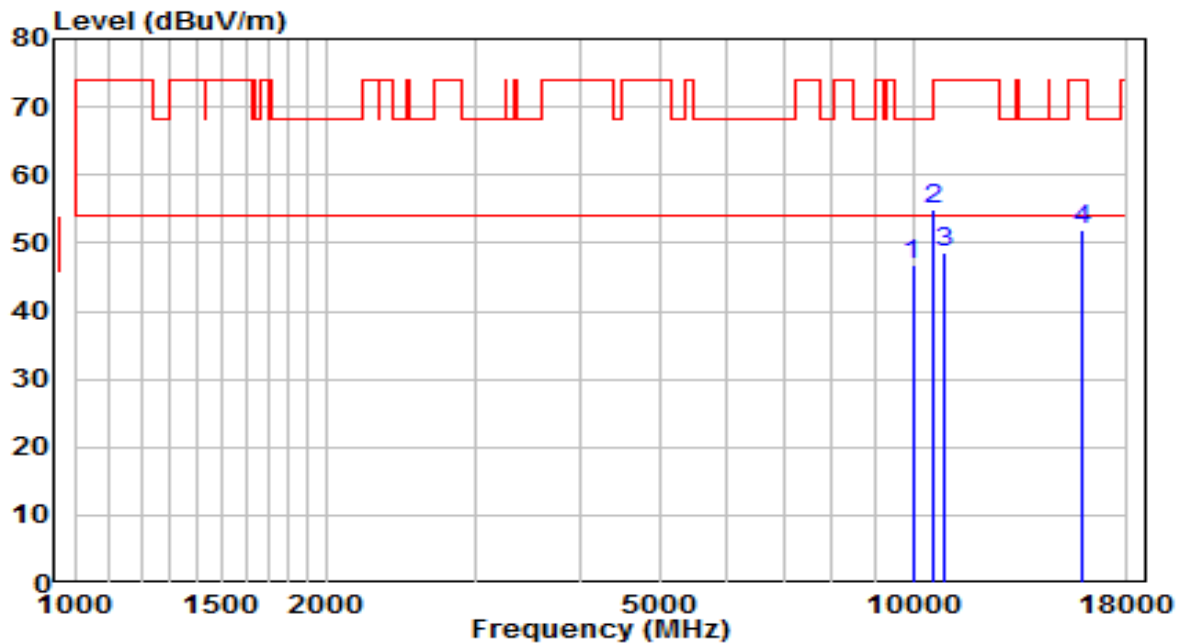


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9984.500	30.40	16.53	46.93	-21.27	68.20	Peak
2	* 10605.000	36.16	18.72	54.88	-19.12	74.00	Peak
3	10911.000	29.40	19.15	48.55	-25.45	74.00	Peak
4	15900.500	31.57	20.36	51.93	-22.07	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5320 MHz	Test Voltage	AC 120V/60Hz

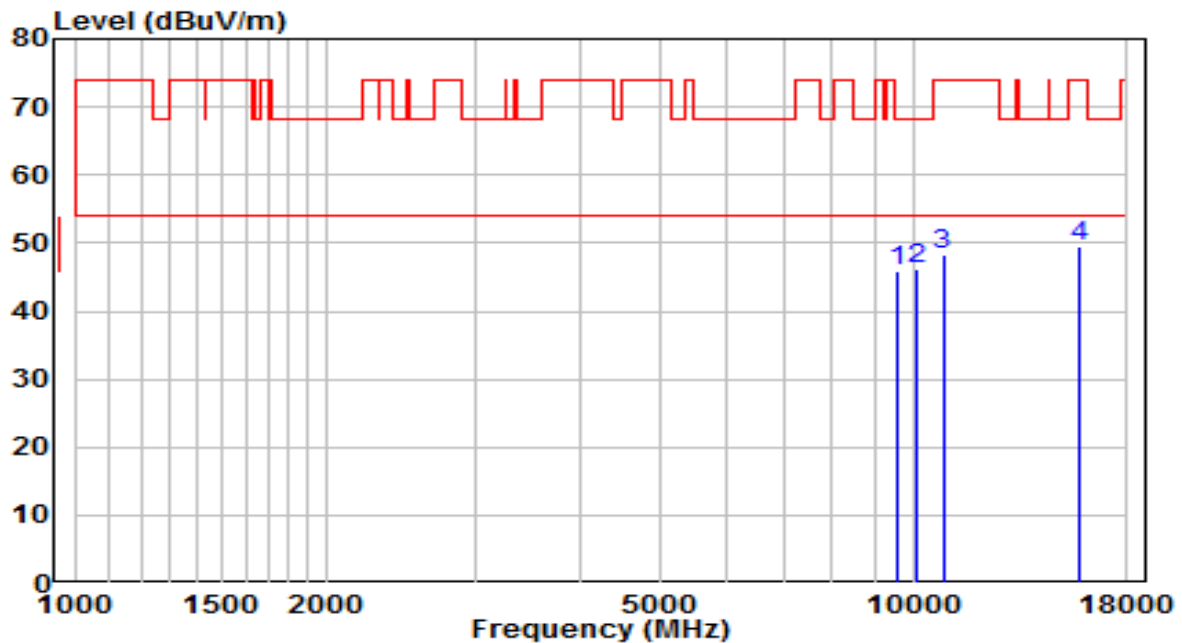


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9593.500	30.07	15.88	45.95	-22.25	68.20	Peak
2	* 10120.500	29.11	17.04	46.15	-22.05	68.20	Peak
3	10851.500	29.14	19.07	48.21	-25.79	74.00	Peak
4	15730.500	28.82	20.78	49.60	-24.40	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5320 MHz	Test Voltage	AC 120V/60Hz

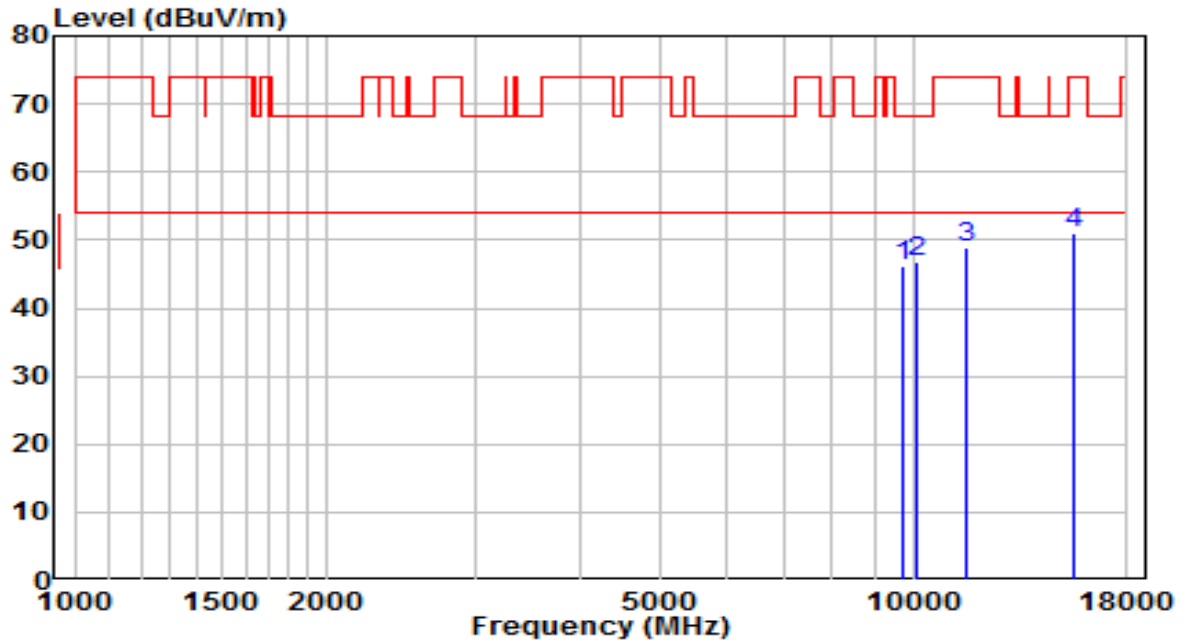


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9721.000	30.23	16.09	46.32	-21.88	68.20	Peak
2	* 10086.500	29.80	16.91	46.71	-21.49	68.20	Peak
3	11565.500	28.95	19.90	48.85	-25.15	74.00	Peak
4	15518.000	29.66	21.31	50.97	-23.03	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5500 MHz	Test Voltage	AC 120V/60Hz

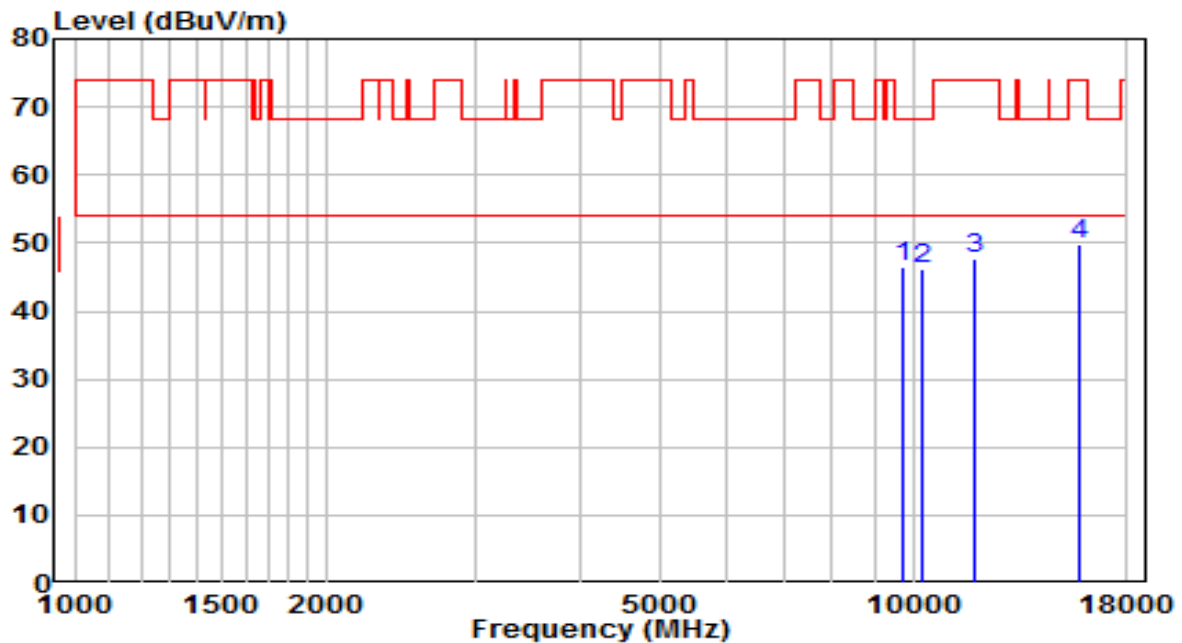


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9712.500	30.45	16.08	46.53	-21.67	68.20	Peak
2		10239.500	28.57	17.52	46.09	-22.11	68.20	Peak
3		11871.500	28.56	19.21	47.77	-26.23	74.00	Peak
4		15773.000	29.15	20.67	49.82	-24.18	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5500 MHz	Test Voltage	AC 120V/60Hz

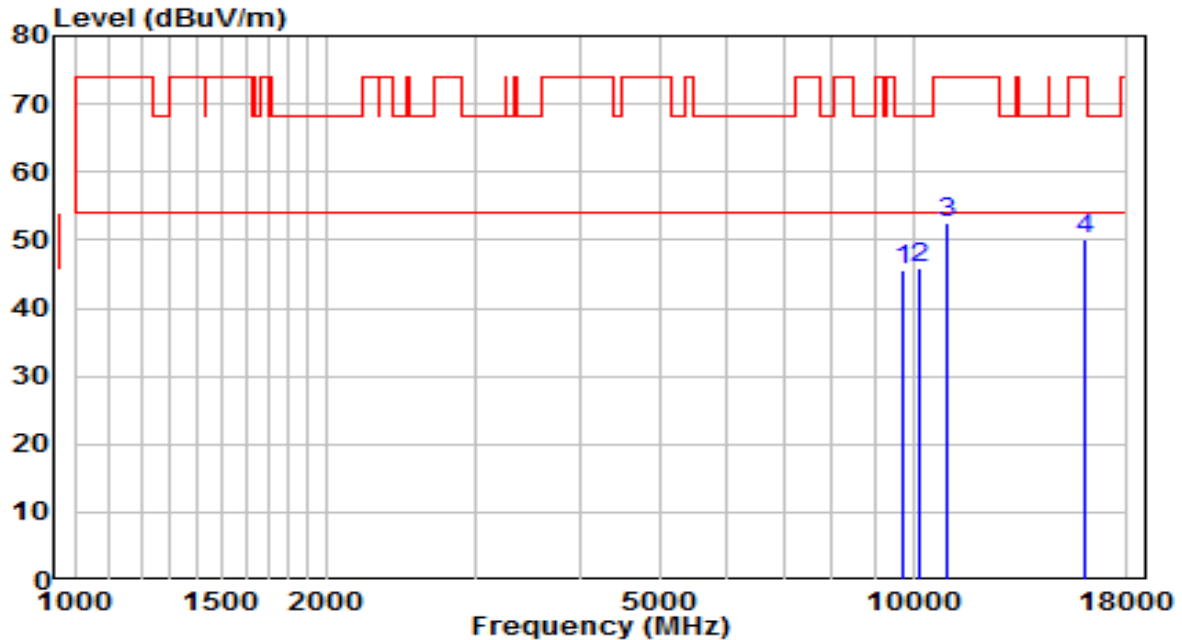


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9721.000	29.60	16.09	45.69	-22.51	68.20	Peak
2	10180.000	28.46	17.28	45.74	-22.46	68.20	Peak
3	* 10996.000	33.33	19.27	52.60	-21.40	74.00	Peak
4	15977.000	29.93	20.17	50.10	-23.90	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5580 MHz	Test Voltage	AC 120V/60Hz

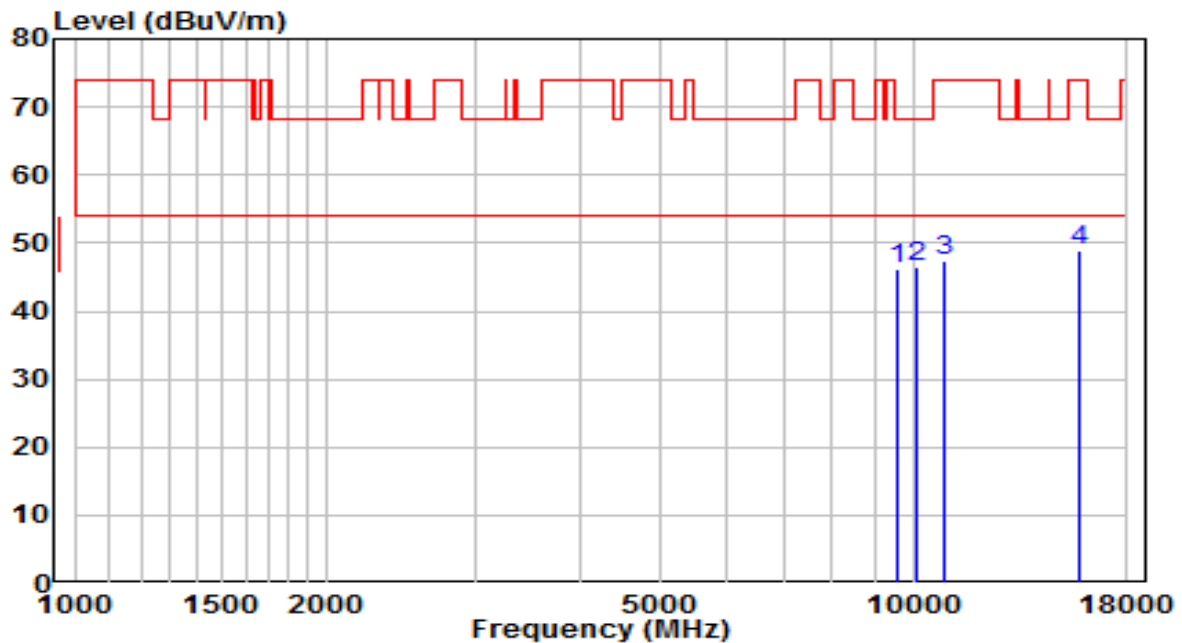


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9610.500	30.22	15.91	46.13	-22.07	68.20	Peak
2	* 10120.500	29.51	17.04	46.56	-21.64	68.20	Peak
3	10868.500	28.21	19.09	47.30	-26.70	74.00	Peak
4	15798.500	28.42	20.61	49.03	-24.97	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5580 MHz	Test Voltage	AC 120V/60Hz

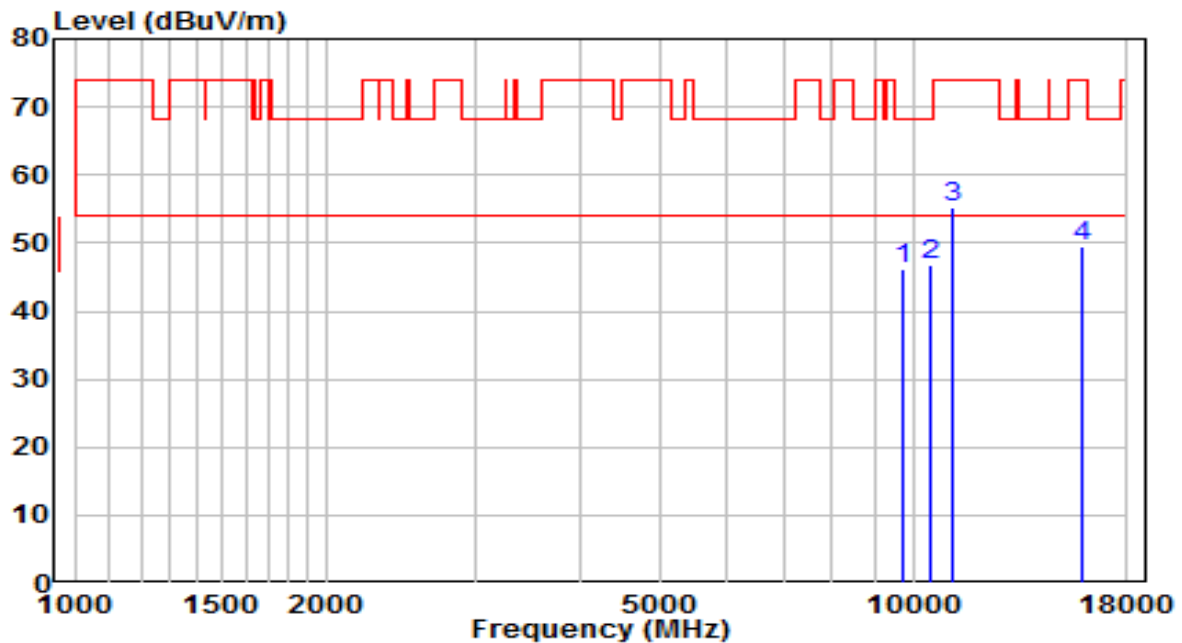


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9755.000	30.09	16.15	46.24	-21.96	68.20	Peak
2	10469.000	28.28	18.45	46.73	-21.47	68.20	Peak
3	* 11157.500	35.87	19.52	55.39	-18.61	74.00	Peak
4	15926.000	29.13	20.29	49.42	-24.58	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5700 MHz	Test Voltage	AC 120V/60Hz

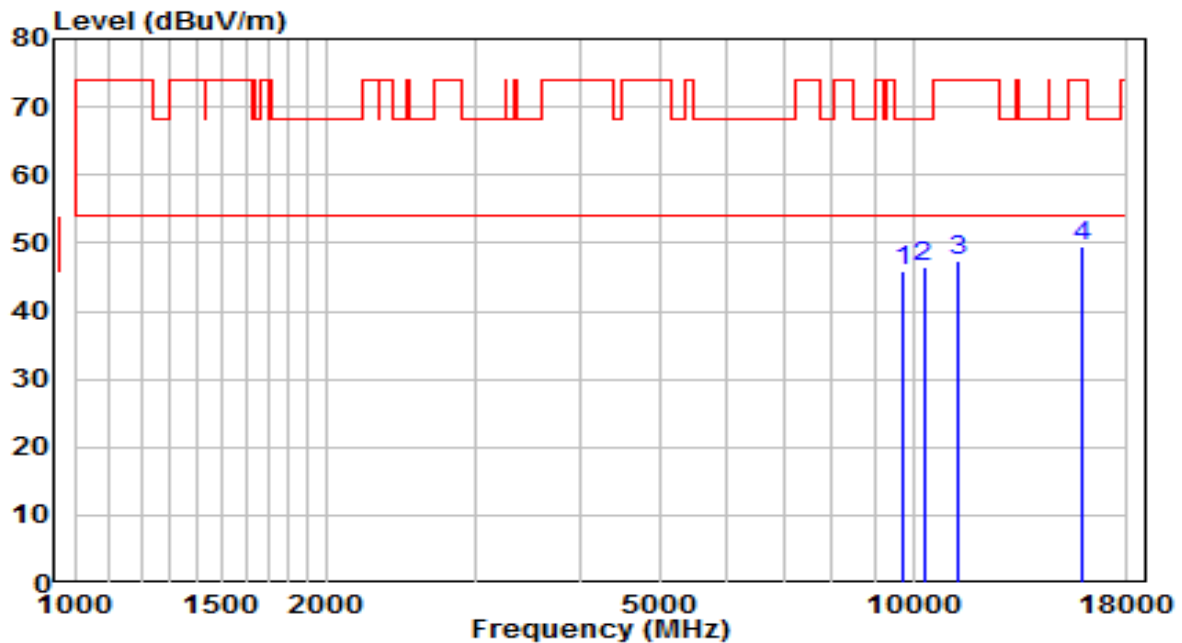


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9712.500	29.91	16.08	45.99	-22.21	68.20	Peak
2	* 10290.500	28.70	17.73	46.43	-21.77	68.20	Peak
3	11293.500	27.79	19.73	47.52	-26.48	74.00	Peak
4	15892.000	29.28	20.38	49.66	-24.34	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5700 MHz	Test Voltage	AC 120V/60Hz

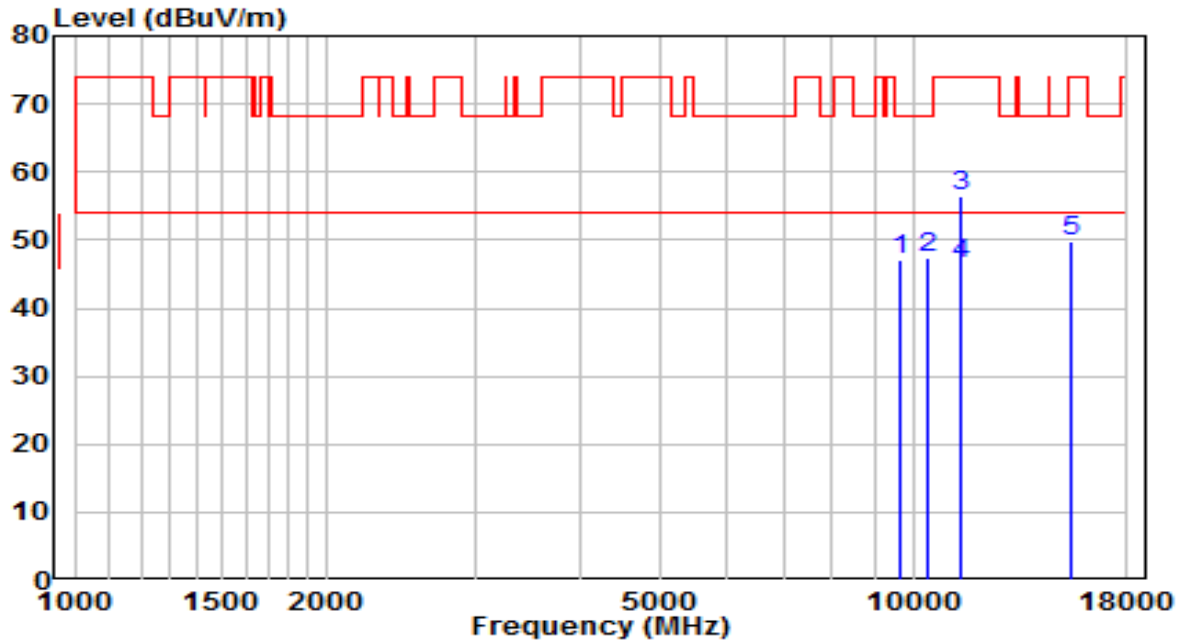


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9653.000	31.14	15.98	47.12	-21.08	68.20	Peak
2	10418.000	29.26	18.24	47.50	-20.70	68.20	Peak
3	11404.000	36.61	19.90	56.51	-17.49	74.00	Peak
4	* 11404.000	26.64	19.90	46.54	-7.46	54.00	Average
5	15467.000	28.38	21.40	49.78	-24.22	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5720 MHz	Test Voltage	AC 120V/60Hz

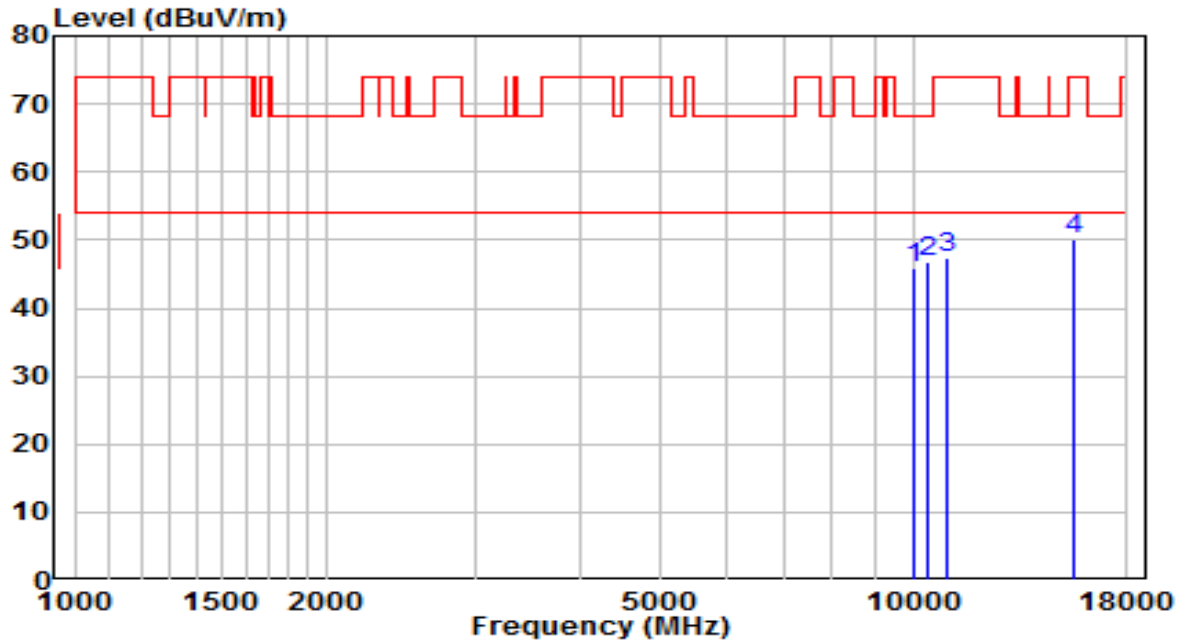


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	10027.000	29.13	16.67	45.80	-22.40	68.20	Peak
2	* 10401.000	28.51	18.17	46.68	-21.52	68.20	Peak
3	11013.000	28.01	19.30	47.31	-26.69	74.00	Peak
4	15552.000	28.77	21.22	49.99	-24.01	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5720 MHz	Test Voltage	AC 120V/60Hz

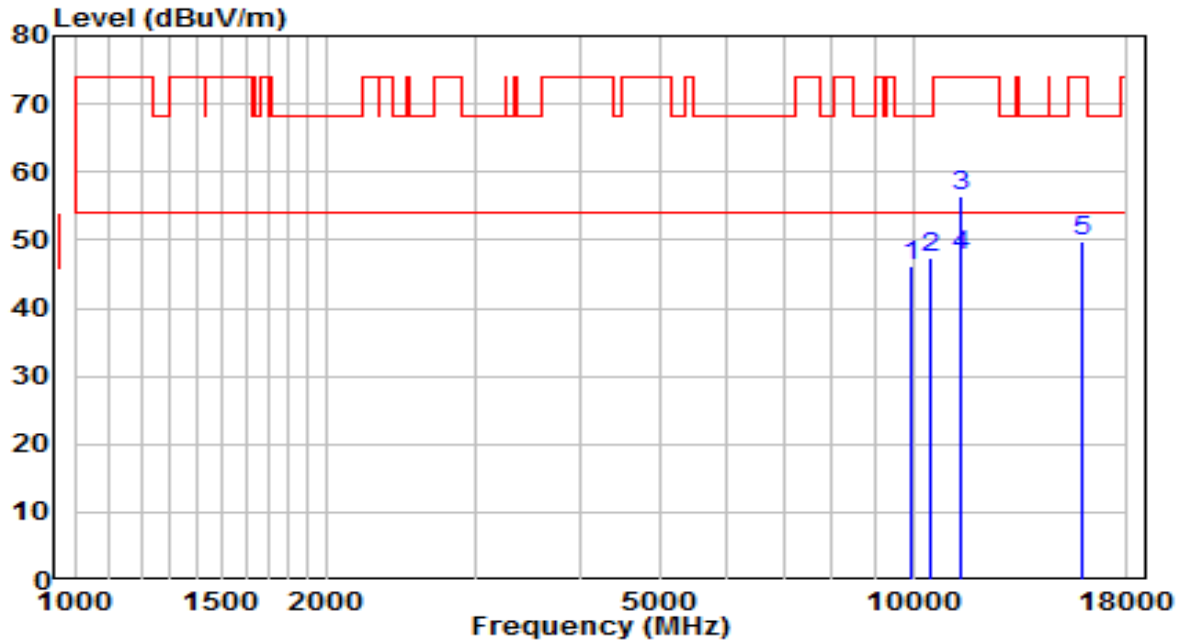


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9925.000	29.74	16.43	46.17	-22.03	68.20	Peak
2	10452.000	28.92	18.38	47.29	-20.91	68.20	Peak
3	11438.000	36.38	19.95	56.33	-17.67	74.00	Peak
4	* 11438.000	27.88	19.95	47.83	-6.17	54.00	Average
5	15909.000	29.60	20.34	49.94	-24.06	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5745 MHz	Test Voltage	AC 120V/60Hz

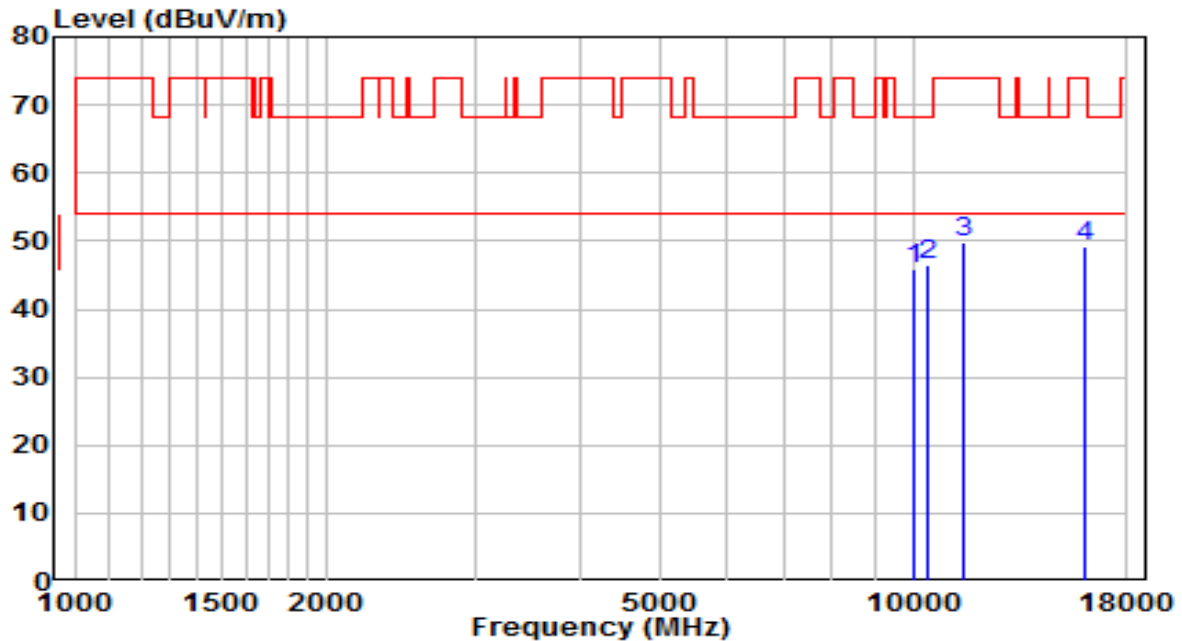


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10035.500	29.31	16.70	46.01	-22.19	68.20	Peak
2	* 10443.500	28.00	18.34	46.34	-21.86	68.20	Peak
3	11489.000	29.86	20.03	49.89	-24.11	74.00	Peak
4	15977.000	29.08	20.17	49.25	-24.75	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5745 MHz	Test Voltage	AC 120V/60Hz

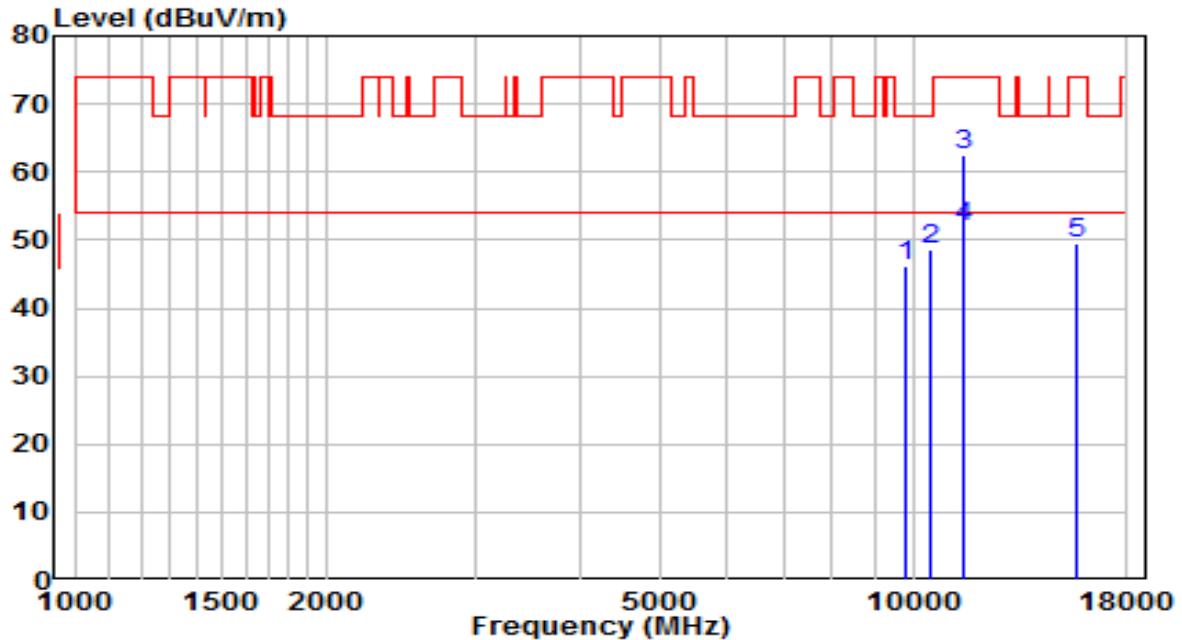


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9831.500	30.02	16.28	46.30	-21.90	68.20	Peak
2	10469.000	30.01	18.45	48.46	-19.74	68.20	Peak
3	11489.000	42.47	20.03	62.50	-11.50	74.00	Peak
4	* 11489.000	31.75	20.03	51.78	-2.22	54.00	Average
5	15645.500	28.56	20.99	49.55	-24.45	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5785 MHz	Test Voltage	AC 120V/60Hz

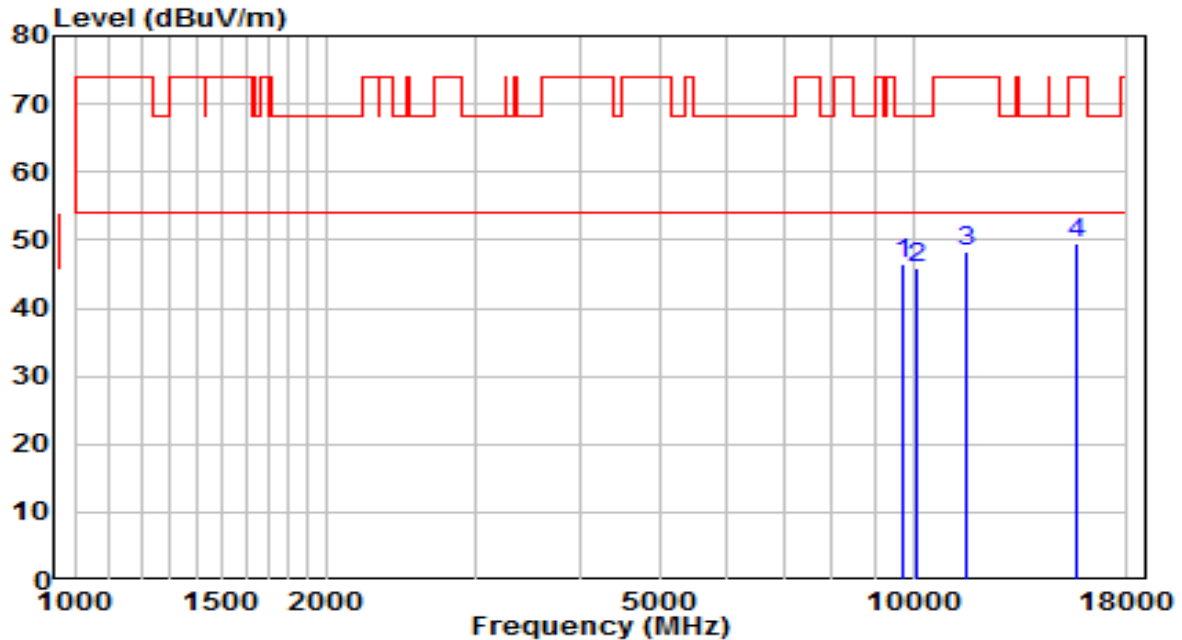


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	9746.500	30.22	16.13	46.35	-21.85	68.20	Peak
2		10095.000	28.84	16.94	45.78	-22.42	68.20	Peak
3		11574.000	28.31	19.88	48.19	-25.81	74.00	Peak
4		15654.000	28.53	20.97	49.50	-24.50	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5785 MHz	Test Voltage	AC 120V/60Hz

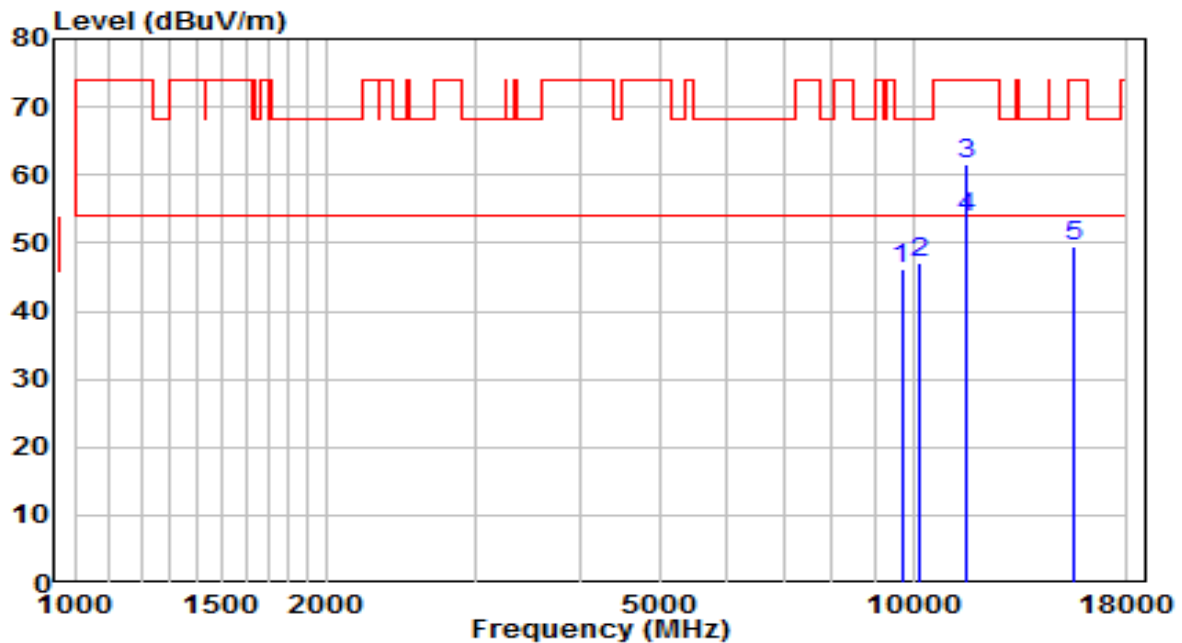


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9687.000	30.16	16.03	46.19	-22.01	68.20	Peak
2	10154.500	29.79	17.18	46.97	-21.23	68.20	Peak
3	11574.000	41.73	19.88	61.61	-12.39	74.00	Peak
4	* 11574.000	33.81	19.88	53.69	-0.31	54.00	Average
5	15543.500	28.24	21.24	49.48	-24.52	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5825 MHz	Test Voltage	AC 120V/60Hz

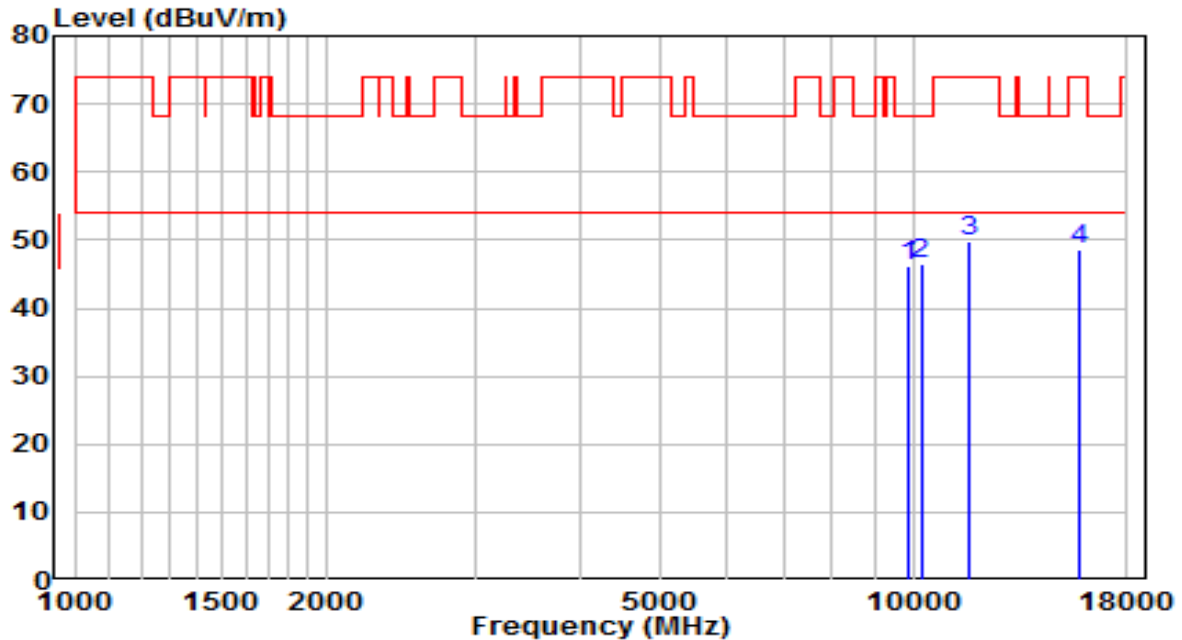


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9899.500	29.67	16.39	46.06	-22.14	68.20	Peak
2	* 10214.000	29.05	17.42	46.47	-21.73	68.20	Peak
3	11650.500	30.01	19.71	49.72	-24.28	74.00	Peak
4	15747.500	27.83	20.74	48.57	-25.43	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5825 MHz	Test Voltage	AC 120V/60Hz

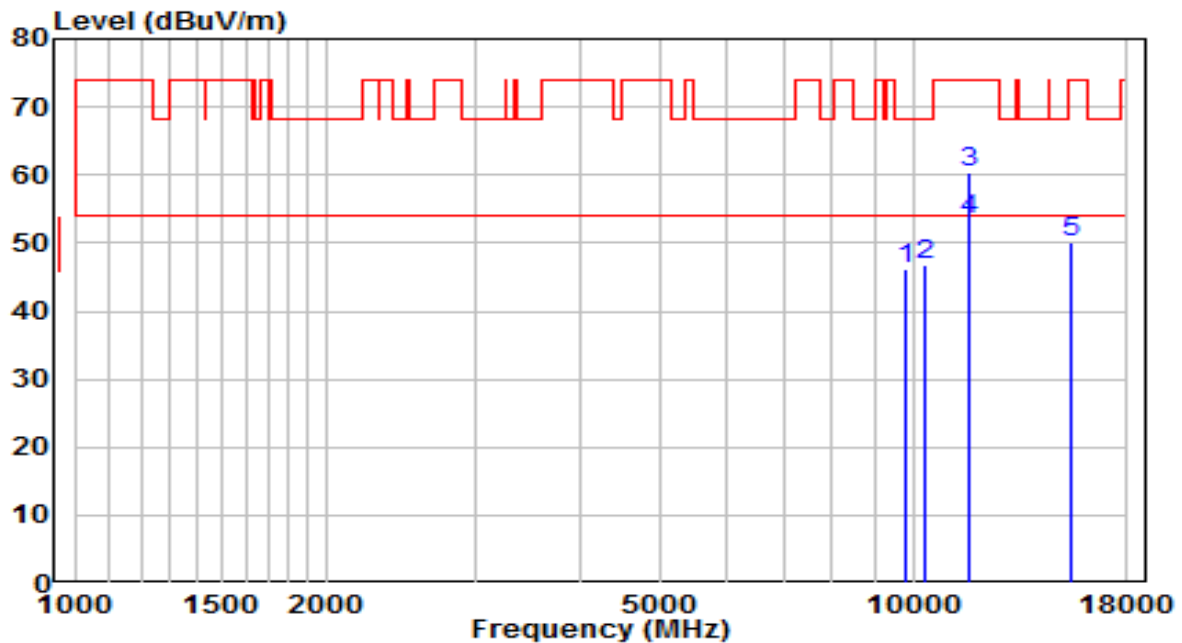


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9806.000	29.81	16.23	46.05	-22.15	68.20	Peak
2	10316.000	28.83	17.83	46.66	-21.54	68.20	Peak
3	11650.500	40.59	19.71	60.30	-13.70	74.00	Peak
4	* 11650.500	33.71	19.71	53.42	-0.58	54.00	Average
5	15475.500	28.85	21.39	50.24	-23.76	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180 MHz	Test Voltage	AC 120V/60Hz

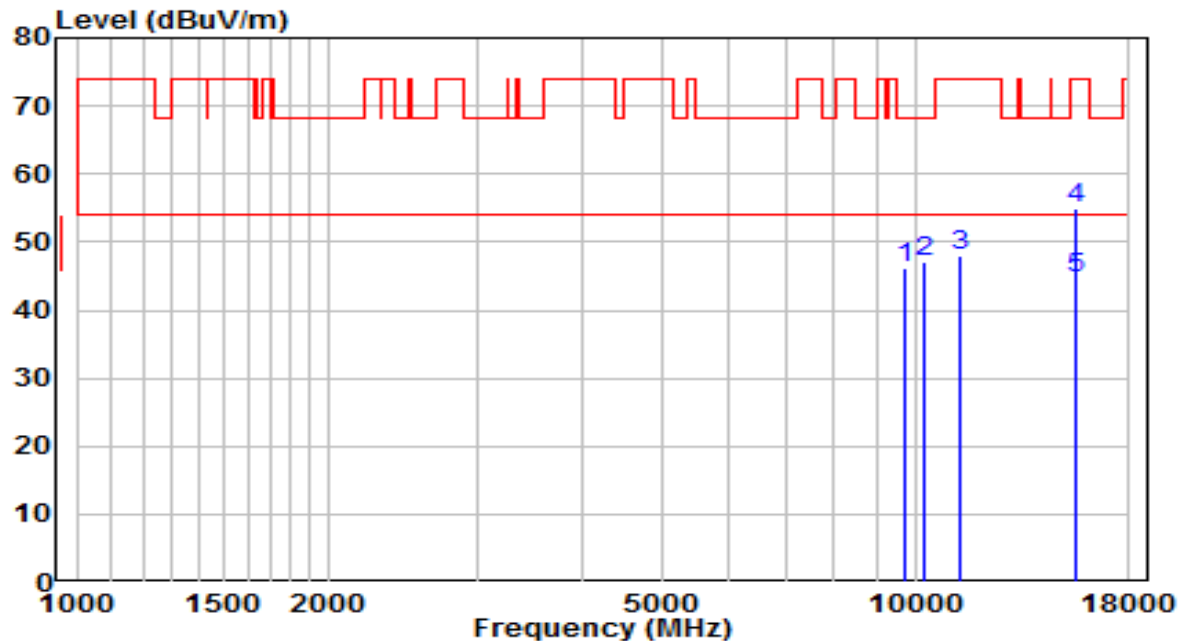


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9721.000	30.05	16.09	46.14	-22.06	68.20	Peak
2	10273.500	29.48	17.66	47.14	-21.06	68.20	Peak
3	11293.500	28.12	19.73	47.85	-26.15	74.00	Peak
4	15535.000	33.69	21.26	54.95	-19.05	74.00	Peak
5	* 15535.000	23.37	21.26	44.63	-9.37	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180 MHz	Test Voltage	AC 120V/60Hz

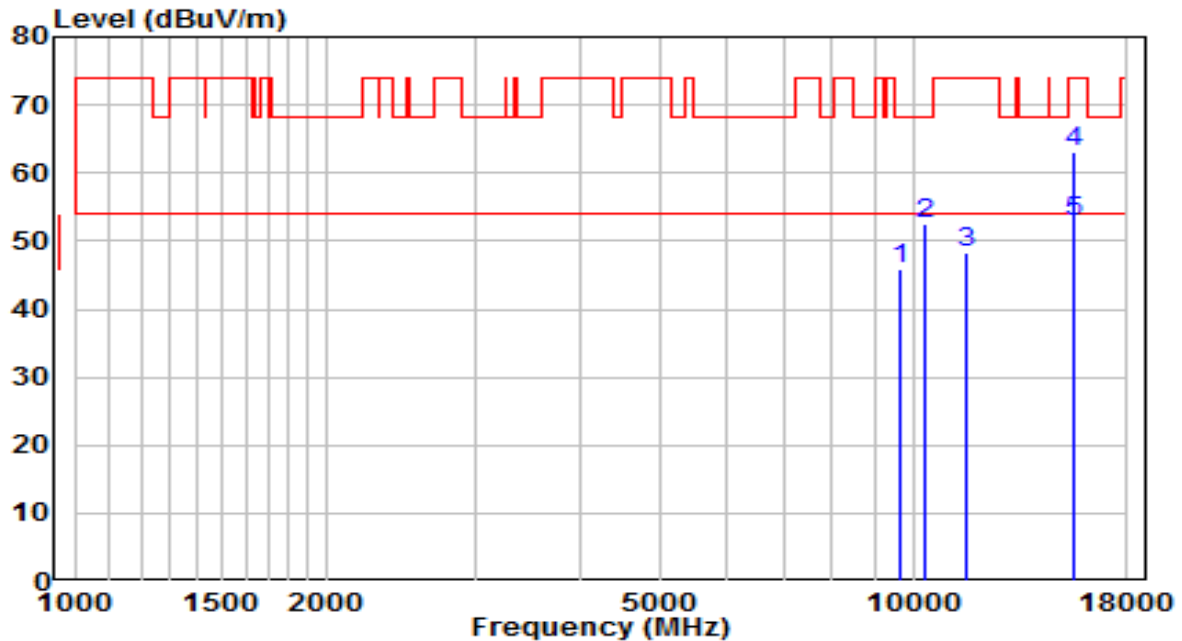


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9653.000	30.06	15.98	46.03	-22.17	68.20	Peak
2	10358.500	34.52	18.00	52.52	-15.68	68.20	Peak
3	11565.500	28.48	19.90	48.38	-25.62	74.00	Peak
4	15543.500	41.84	21.24	63.08	-10.92	74.00	Peak
5	* 15543.500	31.58	21.24	52.82	-1.18	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5220 MHz	Test Voltage	AC 120V/60Hz

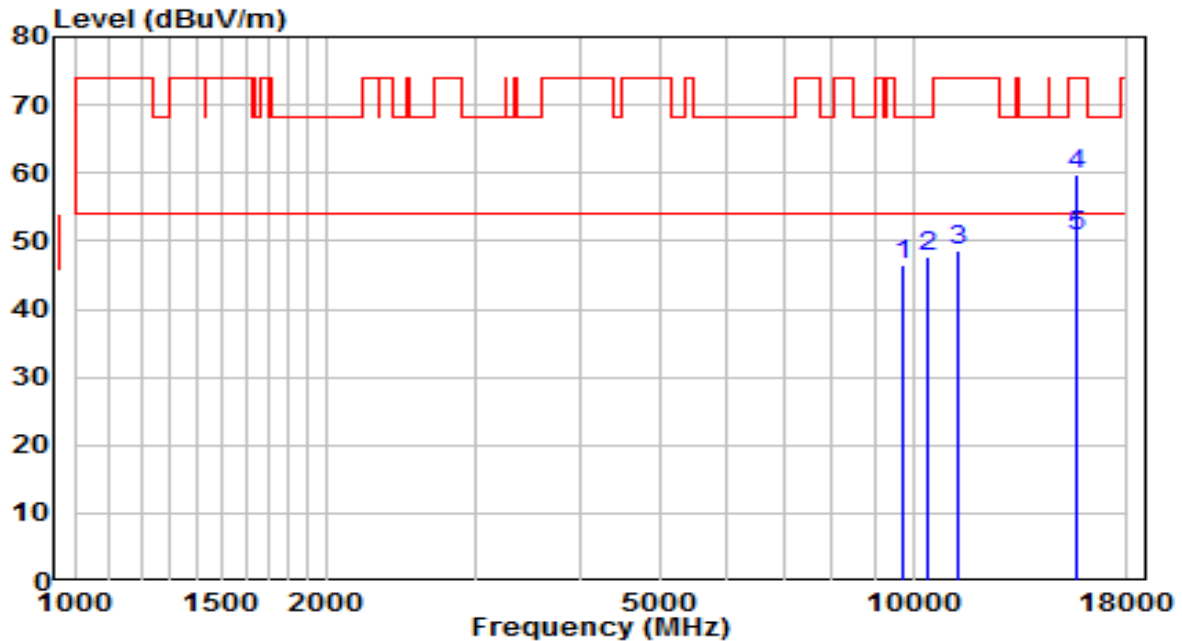


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9721.000	30.46	16.09	46.55	-21.65	68.20	Peak
2	10443.500	29.47	18.34	47.81	-20.39	68.20	Peak
3	11285.000	28.89	19.72	48.61	-25.39	74.00	Peak
4	15662.500	38.69	20.95	59.64	-14.36	74.00	Peak
5	* 15662.500	29.76	20.95	50.71	-3.29	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5220 MHz	Test Voltage	AC 120V/60Hz

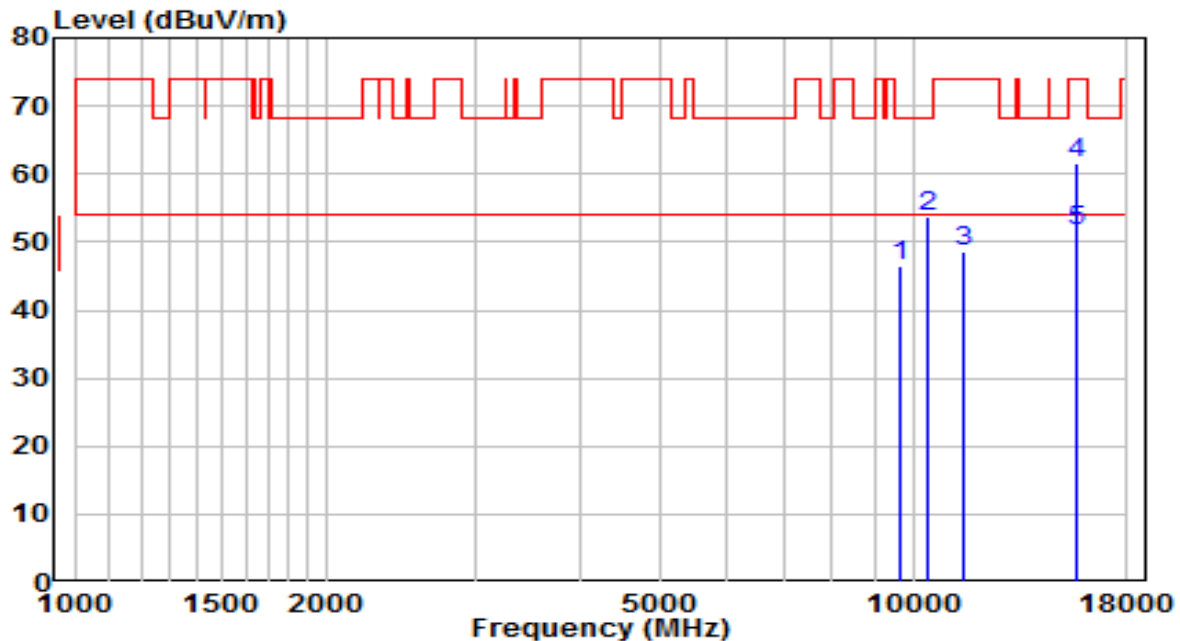


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9661.500	30.44	15.99	46.43	-21.77	68.20	Peak
2	10435.000	35.32	18.31	53.63	-14.57	68.20	Peak
3	11489.000	28.46	20.03	48.49	-25.51	74.00	Peak
4	15654.000	40.57	20.97	61.54	-12.46	74.00	Peak
5	* 15654.000	30.61	20.97	51.58	-2.42	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5240 MHz	Test Voltage	AC 120V/60Hz

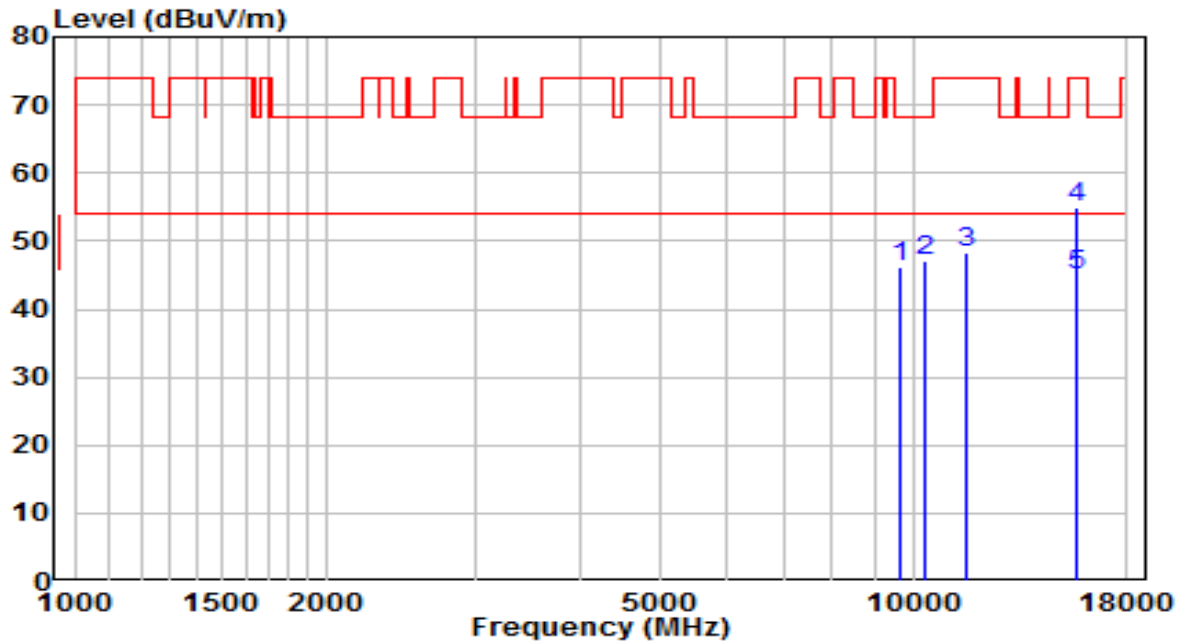


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9653.000	30.13	15.98	46.11	-22.09	68.20	Peak
2	10324.500	29.30	17.86	47.16	-21.04	68.20	Peak
3	11582.500	28.30	19.86	48.16	-25.84	74.00	Peak
4	15713.500	34.00	20.82	54.82	-19.18	74.00	Peak
5	* 15713.500	24.04	20.82	44.86	-9.14	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5240 MHz	Test Voltage	AC 120V/60Hz

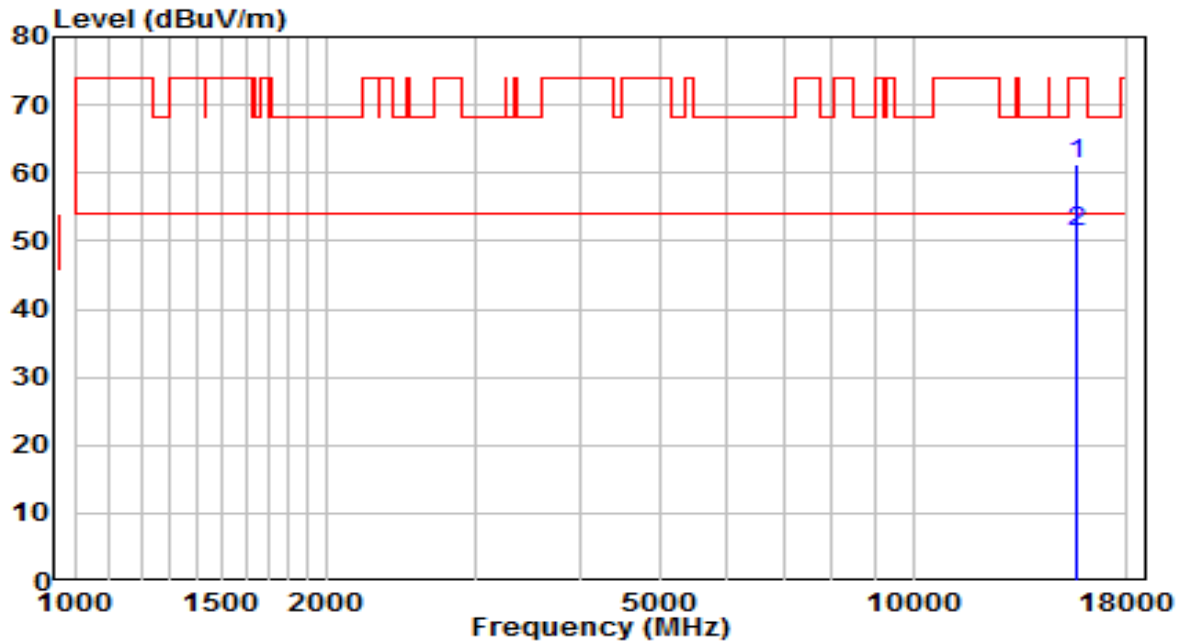


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	15722.000	40.51	20.80	61.31	-12.69	74.00	Peak
2	* 15722.000	30.50	20.80	51.30	-2.70	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5260 MHz	Test Voltage	AC 120V/60Hz

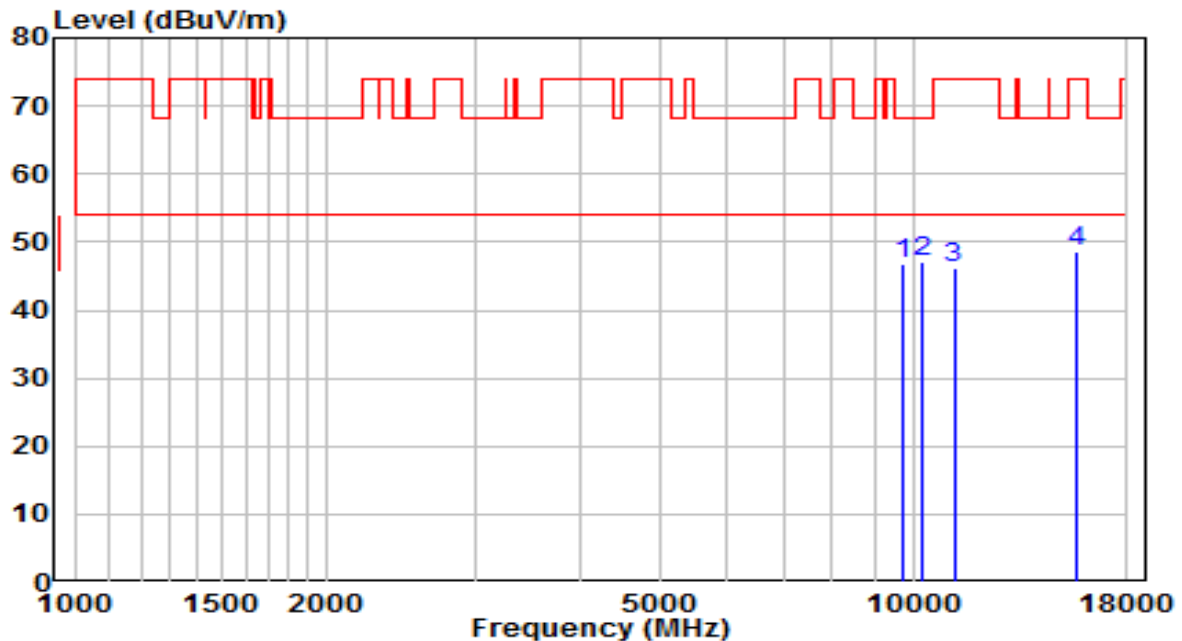


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9721.000	30.56	16.09	46.65	-21.55	68.20	Peak
2	* 10239.500	29.67	17.52	47.19	-21.01	68.20	Peak
3	11183.000	26.58	19.56	46.14	-27.86	74.00	Peak
4	15654.000	27.77	20.97	48.74	-25.26	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5260 MHz	Test Voltage	AC 120V/60Hz

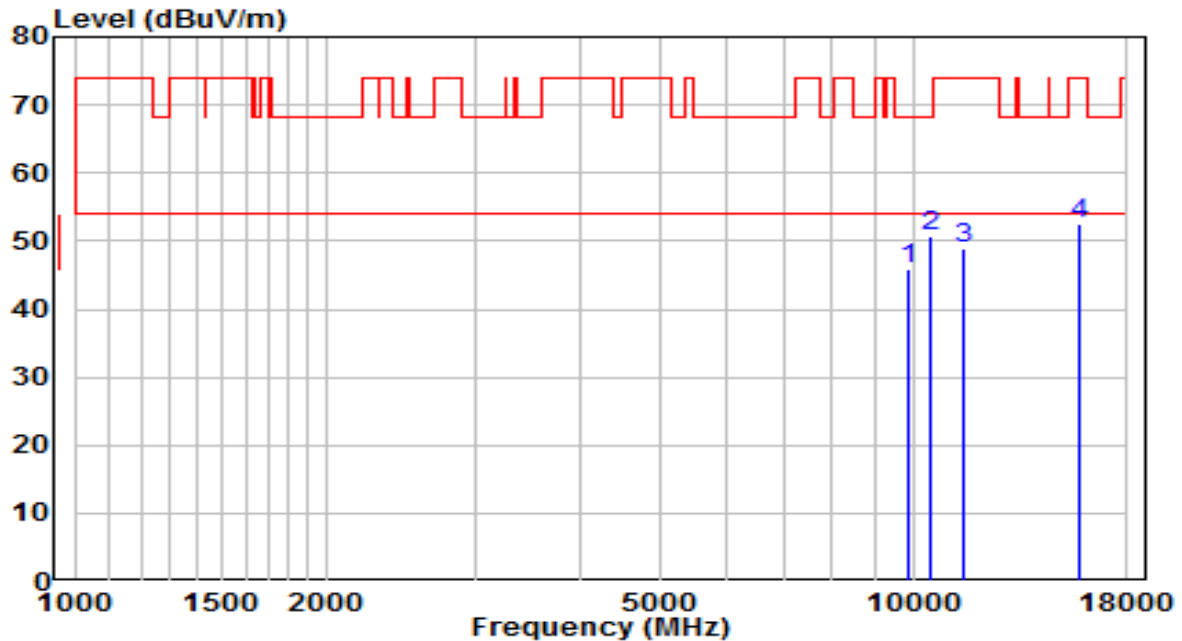


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9891.000	29.58	16.38	45.95	-22.25	68.20	Peak
2	* 10503.000	32.21	18.57	50.78	-17.42	68.20	Peak
3	11497.500	28.99	20.05	49.04	-24.96	74.00	Peak
4	15773.000	31.83	20.67	52.50	-21.50	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5300 MHz	Test Voltage	AC 120V/60Hz

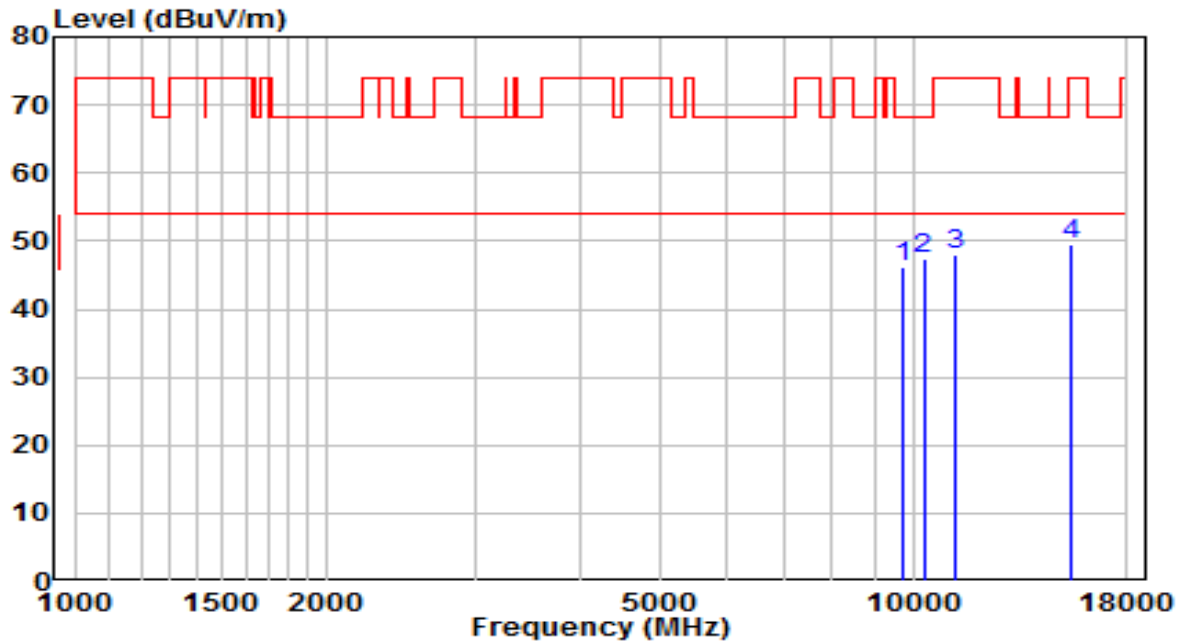


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9738.000	29.96	16.12	46.08	-22.12	68.20	Peak
2	* 10290.500	29.65	17.73	47.37	-20.83	68.20	Peak
3	11225.500	28.35	19.63	47.98	-26.02	74.00	Peak
4	15450.000	27.94	21.42	49.36	-24.64	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5300 MHz	Test Voltage	AC 120V/60Hz

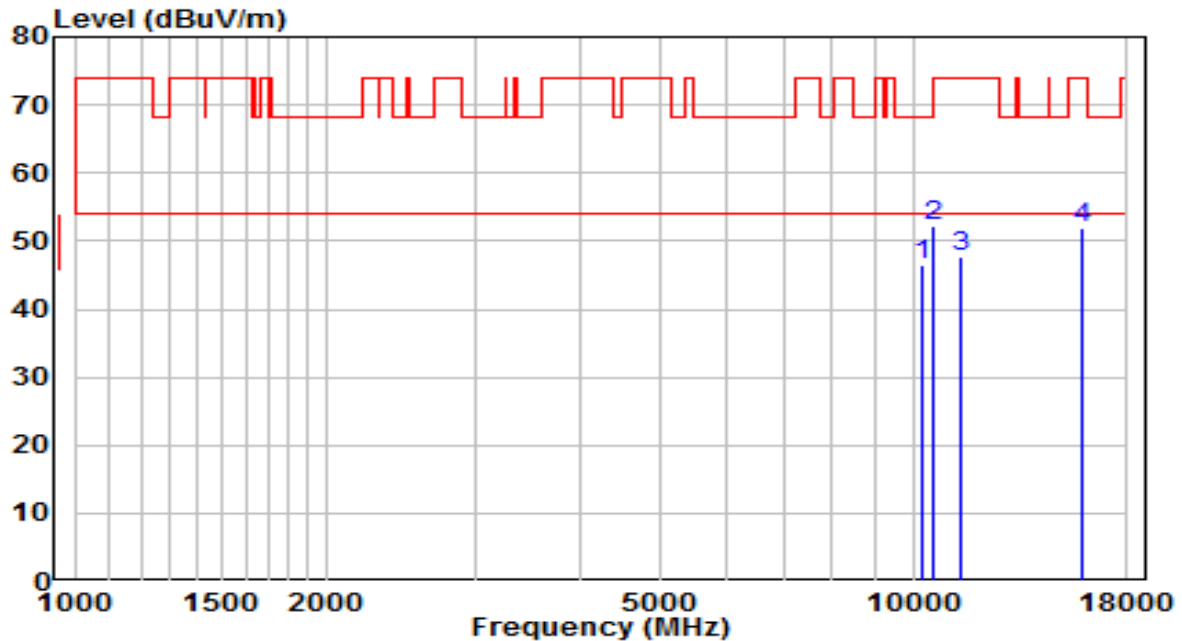


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10282.000	28.66	17.69	46.35	-21.85	68.20	Peak
2	* 10596.500	33.58	18.71	52.29	-15.91	68.20	Peak
3	11378.500	27.97	19.86	47.83	-26.17	74.00	Peak
4	15900.500	31.48	20.36	51.84	-22.16	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	AC 120V/60Hz

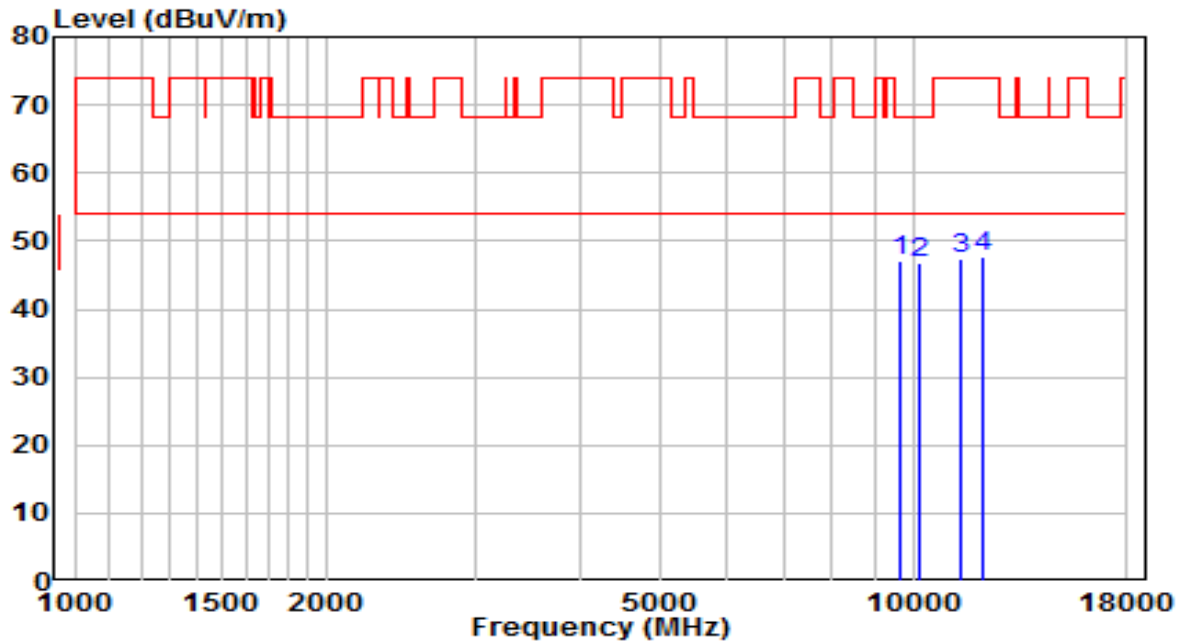


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9653.000	31.15	15.98	47.13	-21.07	68.20	Peak
2		10171.500	29.48	17.25	46.73	-21.47	68.20	Peak
3		11438.000	27.52	19.95	47.47	-26.53	74.00	Peak
4		12118.000	29.04	18.80	47.84	-26.16	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	AC 120V/60Hz

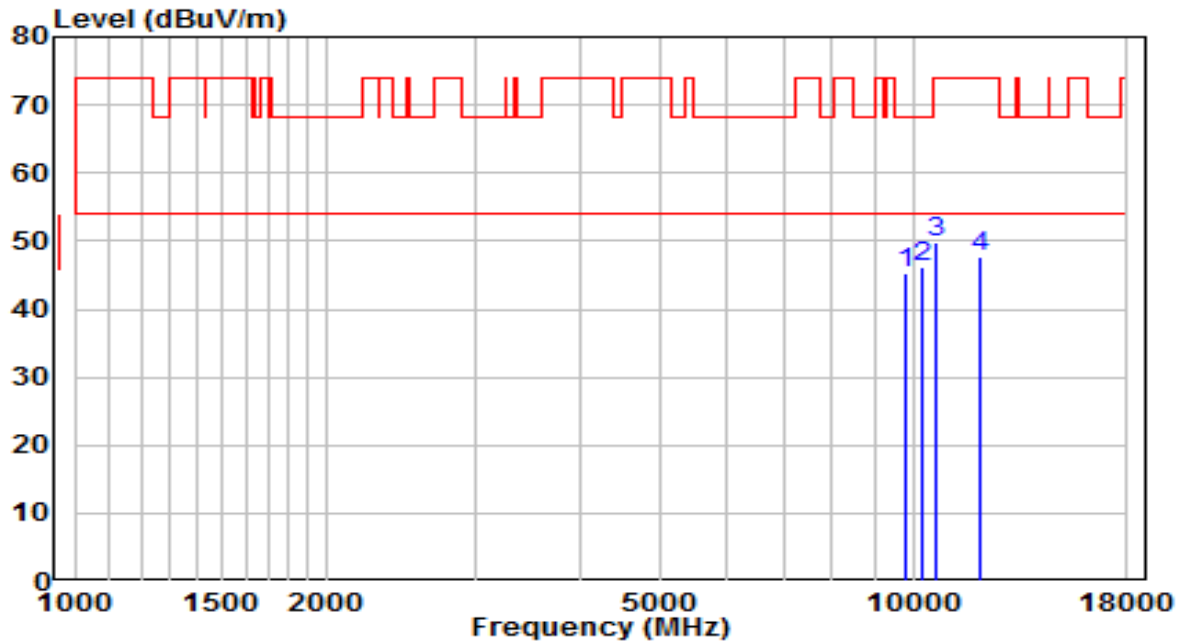


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9806.000	29.13	16.23	45.37	-22.83	68.20	Peak
2	* 10282.000	28.60	17.69	46.30	-21.90	68.20	Peak
3	10639.000	30.97	18.77	49.73	-24.27	74.00	Peak
4	12058.500	28.71	18.86	47.57	-26.43	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500 MHz	Test Voltage	AC 120V/60Hz

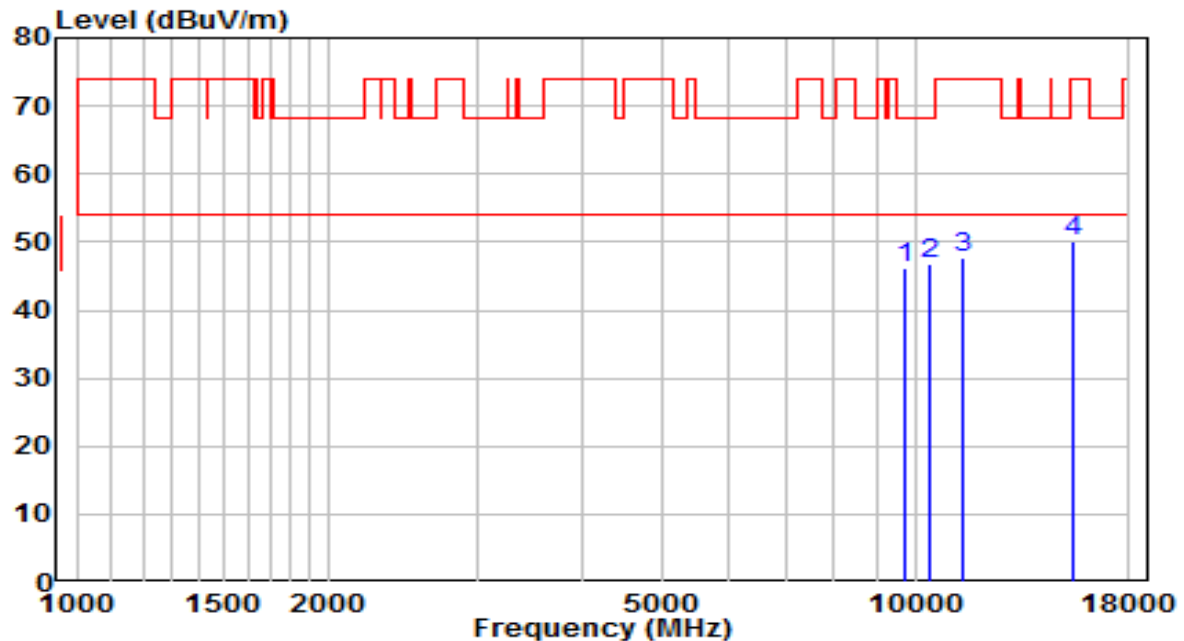


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9721.000	30.05	16.09	46.14	-22.06	68.20	Peak
2	* 10426.500	28.67	18.27	46.94	-21.26	68.20	Peak
3	11421.000	27.62	19.93	47.55	-26.45	74.00	Peak
4	15441.500	28.59	21.44	50.03	-23.97	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500 MHz	Test Voltage	AC 120V/60Hz

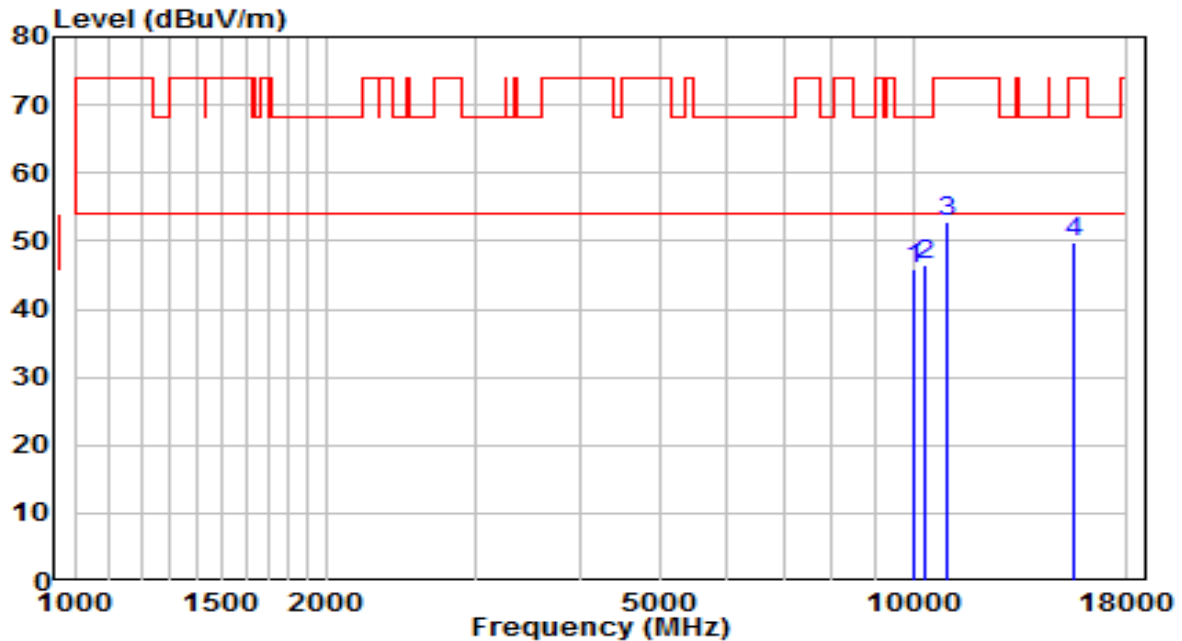


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10001.500	29.40	16.57	45.97	-22.23	68.20	Peak
2	10316.000	28.52	17.83	46.35	-21.85	68.20	Peak
3	* 11004.500	33.49	19.29	52.78	-21.22	74.00	Peak
4	15501.000	28.45	21.35	49.80	-24.20	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5580 MHz	Test Voltage	AC 120V/60Hz

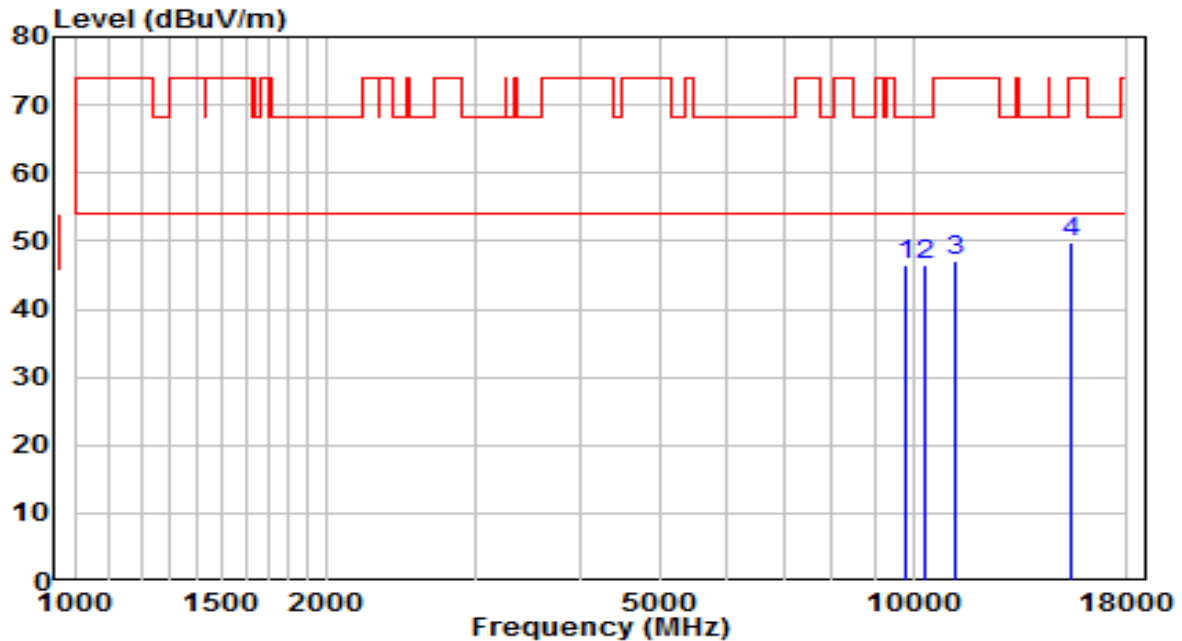


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9823.000	30.31	16.26	46.57	-21.63	68.20	Peak
2	* 10341.500	28.67	17.93	46.60	-21.60	68.20	Peak
3	11259.500	27.52	19.68	47.20	-26.80	74.00	Peak
4	15441.500	28.29	21.44	49.73	-24.27	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5580 MHz	Test Voltage	AC 120V/60Hz

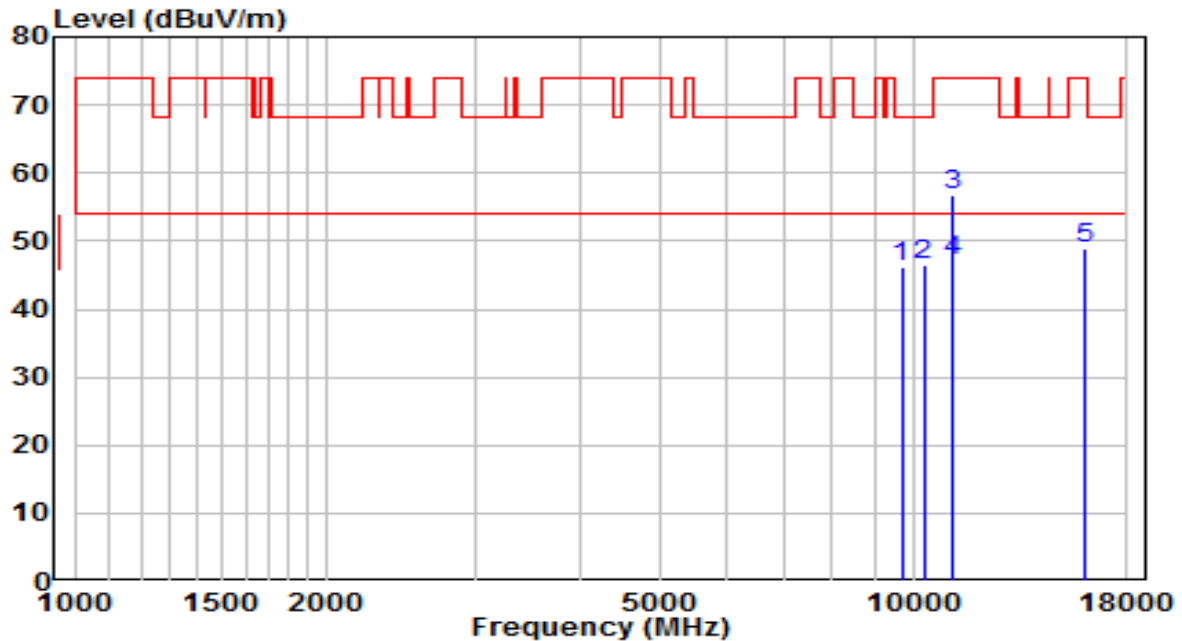


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9687.000	30.02	16.03	46.06	-22.14	68.20	Peak
2	10290.500	28.72	17.73	46.45	-21.75	68.20	Peak
3	11157.500	37.12	19.52	56.64	-17.36	74.00	Peak
4	* 11157.500	27.53	19.52	47.05	-6.95	54.00	Average
5	15977.000	28.75	20.17	48.92	-25.08	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	AC 120V/60Hz

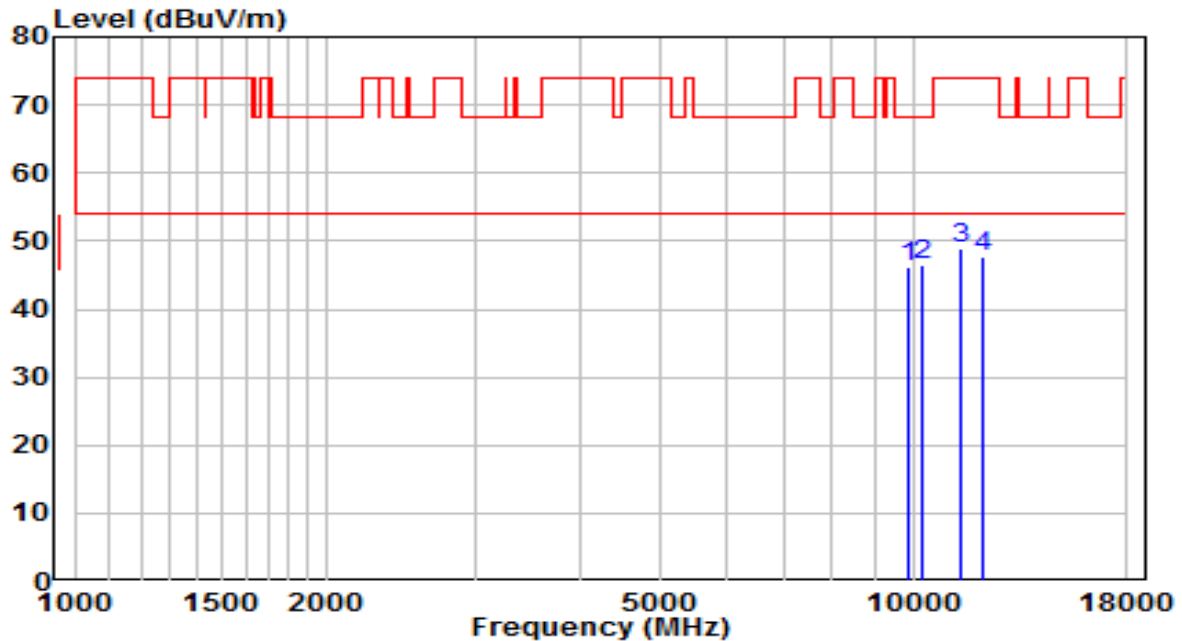


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9874.000	29.83	16.35	46.18	-22.02	68.20	Peak
2	* 10248.000	29.01	17.56	46.56	-21.64	68.20	Peak
3	11395.500	29.04	19.89	48.93	-25.07	74.00	Peak
4	12101.000	28.96	18.82	47.77	-26.23	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	AC 120V/60Hz

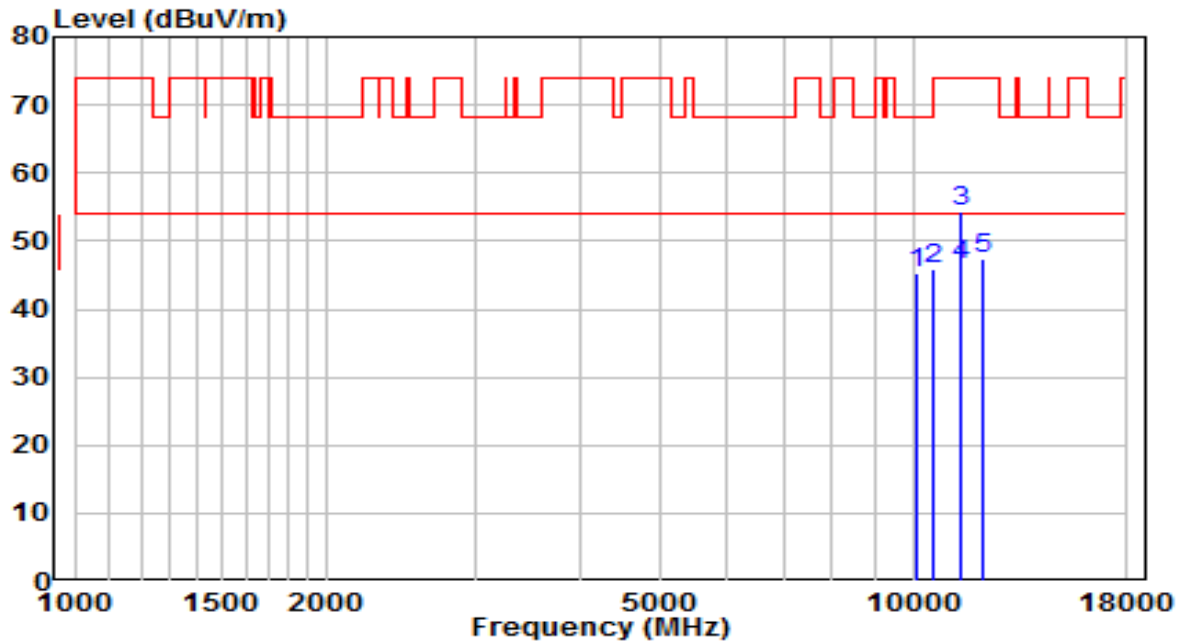


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10103.500	28.29	16.98	45.27	-22.93	68.20	Peak
2	10596.500	27.31	18.71	46.02	-22.18	68.20	Peak
3	11395.500	34.50	19.89	54.39	-19.61	74.00	Peak
4	* 11395.500	26.72	19.89	46.61	-7.39	54.00	Average
5	12143.500	28.52	18.77	47.29	-26.71	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5720 MHz	Test Voltage	AC 120V/60Hz

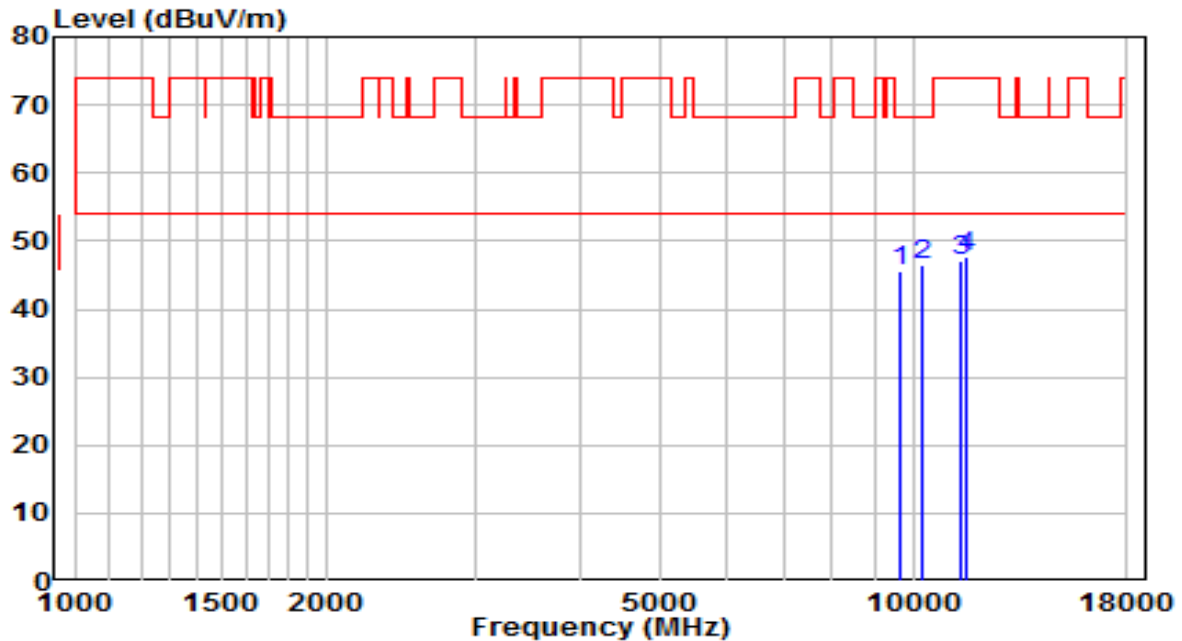


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9670.000	29.46	16.01	45.46	-22.74	68.20	Peak
2	* 10256.500	28.98	17.59	46.57	-21.63	68.20	Peak
3	11387.000	27.28	19.88	47.16	-26.84	74.00	Peak
4	11574.000	27.73	19.88	47.61	-26.39	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5720 MHz	Test Voltage	AC 120V/60Hz

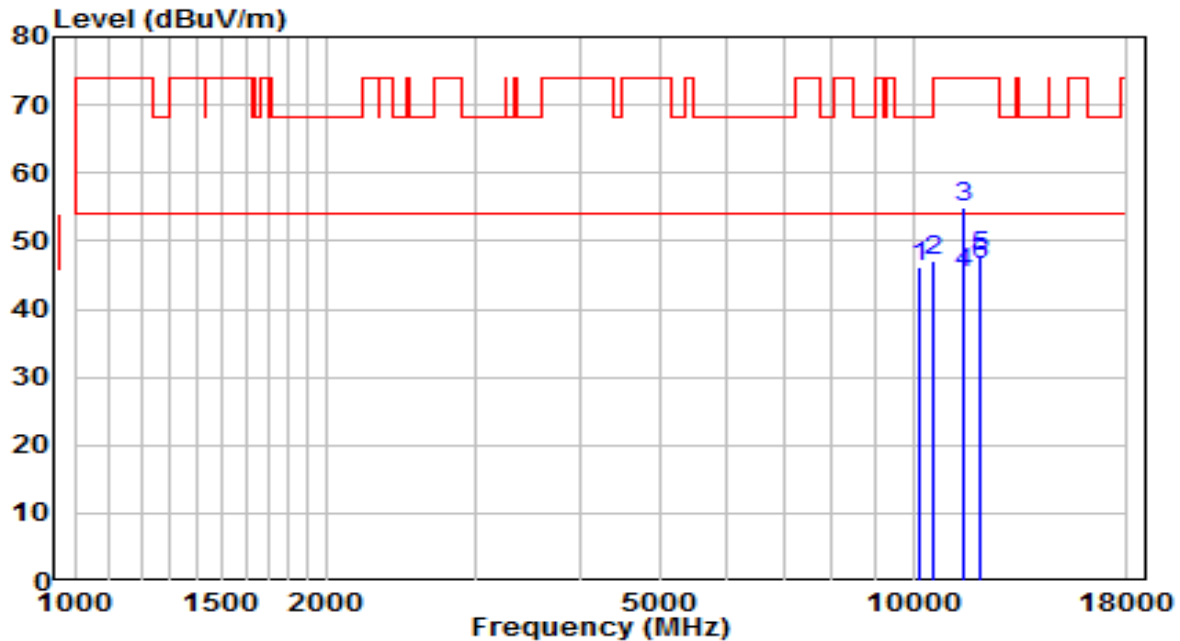


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10180.000	28.76	17.28	46.04	-22.16	68.20	Peak
2	10596.500	28.43	18.71	47.14	-21.06	68.20	Peak
3	11446.500	34.89	19.97	54.86	-19.14	74.00	Peak
4	11446.500	25.34	19.97	45.31	-8.69	54.00	Average
5	12041.500	28.83	18.88	47.71	-26.29	74.00	Peak
6	* 12041.500	27.74	18.88	46.61	-7.39	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745 MHz	Test Voltage	AC 120V/60Hz

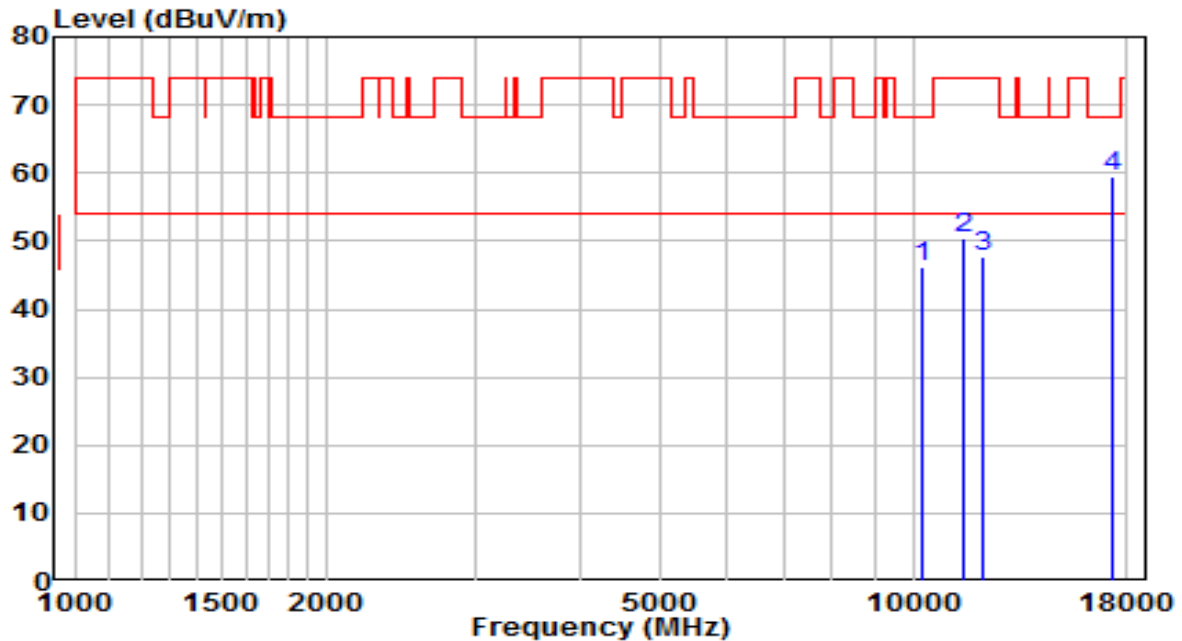


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10273.500	28.43	17.66	46.09	-22.11	68.20	Peak
2	11497.500	30.44	20.05	50.48	-23.52	74.00	Peak
3	12084.000	28.94	18.83	47.77	-26.23	74.00	Peak
4	* 17235.000	33.26	26.08	59.33	-8.87	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745 MHz	Test Voltage	AC 120V/60Hz

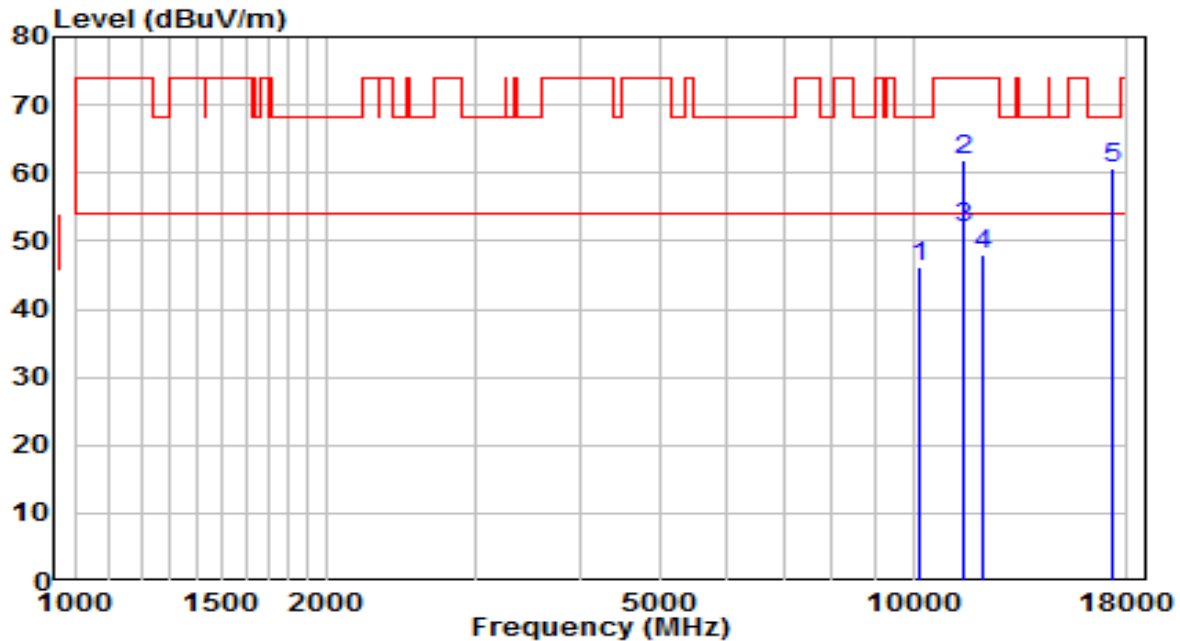


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10163.000	28.83	17.22	46.05	-22.15	68.20	Peak
2	11489.000	41.94	20.03	61.97	-12.03	74.00	Peak
3	* 11489.000	32.00	20.03	52.04	-1.96	54.00	Average
4	12118.000	29.10	18.80	47.90	-26.10	74.00	Peak
5	17243.500	34.46	26.13	60.59	-7.61	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5785 MHz	Test Voltage	AC 120V/60Hz

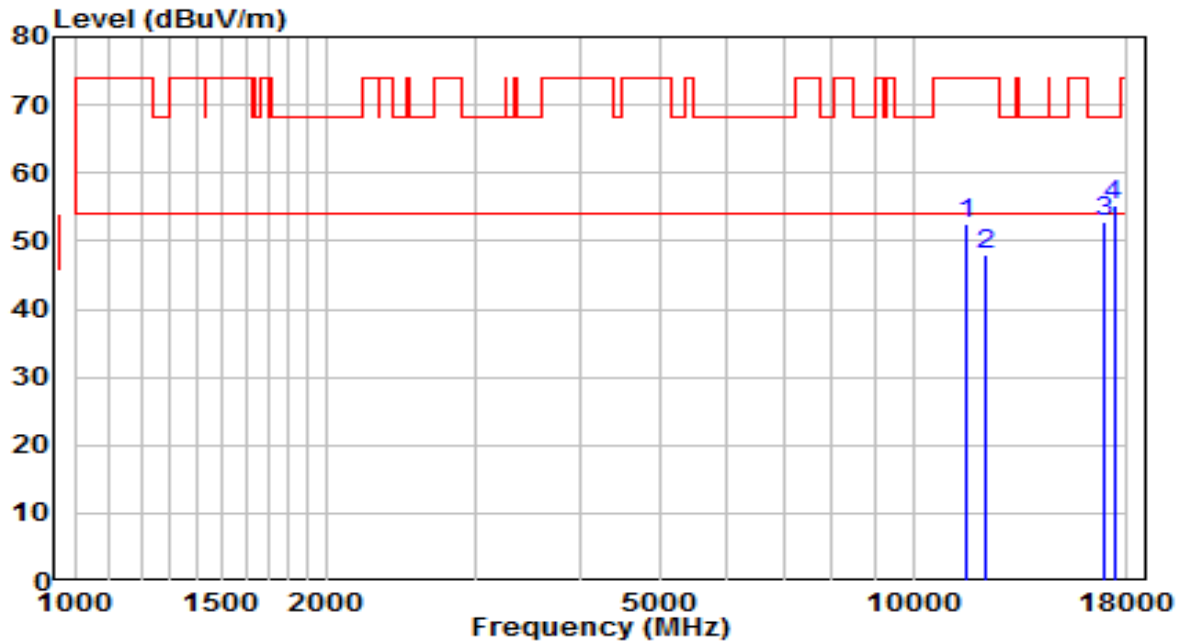


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	11565.500	32.48	19.90	52.38	-21.62	74.00	Peak
2	12220.000	29.39	18.69	48.08	-25.92	74.00	Peak
3	16852.500	29.37	23.55	52.92	-15.28	68.20	Peak
4	* 17354.000	28.24	26.87	55.11	-13.09	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5785 MHz	Test Voltage	AC 120V/60Hz

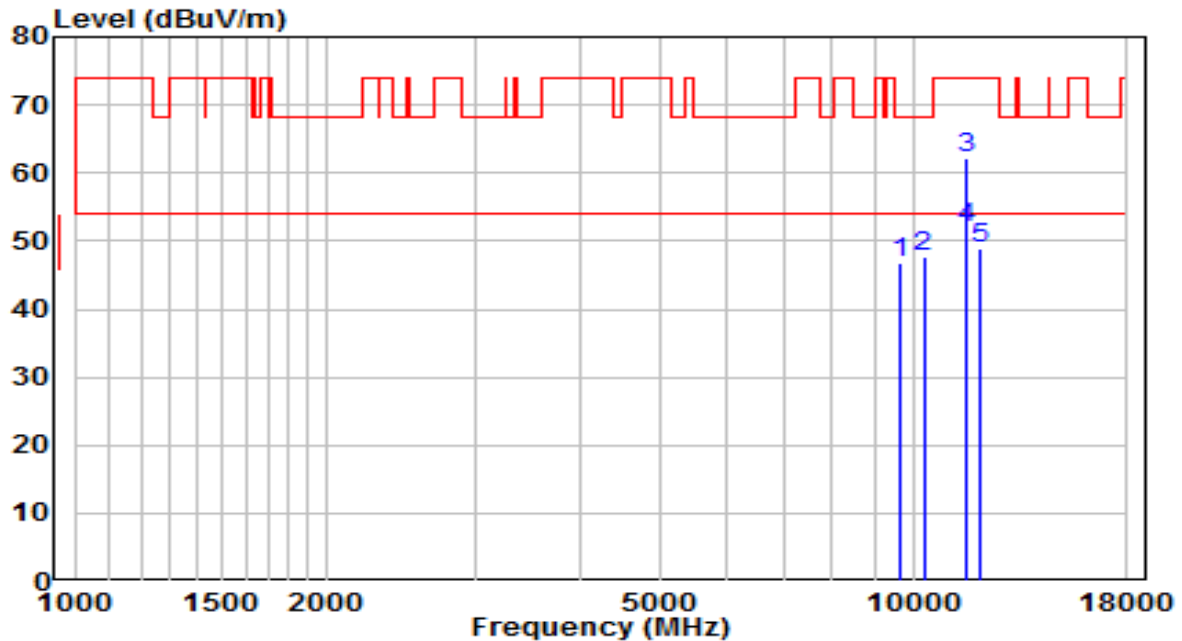


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9670.000	30.74	16.01	46.74	-21.46	68.20	Peak
2	10290.500	29.86	17.73	47.59	-20.61	68.20	Peak
3	11574.000	42.19	19.88	62.07	-11.93	74.00	Peak
4 *	11574.000	32.06	19.88	51.95	-2.05	54.00	Average
5	12016.000	29.86	18.90	48.77	-25.23	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825 MHz	Test Voltage	AC 120V/60Hz

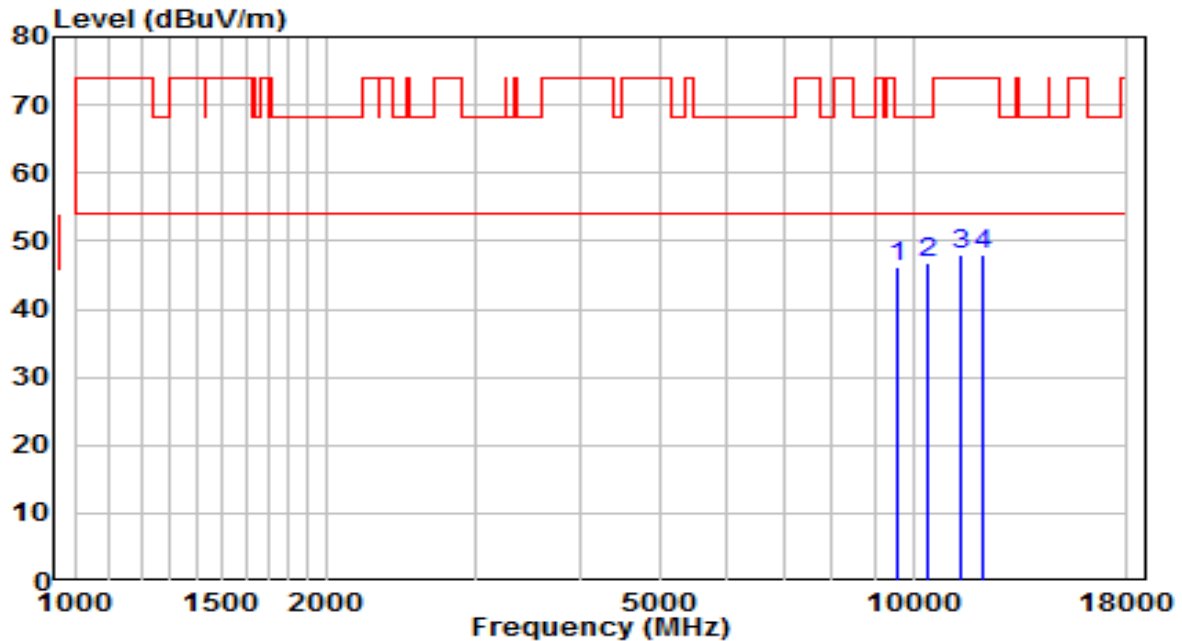


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9602.000	30.38	15.89	46.27	-21.93	68.20	Peak
2	* 10384.000	28.82	18.10	46.92	-21.28	68.20	Peak
3	11395.500	28.02	19.89	47.91	-26.09	74.00	Peak
4	12126.500	29.29	18.79	48.08	-25.92	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825 MHz	Test Voltage	AC 120V/60Hz

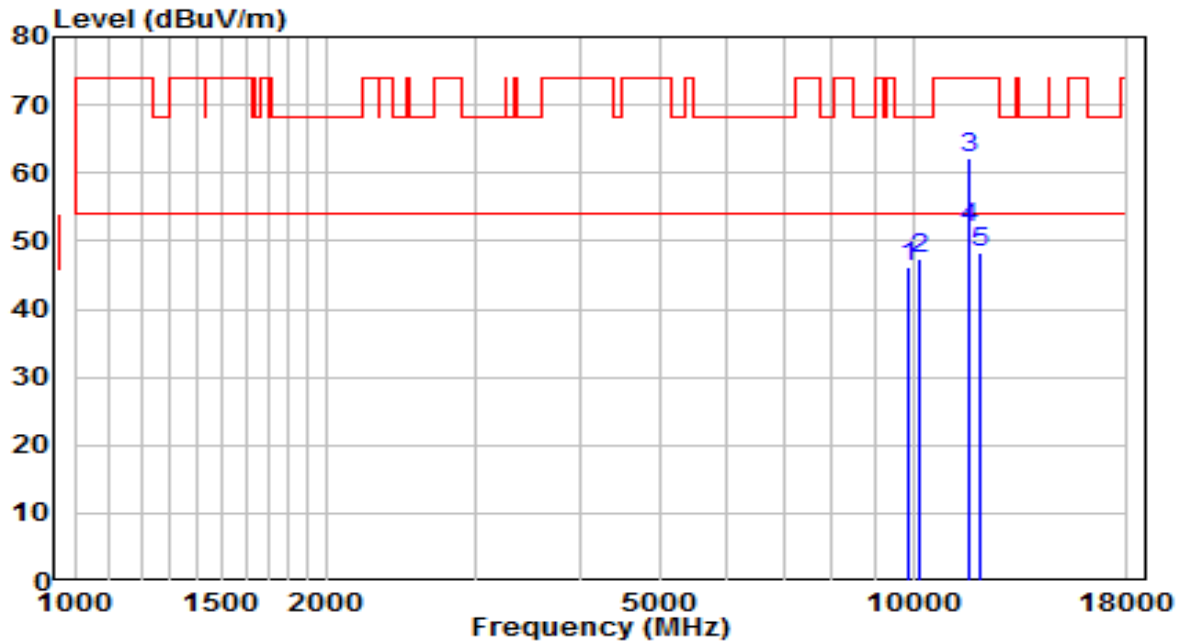


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9891.000	29.86	16.38	46.24	-21.96	68.20	Peak
2	10205.500	29.94	17.39	47.33	-20.87	68.20	Peak
3	11650.500	42.48	19.71	62.19	-11.81	74.00	Peak
4	* 11650.500	32.25	19.71	51.96	-2.04	54.00	Average
5	12041.500	29.28	18.88	48.15	-25.85	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	AC 120V/60Hz

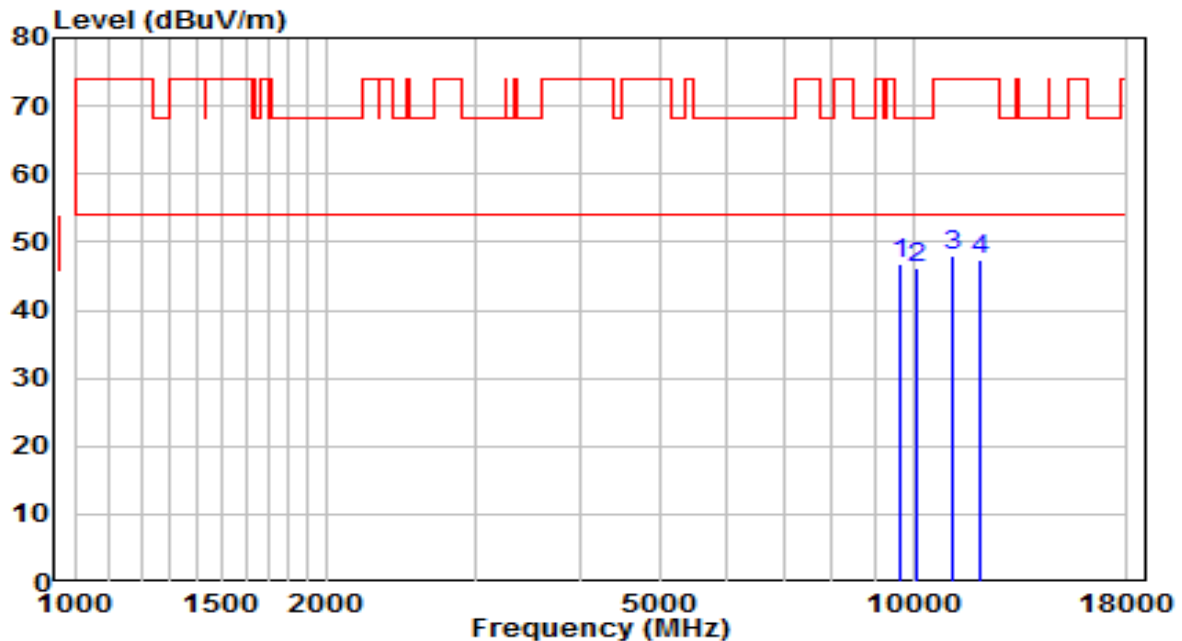


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	9644.500	30.78	15.96	46.74	-21.46	68.20	Peak
2		10103.500	29.34	16.98	46.32	-21.88	68.20	Peak
3		11149.000	28.56	19.51	48.07	-25.93	74.00	Peak
4		12024.500	28.42	18.89	47.32	-26.68	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	AC 120V/60Hz

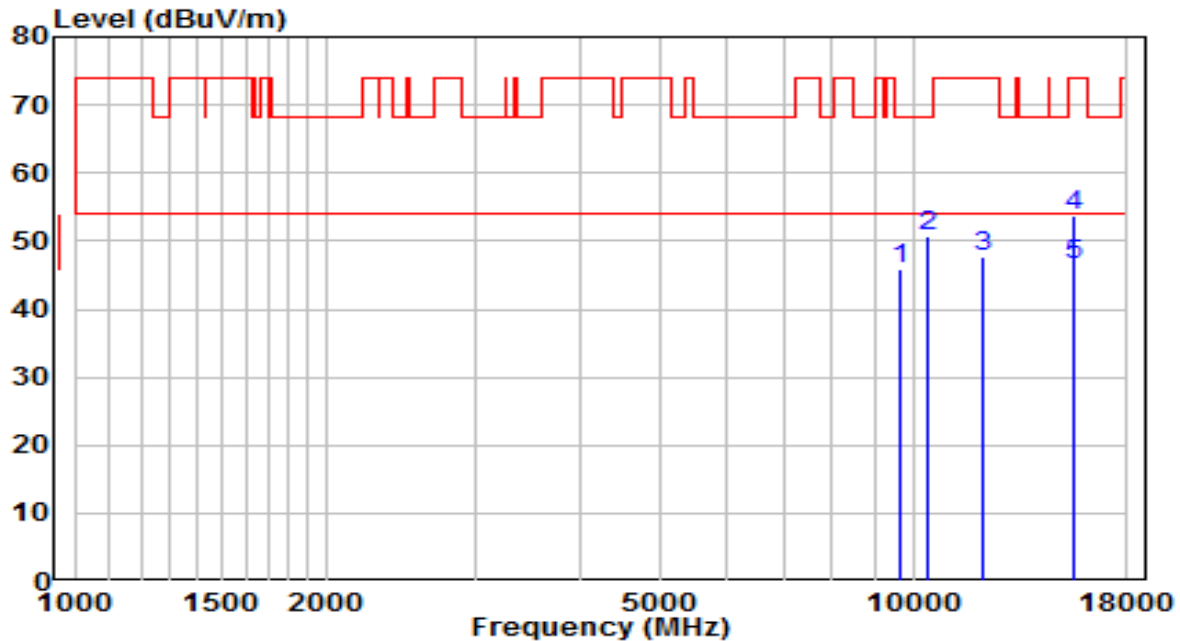


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9670.000	29.94	16.01	45.95	-22.25	68.20	Peak
2	10375.500	32.59	18.07	50.66	-17.54	68.20	Peak
3	12118.000	28.84	18.80	47.64	-26.36	74.00	Peak
4	15569.000	32.66	21.18	53.84	-20.16	74.00	Peak
5	* 15569.000	25.34	21.18	46.52	-7.48	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5230MHz	Test Voltage	AC 120V/60Hz

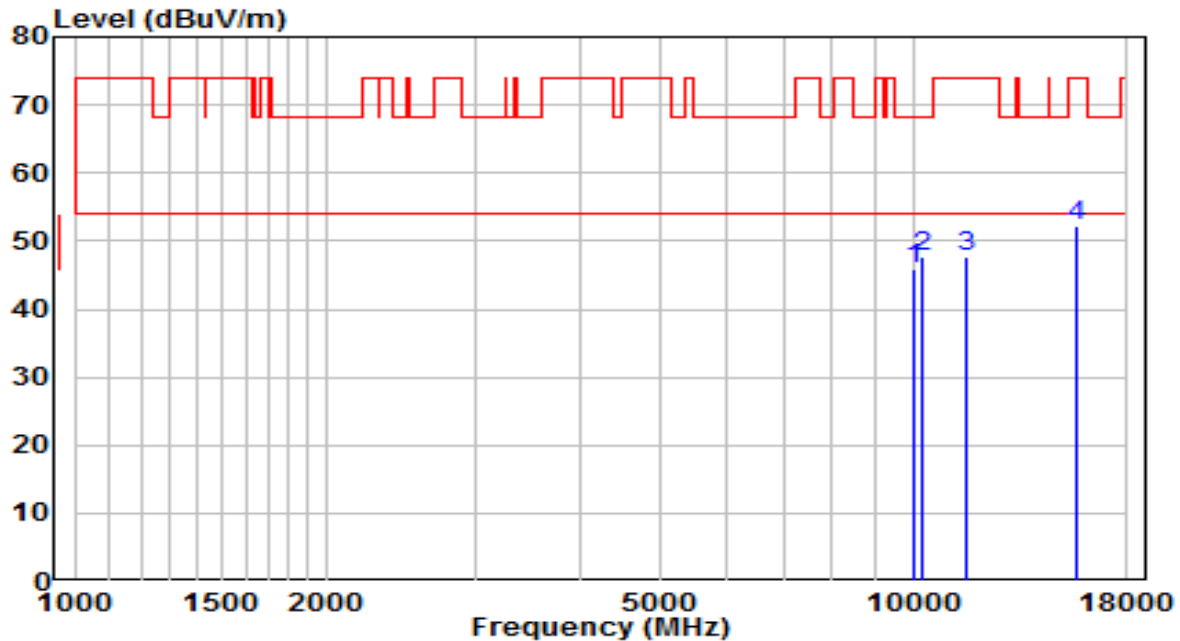


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10027.000	29.23	16.67	45.90	-22.30	68.20	Peak
2	* 10265.000	30.17	17.63	47.80	-20.40	68.20	Peak
3	11540.000	27.66	19.96	47.62	-26.38	74.00	Peak
4	15620.000	31.13	21.05	52.18	-21.82	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5230MHz	Test Voltage	AC 120V/60Hz

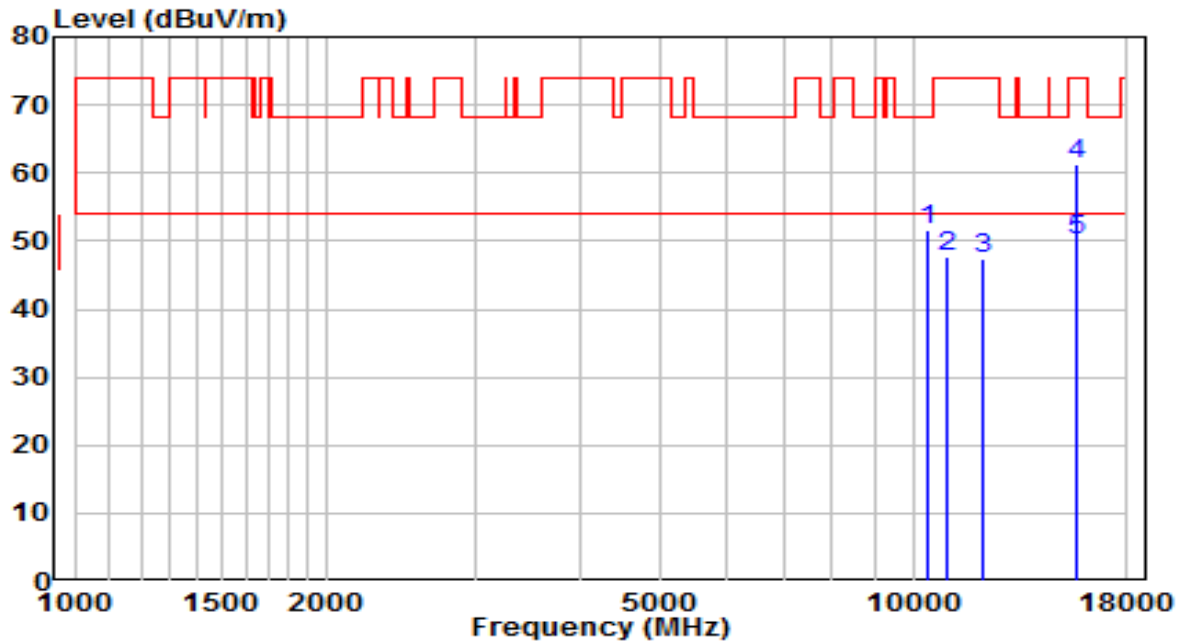


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10435.000	33.23	18.31	51.53	-16.67	68.20	Peak
2	10996.000	28.47	19.27	47.74	-26.26	74.00	Peak
3	12075.500	28.54	18.84	47.38	-26.62	74.00	Peak
4	15637.000	40.26	21.01	61.27	-12.73	74.00	Peak
5	* 15637.000	28.96	21.01	49.97	-4.03	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5270 MHz	Test Voltage	AC 120V/60Hz

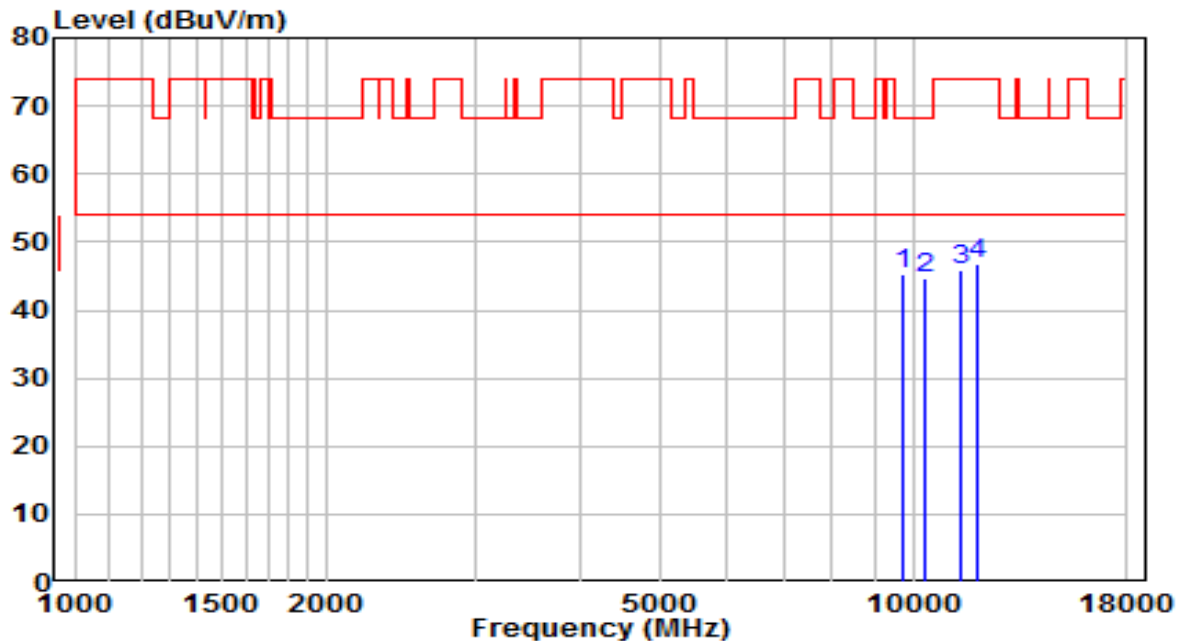


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	9738.000	29.27	16.12	45.39	-22.81	68.20	Peak
2		10299.000	27.04	17.76	44.80	-23.40	68.20	Peak
3		11395.500	25.94	19.89	45.83	-28.17	74.00	Peak
4		11948.000	27.90	19.04	46.94	-27.06	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5270 MHz	Test Voltage	AC 120V/60Hz

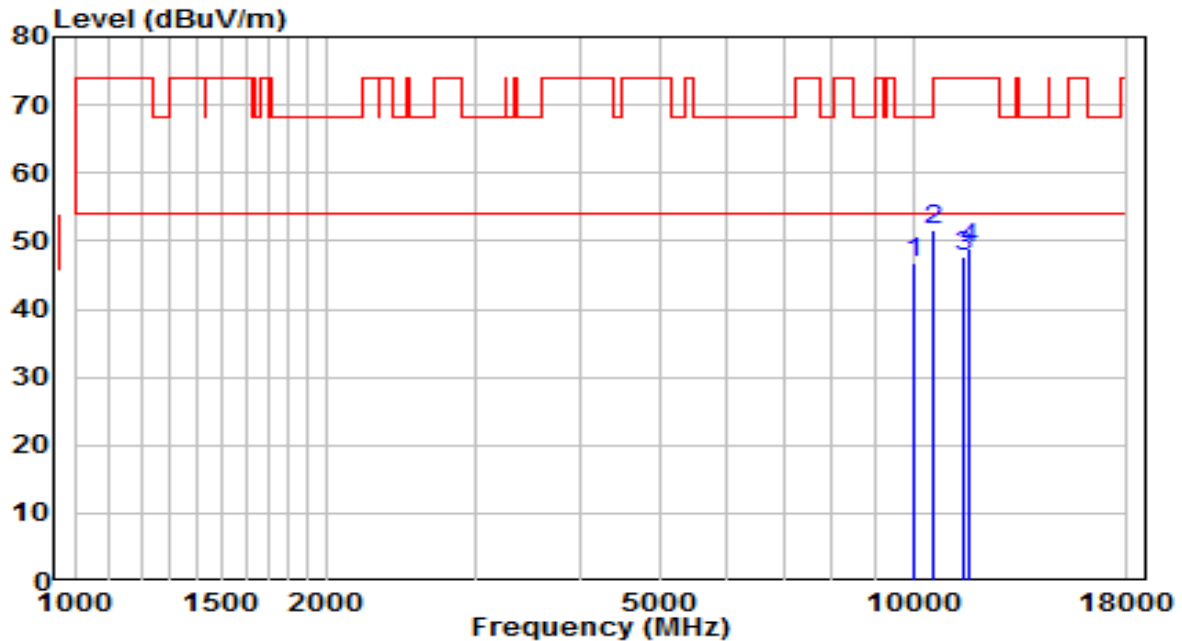


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10010.000	30.05	16.60	46.65	-21.55	68.20	Peak
2	* 10545.500	33.02	18.63	51.66	-16.54	68.20	Peak
3	11472.000	27.79	20.01	47.80	-26.20	74.00	Peak
4	11667.500	29.20	19.67	48.87	-25.13	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310 MHz	Test Voltage	AC 120V/60Hz

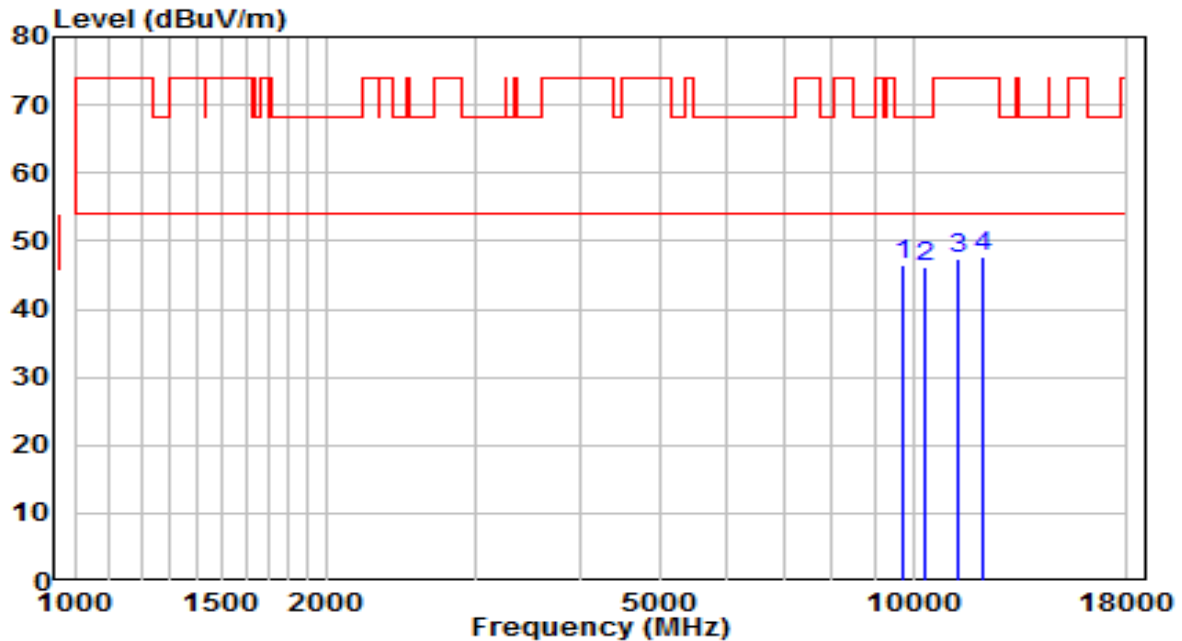


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9738.000	30.29	16.12	46.41	-21.79	68.20	Peak
2		10324.500	28.46	17.86	46.33	-21.87	68.20	Peak
3		11327.500	27.53	19.78	47.32	-26.68	74.00	Peak
4		12126.500	28.98	18.79	47.77	-26.23	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310 MHz	Test Voltage	AC 120V/60Hz

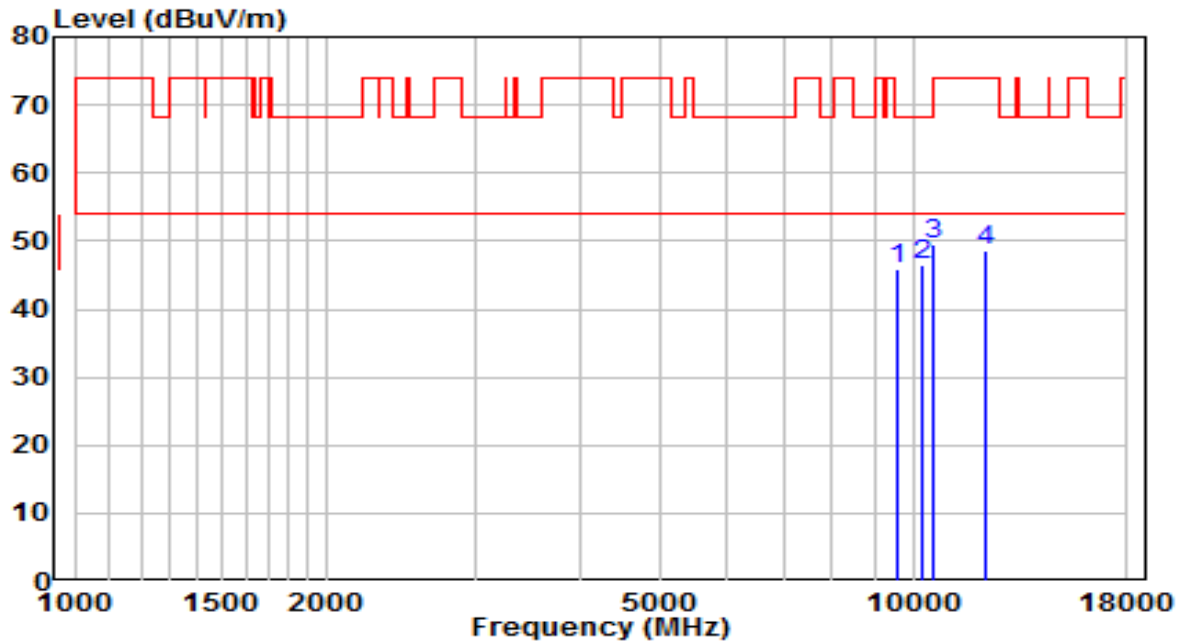


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9593.500	29.99	15.88	45.87	-22.33	68.20	Peak
2	* 10256.500	29.04	17.59	46.64	-21.56	68.20	Peak
3	10605.000	30.69	18.72	49.41	-24.59	74.00	Peak
4	12211.500	29.81	18.70	48.51	-25.49	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510 MHz	Test Voltage	AC 120V/60Hz

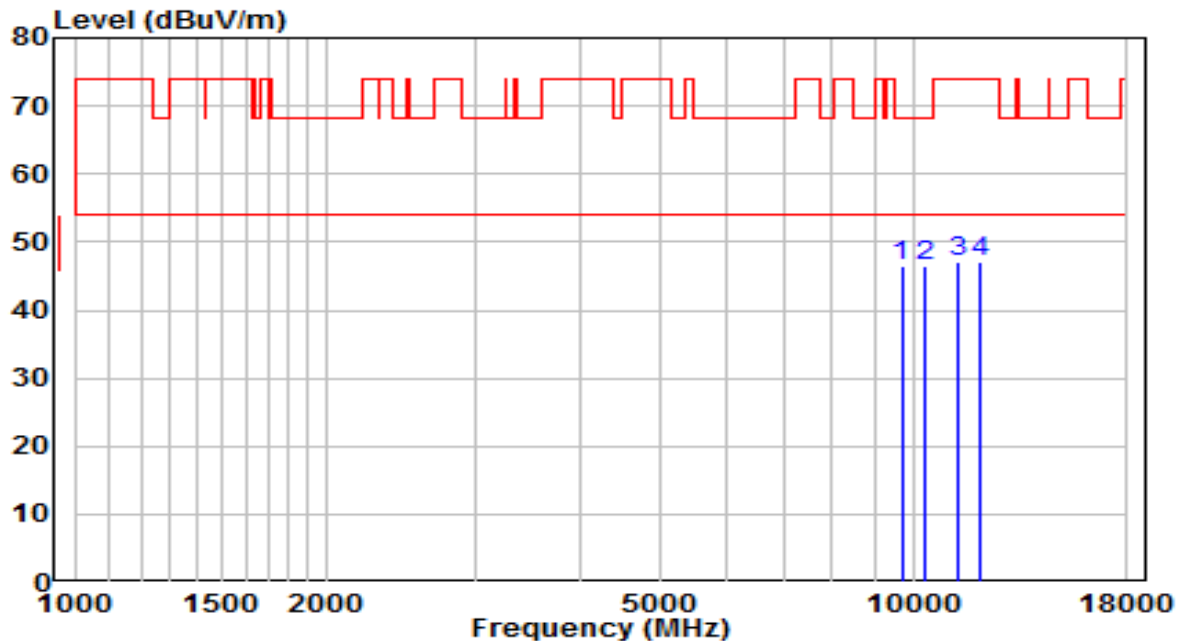


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9687.000	30.35	16.03	46.38	-21.82	68.20	Peak
2	* 10307.500	28.64	17.80	46.44	-21.76	68.20	Peak
3	11276.500	27.31	19.71	47.02	-26.98	74.00	Peak
4	12058.500	28.09	18.86	46.95	-27.05	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510 MHz	Test Voltage	AC 120V/60Hz

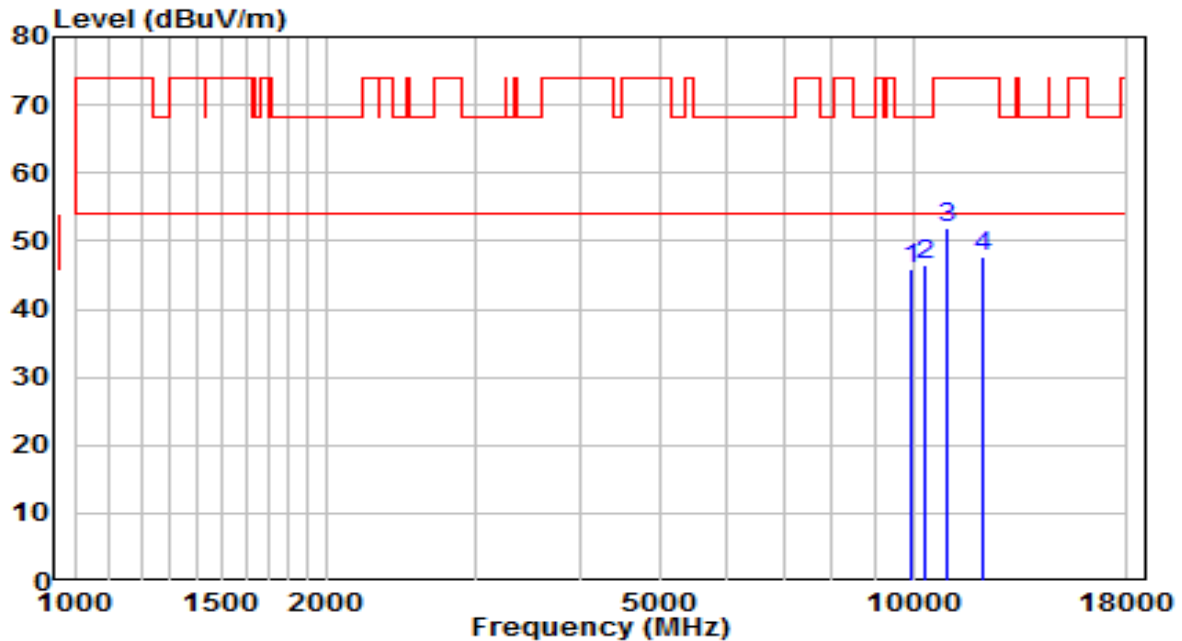


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9959.000	29.37	16.49	45.86	-22.34	68.20	Peak
2	* 10307.500	28.69	17.80	46.48	-21.72	68.20	Peak
3	11004.500	32.64	19.29	51.93	-22.07	74.00	Peak
4	12084.000	28.77	18.83	47.60	-26.40	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5550 MHz	Test Voltage	AC 120V/60Hz

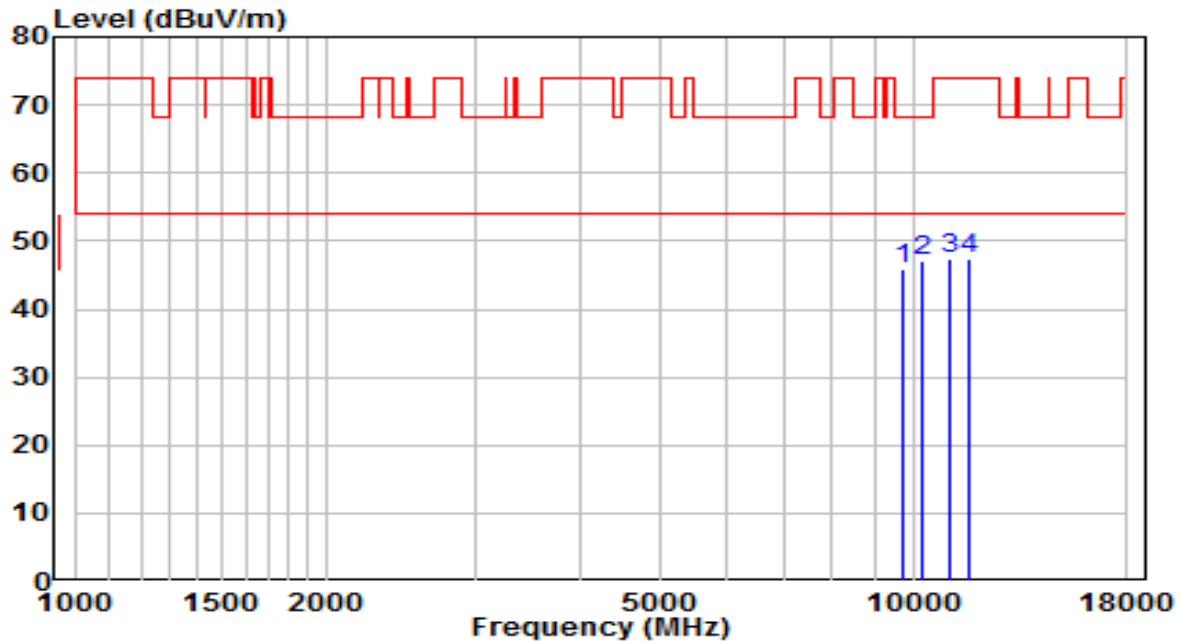


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9695.500	29.91	16.05	45.96	-22.24	68.20	Peak
2	* 10273.500	29.54	17.66	47.20	-21.00	68.20	Peak
3	11064.000	27.97	19.38	47.35	-26.65	74.00	Peak
4	11659.000	27.79	19.69	47.49	-26.51	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5550 MHz	Test Voltage	AC 120V/60Hz

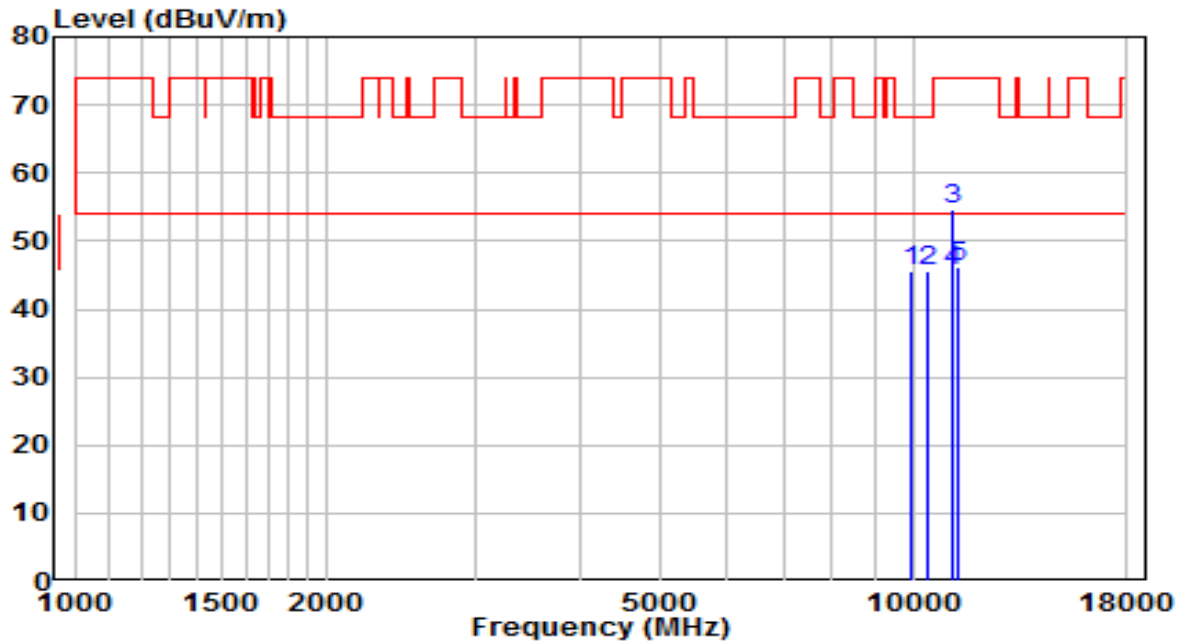


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9942.000	29.09	16.46	45.55	-22.65	68.20	Peak
2	10392.500	27.52	18.14	45.66	-22.54	68.20	Peak
3	11106.500	35.33	19.44	54.77	-19.23	74.00	Peak
4	* 11106.500	26.23	19.44	45.67	-8.33	54.00	Average
5	11276.500	26.53	19.71	46.24	-27.76	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670 MHz	Test Voltage	AC 120V/60Hz

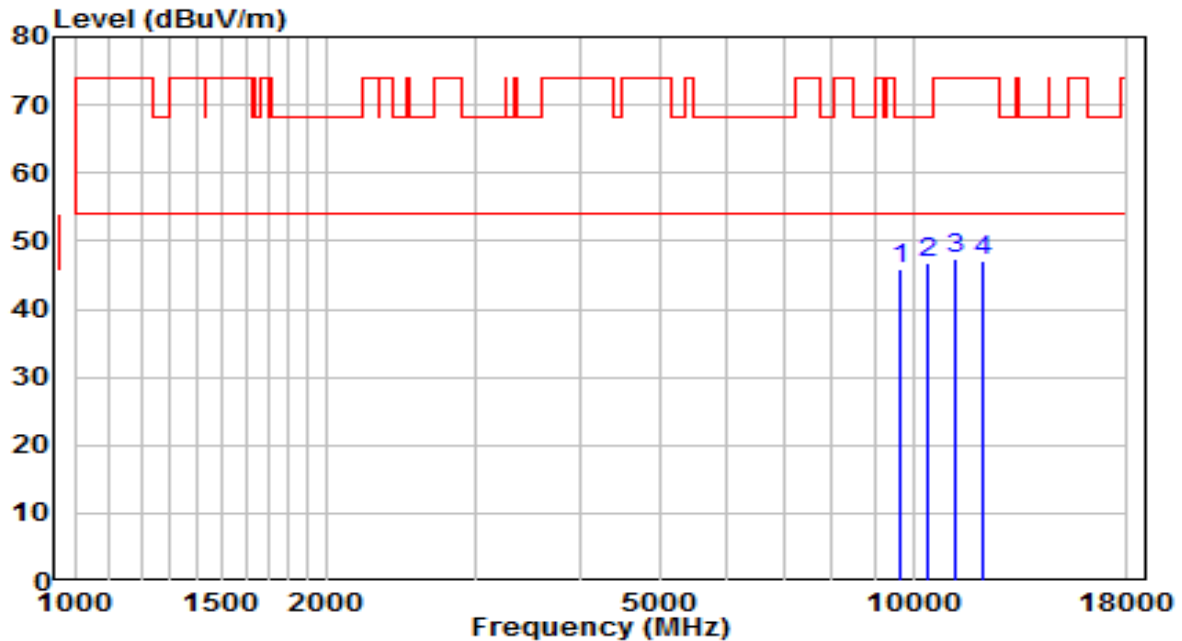


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9636.000	29.91	15.95	45.86	-22.34	68.20	Peak
2	* 10375.500	28.66	18.07	46.73	-21.47	68.20	Peak
3	11251.000	27.60	19.67	47.27	-26.73	74.00	Peak
4	12075.500	28.11	18.84	46.96	-27.04	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670 MHz	Test Voltage	AC 120V/60Hz

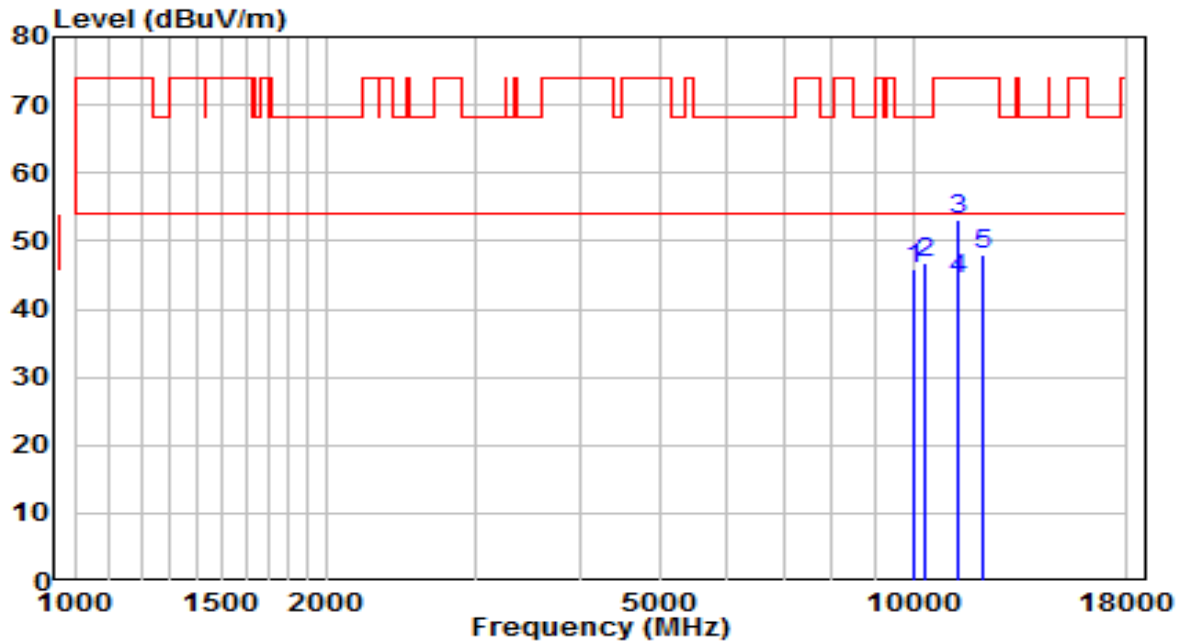


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10018.500	29.29	16.63	45.93	-22.27	68.20	Peak
2	10299.000	29.10	17.76	46.86	-21.34	68.20	Peak
3	11344.500	33.36	19.81	53.17	-20.83	74.00	Peak
4	* 11344.500	24.68	19.81	44.49	-9.51	54.00	Average
5	12101.000	29.30	18.82	48.11	-25.89	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5710 MHz	Test Voltage	AC 120V/60Hz

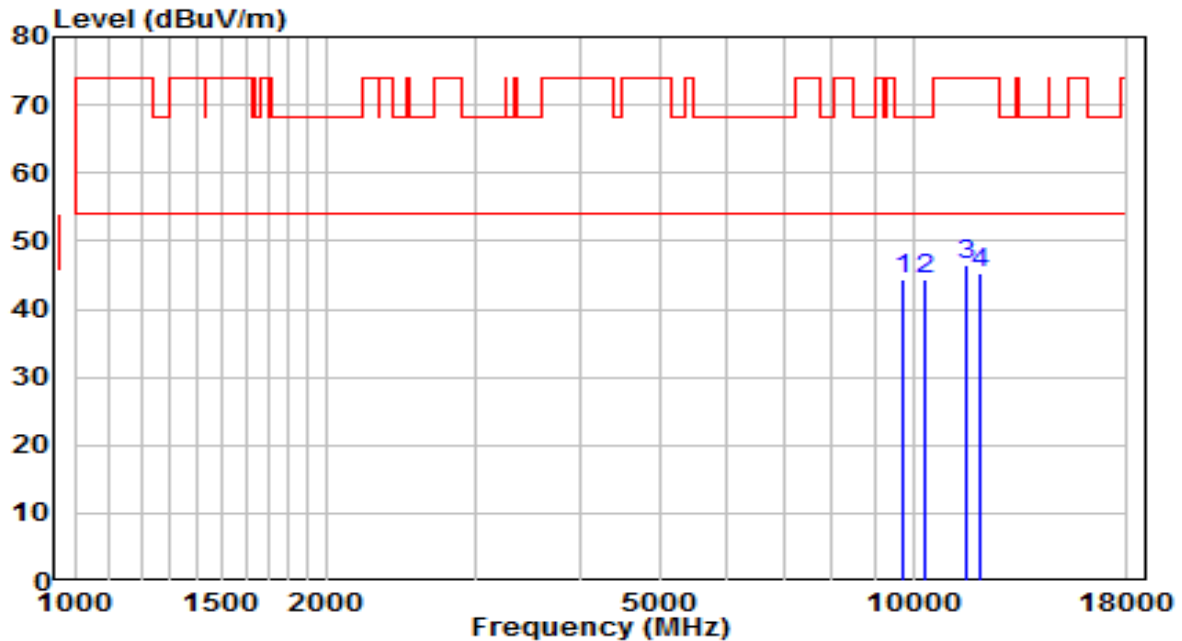


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9738.000	28.37	16.12	44.49	-23.71	68.20	Peak
2		10324.500	26.52	17.86	44.38	-23.82	68.20	Peak
3		11599.500	26.65	19.83	46.47	-27.53	74.00	Peak
4		11999.000	26.24	18.92	45.17	-28.83	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5710 MHz	Test Voltage	AC 120V/60Hz

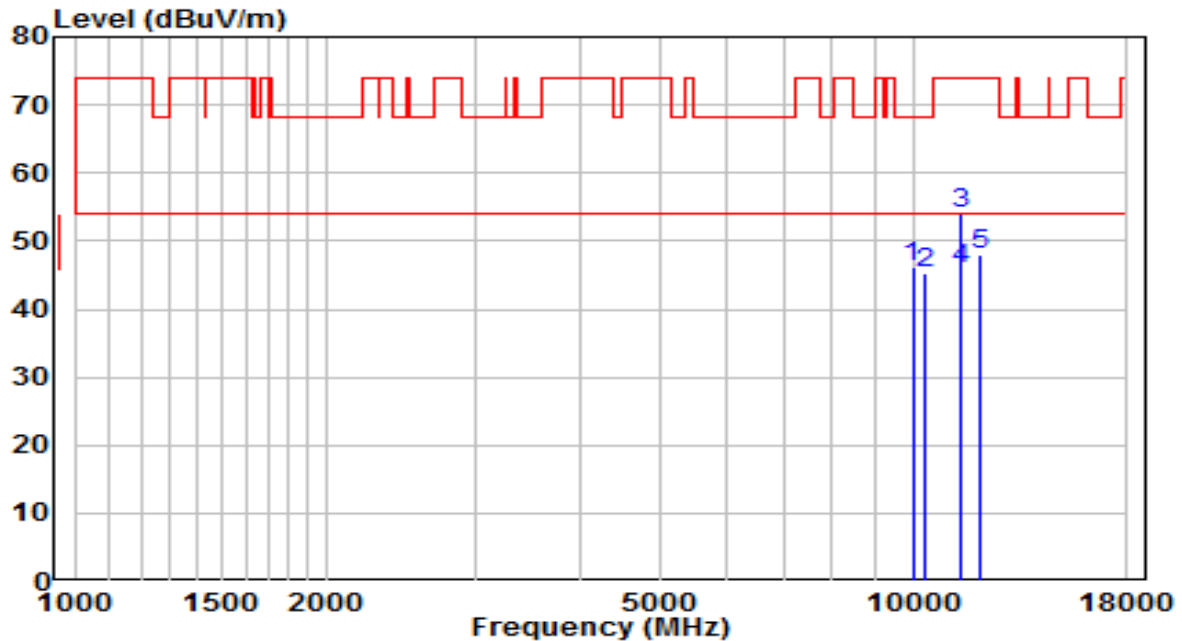


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9984.500	29.79	16.53	46.32	-21.88	68.20	Peak
2	10299.000	27.43	17.76	45.19	-23.01	68.20	Peak
3	11412.500	33.97	19.92	53.89	-20.11	74.00	Peak
4	* 11412.500	25.85	19.92	45.76	-8.24	54.00	Average
5	12033.000	29.22	18.89	48.10	-25.90	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5755 MHz	Test Voltage	AC 120V/60Hz

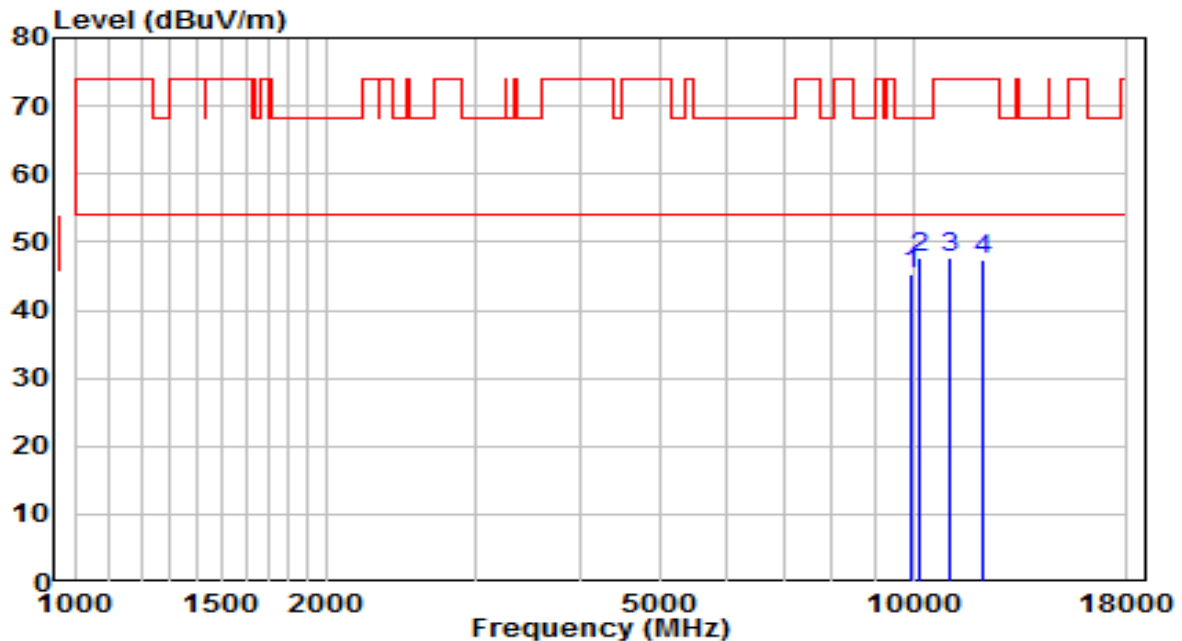


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9933.500	28.88	16.45	45.32	-22.88	68.20	Peak
2	* 10197.000	30.22	17.35	47.57	-20.63	68.20	Peak
3	11072.500	28.30	19.39	47.69	-26.31	74.00	Peak
4	12135.000	28.67	18.78	47.45	-26.55	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5755 MHz	Test Voltage	AC 120V/60Hz

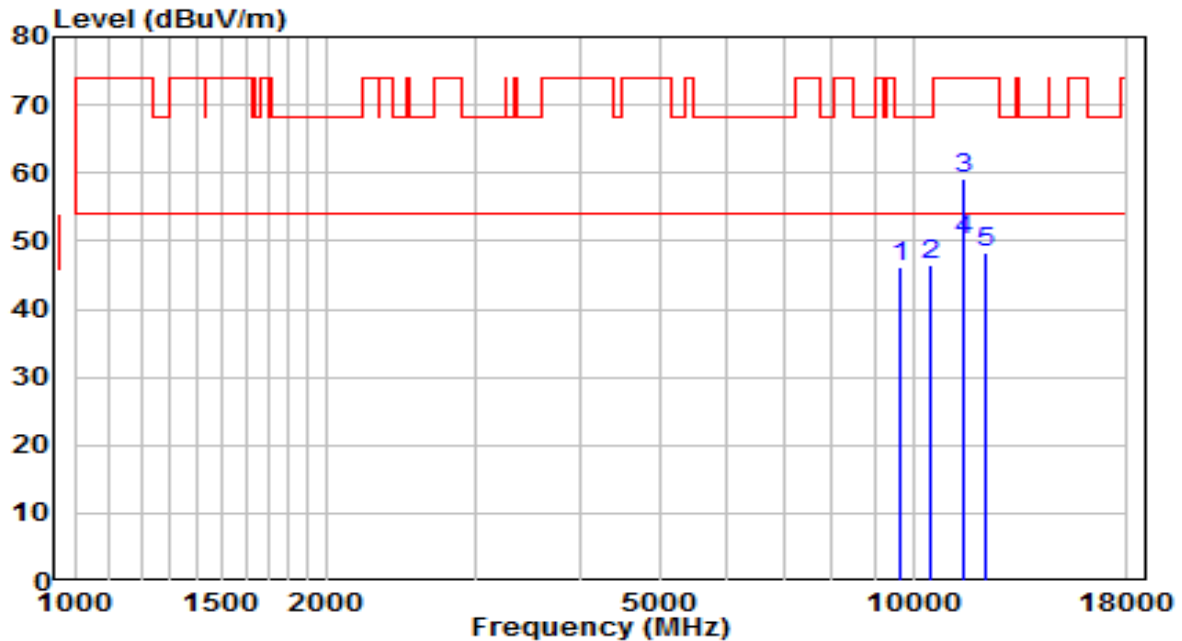


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9636.000	30.11	15.95	46.06	-22.14	68.20	Peak
2	10477.500	27.87	18.48	46.35	-21.85	68.20	Peak
3	11514.500	39.08	20.02	59.10	-14.90	74.00	Peak
4	* 11514.500	29.97	20.02	49.99	-4.01	54.00	Average
5	12186.000	29.58	18.73	48.31	-25.69	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5795MHz	Test Voltage	AC 120V/60Hz

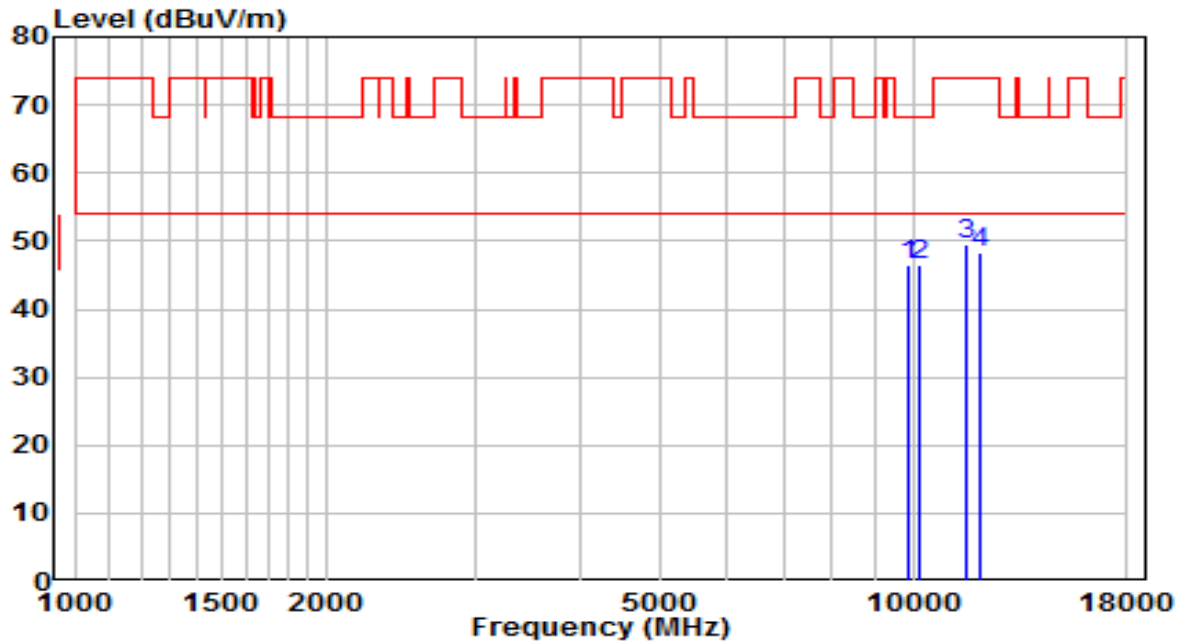


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	9899.500	30.24	16.39	46.63	-21.57	68.20	Peak
2		10188.500	29.10	17.32	46.42	-21.78	68.20	Peak
3		11591.000	29.81	19.84	49.66	-24.34	74.00	Peak
4		12058.500	29.48	18.86	48.34	-25.66	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5795MHz	Test Voltage	AC 120V/60Hz

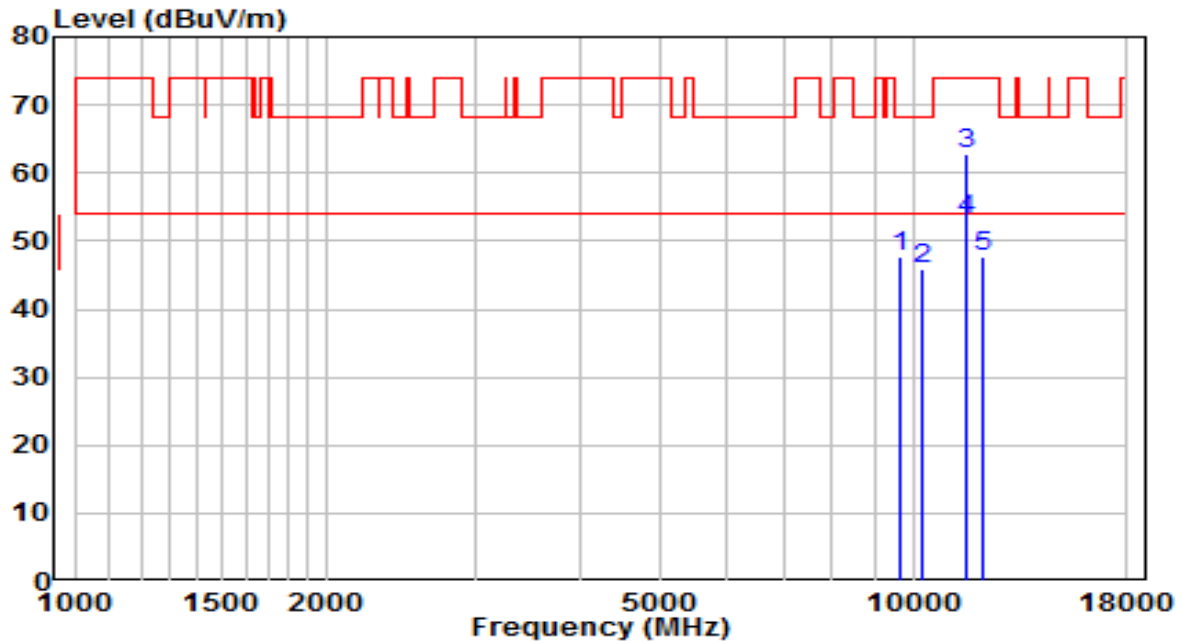


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9678.500	31.79	16.02	47.81	-20.39	68.20	Peak
2	10239.500	28.39	17.52	45.91	-22.29	68.20	Peak
3	11591.000	43.06	19.84	62.91	-11.09	74.00	Peak
4 *	11591.000	33.16	19.84	53.00	-1.00	54.00	Average
5	12092.500	28.97	18.82	47.79	-26.21	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	AC 120V/60Hz

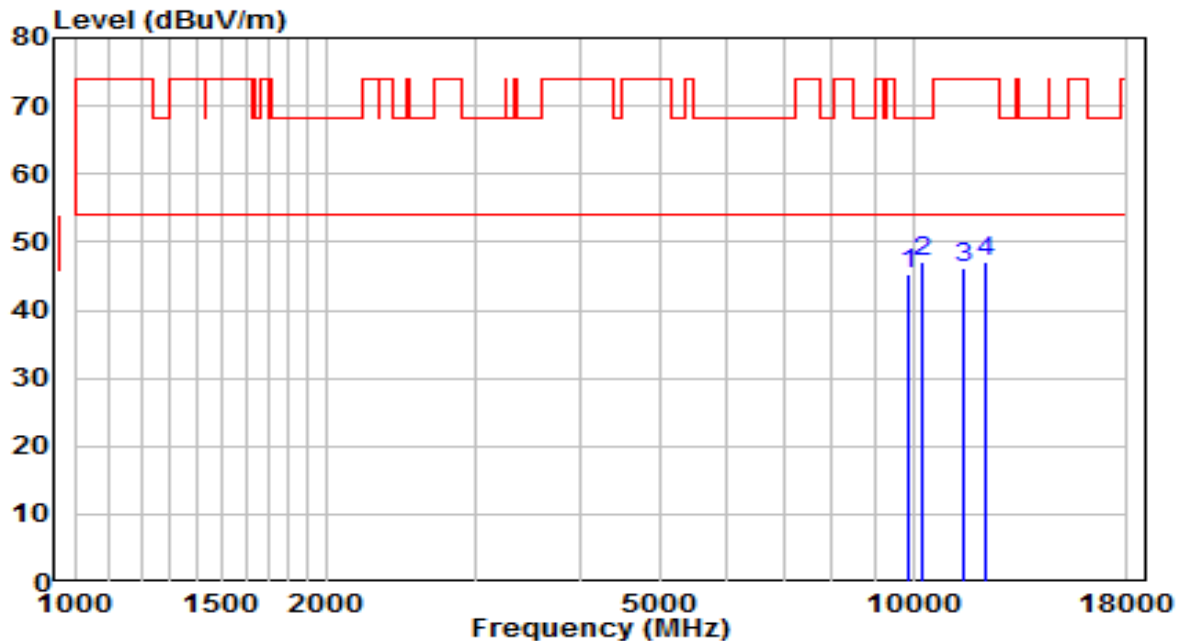


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9882.500	28.95	16.36	45.32	-22.88	68.20	Peak
2	* 10265.000	29.35	17.63	46.98	-21.22	68.20	Peak
3	11463.500	26.23	19.99	46.22	-27.78	74.00	Peak
4	12194.500	28.23	18.72	46.95	-27.05	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	22.2°C/38.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	AC 120V/60Hz

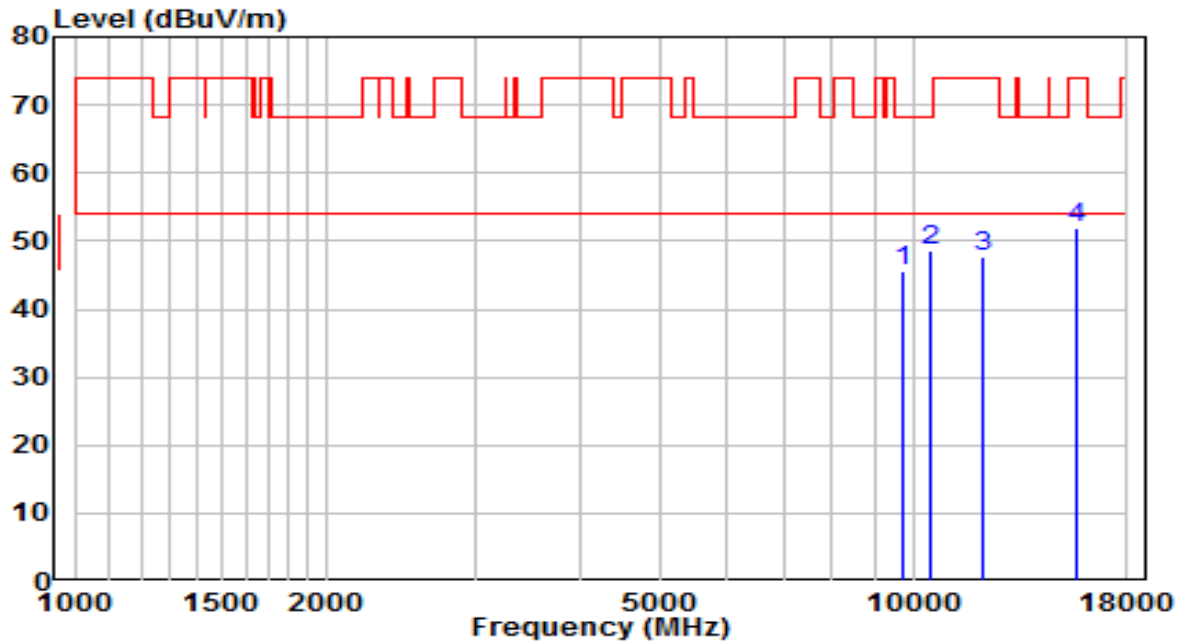

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9729.500	29.58	16.11	45.68	-22.52	68.20	Peak
2	* 10477.500	30.15	18.48	48.63	-19.57	68.20	Peak
3	12092.500	28.74	18.82	47.57	-26.43	74.00	Peak
4	15611.500	30.71	21.07	51.78	-22.22	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.