

# FCC / ISED BT REPORT

## Class II Permissive Change

**Applicant Name:**  
Kenwood USA Corporation**Address:**  
1-16-2, Hakusan, Midori-ku, Yokohama-shi, Kanagawa,  
226-8525 JAPAN**Date of Issue:**

July 19, 2018


**Location:**HCT CO., LTD.,  
74, Seoicheon-ro 578beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA**Report No.:** HCT-RF-1807-FI005**ISED Registration Number :** 5944A-6

<b>FCC ID:</b>	<b>ALH442000</b>
<b>ISED:</b>	<b>282D-442000</b>
<b>APPLICANT:</b>	<b>Kenwood USA Corporation</b>

<b>FCC Model(s):</b>	NX-5400-K2, NX-5400-K3, NX-5400-F2, NX-5400-F3, TK-5430-F2, TK-5430-F3, VP5430-F2, VP5430-F3, VP6430-F2, VP6430-F3
<b>ISED Model(s):</b>	NX-5400-K2, NX-5400-K3, TK-5430-F2, TK-5430-F3, VP5430-F2, VP5430-F3, VP6430-F2, VP6430-F3
<b>EUT Type:</b>	700/800MHZ DIGITAL TRANSCEIVER
<b>Frequency Range:</b>	2402 MHz - 2480 MHz (Bluetooth)
<b>Modulation type</b>	GFSK(Normal), $\pi/4$ DQPSK and 8DPSK(EDR)
<b>FCC Classification:</b>	FCC Part 15 Spread Spectrum Transmitter
<b>FCC Rule Part(s):</b>	Part 15 subpart C 15.247
<b>ISED Rule Part(s):</b>	RSS-247 Issue 2 (February 2017), RSS-Gen Issue 5(April 2018)

The measurements shown in this report were made in accordance with the procedures specified in §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

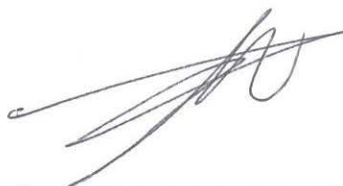

Report prepared by : Kwon Jeong  
Engineer of Telecommunication testing center



Approved by : Jong Seok Lee  
Manager of Telecommunication testing center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1807-FI005	July 19, 2018	- First Approval Report

# Table of Contents

1.	GENERAL INFORMATION .....	4
2.	EUT DESCRIPTION .....	4
3.	TEST METHODOLOGY .....	5
3.1	EUT CONFIGURATION .....	5
3.2	EUT EXERCISE .....	5
3.3	GENERAL TEST PROCEDURES .....	5
3.4	DESCRIPTION OF TEST MODES .....	6
4.	INSTRUMENT CALIBRATION .....	6
5.	FACILITIES AND ACCREDITATIONS .....	6
5.1	FACILITIES .....	6
5.2	EQUIPMENT .....	6
6.	ANTENNA REQUIREMENTS .....	6
7.	MEASUREMENT UNCERTAINTY .....	7
8.	SUMMARY OF TEST RESULTS .....	8
8.1	FCC Part .....	8
8.2	ISED Part .....	8
8.3	Operating Mode .....	8
9.	TEST RESULT .....	9
9.1	SPURIOUS EMISSIONS .....	9
9.1.1	RADIATED SPURIOUS EMISSIONS .....	9
9.1.2	RADIATED RESTRICTED BAND EDGES .....	20
9.1.3	RECEIVER SPURIOUS EMISSIONS.....	23
10.	LIST OF TEST EQUIPMENT .....	24
10.1	LIST OF TEST EQUIPMENT(Radiated Test) .....	24
11.	APPENDIX A_EUT AND TEST SETUP PHOTO .....	25

## 1. GENERAL INFORMATION

**Manufacturer:** Kenwood USA Corporation

**Address:** 3-12, Moriyacho, Kanagawa-ku, Yokohama-shi, Knagawa, 221-0022 JAPAN

**FCC ID:** ALH442000

**ISED:** 282D-442000

**EUT Type:** 700/800MHZ DIGITAL TRANSCEIVER

**FCC Model(s):** NX-5400-K2, NX-5400-K3, NX-5400-F2, NX-5400-F3, TK-5430-F2, TK-5430-F3, VP5430-F2, VP5430-F3, VP6430-F2, VP6430-F3

**ISED Model(s):** NX-5400-K2, NX-5400-K3, TK-5430-F2, TK-5430-F3, VP5430-F2, VP5430-F3, VP6430-F2, VP6430-F3

**Date(s) of Tests:** May 30, 2018 ~ June 07, 2018

**Place of Tests:** HCT Co., Ltd.  
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea

## 2. EUT DESCRIPTION

<b>FCC Model(s):</b>	NX-5400-K2, NX-5400-K3, NX-5400-F2, NX-5400-F3, TK-5430-F2, TK-5430-F3, VP5430-F2, VP5430-F3, VP6430-F2, VP6430-F3
<b>ISED Model(s):</b>	NX-5400-K2, NX-5400-K3, TK-5430-F2, TK-5430-F3, VP5430-F2, VP5430-F3, VP6430-F2, VP6430-F3
<b>EUT Type</b>	700/800MHZ DIGITAL TRANSCEIVER
<b>Power Supply</b>	DC 7.5 V
<b>Battery Information</b>	Li-ion Battery (KNB-L1, KNB-L2, KNB-L3, KNB-LS7)
<b>Frequency Range</b>	2402 MHz - 2480 MHz (Bluetooth)
<b>BT Operating Mode</b>	Normal, EDR, AFH
<b>Modulation Type</b>	GFSK(Normal), $\pi/4$ DQPSK and 8DPSK(EDR)
<b>Modulation Technique</b>	FHSS
<b>Number of Channels</b>	79Channels, Minimum 20 Channels(AFH)
<b>Antenna Specification</b>	Manufacturer : JVC KENWOOD Corporation Antenna type : Sheet metal Antenna Peak Antenna Gain : -1.485 dBi

### ※ 15.247 / RSS-247 Requirements for Bluetooth transmitter

- This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:
  - 1) This system is hopping pseudo-randomly.
  - 2) Each frequency is used equally on the average by each transmitter.
  - 3) The receiver input bandwidths that match the hopping channel bandwidths of their corresponding transmitters
  - 4) The receiver shifts frequencies in synchronization with the transmitted signals.
- The system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this Section 15.247 should the transmitter be presented with a continuous data (or information) stream.
- The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

### **3. TEST METHODOLOGY**

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) is used in the measurement of the test device.

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2 EUT EXERCISE**

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C / the RSS-GEN issue 5, RSS-247 issue 2

#### **3.3 GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 8 of ANSI C63.10. (Version: 2013). To record the final measurements, the analyzer detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 120 kHz for frequencies below 1 GHz or 1 MHz for frequencies above 1 GHz. For average measurements above 1 GHz, the analyzer was set to peak detector with a reduced VBW setting(RBW = 1 MHz, VBW = 1/T Hz, where T = Pulse width).

##### **Conducted Antenna Terminal**

See Section from 7.8.2 to 7.8.8.(ANSI 63.10-2013)

### 3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

## 4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2006).

## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 07, 2015 (Registration Number: 90661)

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 6. ANTENNA REQUIREMENTS

**According to FCC 47 CFR §15.203 / RSS-Gen(Issue 5 Section 8.3:**

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

\* The antennas of this E.U.T are permanently attached.

\*The E.U.T Complies with the requirement of §15. 203 / RSS-GEN

## 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.71

## 8. SUMMARY OF TEST RESULTS

### 8.1 FCC Part

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 9.1.1	RADIATED	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 9.1.2		PASS

### 8.2 ISED Part

Test Description	ISED Part Section(s)	Test Limit	Test Condition	Test Result
Radiated Spurious Emissions	RSS-GEN, 8.9	RSS-GEN section 8.9 table 5, 6	RADIATED	PASS
Radiated Restricted Band Edge	RSS-GEN, 8.10	RSS-GEN section 8.10 table 7		PASS
Receiver Spurious Emissions	RSS-GEN, 5 RSS-GEN, 7.3	RSS-GEN section 7.3 table 3		PASS

### 8.3 Operating Mode

EUT Type (Worst case)	Modulation	Battery	Test frequency (MHz)
Stand alone	GFSK, $\pi/4$ DQPSK, 8DPSK	KNB-LS7	2402(Low)
			2440(Mid)
			2480(High)

#### Note:

All modes of operation were investigated and the worst case configuration results are reported.

## 9. TEST RESULT

### 9.1 SPURIOUS EMISSIONS

#### 9.1.1 RADIATED SPURIOUS EMISSIONS


**LIMIT : §15.247(d), §15.205, §15.209 / RSS-Gen(Issue 5 Section 8.9, 8.10**

20dBc in any 100kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a) / RSS-Gen 8.10, then the 15.209(a) / RSS-Gen 8.9 limit in the table below has to be followed.


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


## Test Configuration

### Below 30 MHz

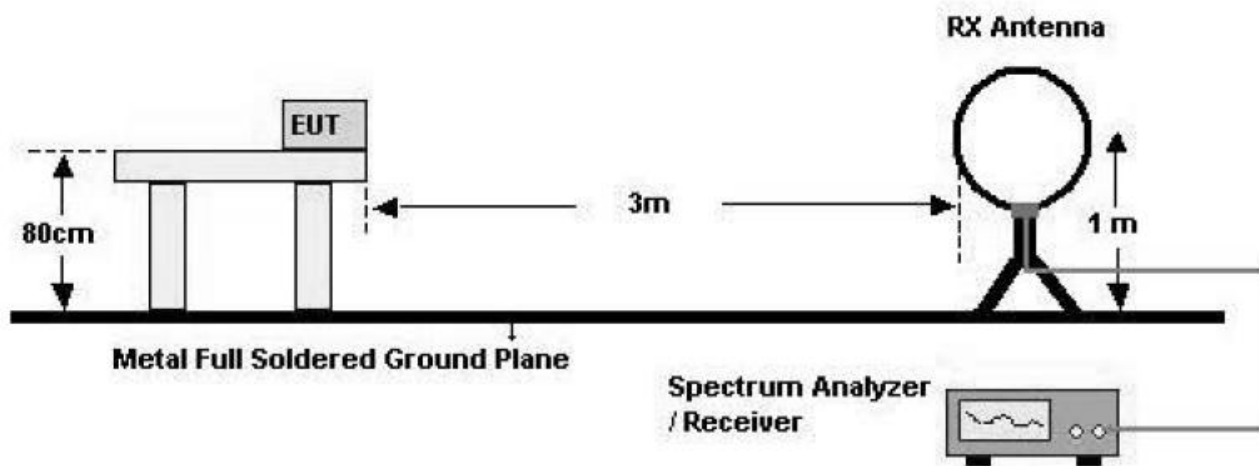

### 30 MHz - 1 GHz

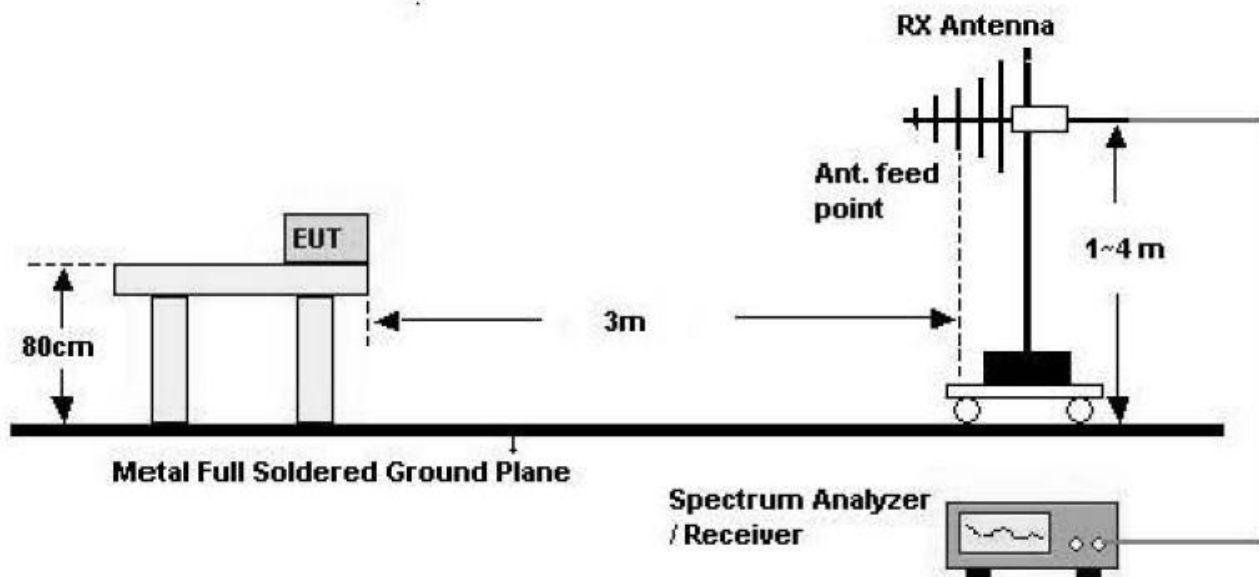

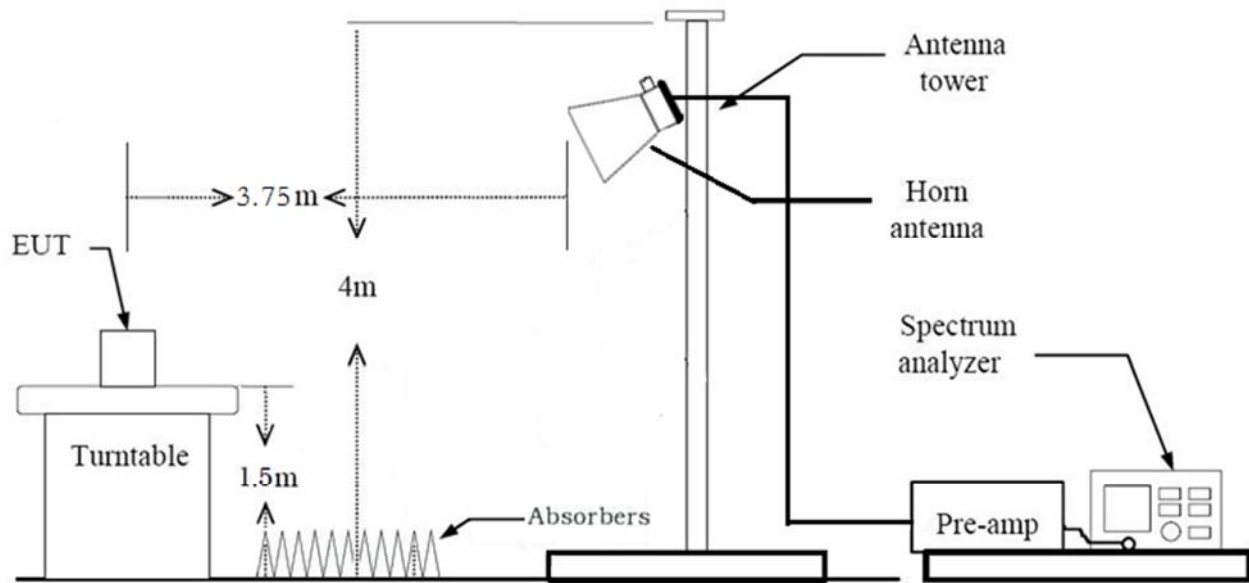**Above 1 GHz****TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. Spectrum Setting
  - a. Peak: 1 GHz – 25 GHz, RBW = 1 MHz, VBW  $\geq 3 \times$  RBW
  - b. Average: 1 GHz – 25 GHz, RBW = 1 MHz, VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds.

**TEST RESULTS****9 kHz – 30MHz****Operation Mode:** Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Notes:**

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB)
4. Limit line = specific Limits (dBuV) + Distance extrapolation factor
5. This test is performed with hopping off.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. The test results for below 30 MHz is correlated to an open site.  
The result on OATS is about 2 dB higher than semi-anechoic chamber(10 m chamber)

**TEST RESULTS****Below 1 GHz****Operation Mode:** Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Notes:**

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
3. This test is performed with hopping off.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Above 1 GHz

Operation Mode: CH Low(GFSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	51.05	0.61	V	51.66	73.98	22.32	PK
4804	37.56	0.61	V	38.17	53.98	15.81	AV
7206	50.54	6.25	V	56.785	73.98	17.20	PK
7206	37.37	6.25	V	43.615	53.98	10.37	AV
4804	51.36	0.61	H	51.97	73.98	22.01	PK
4804	37.91	0.61	H	38.52	53.98	15.46	AV
7206	51.21	6.25	H	57.455	73.98	16.53	PK
7206	37.24	6.25	H	43.485	53.98	10.50	AV

Operation Mode: CH Low(8DPSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	50.49	0.61	V	51.10	73.98	22.88	PK
4804	37.35	0.61	V	37.96	53.98	16.02	AV
7206	50.78	6.25	V	57.025	73.98	16.96	PK
7206	37.25	6.25	V	43.495	53.98	10.49	AV
4804	50.95	0.61	H	51.56	73.98	22.42	PK
4804	37.82	0.61	H	38.43	53.98	15.55	AV
7206	51.04	6.25	H	57.285	73.98	16.70	PK
7206	37.45	6.25	H	43.695	53.98	10.29	AV

Operation Mode: CH Low( $\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	51.11	0.61	V	51.72	73.98	22.26	PK
4804	37.51	0.61	V	38.12	53.98	15.86	AV
7206	51.64	6.25	V	57.885	73.98	16.10	PK
7206	37.04	6.25	V	43.285	53.98	10.70	AV
4804	51.50	0.61	H	52.11	73.98	21.87	PK
4804	37.91	0.61	H	38.52	53.98	15.46	AV
7206	51.83	6.25	H	58.075	73.98	15.91	PK
7206	37.38	6.25	H	43.625	53.98	10.36	AV

\*A.F. : Antenna Factor / C.L. : Cable Loss / AMP.G. : Amplifier Gain / D.F. : Distance Factor

## Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
5. Distance extrapolation factor =  $20 \log (\text{test distance} / \text{specific distance})$  (dB)
6. Spectrum setting:
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds.  
We performed using a reduced video BW method was done with the analyzer in linear mode.
7. We have done Normal Mode and EDR Mode test.
8. This test is performed with hopping off.
9. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

## Operation Mode: CH Mid(GFSK)

Frequency [MHz]	Reading [dBuV]	※ A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	51.11	0.62	V	51.73	73.98	22.25	PK
4882	37.68	0.62	V	38.3	53.98	15.68	AV
7323	50.54	5.87	V	56.41	73.98	17.57	PK
7323	36.29	5.87	V	42.16	53.98	11.82	AV
4882	51.37	0.62	H	51.99	73.98	21.99	PK
4882	37.87	0.62	H	38.49	53.98	15.49	AV
7323	50.78	5.87	H	56.65	73.98	17.33	PK
7323	36.70	5.87	H	42.57	53.98	11.41	AV

## Operation Mode: CH Mid(8DPSK)

Frequency [MHz]	Reading [dBuV]	※ A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	50.62	0.62	V	51.24	73.98	22.74	PK
4882	37.34	0.62	V	37.96	53.98	16.02	AV
7323	50.11	5.87	V	55.98	73.98	18.00	PK
7323	36.28	5.87	V	42.15	53.98	11.83	AV
4882	50.94	0.62	H	51.56	73.98	22.42	PK
4882	37.84	0.62	H	38.46	53.98	15.52	AV
7323	50.43	5.87	H	56.3	73.98	17.68	PK
7323	36.67	5.87	H	42.54	53.98	11.44	AV

Operation Mode: CH Mid( $\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	51.20	0.62	V	51.82	73.98	22.16	PK
4882	37.79	0.62	V	38.41	53.98	15.57	AV
7323	50.35	5.87	V	56.22	73.98	17.76	PK
7323	36.37	5.87	V	42.24	53.98	11.74	AV
4882	51.41	0.62	H	52.03	73.98	21.95	PK
4882	37.84	0.62	H	38.46	53.98	15.52	AV
7323	50.61	5.87	H	56.48	73.98	17.50	PK
7323	36.64	5.87	H	42.51	53.98	11.47	AV

\*A.F. : Antenna Factor / C.L. : Cable Loss / AMP.G. : Amplifier Gain / D.F. : Distance Factor

## Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
5. Distance extrapolation factor =  $20 \log (\text{test distance} / \text{specific distance})$  (dB)
6. Spectrum setting:
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds.  
We performed using a reduced video BW method was done with the analyzer in linear mode.
7. We have done Normal Mode and EDR Mode test.
8. This test is performed with hopping off.
9. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

## Operation Mode: CH High(GFSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	51.09	0.71	V	51.80	73.98	22.18	PK
4960	37.51	0.71	V	38.22	53.98	15.76	AV
7440	49.98	6.11	V	56.09	73.98	17.89	PK
7440	35.64	6.11	V	41.75	53.98	12.23	AV
4960	51.41	0.71	H	52.12	73.98	21.86	PK
4960	37.63	0.71	H	38.34	53.98	15.64	AV
7440	50.13	6.11	H	56.24	73.98	17.74	PK
7440	36.08	6.11	H	42.19	53.98	11.79	AV

## Operation Mode: CH High(8DPSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	50.33	0.71	V	51.04	73.98	22.94	PK
4960	37.21	0.71	V	37.92	53.98	16.06	AV
7440	50.00	6.11	V	56.11	73.98	17.87	PK
7440	36.05	6.11	V	42.16	53.98	11.82	AV
4960	50.56	0.71	H	51.27	73.98	22.71	PK
4960	37.71	0.71	H	38.42	53.98	15.56	AV
7440	50.19	6.11	H	56.3	73.98	17.68	PK
7440	36.23	6.11	H	42.34	53.98	11.64	AV

Operation Mode: CH High ( $\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	50.76	0.71	V	51.47	73.98	22.51	PK
4960	37.29	0.71	V	38.00	53.98	15.98	AV
7440	48.99	6.11	V	55.1	73.98	18.88	PK
7440	35.61	6.11	V	41.72	53.98	12.26	AV
4960	50.93	0.71	H	51.64	73.98	22.34	PK
4960	37.60	0.71	H	38.31	53.98	15.67	AV
7440	49.16	6.11	H	55.27	73.98	18.71	PK
7440	36.01	6.11	H	42.12	53.98	11.86	AV

\*A.F. : Antenna Factor / C.L. : Cable Loss / AMP.G. : Amplifier Gain / D.F. : Distance Factor

## Notes:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
- Distance extrapolation factor =  $20 \log (\text{test distance} / \text{specific distance})$  (dB)
- Spectrum setting:
  - Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds.  
We performed using a reduced video BW method was done with the analyzer in linear mode.
- We have done Normal Mode and EDR Mode test.
- This test is performed with hopping off.
- We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

## 9.1.2 RADIATED RESTRICTED BAND EDGES

### Test Requirements and limit, §15.247(d), §15.205, §15.209 / RSS-Gen(Issue 5 Section 8.10

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) / RSS-Gen is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

Operation Mode	Normal(GFSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH 0, CH 78

Frequency [MHz]	Reading dBuV	※ A.F.+CL + D.F. [dB]	ANT. POL [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	52.92	1.34	H	0	54.26	73.98	19.72	PK
2390.0	40.11	1.34	H	-24.73	16.72	53.98	37.26	AV
2390.0	51.33	1.34	V	0	52.67	73.98	21.31	PK
2390.0	39.51	1.34	V	-24.73	16.12	53.98	37.86	AV
2483.5	57.59	0.37	H	0	57.96	73.98	16.02	PK
2483.5	53.94	0.37	H	-24.73	29.58	53.98	24.40	AV
2483.5	56.78	0.37	V	0	57.15	73.98	16.83	PK
2483.5	52.64	0.37	V	-24.73	28.28	53.98	25.70	AV

Operation Mode	Normal(8DPSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH 0, CH 78

Frequency [MHz]	Reading dBuV	※ A.F.+CL + D.F. [dB]	ANT. POL [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	52.89	1.34	H	0	54.23	73.98	19.75	PK
2390.0	40.45	1.34	H	-24.73	17.06	53.98	36.92	AV
2390.0	51.35	1.34	V	0	52.69	73.98	21.29	PK
2390.0	40.09	1.34	V	-24.73	16.70	53.98	37.28	AV
2483.5	58.04	0.37	H	0	58.41	73.98	15.57	PK
2483.5	52.26	0.37	H	-24.73	27.90	53.98	26.08	AV
2483.5	57.11	0.37	V	0	57.48	73.98	16.50	PK
2483.5	51.68	0.37	V	-24.73	27.32	53.98	26.66	AV

Operation Mode	Normal( $\pi/4$ DQPSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH 0, CH 78

Frequency [MHz]	Reading dBuV	※ A.F.+CL + D.F. [dB]	ANT. POL [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	53.15	1.34	H	0	54.49	73.98	19.49	PK
2390.0	40.46	1.34	H	-24.73	17.07	53.98	36.91	AV
2390.0	52.11	1.34	V	0	53.45	73.98	20.53	PK
2390.0	39.95	1.34	V	-24.73	16.56	53.98	37.42	AV
2483.5	57.60	0.37	H	0	57.97	73.98	16.01	PK
2483.5	52.23	0.37	H	-24.73	27.87	53.98	26.11	AV
2483.5	56.71	0.37	V	0	57.08	73.98	16.90	PK
2483.5	51.28	0.37	V	-24.73	26.92	53.98	27.06	AV

\*A.F. : Antenna Factor

C.L. : Cable Loss

D.F. : Distance Factor

**Notes:**

1. Frequency range of measurement = 2483.5 MHz ~ 2500 MHz
2. Total = Reading Value + Antenna Factor + Cable Loss + Distance Factor + Duty Cycle Correction Factor
3. Distance extrapolation factor =  $20 \log (\text{test distance} / \text{specific distance})$  (dB)
4. Spectrum setting:
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds.  
We performed using a reduced video BW method was done with the analyzer in linear mode.
5. FYI : Duty Cycle Correction Factor (79 channel hopping)
  - a. Time to cycle through all channels=  $\Delta t = \tau [\text{ms}] \times 79 \text{ channels} = 229.100 \text{ ms}$ , where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t [\text{ms}] = H \rightarrow$  Round up to next highest integer,  $H' = 1$
  - c. Worst Case Dwell Time =  $\tau [\text{ms}] \times H' = 2.900 \text{ ms}$
  - d. Duty Cycle Correction =  $20 \log (\text{Worst Case Dwell Time} / 100 \text{ms}) \text{ dB} = -30.752 \text{ dB}$
6. Duty Cycle Correction Factor (AFH mode – minimum channel number case - 20 channels)
  - a. Time to cycle through all channels=  $\Delta t = \tau [\text{ms}] \times 20 \text{ channels} = 58.00 \text{ ms}$ , where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t [\text{ms}] = H \rightarrow$  Round up to next highest integer,  $H' = 2$
  - c. Worst Case Dwell Time =  $\tau [\text{ms}] \times H' = 5.800 \text{ ms}$
  - d. Duty Cycle Correction (AFH) =  $20 \log (\text{Worst Case Dwell Time} / 100 \text{ms}) \text{ dB} = -24.7314 \text{ dB}$
  - e. We applied DCCF in the test result which hopping channel number is 20.
7. We have done Normal Mode, EDR Mode.
8. This test is performed with hopping off.
9. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

### 9.1.3 RECEIVER SPURIOUS EMISSIONS

**ISED Rule(s):** RSS-GEN  
**Test Requirements:** Blow the table  
**Operating conditions:** Under normal test conditions  
**Method of testing:** Radiated

**S/A. Settings:** F < 1 GHz: RBW: 120 kHz, VBW: 300 kHz (Quasi Peak)  
 F > 1 GHz: RBW: 1 MHz, VBW: 1 MHz (Peak)  
**Mode of operation:** Receive

Frequency (MHz)	Field Strength (microvolts/m at 3 meters)
30 – 88	100
88 - 216	150
216 – 960	200
Above 960	500

#### Operation Mode: Receive:

30 MHz ~ 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V	dB /m	dB	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
No critical peaks found							

Above 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V	dB /m	dB	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
No critical peaks found							

## 10. LIST OF TEST EQUIPMENT

### 10.1 LIST OF TEST EQUIPMENT(Radiated Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	04/19/2017	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	04/06/2017	Biennial	760
Schwarzbeck	BBHA 9120D / Horn Antenna	11/21/2017	Biennial	9120D-1191
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	12/04/2017	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer	09/21/2017	Annual	836650/016
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/27/2017	Annual	101068-SZ
Wainwright Instruments	WHKX10-2700-3000-18000-40SS / High Pass Filter	08/01/2017	Annual	4
Wainwright Instruments	WHKX8-6090-7000-18000-40SS / High Pass Filter	07/11/2017	Annual	5
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	06/30/2017	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/03/2018	Annual	2
Api tech.	18B-03 / Attenuator (3 dB)	06/12/2017	Annual	2
WEINSCHL	56-10 / Attenuator(10 dB)	10/13/2017	Annual	72316
CERNEX	CBLU1183540 / Broadband Low Noise Amplifier	01/03/2018	Annual	24613
CERNEX	CBL06185030 / Broadband Low Noise Amplifier	01/03/2018	Annual	24615
CERNEX	CBL18265035 / Power Amplifier	01/10/2018	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	06/30/2017	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/27/2018	Annual	3000C000276

## 11. APPENDIX A\_EUT AND TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1807-FI005-P