



FCC RF Test Report

APPLICANT : Meta Platforms Technologies, LLC.
EQUIPMENT : Handheld controller
BRAND NAME : META PLATFORMS TECHNOLOGIES, LLC
MODEL NAME : LW9
FCC ID : 2AGOZ-D39
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Feb. 11, 2022 ~ Jun. 09, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Product Feature of Equipment Under Test.....	5
1.3 Product Specification of Equipment Under Test.....	5
1.4 Modification of EUT	5
1.5 Testing Location	6
1.6 Test Software.....	6
1.7 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 EUT Operation Test Setup	9
2.5 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	18
3.3 Power Spectral Density Measurement	19
3.4 Conducted Band Edges and Spurious Emission Measurement	26
3.5 Radiated Band Edges and Spurious Emission Measurement	35
3.6 AC Conducted Emission Measurement.....	39
3.7 Antenna Requirements.....	41
4 LIST OF MEASURING EQUIPMENT.....	42
5 UNCERTAINTY OF EVALUATION.....	44
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR192411-03A	Rev. 01	Initial issue of report	Jul. 12, 2022

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report only	-
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 5.73 dB at 2483.620 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 22.13 dB at 0.428 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Meta Platforms Technologies, LLC.
1 Hacker Way, Menlo Park, CA 94025, USA

1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	Handheld controller
Brand Name	META PLATFORMS TECHNOLOGIES, LLC
Model Name	LW9
FCC ID	2AGOZ-D39
SW Version	QCAHLSWMTPLZ-1.473021.1
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2478 MHz for Bypass Mode 2402 MHz ~ 2426 MHz for Filter Mode
Number of Channels	39 for Bypass Mode 13 for Filter Mode
Maximum Output Power to Antenna	nRF Bypass Mode: 10.52 dBm (0.0113 W) nRF Filter Mode: 9.91 dBm (0.0098 W)
99% Occupied Bandwidth	nRF Bypass Mode: 2.002MHz nRF Filter Mode: 2.002MHz
Antenna Type / Gain	FPC Antenna with gain 2.65 dBi
Type of Modulation	nRF: GFSK

Note: The sample 1 is Antenna with no glue, the sample 2 is Antenna with UV glue, Stylus magnet tip, and second source memory supplier and the sample 3 is Antenna with no glue, alternate source antenna vendor (same design, another vendor), LED Flex S-bend design, integrated shield can. According to the difference, we choose the sample 1 to full test and the sample 3 is verified for harmonic for WLAN mode which could refer to FR192411-03B and the sample 2 is verified worse cases between sample 1 and sample 3.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS 03CH08-KS TH01-KS	CN1257	314309

1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24al
2.	03CH08-KS	AUDIX	E3	6.2009-8-24
3.	CO01-KS	AUDIX	E3	6.2009-8-24

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
nRF	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	-	-
	19	2440	-	-
	20	2442	-	-


2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases(X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	nRF / GFSK
Conducted TCs	Mode 1: nRF Bypass mode Tx CH00_2402 MHz_2Mbps Mode 2: nRF Bypass mode Tx CH19_2440 MHz_2Mbps Mode 3: nRF Bypass mode Tx CH38_2478 MHz_2Mbps Mode 4: nRF Filter mode Tx CH00_2402 MHz_2Mbps Mode 5: nRF Filter mode Tx CH07_2416 MHz_2Mbps Mode 6: nRF Filter mode Tx CH12_2426 MHz_2Mbps
Radiated TCs	Mode 1: nRF Bypass mode Tx CH00_2402 MHz_2Mbps Mode 2: nRF Bypass mode Tx CH19_2440 MHz_2Mbps Mode 3: nRF Bypass mode Tx CH38_2478 MHz_2Mbps Mode 4: nRF Filter mode Tx CH00_2402 MHz_2Mbps Mode 5: nRF Filter mode Tx CH07_2416 MHz_2Mbps Mode 6: nRF Filter mode Tx CH12_2426 MHz_2Mbps
AC Conducted Emission	Mode 1: nRF Tx+WLAN Tx(2.4G)+USB Cable 1(Charging from Adapter)
Remark: For Radiated Test Cases, The tests were performed with Adapter.	

2.3 Connection Diagram of Test System

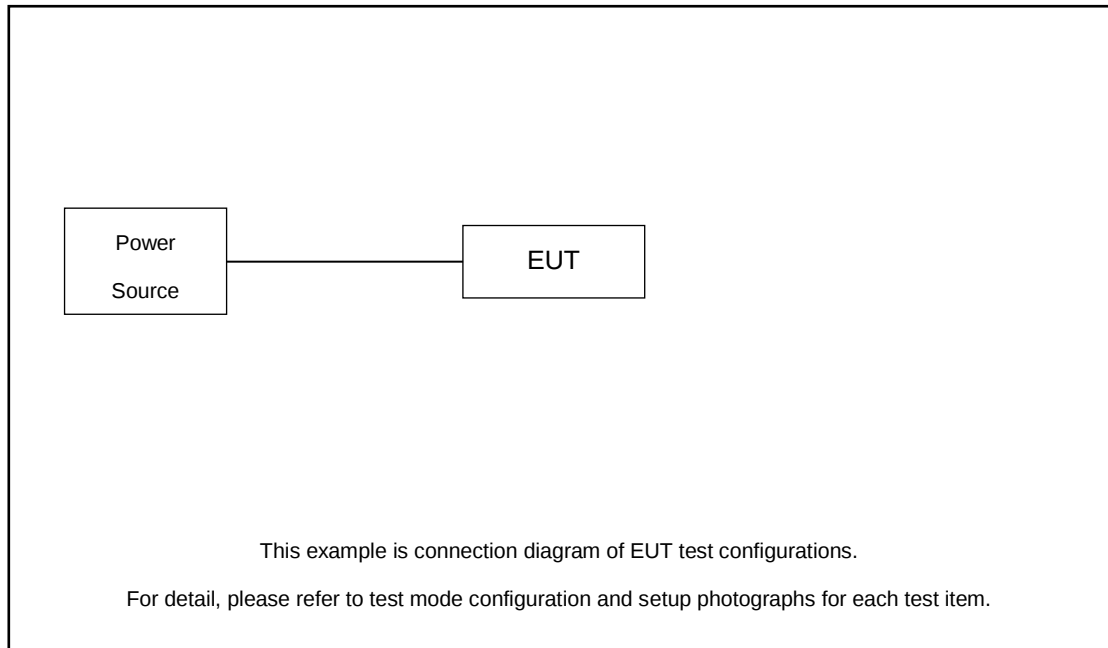

2.4 EUT Operation Test Setup

For nRF function, the engineering test program was provided and enabled to make EUT continuous transmit.



2.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.5 dB.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 5.5 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup






3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.


<Bypass Mode>

6 dB Bandwidth Plot on Channel 00

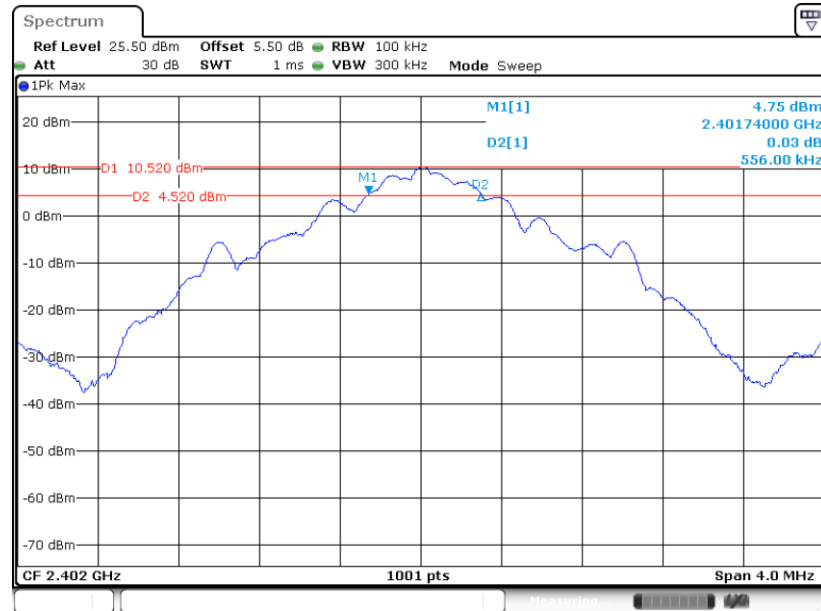

Date: 11.FEB.2022 23:53:44


6 dB Bandwidth Plot on Channel 19

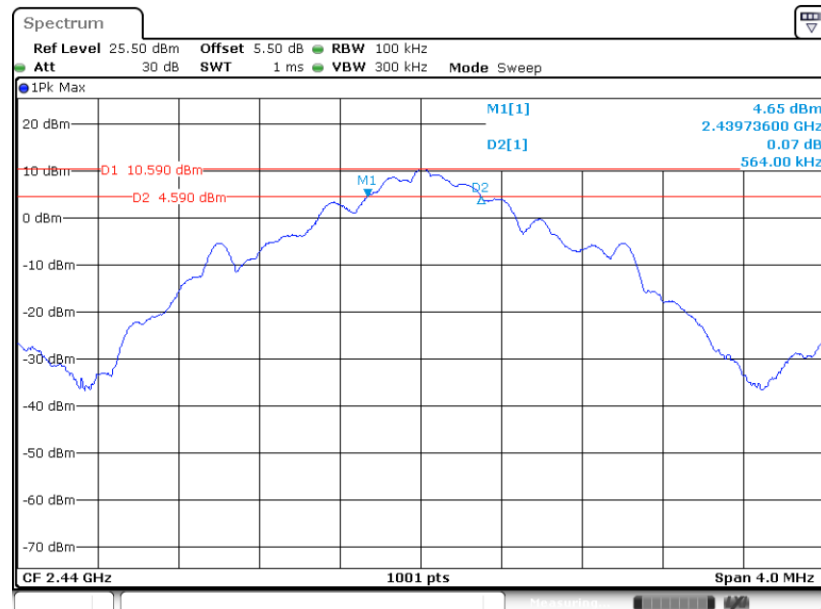

Date: 11.FEB.2022 23:57:10




6 dB Bandwidth Plot on Channel 38

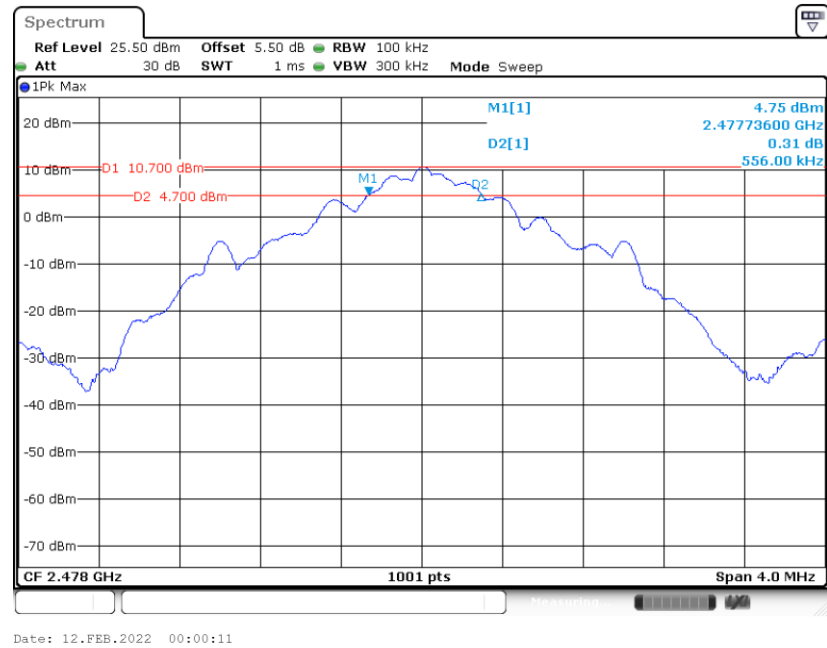


<Filter Mode>

6 dB Bandwidth Plot on Channel 00

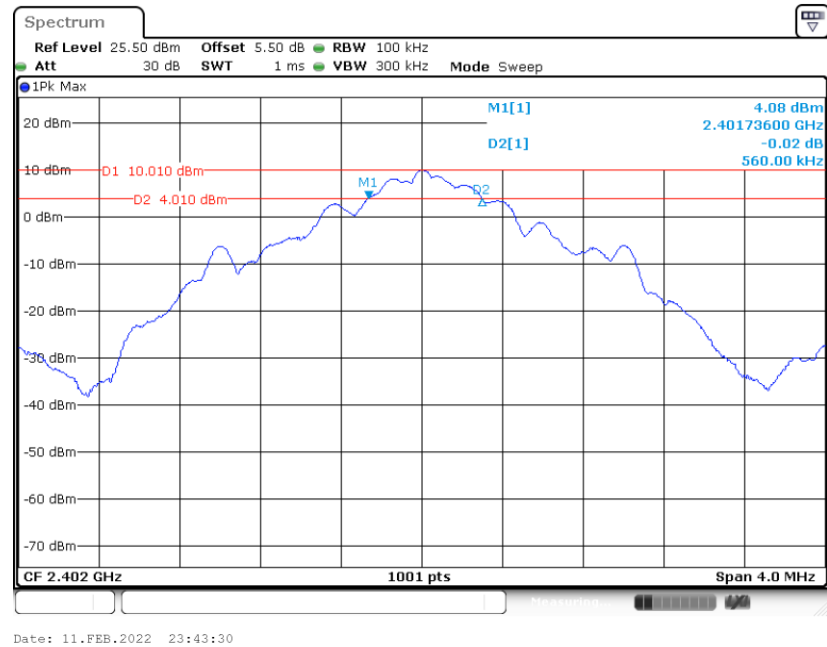




6 dB Bandwidth Plot on Channel 07

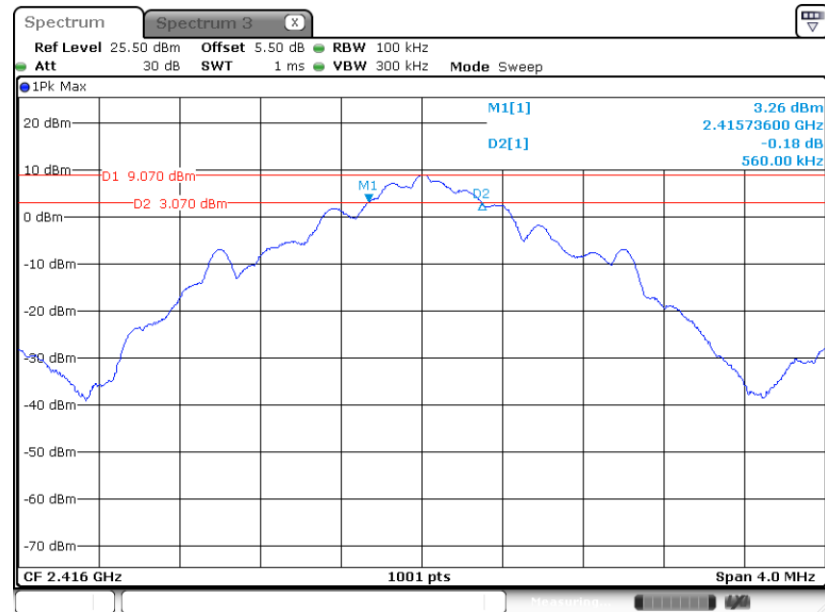

Date: 16.FEB.2022 11:09:51

6 dB Bandwidth Plot on Channel 12

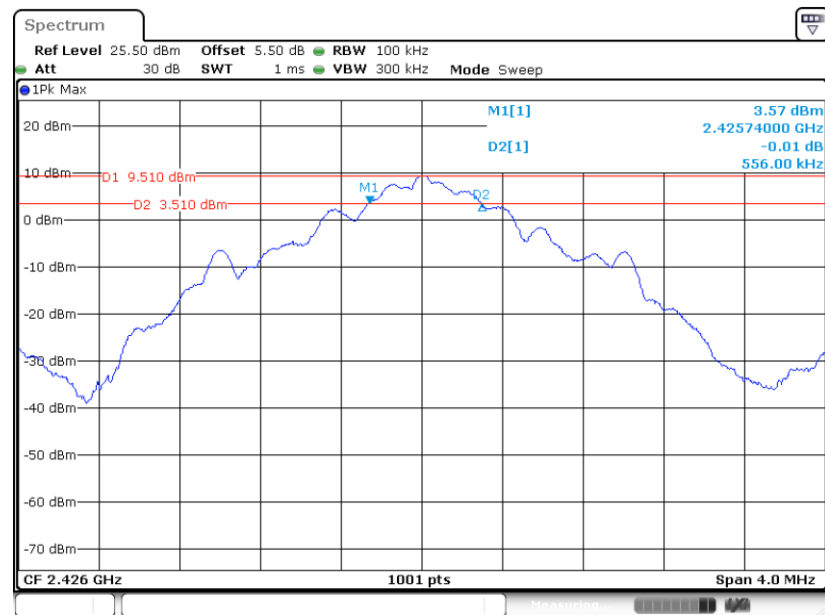

Date: 11.FEB.2022 23:46:58




3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.


<Bypass Mode>

99% Occupied Bandwidth Plot on Channel 00

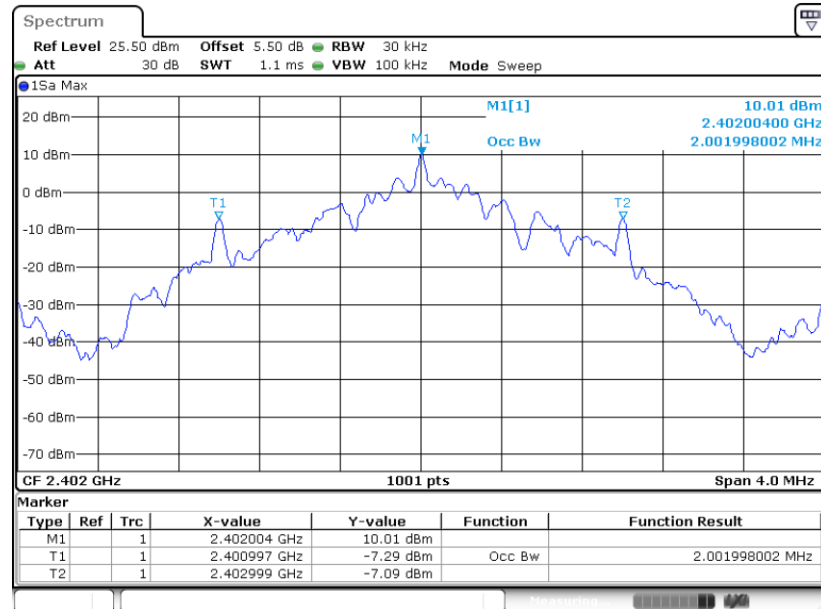

Date: 11.FEB.2022 23:55:33


99% Occupied Bandwidth Plot on Channel 19

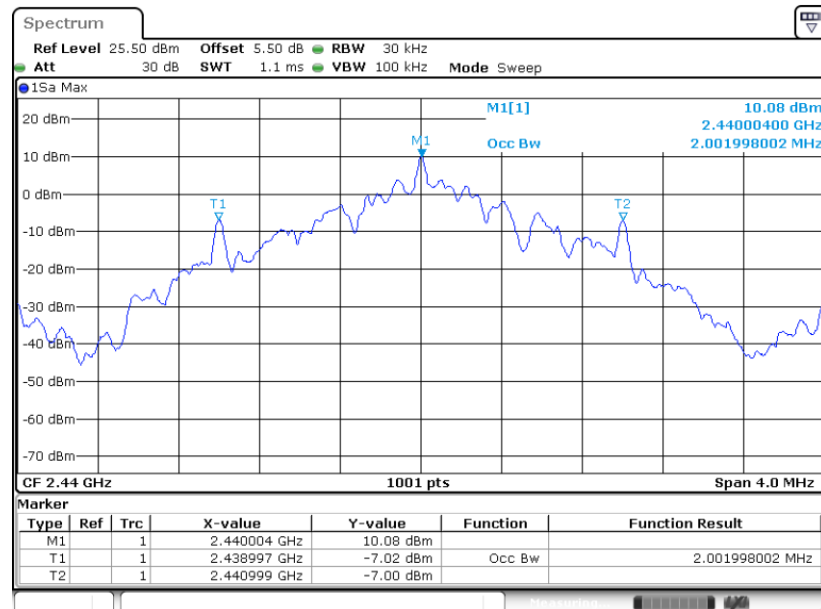

Date: 11.FEB.2022 23:58:39




99% Occupied Bandwidth Plot on Channel 38

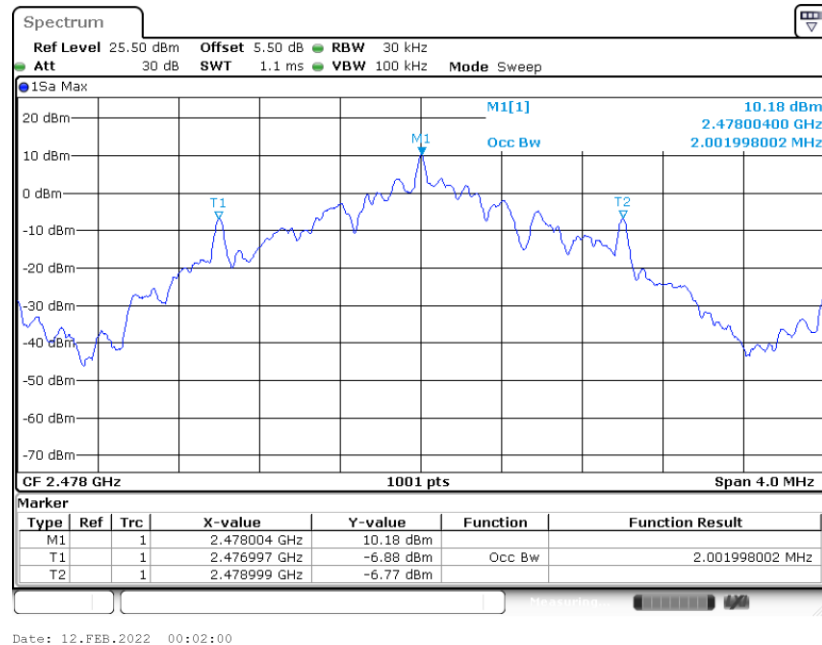


<Filter Mode>

99% Occupied Bandwidth Plot on Channel 00

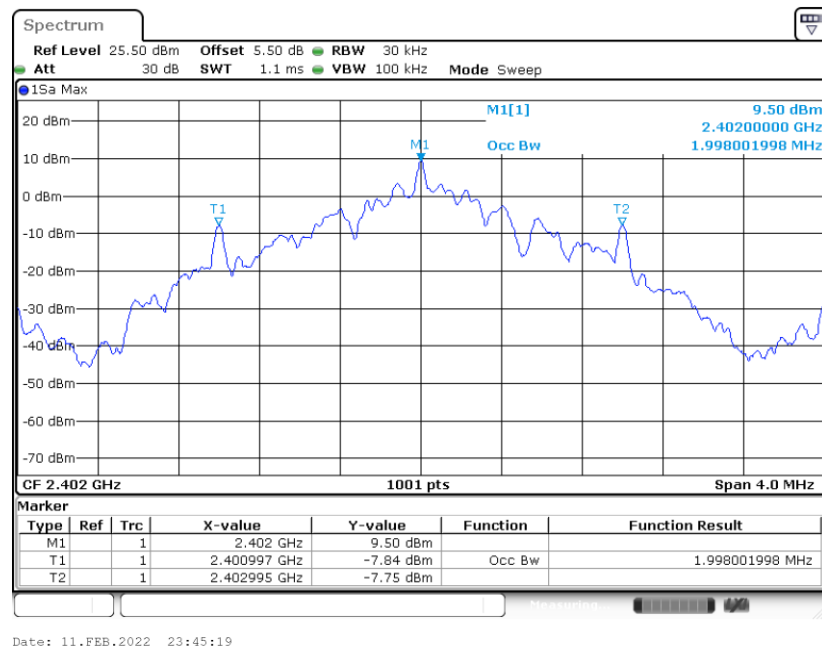




99% Occupied Bandwidth Plot on Channel 07

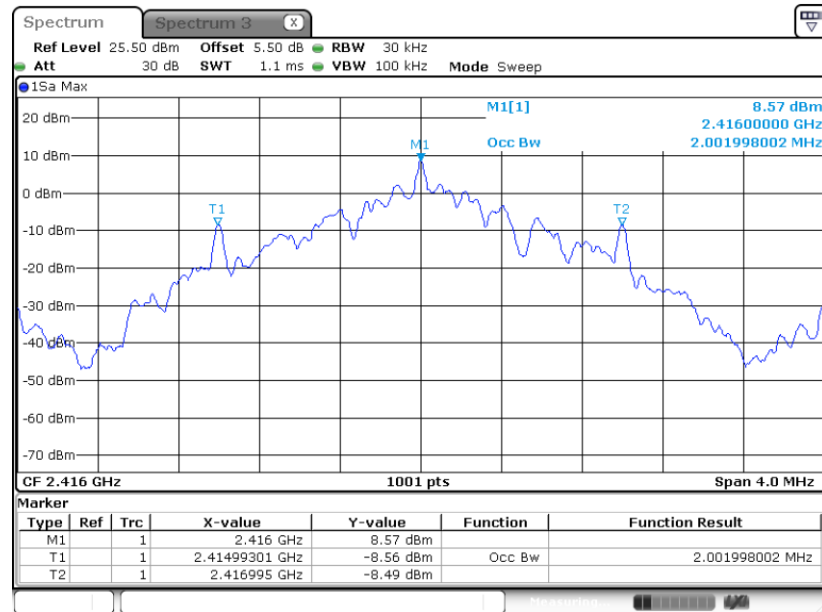

99% Occupied Bandwidth Plot on Channel 12

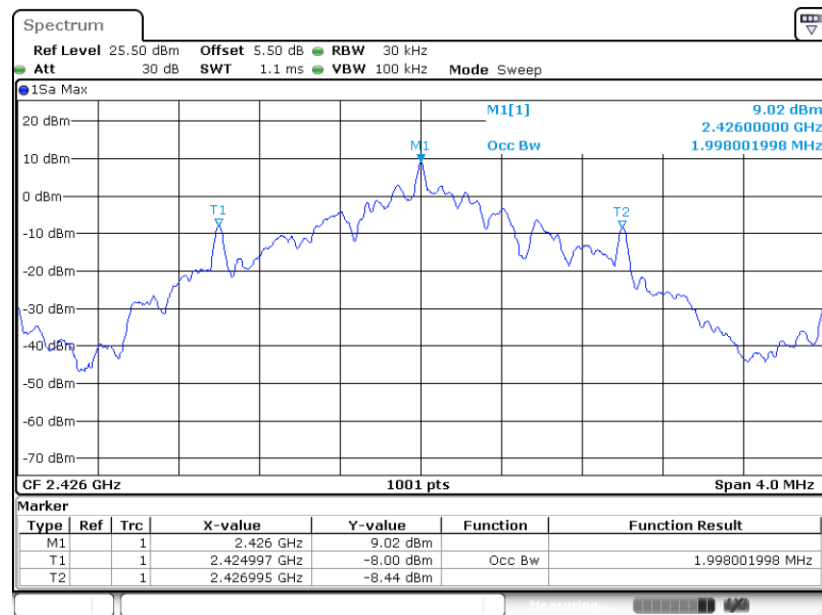

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

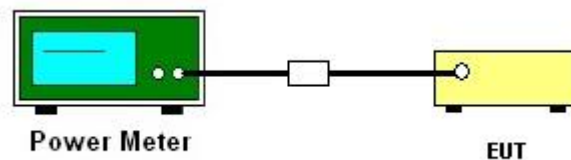

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

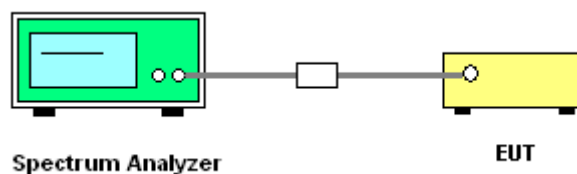

3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.



3.3.6 Test Result of Power Spectral Density Plots (100kHz)


<Bypass Mode>

PSD 100kHz Plot on Channel 00

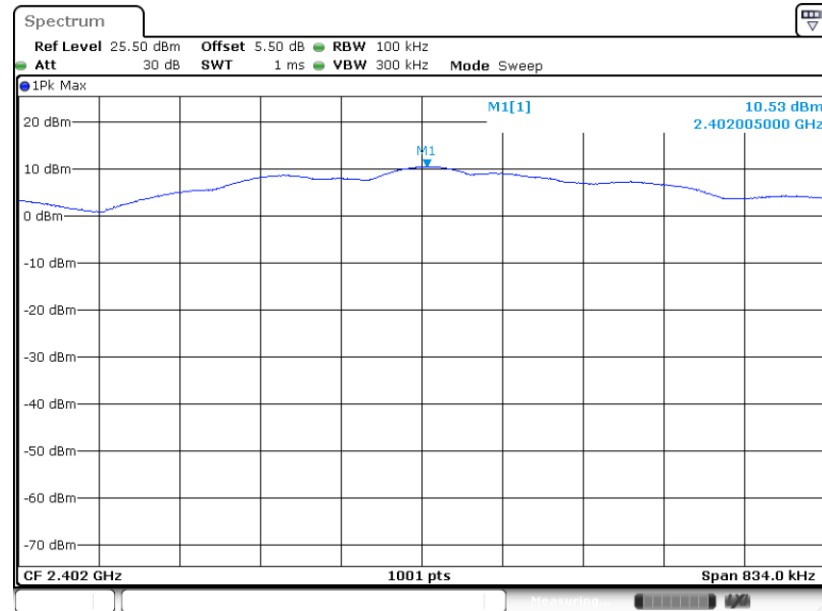

Date: 11.FEB.2022 23:54:22


PSD 100kHz Plot on Channel 19

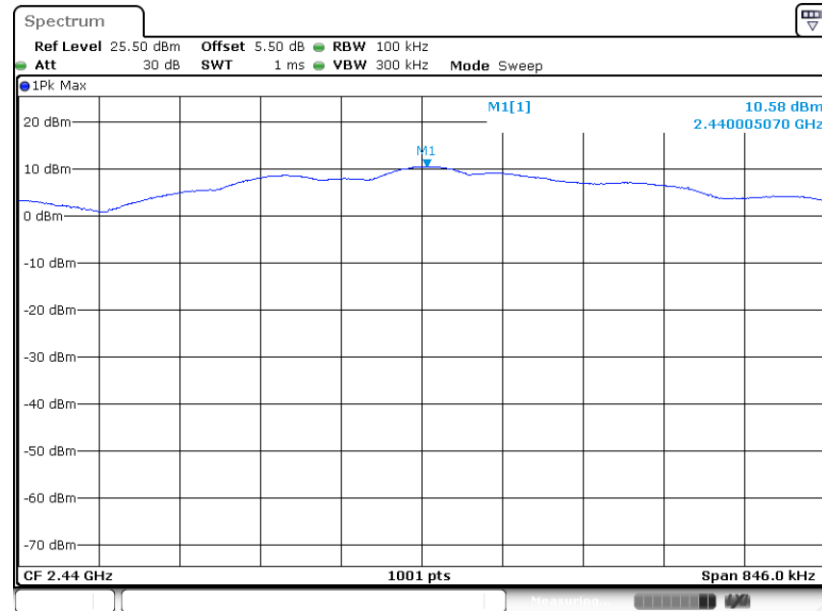

Date: 11.FEB.2022 23:57:48




PSD 100kHz Plot on Channel 38

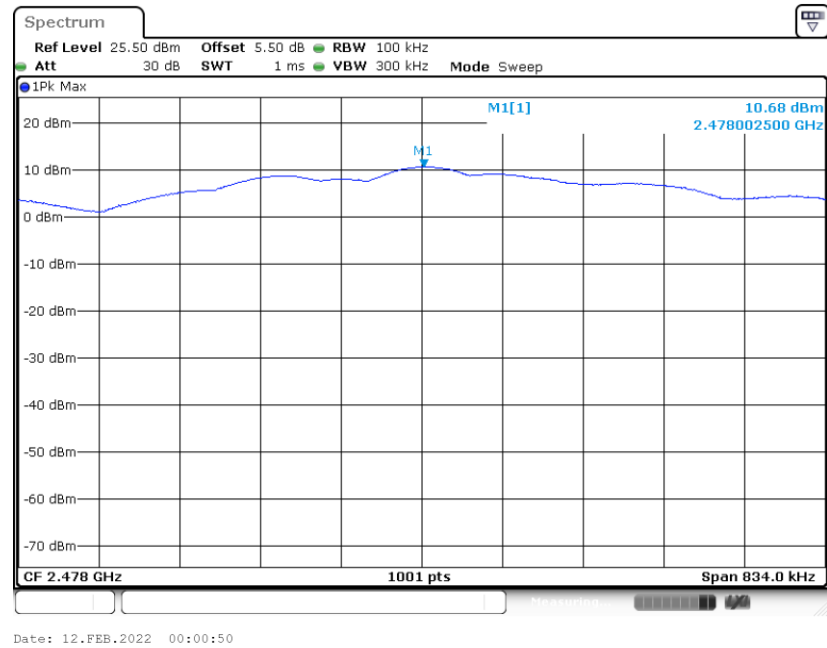


<Filter Mode>

PSD 100kHz Plot on Channel 00

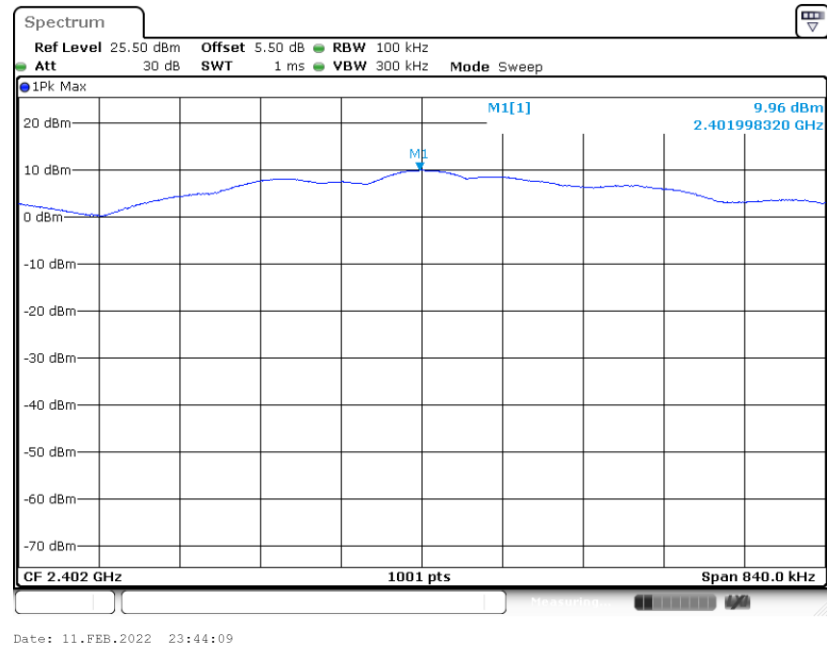




PSD 100kHz Plot on Channel 07

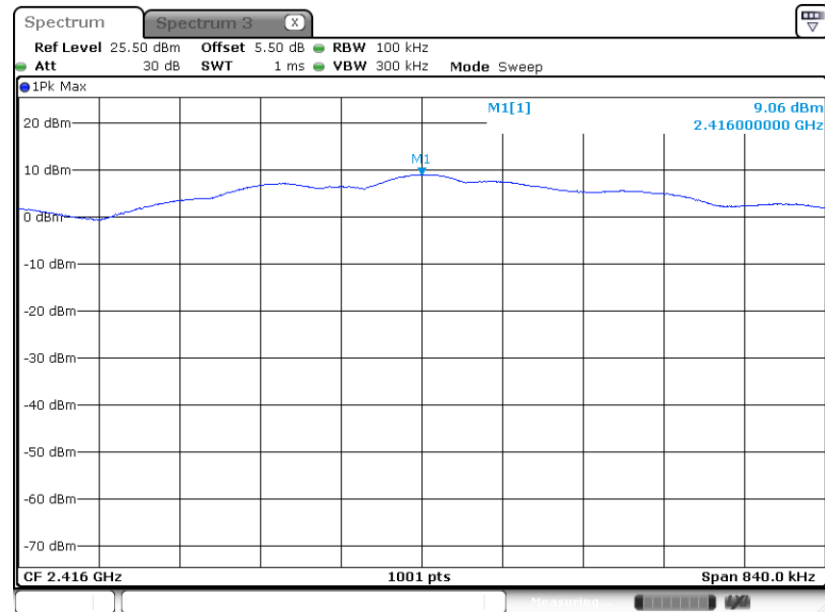

Date: 16.FEB.2022 11:10:30

PSD 100kHz Plot on Channel 12

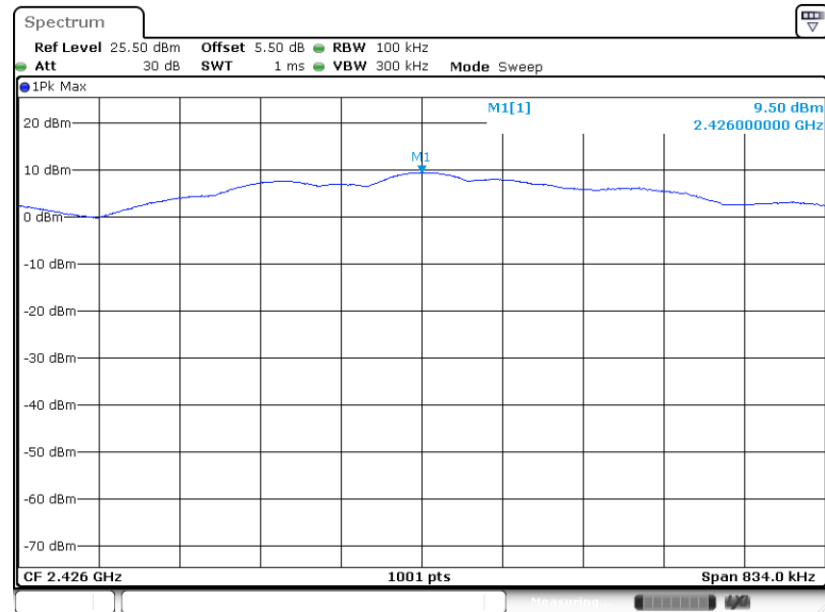


Date: 11.FEB.2022 23:47:37



3.3.7 Test Result of Power Spectral Density Plots (3kHz)


<Bypass Mode>

PSD 3kHz Plot on Channel 00

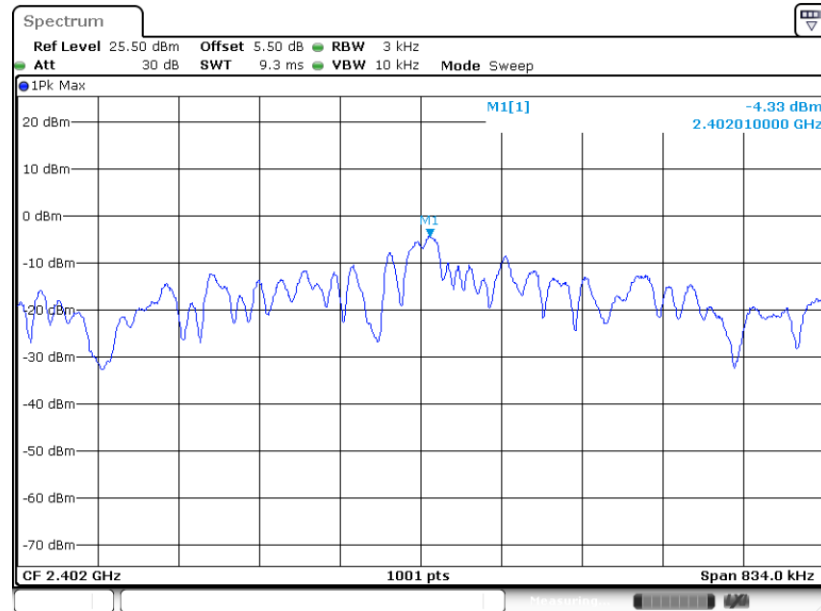


Date: 11.FEB.2022 23:54:03

PSD 3kHz Plot on Channel 19

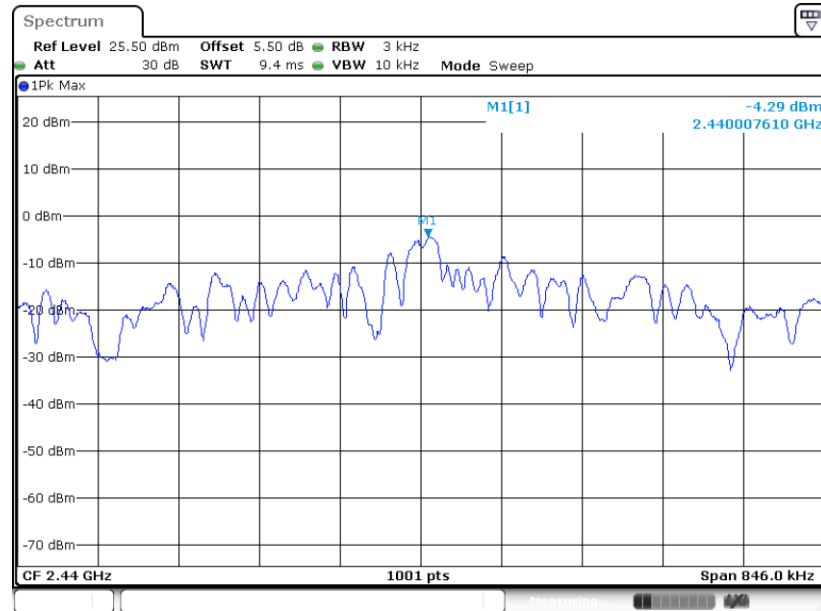


Date: 11.FEB.2022 23:57:29

PSD 3kHz Plot on Channel 38

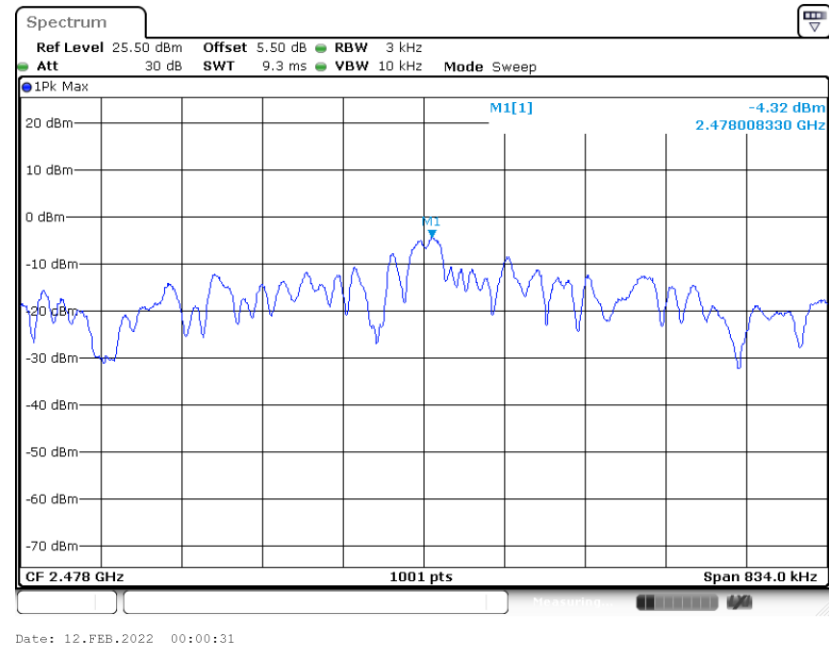


<Filter Mode>

PSD 3kHz Plot on Channel 00

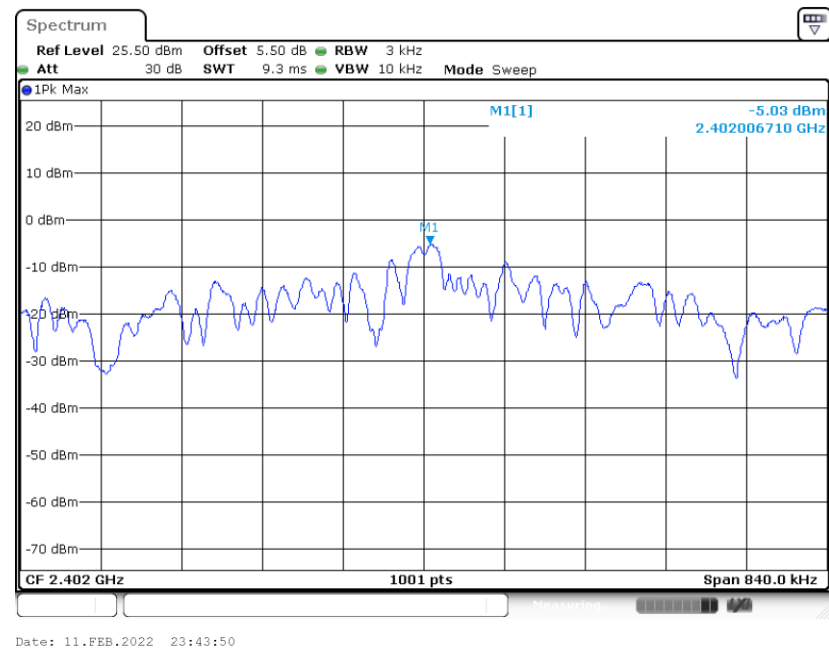




PSD 3kHz Plot on Channel 07

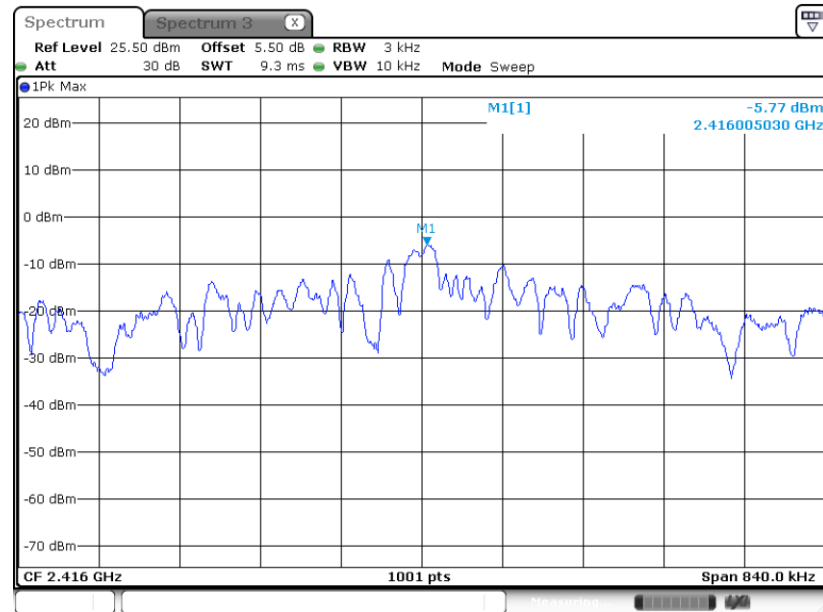

Date: 16.FEB.2022 11:10:11

PSD 3kHz Plot on Channel 12

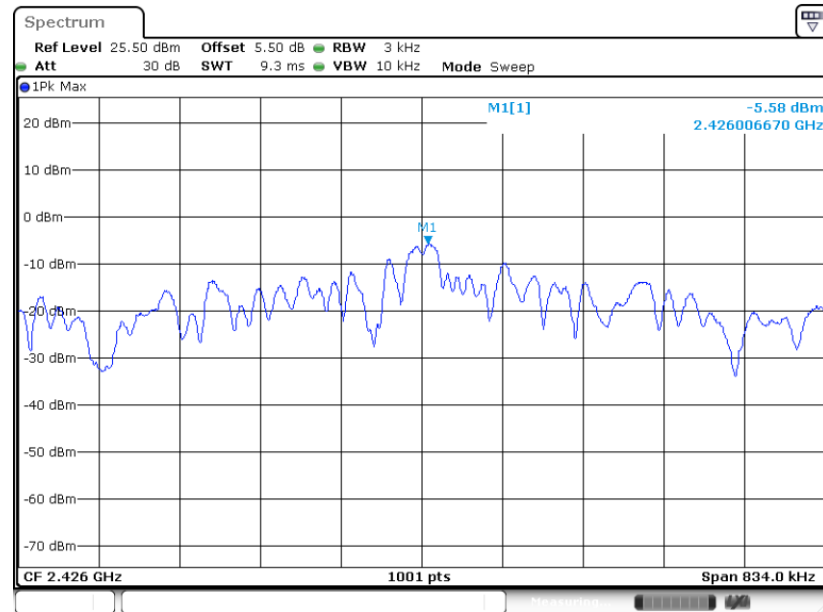

Date: 11.FEB.2022 23:47:18

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

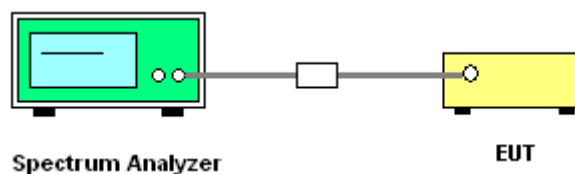





3.4.5 Test Result of Conducted Band Edges Plots

<Bypass Mode>

Low Band Edge Plot on Channel 00

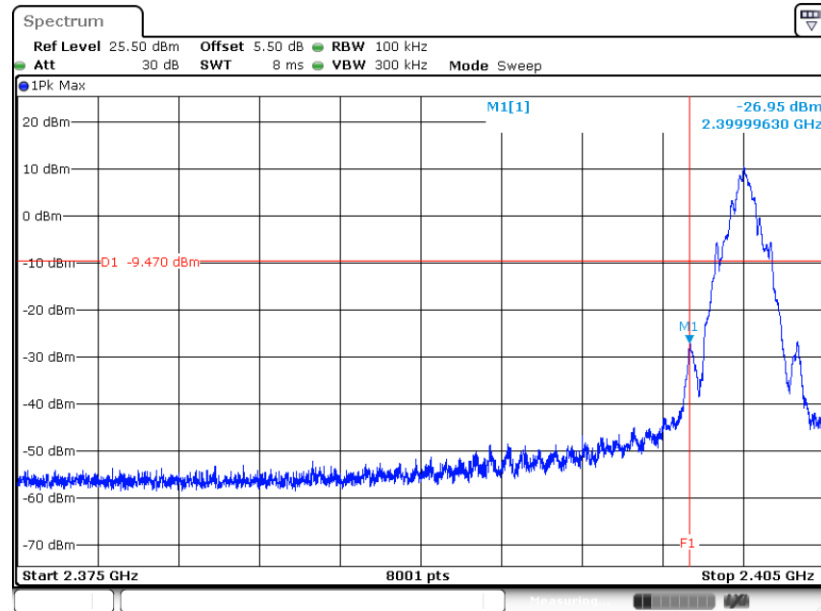


High Band Edge Plot on Channel 38

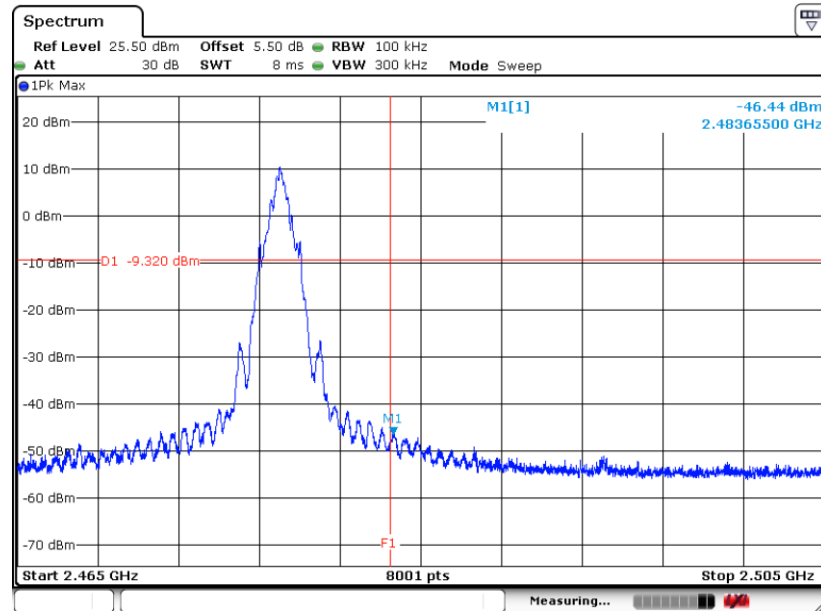




<Filter Mode>

Low Band Edge Plot on Channel 00

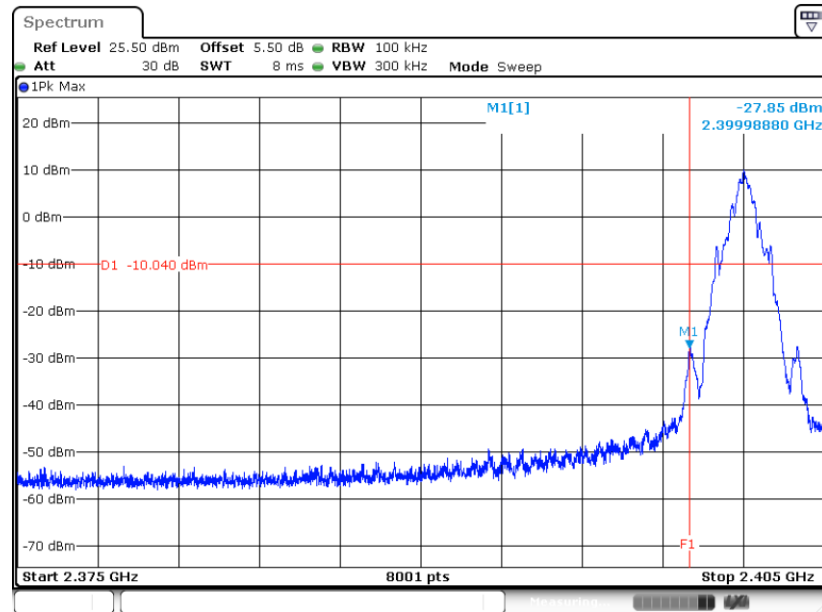

Date: 11.FEB.2022 23:44:28

High Band Edge Plot on Channel 12

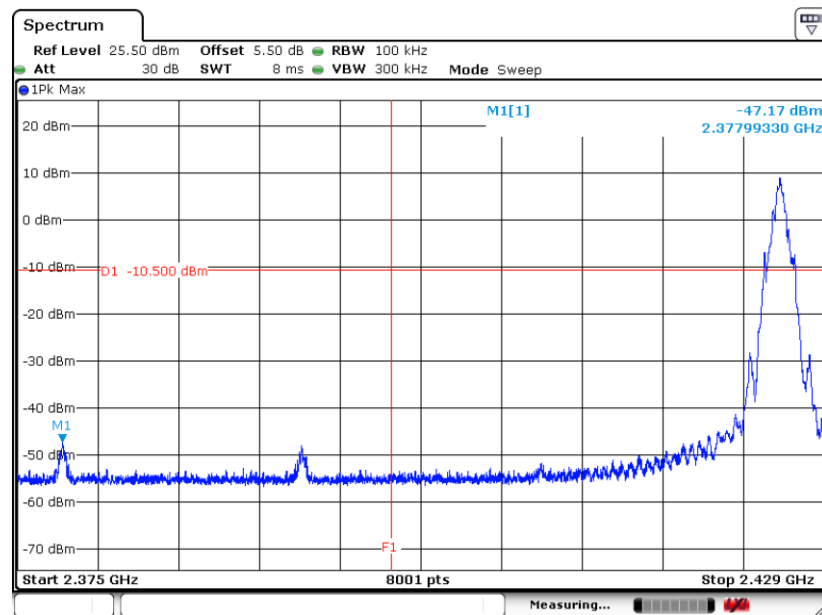


Date: 12.FEB.2022 22:53:13




3.4.6 Test Result of Conducted Spurious Emission Plots

<Bypass Mode>


Conducted Spurious Emission Plot on Channel 00

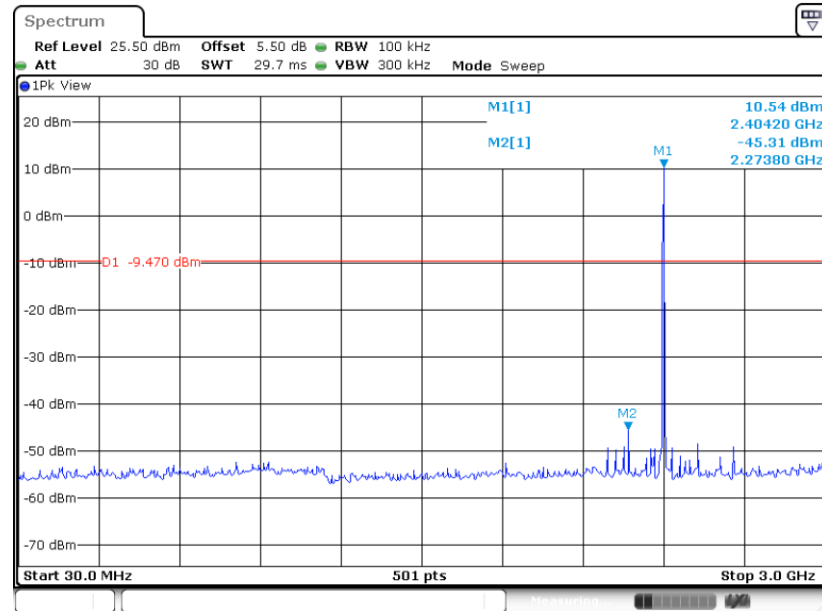


Conducted Spurious Emission Plot on Channel 00

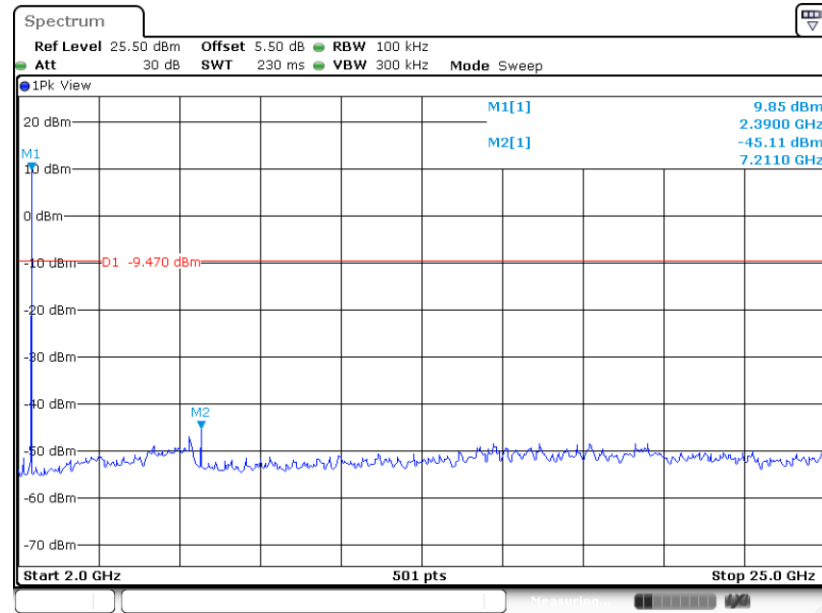

Conducted Spurious Emission Plot on Channel 19

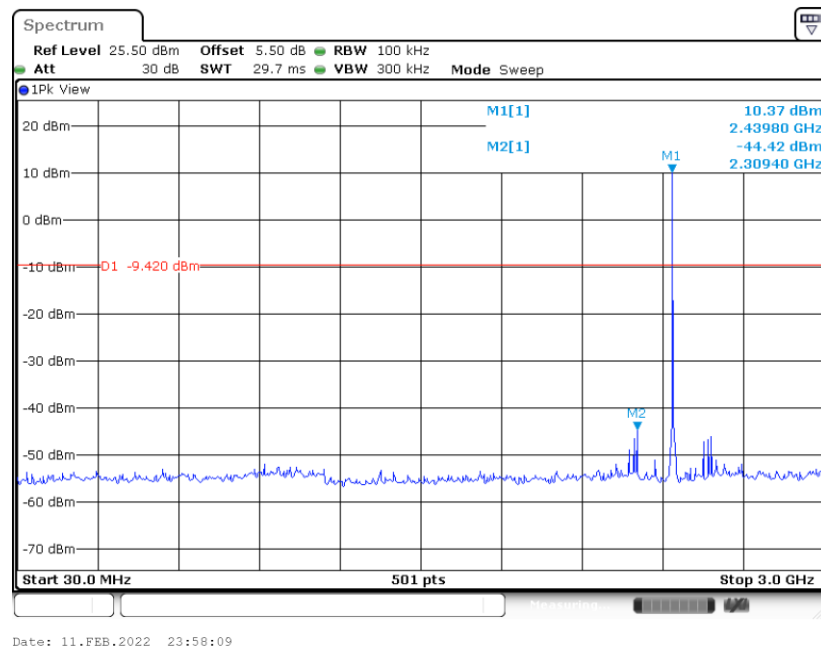


Conducted Spurious Emission Plot on Channel 19

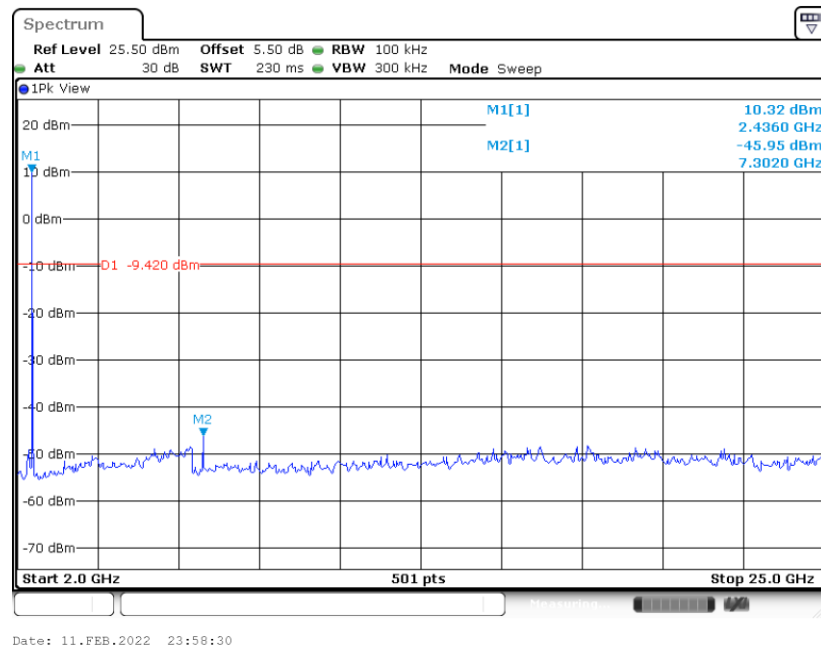




Conducted Spurious Emission Plot on Channel 38

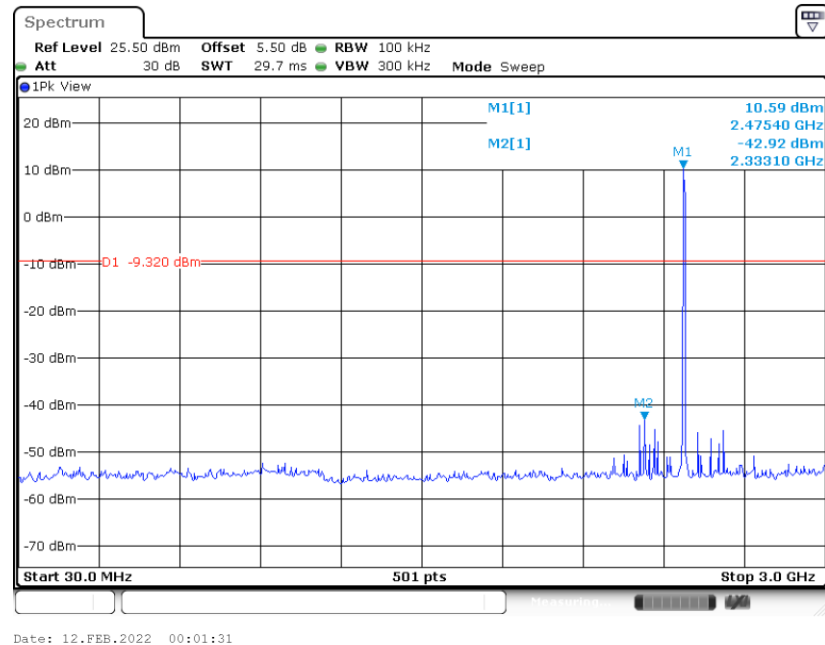


Conducted Spurious Emission Plot on Channel 38

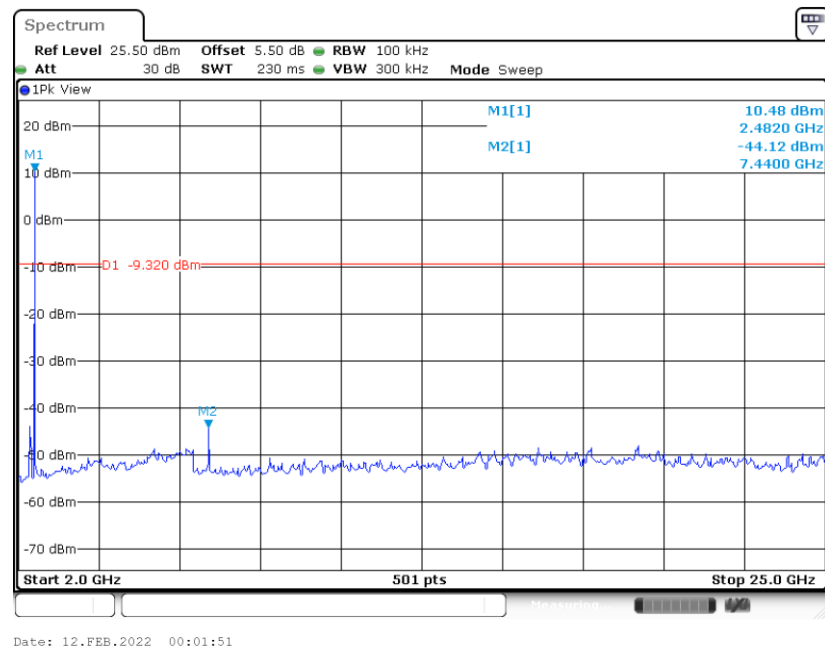




<Filter Mode>

Conducted Spurious Emission Plot on Channel 00

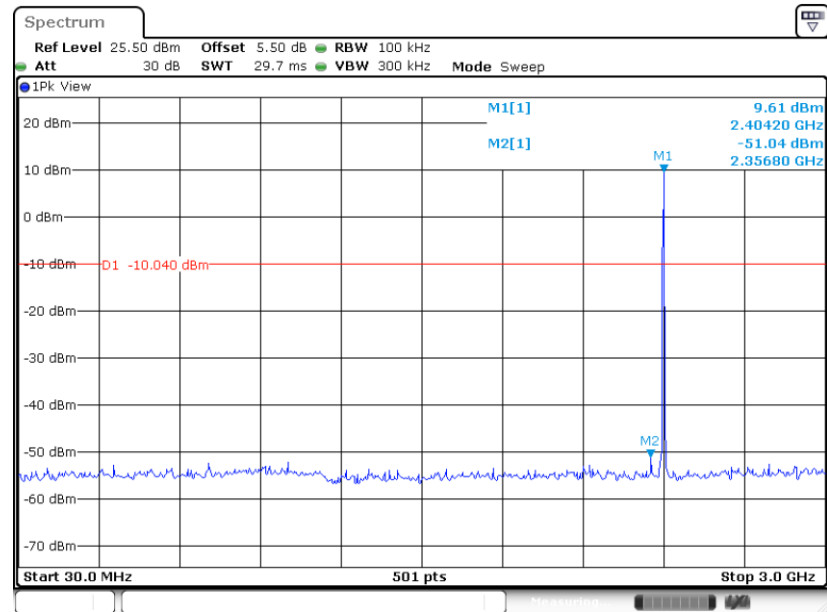

Date: 11.FEB.2022 23:44:49


Conducted Spurious Emission Plot on Channel 00

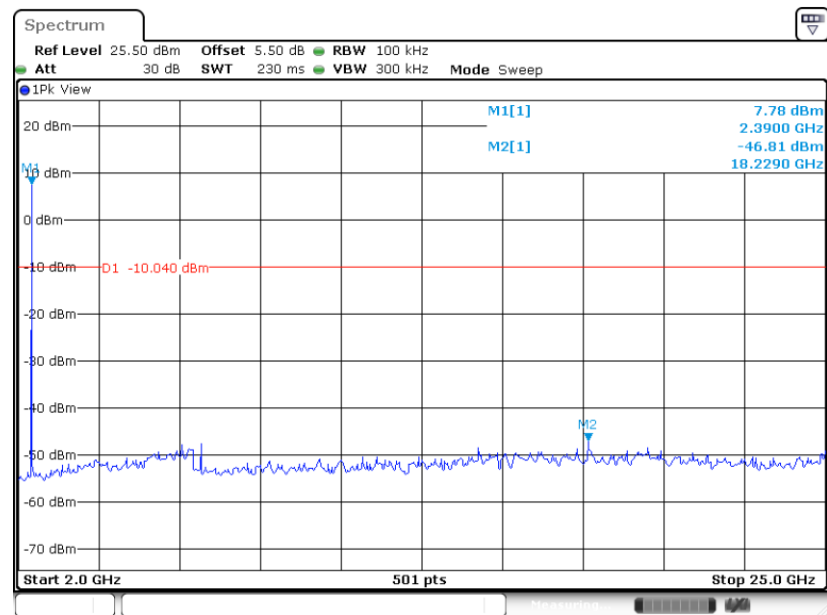

Date: 11.FEB.2022 23:45:10




Conducted Spurious Emission Plot on Channel 07

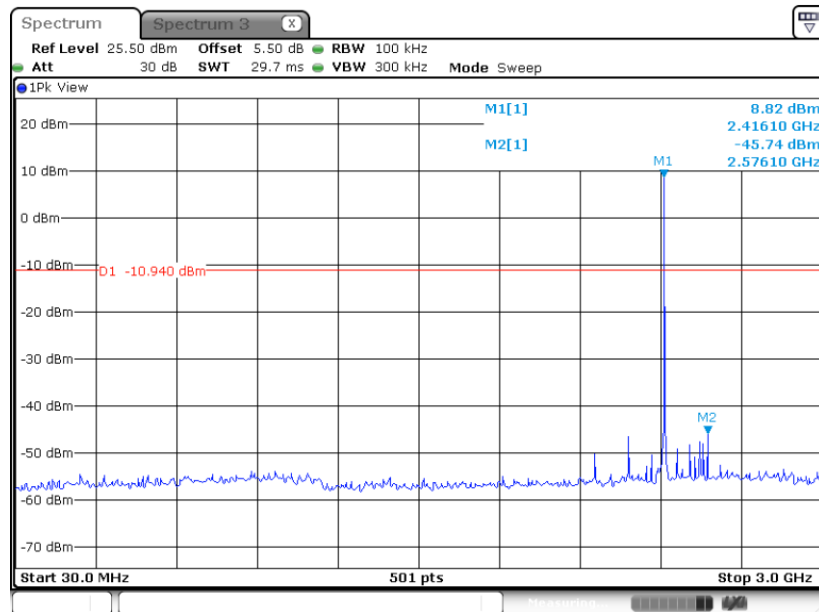

Date: 16.FEB.2022 11:11:10


Conducted Spurious Emission Plot on Channel 07

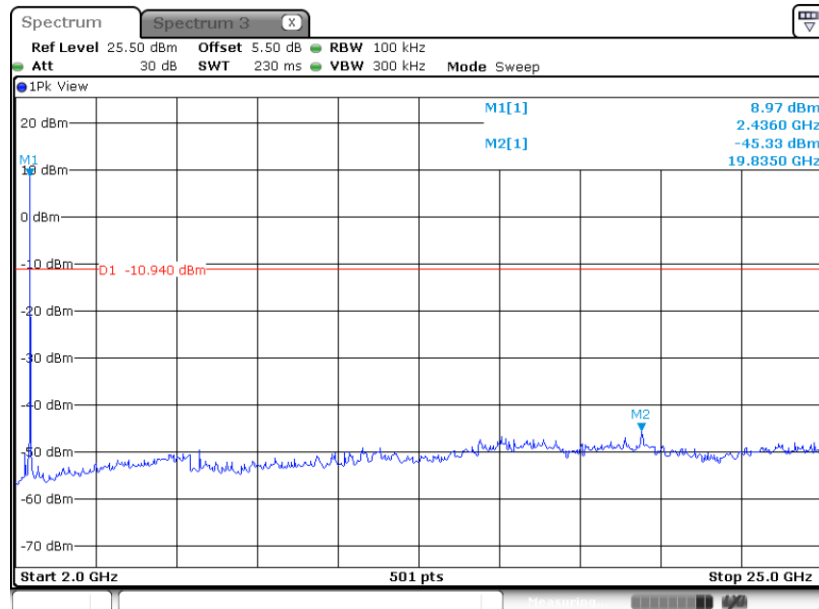


Date: 16.FEB.2022 11:11:30



Conducted Spurious Emission Plot on Channel 12

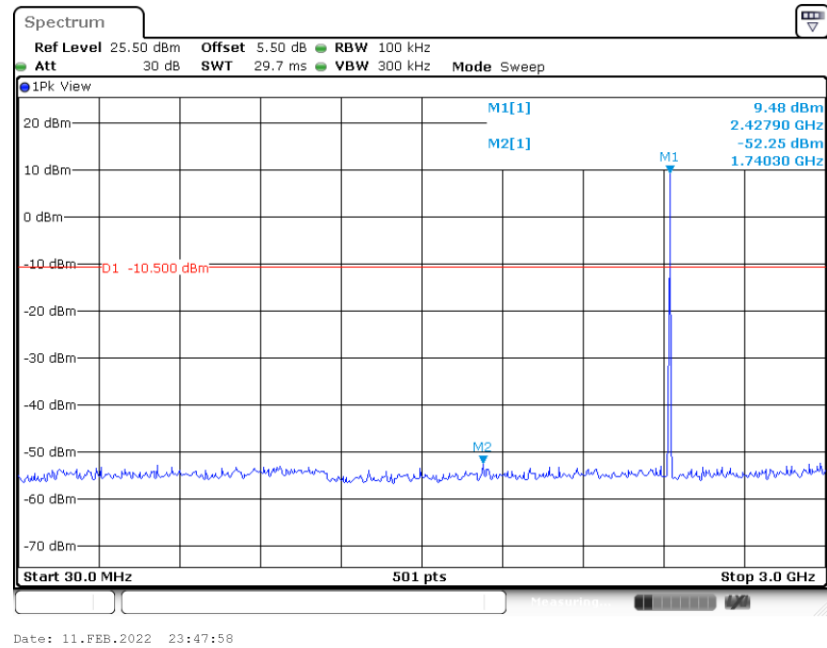

Conducted Spurious Emission Plot on Channel 12

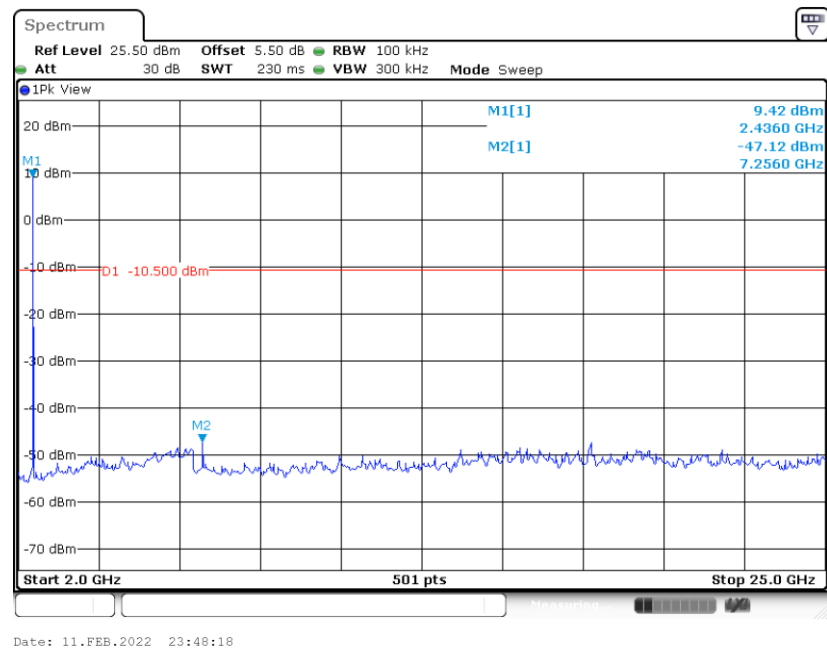

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1 \text{ GHz}$; $\text{VBW} \geq \text{RBW}$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1 \text{ GHz}$ for peak measurement.
For average measurement:
 - RBW = 1 MHz, VBW= 3MHz
 - Detector = RMS (power averaging).
 - If power averaging (rms) mode was used, then the applicable correction factor is $[10 \log (1 / D)]$, where D is the duty cycle.

3.5.4 Test Setup


For radiated emissions below 30MHz

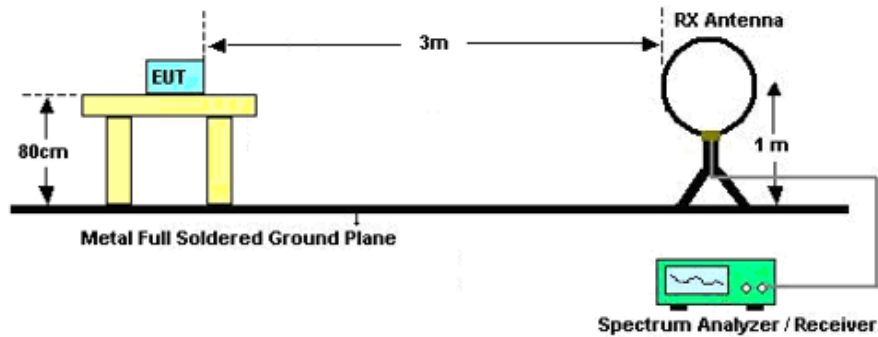

For radiated emissions from 30MHz to 1GHz

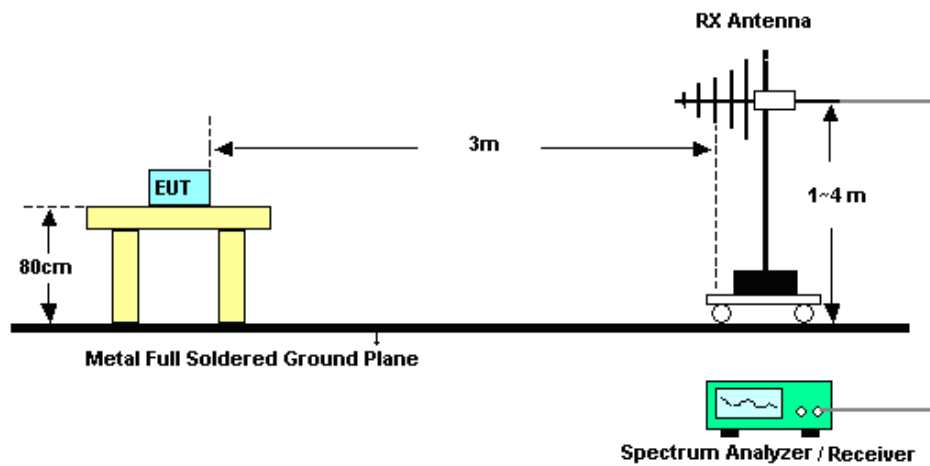

For radiated emissions above 1GHz

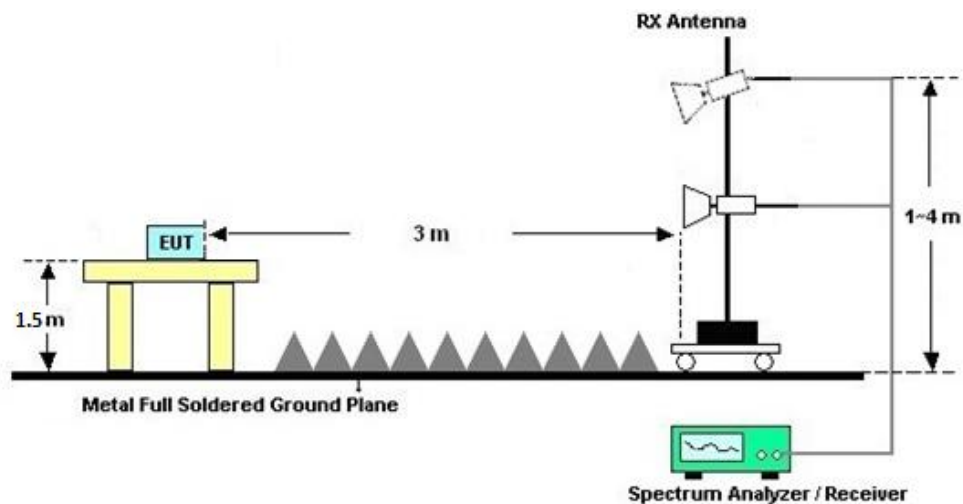

**3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

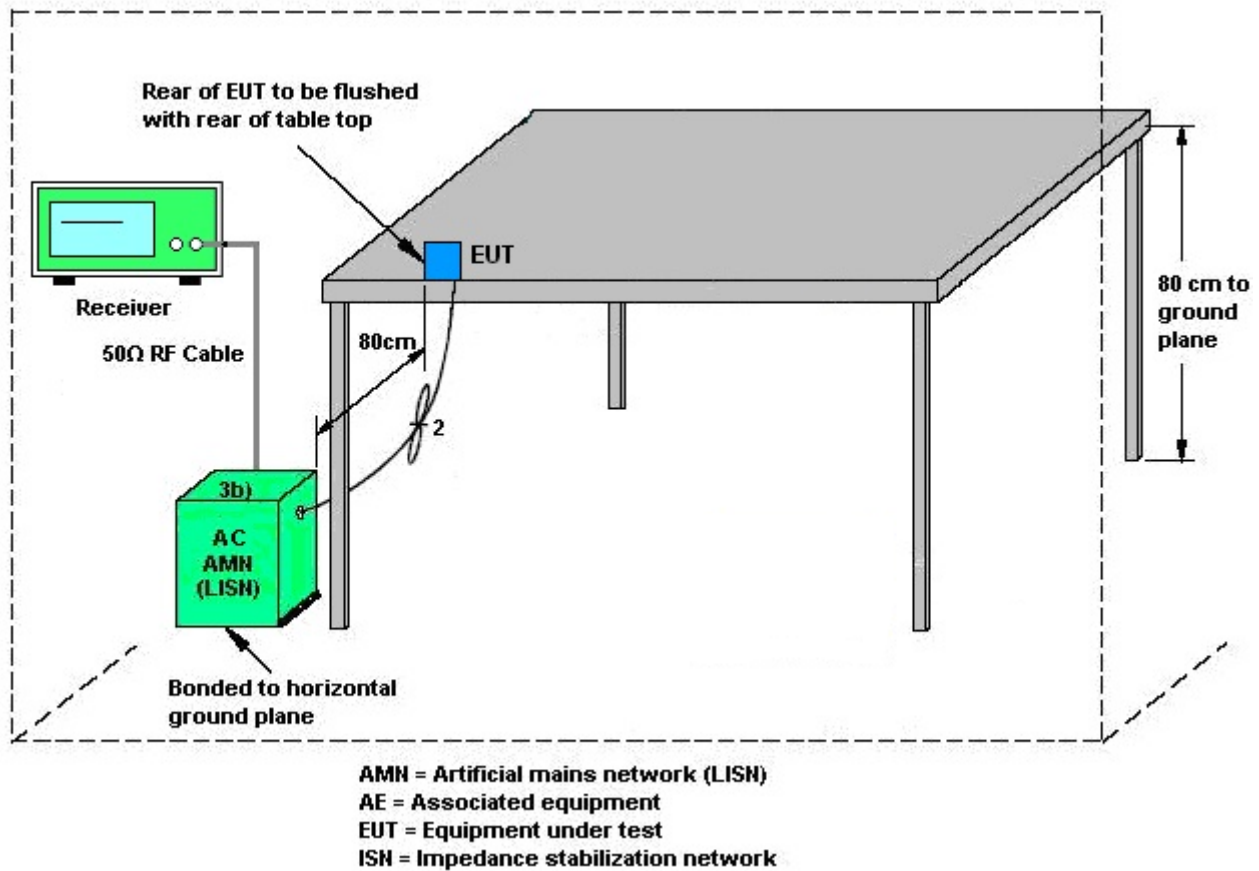

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 14, 2021	Feb. 11, 2022~ Feb. 16, 2022	Oct. 13, 2022	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2022	Feb. 11, 2022~ Feb. 16, 2022	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2022	Feb. 11, 2022~ Feb. 16, 2022	Jan. 04, 2023	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz; Max 30dBm	Oct. 16, 2021	May 24, 2022	Oct. 15, 2022	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44GHz	Oct. 26, 2021	May 24, 2022	Oct. 25, 2022	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	May 24, 2022	Oct. 29, 2022	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	May 27, 2021	May 24, 2022	May 26, 2022	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00240138	1GHz~18GHz	Jul. 19, 2021	May 24, 2022	Jul. 18, 2022	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 05, 2022	May 24, 2022	Jan. 04, 2023	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHz	Jul. 30, 2021	May 24, 2022	Jul. 29, 2022	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2022	May 24, 2022	Jan. 04, 2023	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2025788	1Ghz-18Ghz	Jul. 30, 2021	May 24, 2022	Jul. 29, 2022	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5GHz	Oct. 14, 2021	May 24, 2022	Oct. 13, 2022	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	May 24, 2022	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	May 24, 2022	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	May 24, 2022	NCR	Radiation (03CH06-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Oct. 16, 2021	May 24, 2022	Oct. 15, 2022	Radiation (03CH08-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471084	10Hz~44GHz, MAX 30dB	Jul. 12, 2021	May 24, 2022	Jul. 11, 2022	Radiation (03CH08-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	May 24, 2022	Oct. 29, 2022	Radiation (03CH08-KS)
Bilog Antenna	TESEQ& VGT	CBL 61110	59915	30MHz~1GHz	Sep. 02, 2021	May 24, 2022	Sep. 01, 2022	Radiation (03CH08-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Dec. 24, 2021	May 24, 2022	Dec. 23, 2022	Radiation (03CH08-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2025788	1Ghz-18Ghz	Jul. 30, 2021	May 24, 2022	Jul. 29, 2022	Radiation (03CH08-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	May 24, 2022	Jan. 04, 2023	Radiation (03CH08-KS)
Amplifier	SONOMA	310N	413741	9KHz-1GHz	Jan. 05, 2022	May 24, 2022	Jan. 04, 2023	Radiation (03CH08-KS)
Amplifier	Keysight	83017A	MY53270389	500MHz~26.5GHz	Jan. 05, 2022	May 24, 2022	Jan. 04, 2023	Radiation (03CH08-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2022	May 24, 2022	Jan. 04, 2023	Radiation (03CH08-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	May 24, 2022	NCR	Radiation (03CH08-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	May 24, 2022	NCR	Radiation (03CH08-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	May 24, 2022	NCR	Radiation (03CH08-KS)



EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 24, 2022	Jun. 09, 2022	May 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 14, 2021	Jun. 09, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC LISN	R&S	ENV216	100334	9kHz~30MHz	Oct. 14, 2021	Jun. 09, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 14, 2021	Jun. 09, 2022	Oct. 13, 2022	Conduction (CO01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	± 0.56 dB
Conducted Emissions	± 0.92 dB
Occupied Channel Bandwidth	± 0.03 %
Conducted Power Spectral Density	± 0.54 dB

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz) <03CH06-KS>

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz) <03CH06-KS>

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz) <03CH06-KS>

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

**Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz) <03CH08-KS>**

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9dB
--	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz) <03CH08-KS>

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
--	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz) <03CH08-KS>

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
--	-------

----- THE END -----



Appendix A. Conducted Test Results

Test Engineer:	Jacob Zhang	Temperature:	20~26	°C
Test Date:	2022/2/11~2022/2/16	Relative Humidity:	40~51	%

nRF Bypass Mode

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
nRF Bypass	2Mbps	1	0	2402	2.002	0.556	0.500	Pass
nRF Bypass	2Mbps	1	19	2440	2.002	0.564	0.500	Pass
nRF Bypass	2Mbps	1	38	2478	2.002	0.556	0.500	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
nRF Bypass	2Mbps	1	0	2402	10.41	30.00	2.65	13.06	36.00	Pass
nRF Bypass	2Mbps	1	19	2440	10.43	30.00	2.65	13.08	36.00	Pass
nRF Bypass	2Mbps	1	38	2478	10.52	30.00	2.65	13.17	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
nRF Bypass	2Mbps	1	0	2402	3.24	10.38
nRF Bypass	2Mbps	1	19	2440	3.24	10.37
nRF Bypass	2Mbps	1	38	2478	3.24	10.41

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
nRF Bypass	2Mbps	1	0	2402	10.53	-4.33	2.65	8.00	Pass
nRF Bypass	2Mbps	1	19	2440	10.58	-4.29	2.65	8.00	Pass
nRF Bypass	2Mbps	1	38	2478	10.68	-4.32	2.65	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

nRF Filter Mode

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
nRF Filter	2Mbps	1	0	2402	1.998	0.560	0.500	Pass
nRF Filter	2Mbps	1	7	2416	2.002	0.560	0.500	Pass
nRF Filter	2Mbps	1	12	2426	1.998	0.556	0.500	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
nRF Filter	2Mbps	1	0	2402	9.83	30.00	2.65	12.48	36.00	Pass
nRF Filter	2Mbps	1	7	2416	9.91	30.00	2.65	12.56	36.00	Pass
nRF Filter	2Mbps	1	12	2426	9.56	30.00	2.65	12.21	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
nRF Filter	2Mbps	1	0	2402	3.24	9.71
nRF Filter	2Mbps	1	7	2416	3.24	9.78
nRF Filter	2Mbps	1	12	2426	3.24	9.51


TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
nRF Filter	2Mbps	1	0	2402	9.96	-5.03	2.65	8.00	Pass
nRF Filter	2Mbps	1	7	2416	9.06	-5.77	2.65	8.00	Pass
nRF Filter	2Mbps	1	12	2426	9.50	-5.58	2.65	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.




Appendix B. AC Conducted Emission Test Results

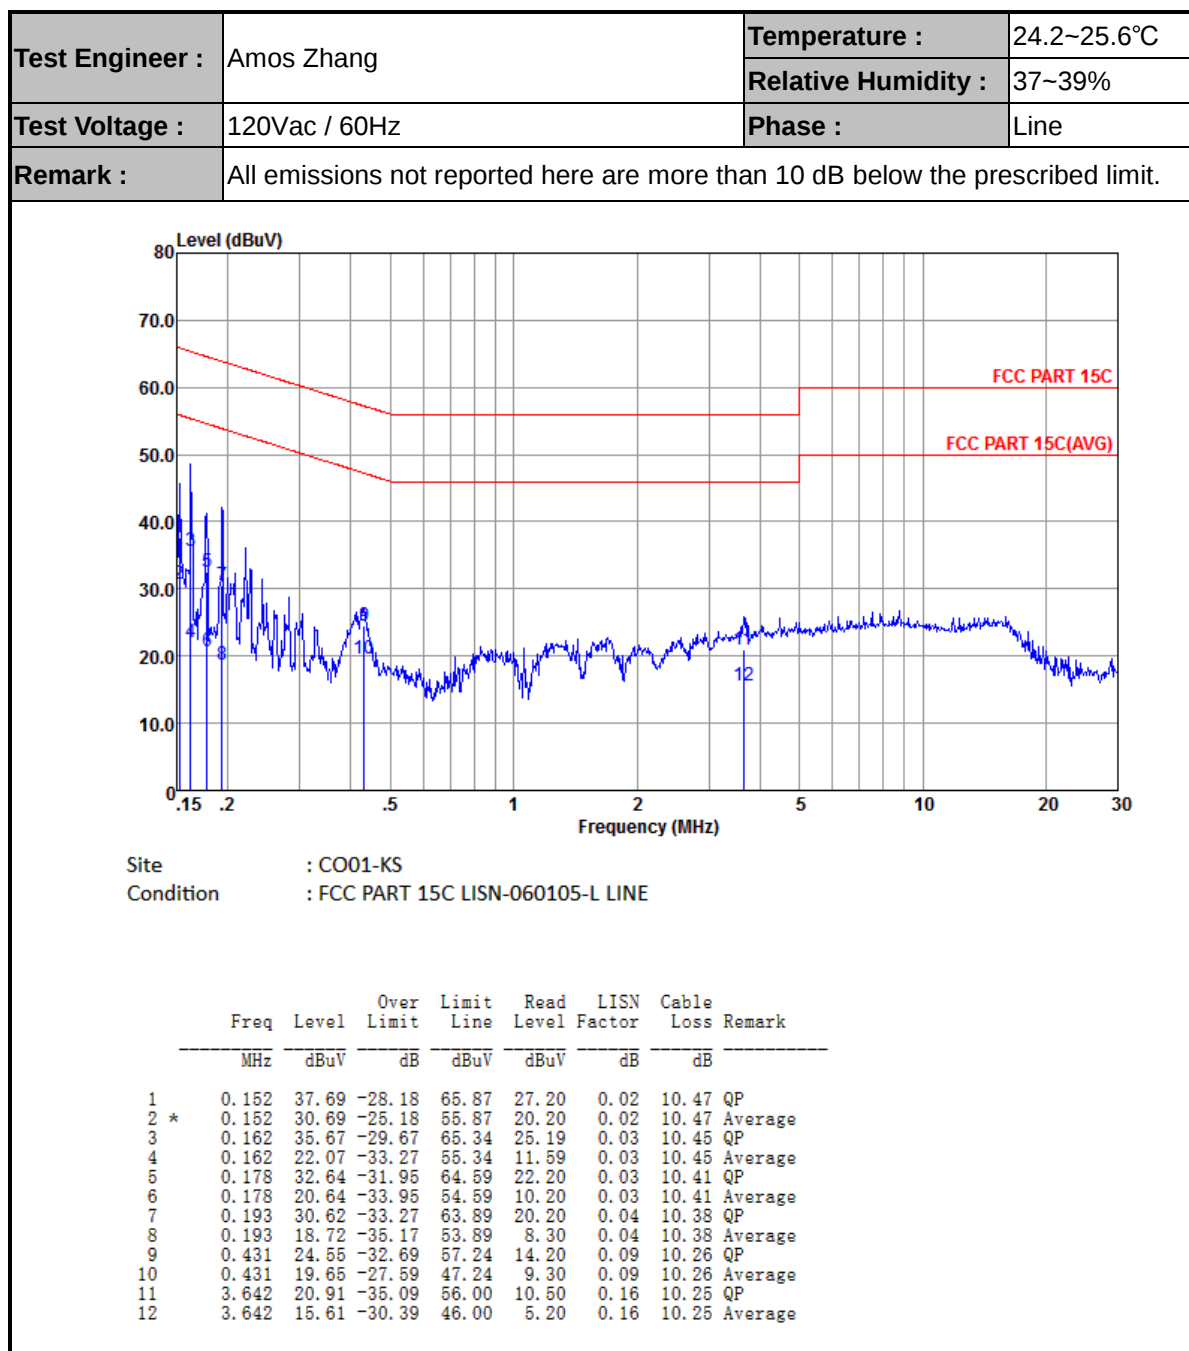



Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

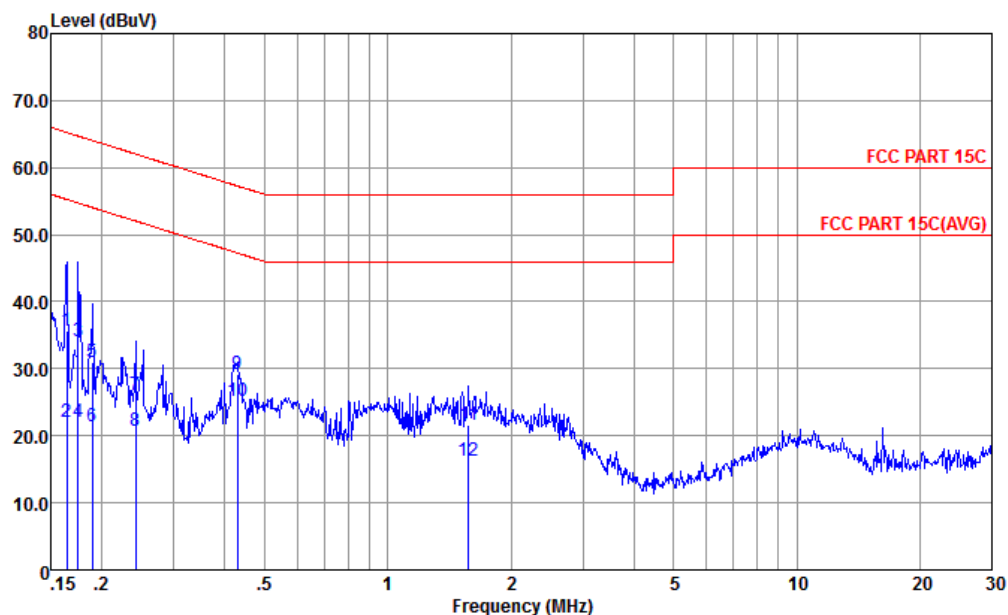

Site : CO01-KS
Condition : FCC PART 15C LISN-060105-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.164	35.65	-29.60	65.25	25.10	0.11	10.44	QP
2	0.164	22.15	-33.10	55.25	11.60	0.11	10.44	Average
3	0.175	34.12	-30.60	64.72	23.60	0.10	10.42	QP
4	0.175	22.02	-32.70	54.72	11.50	0.10	10.42	Average
5	0.189	31.09	-32.97	64.06	20.61	0.10	10.38	QP
6	0.189	21.29	-32.77	54.06	10.81	0.10	10.38	Average
7	0.242	26.04	-36.00	62.04	15.60	0.10	10.34	QP
8	0.242	20.64	-31.40	52.04	10.20	0.10	10.34	Average
9	0.428	29.16	-28.13	57.29	18.79	0.11	10.26	QP
10 *	0.428	25.16	-22.13	47.29	14.79	0.11	10.26	Average
11	1.577	21.56	-34.44	56.00	11.20	0.13	10.23	QP
12	1.577	16.16	-29.84	46.00	5.80	0.13	10.23	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Sample 1

nRF—Bypass Mode (Band Edge @ 3m)

nRF--Bypass	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
nRF--Bypass CH 00 2402MHz		2354.07	56.66	-17.34	74	51.15	31.87	6.56	32.92	130	71	P	H
		2338.08	45.96	-8.04	54	40.59	31.8	6.53	32.96	130	71	A	H
		2402	107.97	---	---	102.2	32	6.61	32.84	130	71	P	H
		2402	104.3	---	---	98.53	32	6.61	32.84	130	71	A	H
		2338.08	54.98	-19.02	74	49.61	31.8	6.53	32.96	106	76	P	V
		2389.43	43.98	-10.02	54	38.25	32	6.61	32.88	106	76	A	V
		2402	101.55	---	---	95.78	32	6.61	32.84	106	76	P	V
		2402	97.75	---	---	91.98	32	6.61	32.84	106	76	A	V
nRF--Bypass CH 19 2440MHz		2328.2	59.43	-14.57	74	54.12	31.77	6.5	32.96	127	49	P	H
		2375.91	45.62	-8.38	54	39.99	31.93	6.58	32.88	127	49	A	H
		2488	55.66	-18.34	74	49.35	32.2	6.75	32.64	127	49	P	H
		2488.6	44.16	-9.84	54	37.85	32.2	6.75	32.64	127	49	A	H
		2440	106.04	---	---	99.93	32.2	6.68	32.77	127	49	P	H
		2440	102.46	---	---	96.35	32.2	6.68	32.77	127	49	A	H
		2328.33	57.08	-16.92	74	51.77	31.77	6.5	32.96	105	252	P	V
		2375.91	46.31	-7.69	54	40.68	31.93	6.58	32.88	105	252	A	V
		2491.84	55.28	-18.72	74	48.9	32.2	6.75	32.57	105	252	P	V
		2497.96	44.09	-9.91	54	37.71	32.2	6.75	32.57	105	252	A	V
		2440	106.66	---	---	100.55	32.2	6.68	32.77	105	252	P	V
		2440	103.02	---	---	96.91	32.2	6.68	32.77	105	252	A	V



nRF--Bypass CH 38 2478MHz		2483.62	58.6	-15.4	74	52.31	32.2	6.73	32.64	101	49	P	H
		2483.62	47.27	-6.73	54	40.98	32.2	6.73	32.64	101	49	A	H
		2478	105.1	---	---	98.81	32.2	6.73	32.64	101	49	P	H
		2478	101.64	---	---	95.35	32.2	6.73	32.64	101	49	A	H
		2483.5	58.72	-15.28	74	52.43	32.2	6.73	32.64	230	276	P	V
		2483.62	47.27	-6.73	54	38.06	32.58	9.27	32.64	230	276	A	V
		2478	104.54	---	---	98.25	32.2	6.73	32.64	230	276	P	V
		2478	101.09	---	---	94.8	32.2	6.73	32.64	230	276	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

nRF--Bypass Mode (Harmonic @ 3m)

nRF--Bypass	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
nRF--Bypass CH 00 2402MHz		4804	42.61	-31.39	74	61.6	33.55	12.04	64.58	300	0	P	H
		4804	42.32	-31.68	74	61.31	33.55	12.04	64.58	100	0	P	V
nRF--Bypass CH 19 2440MHz		4880	42.15	-31.85	74	61.09	33.67	11.94	64.55	241	48	P	H
		7320	41.8	-32.2	74	57.56	35.39	14.03	65.18	241	48	P	H
		4880	41.31	-32.69	74	60.25	33.67	11.94	64.55	154	117	P	V
		7320	42.86	-31.14	74	58.62	35.39	14.03	65.18	154	117	P	V
nRF--Bypass CH 38 2478MHz		4956	42.52	-31.48	74	61.41	33.82	11.81	64.52	172	118	P	H
		7434	43.54	-30.46	74	59.36	35.41	14.2	65.43	172	118	P	H
		4956	42.24	-31.76	74	61.13	33.82	11.81	64.52	241	28	P	V
		7434	43.05	-30.95	74	58.87	35.41	14.2	65.43	241	28	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



nRF—Filter Mode (Band Edge @ 3m)

nRF--Filter	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
nRF--Filter CH 00 2402MHz		2389.69	56.29	-17.71	74	50.56	32	6.61	32.88	187	360	P	H
		2389.69	44.62	-9.38	54	38.89	32	6.61	32.88	187	360	A	H
		2402	109.27	---	---	103.5	32	6.61	32.84	187	360	P	H
		2402	105.49	---	---	99.72	32	6.61	32.84	187	360	A	H
		2389.56	56.19	-17.81	74	50.46	32	6.61	32.88	344	254	P	V
		2389.3	44.08	-9.92	54	38.35	32	6.61	32.88	344	254	A	V
		2402	106.78	---	---	101.01	32	6.61	32.84	344	254	P	V
		2402	102.98	---	---	97.21	32	6.61	32.84	344	254	A	V
nRF--Filter CH 07 2416MHz		2384.23	56.03	-17.97	74	50.4	31.93	6.58	32.88	177	7	P	H
		2351.86	44.09	-9.91	54	38.58	31.87	6.56	32.92	177	7	A	H
		2416	109.2	---	---	103.27	32.07	6.63	32.77	177	7	P	H
		2416	105.32	---	---	99.39	32.07	6.63	32.77	177	7	A	H
		2338.08	55.36	-18.64	74	49.99	31.8	6.53	32.96	345	253	P	V
		2383.71	43.61	-10.39	54	37.98	31.93	6.58	32.88	345	253	A	V
		2416	106.46	---	---	100.53	32.07	6.63	32.77	345	253	P	V
		2416	102.76	---	---	96.83	32.07	6.63	32.77	345	253	A	V



nRF--Filter CH 12 2426MHz		2378.25	57.08	-16.92	74	51.45	31.93	6.58	32.88	106	55	P	H
		2361.87	45.95	-8.05	54	40.44	31.87	6.56	32.92	106	55	A	H
		2426	109.52	---	---	103.5	32.13	6.66	32.77	106	55	P	H
		2426	105.84	---	---	99.82	32.13	6.66	32.77	106	55	A	H
		2377.86	55.24	-18.76	74	49.61	31.93	6.58	32.88	100	47	P	V
		2362.39	44.14	-9.86	54	38.63	31.87	6.56	32.92	100	47	A	V
		2426	107.1	---	---	101.08	32.13	6.66	32.77	100	47	P	V
		2426	103.45	---	---	97.43	32.13	6.66	32.77	100	47	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

nRF—Filter Mode (Harmonic @ 3m)

nRF--Filter	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
nRF--Filter CH 00 2402MHz		4804	40.97	-33.03	74	59.96	33.55	12.04	64.58	228	287	P	H
		4804	41.2	-32.8	74	60.19	33.55	12.04	64.58	163	241	P	V
nRF--Filter CH 07 2416MHz		4832	41.32	-32.68	74	60.3	33.58	12.01	64.57	310	47	P	H
		7245	43.16	-30.84	74	58.8	35.39	13.95	64.98	310	47	P	H
		4832	40.68	-33.32	74	59.66	33.58	12.01	64.57	105	149	P	V
		7248	41.66	-32.34	74	57.32	35.39	13.97	65.02	105	149	P	V
nRF--Filter CH 12 2426MHz		4852	41.94	-32.06	74	60.9	33.64	11.96	64.56	100	0	P	H
		7278	42.74	-31.26	74	58.43	35.39	13.98	65.06	100	0	P	H
		4852	41.25	-32.75	74	60.21	33.64	11.96	64.56	300	0	P	V
		7278	41.92	-32.08	74	57.61	35.39	13.98	65.06	300	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Sample 2

nRF—Bypass Mode (Band Edge @ 3m)

nRF--Bypass	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
nRF--Bypass CH 38 2478MHz		2483.62	59.1	-14.9	74	52.81	32.2	6.73	32.64	101	49	P	H
		2483.62	48.27	-5.73	54	41.98	32.2	6.73	32.64	101	49	A	H
		2478	106.1	---	---	99.81	32.2	6.73	32.64	101	49	P	H
		2478	102.64	---	---	96.35	32.2	6.73	32.64	101	49	A	H
		2486.44	57.08	-16.92	74	50.79	32.2	6.73	32.64	230	276	P	V
		2485.3	46.09	-7.91	54	39.8	32.2	6.73	32.64	230	276	A	V
		2478	105.64	---	---	99.35	32.2	6.73	32.64	230	276	P	V
		2478	101.79	---	---	95.5	32.2	6.73	32.64	230	276	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

nRF—Bypass Mode (Harmonic @ 3m)

nRF--Bypass	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
nRF--Bypass CH 38 2478MHz		4950	41.64	-32.36	74	59.87	33.9	9.6	61.73	300	0	P	H
		7434	42.67	-31.33	74	57.28	35.7	11.76	62.07	300	0	P	H
		4950	42.42	-31.58	74	60.65	33.9	9.6	61.73	100	0	P	V
		7434	42.03	-31.97	74	56.64	35.7	11.76	62.07	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

nRF—Bypass Mode (LF)

nRF--Bypass	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
2.4GHz nRF--Bypass LF		35.82	27.39	-12.61	40	37.47	21.82	0.97	32.87	-	-	P	H
		79.47	27.83	-12.17	40	46.12	13.22	1.41	32.92	-	-	P	H
		95.96	21.94	-21.56	43.5	38.06	15.24	1.56	32.92	-	-	P	H
		169.68	29.99	-13.51	43.5	44.71	16.14	2.08	32.94	-	-	P	H
		307.42	23.59	-22.41	46	34.41	19.35	2.82	32.99	-	-	P	H
		527.61	28	-18	46	33.18	24.51	3.67	33.36	-	-	P	H
		35.82	31.53	-8.47	40	41.61	21.82	0.97	32.87	-	-	P	V
		51.34	29.81	-10.19	40	47.72	13.88	1.12	32.91	-	-	P	V
		94.99	29.53	-13.97	43.5	45.79	15.1	1.55	32.91	-	-	P	V
		169.68	31.41	-12.09	43.5	46.13	16.14	2.08	32.94	-	-	P	V
		524.7	33.61	-12.39	46	38.87	24.44	3.66	33.36	-	-	P	V
		843.83	32.99	-13.01	46	32.18	28.91	4.64	32.74	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

nRF--Filter	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
nRF--Filter		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 00													
2402MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)

2. Level(dBμV/m) =

Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)


= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	Duty factor(dB)
nRF Bypass Mode	47.44	3.24
nRF Filter Mode	47.44	3.24

nRF Bypass Mode

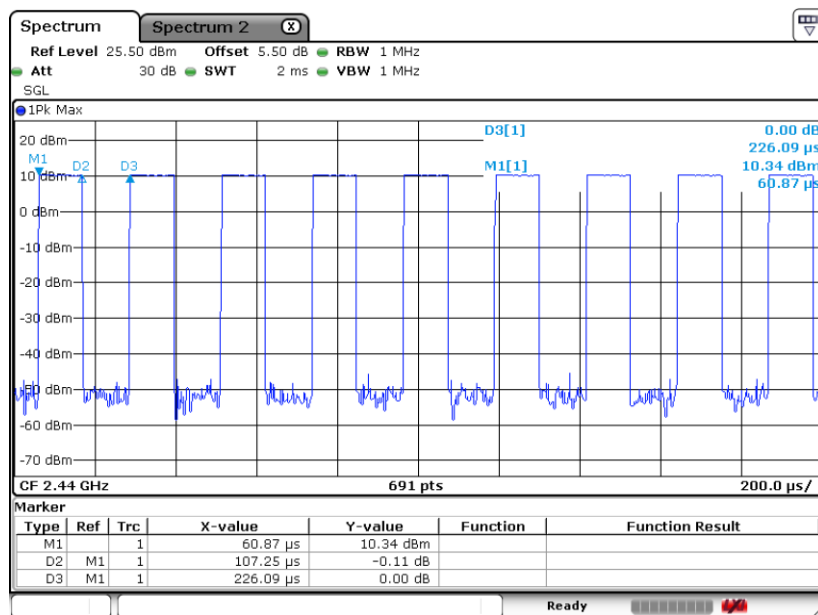



nRF Filter Mode

