




RADIO EXPOSURE TEST REPORT

FCC ID : 2ABLK-GS5239XX
Equipment : GS7 XGS Tri Gateway, GS7 10GE Tri Gateway
Brand Name : Calix
Model Name : GS7 XGS GS5239XG, GS7 10GE GS5239E
Applicant : Calix Inc.
1035 N. McDowell Blvd. Petaluma, CA94954 U.S.A.
Standard : 47 CFR Part 2.1091

The product was received on Mar. 25, 2024, and testing was started from Apr. 12, 2024 and completed on May 23, 2024. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in 47 CFR Part 2.1091 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

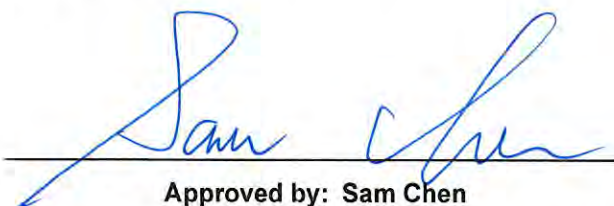

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory
No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 EUT General Information	5
1.2 Antenna Information	5
1.3 Table for Multiple Listing	7
1.4 Table for EUT supports functions.....	7
1.5 Accessories	7
1.6 Applicable Standards	7
1.7 Testing Location	9
2 Maximum Permissible Exposure	10
2.1 Limit of Maximum Permissible Exposure	10
2.2 MPE Calculation Method.....	10
2.3 MPE Exemption.....	11
2.4 Calculated Result and Limit.....	12

Photographs of EUT v01



History of this test report

TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A1_1 Ver1.1

Page Number : 3 of 12
Issued Date : Jun. 21, 2024
Report Version : 01



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
2	-	Exposure evaluation	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen

Report Producer: Muse Chan



1 General Description

1.1 EUT General Information

RF General Information			
Evaluation Mode	Frequency Range (MHz)	Operating Frequency (MHz)	Modulation Type
2.4GHz WLAN	2400-2483.5	2412-2462	802.11b: DSSS (DBPSK, DQPSK, CCK) 802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) VHT: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM) 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
5GHz WLAN	5150-5250 5725-5850	5180-5240 5745-5825	802.11a/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM) 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM) 802.11be: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM)
6GHz WLAN	5925-7125	5955-7115	802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM) 802.11be: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM)

1.2 Antenna Information

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	Alpha	290-20543	Dipole	I-PEX	Note 1
2	Alpha	290-20544	Dipole	I-PEX	
3	Alpha	290-20546	Dipole	I-PEX	
4	Alpha	290-20545	Dipole	I-PEX	
5	Alpha	290-20548	Dipole	I-PEX	
6	Alpha	290-20549	Omni	I-PEX	
7	Alpha	290-20547	Dipole	I-PEX	
8	Alpha	290-20550	Omni	I-PEX	



Note 1:

Ant.	Port		Antenna Gain (dBi)		
	WLAN 2.4GHz	WLAN 5GHz	WLAN 2.4GHz	WLAN 5GHz	
				UNII 1	UNII 3
1	1	3	2.61	4.07	3.30
2	2	4	3.15	3.95	3.77
3	-	1	-	3.90	3.67
4	-	2	-	4.07	4.99

Ant.	Port		Antenna Gain (dBi)			
	WLAN 6GHz		WLAN 6GHz			
			UNII 5	UNII 6	UNII 7	UNII 8
5	1		4.57	4.18	3.89	3.82
6	2		3.78	4.25	4.39	4.07
7	3		5.99	4.05	4.08	4.55
8	4		4.64	4.51	4.33	3.64

Item	Directional gain (dBi)						
	WLAN 2.4GHz	WLAN 5GHz		WLAN 6GHz			
		UNII 1	UNII 3	UNII 5	UNII 6	UNII 7	UNII 8
2T1S	4.09	-	-	-		-	-
2T2S	3.15	-	-	-		-	-
4T1S	-	6.88	7.39	7.14	7.44	6.67	5.98
4T2S	-	4.07	4.99	5.99	4.51	4.39	4.55
4T4S	-	4.07	4.99	5.99	4.51	4.39	4.55

Note 2: The above information (except antenna gain and directional gain) was declared by manufacturer.

Note 3: The antenna gain and directional gain are measured which follow the procedure of KDB 662911 D03.

Note 4: **For 2.4GHz function:****For IEEE 802.11 b/g/n/VHT/ax (2TX/2RX):**

Port 1~2 can be used as transmitting/receiving antenna.

Port 1~2 could transmit/receive simultaneously.

For 5GHz function:**For IEEE 802.11 a/n/ac/ax/be (4TX/4RX):**

Port 1~4 can be used as transmitting/receiving antenna.

Port 1~4 could transmit/receive simultaneously.

For 6GHz function:**For IEEE 802.11 ax/be (4TX/4RX):**

Port 1~4 can be used as transmitting/receiving antenna.

Port 1~4 could transmit/receive simultaneously.



1.3 Table for Multiple Listing

The EUT has two equipment/model names, the difference is listed in the following table:

EUT	Equipment Name	Model Name	BOSA	10G PHY port	SLIC IC
1	GS7 XGS Tri Gateway	GS7 XGS GS5239XG	With	1 port	Brand : Intel Model : SLC220
2	GS7 10GE Tri Gateway	GS7 10GE GS5239E	Without	2 port	Brand : Microsemi Model : Le9632

Note1: From the above, EUT 1 has been selected as representative mode for the test and its data was recorded in this report

Note2: The above information was declared by manufacturer.

1.4 Table for EUT supports functions

Function
AP Router
Bridge
Extender

Note: The above information was declared by manufacturer.

1.5 Accessories

Accessories			
Equipment Name	Brand Name	Model Name	Rating
Adapter 1	AMIGO	AMS340-1204500FU	INPUT: 100-240V~50/60Hz, 2.0A OUTPUT: 12V, 4.5A
Adapter 2	MOSO	V30-V4500R120-060K0-US	INPUT: 100-240V~50/60Hz, 1.5A max. OUTPUT: 12.0V, 4.5A
other			
Cradle*1			

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2.1091
- ♦ KDB 447498 D04 Interim General RF Exposure Guidance v01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ 47 CFR Part 1.1307
- ♦ 47 CFR Part 1.1310





1.7 Testing Location

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)
(TAF: 3787)	TEL: 886-3-656-9065 FAX: 886-3-656-9085
	Test site Designation No. TW3787 with FCC.
	Conformity Assessment Body Identifier (CABID) TW3787 with ISCED.



2 Maximum Permissible Exposure

2.1 Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	*(100)	<6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500	-	-	f/300	<6
1500-100,000	-	-	5	<6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500	-	-	f/1500	<30
1500-100,000	-	-	1.0	<30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

2.2 MPE Calculation Method

The MPE was calculated at 47 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$



2.3 MPE Exemption

Option (A): 1.1307(b)(3)(i)(A): Available maximum time-averaged power is < 1 mW

Option (B): 1.1307(b)(3)(i)(B): Device operates between 300 MHz and 6 GHz and the maximum time-averaged power or effective radiated power (ERP), whichever is greater, <= P_{th}.

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

Where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

d = the separation distance (cm);

Option (C): 1.1307(b)(3)(i)(C): ERP is below a threshold calculated based on the distance

R between the person and the antenna / radiating structure, where $R > \lambda / 2 \pi$.

Single RF Sources Subject to Routine Environmental Evaluation	
RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.
Note: R is in meters, f is in MHz.	



2.4 Calculated Result and Limit

Exposure Environment: General Population / Uncontrolled Exposure

Mode	DG (dBi)	Power (dBm)	ERP (dBm)	Tolerance (dB)	Tune-up ERP (mW)	Distance (cm)	Option	TL ERP (mW)	TL Ratio
2.4G;D1D	3.15	28.96	29.96	0.50	1111.732	47	C	4241.3	0.2622
5.2G;D1D	6.88	28.60	33.33	0.50	2415.461	47	C	4241.3	0.5697
5.8G;D1D	7.39	28.53	33.77	0.07	2421.029	47	C	4241.3	0.5710
6.2G;D1D	5.99	-	26.51	0.50	502.343	47	C	4241.3	0.1185
6.4G;D1D	4.51	-	24.50	0.50	316.228	47	C	4241.3	0.0746
6.7G;D1D	4.39	-	27.58	0.26	608.135	47	C	4241.3	0.1434
7.0G;D1D	4.55	-	24.93	0.50	349.140	47	C	4241.3	0.0823

Simultaneous Transmission Analysis Mode: EUT 1-WLAN 2.4GHz + WLAN 5GHz + WLAN 6GHz

Mode	DG (dBi)	Power (dBm)	ERP (dBm)	Tolerance (dB)	Tune-up ERP (mW)	Distance (cm)	Option	TL ERP (mW)	TL Ratio
2.4G;D1D	3.15	28.96	29.96	0.50	1111.732	47	C	4241.3	0.2622
5.8G;D1D	7.39	28.53	33.77	0.07	2421.029	47	C	4241.3	0.5710
6.7G;D1D	4.39	-	27.58	0.26	608.135	47	C	4241.3	0.1434
Sum TL Ratio_C	0.9766	-	-	-	-	-	-	-	-
Ratio Limit	1	-	-	-	-	-	-	-	-

Note: The above antenna gain was declared by manufacturer.

—————THE END—————