

INSTALLATION INSTRUCTIONS


I highly recommend watching the How To Do by scanning this QR code



OX


- | | | |
|-------------------|----------------------------|-----------------------------|
| arger | 1 x 3mm hex key | POWER SPECIFICATIONS |
| sunk screw | 5 x 200mm Nylon zip ties | 5V / 2A (MINIMUM) |
| sunk screw | 1 x 1.1m Power cable USB-A | 9V / 2A |

For more information about the study, please contact Dr. Michael J. Hwang at (310) 794-3000 or email at mhwang@ucla.edu.

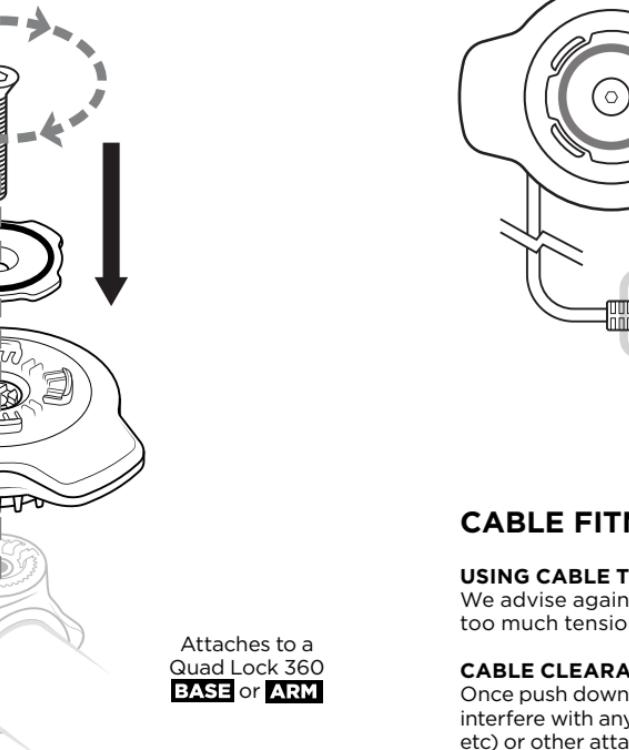


(INCLUDED)

REFER TO



1

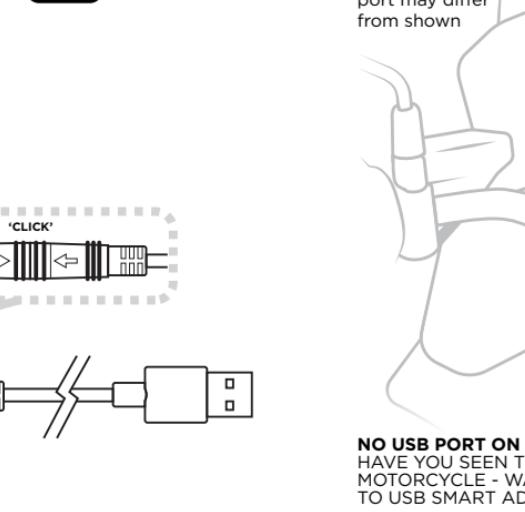

YOUR BIKE?
THE QUAD LOCK
WATERPROOF 12V


A diagram showing a rear suspension assembly with two downward arrows pointing to the top of the rear shock absorber mount, indicating where to apply anti-seize compound.

100

A simple line drawing of a chair from a front-on perspective. It features a rectangular backrest with curved armrests and a large, rounded rectangular seat below it.

11

100



POWER CABLES (SOLD SEPARATELY)




**ONLY USE GENUINE
UAD LOCK POWER
ISPI AXING THIS S**



**COMPATIBILITY GUIDE
INSTALLATION
INSTRUCTIONS FOR
ALTERNATIVE POWER**

ATTACHING YOUR P

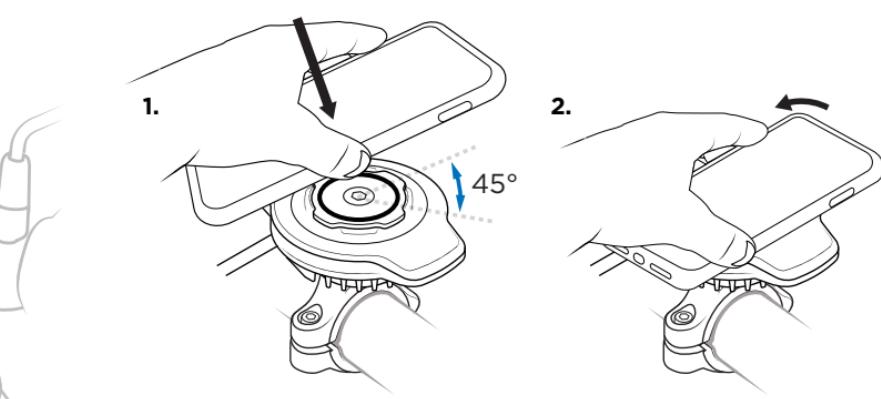

DETACHING YOUR E

