



EMC TEST REPORT

Product Name: DTEN Bar

Model Name: DCR200

FCC ID: 2AQ7Q-DCR200

Issued For : DTEN Inc

97 E Brokaw Road suite 180 San Jose CA 95112

Issued By : Shenzhen LGT Test Service Co., Ltd.

Room 205, Building 13, Zone B, Zhenxiong Industrial Park,
No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan
District, Shenzhen, Guangdong, China

Report Number: LGT23J114EM03

Sample Received Date: Nov. 01, 2023

Date of Test: Nov. 01, 2023 – Dec. 04, 2023

Date of Issue: Dec. 04, 2023

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



TEST REPORT CERTIFICATION

Applicant: DTEN Inc
Address: 97 E Brokaw Road suite 180 San Jose CA 95112
Manufacturer: DTEN Inc
Address: 97 E Brokaw Road suite 180 San Jose CA 95112
Product Name: DTEN Bar
Trademark: DTEN
Model Name: DCR200
Sample Status: Normal

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC 47 CFR Part 15 Subpart B ANSI C63.4-2014	PASS

Prepared by:

Terry Zhao

Terry Zhao
Engineer

Approved by:

Vita Li

Vita Li
Technical Director





Table of Contents

1. TEST SUMMARY	5
1.1 TEST LABORATORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	8
2.3 DESCRIPTION OF THE SUPPORT UNITS	8
2.5 MEASUREMENT INSTRUMENTS LIST	10
3. EMC EMISSION TEST	11
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.2 RADIATED EMISSION MEASUREMENT	17
APPENDIX I - TEST SETUP	23



Revision History

Rev.	Issue Date	Revisions
00	Dec. 04, 2023	Initial Issue



1. TEST SUMMARY

EMC Emission				
Standard	Test Item	Limit	Judgement	Remark
FCC 47 CFR Part 15 Subpart B ANSI C63.4-2014	Conducted Emissions	Class B	PASS	
	Radiated Emissions Below 1GHz	Class B	PASS	
	Radiated Emissions Above 1GHz	Class B	PASS	Note 2

Note:

- 1 "N/A" denotes test is not applicable in this Test Report
- 2 If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz. If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, measurement shall only be made up to 5 GHz. If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 40 GHz, whichever is less.



1.1 TEST LABORATORY

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China
Accreditation Certificate	A2LA Certificate No.: 6727.01
	FCC Registration No.: 746540
	CAB ID: CN0136

1.2 MEASUREMENT UNCERTAINTY

Test Item	Measurement Frequency Range MHz	Uncertainty dB
Conducted Emissions at AC mains power port	0.009 ~ 30	2.80
Radiated Emissions	0.009 ~ 30	2.16
Radiated Emissions	30 ~ 1000	4.40
Radiated Emissions	1000 ~ 18000	5.49
Note: 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2. 2. The measurement uncertainty is not included in the test result.		



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name:	DTEN Bar
Trademark:	DTEN
Model Name:	DCR200
Series Model:	N/A
Model Difference:	N/A
Adapter:	Input: 100-240 V, 50/60 Hz, 2.5 A Output: 24V, 5A
Battery:	N/A
Test Voltage:	AC 120V/60Hz
Hardware Version:	DTEN_BAR_RK3588_MB_P2
Software Version:	0.0.6

Note: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operating mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Mode	Description
Mode 1	HDMI IN+HDMI OUT+Mouse+Keyboard+USB+LAN+Camera+Wireless Communication
Mode 2	USB-C IN+HDMI OUT+Mouse+Keyboard+USB+LAN+Camera+Wireless Communication

Note: Only the data of worst-case mode 1 was recorded in this report.

2.3 DESCRIPTION OF THE SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Standard Accessories Equipment

Description	Manufacturer	Model	S/N	Rating
DTEN Remote Control	DTEN	DARCWL01	N/A	N/A
DTEN Remote Control Dongle	DTEN	DARCWLMD01	N/A	N/A
USB C-to-C cable	DTEN	N/A	N/A	1.8m, shielded, without ferrite core
HDMI cable	DTEN	N/A	N/A	1.85m, shielded, with ferrite core
Adapter	Foshan Shunde GUANYUDA Power Supply Co., Ltd.	DPA03	N/A	Input: 100-240V ~ 50/60Hz 2.5A Output: 24V, 5A
Power cord	N/A	N/A	N/A	2m, US plug
Power cord	N/A	N/A	N/A	2m, EU plug
Power cord	N/A	N/A	N/A	2m, UK plug
Power cord	N/A	N/A	N/A	2m, AU plug
Power cord	N/A	N/A	N/A	2m, IND plug

Optional Accessories Equipment

Description	Manufacturer	Model	S/N	Rating
USB C-to-C cable	DTEN	N/A	N/A	5m, shielded, without ferrite core
USB C-to-C cable	DTEN	N/A	N/A	10m, shielded, without ferrite core
DTEN Vue	DTEN	DAVCS01	N/A	N/A
DTEN Vue Pro	DTEN	DAVCS01	N/A	N/A
DTEN Mate	DTEN	DBA13310	N/A	N/A
Adapter	HUIZHOU FUJIAAPPLIANC E TECH. CO., LTD.	FJ-SW2120502400 U	N/A	Input: 100-240V ~ 50/60Hz 0.4A Output: 5Vdc 2.4A



USB A-to-C cable	DTEN	N/A	DTEN	4m, shielded, without ferrite core
DTEN Mate Dock	DTEN	DAS0210	DTEN	Input: 5Vdc 2.4A Output: 5Vdc 2A

Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Keyboard	Lenovo	EKB-536A	N/A	N/A
Mouse	Lenovo	EMS-537A	N/A	N/A
Laptop	Lenovo	HKF-16	N/A	N/A
Monitor	Lenovo	G19270FG0	N/A	N/A
Monitor	HKC	T275IU	N/A	N/A
HDMI cable	SONY	20276	N/A	0.8m, shielded
HDMI cable	DTEN	N/A	N/A	1.85m, shielded, with ferrite core
RJ45 Cable	UGREEN	NW153	N/A	2m, shielded, without ferrite core

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.5 MEASUREMENT INSTRUMENTS LIST

Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2023.04.13	2024.04.12
LISN	COM-POWER	LI-115	02032	2023.04.07	2024.04.06
LISN	SCHWARZBECK	NNLK 8122	00160	2023.04.07	2024.04.06
Transient Limiter	CYBERTEK	EM5010A	E2250100049	2023.04.07	2024.04.06
Temperature & Humidity	KTJ	TA218B	N.A	2023.04.24	2024.04.23
Testing Software	EMC-I_V1.4.0.3_SKET				

Radiated Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2023.04.13	2024.04.12
Active loop Antenna	ETS	6502	00049544	2022.06.02	2025.06.01
Spectrum Analyzer	Keysight	N9010B	MY60242508	2023.04.10	2024.04.09
Bilog Antenna	SCHAFFNER	CBL6112B	2705	2022.06.05	2025.06.04
Horn Antenna	SCHWARZBECK	3115	10SL0060	2022.06.02	2025.06.01
Pre-amplifier(9kHz-1GHz)	EMtrace	RP01A	02017	2023.04.07	2024.04.06
Pre-amplifier(1-26.5G)	Agilent	8449B	3008A4722	2023.04.07	2024.04.06
Wireless Communications Test Set	R&S	CMW 500	137737	2023.04.13	2024.04.12
Temperature & Humidity	KTJ	TA218B	N.A	2023.04.24	2024.04.23
Testing Software	EMC-I_V1.4.0.3_SKET				



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 LIMITS

FREQUENCY (MHz)	Conducted Emission Limits (dBuV)			
	Class A		Class B	
	Quasi-peak	Average	Quasi-peak	Average
0.15 ~ 0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.5 ~ 5	73.00	60.00	56.00	46.00
5 ~ 30	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor
Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item - EUT Test Photos.




3.1.3 TEST SETUP

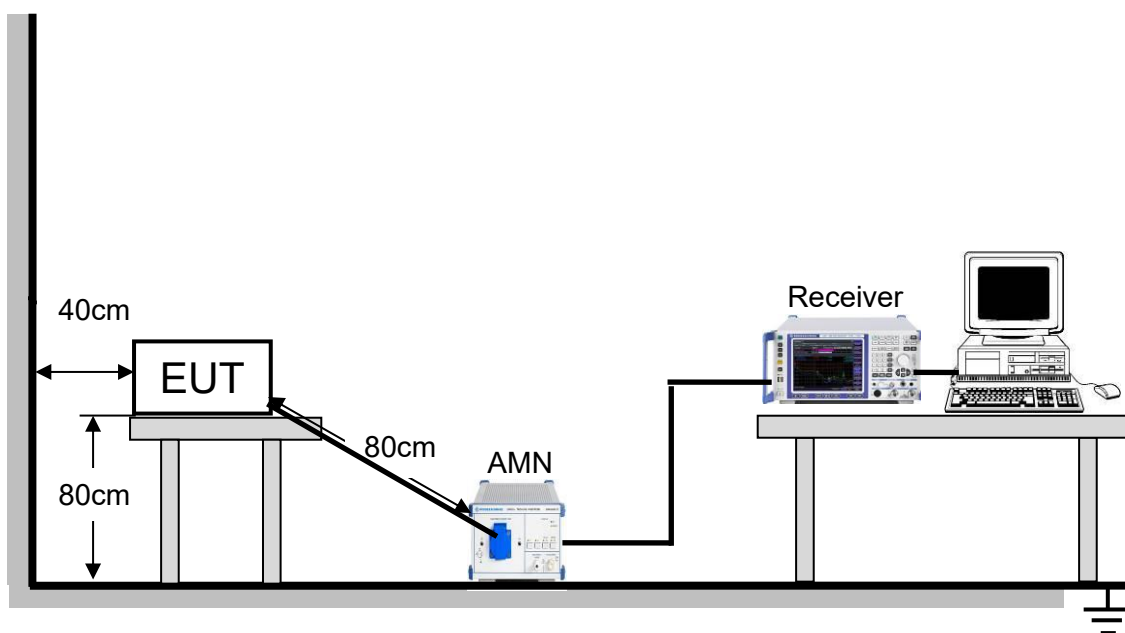



3.1.4 TEST RESULTS


Project: LGT23J114	Test Engineer: LiuH
EUT: DTEN Bar	Temperature: 24.5℃
M/N: DCR200	Humidity: 50%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-11-10
Test Mode: HDMI IN+HDMI OUT+Mouse+Keyboard+USB+LAN+Camera+Wireless Communication+Remote control+Dongle	
Note:	

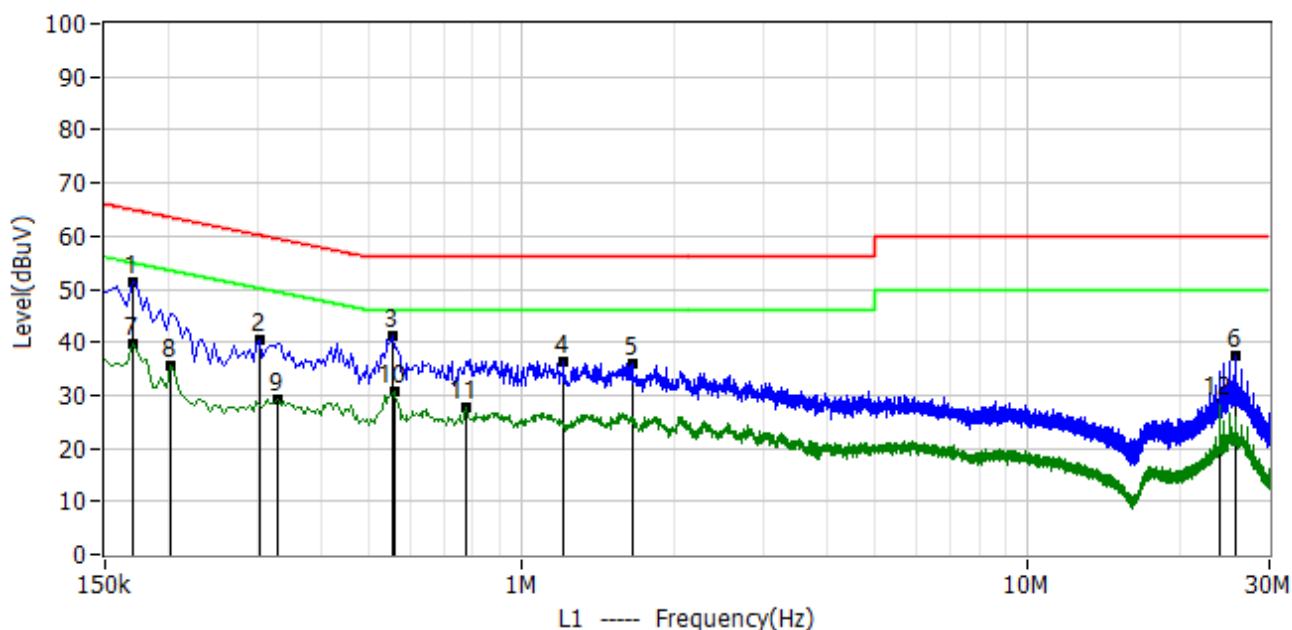

No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.170	40.80	10.58	51.38	64.96	-13.58	QP	L1
2*	0.302	29.77	10.59	40.36	60.19	-19.83	QP	L1
3*	0.554	30.51	10.58	41.09	56.00	-14.91	QP	L1
4*	1.206	25.79	10.62	36.41	56.00	-19.59	QP	L1
5*	1.654	25.42	10.69	36.11	56.00	-19.89	QP	L1
6*	25.718	26.03	11.31	37.34	60.00	-22.66	QP	L1
7*	0.170	29.04	10.58	39.62	54.96	-15.34	AV	L1
8*	0.202	24.91	10.60	35.51	53.53	-18.02	AV	L1
9*	0.330	18.80	10.59	29.39	49.45	-20.06	AV	L1
10*	0.558	19.99	10.58	30.57	46.00	-15.43	AV	L1
11*	0.778	17.13	10.58	27.71	46.00	-18.29	AV	L1
12*	24.002	16.99	11.29	28.28	50.00	-21.72	AV	L1




Project: LGT23J114	Test Engineer: LiuH
EUT: DTEN Bar	Temperature: 24.5℃
M/N: DCR200	Humidity: 50%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-11-10
Test Mode: HDMI IN+HDMI OUT+Mouse+Keyboard+USB+LAN+Camera+Wireless Communication+Remote control+Dongle	
Note:	

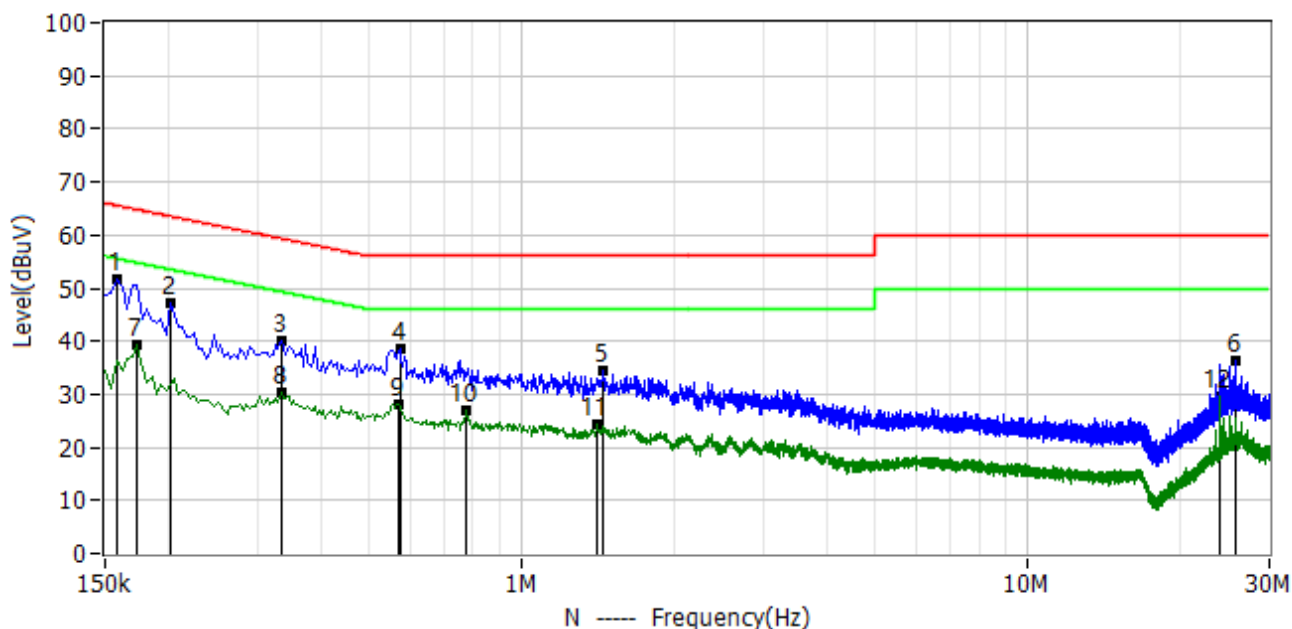

No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.158	41.18	10.57	51.75	65.57	-13.82	QP	N
2*	0.202	36.76	10.60	47.36	63.53	-16.17	QP	N
3*	0.334	29.42	10.59	40.01	59.35	-19.35	QP	N
4*	0.574	27.88	10.58	38.46	56.00	-17.54	QP	N
5*	1.446	23.81	10.66	34.47	56.00	-21.53	QP	N
6*	25.738	25.02	11.44	36.46	60.00	-23.54	QP	N
7*	0.174	28.66	10.58	39.24	54.77	-15.53	AV	N
8*	0.334	19.63	10.59	30.22	49.35	-19.13	AV	N
9*	0.570	17.61	10.58	28.19	46.00	-17.81	AV	N
10*	0.778	16.21	10.58	26.79	46.00	-19.21	AV	N
11*	1.406	13.61	10.65	24.26	46.00	-21.74	AV	N
12*	24.002	18.32	11.40	29.72	50.00	-20.28	AV	N




Project: LGT23J114	Test Engineer: LiuH
EUT: DTEN Bar	Temperature: 24.5℃
M/N: DCR200	Humidity: 50%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-11-10
Test Mode: USB-C IN+HDMI OUT+Mouse+Keyboard+USB+LAN+Camera+Wireless Communication+Remote control+Dongle	
Note:	

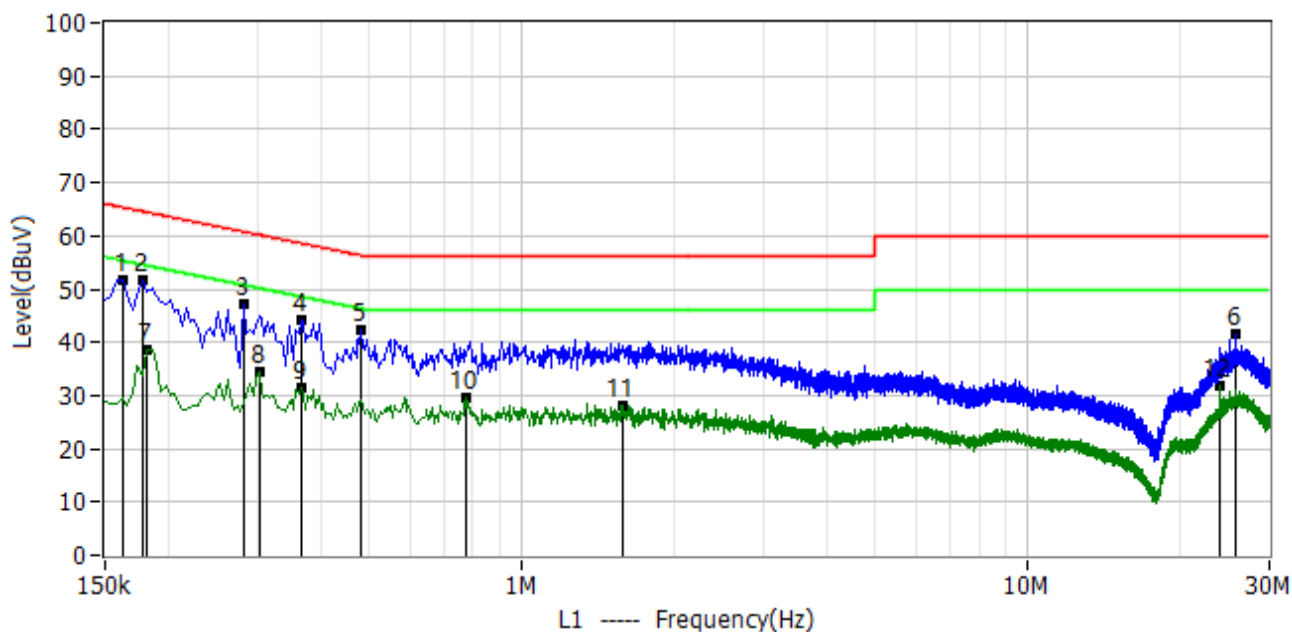

No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.162	41.11	10.57	51.68	65.36	-13.68	QP	L1
2*	0.178	41.18	10.58	51.76	64.58	-12.82	QP	L1
3*	0.282	36.50	10.59	47.09	60.76	-13.67	QP	L1
4*	0.366	33.67	10.59	44.26	58.59	-14.33	QP	L1
5*	0.482	31.62	10.58	42.20	56.30	-14.10	QP	L1
6*	25.726	30.18	11.31	41.49	60.00	-18.51	QP	L1
7*	0.182	28.17	10.59	38.76	54.39	-15.64	AV	L1
8*	0.302	24.02	10.59	34.61	50.19	-15.58	AV	L1
9*	0.366	21.03	10.59	31.62	48.59	-16.97	AV	L1
10*	0.778	19.01	10.58	29.59	46.00	-16.41	AV	L1
11*	1.582	17.37	10.68	28.05	46.00	-17.95	AV	L1
12*	23.998	20.38	11.29	31.67	50.00	-18.33	AV	L1



Project: LGT23J114	Test Engineer: LiuH
EUT: DTEN Bar	Temperature: 24.5℃
M/N: DCR200	Humidity: 50%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-11-10
Test Mode: USB-C IN+HDMI OUT+Mouse+Keyboard+USB+LAN+Camera+Wireless Communication+Remote control+Dongle	
Note:	

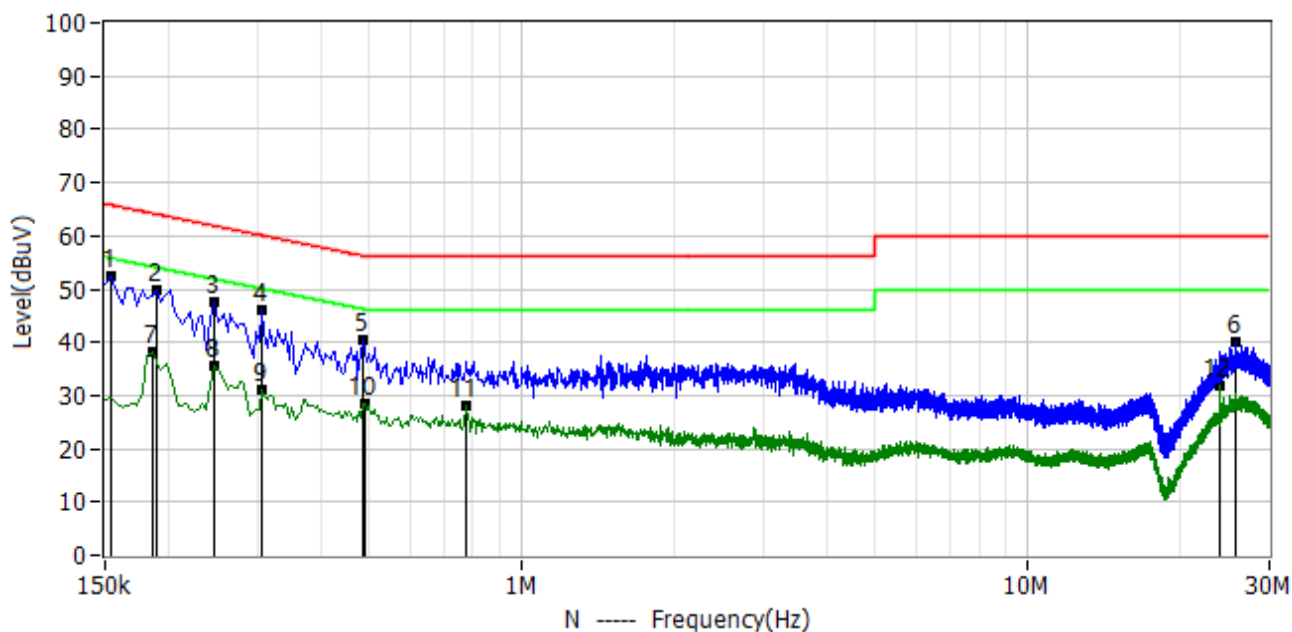

No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.154	41.78	10.56	52.34	65.78	-13.44	QP	N
2*	0.190	39.39	10.59	49.98	64.04	-14.05	QP	N
3*	0.246	37.07	10.59	47.66	61.89	-14.23	QP	N
4*	0.306	35.45	10.59	46.04	60.08	-14.04	QP	N
5*	0.486	29.79	10.58	40.37	56.24	-15.87	QP	N
6*	25.698	28.62	11.44	40.06	60.00	-19.94	QP	N
7*	0.186	27.49	10.59	38.08	54.21	-16.13	AV	N
8*	0.246	24.81	10.59	35.40	51.89	-16.49	AV	N
9*	0.306	20.51	10.59	31.10	50.08	-18.97	AV	N
10*	0.490	17.98	10.58	28.56	46.17	-17.61	AV	N
11*	0.778	17.44	10.58	28.02	46.00	-17.98	AV	N
12*	24.002	20.43	11.40	31.83	50.00	-18.17	AV	N



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS

Below 1 GHz

Frequency (MHz)	Class A	Class B
	Field strength (dBuV/m) (at 3m)	Field strength (dBuV/m) (at 3m)
30 - 88	49.5	40
88 - 216	53.9	43.5
216 - 960	56.9	46
Above 960	60	54

Above 1 GHz

Frequency (MHz)	Class A		Class B	
	Field strength (dBuV/m) (at 3m)		Field strength (dBuV/m) (at 3m)	
	Peak	Average	Peak	Average
Above 1000	80	60	74	54

Frequency Range of Radiated Disturbance Measurement

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower

Note:

- (1) The limit for radiated test was performed according to FCC Part 15, Subpart B;
- (2) The tighter limit applies at the band edges;
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use),
 Margin Level = Measurement Value - Limit Value.


3.2.2 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. EUT as the center to the edge of the auxiliary device, the distance from the maximum edge to the center of the antenna is 3 meter.
- c. The height of antenna is varied from 1 meter to 4 meter above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meter and the rotatable table was turned from 0 degrees to 360 degree to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1GHz.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.




3.2.3 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

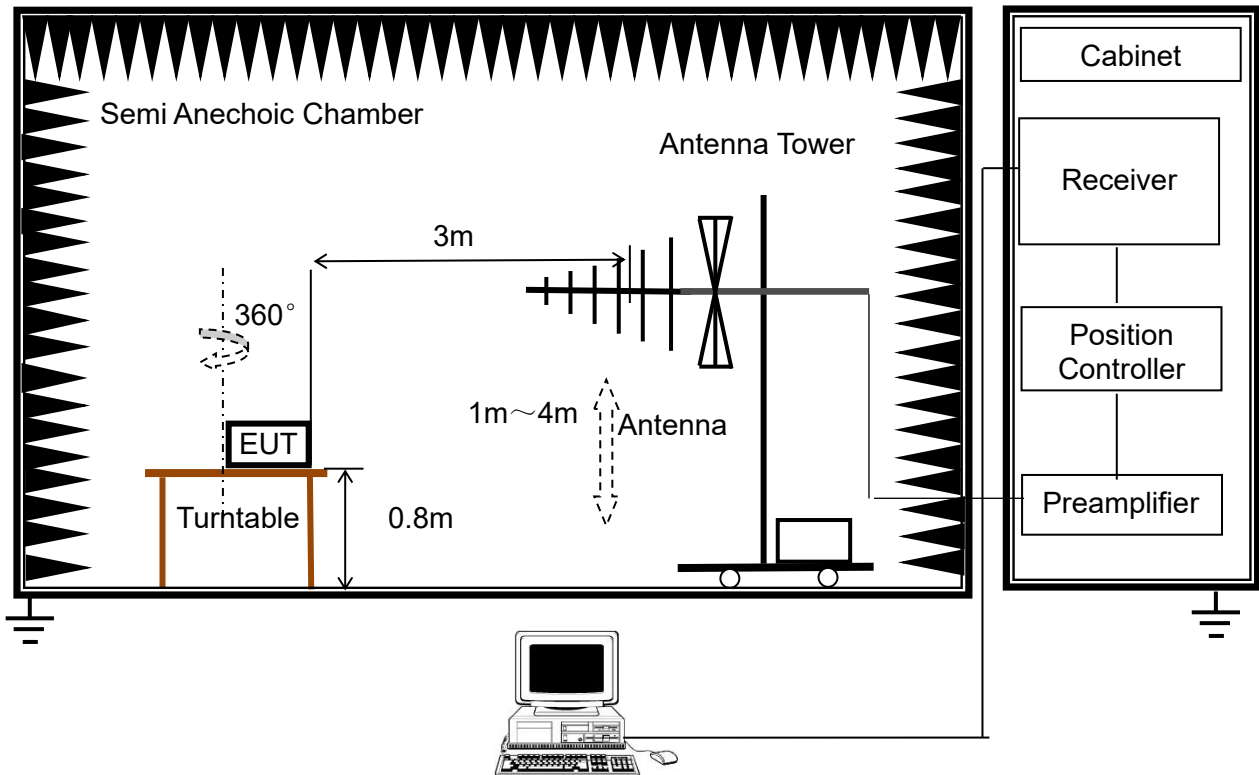

(B) Radiated Emission Test Set-Up Frequency Above 1GHz

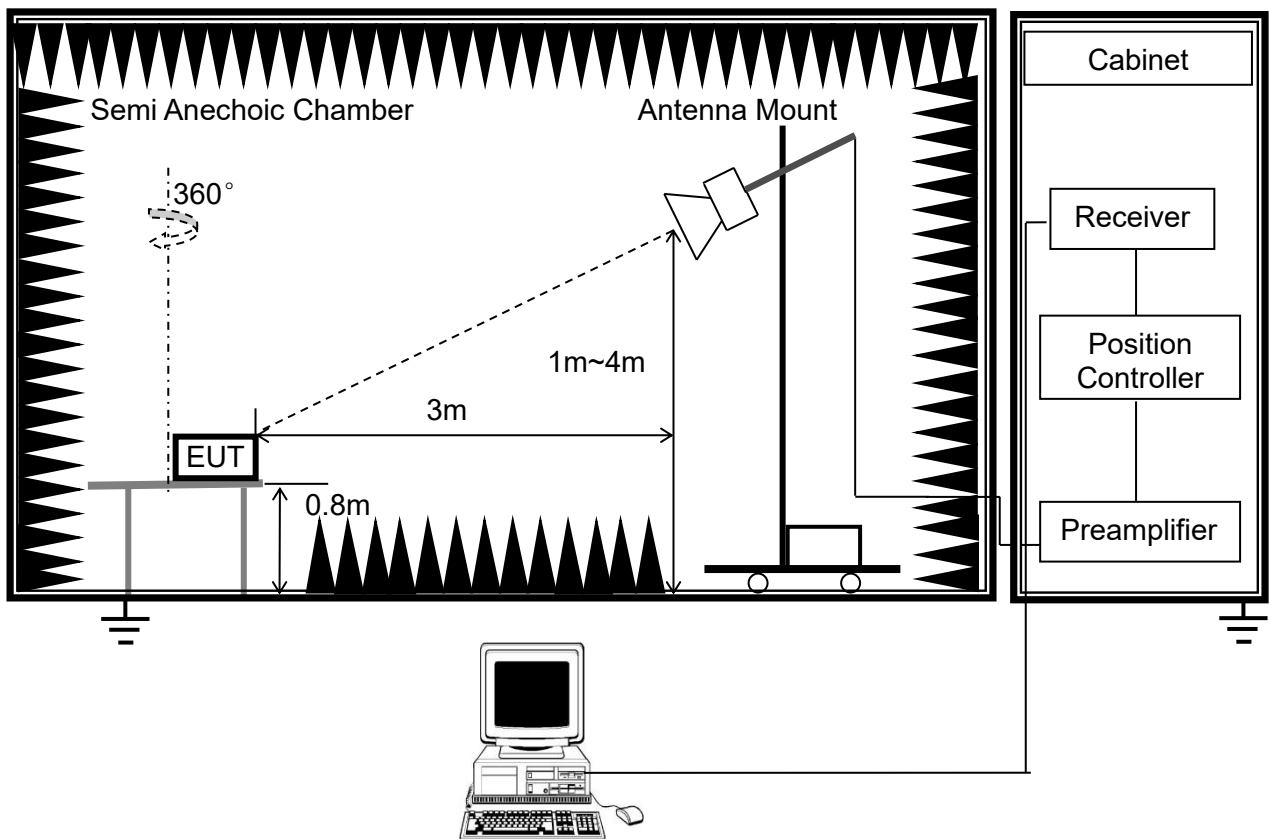





3.2.4 TEST RESULTS

BELOW 1GHZ

Project: LGT23J114	Test Engineer: Xiangdong Ma
EUT: DTEN Bar	Temperature: 29.4℃
M/N: DCR200	Humidity: 45%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-11-13
Test Mode: HDMI IN+HDMI OUT+Mouse+Keyboard+USB+LAN+Camera+Wireless Communication+Remote control+Dongle	
Note:	

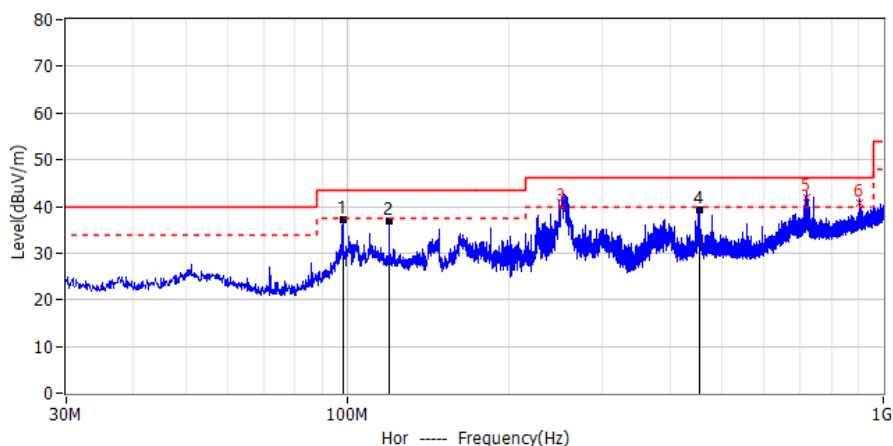


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	98.264	21.56	15.52	37.08	43.50	-6.42	QP	Hor
2*	119.968	19.20	17.64	36.84	43.50	-6.66	QP	Hor
3	252.174	21.58	18.30	39.88	46.00	-6.12	QP	Hor
4*	453.526	15.47	23.89	39.36	46.00	-6.64	QP	Hor
5	720.002	12.04	30.00	42.04	46.00	-3.96	QP	Hor
6	904.717	7.30	33.30	40.60	46.00	-5.40	QP	Hor

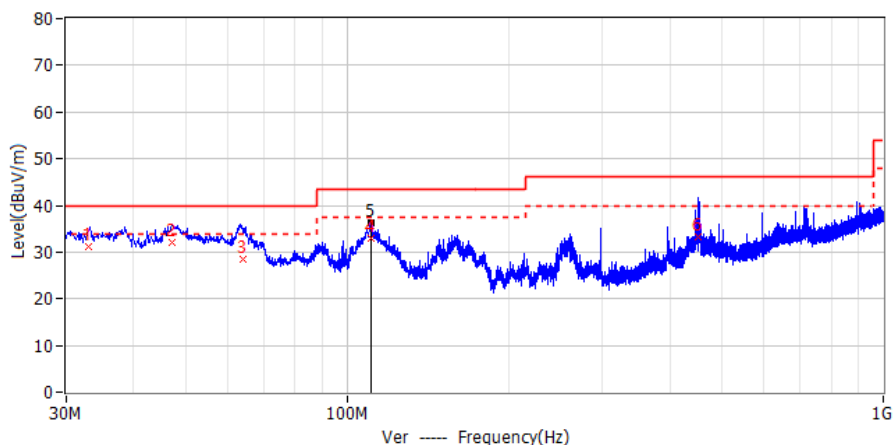


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1	33.078	12.65	18.40	31.05	40.00	-8.95	QP	Ver
2	47.292	12.74	19.30	32.04	40.00	-7.96	QP	Ver
3	63.902	10.18	18.40	28.58	40.00	-11.42	QP	Ver
4	111.240	16.17	16.90	33.07	43.50	-10.43	QP	Ver
5*	111.116	19.41	16.88	36.29	43.50	-7.21	QP	Ver
6	452.356	9.49	23.90	33.39	46.00	-12.61	QP	Ver



Project: LGT23J114	Test Engineer: Xiangdong Ma
EUT: DTEN Bar	Temperature: 29.4℃
M/N: DCR200	Humidity: 45%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-11-13
Test Mode: USB-C IN+HDMI OUT+Mouse+Keyboard+USB+LAN+Camera+Wireless Communication+Remote control+Dongle	
Note:	

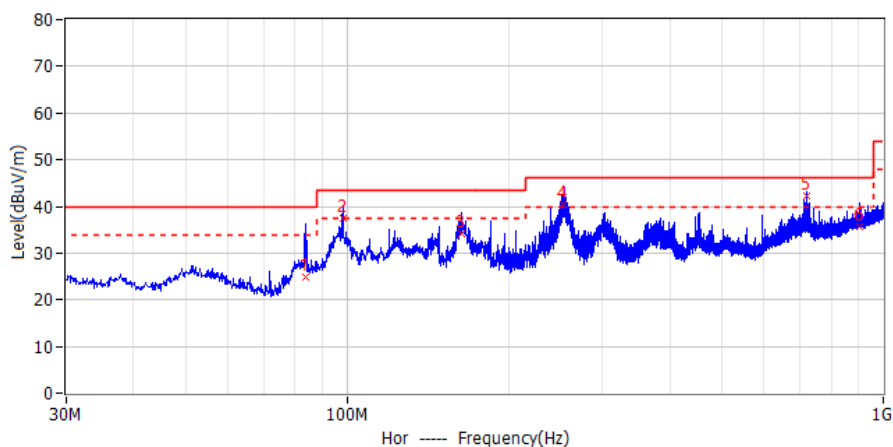

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1	83.995	9.74	15.10	24.84	40.00	-15.16	QP	Hor
2	98.307	21.86	15.50	37.36	43.50	-6.14	QP	Hor
3	163.325	14.46	19.80	34.26	43.50	-9.24	QP	Hor
4	253.076	22.09	18.40	40.49	46.00	-5.51	QP	Hor
5	720.003	12.18	30.00	42.18	46.00	-3.82	QP	Hor
6	904.773	2.33	33.30	35.63	46.00	-10.37	QP	Hor

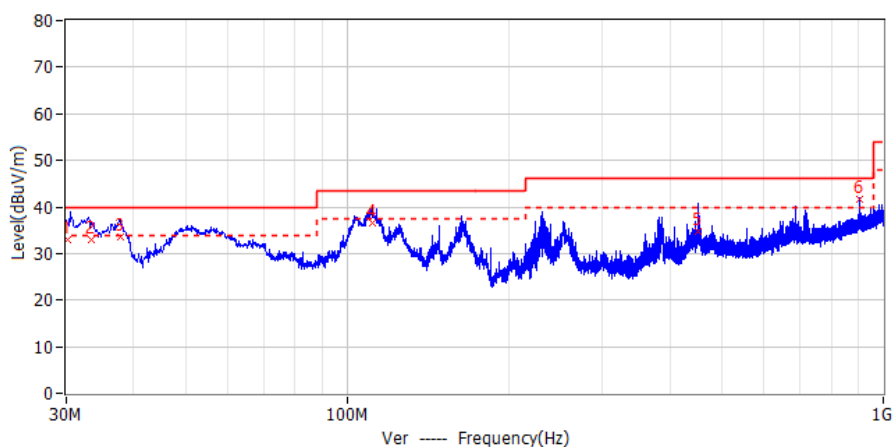


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1	30.207	14.73	18.20	32.93	40.00	-7.07	QP	Ver
2	33.318	14.56	18.40	32.96	40.00	-7.04	QP	Ver
3	37.855	14.70	19.00	33.70	40.00	-6.30	QP	Ver
4	111.343	19.54	16.90	36.44	43.50	-7.06	QP	Ver
5	452.375	10.81	23.90	34.71	46.00	-11.29	QP	Ver
6	904.702	8.25	33.30	41.55	46.00	-4.45	QP	Ver




ABOVE 1GHZ

Project: LGT23J114	Test Engineer: Xiangdong Ma
EUT: DTEN Bar	Temperature: 29.4℃
M/N: DCR200	Humidity: 45%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-11-13
Test Mode: HDMI IN+HDMI OUT+Mouse+Keyboard+USB+LAN+Camera+Wireless Communication+Remote control+Dongle	
Note:	

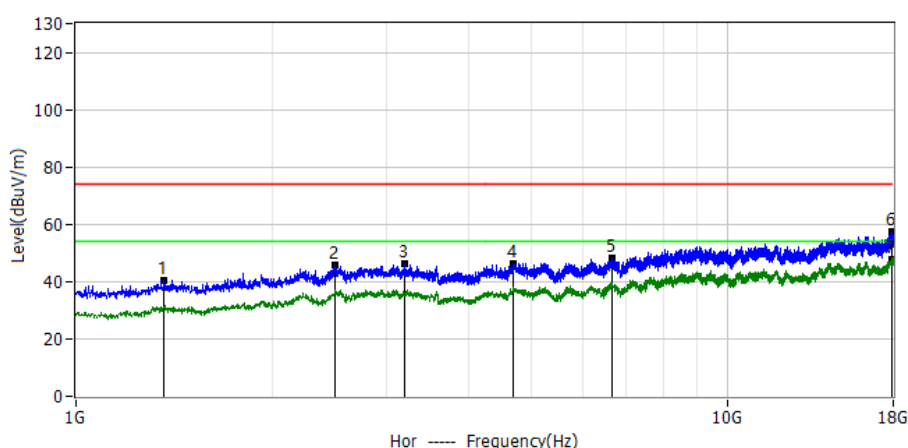


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.366GHz	62.03	-21.66	40.37	74.00	-33.63	PK	Hor
2*	2.496GHz	56.99	-11.03	45.96	74.00	-28.04	PK	Hor
3*	3.199GHz	54.61	-8.41	46.20	74.00	-27.80	PK	Hor
4*	4.695GHz	52.10	-5.91	46.19	74.00	-27.81	PK	Hor
5*	6.650GHz	54.72	-6.30	48.42	74.00	-25.58	PK	Hor
6*	17.951GHz	48.92	8.49	57.41	74.00	-16.59	PK	Hor
7*	17.951GHz	39.11	8.49	47.60	54.00	-6.40	AV	Hor

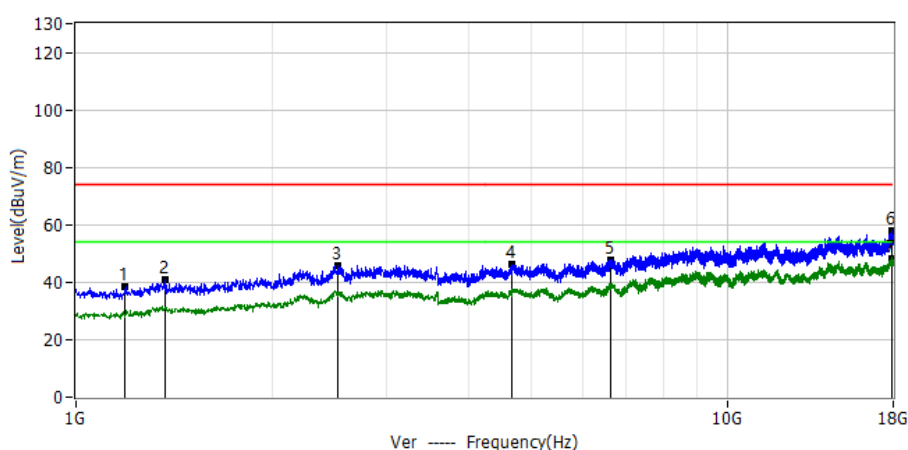


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.191GHz	61.47	-23.04	38.43	74.00	-35.57	PK	Ver
2*	1.368GHz	62.40	-21.64	40.76	74.00	-33.24	PK	Ver
3*	2.526GHz	56.83	-10.85	45.98	74.00	-28.02	PK	Ver
4*	4.670GHz	52.33	-5.89	46.44	74.00	-27.56	PK	Ver
5*	6.638GHz	54.26	-6.32	47.94	74.00	-26.06	PK	Ver
6*	17.938GHz	49.65	8.48	58.13	74.00	-15.87	PK	Ver
7*	17.938GHz	39.82	8.48	48.30	54.00	-5.70	AV	Ver



Project: LGT23J114	Test Engineer: Xiangdong Ma
EUT: DTEN Bar	Temperature: 29.4℃
M/N: DCR200	Humidity: 45%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-11-13
Test Mode: USB-C IN+HDMI OUT+Mouse+Keyboard+USB+LAN+Camera+Wireless Communication+Remote control+Dongle	
Note:	

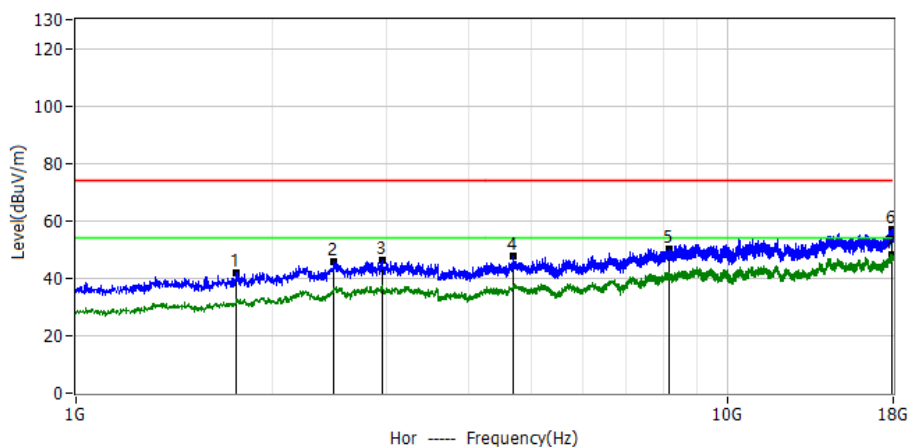

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.763GHz	60.71	-18.61	42.10	74.00	-31.90	PK	Hor
2*	2.488GHz	56.67	-11.12	45.55	74.00	-28.45	PK	Hor
3*	2.957GHz	54.67	-8.57	46.10	74.00	-27.90	PK	Hor
4*	4.695GHz	53.41	-5.91	47.50	74.00	-26.50	PK	Hor
5*	8.163GHz	53.90	-3.54	50.36	74.00	-23.64	PK	Hor
6*	17.947GHz	48.33	8.48	56.81	74.00	-17.19	PK	Hor
7*	17.947GHz	39.52	8.48	48.00	54.00	-6.00	AV	Hor

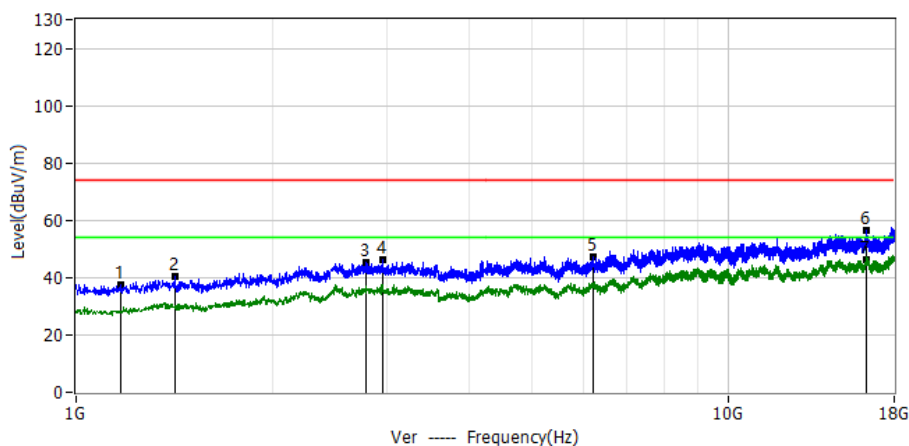

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.170GHz	60.87	-23.23	37.64	74.00	-36.36	PK	Ver
2*	1.417GHz	61.57	-21.29	40.28	74.00	-33.72	PK	Ver
3*	2.785GHz	54.96	-9.48	45.48	74.00	-28.52	PK	Ver
4*	2.953GHz	54.62	-8.59	46.03	74.00	-27.97	PK	Ver
5*	6.211GHz	54.48	-7.13	47.35	74.00	-26.65	PK	Ver
6*	16.343GHz	49.68	6.79	56.47	74.00	-17.53	PK	Ver
7*	16.343GHz	39.41	6.79	46.20	54.00	-7.80	AV	Ver




APPENDIX I - TEST SETUP

Set-up for Conducted Emission on AC Mains (CE)




Set-up for Radiated Emission (RE), Below 1GHz

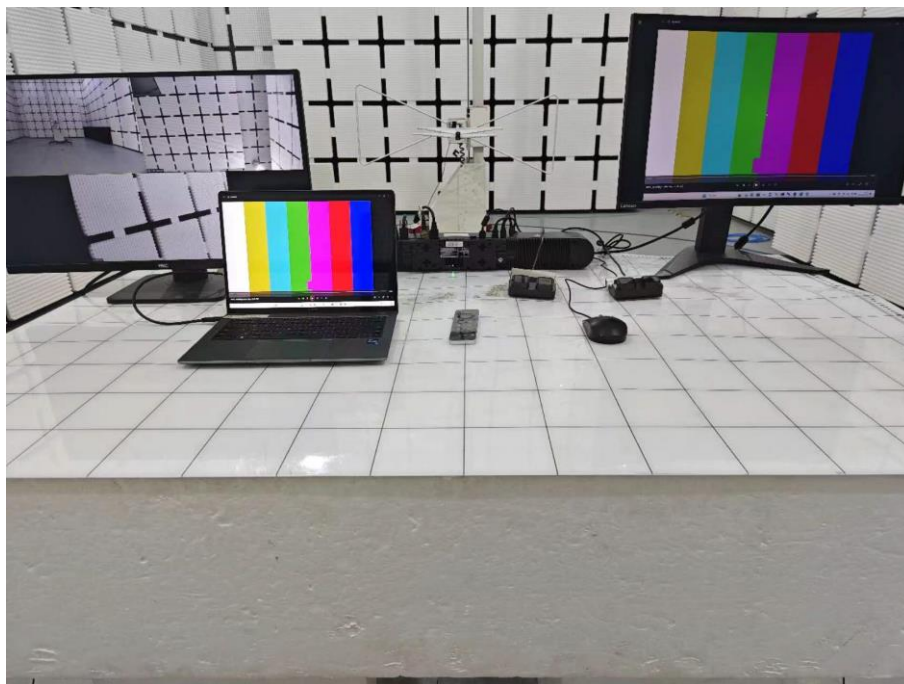



Set-up for Radiated Emission (RE), Above 1GHz

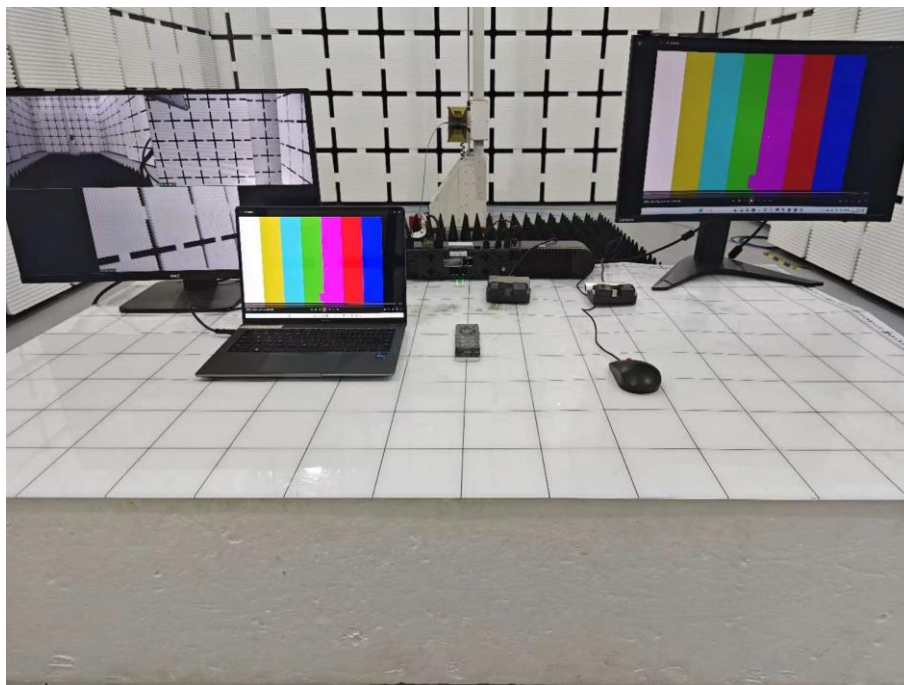

*****END OF THE REPORT*****