


Appendix C. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	24°C	Humidity	55%
Test Engineer	James Chou	Configurations	2.4G + 5G

Horizontal

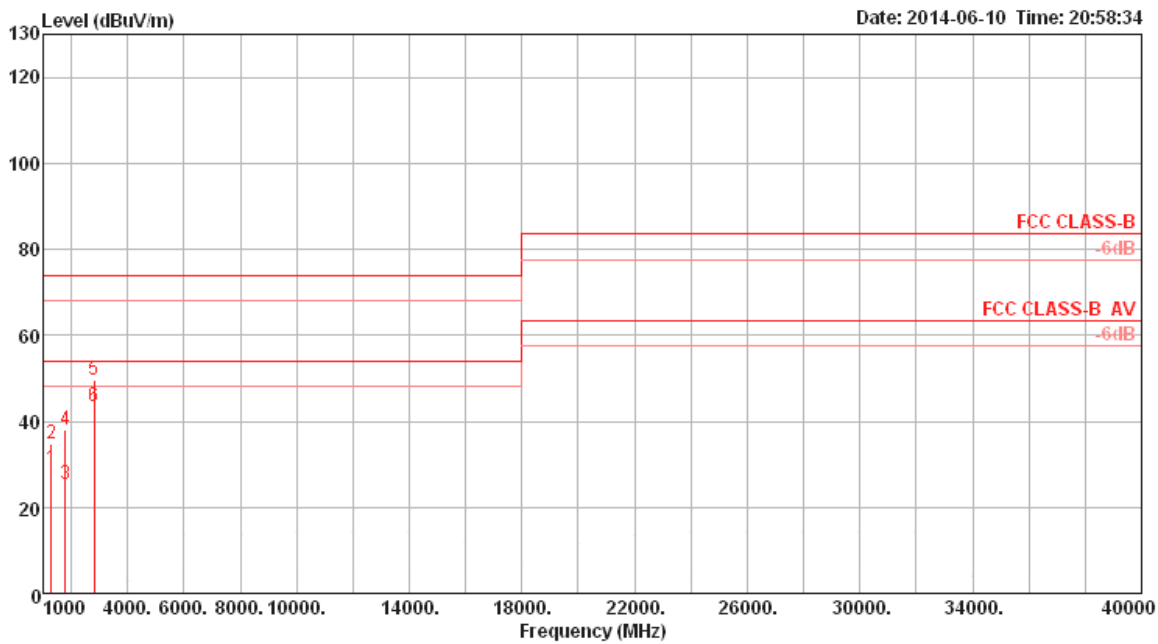

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			
1	1279.96	28.86	54.00	-25.14	35.70	2.90	24.91	34.65	Average	100	72 HORIZONTAL
2	1280.20	34.88	74.00	-39.12	41.72	2.90	24.91	34.65	Peak	100	72 HORIZONTAL
3	1800.04	25.31	54.00	-28.69	30.19	3.54	26.48	34.90	Average	100	288 HORIZONTAL
4	1800.21	37.95	74.00	-36.05	42.83	3.54	26.48	34.90	Peak	100	288 HORIZONTAL
5	2799.89	49.44	74.00	-24.56	50.81	4.49	29.26	35.12	Peak	100	97 HORIZONTAL
6	2800.00	43.36	54.00	-10.64	44.73	4.49	29.26	35.12	Average	100	97 HORIZONTAL

Vertical

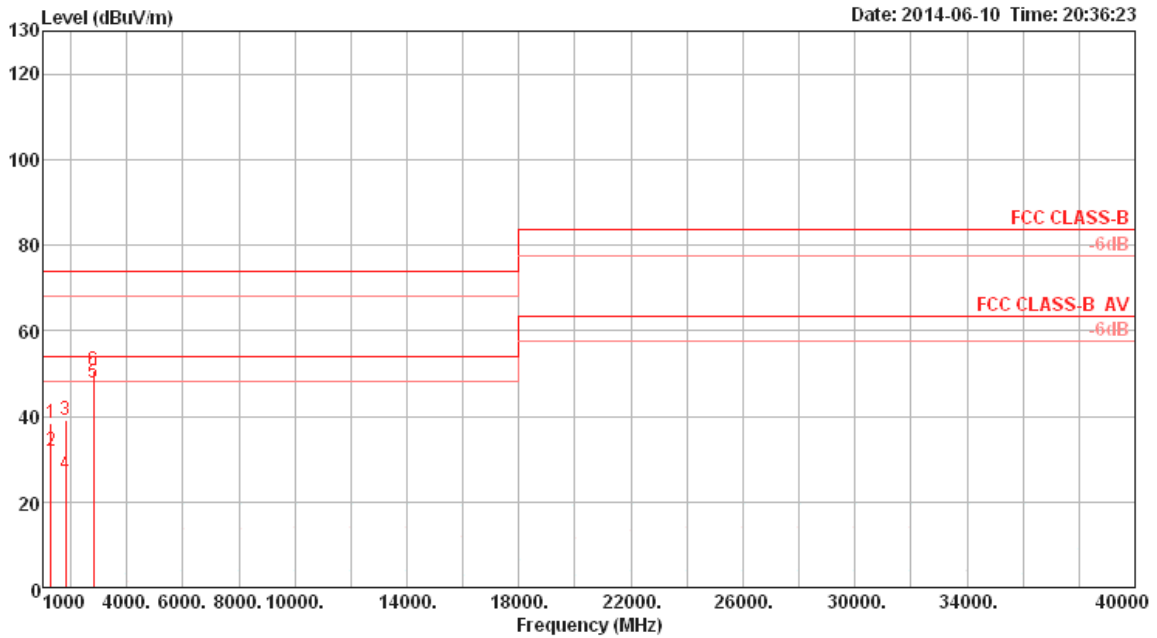

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1279.89	38.28	74.00	-35.72	45.12	2.90	24.91	34.65	100	217	VERTICAL
2	1280.90	31.83	54.00	-22.17	38.65	2.92	24.91	34.65	100	217	VERTICAL
3	1815.14	38.95	74.00	-35.05	43.75	3.57	26.53	34.90	100	334	VERTICAL
4	1815.35	26.30	54.00	-27.70	31.10	3.57	26.53	34.90	100	334	VERTICAL
5	2800.04	47.72	54.00	-6.28	49.09	4.49	29.26	35.12	100	233	VERTICAL
6	2800.04	50.75	74.00	-23.25	52.12	4.49	29.26	35.12	100	233	VERTICAL