



“mfr” file

Modulation Frequency Response

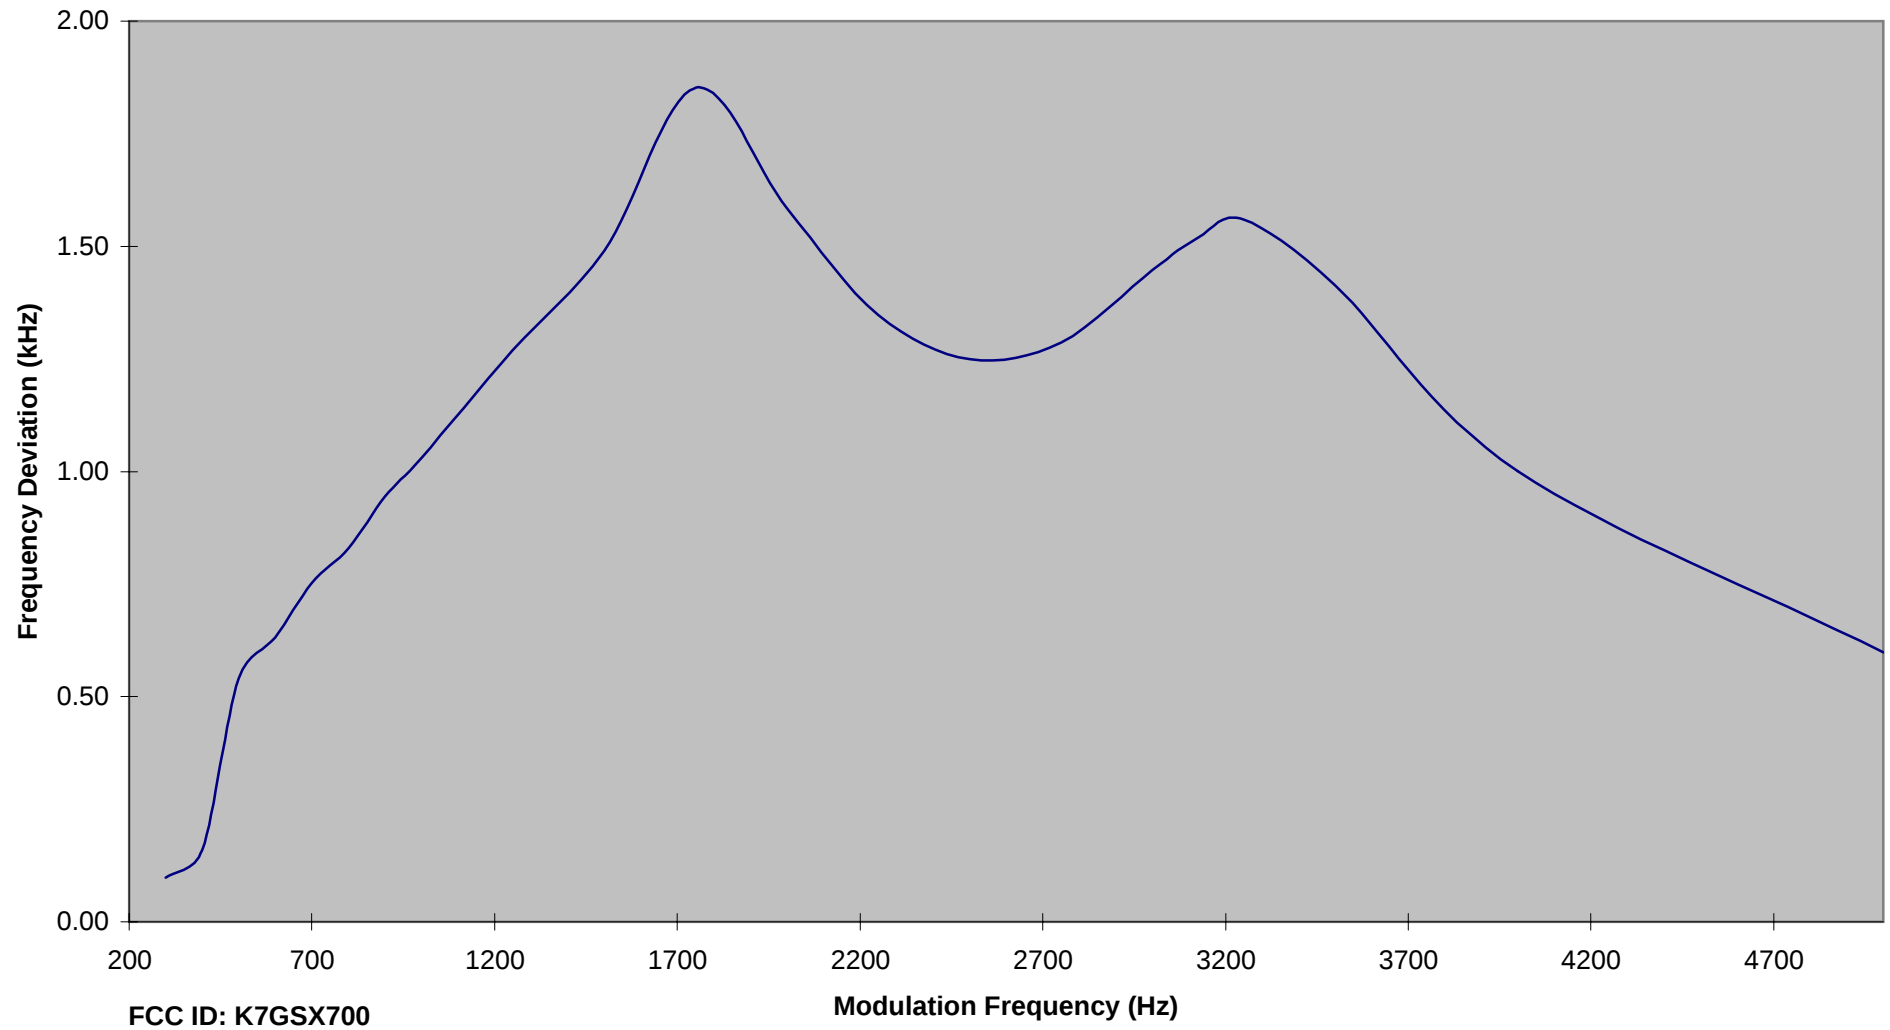


Modulation Frequency Response

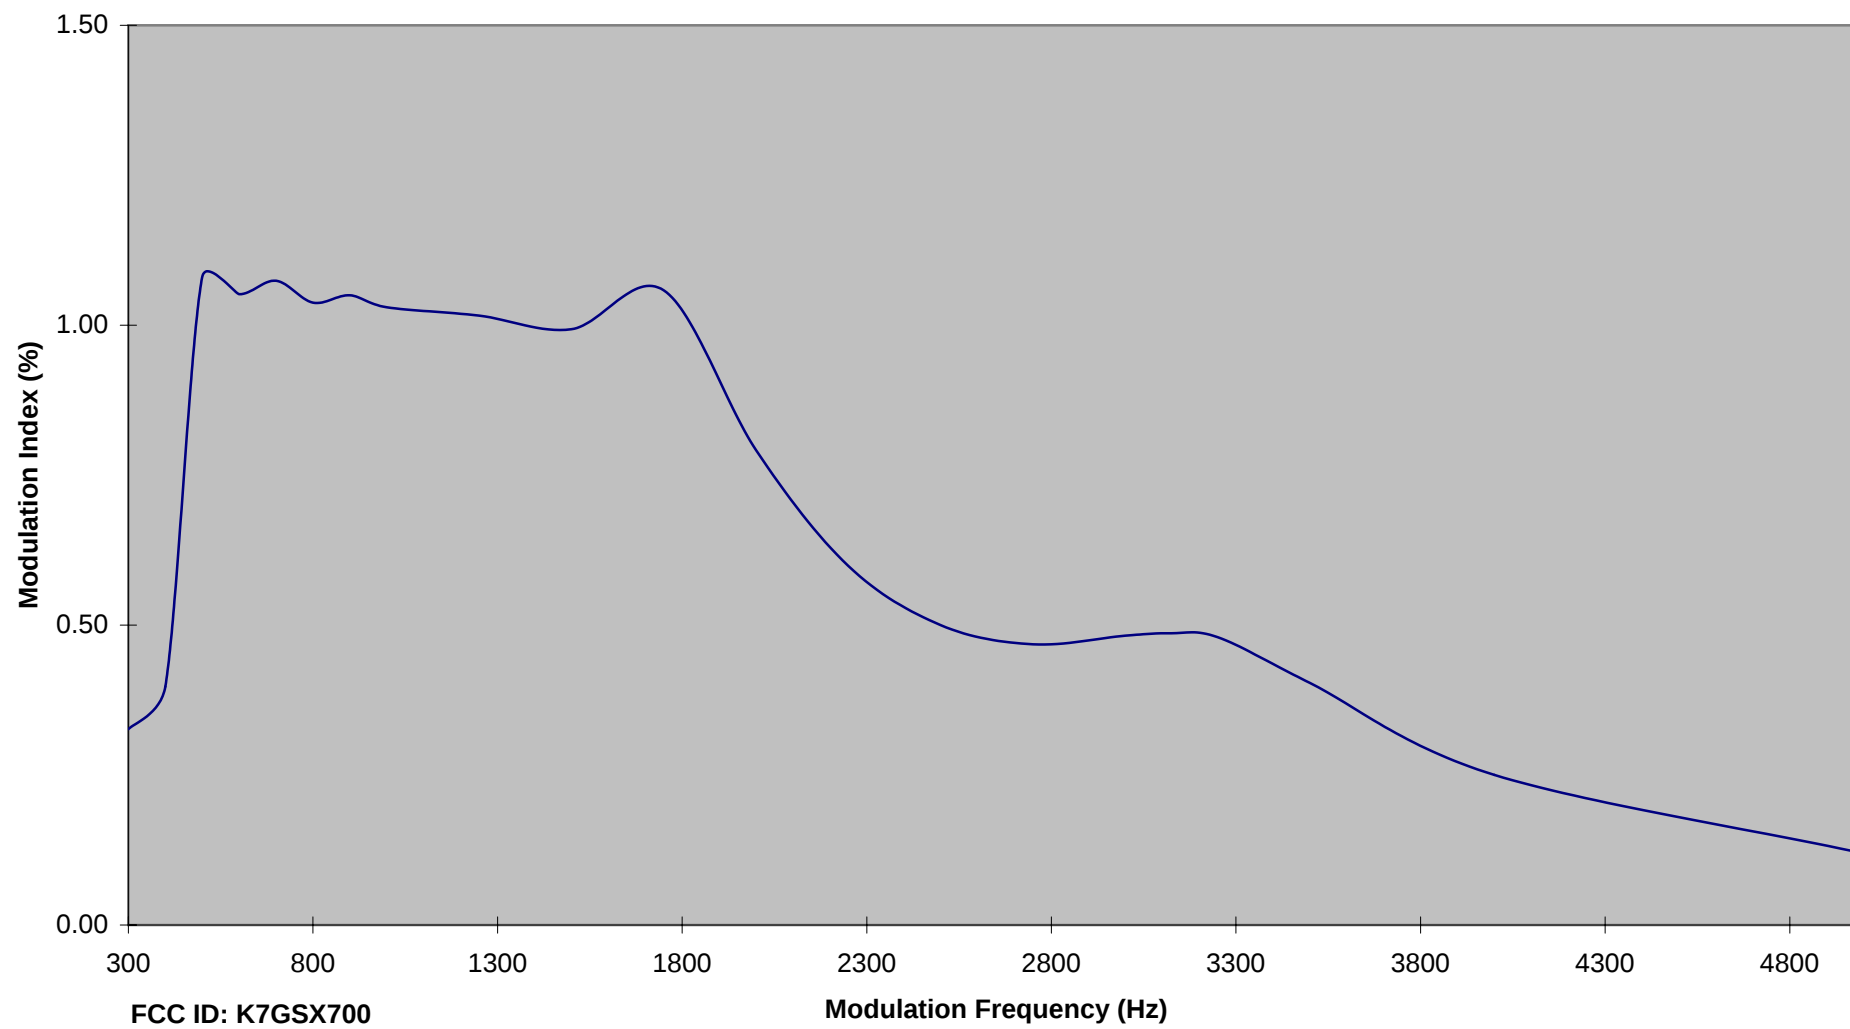


“mlc” file

Modulation Limiting Characteristic

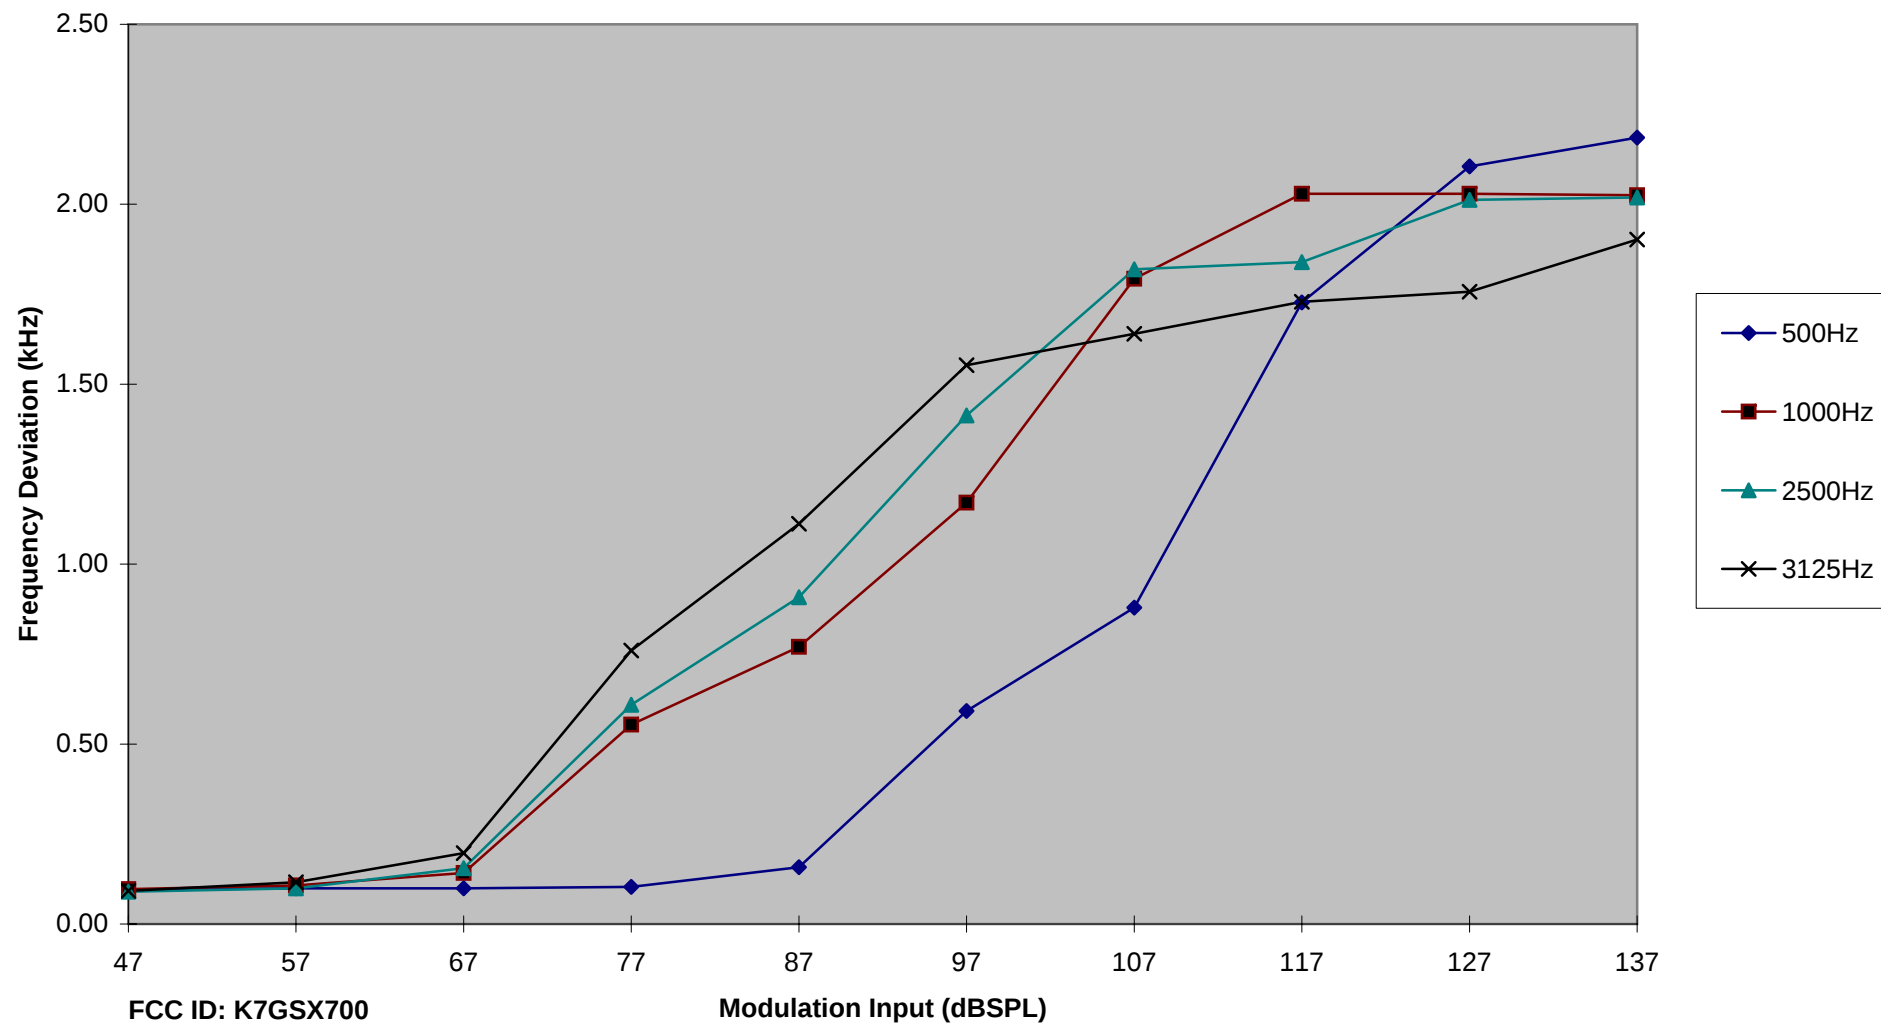

“lpf” file

Audio Low Pass Filter Response

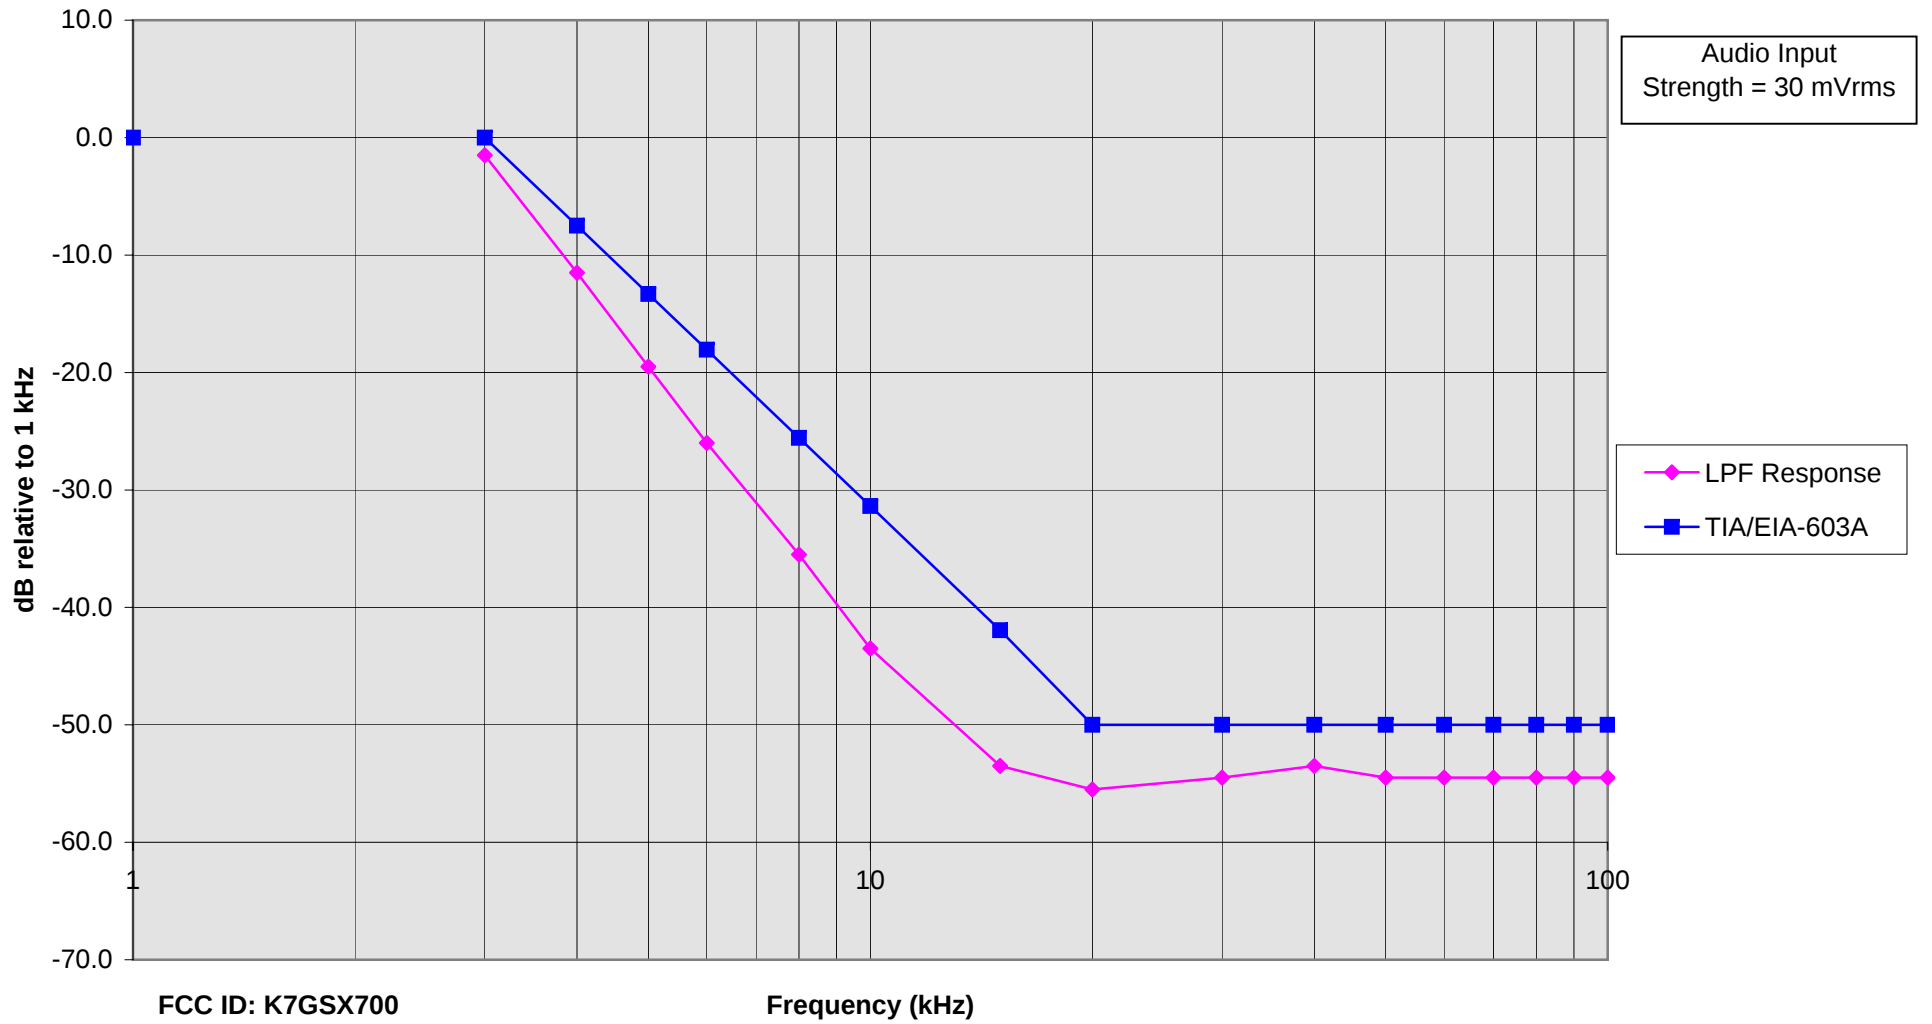

“bw” file

hp

REF 108.9 dB μ V

AT 20 dB

MKR -10.00 KHz

-.06 dB

PEAK

LOG


10

dB/

VA VB

SC FC

CORR

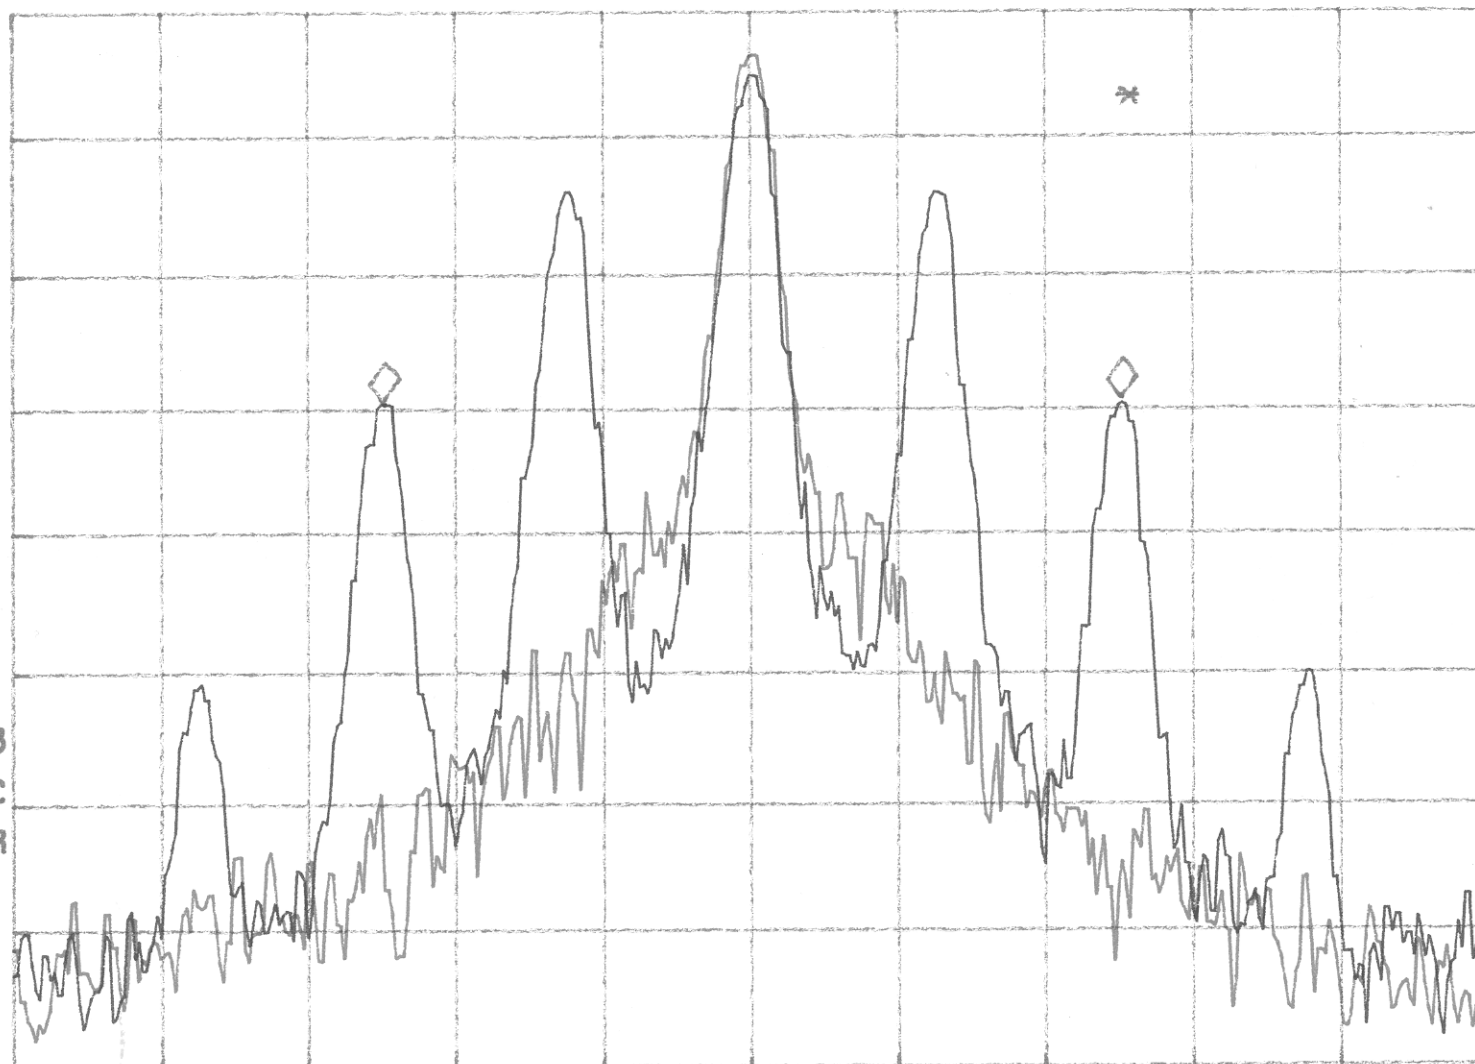

CENTER 462.63760 MHz

#RES BW 300 Hz

SPAN 20.00 KHz

VBW 300 Hz

SWP 1.00 sec

hp

REF 100.9 dB μ V

AT 10 dB

MKR -10.30 KHz

-1.61 dB

PEAK

LOG


10

dB/

VA VB

SC FC

CORR

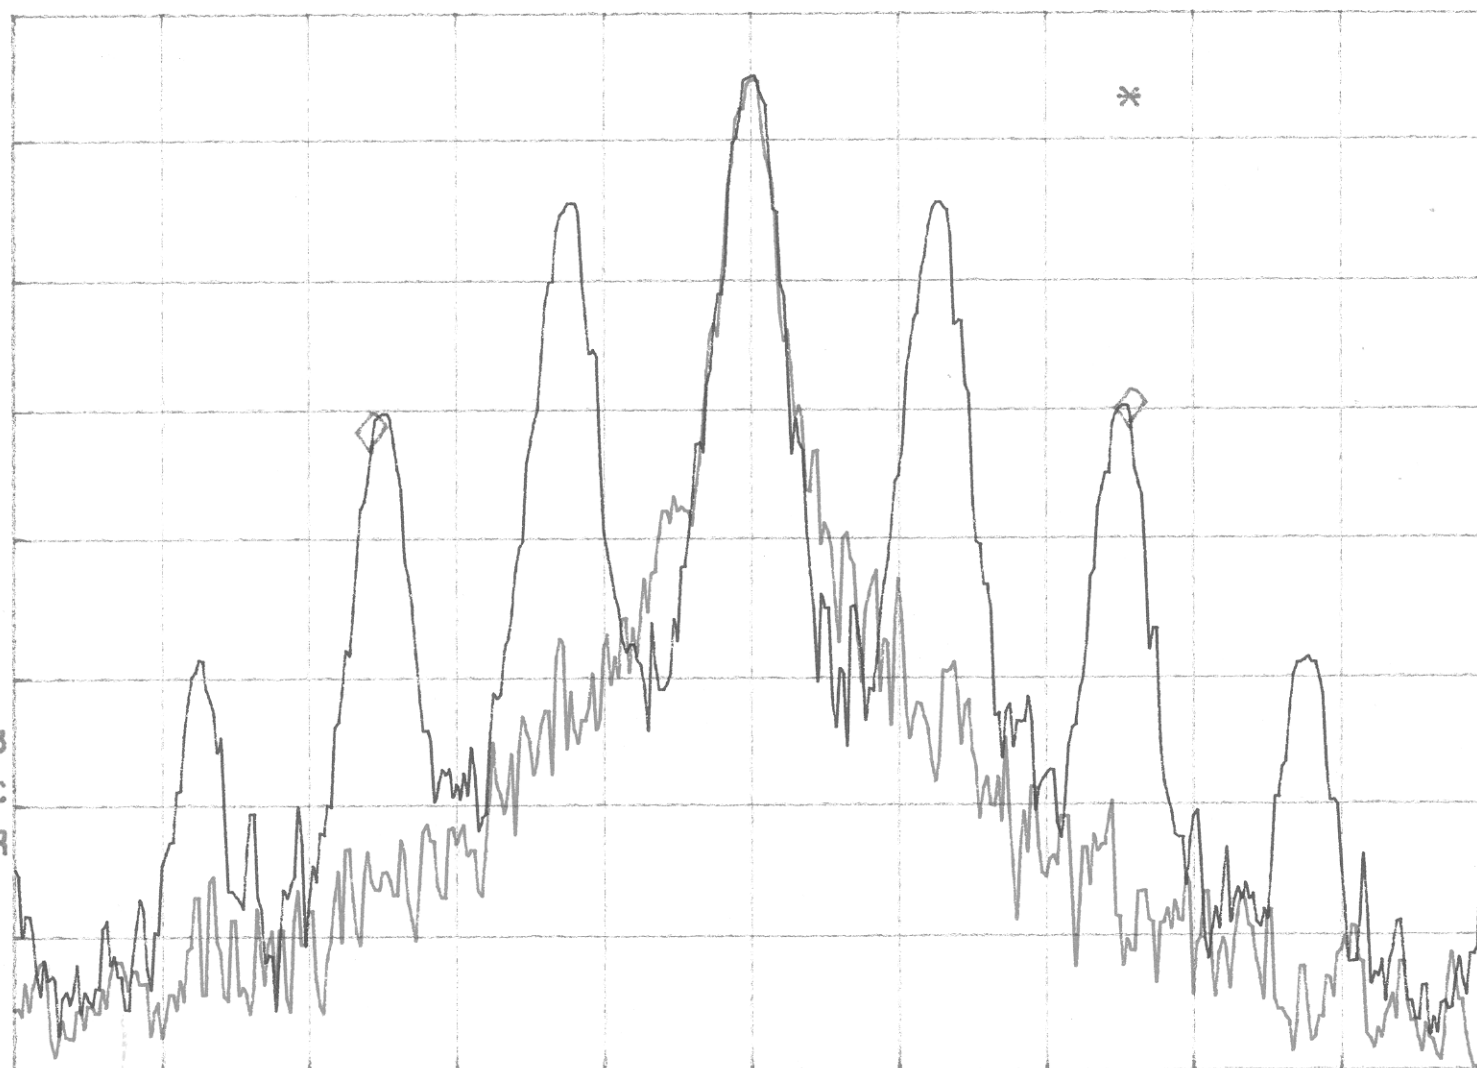

CENTER 467.63750 MHz

#RES BW 300 Hz

VBW 300 Hz

SPAN 20.00 KHz

SWP 1.00 sec

Emission mask
“spurious” file

hp

REF 106.9 dB μ V

AT 20 dB

PEAK

LOG


10

dB/

VA VB

SC FC

CORR

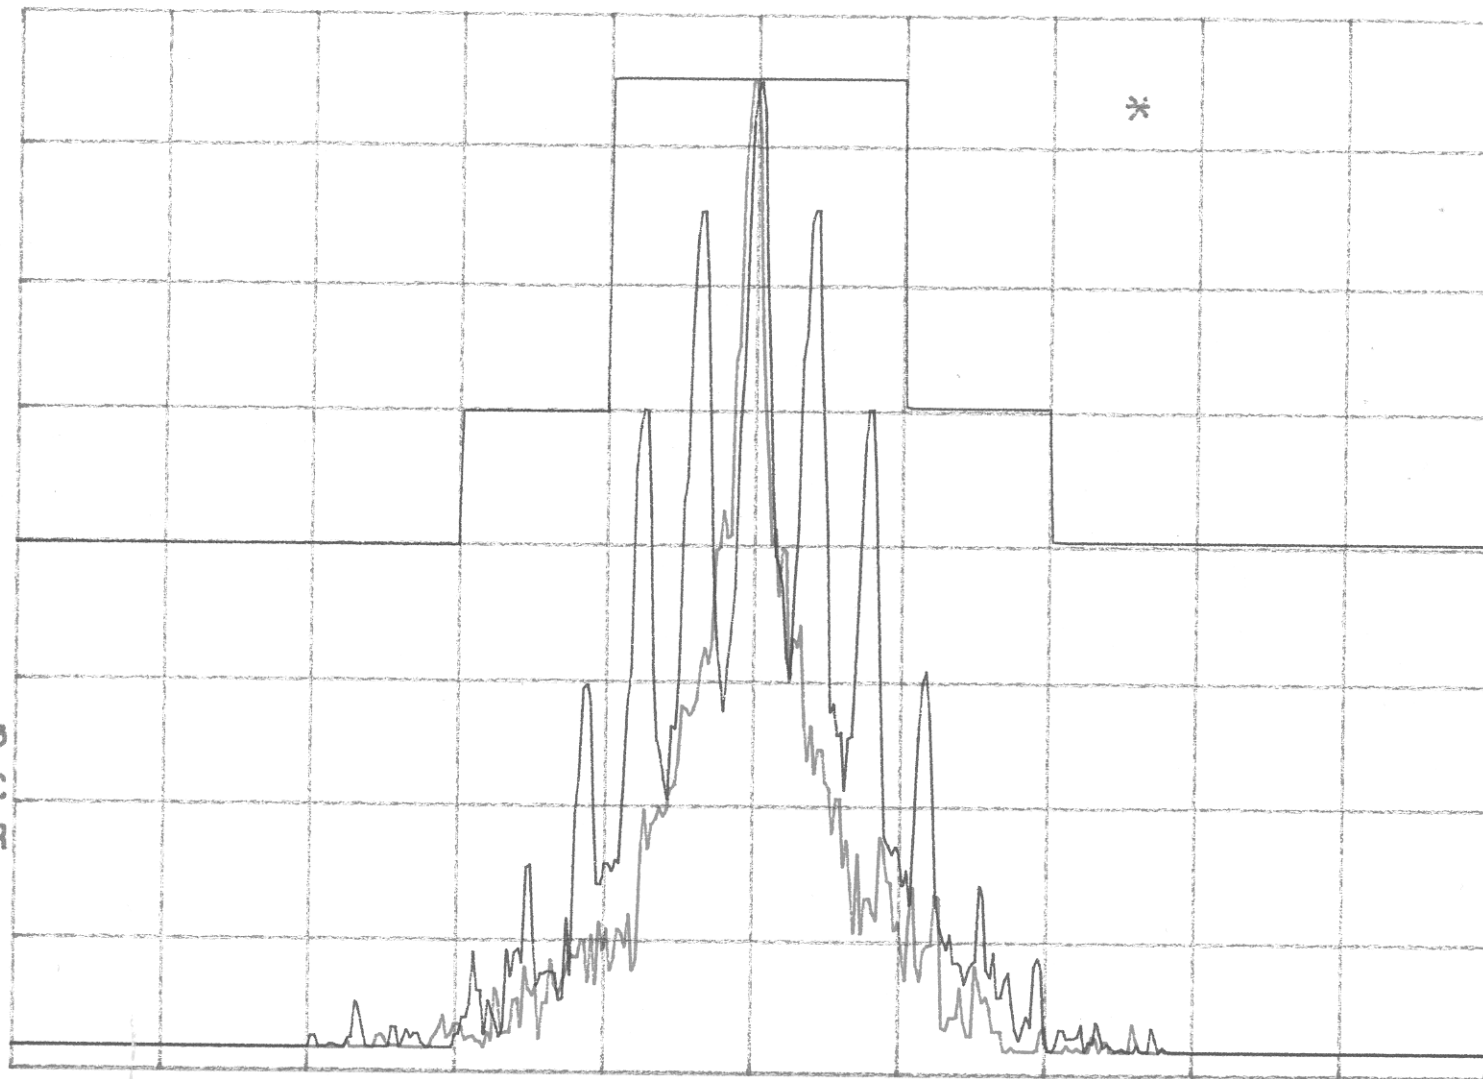

CENTER 462.63750 MHz

#RES BW 300 Hz

VBW 300 Hz

SPAN 65.00 kHz

SWP 2.17 sec

hp

REF 104.5 dB μ V

AT 10 dB

PEAK

LOG


10

dB/

VA VB

SC FC

CORR

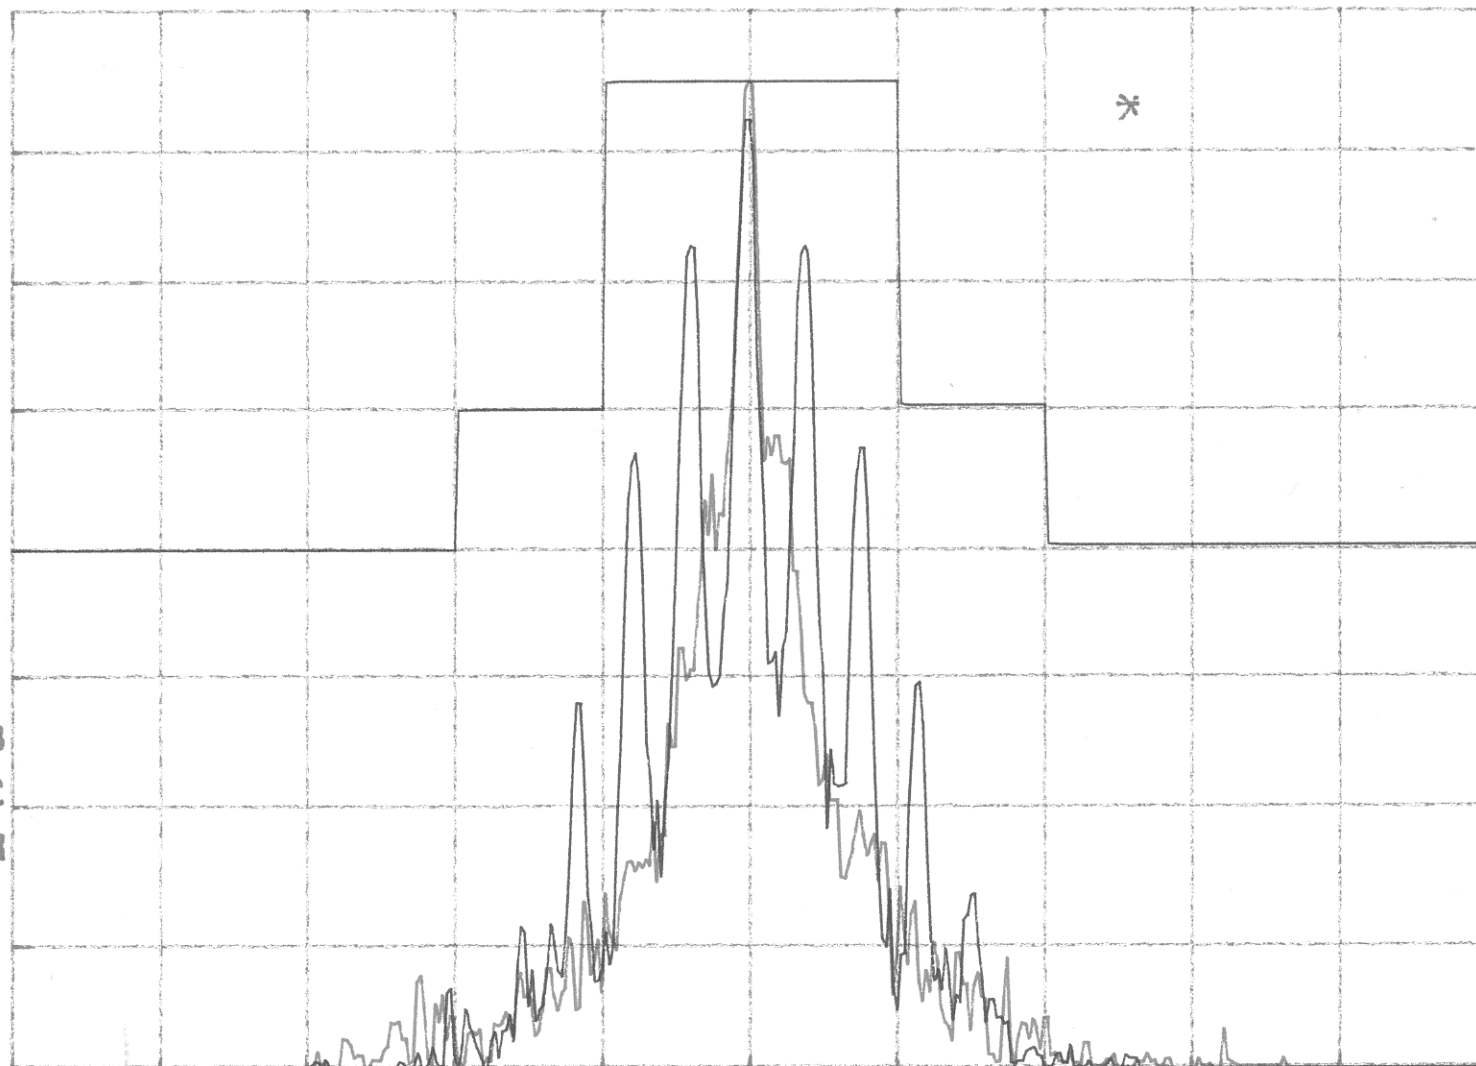

CENTER 467.63750 MHz

#RES BW 300 Hz

VBW 300 Hz

SPAN 65.00 kHz

SWP 2.17 sec