

# FLEXTRONICS

## EMC Test Report for ARUS 32 B4

Radio Access Technology (RAT): LTE

**Tested to:** CFR 47 FCC Part 15 B  
CFR 47 FCC Part 27  
ICES-003  
RSS-139

**Document number:** K0002479-TR-RAD-01-01  
**Release date:** Aug 29, 2014

**Prepared for:** Ericsson Canada  
349 Terry Fox Drive,  
Ottawa, Ontario,  
Canada, K2K 2V6

**Author:** Dave Pampararo  
Product Compliance Specialist  
Flextronics Canada Design Services Inc.  
1280 Teron Side Road  
Kanata, Ontario, K2K 2C1

---

© Copyright Flextronics Canada Design Services Inc. Aug 29, 2014

This document shall not be reproduced except in full, without written approval of the Flextronics Canada Design Services Inc.

The master of this document is stored on an electronic database and is “write-protected” and may be altered only by authorized persons at Flextronics. Viewing of the master document electronically on the Flextronics electronic database ensures access to the current issue. Any other copies are regarded as uncontrolled copies.

---

## About this document

The release control record, document approvals, and laboratory Accreditations are as follows.

### Release control record

| Release no. | Reason for change | Date released |
|-------------|-------------------|---------------|
| 01          | Initial release   | Aug 29, 2014  |

### Approvals

| Function                  | Name            | Job title                     | Record of Approval                                                                                                            |
|---------------------------|-----------------|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| Document Release Approval | Steve Tippet    | Lab Operations Manager        | <br>Damien Warin on behalf of Steve Tippet |
| Technical reviewer        | Kasi Sivaratnam | EMC Discipline Specialist     |                                            |
| Author                    | Dave Pampararo  | Product Compliance Specialist |                                           |

### Accreditations

The Design Validation Centre (DVC) test facilities are accredited by the Standards Council of Canada (SCC) to ISO/IEC 17025 in accordance with the scope of accreditation outlined at the web site [http://palcan.scc.ca/Specs/PDF/95\\_e.pdf](http://palcan.scc.ca/Specs/PDF/95_e.pdf) [16]. The SCC is a signatory of the APLAC [4] and ILAC [14] Mutual Recognition Arrangements. The SCC's Laboratory Accreditation Program has been evaluated and has demonstrated its competence to operate according to the requirements of ISO/IEC 17011.

# Table of contents

|                                                                              |           |
|------------------------------------------------------------------------------|-----------|
| <b>About this document .....</b>                                             | <b>2</b>  |
| Release control record.....                                                  | 2         |
| Approvals .....                                                              | 2         |
| Accreditations.....                                                          | 2         |
| <b>Table of contents.....</b>                                                | <b>3</b>  |
| <b>List of figures .....</b>                                                 | <b>4</b>  |
| <b>List of tables .....</b>                                                  | <b>5</b>  |
| <b>1. Introduction .....</b>                                                 | <b>6</b>  |
| 1.1 Purpose and scope.....                                                   | 6         |
| 1.2 Executive summary.....                                                   | 6         |
| 1.3 Test lab information.....                                                | 7         |
| 1.4 Customer information .....                                               | 7         |
| <b>2. Test results summary .....</b>                                         | <b>8</b>  |
| <b>3. Equipment under test.....</b>                                          | <b>9</b>  |
| 3.1 Assessed hardware .....                                                  | 9         |
| 3.2 Product overview .....                                                   | 9         |
| 3.3 System modifications.....                                                | 12        |
| 3.4 Power and grounding requirements .....                                   | 12        |
| 3.5 Clocks, oscillators, or switching frequencies for power supplies .....   | 13        |
| 3.6 Product port definition and EUT cable information.....                   | 14        |
| 3.7 Software and operations of the EUT .....                                 | 15        |
| 3.8 Customer support equipment .....                                         | 15        |
| 3.9 Hardware Configuration of the EUT.....                                   | 15        |
| 3.10 Inventory of the EUT .....                                              | 16        |
| <b>4. General test conditions.....</b>                                       | <b>17</b> |
| 4.1 Description of test facilities .....                                     | 17        |
| 4.2 Measurement Instrumentation.....                                         | 17        |
| <b>5. Detailed Emissions Test Results.....</b>                               | <b>18</b> |
| 5.1 Radiated Emissions, E-field (FCC & ICES).....                            | 18        |
| 5.1.1 Test specification and limits .....                                    | 18        |
| 5.1.2 Test procedure .....                                                   | 18        |
| 5.1.3 Calculation of the compliance margin .....                             | 20        |
| 5.1.4 Measurement uncertainties .....                                        | 21        |
| 5.1.5 Strategy for selection of multiple radio modes to be tested.....       | 21        |
| 5.1.6 Test results for RAT: BOT Channel, 1.4MHz QPSK, 1 Carrier, LTE .....   | 22        |
| 5.1.7 Test results for RAT: Middle Channel, 1.4MHz QPSK, 1 Carrier, LTE..... | 28        |

|         |                                                                                  |    |
|---------|----------------------------------------------------------------------------------|----|
| 5.1.8   | Test results for RAT: Top Channel, 1.4MHz QPSK, 1 Carrier, LTE.....              | 34 |
| 5.1.9   | Test results for RAT: 1.4MHz QPSK, 2 Carrier, LTE .....                          | 40 |
| 5.1.10  | Test equipment.....                                                              | 46 |
| 5.1.11  | Test conclusion .....                                                            | 47 |
| 5.2     | Radiated Spurious Emissions .....                                                | 48 |
| 5.2.1   | Test specification and limits .....                                              | 48 |
| 5.2.1.1 | FCC Part 2.1053 Measurements required: Field strength of spurious radiation..... | 48 |
| 5.2.1.2 | FCC Part 2.1057 Frequency spectrum to be investigated. ....                      | 48 |
| 5.2.2   | Test procedure .....                                                             | 48 |
| 5.2.3   | Calculation of the compliance margin .....                                       | 50 |
| 5.2.4   | Measurement uncertainties .....                                                  | 50 |
| 5.2.5   | Test results for Spurious Emissions.....                                         | 50 |
| 5.2.6   | Test equipment.....                                                              | 51 |
| 5.2.7   | Test conclusion .....                                                            | 51 |
| 6.      | References .....                                                                 | 52 |
| 7.      | Appendices .....                                                                 | 53 |
| 7.1     | Appendix A: Test setup photographs.....                                          | 53 |
| 7.2     | Appendix B: Abbreviations .....                                                  | 54 |

## List of figures

|            |                                                                                        |    |
|------------|----------------------------------------------------------------------------------------|----|
| Figure 1:  | AIR 32 B4A B2P Test Platform for ARUS 32 B4 EMC testing and compliance assessment..... | 10 |
| Figure 2:  | ARUS 32 B4.....                                                                        | 10 |
| Figure 3:  | System grounding .....                                                                 | 13 |
| Figure 4:  | Setup for Emission Testing.....                                                        | 15 |
| Figure 5:  | Test setup for Emissions Measurements .....                                            | 20 |
| Figure 6:  | Plot of RE from 10 KHz to 30 MHz (Bottom 1.4QPSK 1C LTE) .....                         | 22 |
| Figure 7:  | Plot of RE from 30 MHz to 1 GHz (Bottom 1.4QPSK 1C LTE) .....                          | 23 |
| Figure 8:  | Plot of RE from 1 to 3 GHz (Bottom 1.4QPSK 1C LTE).....                                | 24 |
| Figure 9:  | Plot of RE from 3 to 10 GHz (Bottom 1.4QPSK 1C LTE).....                               | 25 |
| Figure 10: | Plot of RE from 10 to 18 GHz (Bottom 1.4QPSK 1C LTE).....                              | 26 |
| Figure 11: | Plot of RE from 18 to 26.5 GHz (Bottom 1.4QPSK 1C LTE).....                            | 27 |
| Figure 12: | Plot of RE from 10 KHz to 30 MHz (Middle 1.4QPSK 1C LTE).....                          | 28 |
| Figure 13: | Plot of RE from 30 MHz to 1 GHz (Middle 1.4QPSK 1C LTE).....                           | 29 |
| Figure 14: | Plot of RE from 1 to 3 GHz (Middle 1.4QPSK 1C LTE).....                                | 30 |
| Figure 15: | Plot of RE from 3 to 10 GHz (Middle 1.4QPSK 1C LTE).....                               | 31 |
| Figure 16: | Plot of RE from 10 to 18 GHz (Middle 1.4QPSK 1C LTE) .....                             | 32 |
| Figure 17: | Plot of RE from 18 to 26.5 GHz (Middle 1.4QPSK 1C LTE).....                            | 33 |
| Figure 18: | Plot of RE from 10 KHz to 30 MHz (Top 1.4QPSK 1C LTE).....                             | 34 |
| Figure 19: | Plot of RE from 30 MHz to 1 GHz (Top 1.4QPSK 1C LTE).....                              | 35 |
| Figure 20: | Plot of RE from 1 to 3 GHz (Top 1.4QPSK 1C LTE).....                                   | 36 |
| Figure 21: | Plot of RE from 3 to 10 GHz (Top 1.4QPSK 1C LTE) .....                                 | 37 |
| Figure 22: | Plot of RE from 10 to 18 GHz (Top 1.4QPSK 1C LTE).....                                 | 38 |
| Figure 23: | Plot of RE from 18 to 26.5 GHz (Top 1.4QPSK 1C LTE) .....                              | 39 |
| Figure 24: | Plot of RE from 10 KHz to 30 MHz (1.4QPSK 2 Carrier LTE).....                          | 40 |
| Figure 25: | Plot of RE from 30 MHz to 1 GHz (1.4QPSK 2 Carrier LTE).....                           | 41 |
| Figure 26: | Plot of RE from 1 to 3 GHz (1.4QPSK 2 Carrier LTE).....                                | 42 |

|                                                                        |    |
|------------------------------------------------------------------------|----|
| Figure 27: Plot of RE from 3 to 10 GHz (1.4QPSK 2 Carrier LTE).....    | 43 |
| Figure 28: Plot of RE from 10 to 18 GHz (1.4QPSK 2 Carrier LTE).....   | 44 |
| Figure 29: Plot of RE from 18 to 26.5 GHz (1.4QPSK 2 Carrier LTE)..... | 45 |
| Figure 30: Setup for Emissions tests .....                             | 53 |

## List of tables

|                                                                                                            |    |
|------------------------------------------------------------------------------------------------------------|----|
| Table 1: Summary of test results.....                                                                      | 8  |
| Table 2: Assessed hardware .....                                                                           | 9  |
| Table 3: Product Technical Details .....                                                                   | 11 |
| Table 4: Channel Frequencies .....                                                                         | 12 |
| Table 5: DC power requirements .....                                                                       | 12 |
| Table 6: AIR32 B4A B2P port definition .....                                                               | 14 |
| Table 7: Cable description.....                                                                            | 14 |
| Table 8: Test support equipment.....                                                                       | 15 |
| Table 9: Inventory .....                                                                                   | 16 |
| Table 10: Radiated emissions requirements.....                                                             | 18 |
| Table 11: E-field RE test limits at 10 m for Class B of FCC & ICES-003 .....                               | 18 |
| Table 12: E-field RE test results at 3 m for FCC part 15 from 30 to 1000 MHz (Bottom 1.4QPSK 1C LTE).....  | 23 |
| Table 13: E-field RE test results at 3 m for FCC part 15 from 1 to 3 GHz (Bottom 1.4QPSK 1C LTE).....      | 24 |
| Table 14: E-field RE test results at 3 m for FCC part 15 from 1 to 3 GHz (Bottom 1.4QPSK 1C LTE).....      | 25 |
| Table 15: E-field RE test results at 3 m for FCC part 15 from 30 to 1000 MHz (Middle 1.4QPSK 1C LTE) ..... | 29 |
| Table 16: E-field RE test results at 3 m for FCC part 15 from 1 to 3 GHz (Middle 1.4QPSK 1C LTE) .....     | 30 |
| Table 17: E-field RE test results at 3 m for FCC part 15 from 3 to 10 GHz (Middle 1.4QPSK 1C LTE) .....    | 31 |
| Table 18: E-field RE test results at 3 m for FCC part 15 from 30 to 1000 MHz (Top 1.4QPSK 1C LTE) .....    | 35 |
| Table 19: E-field RE test results at 3 m for FCC part 15 from 1 to 3 GHz (Top 1.4QPSK 1C LTE) .....        | 36 |
| Table 20: E-field RE test results at 3 m for FCC part 15 from 3 to 10 GHz (Top 1.4QPSK 1C LTE) .....       | 37 |
| Table 21: E-field RE test results at 3 m for FCC part 15 from 1 to 3 GHz (1.4QPSK 2 Carrier LTE).....      | 42 |
| Table 22: E-field RE test results at 3 m for FCC part 15 from 3 to 10 GHz (1.4QPSK 2 Carrier LTE).....     | 43 |
| Table 23: E-field RE test equipment .....                                                                  | 46 |
| Table 24: Spurious emissions requirements.....                                                             | 48 |
| Table 25: Spurious Emissions ERP Results (AIR32 B4A B2P LTE).....                                          | 51 |

# 1. Introduction

This document is written and distributed by Flextronics Canada Design Services Inc. Whenever Flextronics is mentioned in this document it shall be taken as referring to Flextronics Canada Design Services Inc.

## 1.1 Purpose and scope

This document reports the results and findings of the Electromagnetic Compatibility (EMC) test activities performed by the Design Validation Centre (DVC) on the product KRC 118 050/1 ARUS 32 B4 for Ericsson Canada. The objective of the test activities was to evaluate compliance of the product in multiple radio modes of operation against:

- Radiated Emissions and Conducted Emissions of FCC Part 15 Subpart B [12] and ICES-003 [13].
- Spurious Emissions of FCC Part 27 [12] and RSS-139 [10]

## 1.2 Executive summary

The ARUS 32 B4 radio, tested in LTE modes of operation, is verified to comply with the following standards:

- Radiated Emissions and Conducted Emissions of FCC Part 15 Subpart B [12] and ICES-003 [13].
- Spurious Emissions of FCC Part 27 [12] and RSS-139 [10]

The test results in this report apply only to the tested units.

The configuration, operation, support equipment and setup of the ARUS 32 B4 / AIR 32 B4A B2P are described in Section 3.

The assessment activities and detailed test results for the ARUS 32 B4 / AIR 32 B4A B2P are presented in the Section 5 of this document.

### 1.3 Test lab information

|                            |                                                  |
|----------------------------|--------------------------------------------------|
| Lab Name                   | Flextronics Design Validation Centre             |
| Mailing / Shipping Address | 1280 Teron Rd., Kanata, Ontario, K2K 2C1, Canada |
| Primary Technical Contact  | Steve Tippet                                     |
| Title                      | Manager of Regulatory Design & Compliance        |
| Phone                      | 613-895-2050, extension 2820                     |

### 1.4 Customer information

|                 |                                                                   |
|-----------------|-------------------------------------------------------------------|
| Company Name    | Ericsson Canada                                                   |
| Mailing Address | 349 Terry Fox Drive, Ottawa, On, K2K 2V6, Canada                  |
| Primary Contact | David Bolzon                                                      |
| Title           | Hardware Developer, Object Leader, Regulatory / Product Integrity |
| Phone           | 1.613.219.5892                                                    |
| E-mail          | david.bolzon@ericsson.com                                         |

## 2. Test results summary

Table 1 summarizes the regulatory test case results for selected worst case modes of operation of the ARUS 32 B4. The ARUS 32 was tested in an AIR 32 B4A B2P host test platform. The EUT is DC powered therefore AC power test cases are not applicable.

**Table 1: Summary of test results**

| Test case description                                                                                 | Test result    | Radio Mode of Operation                              |
|-------------------------------------------------------------------------------------------------------|----------------|------------------------------------------------------|
| Radiated Emissions (RE) from 30MHz to 22 GHz<br>FCC Part 15 Subpart B – Class B<br>ICES 003 – Class B | Pass           | LTE Bottom Channel<br>1.4MHz BW<br>QPSK<br>1 Carrier |
| AC Power Conducted Emissions<br>FCC Part 15 Subpart B – Class B<br>ICES 003 – Class B                 | Not Applicable |                                                      |
| Spurious Emissions , traffic mode<br>RSS-139, RSS-GEN, FCC Part 27                                    | Pass           |                                                      |
| Radiated Emissions (RE) from 30MHz to 22 GHz<br>FCC Part 15 Subpart B – Class B<br>ICES 003 – Class B | Pass           | LTE Middle Channel<br>1.4MHz BW<br>QPSK<br>1 Carrier |
| AC Power Conducted Emissions<br>FCC Part 15 Subpart B – Class B<br>ICES 003 – Class B                 | Not Applicable |                                                      |
| Spurious Emissions , traffic mode<br>RSS-139, RSS-GEN, FCC Part 27                                    | Pass           |                                                      |
| Radiated Emissions (RE) from 30MHz to 22 GHz<br>FCC Part 15 Subpart B – Class B<br>ICES 003 – Class B | Pass           | LTE Top Channel<br>1.4MHz BW<br>QPSK<br>1 Carrier    |
| AC Power Conducted Emissions<br>FCC Part 15 Subpart B – Class B<br>ICES 003 – Class B                 | Not Applicable |                                                      |
| Spurious Emissions , traffic mode<br>RSS-139, RSS-GEN, FCC Part 27                                    | Pass           |                                                      |
| Radiated Emissions (RE) from 30MHz to 22 GHz<br>FCC Part 15 Subpart B – Class B<br>ICES 003 – Class B | Pass           | LTE<br>1.4MHz BW<br>QPSK<br>2 Carrier                |
| AC Power Conducted Emissions<br>FCC Part 15 Subpart B – Class B<br>ICES 003 – Class B                 | Not Applicable |                                                      |
| Spurious Emissions , traffic mode<br>RSS-139, RSS-GEN, FCC Part 27                                    | Pass           |                                                      |

## 3. Equipment under test

### 3.1 Assessed hardware

Table 2 indicates the hardware that was assessed. The unit was operating in LTE mode.

**Table 2: Assessed hardware**

| Hardware component | Part number   | Release number |
|--------------------|---------------|----------------|
| ARUS 32 B4         | KRC 118 050/1 | R1A            |

### 3.2 Product overview

The ARUS 32 B4 is a multi-standard Antenna Radio Unit (ARUS) forming part of Ericsson's Radio Base Station (RBS) equipment. The ARUS product provides the radio access for mobile and fixed devices and is intended for the outdoor environment.

The ARUS 32 B4 is designed to be co-located and directly mated with a compatible antenna, specified for transceiver path optimization. A fibre optic interface provides the ARUS / RBS control and digital communications between the Radio and RBS. The location of the ARUS with respect to the RBS is only limited to a distance dictated by the limitations of the fibre link.

The ARUS 32 B4 supports four (4) Transmit / Receive ports operating in the E-UTRA Band 4 (AWS) at a Downlink (transmit) frequency from 2110 MHz to 2155 MHz and an Uplink (receive) frequency from 1710 MHz to 1755 MHz. The radio operates in FDD (Frequency Division Duplex) with a duplex spacing of 400 MHz and supports operation on multi Radio Access Transmission Standards (RATS) at transmit bandwidths up to 20 MHz. The ARUS 32 B4 radio operates over the 4 transmit ports in Single, Multi-Carrier, Mixed Mode, and MIMO transmission with a maximum rated RF output power of 30W per port over an operational temperature of -40° C to +55° C.

The ARUS is mounted directly behind a specified antenna along with a Fan Tray and Solar Shield cover, which provides Forced Air Cooling and ducting for directional air flow and thermal optimization. The Fan Tray has an internal controller which will vary the fan speed based on temperature and cooling requirements monitored by sensors in the ARUS and Fan Tray. Power for the Fan Tray is provided from the ARUS (28V  $\pm$ 6% @ 1.25A).

The ARUS product also has an active RET (Remote Electronic Tilt) function provided for antenna directional optimization. Power for this option is provided via the ARUS RET interface (30V @ < 2A).

**Figure 1: AIR 32 B4A B2P Test Platform for ARUS 32 B4 EMC testing and compliance assessment**



**Figure 2: ARUS 32 B4**



**Table 3: Product Technical Details**

| <b>Model:</b>                         | <b>ARUS B4</b>                                                                         | <b>AIR 32 B4A B2P</b>           |
|---------------------------------------|----------------------------------------------------------------------------------------|---------------------------------|
| Part No.                              | KRC 118 050/1                                                                          | KRD 901 044/1                   |
| Antenna Ports:                        | 4 TX/RX Ports (Coaxial Kenya)                                                          | 4 TX/RX Ports (Coaxial Nairobi) |
| IBW:                                  | 45MHz                                                                                  |                                 |
| FDD:                                  | 400MHz                                                                                 |                                 |
| Frequency:                            | TX (DL): 2110 - 2155MHz<br>RX (UL): 1710 - 1755MHz                                     |                                 |
| Nominal O/P per Antenna Port:         | Single Carrier: 1 x 30W (44.77dBm)                                                     |                                 |
| Up to 20MHz Carrier BW                | Multi-Carrier: 2 x 15W (41.76dBm)                                                      |                                 |
| Up to 15MHz Carrier BW                | Multi-Carrier: 3 x 10W (40.00dBm)                                                      |                                 |
| Up to 10MHz Carrier BW                | Multi-Carrier: 4 x 7.5W (38.75dBm)                                                     |                                 |
| Accuracy (Nominal):                   | >5MHz from BE: $\pm 0.3\text{dB}$ (25°C), $\pm 0.6\text{dB}$ (45-55°C)                 |                                 |
| Nominal Voltage:                      | -48 VDC @ 20A                                                                          |                                 |
| RAT:                                  | LTE: SC, MC                                                                            |                                 |
| Modulation:                           | QPSK, 16QAM, 64QAM                                                                     |                                 |
| Channel Bandwidth:                    | 1.4, 3, 5, 10, 15, 20 MHz                                                              |                                 |
| Maximum Combined OBW per Port:        | 45MHz                                                                                  |                                 |
| Digital Interface:                    | CPRI: 2.5Gbps / 5Gbps /10Gbps (Data 1, Data 2)                                         |                                 |
| Channel Raster:                       | 100kHz                                                                                 |                                 |
| Regulatory Requirements:              | FCC: CFR 47 Part 2, 27<br>EMC: CFR 47 Part 15<br>IC: RSS-GEN, RSS-139<br>EMC: ICES-003 |                                 |
| SR and MC:                            | MIMO 4 x 4, TX Diversity                                                               |                                 |
| Regulatory ID:                        | FCC: TA8AKRC118050-1<br>IC: 287AB-AS1180501<br>IC Model: AS1180501                     |                                 |
| Operating Temperature:                | -40°C to +55°C                                                                         |                                 |
| Total Power based on IBW:             | 45MHz IBW: 4 x 30W                                                                     | With KRD Forced Air Cooling     |
| LTE Supported Carrier Configurations: | BW=1.4, 3, 5, 10 (1-4); BW=15 (1-3); BW=20 (1-2)                                       |                                 |
| Dimensions                            | 460 x 310 x 120 mm [H x W x D]                                                         |                                 |

**Table 4: Channel Frequencies**

| Number of Carriers | Bandwidth | Carrier Frequency Configuration (MHz) |                                      |        |
|--------------------|-----------|---------------------------------------|--------------------------------------|--------|
|                    |           | Bottom                                | Middle                               | Top    |
| 1                  | 1.4 MHz   | 2110.7                                | 2132.5                               | 2154.3 |
| 1                  | 3 MHz     | 2111.5                                | 2132.5                               | 2153.5 |
| 1                  | 5 MHz     | 2112.5                                | 2132.5                               | 2152.5 |
| 1                  | 10 MHz    | 2115.0                                | 2132.5                               | 2150.0 |
| 1                  | 15 MHz    | 2117.5                                | 2132.5                               | 2147.5 |
| 1                  | 20 MHz    | 2120.0                                | 2132.5                               | 2145.0 |
| 2                  | 1.4 MHz   | -                                     | 2110.7 + 2154.3                      | -      |
| 2                  | 3 MHz     | -                                     | 2111.5 + 2153.5                      | -      |
| 2                  | 5 MHz     | -                                     | 2112.5 + 2152.5                      | -      |
| 2                  | 10 MHz    | -                                     | 2115.0 + 2150.0                      | -      |
| 2                  | 15 MHz    | -                                     | 2117.5 + 2147.5                      | -      |
| 2                  | 20 MHz    | -                                     | 2120.0 + 2145.0                      | -      |
| 4                  | 1.4 MHz   | -                                     | 2110.7 + 2112.1 +<br>2152.9 + 2154.3 | -      |
| 4                  | 3 MHz     | -                                     | 2111.5 + 2114.5 +<br>2150.5 + 2153.5 | -      |
| 4                  | 5 MHz     | -                                     | 2112.5 + 2117.5 +<br>2147.5 + 2152.5 | -      |
| 4                  | 10 MHz    | -                                     | 2115 + 2125 +<br>2140 + 2150         | -      |

### 3.3 System modifications

There were no modifications made to the system or its sub-assemblies under test.

### 3.4 Power and grounding requirements


The power requirements for the ARUS 32 B4 are as follows.

**Table 5: DC power requirements**

| Voltage  | Rated Current                              |
|----------|--------------------------------------------|
| -48 V DC | Rated Current: 20 Amp at 4 x 30W RF output |

For EMC testing, the system was grounded in the same manner as its typical installation as shown in Figure 3.

**Figure 3: System grounding**

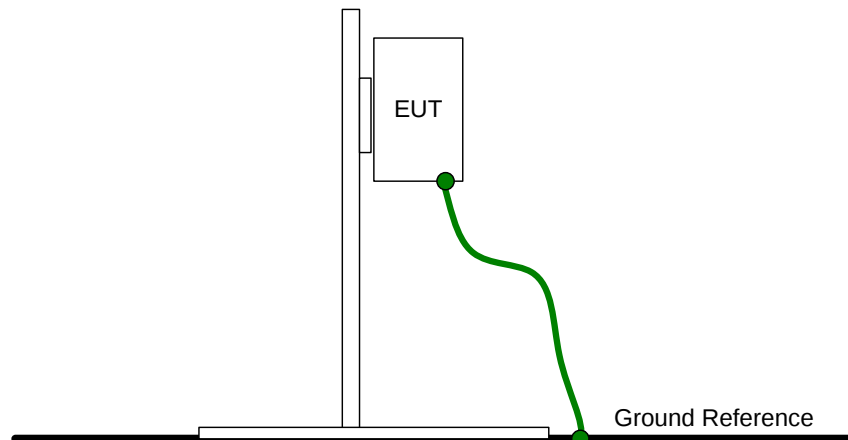

### 3.5 Clocks, oscillators, or switching frequencies for power supplies

- OOK: 2.176 MHz
- FSK: 9.69/11.07 MHz
- BFN, BCLK: 10.00 MHz
- AIB: 14.40 MHz
- XP: 19.44 MHz
- Eth: 25.000 MHz
- BFN, BBCLK: 30.72 MHz
- ADC, Surveyor: 61.44 MHz
- DAC, TOR: 122.88 MHz
- DAC data: 245.76 MHz
- DAC clk: 491.52 MHz
- ADC: 983.04 MHz
- CPRI E.6: 614.4 (Mb/s)
- CPRI E.24: 2457.6 (Mb/s)
- CIPRI E.48: 4915.2 (Mb/s)
- CIPRI E.96: 9.8304 (Gb/s)
- RXIFLO: 439.04 MHz
- RXRFLO: 2090.90 MHz
- TXRFLO: 2112.50, 2132.50, 2152.50 MHz
- TOR\_LO : 2266.10, 2286.10, 1306.10 MHz

### 3.6 Product port definition and EUT cable information

Table 6 identifies all the cables and ports on the system tested.

**Table 6: AIR32 B4A B2P port definition**

| Port or cable designation | Interface description      | Port location                                 | Permanent connection | Shielded cable | Max cable length (m) | Max quantity | Environment |
|---------------------------|----------------------------|-----------------------------------------------|----------------------|----------------|----------------------|--------------|-------------|
| DC Power                  | 48V, 3 Wire                | DC PWR In                                     | Yes                  | Yes            | >10                  | 1/system     | Outdoor     |
| Ground                    | Main Unit Ground cable     | GND Point, bottom, centre                     | Yes                  | No             | 3                    | 1/system     | Outdoor     |
| Data 1                    | CPRI Fiber Cable           | Bottom, inner most                            | Yes                  | No             | 15 KM                | 1/system     | Outdoor     |
| Data 2                    | CPRI Fiber Cable           | Bottom, outer most                            | Optional             | No             | 15 KM                | 1/system     | Outdoor     |
| RF A, B, C, D             | Transmit and Receive Cable | Test Unit Modified for access to these ports. | No                   | Yes            | >10                  | 1/port       | Outdoor     |

Table 7 identifies the cables present during testing.

**Table 7: Cable description**

| Cable ref #                               | Port or cable designation            | Qty        | Cable length (m) | Termination during testing                         |
|-------------------------------------------|--------------------------------------|------------|------------------|----------------------------------------------------|
| 1                                         | DC Power                             | 1          | 3                | Lab Power Source, -48 VDC                          |
| 2                                         | Ground Cable                         | 1          | 2                | Lab Ground Location                                |
| 3                                         | Data 1                               | 1          | 10               | STS-2                                              |
| 4                                         | Data 2                               | 1          | 10               | STS-2                                              |
| 5                                         | RF A, B, C, D                        | 1 per port | 7.5              | STS-2                                              |
| <b><u>ARUS 32 B4 Accessory Cables</u></b> |                                      |            |                  |                                                    |
| 6                                         | Fan Power & Signal Cable             | 1          | 292 mm           | Terminated into Fan Tray (power and signal)        |
| 7                                         | RET: Cable (SMA coax)                | 1          | 20 mm            | Terminated into the antenna RET port. (30V @ < 2A) |
| 8                                         | MMI: Optical LED Indicator interface | 1          | 965mm            | No Termination (indicator only)                    |

### 3.7 Software and operations of the EUT

The software load used to operate the system was representative of the latest production software. The software version number was R59AE.

### 3.8 Customer support equipment

During emissions testing the system was configured with a STS-2.

Table 8: Test support equipment


| Make     | Model                                 |
|----------|---------------------------------------|
| Ericsson | STS-2 / CT-10 Software load to R17B08 |

### 3.9 Hardware Configuration of the EUT

Traffic mode, channel, and operational mode were set to achieve required test coverage. Figure 4 shows the test setup of the radio and support equipment with cabling for the Emissions testing.

Section 5.1.5 describes the rationale for test coverage of multiple radio mode settings.

Figure 4: Setup for Emission Testing

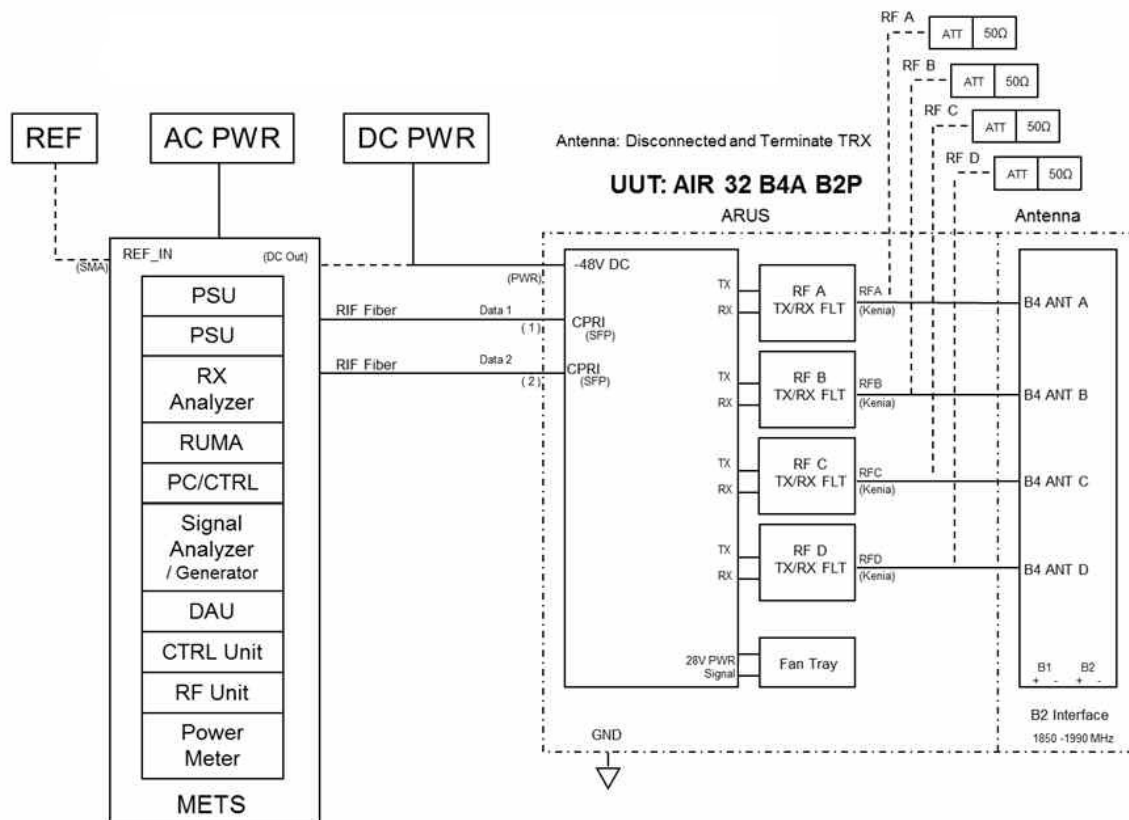

Photographs of all the test configurations used throughout this test report are in Appendix A: Test setup photographs.

### 3.10 Inventory of the EUT

The following table identifies the ARUS 32 B4's units that were tested.

**Table 9: Inventory**

| Component  | Part number   | Release number | Serial number |
|------------|---------------|----------------|---------------|
| ARUS 32 B4 | KRC 118 050/1 | R1A            | C828074984    |

## **4. General test conditions**

### **4.1 Description of test facilities**

Radiated Emissions testing was performed in a 10-meter Ambient Free Chamber (AFC). The AFC consists of a shielded room lined with ferrite tiles and anechoic material.

The temperature and humidity in these test facilities are controlled and maintained between 15 °C and 35 °C with a relative humidity between 30 % and 60 %. Levels are recorded and any exceptions are included in the detailed test results sections of this report.

The above facilities are located at 1280 Teron Road, Kanata, Ontario, Canada.

Facility accreditation information is located in the Accreditations section of this test report.

### **4.2 Measurement Instrumentation**

The measurement instrumentation conforms to ANSI C63.2 [1] and CISPR 16 [5]. Calibration of the measurement instrumentation is maintained in accordance with the supplier's recommendations, or as necessary to ensure its accuracy.

## 5. Detailed Emissions Test Results

Emissions from telecommunication systems manifest themselves in two forms: Conducted Emissions on cables and Radiated Emissions from the entire system (that is, electronic modules, hardware, and cables). Emissions standards restrict these different forms of emissions generated by the system. For information on test facilities and measurement instrumentation, see Section 4.

### 5.1 Radiated Emissions, E-field (FCC & ICES)

This test verifies that the EUT does not produce excess amounts of E-field Radiated Emissions (RE) that could interfere with licensed radiators.

#### 5.1.1 Test specification and limits

The testing requirements are as follows.

**Table 10: Radiated emissions requirements**

| Requirement                   | Method     | Country |
|-------------------------------|------------|---------|
| FCC Part 15.109,<br>Subpart B | ANSI C63.4 | USA     |
| ICES-003                      |            | Canada  |

The limits of the E-field RE tests are as follows:

**Table 11: E-field RE test limits at 10 m for Class B of FCC & ICES-003**

| Frequency range<br>(MHz) | FCC Part 15<br>ICES-003<br>(dB $\mu$ V/m) |
|--------------------------|-------------------------------------------|
| 30 to 88                 | 29.5                                      |
| 88 to 216                | 33.0                                      |
| 216 to 960               | 35.5                                      |
| 960 to 40000             | 43.5                                      |

#### 5.1.2 Test procedure


Verifications of the test equipment and AFC were performed before the installation of the EUT in accordance with the quality assurance procedures documented in the EMC test procedures document [9]. The test was performed using the procedures described in ANSI C63.4 [2] and FCC Part 15 [10].

- The EUT was placed on the turntable inside the AFC (configured as in normal operation) as shown in Figure 5. The system and its cables were separated from the ground plane by an

insulating support 10 mm in height. The system was grounded in accordance with its installation specifications. No additional grounding connections were connected.

- For tests between **30 MHz and 1 GHz** the receive bi-log antenna was placed at 3 m away from the EUT. An initial scan was performed to find emissions (frequencies) requiring detailed measurement. The pre-scan was performed by rotating the system 360 degrees while recording all emissions (frequency and amplitude). This procedure was repeated for antenna heights of 1 to 4 m, and for horizontal and vertical polarizations of the receiving antenna. The detector mode was quasi-peak (QP) unless otherwise noted.
- For tests between **1 GHz and 10 GHz** the receive horn antenna was placed at 3 m away from the EUT. An initial scan was performed to find emissions (frequencies) requiring detailed measurement. The pre-scan was performed by rotating the system 360 degrees while recording all emissions (frequency and amplitude). This procedure was repeated for antenna heights of 1 to 4 m, and for horizontal and vertical polarizations of the receiving antenna. The detector mode was average (AVG) unless otherwise noted. The peak level can be no more than 20 dB above this limit.
- For tests between **10 GHz to 18 GHz** the receive horn antenna was placed at a 3 m distance from the EUT. An initial scan was performed to find emissions (frequencies) requiring detail measurement. The pre-scan was performed by rotating the system 360 degrees while recording all emissions (frequency and amplitude). This procedure was repeated for antenna heights of 1 to 4 m, and for horizontal and vertical polarizations of the receiving antenna. These measurements were made with an average detector mode (AVG) unless otherwise noted.
- For tests between **18 GHz to 26.5 GHz** the receive horn antenna was placed at a 1 m distance from the EUT. An initial scan was performed to find emissions (frequencies) requiring detail measurement. The pre-scan was performed manually in close proximity to the EUT to find any system emissions in this frequency band. This search was performed on four sides of the EUT, along the entire height of the EUT, using both polarization of the receive antenna. Final measurements were made with an average detector mode (AVG) unless otherwise noted.
- For **all the above frequency ranges** optimization was performed based on the pre-scan data. For each identified frequency, the EUT was rotated in azimuth over 360 degrees and the direction of maximum emission was noted. Antenna height was then varied from 1 to 4 m at this azimuth to obtain maximum emissions. The procedure was repeated for both horizontal and vertical polarizations (where applicable) of the search antenna. The maximum level measured was recorded.

**Figure 5: Test setup for Emissions Measurements**

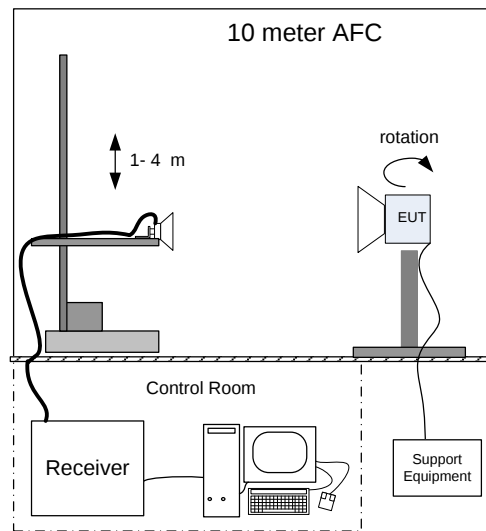

### 5.1.3 Calculation of the compliance margin

The following parameters and coefficients are used to calculate and derive compliance levels and margins with respect to measurement results and test parameters. The example below illustrates the manner in which the emissions levels are calculated.

The rows in these tables are defined as follows.

|                              |                                                                                                                                                |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Meter Reading (dB $\mu$ V) = | Voltage measured using the spectrum analyzer with the proper detector                                                                          |
| Gain/Loss Factor (dB) =      | Cumulative gain or loss of pre-amplifier and cables used in the measurement path (a negative value indicates gain)                             |
| Correction (dB) =            | Gain/Loss Factor (dB) + Antenna factor (dB)                                                                                                    |
| Level (dB $\mu$ V/m) =       | Corrected value or field strength, that is, the parameter of interest that is compared to the limit                                            |
| Margin (dB) =                | Level with respect to the appropriate limit (a positive Margin indicates that the Level is below the limit and that the measurement is a PASS) |

The values in the Level row are calculated as follows:

$$\text{Level} = \text{Meter Reading} + \text{Correction (dB)}$$

The values in the Margin row are calculated as follows:

$$\text{Margin} = \text{Limit} - \text{Level}$$

#### **5.1.4 Measurement uncertainties**

Uncertainty evaluation has been calculated according to the method described in CISPR 16 [5]. The expanded measurement instrumentation uncertainty (with a 95 % level of confidence) on E-field RE is:

- $\pm 3.8$  dB between 30 MHz and 1 GHz
- $\pm 4.7$  dB between 1 GHz and 10 GHz
- $\pm 4.8$  dB between 10 GHz and 18 GHz
- $\pm 4.6$  dB between 18 GHz and 26.5 GHz

#### **5.1.5 Strategy for selection of multiple radio modes to be tested**

In order to determine the worst case emissions for all operating configurations, the ARUS 32 B4 was operated at full power and scanned for emissions during a pre-compliance assessment. The purpose for this exercise was to ensure that the selected configurations represented the absolute worst case configurations / scenarios with respect to emissions. This prescan assessment determined that the following configurations required full compliance testing.


For this determination, the EUT was configured for LTE RAT, QPSK, 1.4MHz BW with:

- a) LTE RAT, QPSK, 1.4MHz BW Top channel, single carrier
- b) LTE RAT, QPSK, 1.4MHz BW Middle channel, single carrier
- c) LTE RAT, QPSK, 1.4MHz BW Bottom channel, single carrier
- d) LTE RAT, QPSK, 1.4MHz BW 2 carrier


### 5.1.6 Test results for RAT: BOT Channel, 1.4MHz QPSK, 1 Carrier, LTE

Test location: DVC 10-meter AFC  
Date tested: Aug 7, 2014  
Tested by: Martin Lee / Kasi Sivaratnam  
Test setup: See Appendix A: Test setup photographs.

Figure 6: Plot of RE from 10 KHz to 30 MHz (Bottom 1.4QPSK 1C LTE)

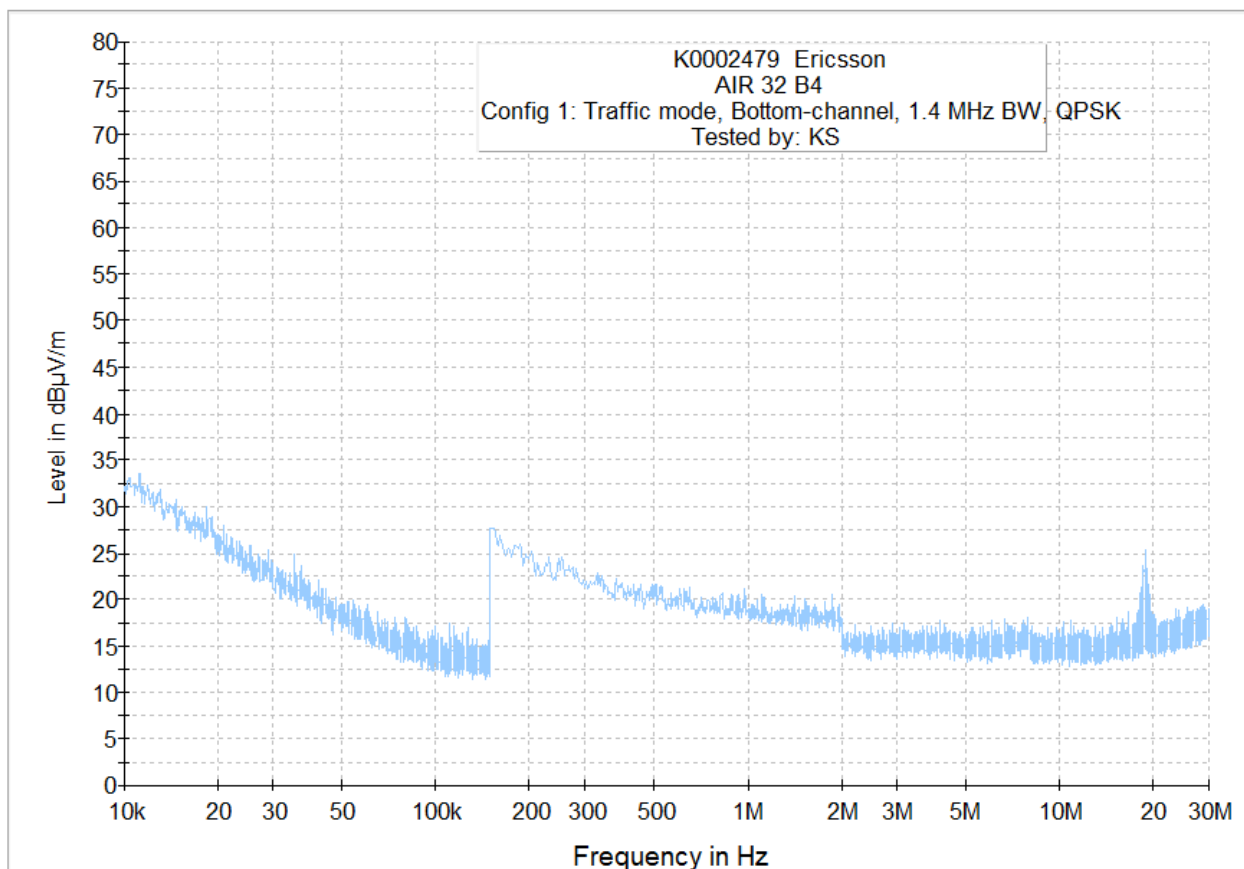


**Figure 7: Plot of RE from 30 MHz to 1 GHz (Bottom 1.4QPSK 1C LTE)**

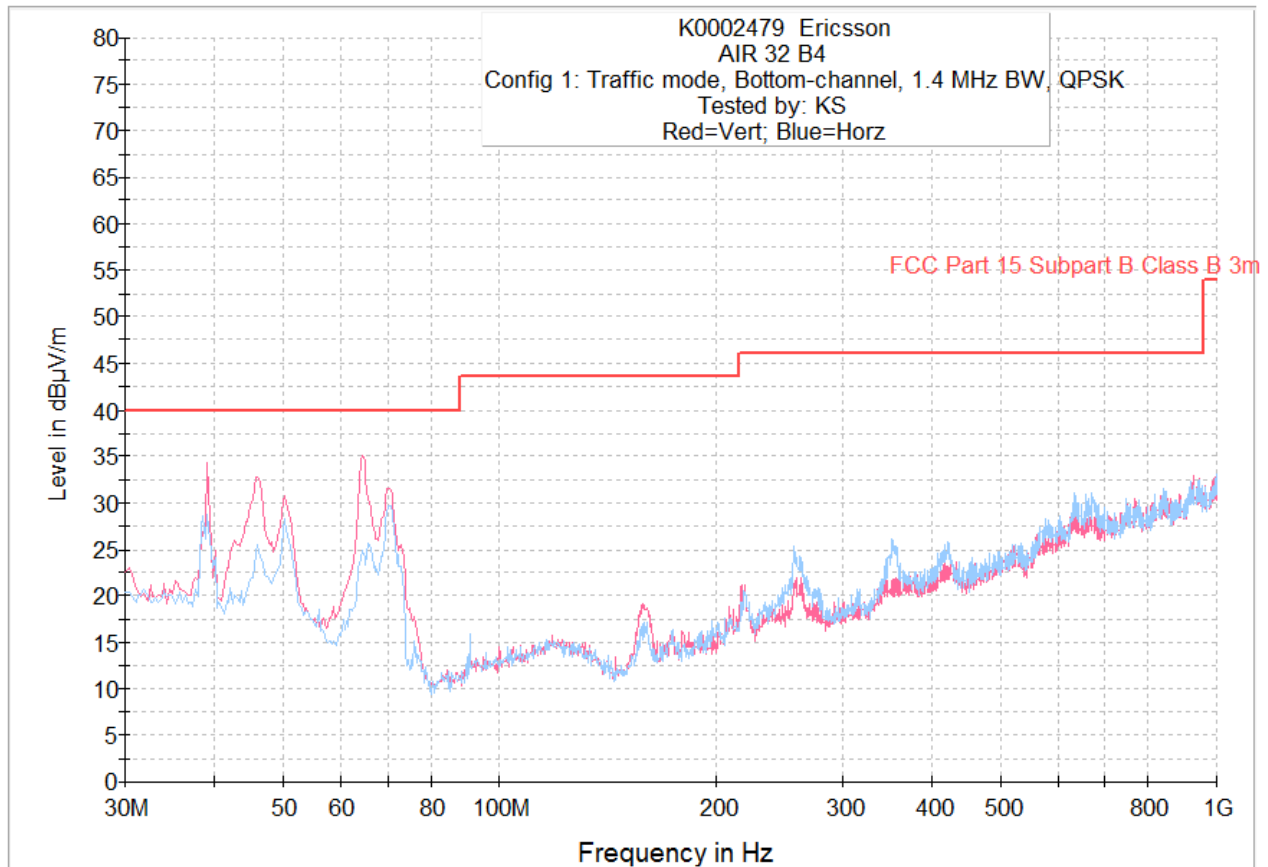

**Table 12: E-field RE test results at 3 m for FCC part 15 from 30 to 1000 MHz (Bottom 1.4QPSK 1C LTE)**

| Frequency (MHz) | Level (dBμV/m) | Detector | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin to FCC Limit (dB) | Note |
|-----------------|----------------|----------|-------------|--------------|---------------|------------|--------------------------|------|
| 39.345750       | 17.9           | QP       | 102         | V            | 171           | 17.2       | 22.0                     |      |
| 45.819750       | 32.1           | QP       | 102         | V            | 98            | 16.3       | 7.9                      |      |
| 50.199750       | 29.2           | QP       | 102         | V            | 101           | 15.4       | 10.8                     |      |
| 64.671750       | 33.1           | QP       | 203         | V            | 283           | 10.0       | 6.8                      |      |
| 69.998250       | 30.6           | QP       | 323         | V            | 2             | 8.4        | 9.3                      |      |

**Figure 8: Plot of RE from 1 to 3 GHz (Bottom 1.4QPSK 1C LTE)**

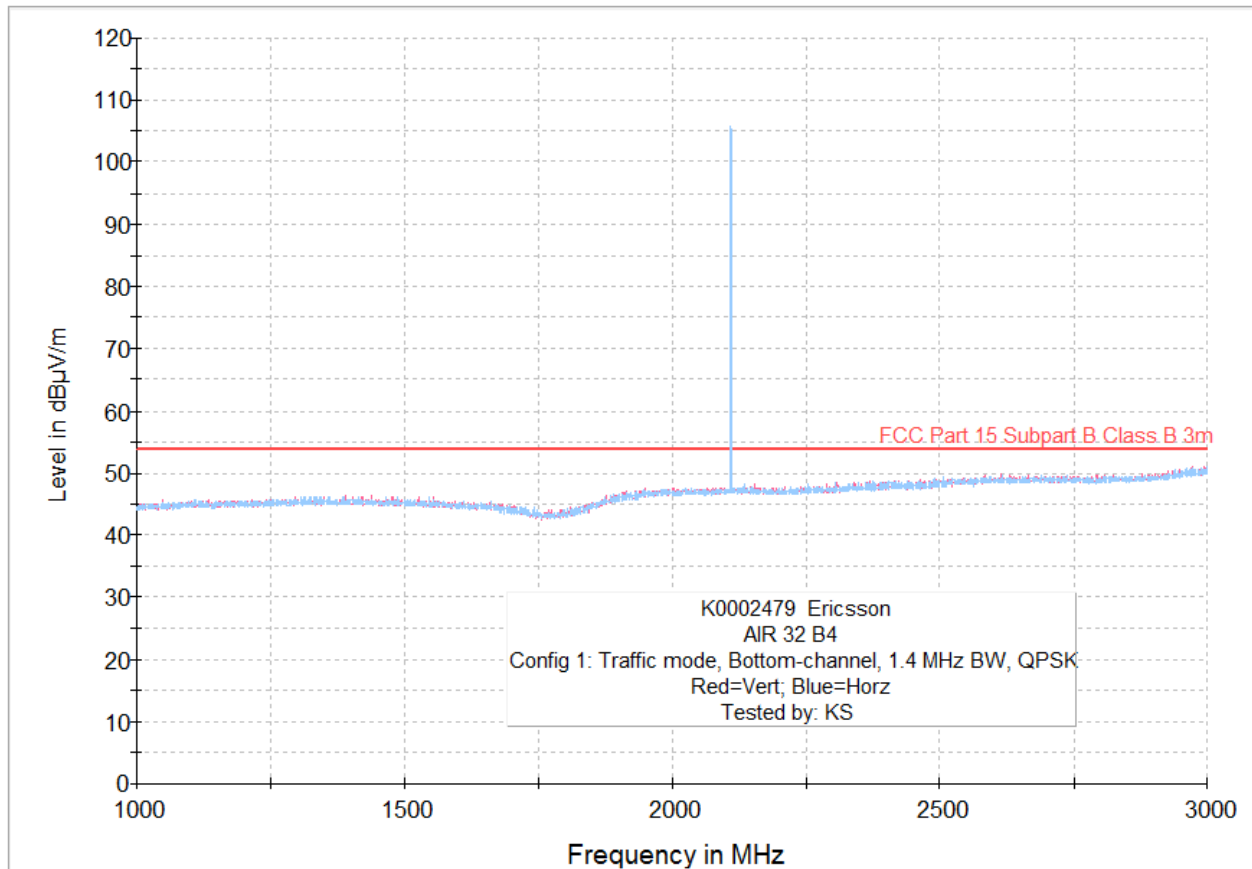


**Note 1:** The emission shown above the limit is the radio transmit frequency.

**Table 13: E-field RE test results at 3 m for FCC part 15 from 1 to 3 GHz (Bottom 1.4QPSK 1C LTE)**

| Frequency (MHz) | Level (dB $\mu$ V/m) | Detector | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin to FCC Limit (dB) | Note        |
|-----------------|----------------------|----------|-------------|--------------|---------------|------------|--------------------------|-------------|
| 2996.408000     | 47.7                 | AVG      | 401.0       | H            | 1             | 25         | 6.3                      | Noise Floor |


**Figure 9: Plot of RE from 3 to 10 GHz (Bottom 1.4QPSK 1C LTE)**

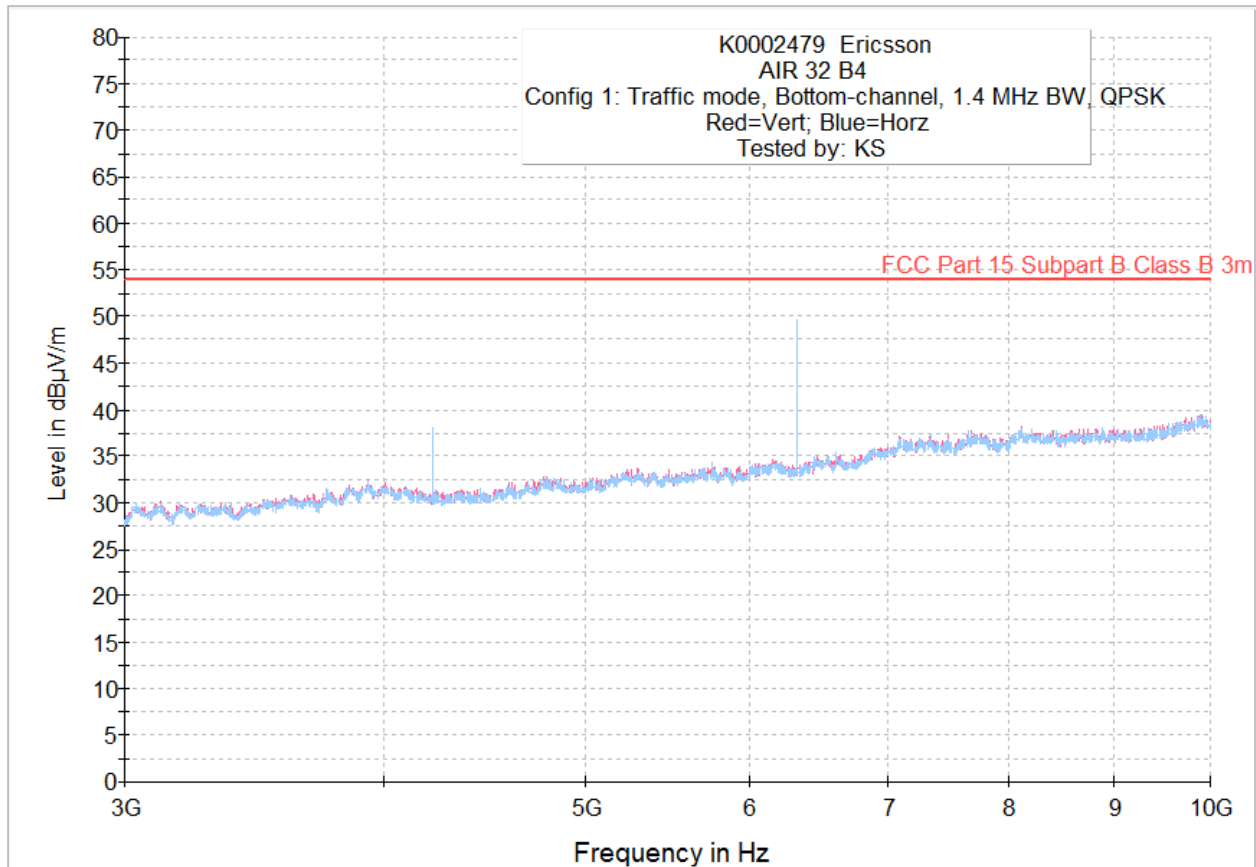

**Table 14: E-field RE test results at 3 m for FCC part 15 from 1 to 3 GHz (Bottom 1.4QPSK 1C LTE)**


| Frequency (MHz) | Level (dBμV/m) | Detector | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin to FCC Limit (dB) | Note |
|-----------------|----------------|----------|-------------|--------------|---------------|------------|--------------------------|------|
| 4221.285000     | 37.6           | AVG      | 112         | H            | 65            | 0.0        | 16.4                     |      |
| 6332.280000     | 47.4           | AVG      | 203         | H            | 173           | 5.3        | 6.6                      |      |

Figure 10: Plot of RE from 10 to 18 GHz (Bottom 1.4QPSK 1C LTE)

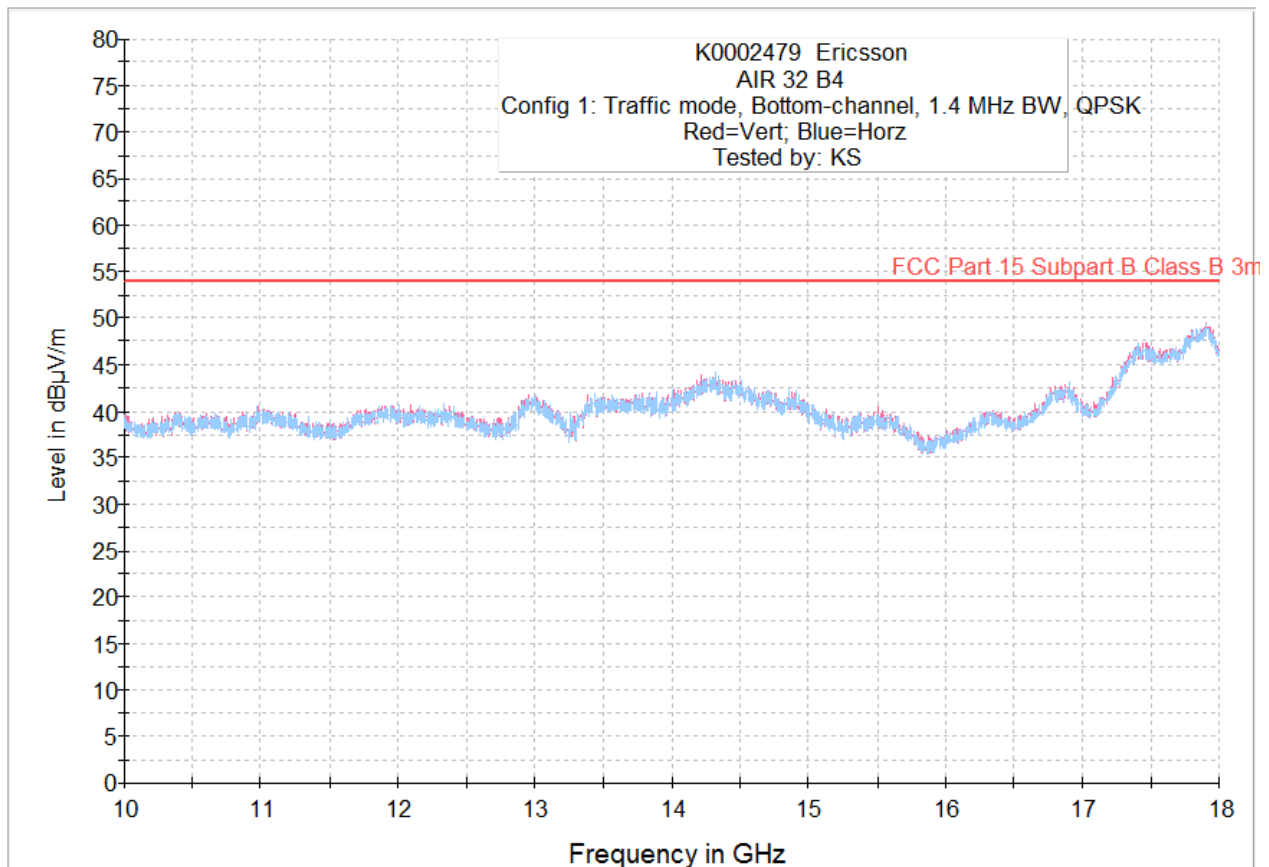

**Note 1:** All frequencies measured had greater than 6dB of passing margin. The noise floor in the upper frequency band was verified.

**Figure 11: Plot of RE from 18 to 26.5 GHz (Bottom 1.4QPSK 1C LTE)**

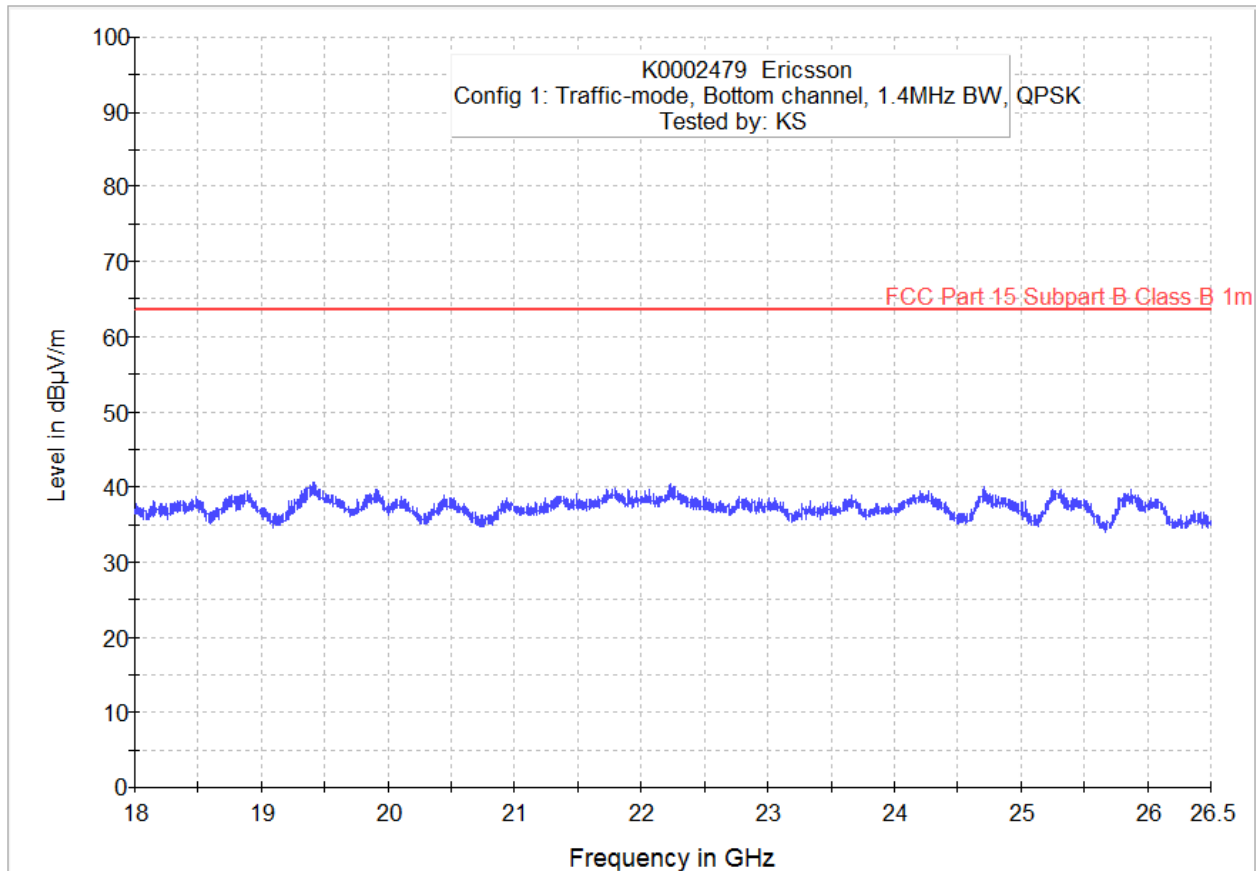

**Note 1:** There were no emissions within 6 dB of the limit to report.

### 5.1.7 Test results for RAT: Middle Channel, 1.4MHz QPSK, 1 Carrier, LTE

Test location: DVC 10-meter AFC  
Date tested: Aug 7, 2014  
Tested by: Martin Lee / Kasi Sivaratnam  
Test setup: See Appendix A: Test setup photographs.

Figure 12: Plot of RE from 10 KHz to 30 MHz (Middle 1.4QPSK 1C LTE)

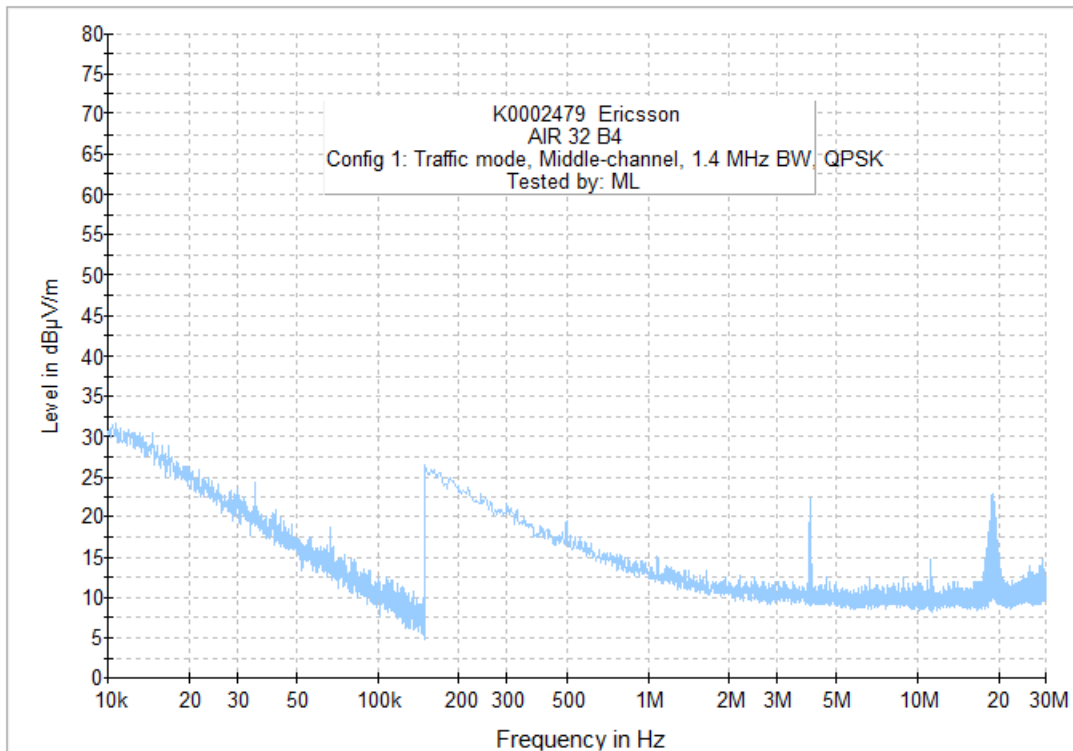


Figure 13: Plot of RE from 30 MHz to 1 GHz (Middle 1.4QPSK 1C LTE)


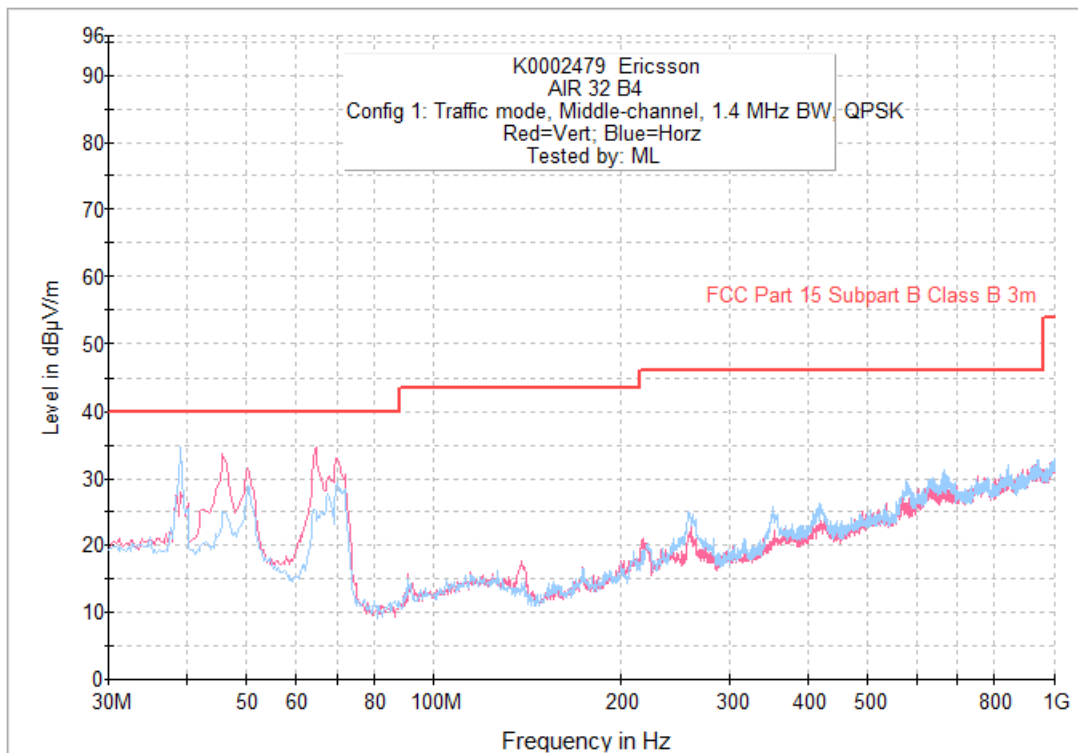


Table 15: E-field RE test results at 3 m for FCC part 15 from 30 to 1000 MHz (Middle 1.4QPSK 1C LTE)

| Frequency (MHz) | Level (dBμV/m) | Detector | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin to FCC Limit (dB) | Note |
|-----------------|----------------|----------|-------------|--------------|---------------|------------|--------------------------|------|
| 39.224250       | 15.2           | QP       | 102         | H            | 2             | 17.2       | 24.8                     |      |
| 45.833750       | 34.6           | QP       | 102         | V            | 100           | 16.3       | 5.3                      |      |
| 50.183750       | 32.9           | QP       | 102         | V            | 106           | 15.4       | 7.0                      |      |
| 64.539250       | 35.1           | QP       | 203         | V            | 277           | 10.1       | 4.9                      |      |
| 70.018750       | 33.4           | QP       | 203         | V            | 325           | 8.4        | 6.5                      |      |

**Figure 14: Plot of RE from 1 to 3 GHz (Middle 1.4QPSK 1C LTE)**

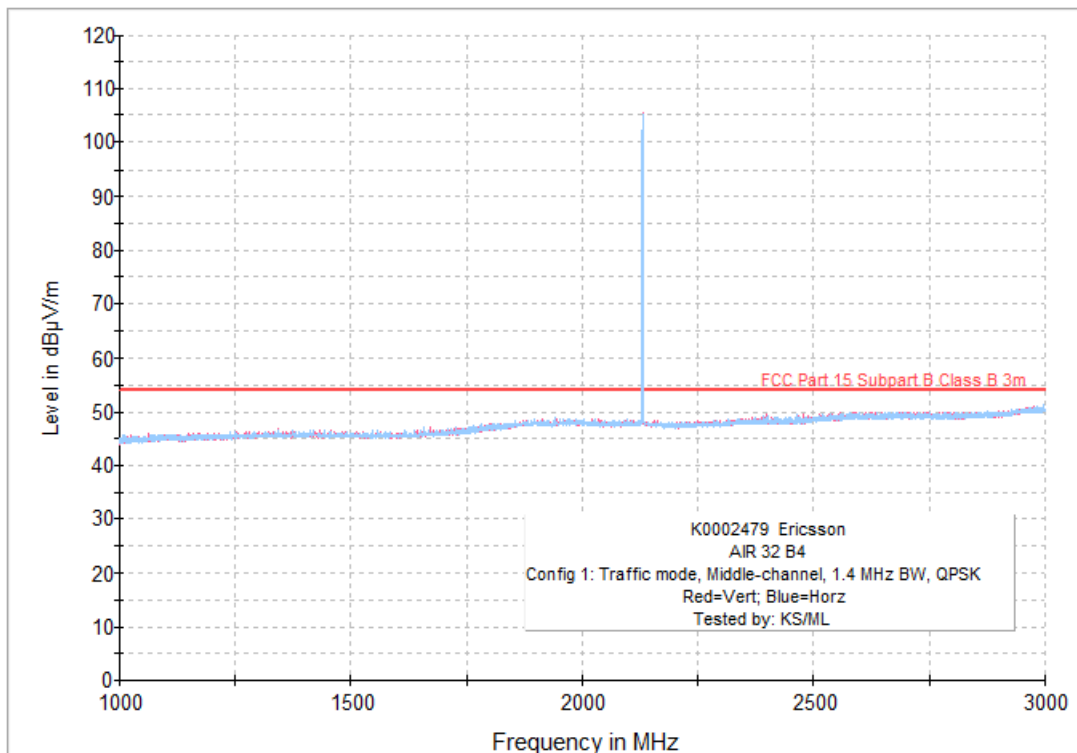


**Note 1:** The emission shown above the limit is the radio transmit frequency.

**Table 16: E-field RE test results at 3 m for FCC part 15 from 1 to 3 GHz (Middle 1.4QPSK 1C LTE)**

| Frequency (MHz) | Level (dBµV/m) | Detector | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin to FCC Limit (dB) | Note        |
|-----------------|----------------|----------|-------------|--------------|---------------|------------|--------------------------|-------------|
| 2996.964000     | 47.6           | AVG      | 277.0       | H            | 0             | 25.3       | 6.4                      | Noise Floor |


**Figure 15: Plot of RE from 3 to 10 GHz (Middle 1.4QPSK 1C LTE)**

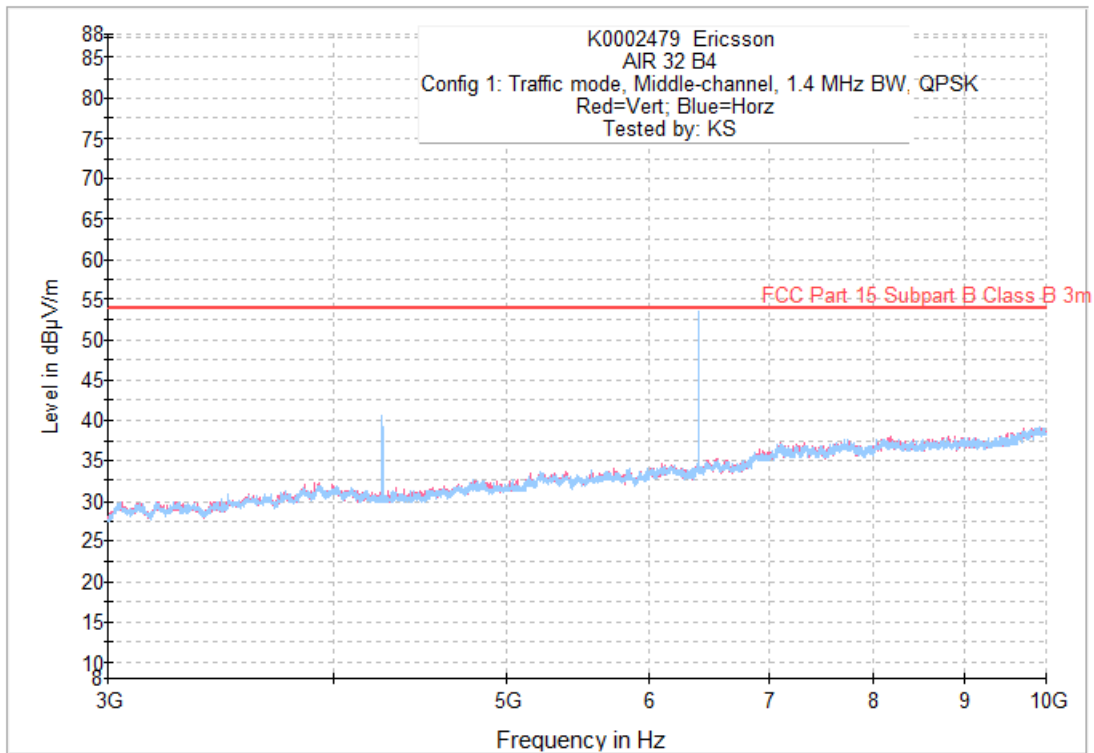

**Table 17: E-field RE test results at 3 m for FCC part 15 from 3 to 10 GHz (Middle 1.4QPSK 1C LTE)**


| Frequency (MHz) | Level (dBμV/m) | Detector | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin to FCC Limit (dB) | Note |
|-----------------|----------------|----------|-------------|--------------|---------------|------------|--------------------------|------|
| 4265.051000     | 37.6           | AVG      | 102         | H            | 62            | 0.0        | 16.4                     |      |
| 6397.529000     | 51.4           | AVG      | 154         | H            | 104           | 5.8        | 2.6                      |      |

Figure 16: Plot of RE from 10 to 18 GHz (Middle 1.4QPSK 1C LTE)

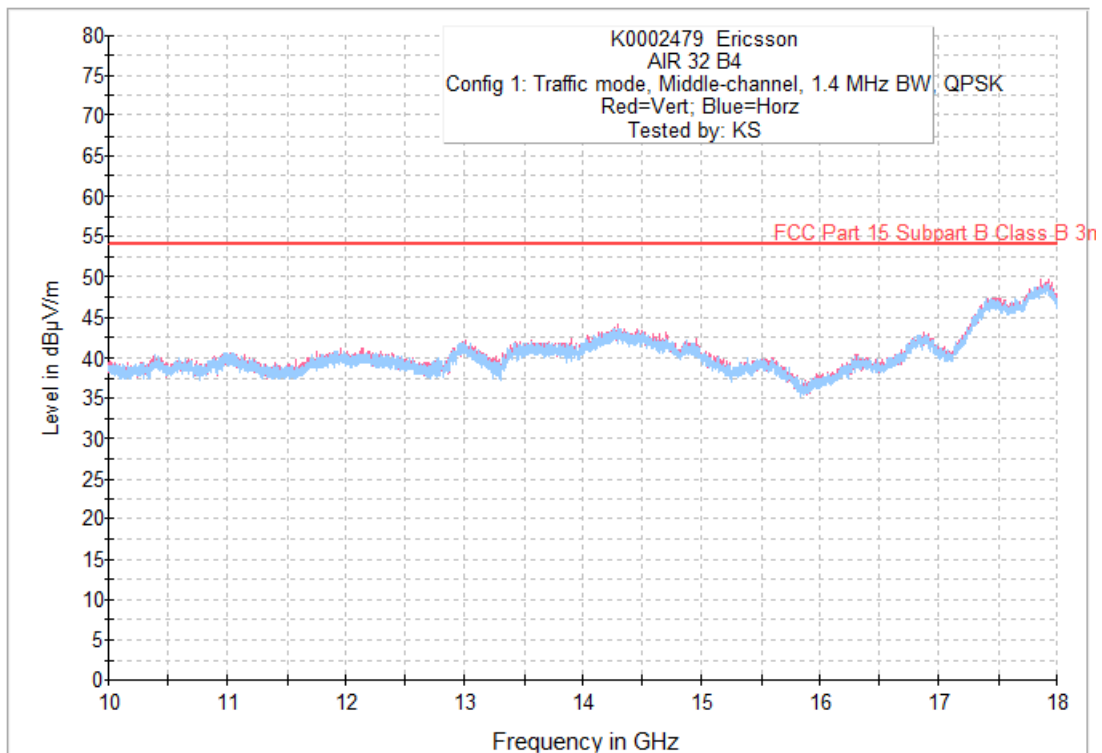

**Note 1:** All frequencies measured had greater than 6dB of passing margin. The noise floor in the upper frequency band was verified.

**Figure 17: Plot of RE from 18 to 26.5 GHz (Middle 1.4QPSK 1C LTE)**

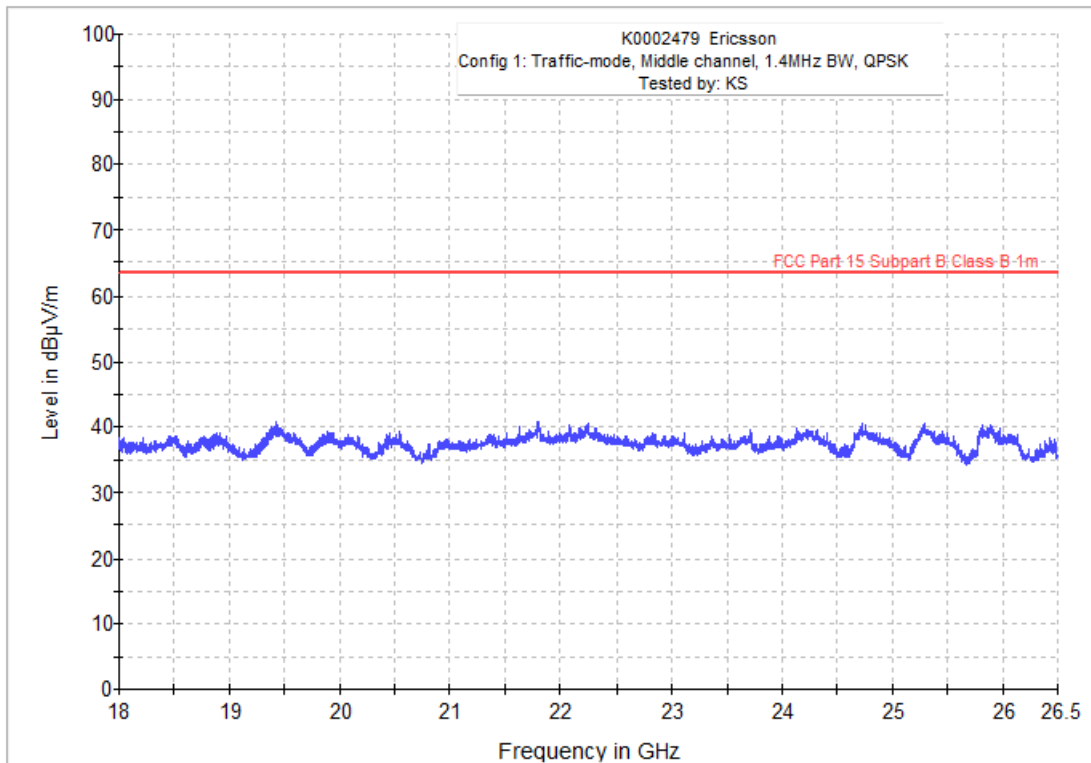


**Note 1:** There were no emissions within 6 dB of the limit to report.


### 5.1.8 Test results for RAT: Top Channel, 1.4MHz QPSK, 1 Carrier, LTE

Test location: DVC 10-meter AFC  
Date tested: Aug 6 &7, 2014  
Tested by: Martin Lee / Kasi Sivaratnam  
Test setup: See Appendix A: Test setup photographs.

**Figure 18: Plot of RE from 10 KHz to 30 MHz (Top 1.4QPSK 1C LTE)**

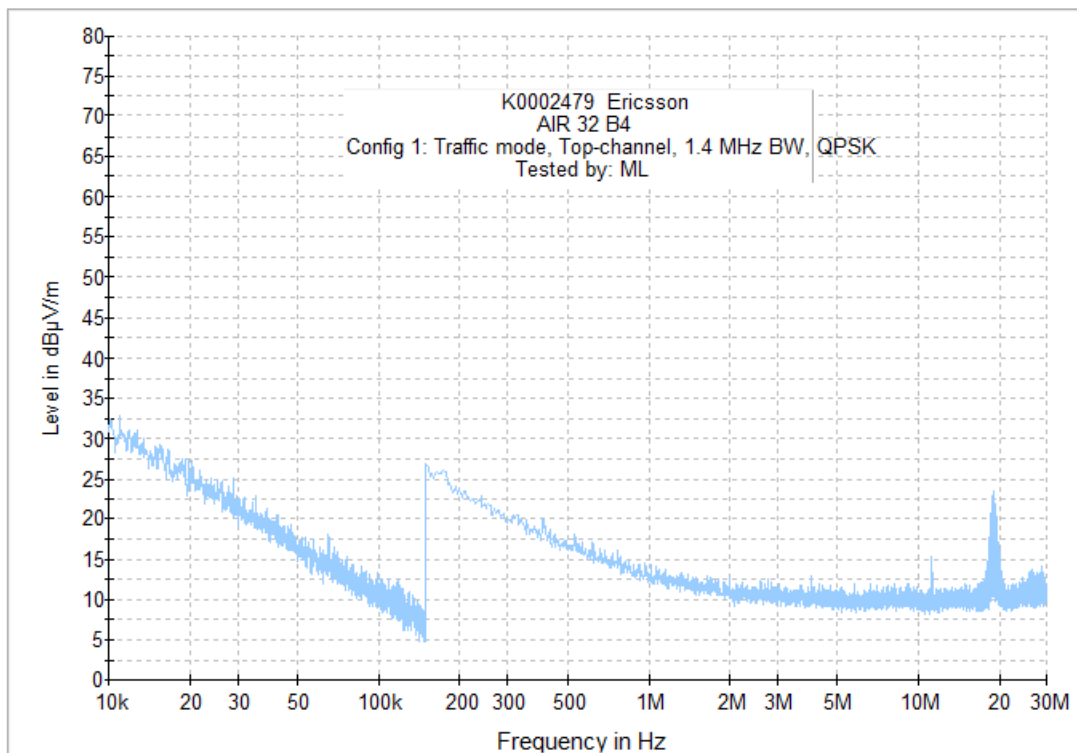


**Figure 19: Plot of RE from 30 MHz to 1 GHz (Top 1.4QPSK 1C LTE)**

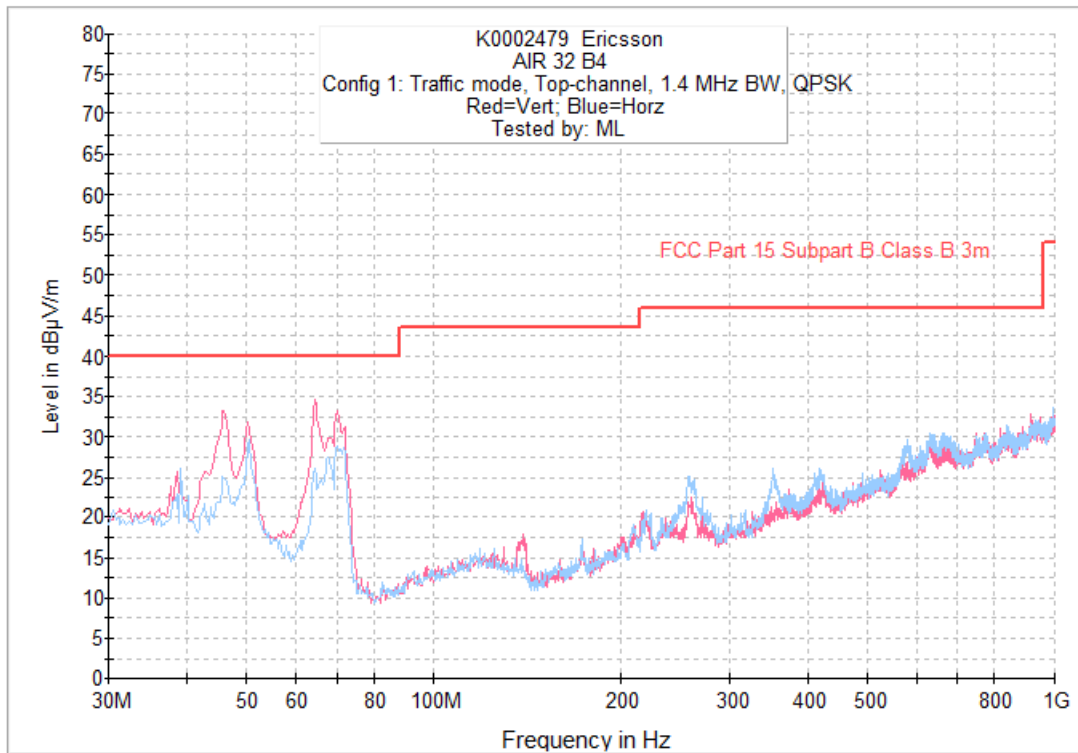

**Table 18: E-field RE test results at 3 m for FCC part 15 from 30 to 1000 MHz (Top 1.4QPSK 1C LTE)**

| Frequency (MHz) | Level (dBμV/m) | Detector | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin to FCC Limit (dB) | Note |
|-----------------|----------------|----------|-------------|--------------|---------------|------------|--------------------------|------|
| 45.913750       | 34.7           | QP       | 102         | V            | 98            | 16.3       | 5.3                      |      |
| 50.178750       | 32.7           | QP       | 102         | V            | 104           | 15.4       | 7.2                      |      |
| 64.503250       | 34.8           | QP       | 203         | V            | 278           | 10.1       | 5.1                      |      |
| 70.014750       | 33.6           | QP       | 203         | V            | 325           | 8.4        | 6.4                      |      |

**Figure 20: Plot of RE from 1 to 3 GHz (Top 1.4QPSK 1C LTE)**

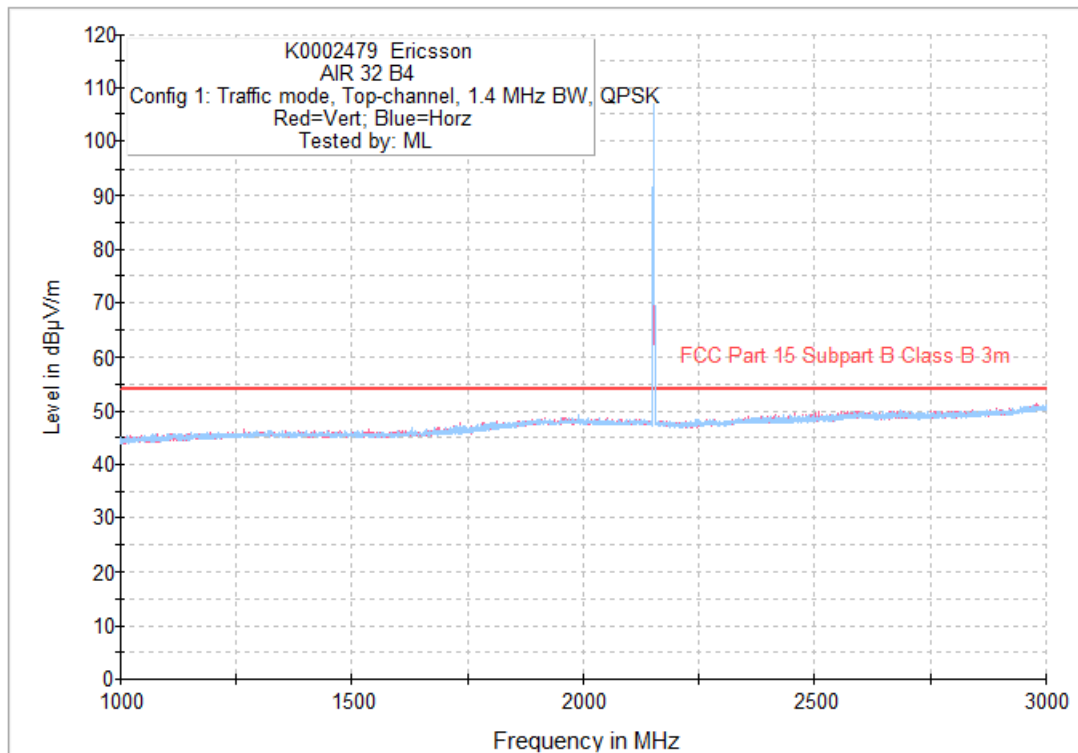


**Note 1:** The emission shown above the limit is the radio transmit frequency.

**Table 19: E-field RE test results at 3 m for FCC part 15 from 1 to 3 GHz (Top 1.4QPSK 1C LTE)**

| Frequency (MHz) | Level (dBμV/m) | Detector | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin to FCC Limit (dB) | Note        |
|-----------------|----------------|----------|-------------|--------------|---------------|------------|--------------------------|-------------|
| 2998.572000     | 61.8           | AVG      | 398         | V            | 202           | 25.3       | -7.8                     | Noise Floor |


**Figure 21: Plot of RE from 3 to 10 GHz (Top 1.4QPSK 1C LTE)**

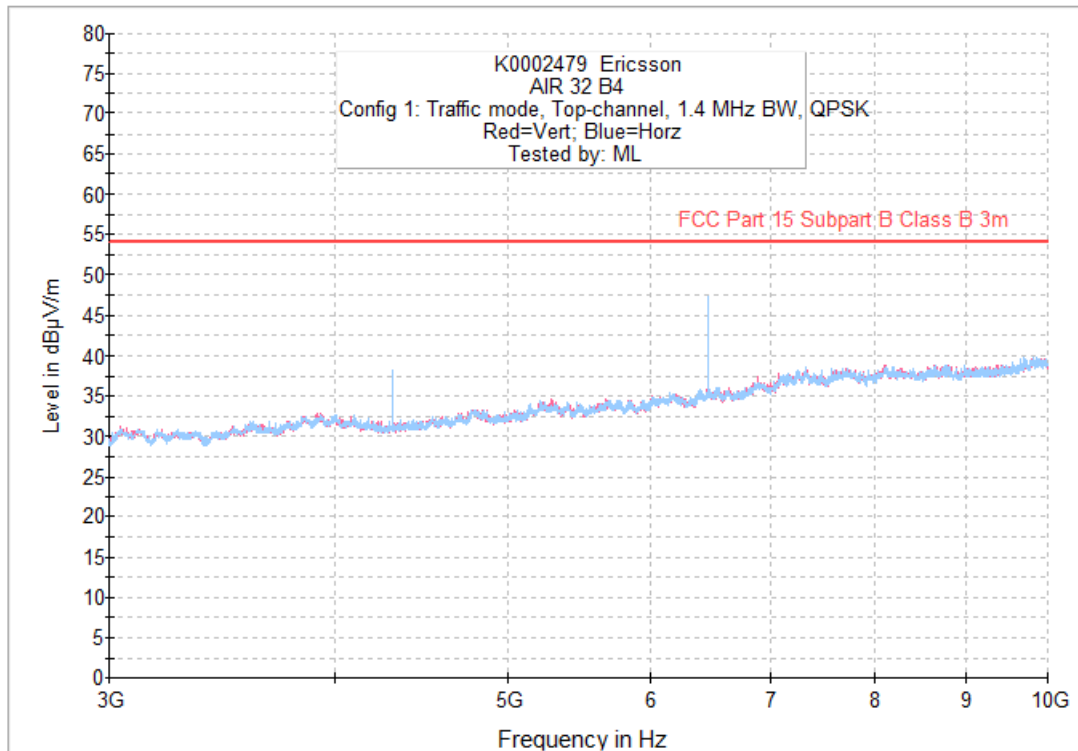

**Table 20: E-field RE test results at 3 m for FCC part 15 from 3 to 10 GHz (Top 1.4QPSK 1C LTE)**


| Frequency (MHz) | Level (dBμV/m) | Detector | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin to FCC Limit (dB) | Note |
|-----------------|----------------|----------|-------------|--------------|---------------|------------|--------------------------|------|
| 4308.516000     | 36.8           | AVG      | 101         | H            | 114           | 0.6        | 17.1                     |      |
| 6463.079000     | 46.4           | AVG      | 179         | V            | 196           | 7.0        | 7.5                      |      |

Figure 22: Plot of RE from 10 to 18 GHz (Top 1.4QPSK 1C LTE)

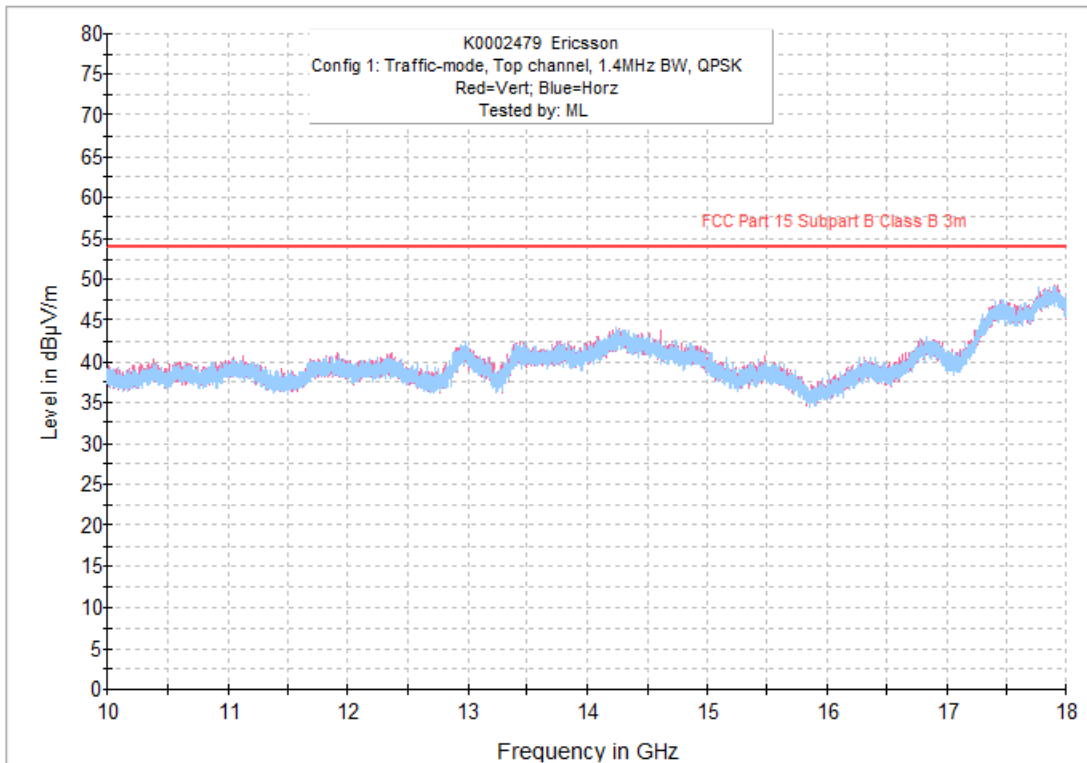

**Note 1:** All frequencies measured had greater than 6dB of passing margin. The noise floor in the upper frequency band was verified.

**Figure 23: Plot of RE from 18 to 26.5 GHz (Top 1.4QPSK 1C LTE)**

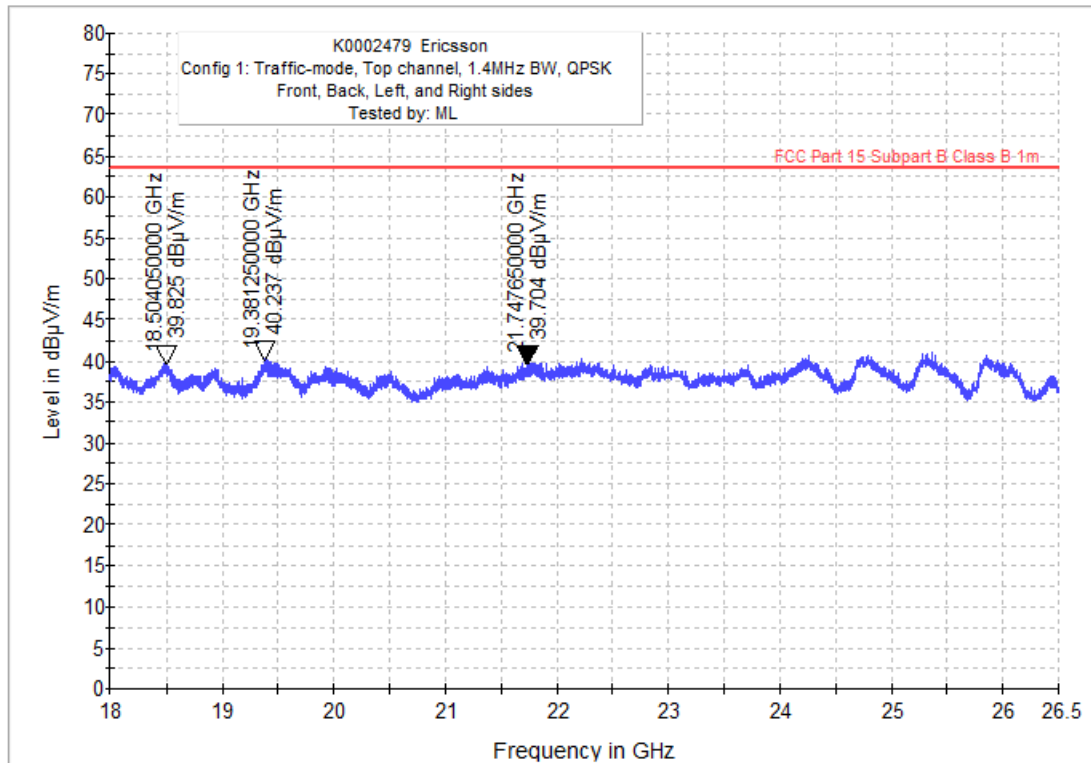


**Note 1:** There were no emissions within 6 dB of the limit to report.


### 5.1.9 Test results for RAT: 1.4MHz QPSK, 2 Carrier, LTE

Test location: DVC 10-meter AFC  
Date tested: Aug 12, 2014  
Tested by: Martin Lee / Kasi Sivaratnam  
Test setup: See Appendix A: Test setup photographs.

Figure 24: Plot of RE from 10 KHz to 30 MHz (1.4QPSK 2 Carrier LTE)

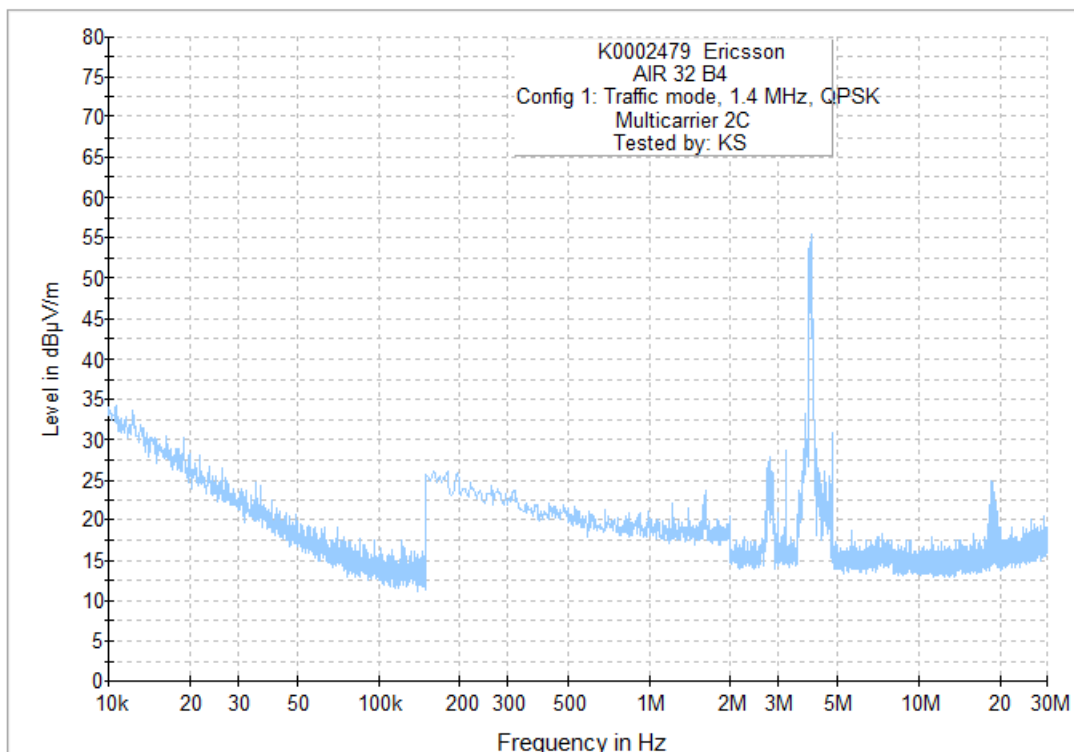


**Figure 25: Plot of RE from 30 MHz to 1 GHz (1.4QPSK 2 Carrier LTE)**

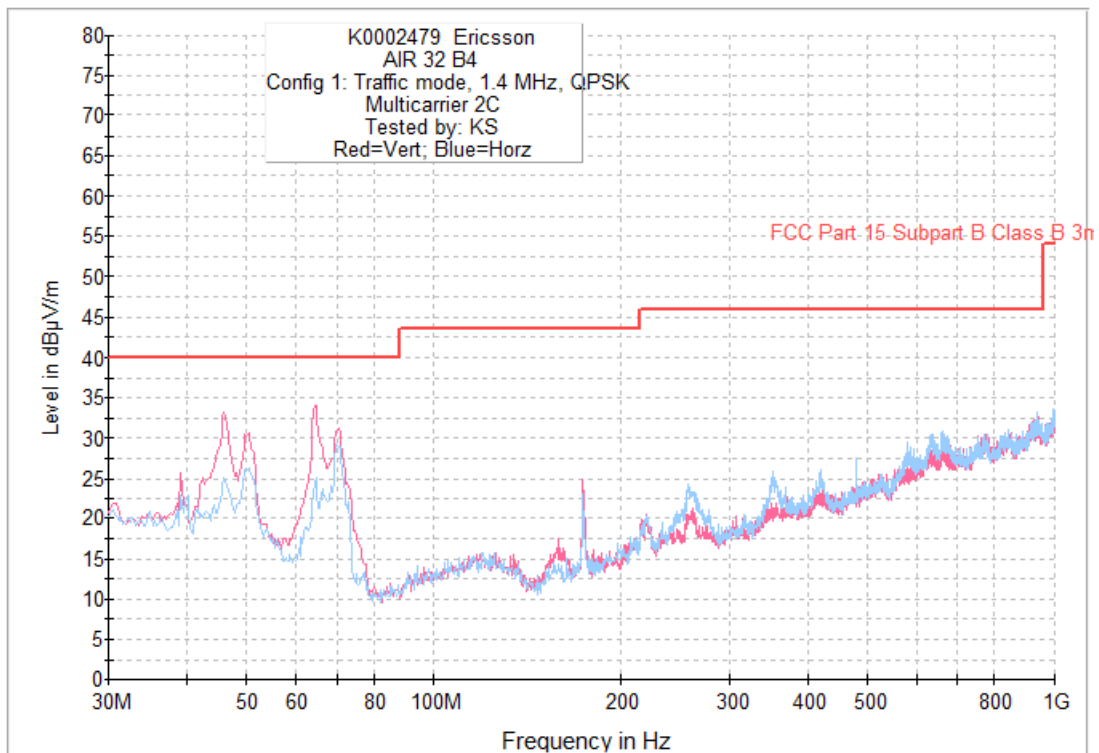

**Note 1:** All measurements had greater than 6 dB of margin to the limit.

**Figure 26: Plot of RE from 1 to 3 GHz (1.4QPSK 2 Carrier LTE)**

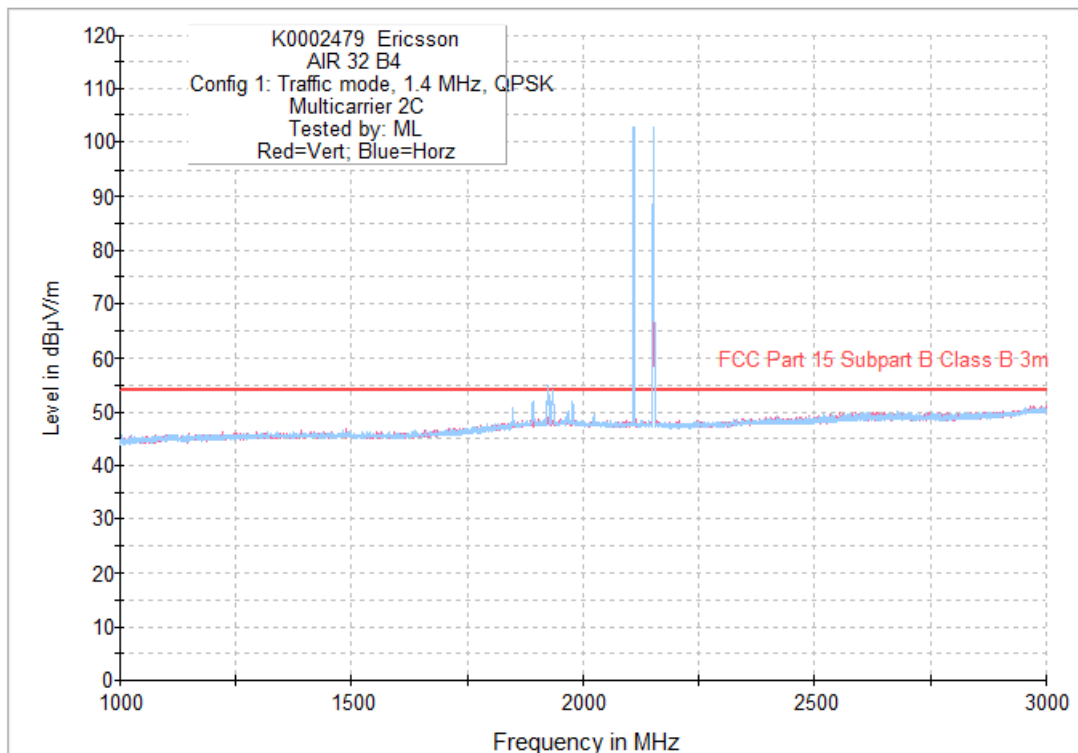


**Note 1:** The emissions shown above the limit are the radio transmit frequencies.

**Table 21: E-field RE test results at 3 m for FCC part 15 from 1 to 3 GHz (1.4QPSK 2 Carrier LTE)**

| Frequency (MHz) | Level (dBμV/m) | Detector | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin to FCC Limit (dB) | Note |
|-----------------|----------------|----------|-------------|--------------|---------------|------------|--------------------------|------|
| 1848.910000     | 45.9           | AVG      | 146         | H            | 175           | 21.1       | 8.1                      |      |
| 1892.474000     | 49.3           | AVG      | 183         | H            | 187           | 21.5       | 4.7                      |      |
| 1936.154000     | 50.6           | AVG      | 147         | H            | 268           | 21.7       | 3.3                      |      |
| 1979.912000     | 49.7           | AVG      | 124         | H            | 188           | 21.9       | 4.3                      |      |
| 2023.562000     | 47.2           | AVG      | 112         | H            | 175           | 22.0       | 6.7                      |      |


**Figure 27: Plot of RE from 3 to 10 GHz (1.4QPSK 2 Carrier LTE)**

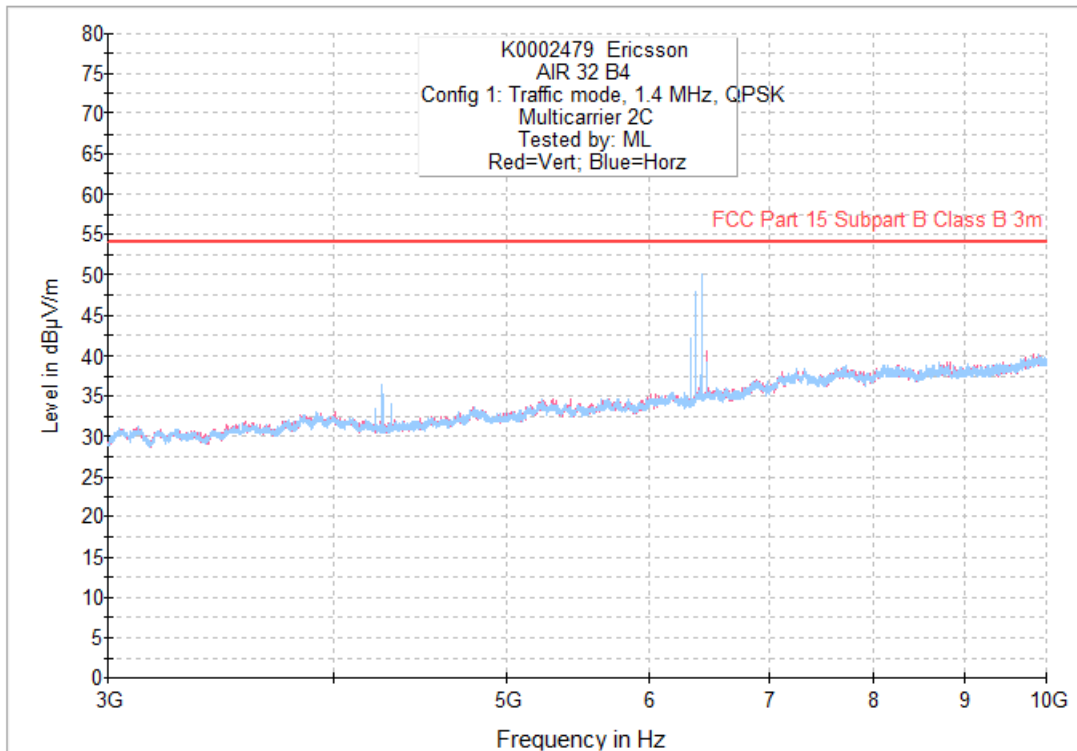

**Table 22: E-field RE test results at 3 m for FCC part 15 from 3 to 10 GHz (1.4QPSK 2 Carrier LTE)**


| Frequency (MHz) | Level (dBμV/m) | Detector | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin to FCC Limit (dB) | Note |
|-----------------|----------------|----------|-------------|--------------|---------------|------------|--------------------------|------|
| 6419.305000     | 48.0           | AVG      | 177         | H            | 183           | 6.9        | 6.0                      |      |

Figure 28: Plot of RE from 10 to 18 GHz (1.4QPSK 2 Carrier LTE)

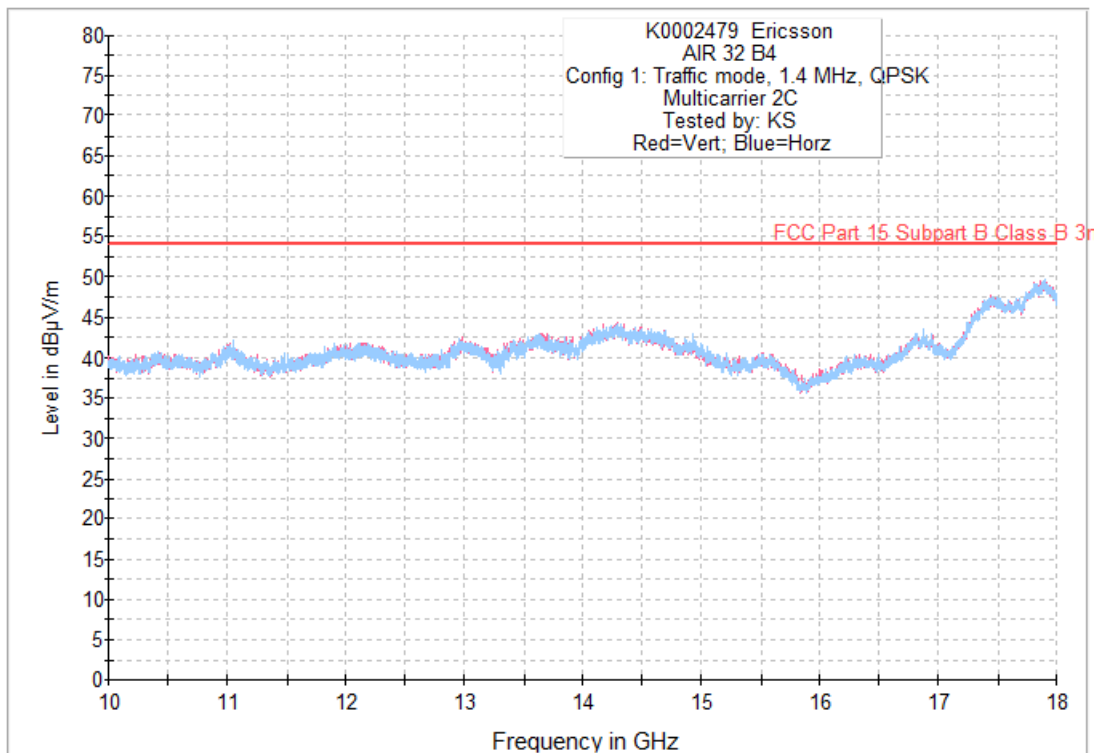

**Note 1:** All frequencies measured had greater than 6dB of passing margin. The noise floor in the upper frequency band was verified.

**Figure 29: Plot of RE from 18 to 26.5 GHz (1.4QPSK 2 Carrier LTE)**

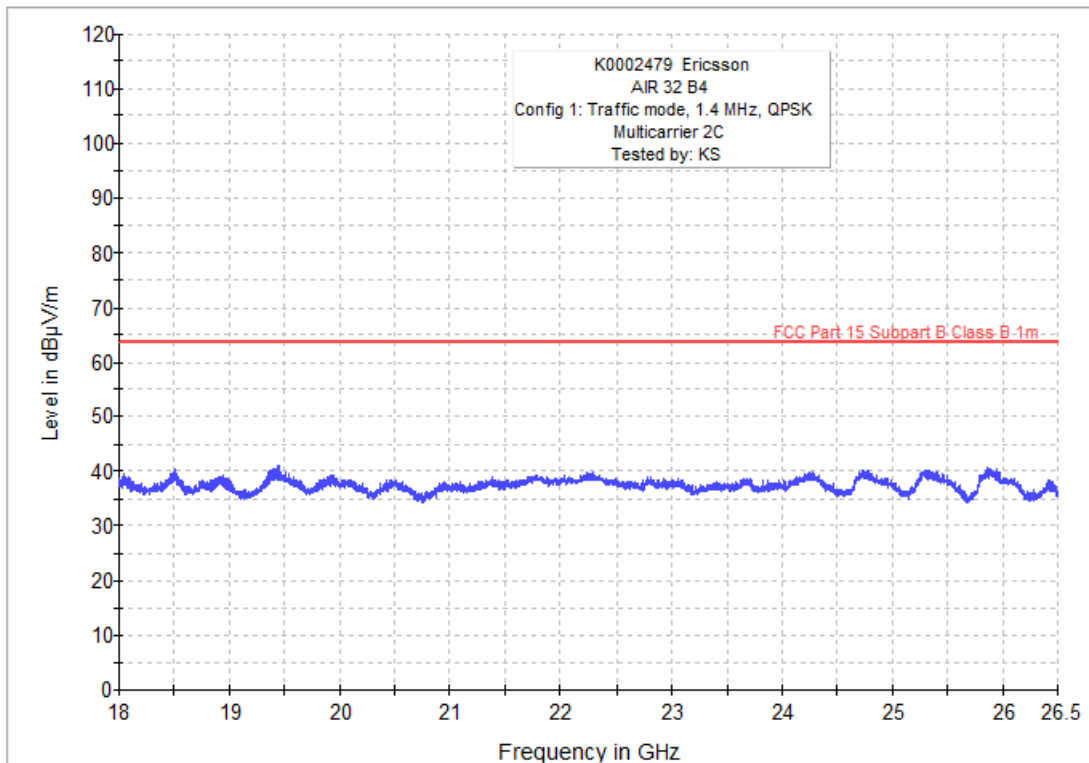

**Note 1:** There were no emissions within 6 dB of the limit to report.

### 5.1.10 Test equipment

The test equipment used for all configurations was as follows.

**Table 23: E-field RE test equipment**

| Description                                               | Make                        | Model number                    | Asset ID  | Calibr. date | Calibr. due  |
|-----------------------------------------------------------|-----------------------------|---------------------------------|-----------|--------------|--------------|
| High Pass Filter                                          | Microwave Circuits inc.     | H3G02G1                         | SSG012728 | 1/9/2014     | 1/9/2015     |
| Low Pass RF Filter                                        | Hewlett Packard             | 360 B                           | SSG013707 | 6/4/2014     | 6/4/2015     |
| Double Ridged Horn                                        | Emco                        | 3115                            | SSG012508 | 12/20/2013   | 12/20/2014   |
| Bilog Antenna                                             | Antenna Research Associates | LPB 2520A                       | SSG012772 | 12/20/2013   | 12/20/2014   |
| Coaxial Cable # 26                                        | Huber & Suhner              | ST18/Nm/Nm/36, Sucotest         | SSG012785 | 1/9/2014     | 1/9/2015     |
| Coaxial Cable # 27                                        | Huber & Suhner              | ST18/Nm/Nm/36, Sucotest         | SSG012786 | 1/8/2014     | 1/8/2015     |
| Coaxial Cable # 6                                         | Huber & Suhner              | 106A, Sucoflex                  | SSG012456 | 1/15/2014    | 1/15/2015    |
| Pre-Amplifier                                             | BNR                         | LNA                             | SSG012360 | 4/4/2014     | 4/4/2015     |
| EMI / EMC Test Software                                   | Rohde & Schwarz             | EMC32, Ver. 8.52                | n/a       | n/a          | n/a          |
| EMI Receiver                                              | Rohde & Schwarz             | ESU40                           | SSG013672 | 11/4/2013    | 11/4/2014    |
| EMI Receiver                                              | Rohde & Schwarz             | ESU26                           | SSG013729 | 1/22/2014    | 1/22/2015    |
| Coaxial Cable # 14                                        | Huber & Suhner              | 104PEA, Sucoflex                | SSG012041 | 1/8/2014     | 1/8/2015     |
| Low Pass RF Filter                                        | Hewlett Packard             | 360 B                           | SSG013707 | 6/4/2014     | 6/4/2015     |
| Coaxial Cable                                             | Huber & Suhner              | 101 PEA, Sucoflex               | SSG012290 | 8/11/2014    | 8/11/2015    |
| Horn Antenna (18 - 26.5 GHz)                              | Emco                        | 3160-09                         | SSG012292 | 12/27/2013   | 12/27/2014   |
| Active Monopole Antenna                                   | Emco                        | 3301B                           | SSG012683 | 2/17/2014    | 2/17/2015    |
| 10-18 GHz, Coaxial Cable H3                               | Micro-Coax                  | UFA 210B-1-1500-504504, Utiflex | SSG012376 | 1/9/2014     | 1/9/2015     |
| Attenuator                                                | Weinschel                   | 6070-20                         | SSG013016 | 5/20/2014    | 5/20/2015    |
| Attenuator                                                | Narda                       | 766-3                           | SSG012759 | 4/4/2014     | 4/4/2015     |
| 6 dB Attenuator                                           | Narda                       | 774-6                           | SSG013706 | 5/8/2014     | 5/8/2015     |
| <b>Additional Substitution Measurement Test Equipment</b> |                             |                                 |           |              |              |
| EMC Automation Software                                   | Rohde & Schwarz             | EMC32 V.8.52                    | SSG013731 | not required | not required |
| Bilog Antenna                                             | Antenna Research Associates | LPB 2520A                       | SSG012772 | 12/20/13     | 12/20/14     |
| Double Ridged Horn                                        | Emco                        | 3115                            | SSG012508 | 12/20/13     | 12/20/14     |
| Signal Generator                                          | Anritsu                     | 69369A                          | SSG012077 | 4/9/14       | 4/9/15       |
| Coaxial Cable # 26                                        | Huber & Suhner              | ST18/Nm/Nm/36, Sucotest         | SSG012785 | 1/09/14      | 1/09/15      |
| Pre-Amplifier                                             | BNR                         | LNA                             | SSG012360 | 4/04/14      | 4/04/15      |
| Coaxial Cable # 14                                        | Huber & Suhner              | 104PEA, Sucoflex                | SSG012041 | 1/08/14      | 1/08/15      |
| Coaxial Cable # 27                                        | Huber & Suhner              | ST18/Nm/Nm/36, Sucotest         | SSG012786 | 1/08/14      | 1/08/15      |
| EMI Receiver                                              | Rohde & Schwarz             | ESU26                           | SSG013729 | 1/22/14      | 1/22/15      |
| Coaxial Cable # 6                                         | Huber & Suhner              | 106A, Sucoflex                  | SSG012456 | 1/15/14      | 1/15/15      |

#### **5.1.11 Test conclusion**

The ARUS 32 B4 has passed the E-field Radiated Emission tests with respect to the Class B limit of FCC Part 15 Subpart B and ICES-003 for LTE modes of operation tested.

## 5.2 Radiated Spurious Emissions

### 5.2.1 Test specification and limits

The testing requirements are as follows.

Table 24: Spurious emissions requirements

| Test Method             | Level                                                                                                                                                                |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RSS-139 / RSS-GEN       | "The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB" |
| FCC part 2.1053, 2.1057 | ANSI C63.4 [2], TIA-603-C [3]                                                                                                                                        |
| FCC Part 27.53          | ANSI C63.4 [2], TIA-603-C [3]                                                                                                                                        |

#### 5.2.1.1 FCC Part 2.1053 Measurements required: Field strength of spurious radiation.

*Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of FCC 2.1049, as appropriate.*

*Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from half wave dipole antennas.*

#### 5.2.1.2 FCC Part 2.1057 Frequency spectrum to be investigated.

*The spectrum should be investigated from the lowest radio frequency signal generated in the equipment, without going below 9 kHz, up to at least the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. Particular attention should be paid to harmonics and sub harmonics of the carrier frequency as well as to those frequencies removed from the carrier by multiples of the oscillator frequency. Radiation at the frequencies of multiplier stages should also be checked. The amplitude of spurious emissions, which are attenuated more than 20 dB below the permissible value, need not be reported.*

### 5.2.2 Test procedure

Verifications of the test equipment and AFC were completed before the installation of the EUT in accordance with the quality assurance procedures documented in the EMC test procedures document [9].

- The EUT was placed on a turntable inside the AFC (configured as in normal operation). The system and its cables were separated from the ground plane by an insulating support 10 mm in height. The system was grounded in accordance with its installation specifications. No additional grounding connections were connected.
- For tests between **30 MHz and 1 GHz** the receive antenna (bi-log) was placed at 3 m away from the EUT. An initial scan was performed to find emissions (frequencies) requiring detailed measurement. The pre-scan was performed by rotating the system 360 degrees while recording all emissions (frequency and amplitude). This procedure was repeated for antenna heights of 1 to 4 m, and for horizontal and vertical polarizations of the receiving antenna. The detector mode was RMS with a 120 kHz bandwidth unless otherwise noted.
- For tests between **1 GHz and 10 GHz** the receive antenna (horn) was placed at 3 m away from the EUT. An initial scan was performed to find emissions (frequencies) requiring detailed measurement. The pre-scan was performed by rotating the system 360 degrees while recording all emissions (frequency and amplitude). This procedure was repeated for antenna heights of 1 to 4 m, and for horizontal and vertical polarizations of the receiving antenna. The detector mode was RMS with a 1 MHz bandwidth unless otherwise noted.
- For FCC Part 15 or ICES tests between **10 GHz to 18 GHz** the receive horn antenna was placed at a 3 m distance from the EUT. An initial scan was performed to find emissions (frequencies) requiring detail measurement. The pre-scan was performed by rotating the system 360 degrees while recording all emissions (frequency and amplitude). This procedure was repeated for antenna heights of 1 to 4 m, and for horizontal and vertical polarizations of the receiving antenna. These measurements were made with an average detector mode (AVG) with 1 MHz bandwidth unless otherwise noted.
- For FCC Part 15 or ICES tests between **18 GHz to 26.5 GHz** the receive horn antenna was placed at a 1 m distance from the EUT. An initial scan was performed to find emissions (frequencies) requiring detail measurement. The pre-scan was performed manually in close proximity to the EUT to find any system emissions in this frequency band. This search was performed on four sides of the EUT, along the entire height of the EUT, using both polarization of the receive antenna. Final measurements were made with an average detector mode (AVG) with 1 MHz bandwidth unless otherwise noted.
- For **all the above frequency ranges** optimization was performed based on the pre-scan data. For each identified frequency, the EUT was rotated in azimuth over 360 degrees and the direction of maximum emission was noted. Antenna height was then varied from 1 to 4 m at this azimuth to obtain maximum emissions. The procedure was repeated for both horizontal and vertical polarizations (where applicable) of the search antenna. The maximum level measured was recorded. The spectrum analyzer was verified to make sure it was not saturating in the presence of the radio signal.
- The highest emissions were re-evaluated using the substitution method. This is accomplished by replacing the EUT by a calibrated antenna, cable and signal generator. This equipment is used to transmit a signal that will generate a RF meter reading level identical to the one recorded when the EUT was present for the optimization.

### 5.2.3 Calculation of the compliance margin

The following parameters and coefficients are used to calculate and derive compliance levels and margins with respect to measurement results and test parameters. The example below illustrates the manner in which the emissions levels are calculated.

The rows in these tables are defined as follows.

|                         |                                                                                                                                                |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Meter Reading (dBμV) =  | Voltage measured using the spectrum analyzer with quasi-peak adapter                                                                           |
| Gain/Loss Factor (dB) = | Cumulative gain or loss of pre-amplifier and cables used in the measurement path (a negative value indicates gain)                             |
| Correction (dB)         | Gain/Loss Factor (dB) + Antenna factor (dB)                                                                                                    |
| Level (dBμV/m) =        | Corrected value or field strength, that is, the parameter of interest that is compared to the limit                                            |
| Margin (dB) =           | Level with respect to the appropriate limit (a positive Margin indicates that the Level is below the limit and that the measurement is a PASS) |

The values in the Level row are calculated as follows:

$$\text{Level} = \text{Meter Reading} + \text{Correction (dB)}$$

The values in the Margin row are calculated as follows:

The following example shows the manner in which the compliance margin is calculated for ERP:

$$\text{ERP} = \text{Effective Radiated Power or Equivalent Radiated Power}$$

$$\text{ERP (dBm)} = \text{Signal generator level (dBm)} - \text{Cable losses (dB)} + \text{Antenna gain (dBi)} - \text{half wave dipole gain (2.15 dB)}$$

$$\text{Margin} = \text{Limit} - \text{ERP}$$

**dBi to dBd conversion factor is 2.15**

### 5.2.4 Measurement uncertainties

Uncertainty evaluation has been calculated according to the method described in CISPR 16 [5]. The expanded measurement instrumentation uncertainty (with a 95 % level of confidence) on E-field RE is:  $\pm 3.5$  dB between 10 kHz and 30 MHz,  $\pm 4.8$  dB between 30 MHz and 1 GHz,  $\pm 4.6$  dB between 1 GHz and 10 GHz.

### 5.2.5 Test results for Spurious Emissions

Test location: DVC 10-meter AFC  
Date tested: August 22, 2014  
Tested by: Nick Viktorov

**Table 25: Spurious Emissions ERP Results (AIR32 B4A B2P LTE)**

| Mode                       | Frequency (MHz) | Meter reading dB(μV/m) | Signal Generator level (dBm) | Cable Loss (dB) | Polarization | Antenna Gain (dBi) | ERP (dBm) | Margin to FCC Part 27 & RSS 139 (dB) |
|----------------------------|-----------------|------------------------|------------------------------|-----------------|--------------|--------------------|-----------|--------------------------------------|
| Top Channel 1.4MHz QPSK    | 45.91375        | 34.7                   | -57.9                        | 0.76            | V            | -7.9               | -68.7     | 55.7                                 |
| Top Channel 1.4MHz QPSK    | 50.17875        | 32.7                   | -59.9                        | 0.84            | V            | -4.5               | -67.4     | 54.4                                 |
| Top Channel 1.4MHz QPSK    | 64.50325        | 34.8                   | -57.8                        | 0.93            | V            | 0.4                | -60.5     | 47.5                                 |
| Top Channel 1.4MHz QPSK    | 70.01475        | 33.6                   | -59.0                        | 1.00            | V            | 0.7                | -61.5     | 48.5                                 |
| 2 Carrier 1.4MHz QPSK      | 1925.764744     | 72.2                   | -28.0                        | 5.25            | H            | 8.454              | -26.9     | 13.9                                 |
| 2 Carrier 1.4MHz QPSK      | 1966.449359     | 67.9                   | -34.5                        | 5.25            | H            | 8.454              | -33.4     | 20.4                                 |
| Bottom Channel 1.4MHz QPSK | 4221.285        | 53.3                   | -47.0                        | 8.09            | H            | 10.452             | -46.8     | 33.8                                 |
| Middle Channel 1.4MHz QPSK | 4265.051        | 52.7                   | -47.5                        | 8.09            | H            | 10.452             | -47.3     | 34.3                                 |
| Top Channel 1.4MHz QPSK    | 4308.516        | 51.0                   | -49.7                        | 8.17            | H            | 10.726             | -49.3     | 36.3                                 |

## 5.2.6 Test equipment

Refer to the test equipment list presented in Section 5.1.10 on page 46.

## 5.2.7 Test conclusion

The ARUS 32 B4 has passed the spurious radiated emission test cases with respect to the limits of RSS-139 and FCC Part 27 for all radio modes of operation tested.

## 6. References

The documents, regulations, and standards that are referenced throughout this test report are listed alphabetically as follows.

1. ANSI C63.2-2009, American National Standard for Electromagnetic Noise and Field Strength Instrumentation, 10 Hz to 40 GHz – Specifications.
2. ANSI C63.4-2003, Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
3. ANSI/TIA-603-C-2004, Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.
4. APLAC, Asia Pacific Laboratory Accreditation Cooperation, Website (<http://www.aplac.org>).
5. CISPR 16 Publications (all parts and sections), Specification for Radio Disturbance and Immunity Measuring Apparatus and Methods - Part 1: Radio Disturbance and Immunity Measuring Apparatus.
6. CISPR 22 (2008), Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement.
7. DVC Lab Operations Manual KG000347-QD-LAB-01
8. DVC Quality Manual, K0000608-QD-QM-01
9. EMC General Lab Test Procedure, KP000270-LP-EMC-01-15, June 28, 2012.
10. RSS-139 — RSS-139 - Advanced Wireless Services Equipment Operating in the Bands 1710–1755 MHz and 2110–2155 MHz, Issue 2, February 2009.
11. RSS Gen — General Requirements and Information for the Certification of Radio Apparatus, Issue 3, December 2010.
12. FCC Rules for Radio Frequency Devices, Title 47 of the Code of Federal Regulations, U.S. Federal Communications Commission.
13. ICES-003 Issue 5 (2012), “Spectrum Management: Interference-causing equipment standard (Digital Apparatus)”.
14. ILAC, International Laboratory Accreditation Cooperation, Website (<http://www.ilac.org/>)
15. Lab34 Edition 1, “The Expression of Uncertainty in EMC Testing”, UKAS, August 2002.
16. Standards Council of Canada, Scope of Accreditation for the Design Validation Centre of Flextronics Canada Design Services Inc. outlined at the following web site [http://palcan.scc.ca/Specs/PDF/95\\_e.pdf](http://palcan.scc.ca/Specs/PDF/95_e.pdf)


## 7. Appendices

The Appendices contain information that supports other sections in this document. A section refers to an Appendix as appropriate.

### 7.1 Appendix A: Test setup photographs

Photographs of the EMC test setups are as follows.

**Figure 30: Setup for Emissions tests**

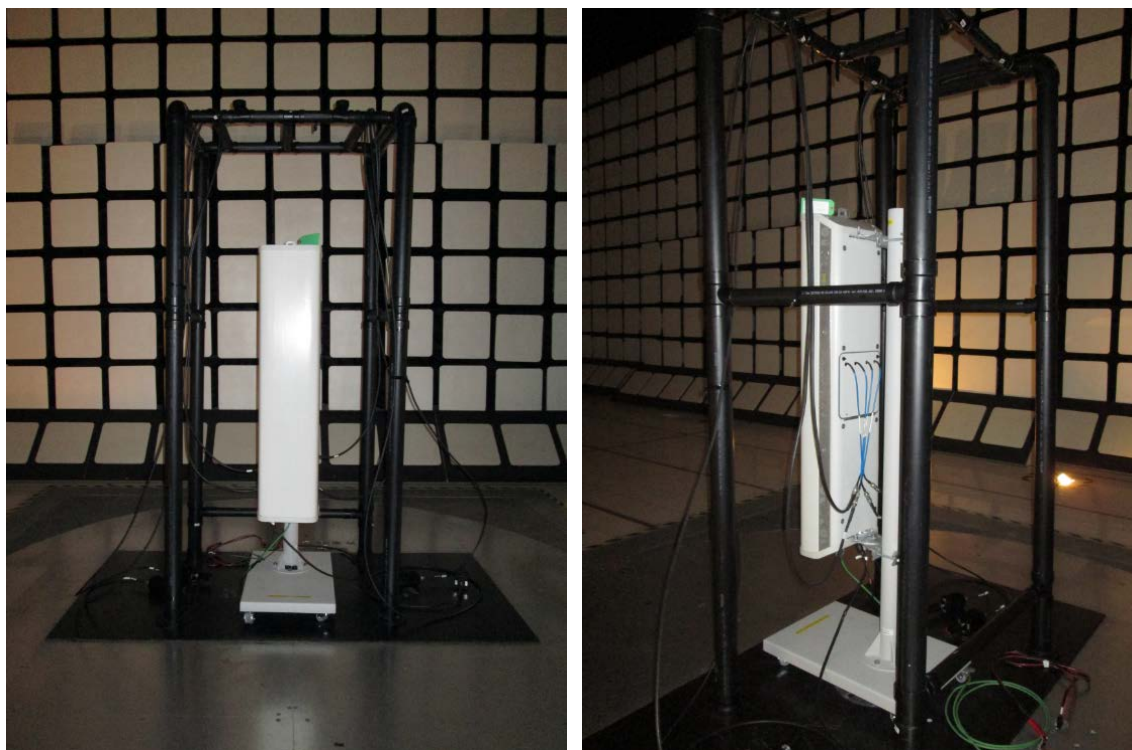

## 7.2 Appendix B: Abbreviations

The abbreviations of terms used in this document are as follows.

| Term   | Definition                                                                                                                   |
|--------|------------------------------------------------------------------------------------------------------------------------------|
| A      | 6 dB Coaxial Attenuator (conducted immunity)                                                                                 |
| AE     | Auxiliary Equipment                                                                                                          |
| AFC    | Ambient Free Chamber                                                                                                         |
| ANSI   | American National Standards Institute                                                                                        |
| AVG    | Average detector                                                                                                             |
| CE     | Conducted Emissions                                                                                                          |
| CISPR  | Comité International Spécial Perturbation Radioélectrique (International Special Committee on Radio Interference)            |
| CSA    | Canadian Standards Association                                                                                               |
| dB     | Decibel                                                                                                                      |
| DVC    | Design Validation Centre (Flextronics)                                                                                       |
| EMC    | Electromagnetic Compatibility                                                                                                |
| EN     | European Normative                                                                                                           |
| EUT    | Equipment Under Test                                                                                                         |
| FCC    | Federal Communications Commission, USA                                                                                       |
| GND    | Ground                                                                                                                       |
| IC     | Industry Canada                                                                                                              |
| ICES   | Canadian Specification: ICES-003, Issue 3, "Spectrum Management: Interference-causing equipment standard (Digital Apparatus) |
| IEC    | International Electro technical Association                                                                                  |
| NA, na | not applicable                                                                                                               |
| PK     | Peak Detector                                                                                                                |
| QP     | Quasi-peak Detector                                                                                                          |
| QPA    | Quasi-peak Adapter (for the Spectrum Analyzer)                                                                               |
| RBW    | Resolution Bandwidth                                                                                                         |
| RE     | Radiated Emissions                                                                                                           |
| RF     | Radio-Frequency                                                                                                              |
| SA     | Spectrum Analyzer, the CISPR 16, ANSI C63.2 Compliant EMI meter                                                              |
| SCC    | Standards Council of Canada                                                                                                  |
| UKAS   | United Kingdom Accreditation Service                                                                                         |
| VBW    | Video Bandwidth                                                                                                              |

**<THIS PAGE INTENTIONALLY BLANK>**

## **Flextronics Canada Design Services Inc.**

### **EMC Test Report**

### **End of Document**

---

© Copyright Flextronics Canada Design Services Inc. Aug 29, 2014

This document shall not be reproduced except in full, without written approval of the Flextronics Canada Design Services Inc.

The master of this document is stored on an electronic database and is “write-protected” and may be altered only by authorized persons at Flextronics. Viewing of the master document electronically on the Flextronics electronic database ensures access to the current issue. Any other copies are regarded as uncontrolled copies.