



SAR TEST REPORT

Applicant Honor Device Co., Ltd.
FCC ID 2AYGCANY-LX3
Product Smart Phone
Model ANY-LX3
Report No. R2202A0171-S1V1
Issue Date March 23, 2022

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **IEEE 1528- 2013, ANSI C95.1: 1992, IEEE C95.1: 1991**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Fangying Wei

Prepared by: Fangying Wei

Guangchang Fan

Approved by: Guangchang Fan

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

Table of Contents

1	Test Laboratory.....	5
1.1	Notes of the Test Report	5
1.2	Test facility	5
1.3	Testing Location.....	5
1.4	Laboratory Environment.....	6
2	Statement of Compliance	7
3	Description of Equipment under Test.....	9
4	Test Specification, Methods and Procedures	12
5	Operational Conditions during Test	13
5.1	Test Positions.....	13
5.1.1	Against Phantom Head	13
5.1.2	Body Worn Configuration.....	13
5.1.3	Phablet SAR test considerations	14
5.2	Measurement Variability.....	15
5.3	Test Configuration	16
5.3.1	GSM Test Configuration	16
5.3.2	UMTS Test Configuration	16
5.3.3	LTE Test Configuration	20
5.3.4	Additional requirements for TDD LTE specification	21
5.3.5	Wi-Fi Test Configuration	25
5.3.6	BT Test Configuration	26
5.3.7	SAR Reduction detection mechanism specification	27
6	SAR Measurements System Configuration	28
6.1	SAR Measurement Set-up	28
6.2	DASY5 E-field Probe System.....	29
6.3	SAR Measurement Procedure	30
7	Main Test Equipment.....	32
8	Tissue Dielectric Parameter Measurements & System Verification	33
8.1	Tissue Verification	33
8.2	System Performance Check.....	35
8.3	SAR System Validation	38
9	Normal and Maximum Output Power	39
9.1	GSM Mode	39
9.2	WCDMA Mode	41
9.3	LTE Mode.....	44
9.4	WLAN Mode.....	98
9.5	Bluetooth Mode	108
10	Measured and Reported (Scaled) SAR Results	109
10.1	EUT Antenna Locations	109
10.2	Standalone SAR test exclusion considerations	111
10.3	Measured SAR Results	112



10.4	Simultaneous Transmission Analysis	130
11	Measurement Uncertainty	134
ANNEX A:	Test Layout.....	135
ANNEX B:	System Check Results	137
ANNEX C:	Highest Graph Results.....	150
ANNEX D:	Probe Calibration Certificate.....	203
ANNEX E:	D750V3 Dipole Calibration Certificate.....	212
ANNEX F:	D835V2 Dipole Calibration Certificate.....	220
ANNEX G:	D1750V2 Dipole Calibration Certificate	228
ANNEX H:	D1900V2 Dipole Calibration Certificate	236
ANNEX I:	D2450V2 Dipole Calibration Certificate	244
ANNEX J:	D2600V2 Dipole Calibration Certificate	252
ANNEX K:	D5GHzV2 Dipole Calibration Certificate	258
ANNEX L:	DAE4 Calibration Certificate.....	272
ANNEX M:	The EUT Appearance	277
ANNEX N:	Test Setup Photos.....	278



Version	Revision description	Issue Date
Rev.0	Initial issue of report.	March 21, 2022
Rev.1	Update data in Page 7.	March 23, 2022
Note: This revised report (Report No. R2202A0171-S1V1) supersedes and replaces the previously issued report (Report No. R2202A0171-S1). Please discard or destroy the previously issued report and dispose of it accordingly.		



1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2 Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Fan Guangchang
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: fanguangchang@ta-shanghai.com



1.4 Laboratory Environment

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	



2 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for the EUT are as follows:

Table 1: Highest Reported SAR

Mode	Highest Reported SAR (W/kg)			
	1g SAR Head	1g SAR Body-worn (Separation 15mm)	1g SAR Hotspot (Separation 10mm)	Product Specific 10-g SAR (Separation 0mm)
GSM 850	0.19	0.28	0.27	NA
GSM 1900	0.12	0.18	0.30	NA
WCDMA Band II	0.62	0.34	0.68	NA
WCDMA Band IV	0.50	0.29	0.79	1.80
WCDMA Band V	0.18	0.35	0.68	NA
LTE FDD 2	0.70	0.34	0.76	2.40
LTE FDD 4	0.55	0.36	0.70	NA
LTE FDD 5	0.20	0.41	0.72	NA
LTE FDD 7	0.62	0.36	0.77	1.53
LTE FDD 13	0.10	0.21	0.47	NA
LTE FDD 26	0.26	0.48	0.72	NA
LTE TDD 38	0.67	0.30	0.72	NA
LTE FDD 66	0.63	0.65	0.76	2.31
Wi-Fi (2.4G)	0.44	0.19	0.20	NA
Wi-Fi (5G)	0.18	0.27	0.53	0.99
BT	0.24	<0.10	0.16	NA

Date of Testing: February 23, 2022 ~ March 14, 2022

Date of Sample Received: February 21, 2022

Note: 1. The device is in compliance with SAR for Uncontrolled Environment /General Population exposure limits (1.6 W/kg and 4.0 W/kg) specified in ANSI C95.1: 1992/IEEE C95.1: 1991, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013.

2.All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.

Note: 1) The highest Reported SAR for head, body-worn, hotspot, Product Specific 10-g SAR and simultaneous transmission exposure conditions (1g) are 0.70 W/kg, 0.65 W/kg, 0.79 W/kg, 2.40 W/kg and 1.05W/kg.



2) For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and that positions the handset a minimum of 15mm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits according to the FCC rule § 2.1093, the ANSI C95.1: 1992/IEEE C95.1: 1991, , and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013.

3 Description of Equipment under Test

Client Information

Applicant	Honor Device Co., Ltd.
Applicant address	Suite 3401, Unit A, Building 6, Shum Yip Sky Park, No. 8089, Hongli West Road, Xiangmihu Street, Futian District, Shenzhen, Guangdong 518040, People's Republic of China
Manufacturer	Honor Device Co., Ltd.
Manufacturer address	Suite 3401, Unit A, Building 6, Shum Yip Sky Park, No. 8089, Hongli West Road, Xiangmihu Street, Futian District, Shenzhen, Guangdong 518040, People's Republic of China

General Technologies

Application Purpose	Original Grant		
EUT Stage	Identical Prototype		
Model	ANY-LX3		
SN	AJDR012126000081		
Hardware Version	HL2ANYM		
Software Version	4.2.0.19(SP01C900E11R1P1)		
Antenna Type	Internal Antenna		
Device Class	B		
Wi-Fi Hotspot	Wi-Fi 2.4G Wi-Fi 5G U-NII-1&U-NII-3		
Power Class	GSM 850: 4 GSM 1900: 1 UMTS Band II/IV/V: 3 LTE FDD 2/4/5/7/13/26/66: 3 LTE TDD 38: 3		
Power Level	GSM 850: level 5 GSM 1900: level 0 UMTS Band II/IV/V: all up bits LTE FDD 2/4/5/7/13/26/66: max power LTE TDD 38: max power		
EUT Accessory			
Accessory	Model	Manufacture	No.
Adapter	HW-110600E00	Honor Device Co., Ltd. (Manufacturer: Astec)	1
	HW-110600B00	Honor Device Co., Ltd. (Manufacturer: Astec)	2



	HW-110600U00	Honor Device Co., Ltd. (Manufacturer: Astec)	3
	HN-110600E00	Honor Device Co., Ltd. (Manufacturer: Astec)	4
	HN-110600B00	Honor Device Co., Ltd. (Manufacturer: Astec)	5
	HN-110600U00	Honor Device Co., Ltd. (Manufacturer: Astec)	6
Battery	HB466596EFW	Honor Device Co., Ltd. (Manufacturer: Desay)	1
	HB466596EFW	Honor Device Co., Ltd. (Manufacturer: NVT)	2
	HB466596EFW	Honor Device Co., Ltd. (Manufacturer: SCUD)	3
Earphone	1293-3283-3.5mm-339	BOLUO COUNTY QUANCHENG ELECTRONIC CO.,LTD.	1
	EPAB542-2WH05-DH	FOXCONN INTERCONNECT TECHNOLOGY LIMITED	2
	MEND1532B528A11	Jiangxi Lianchuang Hongsheng Electronic Co., LTD.	3
USB Cable	L99UC139 - CS - H	Luxshare Precision Industry Co.,Ltd.	1
	213-01011-0	MING JI ELECTRONICS CO., LTD.	2
Earphone,USB Type-C to 3.5mm Adapter Assembly	Model: USB042020090AW7		1
Note: The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.			

Wireless Technology and Frequency Range

Wireless Technology		Modulation	Operating mode	Tx (MHz)
GSM	850	Voice(GMSK) GPRS(GMSK)	☐ Multi-slot Class:8-1UP ☐ Multi-slot Class:10-2UP	824 ~ 849
	1900	EGPRS(GMSK,8PSK)	☒ Multi-slot Class:12-4UP ☐ Multi-slot Class:33-4UP	1850 ~ 1910
	Does this device support DTM (Dual Transfer Mode)? ☐ Yes ☒ No			
UMTS	Band II	QPSK	HSDPA UE Category:14	1850 ~ 1910
	Band IV		HSUPA UE Category:6	1710 ~ 1755
	Band V		DC-HSDPA UE Category:24	824 ~ 849
LTE	FDD 2	QPSK, 16QAM	Rel.10	1850 ~ 1910
	FDD 4			1710 ~ 1755
	FDD 5			824 ~ 849
	FDD 7			2500 ~ 2570
	FDD 13			777 ~ 787
	FDD 26			814 ~ 849
	TDD 38			2570 ~ 2620
	FDD 66			1710 ~ 1780
	Does this device support Carrier Aggregation (CA) ☐ Yes ☒ No			
	Does this device support SV-LTE (1xRTT-LTE)? ☐ Yes ☒ No			
BT	2.4G	Version 4.2 BR/EDR + LE		2402 ~2480
Wi-Fi	2.4G	DSSS, OFDM	802.11b/g/n HT20	2412 ~ 2462
		OFDM	802.11n HT40	2422 ~ 2452
	5G	OFDM	802.11a/n HT20/ HT40/ ac VHT20/ VHT40/ VHT80	5150 ~ 5350 5470 ~ 5850
Does this device support MIMO ☐ Yes ☒ No				



4 Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE 1528- 2013, ANSI C95.1: 1992, IEEE C95.1: 1991, the following FCC Published RF exposure KDB procedures:

Reference Standards

KDB 248227 D01 802.11Wi-Fi SAR v02r02
KDB 447498 D01 General RF Exposure Guidance v06
KDB 648474 D04 Handset SAR v01r03
KDB 690783 D01 SAR Listings on Grants v01r03
KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02 RF Exposure Reporting v01r02
KDB 941225 D01 3G SAR Procedures v03r01
KDB 941225 D05 SAR for LTE Devices v02r05
KDB 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02
KDB 941225 D06 Hotspot Mode v02r01

5 Operational Conditions during Test

5.1 Test Positions

5.1.1 Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2013 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

5.1.2 Body Worn Configuration

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations.

Per FCC KDB Publication 648474 D04, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

5.1.3 Phablet SAR test considerations

For smart phones, with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, that can provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets and support voice calls next to the ear, unless it is confirmed otherwise through KDB inquiries, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance.

- a) The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
- b) The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for product specific 10-g SAR according to the body-equivalent tissue dielectric parameters in KDB Publication 865664 D01 to address interactive hand use exposure conditions. The 1-g SAR at 5 mm for UMPC mini-tablets is not required. When hotspot mode applies, product specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold. The normal tablet procedures in KDB Publication 616217 are required when the overall diagonal dimension of the device is > 20.0 cm. Hotspot mode SAR is not required when normal tablet procedures are applied. Product specific 10-g SAR is also not required for the front (top) surface of larger form factor full size tablets. The more conservative normal tablet SAR results can be used to support phablet mode product specific 10-g SAR.
- c) The simultaneous transmission operating configurations applicable to voice and data transmissions for both phone and mini-tablet modes must be taken into consideration separately for 1-g and 10-g SAR to determine the simultaneous transmission SAR test exclusion and measurement requirements for the relevant wireless modes and exposure conditions.

5.2 Measurement Variability

Per FCC KDB Publication 865664 D01, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

5.3 Test Configuration

5.3.1 GSM Test Configuration

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot. The allowed power reduction in the multi-slot configuration is as following:

Output power of reductions:

Table 2: The allowed power reduction in the multi-slot configuration

Number of timeslots in uplink assignment	Permissible nominal reduction of maximum output power (dB)
1	0
2	0 to 3,0
3	1,8 to 4,8
4	3,0 to 6,0

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. GSM voice and GPRS data use GMSK, which is a constant amplitude modulation with minimal peak to average power difference within the time-slot burst. For EDGE, GMSK is used for MCS 1 – MCS 4 and 8-PSK is used for MCS 5 – MCS 9; where 8-PSK has an inherently higher peak-to-average power ratio. The GMSK and 8-PSK EDGE configurations are considered separately for SAR compliance. The GMSK EDGE configurations are grouped with GPRS and considered with respect to time-averaged maximum output power to determine compliance. The 3G SAR test reduction procedure is applied to 8-PSK EDGE with GMSK GPRS/EDGE as the primary mode.

5.3.2 UMTS Test Configuration

5.3.2.1 3G SAR Test Reduction Procedure

The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations modes according to output power, exposure conditions and device operating capabilities. Maximum output power is verified by applying the applicable versions of 3GPP TS 34.121.

5.3.2.2 Head SAR

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest SAR configuration in 12.2 kbps RMC for head exposure.

5.3.2.3 Body-worn accessory SAR

SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the EUT with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When more than 2 DPDCHn are supported by the EUT, it may be necessary to configure additional DPDCHn using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC

5.3.2.4 Release 5 HSDPA Test Configuration

The 3G SAR test reduction procedure is applied to HSDPA body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures in the “Release 5 HSDPA Data Devices” section of this document, for the highest SAR body-worn accessory exposure configuration in 12.2 kbps RMC. EUT with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

HSDPA should be configured according to the UE category of a test device. The number of HSDSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors (β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) should be set according to values indicated in the Table below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Table 3: Subtests for UMTS Release 5 HSDPA

Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (note 1, note 2)	CM(dB) (note 3)	MPR(dB)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (note 4)	15/15 (note 4)	64	12/15 (note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$ Note 2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TFC1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.							

5.3.2.5 Release 6 HSUPA Test Configuration

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures in the “Release 6 HSPA Data Devices” section of this document, for the highest body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When VOIP is applicable for next to the ear head exposure in HSPA, the 3G SAR test reduction procedure is applied to HSPA with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body-worn accessory measurements is tested for next to the ear head exposure.

Due to inner loop power control requirements in HSPA, a communication test set is required for output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA are configured according to the β values indicated in Table 2 and other applicable procedures described in the ‘WCDMA EUT’ and ‘Release 5 HSDPA Data Devices’ sections of this document

Table 4: Sub-Test 5 Setup for Release 6 HSUPA

Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Figure 5.1g.

Note 6: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

Table 5: HSUPA UE category

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCHTTI (ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592



4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	2	2 SF2 & 2	11484	5.76
	4	4	10	SF4	20000	2.00
7 (No DPDCH)	4	8	2	2 SF2 & 2 SF4	22996	?
	4	4	10		20000	?
NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE Categories 1 to 6 supports QPSK only. UE Category 7 supports QPSK and 16QAM. (TS25.306-7.3.0)						

5.3.2.6 HSPA and DC-HSDPA Test Configuration

SAR test exclusion may apply to 3GPP Rel. 6 HSPA and Rel. 8 DC-HSDPA. When SAR measurement is required for HSPA or DC-HSDPA, a KDB inquiry is required to confirm that the wireless mode configurations in the test setup have remained stable throughout the SAR measurements. Without prior KDB confirmation to determine the SAR results are acceptable, a PAG is required for equipment approval.

SAR test exclusion for HSPA and DC-HSDPA is determined according to the following:

- 1) The HSPA procedures are applied to configure 3GPP Rel. 6 HSPA devices in the required sub-test mode(s) to determine SAR test exclusion.
- 2) SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.
- 3) Regardless of whether a PBA is required, the following information must be verified and included in the SAR report for devices supporting HSPA or DC-HSDPA:
 - a) The output power measurement results and applicable release version(s) of 3GPP TS 34.121. Power measurement difficulties due to test equipment setup or availability must be resolved between the grantee and its test lab.
 - b) The power measurement results are in agreement with the individual device implementation and specifications. When Enhanced MPR (E-MPR) applies, the normal MPR targets may be modified according to the Cubic Metric (CM) measured by the device, which must be taken into consideration.
 - c) The UE category, operating parameters, such as the β and Δ values used to configure the device for testing, power setback procedures described in 3GPP TS 34.121 for the power measurements, and HSPA channel conditions (active and stable) for the entire duration of the measurement according to the required E-TFCI and AG index values.
- 4) When SAR measurement is required, the test configurations, procedures and power measurement results must be clearly described to confirm that the required test parameters are used, including E-TFCI and AG index stability and output power conditions.

Table 6: HS-DSCH UE category

HS-DSCH category	Maximum number of HS-DSCH codes received	Minimum inter-TTI interval	Maximum number of bits of an HS-DSCH transport block received within an HS-DSCH TTI NOTE 1	Total number of soft channel bits	Supported modulations without MIMO operation or dual cell operation	Supported modulations with MIMO operation and without dual cell operation	Supported modulations with dual cell operation
Category 1	5	3	7298	19200	QPSK, 16QAM	Not applicable (MIMO not supported)	Not applicable (dual cell operation not supported)
Category 2	5	3	7298	28800			
Category 3	5	2	7298	28800			
Category 4	5	2	7298	38400			
Category 5	5	1	7298	57600			
Category 6	5	1	7298	67200			
Category 7	10	1	14411	115200			
Category 8	10	1	14411	134400			
Category 9	15	1	20251	172800			
Category 10	15	1	27952	172800			
Category 11	5	2	3630	14400	QPSK		
Category 12	5	1	3630	28800			
Category 13	15	1	35280	259200	QPSK, 16QAM, 64QAM		
Category 14	15	1	42192	259200			
Category 15	15	1	23370	345600	QPSK, 16QAM		
Category 16	15	1	27952	345600	QPSK, 16QAM		
Category 17 NOTE 2	15	1	35280	259200	QPSK, 16QAM, 64QAM	–	
			23370	345600	–	QPSK, 16QAM	
Category 18 NOTE 3	15	1	42192	259200	QPSK, 16QAM, 64QAM	–	
			27952	345600	–	QPSK, 16QAM	
Category 19	15	1	35280	518400	QPSK, 16QAM, 64QAM		
Category 20	15	1	42192	518400	QPSK, 16QAM, 64QAM		
Category 21	15	1	23370	345600	–	–	QPSK, 16QAM
Category 22	15	1	27952	345600			QPSK, 16QAM, 64QAM
Category 23	15	1	35280	518400			QPSK, 16QAM, 64QAM
Category 24	15	1	42192	518400			QPSK, 16QAM, 64QAM

5.3.3 LTE Test Configuration

LTE modes were tested according to FCC KDB 941225 D05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR. The R&S CMW500 was used for LTE output power measurements and SAR testing. Max power control was used so the UE transmits with maximum output power during SAR testing. SAR must be measured with the maximum TTI (transmit time interval) supported by the device in each LTE configuration.

A) Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

B) MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to

3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

C) A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

D) Largest channel bandwidth standalone SAR test requirements

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

4) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

E) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

5.3.4 Additional requirements for TDD LTE specification

For Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

TDD LTE Band supports 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table: Uplink-downlink configurations for uplink-downlink configurations and Table: Configuration of special subframe (lengths of DwPTS/GP/UpPTS) for Special subframe configurations.

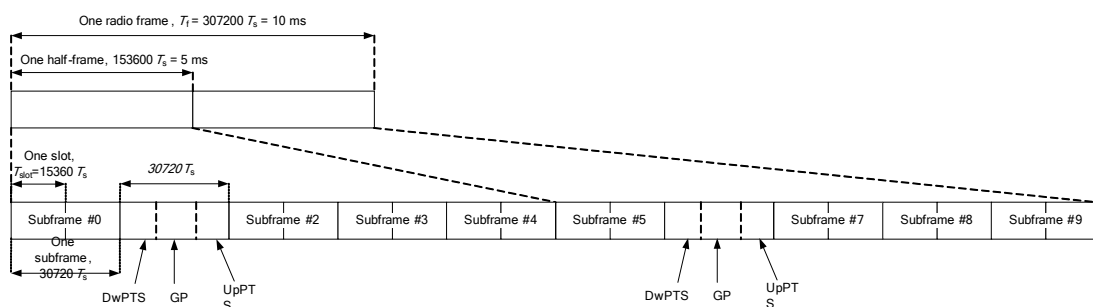


Figure 1: Frame structure type 2

Table 7: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Table 8: Uplink-downlink configurations

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

According to Figure 1, one radio frame is configured by 10 subframes, which consist of Uplink-subframe, Downlink-subframe and Special subframe. For TDD-LTE, the Duty Cycle should be calculated on Uplink-subframes and Special subframes, due to Special subframe containing both Uplink transmissions. So for one radio frame, Duty Cycle can be calculated with formula as below. The count of Uplink subframes are according to Table: Uplink-downlink configurations:

$$\text{Duty cycle} = (30720\text{Ts} \times \text{Ups} + \text{Uplink Component} \times \text{Specials}) / (307200\text{Ts})$$

About the uplink component of Special subframes, we can figure out by Table: Configuration of special subframe (lengths of DwPTS/GP/UpPTS):

$$\text{Uplink Component} = \text{UpPTS}$$


In conclusion, for the TDD LTE Band, Duty Cycle can be calculated with formula as below. All these sets are ok when we test, or we can set as below.

$$\text{Duty cycle} = [(30720\text{Ts} \times \text{Ups}) + \text{UpPTS} \times \text{Specials}] / (307200\text{Ts})$$

And we can get different Duty cycles under different configurations:

Uplink-downlink configuration	Subframe number			Configuration of special subframe							
				Normal cyclic prefix in downlink				Extended cyclic prefix in downlink			
				Normal cyclic prefix in uplink		Extended cyclic prefix in uplink		Normal cyclic prefix in uplink		Extended cyclic prefix in uplink	
	D	S	U	configuration 0~4	configuration 5~9	configuration 0~4	configuration 5~9	configuration 0~3	configuration 4~7	configuration 0~3	configuration 4~7
0	2	2	6	61.43%	62.85%	61.67%	63.33%	61.43%	62.85%	61.67%	63.33%
1	4	2	4	41.43%	42.85%	41.67%	43.33%	41.43%	42.85%	41.67%	43.33%
2	6	2	2	21.43%	22.85%	21.67%	23.33%	21.43%	22.85%	21.67%	23.33%
3	6	1	3	30.71%	31.43%	30.83%	31.67%	30.71%	31.43%	30.83%	31.67%
4	7	1	2	20.71%	21.43%	20.83%	21.67%	20.71%	21.43%	20.83%	21.67%
5	8	1	1	10.71%	11.43%	10.83%	11.67%	10.71%	11.43%	10.83%	11.67%
6	3	2	5	51.43%	52.85%	51.67%	53.33%	51.43%	52.85%	51.67%	53.33%

SAR test Plan: For TDD LTE, SAR should be tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7 for Frame structure type

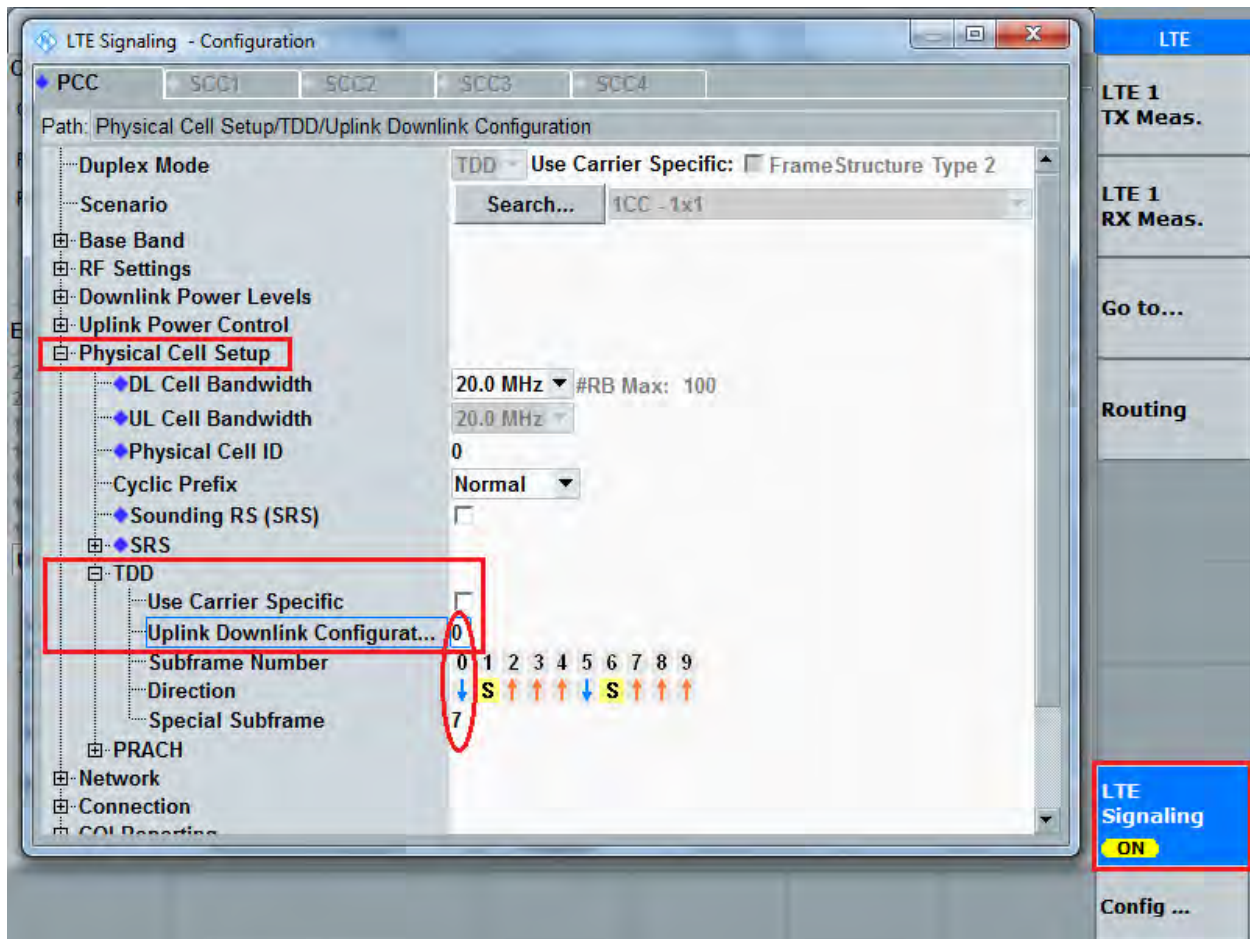

The screenshot shows the 'LTE Signaling - Configuration' window. The 'Physical Cell Setup' section is highlighted with a red box. The 'TDD' section is also highlighted with a red box, showing the 'Uplink Downlink Configuration' table. The table has columns for Subframe Number (0-9) and Direction (S for Special, U for Uplink, D for Downlink). The configuration is as follows:

Subframe Number	Direction
0	S
1	U
2	U
3	U
4	U
5	D
6	S
7	U
8	U
9	U

The 'LTE Signaling' button on the right is highlighted with a red box and shows 'ON'.

5.3.5 Wi-Fi Test Configuration

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; These are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the *initial test position(s)* by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The *initial test position(s)* is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the *reported SAR* for the *initial test position* is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the *initial test position* to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the *reported SAR* is ≤ 0.8 W/kg or all required test positions are tested.
 - ✧ For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - ✧ When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the *initial test position* and subsequent test positions, when the *reported SAR* is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the *reported SAR* is ≤ 1.2 W/kg or all required test channels are considered.
 - ✧ The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.


To determine the initial test position, Area Scans were performed to determine the position with the Maximum Value of SAR (measured). The position that produced the highest Maximum Value of SAR is considered the worst case position; thus used as the initial test position.

A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement.

5.3.6 BT Test Configuration

For BT SAR testing, BT engineering testing software installed on the EUT can provide continuous transmitting RF signal with maximum output power. And the CBT control the EUT operating with hopping off and data rate set for DH5.

The SAR measurement takes full account of the BT duty cycle and is reflected in the report, and the duty factor of the device is as follow:

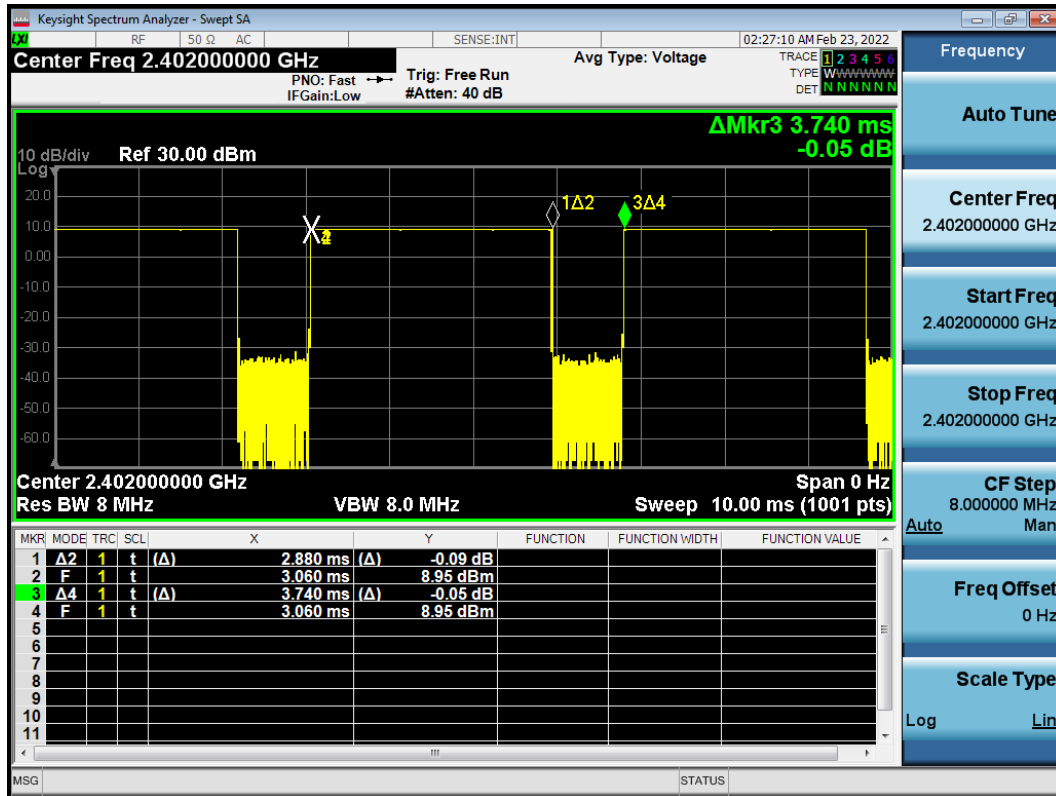

Note: Duty factor= Ton (ms)/ T(on+off) (ms)=2.880/3.740=77%



5.3.7 SAR Reduction detection mechanism specification

This device support the receiver and hotspot detection mechanism, the main purpose is to minimize triggering associated with power reduction scenarios and provide enhanced user experience. It uses the receiver to indicate whether the user is making a call in head scenario or not. The selection between head and body power levels is based on the receiver detection mechanism. It can determine proximity to head or body and set the relevant power level for 2G&3G&4G and Wi-Fi antennas accordingly.

More details information followings:

Main Antenna			Power Reduction Level Amount (dBm)												
Power Reduction Scenario	DSI	Receiver/Hotspot	GSM850	GSM1900	UMTS B2	UMTS B4	UMTS B5	LTE B2	LTE B4	LTE B5	LTE B7	LTE B13	LTE B26	LTE B38	LTE B66
Full power	DSI-1	Full power	33.50	30.50	24.40	24.50	25.00	24.40	24.50	25.00	24.50	25.00	25.00	24.50	24.50
Standalone	DSI-2	白卡receiver on	0.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	6.00	0.00	0.00	4.50	1.00
	DSI-2	白卡/FCC/法国receiver off	0.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	4.00	0.00	0.00	2.50	1.00
	DSI-5	hotspot	4.00	4.00	3.00	3.00	0.00	3.00	3.00	0.00	6.00	0.00	0.00	4.50	3.00


Div Antenna			Power Reduction Level Amount (dBm)						
Power Reduction Scenario	DSI	Receiver/Hotspot	UMTS B2	UMTS B4	LTE B2	LTE B4	LTE B7	LTE B38	LTE B66
Full power	DSI-1	Full power	24.40	24.50	24.40	24.50	23.10	23.10	23.10
Standalone	DSI-1	白卡receiver on	4.50	6.00	4.50	6.00	0.00	0.00	6.00
	DSI-2	白卡/FCC/法国receiver off	3.00	3.50	3.00	3.50	0.00	0.00	3.50
	DSI-5	hotspot	4.00	4.00	4.00	4.00	1.50	1.00	4.00

Wi-Fi Antenna			Power Reduction Level Amount (dBm)								
Power Reduction Scenario	Receiver/Hotspot	WiFi 2.4G 11b	WiFi 2.4G 11g	WiFi 2.4G 11n HT20	WiFi 2.4G 11n HT40	WiFi 5G 11a	WiFi 5G 11n HT20	WiFi 5G 11n HT40	WiFi 5G 802.11ac-VHT20	WiFi 5G 802.11ac-VHT40	WiFi 5G 802.11ac-VHT80
Full power	Full power	19.00	19.50	19.50	15.50	19.00	19.00	18.00	18.50	18.00	17.00
Standalone	Receiver on	3.00	3.50	3.50	0.00	4.00	4.00	3.00	3.50	3.00	2.00
	Hotspot	1.00	1.50	1.50	0.00	2.00	2.00	1.00	1.50	1.00	0.00

6 SAR Measurements System Configuration

6.1 SAR Measurement Set-up

The DASY system for performing compliance tests consists of the following items:

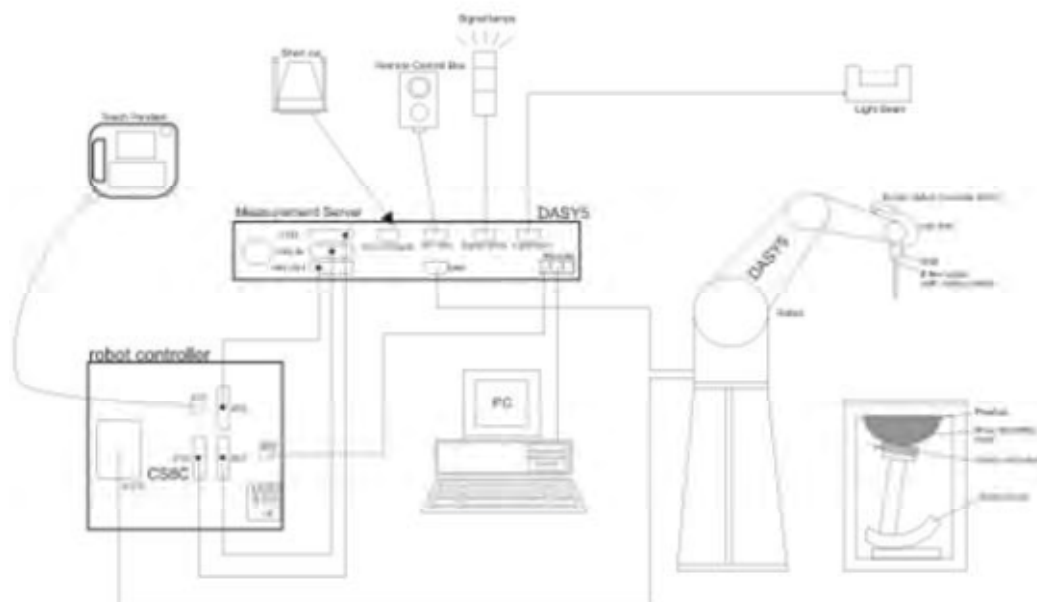

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6.2 DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

EX3DV4 Probe Specification

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure Scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.



E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than ± 0.25 dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \Delta T / \Delta t$$

Where: Δt = Exposure time (30 seconds),
 C = Heat capacity of tissue (brain or muscle),
 ΔT = Temperature increase due to RF exposure.

Or

$$SAR = IEI^2 \sigma / \rho$$

Where: σ = Simulated tissue conductivity,
 ρ = Tissue density (kg/m^3).

6.3 SAR Measurement Procedure

Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

			≤3GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{zoom}} \Delta y_{\text{zoom}}$			≤2GHz: ≤8mm 2 – 3GHz: ≤5mm*	3 – 4GHz: ≤5mm* 4 – 6GHz: ≤4mm*
Maximum zoom scan spatial resolution, normal to phantom surface	Uniform grid: $\Delta z_{\text{zoom}}(n)$		≤5mm	3 – 4GHz: ≤4mm 4 – 5GHz: ≤3mm 5 – 6GHz: ≤2mm
	Graded grid	$\Delta z_{\text{zoom}}(1)$: between 1 st two points closest to phantom surface	≤4mm	3 – 4GHz: ≤3mm 4 – 5GHz: ≤2.5mm 5 – 6GHz: ≤2mm
		$\Delta z_{\text{zoom}}(n>1)$: between subsequent points	≤1.5• $\Delta z_{\text{zoom}}(n-1)$	
Minimum zoom scan volume	X, y, z		≥30mm	3 – 4GHz: ≥28mm 4 – 5GHz: ≥25mm 5 – 6GHz: ≥22mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4W/kg, ≤8mm, ≤7mm and ≤5mm zoom scan resolution may be applied, respectively, for 2GHz to 3GHz, 3GHz to 4GHz and 4GHz to 6GHz.				

Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



7 Main Test Equipment

Name of Equipment	Manufacturer	Type/Model	Serial Number	Last Cal.	Cal. Due Date
Network analyzer	Agilent	E5071B	MY42404014	2021-05-15	2022-05-14
Dielectric Probe Kit	Agilent	85070E	US44020115	/	/
Power meter	Agilent	E4417A	GB41291714	2021-05-15	2022-05-14
Power sensor	Agilent	N8481H	MY50350004	2021-05-15	2022-05-14
Power sensor	Agilent	E9327A	US40441622	2021-05-15	2022-05-14
Dual directional coupler	UCL	UCL-DDC0 56G-S	20010600118	/	/
Amplifier	INDEXSAR	TPA-005060 G01	13030502	2021-05-15	2022-05-14
Wireless communication tester	Anritsu	MT8820C	6201342015	2021-12-12	2022-12-11
Wideband radio communication tester	R&S	CMW 500	113645	2021-05-15	2022-05-14
Base Station Simulator	R&S	CMW270	100673	2021-05-15	2022-05-14
E-field Probe	SPEAG	EX3DV4	3677	2021-08-12	2022-08-11
DAE	SPEAG	DAE4	1692	2021-10-04	2022-10-03
Validation Kit 750MHz	SPEAG	D750V3	1045	2020-08-28	2023-08-27
Validation Kit 835MHz	SPEAG	D835V2	4d020	2020-08-28	2023-08-27
Validation Kit 1750MHz	SPEAG	D1750V2	1033	2020-02-25	2023-02-24
Validation Kit 1900MHz	SPEAG	D1900V2	5d060	2020-08-27	2023-08-26
Validation Kit 2450MHz	SPEAG	D2450V2	786	2020-08-27	2023-08-26
Validation Kit 2600MHz	SPEAG	D2600V2	1025	2021-04-23	2024-04-22
Validation Kit 5GHz	SPEAG	D5GHzV2	1151	2020-02-27	2023-02-26
Temperature Probe	Tianjin jinming	JM222	381	2021-05-15	2022-05-14
Hygrothermograph	Anymetr	HTC - 1	TY2020A001	2021-05-15	2022-05-14
Twin SAM Phantom	Speag	SAM2	1666	/	/
Software for Test	Speag	DASY52	/	/	/
Softwarefor Tissue	Agilent	85070	/	/	/

8 Tissue Dielectric Parameter Measurements & System Verification

8.1 Tissue Verification

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 24 hours of use; or earlier if the dielectric parameters can become out of tolerance.

Target values

Frequency (MHz)	ϵ_r	$\sigma(\text{s/m})$
750	41.9	0.89
835	41.5	0.90
1750	40.1	1.37
1900	40.0	1.40
2450	39.2	1.80
2600	39.0	1.96
Frequency (MHz)	ϵ_r	$\sigma(\text{s/m})$
5250	35.9	4.71
5600	35.5	5.07
5750	35.4	5.22


Measurements results

Frequency (MHz)	Test Date	Temp ℃	Measured Dielectric Parameters		Target Dielectric Parameters		Limit (Within $\pm 5\%$)	
			ϵ_r	σ (s/m)	ϵ_r	σ (s/m)	Dev ϵ_r (%)	Dev σ (%)
750	2022/2/25	21.5	42.3	0.88	41.9	0.89	0.95	-1.12
835	2022/2/23	21.5	41.3	0.87	41.5	0.90	-0.48	-3.33
1750	2022/2/26	21.5	40.2	1.34	40.1	1.37	0.25	-2.19
	2022/2/27	21.5	40.1	1.34	40.1	1.37	0.00	-2.19
	2022/3/2	21.5	40.2	1.36	40.1	1.37	0.25	-0.73
1900	2022/2/28	21.5	40.1	1.41	40.0	1.40	0.25	0.71
	2022/3/1	21.5	40.2	1.43	40.0	1.40	0.50	2.14
2450	2022/3/4	21.5	38.6	1.81	39.2	1.80	-1.53	0.56
2600	2022/3/10	21.5	38.2	2.01	39.0	1.96	-2.05	2.55
	2022/3/11	21.5	38.4	1.94	39.0	1.96	-1.54	-1.02
5250	2022/3/8	21.5	35.5	4.80	35.9	4.71	-1.11	1.91
5600	2022/3/14	21.5	34.2	5.21	35.5	5.07	-3.66	2.76
5750	2022/3/14	21.5	34.9	5.21	35.4	5.22	-1.41	-0.19
Note: The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.								

8.2 System Performance Check

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulates were measured using the dielectric probe kit and the network analyzer. A system check measurement for every day was made following the determination of the dielectric parameters of the Tissue simulates, using the dipole validation kit. The dipole antenna was placed under the flat section of the twin SAM phantom.

System check is performed regularly on all frequency bands where tests are performed with the DASY system.

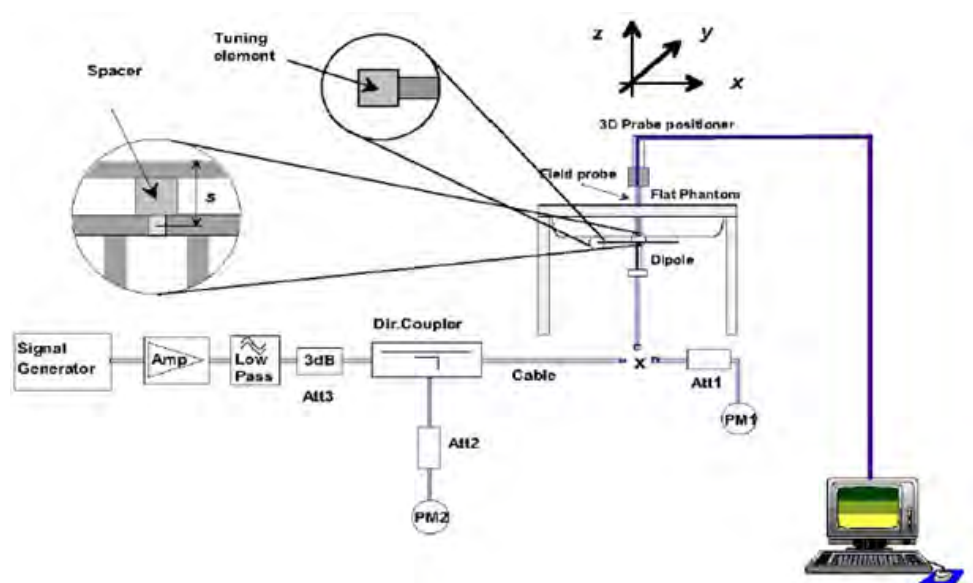

Picture 1 System Performance Check setup



Picture 2 Setup Photo

**Justification for Extended SAR Dipole Calibrations**

Usage of SAR dipoles calibrated less than 3 years ago but more than 1 year ago were confirmed in maintaining return loss (< -20 dB, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibrations in KDB 865664 D01:

Dipole		Date of Measurement	Return Loss(dB)	Δ %	Impedance (Ω)	$\Delta\Omega$
Dipole D750V3 SN: 1045	Head	8/28/2020	-26.6	/	54.3	/
	Liquid	8/27/2021	-26.2	-1.5	53.9	-0.4
Dipole D835V2 SN: 4d020	Head	8/28/2020	-26.2	/	54.8	/
	Liquid	8/27/2021	-26.5	1.1	55.2	0.4
Dipole D1750V2 SN: 1033	Head	2/25/2020	-38.3	/	48.8	/
	Liquid	2/26/2021	-40.0	4.4	49.9	1.1
Dipole D1900V2 SN: 5d060	Head	8/27/2020	-23.3	/	52.5	/
	Liquid	8/26/2021	-23.0	-1.3	51.9	-0.6
Dipole D2450V2 SN: 786	Head	8/27/2020	-26.9	/	54.5	/
	Liquid	8/26/2021	-27.1	0.7	53.8	-0.7
Dipole D5GHzV2 SN: 1151 (5250MHz)	Head Liquid	2/27/2020	-23.4	/	52.4	/
		2/26/2021	-23.8	1.7	50.0	-2.4
		2/25/2022	-23.9	0.4	49.3	-0.7
Dipole D5GHzV2 SN: 1151 (5600MHz)	Head Liquid	2/27/2020	-22.6	/	52.4	/
		2/26/2021	-21.5	-4.9	50.0	-2.4
		2/25/2022	-20.9	-2.8	49.3	-0.7
Dipole D5GHzV2 SN: 1151 (5750MHz)	Head Liquid	2/27/2020	-25.0	/	55.9	/
		2/26/2021	-26.8	-1.8	52.5	-3.4
		2/25/2022	-27.1	1.1	52.1	-0.4

System Check results

Frequency (MHz)	Test Date	Temp $^{\circ}\text{C}$	250mW /100mW Measured SAR _{1g} (W/kg)	1W Normalized SAR _{1g} (W/kg)	1W Target SAR _{1g} (W/kg)	Δ % (Limit $\pm 10\%$)	Plot No.
750	2022/2/25	21.5	2.13	8.52	8.37	1.79	1
835	2022/2/23	21.5	2.46	9.84	9.65	1.97	2
1750	2022/2/26	21.5	8.95	35.80	35.90	-0.28	3
	2022/2/27	21.5	9.11	36.44	35.90	1.50	4
	2022/3/2	21.5	8.96	35.84	35.90	-0.17	5
1900	2022/2/28	21.5	9.88	39.52	39.50	0.05	6
	2022/3/1	21.5	9.85	39.40	39.50	-0.25	7
2450	2022/3/4	21.5	13.70	54.80	52.30	4.78	8
2600	2022/3/10	21.5	13.90	55.60	56.10	-0.89	9
	2022/3/11	21.5	13.88	55.52	56.10	-1.03	10
5250	2022/3/8	21.5	7.87	78.70	78.00	0.90	11
5600	2022/3/14	21.5	7.67	76.70	80.50	-4.72	12



5750	2022/3/14	21.5	7.66	76.60	77.40	-1.03	13
Note: Target Values used derive from the calibration certificate Data Storage and Evaluation.							

8.3 SAR System Validation

Per FCC KDB 865664 D02v01, SAR system verification is required to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles are used with the required tissue-equivalent media for system validation, according to the procedures outlined in FCC KDB 865664 D01 and IEEE 1528-2013. Since SAR probe calibrations are frequency dependent, each probe calibration point must be validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status, measurement frequencies, SAR probes, calibrated signal type(s) and tissue dielectric parameters has been included.

Frequency [MHz]	Date	Probe SN	Probe Type	Probe Cal Point		PERM (Er)	COND (Σ)	CW Validation		
								Sensitivity	Probe Linearity	Probe Isotropy
750	8/12/2021	3677	EX3DV4	750	Head	42.81	0.85	PASS	PASS	PASS
835	8/12/2021	3677	EX3DV4	835	Head	42.22	0.90	PASS	PASS	PASS
1750	8/12/2021	3677	EX3DV4	1750	Head	39.91	1.32	PASS	PASS	PASS
1900	8/12/2021	3677	EX3DV4	1900	Head	39.43	1.42	PASS	PASS	PASS
2450	8/12/2021	3677	EX3DV4	2450	Head	38.19	1.83	PASS	PASS	PASS
2600	8/12/2021	3677	EX3DV4	2600	Head	37.60	1.99	PASS	PASS	PASS
5250	8/12/2021	3677	EX3DV4	5250	Head	35.36	4.83	PASS	PASS	PASS
5600	8/12/2021	3677	EX3DV4	5600	Head	34.43	5.29	PASS	PASS	PASS
5750	8/12/2021	3677	EX3DV4	5750	Head	34.07	5.47	PASS	PASS	PASS

NOTE: While the probes have been calibrated for both CW and modulated signals, all measurements were performed using communication systems calibrated for CW signals only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664D01v01 for scenarios when CW probe calibrations are used with other signal types. SAR systems were validated for modulated signals with a periodic duty cycle, such as GMSK, or with a high peak to average ratio (>5dB), such as OFDM according to KDB 865664.

9 Normal and Maximum Output Power

KDB 447498 D01 at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit.

9.1 GSM Mode

GSM 850 DSI-1&DSI-2		Burst-Averaged output power(dBm)				Division Factors	Frame-Averaged output power(dBm)			
		Tune-up	Channel/Frequency(MHz)				Tune-up	Channel/Frequency(MHz)		
		MAX	128 /824.2	190 /836.6	251 /848.8		MAX	128 /824.2	190 /836.6	251 /848.8
GSM	CS	33.50	32.48	32.62	32.68	9.03	24.47	23.45	23.59	23.65
GPRS/ EGPRS (GMSK)	1 Tx Slot	33.50	32.43	32.61	32.65	9.03	24.47	23.40	23.58	23.62
	2 Tx Slots	30.50	29.45	29.80	29.94	6.02	24.48	23.43	23.78	23.92
	3 Tx Slots	28.70	27.40	27.74	27.82	4.26	24.44	23.14	23.48	23.56
	4 Tx Slots	27.50	25.86	26.25	26.28	3.01	24.49	22.85	23.24	23.27
EGPRS (8PSK)	1 Tx Slot	28.50	26.95	27.05	27.07	9.03	19.47	17.92	18.02	18.04
	2 Tx Slots	25.50	24.52	24.62	24.74	6.02	19.48	18.50	18.60	18.72
	3 Tx Slots	23.70	21.92	22.25	22.08	4.26	19.44	17.66	17.99	17.82
	4 Tx Slots	22.50	20.64	20.83	20.67	3.01	19.49	17.63	17.82	17.66
GSM 850 DSI-5		Burst-Averaged output power(dBm)				Division Factors	Frame-Averaged output power(dBm)			
		Tune-up	Channel/Frequency(MHz)				Tune-up	Channel/Frequency(MHz)		
		MAX	128 /824.2	190 /836.6	251 /848.8		MAX	128 /824.2	190 /836.6	251 /848.8
GSM	CS	29.50	29.01	29.12	29.22	9.03	20.47	19.98	20.09	20.19
GPRS/ EGPRS (GMSK)	1 Tx Slot	29.50	28.96	29.16	29.23	9.03	20.47	19.93	20.13	20.20
	2 Tx Slots	26.50	25.63	25.94	25.96	6.02	20.48	19.61	19.92	19.94
	3 Tx Slots	24.70	23.34	23.81	23.80	4.26	20.44	19.08	19.55	19.54
	4 Tx Slots	23.50	21.74	22.10	21.81	3.01	20.49	18.73	19.09	18.80
EGPRS (8PSK)	1 Tx Slot	24.50	23.94	23.94	23.98	9.03	15.47	14.91	14.91	14.95
	2 Tx Slots	21.50	20.64	20.93	20.62	6.02	15.48	14.62	14.91	14.60
	3 Tx Slots	19.70	18.93	19.32	19.47	4.26	15.44	14.67	15.06	15.21
	4 Tx Slots	18.50	17.37	17.34	17.24	3.01	15.49	14.36	14.33	14.23
Notes:The worst-case configuration and mode for SAR testing is determined to be as follows:										
1. Standalone: GSM 850 GMSK (GPRS) mode with 4 time slots for Max power, based on the output power measurements above.										

GSM 1900 DSI-1&DSI-2		Burst-Averaged output power(dBm)				Division Factors	Frame-Averaged output power(dBm)			
		Tune-up	Channel/Frequency(MHz)				Tune-up	Channel/Frequency(MHz)		
		MAX	512 /1850.2	661 /1880	810 /1909.8		MAX	512 /1850.2	661 /1880	810 /1909.8
GSM	CS	30.50	29.39	29.88	29.65	9.03	21.47	20.36	20.85	20.62
GPRS/ EGPRS (GMSK)	1 Tx Slot	30.50	29.25	29.42	29.40	9.03	21.47	20.22	20.39	20.37
	2 Tx Slots	27.00	25.93	26.07	26.12	6.02	20.98	19.91	20.05	20.10
	3 Tx Slots	25.50	23.86	24.04	23.96	4.26	21.24	19.60	19.78	19.70
	4 Tx Slots	24.40	22.87	22.99	22.90	3.01	21.39	19.86	19.98	19.89
EGPRS (8PSK)	1 Tx Slot	26.00	24.64	24.65	24.87	9.03	16.97	15.61	15.62	15.84
	2 Tx Slots	23.30	21.77	22.30	22.13	6.02	17.28	15.75	16.28	16.11
	3 Tx Slots	21.50	19.70	20.18	20.12	4.26	17.24	15.44	15.92	15.86
	4 Tx Slots	19.50	18.12	18.28	18.01	3.01	16.49	15.11	15.27	15.00
GSM 1900 DSI-5		Burst-Averaged output power(dBm)				Division Factors	Frame-Averaged output power(dBm)			
		Tune-up	Channel/Frequency(MHz)				Tune-up	Channel/Frequency(MHz)		
		MAX	512 /1850.2	661 /1880	810 /1909.8		MAX	512 /1850.2	661 /1880	810 /1909.8
GSM	CS	26.50	25.96	26.42	26.03	9.03	17.47	16.93	17.39	17.00
GPRS/ EGPRS (GMSK)	1 Tx Slot	26.50	25.83	25.62	25.79	9.03	17.47	16.80	16.59	16.76
	2 Tx Slots	23.00	22.37	22.40	22.52	6.02	16.98	16.35	16.38	16.50
	3 Tx Slots	21.50	19.97	19.80	19.89	4.26	17.24	15.71	15.54	15.63
	4 Tx Slots	20.40	19.11	19.18	19.27	3.01	17.39	16.10	16.17	16.26
EGPRS (8PSK)	1 Tx Slot	22.00	21.27	21.46	21.50	9.03	12.97	12.24	12.43	12.47
	2 Tx Slots	19.30	18.06	18.33	18.44	6.02	13.28	12.04	12.31	12.42
	3 Tx Slots	17.50	16.83	16.96	16.79	4.26	13.24	12.57	12.70	12.53
	4 Tx Slots	15.50	14.42	14.58	14.57	3.01	12.49	11.41	11.57	11.56
Notes:The worst-case configuration and mode for SAR testing is determined to be as follows:										
1. Standalone: GSM 1900 GMSK (GPRS) mode with 1 time slot for Max power,based on the output power measurements above.										

9.2 WCDMA Mode

The following tests were completed according to the test requirements outlined in the 3GPP TS34.121 specification.

Main- Antenna

WCDMA		Band II(dBm) DSI-1&DSI-2				Band II(dBm) DSI-5			
Tx Channel		9262	9400	9538	Tune-up	9262	9400	9538	Tune-up
Frequency(MHz)		1852.4	1880	1907.6	Limit	1852.4	1880	1907.6	Limit
RMC	12.2kbps	21.77	21.80	21.61	23.40	20.15	20.16	20.17	21.40
AMR	12.2kbps	21.75	21.78	21.71	23.40	20.25	20.06	20.09	21.40
HSDPA	Sub 1	21.13	21.12	20.87	22.60	19.45	19.50	19.29	20.60
	Sub 2	21.03	21.12	20.89	22.60	19.19	19.30	19.33	20.60
	Sub 3	20.61	20.44	20.15	22.10	18.83	19.02	18.97	20.10
	Sub 4	20.61	20.38	20.19	22.10	18.85	18.88	18.99	20.10
HSUPA	Sub 1	20.13	19.94	19.83	21.60	18.33	18.24	18.29	19.60
	Sub 2	18.93	18.88	18.85	20.60	17.23	17.50	17.35	18.60
	Sub 3	19.67	19.78	19.45	21.30	18.17	18.14	18.19	19.30
	Sub 4	19.09	19.06	18.93	20.60	17.21	17.38	17.23	18.60
	Sub 5	20.81	21.10	20.77	22.60	19.45	19.46	19.29	20.60
DC-HSDPA	Subtest 1	21.05	21.00	20.93	22.60	19.23	19.34	19.31	20.60
	Subtest 2	20.95	21.14	20.79	22.60	19.33	19.36	19.23	20.60
	Subtest 3	20.49	20.66	20.41	22.10	18.79	18.92	18.73	20.10
	Subtest 4	20.47	20.64	20.29	22.10	18.69	18.76	18.77	20.10

Note: 1.Per KDB 941225 D01, SAR for each exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".

WCDMA		Band IV(dBm) DSI-1&DSI-2				Band IV(dBm) DSI-5			
Tx Channel		1312	1413	1513	Tune-up	1312	1413	1513	Tune-up
Frequency(MHz)		1712.4	1732.6	1752.6	Limit	1712.4	1732.6	1752.6	Limit
RMC	12.2kbps	23.21	23.38	23.35	23.50	19.73	19.85	19.87	21.50
AMR	12.2kbps	23.25	23.50	23.39	23.50	19.57	19.71	19.97	21.50
HSDPA	Sub 1	22.57	22.54	22.49	22.70	19.03	19.15	18.91	20.70
	Sub 2	22.25	22.64	22.39	22.70	18.93	18.93	19.17	20.70
	Sub 3	21.77	22.20	21.89	22.20	18.55	18.39	18.61	20.20
	Sub 4	21.83	22.12	21.93	22.20	18.49	18.69	18.63	20.20
HSUPA	Sub 1	21.57	21.66	21.55	21.70	17.95	17.93	18.13	19.70
	Sub 2	20.25	20.56	20.63	20.70	17.03	17.01	17.09	18.70



DC-HSDPA	Sub 3	21.15	21.22	21.21	21.40	17.59	17.89	17.73	19.40
	Sub 4	20.49	20.70	20.45	20.70	16.83	17.15	16.99	18.70
	Sub 5	22.27	22.54	22.51	22.70	18.79	18.89	19.13	20.70
	Sub 1	22.25	22.64	22.45	22.70	18.77	19.11	19.09	20.70
DC-HSDPA	Sub 2	22.37	22.70	22.43	22.70	18.77	19.19	19.11	20.70
	Sub 3	21.87	22.00	22.03	22.20	18.29	18.49	18.47	20.20
	Sub 4	21.85	22.04	21.91	22.20	18.55	18.65	18.49	20.20
	Sub 5	22.27	22.54	22.51	22.70	18.79	18.89	19.13	20.70

Note: 1.Per KDB 941225 D01, SAR for each exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".

WCDMA		Band V(dBm) DSI-1&2&5			
Tx Channel		4132	4183	4233	Tune-up Limit
Frequency(MHz)		826.4	836.6	846.6	
RMC	12.2kbps	24.41	24.56	24.11	25.00
AMR	12.2kbps	24.39	24.68	24.13	25.00
HSDPA	Sub 1	23.49	23.82	23.33	24.20
	Sub 2	23.45	23.78	23.47	24.20
	Sub 3	23.17	23.16	22.87	23.70
	Sub 4	23.07	23.14	22.77	23.70
HSUPA	Sub 1	23.67	23.78	23.09	24.10
	Sub 2	21.63	21.80	21.25	22.10
	Sub 3	22.41	22.70	22.31	23.10
	Sub 4	21.45	21.72	21.13	22.10
	Sub 5	23.37	23.60	23.07	24.10

Note: 1.Per KDB 941225 D01, SAR for each exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".

Second - Antenna

WCDMA		Band II(dBm) DSI-1				Band II(dBm) DSI-2				Band II(dBm) DSI-5			
Tx Channel		9262	9400	9538	Tune-up	9262	9400	9538	Tune-up	9262	9400	9538	Tune-up
Frequency(MHz)		1852.4	1880	1907.6	Limit	1852.4	1880	1907.6	Limit	1852.4	1880	1907.6	Limit
RMC	12.2kbps	18.90	18.85	18.89	19.90	20.34	20.89	20.35	21.40	19.35	19.30	19.31	20.40
AMR	12.2kbps	18.84	18.79	18.75	19.90	20.48	21.01	20.29	21.40	19.41	19.22	19.39	20.40
HSDPA	Sub 1	18.08	18.11	17.95	19.10	19.66	19.97	19.61	20.60	18.51	18.38	18.59	19.60
	Sub 2	18.10	17.99	18.11	19.10	19.40	20.13	19.57	20.60	18.69	18.50	18.35	19.60
	Sub 3	17.44	17.65	17.67	18.60	18.92	19.55	19.03	20.10	17.89	17.94	18.05	19.10
	Sub 4	17.66	17.51	17.53	18.60	19.12	19.71	19.05	20.10	17.93	18.10	17.99	19.10
HSUPA	Sub 1	17.10	17.19	17.15	18.10	18.54	18.93	18.43	19.60	17.59	17.50	17.43	18.60
	Sub 2	16.04	15.97	16.05	17.10	17.40	18.09	17.45	18.60	16.49	16.64	16.63	17.60



	Sub 3	16.90	16.65	16.69	17.80	18.14	18.65	18.41	19.30	17.29	17.04	17.13	18.30
	Sub 4	16.06	16.11	15.95	17.10	17.48	18.13	17.41	18.60	16.65	16.50	16.57	17.60
	Sub 5	18.06	17.91	18.15	19.10	19.64	20.07	19.43	20.60	18.69	18.50	18.37	19.60
DC-HSDPA	Sub 1	18.20	18.05	18.19	19.10	19.58	20.25	19.67	20.60	18.49	18.54	18.59	19.60
	Sub 2	18.14	17.97	18.17	19.10	19.38	20.07	19.55	20.60	18.55	18.40	18.35	19.60
	Sub 3	17.58	17.69	17.43	18.60	19.18	19.51	19.01	20.10	18.17	17.90	18.05	19.10
	Sub 4	17.46	17.49	17.71	18.60	19.14	19.49	18.93	20.10	18.01	18.06	18.11	19.10
Note: 1.Per KDB 941225 D01, SAR for each exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".													

WCDMA		Band IV(dBm) DSI-1				Band IV(dBm) DSI-2				Band IV(dBm) DSI-5			
Tx Channel		1312	1413	1513	Tune-up	1312	1413	1513	Tune-up	1312	1413	4233	Tune-up
Frequency(MHz)		1712.4	1732.6	1752.6	Limit	1712.4	1732.6	1752.6	Limit	1712.4	1732.6	846.6	Limit
RMC	12.2kbps	17.93	17.86	18.05	18.50	19.90	20.02	19.99	21.00	20.14	20.31	20.28	20.50
AMR	12.2kbps	18.05	17.86	18.07	18.50	20.06	20.12	20.11	21.00	20.26	20.37	20.32	20.50
HSDPA	Sub 1	17.15	17.14	17.37	17.70	19.90	20.02	19.99	21.00	19.28	19.57	19.48	19.70
	Sub 2	17.25	17.12	17.41	17.70	20.06	20.12	20.11	21.00	19.36	19.41	19.32	19.70
	Sub 3	16.69	16.70	16.73	17.20	18.94	19.36	19.07	20.20	18.90	19.15	18.86	19.20
	Sub 4	16.75	16.40	16.85	17.20	18.96	19.08	19.25	20.20	18.82	19.17	19.00	19.20
HSUPA	Sub 1	16.21	16.18	16.31	16.70	18.46	18.80	18.55	19.70	18.20	18.37	18.34	18.70
	Sub 2	15.05	14.98	15.19	15.70	18.56	18.56	18.53	19.70	17.30	17.41	17.54	17.70
	Sub 3	15.73	15.84	15.83	16.40	17.96	18.38	18.05	19.20	18.04	18.09	18.28	18.40
	Sub 4	15.23	15.18	15.39	15.70	16.94	17.24	17.05	18.20	17.50	17.67	17.34	17.70
	Sub 5	17.23	17.00	17.09	17.70	17.72	17.98	17.89	18.90	19.36	19.39	19.40	19.70
DC-HSDPA	Sub 1	17.29	17.12	17.39	17.70	17.10	17.24	17.19	18.20	19.22	19.47	19.62	19.70
	Sub 2	16.99	17.22	17.27	17.70	19.08	19.26	19.19	20.20	19.48	19.45	19.62	19.70
	Sub 3	16.69	16.50	16.59	17.20	19.22	19.38	19.17	20.20	18.92	18.93	19.10	19.20
	Sub 4	16.53	16.70	16.83	17.20	16.53	16.70	16.83	17.20	18.90	18.93	18.86	19.20
Note: 1.Per KDB 941225 D01, SAR for each exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".													

9.3 LTE Mode

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

Main- Antenna

LTE FDD Band 2 DSI-1&DSI-2				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				18607/1850.7	18900/1880	19193/1909.3	
1.4MHz	QPSK	1	0	22.20	21.97	21.88	23.40
		1	2	22.13	21.85	21.92	23.40
		1	5	21.81	21.51	21.60	23.40
		3	0	23.21	22.90	22.90	23.40
		3	2	23.01	22.89	22.97	23.40
		3	3	22.92	22.72	22.86	23.40
		6	0	22.07	21.89	22.04	23.40
	16QAM	1	0	22.20	22.13	22.13	23.40
		1	2	22.18	22.13	22.14	23.40
		1	5	21.83	21.75	21.81	23.40
		3	0	22.13	21.89	21.91	23.40
		3	2	21.99	21.93	21.96	23.40
		3	3	21.81	21.76	21.79	23.40
		6	0	20.96	20.92	21.02	22.40
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18615/1851.5	18900/1880	19185/1908.5	
3MHz	QPSK	1	0	22.22	22.01	21.91	23.40
		1	7	22.11	21.88	21.96	23.40
		1	14	21.84	21.56	21.64	23.40
		8	0	22.31	22.02	22.03	23.40
		8	4	22.13	21.99	22.09	23.40
		8	7	22.02	21.83	21.96	23.40
		15	0	22.07	21.93	22.07	23.40
	16QAM	1	0	22.23	22.15	22.16	23.40



		1	7	22.21	22.13	22.18	23.40
		1	14	21.85	21.79	21.84	23.40
		8	0	21.24	21.02	21.03	22.40
		8	4	21.10	21.06	21.08	22.40
		8	7	20.91	20.88	20.92	22.40
		15	0	20.99	20.96	21.05	22.40
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18625/1852.5	18900/1880	19175/1907.5	
5MHz	QPSK	1	0	22.19	21.99	21.87	23.40
		1	13	22.09	21.84	21.93	23.40
		1	24	21.81	21.51	21.60	23.40
		12	0	22.28	21.97	21.99	23.40
		12	6	22.11	21.95	22.04	23.40
		12	13	22.00	21.81	21.92	23.40
	16QAM	25	0	22.07	21.92	22.05	23.40
		1	0	22.20	22.11	22.13	23.40
		1	13	22.18	22.11	22.15	23.40
		1	24	21.82	21.77	21.80	23.40
		12	0	21.22	20.98	21.00	22.40
		12	6	21.07	21.01	21.04	22.40
		12	13	20.88	20.83	20.88	22.40
		25	0	20.97	20.92	21.00	22.40
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18650/1855	18900/1880	19150/1905	
10MHz	QPSK	1	0	22.21	22.00	21.90	23.40
		1	25	22.12	21.89	21.97	23.40
		1	49	21.83	21.55	21.63	23.40
		25	0	22.31	22.02	22.03	23.40
		25	13	22.14	22.00	22.08	23.40
		25	25	22.02	21.85	21.97	23.40
		50	0	22.11	21.94	22.09	23.40
	16QAM	1	0	22.22	22.14	22.15	23.40
		1	25	22.21	22.15	22.18	23.40
		1	49	21.85	21.79	21.83	23.40
		25	0	21.25	21.03	21.04	22.40
		25	13	21.09	21.05	21.07	22.40
		25	25	20.91	20.88	20.92	22.40
		50	0	21.00	20.97	21.04	22.40
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18675/1857.5	18900/1880	19125/1902.5	
15MHz	QPSK	1	0	22.20	21.96	21.88	23.40
		1	38	22.10	21.88	21.94	23.40
		1	74	21.80	21.50	21.59	23.40



		36	0	22.29	21.98	22.00	23.40
		36	18	22.11	21.95	22.04	23.40
		36	39	21.99	21.82	21.93	23.40
		75	0	22.09	21.90	22.04	23.40
	16QAM	1	0	22.17	22.12	22.13	23.40
		1	38	22.19	22.12	22.16	23.40
		1	74	21.82	21.75	21.80	23.40
		36	0	21.22	21.01	21.01	22.40
		36	18	21.06	21.00	21.03	22.40
		36	39	20.89	20.84	20.89	22.40
		75	0	20.97	20.92	21.00	22.40
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18700/1860	18900/1880	19100/1900	
20MHz	QPSK	1	0	22.17	21.92	21.85	23.40
		1	50	22.09	21.84	21.92	23.40
		1	99	21.78	21.49	21.56	23.40
		50	0	22.26	21.93	21.96	23.40
		50	25	22.09	21.91	22.01	23.40
		50	50	21.96	21.77	21.89	23.40
		100	0	22.06	21.85	22.00	23.40
	16QAM	1	0	22.24	22.08	22.08	23.40
		1	50	22.15	22.10	22.12	23.40
		1	99	21.80	21.72	21.78	23.40
		50	0	21.19	20.97	20.98	22.40
		50	25	21.03	20.98	21.00	22.40
		50	50	20.86	20.79	20.85	22.40
		100	0	20.95	20.88	20.97	22.40

LTE FDD Band 2 DSI-5				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				18607/1850.7	18900/1880	19193/1909.3	
1.4MHz	QPSK	1	0	20.10	20.03	19.92	21.40
		1	2	20.00	20.07	19.95	21.40
		1	5	19.73	19.61	19.70	21.40
		3	0	20.21	20.03	19.94	21.40
		3	2	19.98	19.96	20.06	21.40
		3	3	19.86	19.81	19.83	21.40
		6	0	20.00	19.97	20.11	21.40
	16QAM	1	0	20.37	20.28	20.35	21.40
		1	2	20.35	20.27	20.30	21.40
		1	5	19.90	19.88	19.94	21.40
		3	0	20.12	19.98	20.00	21.40



		3	2	20.04	20.01	20.15	21.40
		3	3	19.85	19.90	20.00	21.40
		6	0	19.99	19.99	20.06	21.40
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18615/1851.5	18900/1880	19185/1908.5	
3MHz	QPSK	1	0	20.12	20.07	19.95	21.40
		1	7	20.00	20.09	19.99	21.40
		1	14	19.76	19.66	19.74	21.40
		8	0	20.25	20.10	20.01	21.40
		8	4	20.01	20.04	20.12	21.40
		8	7	19.90	19.86	19.87	21.40
		15	0	20.02	20.01	20.14	21.40
	16QAM	1	0	20.40	20.30	20.38	21.40
		1	7	20.38	20.29	20.34	21.40
		1	14	19.92	19.92	19.97	21.40
		8	0	20.17	20.02	20.03	21.40
		8	4	20.09	20.08	20.21	21.40
		8	7	19.89	19.96	20.07	21.40
		15	0	20.02	20.03	20.09	21.40
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18625/1852.5	18900/1880	19175/1907.5	
5MHz	QPSK	1	0	20.09	20.05	19.91	21.40
		1	13	19.98	20.05	19.96	21.40
		1	24	19.73	19.61	19.70	21.40
		12	0	20.22	20.05	19.97	21.40
		12	6	19.99	20.00	20.07	21.40
		12	13	19.88	19.84	19.83	21.40
		25	0	20.00	20.00	20.12	21.40
	16QAM	1	0	20.37	20.26	20.35	21.40
		1	13	20.35	20.27	20.31	21.40
		1	24	19.89	19.90	19.93	21.40
		12	0	20.15	19.98	20.00	21.40
		12	6	20.06	20.03	20.17	21.40
		12	13	19.86	19.91	20.03	21.40
		25	0	20.00	19.99	20.04	21.40
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18650/1855	18900/1880	19150/1905	
10MHz	QPSK	1	0	20.10	20.04	19.93	21.40
		1	25	19.99	20.09	19.98	21.40
		1	49	19.74	19.63	19.72	21.40
		25	0	20.23	20.09	19.99	21.40
		25	13	20.01	20.03	20.10	21.40
		25	25	19.88	19.84	19.87	21.40



	16QAM	50	0	20.00	20.01	20.13	21.40
		1	0	20.36	20.24	20.35	21.40
		1	25	20.37	20.30	20.29	21.40
		1	49	19.90	19.88	19.95	21.40
		25	0	20.13	20.02	20.01	21.40
		25	13	20.05	20.02	20.18	21.40
		25	25	19.88	19.95	20.02	21.40
		50	0	19.99	20.01	20.04	21.40
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18675/1857.5	18900/1880	19125/1902.5	
15MHz	QPSK	1	0	20.10	20.02	19.92	21.40
		1	38	19.99	20.09	19.97	21.40
		1	74	19.72	19.60	19.69	21.40
		36	0	20.23	20.06	19.98	21.40
		36	18	19.99	20.00	20.07	21.40
		36	39	19.87	19.85	19.84	21.40
		75	0	20.03	19.98	20.11	21.40
	16QAM	1	0	20.34	20.27	20.35	21.40
		1	38	20.36	20.28	20.32	21.40
		1	74	19.89	19.88	19.93	21.40
		36	0	20.15	20.01	20.01	21.40
		36	18	20.05	20.02	20.16	21.40
		36	39	19.87	19.92	20.04	21.40
		75	0	20.00	19.99	20.04	21.40
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18700/1860	18900/1880	19100/1900	
20MHz	QPSK	1	0	20.07	19.98	19.89	21.40
		1	50	19.98	20.05	19.95	21.40
		1	99	19.70	19.59	19.66	21.40
		50	0	20.20	20.01	19.94	21.40
		50	25	19.97	19.96	20.04	21.40
		50	50	19.84	19.80	19.80	21.40
		100	0	20.00	19.93	20.07	21.40
	16QAM	1	0	20.32	20.23	20.30	21.40
		1	50	20.32	20.26	20.28	21.40
		1	99	19.87	19.85	19.91	21.40
		50	0	20.12	19.97	19.98	21.40
		50	25	20.02	20.00	20.13	21.40
		50	50	19.84	19.87	20.00	21.40
		100	0	19.98	19.95	20.01	21.40



LTE FDD Band 4 DSI-1&DSI-2				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				19957/1710.7	20175/1732.5	20393/1754.3	
1.4MHz	QPSK	1	0	22.37	22.27	22.19	23.50
		1	2	22.24	22.09	21.98	23.50
		1	5	22.08	21.60	21.80	23.50
		3	0	23.22	23.28	23.23	23.50
		3	2	23.02	22.96	22.93	23.50
		3	3	23.15	22.96	22.93	23.50
		6	0	22.23	22.13	22.12	23.50
	16QAM	1	0	22.50	22.60	22.62	23.50
		1	2	22.48	22.38	22.18	23.50
		1	5	22.23	22.03	22.21	23.50
		3	0	22.24	22.13	22.13	23.50
		3	2	22.06	21.93	21.99	23.50
		3	3	22.06	22.10	21.99	23.50
		6	0	21.06	21.04	21.03	22.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				19965/1711.5	20175/1732.5	20385/1753.5	
3MHz	QPSK	1	0	22.36	22.29	22.18	23.50
		1	7	22.20	22.08	21.99	23.50
		1	14	22.08	21.60	21.80	23.50
		8	0	22.29	22.35	22.32	23.50
		8	4	22.12	22.02	22.00	23.50
		8	7	22.23	22.05	21.99	23.50
		15	0	22.23	22.16	22.13	23.50
	16QAM	1	0	22.50	22.58	22.62	23.50
		1	7	22.48	22.36	22.19	23.50
		1	14	22.22	22.05	22.20	23.50
		8	0	21.33	21.22	21.22	22.50
		8	4	21.14	21.01	21.07	22.50
		8	7	21.13	21.17	21.08	22.50
		15	0	21.07	21.04	21.01	22.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				19975/1712.5	20175/1732.5	20375/1752.5	
5MHz	QPSK	1	0	22.39	22.31	22.22	23.50
		1	13	22.22	22.12	22.02	23.50
		1	24	22.11	21.65	21.84	23.50
		12	0	22.32	22.40	22.36	23.50
		12	6	22.14	22.06	22.05	23.50
		12	13	22.25	22.07	22.03	23.50



	16QAM	25	0	22.23	22.17	22.15	23.50
		1	0	22.53	22.62	22.65	23.50
		1	13	22.51	22.38	22.22	23.50
		1	24	22.25	22.07	22.24	23.50
		12	0	21.35	21.26	21.25	22.50
		12	6	21.17	21.06	21.11	22.50
		12	13	21.16	21.22	21.12	22.50
		25	0	21.09	21.08	21.06	22.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20000/1715	20175/1732.5	20350/1750	
10MHz	QPSK	1	0	22.38	22.30	22.21	23.50
		1	25	22.23	22.13	22.03	23.50
		1	49	22.10	21.64	21.83	23.50
		25	0	22.32	22.40	22.36	23.50
		25	13	22.15	22.07	22.04	23.50
		25	25	22.25	22.09	22.04	23.50
		50	0	22.27	22.18	22.17	23.50
	16QAM	1	0	22.52	22.61	22.64	23.50
		1	25	22.51	22.40	22.22	23.50
		1	49	22.25	22.07	22.23	23.50
		25	0	21.36	21.27	21.26	22.50
		25	13	21.16	21.05	21.10	22.50
		25	25	21.16	21.22	21.12	22.50
		50	0	21.10	21.09	21.05	22.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20025/1717.5	20175/1732.5	20325/1747.5	
15MHz	QPSK	1	0	22.37	22.26	22.19	23.50
		1	38	22.21	22.12	22.00	23.50
		1	74	22.07	21.59	21.79	23.50
		36	0	22.30	22.36	22.33	23.50
		36	18	22.12	22.02	22.00	23.50
		36	39	22.22	22.06	22.00	23.50
		75	0	22.25	22.14	22.12	23.50
	16QAM	1	0	22.47	22.59	22.62	23.50
		1	38	22.49	22.37	22.20	23.50
		1	74	22.22	22.03	22.20	23.50
		36	0	21.33	21.25	21.23	22.50
		36	18	21.13	21.00	21.06	22.50
		36	39	21.14	21.18	21.09	22.50
		75	0	21.07	21.04	21.01	22.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20050/1720	20175/1732.5	20300/1745	
20MHz	QPSK	1	0	22.34	22.22	22.16	23.50



		1	50	22.20	22.08	21.98	23.50
		1	99	22.05	21.58	21.76	23.50
		50	0	22.27	22.31	22.29	23.50
		50	25	22.10	21.98	21.97	23.50
		50	50	22.19	22.01	21.96	23.50
		100	0	22.22	22.09	22.08	23.50
	16QAM	1	0	22.34	22.55	22.57	23.50
		1	50	22.45	22.35	22.16	23.50
		1	99	22.20	22.00	22.18	23.50
		50	0	21.30	21.21	21.20	22.50
		50	25	21.10	20.98	21.03	22.50
		50	50	21.11	21.13	21.05	22.50
		100	0	21.05	21.00	20.98	22.50

LTE FDD Band 4 DSI-5				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				19957/1710.7	20175/1732.5	20393/1754.3	
1.4MHz	QPSK	1	0	20.10	20.28	20.21	21.50
		1	2	20.14	19.96	20.03	21.50
		1	5	19.91	19.64	19.95	21.50
		3	0	20.02	20.18	20.18	21.50
		3	2	19.99	20.01	20.00	21.50
		3	3	20.09	20.04	20.05	21.50
		6	0	20.10	20.16	20.15	21.50
	16QAM	1	0	20.34	20.67	20.65	21.50
		1	2	20.42	20.49	20.54	21.50
		1	5	20.25	19.87	20.25	21.50
		3	0	20.07	20.15	20.39	21.50
		3	2	20.06	19.97	20.07	21.50
		3	3	20.05	20.06	20.09	21.50
		6	0	20.04	20.13	20.14	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				19965/1711.5	20175/1732.5	20385/1753.5	
3MHz	QPSK	1	0	20.09	20.30	20.20	21.50
		1	7	20.12	19.94	20.04	21.50
		1	14	19.91	19.64	19.95	21.50
		8	0	20.03	20.20	20.21	21.50
		8	4	20.00	20.05	20.01	21.50
		8	7	20.11	20.07	20.05	21.50
		15	0	20.10	20.19	20.16	21.50
	16QAM	1	0	20.34	20.65	20.65	21.50
		1	7	20.42	20.49	20.55	21.50



		1	14	20.24	19.89	20.24	21.50
		8	0	20.10	20.15	20.39	21.50
		8	4	20.08	19.99	20.09	21.50
		8	7	20.06	20.07	20.12	21.50
		15	0	20.05	20.13	20.12	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				19975/1712.5	20175/1732.5	20375/1752.5	
5MHz	QPSK	1	0	20.12	20.32	20.24	21.50
		1	13	20.14	19.98	20.07	21.50
		1	24	19.94	19.69	19.99	21.50
		12	0	20.06	20.25	20.25	21.50
		12	6	20.02	20.09	20.06	21.50
		12	13	20.13	20.09	20.09	21.50
		25	0	20.12	20.20	20.18	21.50
	16QAM	1	0	20.37	20.69	20.68	21.50
		1	13	20.45	20.51	20.58	21.50
		1	24	20.27	19.91	20.28	21.50
		12	0	20.12	20.19	20.42	21.50
		12	6	20.11	20.04	20.13	21.50
		12	13	20.09	20.12	20.16	21.50
		25	0	20.07	20.17	20.17	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20000/1715	20175/1732.5	20350/1750	
10MHz	QPSK	1	0	20.10	20.29	20.22	21.50
		1	25	20.13	19.98	20.06	21.50
		1	49	19.92	19.66	19.97	21.50
		25	0	20.04	20.24	20.23	21.50
		25	13	20.02	20.08	20.04	21.50
		25	25	20.11	20.07	20.09	21.50
		50	0	20.10	20.20	20.17	21.50
	16QAM	1	0	20.33	20.63	20.65	21.50
		1	25	20.44	20.52	20.53	21.50
		1	49	20.25	19.87	20.26	21.50
		25	0	20.08	20.19	20.40	21.50
		25	13	20.07	19.98	20.10	21.50
		25	25	20.08	20.11	20.11	21.50
		50	0	20.04	20.15	20.12	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20025/1717.5	20175/1732.5	20325/1747.5	
15MHz	QPSK	1	0	20.10	20.27	20.21	21.50
		1	38	20.13	19.98	20.05	21.50
		1	74	19.90	19.63	19.94	21.50
		36	0	20.04	20.21	20.22	21.50



		36	18	20.00	20.05	20.01	21.50
		36	39	20.10	20.08	20.06	21.50
		75	0	20.13	20.17	20.15	21.50
	16QAM	1	0	20.31	20.66	20.65	21.50
		1	38	20.43	20.50	20.56	21.50
		1	74	20.24	19.87	20.24	21.50
		36	0	20.10	20.18	20.40	21.50
		36	18	20.07	19.98	20.08	21.50
		36	39	20.07	20.08	20.13	21.50
		75	0	20.05	20.13	20.12	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20050/1720	20175/1732.5	20300/1745	
20MHz	QPSK	1	0	20.07	20.23	20.18	21.50
		1	50	20.12	19.94	20.03	21.50
		1	99	19.88	19.62	19.91	21.50
		50	0	20.01	20.16	20.18	21.50
		50	25	19.98	20.01	19.98	21.50
		50	50	20.07	20.03	20.02	21.50
		100	0	20.10	20.12	20.11	21.50
	16QAM	1	0	20.29	20.62	20.60	21.50
		1	50	20.39	20.48	20.52	21.50
		1	99	20.22	19.84	20.22	21.50
		50	0	20.07	20.14	20.37	21.50
		50	25	20.04	19.96	20.05	21.50
		50	50	20.04	20.03	20.09	21.50
		100	0	20.03	20.09	20.09	21.50

LTE FDD Band 5 DSI1&2&5				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				20407/824.7	20525/836.5	20643/848.3	
1.4MHz	QPSK	1	0	24.21	24.26	24.57	25.00
		1	2	24.21	24.21	24.67	25.00
		1	5	24.23	24.32	24.44	25.00
		3	0	23.95	24.17	24.41	25.00
		3	2	23.98	24.24	24.42	25.00
		3	3	24.09	24.21	24.40	25.00
		6	0	23.18	23.27	23.58	24.00
	16QAM	1	0	23.38	23.50	23.76	24.00
		1	2	23.36	23.51	23.57	24.00
		1	5	23.49	23.63	23.72	24.00
		3	0	23.08	23.16	23.30	24.00



		3	2	23.15	23.20	23.50	24.00
		3	3	23.27	23.23	23.45	24.00
		6	0	22.15	22.31	22.54	23.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20415/825.5	20525/836.5	20635/847.5	
3MHz	QPSK	1	0	24.23	24.30	24.60	25.00
		1	7	24.19	24.24	24.71	25.00
		1	14	24.26	24.37	24.48	25.00
		8	0	23.05	23.29	23.54	24.00
		8	4	23.10	23.34	23.54	24.00
		8	7	23.19	23.32	23.50	24.00
		15	0	23.18	23.31	23.61	24.00
	16QAM	1	0	23.41	23.52	23.79	24.00
		1	7	23.39	23.51	23.61	24.00
		1	14	23.51	23.67	23.75	24.00
		8	0	22.19	22.29	22.42	23.00
		8	4	22.26	22.33	22.62	23.00
		8	7	22.37	22.35	22.58	23.00
		15	0	22.18	22.35	22.57	23.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20425/826.5	20525/836.5	20625/846.5	
5MHz	QPSK	1	0	24.21	24.25	24.57	25.00
		1	13	24.18	24.24	24.69	25.00
		1	24	24.22	24.31	24.43	25.00
		12	0	23.03	23.25	23.51	24.00
		12	6	23.08	23.30	23.49	24.00
		12	13	23.16	23.31	23.47	24.00
		25	0	23.20	23.28	23.58	24.00
	16QAM	1	0	23.35	23.49	23.76	24.00
		1	13	23.37	23.50	23.59	24.00
		1	24	23.48	23.63	23.71	24.00
		12	0	22.17	22.28	22.40	23.00
		12	6	22.22	22.27	22.57	23.00
		12	13	22.35	22.31	22.55	23.00
		25	0	22.16	22.31	22.52	23.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20450/829	20525/836.5	20600/844	
10MHz	QPSK	1	0	24.18	24.21	24.54	25.00
		1	25	24.17	24.20	24.67	25.00
		1	49	24.20	24.30	24.40	25.00
		25	0	23.00	23.20	23.47	24.00
		25	13	23.06	23.26	23.46	24.00
		25	25	23.13	23.26	23.43	24.00



	16QAM	50	0	23.17	23.23	23.54	24.00
		1	0	23.41	23.45	23.71	24.00
		1	25	23.33	23.48	23.55	24.00
		1	49	23.46	23.60	23.69	24.00
		25	0	22.14	22.24	22.37	23.00
		25	13	22.19	22.25	22.54	23.00
		25	25	22.32	22.26	22.51	23.00
		50	0	22.14	22.27	22.49	23.00

LTE FDD Band 7 DSI-1&DSI-5				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				20775/2502. 5	21100/2535	21425/2567. 5	
5MHz	QPSK	1	0	17.35	17.17	17.31	18.50
		1	13	17.56	17.63	17.53	18.50
		1	24	17.19	17.32	17.60	18.50
		12	0	17.40	17.36	17.33	18.50
		12	6	17.48	17.53	17.47	18.50
		12	13	17.34	17.48	17.57	18.50
		25	0	17.28	17.49	17.51	18.50
	16QAM	1	0	17.73	17.52	17.66	18.50
		1	13	17.98	17.88	17.93	18.50
		1	24	17.45	17.80	17.89	18.50
		12	0	17.40	17.42	17.38	18.50
		12	6	17.46	17.57	17.54	18.50
		12	13	17.22	17.58	17.51	18.50
		25	0	17.27	17.39	17.49	18.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20800/2505	21100/2535	21400/2565	
10MHz	QPSK	1	0	17.36	17.16	17.33	18.50
		1	25	17.57	17.67	17.55	18.50
		1	49	17.20	17.34	17.62	18.50
		25	0	17.41	17.40	17.35	18.50
		25	13	17.50	17.56	17.50	18.50
		25	25	17.34	17.48	17.61	18.50
		50	0	17.28	17.50	17.52	18.50
	16QAM	1	0	17.72	17.50	17.66	18.50
		1	25	18.00	17.91	17.91	18.50
		1	49	17.46	17.78	17.91	18.50
		25	0	17.38	17.46	17.39	18.50
		25	13	17.45	17.56	17.55	18.50
		25	25	17.24	17.62	17.50	18.50



		50	0	17.26	17.41	17.49	18.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20825/2507.5	21100/2535	21375/2562.5	
15MHz	QPSK	1	0	17.36	17.14	17.32	18.50
		1	38	17.57	17.67	17.54	18.50
		1	74	17.18	17.31	17.59	18.50
		36	0	17.41	17.37	17.34	18.50
		36	18	17.48	17.53	17.47	18.50
		36	39	17.33	17.49	17.58	18.50
		75	0	17.31	17.47	17.50	18.50
	16QAM	1	0	17.70	17.53	17.66	18.50
		1	38	17.99	17.89	17.94	18.50
		1	74	17.45	17.78	17.89	18.50
		36	0	17.40	17.45	17.39	18.50
		36	18	17.45	17.56	17.53	18.50
		36	39	17.23	17.59	17.52	18.50
		75	0	17.27	17.39	17.49	18.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20850/2510	21100/2535	21350/2560	
20MHz	QPSK	1	0	17.33	17.10	17.29	18.50
		1	50	17.56	17.63	17.52	18.50
		1	99	17.16	17.30	17.56	18.50
		50	0	17.38	17.32	17.30	18.50
		50	25	17.46	17.49	17.44	18.50
		50	50	17.30	17.44	17.54	18.50
		100	0	17.28	17.42	17.46	18.50
	16QAM	1	0	17.68	17.49	17.61	18.50
		1	50	17.95	17.87	17.90	18.50
		1	99	17.43	17.75	17.87	18.50
		50	0	17.37	17.41	17.36	18.50
		50	25	17.42	17.54	17.50	18.50
		50	50	17.20	17.54	17.48	18.50
		100	0	17.25	17.35	17.46	18.50



LTE FDD Band 7 DSI-2				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				20775/2502. 5	21100/2535	21425/2567. 5	
5MHz	QPSK	1	0	19.34	19.46	19.43	20.50
		1	13	19.59	19.43	19.59	20.50
		1	24	19.24	19.49	19.56	20.50
		12	0	19.42	19.38	19.52	20.50
		12	6	19.56	19.65	19.73	20.50
		12	13	19.43	19.60	19.67	20.50
		25	0	19.40	19.63	19.66	20.50
	16QAM	1	0	19.76	19.74	19.82	20.50
		1	13	19.95	19.53	20.03	20.50
		1	24	19.54	19.85	19.88	20.50
		12	0	19.42	19.43	19.54	20.50
		12	6	19.56	19.66	19.72	20.50
		12	13	19.40	19.58	19.55	20.50
		25	0	19.42	19.49	19.57	20.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20800/2505	21100/2535	21400/2565	
10MHz	QPSK	1	0	19.35	19.45	19.45	20.50
		1	25	19.60	19.47	19.61	20.50
		1	49	19.25	19.51	19.58	20.50
		25	0	19.43	19.42	19.54	20.50
		25	13	19.58	19.68	19.76	20.50
		25	25	19.43	19.60	19.71	20.50
		50	0	19.40	19.64	19.67	20.50
	16QAM	1	0	19.75	19.72	19.82	20.50
		1	25	19.97	19.56	20.01	20.50
		1	49	19.55	19.83	19.90	20.50
		25	0	19.40	19.47	19.55	20.50
		25	13	19.55	19.65	19.73	20.50
		25	25	19.42	19.62	19.54	20.50
		50	0	19.41	19.51	19.57	20.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20825/2507. 5	21100/2535	21375/2562. 5	
15MHz	QPSK	1	0	19.35	19.43	19.44	20.50
		1	38	19.60	19.47	19.60	20.50
		1	74	19.23	19.48	19.55	20.50
		36	0	19.43	19.39	19.53	20.50



		36	18	19.56	19.65	19.73	20.50
		36	39	19.42	19.61	19.68	20.50
		75	0	19.43	19.61	19.65	20.50
	16QAM	1	0	19.73	19.75	19.82	20.50
		1	38	19.96	19.54	20.04	20.50
		1	74	19.54	19.83	19.88	20.50
		36	0	19.42	19.46	19.55	20.50
		36	18	19.55	19.65	19.71	20.50
		36	39	19.41	19.59	19.56	20.50
		75	0	19.42	19.49	19.57	20.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20850/2510	21100/2535	21350/2560	
20MHz	QPSK	1	0	19.32	19.39	19.41	20.50
		1	50	19.59	19.43	19.58	20.50
		1	99	19.21	19.47	19.52	20.50
		50	0	19.40	19.34	19.49	20.50
		50	25	19.54	19.61	19.70	20.50
		50	50	19.39	19.56	19.64	20.50
		100	0	19.40	19.56	19.61	20.50
	16QAM	1	0	19.71	19.71	19.77	20.50
		1	50	19.92	19.52	20.00	20.50
		1	99	19.52	19.80	19.86	20.50
		50	0	19.39	19.42	19.52	20.50
		50	25	19.52	19.63	19.68	20.50
		50	50	19.38	19.54	19.52	20.50
		100	0	19.40	19.45	19.54	20.50

LTE FDD Band 13 DS11&2&5				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				23205/779.5	23230/782	23255/784.5	
5MHz	QPSK	1	0	24.48	24.52	24.46	25.00
		1	13	24.50	24.51	24.46	25.00
		1	24	24.32	24.37	24.34	25.00
		12	0	23.48	23.52	23.45	24.00
		12	6	23.36	23.41	23.34	24.00
		12	13	23.33	23.36	23.32	24.00
		25	0	23.42	23.46	23.38	24.00
	16QAM	1	0	23.62	23.64	23.56	24.00
		1	13	23.53	23.56	23.54	24.00
		1	24	23.7	23.74	23.69	24.00
		12	0	22.48	22.50	22.47	23.00



		12	6	22.38	22.43	22.40	23.00
		12	13	22.38	22.42	22.35	23.00
		25	0	22.41	22.46	22.39	23.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				/	23230/782	/	
10MHz	QPSK	1	0	/	24.44	/	25.00
		1	25	/	24.46	/	25.00
		1	49	/	24.31	/	25.00
		25	0	/	23.43	/	24.00
		25	13	/	23.32	/	24.00
		25	25	/	23.28	/	24.00
		50	0	/	23.37	/	24.00
	16QAM	1	0	/	23.58	/	24.00
		1	25	/	23.51	/	24.00
		1	49	/	23.67	/	24.00
		25	0	/	22.44	/	23.00
		25	13	/	22.36	/	23.00
		25	25	/	22.33	/	23.00
		50	0	/	22.37	/	23.00

LTE FDD Band 26 DS11&2&5				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				26697/814.7	26865/831.5	27033/848.3	
1.4MHz	QPSK	1	0	24.38	24.26	24.51	25.00
		1	2	24.14	24.02	24.33	25.00
		1	5	24.23	24.31	24.52	25.00
		3	0	24.38	24.34	24.56	25.00
		3	2	24.17	24.09	24.35	25.00
		3	3	24.00	24.00	24.27	25.00
		6	0	23.19	23.21	23.47	24.00
	16QAM	1	0	23.33	23.47	23.57	24.00
		1	2	23.31	23.26	23.62	24.00
		1	5	23.52	23.66	23.60	24.00
		3	0	23.34	23.24	23.47	24.00
		3	2	23.06	23.00	23.34	24.00
		3	3	22.77	22.97	23.09	24.00
		6	0	22.03	22.20	22.49	23.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				26705/815.5	26865/831.5	27025/847.5	
3MHz	QPSK	1	0	24.37	24.28	24.50	25.00
		1	7	24.10	24.01	24.34	25.00
		1	14	24.23	24.31	24.52	25.00



		8	0	23.45	23.41	23.65	24.00
		8	4	23.27	23.15	23.42	24.00
		8	7	23.08	23.09	23.33	24.00
		15	0	23.19	23.24	23.48	24.00
	16QAM	1	0	23.33	23.45	23.57	24.00
		1	7	23.31	23.24	23.63	24.00
		1	14	23.51	23.68	23.59	24.00
		8	0	22.43	22.33	22.56	23.00
		8	4	22.14	22.08	22.42	23.00
		8	7	21.84	22.04	22.18	23.00
		15	0	22.04	22.20	22.47	23.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				26715/816.5	26865/831.5	27015/846.5	
5MHz	QPSK	1	0	24.39	24.29	24.53	25.00
		1	13	24.13	24.06	24.38	25.00
		1	24	24.25	24.35	24.55	25.00
		12	0	23.48	23.46	23.69	24.00
		12	6	23.30	23.20	23.46	24.00
		12	13	23.10	23.13	23.38	24.00
		25	0	23.23	23.26	23.52	24.00
	16QAM	1	0	23.35	23.48	23.59	24.00
		1	13	23.34	23.28	23.66	24.00
		1	24	23.54	23.70	23.62	24.00
		12	0	22.46	22.38	22.60	23.00
		12	6	22.16	22.12	22.45	23.00
		12	13	21.87	22.09	22.22	23.00
		25	0	22.07	22.25	22.51	23.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				26750/820	26865/831.5	26990/844	
10MHz	QPSK	1	0	24.38	24.25	24.51	25.00
		1	25	24.11	24.05	24.35	25.00
		1	49	24.22	24.30	24.51	25.00
		25	0	23.46	23.42	23.66	24.00
		25	13	23.27	23.15	23.42	24.00
		25	25	23.07	23.10	23.34	24.00
		50	0	23.21	23.22	23.47	24.00
	16QAM	1	0	23.30	23.46	23.57	24.00
		1	25	23.32	23.25	23.64	24.00
		1	49	23.51	23.66	23.59	24.00
		25	0	22.43	22.36	22.57	23.00
		25	13	22.13	22.07	22.41	23.00
		25	25	21.85	22.05	22.19	23.00
		50	0	22.04	22.20	22.47	23.00



Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				26775/822.5	26865/831.5	26965/841.5	
15MHz	QPSK	1	0	24.35	24.21	24.48	25.00
		1	38	24.10	24.01	24.33	25.00
		1	74	24.20	24.29	24.47	25.00
		36	0	23.43	23.37	23.62	24.00
		36	18	23.25	23.11	23.39	24.00
		36	39	23.04	23.05	23.30	24.00
		75	0	23.18	23.17	23.43	24.00
	16QAM	1	0	23.48	23.42	23.52	24.00
		1	38	23.28	23.23	23.60	24.00
		1	74	23.49	23.63	23.57	24.00
		36	0	22.40	22.32	22.54	23.00
		36	18	22.10	22.05	22.38	23.00
		36	39	21.82	22.00	22.15	23.00
		75	0	22.02	22.16	22.44	23.00

LTE TDD Band 38 DSI-1&DSI-5				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				37775/2572.5	38000/2595	38225/2617.5	
5MHz	QPSK	1	0	19.26	19.61	19.75	20.00
		1	13	19.54	19.78	19.81	20.00
		1	24	19.62	19.74	19.66	20.00
		12	0	19.31	19.60	19.57	20.00
		12	6	19.43	19.72	19.69	20.00
		12	13	19.42	19.66	19.67	20.00
		25	0	19.33	19.68	19.67	20.00
	16QAM	1	0	19.36	19.61	19.74	20.00
		1	13	19.67	19.76	19.79	20.00
		1	24	19.64	19.80	19.77	20.00
		12	0	19.39	19.62	19.61	20.00
		12	6	19.49	19.69	19.72	20.00
		12	13	19.38	19.69	19.75	20.00
		25	0	19.36	19.60	19.66	20.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				37800/2575	38000/2595	38200/2615	
10MHz	QPSK	1	0	19.27	19.60	19.77	20.00
		1	25	19.55	19.82	19.83	20.00
		1	49	19.63	19.76	19.68	20.00
		25	0	19.32	19.64	19.59	20.00
		25	13	19.45	19.75	19.72	20.00



		25	25	19.42	19.66	19.71	20.00
		50	0	19.33	19.69	19.68	20.00
	16QAM	1	0	19.35	19.59	19.74	20.00
		1	25	19.69	19.79	19.77	20.00
		1	49	19.65	19.78	19.79	20.00
		25	0	19.37	19.66	19.62	20.00
		25	13	19.48	19.68	19.73	20.00
		25	25	19.40	19.73	19.74	20.00
		50	0	19.35	19.62	19.66	20.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				37825/2577.5	38000/2595	38175/2612.5	
15MHz	QPSK	1	0	19.27	19.58	19.76	20.00
		1	38	19.55	19.82	19.82	20.00
		1	74	19.61	19.73	19.65	20.00
		36	0	19.32	19.61	19.58	20.00
		36	18	19.43	19.72	19.69	20.00
		36	39	19.41	19.67	19.68	20.00
		75	0	19.36	19.66	19.66	20.00
	16QAM	1	0	19.33	19.62	19.74	20.00
		1	38	19.68	19.77	19.80	20.00
		1	74	19.64	19.78	19.77	20.00
		36	0	19.39	19.65	19.62	20.00
		36	18	19.48	19.68	19.71	20.00
		36	39	19.39	19.70	19.76	20.00
		75	0	19.36	19.60	19.66	20.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				37850/2580	38000/2595	38150/2610	
20MHz	QPSK	1	0	19.24	19.54	19.73	20.00
		1	50	19.54	19.78	19.80	20.00
		1	99	19.59	19.72	19.62	20.00
		50	0	19.29	19.56	19.54	20.00
		50	25	19.41	19.68	19.66	20.00
		50	50	19.38	19.62	19.64	20.00
		100	0	19.33	19.61	19.62	20.00
	16QAM	1	0	19.31	19.58	19.69	20.00
		1	50	19.64	19.75	19.76	20.00
		1	99	19.62	19.75	19.75	20.00
		50	0	19.36	19.61	19.59	20.00
		50	25	19.45	19.66	19.68	20.00
		50	50	19.36	19.65	19.72	20.00
		100	0	19.34	19.56	19.63	20.00



LTE TDD Band 38 DSI-2				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				37775/2572.5	38000/2595	38225/2617.5	
5MHz	QPSK	1	0	21.25	21.55	21.70	22.00
		1	13	21.30	21.64	21.87	22.00
		1	24	21.33	21.65	21.72	22.00
		12	0	21.32	21.59	21.69	22.00
		12	6	21.30	21.56	21.76	22.00
		12	13	21.38	21.61	21.68	22.00
		25	0	21.30	21.53	21.67	22.00
	16QAM	1	0	21.41	21.67	21.72	22.00
		1	13	21.61	21.78	21.73	22.00
		1	24	21.55	21.88	21.79	22.00
		12	0	21.29	21.55	21.72	22.00
		12	6	21.39	21.60	21.51	22.00
		12	13	21.37	21.63	21.42	22.00
		25	0	21.29	21.56	21.68	22.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				37800/2575	38000/2595	38200/2615	
10MHz	QPSK	1	0	21.26	21.54	21.72	22.00
		1	25	21.31	21.68	21.89	22.00
		1	49	21.34	21.67	21.74	22.00
		25	0	21.33	21.63	21.71	22.00
		25	13	21.32	21.59	21.79	22.00
		25	25	21.38	21.61	21.72	22.00
		50	0	21.30	21.54	21.68	22.00
	16QAM	1	0	21.40	21.65	21.72	22.00
		1	25	21.63	21.81	21.71	22.00
		1	49	21.56	21.86	21.81	22.00
		25	0	21.27	21.59	21.73	22.00
		25	13	21.38	21.59	21.49	22.00
		25	25	21.39	21.67	21.53	22.00
		50	0	21.28	21.58	21.68	22.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				37825/2577.5	38000/2595	38175/2612.5	
15MHz	QPSK	1	0	21.26	21.52	21.71	22.00
		1	38	21.31	21.68	21.88	22.00
		1	74	21.32	21.64	21.71	22.00
		36	0	21.33	21.60	21.70	22.00
		36	18	21.30	21.56	21.76	22.00
		36	39	21.37	21.62	21.69	22.00
		75	0	21.33	21.51	21.66	22.00



	16QAM	1	0	21.38	21.68	21.72	22.00
		1	38	21.62	21.79	21.74	22.00
		1	74	21.55	21.86	21.79	22.00
		36	0	21.29	21.58	21.73	22.00
		36	18	21.38	21.59	21.60	22.00
		36	39	21.38	21.64	21.57	22.00
		75	0	21.29	21.56	21.68	22.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				37850/2580	38000/2595	38150/2610	
20MHz	QPSK	1	0	21.23	21.48	21.68	22.00
		1	50	21.30	21.64	21.86	22.00
		1	99	21.30	21.63	21.68	22.00
		50	0	21.30	21.55	21.66	22.00
		50	25	21.28	21.52	21.73	22.00
		50	50	21.34	21.57	21.65	22.00
		100	0	21.30	21.46	21.62	22.00
	16QAM	1	0	21.36	21.64	21.67	22.00
		1	50	21.58	21.77	21.70	22.00
		1	99	21.53	21.83	21.77	22.00
		50	0	21.26	21.54	21.70	22.00
		50	25	21.35	21.57	21.65	22.00
		50	50	21.35	21.59	21.60	22.00
		100	0	21.27	21.52	21.65	22.00

LTE TDD Band 66 DSI-1&DSI-2				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				131979/1710. 7	132322/174 5	132665/1779. 3	
1.4MHz	QPSK	1	0	22.32	22.34	22.66	23.50
		1	2	22.50	22.34	22.74	23.50
		1	5	22.55	22.50	22.71	23.50
		3	0	22.97	22.90	23.13	23.50
		3	2	23.00	22.91	23.12	23.50
		3	3	23.05	22.84	23.10	23.50
		6	0	22.62	22.46	22.77	23.50
	16QAM	1	0	22.84	22.62	22.92	23.50
		1	2	22.82	22.81	23.06	23.50
		1	5	23.04	22.82	22.55	23.50
		3	0	22.60	22.41	22.58	23.50
		3	2	22.64	22.38	22.70	23.50



		3	3	22.64	22.36	22.54	23.50
		6	0	21.62	21.45	21.72	22.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				131987/1711.5	132322/1745	132657/1778.5	
3MHz	QPSK	1	0	22.34	22.38	22.69	23.50
		1	7	22.48	22.37	22.78	23.50
		1	14	22.58	22.55	22.75	23.50
		8	0	22.57	22.52	22.76	23.50
		8	4	22.62	22.51	22.74	23.50
		8	7	22.65	22.45	22.70	23.50
		15	0	22.62	22.50	22.80	23.50
	16QAM	1	0	22.87	22.64	22.95	23.50
		1	7	22.85	22.81	23.10	23.50
		1	14	23.06	22.86	22.58	23.50
		8	0	21.71	21.54	21.70	22.50
		8	4	21.75	21.51	21.82	22.50
		8	7	21.74	21.48	21.67	22.50
		15	0	21.65	21.49	21.75	22.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				131997/1712.5	132322/1745	132647/1777.5	
5MHz	QPSK	1	0	22.31	22.36	22.65	23.50
		1	13	22.46	22.33	22.75	23.50
		1	24	22.55	22.50	22.71	23.50
		12	0	22.54	22.47	22.72	23.50
		12	6	22.60	22.47	22.69	23.50
		12	13	22.63	22.43	22.66	23.50
		25	0	22.62	22.49	22.78	23.50
	16QAM	1	0	22.84	22.60	22.92	23.50
		1	13	22.82	22.79	23.07	23.50
		1	24	23.03	22.84	22.54	23.50
		12	0	21.69	21.50	21.67	22.50
		12	6	21.72	21.46	21.78	22.50
		12	13	21.71	21.43	21.63	22.50
		25	0	21.63	21.45	21.70	22.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				40240/2555	40690/2600	41140/2645	
10MHz	QPSK	1	0	22.33	22.37	22.68	23.50
		1	25	22.49	22.38	22.79	23.50
		1	49	22.57	22.54	22.74	23.50
		25	0	22.57	22.52	22.76	23.50
		25	13	22.63	22.52	22.73	23.50



		25	25	22.65	22.47	22.71	23.50
		50	0	22.66	22.51	22.82	23.50
	16QAM	1	0	22.86	22.63	22.94	23.50
		1	25	22.85	22.83	23.10	23.50
		1	49	23.06	22.86	22.57	23.50
		25	0	21.72	21.55	21.71	22.50
		25	13	21.74	21.50	21.81	22.50
		25	25	21.74	21.48	21.67	22.50
		50	0	21.66	21.50	21.74	22.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				132047/1717.5	132322/1745	132597/1772.5	
15MHz	QPSK	1	0	22.32	22.33	22.66	23.50
		1	38	22.47	22.37	22.76	23.50
		1	74	22.54	22.49	22.70	23.50
		36	0	22.55	22.48	22.73	23.50
		36	18	22.60	22.47	22.69	23.50
		36	39	22.62	22.44	22.67	23.50
		75	0	22.64	22.47	22.77	23.50
	16QAM	1	0	22.81	22.61	22.92	23.50
		1	38	22.83	22.80	23.08	23.50
		1	74	23.03	22.82	22.54	23.50
		36	0	21.69	21.53	21.68	22.50
		36	18	21.71	21.45	21.77	22.50
		36	39	21.72	21.44	21.64	22.50
		75	0	21.63	21.45	21.70	22.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				132072/1720	132322/1745	132572/1770	
20MHz	QPSK	1	0	22.29	22.29	22.63	23.50
		1	50	22.46	22.33	22.74	23.50
		1	99	22.52	22.48	22.67	23.50
		50	0	22.52	22.43	22.69	23.50
		50	25	22.58	22.43	22.66	23.50
		50	50	22.59	22.39	22.63	23.50
		100	0	22.61	22.42	22.73	23.50
	16QAM	1	0	22.55	22.57	22.87	23.50
		1	50	22.79	22.78	23.04	23.50
		1	99	23.01	22.79	22.52	23.50
		50	0	21.66	21.49	21.65	22.50
		50	25	21.68	21.43	21.74	22.50
		50	50	21.69	21.39	21.60	22.50
		100	0	21.61	21.41	21.67	22.50

LTE TDD Band 66 DSI-5				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				131979/1710. 7	132322/174 5	132665/1779. 3	
1.4MHz	QPSK	1	0	20.50	20.51	20.69	21.50
		1	2	20.69	20.47	20.80	21.50
		1	5	20.85	20.66	20.57	21.50
		3	0	20.72	20.47	20.76	21.50
		3	2	20.58	20.39	20.74	21.50
		3	3	20.57	20.33	20.62	21.50
		6	0	20.67	20.46	20.74	21.50
	16QAM	1	0	20.69	20.76	21.03	21.50
		1	2	20.87	20.89	21.12	21.50
		1	5	21.01	20.92	20.47	21.50
		3	0	20.73	20.49	20.71	21.50
		3	2	20.66	20.43	20.66	21.50
		3	3	20.61	20.37	20.69	21.50
		6	0	20.65	20.40	20.72	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				131987/1711. 5	132322/174 5	132657/1778. 5	
3MHz	QPSK	1	0	20.52	20.55	20.72	21.50
		1	7	20.69	20.49	20.84	21.50
		1	14	20.88	20.71	20.61	21.50
		8	0	20.76	20.54	20.83	21.50
		8	4	20.61	20.47	20.80	21.50
		8	7	20.61	20.38	20.66	21.50
		15	0	20.69	20.50	20.77	21.50
	16QAM	1	0	20.72	20.78	21.06	21.50
		1	7	20.90	20.91	21.16	21.50
		1	14	21.03	20.96	20.50	21.50
		8	0	20.78	20.53	20.74	21.50
		8	4	20.71	20.50	20.72	21.50
		8	7	20.65	20.43	20.76	21.50
		15	0	20.68	20.44	20.75	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				131997/1712. 5	132322/174 5	132647/1777. 5	
5MHz	QPSK	1	0	20.49	20.53	20.68	21.50
		1	13	20.67	20.45	20.81	21.50
		1	24	20.85	20.66	20.57	21.50



		12	0	20.73	20.49	20.79	21.50
		12	6	20.59	20.43	20.75	21.50
		12	13	20.59	20.36	20.62	21.50
		25	0	20.67	20.49	20.75	21.50
	16QAM	1	0	20.69	20.74	21.03	21.50
		1	13	20.87	20.89	21.13	21.50
		1	24	21.00	20.94	20.46	21.50
		12	0	20.76	20.49	20.71	21.50
		12	6	20.68	20.45	20.68	21.50
		12	13	20.62	20.38	20.72	21.50
		25	0	20.66	20.40	20.70	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				40240/2555	40690/2600	41140/2645	
10MHz	QPSK	1	0	20.50	20.52	20.70	21.50
		1	25	20.68	20.49	20.83	21.50
		1	49	20.86	20.68	20.59	21.50
		25	0	20.74	20.53	20.81	21.50
		25	13	20.61	20.46	20.78	21.50
		25	25	20.59	20.36	20.66	21.50
		50	0	20.67	20.50	20.76	21.50
	16QAM	1	0	20.68	20.72	21.03	21.50
		1	25	20.89	20.92	21.11	21.50
		1	49	21.01	20.92	20.48	21.50
		25	0	20.74	20.53	20.72	21.50
		25	13	20.67	20.44	20.69	21.50
		25	25	20.64	20.42	20.71	21.50
		50	0	20.65	20.42	20.70	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				132047/1717.5	132322/1745	132597/1772.5	
15MHz	QPSK	1	0	20.50	20.50	20.69	21.50
		1	38	20.68	20.49	20.82	21.50
		1	74	20.84	20.65	20.56	21.50
		36	0	20.74	20.50	20.80	21.50
		36	18	20.59	20.43	20.75	21.50
		36	39	20.58	20.37	20.63	21.50
		75	0	20.70	20.47	20.74	21.50
	16QAM	1	0	20.66	20.75	21.03	21.50
		1	38	20.88	20.90	21.14	21.50
		1	74	21.00	20.92	20.46	21.50
		36	0	20.76	20.52	20.72	21.50
		36	18	20.67	20.44	20.67	21.50
		36	39	20.63	20.39	20.73	21.50



		75	0	20.66	20.40	20.70	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				132072/1720	132322/1745	132572/1770	
20MHz	QPSK	1	0	20.47	20.46	20.66	21.50
		1	50	20.67	20.45	20.80	21.50
		1	99	20.82	20.64	20.53	21.50
		50	0	20.71	20.45	20.76	21.50
		50	25	20.57	20.39	20.72	21.50
		50	50	20.55	20.32	20.59	21.50
		100	0	20.67	20.42	20.70	21.50
	16QAM	1	0	20.64	20.71	20.98	21.50
		1	50	20.84	20.88	21.10	21.50
		1	99	20.98	20.89	20.44	21.50
		50	0	20.73	20.48	20.69	21.50
		50	25	20.64	20.42	20.64	21.50
		50	50	20.60	20.34	20.69	21.50
		100	0	20.64	20.36	20.67	21.50

Second - Antenna

LTE FDD Band 2 DSI-1				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				18607/1850.7	18900/1880	19193/1909.3	
1.4MHz	QPSK	1	0	19.07	19.06	19.06	19.90
		1	2	19.12	18.94	19.10	19.90
		1	5	18.73	18.66	18.57	19.90
		3	0	19.15	19.03	19.09	19.90
		3	2	19.21	19.00	19.14	19.90
		3	3	18.91	18.92	18.91	19.90
		6	0	18.98	18.98	19.14	19.90
	16QAM	1	0	19.49	19.48	19.46	19.90
		1	2	19.63	19.40	19.62	19.90
		1	5	19.39	19.24	19.08	19.90
		3	0	19.01	19.11	19.06	19.90
		3	2	19.11	18.99	19.24	19.90
		3	3	18.83	18.94	18.98	19.90
		6	0	18.98	18.98	19.10	19.90
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18615/1851.5	18900/1880	19185/1908.5	
3MHz	QPSK	1	0	19.09	19.10	19.09	19.90



		1	7	19.12	18.96	19.14	19.90
		1	14	18.76	18.71	18.61	19.90
		8	0	19.19	19.10	19.16	19.90
		8	4	19.24	19.08	19.20	19.90
		8	7	18.95	18.97	18.95	19.90
		15	0	19.00	19.02	19.17	19.90
		15	0	19.00	19.02	19.17	19.90
	16QAM	1	0	19.52	19.50	19.49	19.90
		1	7	19.66	19.42	19.66	19.90
		1	14	19.41	19.28	19.11	19.90
		8	0	19.06	19.15	19.09	19.90
		8	4	19.16	19.06	19.30	19.90
		8	7	18.87	19.00	19.05	19.90
		15	0	19.01	19.02	19.13	19.90
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18625/1852.5	18900/1880	19175/1907.5	
5MHz	QPSK	1	0	19.06	19.08	19.05	19.90
		1	13	19.10	18.92	19.11	19.90
		1	24	18.73	18.66	18.57	19.90
		12	0	19.16	19.05	19.12	19.90
		12	6	19.22	19.04	19.15	19.90
		12	13	18.93	18.95	18.91	19.90
		25	0	18.98	19.01	19.15	19.90
	16QAM	1	0	19.49	19.46	19.46	19.90
		1	13	19.63	19.40	19.63	19.90
		1	24	19.38	19.26	19.07	19.90
		12	0	19.04	19.11	19.06	19.90
		12	6	19.13	19.01	19.26	19.90
		12	13	18.84	18.95	19.01	19.90
		25	0	18.99	18.98	19.08	19.90
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18650/1855	18900/1880	19150/1905	
10MHz	QPSK	1	0	19.07	19.07	19.07	19.90
		1	25	19.11	18.96	19.13	19.90
		1	49	18.74	18.68	18.59	19.90
		25	0	19.17	19.09	19.14	19.90
		25	13	19.24	19.07	19.18	19.90
		25	25	18.93	18.95	18.95	19.90
		50	0	18.98	19.02	19.16	19.90
	16QAM	1	0	19.48	19.44	19.46	19.90
		1	25	19.65	19.43	19.61	19.90
		1	49	19.39	19.24	19.09	19.90
		25	0	19.02	19.15	19.07	19.90
		25	13	19.12	19.00	19.27	19.90



		25	25	18.86	18.99	19.00	19.90
		50	0	18.98	19.00	19.08	19.90
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18675/1857.5	18900/1880	19125/1902.5	
15MHz	QPSK	1	0	19.07	19.05	19.06	19.90
		1	38	19.11	18.96	19.12	19.90
		1	74	18.72	18.65	18.56	19.90
		36	0	19.17	19.06	19.13	19.90
		36	18	19.22	19.04	19.15	19.90
		36	39	18.92	18.96	18.92	19.90
		75	0	19.01	18.99	19.14	19.90
	16QAM	1	0	19.46	19.47	19.46	19.90
		1	38	19.64	19.41	19.64	19.90
		1	74	19.38	19.24	19.07	19.90
		36	0	19.04	19.14	19.07	19.90
		36	18	19.12	19.00	19.25	19.90
		36	39	18.85	18.96	19.02	19.90
		75	0	18.99	18.98	19.08	19.90
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18700/1860	18900/1880	19100/1900	
20MHz	QPSK	1	0	19.04	19.01	19.03	19.90
		1	50	19.10	18.92	19.08	19.90
		1	99	18.70	18.64	18.53	19.90
		50	0	19.14	19.01	19.09	19.90
		50	25	19.20	19.00	19.12	19.90
		50	50	18.89	18.91	18.88	19.90
		100	0	18.98	18.94	19.10	19.90
	16QAM	1	0	19.44	19.43	19.41	19.90
		1	50	19.60	19.39	19.60	19.90
		1	99	19.36	19.21	19.05	19.90
		50	0	19.01	19.10	19.04	19.90
		50	25	19.09	18.98	19.22	19.90
		50	50	18.82	18.91	18.98	19.90
		100	0	18.97	18.94	19.05	19.90



LTE FDD Band 2 DSI-2				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				18607/1850.7	18900/1880	19193/1909.3	
1.4MHz	QPSK	1	0	20.64	20.44	20.51	21.40
		1	2	20.66	20.45	20.68	21.40
		1	5	20.32	20.13	20.09	21.40
		3	0	20.70	20.48	20.54	21.40
		3	2	20.73	20.45	20.57	21.40
		3	3	20.39	20.39	20.35	21.40
		6	0	20.55	20.43	20.59	21.40
	16QAM	1	0	20.78	20.87	20.84	21.40
		1	2	20.89	20.85	20.90	21.40
		1	5	20.47	20.58	20.35	21.40
		3	0	20.54	20.49	20.59	21.40
		3	2	20.49	20.48	20.68	21.40
		3	3	20.40	20.30	20.44	21.40
		6	0	20.53	20.36	20.53	21.40
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18615/1851.5	18900/1880	19185/1908.5	
3MHz	QPSK	1	0	20.66	20.48	20.54	21.40
		1	7	20.66	20.47	20.72	21.40
		1	14	20.35	20.18	20.13	21.40
		8	0	20.74	20.55	20.61	21.40
		8	4	20.76	20.53	20.63	21.40
		8	7	20.43	20.44	20.39	21.40
		15	0	20.57	20.47	20.62	21.40
	16QAM	1	0	20.81	20.89	20.87	21.40
		1	7	20.92	20.87	20.94	21.40
		1	14	20.49	20.62	20.38	21.40
		8	0	20.59	20.53	20.62	21.40
		8	4	20.54	20.55	20.74	21.40
		8	7	20.44	20.36	20.51	21.40
		15	0	20.56	20.40	20.56	21.40
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18625/1852.5	18900/1880	19175/1907.5	
5MHz	QPSK	1	0	20.63	20.46	20.50	21.40
		1	13	20.64	20.43	20.69	21.40
		1	24	20.32	20.13	20.09	21.40
		12	0	20.71	20.50	20.57	21.40
		12	6	20.74	20.49	20.58	21.40
		12	13	20.41	20.42	20.35	21.40



	16QAM	25	0	20.55	20.46	20.60	21.40
		1	0	20.78	20.85	20.84	21.40
		1	13	20.89	20.85	20.91	21.40
		1	24	20.46	20.60	20.34	21.40
		12	0	20.57	20.49	20.59	21.40
		12	6	20.51	20.50	20.70	21.40
		12	13	20.41	20.31	20.47	21.40
		25	0	20.54	20.36	20.51	21.40
		25	0	20.54	20.36	20.51	21.40
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18650/1855	18900/1880	19150/1905	
10MHz	QPSK	1	0	20.64	20.45	20.52	21.40
		1	25	20.65	20.47	20.71	21.40
		1	49	20.33	20.15	20.11	21.40
		25	0	20.72	20.54	20.59	21.40
		25	13	20.76	20.52	20.61	21.40
		25	25	20.41	20.42	20.39	21.40
		50	0	20.55	20.47	20.61	21.40
	16QAM	1	0	20.77	20.83	20.84	21.40
		1	25	20.91	20.88	20.89	21.40
		1	49	20.47	20.58	20.36	21.40
		25	0	20.55	20.53	20.60	21.40
		25	13	20.50	20.49	20.71	21.40
		25	25	20.43	20.35	20.46	21.40
		50	0	20.53	20.38	20.51	21.40
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18675/1857.5	18900/1880	19125/1902.5	
15MHz	QPSK	1	0	20.64	20.43	20.51	21.40
		1	38	20.65	20.47	20.70	21.40
		1	74	20.31	20.12	20.08	21.40
		36	0	20.72	20.51	20.58	21.40
		36	18	20.74	20.49	20.58	21.40
		36	39	20.40	20.43	20.36	21.40
		75	0	20.58	20.44	20.59	21.40
	16QAM	1	0	20.75	20.86	20.84	21.40
		1	38	20.90	20.86	20.92	21.40
		1	74	20.46	20.58	20.34	21.40
		36	0	20.57	20.52	20.60	21.40
		36	18	20.50	20.49	20.69	21.40
		36	39	20.42	20.32	20.48	21.40
		75	0	20.54	20.36	20.51	21.40
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18700/1860	18900/1880	19100/1900	
20MHz	QPSK	1	0	20.61	20.39	20.48	21.40



		1	50	20.64	20.43	20.68	21.40
		1	99	20.29	20.11	20.05	21.40
		50	0	20.69	20.46	20.54	21.40
		50	25	20.72	20.45	20.55	21.40
		50	50	20.37	20.38	20.32	21.40
		100	0	20.55	20.39	20.55	21.40
	16QAM	1	0	20.73	20.82	20.79	21.40
		1	50	20.86	20.84	20.88	21.40
		1	99	20.44	20.55	20.32	21.40
		50	0	20.54	20.48	20.57	21.40
		50	25	20.47	20.47	20.66	21.40
		50	50	20.39	20.27	20.44	21.40
		100	0	20.52	20.32	20.48	21.40

LTE FDD Band 2 DSI-5				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				18607/1850.7	18900/1880	19193/1909.3	
1.4MHz	QPSK	1	0	19.18	19.29	19.27	20.40
		1	2	19.20	19.30	19.34	20.40
		1	5	18.89	18.78	18.84	20.40
		3	0	19.20	19.19	19.34	20.40
		3	2	19.25	19.24	19.31	20.40
		3	3	19.01	19.02	19.15	20.40
		6	0	19.12	19.10	19.32	20.40
	16QAM	1	0	19.28	19.51	19.41	20.40
		1	2	19.87	19.51	19.64	20.40
		1	5	19.10	19.04	19.73	20.40
		3	0	19.12	19.18	19.58	20.40
		3	2	19.25	18.98	19.26	20.40
		3	3	19.10	19.04	19.35	20.40
		6	0	18.93	19.10	19.30	20.40
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18615/1851.5	18900/1880	19185/1908.5	
3MHz	QPSK	1	0	19.20	19.33	19.30	20.40
		1	7	19.20	19.32	19.38	20.40
		1	14	18.92	18.83	18.88	20.40
		8	0	19.24	19.26	19.41	20.40
		8	4	19.28	19.32	19.37	20.40
		8	7	19.05	19.07	19.19	20.40
		15	0	19.14	19.14	19.35	20.40
	16QAM	1	0	19.31	19.53	19.44	20.40
		1	7	19.90	19.53	19.68	20.40



		1	14	19.12	19.08	19.76	20.40
		8	0	19.17	19.22	19.61	20.40
		8	4	19.30	19.05	19.32	20.40
		8	7	19.14	19.10	19.42	20.40
		15	0	18.96	19.14	19.33	20.40
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18625/1852.5	18900/1880	19175/1907.5	
5MHz	QPSK	1	0	19.17	19.31	19.26	20.40
		1	13	19.18	19.28	19.35	20.40
		1	24	18.89	18.78	18.84	20.40
		12	0	19.21	19.21	19.37	20.40
		12	6	19.26	19.28	19.32	20.40
		12	13	19.03	19.05	19.15	20.40
		25	0	19.12	19.13	19.33	20.40
	16QAM	1	0	19.28	19.49	19.41	20.40
		1	13	19.87	19.51	19.65	20.40
		1	24	19.09	19.06	19.72	20.40
		12	0	19.15	19.18	19.58	20.40
		12	6	19.27	19.00	19.28	20.40
		12	13	19.11	19.05	19.38	20.40
		25	0	18.94	19.10	19.28	20.40
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18650/1855	18900/1880	19150/1905	
10MHz	QPSK	1	0	19.18	19.30	19.28	20.40
		1	25	19.19	19.32	19.37	20.40
		1	49	18.90	18.80	18.86	20.40
		25	0	19.22	19.25	19.39	20.40
		25	13	19.28	19.31	19.35	20.40
		25	25	19.03	19.05	19.19	20.40
		50	0	19.12	19.14	19.34	20.40
	16QAM	1	0	19.27	19.47	19.41	20.40
		1	25	19.89	19.54	19.63	20.40
		1	49	19.10	19.04	19.74	20.40
		25	0	19.13	19.22	19.59	20.40
		25	13	19.26	18.99	19.29	20.40
		25	25	19.13	19.09	19.37	20.40
		50	0	18.93	19.12	19.28	20.40
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18675/1857.5	18900/1880	19125/1902.5	
15MHz	QPSK	1	0	19.18	19.28	19.27	20.40
		1	38	19.19	19.32	19.36	20.40
		1	74	18.88	18.77	18.83	20.40
		36	0	19.22	19.22	19.38	20.40



		36	18	19.26	19.28	19.32	20.40
		36	39	19.02	19.06	19.16	20.40
		75	0	19.15	19.11	19.32	20.40
	16QAM	1	0	19.25	19.50	19.41	20.40
		1	38	19.88	19.52	19.66	20.40
		1	74	19.09	19.04	19.72	20.40
		36	0	19.15	19.21	19.59	20.40
		36	18	19.26	18.99	19.27	20.40
		36	39	19.12	19.06	19.39	20.40
		75	0	18.94	19.10	19.28	20.40
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18700/1860	18900/1880	19100/1900	
20MHz	QPSK	1	0	19.15	19.24	19.24	20.40
		1	50	19.18	19.28	19.34	20.40
		1	99	18.86	18.76	18.80	20.40
		50	0	19.19	19.17	19.34	20.40
		50	25	19.24	19.24	19.29	20.40
		50	50	18.99	19.01	19.12	20.40
		100	0	19.12	19.06	19.28	20.40
	16QAM	1	0	19.23	19.46	19.36	20.40
		1	50	19.84	19.50	19.62	20.40
		1	99	19.07	19.01	19.70	20.40
		50	0	19.12	19.17	19.56	20.40
		50	25	19.23	18.97	19.24	20.40
		50	50	19.09	19.01	19.35	20.40
		100	0	18.92	19.06	19.25	20.40

LTE FDD Band 4 DSI-1				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				19957/1710.7	20175/1732.5	20393/1754.3	
1.4MHz	QPSK	1	0	17.64	17.50	17.71	18.50
		1	2	17.66	17.75	17.29	18.50
		1	5	17.54	17.06	16.72	18.50
		3	0	17.58	17.52	17.92	18.50
		3	2	17.48	17.48	17.47	18.50
		3	3	17.45	17.44	17.41	18.50
		6	0	17.48	17.46	17.49	18.50
	16QAM	1	0	18.19	17.89	18.19	18.50
		1	2	17.76	18.43	18.00	18.50
		1	5	17.87	17.83	17.25	18.50



		3	0	17.62	17.46	17.91	18.50
		3	2	17.52	17.44	17.52	18.50
		3	3	17.45	17.53	17.45	18.50
		6	0	17.47	17.43	17.42	18.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				19965/1711.5	20175/1732.5	20385/1753.5	
3MHz	QPSK	1	0	17.66	17.54	17.74	18.50
		1	7	17.66	17.77	17.33	18.50
		1	14	17.57	17.11	16.76	18.50
		8	0	17.62	17.59	17.99	18.50
		8	4	17.51	17.56	17.53	18.50
		8	7	17.49	17.49	17.45	18.50
		15	0	17.50	17.50	17.52	18.50
	16QAM	1	0	18.22	17.91	18.22	18.50
		1	7	17.79	18.45	18.04	18.50
		1	14	17.89	17.87	17.28	18.50
		8	0	17.67	17.50	17.94	18.50
		8	4	17.57	17.51	17.58	18.50
		8	7	17.49	17.59	17.52	18.50
		15	0	17.50	17.47	17.45	18.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				19975/1712.5	20175/1732.5	20375/1752.5	
5MHz	QPSK	1	0	17.63	17.52	17.70	18.50
		1	13	17.64	17.73	17.30	18.50
		1	24	17.54	17.06	16.72	18.50
		12	0	17.59	17.54	17.95	18.50
		12	6	17.49	17.52	17.48	18.50
		12	13	17.47	17.47	17.41	18.50
		25	0	17.48	17.49	17.50	18.50
	16QAM	1	0	18.19	17.87	18.19	18.50
		1	13	17.76	18.43	18.01	18.50
		1	24	17.86	17.85	17.24	18.50
		12	0	17.65	17.46	17.91	18.50
		12	6	17.54	17.46	17.54	18.50
		12	13	17.46	17.54	17.48	18.50
		25	0	17.48	17.43	17.40	18.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20000/1715	20175/1732.5	20350/1750	
10MHz	QPSK	1	0	17.64	17.51	17.72	18.50
		1	25	17.65	17.77	17.32	18.50
		1	49	17.55	17.08	16.74	18.50
		25	0	17.60	17.58	17.97	18.50
		25	13	17.51	17.55	17.51	18.50



		25	25	17.47	17.47	17.45	18.50
		50	0	17.48	17.50	17.51	18.50
	16QAM	1	0	18.18	17.85	18.19	18.50
		1	25	17.78	18.46	17.99	18.50
		1	49	17.87	17.83	17.26	18.50
		25	0	17.63	17.50	17.92	18.50
		25	13	17.53	17.45	17.55	18.50
		25	25	17.48	17.58	17.47	18.50
		50	0	17.47	17.45	17.40	18.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20025/1717.5	20175/1732.5	20325/1747.5	
15MHz	QPSK	1	0	17.64	17.49	17.71	18.50
		1	38	17.65	17.77	17.31	18.50
		1	74	17.53	17.05	16.71	18.50
		36	0	17.60	17.55	17.96	18.50
		36	18	17.49	17.52	17.48	18.50
		36	39	17.46	17.48	17.42	18.50
		75	0	17.51	17.47	17.49	18.50
	16QAM	1	0	18.16	17.88	18.19	18.50
		1	38	17.77	18.44	18.02	18.50
		1	74	17.86	17.83	17.24	18.50
		36	0	17.65	17.49	17.92	18.50
		36	18	17.53	17.45	17.53	18.50
		36	39	17.47	17.55	17.49	18.50
		75	0	17.48	17.43	17.40	18.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20050/1720	20175/1732.5	20300/1745	
20MHz	QPSK	1	0	17.61	17.45	17.68	18.50
		1	50	17.64	17.73	17.29	18.50
		1	99	17.51	17.04	16.68	18.50
		50	0	17.57	17.50	17.92	18.50
		50	25	17.47	17.48	17.45	18.50
		50	50	17.43	17.43	17.38	18.50
		100	0	17.48	17.42	17.45	18.50
	16QAM	1	0	18.14	17.84	18.14	18.50
		1	50	17.73	18.42	17.98	18.50
		1	99	17.84	17.80	17.22	18.50
		50	0	17.62	17.45	17.89	18.50
		50	25	17.50	17.43	17.50	18.50
		50	50	17.44	17.50	17.45	18.50
		100	0	17.46	17.39	17.37	18.50

LTE FDD Band 4	Conducted Power(dBm)	Tune-up
----------------	----------------------	---------



DSI-2							Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				19957/1710.7	20175/1732.5	20393/1754.3	
1.4MHz	QPSK	1	0	20.19	20.09	20.01	21.00
		1	2	20.25	20.05	19.57	21.00
		1	5	20.14	19.52	19.30	21.00
		3	0	20.17	19.96	20.30	21.00
		3	2	19.97	19.91	19.95	21.00
		3	3	19.96	19.90	19.92	21.00
		6	0	20.00	19.96	19.90	21.00
	16QAM	1	0	20.53	20.35	20.43	21.00
		1	2	20.44	20.52	19.97	21.00
		1	5	20.39	19.63	19.70	21.00
		3	0	20.09	19.96	20.50	21.00
		3	2	20.09	19.89	19.87	21.00
		3	3	20.03	19.88	19.79	21.00
		6	0	19.90	19.92	19.85	21.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				19965/1711.5	20175/1732.5	20385/1753.5	
3MHz	QPSK	1	0	20.21	20.13	20.04	21.00
		1	7	20.25	20.07	19.61	21.00
		1	14	20.17	19.57	19.34	21.00
		8	0	20.21	20.03	20.37	21.00
		8	4	20.00	19.99	20.01	21.00
		8	7	20.00	19.95	19.96	21.00
		15	0	20.02	20.00	19.93	21.00
	16QAM	1	0	20.56	20.37	20.46	21.00
		1	7	20.47	20.54	20.01	21.00
		1	14	20.41	19.67	19.73	21.00
		8	0	20.14	20.00	20.53	21.00
		8	4	20.14	19.96	19.93	21.00
		8	7	20.07	19.94	19.86	21.00
		15	0	19.93	19.96	19.88	21.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				19975/1712.5	20175/1732.5	20375/1752.5	
5MHz	QPSK	1	0	20.18	20.11	20.00	21.00
		1	13	20.23	20.03	19.58	21.00
		1	24	20.14	19.52	19.30	21.00
		12	0	20.18	19.98	20.33	21.00
		12	6	19.98	19.95	19.96	21.00
		12	13	19.98	19.93	19.92	21.00
		25	0	20.00	19.99	19.91	21.00
	16QAM	1	0	20.53	20.33	20.43	21.00



		1	13	20.44	20.52	19.98	21.00
		1	24	20.38	19.65	19.69	21.00
		12	0	20.12	19.96	20.50	21.00
		12	6	20.11	19.91	19.89	21.00
		12	13	20.04	19.89	19.82	21.00
		25	0	19.91	19.92	19.83	21.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20000/1715	20175/1732.5	20350/1750	
10MHz	QPSK	1	0	20.19	20.10	20.02	21.00
		1	25	20.24	20.07	19.60	21.00
		1	49	20.15	19.54	19.32	21.00
		25	0	20.19	20.02	20.35	21.00
		25	13	20.00	19.98	19.99	21.00
		25	25	19.98	19.93	19.96	21.00
		50	0	20.00	20.00	19.92	21.00
	16QAM	1	0	20.52	20.31	20.43	21.00
		1	25	20.46	20.55	19.96	21.00
		1	49	20.39	19.63	19.71	21.00
		25	0	20.10	20.00	20.51	21.00
		25	13	20.10	19.90	19.90	21.00
		25	25	20.06	19.93	19.81	21.00
		50	0	19.90	19.94	19.83	21.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20025/1717.5	20175/1732.5	20325/1747.5	
15MHz	QPSK	1	0	20.19	20.08	20.01	21.00
		1	38	20.24	20.07	19.59	21.00
		1	74	20.13	19.51	19.29	21.00
		36	0	20.19	19.99	20.34	21.00
		36	18	19.98	19.95	19.96	21.00
		36	39	19.97	19.94	19.93	21.00
		75	0	20.03	19.97	19.90	21.00
	16QAM	1	0	20.50	20.34	20.43	21.00
		1	38	20.45	20.53	19.99	21.00
		1	74	20.38	19.63	19.69	21.00
		36	0	20.12	19.99	20.51	21.00
		36	18	20.10	19.90	19.88	21.00
		36	39	20.05	19.90	19.83	21.00
		75	0	19.91	19.92	19.83	21.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20050/1720	20175/1732.5	20300/1745	
20MHz	QPSK	1	0	20.16	20.04	19.98	21.00
		1	50	20.23	20.03	19.57	21.00
		1	99	20.11	19.50	19.26	21.00



		50	0	20.16	19.94	20.30	21.00
		50	25	19.96	19.91	19.93	21.00
		50	50	19.94	19.89	19.89	21.00
		100	0	20.00	19.92	19.86	21.00
	16QAM	1	0	20.48	20.30	20.38	21.00
		1	50	20.41	20.51	19.95	21.00
		1	99	20.36	19.60	19.67	21.00
		50	0	20.09	19.95	20.48	21.00
		50	25	20.07	19.88	19.85	21.00
		50	50	20.02	19.85	19.79	21.00
		100	0	19.89	19.88	19.80	21.00

LTE FDD Band 4 DSI-5				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				19957/1710.7	20175/1732.5	20393/1754.3	
1.4MHz	QPSK	1	0	20.23	19.47	19.69	20.50
		1	2	20.11	19.41	19.21	20.50
		1	5	20.10	19.16	18.66	20.50
		3	0	20.15	19.47	19.82	20.50
		3	2	20.10	19.39	19.45	20.50
		3	3	19.43	19.35	19.35	20.50
		6	0	19.43	19.41	19.45	20.50
	16QAM	1	0	20.07	20.05	20.28	20.50
		1	2	19.97	20.40	19.90	20.50
		1	5	19.94	19.79	19.46	20.50
		3	0	19.62	19.44	19.89	20.50
		3	2	19.49	19.42	19.52	20.50
		3	3	19.39	19.44	19.43	20.50
		6	0	19.44	19.47	19.46	20.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				19965/1711.5	20175/1732.5	20385/1753.5	
3MHz	QPSK	1	0	20.25	19.51	19.72	20.50
		1	7	20.11	19.43	19.25	20.50
		1	14	20.13	19.21	18.70	20.50
		8	0	20.19	19.54	19.89	20.50
		8	4	20.13	19.47	19.51	20.50
		8	7	19.47	19.40	19.39	20.50
		15	0	19.45	19.45	19.48	20.50
	16QAM	1	0	20.10	20.07	20.31	20.50
		1	7	20.00	20.42	19.94	20.50
		1	14	19.96	19.83	19.49	20.50



		8	0	19.67	19.48	19.92	20.50
		8	4	19.54	19.49	19.58	20.50
		8	7	19.43	19.50	19.50	20.50
		15	0	19.47	19.51	19.49	20.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				19975/1712.5	20175/1732.5	20375/1752.5	
5MHz	QPSK	1	0	20.22	19.49	19.68	20.50
		1	13	20.09	19.39	19.22	20.50
		1	24	20.10	19.16	18.66	20.50
		12	0	20.16	19.49	19.85	20.50
		12	6	20.11	19.43	19.46	20.50
		12	13	19.45	19.38	19.35	20.50
		25	0	19.43	19.44	19.46	20.50
	16QAM	1	0	20.07	20.03	20.28	20.50
		1	13	19.97	20.40	19.91	20.50
		1	24	19.93	19.81	19.45	20.50
		12	0	19.65	19.44	19.89	20.50
		12	6	19.51	19.44	19.54	20.50
		12	13	19.40	19.45	19.46	20.50
		25	0	19.45	19.47	19.44	20.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20000/1715	20175/1732.5	20350/1750	
10MHz	QPSK	1	0	20.23	19.48	19.70	20.50
		1	25	20.10	19.43	19.24	20.50
		1	49	20.11	19.18	18.68	20.50
		25	0	20.17	19.53	19.87	20.50
		25	13	20.13	19.46	19.49	20.50
		25	25	19.45	19.38	19.39	20.50
		50	0	19.43	19.45	19.47	20.50
	16QAM	1	0	20.06	20.01	20.28	20.50
		1	25	19.99	20.43	19.89	20.50
		1	49	19.94	19.79	19.47	20.50
		25	0	19.63	19.48	19.90	20.50
		25	13	19.50	19.43	19.55	20.50
		25	25	19.42	19.49	19.45	20.50
		50	0	19.44	19.49	19.44	20.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20025/1717.5	20175/1732.5	20325/1747.5	
15MHz	QPSK	1	0	20.23	19.46	19.69	20.50
		1	38	20.10	19.43	19.23	20.50
		1	74	20.09	19.15	18.65	20.50
		36	0	20.17	19.50	19.86	20.50
		36	18	20.11	19.43	19.46	20.50



		36	39	19.44	19.39	19.36	20.50
		75	0	19.46	19.42	19.45	20.50
	16QAM	1	0	20.04	20.04	20.28	20.50
		1	38	19.98	20.41	19.92	20.50
		1	74	19.93	19.79	19.45	20.50
		36	0	19.65	19.47	19.90	20.50
		36	18	19.50	19.43	19.53	20.50
		36	39	19.41	19.46	19.47	20.50
		75	0	19.45	19.47	19.44	20.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20050/1720	20175/1732.5	20300/1745	
20MHz	QPSK	1	0	20.20	19.42	19.66	20.50
		1	50	20.09	19.39	19.21	20.50
		1	99	20.07	19.14	18.62	20.50
		50	0	20.14	19.45	19.82	20.50
		50	25	20.09	19.39	19.43	20.50
		50	50	19.41	19.34	19.32	20.50
		100	0	19.43	19.37	19.41	20.50
	16QAM	1	0	20.02	20.00	20.23	20.50
		1	50	19.94	20.39	19.88	20.50
		1	99	19.91	19.76	19.43	20.50
		50	0	19.62	19.43	19.87	20.50
		50	25	19.47	19.41	19.50	20.50
		50	50	19.38	19.41	19.43	20.50
		100	0	19.43	19.43	19.41	20.50

LTE FDD Band 7 DSI-1&DSI-2				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				20775/2502. 5	21100/2535	21425/2567. 5	
5MHz	QPSK	1	0	21.54	21.19	21.48	23.10
		1	13	21.77	21.52	21.21	23.10
		1	24	21.17	21.64	21.37	23.10
		12	0	20.61	20.41	20.41	22.10
		12	6	20.60	20.62	20.48	22.10
		12	13	20.40	20.66	20.55	22.10
		25	0	20.47	20.53	20.55	22.10
	16QAM	1	0	20.78	20.39	20.78	22.10
		1	13	20.76	20.76	20.77	22.10
		1	24	20.68	20.91	20.77	22.10



		12	0	19.62	19.37	19.41	21.10
		12	6	19.60	19.58	19.54	21.10
		12	13	19.29	19.63	19.71	21.10
		25	0	19.45	19.53	19.53	21.10
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20800/2505	21100/2535	21400/2565	
10MHz	QPSK	1	0	21.56	21.20	21.51	23.10
		1	25	21.80	21.57	21.25	23.10
		1	49	21.19	21.68	21.40	23.10
		25	0	20.64	20.46	20.45	22.10
		25	13	20.63	20.67	20.52	22.10
		25	25	20.42	20.70	20.60	22.10
		50	0	20.51	20.55	20.59	22.10
	16QAM	1	0	20.80	20.42	20.80	22.10
		1	25	20.79	20.80	20.80	22.10
		1	49	20.71	20.93	20.80	22.10
		25	0	19.65	19.42	19.45	21.10
		25	13	19.62	19.62	19.57	21.10
		25	25	19.32	19.68	19.75	21.10
		50	0	19.48	19.58	19.57	21.10
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20825/2507.5	21100/2535	21375/2562.5	
15MHz	QPSK	1	0	21.55	21.16	21.49	23.10
		1	38	21.78	21.56	21.22	23.10
		1	74	21.16	21.63	21.36	23.10
		36	0	20.62	20.42	20.42	22.10
		36	18	20.60	20.62	20.48	22.10
		36	39	20.39	20.67	20.56	22.10
		75	0	20.49	20.51	20.54	22.10
	16QAM	1	0	20.75	20.40	20.78	22.10
		1	38	20.77	20.77	20.78	22.10
		1	74	20.68	20.89	20.77	22.10
		36	0	19.62	19.40	19.42	21.10
		36	18	19.59	19.57	19.53	21.10
		36	39	19.30	19.64	19.72	21.10
		75	0	19.45	19.53	19.53	21.10
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20850/2510	21100/2535	21350/2560	
20MHz	QPSK	1	0	21.52	21.12	21.46	23.10
		1	50	21.77	21.52	21.20	23.10
		1	99	21.14	21.62	21.33	23.10
		50	0	20.59	20.37	20.38	22.10



		50	25	20.58	20.58	20.45	22.10
		50	50	20.36	20.62	20.52	22.10
		100	0	20.46	20.46	20.50	22.10
	16QAM	1	0	20.79	20.36	20.73	22.10
		1	50	20.73	20.75	20.74	22.10
		1	99	20.66	20.86	20.75	22.10
		50	0	19.59	19.36	19.39	21.10
		50	25	19.56	19.55	19.50	21.10
		50	50	19.27	19.59	19.68	21.10
		100	0	19.43	19.49	19.50	21.10

LTE FDD Band 7 DSI-5				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				20775/2502. 5	21100/2535	21425/2567. 5	
5MHz	QPSK	1	0	20.11	19.79	20.22	21.60
		1	13	20.30	19.88	19.94	21.60
		1	24	19.92	20.15	19.84	21.60
		12	0	20.16	19.91	19.95	21.60
		12	6	20.17	20.06	20.07	21.60
		12	13	19.97	20.19	20.07	21.60
		25	0	20.00	20.13	20.07	21.60
	16QAM	1	0	20.34	19.98	20.47	21.60
		1	13	20.51	19.96	20.40	21.60
		1	24	20.04	20.45	20.34	21.60
		12	0	19.62	19.51	19.41	21.10
		12	6	19.68	19.67	19.54	21.10
		12	13	19.44	19.75	19.70	21.10
		25	0	19.49	19.56	19.62	21.10
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20800/2505	21100/2535	21400/2565	
10MHz	QPSK	1	0	20.12	19.78	20.24	21.60
		1	25	20.31	19.92	19.96	21.60
		1	49	19.93	20.17	19.86	21.60
		25	0	20.17	19.95	19.97	21.60
		25	13	20.19	20.09	20.10	21.60
		25	25	19.97	20.19	20.11	21.60
		50	0	20.00	20.14	20.08	21.60
	16QAM	1	0	20.33	19.96	20.47	21.60
		1	25	20.53	19.99	20.38	21.60
		1	49	20.05	20.43	20.36	21.60
		25	0	19.60	19.55	19.42	21.10



		25	13	19.67	19.66	19.55	21.10
		25	25	19.46	19.79	19.69	21.10
		50	0	19.48	19.58	19.62	21.10
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20825/2507.5	21100/2535	21375/2562.5	
15MHz	QPSK	1	0	20.12	19.76	20.23	21.60
		1	38	20.31	19.92	19.95	21.60
		1	74	19.91	20.14	19.83	21.60
		36	0	20.17	19.92	19.96	21.60
		36	18	20.17	20.06	20.07	21.60
		36	39	19.96	20.20	20.08	21.60
		75	0	20.03	20.11	20.06	21.60
	16QAM	1	0	20.31	19.99	20.47	21.60
		1	38	20.52	19.97	20.41	21.60
		1	74	20.04	20.43	20.34	21.60
		36	0	19.62	19.54	19.42	21.10
		36	18	19.67	19.66	19.53	21.10
		36	39	19.45	19.76	19.71	21.10
		75	0	19.49	19.56	19.62	21.10
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20850/2510	21100/2535	21350/2560	
20MHz	QPSK	1	0	20.09	19.72	20.20	21.60
		1	50	20.30	19.88	19.93	21.60
		1	99	19.89	20.13	19.80	21.60
		50	0	20.14	19.87	19.92	21.60
		50	25	20.15	20.02	20.03	21.60
		50	50	19.93	20.14	20.04	21.60
		100	0	20.00	20.06	20.02	21.60
	16QAM	1	0	20.29	19.95	20.42	21.60
		1	50	20.48	19.95	20.37	21.60
		1	99	20.02	20.40	20.32	21.60
		50	0	19.59	19.50	19.39	21.10
		50	25	19.64	19.64	19.50	21.10
		50	50	19.42	19.71	19.67	21.10
		100	0	19.47	19.52	19.59	21.10

LTE TDD Band 38 DSI-1&DSI-2				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				37775/2572.5	38000/2595	38225/2617.5	
5MHz	QPSK	1	0	21.98	22.28	22.36	23.10
		1	13	21.96	22.45	22.56	23.10
		1	24	22.22	22.45	22.54	23.10
		12	0	21.19	21.43	21.50	22.10
		12	6	21.17	21.47	21.61	22.10
		12	13	21.21	21.46	21.65	22.10
		25	0	21.10	21.41	21.59	22.10
	16QAM	1	0	21.48	21.62	21.64	22.10
		1	13	21.46	21.67	21.84	22.10
		1	24	21.40	21.68	21.75	22.10
		12	0	20.21	20.42	20.54	21.10
		12	6	20.28	20.53	20.69	21.10
		12	13	20.25	20.49	20.69	21.10
		25	0	20.20	20.45	20.65	21.10
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				37800/2575	38000/2595	38200/2615	
10MHz	QPSK	1	0	22.00	22.29	22.39	23.10
		1	25	21.99	22.50	22.60	23.10
		1	49	22.24	22.49	22.57	23.10
		25	0	21.22	21.48	21.54	22.10
		25	13	21.20	21.52	21.65	22.10
		25	25	21.23	21.50	21.70	22.10
		50	0	21.14	21.43	21.63	22.10
	16QAM	1	0	21.50	21.65	21.66	22.10
		1	25	21.49	21.71	21.87	22.10
		1	49	21.43	21.70	21.78	22.10
		25	0	20.24	20.47	20.58	21.10
		25	13	20.30	20.57	20.72	21.10
		25	25	20.28	20.54	20.73	21.10
		50	0	20.23	20.50	20.69	21.10
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				37825/2577.5	38000/2595	38175/2612.5	
15MHz	QPSK	1	0	21.99	22.25	22.37	23.10
		1	38	21.97	22.49	22.57	23.10
		1	74	22.21	22.44	22.53	23.10
		36	0	21.20	21.44	21.51	22.10
		36	18	21.17	21.47	21.61	22.10
		36	39	21.20	21.47	21.66	22.10



	16QAM	75	0	21.12	21.39	21.58	22.10
		1	0	21.45	21.63	21.64	22.10
		1	38	21.47	21.68	21.85	22.10
		1	74	21.40	21.66	21.75	22.10
		36	0	20.21	20.45	20.55	21.10
		36	18	20.27	20.52	20.68	21.10
		36	39	20.26	20.50	20.70	21.10
		75	0	20.20	20.45	20.65	21.10
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				37850/2580	38000/2595	38150/2610	
20MHz	QPSK	1	0	21.96	22.21	22.34	23.10
		1	50	21.96	22.45	22.55	23.10
		1	99	22.19	22.43	22.50	23.10
		50	0	21.17	21.39	21.47	22.10
		50	25	21.15	21.43	21.58	22.10
		50	50	21.17	21.42	21.62	22.10
		100	0	21.09	21.34	21.54	22.10
	16QAM	1	0	21.25	21.59	21.59	22.10
		1	50	21.43	21.66	21.81	22.10
		1	99	21.38	21.63	21.73	22.10
		50	0	20.18	20.41	20.52	21.10
		50	25	20.24	20.50	20.65	21.10
		50	50	20.23	20.45	20.66	21.10
		100	0	20.18	20.41	20.62	21.10

LTE TDD Band 38 DSI-2				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				37775/2572.5	38000/2595	38225/2617.5	
5MHz	QPSK	1	0	20.83	21.21	21.36	22.60
		1	13	20.97	21.27	21.64	22.60
		1	24	21.07	21.41	21.42	22.60
		12	0	21.07	21.34	21.41	22.60
		12	6	21.17	21.44	21.53	22.60
		12	13	21.16	21.38	21.58	22.60
		25	0	21.07	21.44	21.53	22.60
	16QAM	1	0	21.32	21.46	21.61	22.60
		1	13	21.30	21.60	21.76	22.60
		1	24	21.27	21.62	21.54	22.60
		12	0	20.19	20.30	20.52	21.60
		12	6	20.19	20.40	20.60	21.60
		12	13	20.16	20.42	20.61	21.60



		25	0	20.11	20.40	20.59	21.60
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				37800/2575	38000/2595	38200/2615	
10MHz	QPSK	1	0	20.85	21.22	21.39	22.60
		1	25	21.00	21.32	21.68	22.60
		1	49	21.09	21.45	21.45	22.60
		25	0	21.10	21.39	21.45	22.60
		25	13	21.20	21.49	21.57	22.60
		25	25	21.18	21.42	21.63	22.60
		50	0	21.11	21.46	21.57	22.60
	16QAM	1	0	21.34	21.49	21.63	22.60
		1	25	21.33	21.64	21.79	22.60
		1	49	21.30	21.64	21.57	22.60
		25	0	20.22	20.35	20.56	21.60
		25	13	20.21	20.44	20.63	21.60
		25	25	20.19	20.47	20.65	21.60
		50	0	20.14	20.45	20.63	21.60
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				37825/2577.5	38000/2595	38175/2612.5	
15MHz	QPSK	1	0	20.84	21.18	21.37	22.60
		1	38	20.98	21.31	21.65	22.60
		1	74	21.06	21.40	21.41	22.60
		36	0	21.08	21.35	21.42	22.60
		36	18	21.17	21.44	21.53	22.60
		36	39	21.15	21.39	21.59	22.60
		75	0	21.09	21.42	21.52	22.60
	16QAM	1	0	21.29	21.47	21.61	22.60
		1	38	21.31	21.61	21.77	22.60
		1	74	21.27	21.60	21.54	22.60
		36	0	20.19	20.33	20.53	21.60
		36	18	20.18	20.39	20.59	21.60
		36	39	20.17	20.43	20.62	21.60
		75	0	20.11	20.40	20.59	21.60
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				37850/2580	38000/2595	38150/2610	
20MHz	QPSK	1	0	20.81	21.14	21.34	22.60
		1	50	20.97	21.27	21.63	22.60
		1	99	21.04	21.39	21.38	22.60
		50	0	21.05	21.30	21.38	22.60
		50	25	21.15	21.40	21.50	22.60
		50	50	21.12	21.34	21.55	22.60
		100	0	21.06	21.37	21.48	22.60
	16QAM	1	0	21.22	21.43	21.56	22.60



		1	50	21.27	21.59	21.73	22.60
		1	99	21.25	21.57	21.52	22.60
		50	0	20.16	20.29	20.50	21.60
		50	25	20.15	20.37	20.56	21.60
		50	50	20.14	20.38	20.58	21.60
		100	0	20.09	20.36	20.56	21.60

LTE TDD Band 66 DSI-1				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				131979/1710. 7	132322/174 5	132665/1779. 3	
1.4MHz	QPSK	1	0	17.78	17.51	17.90	18.50
		1	2	17.80	17.55	18.11	18.50
		1	5	18.06	17.53	17.44	18.50
		3	0	17.90	17.78	18.09	18.50
		3	2	17.88	17.62	18.05	18.50
		3	3	17.89	17.58	18.08	18.50
		6	0	17.85	17.64	18.04	18.50
	16QAM	1	0	18.10	17.94	18.23	18.50
		1	2	18.25	18.10	17.95	18.50
		1	5	17.85	18.25	17.79	18.50
		3	0	17.90	17.99	18.12	18.50
		3	2	17.93	17.68	18.10	18.50
		3	3	17.90	17.69	17.97	18.50
		6	0	17.84	17.70	18.04	18.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				1319871711. 5	132322/174 5	132657/1778. 5	
3MHz	QPSK	1	0	17.80	17.55	17.93	18.50
		1	7	17.80	17.57	18.15	18.50
		1	14	18.09	17.58	17.48	18.50
		8	0	17.94	17.85	18.16	18.50
		8	4	17.91	17.70	18.11	18.50
		8	7	17.93	17.63	18.12	18.50
		15	0	17.87	17.68	18.07	18.50
	16QAM	1	0	18.13	17.96	18.26	18.50
		1	7	18.28	18.12	17.99	18.50
		1	14	17.87	18.29	17.82	18.50
		8	0	17.95	18.03	18.15	18.50
		8	4	17.98	17.75	18.16	18.50
		8	7	17.94	17.75	18.04	18.50



		15	0	17.87	17.74	18.07	18.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				131997/1712. 5	132322/174 5	132647/1777. 5	
5MHz	QPSK	1	0	17.77	17.53	17.89	18.50
		1	13	17.78	17.53	18.12	18.50
		1	24	18.06	17.53	17.44	18.50
		12	0	17.91	17.80	18.12	18.50
		12	6	17.89	17.66	18.06	18.50
		12	13	17.91	17.61	18.08	18.50
		25	0	17.85	17.67	18.05	18.50
	16QAM	1	0	18.10	17.92	18.23	18.50
		1	13	18.25	18.10	17.96	18.50
		1	24	17.84	18.27	17.78	18.50
		12	0	17.93	17.99	18.12	18.50
		12	6	17.95	17.70	18.12	18.50
		12	13	17.91	17.70	18.00	18.50
		25	0	17.85	17.70	18.02	18.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				40240/2555	40690/2600	41140/2645	
10MHz	QPSK	1	0	17.78	17.52	17.91	18.50
		1	25	17.79	17.57	18.14	18.50
		1	49	18.07	17.55	17.46	18.50
		25	0	17.92	17.84	18.14	18.50
		25	13	17.91	17.69	18.09	18.50
		25	25	17.91	17.61	18.12	18.50
		50	0	17.85	17.68	18.06	18.50
	16QAM	1	0	18.09	17.90	18.23	18.50
		1	25	18.27	18.13	17.94	18.50
		1	49	17.85	18.25	17.80	18.50
		25	0	17.91	18.03	18.13	18.50
		25	13	17.94	17.69	18.13	18.50
		25	25	17.93	17.74	17.99	18.50
		50	0	17.84	17.72	18.02	18.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				132047/1717. 5	132322/174 5	132597/1772. 5	
15MHz	QPSK	1	0	17.78	17.50	17.90	18.50
		1	38	17.79	17.57	18.13	18.50
		1	74	18.05	17.52	17.43	18.50
		36	0	17.92	17.81	18.13	18.50
		36	18	17.89	17.66	18.06	18.50
		36	39	17.90	17.62	18.09	18.50



	16QAM	75	0	17.88	17.65	18.04	18.50
		1	0	18.07	17.93	18.23	18.50
		1	38	18.26	18.11	17.97	18.50
		1	74	17.84	18.25	17.78	18.50
		36	0	17.93	18.02	18.13	18.50
		36	18	17.94	17.69	18.11	18.50
		36	39	17.92	17.71	18.01	18.50
		75	0	17.85	17.70	18.02	18.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				132072/1720	132322/1745	132572/1770	
20MHz	QPSK	1	0	17.75	17.46	17.87	18.50
		1	50	17.78	17.53	18.11	18.50
		1	99	18.03	17.51	17.40	18.50
		50	0	17.89	17.76	18.09	18.50
		50	25	17.87	17.62	18.03	18.50
		50	50	17.87	17.57	18.05	18.50
		100	0	17.85	17.60	18.00	18.50
	16QAM	1	0	18.05	17.89	18.18	18.50
		1	50	18.22	18.09	17.93	18.50
		1	99	17.82	18.22	17.76	18.50
		50	0	17.90	17.98	18.10	18.50
		50	25	17.91	17.67	18.08	18.50
		50	50	17.89	17.66	17.97	18.50
		100	0	17.83	17.66	17.99	18.50

LTE TDD Band 66 DSI-2				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				131979/1710. 7	132322/174 5	132665/1779. 3	
1.4MHz	QPSK	1	0	20.13	19.86	20.37	21.00
		1	2	20.24	19.87	20.55	21.00
		1	5	20.47	20.05	19.70	21.00
		3	0	20.27	20.16	20.48	21.00
		3	2	20.28	20.05	20.44	21.00
		3	3	20.30	19.97	20.40	21.00
		6	0	20.25	20.09	20.41	21.00
	16QAM	1	0	20.47	20.29	20.64	21.00
		1	2	20.63	20.40	20.50	21.00
		1	5	20.80	20.52	20.24	21.00
		3	0	20.30	20.20	20.51	21.00
		3	2	20.33	20.08	20.42	21.00



		3	3	20.33	20.06	20.42	21.00
		6	0	20.27	20.04	20.46	21.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				131987/1711. 5	132322/174 5	132657/1778. 5	
3MHz	QPSK	1	0	20.15	19.90	20.40	21.00
		1	7	20.24	19.89	20.59	21.00
		1	14	20.50	20.10	19.74	21.00
		8	0	20.31	20.23	20.55	21.00
		8	4	20.31	20.13	20.50	21.00
		8	7	20.34	20.02	20.44	21.00
		15	0	20.27	20.13	20.44	21.00
	16QAM	1	0	20.50	20.31	20.67	21.00
		1	7	20.66	20.42	20.54	21.00
		1	14	20.82	20.56	20.27	21.00
		8	0	20.35	20.24	20.54	21.00
		8	4	20.38	20.15	20.48	21.00
		8	7	20.37	20.12	20.49	21.00
		15	0	20.30	20.08	20.49	21.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				131997/1712. 5	132322/174 5	132647/1777. 5	
5MHz	QPSK	1	0	20.12	19.88	20.36	21.00
		1	13	20.22	19.85	20.56	21.00
		1	24	20.47	20.05	19.70	21.00
		12	0	20.28	20.18	20.51	21.00
		12	6	20.29	20.09	20.45	21.00
		12	13	20.32	20.00	20.40	21.00
		25	0	20.25	20.12	20.42	21.00
	16QAM	1	0	20.47	20.27	20.64	21.00
		1	13	20.63	20.40	20.51	21.00
		1	24	20.79	20.54	20.23	21.00
		12	0	20.33	20.20	20.51	21.00
		12	6	20.35	20.10	20.44	21.00
		12	13	20.34	20.07	20.45	21.00
		25	0	20.28	20.04	20.44	21.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				40240/2555	40690/2600	41140/2645	
10MHz	QPSK	1	0	20.13	19.87	20.38	21.00
		1	25	20.23	19.89	20.58	21.00
		1	49	20.48	20.07	19.72	21.00
		25	0	20.29	20.22	20.53	21.00
		25	13	20.31	20.12	20.48	21.00



		25	25	20.32	20.00	20.44	21.00
		50	0	20.25	20.13	20.43	21.00
	16QAM	1	0	20.46	20.25	20.64	21.00
		1	25	20.65	20.43	20.49	21.00
		1	49	20.80	20.52	20.25	21.00
		25	0	20.31	20.24	20.52	21.00
		25	13	20.34	20.09	20.45	21.00
		25	25	20.36	20.11	20.44	21.00
		50	0	20.27	20.06	20.44	21.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				132047/1717.5	132322/1745	132597/1772.5	
15MHz	QPSK	1	0	20.13	19.85	20.37	21.00
		1	38	20.23	19.89	20.57	21.00
		1	74	20.46	20.04	19.69	21.00
		36	0	20.29	20.19	20.52	21.00
		36	18	20.29	20.09	20.45	21.00
		36	39	20.31	20.01	20.41	21.00
		75	0	20.28	20.10	20.41	21.00
	16QAM	1	0	20.44	20.28	20.64	21.00
		1	38	20.64	20.41	20.52	21.00
		1	74	20.79	20.52	20.23	21.00
		36	0	20.33	20.23	20.52	21.00
		36	18	20.34	20.09	20.43	21.00
		36	39	20.35	20.08	20.46	21.00
		75	0	20.28	20.04	20.44	21.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				132072/1720	132322/1745	132572/1770	
20MHz	QPSK	1	0	20.10	19.81	20.34	21.00
		1	50	20.22	19.85	20.55	21.00
		1	99	20.44	20.03	19.66	21.00
		50	0	20.26	20.14	20.48	21.00
		50	25	20.27	20.05	20.42	21.00
		50	50	20.28	19.96	20.37	21.00
		100	0	20.25	20.05	20.37	21.00
	16QAM	1	0	20.42	20.24	20.59	21.00
		1	50	20.60	20.39	20.48	21.00
		1	99	20.77	20.49	20.21	21.00
		50	0	20.30	20.19	20.49	21.00
		50	25	20.31	20.07	20.40	21.00
		50	50	20.32	20.03	20.42	21.00
		100	0	20.26	20.00	20.41	21.00



LTE TDD Band 66 DSI-5				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				131979/1710.7	132322/1745	132665/1779.3	
1.4MHz	QPSK	1	0	19.75	19.49	19.81	20.50
		1	2	19.93	19.44	20.12	20.50
		1	5	20.08	19.64	19.22	20.50
		3	0	19.86	19.67	20.02	20.50
		3	2	19.83	19.62	20.03	20.50
		3	3	19.84	19.63	19.97	20.50
		6	0	19.81	19.66	19.98	20.50
	16QAM	1	0	20.05	19.90	19.96	20.50
		1	2	20.13	19.84	20.09	20.50
		1	5	20.14	20.10	19.96	20.50
		3	0	19.84	19.70	20.12	20.50
		3	2	19.87	19.63	20.00	20.50
		3	3	19.86	19.54	19.97	20.50
		6	0	19.79	19.62	20.03	20.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				1319871711.5	132322/1745	132657/1778.5	
3MHz	QPSK	1	0	19.77	19.53	19.84	20.50
		1	7	19.93	19.46	20.16	20.50
		1	14	20.11	19.69	19.26	20.50
		8	0	19.90	19.74	20.09	20.50
		8	4	19.86	19.70	20.09	20.50
		8	7	19.88	19.68	20.01	20.50
		15	0	19.83	19.70	20.01	20.50
	16QAM	1	0	20.08	19.92	19.99	20.50
		1	7	20.16	19.86	20.13	20.50
		1	14	20.16	20.14	19.99	20.50
		8	0	19.89	19.74	20.15	20.50
		8	4	19.92	19.70	20.06	20.50
		8	7	19.90	19.60	20.04	20.50
		15	0	19.82	19.66	20.06	20.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				131997/1712.5	132322/1745	132647/1777.5	
5MHz	QPSK	1	0	19.74	19.51	19.80	20.50
		1	13	19.91	19.42	20.13	20.50
		1	24	20.08	19.64	19.22	20.50
		12	0	19.87	19.69	20.05	20.50
		12	6	19.84	19.66	20.04	20.50
		12	13	19.86	19.66	19.97	20.50



	16QAM	25	0	19.81	19.69	19.99	20.50
		1	0	20.05	19.88	19.96	20.50
		1	13	20.13	19.84	20.10	20.50
		1	24	20.13	20.12	19.95	20.50
		12	0	19.87	19.70	20.12	20.50
		12	6	19.89	19.65	20.02	20.50
		12	13	19.87	19.55	20.00	20.50
		25	0	19.80	19.62	20.01	20.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				40240/2555	40690/2600	41140/2645	
10MHz	QPSK	1	0	19.75	19.50	19.82	20.50
		1	25	19.92	19.46	20.15	20.50
		1	49	20.09	19.66	19.24	20.50
		25	0	19.88	19.73	20.07	20.50
		25	13	19.86	19.69	20.07	20.50
		25	25	19.86	19.66	20.01	20.50
		50	0	19.81	19.70	20.00	20.50
	16QAM	1	0	20.04	19.86	19.96	20.50
		1	25	20.15	19.87	20.08	20.50
		1	49	20.14	20.10	19.97	20.50
		25	0	19.85	19.74	20.13	20.50
		25	13	19.88	19.64	20.03	20.50
		25	25	19.89	19.59	19.99	20.50
		50	0	19.79	19.64	20.01	20.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				132047/1717.5	132322/1745	132597/1772.5	
15MHz	QPSK	1	0	19.75	19.48	19.81	20.50
		1	38	19.92	19.46	20.14	20.50
		1	74	20.07	19.63	19.21	20.50
		36	0	19.88	19.70	20.06	20.50
		36	18	19.84	19.66	20.04	20.50
		36	39	19.85	19.67	19.98	20.50
		75	0	19.84	19.67	19.98	20.50
	16QAM	1	0	20.02	19.89	19.96	20.50
		1	38	20.14	19.85	20.11	20.50
		1	74	20.13	20.10	19.95	20.50
		36	0	19.87	19.73	20.13	20.50
		36	18	19.88	19.64	20.01	20.50
		36	39	19.88	19.56	20.01	20.50
		75	0	19.80	19.62	20.01	20.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				132072/1720	132322/1745	132572/1770	
20MHz	QPSK	1	0	19.72	19.44	19.78	20.50



		1	50	19.91	19.42	20.12	20.50
		1	99	20.05	19.62	19.18	20.50
		50	0	19.85	19.65	20.02	20.50
		50	25	19.82	19.62	20.01	20.50
		50	50	19.82	19.62	19.94	20.50
		100	0	19.81	19.62	19.94	20.50
	16QAM	1	0	20.00	19.85	19.91	20.50
		1	50	20.10	19.83	20.07	20.50
		1	99	20.11	20.07	19.93	20.50
		50	0	19.84	19.69	20.10	20.50
		50	25	19.85	19.62	19.98	20.50
		50	50	19.85	19.51	19.97	20.50
		100	0	19.78	19.58	19.98	20.50



9.4 WLAN Mode

Wi-Fi 2.4G Full Power Mode	Channel /Frequency(MHz)	Maximum Output Power (dBm)	
		Tune-up	Meas.
802.11b (1M)	1/2412	19.00	18.56
	6/2437	19.00	18.37
	11/2462	19.00	18.75
802.11g (6M)	1/2412	17.00	16.53
	6/2437	19.50	17.62
	11/2462	19.50	19.01
802.11n-HT20 (MCS0)	1/2412	19.50	19.42
	6/2437	15.00	14.42
	11/2462	17.00	16.50
802.11n-HT40 (MCS0)	3/2422	19.50	17.59
	6/2437	19.50	18.82
	9/2452	19.50	19.36

Note: Initial test configuration is 802.11n-HT20 mode.

Wi-Fi 2.4G Receiver on Mode	Channel /Frequency(MHz)	Maximum Output Power (dBm)	
		Tune-up	Meas.
802.11b (1M)	1/2412	16.00	14.68
	6/2437	16.00	14.39
	11/2462	16.00	14.10
802.11g (6M)	1/2412	16.00	15.51
	6/2437	16.00	15.37
	11/2462	16.00	15.20
802.11n-HT20 (MCS0)	1/2412	16.00	15.41
	6/2437	15.00	14.09
	11/2462	16.00	15.40
802.11n-HT40 (MCS0)	3/2422	16.00	15.29
	6/2437	16.00	15.14
	9/2452	16.00	15.33

Note: Initial test configuration is 802.11g mode.



Wi-Fi 2.4G Hotspot Mode	Channel /Frequency(MHz)	Maximum Output Power (dBm)	
		Tune-up	Meas.
802.11b (1M)	1/2412	18.00	17.09
	6/2437	18.00	16.78
	11/2462	18.00	16.78
802.11g (6M)	1/2412	17.00	16.51
	6/2437	18.00	16.94
	11/2462	18.00	17.06
802.11n-HT20 (MCS0)	1/2412	18.00	17.03
	6/2437	15.00	14.09
	11/2462	17.00	16.42
802.11n-HT40 (MCS0)	3/2422	18.00	16.75
	6/2437	18.00	16.99
	9/2452	18.00	16.87

Note: Initial test configuration is 802.11b mode.

Wi-Fi 2.4G Receiver on Mode	Channel /Frequency(MHz)	Maximum Output Power (dBm)	
		Tune-up	Meas.
802.11b (1M)	1/2412	17.00	15.72
	6/2437	17.00	15.41
	11/2462	17.00	15.38
802.11g (6M)	1/2412	16.00	15.17
	6/2437	16.00	14.65
	11/2462	16.00	14.38
802.11n-HT20 (MCS0)	1/2412	16.00	15.08
	6/2437	16.00	14.47
	11/2462	16.00	14.24
802.11n-HT40 (MCS0)	3/2422	16.00	14.46
	6/2437	16.00	14.54
	9/2452	16.00	14.40

Note: Initial test configuration is 802.11b mode.



Wi-Fi 5G (U-NII-1) Full Power Mode	Channel /Frequency(MHz)	Maximum Output Power (dBm)	
		Tune-up	Meas.
802.11a (6M)	36/5180	16.50	16.07
	40/5200	19.00	18.51
	44/5220	19.00	18.39
	48/5240	19.00	18.83
802.11n-HT20 (MCS0)	36/5180	16.50	16.39
	40/5200	19.00	18.79
	44/5220	19.00	18.55
	48/5240	19.00	18.71
802.11n-HT40 (MCS0)	38/5190	10.50	10.48
	46/5230	18.00	18.00
802.11ac-VHT20 (MCS0)	36/5180	16.50	16.33
	40/5200	18.50	18.37
	44/5220	18.50	18.17
	48/5240	18.50	18.24
802.11ac-VHT40 (MCS0)	38/5190	10.50	10.49
	46/5230	18.00	18.00
802.11ac-VHT80 (MCS0)	42/5210	9.50	9.49
Note. Initial test configuration is 802.11a mode, since the highest maximum output power.			

Wi-Fi 5G (U-NII-1) Receiver on Mode	Channel /Frequency(MHz)	Maximum Output Power (dBm)	
		Tune-up	Meas.
802.11a (6M)	36/5180	15.00	13.90
	40/5200	15.00	14.12
	44/5220	15.00	14.28
	48/5240	15.00	14.38
802.11n-HT20 (MCS0)	36/5180	15.00	13.69
	40/5200	15.00	13.86
	44/5220	15.00	14.05
	48/5240	15.00	14.16
802.11n-HT40 (MCS0)	38/5190	10.50	9.75
	46/5230	15.00	14.01
802.11ac-VHT20 (MCS0)	36/5180	15.00	13.62
	40/5200	15.00	13.82



	44/5220	15.00	14.03
	48/5240	15.00	14.12
802.11ac-VHT40 (MCS0)	38/5190	10.50	10.03
	46/5230	15.00	14.10
802.11ac-VHT80 (MCS0)	42/5210	9.50	9.01
Note. Initial test configuration is 802.11ac-VHT80 mode, since the highest maximum output power.			

Wi-Fi 5G (U-NII-1) Hotspot Mode	Channel /Frequency(MHz)	Maximum Output Power (dBm)	
		Tune-up	Meas.
802.11a (6M)	36/5180	16.50	15.40
	40/5200	17.00	15.52
	44/5220	17.00	15.59
	48/5240	17.00	15.64
802.11n-HT20 (MCS0)	36/5180	16.50	15.19
	40/5200	17.00	15.19
	44/5220	17.00	15.36
	48/5240	17.00	15.45
802.11n-HT40 (MCS0)	38/5190	10.50	9.80
	46/5230	17.00	15.31
802.11ac-VHT20 (MCS0)	36/5180	16.50	15.16
	40/5200	17.00	15.13
	44/5220	17.00	15.31
	48/5240	17.00	15.35
802.11ac-VHT40 (MCS0)	38/5190	10.50	9.92
	46/5230	17.00	15.22
802.11ac-VHT80 (MCS0)	42/5210	9.50	8.95
Note. Initial test configuration is 802.11ac-VHT80 mode, since the highest maximum output power.			

Wi-Fi 5G (U-NII-2A) Full Power Mode	Channel /Frequency(MHz)	Maximum Output Power (dBm)	
		Tune-up	Meas.
802.11a (6M)	52/5260	19.00	18.79
	56/5280	19.00	18.53
	60/5300	19.00	18.45
	64/5320	17.50	17.11



802.11n-HT20 (MCS0)	52/5260	19.00	18.74
	56/5280	19.00	18.22
	60/5300	19.00	18.40
	64/5320	17.50	17.06
802.11n-HT40 (MCS0)	54/5270	18.00	17.89
	62/5310	11.00	10.96
802.11ac-VHT20 (MCS0)	52/5260	18.50	18.48
	56/5280	18.50	18.31
	60/5300	18.50	18.41
	64/5320	17.50	17.04
802.11ac-VHT40 (MCS0)	54/5270	18.00	17.95
	62/5310	11.00	10.97
802.11ac-VHT80 (MCS0)	58/5290	9.00	8.97

Note. Initial test configuration is 802.11ac-VHT80 mode, since the highest maximum output power.

Wi-Fi 5G (U-NII-2A) Receiver on Mode	Channel /Frequency(MHz)	Maximum Output Power (dBm)	
		Tune-up	Meas.
802.11a (6M)	52/5260	15.00	14.41
	56/5280	15.00	14.36
	60/5300	15.00	14.31
	64/5320	15.00	14.29
802.11n-HT20 (MCS0)	52/5260	15.00	14.22
	56/5280	15.00	14.14
	60/5300	15.00	14.11
	64/5320	15.00	14.15
802.11n-HT40 (MCS0)	54/5270	15.00	14.06
	62/5310	11.00	10.15
802.11ac-VHT20 (MCS0)	52/5260	15.00	14.13
	56/5280	15.00	14.11
	60/5300	15.00	14.07
	64/5320	15.00	14.10
802.11ac-VHT40 (MCS0)	54/5270	15.00	14.08
	62/5310	11.00	10.22
802.11ac-VHT80 (MCS0)	58/5290	9.00	8.09

Note. Initial test configuration is 802.11ac-VHT80 mode, since the highest maximum output power.



Wi-Fi 5G (U-NII-2A) Hotspot Mode	Channel /Frequency(MHz)	Maximum Output Power (dBm)	
		Tune-up	Meas.
802.11a (6M)	52/5260	17.00	15.68
	56/5280	17.00	15.64
	60/5300	17.00	15.63
	64/5320	17.00	16.02
802.11n-HT20 (MCS0)	52/5260	17.00	15.47
	56/5280	17.00	15.43
	60/5300	17.00	15.39
	64/5320	17.00	15.82
802.11n-HT40 (MCS0)	54/5270	17.00	15.32
	62/5310	11.00	10.37
802.11ac-VHT20 (MCS0)	52/5260	17.00	15.39
	56/5280	17.00	15.35
	60/5300	17.00	15.34
	64/5320	17.00	15.81
802.11ac-VHT40 (MCS0)	54/5270	17.00	15.27
	62/5310	11.00	10.17
802.11ac-VHT80 (MCS0)	58/5290	9.00	8.26
Note. Initial test configuration is 802.11ac-VHT80 mode, since the highest maximum output power.			

Wi-Fi 5G (U-NII-2C) Full Power Mode	Channel /Frequency(MHz)	Maximum Output Power (dBm)	
		Tune-up	Meas.
802.11a (6M)	100/5500	18.50	18.12
	116/5580	19.00	18.84
	132/5660	19.00	18.80
	140/5700	15.00	14.79
802.11n-HT20 (MCS0)	100/5500	18.50	18.37
	116/5580	19.00	18.65
	132/5660	19.00	18.70
	140/5700	15.00	14.68
802.11n-HT40 (MCS0)	102/5510	10.50	10.26
	110/5550	18.00	17.74
	118/5590	18.00	17.67
	134/5670	16.50	16.07



802.11ac-VHT20 (MCS0)	100/5500	18.50	18.31
	116/5580	18.50	18.23
	132/5660	18.50	18.33
	140/5700	15.00	14.69
802.11ac-VHT40 (MCS0)	102/5510	9.50	8.49
	110/5550	18.00	17.76
	118/5590	18.00	17.67
	134/5670	16.50	16.14
802.11ac-VHT80 (MCS0)	106/5530	9.50	9.06
	122/5610	17.00	15.56
	138/5690	17.00	15.88

Note. Initial test configuration is 802.11ac-VHT80 mode, since the highest maximum output power.

Wi-Fi 5G (U-NII-2C) Receiver on Mode	Channel /Frequency(MHz)	Maximum Output Power (dBm)	
		Tune-up	Meas.
802.11a (6M)	100/5500	15.00	14.95
	116/5580	15.00	14.06
	132/5660	15.00	14.08
	140/5700	15.00	14.18
802.11n-HT20 (MCS0)	100/5500	15.00	14.77
	116/5580	15.00	13.90
	132/5660	15.00	13.93
	140/5700	15.00	13.99
802.11n-HT40 (MCS0)	102/5510	10.50	9.93
	110/5550	15.00	14.26
	118/5590	15.00	13.74
	134/5670	15.00	13.87
802.11ac-VHT20 (MCS0)	100/5500	15.00	14.74
	116/5580	15.00	13.88
	132/5660	15.00	13.90
	140/5700	15.00	13.99
802.11ac-VHT40 (MCS0)	102/5510	10.50	9.73
	110/5550	15.00	14.11
	118/5590	15.00	13.66
	134/5670	15.00	13.81
802.11ac-VHT80 (MCS0)	106/5530	9.50	8.59
	122/5610	15.00	14.38
	138/5690	15.00	14.21



Note. Initial test configuration is 802.11ac-VHT80 mode, since the highest maximum output power.

Wi-Fi 5G (U-NII-2C) Hotspot Mode	Channel /Frequency(MHz)	Maximum Output Power (dBm)	
		Tune-up	Meas.
802.11a (6M)	100/5500	17.00	16.23
	116/5580	17.00	15.76
	132/5660	17.00	15.77
	140/5700	15.00	14.18
802.11n-HT20 (MCS0)	100/5500	17.00	15.99
	116/5580	17.00	15.59
	132/5660	17.00	15.63
	140/5700	15.00	13.99
802.11n-HT40 (MCS0)	102/5510	10.50	10.07
	110/5550	17.00	15.48
	118/5590	17.00	15.45
	134/5670	16.50	15.33
802.11ac-VHT20 (MCS0)	100/5500	17.00	15.98
	116/5580	17.00	15.59
	132/5660	17.00	15.60
	140/5700	15.00	13.99
802.11ac-VHT40 (MCS0)	102/5510	10.50	9.61
	110/5550	17.00	15.37
	118/5590	17.00	15.40
	134/5670	16.50	15.29
802.11ac-VHT80 (MCS0)	106/5530	9.50	8.92
	122/5610	17.00	16.07
	138/5690	17.00	15.88

Note. Initial test configuration is 802.11a mode, since the highest maximum output power, the largest channel bandwidth, and lowest order.

Wi-Fi 5G (U-NII-3) Full Power Mode	Channel /Frequency(MHz)	Maximum Output Power (dBm)	
		Tune-up	Meas.
802.11a (6M)	149/5745	19.00	18.77
	157/5785	19.00	18.90
	165/5825	19.00	18.87



802.11n-HT20 (MCS0)	149/5745	19.00	18.64
	157/5785	19.00	18.79
	165/5825	19.00	18.84
802.11n-HT40 (MCS0)	151/5755	18.00	17.77
	159/5795	18.00	17.75
802.11ac-VHT20 (MCS0)	149/5745	18.50	18.21
	157/5785	18.50	18.36
	165/5825	18.50	18.24
802.11ac-VHT40 (MCS0)	151/5755	18.00	17.80
	159/5795	18.00	17.80
802.11ac-VHT80 (MCS0)	155/5775	17.00	16.71
Note. Initial test configuration is 802.11ac-VHT80 mode, since the highest maximum output power.			

Wi-Fi 5G (U-NII-3) Receiver on Mode	Channel /Frequency(MHz)	Maximum Output Power (dBm)	
		Tune-up	Meas.
802.11a (6M)	149/5745	15.00	14.13
	157/5785	15.00	14.24
	165/5825	15.00	14.52
802.11n-HT20 (MCS0)	149/5745	15.00	13.94
	157/5785	15.00	14.06
	165/5825	15.00	14.36
802.11n-HT40 (MCS0)	151/5755	15.00	13.92
	159/5795	15.00	14.03
802.11ac-VHT20 (MCS0)	149/5745	15.00	13.94
	157/5785	15.00	14.07
	165/5825	15.00	14.36
802.11ac-VHT40 (MCS0)	151/5755	15.00	13.86
	159/5795	15.00	13.94
802.11ac-VHT80 (MCS0)	155/5775	15.00	14.56
Note. Initial test configuration is 802.11ac-VHT80 mode, since the highest maximum output power.			

Wi-Fi 5G (U-NII-3) Hotspot Mode	Channel /Frequency(MHz)	Maximum Output Power (dBm)	
		Tune-up	Meas.
802.11a (6M)	149/5745	17.00	15.82
	157/5785	17.00	15.91
	165/5825	17.00	16.19
802.11n-HT20 (MCS0)	149/5745	17.00	15.66
	157/5785	17.00	15.76
	165/5825	17.00	16.04
802.11n-HT40 (MCS0)	151/5755	17.00	15.62
	159/5795	17.00	15.71
802.11ac-VHT20 (MCS0)	149/5745	17.00	15.65
	157/5785	17.00	15.76
	165/5825	17.00	16.05
802.11ac-VHT40 (MCS0)	151/5755	17.00	15.61
	159/5795	17.00	15.69
802.11ac-VHT80 (MCS0)	155/5775	17.00	16.30

Note. Initial test configuration is 802.11ac-VHT80 mode, since the highest maximum output power.

9.5 Bluetooth Mode

BT	Conducted Power(dBm)			Tune-up Limit (dBm)
	Channel/Frequency(MHz)			
	Ch 0/2402 MHz	Ch 39/2441 MHz	Ch 78/2480 MHz	
GFSK	13.42	13.69	13.78	15.20
π/4DQPSK	11.83	12.12	12.41	13.50
8DPSK	12.46	12.28	12.50	13.50
BLE	Ch 0/2402 MHz	Ch 19/2440 MHz	Ch 39/2480 MHz	Tune-up Limit (dBm)
GFSK	8.88	9.01	9.64	10.50

10 Measured and Reported (Scaled) SAR Results

10.1 EUT Antenna Locations

The Detailed Antenna Locations refer to *Antenna Locations*.

Antenna		Band
Main Antenna	ANT 0	GSM 1900/WCDMA 2/4/LTE 2/4/66
	ANT 1	GSM 850/WCDMA 5/LTE 5/13/26
	ANT 4	LTE 7/38
Div Antenna	ANT 2	WCDMA 2/4/LTE 2/4/66
	ANT 0	LTE 7/38
Wi-Fi Antenna & BT		Wi-Fi 2.4G/Bluetooth
5G Wi-Fi Antenna		Wi-Fi 5G

Overall (Length x Width): 166.07 mm x 75.78 mm							
Overall Diagonal: 174.6 mm/Display Diagonal:171.6mm							
Distance of the Antenna to the EUT surface/edge							
Antenna		Back Side	Front side	Left Edge	Right Edge	Top Edge	Bottom Edge
Main Antenna	ANT 0	<25mm	<25mm	<25mm	>25mm	>25mm	<25mm
	ANT 1	<25mm	<25mm	>25mm	<25mm	>25mm	<25mm
	ANT 4	<25mm	<25mm	<25mm	>25mm	>25mm	<25mm
Second Antenna	ANT 2	<25mm	<25mm	>25mm	>25mm	<25mm	>25mm
	ANT 0	<25mm	<25mm	<25mm	>25mm	>25mm	<25mm
BT/Wi-Fi 2.4G Antenna		<25mm	<25mm	>25mm	<25mm	<25mm	>25mm
Wi-Fi 5G Antenna		<25mm	<25mm	>25mm	<25mm	<25mm	>25mm
Hotspot mode, Positions for SAR tests							
Mode		Back Side	Front side	Left Edge	Right Edge	Top Edge	Bottom Edge
Main Antenna	ANT 0	Yes	Yes	Yes	N/A	N/A	Yes
	ANT 1	Yes	Yes	N/A	Yes	N/A	Yes
	ANT 4	Yes	Yes	Yes	N/A	N/A	Yes
Second Antenna	ANT 2	Yes	Yes	N/A	N/A	Yes	N/A
	ANT 0	Yes	Yes	Yes	N/A	N/A	Yes
BT/Wi-Fi 2.4G Antenna		Yes	Yes	N/A	Yes	Yes	N/A
Wi-Fi 5G Antenna		Yes	Yes	N/A	Yes	Yes	N/A

Note: 1. Per KDB 941225 D06, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

2. For smart phones with an overall diagonal dimension is 176mm. Per KDB 648474 D04, for smart phones with a display diagonal dimension $> 15.0\text{ cm}$ or an overall diagonal dimension $> 16.0\text{ cm}$, product specific 10-g SAR must be tested as a phablet to determine SAR compliance. For Phablet, Since hotspot mode 1-g reported SAR < 1.2



W/kg, product specific 10-g SAR is no required.

3. Per FCC KDB 447498 D01, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

a) ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz

b) ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.

c) ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.

4. When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.

5. Per FCC KDB Publication 648474 D04, SAR was evaluated without a headset connected to the device. Since the reported SAR was ≤ 1.2 W/kg, no additional SAR evaluations using a headset cable were required.

10.2 Standalone SAR test exclusion considerations

Per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for product specific 10-g SAR

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

Per KDB 447498 D01, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Bluetooth	Distance (mm)	MAXPower (dBm)	Frequency (MHz)	Ratio	Evaluation
Head	5	15.2	2480	10.43	No
Body-worn	15	15.2	2480	3.48	No
Hotspot	10	15.2	2480	5.21	No
Product Specific 10-g SAR	5	15.2	2480	10.43	No



10.3 Measured SAR Results

Note: 1.The value with blue color is the maximum SAR Value of each test band.

2. For GSM, when multiple slots are used, SAR should be tested to account for the maximum source-based time-averaged output power.

3. For WCDMA, When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

4. For LTE, QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are $\geq 50\%$ limit(1g).

Head SAR

Band	Antenna	Test Position	Dist. (mm)	Mode	Power Reduction	RB	offset	Ch./Freq. (MHz)	Tune-up (dBm)	Measured power (dBm)	Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	Plot No.
GSM 850	Main (ANT1)	Left cheek	0	GSM	DS11	-	-	190/836.6	33.50	32.62	0.157	0.080	1.22	0.192	14
		Left Tilt	0	GSM	DS11	-	-	190/836.6	33.50	32.62	0.091	0.012	1.22	0.111	/
		Right cheek	0	GSM	DS11	-	-	190/836.6	33.50	32.62	0.136	0.150	1.22	0.167	/
		Right Tilt	0	GSM	DS11	-	-	190/836.6	33.50	32.62	0.063	-0.170	1.22	0.077	/
GSM 1900	Main (ANT0)	Left cheek	0	GSM	DS11	-	-	661/1880	30.50	29.88	0.106	0.064	1.15	0.122	15
		Left Tilt	0	GSM	DS11	-	-	661/1880	30.50	29.88	0.029	0.024	1.15	0.033	/
		Right cheek	0	GSM	DS11	-	-	661/1880	30.50	29.88	0.073	-0.160	1.15	0.084	/
		Right Tilt	0	GSM	DS11	-	-	661/1880	30.50	29.88	0.032	-0.024	1.15	0.036	/
WCDMA II	Main (Ant0)	Left cheek	0	RMC 12.2K	DS11	-	-	9400/1880	23.40	21.80	0.112	0.074	1.45	0.162	/
		Left Tilt	0	RMC 12.2K	DS11	-	-	9400/1880	23.40	21.80	0.035	0.150	1.45	0.051	/
		Right cheek	0	RMC 12.2K	DS11	-	-	9400/1880	23.40	21.80	0.064	0.182	1.45	0.093	/
		Right Tilt	0	RMC 12.2K	DS11	-	-	9400/1880	23.40	21.80	0.042	0.046	1.45	0.061	/
	DIV (Ant2)	Left cheek	0	RMC 12.2K	DS11	-	-	9400/1880	19.90	18.85	0.304	-0.010	1.27	0.387	/
		Left Tilt	0	RMC 12.2K	DS11	-	-	9400/1880	19.90	18.85	0.454	-0.010	1.27	0.578	/
		Right cheek	0	RMC 12.2K	DS11	-	-	9400/1880	19.90	18.85	0.423	0.110	1.27	0.539	/
		Right Tilt	0	RMC 12.2K	DS11	-	-	9400/1880	19.90	18.85	0.489	0.020	1.27	0.623	16
WCDMA IV	Main (Ant0)	Left cheek	0	RMC 12.2K	DS11	-	-	1413/1732.6	23.50	23.38	0.112	0.032	1.03	0.115	/
		Left Tilt	0	RMC 12.2K	DS11	-	-	1413/1732.6	23.50	23.38	0.067	0.110	1.03	0.069	/
		Right cheek	0	RMC 12.2K	DS11	-	-	1413/1732.6	23.50	23.38	0.128	0.028	1.03	0.132	/
		Right Tilt	0	RMC 12.2K	DS11	-	-	1413/1732.6	23.50	23.38	0.063	0.170	1.03	0.065	/
	DIV (Ant2)	Left cheek	0	RMC 12.2K	DS11	-	-	1413/1732.6	18.50	17.86	0.231	0.010	1.16	0.268	/
		Left Tilt	0	RMC 12.2K	DS11	-	-	1413/1732.6	18.50	17.86	0.314	0.040	1.16	0.364	/
		Right cheek	0	RMC 12.2K	DS11	-	-	1413/1732.6	18.50	17.86	0.371	0.060	1.16	0.430	/
		Right Tilt	0	RMC 12.2K	DS11	-	-	1413/1732.6	18.50	17.86	0.430	0.040	1.16	0.498	17
WCDMA V	Main (Ant1)	Left cheek	0	RMC 12.2K	DS11	-	-	4183/836.6	25.00	24.56	0.164	0.035	1.11	0.181	18
		Left Tilt	0	RMC 12.2K	DS11	-	-	4183/836.6	25.00	24.56	0.072	0.190	1.11	0.080	/



		Right cheek	0	RMC 12.2K	DSI1	-	-	4183/836.6	25.00	24.56	0.154	0.020	1.11	0.170	/
		Right Tilt	0	RMC 12.2K	DSI1	-	-	4183/836.6	25.00	24.56	0.078	0.110	1.11	0.086	/
LTE 2	Main (ANT0)	Left cheek	0	QPSK	DSI1	1	0	18700/1860	23.40	22.17	0.136	0.100	1.33	0.181	/
			0	QPSK	DSI1	50%	0	18700/1860	23.40	22.26	0.158	0.109	1.30	0.205	/
		Left Tilt	0	QPSK	DSI1	1	50	19100/1900	23.40	22.17	0.039	0.029	1.33	0.052	/
			0	QPSK	DSI1	50%	0	18700/1860	23.40	22.26	0.040	0.024	1.30	0.052	/
		Right cheek	0	QPSK	DSI1	1	50	19100/1900	23.40	22.17	0.074	-0.050	1.33	0.098	/
			0	QPSK	DSI1	50%	0	18700/1860	23.40	22.26	0.090	0.042	1.30	0.117	/
		Right Tilt	0	QPSK	DSI1	1	50	19100/1900	23.40	22.17	0.065	0.059	1.33	0.087	/
			0	QPSK	DSI1	50%	0	18700/1860	23.40	22.26	0.076	0.020	1.30	0.099	/
	DIV (ANT2)	Left cheek	0	QPSK	DSI1	1	50	18700/1860	19.90	19.10	0.331	0.030	1.20	0.398	/
			0	QPSK	DSI1	50%	25	18700/1860	19.90	19.20	0.310	0.040	1.17	0.364	/
		Left Tilt	0	QPSK	DSI1	1	50	18700/1860	19.90	19.10	0.411	0.020	1.20	0.494	/
			0	QPSK	DSI1	50%	25	18700/1860	19.90	19.20	0.416	0.030	1.17	0.489	/
		Right cheek	0	QPSK	DSI1	1	50	18700/1860	19.90	19.10	0.562	0.160	1.20	0.676	/
			0	QPSK	DSI1	50%	25	18700/1860	19.90	19.20	0.562	0.160	1.17	0.660	/
		Right Tilt	0	QPSK	DSI1	1	50	18700/1860	19.90	19.10	0.579	0.080	1.20	0.696	19
			0	QPSK	DSI1	50%	25	18700/1860	19.90	19.20	0.579	0.020	1.17	0.680	/
		Right Tilt (Battery2)	0	QPSK	DSI1	1	50	18700/1860	19.90	19.10	0.539	0.015	1.20	0.648	/
		Right Tilt (Battery3)	0	QPSK	DSI1	1	50	18700/1860	19.90	19.10	0.555	-0.124	1.20	0.667	/
		Right Tilt (SIM2)	0	QPSK	DSI1	1	50	18700/1860	19.90	19.10	0.577	0.014	1.20	0.694	/
LTE 4	Main (ANT0)	Left cheek	0	QPSK	DSI1	1	50	20050/1720	23.50	22.34	0.108	0.027	1.31	0.141	/
			0	QPSK	DSI1	50%	0	20175/1732.5	23.50	22.31	0.124	0.048	1.32	0.163	/
		Left Tilt	0	QPSK	DSI1	1	50	20050/1720	23.50	22.34	0.063	0.140	1.31	0.082	/
			0	QPSK	DSI1	50%	0	20175/1732.5	23.50	22.31	0.058	0.080	1.32	0.076	/
		Right cheek	0	QPSK	DSI1	1	50	20050/1720	23.50	22.34	0.112	0.085	1.31	0.146	/
			0	QPSK	DSI1	50%	0	20175/1732.5	23.50	22.31	0.121	0.055	1.32	0.159	/
		Right Tilt	0	QPSK	DSI1	1	50	20050/1720	23.50	22.34	0.062	0.110	1.31	0.081	/
			0	QPSK	DSI1	50%	0	20175/1732.5	23.50	22.31	0.061	0.040	1.32	0.080	/
	DIV (ANT2)	Left cheek	0	QPSK	DSI1	1	50	20175/1732.5	18.50	17.73	0.207	0.010	1.19	0.247	/
			0	QPSK	DSI1	50%	0	20300/1745	18.50	17.92	0.221	0.020	1.14	0.253	/
		Left Tilt	0	QPSK	DSI1	1	50	20175/1732.5	18.50	17.73	0.279	0.040	1.19	0.333	/
			0	QPSK	DSI1	50%	0	20300/1745	18.50	17.92	0.287	0.020	1.14	0.328	/
		Right cheek	0	QPSK	DSI1	1	50	20175/1732.5	18.50	17.73	0.381	-0.110	1.19	0.455	/
			0	QPSK	DSI1	50%	0	20300/1745	18.50	17.92	0.403	0.010	1.14	0.461	/
		Right Tilt	0	QPSK	DSI1	1	50	20175/1732.5	18.50	17.73	0.458	0.060	1.19	0.547	/
			0	QPSK	DSI1	50%	0	20300/1745	18.50	17.92	0.478	-0.040	1.14	0.546	20
LTE 5	Main (ANT1)	Left cheek	0	QPSK	DSI1	1	25	20600/844	25.00	24.67	0.181	0.121	1.08	0.195	21
			0	QPSK	DSI1	25	0	20600/844	24.00	23.47	0.135	0.118	1.13	0.153	/
		Left Tilt	0	QPSK	DSI1	1	25	20600/844	25.00	24.67	0.074	0.028	1.08	0.080	/



LTE 7	Main (ANT4)	Right cheek	0	QPSK	DSI1	25	0	20600/844	24.00	23.47	0.053	0.048	1.13	0.060	/
			0	QPSK	DSI1	1	25	20600/844	25.00	24.67	0.163	0.098	1.08	0.176	/
		Right Tilt	0	QPSK	DSI1	25	0	20600/844	24.00	23.47	0.113	0.063	1.13	0.128	/
			0	QPSK	DSI1	1	25	20600/844	25.00	24.67	0.102	0.020	1.08	0.110	/
			0	QPSK	DSI1	25	0	20600/844	24.00	23.47	0.073	0.038	1.13	0.082	/
			0	QPSK	DSI1	50%	50	21350/2560	18.50	17.54	0.101	0.043	1.25	0.126	/
		Left Tilt	0	QPSK	DSI1	1	50	21100/2535	18.50	17.63	0.173	0.130	1.22	0.211	/
			0	QPSK	DSI1	50%	50	21350/2560	18.50	17.54	0.171	0.030	1.25	0.213	/
LTE 13	Main (ANT1)	Left cheek	0	QPSK	DSI1	1	50	21100/2535	18.50	17.63	0.503	-0.130	1.22	0.615	22
			0	QPSK	DSI1	50%	50	21350/2560	18.50	17.54	0.452	0.051	1.25	0.564	/
		Right cheek	0	QPSK	DSI1	1	50	21100/2535	18.50	17.63	0.328	0.029	1.22	0.401	/
			0	QPSK	DSI1	50%	50	21350/2560	18.50	17.54	0.329	0.068	1.25	0.410	/
		Right Tilt	0	QPSK	DSI1	1	50	21100/2535	18.50	17.63	0.089	0.168	1.36	0.120	/
			0	QPSK	DSI1	50%	50	21100/2535	22.10	20.62	0.072	0.059	1.41	0.101	/
		Left Tilt	0	QPSK	DSI1	1	50	20850/2510	23.10	21.77	0.054	0.029	1.36	0.074	/
			0	QPSK	DSI1	50%	50	21100/2535	22.10	20.62	0.044	0.069	1.41	0.062	/
		Right cheek	0	QPSK	DSI1	1	50	20850/2510	23.10	21.77	0.075	0.020	1.36	0.101	/
			0	QPSK	DSI1	50%	50	21100/2535	22.10	20.62	0.054	0.022	1.41	0.076	/
		Right Tilt	0	QPSK	DSI1	1	50	20850/2510	23.10	21.77	0.036	0.041	1.36	0.048	/
			0	QPSK	DSI1	25	0	23230/782	24.00	23.43	0.075	0.030	1.14	0.085	/
LTE 26	Main (ANT1)	Left cheek	0	QPSK	DSI1	1	25	23230/782	25.00	24.46	0.090	0.142	1.13	0.102	23
			0	QPSK	DSI1	25	0	23230/782	24.00	23.43	0.075	0.030	1.14	0.085	/
		Left Tilt	0	QPSK	DSI1	1	25	23230/782	25.00	24.46	0.036	0.038	1.13	0.040	/
			0	QPSK	DSI1	25	0	23230/782	24.00	23.43	0.030	0.042	1.14	0.034	/
		Right cheek	0	QPSK	DSI1	1	25	23230/782	25.00	24.46	0.075	0.107	1.13	0.084	/
			0	QPSK	DSI1	25	0	23230/782	24.00	23.43	0.062	0.099	1.14	0.070	/
		Right Tilt	0	QPSK	DSI1	1	25	23230/782	25.00	24.46	0.047	0.020	1.13	0.054	/
			0	QPSK	DSI1	25	0	23230/782	24.00	23.43	0.039	0.050	1.14	0.045	/
		Left cheek	0	QPSK	DSI1	1	0	26965/841.5	25.00	24.48	0.234	0.170	1.13	0.264	24
			0	QPSK	DSI1	36	0	26965/841.5	24.00	23.62	0.203	0.026	1.09	0.222	/
		Left Tilt	0	QPSK	DSI1	1	0	26965/841.5	25.00	24.48	0.116	0.009	1.13	0.131	/
			0	QPSK	DSI1	36	0	26965/841.5	24.00	23.62	0.103	0.016	1.09	0.112	/
LTE 38	Main (ANT4)	Right cheek	0	QPSK	DSI1	1	0	26965/841.5	25.00	24.48	0.162	0.068	1.13	0.183	/
			0	QPSK	DSI1	36	0	26965/841.5	24.00	23.62	0.139	0.117	1.09	0.152	/
		Right Tilt	0	QPSK	DSI1	1	0	26965/841.5	25.00	24.48	0.082	0.170	1.13	0.092	/
			0	QPSK	DSI1	36	0	26965/841.5	24.00	23.62	0.070	0.024	1.09	0.076	/
		Left cheek	0	QPSK	DSI1	1	50	38150/2610	20.00	19.80	0.168	0.023	1.05	0.176	/
			0	QPSK	DSI1	50%	25	38000/2595	20.00	19.68	0.163	0.100	1.08	0.175	/
		Left Tilt	0	QPSK	DSI1	1	50	38150/2610	20.00	19.80	0.181	0.000	1.05	0.190	/
			0	QPSK	DSI1	50%	25	38000/2595	20.00	19.68	0.182	0.010	1.08	0.196	/
		Right cheek	0	QPSK	DSI1	1	50	38150/2610	20.00	19.80	0.508	0.120	1.05	0.532	/
			0	QPSK	DSI1	50%	25	38000/2595	20.00	19.68	0.623	0.020	1.08	0.671	25
		Right Tilt	0	QPSK	DSI1	1	50	38150/2610	20.00	19.80	0.543	0.037	1.05	0.569	/
			0	QPSK	DSI1	1	50	38150/2610	20.00	19.80	0.543	0.037	1.05	0.569	/



LTE 66	DIV (ANT0)	Left cheek	0	QPSK	DS11	50%	25	38000/2595	20.00	19.68	0.520	-0.030	1.08	0.560	/
			0	QPSK	DS11	1	50	38150/2610	23.10	22.55	0.080	0.021	1.14	0.091	/
		Left Tilt	0	QPSK	DS11	50%	50	38150/2610	22.10	21.62	0.063	-0.044	1.12	0.070	/
			0	QPSK	DS11	1	50	38150/2610	23.10	22.55	0.078	0.180	1.14	0.088	/
		Right cheek	0	QPSK	DS11	50%	50	38150/2610	22.10	21.62	0.062	0.041	1.12	0.069	/
			0	QPSK	DS11	1	50	38150/2610	23.10	22.55	0.070	0.122	1.14	0.080	/
		Right Tilt	0	QPSK	DS11	50%	50	38150/2610	22.10	21.62	0.059	0.107	1.12	0.066	/
			0	QPSK	DS11	1	50	38150/2610	23.10	22.55	0.061	0.051	1.14	0.069	/
	Main (ANT0)	Left cheek	0	QPSK	DS11	50%	0	132572/1770	23.50	21.74	0.122	0.041	1.50	0.183	/
			0	QPSK	DS11	1	50	132572/1770	23.50	21.69	0.124	0.096	1.52	0.188	/
		Left Tilt	0	QPSK	DS11	50%	0	132572/1770	23.50	21.74	0.053	0.020	1.50	0.079	/
			0	QPSK	DS11	1	50	132572/1770	23.50	21.69	0.057	0.170	1.52	0.086	/
		Right cheek	0	QPSK	DS11	50%	0	132572/1770	23.50	21.74	0.111	0.070	1.50	0.166	/
			0	QPSK	DS11	1	50	132572/1770	23.50	21.69	0.101	0.141	1.52	0.153	/
		Right Tilt	0	QPSK	DS11	50%	0	132572/1770	23.50	21.74	0.063	0.170	1.50	0.094	/
			0	QPSK	DS11	1	50	132572/1770	23.50	21.69	0.064	-0.040	1.52	0.097	/
	DIV (ANT2)	Left cheek	0	QPSK	DS11	50%	0	132572/1770	18.50	18.11	0.280	0.004	1.09	0.306	/
			0	QPSK	DS11	1	50	132572/1770	18.50	18.09	0.259	-0.002	1.10	0.285	/
		Left Tilt	0	QPSK	DS11	50%	0	132572/1770	18.50	18.11	0.485	0.001	1.09	0.531	/
			0	QPSK	DS11	1	50	132572/1770	18.50	18.09	0.360	-0.002	1.10	0.396	/
		Right cheek	0	QPSK	DS11	50%	0	132572/1770	18.50	18.11	0.454	0.006	1.09	0.497	/
			0	QPSK	DS11	1	50	132572/1770	18.50	18.09	0.434	0.005	1.10	0.477	/
		Right Tilt	0	QPSK	DS11	50%	0	132572/1770	18.50	18.11	0.571	0.000	1.09	0.625	26
			0	QPSK	DS11	1	50	132572/1770	18.50	18.09	0.568	0.014	1.10	0.624	/

Band	Antenna	Test Position	Dist. (mm)	Mode	Duty Cycle	Power Reduction	Ch./Freq. (MHz)	Tune-up (dBm)	Measured power (dBm)	Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	Plot No.
2.4G	Wi-Fi	Left cheek	0	802.11g	98.0%	Receiver on	1/2412	16.00	15.51	0.396	-0.029	1.12	0.443	27
		Left Tilt	0	802.11g	98.0%	Receiver on	1/2412	16.00	15.51	0.168	0.048	1.12	0.188	/
		Right cheek	0	802.11g	98.0%	Receiver on	1/2412	16.00	15.51	0.095	0.020	1.12	0.106	/
		Right Tilt	0	802.11g	98.0%	Receiver on	1/2412	16.00	15.51	0.064	-0.030	1.12	0.072	/
		Left cheek It (Battery2)	0	802.11g	98.0%	Receiver on	1/2412	16.00	15.51	0.322	0.036	1.12	0.360	/
		Left cheek (Battery3)	0	802.11g	98.0%	Receiver on	1/2412	16.00	15.51	0.339	0.014	1.12	0.379	/
		Left cheek (SIM2)	0	802.11g	98.0%	Receiver on	1/2412	16.00	15.51	0.390	0.036	1.12	0.437	/
		Left cheek	0	802.11b	98.0%	Receiver on	1/2412	16.00	14.68	0.299	0.060	1.36	0.405	/
		Left Tilt	0	802.11b	98.0%	Receiver on	1/2412	16.00	14.68	0.126	-0.190	1.36	0.171	/
		Right cheek	0	802.11b	98.0%	Receiver on	1/2412	16.00	14.68	0.089	0.042	1.36	0.120	/
		Right Tilt	0	802.11b	98.0%	Receiver on	1/2412	16.00	14.68	0.055	0.011	1.36	0.075	/



U-NII-1	Wi-Fi	Left cheek	0	802.11a	99.0%	Receiver on	48/5240	15.00	14.38	0.139	-0.176	1.15	0.160	/
		Left Tilt	0	802.11a	99.0%	Receiver on	48/5240	15.00	14.38	0.093	0.196	1.15	0.107	/
		Right cheek	0	802.11a	99.0%	Receiver on	48/5240	15.00	14.38	0.047	0.090	1.15	0.054	/
		Right Tilt	0	802.11a	99.0%	Receiver on	48/5240	15.00	14.38	0.025	0.019	1.15	0.029	/
U-NII-2A	Wi-Fi	Left cheek	0	802.11a	99.0%	Receiver on	52/5260	15.00	14.41	0.126	0.096	1.15	0.144	/
		Left Tilt	0	802.11a	99.0%	Receiver on	52/5260	15.00	14.41	0.098	0.090	1.15	0.112	/
		Right cheek	0	802.11a	99.0%	Receiver on	52/5260	15.00	14.41	0.037	0.079	1.15	0.043	/
		Right Tilt	0	802.11a	99.0%	Receiver on	52/5260	15.00	14.41	0.046	0.099	1.15	0.053	/
U-NII-2C	Wi-Fi	Left cheek	0	802.11a	99.0%	Receiver on	100/5500	15.00	14.95	0.164	0.115	1.01	0.166	/
		Left Tilt	0	802.11a	99.0%	Receiver on	100/5500	15.00	14.95	0.106	0.077	1.01	0.107	/
		Right cheek	0	802.11a	99.0%	Receiver on	100/5500	15.00	14.95	0.034	0.099	1.01	0.034	/
		Right Tilt	0	802.11a	99.0%	Receiver on	100/5500	15.00	14.95	0.061	0.099	1.01	0.062	/
U-NII-3	Wi-Fi	Left cheek	0	802.11ac-VHT80 (MCS0)	92.0%	Receiver on	155/5775	15.00	14.56	0.165	-0.176	1.11	0.183	28
		Left Tilt	0	802.11ac-VHT80 (MCS0)	92.0%	Receiver on	155/5775	15.00	14.56	0.124	0.038	1.11	0.137	/
		Right cheek	0	802.11ac-VHT80 (MCS0)	92.0%	Receiver on	155/5775	15.00	14.56	0.034	0.099	1.11	0.037	/
		Right Tilt	0	802.11ac-VHT80 (MCS0)	92.0%	Receiver on	155/5775	15.00	14.56	0.073	0.099	1.11	0.080	/
Bluetooth	BT	Left cheek	0	DH5	77.0%	Receiver on	31/2433	15.20	13.78	0.173	0.140	1.39	0.240	29
		Left Tilt	0	DH5	77.0%	Receiver on	31/2433	15.20	13.78	0.076	0.160	1.39	0.105	/
		Right cheek	0	DH5	77.0%	Receiver on	31/2433	15.20	13.78	0.055	-0.029	1.39	0.076	/
		Right Tilt	0	DH5	77.0%	Receiver on	31/2433	15.20	13.78	0.034	-0.180	1.39	0.047	/



Body-worn SAR

Band	Antenna	Test Position	Dist. (mm)	Mode	Power Reduction	RB	offset	Ch./Freq. (MHz)	Tune-up (dBm)	Measured power (dBm)	Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	Plot No.
GSM 850	Main (ANT1)	Back Side	15	GSM	DSI2	-	-	190/836.6	33.50	32.62	0.226	0.002	1.22	0.277	30
		Front Side	15	GSM	DSI2	-	-	190/836.6	33.50	32.62	0.151	-0.023	1.22	0.185	/
GSM 1900	Main (ANT0)	Back Side	15	GSM	DSI2	-	-	661/1880	30.50	29.88	0.155	0.170	1.15	0.179	31
		Front Side	15	GSM	DSI2	-	-	661/1880	30.50	29.88	0.091	-0.010	1.15	0.105	/
WCDMA II	Main (Ant0)	Back Side	15	RMC	DSI2	-	-	9400/1880	23.40	21.80	0.236	-0.120	1.45	0.341	32
		Front Side	15	RMC	DSI2	-	-	9400/1880	23.40	21.80	0.151	0.076	1.45	0.218	/
	DIV (Ant2)	Back Side	15	RMC	DSI2	-	-	9400/1880	21.40	20.89	0.142	0.061	1.12	0.160	/
		Front Side	15	RMC	DSI2	-	-	9400/1880	21.40	20.89	0.106	0.010	1.12	0.119	/
WCDMA IV	Main (Ant0)	Back Side	15	RMC	DSI2	-	-	1413/1732.6	23.50	23.38	0.279	0.180	1.03	0.287	33
		Front Side	15	RMC	DSI2	-	-	1413/1732.6	23.50	23.38	0.243	0.025	1.03	0.250	/
	DIV (Ant2)	Back Side	15	RMC	DSI2	-	-	1413/1732.6	21.00	20.02	0.152	0.014	1.25	0.190	/
		Front Side	15	RMC	DSI2	-	-	1413/1732.6	21.00	20.02	0.119	0.060	1.25	0.149	/
WCDMA V	Main (Ant1)	Back Side	15	RMC	DSI2	-	-	4183/836.6	25.00	24.56	0.320	0.003	1.11	0.354	34
		Front Side	15	RMC	DSI2	-	-	4183/836.6	25.00	24.56	0.282	-0.030	1.11	0.312	/
LTE 2	Main (ANT0)	Back Side	15	QPSK	DSI2	1	0	18700/1860	23.40	22.17	0.259	-0.070	1.33	0.344	35
			15	QPSK	DSI2	50%	0	18700/1860	23.40	22.26	0.256	0.032	1.30	0.333	/
		Front Side	15	QPSK	DSI2	1	0	18700/1860	23.40	22.17	0.184	0.017	1.33	0.244	/
			15	QPSK	DSI2	50%	0	18700/1860	23.40	22.26	0.188	0.099	1.30	0.244	/
	DIV (ANT2)	Back Side	15	QPSK	DSI2	1	50	19100/1900	21.40	20.68	0.144	0.025	1.18	0.170	/
			15	QPSK	DSI2	50%	25	18700/1860	21.40	20.72	0.150	0.010	1.17	0.175	/
		Front Side	15	QPSK	DSI2	1	50	19100/1900	21.40	20.68	0.095	0.120	1.18	0.112	/
			15	QPSK	DSI2	50%	25	18700/1860	21.40	20.72	0.108	0.030	1.17	0.126	/
LTE 4	Main (ANT0)	Back Side	15	QPSK	DSI2	1	0	20050/1720	23.50	22.34	0.221	0.088	1.31	0.289	/
			15	QPSK	DSI2	50%	0	20175/1732.5	23.50	22.31	0.272	0.070	1.32	0.358	36
		Front Side	15	QPSK	DSI2	1	0	20050/1720	23.50	22.34	0.171	0.020	1.31	0.223	/
			15	QPSK	DSI2	50%	0	20175/1732.5	23.50	22.31	0.209	0.010	1.32	0.275	/
	DIV (ANT2)	Back Side	15	QPSK	DSI2	1	50	20050/1720	21.00	20.23	0.151	0.012	1.19	0.180	/
			15	QPSK	DSI2	50%	0	20300/1745	21.00	20.30	0.134	-0.107	1.17	0.157	/
		Front Side	15	QPSK	DSI2	1	50	20050/1720	21.00	20.23	0.109	-0.190	1.19	0.130	/
			15	QPSK	DSI2	50%	0	20300/1745	21.00	20.30	0.105	0.022	1.17	0.123	/
LTE 5	Main (ANT1)	Back Side	15	QPSK	DSI2	1	25	20600/844	25.00	24.67	0.379	-0.010	1.08	0.409	37
			15	QPSK	DSI2	50%	0	20600/844	24.00	23.47	0.251	-0.090	1.13	0.284	/
		Front Side	15	QPSK	DSI2	1	25	20600/844	25.00	24.67	0.272	0.030	1.08	0.293	/
			15	QPSK	DSI2	50%	0	20600/844	24.00	23.47	0.224	0.015	1.13	0.253	/
LTE 7	Main (ANT4)	Back Side	15	QPSK	DSI2	1	50	20850/2510	20.50	19.59	0.291	0.182	1.23	0.359	38
			15	QPSK	DSI2	50%	25	21350/2560	20.50	19.70	0.250	0.108	1.20	0.301	/
		Front Side	15	QPSK	DSI2	1	50	20850/2510	20.50	19.59	0.177	0.034	1.23	0.218	/
			15	QPSK	DSI2	50%	25	21350/2560	20.50	19.70	0.132	0.067	1.20	0.159	/



	DIV (ANT0)	Back Side	15	QPSK	DSI2	1	50	20850/2510	23.10	21.77	0.165	0.038	1.36	0.224	/
			15	QPSK	DSI2	50%	50	21100/2535	22.10	20.62	0.174	-0.025	1.41	0.245	/
		Front Side	15	QPSK	DSI2	1	50	20850/2510	23.10	21.77	0.078	0.055	1.36	0.106	/
			15	QPSK	DSI2	50%	50	21100/2535	22.10	20.62	0.079	0.010	1.41	0.111	/
LTE 13	Main (ANT1)	Back Side	15	QPSK	DSI2	1	25	23230/782	25.00	24.46	0.183	0.003	1.13	0.207	39
			15	QPSK	DSI2	50%	0	23230/782	24.00	23.43	0.141	0.014	1.14	0.161	/
		Front Side	15	QPSK	DSI2	1	25	23230/782	25.00	24.46	0.130	0.035	1.13	0.147	/
			15	QPSK	DSI2	50%	0	23230/782	24.00	23.43	0.106	0.051	1.14	0.121	/
LTE 26	Main (ANT1)	Back Side	15	QPSK	DSI2	1	0	26965/841.5	25.00	24.48	0.429	0.005	1.13	0.484	40
			15	QPSK	DSI2	50%	0	26965/841.5	24.00	23.62	0.292	0.023	1.09	0.319	/
		Front Side	15	QPSK	DSI2	1	0	26965/841.5	25.00	24.48	0.286	0.035	1.13	0.322	/
			15	QPSK	DSI2	50%	0	26965/841.5	24.00	23.62	0.251	0.000	1.09	0.274	/
LTE 38 TDD	Main (ANT4)	Back Side	15	QPSK	DSI2	1	50	38150/2610	22.00	21.86	0.292	-0.127	1.03	0.302	41
			15	QPSK	DSI2	50%	25	38150/2610	22.00	21.73	0.201	-0.045	1.06	0.214	/
		Front Side	15	0.130	DSI2	1	50	38150/2610	22.00	21.86	0.111	0.022	1.03	0.115	/
			15	QPSK	DSI2	50%	25	38150/2610	22.00	21.73	0.108	0.035	1.06	0.115	/
	DIV (ANT0)	Back Side	15	QPSK	DSI2	1	50	38150/2610	23.10	22.55	0.131	0.020	1.14	0.149	/
			15	QPSK	DSI2	50%	50	38150/2610	22.10	21.62	0.205	-0.012	1.12	0.229	/
		Front Side	15	QPSK	DSI2	1	50	38150/2610	23.10	22.55	0.084	0.035	1.14	0.095	/
			15	QPSK	DSI2	50%	50	38150/2610	22.10	21.62	0.129	0.025	1.12	0.144	/
LTE 66	Main (ANT0)	Back Side	15	QPSK	DSI2	1	50	132572/1770	23.50	22.74	0.515	0.000	1.19	0.613	/
			15	QPSK	DSI2	50%	0	132572/1770	23.50	22.69	0.539	0.006	1.21	0.650	42
		Front Side	15	QPSK	DSI2	1	50	132572/1770	23.50	22.74	0.339	0.001	1.19	0.404	/
			15	QPSK	DSI2	50%	0	132572/1770	23.50	22.69	0.352	-0.003	1.21	0.424	/
	DIV (ANT2)	Back Side	15	QPSK	DSI2	1	50	132572/1770	18.50	18.11	0.157	0.050	1.09	0.172	/
			15	QPSK	DSI2	50%	0	132572/1770	18.50	18.09	0.154	0.004	1.10	0.169	/
		Front Side	15	QPSK	DSI2	1	50	132572/1770	18.50	18.11	0.120	0.001	1.09	0.131	/
			15	QPSK	DSI2	50%	0	132572/1770	18.50	18.09	0.117	0.012	1.10	0.129	/
	Main (ANT0)	Back Side (Battery2)	15	QPSK	DSI2	50%	0	132572/1770	23.50	22.69	0.505	0.011	1.21	0.609	/
		Back Side (Battery3)	15	QPSK	DSI2	50%	0	132572/1770	23.50	22.69	0.527	0.037	1.21	0.635	/
		Back Side (SIM2)	15	QPSK	DSI2	50%	0	132572/1770	23.50	22.69	0.534	0.025	1.21	0.643	/

Band	Antenna	Test Position	Dist. (mm)	Mode	Duty Cycle	Power Reduction	Ch./Freq. (MHz)	Tune-up (dBm)	Measured power (dBm)	Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	Plot No.
2.4G	Wi-Fi	Back Side	15	802.11b	98.0%	Receiver off	11/2462	19.00	18.75	0.078	0.153	-0.02	-0.002	/
		Front Side	15	802.11b	98.0%	Receiver off	11/2462	19.00	18.75	0.073	0.020	1.06	0.077	/
2.4G	Wi-Fi	Back Side	15	802.11g	98.0%	Receiver off	8/2447	19.50	19.42	0.185	0.017	1.02	0.188	43
		Front Side	15	802.11g	98.0%	Receiver off	8/2447	19.50	19.42	0.093	0.048	1.02	0.095	/
U-NII-1	Wi-Fi	Back Side	15	802.11a	99.0%	Receiver off	48/5240	19.00	18.83	0.192	-0.031	1.04	0.200	/



		Front Side	15	802.11a	99.0%	Receiver off	48/5240	19.00	18.83	0.071	0.120	1.04	0.074	/
U-NII-2A	Wi-Fi	Back Side	15	802.11a	99.0%	Receiver off	52/5260	19.00	18.79	0.200	-0.034	1.05	0.210	/
		Front Side	15	802.11a	99.0%	Receiver off	52/5260	19.00	18.79	0.075	0.016	1.05	0.079	/
U-NII-2C	Wi-Fi	Back Side	15	802.11a	99.0%	Receiver off	116/5580	19.00	18.84	0.188	0.100	1.04	0.195	/
		Front Side	15	802.11a	99.0%	Receiver off	116/5580	19.00	18.84	0.064	0.000	1.04	0.066	/
U-NII-3	Wi-Fi	Back Side	15	802.11a	99.0%	Receiver off	157/5785	19.00	18.90	0.262	0.099	1.02	0.268	44
		Front Side	15	802.11a	99.0%	Receiver off	157/5785	19.00	18.90	0.092	0.020	1.02	0.094	/
		Back Side (Battery2)	15	802.11a	99.0%	Receiver off	157/5785	19.00	18.90	0.233	0.011	1.02	0.238	/
		Back Side (Battery3)	15	802.11a	99.0%	Receiver off	157/5785	19.00	18.90	0.251	0.025	1.02	0.257	/
		Back Side (SIM2)	15	802.11a	99.0%	Receiver off	157/5785	19.00	18.90	0.244	-0.014	1.02	0.250	/
Bluetooth	BT	Back Side	15	DH5	77.0%	Receiver off	31/2433	15.20	13.78	0.037	-0.180	1.39	0.051	45
		Front Side	15	DH5	77.0%	Receiver off	31/2433	15.20	13.78	0.025	0.014	1.39	0.035	/



Hotspot

Band	Antenna	Test Position	Dist. (mm)	Mode	Power Reduction	RB	offset	Ch./Freq. (MHz)	Tune-up (dBm)	Measured power (dBm)	Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	Plot No.
GSM850	Main (ANT1)	Back Side	10	GPRS 4TX Slots	DSI5	-	-	190/836.6	23.50	22.10	0.196	-0.073	1.38	0.271	66
		Front Side	10	GPRS 4TX Slots	DSI5	-	-	190/836.6	23.50	22.10	0.081	0.020	1.38	0.112	/
		Left Edge	10	GPRS 4TX Slots	DSI5	-	-	190/836.6	23.50	22.10	0.041	0.018	1.38	0.057	/
		Right Edge	10	GPRS 4TX Slots	DSI5	-	-	190/836.6	23.50	22.10	0.021	-0.035	1.38	0.029	/
		Top Edge	10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
		Bottom Edge	10	GPRS 4TX Slots	DSI5	-	-	190/836.6	23.50	22.10	0.087	0.064	1.38	0.120	/
GSM1900	Main (ANT0)	Back Side	10	GPRS 1TX Slots	DSI5	-	-	661/1880	26.50	25.62	0.059	0.080	1.22	0.072	/
		Front Side	10	GPRS 1TX Slots	DSI5	-	-	661/1880	26.50	25.62	0.052	-0.017	1.22	0.064	/
		Left Edge	10	GPRS 1TX Slots	DSI5	-	-	661/1880	26.50	25.62	0.018	0.032	1.22	0.022	/
		Right Edge	10	GPRS 1TX Slots	DSI5	-	-	661/1880	26.50	25.62	0.017	0.058	1.22	0.021	/
		Top Edge	10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
		Bottom Edge	10	GPRS 1TX Slots	DSI5	-	-	661/1880	26.50	25.62	0.243	-0.046	1.22	0.298	46
WCDMA II	Main (Ant0)	Back Side	10	RMC	DSI5	-	-	9400/1880	21.40	20.16	0.448	-0.023	1.33	0.596	/
		Front Side	10	RMC	DSI5	-	-	9400/1880	21.40	20.16	0.301	0.102	1.33	0.400	/
		Left Edge	10	RMC	DSI5	-	-	9400/1880	21.40	20.16	0.077	0.016	1.33	0.102	/
		Right Edge	10	RMC	DSI5	-	-	9400/1880	21.40	20.16	0.056	-0.020	1.33	0.075	/
		Top Edge	10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
		Bottom Edge	10	RMC	DSI5	-	-	9400/1880	21.40	20.16	0.511	0.040	1.33	0.680	47
	DIV (Ant2)	Back Side	10	RMC	DSI5	-	-	9400/1880	20.40	19.30	0.223	-0.020	1.29	0.287	/
		Front Side	10	RMC	DSI5	-	-	9400/1880	20.40	19.30	0.137	0.010	1.29	0.176	/
		Left Edge	10	RMC	DSI5	-	-	9400/1880	20.40	19.30	0.052	0.123	1.29	0.067	/
		Right Edge	10	RMC	DSI5	-	-	9400/1880	20.40	19.30	0.000	0.025	1.29	0.000	/
		Top Edge	10	RMC	DSI5	-	-	9400/1880	20.40	19.30	0.372	0.103	1.29	0.479	/
		Bottom Edge	10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
WCDMA IV	Main (Ant0)	Back Side	10	RMC	DSI5	-	-	1413/1732.6	21.50	19.85	0.510	0.041	1.46	0.746	/
		Front Side	10	RMC	DSI5	-	-	1413/1732.6	21.50	19.85	0.427	0.022	1.46	0.624	/
		Left Edge	10	RMC	DSI5	-	-	1413/1732.6	21.50	19.85	0.124	0.011	1.46	0.181	/
		Right Edge	10	RMC	DSI5	-	-	1413/1732.6	21.50	19.85	0.051	0.103	1.46	0.075	/
		Top Edge	10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
		Bottom Edge	10	RMC	DSI5	-	-	1413/1732.6	21.50	19.85	0.538	0.050	1.46	0.787	48
	DIV (Ant2)	Back Side	10	RMC	DSI5	-	-	1413/1732.6	20.50	20.31	0.259	0.042	1.04	0.271	/
		Front Side	10	RMC	DSI5	-	-	1413/1732.6	20.50	20.31	0.174	0.012	1.04	0.182	/
		Left Edge	10	RMC	DSI5	-	-	1413/1732.6	20.50	20.31	0.080	0.026	1.04	0.084	/
		Right Edge	10	RMC	DSI5	-	-	1413/1732.6	20.50	20.31	0.047	0.061	1.04	0.049	/
		Top Edge	10	RMC	DSI5	-	-	1413/1732.6	20.50	20.31	0.513	0.020	1.04	0.536	/
		Bottom Edge	10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
WCDMA	Main	Back Side	10	RMC	DSI5	-	-	4183/836.6	25.00	24.56	0.615	-0.003	1.11	0.681	49



V	(Ant1)	Front Side	10	RMC	DSI5	-	-	4183/836.6	25.00	24.56	0.471	0.000	1.11	0.521	/
		Left Edge	10	RMC	DSI5	-	-	4183/836.6	25.00	24.56	0.206	0.130	1.11	0.228	/
		Right Edge	10	RMC	DSI5	-	-	4183/836.6	25.00	24.56	0.094	-0.170	1.11	0.104	/
		Top Edge	10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
		Bottom Edge	10	RMC	DSI5	-	-	4183/836.6	25.00	24.56	0.329	0.030	1.11	0.364	/
LTE 2	Main (ANT0)	Back Side	10	QPSK	DSI5	1	0	18700/1860	21.40	20.07	0.290	0.062	1.36	0.394	/
			10	QPSK	DSI5	50%	0	18700/1860	21.40	20.20	0.295	0.105	1.32	0.389	/
		Front Side	10	QPSK	DSI5	1	0	18700/1860	21.40	20.07	0.182	0.024	1.36	0.247	/
			10	QPSK	DSI5	50%	0	18700/1860	21.40	20.20	0.185	0.120	1.32	0.244	/
		Left Edge	10	QPSK	DSI5	1	0	18700/1860	21.40	20.07	0.074	0.010	1.36	0.101	/
			10	QPSK	DSI5	50%	0	18700/1860	21.40	20.20	0.075	0.036	1.32	0.099	/
		Right Edge	10	QPSK	DSI5	1	0	18700/1860	21.40	20.07	0.000	0.000	1.36	0.000	/
			10	QPSK	DSI5	50%	0	18700/1860	21.40	20.20	0.050	0.102	1.32	0.066	/
		Top Edge	10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
			10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
		Bottom Edge	10	QPSK	DSI5	1	0	18700/1860	21.40	20.07	0.543	0.025	1.36	0.738	/
			10	QPSK	DSI5	50%	0	18700/1860	21.40	20.20	0.576	-0.060	1.32	0.759	50
	DIV (ANT2)	Back Side	10	QPSK	DSI5	1	50	19100/1900	20.40	19.34	0.265	0.064	1.28	0.338	/
			10	QPSK	DSI5	50%	0	19100/1900	20.40	19.34	0.238	-0.024	1.28	0.304	/
		Front Side	10	QPSK	DSI5	1	50	19100/1900	20.40	19.34	0.120	-0.035	1.28	0.153	/
			10	QPSK	DSI5	50%	0	19100/1900	20.40	19.34	0.131	0.042	1.28	0.167	/
		Left Edge	10	QPSK	DSI5	1	50	19100/1900	20.40	19.34	0.060	-0.130	1.28	0.077	/
			10	QPSK	DSI5	50%	0	19100/1900	20.40	19.34	0.066	-0.023	1.28	0.084	/
		Right Edge	10	QPSK	DSI5	1	50	19100/1900	20.40	19.34	0.000	0.000	1.28	0.000	/
			10	QPSK	DSI5	50%	0	19100/1900	20.40	19.34	0.000	0.000	1.28	0.000	/
		Top Edge	10	QPSK	DSI5	1	50	19100/1900	20.40	19.34	0.336	0.022	1.28	0.429	/
			10	QPSK	DSI5	50%	0	19100/1900	20.40	19.34	0.355	0.029	1.28	0.453	/
		Bottom Edge	10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
			10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
LTE 4	Main (ANT0)	Back Side	10	QPSK	DSI5	1	0	20175/1732.5	21.50	20.23	0.300	0.021	1.34	0.402	/
			10	QPSK	DSI5	50%	0	20300/1745	21.50	20.18	0.290	0.023	1.36	0.393	/
		Front Side	10	QPSK	DSI5	1	0	20175/1732.5	21.50	20.23	0.237	-0.170	1.34	0.318	/
			10	QPSK	DSI5	50%	0	20300/1745	21.50	20.18	0.218	0.023	1.36	0.295	/
		Left Edge	10	QPSK	DSI5	1	0	20175/1732.5	21.50	20.23	0.120	0.058	1.34	0.161	/
			10	QPSK	DSI5	50%	0	20300/1745	21.50	20.18	0.111	0.010	1.36	0.150	/
		Right Edge	10	QPSK	DSI5	1	0	20175/1732.5	21.50	20.23	0.086	0.012	1.34	0.115	/
			10	QPSK	DSI5	50%	0	20300/1745	21.50	20.18	0.078	0.023	1.36	0.106	/
		Top Edge	10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
			10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
		Bottom Edge	10	QPSK	DSI5	1	0	20175/1732.5	21.50	20.23	0.507	0.010	1.34	0.679	/
			10	QPSK	DSI5	50%	0	20300/1745	21.50	20.18	0.514	0.030	1.36	0.697	51
	DIV (ANT2)	Back Side	10	QPSK	DSI5	1	0	20050/1720	20.50	20.20	0.233	0.062	1.07	0.250	/
			10	QPSK	DSI5	50%	0	20050/1720	20.50	20.14	0.248	0.031	1.09	0.269	/



		Front Side	10	QPSK	DSI5	1	0	20050/1720	20.50	20.20	0.142	-0.116	1.07	0.152	/
			10	QPSK	DSI5	50%	0	20050/1720	20.50	20.14	0.135	-0.021	1.09	0.147	/
		Left Edge	10	QPSK	DSI5	1	0	20050/1720	20.50	20.20	0.095	0.010	1.07	0.102	/
			10	QPSK	DSI5	50%	0	20050/1720	20.50	20.14	0.083	0.033	1.09	0.090	/
		Right Edge	10	QPSK	DSI5	1	0	20050/1720	20.50	20.20	0.057	0.022	1.07	0.061	/
			10	QPSK	DSI5	50%	0	20050/1720	20.50	20.14	0.043	-0.090	1.09	0.047	/
		Top Edge	10	QPSK	DSI5	1	0	20050/1720	20.50	20.20	0.403	0.050	1.07	0.432	/
			10	QPSK	DSI5	50%	0	20050/1720	20.50	20.14	0.405	0.034	1.09	0.440	/
		Bottom Edge	10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
			10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
LTE 5	Main (ANT1)	Back Side	10	QPSK	DSI5	1	25	20600/844	25.00	24.67	0.665	-0.020	1.08	0.717	52
			10	QPSK	DSI5	50%	0	20600/844	24.00	23.47	0.317	0.020	1.13	0.358	/
		Front Side	10	QPSK	DSI5	1	25	20600/844	25.00	24.67	0.384	-0.060	1.08	0.414	/
			10	QPSK	DSI5	50%	0	20600/844	24.00	23.47	0.310	-0.180	1.13	0.350	/
		Left Edge	10	QPSK	DSI5	1	25	20600/844	25.00	24.67	0.132	0.070	1.08	0.142	/
			10	QPSK	DSI5	50%	0	20600/844	24.00	23.47	0.112	-0.140	1.13	0.127	/
		Right Edge	10	QPSK	DSI5	1	25	20600/844	25.00	24.67	0.073	-0.100	1.08	0.079	/
			10	QPSK	DSI5	50%	0	20600/844	24.00	23.47	0.062	0.020	1.13	0.070	/
		Top Edge	10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
			10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
		Bottom Edge	10	QPSK	DSI5	1	25	20600/844	25.00	24.67	0.380	0.090	1.08	0.410	/
			10	QPSK	DSI5	50%	0	20600/844	24.00	23.47	0.305	-0.120	1.13	0.345	/
LTE 7	DIV (ANT0)	Back Side	10	QPSK	DSI5	1	50	21100/2535	18.50	17.63	0.393	0.140	1.22	0.480	/
			10	QPSK	DSI5	50%	50	21350/2560	18.50	17.54	0.309	0.046	1.25	0.385	/
		Front Side	10	QPSK	DSI5	1	50	21100/2535	18.50	17.63	0.182	0.110	1.22	0.222	/
			10	QPSK	DSI5	50%	50	21350/2560	18.50	17.54	0.190	-0.130	1.25	0.237	/
		Left Edge	10	QPSK	DSI5	1	50	21100/2535	18.50	17.63	0.040	-0.090	1.22	0.049	/
			10	QPSK	DSI5	50%	50	21350/2560	18.50	17.54	0.047	0.190	1.25	0.059	/
		Right Edge	10	QPSK	DSI5	1	50	21100/2535	18.50	17.63	0.048	0.010	1.22	0.059	/
			10	QPSK	DSI5	50%	50	21350/2560	18.50	17.54	0.046	0.090	1.25	0.057	/
		Top Edge	10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
			10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
		Bottom Edge	10	QPSK	DSI5	1	50	21100/2535	18.50	17.63	0.620	0.054	1.22	0.758	/
			10	QPSK	DSI5	50%	50	21350/2560	18.50	17.54	0.602	-0.110	1.25	0.751	/
	Main (ANT4)	Back Side	10	QPSK	DSI5	1	50	20850/2510	21.60	20.30	0.323	-0.150	1.35	0.436	/
			10	QPSK	DSI5	50%	25	20850/2510	21.60	20.15	0.251	-0.120	1.40	0.350	/
		Front Side	10	QPSK	DSI5	1	50	20850/2510	21.60	20.30	0.194	-0.070	1.35	0.262	/
			10	QPSK	DSI5	50%	25	20850/2510	21.60	20.15	0.180	0.010	1.40	0.251	/
		Left Edge	10	QPSK	DSI5	1	50	20850/2510	21.60	20.30	0.556	0.000	1.35	0.750	/
			10	QPSK	DSI5	50%	25	20850/2510	21.60	20.15	0.502	-0.130	1.40	0.701	/
		Right Edge	10	QPSK	DSI5	1	50	20850/2510	21.60	20.30	0.000	-0.140	1.35	0.000	/
			10	QPSK	DSI5	50%	25	20850/2510	21.60	20.15	0.000	0.080	1.40	0.000	/
		Top Edge	10	QPSK	DSI5	1	50	20850/2510	21.60	20.30	0.143	0.090	1.35	0.193	/
			10	QPSK	DSI5	1	50	20850/2510	21.60	20.30	0.143	0.090	1.35	0.193	/



			10	QPSK	DSI5	50%	25	20850/2510	21.60	20.15	0.135	-0.190	1.40	0.189	/
		Bottom Edge	10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
			10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
	DIV (ANT0)	Bottom Edge (Battery2)	10	QPSK	DSI5	1	50	21100/2535	18.50	17.63	0.533	0.025	1.22	0.651	/
		Bottom Edge (Battery3)	10	QPSK	DSI5	1	50	21100/2535	18.50	17.63	0.610	0.036	1.22	0.745	/
		Bottom Edge (SIM2)	10	QPSK	DSI5	1	50	21100/2535	18.50	17.63	0.633	-0.024	1.22	0.773	53
LTE 13	Main (ANT1)	Back Side	10	QPSK	DSI5	1	25	23230/782	25.00	24.46	0.413	0.000	1.13	0.468	54
			10	QPSK	DSI5	50%	0	23230/782	24.00	23.43	0.244	0.160	1.14	0.278	/
		Front Side	10	QPSK	DSI5	1	25	23230/782	25.00	24.46	0.250	0.100	1.13	0.283	/
			10	QPSK	DSI5	50%	0	23230/782	24.00	23.43	0.200	0.060	1.14	0.228	/
		Left Edge	10	QPSK	DSI5	1	25	23230/782	25.00	24.46	0.046	-0.060	1.13	0.052	/
			10	QPSK	DSI5	50%	0	23230/782	24.00	23.43	0.000	-0.190	1.14	0.000	/
		Right Edge	10	QPSK	DSI5	1	25	23230/782	25.00	24.46	0.105	-0.040	1.13	0.119	/
			10	QPSK	DSI5	50%	0	23230/782	24.00	23.43	0.079	-0.120	1.14	0.090	/
		Top Edge	10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
			10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
		Bottom Edge	10	QPSK	DSI5	1	25	23230/782	25.00	24.46	0.153	0.050	1.13	0.173	/
			10	QPSK	DSI5	50%	0	23230/782	24.00	23.43	0.128	-0.130	1.14	0.146	/
LTE 26	Main (ANT1)	Back Side	10	QPSK	DSI5	1	0	26965/841.5	25.00	24.48	0.640	-0.110	1.13	0.721	55
			10	QPSK	DSI5	50%	0	26965/841.5	24.00	23.62	0.510	0.140	1.09	0.557	/
		Front Side	10	QPSK	DSI5	1	0	26965/841.5	25.00	24.48	0.576	-0.061	1.13	0.649	/
			10	QPSK	DSI5	50%	0	26965/841.5	24.00	23.62	0.482	-0.035	1.09	0.526	/
		Left Edge	10	QPSK	DSI5	1	0	26965/841.5	25.00	24.48	0.054	-0.130	1.13	0.061	/
			10	QPSK	DSI5	50%	0	26965/841.5	24.00	23.62	0.000	0.050	1.09	0.000	/
		Right Edge	10	QPSK	DSI5	1	0	26965/841.5	25.00	24.48	0.201	-0.120	1.13	0.227	/
			10	QPSK	DSI5	50%	0	26965/841.5	24.00	23.62	0.173	0.170	1.09	0.189	/
		Top Edge	10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
			10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
		Bottom Edge	10	QPSK	DSI5	1	0	26965/841.5	25.00	24.48	0.360	-0.060	1.13	0.406	/
			10	QPSK	DSI5	50%	0	26965/841.5	24.00	23.62	0.276	0.020	1.09	0.301	/
LTE 38 TDD	DIV (ANT0)	Back Side	10	QPSK	DSI5	1	50	38150/2610	20.00	19.80	0.449	0.040	1.05	0.470	/
			10	QPSK	DSI5	50%	25	38000/2595	20.00	19.68	0.349	0.060	1.08	0.376	/
		Front Side	10	QPSK	DSI5	1	50	38150/2610	20.00	19.80	0.210	0.020	1.05	0.220	/
			10	QPSK	DSI5	50%	25	38000/2595	20.00	19.68	0.179	-0.110	1.08	0.193	/
		Left Edge	10	QPSK	DSI5	1	50	38150/2610	20.00	19.80	0.048	-0.030	1.05	0.050	/
			10	QPSK	DSI5	50%	25	38000/2595	20.00	19.68	0.041	0.090	1.08	0.044	/
		Right Edge	10	QPSK	DSI5	1	50	38150/2610	20.00	19.80	0.046	-0.026	1.05	0.048	/
			10	QPSK	DSI5	50%	25	38000/2595	20.00	19.68	0.044	0.050	1.08	0.047	/
		Top Edge	10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
			10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/



		Bottom Edge	10	QPSK	DSI5	1	50	38150/2610	20.00	19.80	0.688	0.125	1.05	0.720	56
			10	QPSK	DSI5	50%	25	38000/2595	20.00	19.68	0.587	0.025	1.08	0.632	/
	Main (ANT4)	Back Side	10	QPSK	DSI5	1	50	38150/2610	22.10	21.63	0.465	0.080	1.11	0.518	/
			10	QPSK	DSI5	50%	50	38150/2610	22.10	21.55	0.388	0.130	1.14	0.440	/
		Front Side	10	QPSK	DSI5	1	50	38150/2610	22.10	21.63	0.118	-0.180	1.11	0.131	/
			10	QPSK	DSI5	50%	50	38150/2610	22.10	21.55	0.226	0.047	1.14	0.257	/
		Left Edge	10	QPSK	DSI5	1	50	38150/2610	22.10	21.63	0.356	0.010	1.11	0.397	/
			10	QPSK	DSI5	50%	50	38150/2610	22.10	21.55	0.620	-0.050	1.14	0.704	/
		Right Edge	10	QPSK	DSI5	1	50	38150/2610	22.10	21.63	0.000	0.010	1.11	0.000	/
			10	QPSK	DSI5	50%	50	38150/2610	22.10	21.55	0.000	-0.040	1.14	0.000	/
		Top Edge	10	QPSK	DSI5	1	50	38150/2610	22.10	21.63	0.090	-0.070	1.11	0.100	/
			10	QPSK	DSI5	50%	50	38150/2610	22.10	21.55	0.107	-0.190	1.14	0.121	/
		Bottom Edge	10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
			10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
LTE 66	Main (ANT0)	Back Side	10	QPSK	DSI5	1	99	132072/1720	21.50	20.82	0.374	-0.010	1.17	0.437	/
			10	QPSK	DSI5	50%	0	132572/1770	21.50	20.76	0.258	0.160	1.19	0.306	/
		Front Side	10	QPSK	DSI5	1	99	132072/1720	21.50	20.82	0.242	-0.140	1.17	0.283	/
			10	QPSK	DSI5	50%	0	132572/1770	21.50	20.76	0.178	-0.110	1.19	0.211	/
		Left Edge	10	QPSK	DSI5	1	99	132072/1720	21.50	20.82	0.136	0.110	1.17	0.159	/
			10	QPSK	DSI5	50%	0	132572/1770	21.50	20.76	0.090	-0.080	1.19	0.107	/
		Right Edge	10	QPSK	DSI5	1	99	132072/1720	21.50	20.82	0.114	0.130	1.17	0.133	/
			10	QPSK	DSI5	50%	0	132572/1770	21.50	20.76	0.079	-0.070	1.19	0.094	/
		Top Edge	10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
			10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
		Bottom Edge	10	QPSK	DSI5	1	99	132072/1720	21.50	20.82	0.649	0.080	1.17	0.759	57
			10	QPSK	DSI5	50%	0	132572/1770	21.50	20.76	0.560	0.190	1.19	0.664	/
	DIV (ANT2)	Back Side	10	QPSK	DSI5	1	50	132572/1770	20.50	20.12	0.371	0.190	1.09	0.405	/
			10	QPSK	DSI5	50%	0	132572/1770	20.50	20.02	0.361	-0.140	1.12	0.403	/
		Front Side	10	QPSK	DSI5	1	50	132572/1770	20.50	20.12	0.249	0.170	1.09	0.272	/
			10	QPSK	DSI5	50%	0	132572/1770	20.50	20.02	0.250	0.190	1.12	0.279	/
		Left Edge	10	QPSK	DSI5	1	50	132572/1770	20.50	20.12	0.102	-0.190	1.09	0.111	/
			10	QPSK	DSI5	50%	0	132572/1770	20.50	20.02	0.108	-0.080	1.12	0.121	/
		Right Edge	10	QPSK	DSI5	1	50	132572/1770	20.50	20.12	0.061	0.090	1.09	0.067	/
			10	QPSK	DSI5	50%	0	132572/1770	20.50	20.02	0.060	0.000	1.12	0.067	/
		Top Edge	10	QPSK	DSI5	1	50	132572/1770	20.50	20.12	0.532	-0.070	1.09	0.581	/
			10	QPSK	DSI5	50%	0	132572/1770	20.50	20.02	0.505	-0.140	1.12	0.564	/
		Bottom Edge	10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
			10	N/A	DSI5	N/A	N/A	N/A	N/A	N/A	N/A	NA	N/A	N/A	/

Band	Antenna	Test Position	Dist. (mm)	Mode	Duty Cycle	Power Reduction	Ch./Freq. (MHz)	Tune-up (dBm)	Measured power (dBm)	Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	Plot No.
2.4G	Wi-Fi	Back Side	10	802.11b	98.0%	Hotspot	1/2412	18.00	17.09	0.106	-0.080	1.23	0.131	/



		Front Side	10	802.11b	98.0%	Hotspot	1/2412	18.00	17.09	0.101	0.010	1.23	0.125	/
		Left Edge	10	802.11b	98.0%	Hotspot	1/2412	18.00	17.09	0.000	-0.150	1.23	0.000	/
		Right Edge	10	802.11b	98.0%	Hotspot	1/2412	18.00	17.09	0.164	0.011	1.23	0.202	58
		Top Edge	10	802.11b	98.0%	Hotspot	1/2412	18.00	17.09	0.000	-0.030	1.23	0.000	/
		Bottom Edge	10	N/A	N/A	Hotspot	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
U-NII-1	Wi-Fi	Back Side	10	802.11a	99.0%	Hotspot	48/5240	17.00	15.64	0.158	-0.170	1.37	0.216	/
		Front Side	10	802.11a	99.0%	Hotspot	48/5240	17.00	15.64	0.071	-0.170	1.37	0.097	/
		Left Edge	10	802.11a	99.0%	Hotspot	48/5240	17.00	15.64	0.051	0.040	1.37	0.070	/
		Right Edge	10	802.11a	99.0%	Hotspot	48/5240	17.00	15.64	0.272	-0.040	1.37	0.372	/
		Top Edge	10	802.11a	99.0%	Hotspot	48/5240	17.00	15.64	0.104	0.025	1.37	0.142	/
		Bottom Edge	10	N/A	N/A	Hotspot	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
U-NII-3	Wi-Fi	Back Side	10	802.11ac-VHT80(MCS0)	92.0%	Hotspot	155/5775	17.00	16.30	0.256	0.060	1.17	0.301	/
		Front Side	10	802.11ac-VHT80(MCS0)	92.0%	Hotspot	155/5775	17.00	16.30	0.119	0.150	1.17	0.140	/
		Left Edge	10	802.11ac-VHT80(MCS0)	92.0%	Hotspot	155/5775	17.00	16.30	0.069	0.030	1.17	0.081	/
		Right Edge	10	802.11ac-VHT80(MCS0)	92.0%	Hotspot	155/5775	17.00	16.30	0.448	0.054	1.17	0.526	59
		Top Edge	10	802.11ac-VHT80(MCS0)	92.0%	Hotspot	155/5775	17.00	16.30	0.182	0.040	1.17	0.214	/
		Bottom Edge	10	N/A	N/A	Hotspot	N/A	N/A	N/A	N/A	NA	N/A	N/A	/
		Right Edge (Battery2)	10	802.11ac-VHT80(MCS0)	92.0%	Hotspot	155/5775	17.00	16.30	0.405	0.036	1.17	0.476	/
		Right Edge (Battery3)	10	802.11ac-VHT80(MCS0)	92.0%	Hotspot	155/5775	17.00	16.30	0.436	-0.124	1.17	0.512	/
Bluetooth	BT	Back Side	10	DH5	77.0%	Hotspot	31/2433	15.20	13.78	0.060	0.080	1.39	0.083	/
		Front Side	10	DH5	77.0%	Hotspot	31/2433	15.20	13.78	0.050	0.160	1.39	0.069	/
		Left Edge	10	DH5	77.0%	Hotspot	31/2433	15.20	13.78	0.000	0.080	1.39	0.000	/
		Right Edge	10	DH5	77.0%	Hotspot	31/2433	15.20	13.78	0.114	0.125	1.39	0.158	60
		Top Edge	10	DH5	77.0%	Hotspot	31/2433	15.20	13.78	0.045	0.120	1.39	0.062	/
		Bottom Edge	10	N/A	N/A	Hotspot	N/A	N/A	N/A	N/A	NA	N/A	N/A	/



Product-specific 10g SAR Evaluation

Band	Antenna	Test Position	Mode	Power Reduction	RB	offset	Channel Frequency(MHz)	Tune-up (dBm)	Measured power (dBm)	Measured SAR1g	Scaling Factor	Report SAR1g	0mm SAR
GSM850	Main (Bottom)	Back Side	GPRS 4TX Slots	Hotsot	-	-	190/836.6	27.50	23.50	0.271	2.51	0.681	NO
		Front Side	GPRS 4TX Slots	Hotsot	-	-	190/836.6	27.50	23.50	0.112	2.51	0.281	NO
		Left Edge	GPRS 4TX Slots	Hotsot	-	-	190/836.6	27.50	23.50	0.057	2.51	0.142	NO
		Right Edge	GPRS 4TX Slots	Hotsot	-	-	190/836.6	27.50	23.50	0.029	2.51	0.073	NO
		Bottom Edge	GPRS 4TX Slots	Hotsot	-	-	190/836.6	27.50	23.50	0.120	2.51	0.301	NO
GSM1900	Main (Bottom)	Back Side	GPRS 1TX Slots	Hotsot	-	-	661/1880	30.50	26.50	0.072	2.51	0.181	NO
		Front Side	GPRS 1TX Slots	Hotsot	-	-	661/1880	30.50	26.50	0.064	2.51	0.160	NO
		Left Edge	GPRS 1TX Slots	Hotsot	-	-	661/1880	30.50	26.50	0.022	2.51	0.055	NO
		Right Edge	GPRS 1TX Slots	Hotsot	-	-	661/1880	30.50	26.50	0.021	2.51	0.052	NO
		Bottom Edge	GPRS 1TX Slots	Hotsot	-	-	661/1880	30.50	26.50	0.298	2.51	0.749	NO
WCDMA II	Main (Bottom)	Back Side	RMC	Hotsot	-	-	9400/1880	23.40	21.40	0.596	1.58	0.945	NO
		Front Side	RMC	Hotsot	-	-	9400/1880	23.40	21.40	0.400	1.58	0.635	NO
		Left Edge	RMC	Hotsot	-	-	9400/1880	23.40	21.40	0.102	1.58	0.162	NO
		Right Edge	RMC	Hotsot	-	-	9400/1880	23.40	21.40	0.075	1.58	0.118	NO
		Bottom Edge	RMC	Hotsot	-	-	9400/1880	23.40	21.40	0.680	1.58	1.078	NO
	DIV (Top)	Back Side	RMC	Hotsot	-	-	9400/1880	21.40	20.40	0.287	1.26	0.362	NO
		Front Side	RMC	Hotsot	-	-	9400/1880	21.40	20.40	0.176	1.26	0.222	NO
		Left Edge	RMC	Hotsot	-	-	9400/1880	21.40	20.40	0.067	1.26	0.084	NO
		Right Edge	RMC	Hotsot	-	-	9400/1880	21.40	20.40	0.000	1.26	0.000	NO
		Top Edge	RMC	Hotsot	-	-	9400/1880	21.40	20.40	0.479	1.26	0.603	NO
WCDMA IV	Main (Bottom)	Back Side	RMC	Hotsot	-	-	1413/1732.6	23.50	21.50	0.746	1.58	1.182	NO
		Front Side	RMC	Hotsot	-	-	1413/1732.6	23.50	21.50	0.624	1.58	0.990	NO
		Left Edge	RMC	Hotsot	-	-	1413/1732.6	23.50	21.50	0.181	1.58	0.287	NO
		Right Edge	RMC	Hotsot	-	-	1413/1732.6	23.50	21.50	0.075	1.58	0.118	NO
		Bottom Edge	RMC	Hotsot	-	-	1413/1732.6	23.50	21.50	0.787	1.58	1.247	YES
	DIV (Top)	Back Side	RMC	Hotsot	-	-	1413/1732.6	21.00	20.50	0.268	1.12	0.300	NO
		Front Side	RMC	Hotsot	-	-	1413/1732.6	21.00	20.50	0.182	1.12	0.204	NO
		Left Edge	RMC	Hotsot	-	-	1413/1732.6	21.00	20.50	0.084	1.12	0.094	NO
		Right Edge	RMC	Hotsot	-	-	1413/1732.6	21.00	20.50	0.049	1.12	0.055	NO
		Top Edge	RMC	Hotsot	-	-	1413/1732.6	21.00	20.50	0.498	1.12	0.559	NO
LTE 2	Main (Bottom)	Back Side	QPSK	Hotsot	1	0	18700/1860	23.40	21.40	0.394	1.58	0.624	NO
			QPSK	Hotsot	50%	0	18700/1860	23.40	21.40	0.389	1.58	0.616	NO
		Front Side	QPSK	Hotsot	1	0	18700/1860	23.40	21.40	0.247	1.58	0.392	NO
			QPSK	Hotsot	50%	0	18700/1860	23.40	21.40	0.244	1.58	0.387	NO
		Left Edge	QPSK	Hotsot	1	0	18700/1860	23.40	21.40	0.101	1.58	0.159	NO
			QPSK	Hotsot	50%	0	18700/1860	23.40	21.40	0.099	1.58	0.157	NO
		Right Edge	QPSK	Hotsot	1	0	18700/1860	23.40	21.40	0.000	1.58	0.000	NO
			QPSK	Hotsot	50%	0	18700/1860	23.40	21.40	0.066	1.58	0.104	NO
		Bottom Edge	QPSK	Hotsot	1	0	18700/1860	23.40	21.40	0.738	1.58	1.169	NO
			QPSK	Hotsot	50%	0	18700/1860	23.40	21.40	0.738	1.58	1.169	NO



	DIV (Top)	Back Side	QPSK	Hotsot	50%	0	18700/1860	23.40	21.40	0.759	1.58	1.203	YES
			QPSK	Hotsot	1	50	19100/1900	21.40	20.40	0.338	1.26	0.426	NO
		Front Side	QPSK	Hotsot	50%	0	19100/1900	21.40	20.40	0.304	1.26	0.382	NO
			QPSK	Hotsot	1	50	19100/1900	21.40	20.40	0.153	1.26	0.193	NO
		Left Edge	QPSK	Hotsot	50%	0	19100/1900	21.40	20.40	0.167	1.26	0.211	NO
			QPSK	Hotsot	1	50	19100/1900	21.40	20.40	0.077	1.26	0.096	NO
		Right Edge	QPSK	Hotsot	50%	0	19100/1900	21.40	20.40	0.084	1.26	0.106	NO
			QPSK	Hotsot	1	50	19100/1900	21.40	20.40	0.000	1.26	0.000	NO
		Top Edge	QPSK	Hotsot	50%	0	19100/1900	21.40	20.40	0.000	1.26	0.000	NO
			QPSK	Hotsot	1	50	19100/1900	21.40	20.40	0.429	1.26	0.540	NO
LTE 4	Main (Bottom)	Back Side	QPSK	Hotsot	1	0	20175/1732.5	23.50	21.50	0.402	1.58	0.637	NO
			QPSK	Hotsot	50%	0	20300/1745	23.50	21.50	0.393	1.58	0.623	NO
		Front Side	QPSK	Hotsot	1	0	20175/1732.5	23.50	21.50	0.318	1.58	0.503	NO
			QPSK	Hotsot	50%	0	20300/1745	23.50	21.50	0.295	1.58	0.468	NO
		Left Edge	QPSK	Hotsot	1	0	20175/1732.5	23.50	21.50	0.161	1.58	0.255	NO
			QPSK	Hotsot	50%	0	20300/1745	23.50	21.50	0.150	1.58	0.238	NO
		Right Edge	QPSK	Hotsot	1	0	20175/1732.5	23.50	21.50	0.115	1.58	0.183	NO
			QPSK	Hotsot	50%	0	20300/1745	23.50	21.50	0.106	1.58	0.168	NO
		Bottom Edge	QPSK	Hotsot	1	0	20175/1732.5	23.50	21.50	0.679	1.58	1.076	NO
			QPSK	Hotsot	50%	0	20300/1745	23.50	21.50	0.697	1.58	1.104	NO
	DIV (Top)	Back Side	QPSK	Hotsot	1	0	20050/1720	21.00	20.50	0.250	1.12	0.280	NO
			QPSK	Hotsot	50%	0	20050/1720	21.00	20.50	0.269	1.12	0.302	NO
		Front Side	QPSK	Hotsot	1	0	20050/1720	21.00	20.50	0.152	1.12	0.171	NO
			QPSK	Hotsot	50%	0	20050/1720	21.00	20.50	0.147	1.12	0.165	NO
		Left Edge	QPSK	Hotsot	1	0	20050/1720	21.00	20.50	0.102	1.12	0.114	NO
			QPSK	Hotsot	50%	0	20050/1720	21.00	20.50	0.090	1.12	0.101	NO
		Right Edge	QPSK	Hotsot	1	0	20050/1720	21.00	20.50	0.061	1.12	0.069	NO
			QPSK	Hotsot	50%	0	20050/1720	21.00	20.50	0.047	1.12	0.052	NO
		Top Edge	QPSK	Hotsot	1	0	20050/1720	21.00	20.50	0.432	1.12	0.485	NO
			QPSK	Hotsot	50%	0	20050/1720	21.00	20.50	0.440	1.12	0.494	NO
LTE 7	DIV (ANT0)	Back Side	QPSK	Hotsot	1	50	21100/2535	20.50	18.50	0.480	1.58	0.761	NO
			QPSK	Hotsot	50%	50	21350/2560	20.50	18.50	0.385	1.58	0.611	NO
		Front Side	QPSK	Hotsot	1	50	21100/2535	20.50	18.50	0.222	1.58	0.352	NO
			QPSK	Hotsot	50%	50	21350/2560	20.50	18.50	0.237	1.58	0.376	NO
		Left Edge	QPSK	Hotsot	1	50	21100/2535	20.50	18.50	0.049	1.58	0.077	NO
			QPSK	Hotsot	50%	50	21350/2560	20.50	18.50	0.059	1.58	0.093	NO
		Right Edge	QPSK	Hotsot	1	50	21100/2535	20.50	18.50	0.059	1.58	0.093	NO
			QPSK	Hotsot	50%	50	21350/2560	20.50	18.50	0.057	1.58	0.091	NO
		Bottom Edge	QPSK	Hotsot	1	50	21100/2535	20.50	18.50	0.773	1.58	1.226	YES
			QPSK	Hotsot	50%	50	21350/2560	20.50	18.50	0.751	1.58	1.190	NO
	Main (ANT4)	Back Side	QPSK	Hotsot	1	50	20850/2510	23.10	21.60	0.436	1.41	0.615	NO
			QPSK	Hotsot	50%	25	20850/2510	22.10	21.60	0.350	1.12	0.393	NO



		Front Side	QPSK	Hotsot	1	50	20850/2510	23.10	21.60	0.262	1.41	0.370	NO
			QPSK	Hotsot	50%	25	20850/2510	22.10	21.60	0.251	1.12	0.282	NO
		Left Edge	QPSK	Hotsot	1	50	20850/2510	23.10	21.60	0.750	1.41	1.059	NO
			QPSK	Hotsot	50%	25	20850/2510	22.10	21.60	0.701	1.12	0.787	NO
		Right Edge	QPSK	Hotsot	1	50	20850/2510	23.10	21.60	0.000	1.41	0.000	NO
			QPSK	Hotsot	50%	25	20850/2510	22.10	21.60	0.000	1.12	0.000	NO
		Top Edge	QPSK	Hotsot	1	50	20850/2510	23.10	21.60	0.193	1.41	0.272	NO
			QPSK	Hotsot	50%	25	20850/2510	22.10	21.60	0.189	1.12	0.212	NO
LTE 66	Main (Bottom)	Back Side	QPSK	Hotsot	1	99	132072/1720	23.50	21.50	0.437	1.58	0.693	NO
			QPSK	Hotsot	50%	0	132572/1770	23.50	21.50	0.306	1.58	0.485	NO
		Front Side	QPSK	Hotsot	1	99	132072/1720	23.50	21.50	0.283	1.58	0.449	NO
			QPSK	Hotsot	50%	0	132572/1770	23.50	21.50	0.211	1.58	0.335	NO
		Left Edge	QPSK	Hotsot	1	99	132072/1720	23.50	21.50	0.159	1.58	0.252	NO
			QPSK	Hotsot	50%	0	132572/1770	23.50	21.50	0.107	1.58	0.169	NO
		Right Edge	QPSK	Hotsot	1	99	132072/1720	23.50	21.50	0.133	1.58	0.211	NO
			QPSK	Hotsot	50%	0	132572/1770	23.50	21.50	0.094	1.58	0.148	NO
	DIV (Top)	Bottom Edge	QPSK	Hotsot	1	99	132072/1720	23.50	21.50	0.759	1.58	1.203	YES
			QPSK	Hotsot	50%	0	132572/1770	23.50	21.50	0.664	1.58	1.052	NO
		Back Side	QPSK	Hotsot	1	50	132572/1770	19.60	19.10	0.405	1.12	0.454	NO
			QPSK	Hotsot	50%	0	132572/1770	19.60	19.10	0.403	1.12	0.452	NO
		Front Side	QPSK	Hotsot	1	50	132572/1770	19.60	19.10	0.272	1.12	0.305	NO
			QPSK	Hotsot	50%	0	132572/1770	19.60	19.10	0.279	1.12	0.313	NO
		Left Edge	QPSK	Hotsot	1	50	132572/1770	19.60	19.10	0.111	1.12	0.125	NO
			QPSK	Hotsot	50%	0	132572/1770	19.60	19.10	0.121	1.12	0.135	NO
LTE 38 TDD	DIV (ANT0)	Right Edge	QPSK	Hotsot	1	50	132572/1770	19.60	19.10	0.067	1.12	0.075	NO
			QPSK	Hotsot	50%	0	132572/1770	19.60	19.10	0.067	1.12	0.075	NO
		Top Edge	QPSK	Hotsot	1	50	132572/1770	19.60	19.10	0.581	1.12	0.651	NO
			QPSK	Hotsot	50%	0	132572/1770	19.60	19.10	0.564	1.12	0.633	NO
		Back Side	QPSK	Hotsot	1	50	38150/2610	22.00	20.00	0.470	1.58	0.745	NO
			QPSK	Hotsot	50%	25	38000/2595	22.00	20.00	0.376	1.58	0.595	NO
		Front Side	QPSK	Hotsot	1	50	38150/2610	22.00	20.00	0.220	1.58	0.349	NO
			QPSK	Hotsot	50%	25	38000/2595	22.00	20.00	0.193	1.58	0.305	NO
	Main (ANT4)	Left Edge	QPSK	Hotsot	1	50	38150/2610	22.00	20.00	0.050	1.58	0.080	NO
			QPSK	Hotsot	50%	25	38000/2595	22.00	20.00	0.044	1.58	0.070	NO
		Right Edge	QPSK	Hotsot	1	50	38150/2610	22.00	20.00	0.048	1.58	0.076	NO
			QPSK	Hotsot	50%	25	38000/2595	22.00	20.00	0.047	1.58	0.075	NO
		Bottom Edge	QPSK	Hotsot	1	50	38150/2610	22.00	20.00	0.720	1.58	1.142	NO
			QPSK	Hotsot	50%	25	38000/2595	22.00	20.00	0.632	1.58	1.001	NO
		Back Side	QPSK	Hotsot	1	50	38150/2610	23.10	22.10	0.518	1.26	0.652	NO
			QPSK	Hotsot	50%	50	38150/2610	22.10	22.10	0.440	1.00	0.440	NO
		Front Side	QPSK	Hotsot	1	50	38150/2610	23.10	22.10	0.131	1.26	0.166	NO
			QPSK	Hotsot	50%	50	38150/2610	22.10	22.10	0.257	1.00	0.257	NO
		Left Edge	QPSK	Hotsot	1	50	38150/2610	23.10	22.10	0.397	1.26	0.499	NO



			QPSK	Hotsot	50%	50	38150/2610	22.10	22.10	0.704	1.00	0.704	NO
		Right Edge	QPSK	Hotsot	1	50	38150/2610	23.10	22.10	0.000	1.26	0.000	NO
			QPSK	Hotsot	50%	50	38150/2610	22.10	22.10	0.000	1.00	0.000	NO
		Top Edge	QPSK	Hotsot	1	50	38150/2610	23.10	22.10	0.100	1.26	0.126	NO
			QPSK	Hotsot	50%	50	38150/2610	22.10	22.10	0.121	1.00	0.121	NO

Product-specific 10g SAR

Band	Antenna	Test Position	Dist. (mm)	Mode	Power Reduction	RB	offset	Ch./Freq. (MHz)	Tune-up (dBm)	Measured power (dBm)	Measured SAR10g	Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	Plot No.
WCDMA IV	Main (Ant0)	Bottom Edge	0	RMC	DSI2	-	-	1413/173 2.6	23.50	23.38	1.750	4.240	-0.027	1.03	1.799	/
LTE B2	Main (Ant0)	Bottom Edge	0	QPSK	DSI2	1	0	18700/18 60	23.40	22.17	1.810	4.390	-0.080	1.33	2.403	61
LTE B7	DIV (ANT0)	Bottom Edge	0	QPSK	DSI2	1	50	20850/25 10	20.50	19.59	1.240	3.330	0.071	1.23	1.529	/
LTE B66	Main (Ant0)	Bottom Edge	0	QPSK	DSI2	1	50	132572/1 770	23.50	22.74	1.940	4.700	-0.080	1.19	2.311	62

Band	Antenna	Test Position	Dist. (mm)	Mode	Duty Cycle	Power Reduction	Ch./Freq. (MHz)	Tune-up (dBm)	Measured power (dBm)	Measured SAR10g	Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR10g	Plot No.
U-NII-2A	Wi-Fi	Back Side	0	802.11a	99.0%	Receiver off	52/5260	19.00	18.79	0.333	1.160	0.130	1.05	0.349	/
		Front Side	0	802.11a	99.0%	Receiver off	52/5260	19.00	18.79	0.233	0.702	0.120	1.05	0.245	/
		Left Edge	0	802.11a	99.0%	Receiver off	52/5260	19.00	18.79	0.010	0.050	0.030	1.05	0.010	/
		Right Edge	0	802.11a	99.0%	Receiver off	52/5260	19.00	18.79	0.897	3.320	-0.030	1.05	0.941	/
		Top Edge	0	802.11a	99.0%	Receiver off	52/5260	19.00	18.79	0.203	0.617	0.120	1.05	0.213	/
U-NII-2C	Wi-Fi	Back Side	0	802.11a	99.0%	Receiver off	116/5580	19.00	18.84	0.365	1.230	-0.130	1.04	0.379	/
		Front Side	0	802.11a	99.0%	Receiver off	116/5580	19.00	18.84	0.256	0.883	-0.190	1.04	0.266	/
		Left Edge	0	802.11a	99.0%	Receiver off	116/5580	19.00	18.84	0.020	0.077	0.015	1.04	0.021	/
		Right Edge	0	802.11a	99.0%	Receiver off	116/5580	19.00	18.84	0.942	3.400	-0.150	1.04	0.977	/
		Top Edge	0	802.11a	99.0%	Receiver off	116/5580	19.00	18.84	0.273	0.991	0.050	1.04	0.283	/
		Right Edge (Battery2)	0	802.11a	99.0%	Receiver off	116/5580	19.00	18.84	0.925	3.050	0.170	1.04	0.960	/
		Right Edge (Battery3)	0	802.11a	99.0%	Receiver off	116/5580	19.00	18.84	0.956	3.450	0.120	1.04	0.992	63
		Right Edge (SIM2)	0	802.11a	99.0%	Receiver off	116/5580	19.00	18.84	0.905	2.980	0.035	1.04	0.939	/

10.4 Simultaneous Transmission Analysis

Simultaneous Transmission Configurations	Head	Body-worn	Hotspot	Product Specific 10-g SAR
Main Antenna + Bluetooth	Yes	Yes	Yes	Yes
Second Antenna + Bluetooth	Yes	Yes	Yes	Yes
Main Antenna + Wi-Fi 2.4G	Yes	Yes	Yes	Yes
Second Antenna + Wi-Fi 2.4G	Yes	Yes	Yes	Yes
Main Antenna + Wi-Fi 5G	Yes	Yes	Yes	Yes
Second Antenna + Wi-Fi 5G	Yes	Yes	Yes	Yes
Wi-Fi 2.4G + Bluetooth	NA	NA	NA	NA
Wi-Fi 5G + Bluetooth	NA	NA	NA	NA
Wi-Fi 2.4G + Wi-Fi 5G	NA	NA	NA	NA
Main Antenna + Second Antenna	NA	NA	NA	NA

General Note:

- The Scaled SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation $< 1.6\text{W/kg}$, simultaneously transmission SAR measurement is not necessary.
 - $\text{SPLSR} = (\text{SAR1} + \text{SAR2})^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where $(x1, y1, z1)$ and $(x2, y2, z2)$ are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary.

The maximum SAR_{1g/10g} Value for Main-Antenna

SAR _{1g/10g} (W/kg)		GSM	GSM	WCDMA	WCDMA	WCDMA	LTE	LTE	LTE	LTE	LTE	LTE	LTE	LTE	MAX.
Test Position		850	1900	Band II	Band IV	Band V	2	4	5	7	13	26	38	66	SAR _{1g/10g}
Head	Left Cheek	0.192	0.122	0.162	0.115	0.181	0.205	0.163	0.195	0.187	0.102	0.264	0.176	0.188	0.264
	Left Tilt	0.111	0.033	0.051	0.069	0.080	0.052	0.082	0.080	0.213	0.040	0.131	0.196	0.086	0.213
	Right Cheek	0.167	0.084	0.093	0.132	0.170	0.117	0.159	0.176	0.615	0.084	0.183	0.671	0.166	0.671
	Right Tilt	0.077	0.036	0.061	0.065	0.086	0.099	0.081	0.110	0.410	0.054	0.092	0.569	0.097	0.569
Body worn	Back Side	0.277	0.179	0.341	0.287	0.354	0.344	0.358	0.409	0.359	0.207	0.484	0.302	0.650	0.650
	Front Side	0.185	0.105	0.218	0.250	0.312	0.244	0.275	0.293	0.218	0.147	0.322	0.115	0.424	0.424
Hotspot	Back Side	0.271	0.072	0.596	0.746	0.681	0.394	0.402	0.717	0.436	0.468	0.721	0.518	0.437	0.746
	Front Side	0.112	0.064	0.400	0.624	0.521	0.247	0.318	0.414	0.262	0.283	0.649	0.257	0.283	0.649
	Left Edge	0.057	0.022	0.102	0.181	0.228	0.101	0.161	0.142	0.750	0.052	0.061	0.704	0.159	0.750
	Right Edge	0.029	0.021	0.075	0.075	0.104	0.066	0.115	0.079	0.000	0.119	0.227	0.000	0.133	0.227
	Top Edge	NA	NA	NA	NA	NA	NA	NA	NA	0.193	NA	NA	0.121	NA	0.193
	Bottom Edge	0.120	0.298	0.680	0.787	0.364	0.759	0.697	0.410	NA	0.173	0.406	NA	0.759	0.787
Product Specific 10-g SAR	Back Side	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	Front Side	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	Left Edge	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	Right Edge	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	Top Edge	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	Bottom Edge	NA	NA	NA	1.799	NA	2.043	NA	NA	1.529	NA	NA	NA	NA	NA

The maximum SAR_{1g/10g} Value for Second-Antenna

SAR _{1g/10g} (W/kg)		WCDMA Band II	WCDMA Band IV	LTE 2	LTE 4	LTE 7	LTE 38	LTE 66	MAX. SAR _{1g/10g}
Test Position									
Head	Left Cheek	0.387	0.268	0.398	0.253	0.120	0.091	0.306	0.398
	Left Tilt	0.578	0.364	0.494	0.333	0.074	0.088	0.531	0.578
	Right Cheek	0.539	0.430	0.676	0.461	0.101	0.080	0.497	0.676
	Right Tilt	0.623	0.498	0.696	0.547	0.048	0.069	0.625	0.696
Body worn	Back Side	0.160	0.190	0.175	0.180	0.245	0.229	0.172	0.245
	Front Side	0.119	0.149	0.126	0.130	0.111	0.144	0.131	0.149
Hotspot	Back Side	0.287	0.271	0.338	0.269	0.480	0.470	0.405	0.480
	Front Side	0.176	0.182	0.167	0.152	0.237	0.220	0.279	0.279
	Left Edge	0.067	0.084	0.084	0.102	0.059	0.050	0.121	0.121
	Right Edge	0.000	0.049	0.000	0.061	0.059	0.048	0.067	0.067
	Top Edge	0.479	0.536	0.453	0.440	NA	NA	0.581	0.581
	Bottom Edge	NA	NA	NA	NA	0.773	0.720	NA	0.773
Product Specific 10-g SAR	Back Side	NA	NA	NA	NA	NA	NA	NA	NA
	Front Side	NA	NA	NA	NA	NA	NA	NA	NA
	Left Edge	NA	NA	NA	NA	NA	NA	NA	NA
	Right Edge	NA	NA	NA	NA	NA	NA	NA	NA
	Top Edge	NA	NA	NA	NA	NA	NA	NA	NA
	Bottom Edge	NA	NA	NA	NA	NA	NA	NA	NA



About BT/ Wi-Fi Antenna and Main Antenna/Second Antenna

Test Position		SAR _{1g/10g} (W/kg)	Main antenna	Second antenna	Wi-Fi 2.4G	Wi-Fi 5G				Bluetooth	MAX. Σ SAR _{1g/10g}
						U-NII-1	U-NII-2A	U-NII-2C	U-NII-3		
Head	Left Cheek		0.264	0.398	0.443	0.160	0.144	0.166	0.183	0.240	0.841
	Left Tilt		0.213	0.578	0.188	0.107	0.112	0.107	0.137	0.105	0.766
	Right Cheek		0.671	0.676	0.106	0.054	0.043	0.034	0.037	0.076	0.782
	Right Tilt		0.569	0.696	0.072	0.029	0.053	0.062	0.080	0.047	0.776
Body worn	Back Side		0.650	0.245	0.188	0.200	0.210	0.195	0.268	0.051	0.918
	Front Side		0.424	0.149	0.095	0.074	0.079	0.066	0.094	0.035	0.519
Hotspot	Back Side		0.746	0.480	0.131	0.216	NA	NA	0.301	0.083	1.047
	Front Side		0.649	0.279	0.125	0.097	NA	NA	0.140	0.069	0.789
	Left Edge		0.750	0.121	0.000	0.070	NA	NA	0.081	0.000	0.831
	Right Edge		0.227	0.067	0.202	0.372	NA	NA	0.526	0.158	0.753
	Top Edge		0.193	0.581	0.000	0.142	NA	NA	0.214	0.062	0.795
	Bottom Edge		0.787	0.773	NA	NA	NA	NA	NA	NA	0.787
Product Specific 10-g SAR	Back Side		NA	NA	NA	NA	0.349	0.379	NA	NA	0.379
	Front Side		NA	NA	NA	NA	0.245	0.266	NA	NA	0.266
	Left Edge		NA	NA	NA	NA	0.010	0.021	NA	NA	0.021
	Right Edge		NA	NA	NA	NA	0.941	0.992	NA	NA	0.992
	Top Edge		NA	NA	NA	NA	0.213	0.283	NA	NA	0.283
	Bottom Edge		2.403	NA	NA	NA	NA	NA	NA	NA	2.403

Note: 1.The value with blue color is the maximum Σ SAR_{1g/10g} /Value.

2.MAX. Σ SAR_{1g/10g} =Unlicensed SAR_{MAX} +Licensed SAR_{MAX}

MAX. Σ SAR_{1g} =1.047W/kg<1.6W/kg and MAX. Σ SAR_{10g} =2.403W/kg<4 W/kg, so the Simultaneous transimition SAR with volum scan are not required for BT and Main-Antenna.

Conclusion:

According to the KDB 690783 D01 section 1) d) i), when the sum of 1-g SAR applies for simultaneous transmission SAR test exclusion, the highest sum of 1-g SAR according to the highest reported stand-alone SAR values is used, and the highest Reported SAR for simultaneous transmission exposure conditions is 1.047 W/kg



11 Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528- 2013 is not required in SAR reports submitted for equipment approval. This also applies to the 10-g SAR required for phablets in KDB Publication 648474.

*****END OF REPORT *****

ANNEX A: Test Layout




Tissue Simulating Liquids

For the measurement of the field distribution inside the flat phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For Head and Body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Picture 3 and Picture 4.



Picture 3: liquid depth in the head Phantom

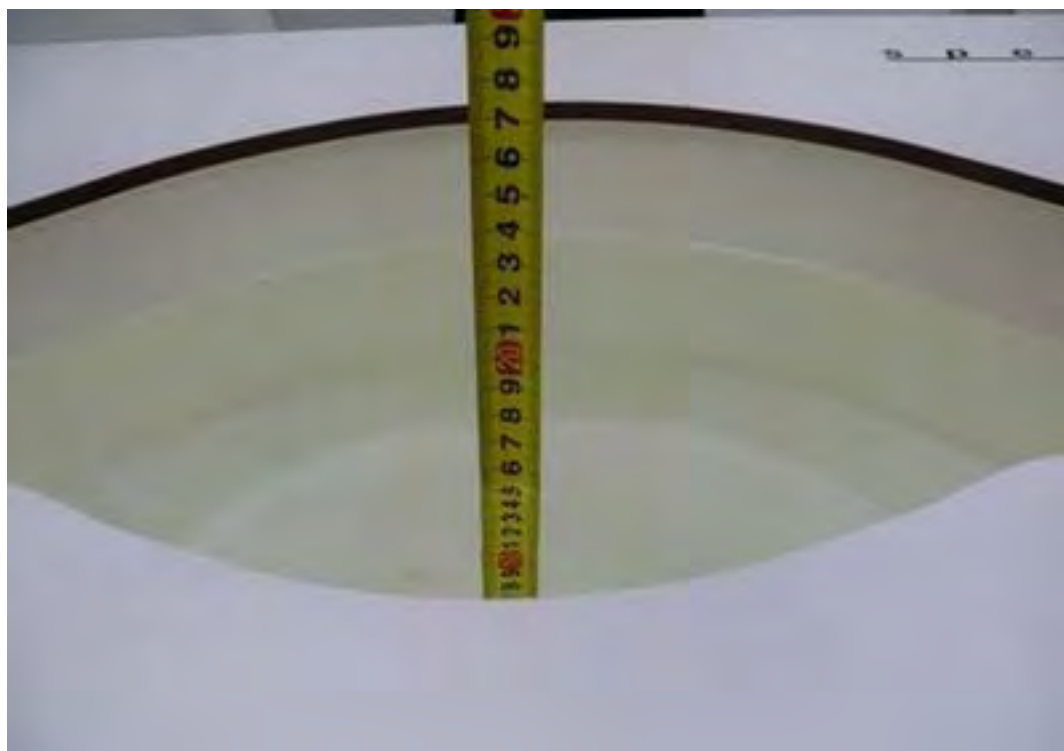

Picture 4: Liquid depth in the flat Phantom

ANNEX B: System Check Results

Plot 1 System Performance Check at 750 MHz TSL

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1045

Date: 2022/2/25

Communication System: CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.88 \text{ S/m}$; $\epsilon_r = 42.3$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.64, 9.64, 9.64); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

d=15mm, Pin=250mW/Area Scan (4x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.29 W/kg


d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.653 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 3.16 W/kg

SAR(1 g) = 2.13 W/kg; SAR(10 g) = 1.41 W/kg

Maximum value of SAR (measured) = 2.29 W/kg

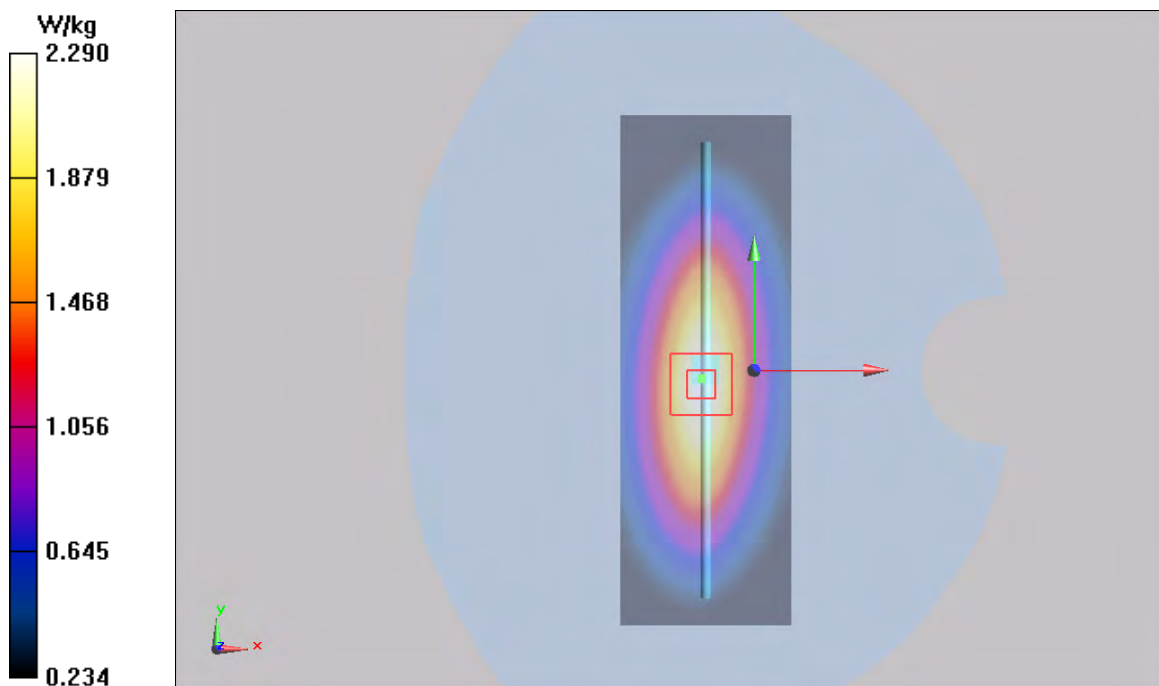

Plot 2 System Performance Check at 835 MHz TSL

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d020

Date: 2022/2/23

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.87 \text{ S/m}$; $\epsilon_r = 41.3$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C

Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.30, 9.30, 9.30); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

d=15mm, Pin=250mW/Area Scan (4x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.59 mW/g


d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 54.3 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.67 W/kg

SAR(1 g) = 2.46 mW/g; SAR(10 g) = 1.65 mW/g

Maximum value of SAR (measured) = 2.70 mW/g

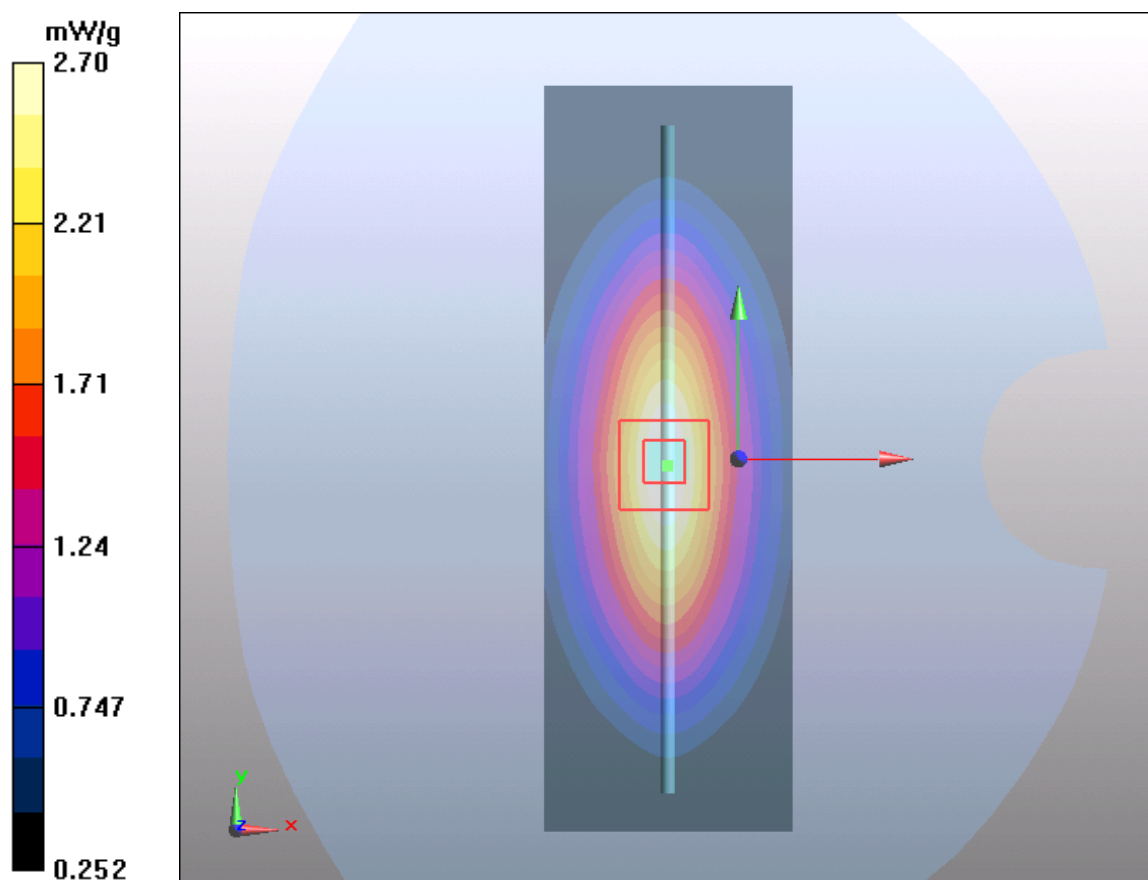

Plot 3 System Performance Check at 1750 MHz TSL

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1033

Date: 2022/2/26

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.22, 8.22, 8.22); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

d=10mm, Pin=250mW/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 9.78 mW/g


d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 80 V/m; Power Drift = 0.075 dB

Peak SAR (extrapolated) = 15.5 W/kg

SAR(1 g) = 8.95 mW/g; SAR(10 g) = 4.5 mW/g

Maximum value of SAR (measured) = 9.46 mW/g

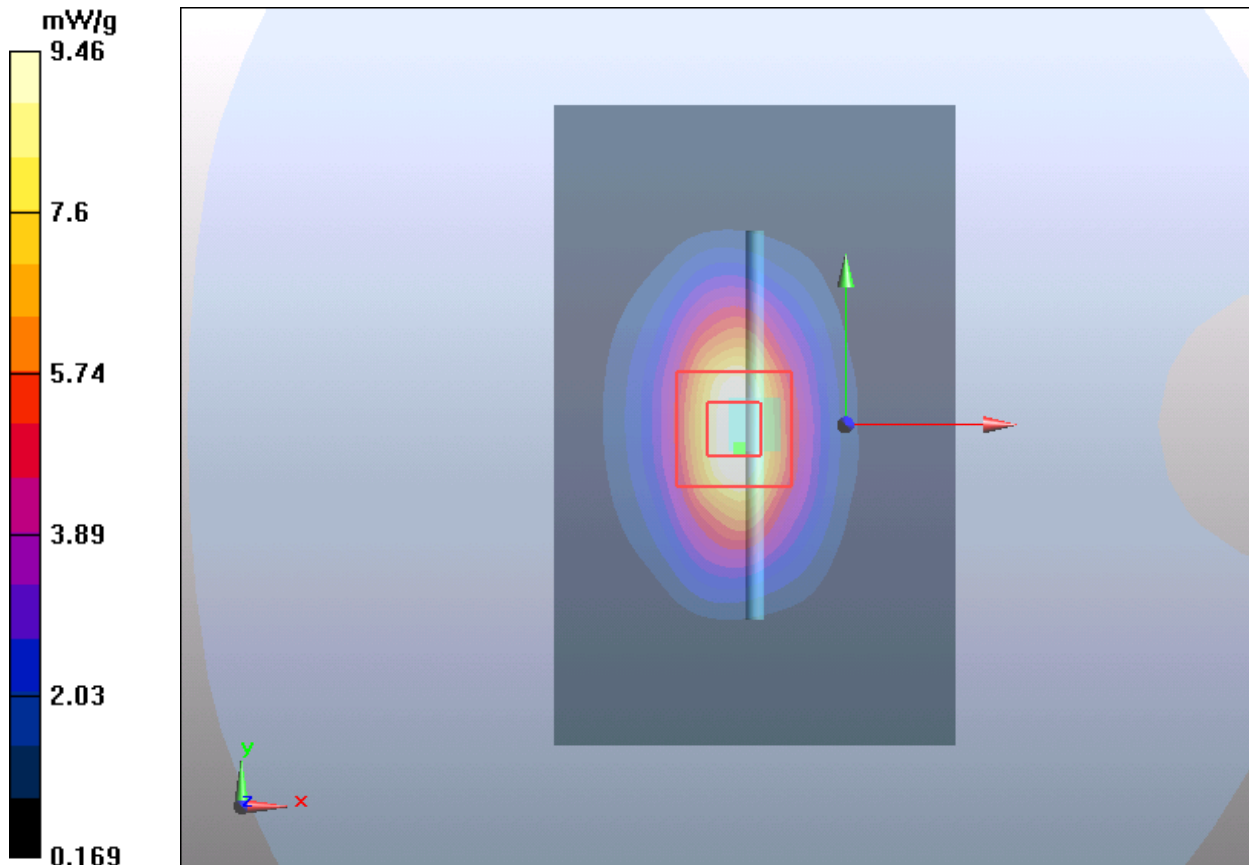

Plot 4 System Performance Check at 1750 MHz TSL

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1033

Date: 2022/2/27

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C

Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.22, 8.22, 8.22); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

d=10mm, Pin=250mW/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 9.77 mW/g


d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 80 V/m; Power Drift = 0.055 dB

Peak SAR (extrapolated) = 15.51 W/kg

SAR(1 g) = 9.11 mW/g; SAR(10 g) = 4.77 mW/g

Maximum value of SAR (measured) = 9.87 mW/g

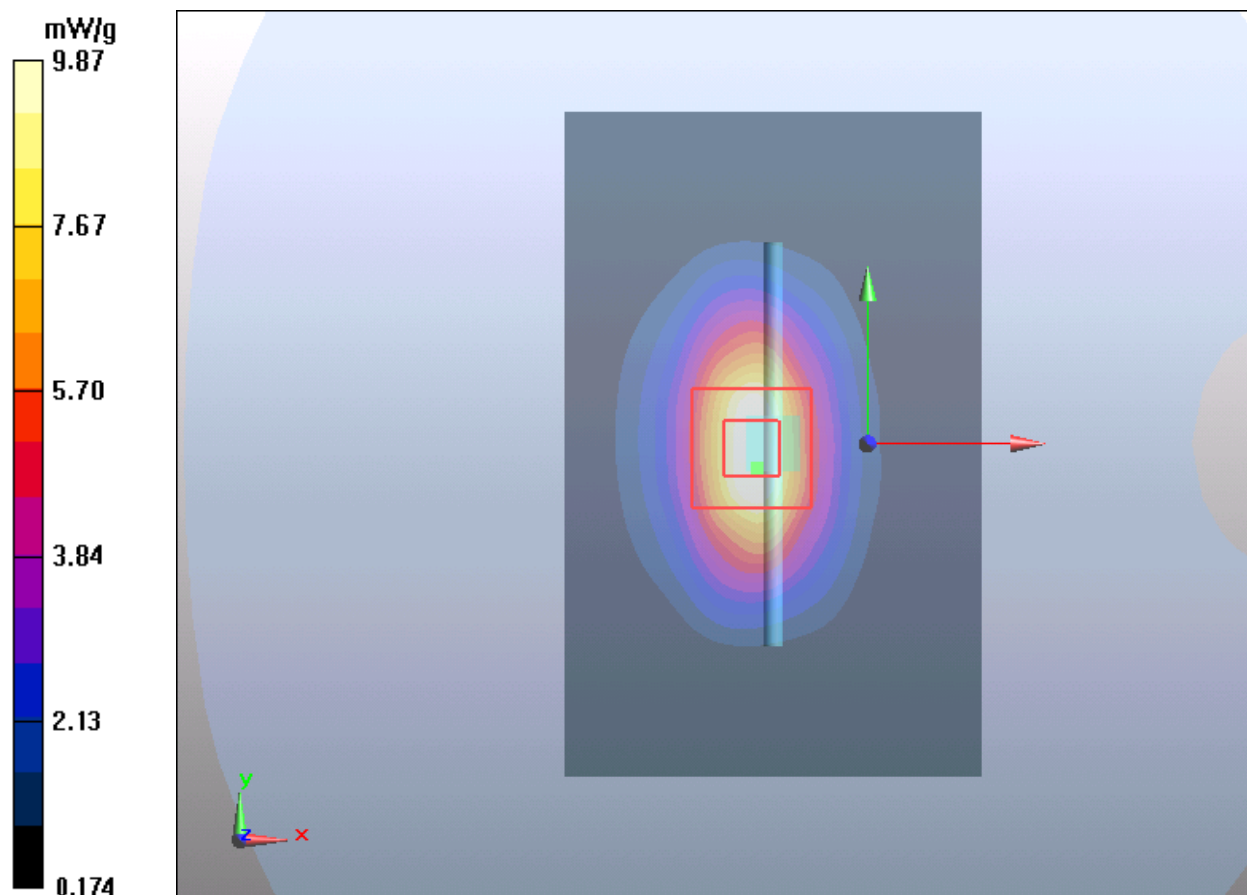

Plot 5 System Performance Check at 1750 MHz TSL

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1033

Date: 2022/3/2

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.22, 8.22, 8.22); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

d=10mm, Pin=250mW/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 9.11 mW/g


d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 80 V/m; Power Drift = 0.075 dB

Peak SAR (extrapolated) = 15.47 W/kg

SAR(1 g) = 8.96 mW/g; SAR(10 g) = 4.75 mW/g

Maximum value of SAR (measured) = 9.46 mW/g

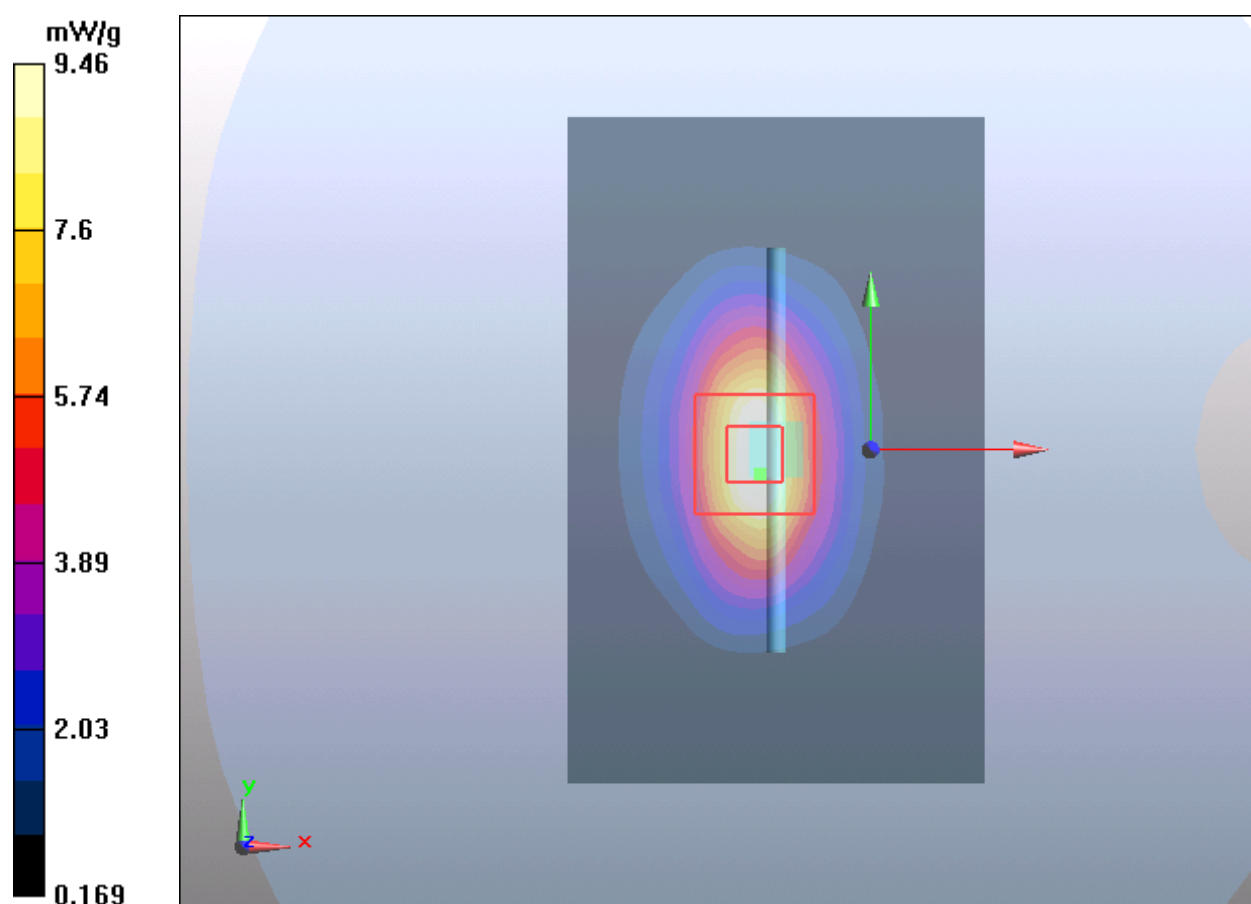

Plot 6 System Performance Check at 1900 MHz TSL

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d060

Date: 2022/2/28

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C

Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.88, 7.88, 7.88); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

d=10mm, Pin=250mW/Area Scan (4x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 11.3 mW/g


d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 85.5 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 17.8 W/kg

SAR(1 g) = 9.88 mW/g; SAR(10 g) = 4.9 mW/g

Maximum value of SAR (measured) = 10.7 mW/g

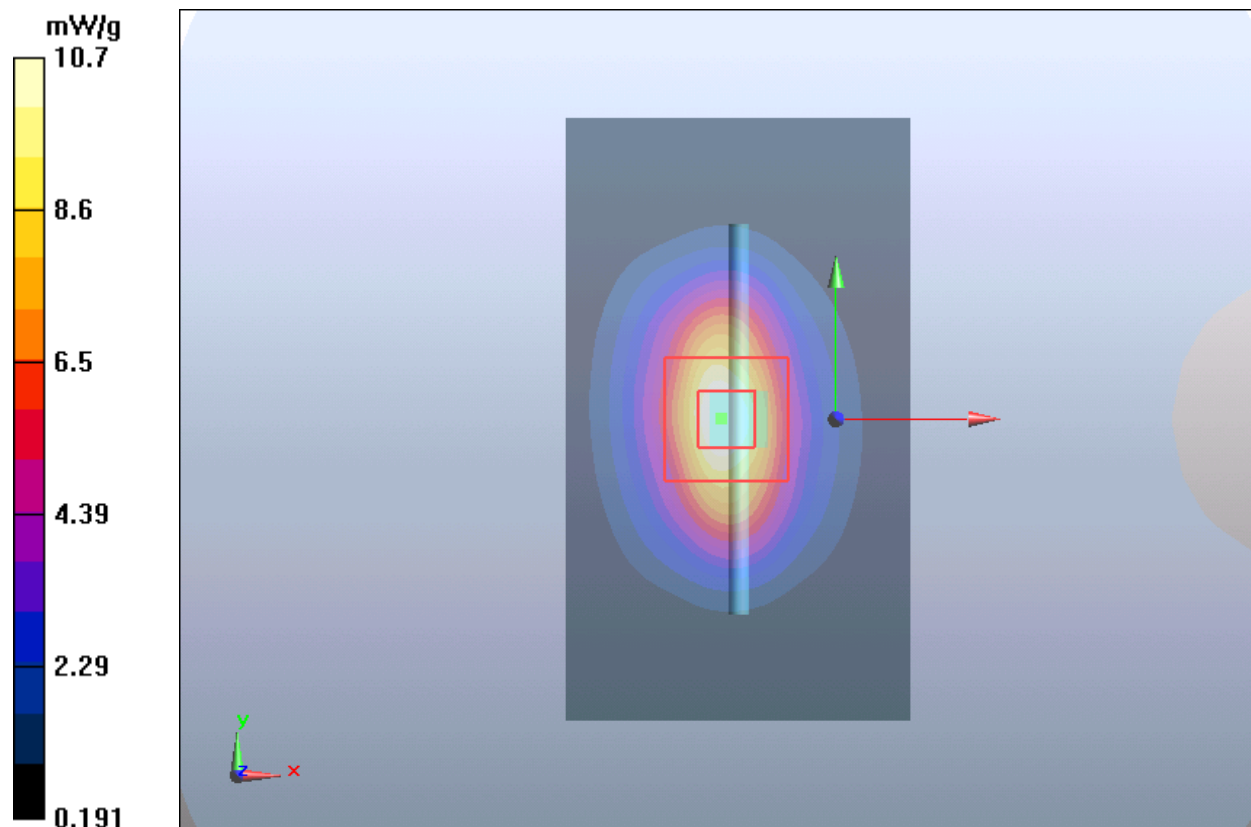

Plot 7 System Performance Check at 1900 MHz TSL

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d060

Date: 2022/3/1

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C

Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.88, 7.88, 7.88); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

d=10mm, Pin=250mW/Area Scan (4x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 11.23 mW/g


d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 85.0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 17.8 W/kg

SAR(1 g) = 9.85 mW/g; SAR(10 g) = 4.93 mW/g

Maximum value of SAR (measured) = 11.12 mW/g

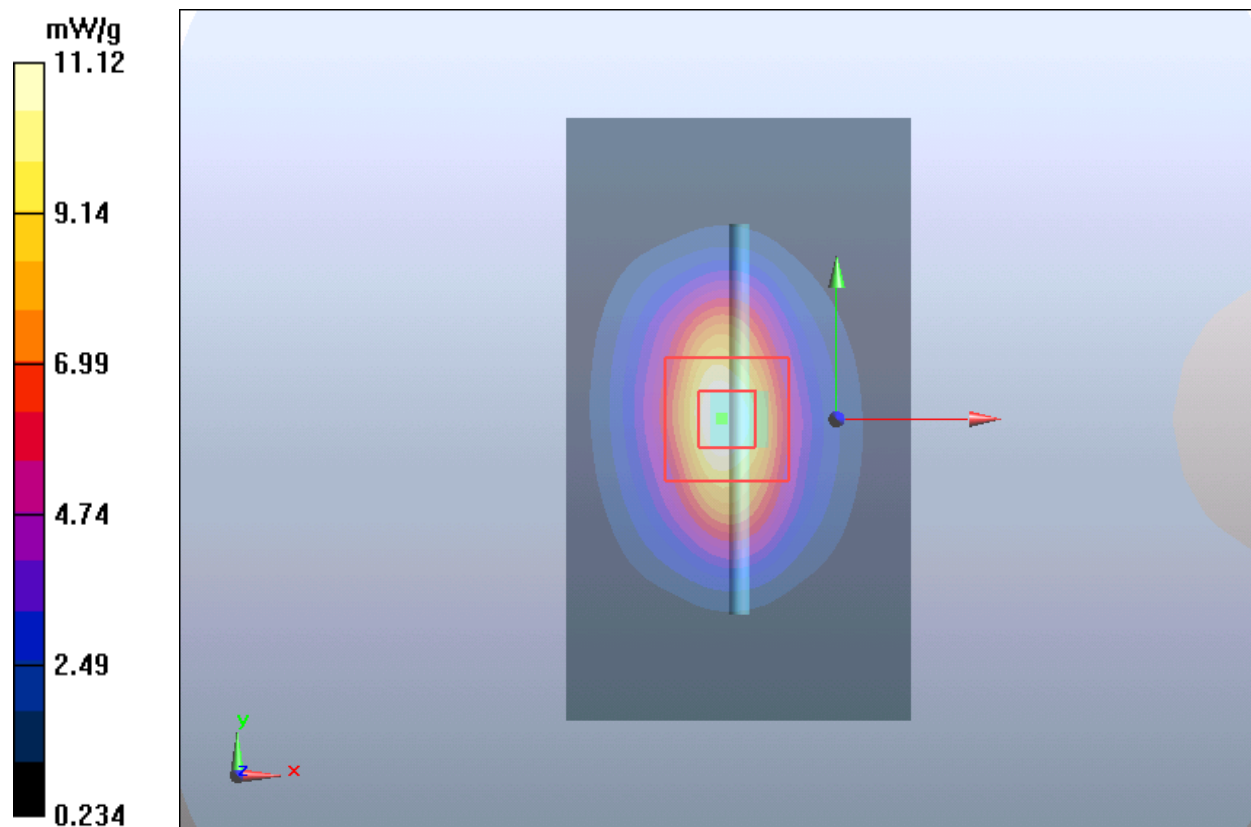

Plot 8 System Performance Check at 2450 MHz TSL

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 786

Date: 2022/3/4

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C

Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.50, 7.50, 7.50); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

d=10mm, Pin=250mW/Area Scan (4x7x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 18.2 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 88.8 V/m; Power Drift = 0.075 dB

Peak SAR (extrapolated) = 30 W/kg

SAR(1 g) = 13.7 mW/g; SAR(10 g) = 6.22 mW/g

Maximum value of SAR (measured) = 15.9 mW/g

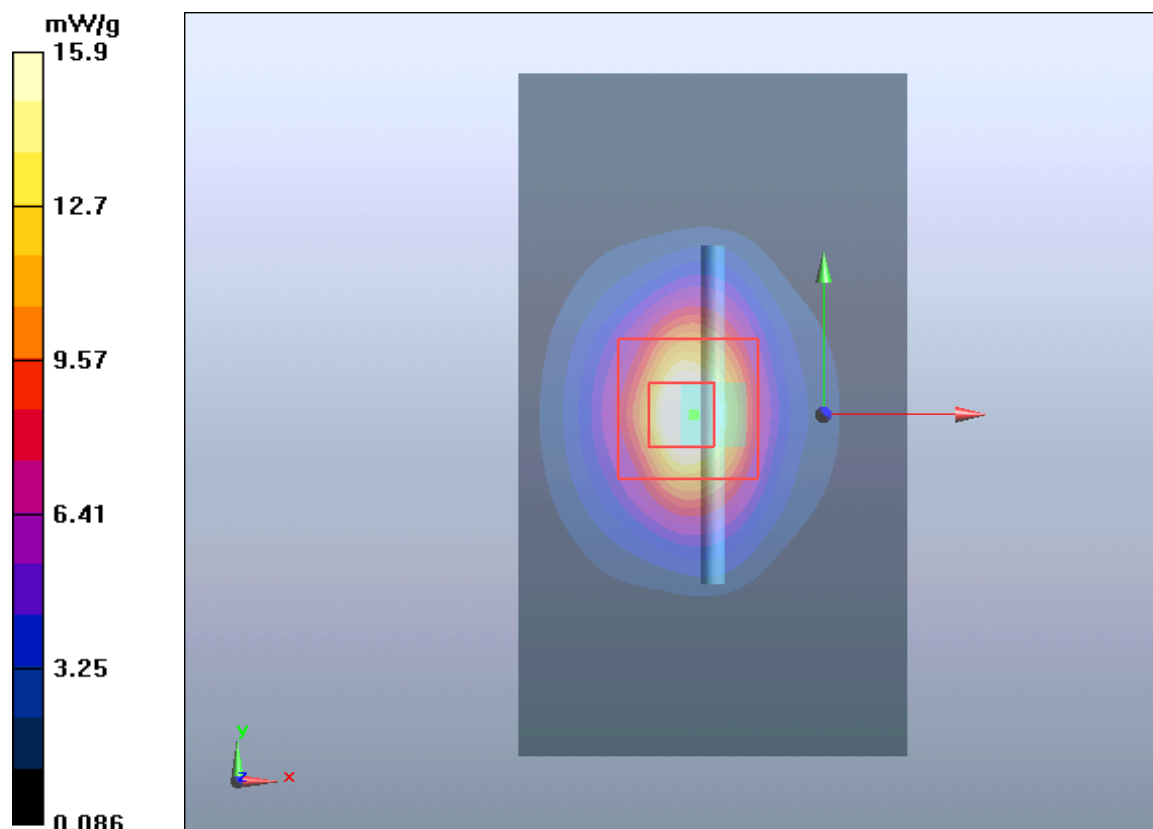

Plot 9 System Performance Check at 2600 MHz TSL

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1025

Date: 2022/3/10

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.01$ S/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.25, 7.25, 7.25); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

d=10mm, Pin=250mW/Area Scan (4x7x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 17.439 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.998 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 31.858 W/kg

SAR(1 g) = 13.9 mW/g; SAR(10 g) = 6.07 mW/g

Maximum value of SAR (measured) = 15.617 mW/g

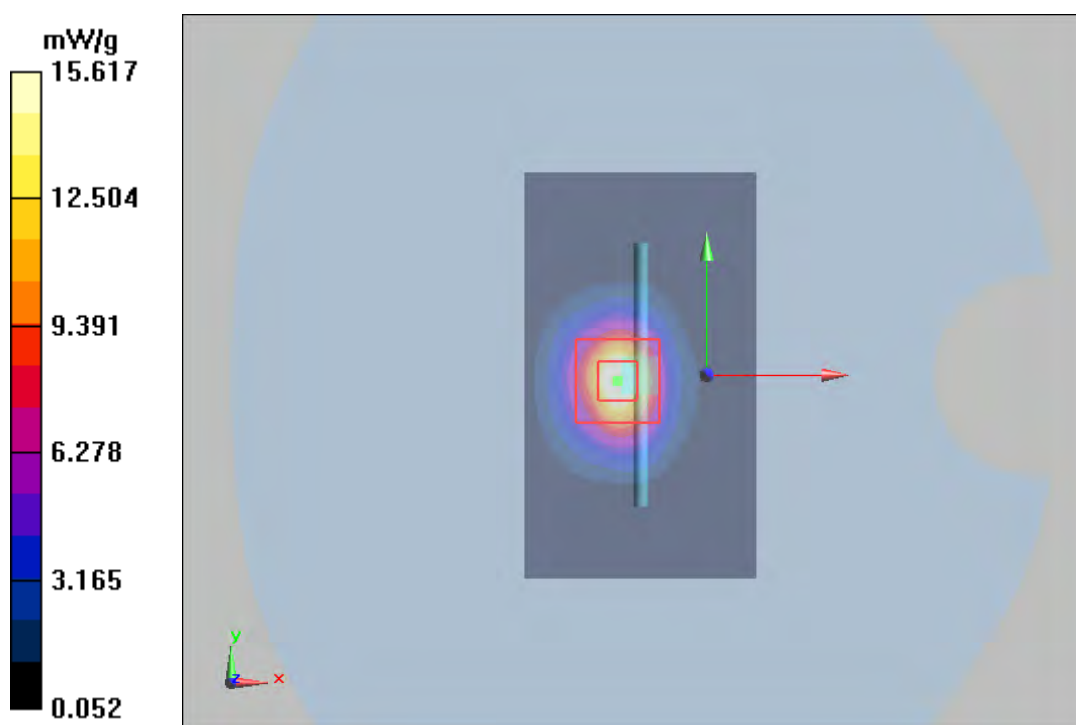

Plot 10 System Performance Check at 2600 MHz TSL

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1025

Date: 2022/3/11

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.25, 7.25, 7.25); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

d=10mm, Pin=250mW/Area Scan (4x7x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 17.59 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.998 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 31.858 W/kg

SAR(1 g) = 13.88 mW/g; SAR(10 g) = 6.09 mW/g

Maximum value of SAR (measured) = 15.66 mW/g

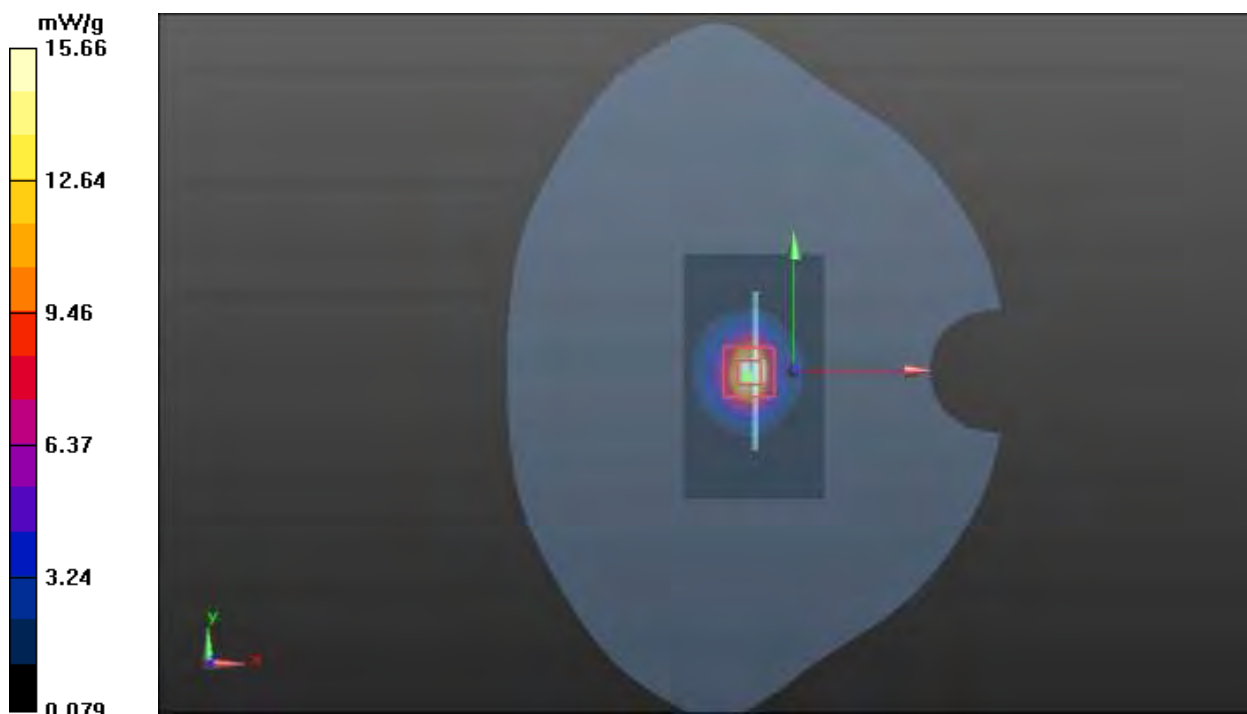

Plot 11 System Performance Check at 5250 MHz TSL

DUT: Dipole 5250 MHz; Type: D5GHzV2; Serial: 1151

Date: 2022/3/8

Communication System: CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.80$ S/m; $\epsilon_r = 35.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(5.45, 5.45, 5.45); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

d=10mm, Pin=100mW/Area Scan (6x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 9.14 mW/g


d=10mm, Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 33.6 V/m; Power Drift = -0.095 dB

Peak SAR (extrapolated) = 52.2 W/kg

SAR(1 g) = 7.87 mW/g; SAR(10 g) = 2.25 mW/g

Maximum value of SAR (measured) = 9.73 mW/g

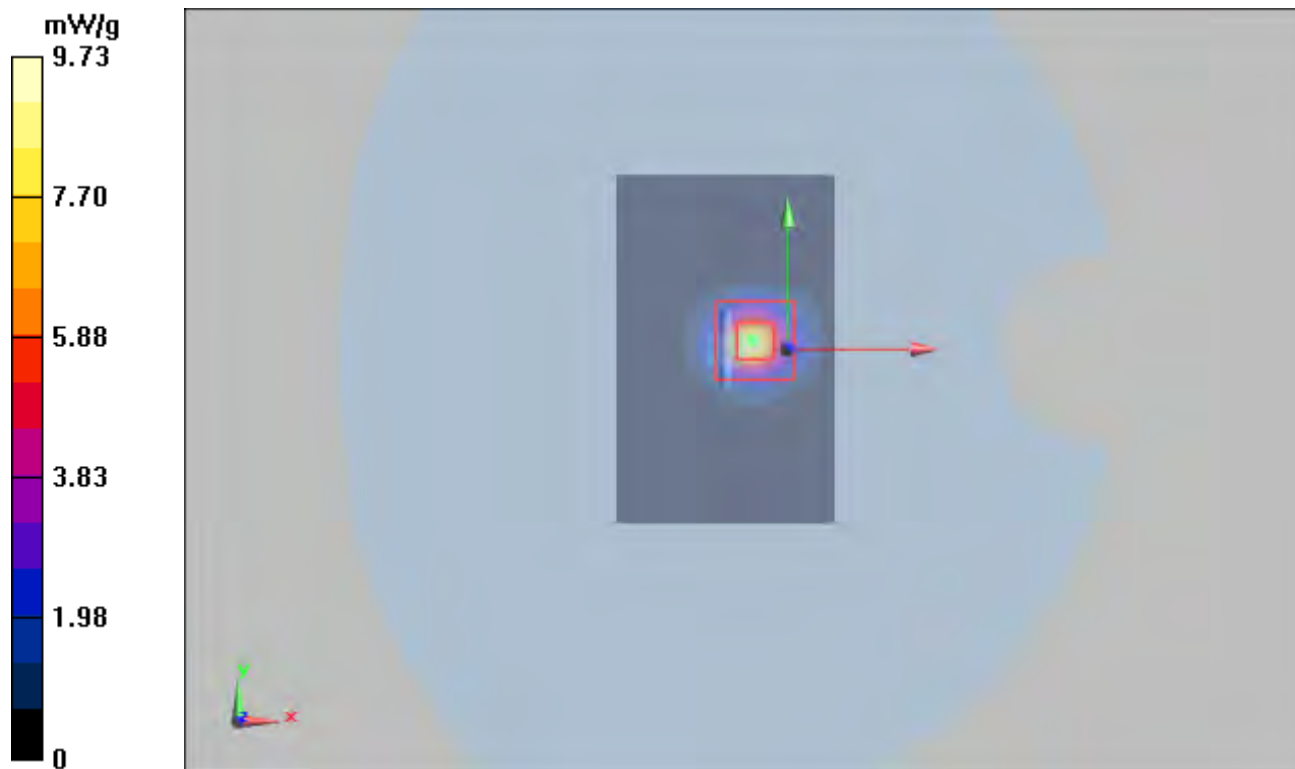

Plot 12 System Performance Check at 5600 MHz TSL

DUT: Dipole 5600 MHz; Type: D5GHzV2; Serial: 1151

Date: 2022/3/14

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.21$ S/m; $\epsilon_r = 34.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(5.00, 5.00, 5.00); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

d=10mm, Pin=100mW/Area Scan (6x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 8.25 mW/g


d=10mm, Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 23.1 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 22.9 W/kg

SAR(1 g) = 7.67 mW/g; SAR(10 g) = 2.27 mW/g

Maximum value of SAR (measured) = 8.67 mW/g

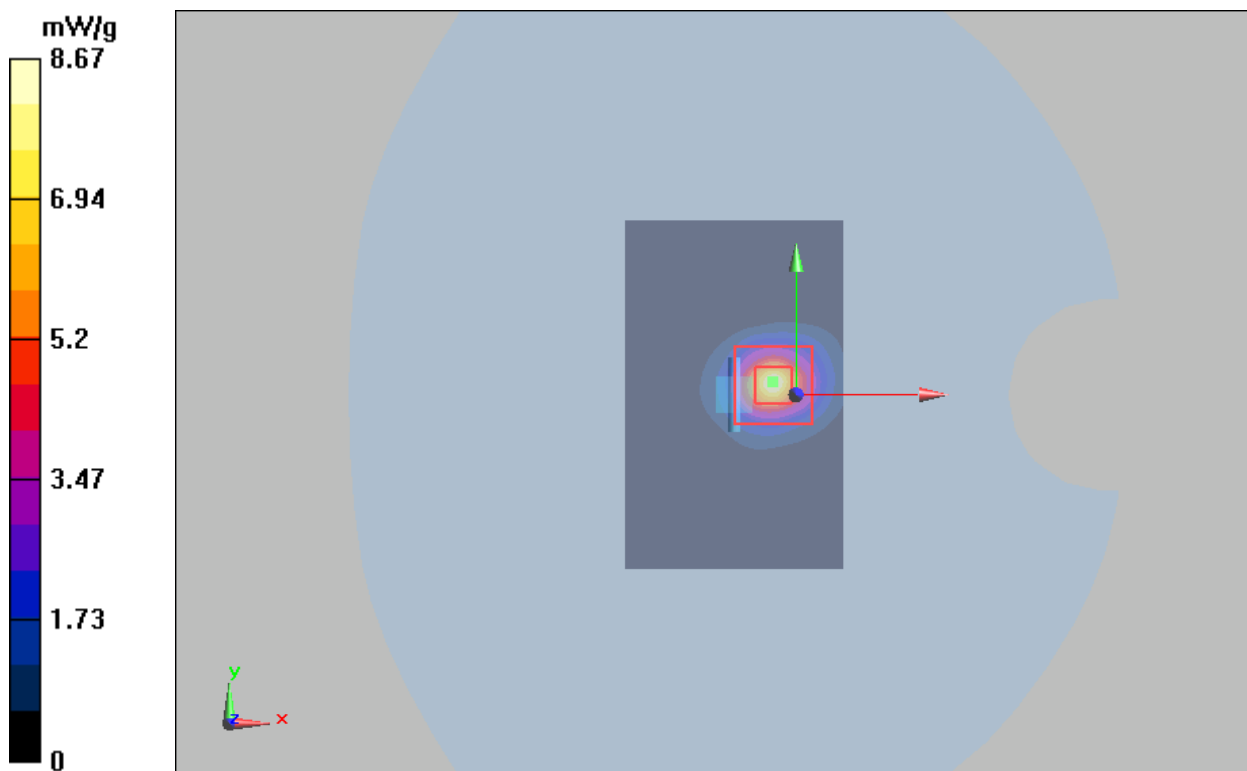

Plot 13 System Performance Check at 5750 MHz TSL

DUT: Dipole 5750 MHz; Type: D5GHzV2; Serial: 1151

Date: 2022/3/14

Communication System: CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5750$ MHz; $\sigma = 5.21$ S/m; $\epsilon_r = 34.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(5.04, 5.04, 5.04); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

d=10mm, Pin=100mW/Area Scan (6x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 8.31 mW/g


d=10mm, Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 23.1 V/m; Power Drift = 0.044 dB

Peak SAR (extrapolated) = 23.4 W/kg

SAR(1 g) = 7.66 mW/g; SAR(10 g) = 2.27 mW/g

Maximum value of SAR (measured) = 8.976 mW/g

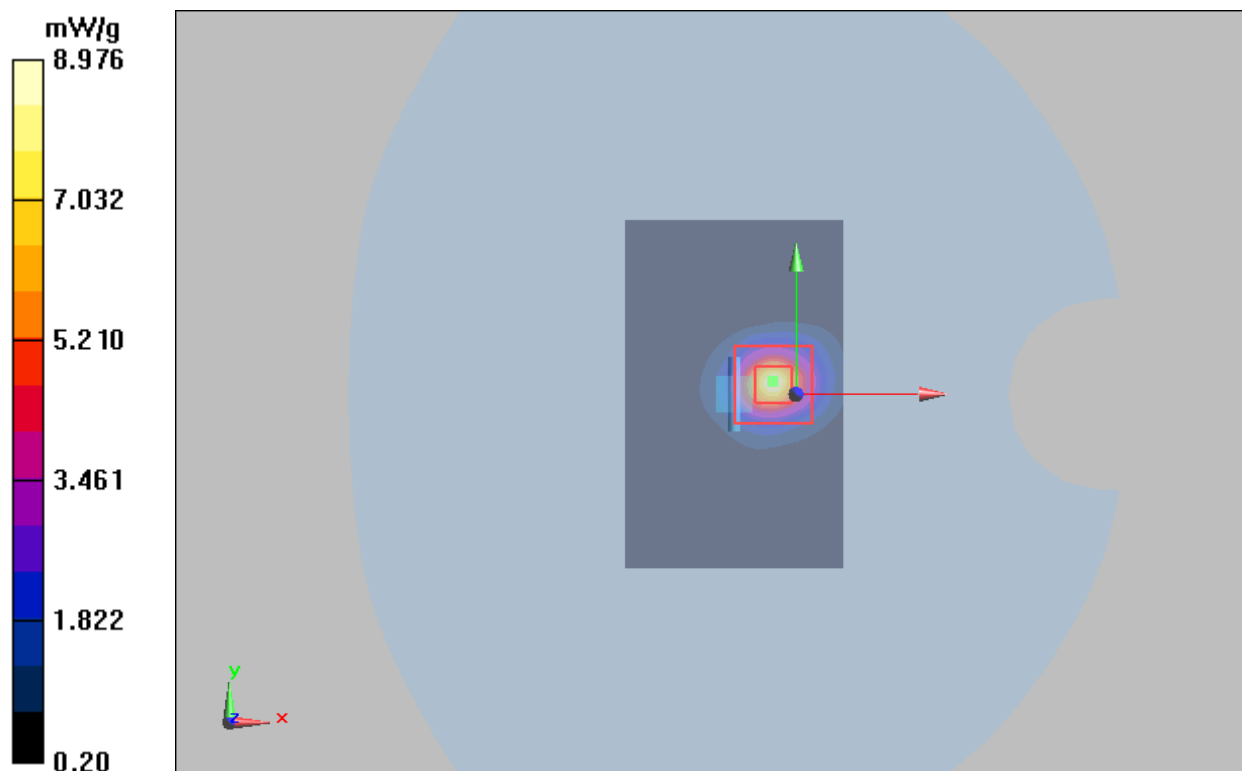

ANNEX C: Highest Graph Results

Plot 14 GSM 850 Left Cheek Middle

Date: 2022/2/23

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.953$ S/m; $\epsilon_r = 39.762$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.30, 9.30, 9.30); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Left Cheek Middle/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.190 W/kg


Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.502 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.223 W/kg

SAR(1 g) = 0.157 W/kg; SAR(10 g) = 0.115 W/kg

Maximum value of SAR (measured) = 0.194 W/kg

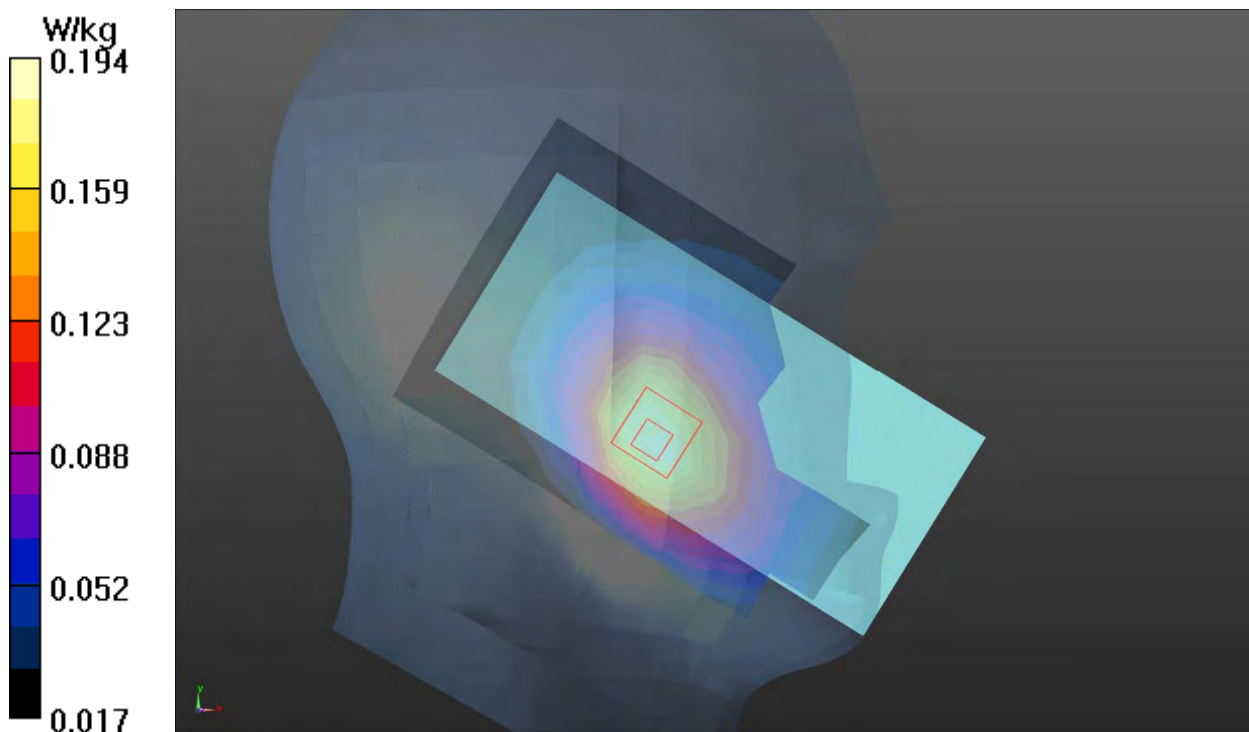

Plot 15 GSM 1900 Left Cheek Middle

Date: 2022/2/28

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 38.948$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.88, 7.88, 7.88); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Left Cheek Middle/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.109 W/kg


Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.207 V/m; Power Drift = 0.064 dB

Peak SAR (extrapolated) = 0.171 W/kg

SAR(1 g) = 0.106 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.113 W/kg

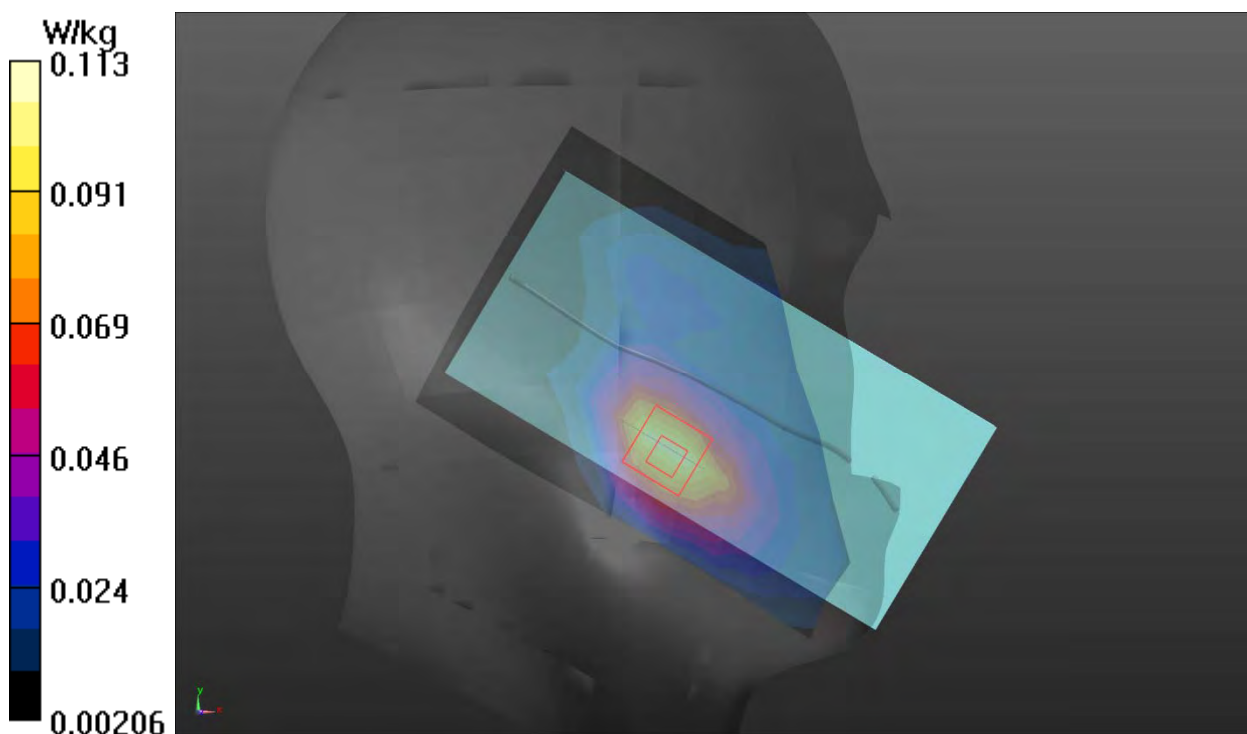

Plot 16 UMTS Band II Right Tilt Middle

Date: 2022/2/28

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.393$ S/m; $\epsilon_r = 38.344$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.88, 7.88, 7.88); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Right Tilt Middle/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.626 W/kg


Right Tilt Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.39 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.489 W/kg; SAR(10 g) = 0.226 W/kg

Maximum value of SAR (measured) = 0.910 W/kg

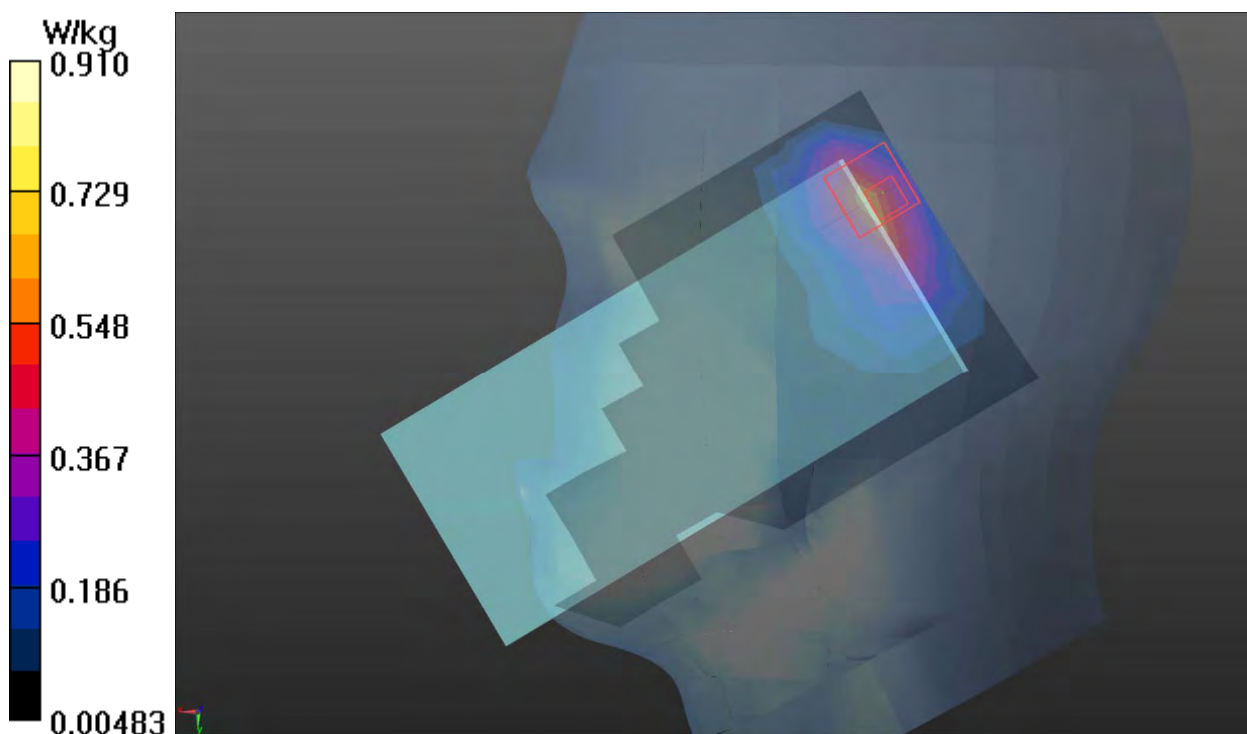

Plot 17 UMTS Band IV Right Tilt Middle

Date: 2022/2/26

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.293$ S/m; $\epsilon_r = 38.782$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.22, 8.22, 8.22); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Right Tilt Middle/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.538 W/kg


Right Tilt Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.48 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.937 W/kg

SAR(1 g) = 0.430 W/kg; SAR(10 g) = 0.199 W/kg

Maximum value of SAR (measured) = 0.734 W/kg

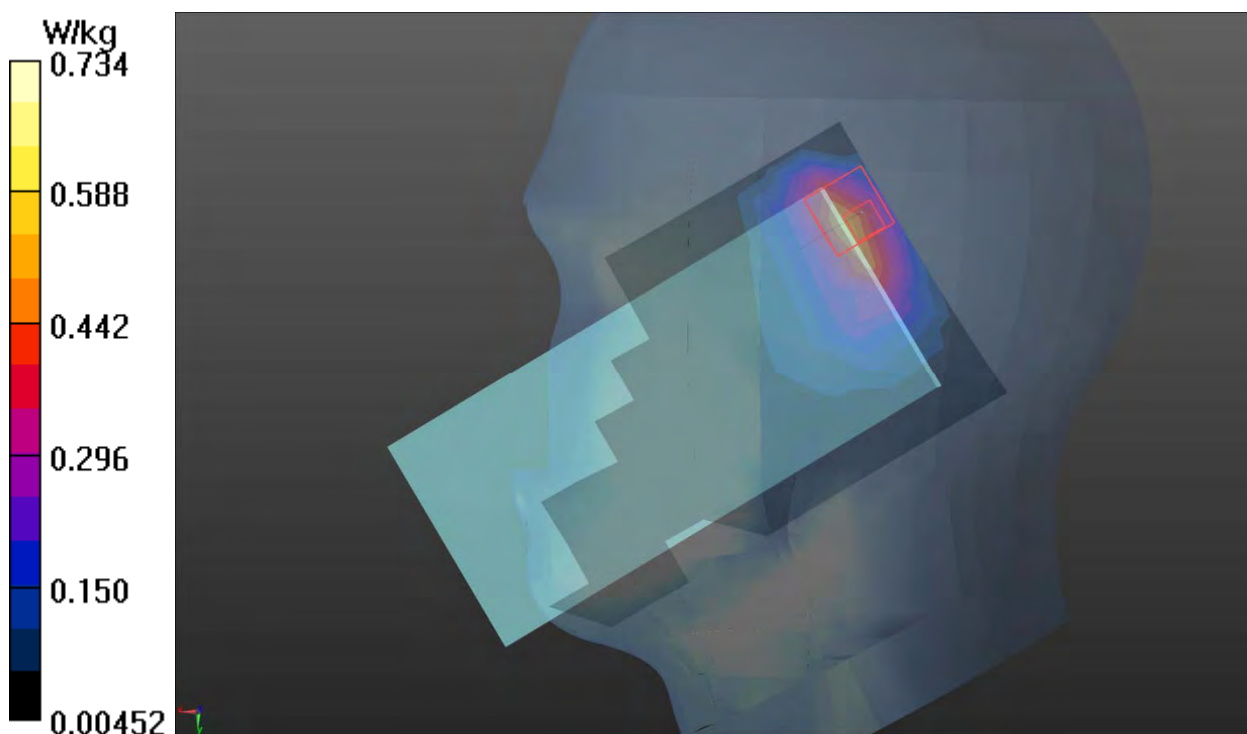

Plot 18 UMTS Band V Left Cheek Middle

Date: 2022/2/23

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.953 \text{ S/m}$; $\epsilon_r = 39.762$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.30, 9.30, 9.30); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Left Cheek Middle/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.193 W/kg


Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.466 V/m ; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 0.226 W/kg

SAR(1 g) = 0.164 W/kg ; SAR(10 g) = 0.121 W/kg

Maximum value of SAR (measured) = 0.203 W/kg

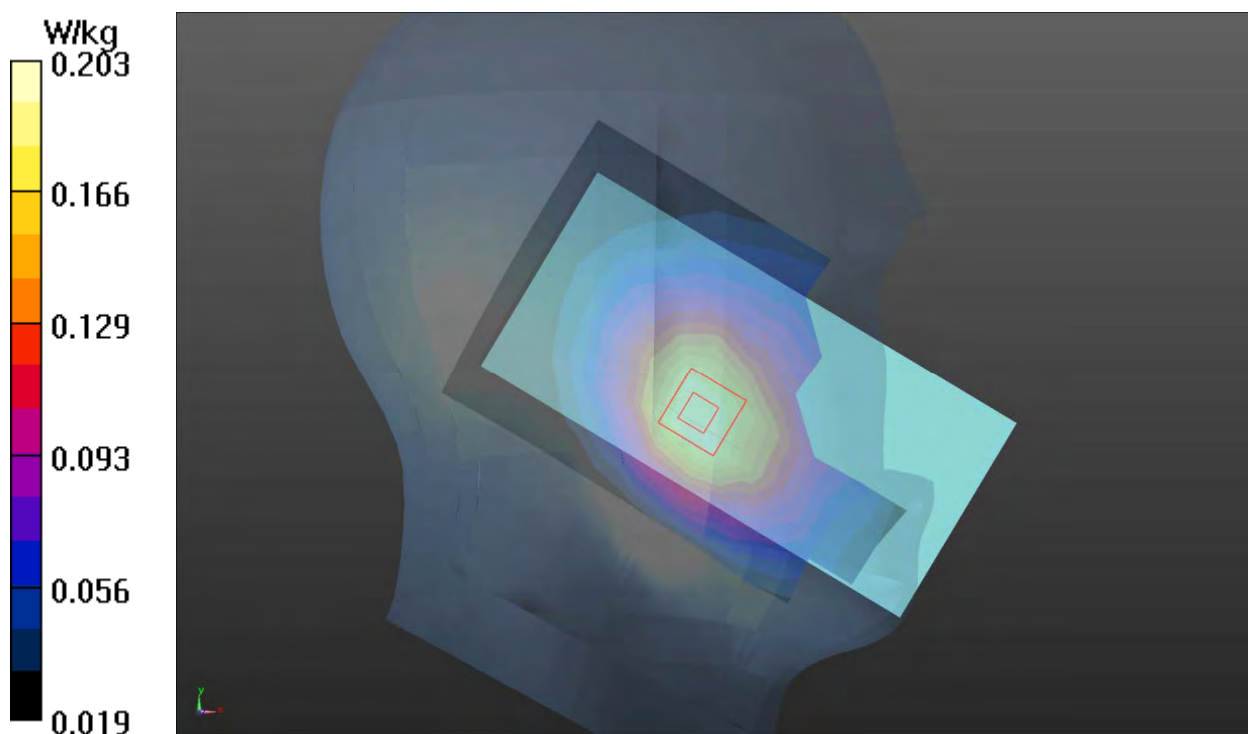

Plot 19 LTE Band 2 1RB Right Tilt Low

Date: 2022/2/28

Communication System: UID 0, LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.379$ S/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.88, 7.88, 7.88); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Right Tilt Low/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.724 W/kg


Right Tilt Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.04 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.579 W/kg; SAR(10 g) = 0.274 W/kg

Maximum value of SAR (measured) = 0.920 W/kg

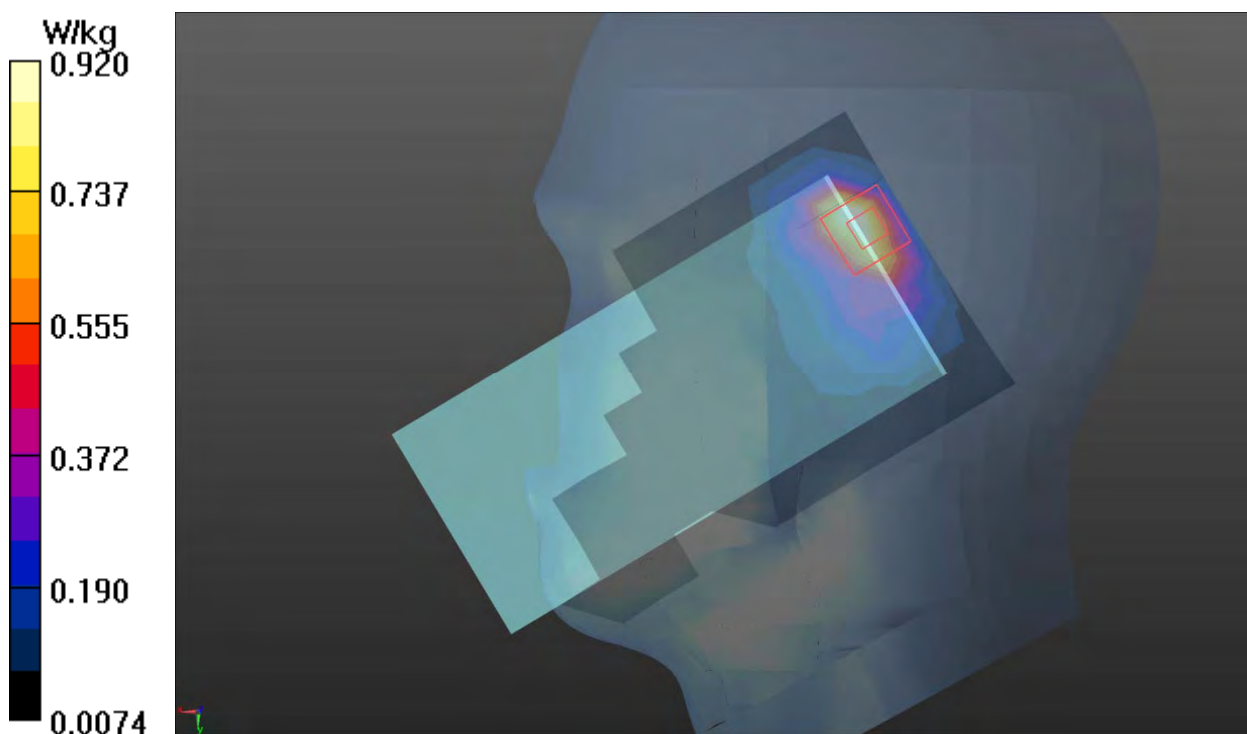

Plot 20 LTE Band 4 50%RB Right Tilt High

Date: 2022/2/26

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.301$ S/m; $\epsilon_r = 38.753$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.22, 8.22, 8.22); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Right Tilt High/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.627 W/kg


Right Tilt High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.27 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.478 W/kg; SAR(10 g) = 0.227 W/kg

Maximum value of SAR (measured) = 0.779 W/kg

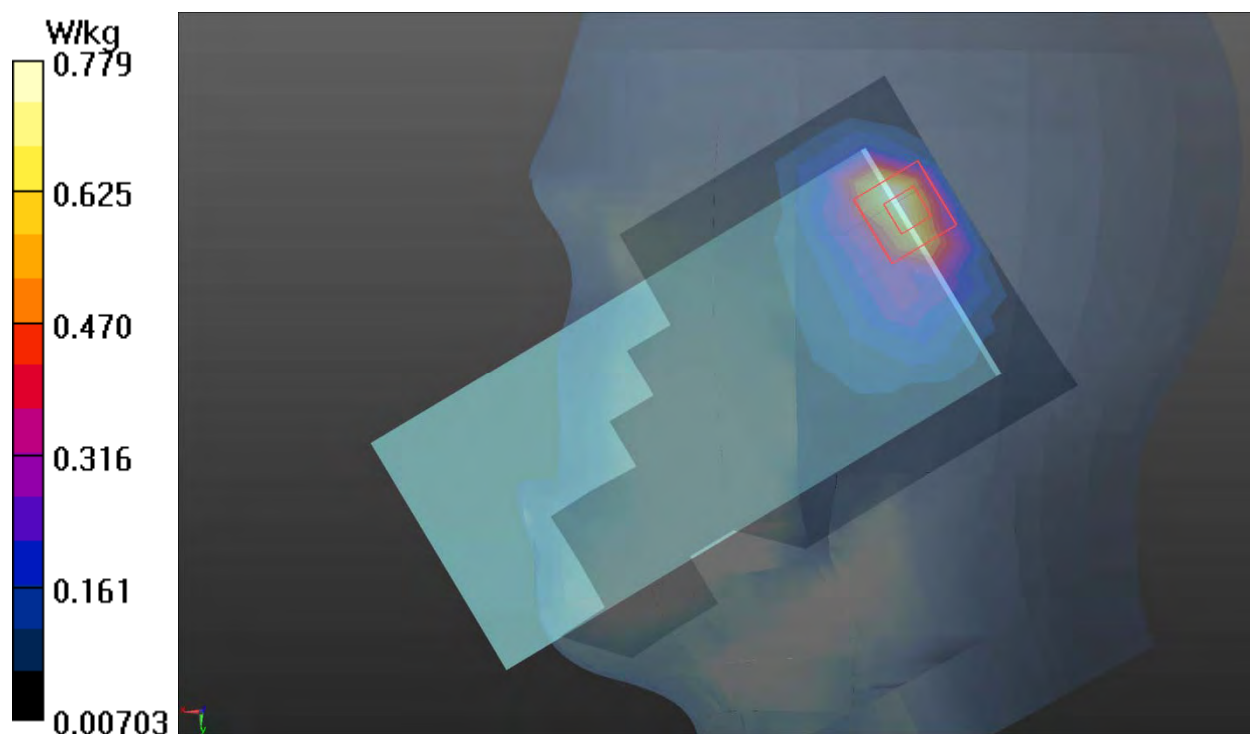

Plot 21 LTE Band 5 1RB Left Cheek High

Date: 2022/2/23

Communication System: UID 0, LTE (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844$ MHz; $\sigma = 0.958$ S/m; $\epsilon_r = 39.728$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.30, 9.30, 9.30); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Left Cheek High/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.219 W/kg


Left Cheek High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.116 V/m; Power Drift = 0.121 dB

Peak SAR (extrapolated) = 0.252 W/kg

SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.133 W/kg

Maximum value of SAR (measured) = 0.224 W/kg

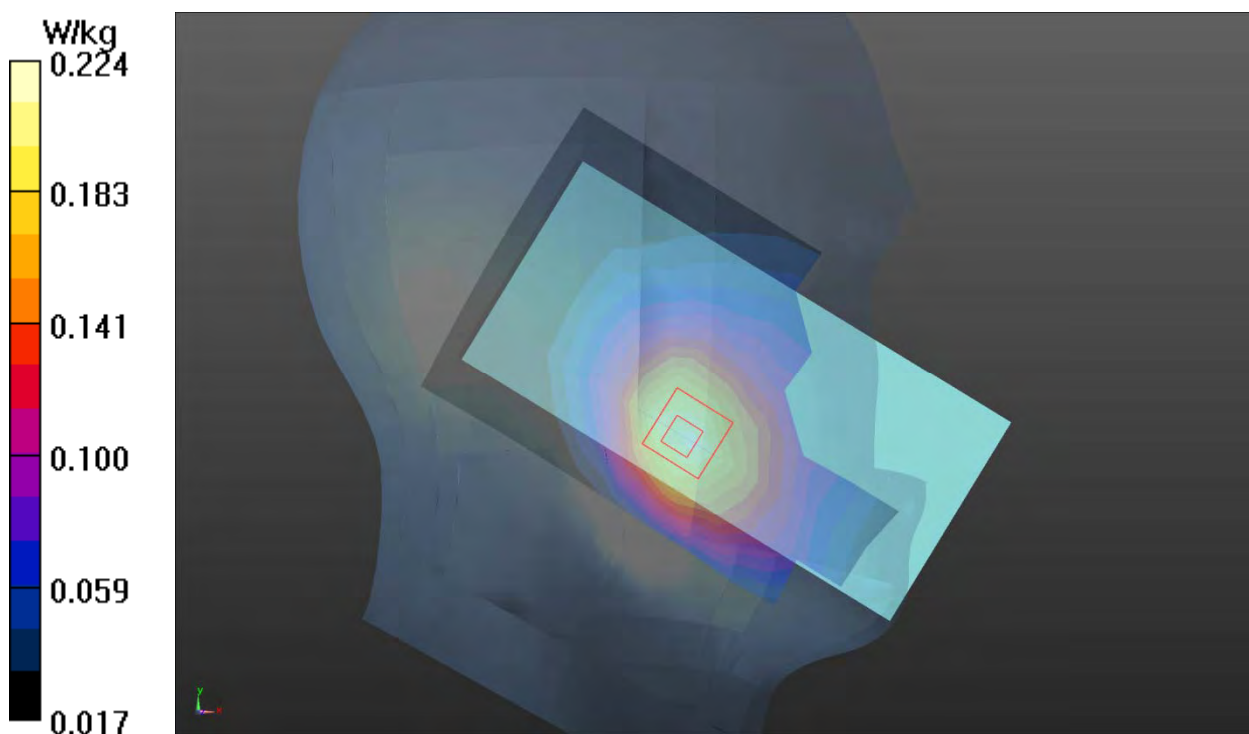

Plot 22 LTE Band 7 1RB Right Cheek Middle

Date: 2022/3/10

Communication System: UID 0, LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 37.31$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.25, 7.25, 7.25); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP: 1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Right Cheek Middle/Area Scan (10x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.554 W/kg


Right Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.760 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.503 W/kg; SAR(10 g) = 0.204 W/kg

Maximum value of SAR (measured) = 0.566 W/kg

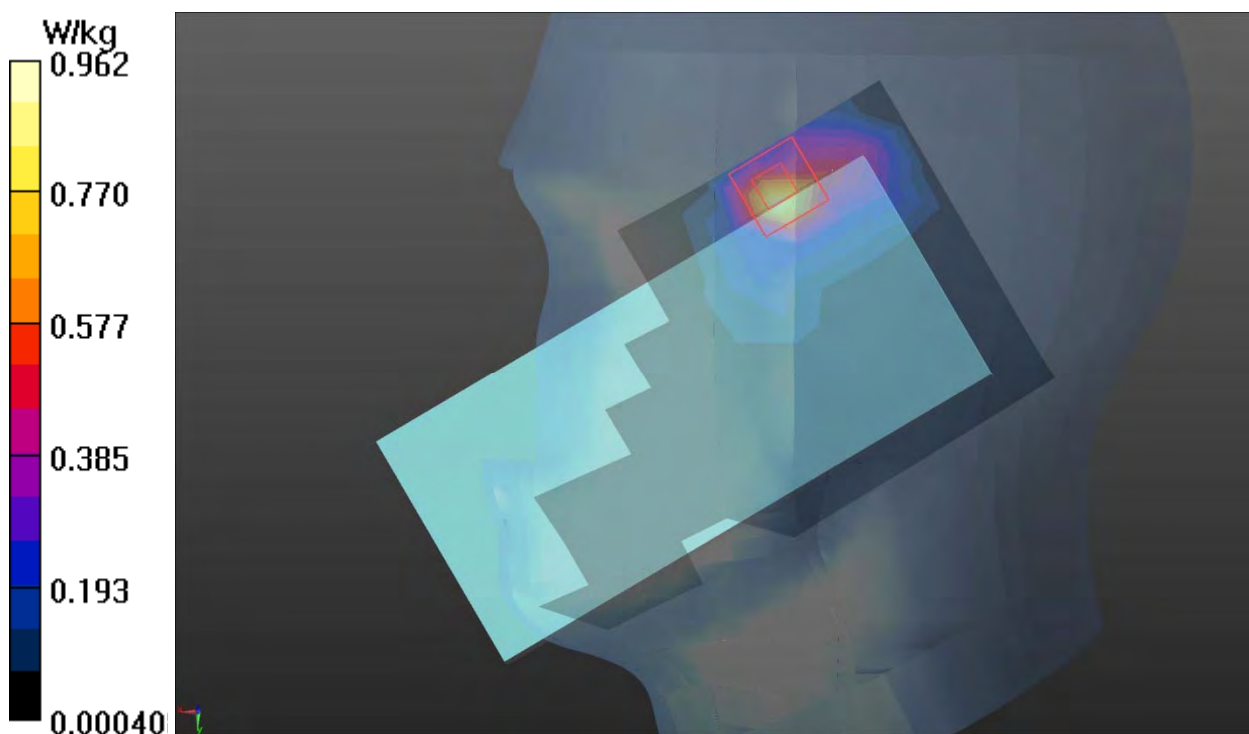

Plot 23 LTE Band 13 1RB Left Cheek Middle

Date: 2022/2/25

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.917 \text{ S/m}$; $\epsilon_r = 40.132$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.64, 9.64, 9.64); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Left Cheek Middle/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.098 W/kg


Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.042 V/m ; Power Drift = 0.142 dB

Peak SAR (extrapolated) = 0.122 W/kg

SAR(1 g) = 0.090 W/kg ; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.110 W/kg

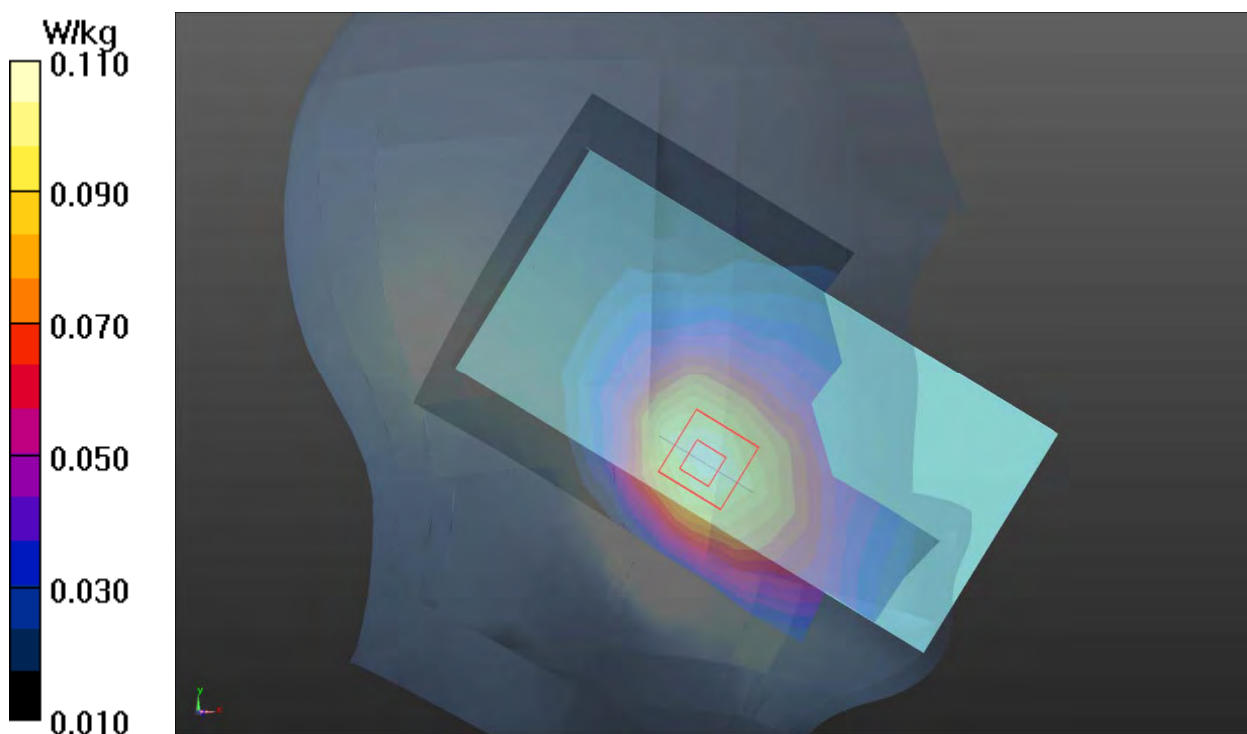

Plot 24 LTE Band 26 1RB Left Cheek High

Date: 2022/2/23

Communication System: UID 0, LTE (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.957$ S/m; $\epsilon_r = 39.746$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.30, 9.30, 9.30); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Left Cheek High/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.274 W/kg


Left Cheek High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.869 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.323 W/kg

SAR(1 g) = 0.234 W/kg; SAR(10 g) = 0.173 W/kg

Maximum value of SAR (measured) = 0.289 W/kg

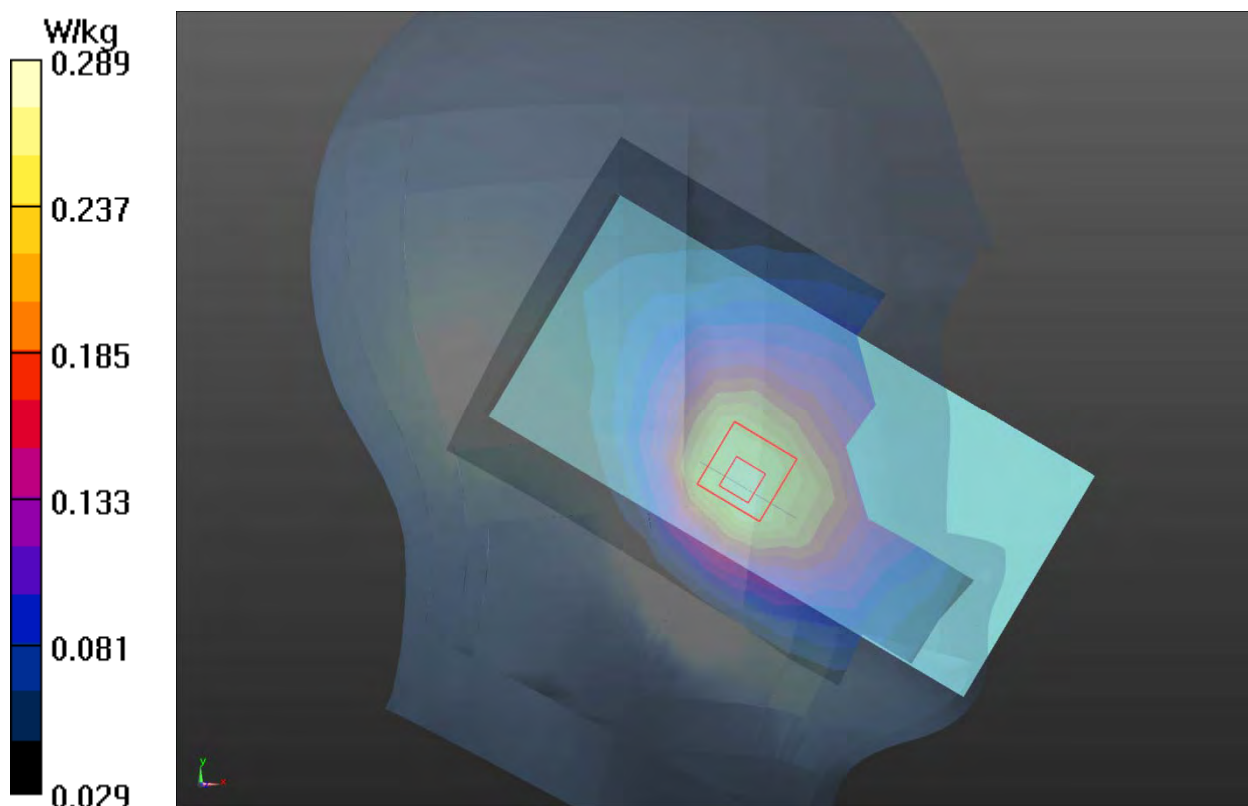

Plot 25 LTE Band 38 50%RB Right Cheek Middle

Date: 2022/3/11

Communication System: UID 0, LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 2.027$ S/m; $\epsilon_r = 37.056$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.25, 7.25, 7.25); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Right Cheek Middle/Area Scan (10x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.799 W/kg


Right Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.857 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.623 W/kg; SAR(10 g) = 0.264 W/kg

Maximum value of SAR (measured) = 1.19 W/kg

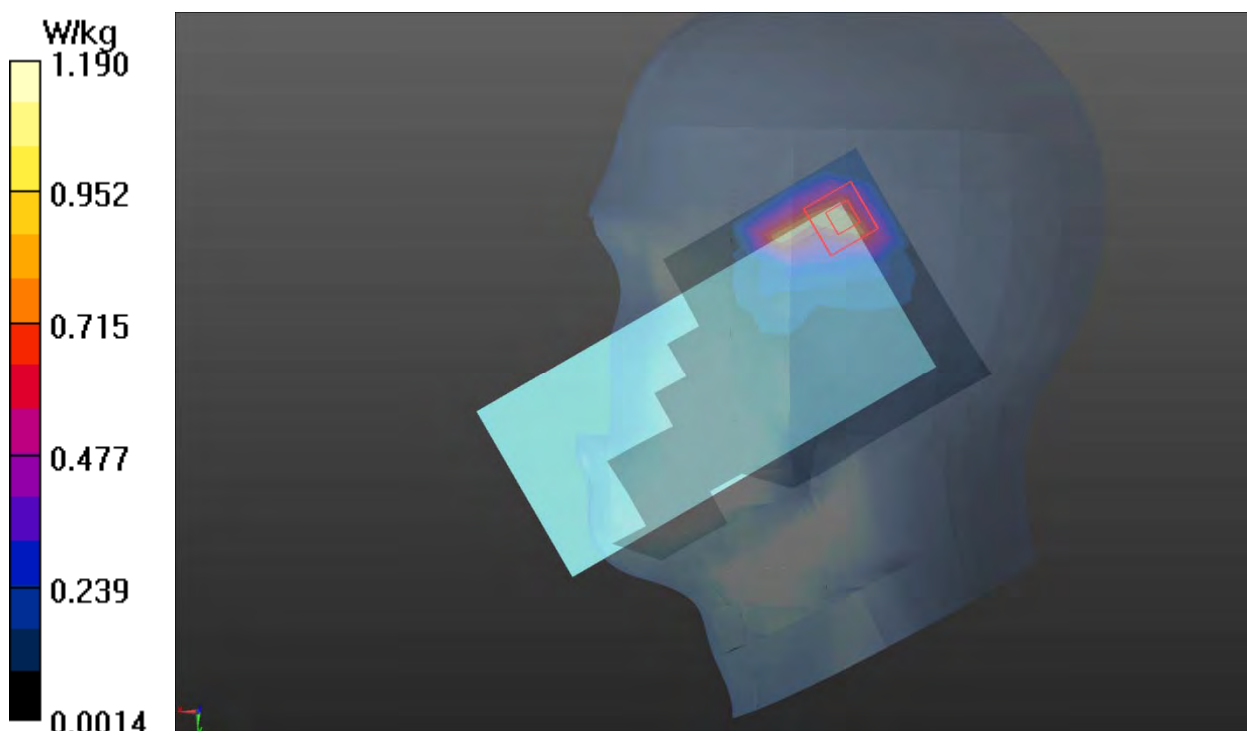

Plot 26 LTE Band 66 1RB Right Tilt High

Date: 2022/2/26

Communication System: UID 0, LTE (0); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.341$ S/m; $\epsilon_r = 39.287$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.22, 8.22, 8.22); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Right Tilt High/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.612 W/kg


Right Tilt High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.64 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.571 W/kg; SAR(10 g) = 0.295 W/kg

Maximum value of SAR (measured) = 0.645 W/kg

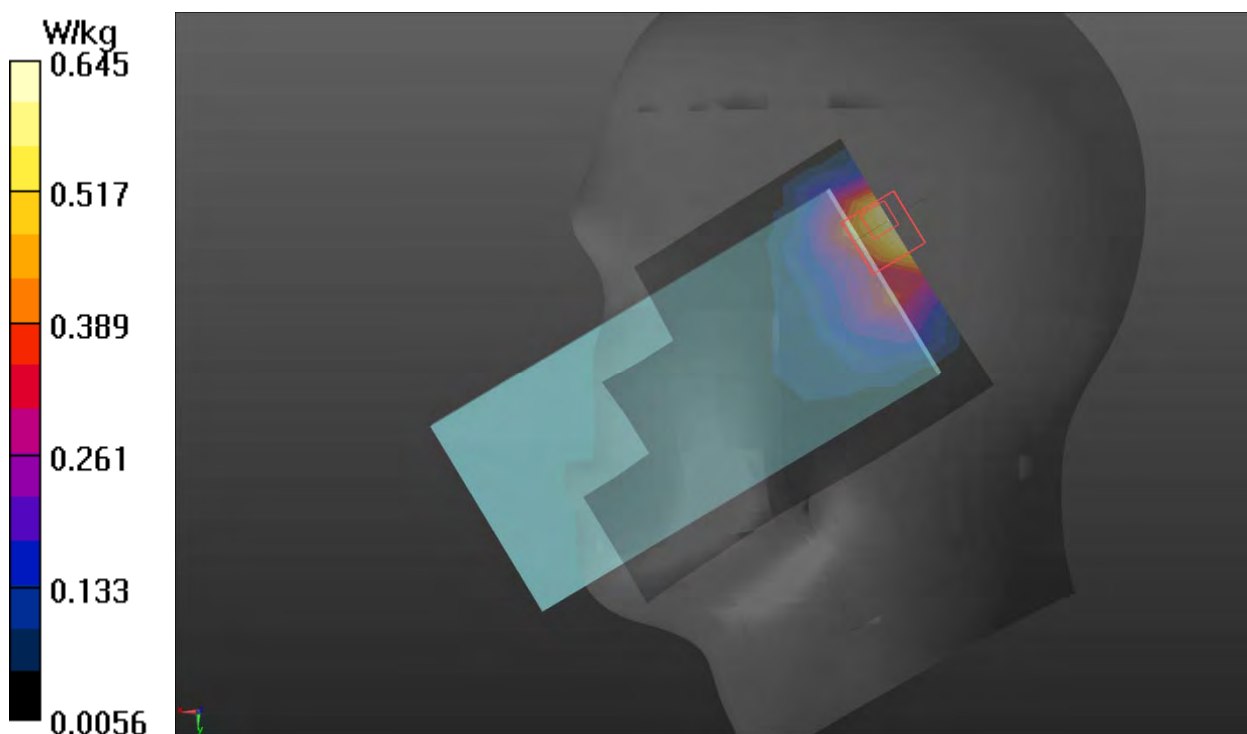

Plot 27 802.11g Left Cheek Low

Date: 2022/3/4

Communication System: UID 0, 802.11g (0); Frequency: 2412 MHz; Duty Cycle: 1:1.02

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.833 \text{ S/m}$; $\epsilon_r = 40.965$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.50, 7.50, 7.50); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Left Cheek Low/Area Scan (10x18x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.683 W/kg


Left Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.219 V/m ; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 0.975 W/kg

SAR(1 g) = 0.396 W/kg ; SAR(10 g) = 0.173 W/kg

Maximum value of SAR (measured) = 0.724 W/kg

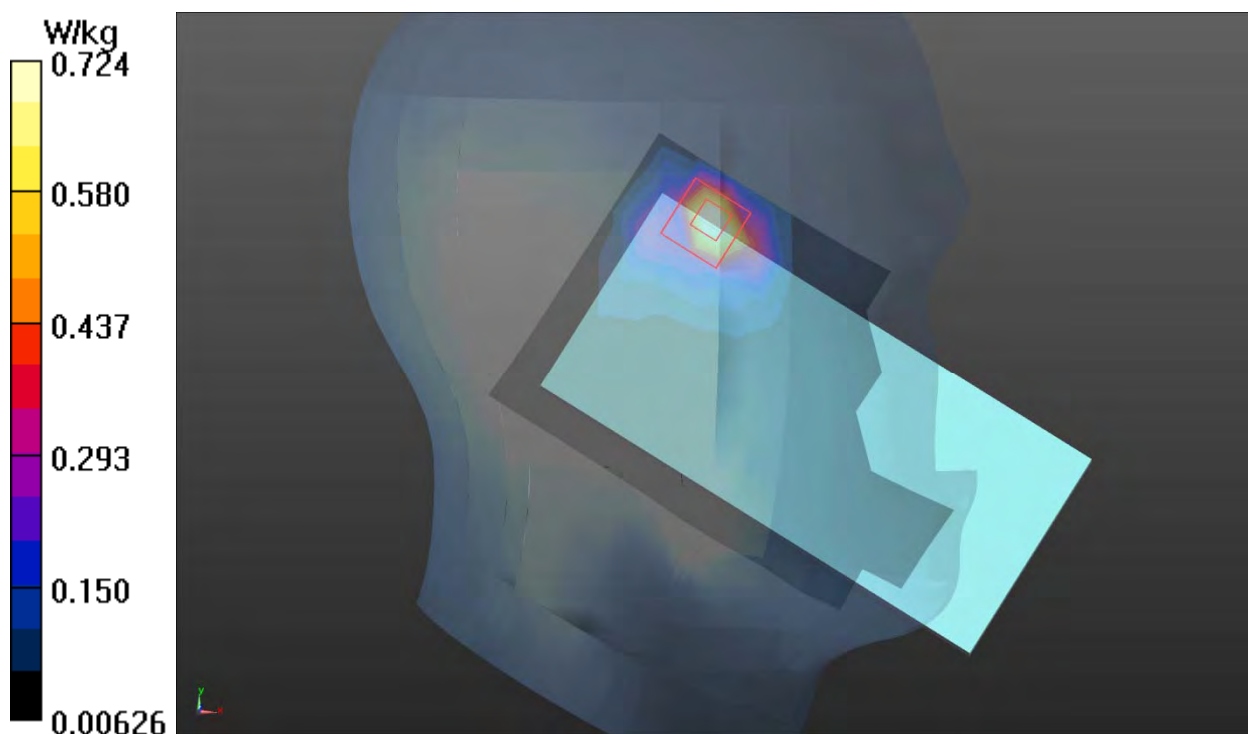

Plot 28 802.11ac-VHT80 U-NII-3 Left Cheek Low

Date: 2022/3/14

Communication System: UID 0, 802.11ac-VHT80 (0); Frequency: 5775 MHz; Duty Cycle: 1:1.09

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.428$ S/m; $\epsilon_r = 34.617$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(5.04, 5.04, 5.04); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Left Cheek Low/Area Scan (12x21x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.190 W/kg


Left Cheek Low/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.704 V/m; Power Drift = -0.176 dB

Peak SAR (extrapolated) = 0.553 W/kg

SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.055 W/kg

Maximum value of SAR (measured) = 0.209 W/kg

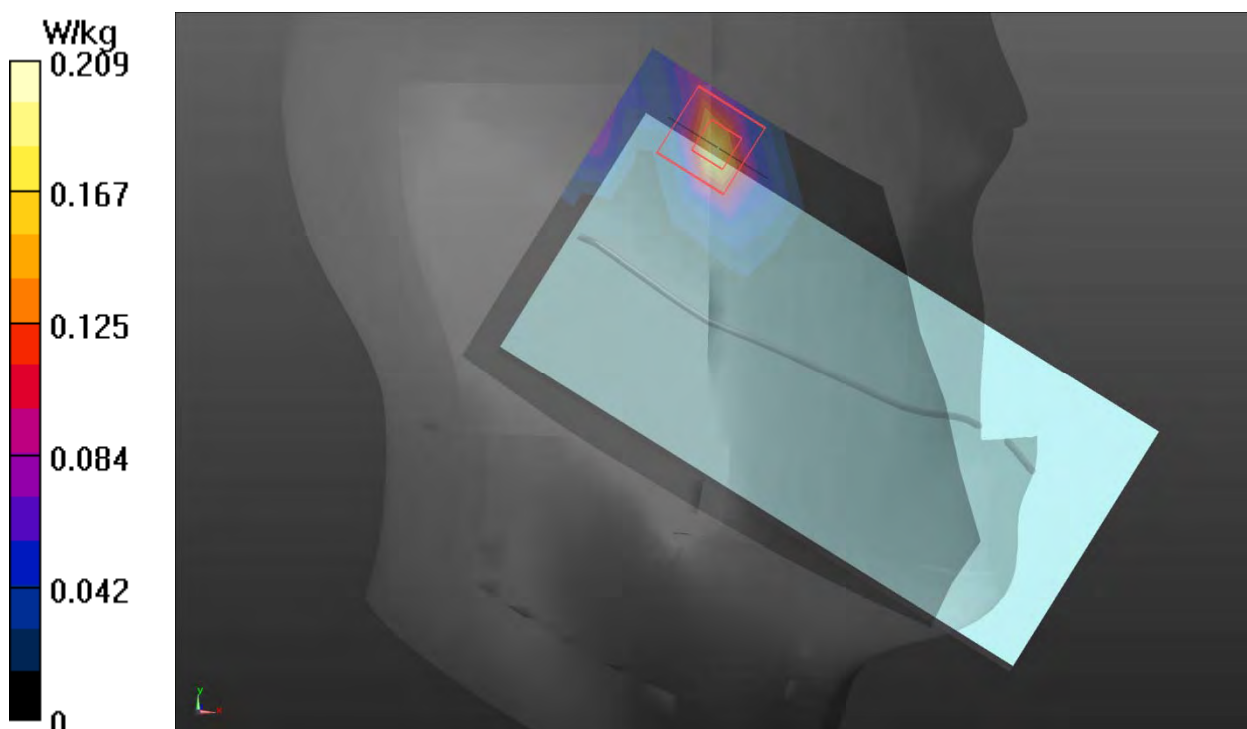

Plot 29 Bluetooth Left Cheek Middle

Date: 2022/3/4

Communication System: UID 0, BT (0); Frequency: 2433 MHz; Duty Cycle: 1:1.30

Medium parameters used: $f = 2433$ MHz; $\sigma = 1.827$ S/m; $\epsilon_r = 37.673$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.50, 7.50, 7.50); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Left Cheek Middle/Area Scan (10x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.268 W/kg


Left Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.882 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.407 W/kg

SAR(1 g) = 0.173 W/kg; SAR(10 g) = 0.076 W/kg

Maximum value of SAR (measured) = 0.284 W/kg

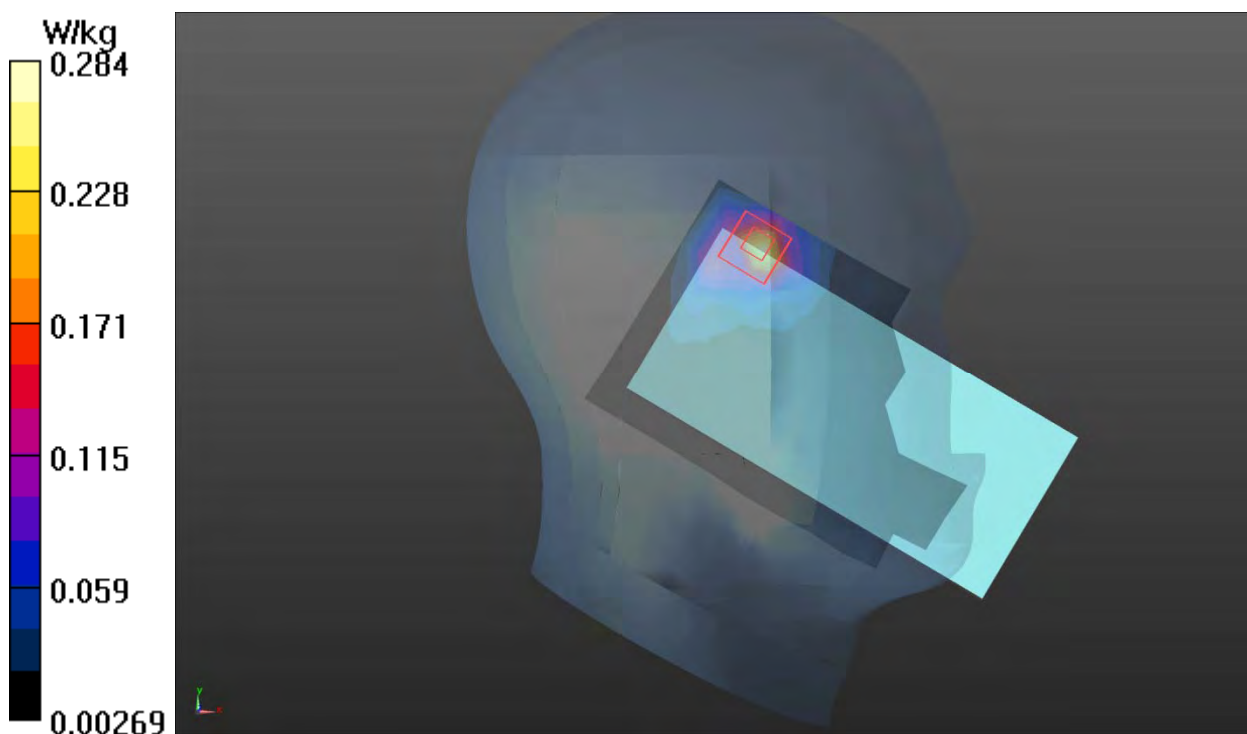

Plot 30 GSM 850 Back Side Middle (Distance 15mm)

Date: 2022/2/23

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.953$ S/m; $\epsilon_r = 39.762$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.30, 9.30, 9.30); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Back Side Middle/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.303 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.02 V/m; Power Drift = 0.002 dB

Peak SAR (extrapolated) = 0.365 W/kg

SAR(1 g) = 0.226 W/kg; SAR(10 g) = 0.149 W/kg

Maximum value of SAR (measured) = 0.312 W/kg

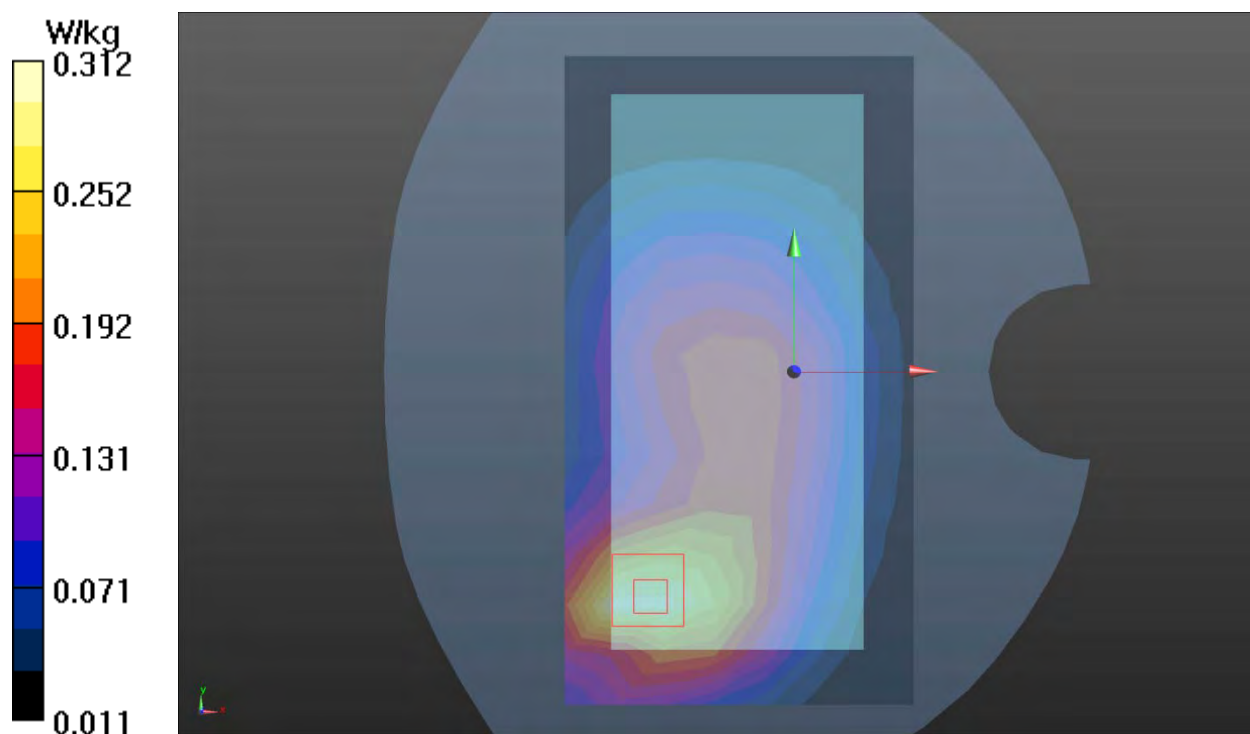

Plot 31 GSM 1900 Back Side Middle (Distance 15mm)

Date: 2022/3/1

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.393$ S/m; $\epsilon_r = 38.344$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.88, 7.88, 7.88); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Back Side Middle/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.207 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.438 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.264 W/kg

SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.223 W/kg

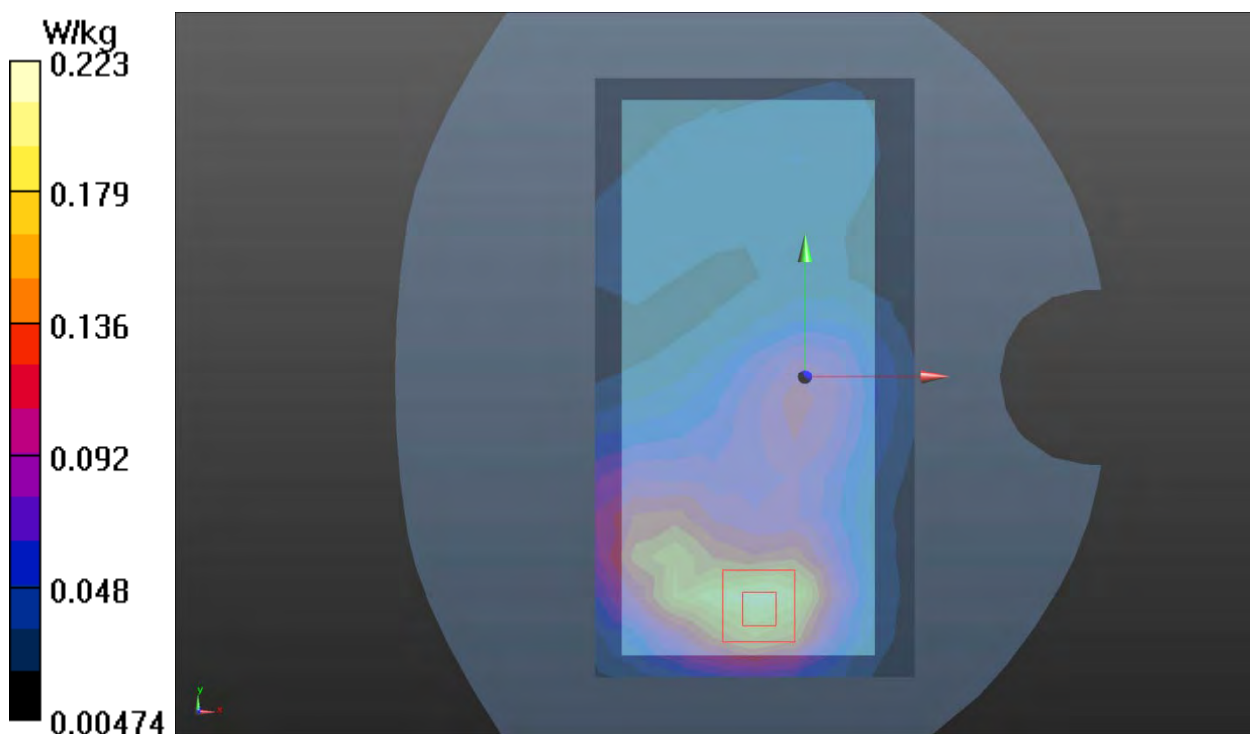

Plot 32 UMTS Band II Back Side Middle (Distance 15mm)

Date: 2022/2/28

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.393$ S/m; $\epsilon_r = 38.344$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.88, 7.88, 7.88); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Back Side Middle/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.328 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.993 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.399 W/kg

SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 0.340 W/kg

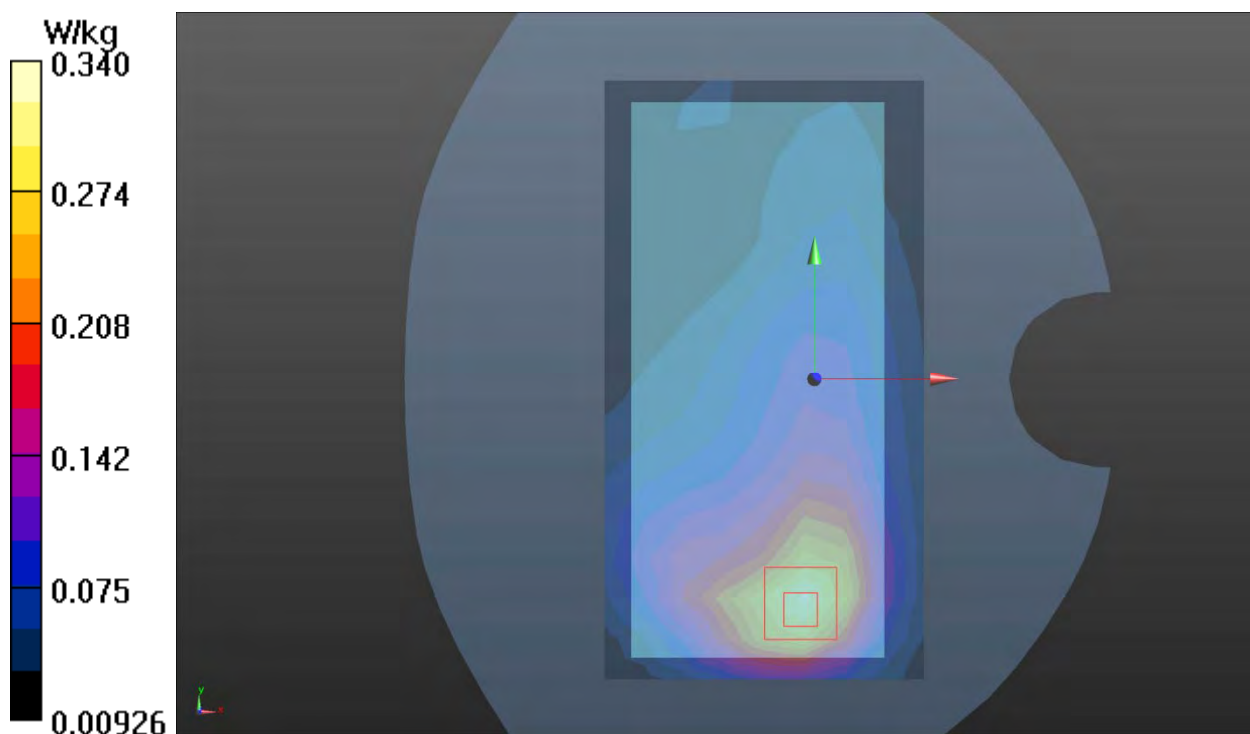

Plot 33 UMTS Band IV Back Side Middle (Distance 15mm)

Date: 2022/2/27

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.293$ S/m; $\epsilon_r = 38.782$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.22, 8.22, 8.22); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Back Side Middle/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.356 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.476 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.462 W/kg

SAR(1 g) = 0.279 W/kg; SAR(10 g) = 0.166 W/kg

Maximum value of SAR (measured) = 0.396 W/kg

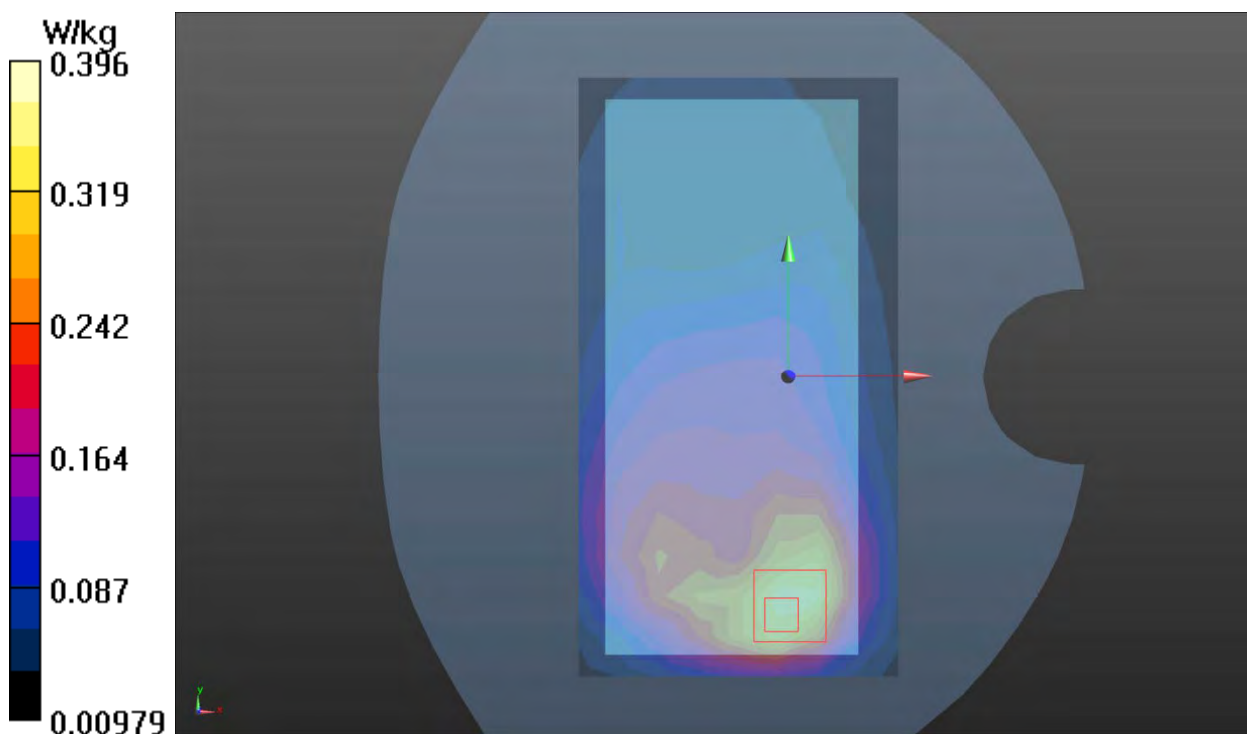

Plot 34 UMTS Band V Back Side Middle (Distance 15mm)

Date: 2022/2/23

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.953 \text{ S/m}$; $\epsilon_r = 39.762$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.30, 9.30, 9.30); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Back Side Middle/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.431 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.77 V/m ; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 0.509 W/kg

SAR(1 g) = 0.320 W/kg ; SAR(10 g) = 0.216 W/kg

Maximum value of SAR (measured) = 0.432 W/kg

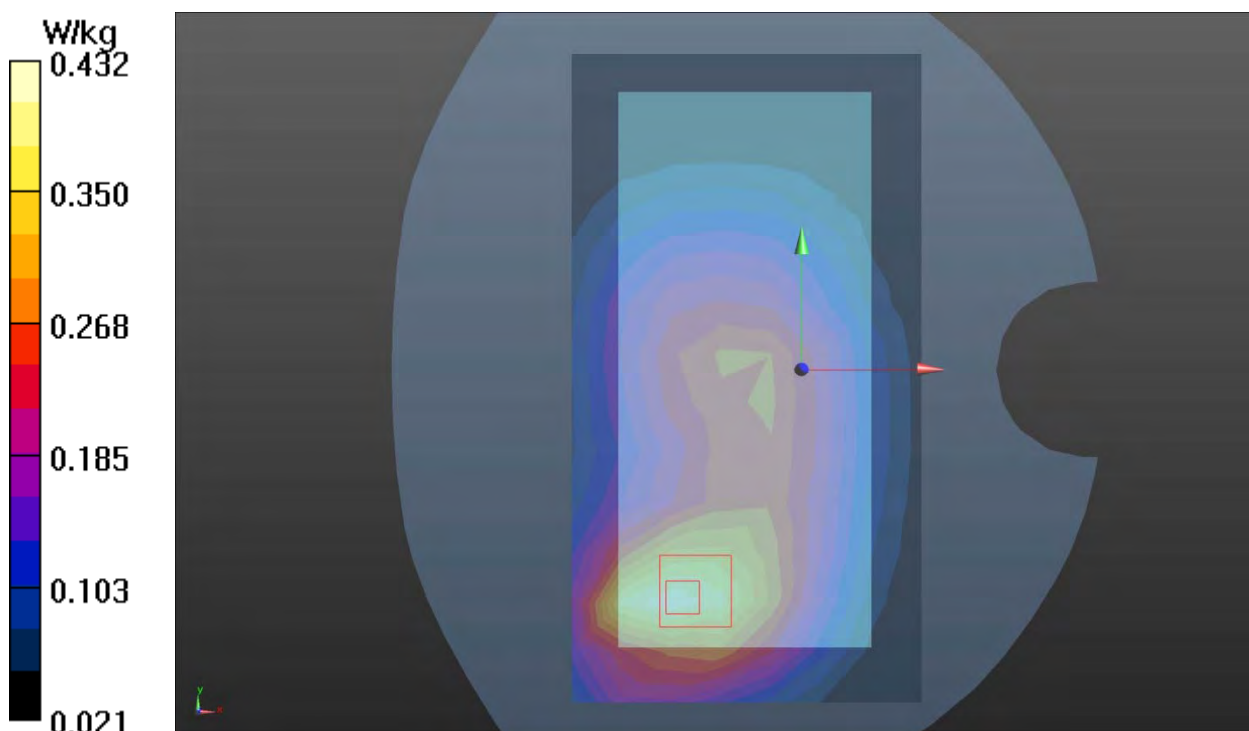

Plot 35 LTE Band 2 1RB Back Side Low (Distance 15mm)

Date: 2022/2/28

Communication System: UID 0, LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.379$ S/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.88, 7.88, 7.88); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Back Side Low/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.299 W/kg


Back Side Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.976 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.380 W/kg

SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.151 W/kg

Maximum value of SAR (measured) = 0.323 W/kg

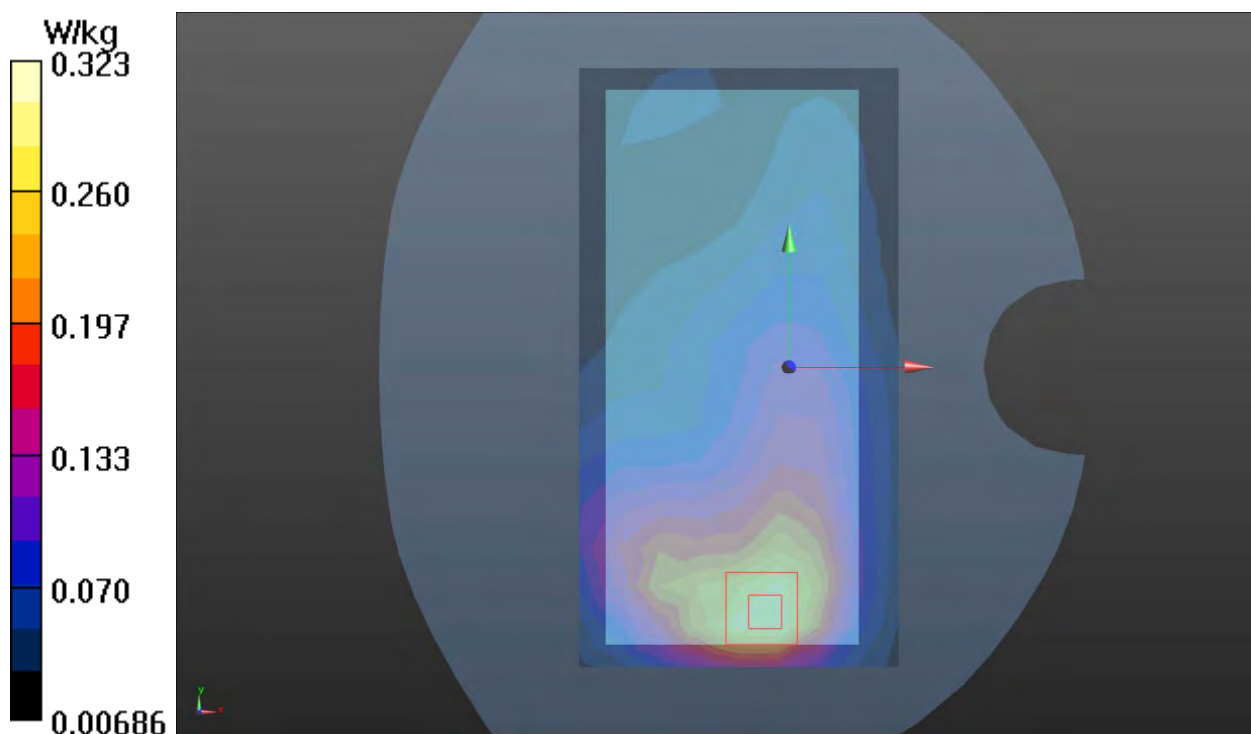

Plot 36 LTE Band 4 50%RB Back Side Middle (Distance 15mm)

Date: 2022/2/27

Communication System: UID 0, LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.293$ S/m; $\epsilon_r = 38.785$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.22, 8.22, 8.22); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Back Side Middle/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.304 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.037 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.368 W/kg

SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.163 W/kg

Maximum value of SAR (measured) = 0.312 W/kg

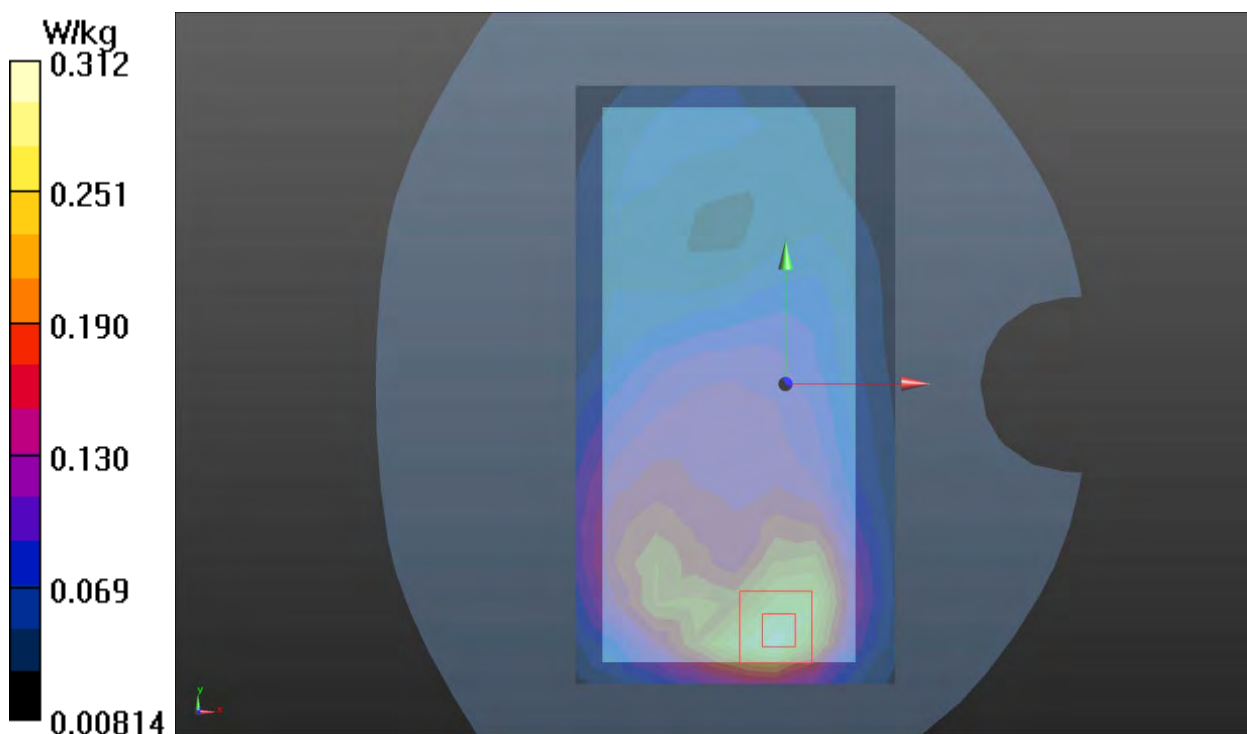

Plot 37 LTE Band 5 1RB Back Side High (Distance 15mm)

Date: 2022/2/23

Communication System: UID 0, LTE (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844$ MHz; $\sigma = 0.958$ S/m; $\epsilon_r = 39.728$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.30, 9.30, 9.30); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Back Side High/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.500 W/kg


Back Side High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.05 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 0.627 W/kg

SAR(1 g) = 0.379 W/kg; SAR(10 g) = 0.246 W/kg

Maximum value of SAR (measured) = 0.530 W/kg

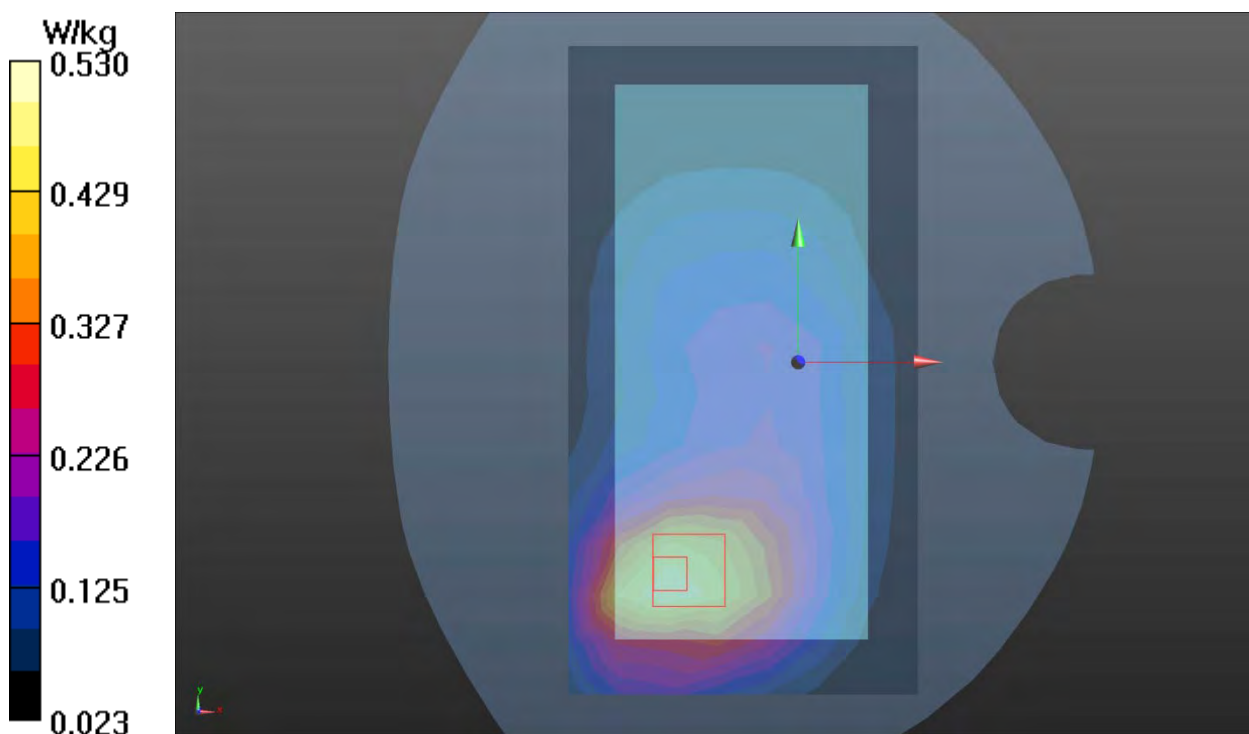

Plot 38 LTE Band 7 1RB Back Side Low (Distance 15mm)

Date: 2022/3/10

Communication System: UID 0, LTE (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 37.398$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.25, 7.25, 7.25); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Back Side Low/Area Scan ((10x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.399 W/kg


Back Side Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.062 V/m; Power Drift = 0.182 dB

Peak SAR (extrapolated) = 0.578 W/kg

SAR(1 g) = 0.291 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.467 W/kg

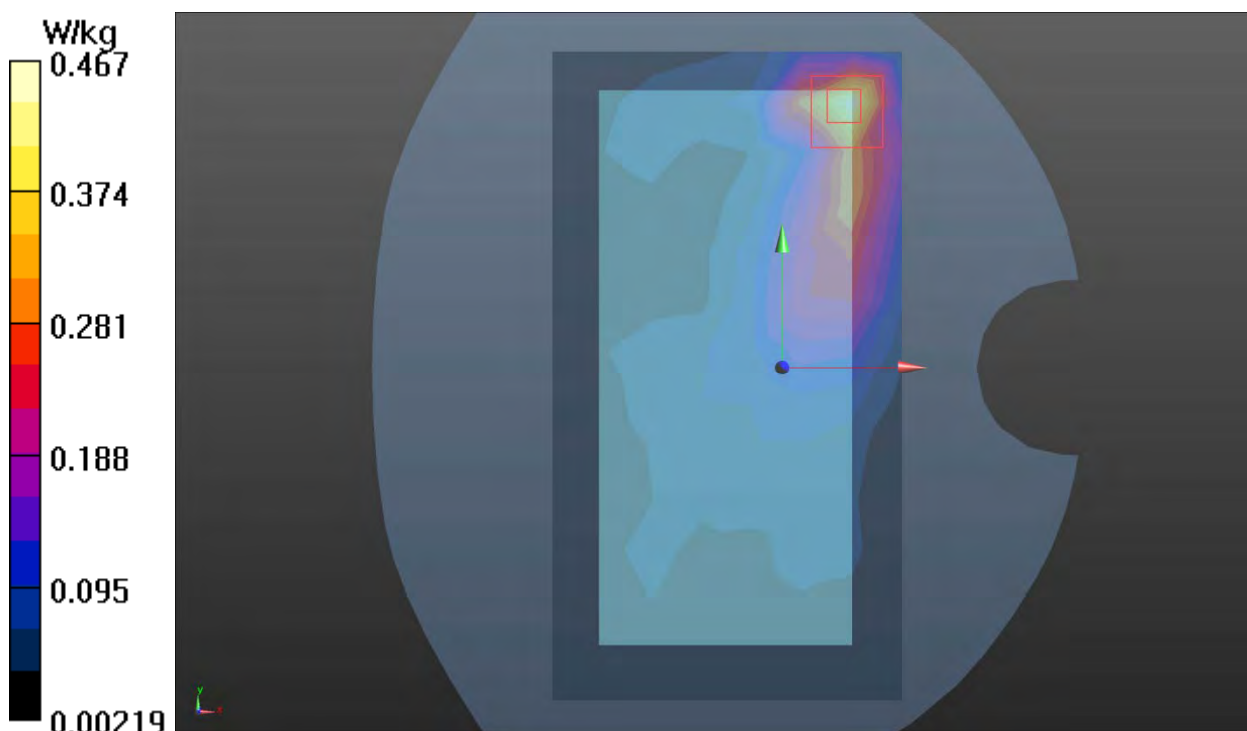

Plot 39 LTE Band 13 1RB Back Side Middle (Distance 15mm)

Date: 2022/2/25

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.917 \text{ S/m}$; $\epsilon_r = 40.132$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.64, 9.64, 9.64); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Back Side Middle/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.231 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.57 V/m ; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 0.306 W/kg

SAR(1 g) = 0.183 W/kg ; SAR(10 g) = 0.128 W/kg

Maximum value of SAR (measured) = 0.259 W/kg

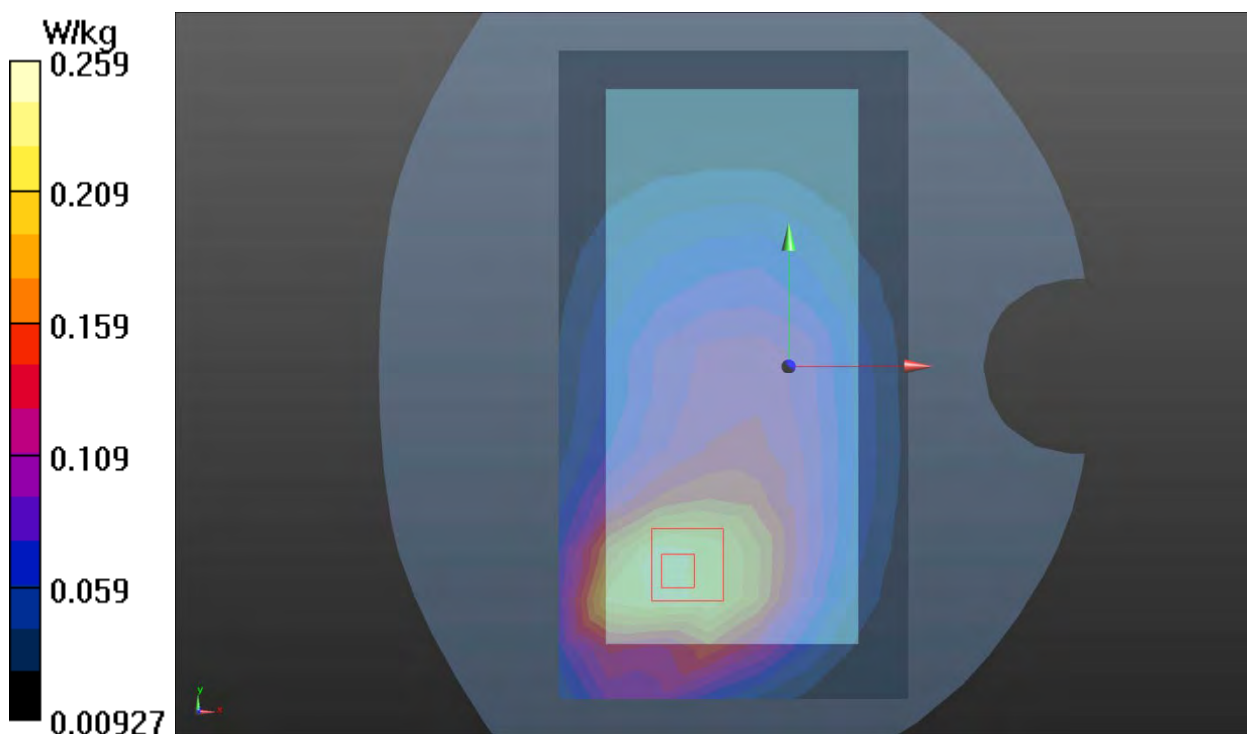

Plot 40 LTE Band 26 1RB Back Side High (Distance 15mm)

Date: 2022/2/23

Communication System: UID 0, LTE (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.957$ S/m; $\epsilon_r = 39.746$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.30, 9.30, 9.30); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Back Side High/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.556 W/kg


Back Side High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.94 V/m; Power Drift = 0.005 dB

Peak SAR (extrapolated) = 0.717 W/kg

SAR(1 g) = 0.429 W/kg; SAR(10 g) = 0.279 W/kg

Maximum value of SAR (measured) = 0.600 W/kg

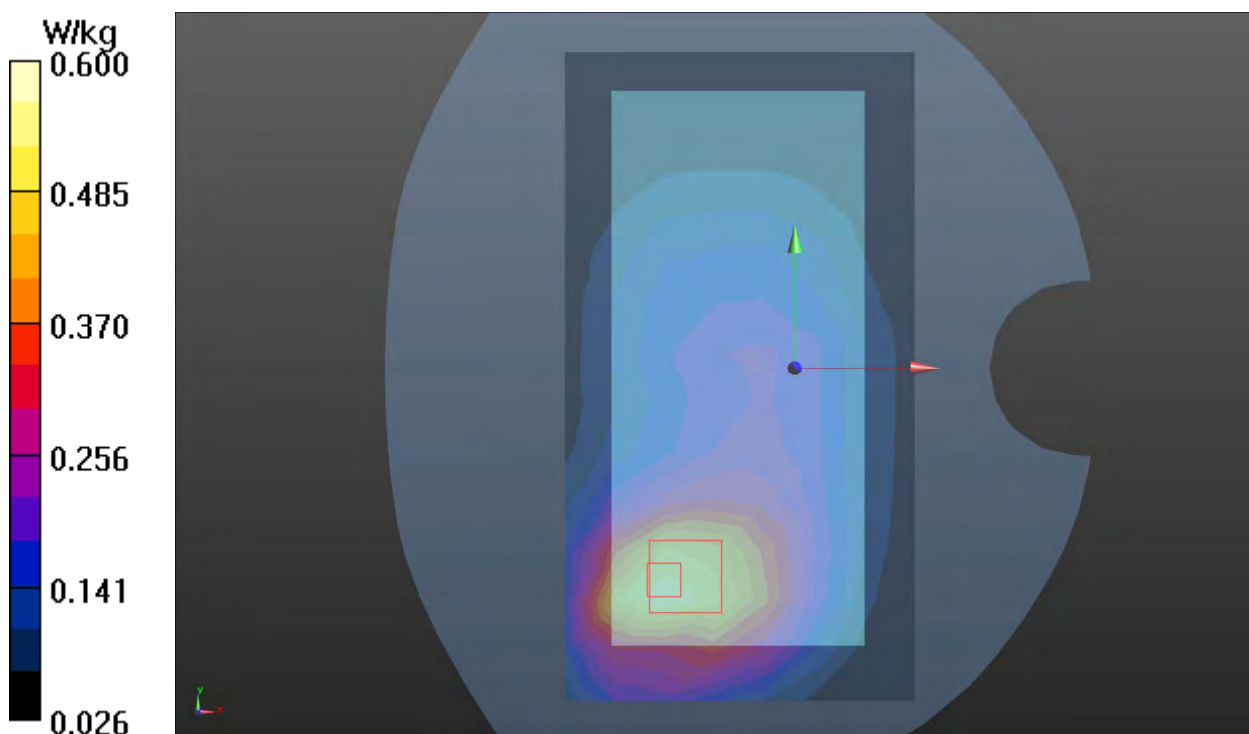

Plot 41 LTE Band 38 1RB Back Side High (Distance 15mm)

Date: 2022/3/11

Communication System: UID 0, LTE (0); Frequency: 2610 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2610$ MHz; $\sigma = 2.027$ S/m; $\epsilon_r = 37.056$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.25, 7.25, 7.25); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Back Side High/Area Scan (10x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.296 W/kg


Back Side High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.242 V/m; Power Drift = -0.127 dB

Peak SAR (extrapolated) = 0.546 W/kg

SAR(1 g) = 0.292 W/kg; SAR(10 g) = 0.147 W/kg

Maximum value of SAR (measured) = 0.300 W/kg

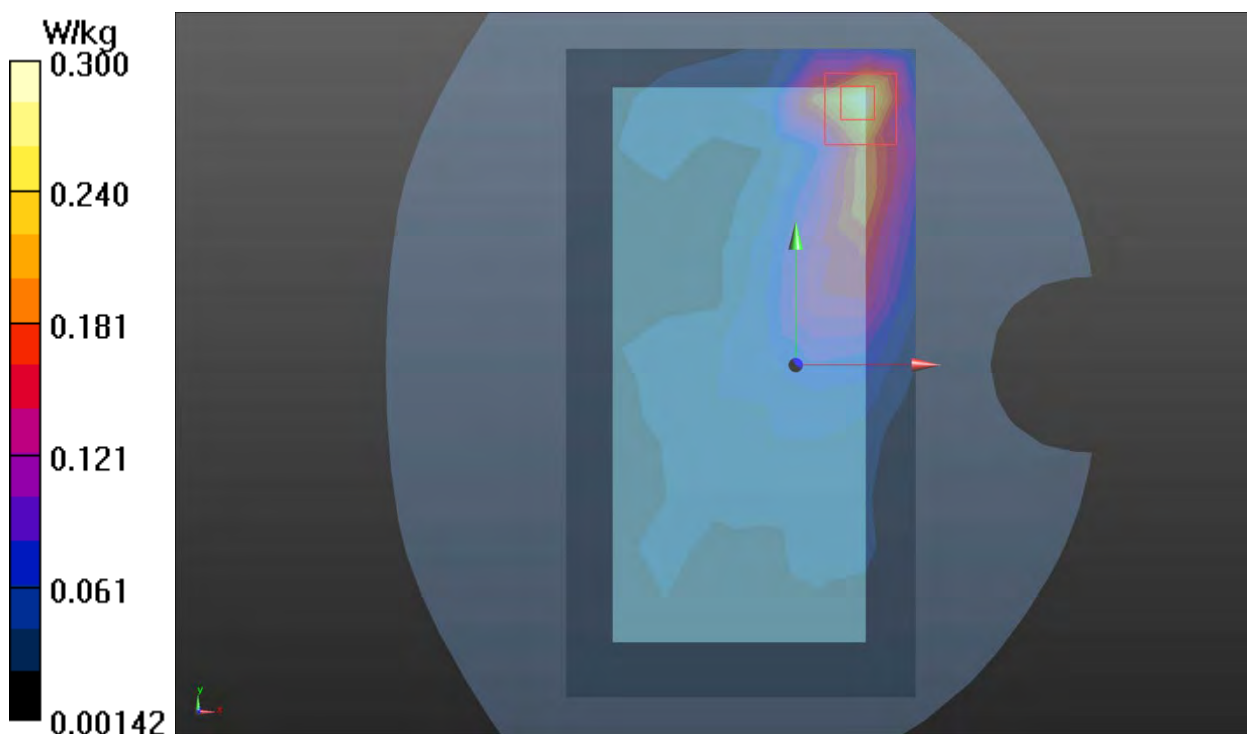

Plot 42 LTE Band 66 50%RB Back Side High (Distance 15mm)

Date: 2022/2/27

Communication System: UID 0, LTE (0); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.341$ S/m; $\epsilon_r = 39.287$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.22, 8.22, 8.22); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Back Side High/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.578 W/kg


Back Side High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.30 V/m; Power Drift = 0.006 dB

Peak SAR (extrapolated) = 0.908 W/kg

SAR(1 g) = 0.539 W/kg; SAR(10 g) = 0.311 W/kg

Maximum value of SAR (measured) = 0.558 W/kg

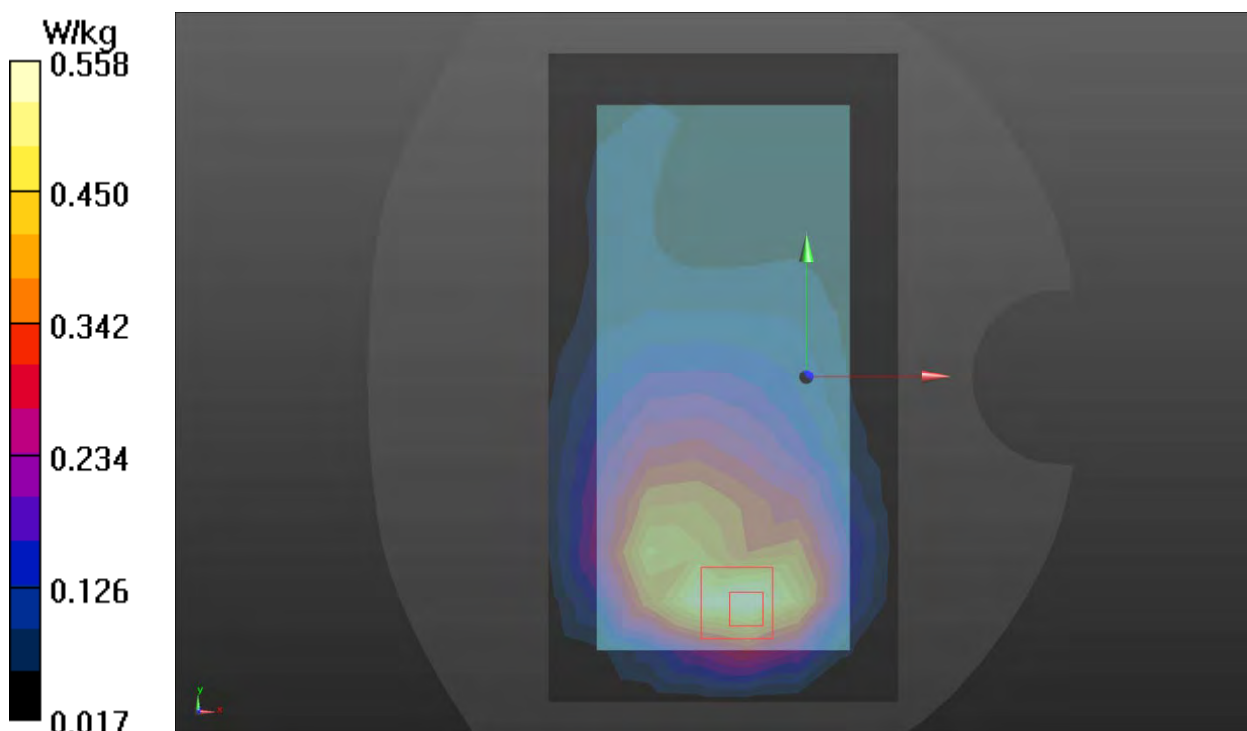

Plot 43 802.11g Back Side Middle (Distance 15mm)

Date: 2022/3/4

Communication System: UID 0, 802.11g (0); Frequency: 2447 MHz; Duty Cycle: 1:1.02

Medium parameters used: $f = 2447$ MHz; $\sigma = 1.843$ S/m; $\epsilon_r = 37.629$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.50, 7.50, 7.50); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Back Side Middle/Area Scan (10x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.190 W/kg


Back Side Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.807 V/m; Power Drift = 0.017 dB

Peak SAR (extrapolated) = 0.381 W/kg

SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.201 W/kg

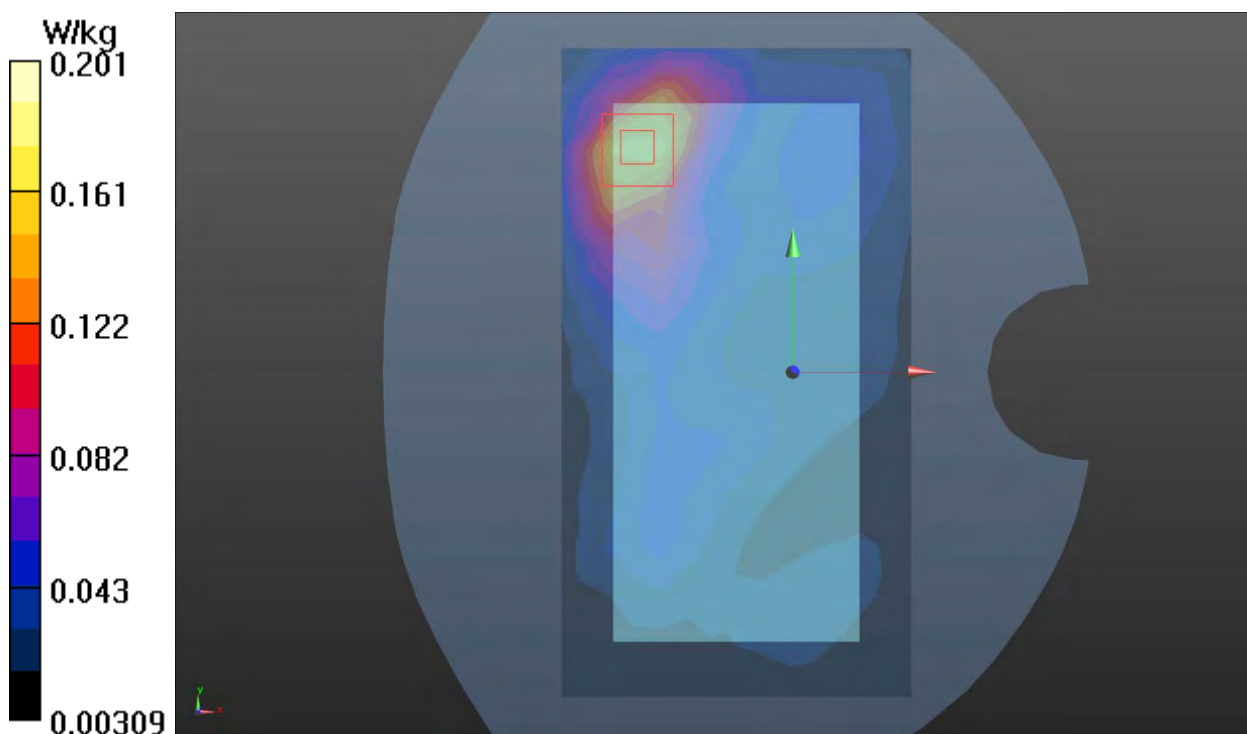

Plot 44 802.11a U-NII-3 Back Side Middle (Distance 15mm)

Date: 2022/3/14

Communication System: UID 0, 802.11a (0); Frequency: 5785 MHz; Duty Cycle: 1:1.01

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.436$ S/m; $\epsilon_r = 34.587$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(5.04, 5.04, 5.04); Calibrated: 2021/8/12

Electronics: DAE4 SN1692; Calibrated: 2021/10/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Back Side Middle/Area Scan (12x21x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.281 W/kg

Back Side Middle/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.674 V/m; Power Drift = 0.099 dB

Peak SAR (extrapolated) = 0.58 W/kg

SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.325 W/kg

