

# VARIANT FCC TEST REPORT

## (Part 15, Subpart C)

|            |                                             |
|------------|---------------------------------------------|
| Applicant: | HMD Global Oy                               |
| Address:   | Bertel Jungin aukio 9, 02600 Espoo, Finland |



|                           |                                                    |
|---------------------------|----------------------------------------------------|
| Manufacturer or Supplier: | HMD Global Oy                                      |
| Address:                  | Bertel Jungin aukio 9, 02600 Espoo, Finland        |
| Product:                  | Multi-band GSM/WCDMA/LTE phone with Bluetooth&WLAN |
| Brand Name:               | NOKIA                                              |
| Model Name:               | TA-1401                                            |
| FCC ID:                   | 2AJOTTA-1401                                       |
| Date of tests:            | Nov. 25, 2021 ~ Oct. 10, 2022                      |

The tests have been carried out according to the requirements of the following standard:

☒ **FCC Part 15, Subpart C, Section 15.247**

☒ **ANSI C63.10-2013**

**CONCLUSION:** The submitted sample was found to **COMPLY** with the test requirement

|                                                                                                            |                                                                                                              |
|------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| Prepared by Simon Wang<br>Engineer / Mobile Department                                                     | Approved by Luke Lu<br>Manager / Mobile Department                                                           |
| <br>Date: Oct. 10, 2022 | <br>Date: Oct. 10, 2022 |

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



Test Report No.: W7L-P22090015-1RF01

## TABLE OF CONTENTS

|                                                                  |    |
|------------------------------------------------------------------|----|
| RELEASE CONTROL RECORD .....                                     | 5  |
| 1 SUMMARY OF TEST RESULTS.....                                   | 6  |
| 1.1 MEASUREMENT UNCERTAINTY .....                                | 7  |
| 2 GENERAL INFORMATION .....                                      | 8  |
| 2.1 GENERAL DESCRIPTION OF EUT .....                             | 8  |
| 2.2 DESCRIPTION OF TEST MODES.....                               | 10 |
| 2.2.1 CONFIGURATION OF SYSTEM UNDER TEST .....                   | 11 |
| 2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL .....    | 11 |
| 2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS .....               | 13 |
| 2.4 DESCRIPTION OF SUPPORT UNITS.....                            | 13 |
| 3 TEST TYPES AND RESULTS.....                                    | 14 |
| 3.1 CONDUCTED EMISSION MEASUREMENT.....                          | 14 |
| 3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....             | 14 |
| 3.1.2 TEST INSTRUMENTS .....                                     | 14 |
| 3.1.3 TEST PROCEDURES .....                                      | 14 |
| 3.1.4 DEVIATION FROM TEST STANDARD.....                          | 15 |
| 3.1.5 TEST SETUP .....                                           | 15 |
| 3.1.6 EUT OPERATING CONDITIONS .....                             | 15 |
| 3.1.7 TEST RESULTS.....                                          | 16 |
| 3.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT .....             | 18 |
| 3.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT ..... | 18 |
| 3.2.2 TEST INSTRUMENTS .....                                     | 19 |
| 3.2.3 TEST PROCEDURES .....                                      | 20 |
| 3.2.4 DEVIATION FROM TEST STANDARD.....                          | 20 |
| 3.2.5 TEST SETUP .....                                           | 21 |
| 3.2.6 EUT OPERATING CONDITIONS .....                             | 22 |
| 3.2.7 TEST RESULTS.....                                          | 23 |
| 3.3 NUMBER OF HOPPING FREQUENCY USED.....                        | 33 |
| 3.3.1 LIMIT OF HOPPING FREQUENCY USED.....                       | 33 |
| 3.3.2 TEST SETUP .....                                           | 33 |
| 3.3.3 TEST INSTRUMENTS .....                                     | 33 |
| 3.3.4 TEST PROCEDURES .....                                      | 34 |
| 3.3.5 DEVIATION FROM TEST STANDARD.....                          | 34 |
| 3.3.6 TEST RESULTS.....                                          | 34 |
| 3.4 DWELL TIME ON EACH CHANNEL .....                             | 36 |



## Test Report No.: W7L-P22090015-1RF01

|            |                                                  |           |
|------------|--------------------------------------------------|-----------|
| 3.4.1      | LIMIT OF DWELL TIME USED .....                   | 36        |
| 3.4.2      | TEST SETUP .....                                 | 36        |
| 3.4.3      | TEST INSTRUMENTS .....                           | 36        |
| 3.4.4      | TEST PROCEDURES .....                            | 36        |
| 3.4.5      | DEVIATION FROM TEST STANDARD.....                | 37        |
| 3.4.6      | TEST RESULTS.....                                | 37        |
| <b>3.5</b> | <b>CHANNEL BANDWIDTH .....</b>                   | <b>38</b> |
| 3.5.1      | LIMITS OF CHANNEL BANDWIDTH .....                | 38        |
| 3.5.2      | TEST SETUP .....                                 | 38        |
| 3.5.3      | TEST INSTRUMENTS .....                           | 38        |
| 3.5.4      | TEST PROCEDURE .....                             | 38        |
| 3.5.5      | DEVIATION FROM TEST STANDARD.....                | 38        |
| 3.5.6      | EUT OPERATING CONDITION.....                     | 39        |
| 3.5.7      | TEST RESULTS.....                                | 39        |
| <b>3.6</b> | <b>HOPPING CHANNEL SEPARATION .....</b>          | <b>40</b> |
| 3.6.1      | LIMIT OF HOPPING CHANNEL SEPARATION .....        | 40        |
| 3.6.2      | TEST SETUP .....                                 | 40        |
| 3.6.3      | TEST INSTRUMENTS .....                           | 40        |
| 3.6.4      | TEST PROCEDURES .....                            | 40        |
| 3.6.5      | DEVIATION FROM TEST STANDARD.....                | 40        |
| 3.6.6      | TEST RESULTS.....                                | 41        |
| <b>3.7</b> | <b>MAXIMUM OUTPUT POWER.....</b>                 | <b>41</b> |
| 3.7.1      | LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT ..... | 41        |
| 3.7.2      | TEST SETUP .....                                 | 41        |
| 3.7.3      | TEST INSTRUMENTS .....                           | 41        |
| 3.7.4      | TEST PROCEDURES .....                            | 41        |
| 3.7.5      | DEVIATION FROM TEST STANDARD.....                | 42        |
| 3.7.6      | EUT OPERATING CONDITION.....                     | 42        |
| 3.7.7      | TEST RESULTS.....                                | 43        |
| 3.7.7.1    | MAXIMUM PEAK OUTPUT POWER .....                  | 43        |
| 3.7.7.2    | AVERAGE OUTPUT POWER (FOR REFERENCE).....        | 44        |
| <b>3.8</b> | <b>OUT OF BAND MEASUREMENT .....</b>             | <b>45</b> |
| 3.8.1      | LIMITS OF OUT OF BAND MEASUREMENT .....          | 45        |
| 3.8.2      | TEST INSTRUMENTS .....                           | 45        |
| 3.8.3      | TEST PROCEDURE .....                             | 45        |
| 3.8.4      | DEVIATION FROM TEST STANDARD.....                | 45        |



Test Report No.: W7L-P22090015-1RF01

|                                                 |                                                                            |     |
|-------------------------------------------------|----------------------------------------------------------------------------|-----|
| 3.8.5                                           | EUT OPERATING CONDITION.....                                               | 45  |
| 3.8.6                                           | TEST RESULTS.....                                                          | 45  |
| 4                                               | PHOTOGRAPHS OF THE TEST CONFIGURATION.....                                 | 46  |
| 5                                               | MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB..... | 47  |
| 6                                               | APPENDIX .....                                                             | 48  |
| APPENDIX A: 20DB EMISSION BANDWIDTH .....       |                                                                            | 48  |
| TEST RESULT .....                               |                                                                            | 48  |
| TEST GRAPHS.....                                |                                                                            | 49  |
| APPENDIX B: OCCUPIED CHANNEL BANDWIDTH .....    |                                                                            | 54  |
| TEST RESULT .....                               |                                                                            | 54  |
| TEST GRAPHS.....                                |                                                                            | 55  |
| APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER..... |                                                                            | 60  |
| PEAK POWER TEST RESULT .....                    |                                                                            | 60  |
| AVERAGE POWER TEST RESULT .....                 |                                                                            | 60  |
| APPENDIX D: CARRIER FREQUENCY SEPARATION .....  |                                                                            | 61  |
| TEST RESULT .....                               |                                                                            | 61  |
| TEST GRAPHS.....                                |                                                                            | 62  |
| APPENDIX E: TIME OF OCCUPANCY .....             |                                                                            | 64  |
| TEST RESULT .....                               |                                                                            | 64  |
| TEST GRAPHS.....                                |                                                                            | 65  |
| APPENDIX F: NUMBER OF HOPPING CHANNELS .....    |                                                                            | 74  |
| TEST RESULT .....                               |                                                                            | 74  |
| TEST GRAPHS.....                                |                                                                            | 75  |
| APPENDIX G: BAND EDGE MEASUREMENTS.....         |                                                                            | 77  |
| TEST RESULT .....                               |                                                                            | 77  |
| TEST GRAPHS.....                                |                                                                            | 78  |
| APPENDIX H: CONDUCTED SPURIOUS EMISSION .....   |                                                                            | 84  |
| TEST RESULT .....                               |                                                                            | 84  |
| TEST GRAPHS.....                                |                                                                            | 85  |
| APPENDIX I: DUTY CYCLE.....                     |                                                                            | 99  |
| TEST RESULT .....                               |                                                                            | 99  |
| TEST GRAPHS.....                                |                                                                            | 100 |



Test Report No.: W7L-P22090015-1RF01

## RELEASE CONTROL RECORD

| ISSUE NO.           | REASON FOR CHANGE                                                                                                                                                                                                                                                                                                                                                                                | DATE ISSUED   |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| W7L-P21100018-4RF01 | Original release                                                                                                                                                                                                                                                                                                                                                                                 | Dec. 17, 2021 |
| W7L-P22090015-5RF01 | Based on the original product changing the packaging factory of the chip and software version, removed Aohai_A829US adapter, BRL_CB - 36A USB cable, Saibao_CB - 12A USB cable, LEADER_HS-34 earphone, added Saibao_AC-2A USB cable. The new sample verify CE, Power(Only verify) and RSE worst case (BT_GFSK CH0), other test data is copied from the original test report W7L-P21100018-4RF01. | Oct. 10, 2022 |



Test Report No.: W7L-P22090015-1RF01

## 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC Part 15, Subpart C |                                                                                                               |             |
|------------------------------------------|---------------------------------------------------------------------------------------------------------------|-------------|
| STANDARD                                 | TEST TYPE AND LIMIT                                                                                           | RESULT      |
| 15.207                                   | AC Power Conducted Emission                                                                                   | Compliance  |
| 15.247(a)(1)(iii)                        | Number of Hopping Frequency Used                                                                              | Compliance  |
| 15.247(a)(1)(iii)                        | Dwell Time on Each Channel                                                                                    | Compliance  |
| 15.247(a)(1)                             | 1. Hopping Channel Separation<br>2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System | Compliance  |
| 15.247(b)                                | Maximum Peak Output Power                                                                                     | Compliance  |
| 15.247(d)&15.209                         | Transmitter Radiated Emissions                                                                                | *Compliance |
| 15.247(d)                                | Out of band Measurement                                                                                       | Compliance  |
| 15.203                                   | Antenna Requirement                                                                                           | Compliance  |

\*Except the data of RSE, other data please refer to APPENDIX.

### NOTE:

1. If the Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.
2. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.
3. The power table are not updated, Because the same as for original case power in Verified power.

### Test Lab Information Reference:

BV 7Layers Communications Technology (Shenzhen) Co. Ltd

#### Lab Address:

No.B102, Dazhu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

**Accredited Test Lab Cert 3939.01**

## 1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| MEASUREMENT                         | UNCERTAINTY |
|-------------------------------------|-------------|
| AC Power Conducted emissions        | ±2.70dB     |
| Radiated emissions (30MHz~1GMHz)    | ±4.98dB     |
| Radiated emissions (1GMHz ~6GMHz)   | ±4.70dB     |
| Radiated emissions (6GMHz ~18GMHz)  | ±4.60dB     |
| Radiated emissions (18GMHz ~40GMHz) | ±4.12dB     |
| Conducted emissions                 | ±4.01dB     |
| Occupied Channel Bandwidth          | ±43.58KHz   |
| Conducted Output power              | ±2.06dB     |
| Power Spectral Density              | ±0.85 dB    |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 2 GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

|                              |                                                                                                                                                                         |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>PRODUCT</b>               | Multi-band GSM/WCDMA/LTE phone with Bluetooth&WLAN                                                                                                                      |
| <b>BRAND NAME</b>            | NOKIA                                                                                                                                                                   |
| <b>MODEL NAME</b>            | TA-1401                                                                                                                                                                 |
| <b>NOMINAL VOLTAGE</b>       | 5.0Vdc(adapter or host equipment)<br>3.85Vdc (Li-ion, battery)                                                                                                          |
| <b>MODULATION TECHNOLOGY</b> | FHSS                                                                                                                                                                    |
| <b>MODULATION TYPE</b>       | GFSK, 8DPSK, $\pi/4$ DQPSK                                                                                                                                              |
| <b>OPERATING FREQUENCY</b>   | 2402MHz~2480MHz                                                                                                                                                         |
| <b>NUMBER OF CHANNEL</b>     | 79                                                                                                                                                                      |
| <b>MAX. OUTPUT POWER</b>     | 9.23mW (Max. Measured)                                                                                                                                                  |
| <b>ANTENNA TYPE</b>          | Fixed Internal Antenna with 1.19dBi gain                                                                                                                                |
| <b>HW VERSION</b>            | 19655-1-11M12                                                                                                                                                           |
| <b>SW VERSION</b>            | 00WW_1_520                                                                                                                                                              |
| <b>I/O PORTS</b>             | Refer to user's manual                                                                                                                                                  |
| <b>CABLE SUPPLIED</b>        | USB1 cable: unshielded without ferrite, 1.0meter<br>USB2 cable: unshielded without ferrite, 1.0meter<br>Earphone1: non-shielded cable, with w/o ferrite core, 1.2 meter |

**NOTE:**

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

**List of Accessory:**

| ACCESSORIES  | BRAND | MANUFACTURER                                   | MODEL          | SPECIFICATION                             |
|--------------|-------|------------------------------------------------|----------------|-------------------------------------------|
| Battery      | Nokia | Hunan Gaoyuan Battery Co., Ltd.                | WT341          | Capacity: 3.85 Vdc, 4900mAh               |
| AC Adapter 1 | Nokia | ShenZhenBaiJunDa ElectronicCO.,LTD.            | AD-010U        | I/P: 100-240Vac, 0.35A, O/P: 5.0Vdc, 2.0A |
| AC Adapter 2 | Nokia | SHENZHEN TIANYIN ELECTRONICS CO., LTD.         | CH-21U         | I/P: 100-240Vac, 0.3A, O/P: 5.0Vdc, 2.0A  |
| AC Adapter 3 | Nokia | YuTong Electronics(HuiZhou) Co.,Ltd            | PA-US5V2A-03 6 | I/P: 100-240Vac, 0.5A, O/P: 5.0Vdc, 2.0A  |
| Earphone 1   | Nokia | Guangdong Wivtak Technology Co., Ltd.          | HS-34          | Signal Line, 1.2meter                     |
| USB Cable 1  | Nokia | HUIZHOU WASHIN ELECTRONICS CO.,LTD             | CB-36A         | Signal Line, 1.0meter                     |
| USB Cable 2  | Nokia | Saibao(Jiangi) Communication Industial Co.,Ltd | AC-2A          | Signal Line, 1.0meter                     |

**NOTE:**

1. In the finger plate, dial the code for entering Engineer mode: \*##83781#\*#\*
2. EngineerMode->CONNECTIVITY->BT->Tx

## 2.2 DESCRIPTION OF TEST MODES

79 channels are provided to this EUT:

| CHANNEL | FREQ.<br>(MHz) | CHANNEL | FREQ.<br>(MHz) | CHANNEL | FREQ.<br>(MHz) | CHANNEL | FREQ.<br>(MHz) |
|---------|----------------|---------|----------------|---------|----------------|---------|----------------|
| 0       | 2402           | 20      | 2422           | 40      | 2442           | 60      | 2462           |
| 1       | 2403           | 21      | 2423           | 41      | 2443           | 61      | 2463           |
| 2       | 2404           | 22      | 2424           | 42      | 2444           | 62      | 2464           |
| 3       | 2405           | 23      | 2425           | 43      | 2445           | 63      | 2465           |
| 4       | 2406           | 24      | 2426           | 44      | 2446           | 64      | 2466           |
| 5       | 2407           | 25      | 2427           | 45      | 2447           | 65      | 2467           |
| 6       | 2408           | 26      | 2428           | 46      | 2448           | 66      | 2468           |
| 7       | 2409           | 27      | 2429           | 47      | 2449           | 67      | 2469           |
| 8       | 2410           | 28      | 2430           | 48      | 2450           | 68      | 2470           |
| 9       | 2411           | 29      | 2431           | 49      | 2451           | 69      | 2471           |
| 10      | 2412           | 30      | 2432           | 50      | 2452           | 70      | 2472           |
| 11      | 2413           | 31      | 2433           | 51      | 2453           | 71      | 2473           |
| 12      | 2414           | 32      | 2434           | 52      | 2454           | 72      | 2474           |
| 13      | 2415           | 33      | 2435           | 53      | 2455           | 73      | 2475           |
| 14      | 2416           | 34      | 2436           | 54      | 2456           | 74      | 2476           |
| 15      | 2417           | 35      | 2437           | 55      | 2457           | 75      | 2477           |
| 16      | 2418           | 36      | 2438           | 56      | 2458           | 76      | 2478           |
| 17      | 2419           | 37      | 2439           | 57      | 2459           | 77      | 2479           |
| 18      | 2420           | 38      | 2440           | 58      | 2460           | 78      | 2480           |
| 19      | 2421           | 39      | 2441           | 59      | 2461           |         |                |

## 2.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photograph of the test configuration for reference.

## 2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.

The worst case was found when positioned on X axis for radiated emission.

Following channel(s) was (were) selected for the final test as listed below:

| EUT CONFIGURE<br>MODE | APPLICABLE TO |       |     |      | DESCRIPTION |
|-----------------------|---------------|-------|-----|------|-------------|
|                       | RE<1G         | RE≥1G | PLC | APCM |             |
| -                     | √             | √     | √   | √    | -           |

Where **RE<1G**: Radiated Emission below 1GHz  
**PLC**: Power Line Conducted Emission

**RE≥1G**: Radiated Emission above 1GHz  
**APCM**: Antenna Port Conducted Measurement

### RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE<br>MODE | AVAILABLE<br>CHANNEL | TESTED<br>CHANNEL | MODULATION<br>TECHNOLOGY | MODULATION<br>TYPE | PACKET<br>TYPE |
|-----------------------|----------------------|-------------------|--------------------------|--------------------|----------------|
| -                     | 0 to 78              | 0                 | FHSS                     | GFSK               | DH5            |

### RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE<br>MODE | AVAILABLE<br>CHANNEL | TESTED<br>CHANNEL | MODULATION<br>TECHNOLOGY | MODULATION<br>TYPE | PACKET<br>TYPE |
|-----------------------|----------------------|-------------------|--------------------------|--------------------|----------------|
| -                     | 0 to 78              | 0, 39, 78         | FHSS                     | GFSK               | DH5            |
| -                     | 0 to 78              | 0, 39, 78         | FHSS                     | 8DPSK              | 3DH5           |



**BUREAU  
VERITAS**

**Test Report No.: W7L-P22090015-1RF01**

#### **POWER LINE CONDUCTED EMISSION TEST:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture) and packet type.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | PACKET TYPE |
|--------------------|-------------------|----------------|-----------------------|-----------------|-------------|
| -                  | 0 to 78           | 39             | FHSS                  | 8DPSK           | 3DH5        |

#### **ANTENNA PORT CONDUCTED MEASUREMENT:**

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | PACKET TYPE    |
|-------------------|----------------|-----------------------|-----------------|----------------|
| 0 to 78           | 0, 39, 78      | FHSS                  | GFSK            | DH1/DH3/DH5    |
| 0 to 78           | 0, 39, 78      | FHSS                  | $\pi/4$ DQPSK   | 2DH1/2DH3/2DH5 |
| 0 to 78           | 0, 39, 78      | FHSS                  | 8DPSK           | 3DH1/3DH3/3DH5 |

#### **TEST CONDITION:**

| APPLICABLE TO | ENVIRONMENTAL CONDITIONS | TEST VOLTAGE (SYSTEM) | TESTED BY |
|---------------|--------------------------|-----------------------|-----------|
| RE<1G         | 23deg. C, 70%RH          | DC 5V By Adapter      | Jace Hu   |
| RE≥1G         | 23deg. C, 70%RH          | DC5V By Adapter       | Jace Hu   |
| PLC           | 25deg. C, 52%RH          | DC5V By Adapter       | James Fu  |
| APCM          | 25deg. C, 60%RH          | DC 3.85V By Battery   | James Fu  |



Test Report No.: W7L-P22090015-1RF01

## 2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C. Section 15.247**

**ANSI C63.10-2013**

- NOTE:**
1. All test items have been performed and recorded as per the above standards.
  2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.

## 2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| NO. | PRODUCT | BRAND  | MODEL NO.     | SERIAL NO. | FCC ID |
|-----|---------|--------|---------------|------------|--------|
| 1   | Desktop | Lenovo | M73 SFF       | PC04GRQV   | N/A    |
| 2   | Desktop | Lenovo | M73 SFF       | PC06CS27   | N/A    |
| 3   | Laptop  | Lenovo | Thnikpad L440 | R90FTFKN   | N/A    |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|-----------------------------------------------------|
| 1   | AC Line: Unshielded, Detachable 1.5m                |
| 2   | AC Line: Unshielded, Detachable 1.5m                |
| 3   | AC Line: Unshielded, Detachable 1.5m                |

### 3 TEST TYPES AND RESULTS

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

| FREQUENCY OF EMISSION (MHz) | CONDUCTED LIMIT (dB $\mu$ V) |          |
|-----------------------------|------------------------------|----------|
|                             | Quasi-peak                   | Average  |
| 0.15 ~ 0.5                  |                              |          |
| 0.5 ~ 5                     | 66 to 56                     | 56 to 46 |
| 5 ~ 30                      | 56                           | 46       |
|                             | 60                           | 50       |

**NOTE:** 1. The lower limit shall apply at the transition frequencies.

- The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
- All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

##### 3.1.2 TEST INSTRUMENTS

| Equipment           | Manufacturer  | Model No. | Serial No. | Last Cal.  | Next Cal.  |
|---------------------|---------------|-----------|------------|------------|------------|
| EMI Test Receiver   | Rohde&Schwarz | ESR3      | 101900     | Mar. 03,21 | Mar. 02,22 |
| EMI Test Receiver   | Rohde&Schwarz | ESR3      | 101900     | Mar. 02,22 | Mar. 01,23 |
| EMC32 test software | Rohde&Schwarz | EMC32     | NA         | NA         | NA         |
| LISN network        | Rohde&Schwarz | ENV216    | 101922     | Feb. 25,21 | Feb. 24,22 |
| LISN network        | Rohde&Schwarz | ENV216    | 101922     | Feb. 24,22 | Feb. 23,23 |

**NOTE:** 1. The test was performed in CE shielded room.

- The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

##### 3.1.3 TEST PROCEDURES

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.

- Both lines of the power mains connected to the EUT were checked for

maximum conducted interference.


- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

### 3.1.4 DEVIATION FROM TEST STANDARD

No deviation.

### 3.1.5 TEST SETUP

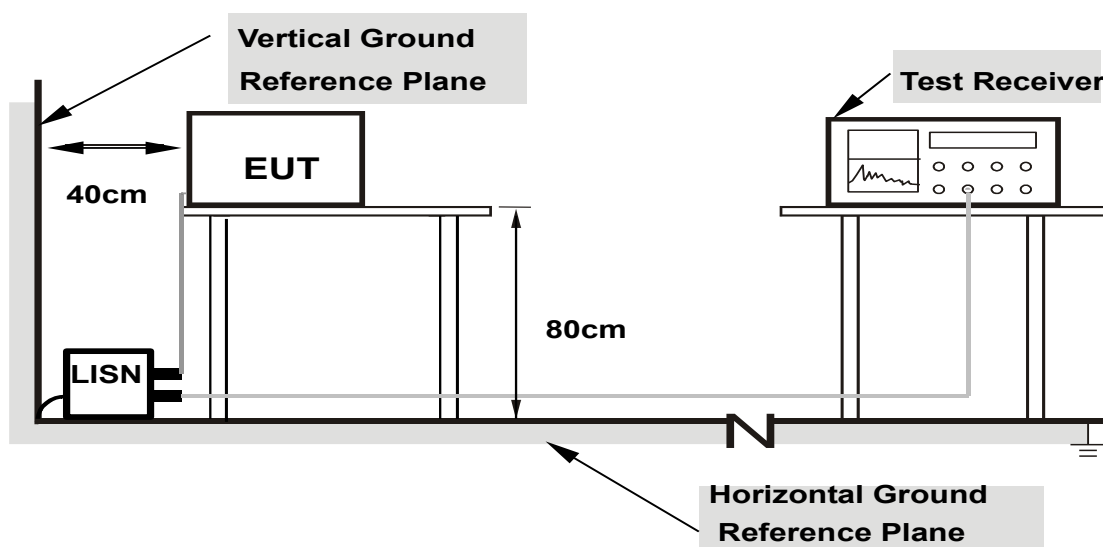

**Note: 1.Support units were connected to second LISN.**

**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 3.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.

### 3.1.7 TEST RESULTS


#### CONDUCTED WORST-CASE DATA:

|                 |                |                                          |                                       |
|-----------------|----------------|------------------------------------------|---------------------------------------|
| Frequency Range | 150KHz ~ 30MHz | Detector Function & Resolution Bandwidth | Quasi-Peak (QP) / Average (AV), 9 kHz |
| Input Power     | 120Vac, 60Hz   | Environmental Conditions                 | 26deg. C, 51%RH                       |
| Tested By       | Carl xie       |                                          |                                       |

| Frequency (MHz) | QuasiPeak (dBuV) | CAverage (dBuV) | Limit (dBuV) | Margin (dB) | Line | Filter | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|------|--------|------------|
| 0.520000        | ---              | 32.01           | 46.00        | 13.99       | L1   | ON     | 9.7        |
| 0.520000        | 40.76            | ---             | 56.00        | 15.24       | L1   | ON     | 9.7        |
| 0.664000        | ---              | 27.10           | 46.00        | 18.90       | L1   | ON     | 9.7        |
| 0.664000        | 36.53            | ---             | 56.00        | 19.47       | L1   | ON     | 9.7        |
| 1.268000        | ---              | 24.38           | 46.00        | 21.62       | L1   | ON     | 9.7        |
| 1.268000        | 33.73            | ---             | 56.00        | 22.27       | L1   | ON     | 9.7        |
| 2.292000        | ---              | 22.48           | 46.00        | 23.52       | L1   | ON     | 9.7        |
| 2.292000        | 31.78            | ---             | 56.00        | 24.22       | L1   | ON     | 9.7        |
| 4.556000        | ---              | 21.13           | 46.00        | 24.87       | L1   | ON     | 9.7        |
| 4.556000        | 29.50            | ---             | 56.00        | 26.50       | L1   | ON     | 9.7        |
| 27.704000       | ---              | 27.68           | 50.00        | 22.32       | L1   | ON     | 9.8        |
| 27.704000       | 34.58            | ---             | 60.00        | 25.42       | L1   | ON     | 9.8        |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Limit value - Emission level
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

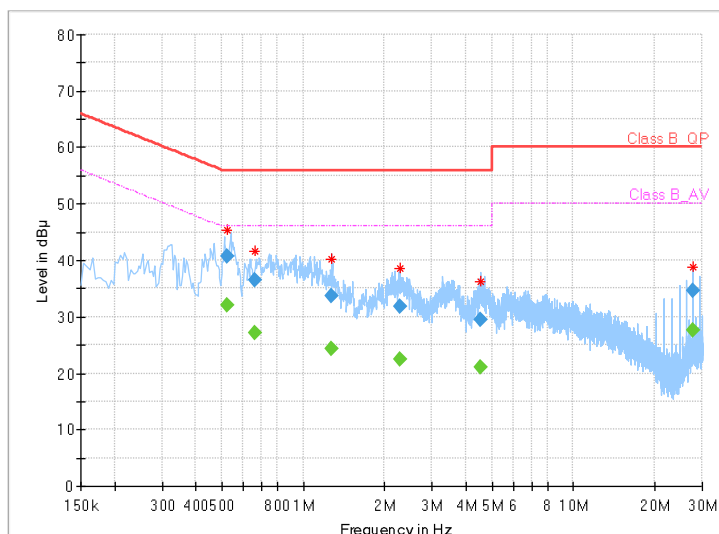


|                 |                |                                          |                                       |
|-----------------|----------------|------------------------------------------|---------------------------------------|
| Frequency Range | 150KHz ~ 30MHz | Detector Function & Resolution Bandwidth | Quasi-Peak (QP) / Average (AV), 9 kHz |
| Input Power     | 120Vac, 60Hz   | Environmental Conditions                 | 26deg. C, 51%RH                       |
| Tested By       | Carl xie       |                                          |                                       |

| Frequency (MHz) | QuasiPeak (dBuV) | CAverage (dBuV) | Limit (dBuV) | Margin (dB) | Line | Filter | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|------|--------|------------|
| 0.452000        | ---              | 28.36           | 46.84        | 18.48       | N    | ON     | 9.7        |
| 0.452000        | 41.66            | ---             | 56.84        | 15.18       | N    | ON     | 9.7        |
| 0.544000        | ---              | 34.67           | 46.00        | 11.33       | N    | ON     | 9.7        |
| 0.544000        | 45.24            | ---             | 56.00        | 10.76       | N    | ON     | 9.7        |
| 0.912000        | ---              | 33.51           | 46.00        | 12.49       | N    | ON     | 9.7        |
| 0.912000        | 43.65            | ---             | 56.00        | 12.35       | N    | ON     | 9.7        |
| 1.276000        | ---              | 31.32           | 46.00        | 14.68       | N    | ON     | 9.8        |
| 1.276000        | 42.05            | ---             | 56.00        | 13.95       | N    | ON     | 9.8        |
| 2.128000        | ---              | 29.42           | 46.00        | 16.58       | N    | ON     | 9.8        |
| 2.128000        | 38.88            | ---             | 56.00        | 17.12       | N    | ON     | 9.8        |
| 4.748000        | ---              | 25.94           | 46.00        | 20.06       | N    | ON     | 9.8        |
| 4.748000        | 36.12            | ---             | 56.00        | 19.88       | N    | ON     | 9.8        |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Limit value - Emission level
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

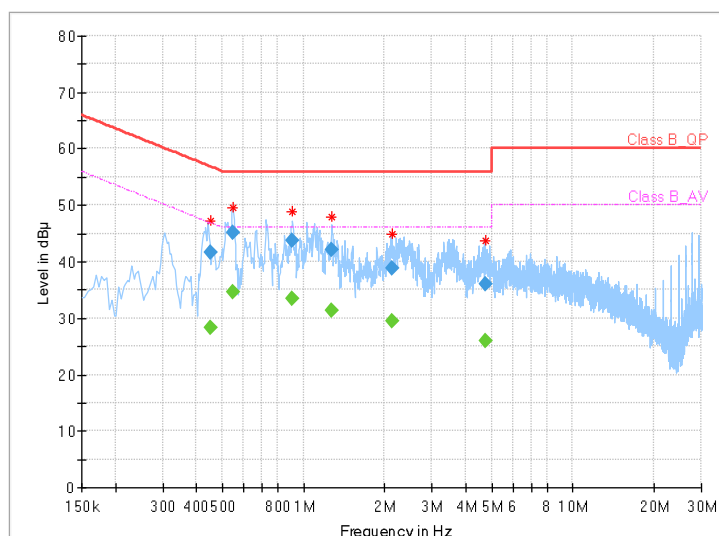

## 3.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT

### 3.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a). Other emissions shall be at least 20dB below the highest level of the desired power.

| FREQUENCIES (MHz) | FIELD STRENGTH (microvolts/meter) | MEASUREMENT DISTANCE (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490     | 2400/F(kHz)                       | 300                           |
| 0.490 ~ 1.705     | 24000/F(kHz)                      | 30                            |
| 1.705 ~ 30.0      | 30                                | 30                            |
| 30 ~ 88           | 100                               | 3                             |
| 88 ~ 216          | 150                               | 3                             |
| 216 ~ 960         | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

### 3.2.2 TEST INSTRUMENTS

| Equipment                  | Manufacturer | Model No.                   | Serial No.                  | Last Cal.   | Next Cal.   |
|----------------------------|--------------|-----------------------------|-----------------------------|-------------|-------------|
| 3m Semi-anechoic Chamber   | ETS-LINDGREN | 9m*6m*6m                    | Euroshieldpn-CT0001143-1216 | May. 19,20  | May. 18,23  |
| Bilog Antenna              | ETS-LINDGREN | 3143B                       | 00161965                    | Mar. 05,21  | Mar. 04,22  |
| Bilog Antenna              | ETS-LINDGREN | 3143B                       | 00161965                    | Mar. 04,22  | Mar. 03,23  |
| Horn Antenna               | ETS-LINDGREN | 3117                        | 00168728                    | Apr. 02, 21 | Apr. 01, 22 |
| Horn Antenna               | ETS-LINDGREN | 3117                        | 00168728                    | Apr. 01, 22 | Mar. 31, 23 |
| Horn Antenna (18GHz-40GHz) | N/A          | QWH-SL-18-40-K-SG/QMS-00361 | 15433                       | Aug. 25, 21 | Aug. 24, 22 |
| Horn Antenna (18GHz-40GHz) | N/A          | QWH-SL-18-40-K-SG/QMS-00361 | 15433                       | Aug. 24, 22 | Aug. 23, 23 |
| Test Software              | E3           | V 9.160323                  | N/A                         | N/A         | N/A         |
| Test Software              | ADT          | ADT_Radiated_V7.6.15.9.2    | N/A                         | N/A         | N/A         |
| 10dB Attenuator            | JFW/USA      | 50HF-010-SMA                | 1505                        | Jun. 03,21  | Jun. 02,22  |
| 10dB Attenuator            | JFW/USA      | 50HF-010-SMA                | 1505                        | Jun. 02,22  | Jun. 01,23  |
| MXE EMI Receiver           | KEYSIGHT     | N9038A-544                  | MY54450026                  | Apr. 27,21  | Apr. 26,22  |
| MXE EMI Receiver           | KEYSIGHT     | N9038A-544                  | MY54450026                  | Apr. 26,22  | Apr. 25,23  |
| Signal Pre-Amplifier       | EMSI         | EMC 9135                    | 980249                      | Jun. 02,21  | Jun. 01,22  |
| Signal Pre-Amplifier       | EMSI         | EMC 9135                    | 980249                      | Jun. 01,22  | May. 31,23  |
| Signal Pre-Amplifier       | EMSI         | EMC 012645B                 | 980257                      | Jun. 02,21  | Jun. 01,22  |
| Signal Pre-Amplifier       | EMSI         | EMC 012645B                 | 980257                      | Jun. 01,22  | May. 31,23  |
| Signal Pre-Amplifier       | EMSI         | EMC 184045B                 | 980259                      | Apr. 30,21  | Apr. 29,22  |
| Signal Pre-Amplifier       | EMSI         | EMC 184045B                 | 980259                      | Apr. 29,22  | Apr. 28,23  |
| DC Source                  | Kikusui/JP   | PMX18-5A                    | 0000001                     | Aug. 25,21  | Aug. 24,22  |
| DC Source                  | Kikusui/JP   | PMX18-5A                    | 0000001                     | Aug. 24,22  | Aug. 23,23  |
| Power Meter                | Anritsu      | ML2495A                     | 1506002                     | Feb. 25,21  | Feb. 24,22  |
| Power Meter                | Anritsu      | ML2495A                     | 1506002                     | Feb. 24,22  | Feb. 23,23  |
| Power Sensor               | Anritsu      | MA2411B                     | 1339352                     | Feb. 25,21  | Feb. 24,22  |
| Power Sensor               | Anritsu      | MA2411B                     | 1339352                     | Feb. 24,22  | Feb. 23,23  |
| Loop Antenna               | Schwarzbeck  | FMZB 1519B                  | 1519B-051                   | Feb 14,20   | Feb. 13,23  |

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
  2. The test was performed in 3m Chamber.
  3. The FCC Site Registration No. is 525120; The Designation No. is CN1171.

### 3.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

#### NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from  $20\log(\text{dwell time}/100 \text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit.
5. All modes of operation were investigated and the worst-case emissions are reported.

### 3.2.4 DEVIATION FROM TEST STANDARD


No deviation.

### 3.2.5 TEST SETUP


#### <Frequency Range 9KHz~30MHz >

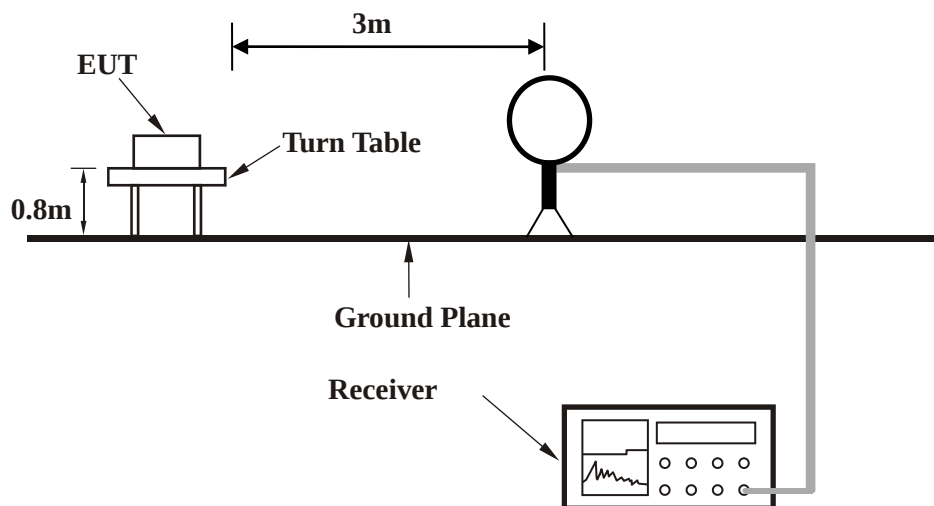

#### < Frequency Range 30MHz~1GHz >

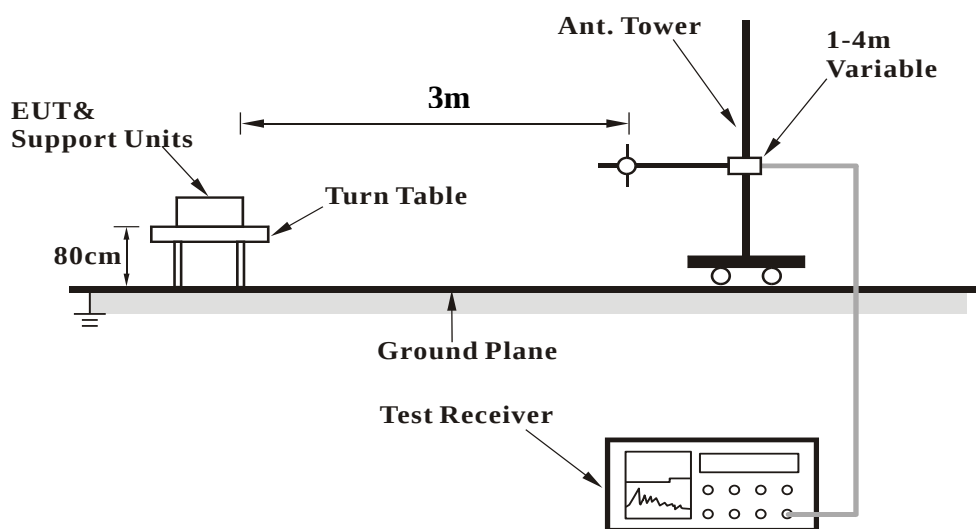

### <Frequency Range above 1GHz>

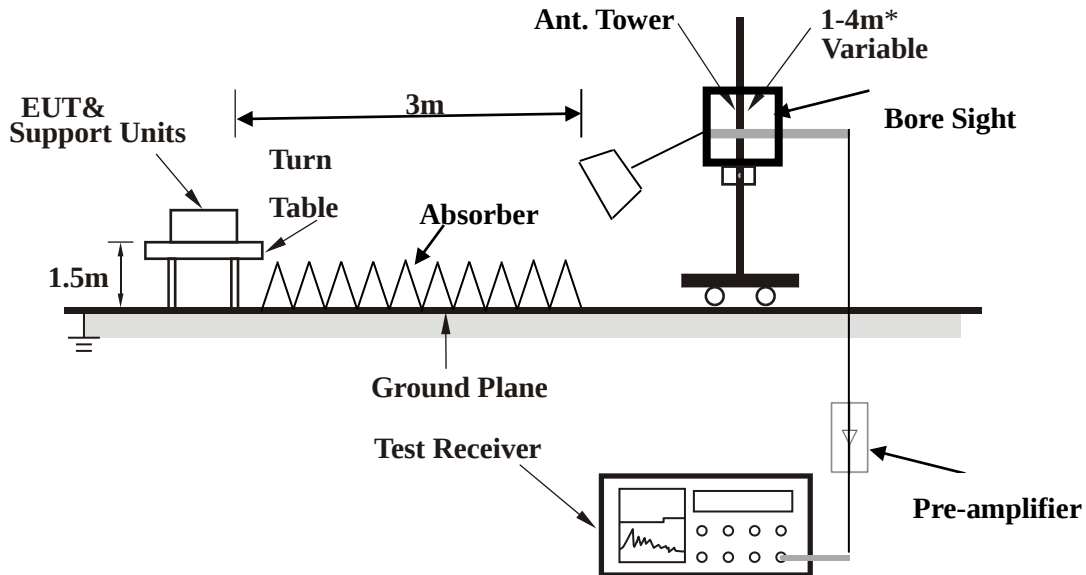

**Note:** Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 3.2.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



BUREAU  
VERITAS

Test Report No.: W7L-P22090015-1RF01

### 3.2.7 TEST RESULTS

#### BELOW 1GHz WORST-CASE DATA:

**Note:** For frequency below 30MHz, the emission was tested 20db below the limit so the data not recorded in the sheet.

**30 MHz – 1GHz data:**


**GFSK**

|                        |              |                          |                 |
|------------------------|--------------|--------------------------|-----------------|
| <b>CHANNEL</b>         | Channel 0    | <b>DETECTOR FUNCTION</b> | Quasi-Peak (QP) |
| <b>FREQUENCY RANGE</b> | 30MHz ~ 1GHz |                          |                 |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                               |                         |                   |                |                              |                       |                          |                           |                            |        |
|-----------------------------------------------------|-------------------------------|-------------------------|-------------------|----------------|------------------------------|-----------------------|--------------------------|---------------------------|----------------------------|--------|
| FREQ.<br>(MHz)                                      | EMISSION<br>LEVEL<br>(dBuV/m) | READ<br>LEVEL<br>(dBuV) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>FACTOR<br>(dB /m) | CABLE<br>LOSS<br>(dB) | PREAMP<br>FACTOR<br>(dB) | ANTENNA<br>HEIGHT<br>(cm) | TABLE<br>ANGLE<br>(Degree) | REMARK |
| 34.85                                               | 26.26                         | 44.62                   | 40                | -13.74         | 18.66                        | 0.33                  | 37.35                    | 197                       | 344                        | QP     |
| 56.19                                               | 30.23                         | 57.18                   | 40                | -9.77          | 9.58                         | 0.43                  | 36.96                    | 102                       | 126                        | QP     |
| 176.47                                              | 25.16                         | 49.57                   | 43.5              | -18.34         | 11.31                        | 0.7                   | 36.42                    | 196                       | 356                        | QP     |
| 210.42                                              | 25.25                         | 49.03                   | 43.5              | -18.25         | 11.76                        | 0.75                  | 36.29                    | 159                       | 264                        | QP     |
| 275.41                                              | 25.81                         | 47.46                   | 46                | -20.19         | 13.75                        | 0.87                  | 36.27                    | 199                       | 54                         | QP     |
| 422.85                                              | 26.18                         | 44.91                   | 46                | -19.82         | 16.63                        | 1.11                  | 36.47                    | 197                       | 299                        | QP     |

#### REMARKS:

1. Emission Level(dBuV/m) = Read Level(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

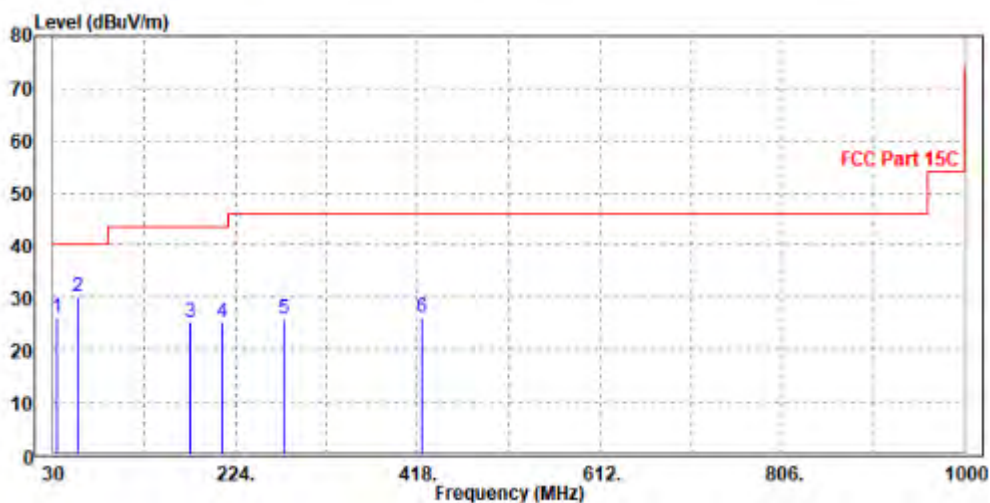


|                        |              |                          |                 |
|------------------------|--------------|--------------------------|-----------------|
| <b>CHANNEL</b>         | Channel 0    | <b>DETECTOR FUNCTION</b> | Quasi-Peak (QP) |
| <b>FREQUENCY RANGE</b> | 30MHz ~ 1GHz |                          |                 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                               |                         |                   |                |                              |                       |                          |                           |                            |        |
|---------------------------------------------------|-------------------------------|-------------------------|-------------------|----------------|------------------------------|-----------------------|--------------------------|---------------------------|----------------------------|--------|
| FREQ.<br>(MHz)                                    | EMISSION<br>LEVEL<br>(dBuV/m) | READ<br>LEVEL<br>(dBuV) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>FACTOR<br>(dB /m) | CABLE<br>LOSS<br>(dB) | PREAMP<br>FACTOR<br>(dB) | ANTENNA<br>HEIGHT<br>(cm) | TABLE<br>ANGLE<br>(Degree) | REMARK |
| 34.85                                             | 34.38                         | 53.52                   | 40                | -5.62          | 17.88                        | 0.33                  | 37.35                    | 134                       | 156                        | QP     |
| 55.22                                             | 30.51                         | 57.92                   | 40                | -9.49          | 9.13                         | 0.43                  | 36.97                    | 109                       | 183                        | QP     |
| 82.38                                             | 18.86                         | 47.49                   | 40                | -21.14         | 7.84                         | 0.5                   | 36.97                    | 101                       | 144                        | QP     |
| 179.38                                            | 19.55                         | 44.06                   | 43.5              | -23.95         | 11.19                        | 0.7                   | 36.4                     | 150                       | 19                         | QP     |
| 307.42                                            | 22.07                         | 43.25                   | 46                | -23.93         | 14.17                        | 0.92                  | 36.27                    | 102                       | 84                         | QP     |
| 422.85                                            | 20.83                         | 39.59                   | 46                | -25.17         | 16.6                         | 1.11                  | 36.47                    | 133                       | 249                        | QP     |

**REMARKS:**

1. Emission Level(dBuV/m) = Read Level(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

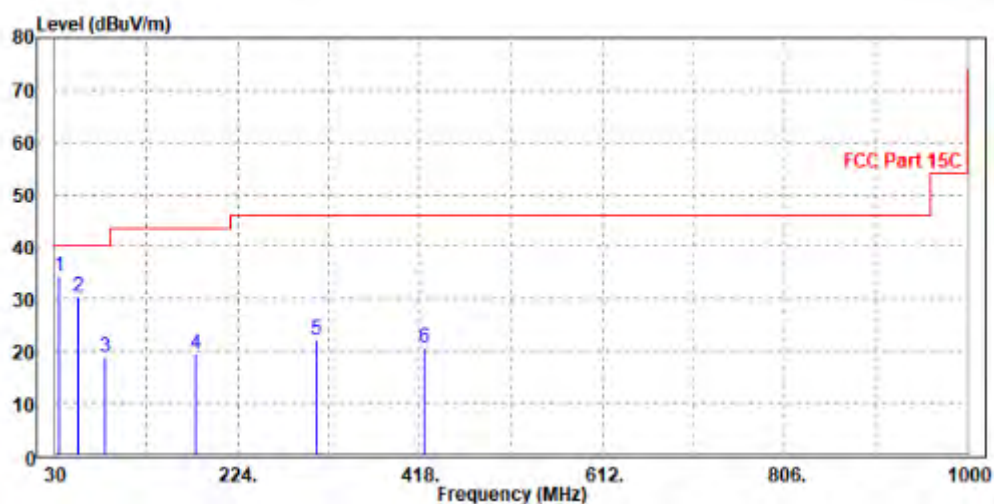



Test Report No.: W7L-P22090015-1RF01

# ABOVE 1GHz WORST-CASE DATA:

**Note:** For higher frequency, the emission is too low to be detected.

## BT\_GFSK

|                        |              |                          |              |
|------------------------|--------------|--------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 0 | <b>DETECTOR FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz |                          | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                               |                         |                   |                |                              |                       |                          |                           |                            |         |
|-----------------------------------------------------|-------------------------------|-------------------------|-------------------|----------------|------------------------------|-----------------------|--------------------------|---------------------------|----------------------------|---------|
| FREQ.<br>(MHz)                                      | EMISSION<br>LEVEL<br>(dBuV/m) | READ<br>LEVEL<br>(dBuV) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>FACTOR<br>(dB /m) | CABLE<br>LOSS<br>(dB) | PREAMP<br>FACTOR<br>(dB) | ANTENNA<br>HEIGHT<br>(cm) | TABLE<br>ANGLE<br>(Degree) | REMARK  |
| 2390                                                | 50.02                         | 58.78                   | 74                | -23.98         | 31.75                        | 5.86                  | 46.37                    | 100                       | 190                        | Peak    |
| 2390                                                | 43.44                         | 52.2                    | 54                | -10.56         | 31.75                        | 5.86                  | 46.37                    | 100                       | 190                        | Average |
| 2402                                                | 98.89                         | 107.59                  | /                 | /              | 31.79                        | 5.88                  | 46.37                    | 100                       | 190                        | Peak    |
| 2402                                                | 98.45                         | 107.15                  | /                 | /              | 31.79                        | 5.88                  | 46.37                    | 100                       | 190                        | Average |
| 2483.5                                              | 50.55                         | 58.88                   | 74                | -23.45         | 32.05                        | 5.99                  | 46.37                    | 100                       | 190                        | Peak    |
| 2483.5                                              | 43.6                          | 51.93                   | 54                | -10.4          | 32.05                        | 5.99                  | 46.37                    | 100                       | 190                        | Average |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                               |                         |                   |                |                              |                       |                          |                           |                            |         |
| FREQ.<br>(MHz)                                      | EMISSION<br>LEVEL<br>(dBuV/m) | READ<br>LEVEL<br>(dBuV) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>FACTOR<br>(dB /m) | CABLE<br>LOSS<br>(dB) | PREAMP<br>FACTOR<br>(dB) | ANTENNA<br>HEIGHT<br>(cm) | TABLE<br>ANGLE<br>(Degree) | REMARK  |
| 2390                                                | 51.73                         | 60.1                    | 74                | -22.27         | 32.14                        | 5.86                  | 46.37                    | 100                       | 145                        | Peak    |
| 2390                                                | 43.33                         | 51.7                    | 54                | -10.67         | 32.14                        | 5.86                  | 46.37                    | 100                       | 145                        | Average |
| 2402                                                | 94.52                         | 102.85                  | /                 | /              | 32.16                        | 5.88                  | 46.37                    | 100                       | 145                        | Peak    |
| 2402                                                | 94.3                          | 102.63                  | /                 | /              | 32.16                        | 5.88                  | 46.37                    | 100                       | 145                        | Average |
| 2483.5                                              | 51.34                         | 59.36                   | 74                | -22.66         | 32.36                        | 5.99                  | 46.37                    | 100                       | 145                        | Peak    |
| 2483.5                                              | 43.94                         | 51.96                   | 54                | -10.06         | 32.36                        | 5.99                  | 46.37                    | 100                       | 145                        | Average |

## REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 2402MHz: Fundamental frequency.

|                        |               |                              |              |
|------------------------|---------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 39 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz  |                              | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                               |                         |                   |                |                              |                       |                          |                           |                            |         |
|-----------------------------------------------------|-------------------------------|-------------------------|-------------------|----------------|------------------------------|-----------------------|--------------------------|---------------------------|----------------------------|---------|
| FREQ.<br>(MHz)                                      | EMISSION<br>LEVEL<br>(dBuV/m) | READ<br>LEVEL<br>(dBuV) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>FACTOR<br>(dB /m) | CABLE<br>LOSS<br>(dB) | PREAMP<br>FACTOR<br>(dB) | ANTENNA<br>HEIGHT<br>(cm) | TABLE<br>ANGLE<br>(Degree) | REMARK  |
| 2390                                                | 51.49                         | 60.25                   | 74                | -22.51         | 31.75                        | 5.86                  | 46.37                    | 125                       | 280                        | Peak    |
| 2390                                                | 44.39                         | 53.15                   | 54                | -9.61          | 31.75                        | 5.86                  | 46.37                    | 125                       | 280                        | Average |
| 2441                                                | 98.89                         | 107.42                  | /                 | /              | 31.91                        | 5.93                  | 46.37                    | 125                       | 280                        | Peak    |
| 2441                                                | 98.51                         | 107.04                  | /                 | /              | 31.91                        | 5.93                  | 46.37                    | 125                       | 280                        | Average |
| 2483.5                                              | 51.84                         | 60.17                   | 74                | -22.16         | 32.05                        | 5.99                  | 46.37                    | 125                       | 280                        | Peak    |
| 2483.5                                              | 44.23                         | 52.56                   | 54                | -9.77          | 32.05                        | 5.99                  | 46.37                    | 125                       | 280                        | Average |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                               |                         |                   |                |                              |                       |                          |                           |                            |         |
| FREQ.<br>(MHz)                                      | EMISSION<br>LEVEL<br>(dBuV/m) | READ<br>LEVEL<br>(dBuV) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>FACTOR<br>(dB /m) | CABLE<br>LOSS<br>(dB) | PREAMP<br>FACTOR<br>(dB) | ANTENNA<br>HEIGHT<br>(cm) | TABLE<br>ANGLE<br>(Degree) | REMARK  |
| 2390                                                | 51.1                          | 59.47                   | 74                | -22.9          | 32.14                        | 5.86                  | 46.37                    | 103                       | 145                        | Peak    |
| 2390                                                | 44.87                         | 53.24                   | 54                | -9.13          | 32.14                        | 5.86                  | 46.37                    | 103                       | 145                        | Average |
| 2441                                                | 100.08                        | 108.26                  | /                 | /              | 32.26                        | 5.93                  | 46.37                    | 103                       | 145                        | Peak    |
| 2441                                                | 98.32                         | 106.5                   | /                 | /              | 32.26                        | 5.93                  | 46.37                    | 103                       | 145                        | Average |
| 2483.5                                              | 51.76                         | 59.78                   | 74                | -22.24         | 32.36                        | 5.99                  | 46.37                    | 103                       | 145                        | Peak    |
| 2483.5                                              | 44.37                         | 52.39                   | 54                | -9.63          | 32.36                        | 5.99                  | 46.37                    | 103                       | 145                        | Average |

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2441MHz: Fundamental frequency.

|                        |               |                              |              |
|------------------------|---------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 78 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz  |                              | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                               |                         |                   |                |                              |                       |                          |                           |                            |         |
|-----------------------------------------------------|-------------------------------|-------------------------|-------------------|----------------|------------------------------|-----------------------|--------------------------|---------------------------|----------------------------|---------|
| FREQ.<br>(MHz)                                      | EMISSION<br>LEVEL<br>(dBuV/m) | READ<br>LEVEL<br>(dBuV) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>FACTOR<br>(dB /m) | CABLE<br>LOSS<br>(dB) | PREAMP<br>FACTOR<br>(dB) | ANTENNA<br>HEIGHT<br>(cm) | TABLE<br>ANGLE<br>(Degree) | REMARK  |
| 2390                                                | 53.36                         | 62.12                   | 74                | -20.64         | 31.75                        | 5.86                  | 46.37                    | 125                       | 280                        | Peak    |
| 2390                                                | 43.48                         | 52.24                   | 54                | -10.52         | 31.75                        | 5.86                  | 46.37                    | 125                       | 280                        | Average |
| 2480                                                | 96.93                         | 105.28                  | /                 | /              | 32.04                        | 5.98                  | 46.37                    | 125                       | 280                        | Peak    |
| 2480                                                | 96.79                         | 105.14                  | /                 | /              | 32.04                        | 5.98                  | 46.37                    | 125                       | 280                        | Average |
| 2483.5                                              | 52.25                         | 60.58                   | 74                | -21.75         | 32.05                        | 5.99                  | 46.37                    | 125                       | 280                        | Peak    |
| 2483.5                                              | 44.93                         | 53.26                   | 54                | -9.07          | 32.05                        | 5.99                  | 46.37                    | 125                       | 280                        | Average |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                               |                         |                   |                |                              |                       |                          |                           |                            |         |
| FREQ.<br>(MHz)                                      | EMISSION<br>LEVEL<br>(dBuV/m) | READ<br>LEVEL<br>(dBuV) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>FACTOR<br>(dB /m) | CABLE<br>LOSS<br>(dB) | PREAMP<br>FACTOR<br>(dB) | ANTENNA<br>HEIGHT<br>(cm) | TABLE<br>ANGLE<br>(Degree) | REMARK  |
| 2390                                                | 52.19                         | 60.56                   | 74                | -21.81         | 32.14                        | 5.86                  | 46.37                    | 103                       | 145                        | Peak    |
| 2390                                                | 44.88                         | 53.25                   | 54                | -9.12          | 32.14                        | 5.86                  | 46.37                    | 103                       | 145                        | Average |
| 2480                                                | 95.8                          | 103.84                  | /                 | /              | 32.35                        | 5.98                  | 46.37                    | 103                       | 145                        | Peak    |
| 2480                                                | 95.57                         | 103.61                  | /                 | /              | 32.35                        | 5.98                  | 46.37                    | 103                       | 145                        | Average |
| 2483.5                                              | 52.42                         | 60.44                   | 74                | -21.58         | 32.36                        | 5.99                  | 46.37                    | 103                       | 145                        | Peak    |
| 2483.5                                              | 45.19                         | 53.21                   | 54                | -8.81          | 32.36                        | 5.99                  | 46.37                    | 103                       | 145                        | Average |

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2480MHz: Fundamental frequency.



BUREAU  
VERITAS

Test Report No.: W7L-P22090015-1RF01


Worst case harmonic:

BT\_ GFSK

|                 |              |                      |              |
|-----------------|--------------|----------------------|--------------|
| CHANNEL         | TX Channel 0 | DETECTOR<br>FUNCTION | Peak (PK)    |
| FREQUENCY RANGE | 1GHz ~ 25GHz |                      | Average (AV) |


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

|      | Freq     | Level  | Read  | Limit  | Over   |        |        |            |
|------|----------|--------|-------|--------|--------|--------|--------|------------|
|      | MHz      | dBuV/m | Level | Line   | Limit  | Factor | Remark | Pol/Phase  |
|      |          |        | dBuV  | dBuV/m | dB     | dB/m   |        |            |
| 1    | 4808.000 | 41.32  | 44.69 | 74.00  | -32.68 | -3.37  | Peak   | Horizontal |
| 2 PP | 7206.000 | 45.45  | 43.44 | 74.00  | -28.55 | 2.01   | Peak   | Horizontal |

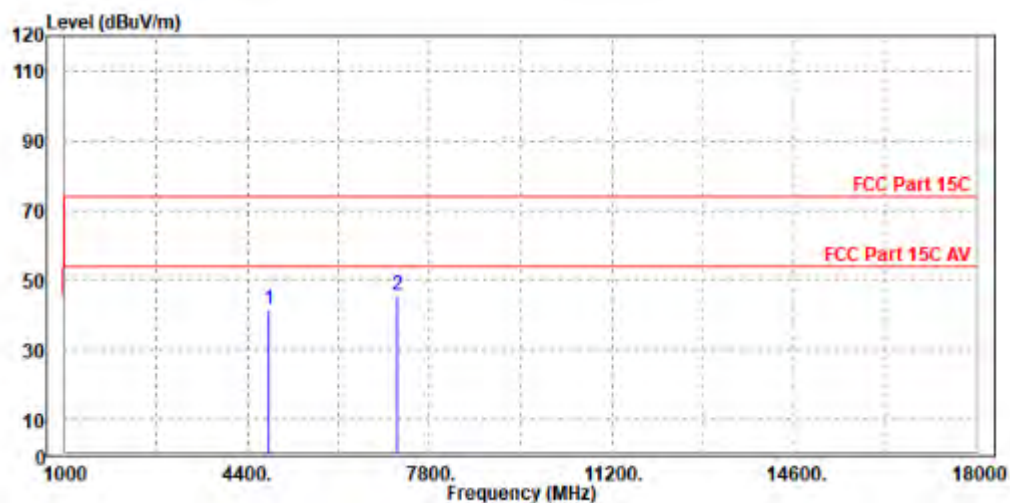

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

|      | Freq     | Level  | Read<br>Level | Limit<br>Line | Over<br>Limit | Factor | Remark | Pol/Phase |
|------|----------|--------|---------------|---------------|---------------|--------|--------|-----------|
|      | MHz      | dBuV/m | dBuV          | dBuV/m        | dB            | dB/m   |        |           |
| 1    | 4804.000 | 41.69  | 44.86         | 74.00         | -32.31        | -3.17  | Peak   | Vertical  |
| 2 PP | 7205.000 | 45.03  | 42.90         | 74.00         | -28.97        | 2.13   | Peak   | Vertical  |

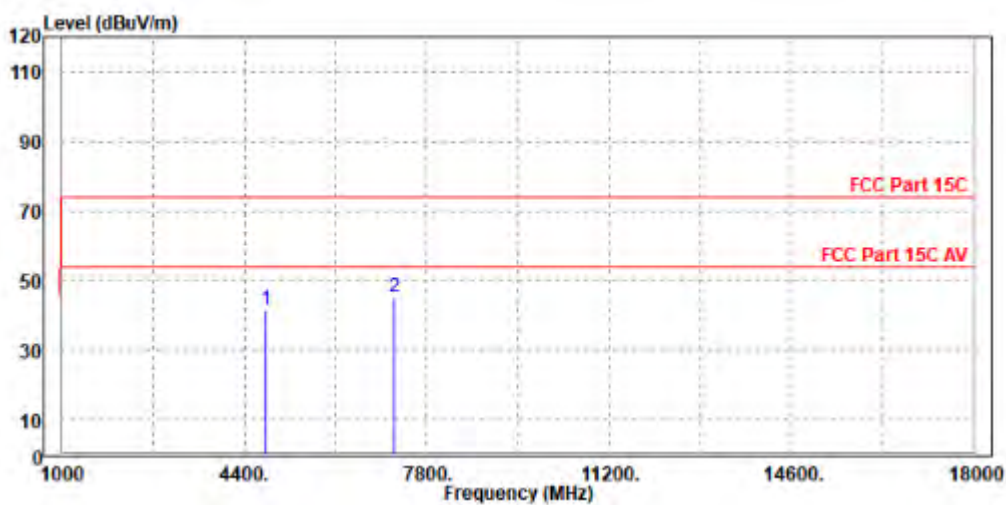

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.



**BUREAU  
VERITAS**

Test Report No.: W7L-P22090015-1RF01

BT\_8DPSK

|                        |              |                              |              |
|------------------------|--------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 0 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz |                              | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                               |                         |                   |                |                              |                       |                          |                           |                            |         |
|-----------------------------------------------------|-------------------------------|-------------------------|-------------------|----------------|------------------------------|-----------------------|--------------------------|---------------------------|----------------------------|---------|
| FREQ.<br>(MHz)                                      | EMISSION<br>LEVEL<br>(dBuV/m) | READ<br>LEVEL<br>(dBuV) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>FACTOR<br>(dB /m) | CABLE<br>LOSS<br>(dB) | PREAMP<br>FACTOR<br>(dB) | ANTENNA<br>HEIGHT<br>(cm) | TABLE<br>ANGLE<br>(Degree) | REMARK  |
| 2390                                                | 51.62                         | 60.38                   | 74                | -22.38         | 31.75                        | 5.86                  | 46.37                    | 125                       | 255                        | Peak    |
| 2390                                                | 44.29                         | 53.05                   | 54                | -9.71          | 31.75                        | 5.86                  | 46.37                    | 125                       | 255                        | Average |
| 2402                                                | 100.14                        | 108.84                  | /                 | /              | 31.79                        | 5.88                  | 46.37                    | 125                       | 255                        | Peak    |
| 2402                                                | 99.63                         | 108.33                  | /                 | /              | 31.79                        | 5.88                  | 46.37                    | 125                       | 255                        | Average |
| 2483.5                                              | 52.91                         | 61.24                   | 74                | -21.09         | 32.05                        | 5.99                  | 46.37                    | 125                       | 255                        | Peak    |
| 2483.5                                              | 44.06                         | 52.39                   | 54                | -9.94          | 32.05                        | 5.99                  | 46.37                    | 125                       | 255                        | Average |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                               |                         |                   |                |                              |                       |                          |                           |                            |         |
| FREQ.<br>(MHz)                                      | EMISSION<br>LEVEL<br>(dBuV/m) | READ<br>LEVEL<br>(dBuV) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>FACTOR<br>(dB /m) | CABLE<br>LOSS<br>(dB) | PREAMP<br>FACTOR<br>(dB) | ANTENNA<br>HEIGHT<br>(cm) | TABLE<br>ANGLE<br>(Degree) | REMARK  |
| 2390                                                | 51.36                         | 59.73                   | 74                | -22.64         | 32.14                        | 5.86                  | 46.37                    | 100                       | 145                        | Peak    |
| 2390                                                | 44.53                         | 52.9                    | 54                | -9.47          | 32.14                        | 5.86                  | 46.37                    | 100                       | 145                        | Average |
| 2402                                                | 101.62                        | 109.95                  | /                 | /              | 32.16                        | 5.88                  | 46.37                    | 100                       | 145                        | Peak    |
| 2402                                                | 101.35                        | 109.68                  | /                 | /              | 32.16                        | 5.88                  | 46.37                    | 100                       | 145                        | Average |
| 2483.5                                              | 52.69                         | 60.71                   | 74                | -21.31         | 32.36                        | 5.99                  | 46.37                    | 100                       | 145                        | Peak    |
| 2483.5                                              | 44.82                         | 52.84                   | 54                | -9.18          | 32.36                        | 5.99                  | 46.37                    | 100                       | 145                        | Average |

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2402MHz: Fundamental frequency.

|                        |               |                              |              |
|------------------------|---------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 39 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz  |                              | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                               |                         |                   |                |                              |                       |                          |                           |                            |         |
|-----------------------------------------------------|-------------------------------|-------------------------|-------------------|----------------|------------------------------|-----------------------|--------------------------|---------------------------|----------------------------|---------|
| FREQ.<br>(MHz)                                      | EMISSION<br>LEVEL<br>(dBuV/m) | READ<br>LEVEL<br>(dBuV) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>FACTOR<br>(dB /m) | CABLE<br>LOSS<br>(dB) | PREAMP<br>FACTOR<br>(dB) | ANTENNA<br>HEIGHT<br>(cm) | TABLE<br>ANGLE<br>(Degree) | REMARK  |
| 2390                                                | 51.07                         | 59.83                   | 74                | -22.93         | 31.75                        | 5.86                  | 46.37                    | 123                       | 240                        | Peak    |
| 2390                                                | 44.29                         | 53.05                   | 54                | -9.71          | 31.75                        | 5.86                  | 46.37                    | 123                       | 240                        | Average |
| 2441                                                | 98.25                         | 106.78                  | /                 | /              | 31.91                        | 5.93                  | 46.37                    | 123                       | 240                        | Peak    |
| 2441                                                | 97.63                         | 106.16                  | /                 | /              | 31.91                        | 5.93                  | 46.37                    | 123                       | 240                        | Average |
| 2483.5                                              | 52.85                         | 61.18                   | 74                | -21.15         | 32.05                        | 5.99                  | 46.37                    | 123                       | 240                        | Peak    |
| 2483.5                                              | 44.57                         | 52.9                    | 54                | -9.43          | 32.05                        | 5.99                  | 46.37                    | 123                       | 240                        | Average |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                               |                         |                   |                |                              |                       |                          |                           |                            |         |
| FREQ.<br>(MHz)                                      | EMISSION<br>LEVEL<br>(dBuV/m) | READ<br>LEVEL<br>(dBuV) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>FACTOR<br>(dB /m) | CABLE<br>LOSS<br>(dB) | PREAMP<br>FACTOR<br>(dB) | ANTENNA<br>HEIGHT<br>(cm) | TABLE<br>ANGLE<br>(Degree) | REMARK  |
| 2390                                                | 51.65                         | 60.02                   | 74                | -22.35         | 32.14                        | 5.86                  | 46.37                    | 100                       | 145                        | Peak    |
| 2390                                                | 44.46                         | 52.83                   | 54                | -9.54          | 32.14                        | 5.86                  | 46.37                    | 100                       | 145                        | Average |
| 2441                                                | 101.7                         | 109.88                  | /                 | /              | 32.26                        | 5.93                  | 46.37                    | 100                       | 145                        | Peak    |
| 2441                                                | 100.3                         | 108.48                  | /                 | /              | 32.26                        | 5.93                  | 46.37                    | 100                       | 145                        | Average |
| 2483.5                                              | 53.09                         | 61.11                   | 74                | -20.91         | 32.36                        | 5.99                  | 46.37                    | 100                       | 145                        | Peak    |
| 2483.5                                              | 44.47                         | 52.49                   | 54                | -9.53          | 32.36                        | 5.99                  | 46.37                    | 100                       | 145                        | Average |

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2441MHz: Fundamental frequency.

|                        |               |                              |              |
|------------------------|---------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 78 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz  |                              | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                               |                         |                   |                |                              |                       |                          |                           |                            |         |
|-----------------------------------------------------|-------------------------------|-------------------------|-------------------|----------------|------------------------------|-----------------------|--------------------------|---------------------------|----------------------------|---------|
| FREQ.<br>(MHz)                                      | EMISSION<br>LEVEL<br>(dBuV/m) | READ<br>LEVEL<br>(dBuV) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>FACTOR<br>(dB /m) | CABLE<br>LOSS<br>(dB) | PREAMP<br>FACTOR<br>(dB) | ANTENNA<br>HEIGHT<br>(cm) | TABLE<br>ANGLE<br>(Degree) | REMARK  |
| 2390                                                | 52.52                         | 61.28                   | 74                | -21.48         | 31.75                        | 5.86                  | 46.37                    | 123                       | 245                        | Peak    |
| 2390                                                | 43.11                         | 51.87                   | 54                | -10.89         | 31.75                        | 5.86                  | 46.37                    | 123                       | 245                        | Average |
| 2480                                                | 100.19                        | 108.54                  | /                 | /              | 32.04                        | 5.98                  | 46.37                    | 123                       | 245                        | Peak    |
| 2480                                                | 99.89                         | 108.24                  | /                 | /              | 32.04                        | 5.98                  | 46.37                    | 123                       | 245                        | Average |
| 2483.5                                              | 54.86                         | 63.19                   | 74                | -19.14         | 32.05                        | 5.99                  | 46.37                    | 123                       | 245                        | Peak    |
| 2483.5                                              | 44.85                         | 53.18                   | 54                | -9.15          | 32.05                        | 5.99                  | 46.37                    | 123                       | 245                        | Average |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                               |                         |                   |                |                              |                       |                          |                           |                            |         |
| FREQ.<br>(MHz)                                      | EMISSION<br>LEVEL<br>(dBuV/m) | READ<br>LEVEL<br>(dBuV) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>FACTOR<br>(dB /m) | CABLE<br>LOSS<br>(dB) | PREAMP<br>FACTOR<br>(dB) | ANTENNA<br>HEIGHT<br>(cm) | TABLE<br>ANGLE<br>(Degree) | REMARK  |
| 2390                                                | 51.37                         | 59.74                   | 74                | -22.63         | 32.14                        | 5.86                  | 46.37                    | 100                       | 145                        | Peak    |
| 2390                                                | 44.11                         | 52.48                   | 54                | -9.89          | 32.14                        | 5.86                  | 46.37                    | 100                       | 145                        | Average |
| 2480                                                | 100.98                        | 109.02                  | /                 | /              | 32.35                        | 5.98                  | 46.37                    | 100                       | 145                        | Peak    |
| 2480                                                | 100.56                        | 108.6                   | /                 | /              | 32.35                        | 5.98                  | 46.37                    | 100                       | 145                        | Average |
| 2483.5                                              | 53.94                         | 61.96                   | 74                | -20.06         | 32.36                        | 5.99                  | 46.37                    | 100                       | 145                        | Peak    |
| 2483.5                                              | 44.51                         | 52.53                   | 54                | -9.49          | 32.36                        | 5.99                  | 46.37                    | 100                       | 145                        | Average |

**REMARKS:**


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2480MHz: Fundamental frequency.

### 3.3 NUMBER OF HOPPING FREQUENCY USED

#### 3.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies, and should be equally spaced.

#### 3.3.2 TEST SETUP



#### 3.3.3 TEST INSTRUMENTS

| Equipment                  | Manufacturer  | Model No.  | Serial No. | Last Cal.  | Next Cal.  |
|----------------------------|---------------|------------|------------|------------|------------|
| Power Meter                | ANRITSU       | ML2495A    | 1506002    | Feb. 25,21 | Feb. 24,22 |
| Power Meter                | ANRITSU       | ML2495A    | 1506002    | Feb. 24,22 | Feb. 23,23 |
| EXA Signal Analyzer        | KEYSIGHT      | N9010A-526 | MY54510322 | Apr. 26,21 | Apr. 25,22 |
| EXA Signal Analyzer        | KEYSIGHT      | N9010A-526 | MY54510322 | Apr. 25,22 | Apr. 24,23 |
| EXA Signal Analyzer        | KEYSIGHT      | N9010A-544 | MY54510355 | Feb. 25,21 | Feb. 24,22 |
| EXA Signal Analyzer        | KEYSIGHT      | N9010A-544 | MY54510355 | Feb. 24,22 | Feb. 23,23 |
| Power Sensor               | ANRITSU       | MA2411B    | 1339352    | Feb. 25,21 | Feb. 24,22 |
| Power Sensor               | ANRITSU       | MA2411B    | 1339352    | Feb. 24,22 | Feb. 23,23 |
| CBT32 BLUETOOTH TESTER 4HU | Rohde&Schwarz | CBT32      | 101176     | Mar. 09,21 | Mar. 08,22 |
| CBT32 BLUETOOTH TESTER 4HU | Rohde&Schwarz | CBT32      | 101176     | Mar. 08,22 | Mar. 07,23 |

#### NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.



Test Report No.: W7L-P22090015-1RF01

### 3.3.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were completed.

### 3.3.5 DEVIATION FROM TEST STANDARD

No deviation.

### 3.3.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.



**Test Report No.: W7L-P22090015-1RF01**


Please Refer to Appendix F Of this test report.

### 3.4 DWELL TIME ON EACH CHANNEL

#### 3.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### 3.4.2 TEST SETUP



#### 3.4.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

#### 3.4.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.



Test Report No.: W7L-P22090015-1RF01

### 3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

### 3.4.6 TEST RESULTS


Please Refer to Appendix E Of this test report

### 3.5 CHANNEL BANDWIDTH

#### 3.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

#### 3.5.2 TEST SETUP



#### 3.5.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

#### 3.5.4 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

#### 3.5.5 DEVIATION FROM TEST STANDARD

No deviation.



**Test Report No.: W7L-P22090015-1RF01**

### 3.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

### 3.5.7 TEST RESULTS


Please Refer to Appendix A Of this test report.

### 3.6 HOPPING CHANNEL SEPARATION

#### 3.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

#### 3.6.2 TEST SETUP



#### 3.6.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

#### 3.6.4 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

#### 3.6.5 DEVIATION FROM TEST STANDARD

No deviation.

### 3.6.6 TEST RESULTS


Please Refer to Appendix D Of this test report.

## 3.7 MAXIMUM OUTPUT POWER

### 3.7.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT

The Maximum Output Power Measurement is 125mW.

### 3.7.2 TEST SETUP

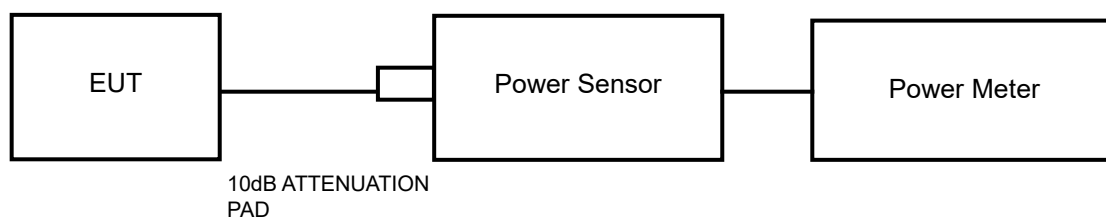

### 3.7.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

### 3.7.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.



**Test Report No.: W7L-P22090015-1RF01**

### 3.7.5 DEVIATION FROM TEST STANDARD

No deviation.

### 3.7.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



**Test Report No.: W7L-P22090015-1RF01**

### 3.7.7 TEST RESULTS

#### 3.7.7.1 MAXIMUM PEAK OUTPUT POWER

Please Refer to Appendix C Of this test report.



**Test Report No.: W7L-P22090015-1RF01**

### 3.7.7.2 Average Output Power (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

Please Refer to Appendix C Of this test report.



Test Report No.: W7L-P22090015-1RF01

### 3.8 OUT OF BAND MEASUREMENT

#### 3.8.1 LIMITS OF OUT OF BAND MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RBW).

#### 3.8.2 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

#### 3.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Spectrum Analyzer was set RBW to 100 kHz and VBW to 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. Detector = PEAK and Trace mode = Max Hold. The band edges was measured and recorded.

#### 3.8.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 3.8.5 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 3.8.6 TEST RESULTS

Please Refer to Appendix G Of this test report.



**BUREAU  
VERITAS**

**Test Report No.: W7L-P22090015-1RF01**

## **4 PHOTOGRAPHS OF THE TEST CONFIGURATION**

Please refer to the attached file (Test Setup Photo).



Test Report No.: W7L-P22090015-1RF01

## **5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.

## 6 APPENDIX

### APPENDIX A: 20DB EMISSION BANDWIDTH

#### TEST RESULT

| TestMode | Antenna | Channel | 20db<br>EBW[MHz] | FL[MHz]  | FH[MHz]  | Limit[MHz] | Verdict |
|----------|---------|---------|------------------|----------|----------|------------|---------|
| DH5      | Ant1    | 2402    | 0.939            | 2401.538 | 2402.477 | ---        | PASS    |
|          |         | 2441    | 0.954            | 2440.538 | 2441.492 | ---        | PASS    |
|          |         | 2480    | 0.894            | 2479.538 | 2480.432 | ---        | PASS    |
| 2DH5     | Ant1    | 2402    | 1.311            | 2401.343 | 2402.654 | ---        | PASS    |
|          |         | 2441    | 1.311            | 2440.343 | 2441.654 | ---        | PASS    |
|          |         | 2480    | 1.296            | 2479.343 | 2480.639 | ---        | PASS    |
| 3DH5     | Ant1    | 2402    | 1.302            | 2401.346 | 2402.648 | ---        | PASS    |
|          |         | 2441    | 1.293            | 2440.352 | 2441.645 | ---        | PASS    |
|          |         | 2480    | 1.281            | 2479.349 | 2480.630 | ---        | PASS    |

## TEST GRAPHS



DH5\_Ant1\_2402



DH5\_Ant1\_2441



BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01



DH5\_Ant1\_2480



2DH5\_Ant1\_2402



BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01



2DH5\_Ant1\_2441



2DH5\_Ant1\_2480



BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01



3DH5\_Ant1\_2402



3DH5\_Ant1\_2441



BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01



3DH5\_Ant1\_2480

## APPENDIX B: OCCUPIED CHANNEL BANDWIDTH

### TEST RESULT

| TestMode | Antenna | Channel | OCB [MHz] | FL[MHz]  | FH[MHz]  | Limit[MHz] | Verdict |
|----------|---------|---------|-----------|----------|----------|------------|---------|
| DH5      | Ant1    | 2402    | 0.86658   | 2401.566 | 2402.432 | ---        | PASS    |
|          |         | 2441    | 0.87248   | 2440.564 | 2441.436 | ---        | PASS    |
|          |         | 2480    | 0.85521   | 2479.568 | 2480.424 | ---        | PASS    |
| 2DH5     | Ant1    | 2402    | 1.1924    | 2401.405 | 2402.597 | ---        | PASS    |
|          |         | 2441    | 1.1896    | 2440.405 | 2441.595 | ---        | PASS    |
|          |         | 2480    | 1.1966    | 2479.400 | 2480.597 | ---        | PASS    |
| 3DH5     | Ant1    | 2402    | 1.1998    | 2401.391 | 2402.591 | ---        | PASS    |
|          |         | 2441    | 1.2034    | 2440.390 | 2441.594 | ---        | PASS    |
|          |         | 2480    | 1.1988    | 2479.390 | 2480.589 | ---        | PASS    |

## TEST GRAPHS



DH5\_Ant1\_2402



DH5\_Ant1\_2441



BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01



DH5\_Ant1\_2480



2DH5\_Ant1\_2402




BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01



2DH5\_Ant1\_2441

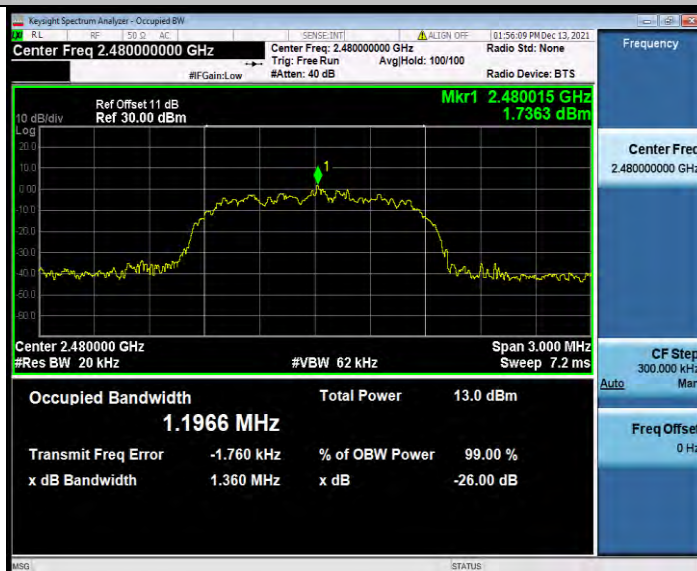

2DH5\_Ant1\_2480




BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01



3DH5\_Ant1\_2402

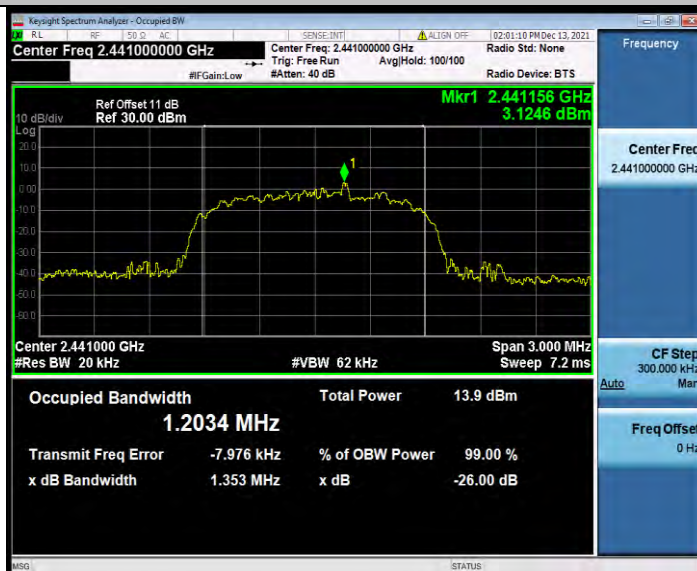


3DH5\_Ant1\_2441



BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01

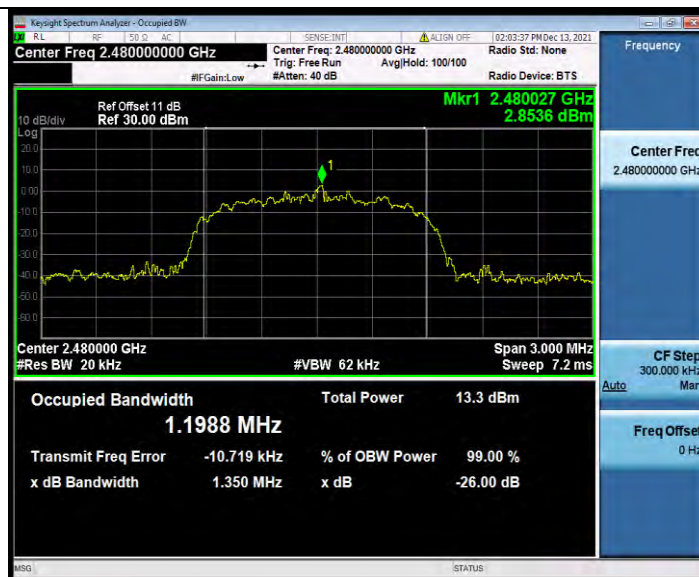

3DH5\_Ant1\_2480

## APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER

### PEAK POWER TEST RESULT

| TestMode | Antenna | Channel | Result[dBm] | Result[mW] | Limit[dBm] | Verdict | Power Setting |
|----------|---------|---------|-------------|------------|------------|---------|---------------|
| DH5      | Ant1    | 2402    | 8.55        | 7.16       | ≤20.97     | PASS    | Default       |
|          |         | 2441    | 8.14        | 6.52       | ≤20.97     | PASS    | Default       |
|          |         | 2480    | 7.96        | 6.25       | ≤20.97     | PASS    | Default       |
| 2DH5     | Ant1    | 2402    | 9.26        | 8.43       | ≤20.97     | PASS    | Default       |
|          |         | 2441    | 9.36        | 8.63       | ≤20.97     | PASS    | Default       |
|          |         | 2480    | 8.50        | 7.08       | ≤20.97     | PASS    | Default       |
| 3DH5     | Ant1    | 2402    | 9.60        | 9.12       | ≤20.97     | PASS    | Default       |
|          |         | 2441    | 9.65        | 9.23       | ≤20.97     | PASS    | Default       |
|          |         | 2480    | 8.70        | 7.41       | ≤20.97     | PASS    | Default       |

### AVERAGE POWER TEST RESULT

| TestMode | Antenna | Channel | Result[dBm] | Limit[dBm] | Verdict | Power Setting |
|----------|---------|---------|-------------|------------|---------|---------------|
| DH5      | Ant1    | 2402    | 7.02        | /          | PASS    | Default       |
|          |         | 2441    | 6.65        | /          | PASS    | Default       |
|          |         | 2480    | 6.42        | /          | PASS    | Default       |
| 2DH5     | Ant1    | 2402    | 5.85        | /          | PASS    | Default       |
|          |         | 2441    | 5.72        | /          | PASS    | Default       |
|          |         | 2480    | 5.04        | /          | PASS    | Default       |
| 3DH5     | Ant1    | 2402    | 5.86        | /          | PASS    | Default       |
|          |         | 2441    | 5.70        | /          | PASS    | Default       |
|          |         | 2480    | 5.05        | /          | PASS    | Default       |



Test Report No.: W7L-P22090015-1RF01

## APPENDIX D: CARRIER FREQUENCY SEPARATION TEST RESULT

| TestMode | Antenna | Channel | Result[dBm] | Limit[dBm]   | Verdict |
|----------|---------|---------|-------------|--------------|---------|
| DH5      | Ant1    | Hop     | 0.996       | $\geq 0.954$ | PASS    |
| 2DH5     | Ant1    | Hop     | 1.006       | $\geq 0.874$ | PASS    |
| 3DH5     | Ant1    | Hop     | 1.01        | $\geq 0.868$ | PASS    |

## TEST GRAPHS



DH5\_Ant1\_Hop



2DH5\_Ant1\_Hop



BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01



3DH5\_Ant1\_Hop

## APPENDIX E: TIME OF OCCUPANCY

### TEST RESULT

| TestMode | Antenna | Channel | BurstWidth<br>[ms] | TotalHops<br>[Num] | Result[s] | Limit[s] | Verdict |
|----------|---------|---------|--------------------|--------------------|-----------|----------|---------|
| DH1      | Ant1    | Hop     | 0.40               | 330                | 0.133     | ≤0.4     | PASS    |
| DH3      | Ant1    | Hop     | 1.66               | 110                | 0.183     | ≤0.4     | PASS    |
| DH5      | Ant1    | Hop     | 2.91               | 110                | 0.32      | ≤0.4     | PASS    |
| 2DH1     | Ant1    | Hop     | 0.40               | 320                | 0.127     | ≤0.4     | PASS    |
| 2DH3     | Ant1    | Hop     | 1.65               | 190                | 0.313     | ≤0.4     | PASS    |
| 2DH5     | Ant1    | Hop     | 2.90               | 120                | 0.348     | ≤0.4     | PASS    |
| 3DH1     | Ant1    | Hop     | 0.40               | 320                | 0.126     | ≤0.4     | PASS    |
| 3DH3     | Ant1    | Hop     | 1.64               | 180                | 0.296     | ≤0.4     | PASS    |
| 3DH5     | Ant1    | Hop     | 2.90               | 110                | 0.319     | ≤0.4     | PASS    |

## TEST GRAPHS



DH1\_Ant1\_Hop



DH1\_Ant1\_Hop



BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01



DH3\_Ant1\_Hop



DH3\_Ant1\_Hop



BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01



DH5\_Ant1\_Hop




DH5\_Ant1\_Hop



BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01

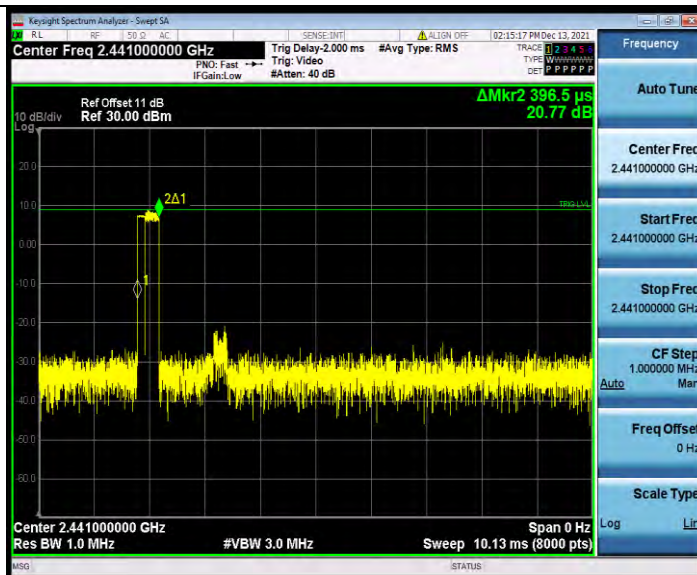

2DH1\_Ant1\_Hop




2DH1\_Ant1\_Hop



BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01

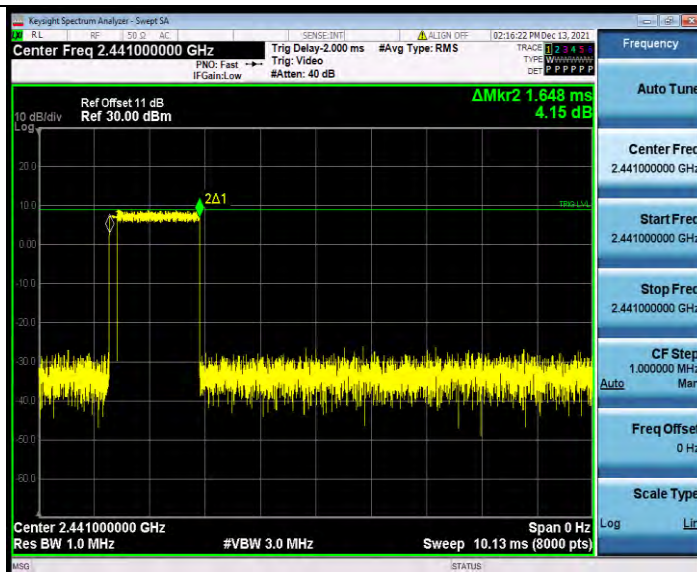

2DH3\_Ant1\_Hop




2DH3\_Ant1\_Hop




BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01

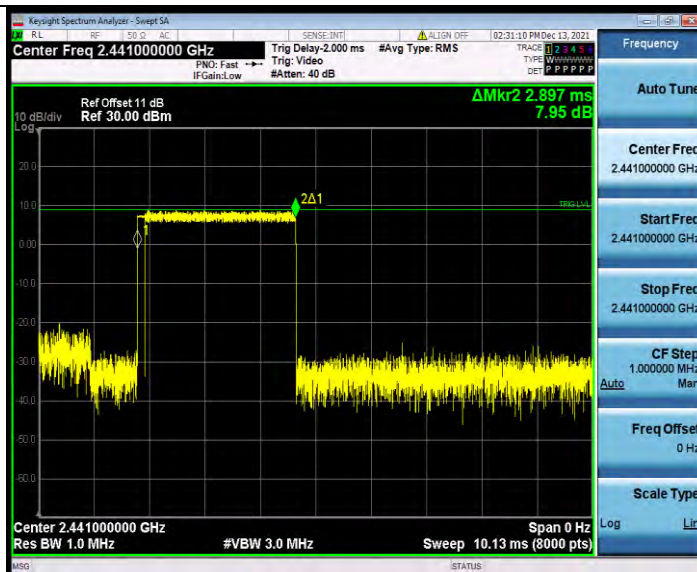

2DH5\_Ant1\_Hop

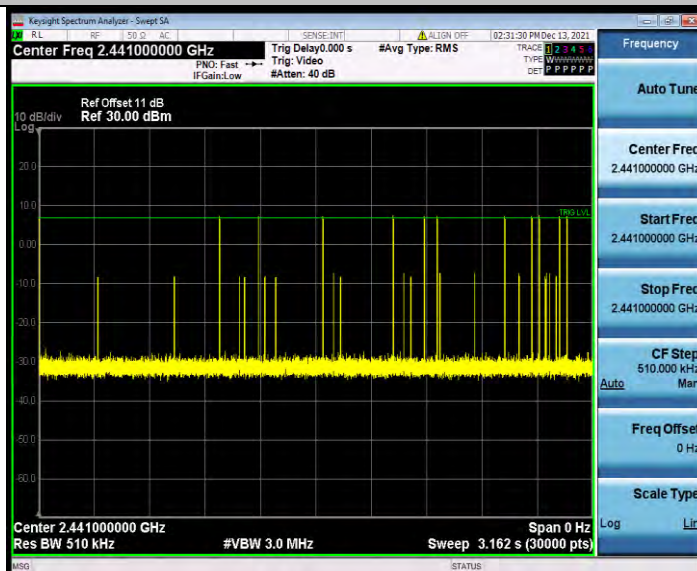


2DH5\_Ant1\_Hop




BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01

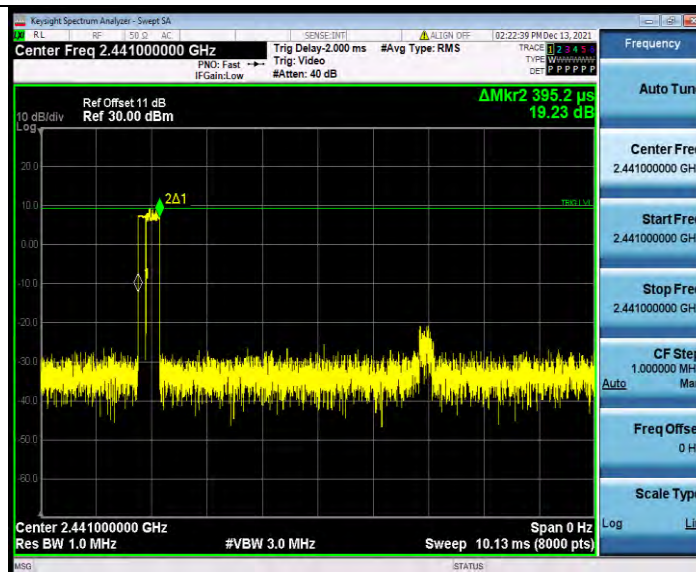

3DH1\_Ant1\_Hop

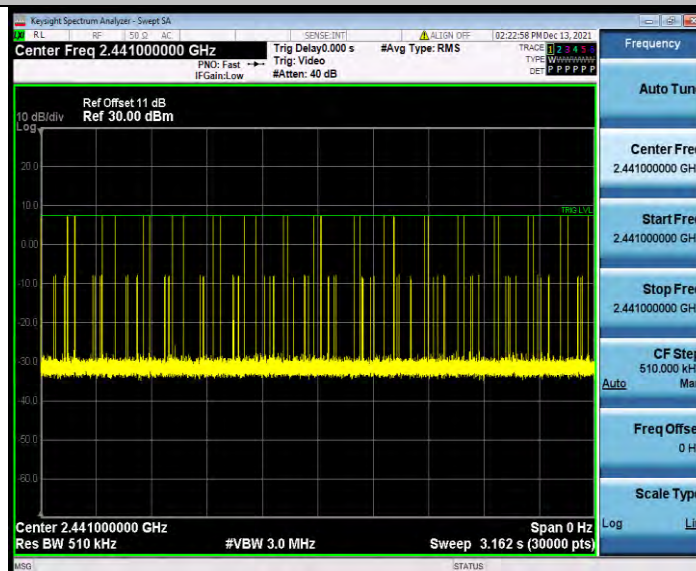


3DH1\_Ant1\_Hop




BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01

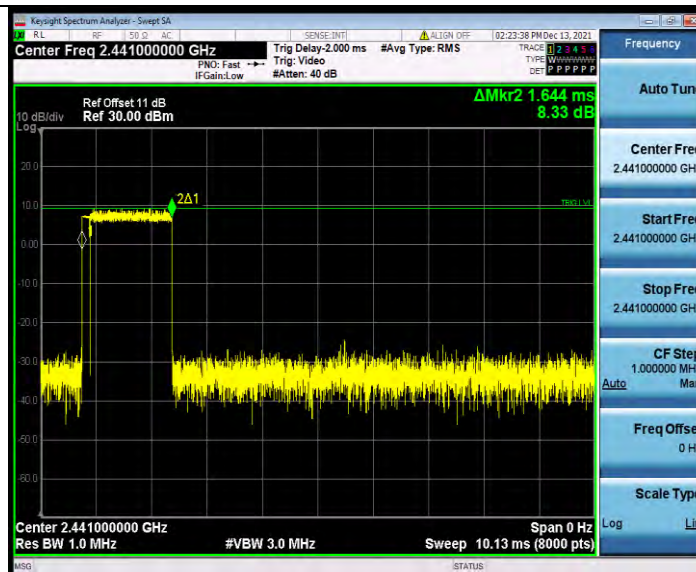

3DH3\_Ant1\_Hop

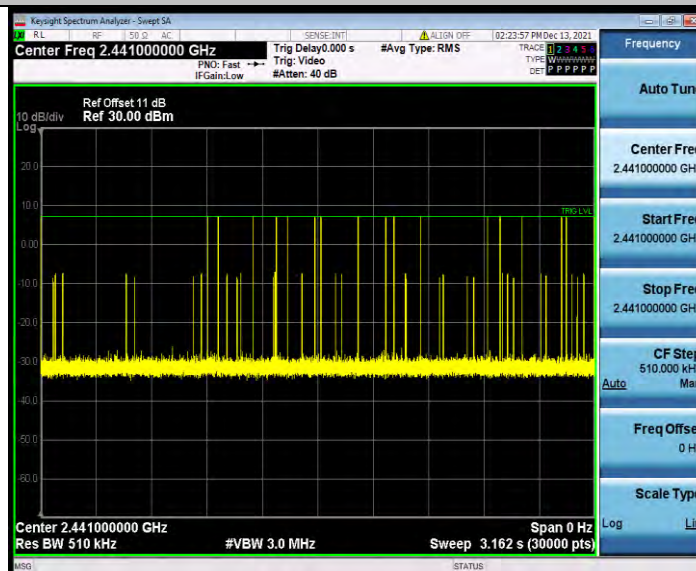


3DH3\_Ant1\_Hop



BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01

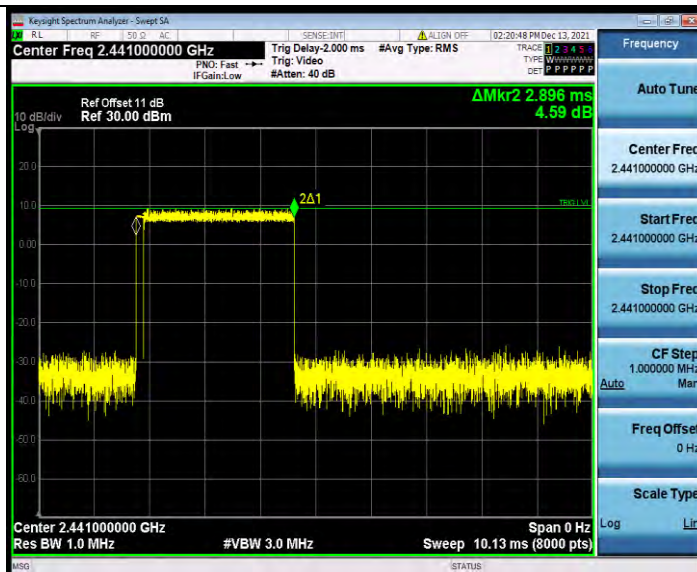

3DH5\_Ant1\_Hop




3DH5\_Ant1\_Hop

## **APPENDIX F: NUMBER OF HOPPING CHANNELS**

### **TEST RESULT**

| TestMode | Antenna | Channel | Result[Num] | Limit[Num] | Verdict |
|----------|---------|---------|-------------|------------|---------|
| DH5      | Ant1    | Hop     | 79          | ≥15        | PASS    |
| 2DH5     | Ant1    | Hop     | 79          | ≥15        | PASS    |
| 3DH5     | Ant1    | Hop     | 79          | ≥15        | PASS    |

## TEST GRAPHS

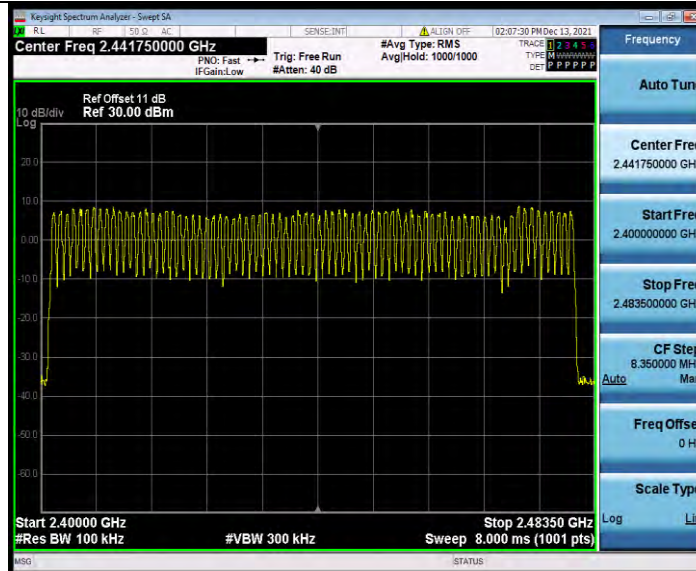

DH5\_Ant1\_Hop




2DH5\_Ant1\_Hop



BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01

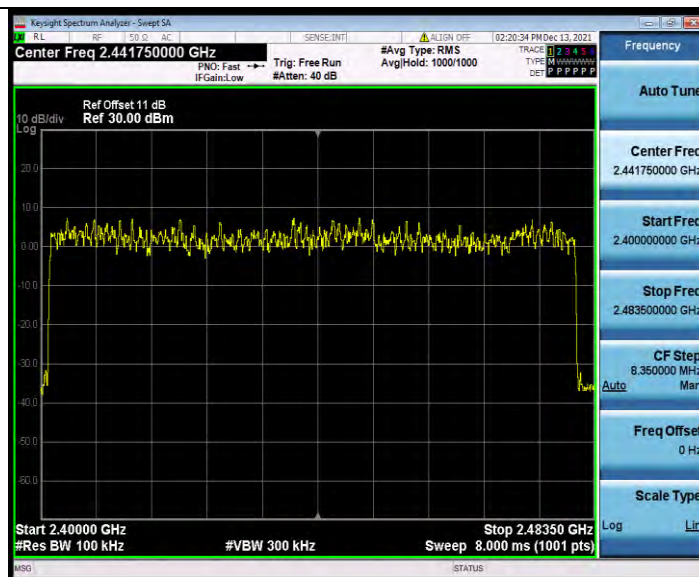


3DH5\_Ant1\_Hop

## APPENDIX G: BAND EDGE MEASUREMENTS


### TEST RESULT

| TestMode | Antenna | ChName | Channel  | RefLevel<br>[dBm] | Result<br>[dBm] | Limit<br>[dBm] | Verdict |
|----------|---------|--------|----------|-------------------|-----------------|----------------|---------|
| DH5      | Ant1    | Low    | 2402     | 7.99              | -43.78          | ≤-12.01        | PASS    |
|          |         | High   | 2480     | 7.46              | -43.42          | ≤-12.54        | PASS    |
|          |         | Low    | Hop_2402 | 7.84              | -47.3           | ≤-12.16        | PASS    |
|          |         | High   | Hop_2480 | 8.47              | -44             | ≤-11.53        | PASS    |
| 2DH5     | Ant1    | Low    | 2402     | 6.89              | -41.97          | ≤-13.12        | PASS    |
|          |         | High   | 2480     | 6.59              | -44.18          | ≤-13.41        | PASS    |
|          |         | Low    | Hop_2402 | 4.43              | -45.07          | ≤-15.57        | PASS    |
|          |         | High   | Hop_2480 | 7.52              | -43.75          | ≤-12.48        | PASS    |
| 3DH5     | Ant1    | Low    | 2402     | 7.21              | -40.59          | ≤-12.79        | PASS    |
|          |         | High   | 2480     | 6.48              | -44.04          | ≤-13.52        | PASS    |
|          |         | Low    | Hop_2402 | 4.57              | -44.95          | ≤-15.43        | PASS    |
|          |         | High   | Hop_2480 | 7.08              | -44.09          | ≤-12.92        | PASS    |

## TEST GRAPHS

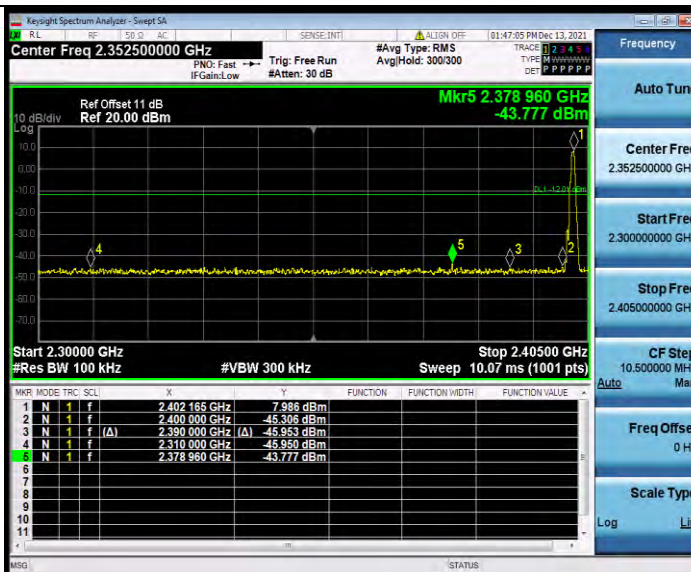

DH5\_Ant1\_Low\_2402

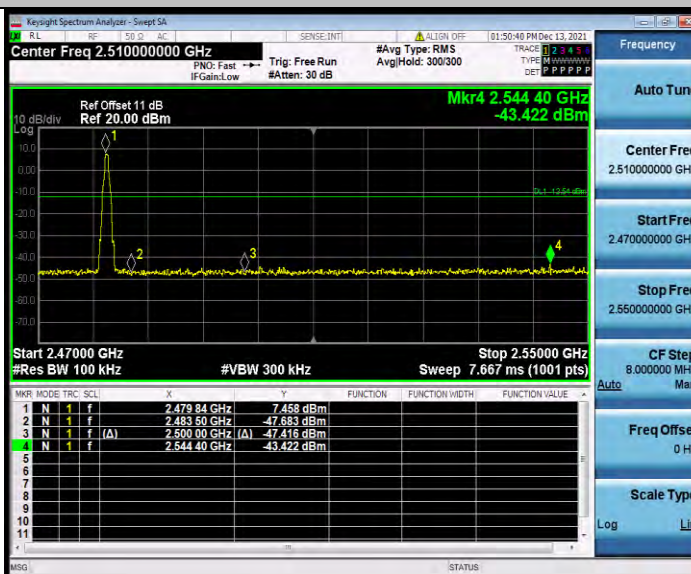


DH5\_Ant1\_High\_2480




BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01

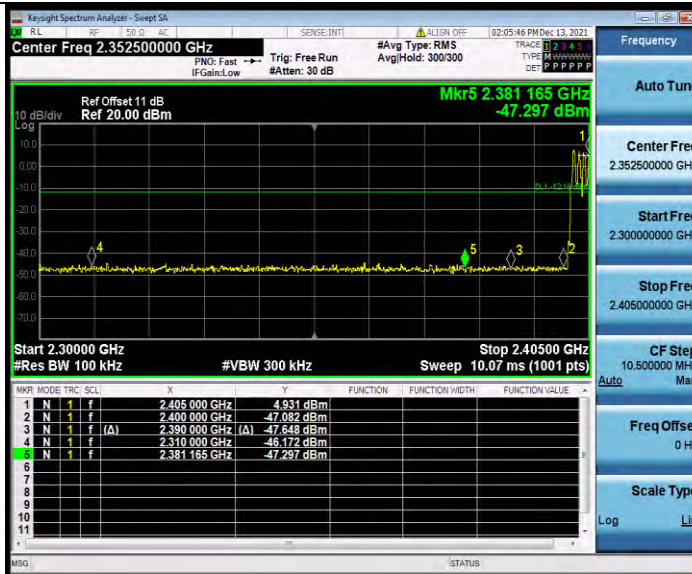

DH5\_Ant1\_Low\_Hop\_2402

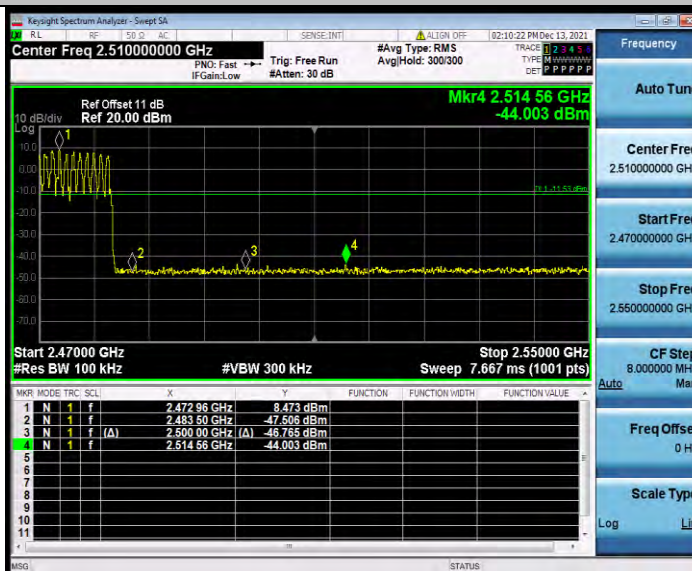


DH5\_Ant1\_High\_Hop\_2480




BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01

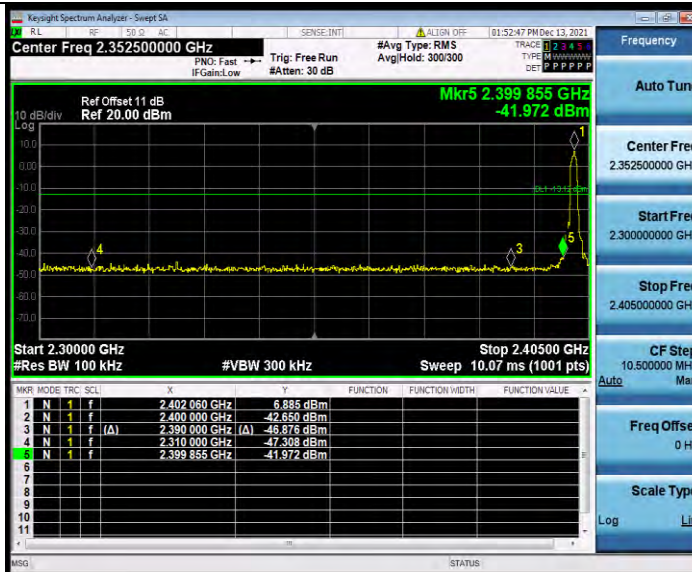

2DH5\_Ant1\_Low\_2402

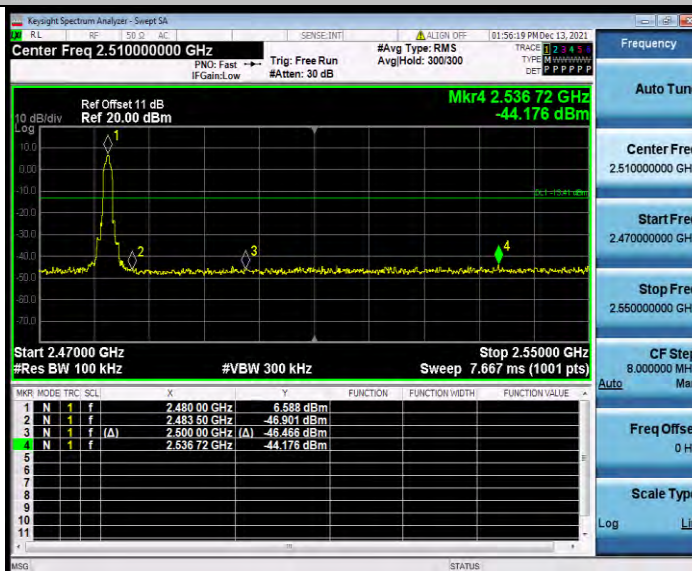


2DH5\_Ant1\_High\_2480




BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01

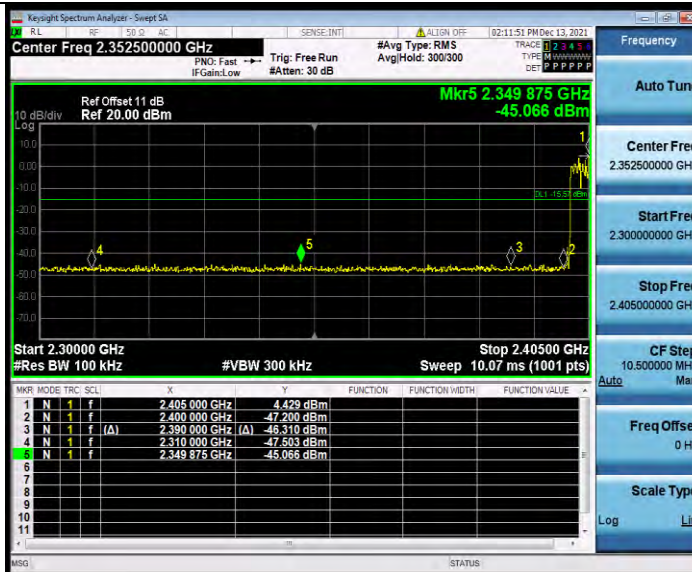

2DH5\_Ant1\_Low\_Hop\_2402

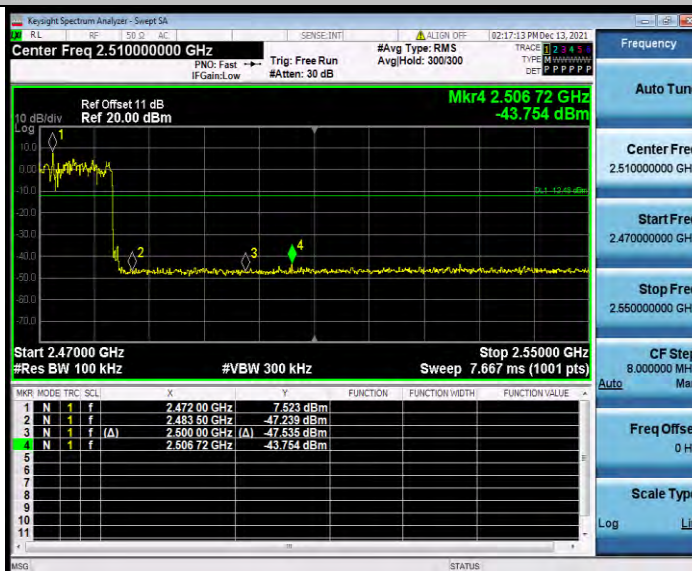


2DH5\_Ant1\_High\_Hop\_2480




BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01

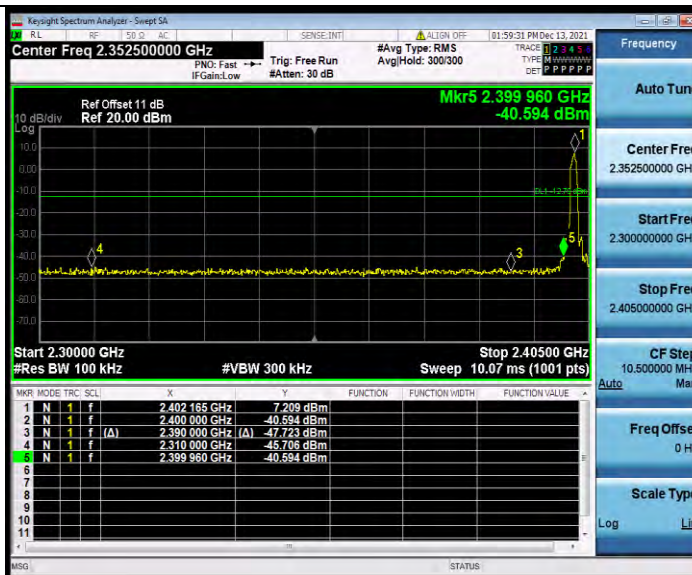

3DH5\_Ant1\_Low\_2402

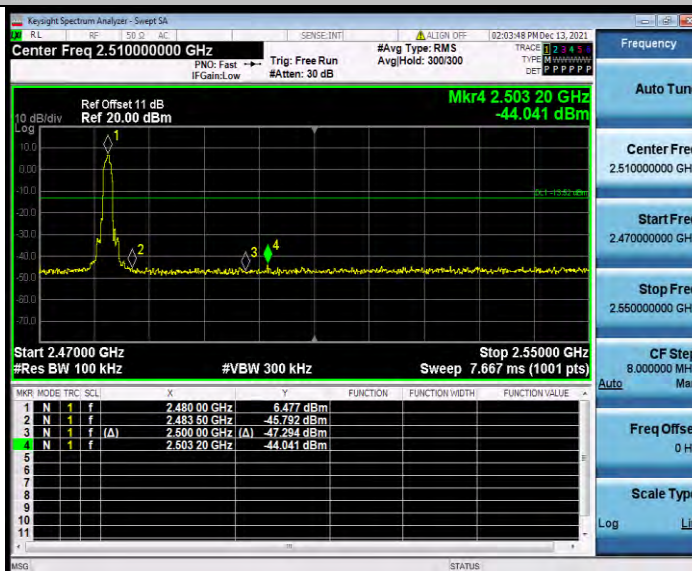


3DH5\_Ant1\_High\_2480




BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01

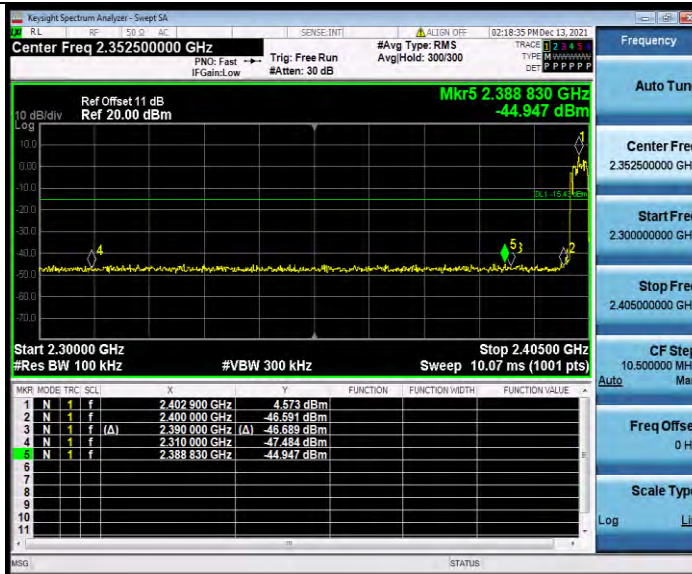

3DH5\_Ant1\_Low\_Hop\_2402

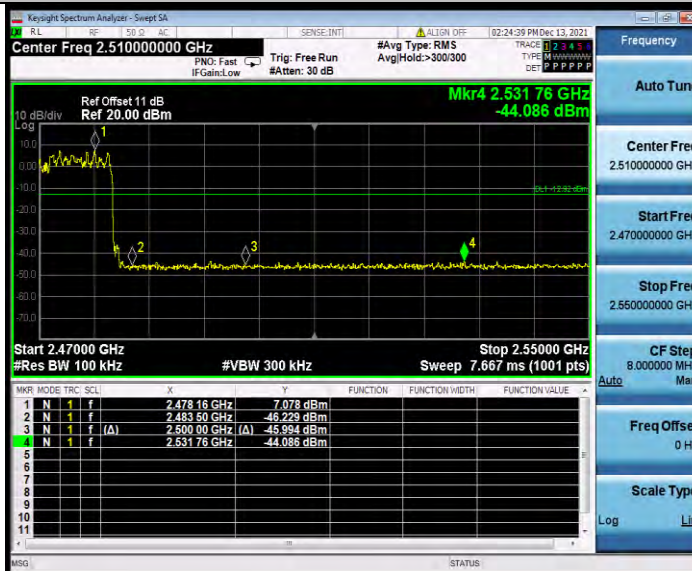

3DH5\_Ant1\_High\_Hop\_2480


## APPENDIX H: CONDUCTED SPURIOUS EMISSION TEST RESULT

| TestMode | Antenna | Channel | FreqRange<br>[MHz] | RefLevel<br>[dBm] | Result<br>[dBm] | Limit<br>[dBm] | Verdict |
|----------|---------|---------|--------------------|-------------------|-----------------|----------------|---------|
| DH5      | Ant1    | 2402    | Reference          | 7.61              | 7.61            | ---            | PASS    |
|          |         |         | 30~1000            | 7.61              | -54.2           | ≤-12.39        | PASS    |
|          |         |         | 1000~26500         | 7.61              | -38.26          | ≤-12.39        | PASS    |
|          |         | 2441    | Reference          | 6.90              | 6.90            | ---            | PASS    |
|          |         |         | 30~1000            | 6.90              | -54.18          | ≤-13.1         | PASS    |
|          |         |         | 1000~26500         | 6.90              | -38.81          | ≤-13.1         | PASS    |
|          |         | 2480    | Reference          | 7.25              | 7.25            | ---            | PASS    |
|          |         |         | 30~1000            | 7.25              | -54.19          | ≤-12.75        | PASS    |
|          |         |         | 1000~26500         | 7.25              | -38.03          | ≤-12.75        | PASS    |
| 2DH5     | Ant1    | 2402    | Reference          | 7.08              | 7.08            | ---            | PASS    |
|          |         |         | 30~1000            | 7.08              | -53.16          | ≤-12.92        | PASS    |
|          |         |         | 1000~26500         | 7.08              | -38.69          | ≤-12.92        | PASS    |
|          |         | 2441    | Reference          | 7.01              | 7.01            | ---            | PASS    |
|          |         |         | 30~1000            | 7.01              | -53.89          | ≤-12.99        | PASS    |
|          |         |         | 1000~26500         | 7.01              | -38.54          | ≤-12.99        | PASS    |
|          |         | 2480    | Reference          | 6.04              | 6.04            | ---            | PASS    |
|          |         |         | 30~1000            | 6.04              | -54.55          | ≤-13.97        | PASS    |
|          |         |         | 1000~26500         | 6.04              | -37.78          | ≤-13.97        | PASS    |
| 3DH5     | Ant1    | 2402    | Reference          | 6.02              | 6.02            | ---            | PASS    |
|          |         |         | 30~1000            | 6.02              | -53.63          | ≤-13.98        | PASS    |
|          |         |         | 1000~26500         | 6.02              | -37.92          | ≤-13.98        | PASS    |
|          |         | 2441    | Reference          | 4.29              | 4.29            | ---            | PASS    |
|          |         |         | 30~1000            | 4.29              | -54.36          | ≤-15.71        | PASS    |
|          |         |         | 1000~26500         | 4.29              | -38.53          | ≤-15.71        | PASS    |
|          |         | 2480    | Reference          | 6.23              | 6.23            | ---            | PASS    |
|          |         |         | 30~1000            | 6.23              | -54.03          | ≤-13.77        | PASS    |
|          |         |         | 1000~26500         | 6.23              | -38.4           | ≤-13.77        | PASS    |

## TEST GRAPHS



DH5\_Ant1\_2402\_0~Reference

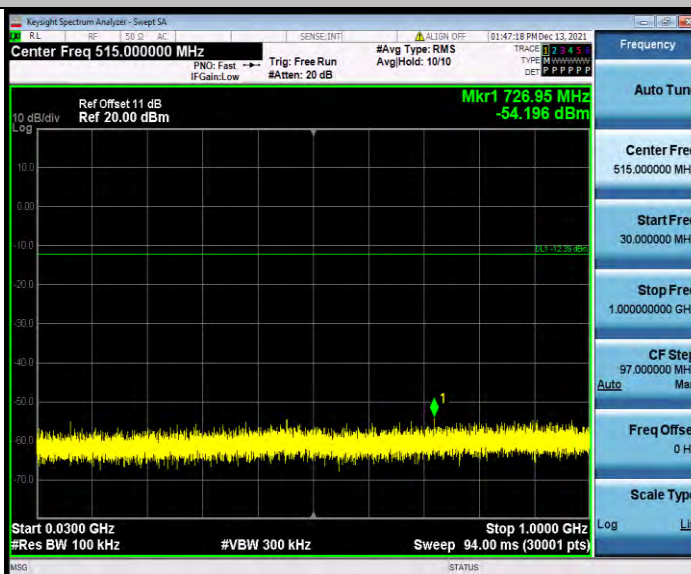


DH5\_Ant1\_2402\_30~1000



BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01

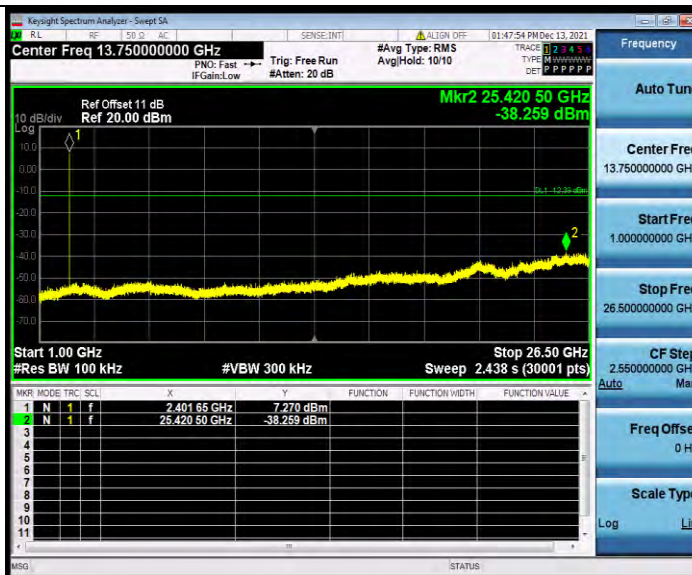

DH5\_Ant1\_2402\_1000~26500




DH5\_Ant1\_2441\_0~Reference



BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01

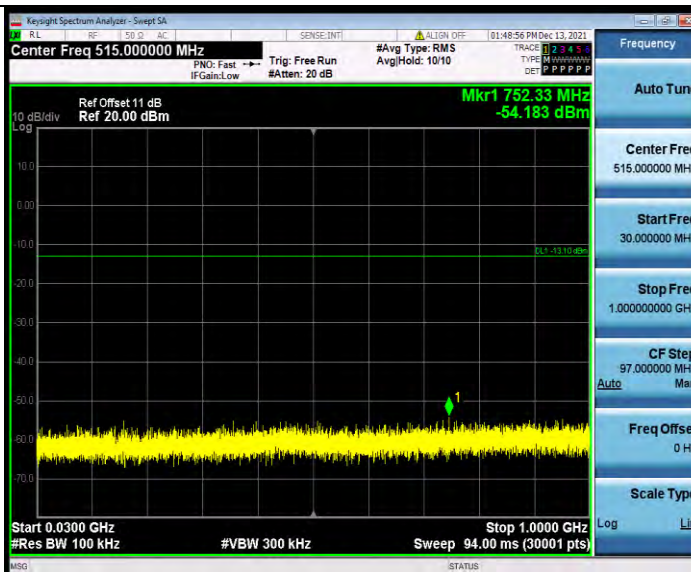

DH5\_Ant1\_2441\_30~1000



DH5\_Ant1\_2441\_1000~26500




BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01



DH5\_Ant1\_2480\_0~Reference

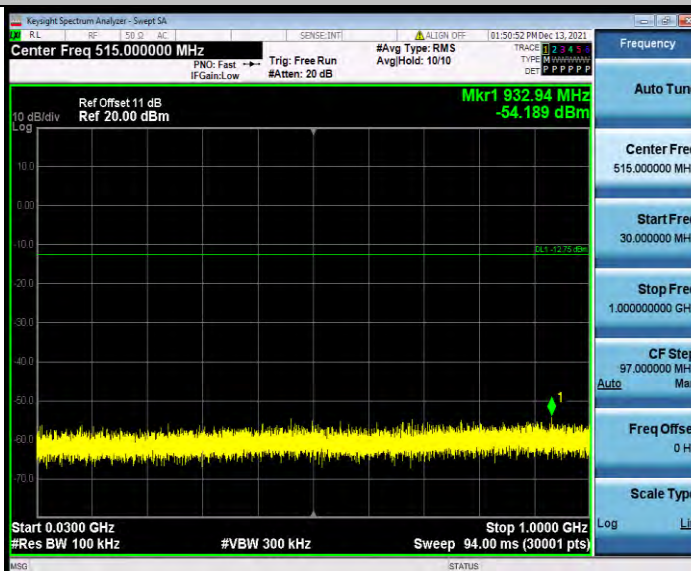

DH5\_Ant1\_2480\_30~1000



BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01



DH5\_Ant1\_2480\_1000~26500




2DH5\_Ant1\_2402\_0~Reference



BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01

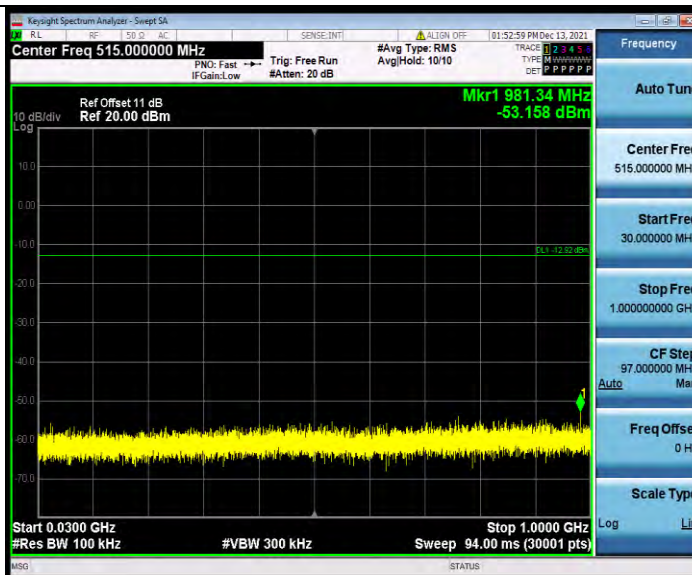

2DH5\_Ant1\_2402\_30~1000



2DH5\_Ant1\_2402\_1000~26500




BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01



2DH5\_Ant1\_2441\_0~Reference

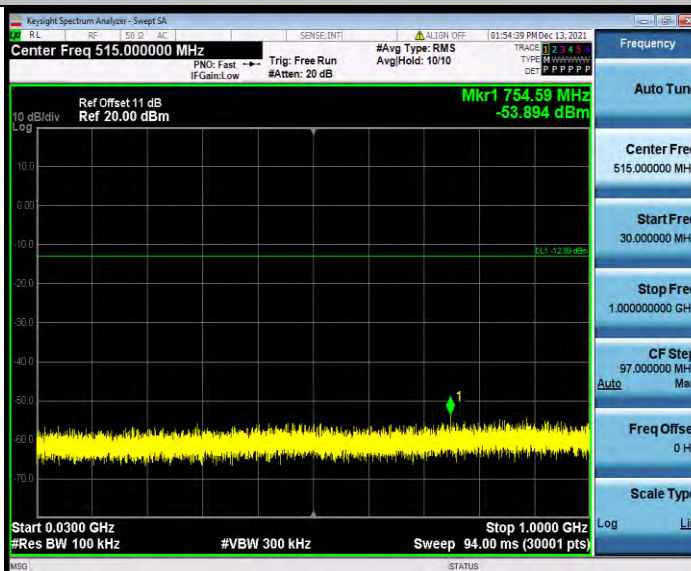

2DH5\_Ant1\_2441\_30~1000



BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01



2DH5\_Ant1\_2441\_1000~26500




2DH5\_Ant1\_2480\_0~Reference



BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01

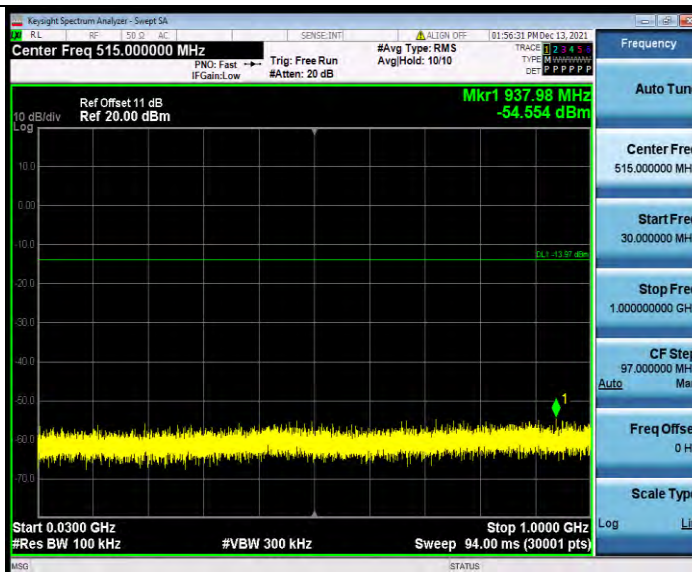

2DH5\_Ant1\_2480\_30~1000



2DH5\_Ant1\_2480\_1000~26500




BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01



3DH5\_Ant1\_2402\_0~Reference

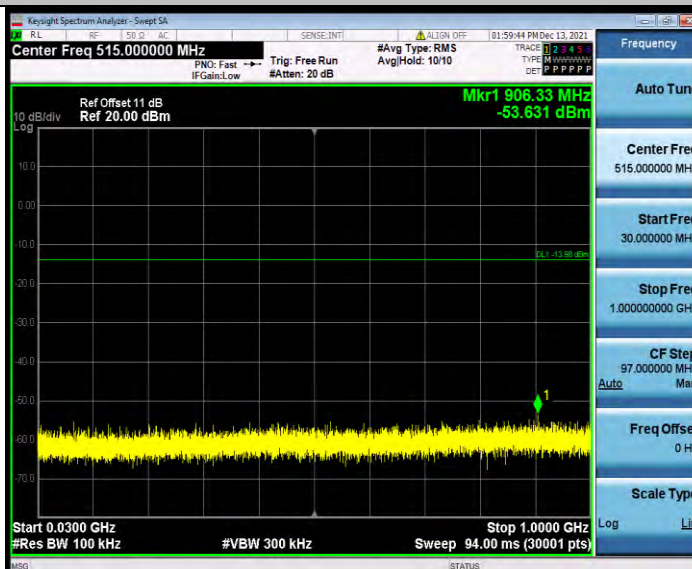

3DH5\_Ant1\_2402\_30~1000



BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01



3DH5\_Ant1\_2402\_1000~26500




3DH5\_Ant1\_2441\_0~Reference




BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01

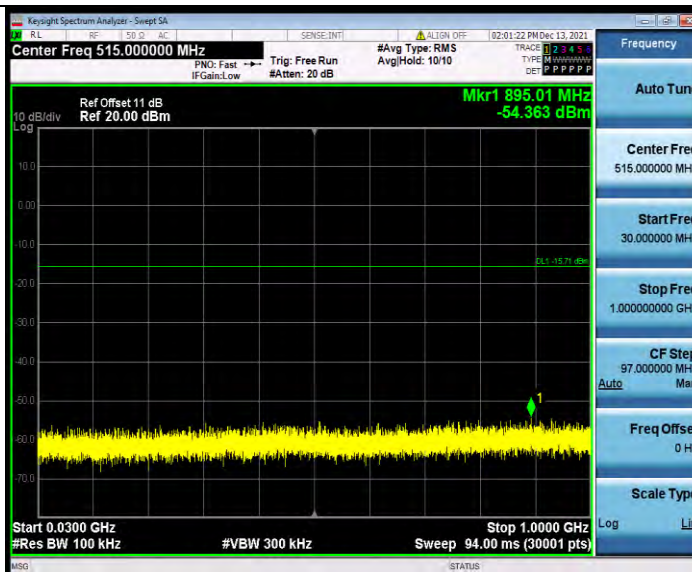

3DH5\_Ant1\_2441\_30~1000

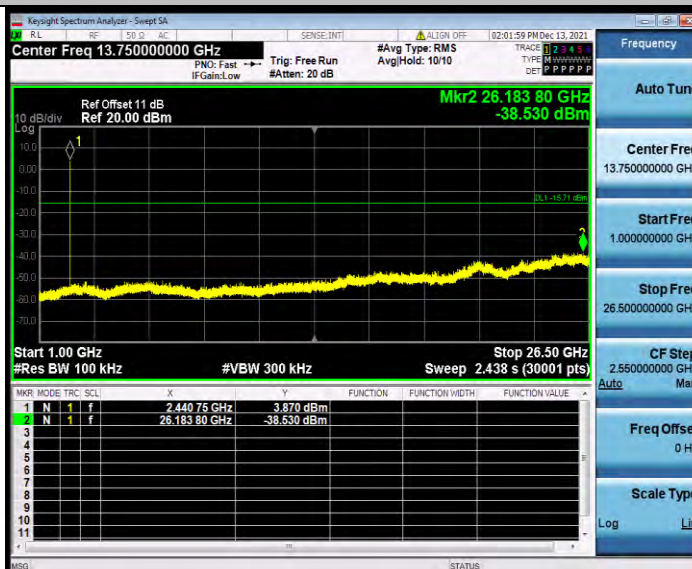

3DH5\_Ant1\_2441\_1000~26500



BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01



3DH5\_Ant1\_2480\_0~Reference



3DH5\_Ant1\_2480\_30~1000



BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01



3DH5\_Ant1\_2480\_1000~26500



BUREAU  
VERITAS


Test Report No.: W7L-P22090015-1RF01

## APPENDIX I: DUTY CYCLE


### TEST RESULT

| TestMode | Antenna | Channel | ON Time<br>[ms] | Period<br>[ms] | X      | DC<br>[%] | xFactor | Limit | Verdict |
|----------|---------|---------|-----------------|----------------|--------|-----------|---------|-------|---------|
| DH5      | Ant1    | 2402    | 2.91            | 3.75           | 0.7760 | 77.60     | 1.10    | ---   | PASS    |
|          |         | 2441    | 2.91            | 3.75           | 0.7760 | 77.60     | 1.10    | ---   | PASS    |
|          |         | 2480    | 2.91            | 3.75           | 0.7760 | 77.60     | 1.10    | ---   | PASS    |
| 2DH5     | Ant1    | 2402    | 2.90            | 3.75           | 0.7733 | 77.33     | 1.12    | ---   | PASS    |
|          |         | 2441    | 2.90            | 3.75           | 0.7733 | 77.33     | 1.12    | ---   | PASS    |
|          |         | 2480    | 2.90            | 3.75           | 0.7733 | 77.33     | 1.12    | ---   | PASS    |
| 3DH5     | Ant1    | 2402    | 2.90            | 3.75           | 0.7733 | 77.33     | 1.12    | ---   | PASS    |
|          |         | 2441    | 2.90            | 3.75           | 0.7733 | 77.33     | 1.12    | ---   | PASS    |
|          |         | 2480    | 2.90            | 3.75           | 0.7733 | 77.33     | 1.12    | ---   | PASS    |

## TEST GRAPHS

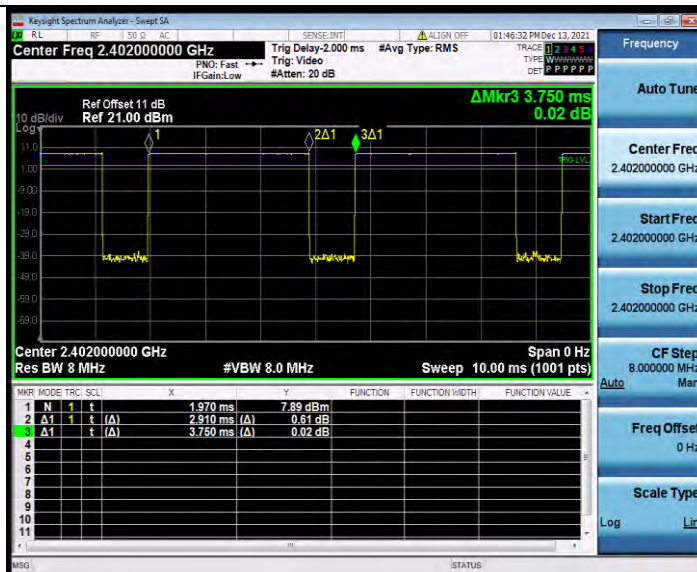

DH5\_Ant1\_2402

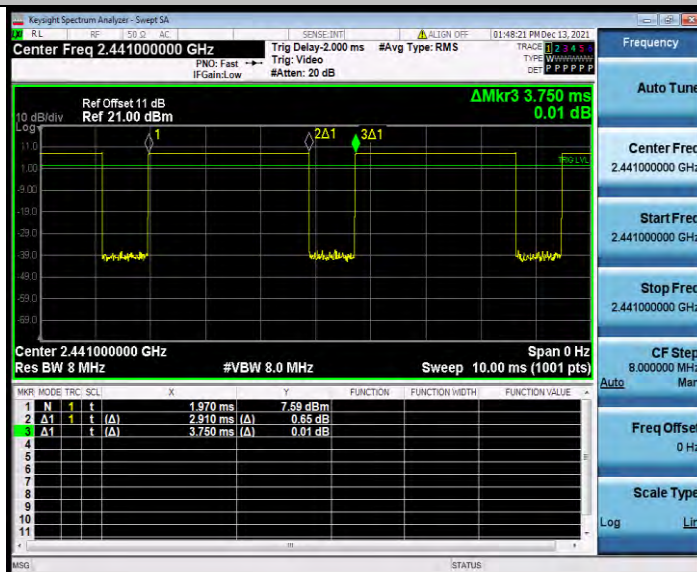


DH5\_Ant1\_2441




BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01

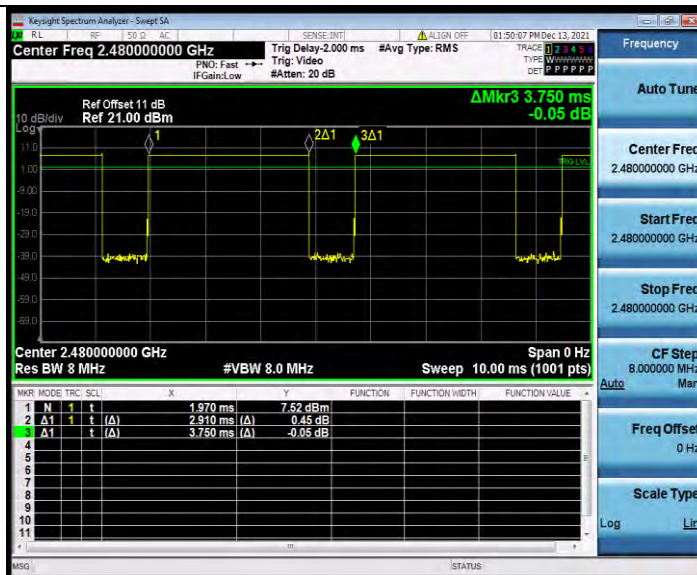

DH5\_Ant1\_2480

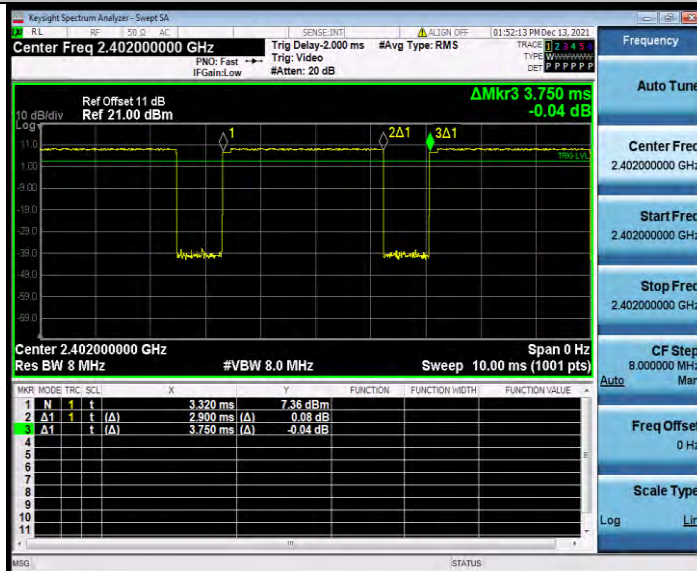


2DH5\_Ant1\_2402




BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01

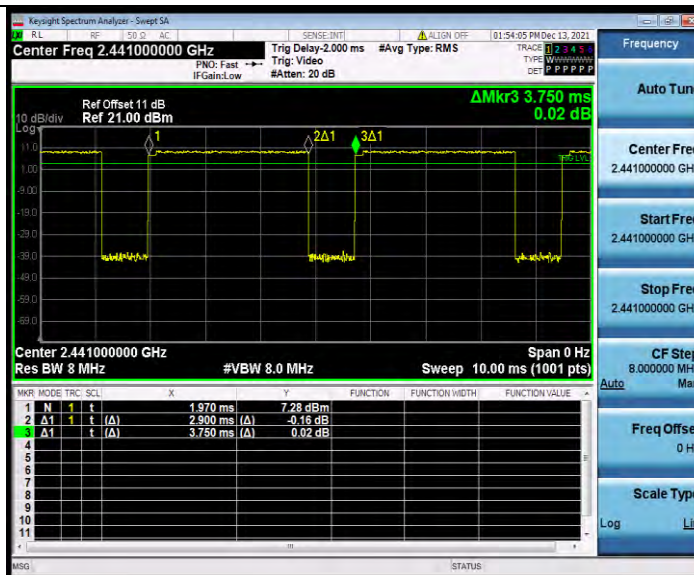

2DH5\_Ant1\_2441

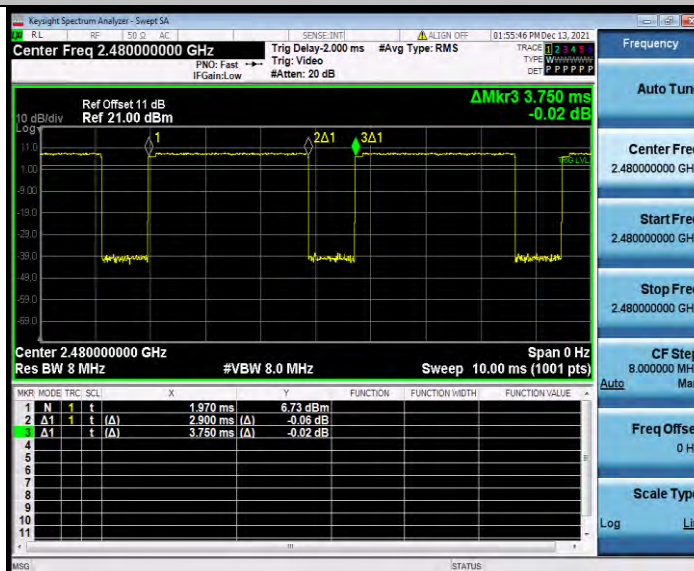


2DH5\_Ant1\_2480




BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01

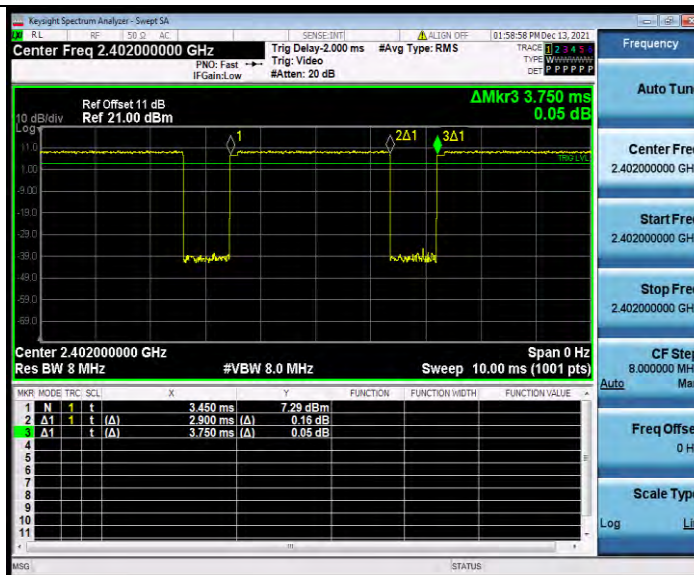

3DH5\_Ant1\_2402

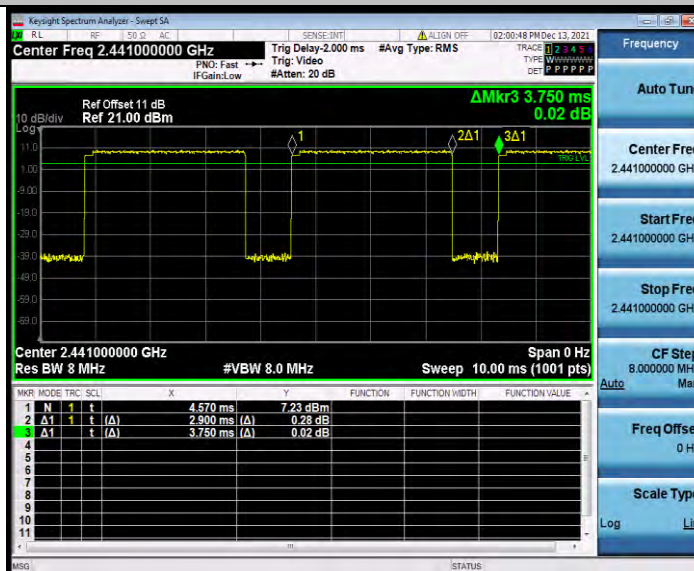


3DH5\_Ant1\_2441



BUREAU  
VERITAS

## Test Report No.: W7L-P22090015-1RF01

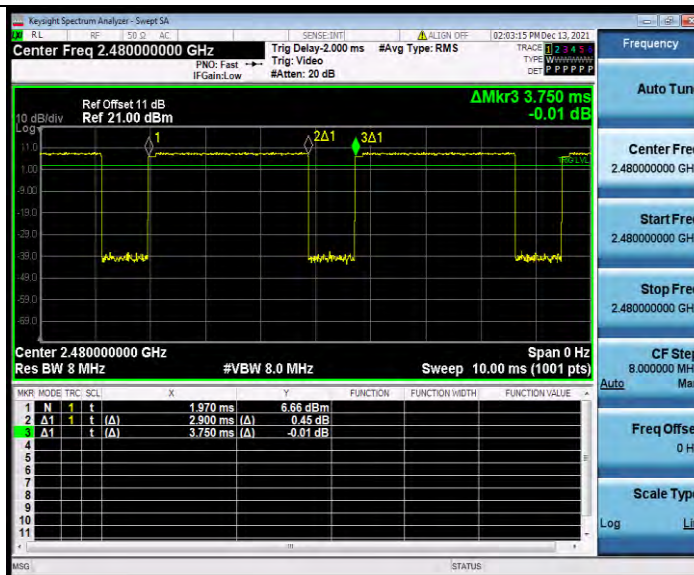

3DH5\_Ant1\_2480

---END---