

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China Tel: +86-755- 27521059 Fax: +86-755- 27521011 Http://www.sz-ctc.org.cn

TECT	. DE		DT
ICOL	RE	:PU	ואי

Report No. : CTC20210601E05

FCC ID...... 2AR24-AIBOX30M

Shenzhen Absen Optoelectronic Co.,Ltd Applicant ·-

18-20F Building 3A, Cloud Park, Bantian, Longgang District, Address—

Shenzhen, China

Manufacturer ·--Shenzhen Absen Optoelectronic Co.,Ltd

18-20F Building 3A, Cloud Park, Bantian, Longgang District, Address—

Shenzhen, China

LED Multimedia Processor Product Name -

Trade Mark····· /

Model/Type reference: Ai Box3.0 M

Listed Model(s)-

Standard FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of receipt of test sample...: Feb. 23, 2021

Date of testing...... Apr. 12, 2021 to Apr. 26, 2021

Date of issue...... Apr. 26, 2021

Result....: **PASS**

Compiled by:

(Printed name+signature) Jim Jiang Jin Jiang Miller Ma

Supervised by:

(Printed name+signature) Miller Ma

Approved by:

(Printed name+signature) Walter Chen jutter ch

Testing Laboratory Name.....: CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Address.....

Shenzhen, Guangdong, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.






Table of Contents

Page

Report No.: CTC20210601E05

1. TE	EST SUMMARY	3
1.1.	Test Standards	a
1.2.		
1.3.	TEST DESCRIPTION	
1.4.		
1.5.		
1.6.		
2. GI	SENERAL INFORMATION	
2. GI	ENERAL INFORMATION	
2.1.	CLIENT INFORMATION	6
2.2.	GENERAL DESCRIPTION OF EUT	6
2.3.	ACCESSORY EQUIPMENT INFORMATION	7
2.4.	OPERATION STATE	8
2.5.	MEASUREMENT INSTRUMENTS LIST	g
3. TE	EST ITEM AND RESULTS	11
3.1.	CONDUCTED EMISSION	11
3.2.		
3.3.	BAND EDGE EMISSIONS (RADIATED)	43
3.4.	BAND EDGE AND SPURIOUS EMISSIONS (CONDUCTED)	60
3.5.	DTS BANDWIDTH	94
3.6.	PEAK OUTPUT POWER	104
3.7.		
3.8.	DUTY CYCLE	116
2.0	ANTENNA PEOURPEAENT	126

Page 3 of 126

Report No.: CTC20210601E05



1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

RSS 247 Issue 2: Standard Specifications for Frequency Hopping Systems (FHSs) and Digital Transmission Systems (DTSs) Operating in the Bands 902-928MHz, 2400-2483.5MHz and 5725-5850MHz.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

1.2. Report Version

Revised No.	Date of issue	Description
01	Apr. 26, 2021	Original

1.3. Test Description


FCC Part 15 Subpart C (15.247) / RSS 247 Issue 2					
Test Item	Standard	Section	Result	Test	
rest item	FCC	IC		Engineer	
Antenna Requirement	15.203	1	Pass	Rod Luo	
Conducted Emission	15.207	RSS-Gen 8.8	Pass	Rod Luo	
Radiated Band Edge and Spurious Emissions	15.205&15.209& 15.247(d)	RSS 247 5.5	Pass	Rod Luo	
Conducted Band Edge and Spurious Emissions	15.247(d)	RSS 247 5.5	Pass	Rod Luo	
6dB Bandwidth	15.247(a)(2)	RSS 247 5.2 (a)	Pass	Rod Luo	
Conducted Max Output Power	15.247(b)(3)	RSS 247 5.4 (d)	Pass	Rod Luo	
Power Spectral Density	15.247(e)	RSS 247 5.2 (b)	Pass	Rod Luo	
Transmitter Radiated Spurious	15.209&15.247(d)	RSS 247 5.5& RSS-Gen 8.9	Pass	Rod Luo	

Note:

(1)The measurement uncertainty is not included in the test result.

(2)The test data except AC conducted emission and Radiated emission below 1GHz refer to CTC20210599E05(FCC ID: 2AR24-AIBOX30XS; Equipment code: DTS). The EUT wireless module, antenna, PCB layout and electrical circuit are the same, the difference is EUT size.

EN 中国国家认证认可监督管理委员会





1.4. Test Facility

CTC Laboratories, Inc.

Add: 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5365

CTC Laboratories, Inc. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation. Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug. 26, 2017.

1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01" Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.

CTC Laboratories, Inc.






Test Items Measurement Uncertainty Notes Transmitter power conducted 0.42 dB (1) Transmitter power Radiated 2.14 dB (1) Conducted spurious emissions 9kHz~40GHz 1.60 dB (1) Radiated spurious emissions 9kHz~40GHz 2.20 dB (1) Conducted Emissions 9kHz~30MHz 3.08 dB (1) Radiated Emissions 30~1000MHz 4.51 dB (1) Radiated Emissions 1~18GHz 5.84 dB (1) Radiated Emissions 18~40GHz 6.12 dB (1) Occupied Bandwidth (1)

1.6. Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	21°C ~27°C
Relative Humidity:	40%~60%
Air Pressure:	101kPa

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.





2. GENERAL INFORMATION


2.1. Client Information

Applicant:	Shenzhen Absen Optoelectronic Co.,Ltd
Address:	18-20F Building 3A, Cloud Park, Bantian, Longgang District, Shenzhen, China
Manufacturer:	Shenzhen Absen Optoelectronic Co.,Ltd
Address:	18-20F Building 3A, Cloud Park, Bantian, Longgang District, Shenzhen, China

Report No.: CTC20210601E05

2.2. General Description of EUT


Product Name:	LED Multimedia Processor
Trade Mark:	1
Model/Type reference:	Ai Box3.0 M
Listed Model(s):	1
Model Difference:	1
Power supply:	100-240V~ 50/60Hz 23W
RF Module Model:	ZK-7612U
Hardware version:	V1.0
Software version:	V1.0
WIFI 802.11b/ g/ n(HT20)/	n(HT40)
Modulation:	802.11b: DSSS(CCK, DQPSK, DBPSK) 802.11g/n: OFDM(BPSK, QPSK, 16QAM, 64QAM)
Operation frequency:	802.11b/g/n(HT20): 2412MHz~2462MHz 802.11n(HT40): 2422MHz~2452MHz
Channel number:	802.11b/g/n(HT20): 11 Channels 802.11n(HT40): 7 Channels
Channel separation:	5MHz
Antenna 1 or 2 type:	PCB Antenna
Antenna 1 or 2 gain:	5dBi





2.3. Accessory Equipment Information

Equipment Information						
Name	Model	S/N	Manufacturer			
Notebook	X220	1	Lenovo			
Cable Information	Cable Information					
Name	Shielded Type	Ferrite Core	Length			
USB Cable	Unshielded	NO	150cm			
AC Cable	Unshielded	NO	120cm			
Test Software Information						
Name	Software version	1	1			
MT7662 QA	V1.0.3.14	1	1			





2.4. Operation State

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing.

Operation Frequency List:

Channel	Frequency (MHz)
01	2412
02	2417
03	2422
04	2427
05	2432
06	2437
07	2442
08	2447
09	2452
10	2457
11	2462

Note: CH 01~CH 11 for 802.11b/g/n(HT20), CH 03~CH 09 for 802.11n(HT40)

Data Rated

Preliminary tests were performed in different data rate, and found which the below bit rate is worst case mode, so only show data which it is a worst case mode.

Mode	Data rate (worst mode)	
802.11b	1Mbps	
802.11g	6Mbps	
802.11n(HT20)	HT-MCS0	
802.11n(HT40)	HT-MCS0	

Test mode

For RF test items:


The engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions:

The EUT was set to connect with the WLAN AP under large package sizes transmission.

For Radiated spurious emissions test item:

The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data Recorded in the report.





Measurement Instruments List

Tonsce	Tonscend JS0806-2 Test system					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until	
1	Spectrum Analyzer	Rohde & Schwarz	FSU26	100105	Dec. 25, 2021	
2	Spectrum Analyzer	Rohde & Schwarz	FUV40-N	101331	Mar. 15, 2022	
3	MXG Vector Signal Generator	Agilent	N5182A	MY47420864	Dec. 25, 2021	
4	Signal Generator	Agilent	E8257D	MY46521908	Dec. 25, 2021	
5	Power Sensor	Agilent	U2021XA	MY5365004	Dec. 25, 2021	
6	Power Sensor	Agilent	U2021XA	MY5365006	Dec. 25, 2021	
7	Simultaneous Sampling DAQ	Agilent	U2531A	TW54493510	Dec. 25, 2021	
8	Climate Chamber	TABAI	PR-4G	A8708055	Dec. 25, 2021	
9	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	116410	Dec. 25, 2021	
10	Climate Chamber	ESPEC	MT3065	/	Dec. 25, 2021	
11	300328 v2.2.2 test system	TONSCEND	v2.6	1	1	

Radiate	Radiated Emission and Transmitter spurious emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until	
1	EMI Test Receiver	Rohde & Schwarz	ESCI	100658	Dec. 25, 2021	
2	High pass filter	micro-tranics	HPM50111	142	Dec. 25, 2021	
3	Log-Bicon Antenna	Schwarzbeck	CBL6141A	4180	Dec. 25, 2021	
4	Ultra-Broadband Antenna	ShwarzBeck	BBHA9170	25841	Dec. 25, 2021	
5	Loop Antenna	LAPLAC	RF300	9138	Dec. 25, 2021	
6	Spectrum Analyzer	Rohde & Schwarz	FSU26	100105	Dec. 25, 2021	
7	Horn Antenna	Schwarzbeck	BBHA 9120D	647	Dec. 25, 2021	
8	Pre-Amplifier	HP	8447D	1937A03050	Dec. 25, 2021	
9	Pre-Amplifier	EMCI	EMC051835	980075	Dec. 25, 2021	
10	Antenna Mast	UC	UC3000	N/A	N/A	
11	Turn Table	UC	UC3000	N/A	N/A	
12	Cable Below 1GHz	Schwarzbeck	AK9515E	33155	Dec. 25, 2021	
13	Cable Above 1GHz	Hubersuhner	SUCOFLEX 102	DA1580	Dec. 25, 2021	
14	Splitter	Mini-Circuit	ZAPD-4	400059	Dec. 25, 2021	
15	RF Connection Cable	HUBER+SUHNER	RE-7-FL	N/A	Dec. 25, 2021	
16	RF Connection Cable	Chengdu E-Microwave			Dec. 25, 2021	
17	High pass filter	Compliance	BSU-6	34202	Dec. 25, 2021	

CTC Laboratories, Inc.





Page 10 of 126

		Direction systems			
18	Attenuator	Chengdu E-Microwave	EMCAXX-10 RNZ-3		Dec. 25, 2021
19	High and low temperature box	ESPEC	MT3065	12114019	Dec. 25, 2021

Report No.: CTC20210601E05

Conducted Emission									
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until				
1	LISN	R&S	ENV216	101112	Dec. 25, 2021				
2	LISN	R&S	ENV216	101113	Dec. 25, 2021				
3	EMI Test Receiver	R&S	ESCI	100658	Dec. 25, 2021				

Note:1. The Cal. Interval was one year.

2. The cable loss has calculated in test result which connection between each test instruments.



3. TEST ITEM AND RESULTS

3.1. Conducted Emission


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207/ RSS - Gen 8.8:

Fraguency range (MUT)	Limit (dBuV)				
Frequency range (MHz)	Quasi-peak	Average			
0.15-0.5	66 to 56*	56 to 46*			
0.5-5	56	46			
5-30	60	50			

^{*} Decreases with the logarithm of the frequency.

Test Configuration

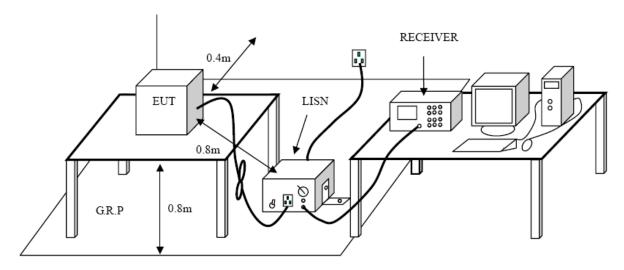

Test Procedure

- 1. The EUT was setup according to ANSI C63.10:2013 requirements.
- 2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
- 3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
- 4. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
- 5. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
- 6. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
- 7. During the above scans, the emissions were maximized by cable manipulation.






Test Mode:

Please refer to the clause 2.4.

Test Results

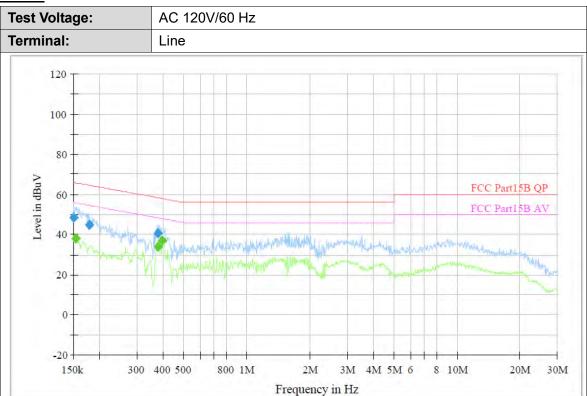

Final Measurement Detector 1


	Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)	Comment
ſ	0.150000	48.6	1000.00	9.000	On	L1	10.4	17.4	66.0	
	0.177380	44.6	1000.00	9.000	On	L1	10.4	20.0	64.6	
	0.378720	40.9	1000.00	9.000	On	L1	10.4	17.4	58.3	·

Final Measurement Detector 2

Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)	Comment
0.153640	38.1	1000.00	9.000	On	L1	10.4	17.7	55.8	
0.378720	33.9	1000.00	9.000	On	L1	10.4	14.4	48.3	
0.397300	36.8	1000.00	9.000	On	L1	10.4	11.1	47.9	

Emission Level= Read Level+ Correct Factor



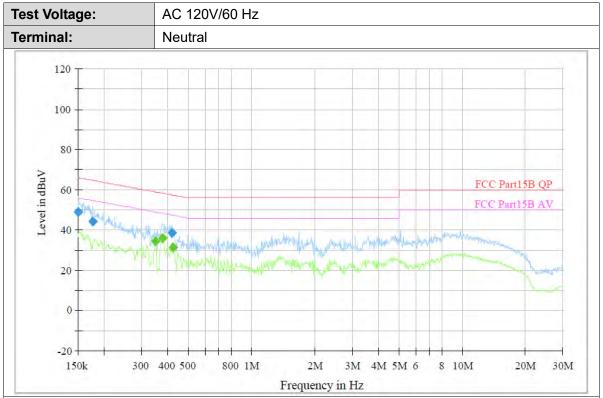


Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)	Comment
0.150600	49.1	1000.00	9.000	On	N	10.7	16.9	66.0	
0.175970	44.5	1000.00	9.000	On	N	10.7	20.2	64.7	
0.420140	38.5	1000.00	9.000	On	N	10.7	18.9	57.4	

Final Measurement Detector 2

Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)	Comment
0.346870	34.2	1000.00	9.000	On	N	10.7	14.8	49.0	
0.375700	35.9	1000.00	9.000	On	N	10.7	12.5	48.4	
0.421820	31.5	1000.00	9.000	On	N	10.7	15.9	47.4	

Emission Level= Read Level+ Correct Factor





3.2. Radiated Emission

<u>Limit</u>

FCC CFR Title 47 Part 15 Subpart C Section 15.209/ RSS - Gen 8.9:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)		
0.009~0.490	2400/F(KHz)	300		
0.490~1.705	24000/F(KHz)	30		
1.705~30.0	30	30		
30~88	100	3		
88~216	150	3		
216~960	200	3		
960~1000	500	3		


Fraguesov (MHT)	dB(uV/m) (at 3 meters)				
Frequency (MHz)	Peak	Average			
Above 1000	74	54			

Note:


- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m).

Test Configuration



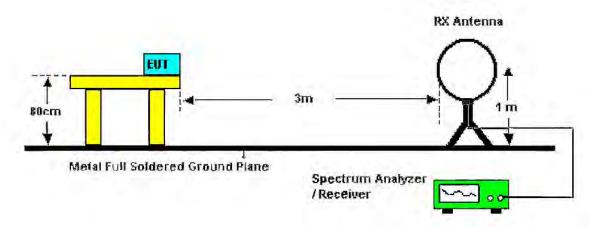


Below 30MHz Test Setup

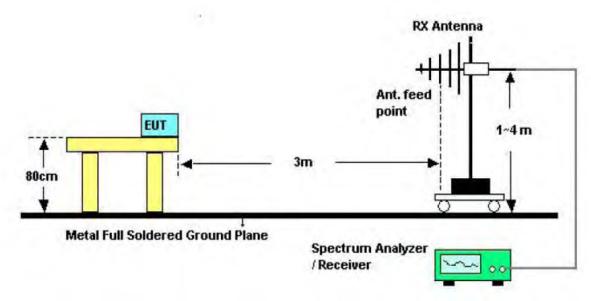

Below 1000MHz Test Setup



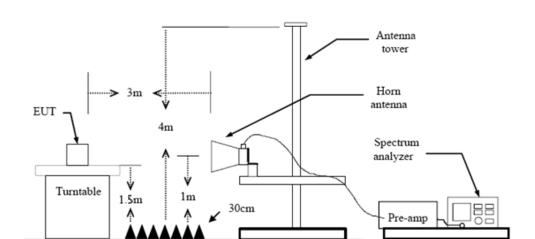

Above 1GHz Test Setup

Test Procedure

- 1. The EUT was setup and tested according to ANSI C63.10:2013
- 2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
- 3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
- 4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the quidelines.
- Set to the maximum power setting and enable the EUT transmit continuously.
- 6. Use the following spectrum analyzer settings
- (1) Span shall wide enough to fully capture the emission being measured;
- (2) Below 1 GHz:

RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;

If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

(3) From 1 GHz to 10th harmonic:

RBW=1MHz, VBW=3MHz Peak detector for Peak value.

RBW=1MHz, VBW≥1/T Peak detector for Average value.

Note 1: For the 1/T& Duty Cycle please refer to clause 3.8 Duty Cycle.

Test Mode

Please refer to the clause 2.4.

Test Result

9 KHz~30 MHz

From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Pre-scan all antenna, only show the test data for worse case antenna on the test report.





30MHz-1GHz

Ant. Pol.	Horizontal Ant 1 802.11b Mode 2412MHz				
Test Mode:					
Remark:	Only worse case is reported				
90.0 dBuV/m					
10 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	The Market Marke	FCC Part15 Class B 3M Radiation Margin -6 dB			
30.000 40 50 60	70 80 (MHz)	300 400 500 600 700 1000.00			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	55.2207	-18.16	51.41	33.25	40.00	-6.75	QP
2	151.0663	-16.87	52.73	35.86	43.50	-7.64	QP
3	165.4866	-18.07	54.93	36.86	43.50	-6.64	QP
4	191.0738	-20.21	56.27	36.06	43.50	-7.44	QP
5	230.0985	-19.85	55.90	36.05	46.00	-9.95	QP
6	280.0237	-18.36	58.03	39.67	46.00	-6.33	QP

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value



Ant. Pol.

Test Mode:

Ant 1 802.11b Mode 2412MHz

Remark:

Only worse case is reported

90.0 dBuV/m

FCC Part15 Class B 3M Radiation
Margin -6 dB

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	55.8046	-18.20	52.14	33.94	40.00	-6.06	QP
2	141.8262	-17.49	54.99	37.50	43.50	-6.00	QP
3	399.0300	-15.80	51.76	35.96	46.00	-10.04	QP
4	470.5230	-14.24	50.54	36.30	46.00	-9.70	QP
5	510.0434	-13.69	48.29	34.60	46.00	-11.40	QP
6	537.5891	-13.25	51.42	38.17	46.00	-7.83	QP

(MHz)

300

400

500

600 700

1000.000

Remarks:

-10

30.000


40

50

60

70 80

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor





Adobe 1GHz


Ant No.:	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX B Mode 2412MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

Report No.: CTC20210601E05

No.	Frequency (MHz)			Level (dBuV/m)		Margin (dB)	Detector
1	4823.856	-2.76	39.79	37.03	54.00	-16.97	AVG
2	4824.250	-2.76	53.04	50.28	74.00	-23.72	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor






Ant No.:	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX B Mode 2412MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)		Margin (dB)	Detector
1	4823.699	-2.76	38.41	35.65	54.00	-18.35	AVG
2	4824.210	-2.76	52.81	50.05	74.00	-23.95	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor






Ant No.:	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX B Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	ı	Margin (dB)	Detector
1	4873.689	-2.61	39.01	36.40	54.00	-17.60	AVG
2	4874.354	-2.61	53.93	51.32	74.00	-22.68	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor






Ant No.:	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX B Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	I	Margin (dB)	Detector
1	4873.890	-2.61	38.26	35.65	54.00	-18.35	AVG
2	4874.420	-2.61	52.47	49.86	74.00	-24.14	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor






Ant No.:	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX B Mode 2462MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)		Margin (dB)	Detector
1	4923.857	-2.47	53.02	50.55	74.00	-23.45	peak
2	4924.208	-2.47	38.61	36.14	54.00	-17.86	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor






Ant No.:	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX B Mode 2462MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)		Margin (dB)	Detector
1	4923.795	-2.47	52.44	49.97	74.00	-24.03	peak
2	4924.236	-2.47	38.22	35.75	54.00	-18.25	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor






Ant No.:	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX G Mode 2412MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Factor (dB/m)	_	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4824.003	-2.76	53.61	50.85	74.00	-23.15	peak
2	4824.025	-2.76	38.99	36.23	54.00	-17.77	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor






Ant No.:	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX G Mode 2412MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)		Margin (dB)	Detector
1	4824.136	-2.76	38.22	35.46	54.00	-18.54	AVG
2	4824.215	-2.76	52.41	49.65	74.00	-24.35	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor






Ant No.:	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX G Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)		Margin (dB)	Detector
1	4873.757	-2.61	38.64	36.03	54.00	-17.97	AVG
2	4874.077	-2.61	52.71	50.10	74.00	-23.90	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor






Ant No.:	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX G Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)		Margin (dB)	Detector
1	4873.784	-2.61	52.28	49.67	74.00	-24.33	peak
2	4874.451	-2.61	38.23	35.62	54.00	-18.38	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor






Ant No.:	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX G Mode 2462MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)		Margin (dB)	Detector
1	4923.850	-2.47	53.03	50.56	74.00	-23.44	peak
2	4924.302	-2.47	38.80	36.33	54.00	-17.67	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor






Ant No.:	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX G Mode 2462MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	ı	Margin (dB)	Detector
1	4923.768	-2.47	38.15	35.68	54.00	-18.32	AVG
2	4924.352	-2.47	52.79	50.32	74.00	-23.68	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor





Ant No.:	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX N20 Mode 2412MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)		Margin (dB)	Detector
1	4824.168	-2.76	39.12	36.36	54.00	-17.64	AVG
2	4824.452	-2.76	53.64	50.88	74.00	-23.12	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor






Ant No.:	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX N20 Mode 2412MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)		Margin (dB)	Detector
1	4823.685	-2.76	52.53	49.77	74.00	-24.23	peak
2	4824.805	-2.76	38.31	35.55	54.00	-18.45	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor






Ant No.:	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX N20 Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)		Margin (dB)	Detector
1	4873.698	-2.61	38.64	36.03	54.00	-17.97	AVG
2	4874.454	-2.61	52.73	50.12	74.00	-23.88	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor






Ant No.:	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX N20 Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)		Margin (dB)	Detector
1	4873.757	-2.61	38.41	35.80	54.00	-18.20	AVG
2	4874.414	-2.61	52.47	49.86	74.00	-24.14	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor





Ant No.:	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX N20 Mode 2462MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)		Margin (dB)	Detector
1	4923.857	-2.47	38.33	35.86	54.00	-18.14	AVG
2	4924.020	-2.47	52.99	50.52	74.00	-23.48	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor






Ant No.:	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX N20 Mode 2462MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)		Margin (dB)	Detector
1	4923.675	-2.47	51.92	49.45	74.00	-24.55	peak
2	4924.420	-2.47	37.99	35.52	54.00	-18.48	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor






Ant No.:	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX N40 Mode 2422MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)		Margin (dB)	Detector
1	4844.032	-2.70	52.45	49.75	74.00	-24.25	peak
2	4844.352	-2.70	38.68	35.98	54.00	-18.02	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor







Ant No.:	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX N40 Mode 2422MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	I	Margin (dB)	Detector
1	4843.451	-2.70	52.91	50.21	74.00	-23.79	peak
2	4844.342	-2.70	38.22	35.52	54.00	-18.48	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn





Ant No.:	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX N40 Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	ı	Margin (dB)	Detector
1	4873.952	-2.61	38.35	35.74	54.00	-18.26	AVG
2	4874.212	-2.61	52.81	50.20	74.00	-23.80	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Accreditation Administration of the People's Republic of China: <u>yz.cnca.cn</u>






Ant No.:	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX N40 Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	I	Margin (dB)	Detector
1	4873.210	-2.61	52.53	49.92	74.00	-24.08	peak
2	4874.321	-2.61	38.17	35.56	54.00	-18.44	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor





Ant No.:	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX N40 Mode 2452MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)		Margin (dB)	Detector
1	4904.018	-2.53	38.15	35.62	54.00	-18.38	AVG
2	4904.210	-2.53	52.74	50.21	74.00	-23.79	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor





Ant No.:	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX N40 Mode 2452MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	l	Margin (dB)	Detector
1	4904.056	-2.53	52.18	49.65	74.00	-24.35	peak
2	4904.421	-2.53	37.84	35.31	54.00	-18.69	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor




3.3. Band Edge Emissions (Radiated)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d)/ RSS 247 5.5:

Restricted Frequency Band	(dBuV/m)(at 3m)				
(MHz)	Peak	Average			
2310 ~2390	74	54			
2483.5 ~2500	74	54			

Test Configuration

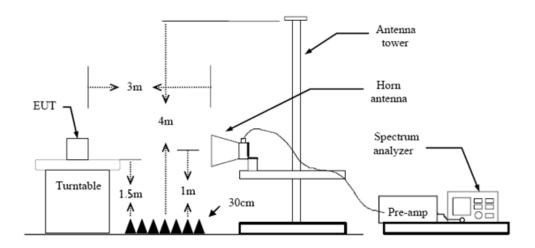


Test Procedure

- 1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
- 2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
- 3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
- 4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
- 5. The receiver set as follow:
 - RBW=1MHz, VBW=3MHz Peak detector for Peak value.
 - RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.7 Duty Cycle.

Test Mode


Please refer to the clause 2.4.





Test Results

Pre-scan all antenna, only show the test data for worse case antenna on the test report.

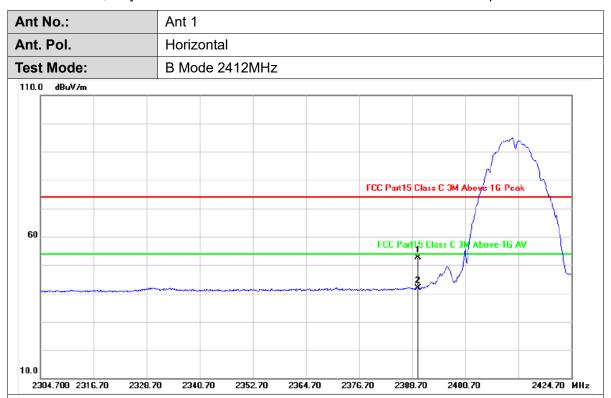

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	l	Margin (dB)	Detector
1	2390.000	31.10	21.49	52.59	74.00	-21.41	peak
2	2390.000	31.10	10.79	41.89	54.00	-12.11	AVG

Remarks:


1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Accreditation Administration of the People's Republic of China: yz.cnca.cn

2428.80 MHz



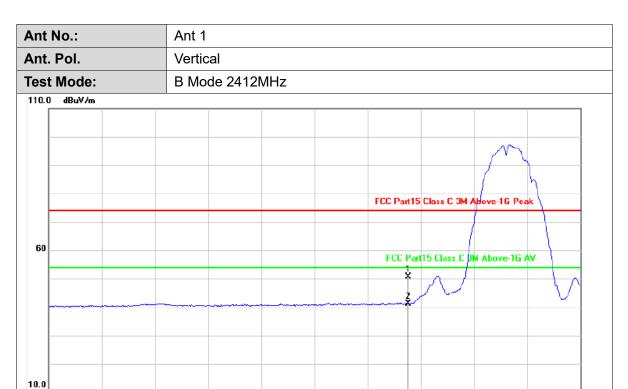

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)		Margin (dB)	Detector
1	2390.000	31.10	19.64	50.74	74.00	-23.26	peak
2	2390.000	31.10	10.14	41.24	54.00	-12.76	AVG

2368.80

2380.80

2392.80

2404.80

Remarks:

2308.800 2320.80

2332.80

2344.80

2356.80


1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor



Ant No.: Ant 1 Ant. Pol. Horizontal

Report No.: CTC20210601E05

Test Mode: B Mode 2462 MHz

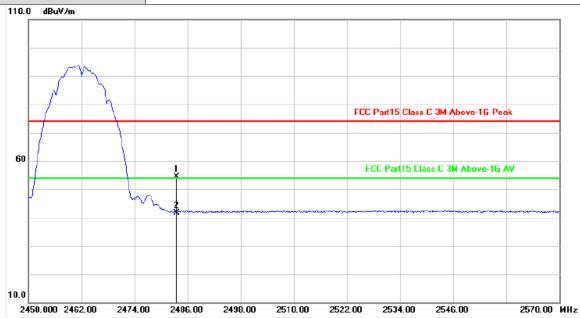

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	l	Margin (dB)	Detector
1	2483.500	31.50	22.79	54.29		-19.71	peak
2	2483.500	31.50	10.15	41.65	54.00	-12.35	AVG


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor



Ant No.: Ant 1 Ant. Pol. Vertical

Report No.: CTC20210601E05

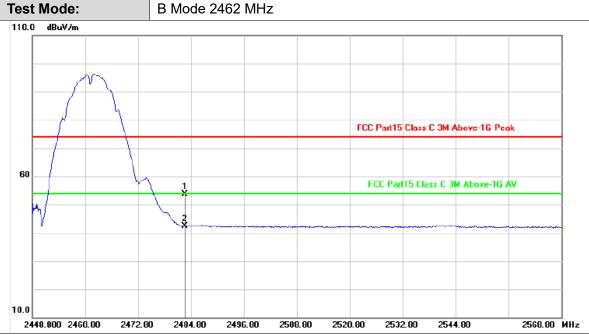


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	ı	Margin (dB)	Detector
1	2483.500	31.50	22.20	53.70	74.00	-20.30	peak
2	2483.500	31.50	10.98	42.48	54.00	-11.52	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor



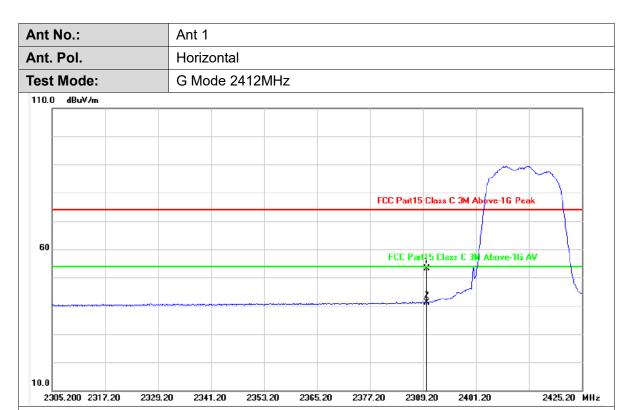


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	I	Margin (dB)	Detector
1	2390.000	31.10	21.92	53.02	74.00	-20.98	peak
2	2390.000	31.10	10.09	41.19	54.00	-12.81	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor



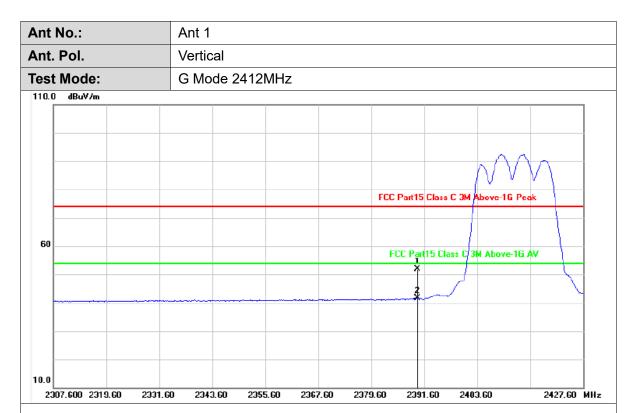


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	l	Margin (dB)	Detector
1	2390.000	31.10	20.67	51.77	74.00	-22.23	peak
2	2390.000	31.10	10.46	41.56	54.00	-12.44	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor




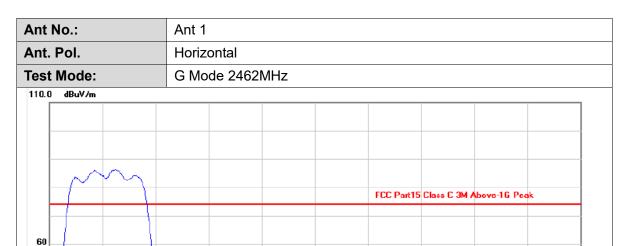

FCC Part15 Class C 3M Above-1G AV

2544.80

2568.80 MHz



2508.80

2520.80

2532.80

Remarks:

10.0

2448.800 2460.80

2472.80

2484.80

2496.80

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor



Ant No.: Ant 1 Ant. Pol. Vertical G Mode 2462MHz **Test Mode:** 110.0 dBuV/m FCC Part15 Class C 3M Above-1G Peak 60 FCC Part15 Class C 3M Above-1G AV

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	l	Margin (dB)	Detector
1	2483.500	31.50	22.84	54.34	74.00	-19.66	peak
2	2483.500	31.50	10.70	42.20	54.00	-11.80	AVG

2507.60

2519.60

2531.60

2543.60

2567.60 MHz

Remarks:

10.0

2447.600 2459.60


2471.60

2483.60

2495.60

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor



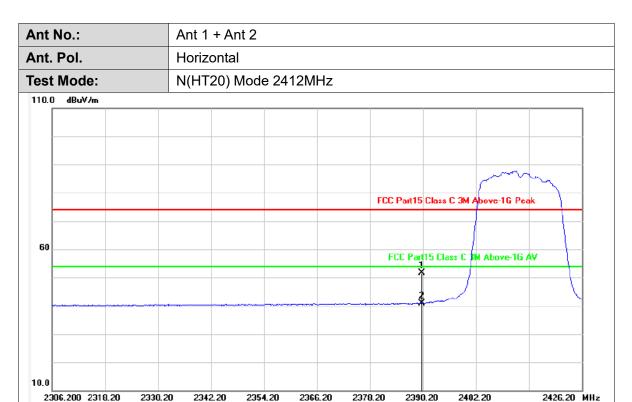


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	ı	Margin (dB)	Detector
1	2390.000	31.10	20.53	51.63	74.00	-22.37	peak
2	2390.000	31.10	9.88	40.98	54.00	-13.02	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor



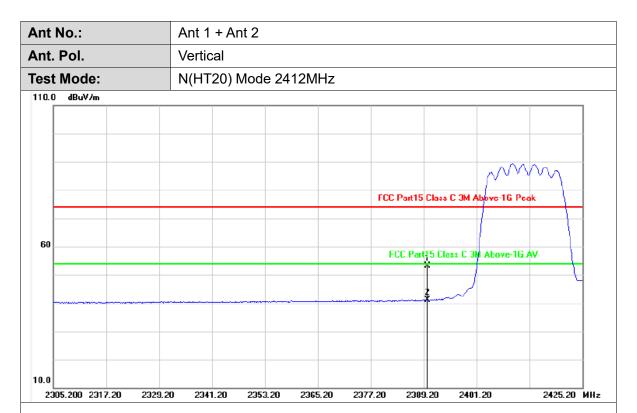

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	l	Margin (dB)	Detector
1	2390.000	31.10	22.10	53.20	74.00	-20.80	peak
2	2390.000	31.10	10.10	41.20	54.00	-12.80	AVG


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor



Ant No.: Ant 1 + Ant 2 Ant. Pol. Horizontal **Test Mode:** N(HT20) Mode 2462MHz

Report No.: CTC20210601E05

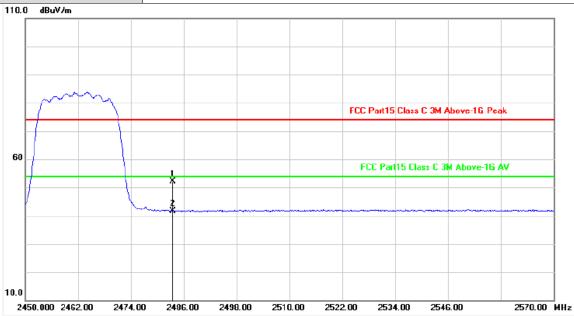

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	l	Margin (dB)	Detector
1	2483.500	31.50	20.53	52.03	74.00	-21.97	peak
2	2483.500	31.50	10.13	41.63	54.00	-12.37	AVG

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value



Ant No.: Ant 1 + Ant 2 Ant. Pol. Vertical **Test Mode:** N(HT20) Mode 2462MHz 110.0 dBuV/m FCC Part15 Class C 3M Above-1G Peak 60 FCC Part15 Class C 3M Above-1G AV

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	l	Margin (dB)	Detector
1	2483.500	31.50	21.08	52.58	74.00	-21.42	peak
2	2483.500	31.50	10.66	42.16	54.00	-11.84	AVG

2510.00

2522.00

2534.00

2546.00

2570.00 MHz

Remarks:

10.0

2450.000 2462.00

2474.00


2486.00

2498.00

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor





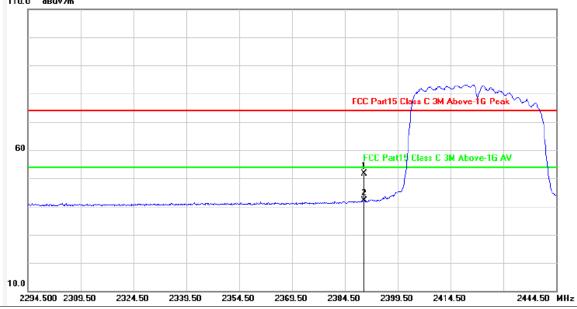


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)		Margin (dB)	Detector
1	2390.000	31.10	20.60	51.70	74.00	-22.30	peak
2	2390.000	31.10	10.95	42.05	54.00	-11.95	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor



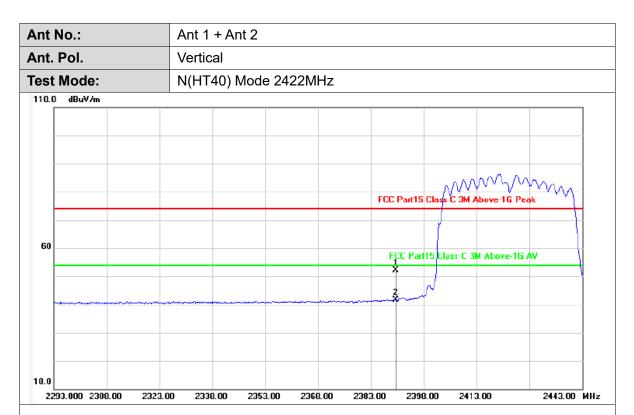

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	l	Margin (dB)	Detector
1	2390.000	31.10	21.06	52.16	74.00	-21.84	peak
2	2390.000	31.10	10.63	41.73	54.00	-12.27	AVG


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor



Ant No.: Ant 1 + Ant 2 Ant. Pol. Horizontal

Report No.: CTC20210601E05

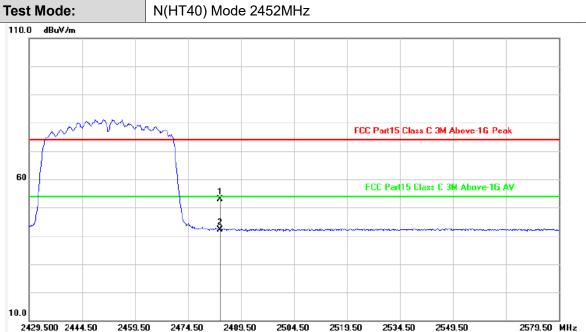

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	l	Margin (dB)	Detector
1	2483.500	31.50	21.42	52.92	74.00	-21.08	peak
2	2483.500	31.50	10.62	42.12	54.00	-11.88	AVG


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor



Ant No.: Ant 1 + Ant 2 Ant. Pol. Vertical

Report No.: CTC20210601E05

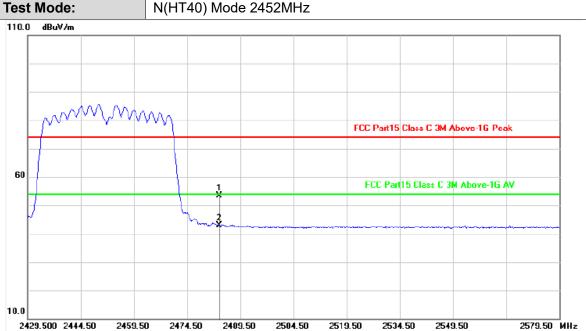

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	l	Margin (dB)	Detector
1	2483.500	31.50	21.81	53.31	74.00	-20.69	peak
2	2483.500	31.50	11.33	42.83	54.00	-11.17	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

Page 60 of 126

Report No.: CTC20210601E05




3.4. Band edge and Spurious Emissions (Conducted)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Test Configuration



Test Procedure


- 1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
- Set to the maximum power setting and enable the EUT transmit continuously
- Use the following spectrum analyzer settings: RBW = 100 kHz, VBW ≥ RBW, scan up through 10th harmonic. Sweep = auto, Detector function = peak, Trace = max hold
- 4. Measure and record the results in the test report.

Test Mode

Please refer to the clause 2.4.

Test Results

CTC Laboratories, Inc.







(1) Band edge Conducted Test

Test Mode	Antenna	ChName	Frequency (MHz)	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
	Ant1	Low	2412	5.10	-40.07	<=-14.90	PASS
11B	Ant2	Low	2412	4.97	-41.07	<=-15.03	PASS
ПБ	Ant1	High	2462	3.52	-49.71	<=-16.48	PASS
	Ant2	High	2462	3.43	-51.05	<=-16.57	PASS
44.0	Ant1	Low	2412	-0.30	-37.11	<=-20.30	PASS
	Ant2	Low	2412	1.21	-34.74	<=-18.79	PASS
11G	Ant1	High	2462	-0.70	-47.75	<=-20.70	PASS
	Ant2	High	2462	-1.20	-46.80	<=-21.20	PASS
	Ant1	Low	2412	-4.07	-41.05	<=-24.07	PASS
111120111110	Ant2	Low	2412	-0.28	-37.55	<=-20.28	PASS
11N20MIMO	Ant1	High	2462	-1.07	-50.64	<=-21.07	PASS
	Ant2	High	2462	-1.02	-48.20	<=-21.02	PASS
11N40MIMO	Ant1	Low	2422	-4.88	-40.48	<=-24.88	PASS
	Ant2	Low	2422	-4.56	-39.25	<=-24.56	PASS
	Ant1	High	2452	-3.65	-43.33	<=-23.65	PASS
	Ant2	High	2452	-3.40	-43.31	<=-23.40	PASS




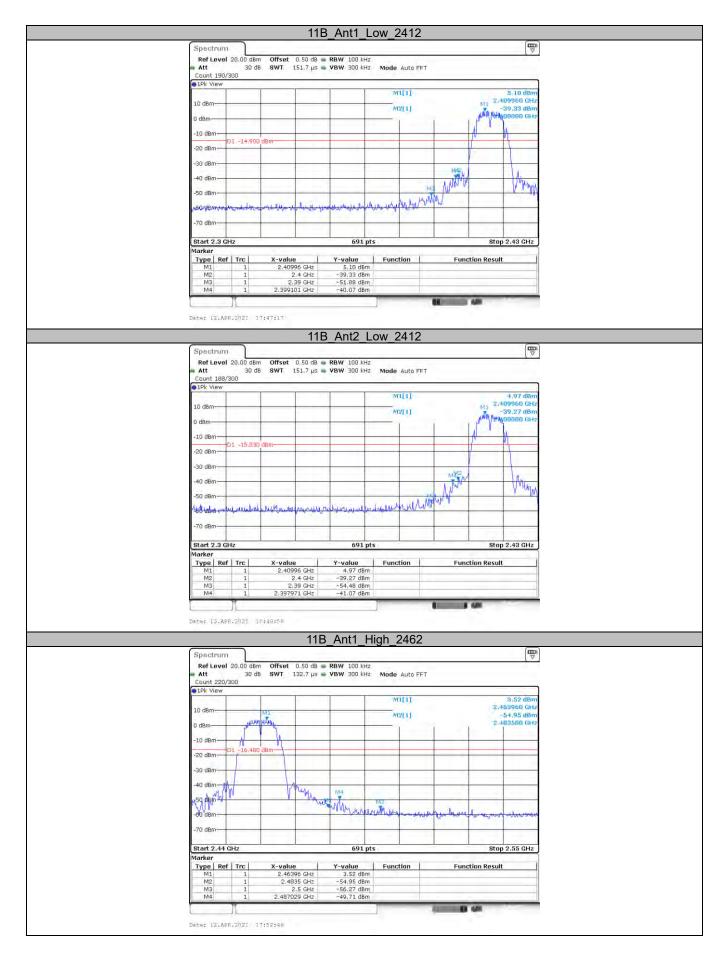




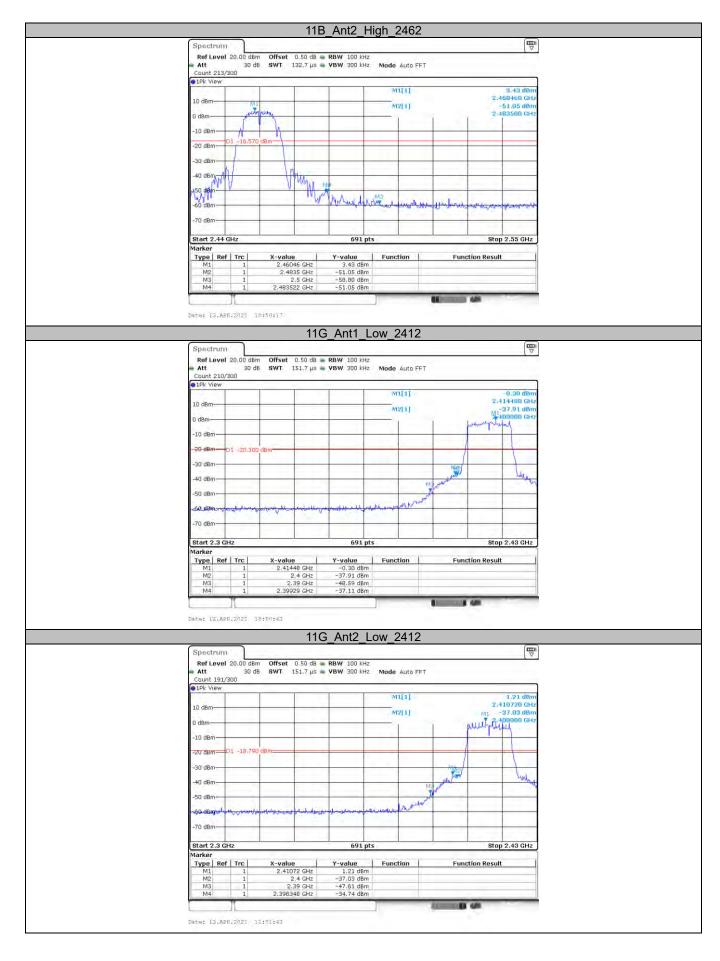




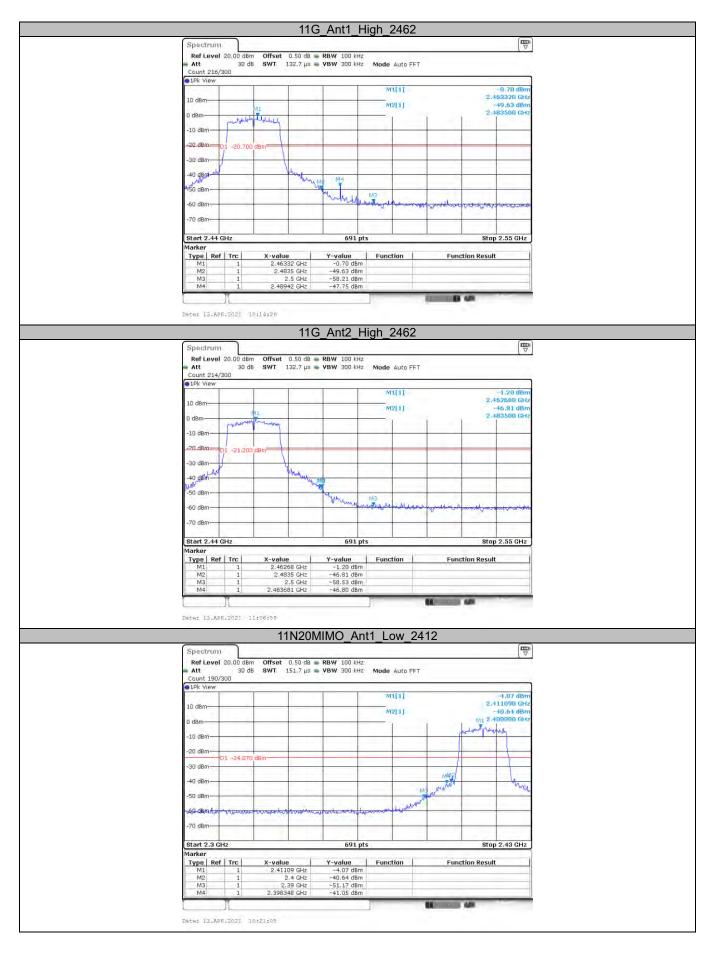




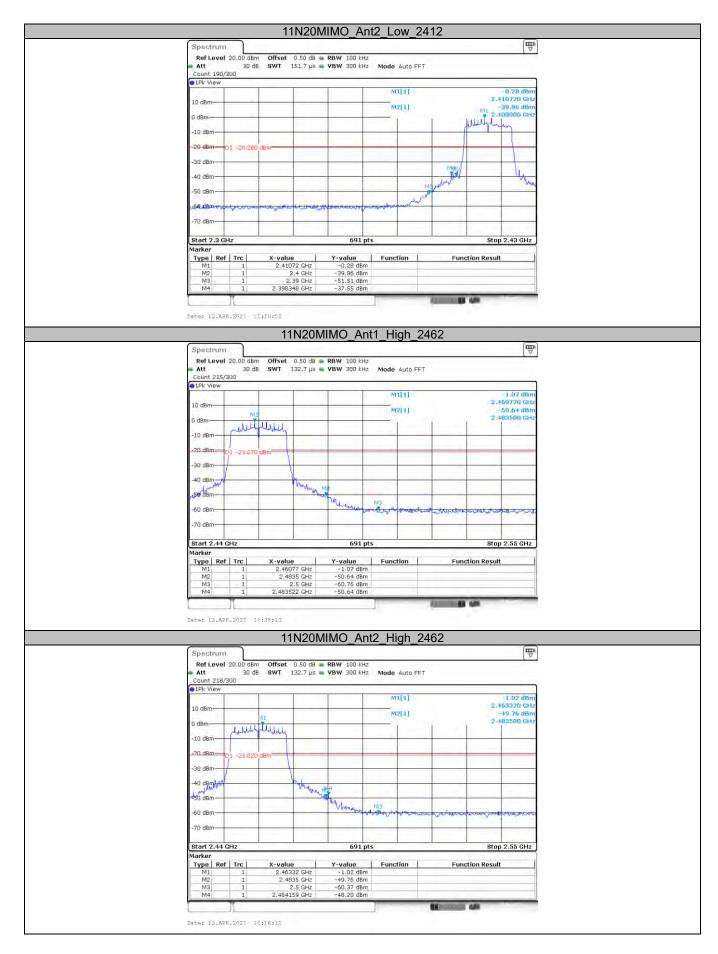



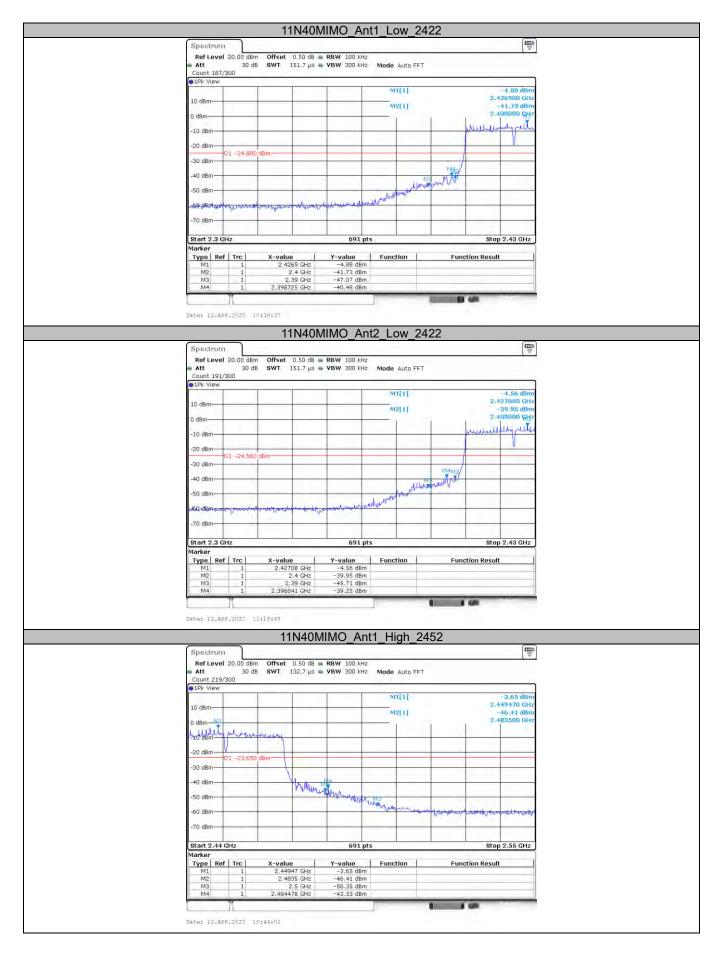



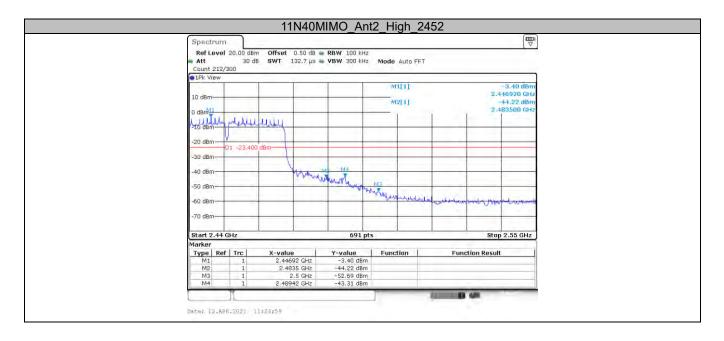



(2) Conducted Spurious Emissions Test

(2) Conducted Spurious Emissions Test									
Test Mode	Antenna	Frequency (MHz)	Freq Range [Mhz]	Ref Level [dBm]	Result [dBm]	Limit [dBm]	Verdict		
		(1011 12)	Reference	5.46	5.46	[ubiii]	DVCC		
	Ant1	2412	30~1000	30~1000	-70.48	<=-14.54			
	Aiiti	2412	1000~26500	1000~26500	-38.98	<=-14.54			
			Reference	5.34	5.34				
	Ant2	2412	30~1000	30~1000	-69.85	<=-14.66			
	Anz	2412	1000~26500	1000~26500	-38.46	<=-14.66			
			Reference	5.02	5.02				
	Ant1	2437	30~1000	30~1000	-70.02	<=-14.98			
	7 (1)(1)	2407	1000~26500	1000~26500	-46.76	<=-14.98			
11B			Reference	5.68	5.68				
	Ant2	2437	30~1000	30~1000	-69.03	<=-14.32			
	7 (11)	2407	1000~26500	1000~26500	-46.93	<=-14.32			
			Reference	5.02	5.02				
	Ant1	2462	30~1000	30~1000	-69.89	<=-14.98			
	7 4161	2.102	1000~26500	1000~26500	-46.78	<=-14.98			
			Reference	5.20	5.20				
	Ant2	2462	30~1000	30~1000	-69.39	<=-14.80			
	7 1112	2.102	1000~26500	1000~26500	-47.22	<=-14.80			
			Reference	1.27	1.27				
	Ant1	2412	30~1000	30~1000	-70.50	<=-18.73			
	,		1000~26500	1000~26500	-37.61	<=-18.73			
			Reference	1.46	1.46				
	Ant2	2412	30~1000	30~1000	-69.23	<=-18.54			
	7		1000~26500	1000~26500	-36.25	<=-18.54			
			Reference	1.27	1.27				
	Ant1	2437	30~1000	30~1000	-70.97	<=-18.73			
	7		1000~26500	1000~26500	-47.42				
11G			Reference	1.06	1.06				
	Ant2	2437	30~1000	30~1000	-68.62	<=-18.94			
			1000~26500	1000~26500	-46.77				
			Reference	0.28	0.28				
	Ant1	2462	30~1000	30~1000	-70.50	<=-19.72			
			1000~26500	1000~26500	-47.15	PA <=-18.73 PA <=-18.73 PA <=-18.73 PA <=-18.94 PA <=-18.94 PA <=-19.72 PA <=-19.72 PA <=-19.72 PA <=-19.70 PA			
			Reference	1.00	1.00		PASS		
	Ant2	2462	30~1000	30~1000	-69.43	<=-19.00	PASS		
			1000~26500	1000~26500	-47.09	<=-19.00	PASS		
			Reference	-0.93	-0.93		PASS		
	Ant1	2412	30~1000	30~1000	-70.74	<=-20.93	PASS		
			1000~26500	1000~26500	-39.26	<=-20.93	PASS		
			Reference	-0.92	-0.92		PASS		
	Ant2	2412	30~1000	30~1000	-69.56	<=-20.92	PASS		
			1000~26500	1000~26500	-38.79	<=-20.92	PASS		
			Reference	-0.77	-0.77		PASS		
	Ant1	2437	30~1000	30~1000	-70.18	<=-20.77	PASS		
11N20MIMO			1000~26500	1000~26500	-47.60	<=-20.77	PASS		
			Reference	-0.37	-0.37		PASS		
	Ant2	2437	30~1000	30~1000	-68.33	<=-20.37	PASS PASS PASS PASS PASS PASS PASS PASS		
			1000~26500	1000~26500	-47.50	<=-20.37	PASS		
			Reference	-2.78	-2.78		PASS		
	Ant1	2462	30~1000	30~1000	-70.64	<=-22.78	PASS		
ı			1000~26500	1000~26500	-46.54	<=-22.78	PASS		
	Ant2	2462	Reference	-0.54	-0.54		PASS		
	AIIL	2402	30~1000	30~1000	-69.67	<=-20.54	PASS		




Page 69 of 126

Report No.: CTC20210601E05

		ı					
			1000~26500	1000~26500	-45.96	<=-20.54	PASS
			Reference	-3.80	-3.80		PASS
	Ant1	2422	30~1000	30~1000	-70.00	<=-23.80	PASS
			1000~26500	1000~26500	-39.32	<=-23.80	PASS
			Reference	-3.56	-3.56		PASS
	Ant2	2422	30~1000	30~1000	-69.23	<=-23.56	PASS
			1000~26500	1000~26500	-40.71	<=-23.56	PASS
			Reference	-3.97	-3.97	 <23.07	PASS
	Ant1	2437	30~1000	30~1000	-70.98	<=-23.97	PASS
11N40MIMO			1000~26500	1000~26500	-47.42	<=-23.97	PASS
11114UIVIIIVIO			Reference	-3.60	-3.60		PASS
	Ant2	2437	30~1000	30~1000	-69.10	<=-23.60	PASS
			1000~26500	1000~26500	-43.35	<=-23.97 <=-23.60 <=-23.60	PASS
			Reference	-3.45	-3.45		PASS
	Ant1	2452	30~1000	30~1000	-70.46	<=-23.45	PASS
			1000~26500	1000~26500	-46.08	<=-23.45	PASS
			Reference	-3.27	-3.27		PASS
	Ant2	2452	30~1000	30~1000	-68.98	<=-23.56 <=-23.97 <=-23.60 <=-23.60 <=-23.45 <=-23.45 <=-23.27	PASS
			1000~26500	1000~26500	-45.33	<=-23.27	PASS




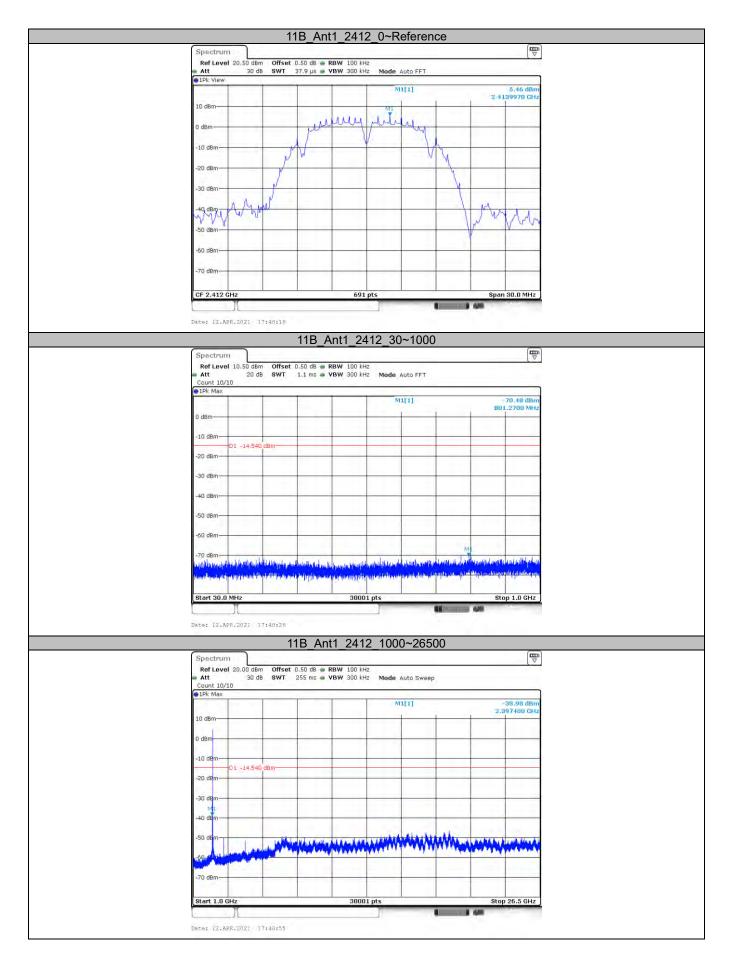









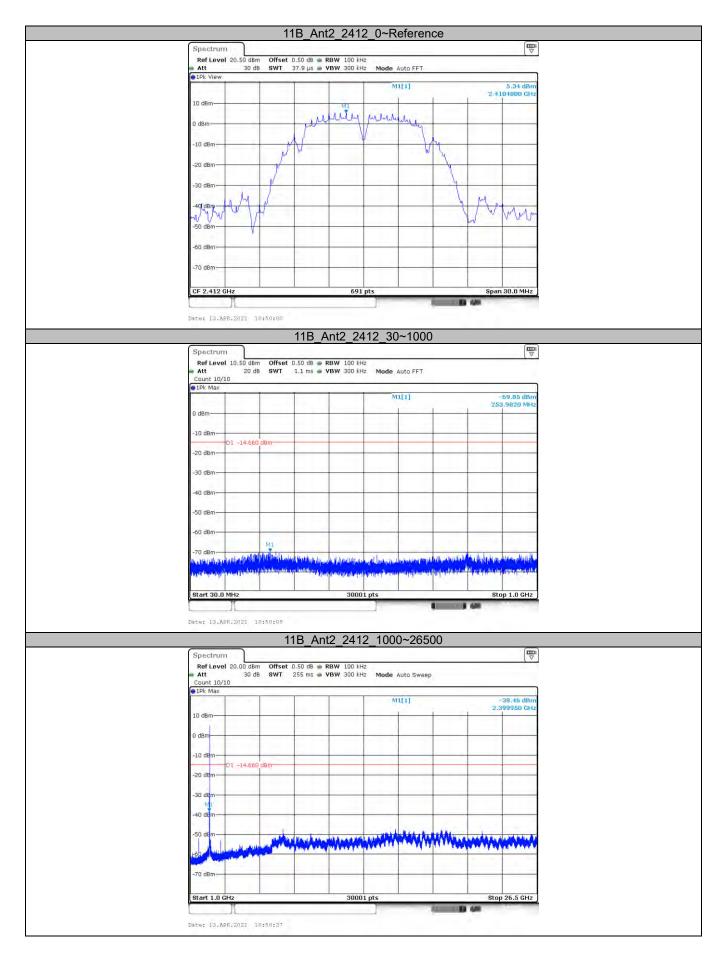




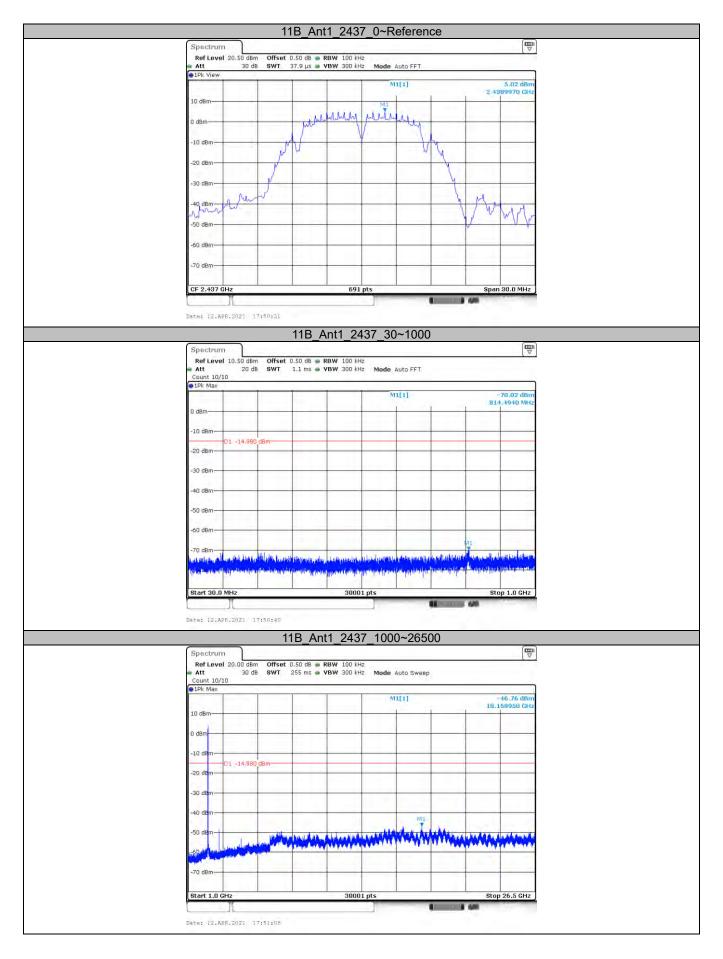




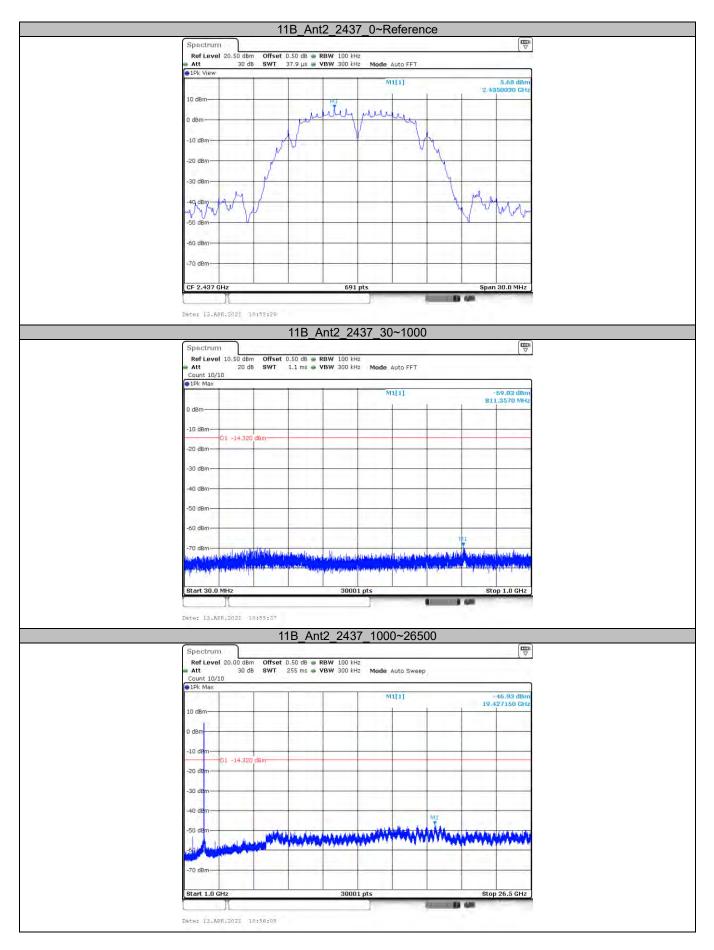



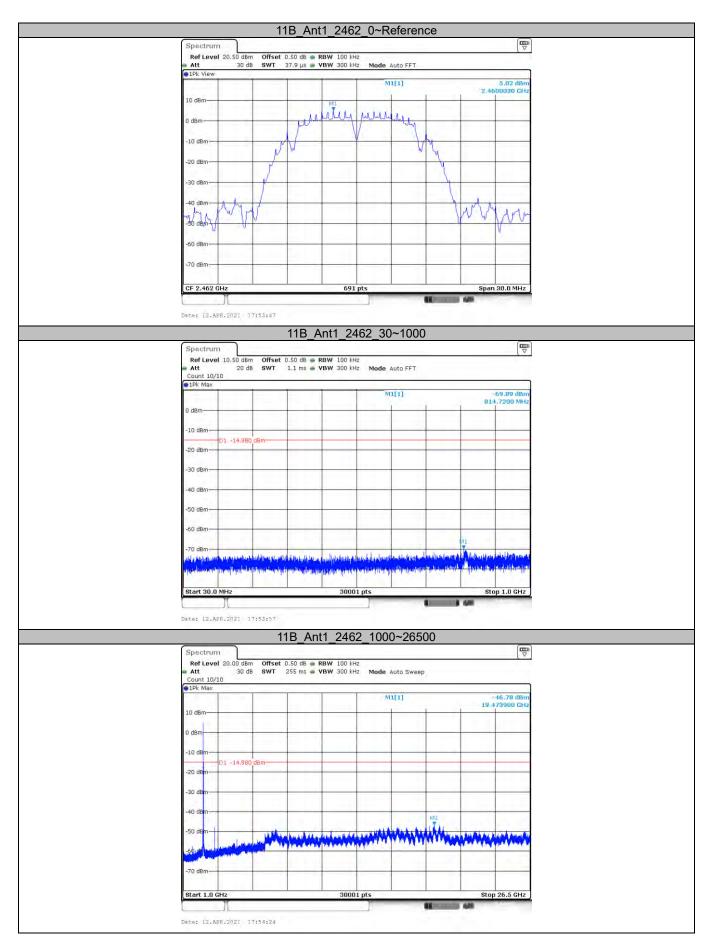




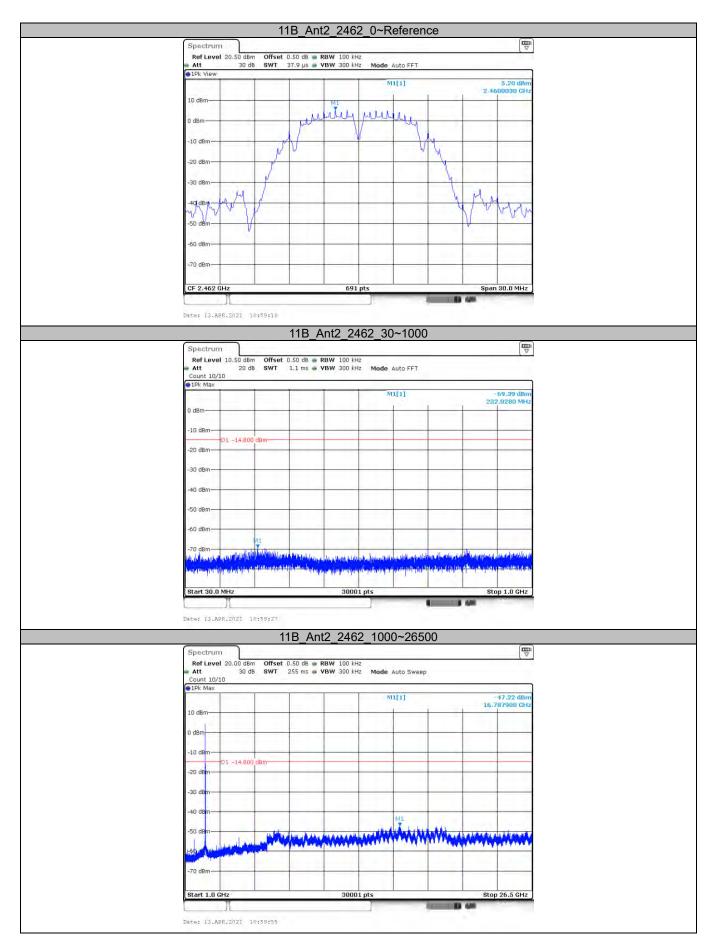






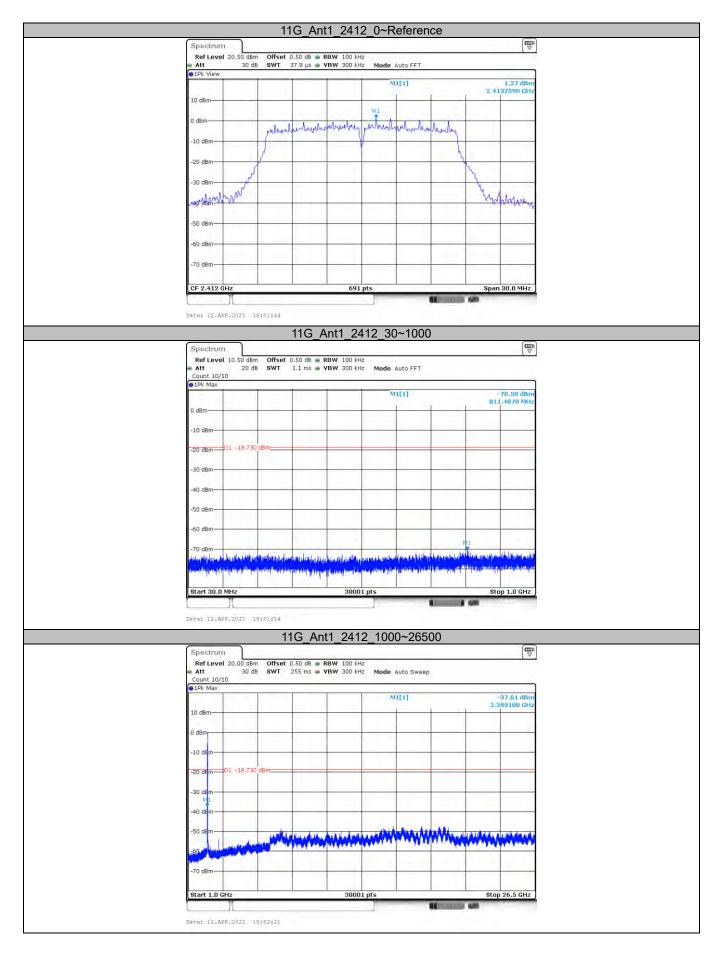




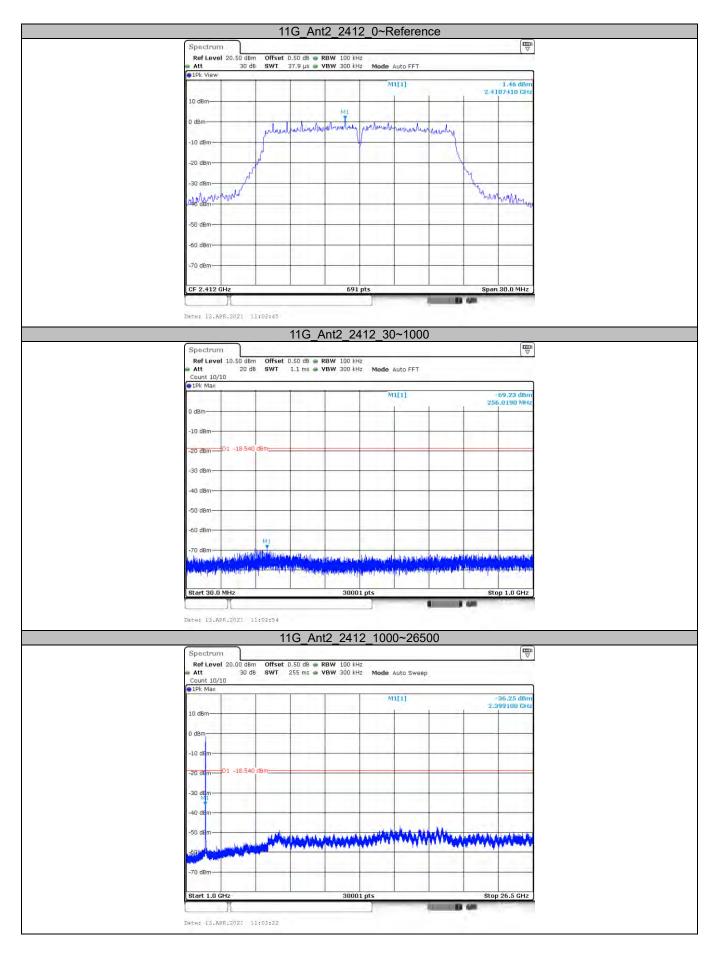






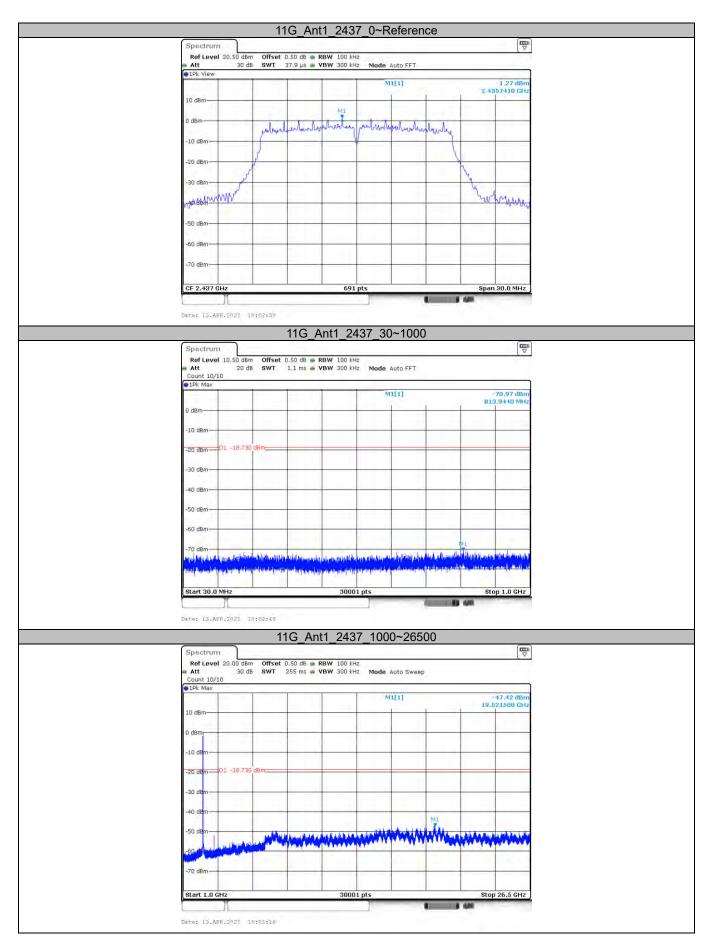







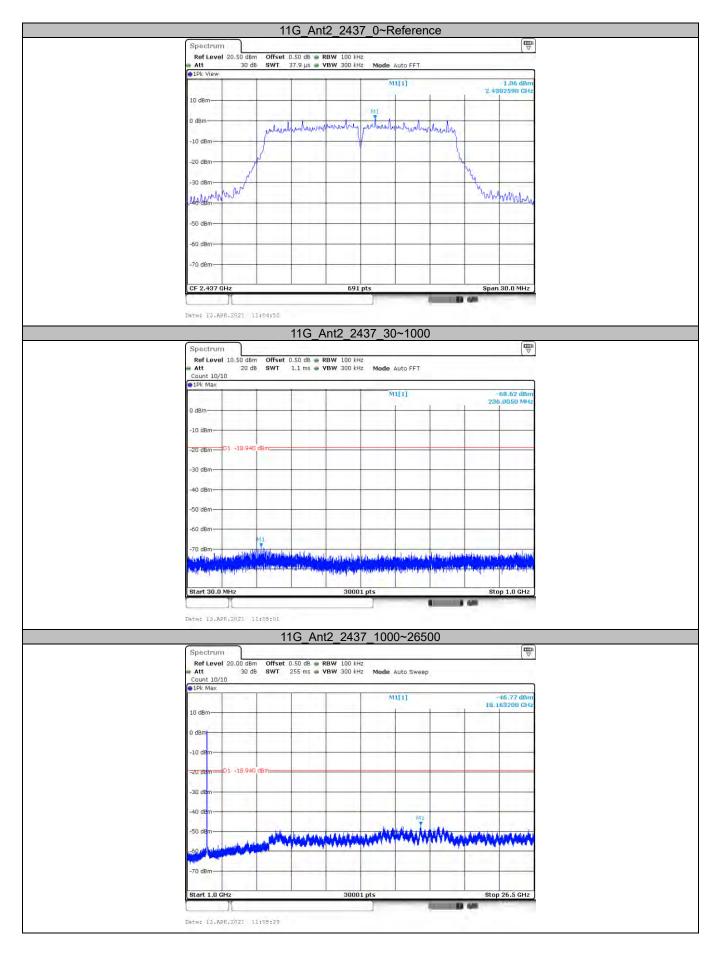




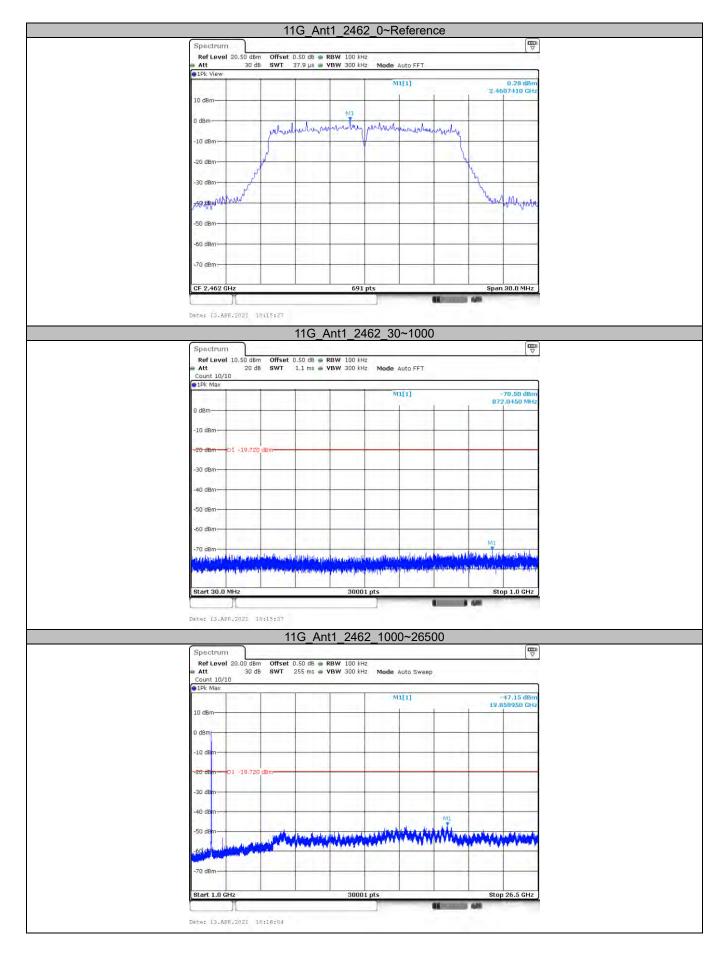



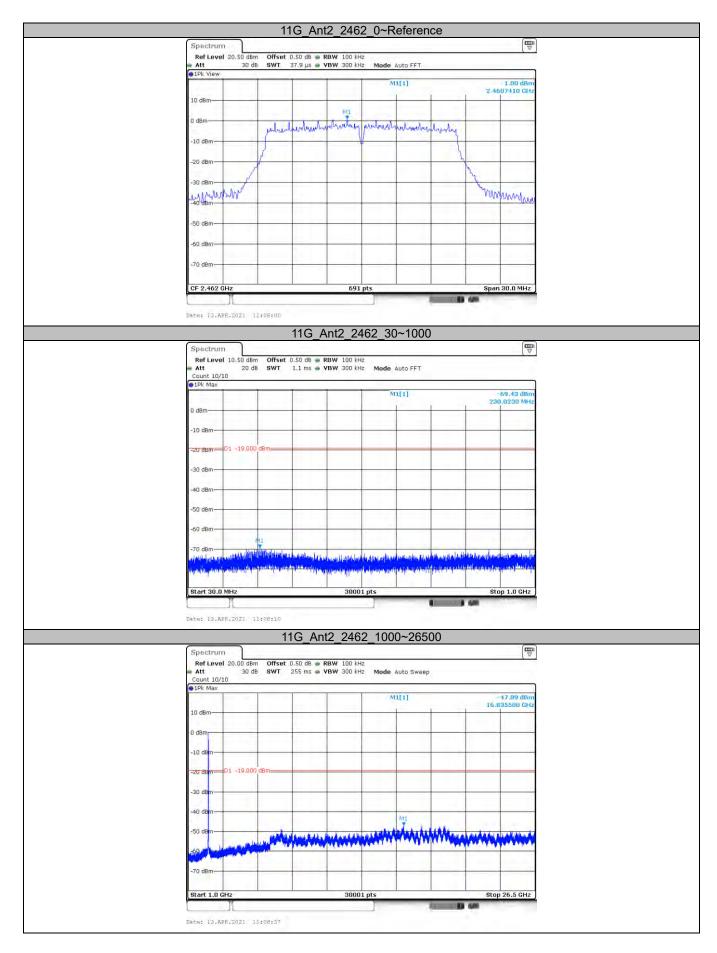




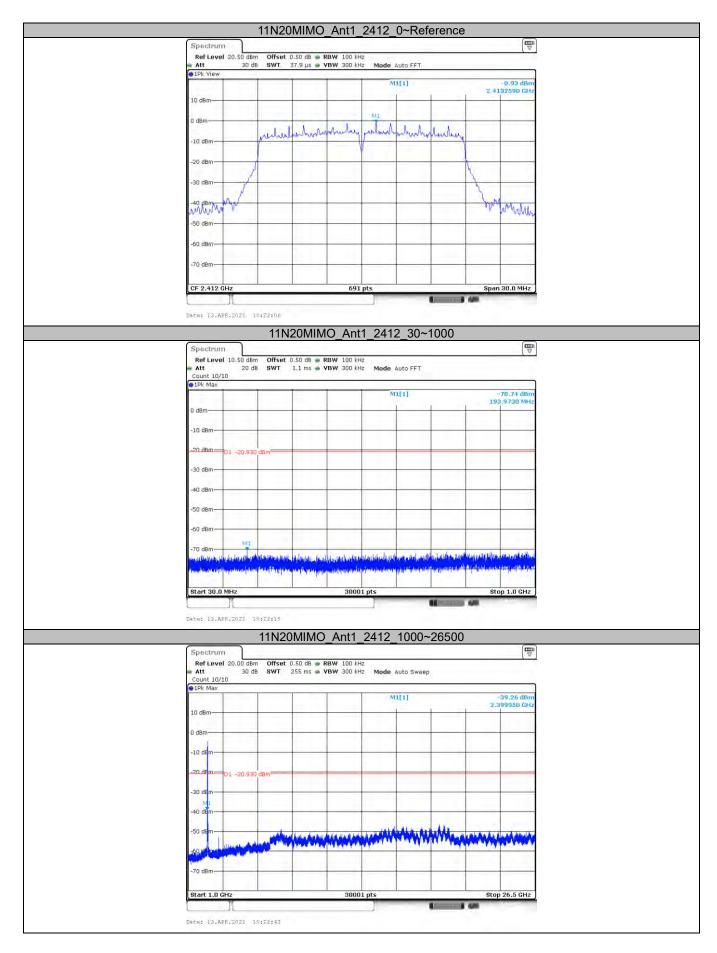









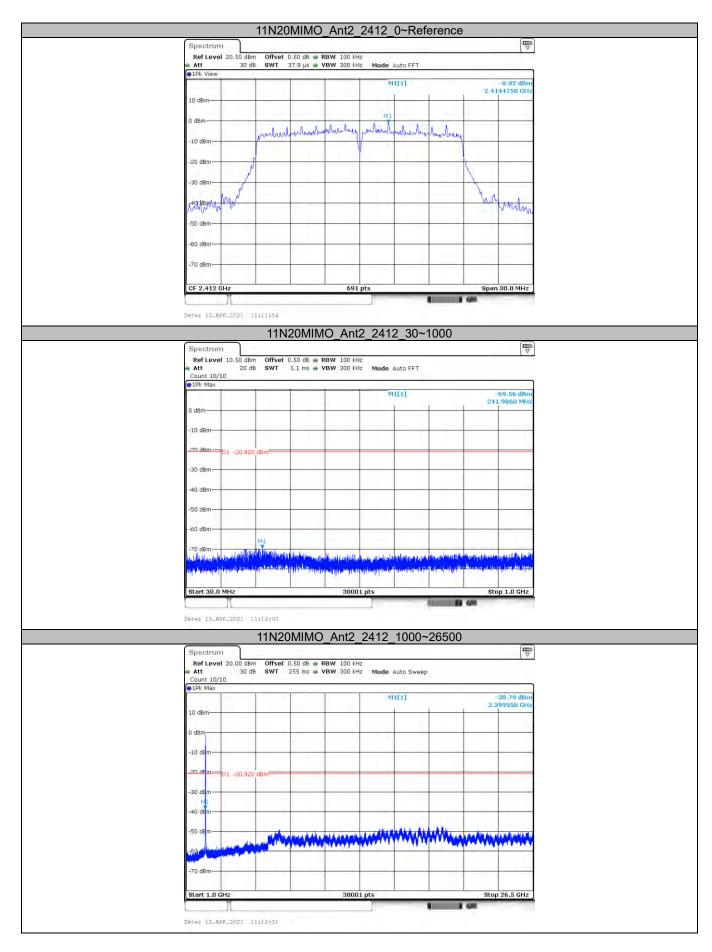




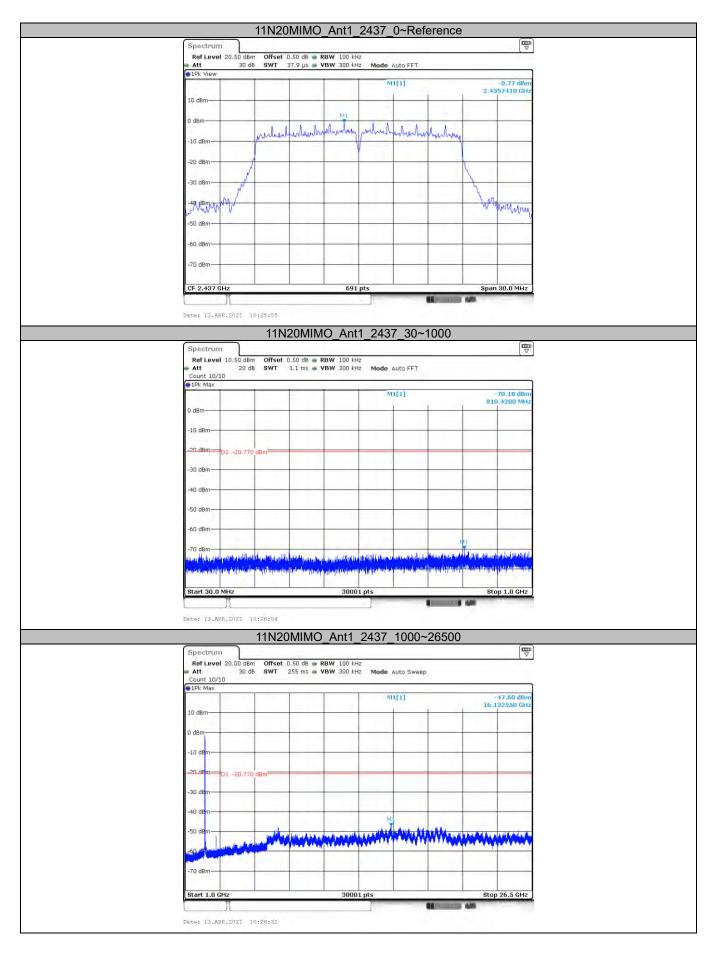




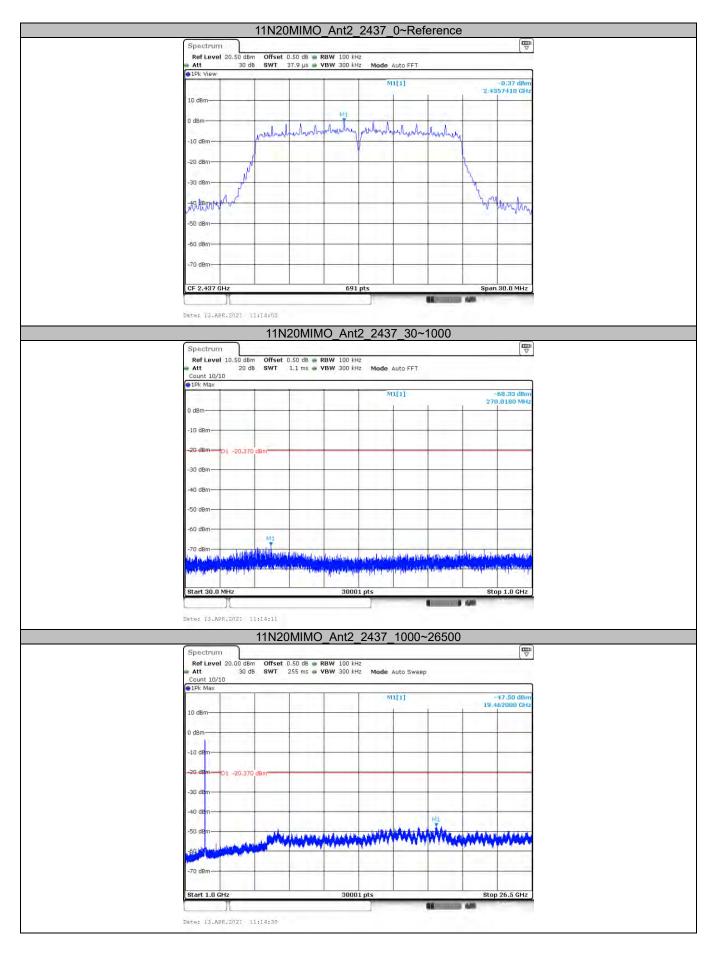




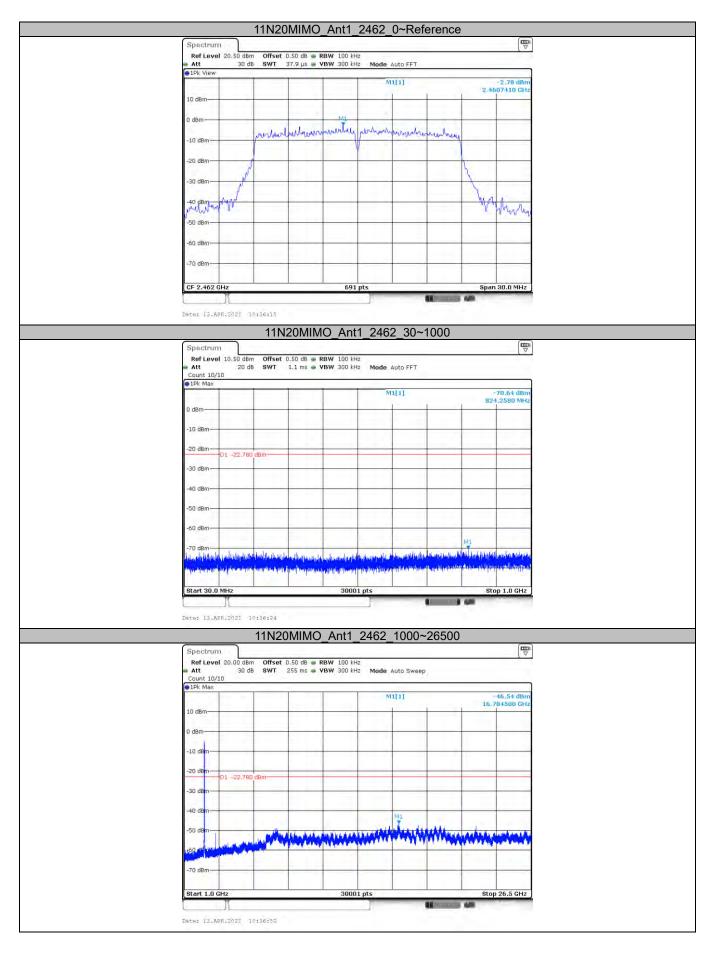




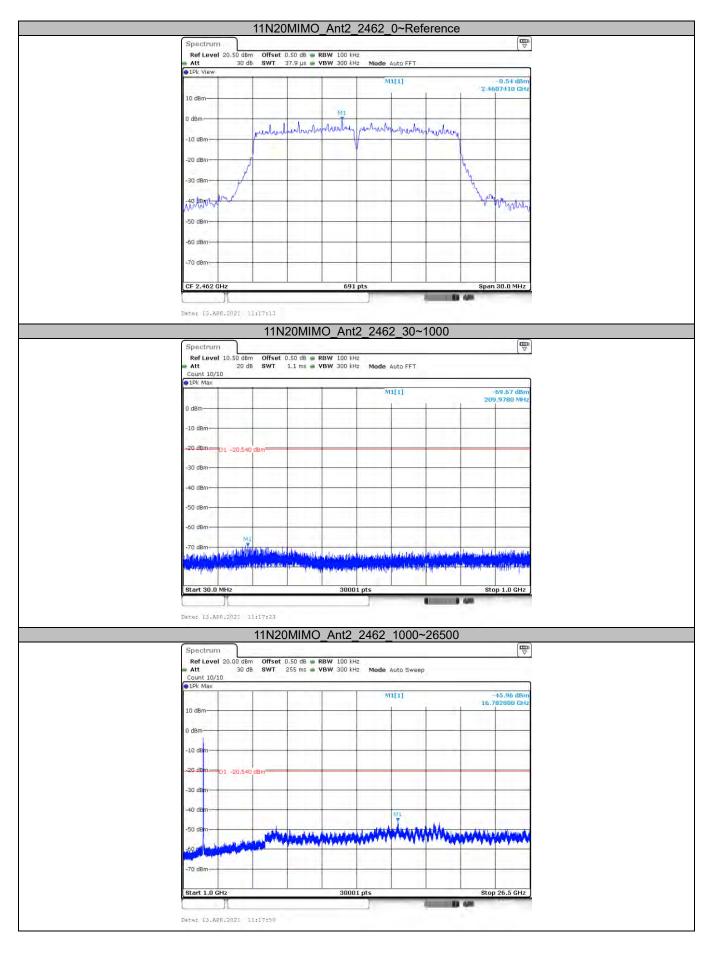




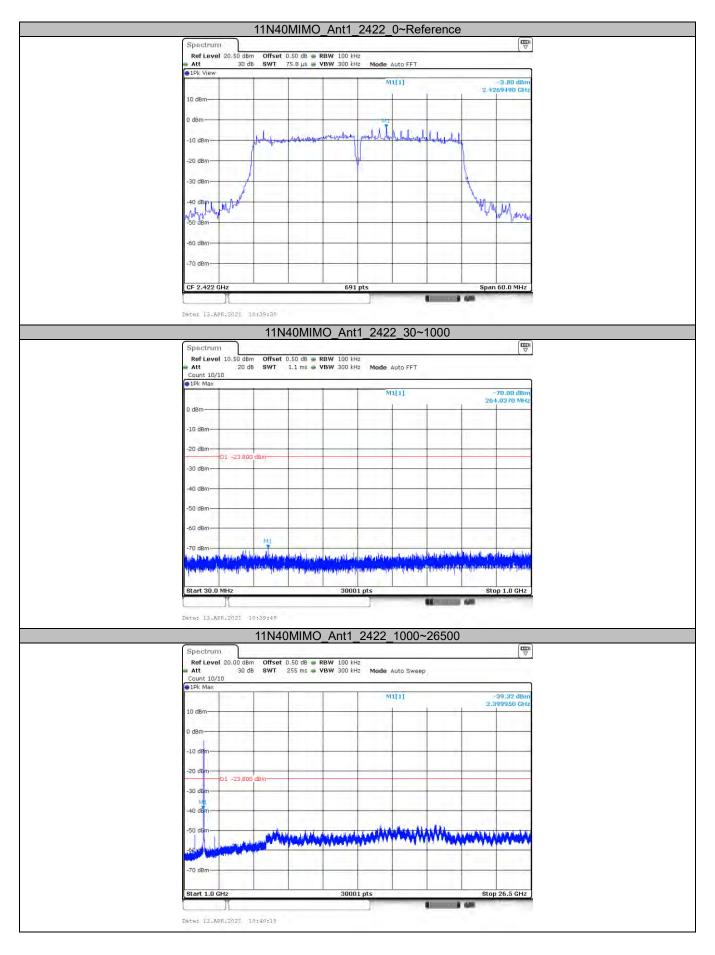




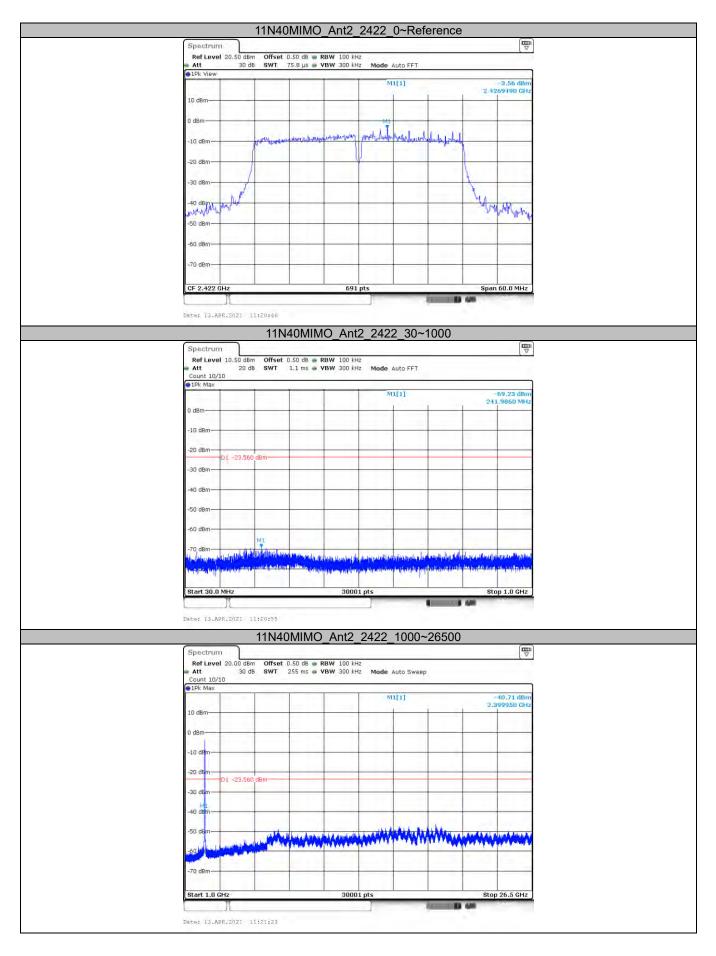




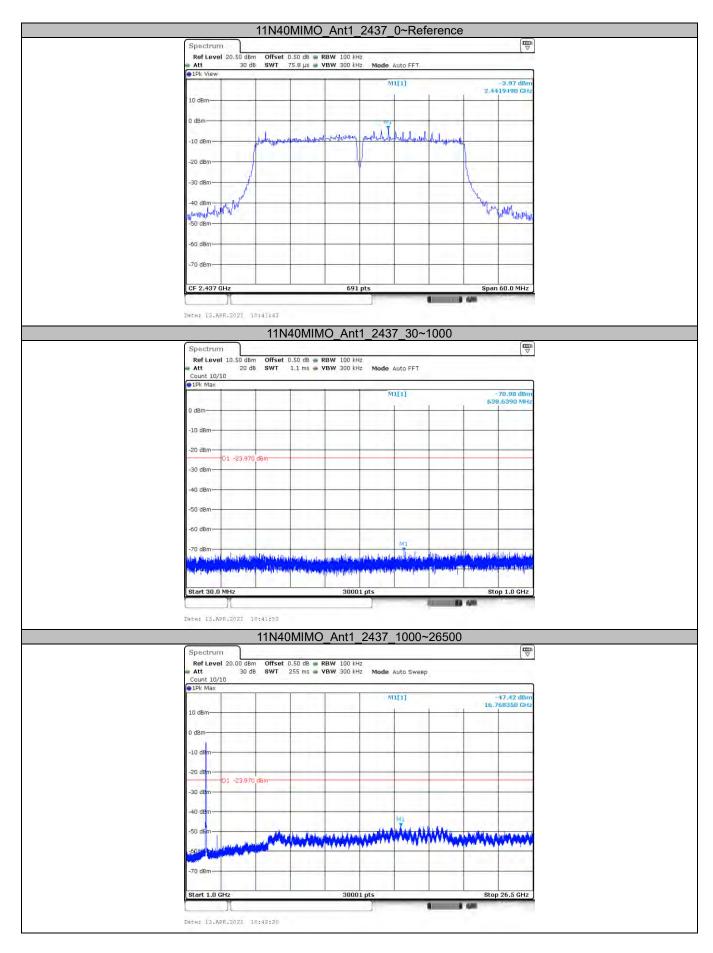




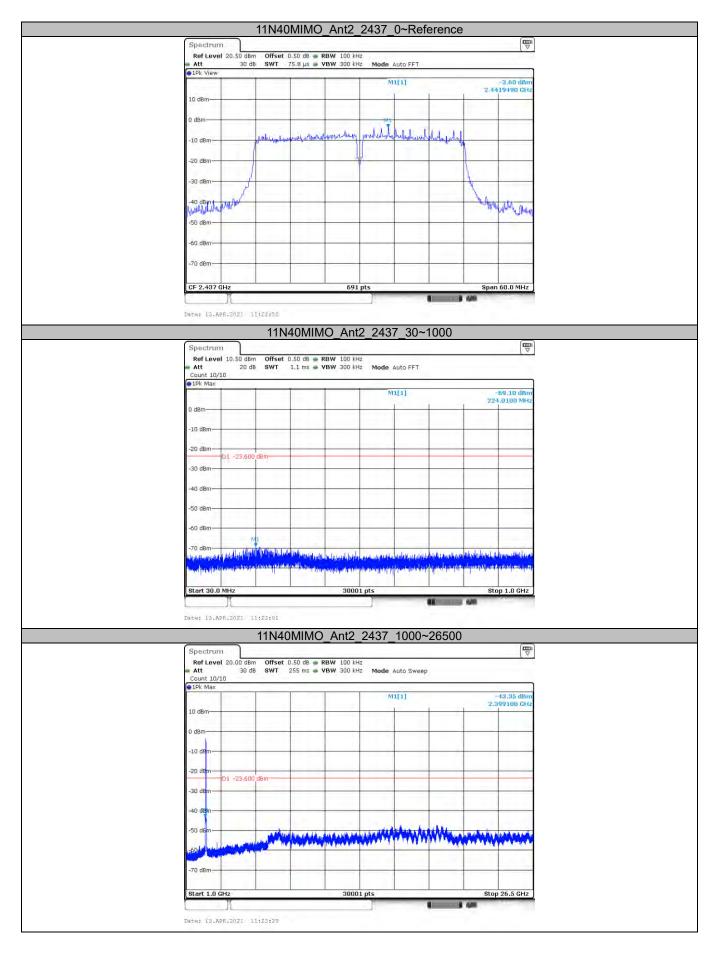



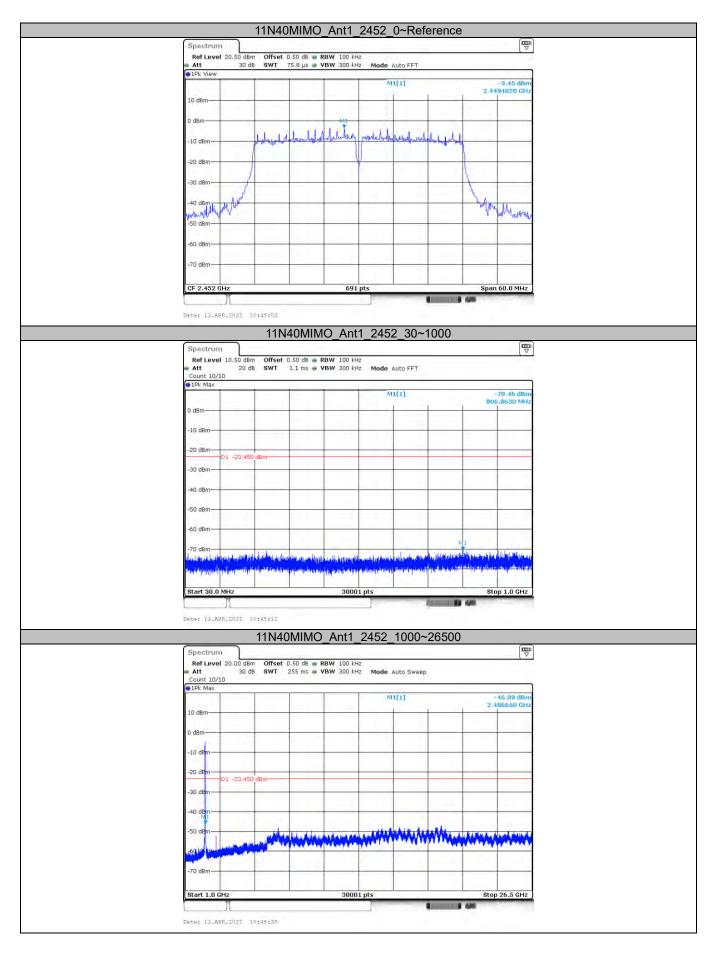



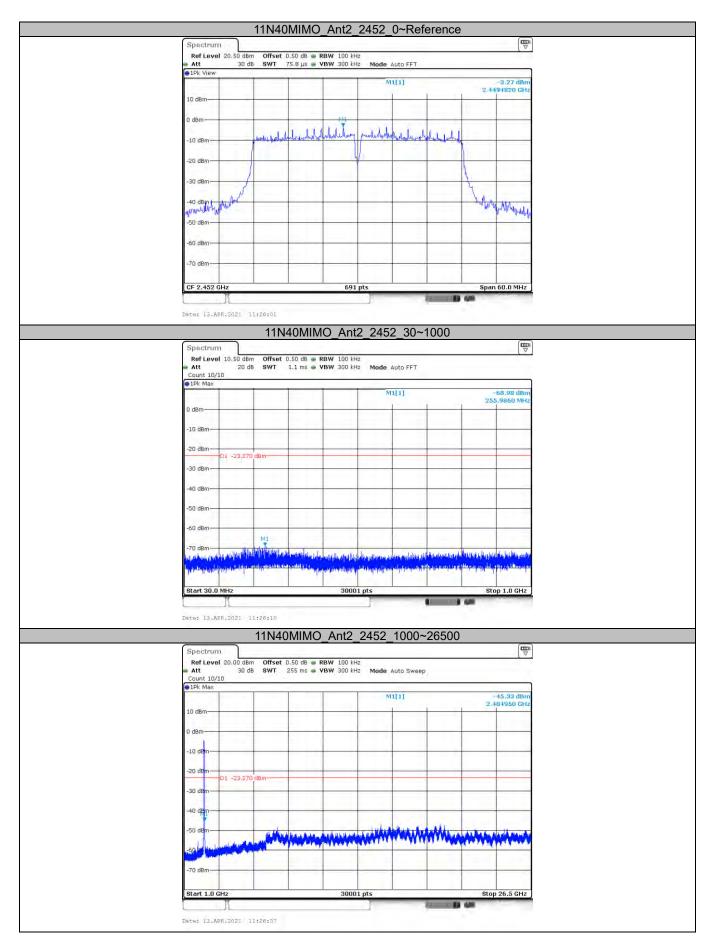



3.5. DTS Bandwidth


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2)/ RSS-247 5.2 a:

Test Item	Limit	Frequency Range(MHz)	
DTS Bandwidth	>=500 KHz (6dB bandwidth)	2400~2483.5	

Report No.: CTC20210601E05

Test Configuration



Test Procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 6. DTS Spectrum Setting:
 - (1) Set RBW = 100 kHz.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.
 - OCB Spectrum Setting:
 - (1) Set RBW = 1% ~ 5% occupied bandwidth.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.


NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

Test Mode

Please refer to the clause 2.4.



CTC Laboratories, Inc.







Test Results

Test Mode	Antenna	Frequency (MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	10.160	2406.920	2417.080	0.5	PASS
	Ant2	2412	10.160	2406.920	2417.080	0.5	PASS
	Ant1	2437	10.160	2431.920	2442.080	0.5	PASS
	Ant2	2437	10.160	2431.920	2442.080	0.5	PASS
	Ant1	2462	10.120	2456.920	2467.040	0.5	PASS
	Ant2	2462	10.120	2456.920	2467.040	0.5	PASS
	Ant1	2412	16.400	2403.800	2420.200	0.5	PASS
	Ant2	2412	16.360	2403.800	2420.160	0.5	PASS
11G	Ant1	2437	16.400	2428.800	2445.200	0.5	PASS
116	Ant2	2437	16.400	2428.800	2445.200	0.5	PASS
	Ant1	2462	16.400	2453.800	2470.200	0.5	PASS
	Ant2	2462	16.360	2453.800	2470.160	0.5	PASS
	Ant1	2412	17.000	2403.440	2420.440	0.5	PASS
	Ant2	2412	17.000	2403.560	2420.560	0.5	PASS
11N20MIMO	Ant1	2437	17.160	2428.400	2445.560	0.5	PASS
TTINZUIVIIIVIO	Ant2	2437	17.120	2428.440	2445.560	0.5	PASS
	Ant1	2462	17.120	2453.440	2470.560	0.5	PASS
	Ant2	2462	17.000	2453.440	2470.440	0.5	PASS
	Ant1	2422	35.360	2404.320	2439.680	0.5	PASS
11N40MIMO	Ant2	2422	35.360	2404.320	2439.680	0.5	PASS
	Ant1	2437	35.360	2419.320	2454.680	0.5	PASS
	Ant2	2437	35.360	2419.320	2454.680	0.5	PASS
	Ant1	2452	35.280	2434.320	2469.600	0.5	PASS
	Ant2	2452	35.520	2434.320	2469.840	0.5	PASS




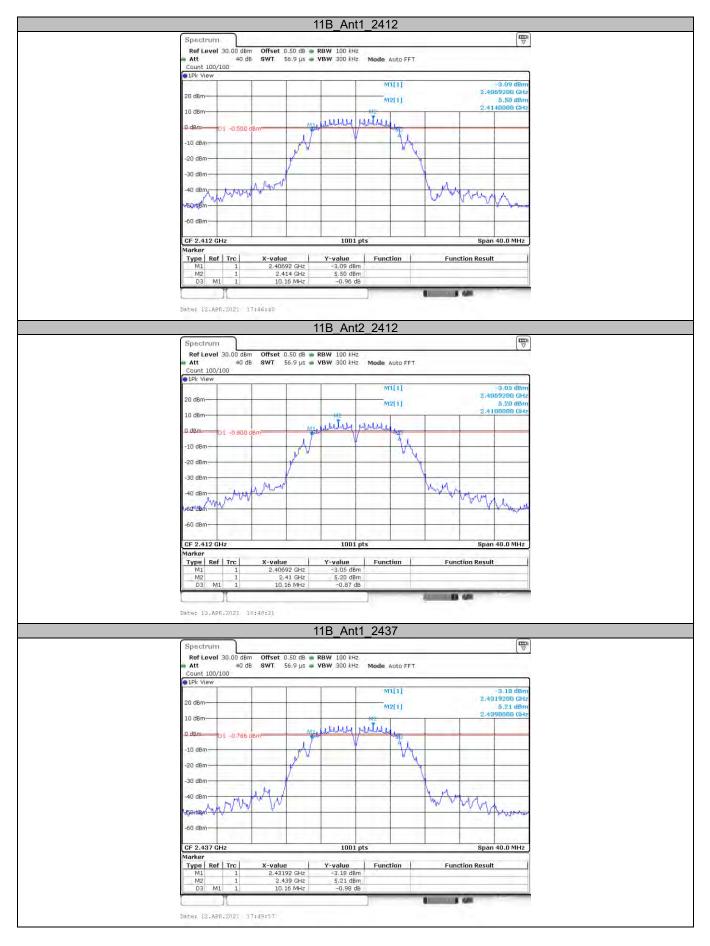




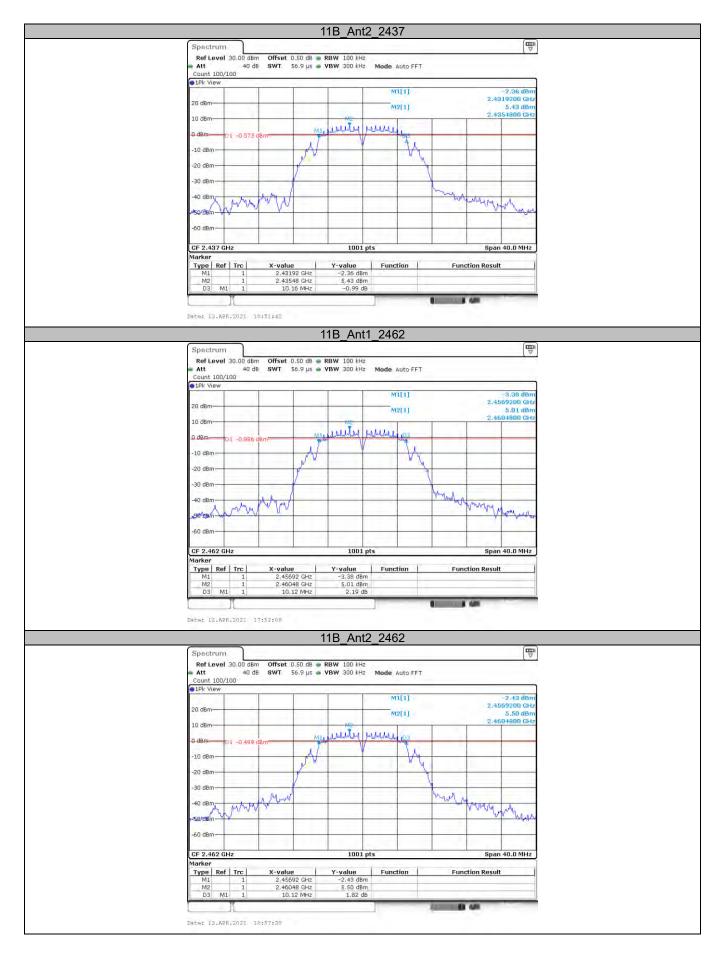




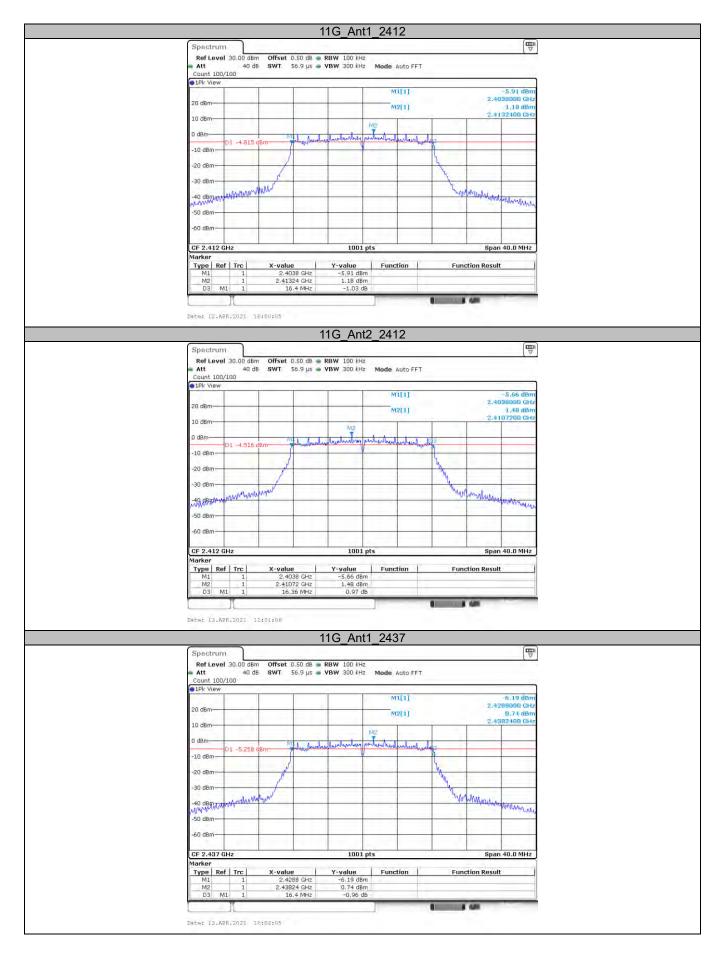




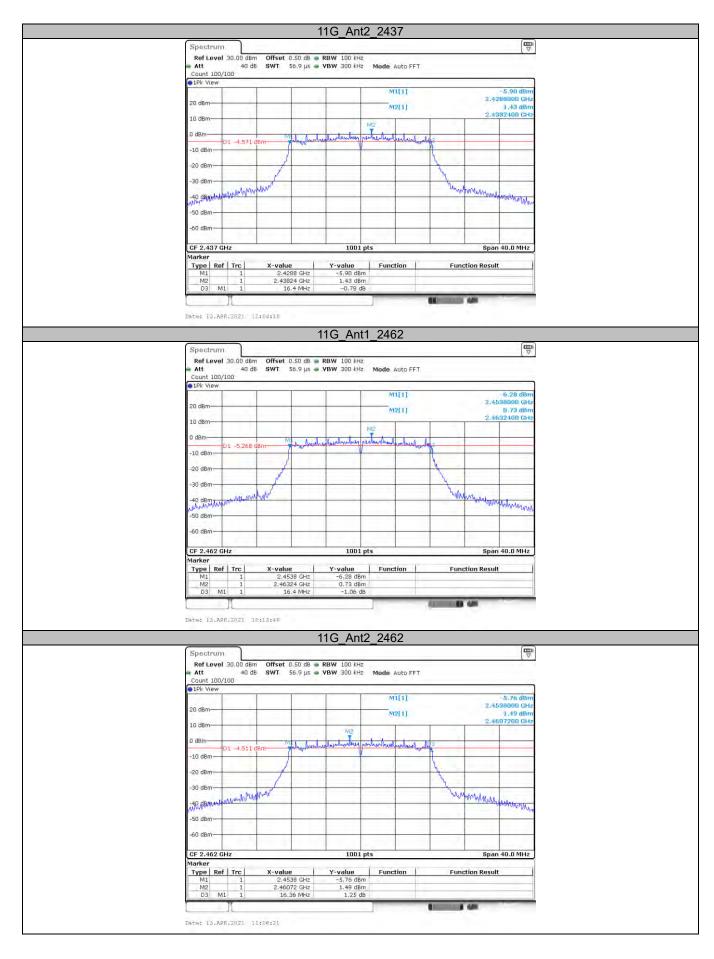




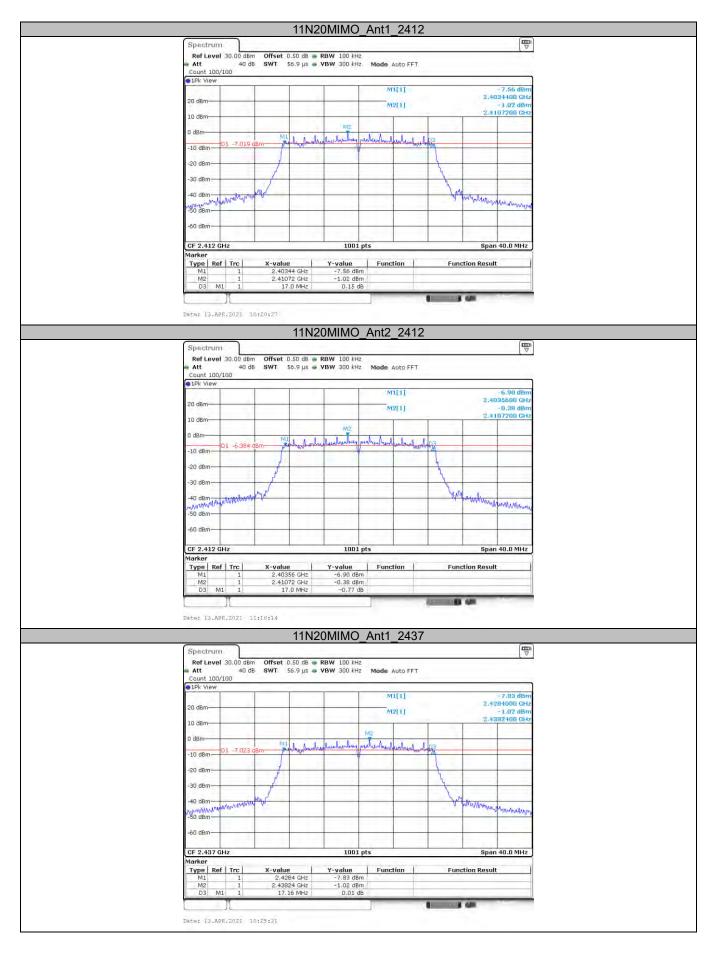




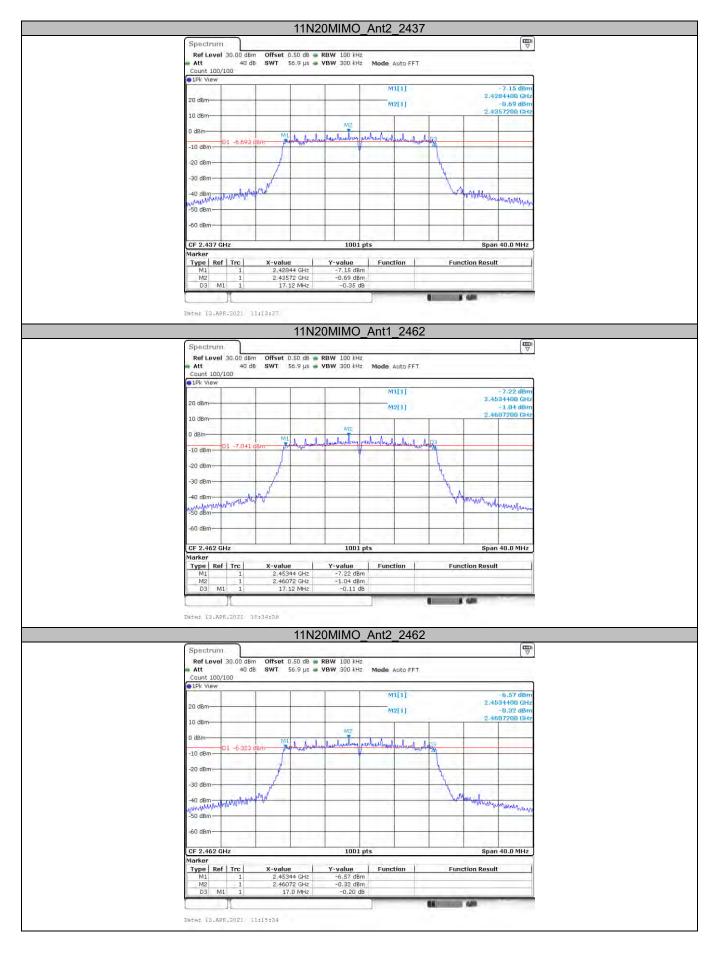



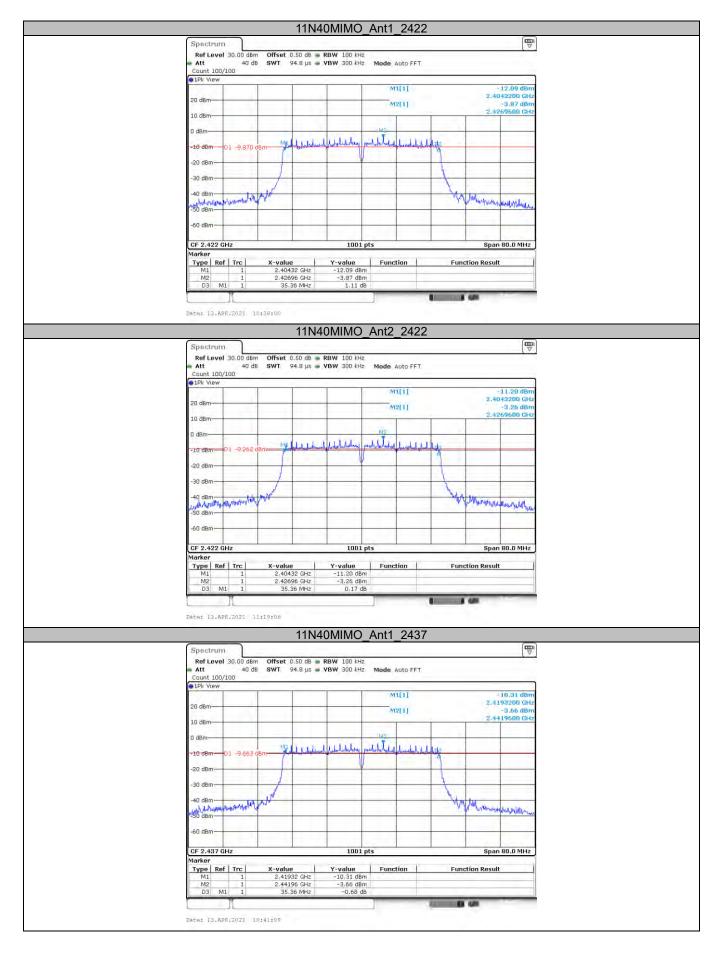



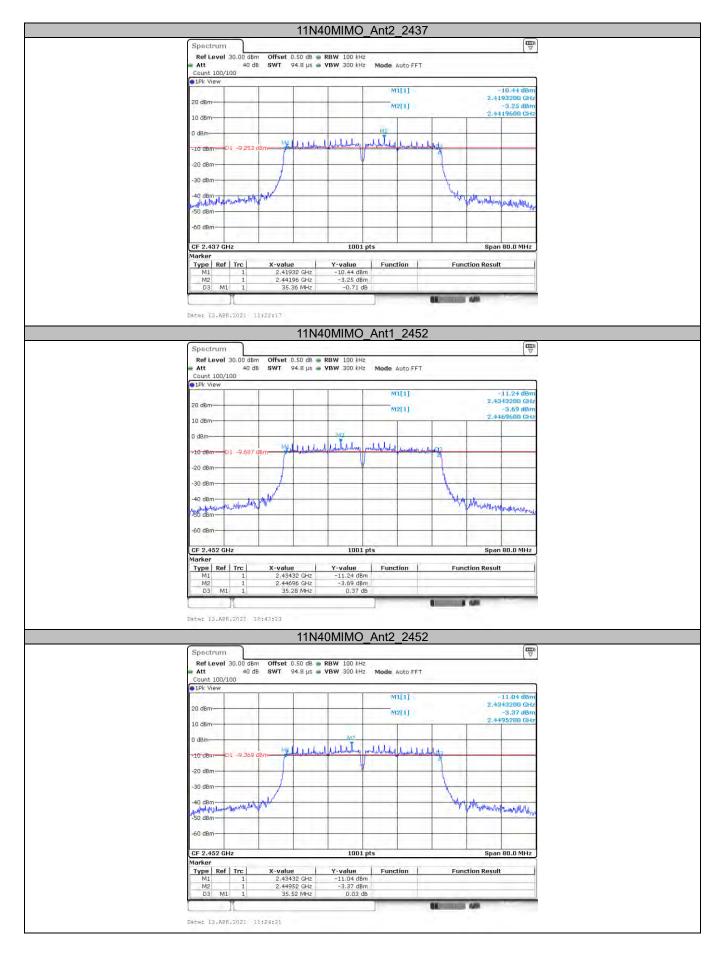




3.6. Peak Output Power

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3)/ RSS-247 5.4:

Section	Test Item	Limit	Frequency Range(MHz)	
CFR 47 FCC 15.247(b)(3)	Maximum conducted output power	1 Watt or 30dBm	2400~2483.5	
ISED RSS-247 5.4 d	EIRP	4 Watt or 36dBm	2400~2483.5	

Test Configuration



Test Procedure

- The maximum conducted output power may be measured using a broadband Peak RF power meter.
- Peak power measurements were performed only when the EUT was transmitting at its maximum 2. power control level using a broadband power meter with a pulse sensor.
- The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.
- Record the measurement data.

Test Mode

Please refer to the clause 2.4.



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: <u>yz.cnca.cn</u>



Test Result

Test Mode	Antenna	Frequency (MHz)	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	17.33	<=30	PASS
	Ant2	2412	17.91	<=30	PASS
	Ant1	2437	17.14	<=30	PASS
TID	Ant2	2437	17.87	<=30	PASS
	Ant1	2462	17.35	<=30	PASS
	Ant2	2462	17.87	<=30	PASS
	Ant1	2412	18.93	<=30	PASS
	Ant2	2412	19.14	<=30	PASS
11G	Ant1	2437	19.01	<=30	PASS
116	Ant2	2437	19.18	<=30	PASS
	Ant1	2462	18.57	<=30	PASS
	Ant2	2462	19.18	<=30	PASS
	Ant1	2412	16.67	<=30	PASS
	Ant2	2412	17.26	<=30	PASS
	total	2412	20.00	<=30	PASS
	Ant1	2437	16.81	<=30	PASS
11N20MIMO	Ant2	2437	17.23	<=30	PASS
	total	2437	20.00	<=30	PASS
	Ant1	2462	16.62	<=30	PASS
	Ant2	2462	17.23	<=30	PASS
	total	2462	19.90	<=30	PASS
	Ant1	2422	16.82	<=30	PASS
11N40MIMO	Ant2	2422	17.30	<=30	PASS
	total	2422	20.10	<=30	PASS
	Ant1	2437	16.92	<=30	PASS
	Ant2	2437	17.36	<=30	PASS
	total	2437	20.20	<=30	PASS
	Ant1	2452	17.03	<=30	PASS
	Ant2	2452	17.42	<=30	PASS
	total	2452	20.20	<=30	PASS

Note: Test results increased RF cable loss by 0.5dB.



3.7. Power Spectral Density

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e)/ RSS-247 5.2 b:

Test Item	Limit	Frequency Range(MHz)	
Power Spectral Density	8dBm(in any 3 kHz)	2400~2483.5	

Report No.: CTC20210601E05

Test Configuration



Test Procedure

- 1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
- 3. Spectrum Setting:

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.


Set the RBW to: 3 kHz Set the VBW to: 10 kHz

Detector: PK Sweep time: Auto

Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode


Please refer to the clause 2.4.






Test Result


Test Mode	Antenna	Frequency (MHz)	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-9.90	<=8	PASS
	Ant2	2412	-9.03	<=8	PASS
	Ant1	2437	-9.15	<=8	PASS
IID	Ant2	2437	-8.15	<=8	PASS
	Ant1	2462	-9.71	<=8	PASS
	Ant2	2462	-8.69	<=8	PASS
	Ant1	2412	-12.35	<=8	PASS
	Ant2	2412	-12.54	<=8	PASS
11G	Ant1	2437	-12.79	<=8	PASS
110	Ant2	2437	-11.43	<=8	PASS
	Ant1	2462	-12.89	<=8	PASS
	Ant2	2462	-12.32	<=8	PASS
	Ant1	2412	-14.99	<=8	PASS
	Ant2	2412	-13.54	<=8	PASS
	total	2412	-8.97	<=8	PASS
	Ant1	2437	-14.78	<=8	PASS
11N20MIMO	Ant2	2437	-14.16	<=8	PASS
	total	2437	-8.25	<=8	PASS
	Ant1	2462	-14.92	<=8	PASS
	Ant2	2462	-14.22	<=8	PASS
	total	2462	-8.60	<=8	PASS
11N40MIMO	Ant1	2422	-18.11	<=8	PASS
	Ant2	2422	-17.16	<=8	PASS
	total	2422	-11.60	<=8	PASS
	Ant1	2437	-18.11	<=8	PASS
	Ant2	2437	-18.08	<=8	PASS
	total	2437	-11.49	<=8	PASS
	Ant1	2452	-17.64	<=8	PASS
	Ant2	2452	-18.06	<=8	PASS
	total	2452	-10.58	<=8	PASS






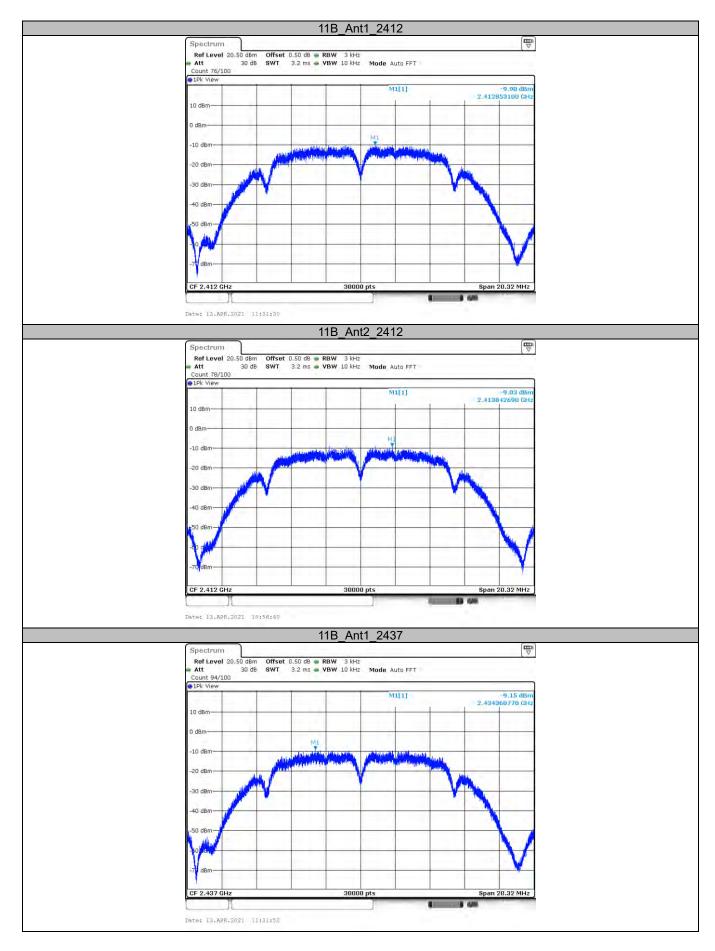




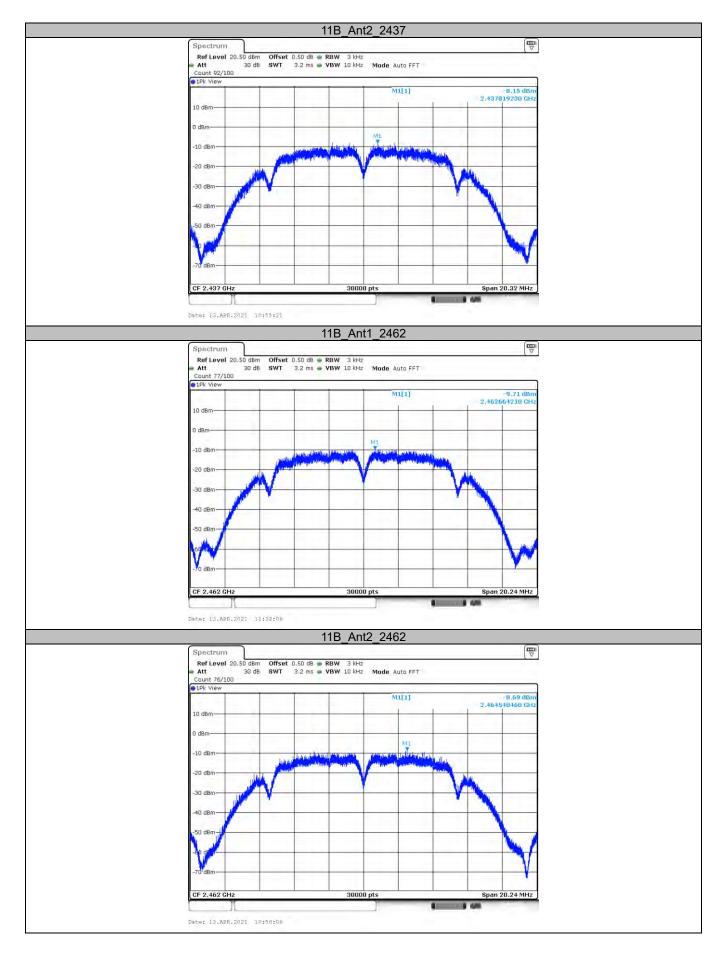




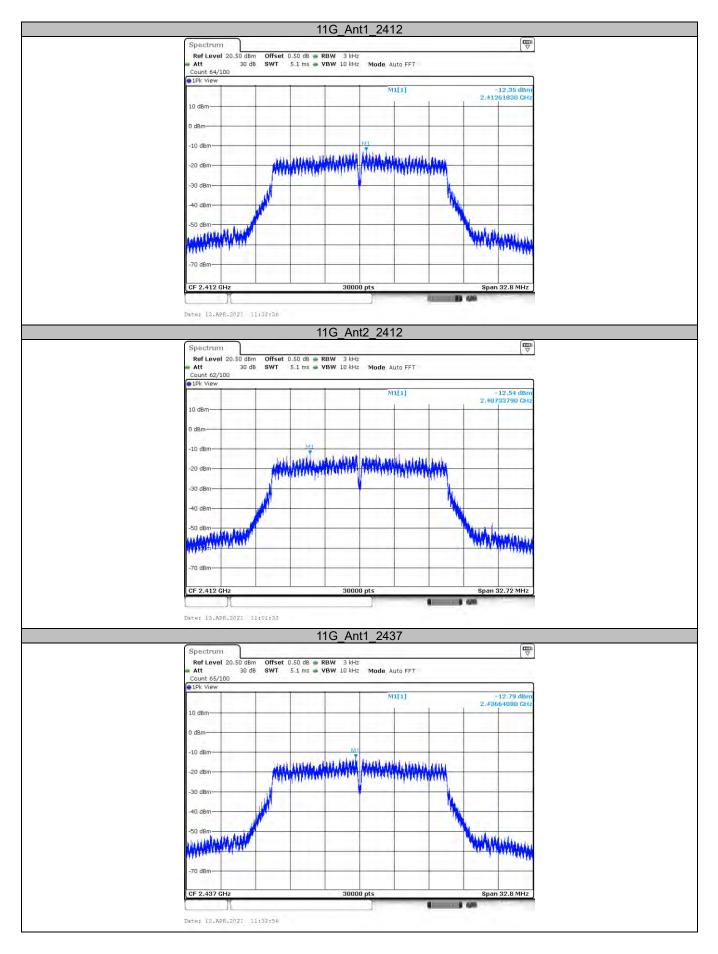




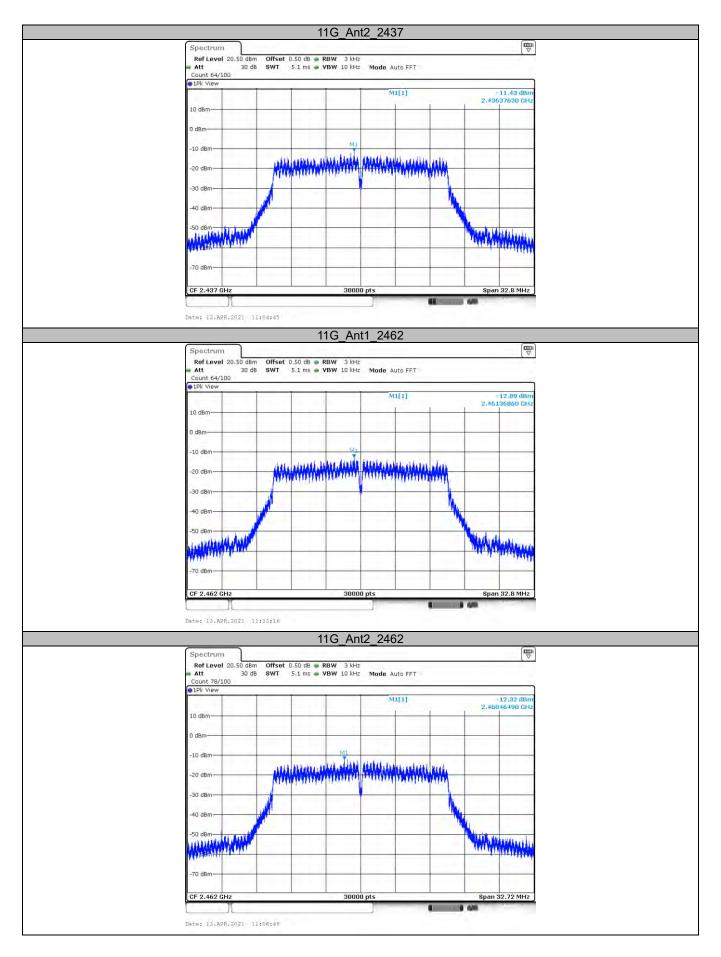




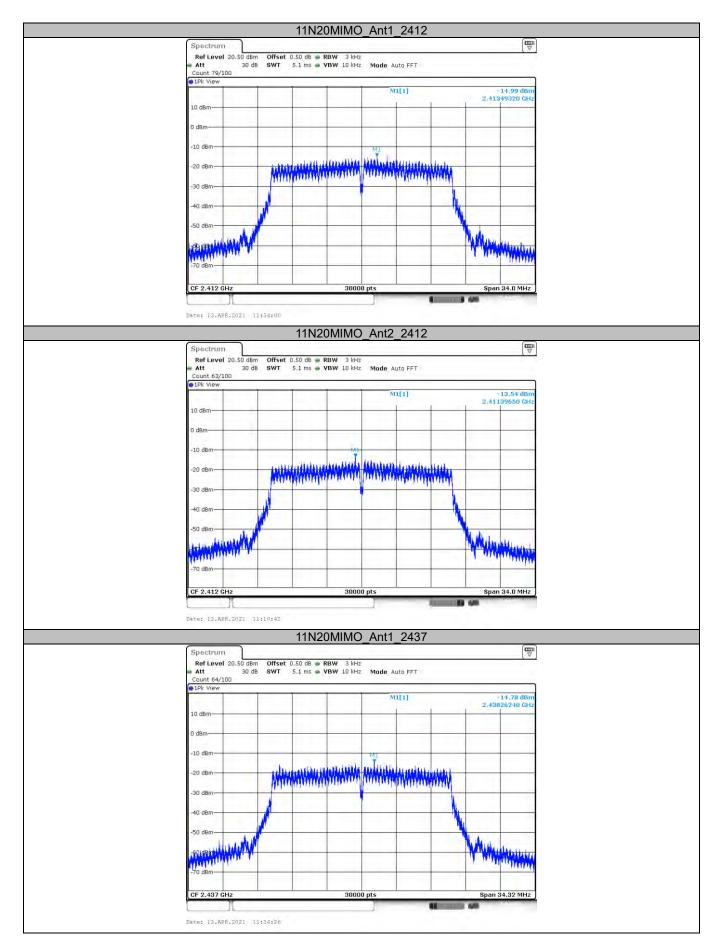




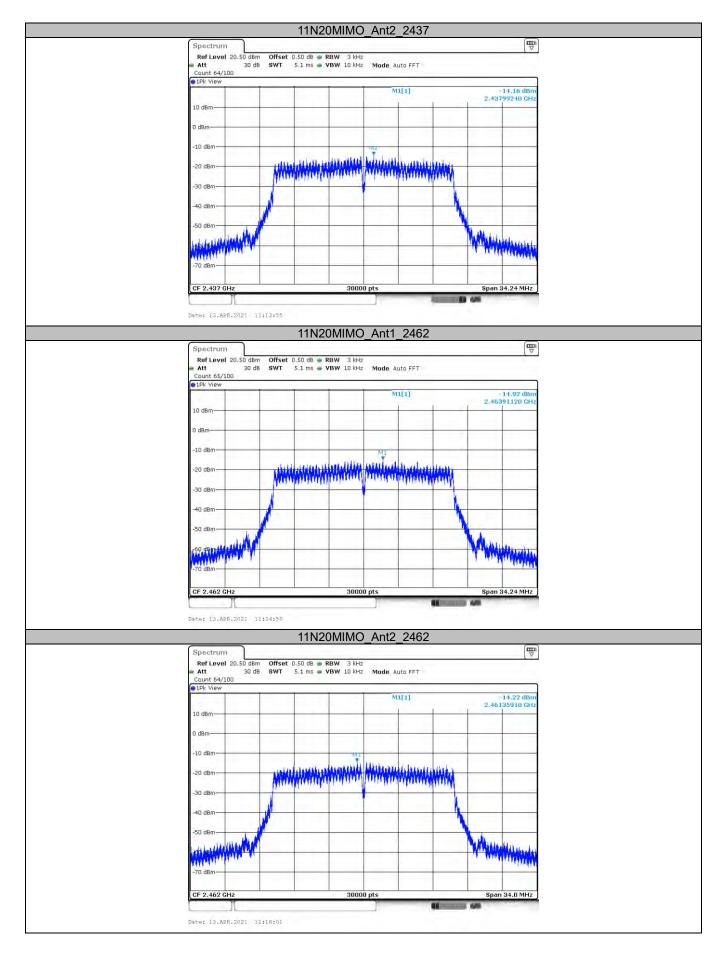



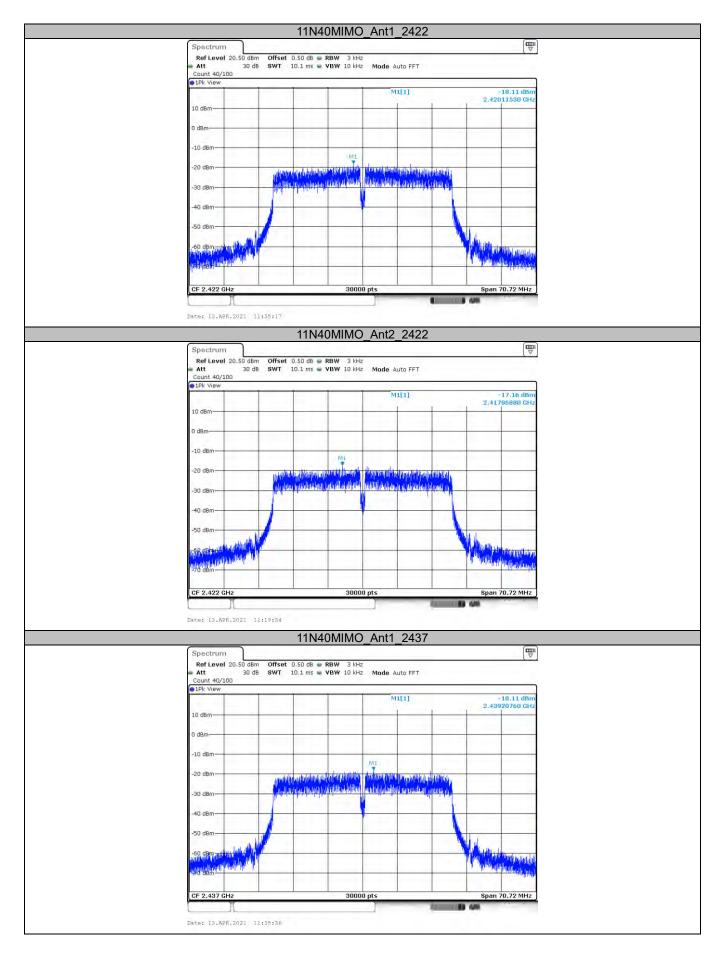



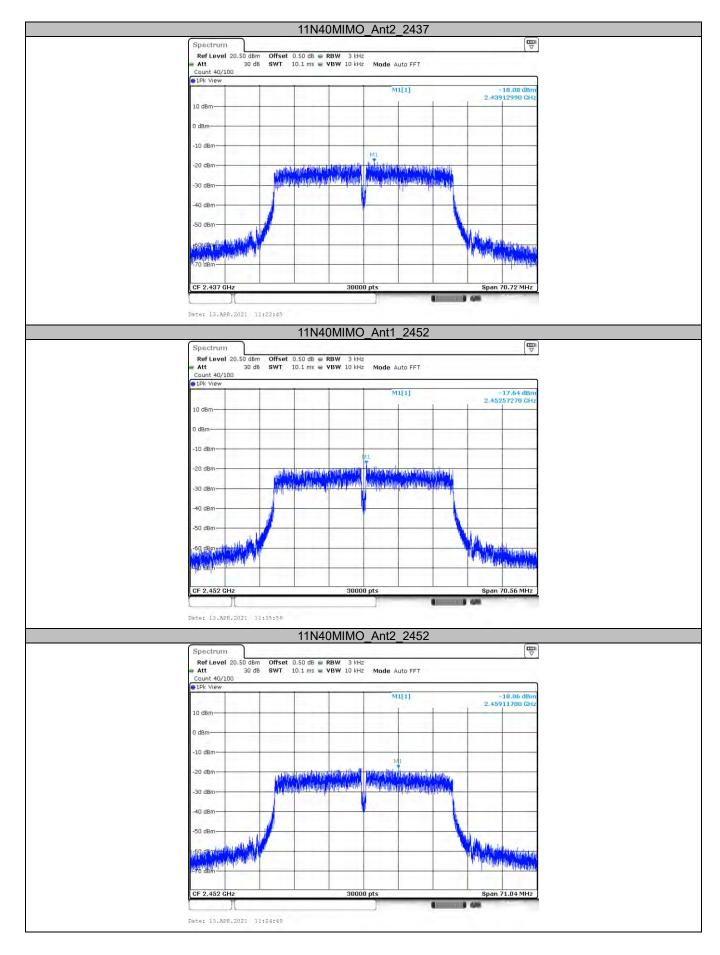




3.8. Duty Cycle

Limit

None, for report purposes only.

Test Configuration



Test Procedure

- 1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
- 3. Spectrum Setting:

Set analyzer center frequency to DTS channel center frequency.

Set the span to 0Hz Set the RBW to 10MHz Set the VBW to 10MHz


Detector: peak Sweep time: auto

Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode

Please refer to the clause 2.4.

CTC Laboratories, Inc.







Test Result

Test Mode	Antenna	Frequency (MHz)	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
11B	Ant1	2412	8.65	8.86	97.63	0.12	1.00
	Ant2	2412	8.66	8.86	97.66	0.12	1.00
	Ant1	2437	8.65	8.86	97.63	0.12	1.00
	Ant2	2437	8.65	8.86	97.63	0.12	1.00
	Ant1	2462	8.65	8.86	97.63	0.12	1.00
	Ant2	2462	8.65	8.86	97.63	0.12	1.00
11G	Ant1	2412	1.43	1.64	87.39	0.70	1.00
	Ant2	2412	1.43	1.64	87.39	0.70	1.00
	Ant1	2437	1.43	1.64	87.39	0.70	1.00
	Ant2	2437	1.43	1.64	87.39	0.70	1.00
	Ant1	2462	1.43	1.64	87.39	0.70	1.00
	Ant2	2462	1.43	1.64	87.39	0.70	1.00
11N20MIMO	Ant1	2412	1.34	1.54	86.64	0.75	1.00
	Ant2	2412	1.34	1.54	86.56	0.75	1.00
	Ant1	2437	1.34	1.54	86.56	0.75	1.00
	Ant2	2437	1.34	1.54	86.64	0.75	1.00
	Ant1	2462	1.34	1.54	86.56	0.75	1.00
	Ant2	2462	1.34	1.54	86.64	0.75	1.00
11N40MIMO	Ant1	2422	0.66	0.87	76.33	1.52	2.00
	Ant2	2422	0.66	0.87	76.33	1.52	2.00
	Ant1	2437	0.66	0.87	76.33	1.52	2.00
	Ant2	2437	0.66	0.87	76.33	1.52	2.00
	Ant1	2452	0.66	0.87	76.37	1.52	2.00
	Ant2	2452	0.66	0.87	76.33	1.52	2.00



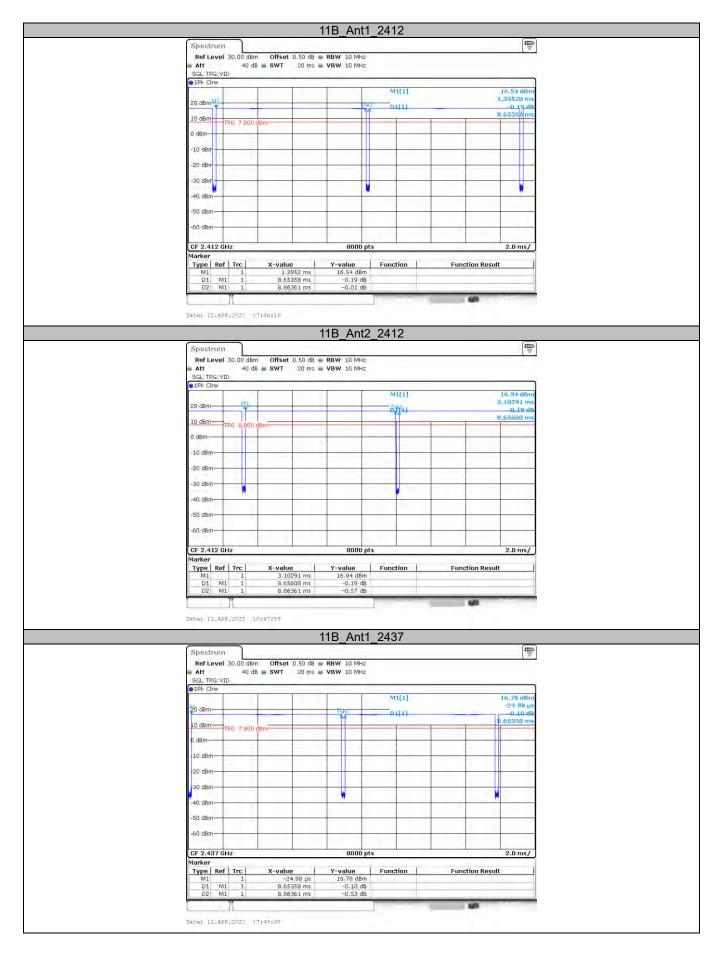




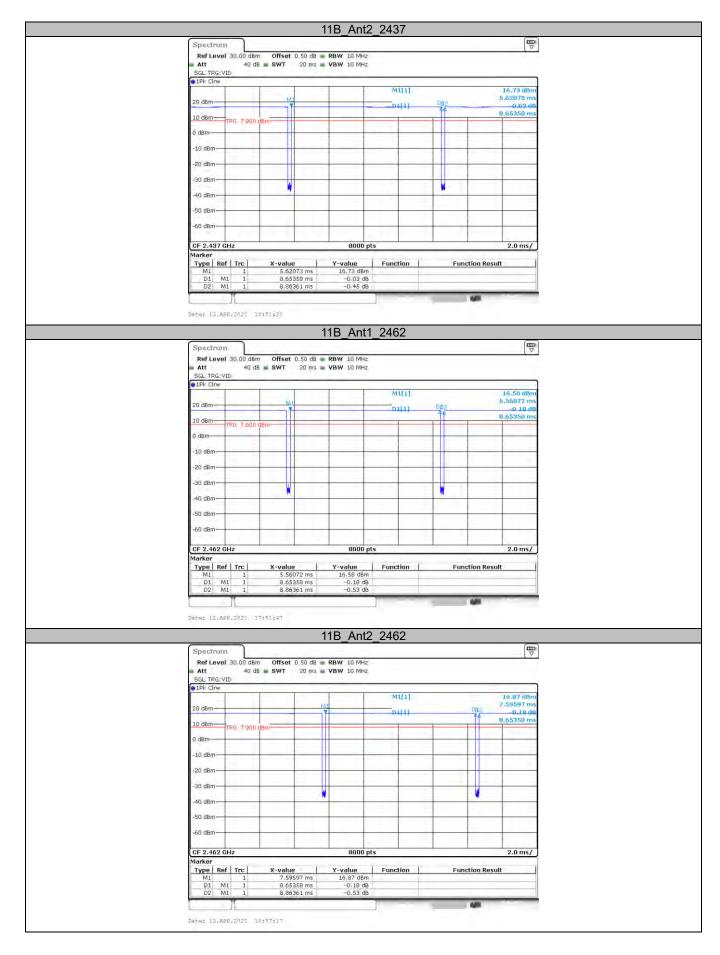








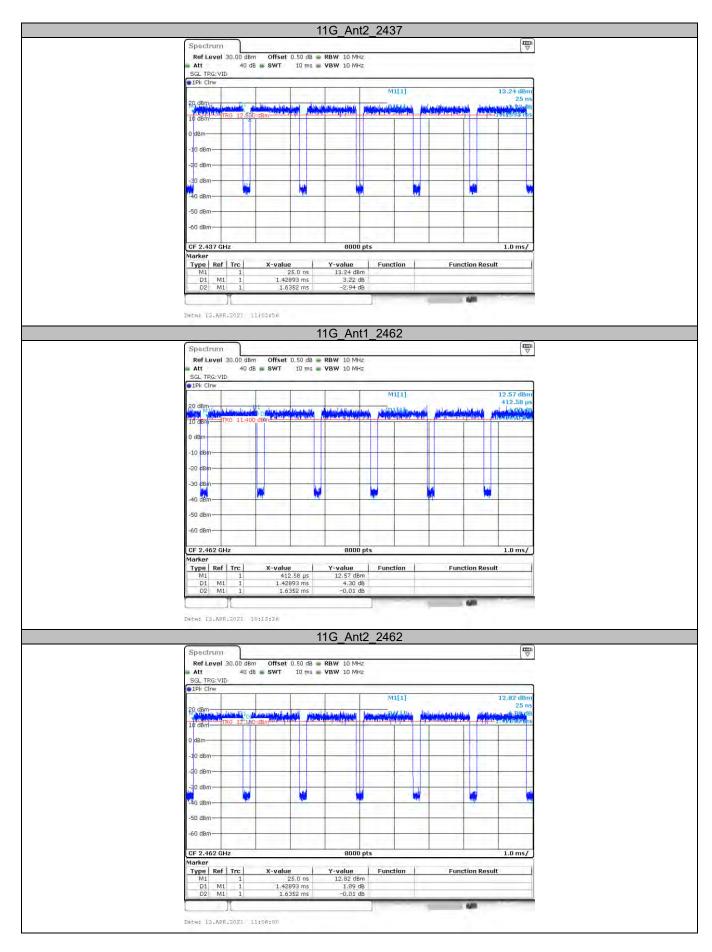




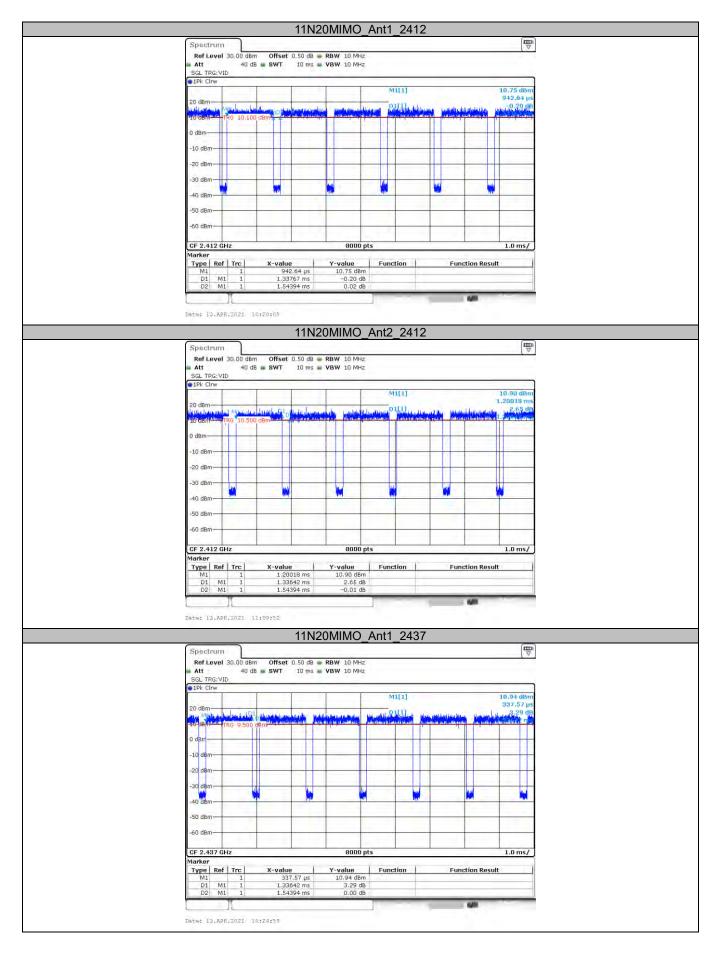


CTC Laboratories, Inc.




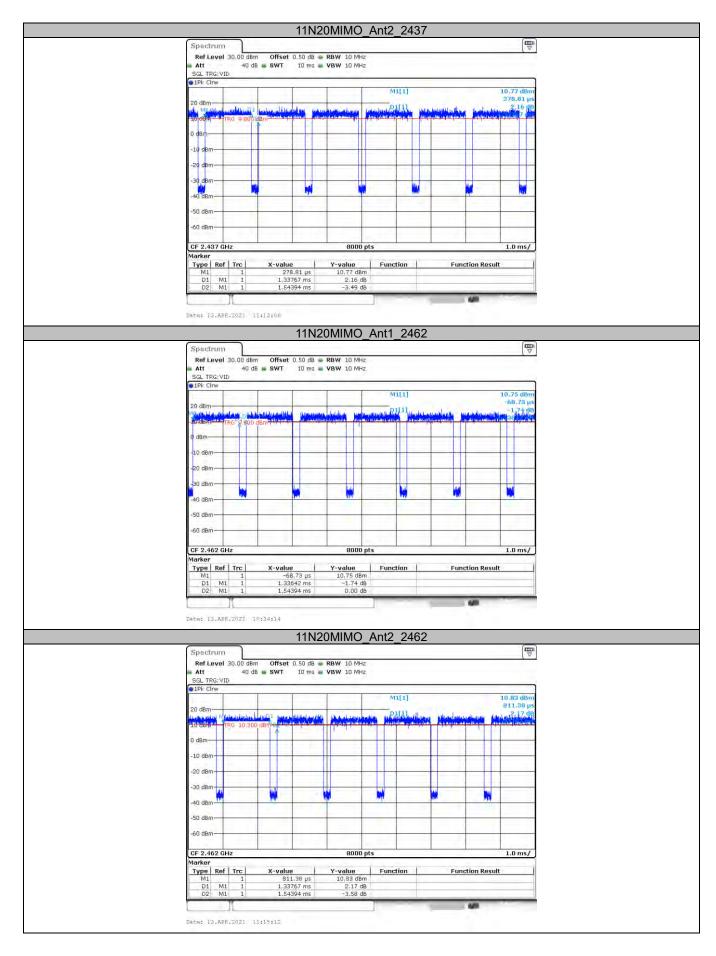



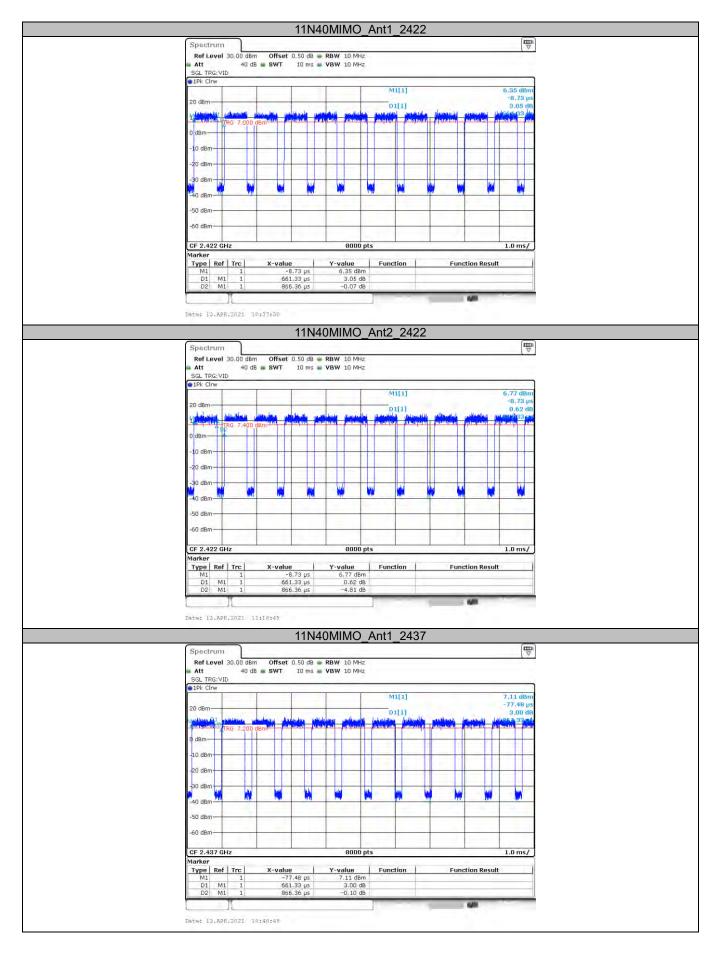



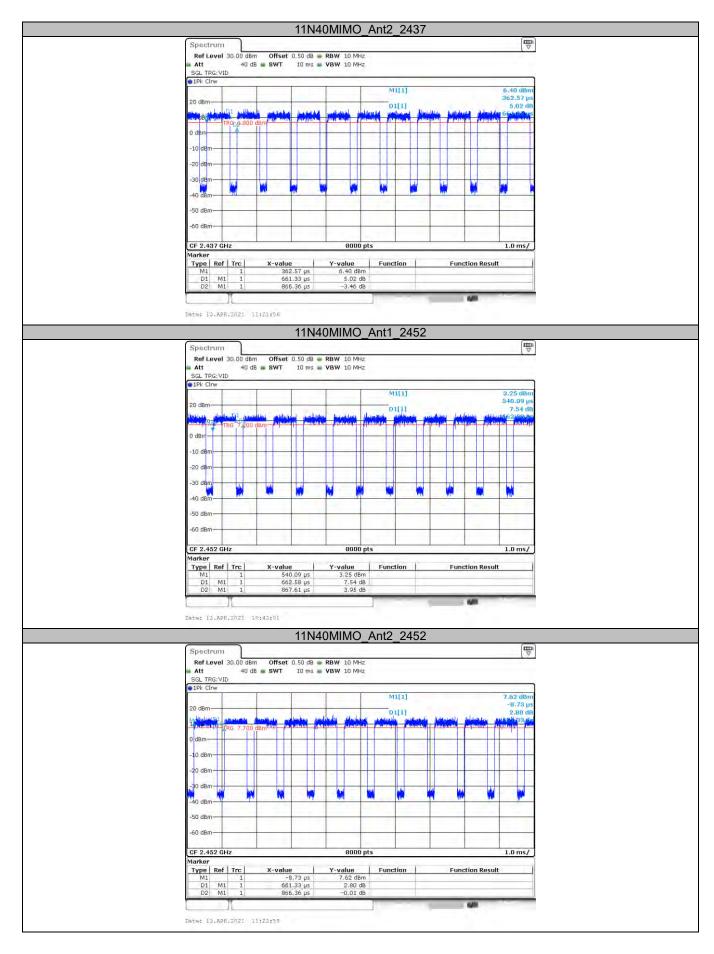





3.9. Antenna Requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result

Complies

Directional gain = G_{ANT} = 5dBi

Note: All transmit signals are completely uncorrelated with each other in MIMO transmitting modes (Manufacturer's Declaration).

