

FCC Test Report

Report No.: RF180330E07

FCC ID: PY318100409

Test Model: C6300v2

Received Date: Mar. 30, 2018

Test Date: Apr. 18 to 19, 2018

Issued Date: May 11, 2018

Applicant: NETGEAR, Inc.

Address: 350 East Plumeria Drive San Jose, CA 95134

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (1): E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.

FCC Registration / 723255 / TW2022 for Test Location (1)
Designation Number: 736135 / TW0004 for Test Location (2)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability and Tested Channel Detail	11
3.3 Duty Cycle of Test Signal	13
3.4 Description of Support Units	14
3.4.1 Configuration of System under Test	14
3.5 General Description of Applied Standards	15
4 Test Types and Results	16
4.1 Radiated Emission and Bandedge Measurement.....	16
4.1.1 Limits of Radiated Emission and Bandedge Measurement	16
4.1.2 Test Instruments	17
4.1.3 Test Procedures.....	18
4.1.4 Deviation from Test Standard	19
4.1.5 Test Setup.....	19
4.1.6 EUT Operating Conditions.....	20
4.1.7 Test Results	21
4.2 Conducted Emission Measurement	34
4.2.1 Limits of Conducted Emission Measurement	34
4.2.2 Test Instruments	34
4.2.3 Test Procedures.....	35
4.2.4 Deviation from Test Standard	35
4.2.5 Test Setup.....	35
4.2.6 EUT Operating Conditions.....	35
4.2.7 Test Results (Mode 1).....	36
4.2.8 Test Results (Mode 2).....	38
4.3 6dB Bandwidth Measurement	40
4.3.1 Limits of 6dB Bandwidth Measurement	40
4.3.2 Test Setup.....	40
4.3.3 Test Instruments	40
4.3.4 Test Procedure	40
4.3.5 Deviation from Test Standard	40
4.3.6 EUT Operating Conditions.....	40
4.3.7 Test Result.....	41
4.4 Conducted Output Power Measurement.....	43
4.4.1 Limits of Conducted Output Power Measurement	43
4.4.2 Test Setup.....	43
4.4.3 Test Instruments	43
4.4.4 Test Procedures.....	43
4.4.5 Deviation from Test Standard	43
4.4.6 EUT Operating Conditions.....	43
4.4.7 Test Results	44
4.5 Power Spectral Density Measurement.....	45
4.5.1 Limits of Power Spectral Density Measurement	45
4.5.2 Test Setup.....	45
4.5.3 Test Instruments	45
4.5.4 Test Procedure	45
4.5.5 Deviation from Test Standard	45

4.5.6	EUT Operating Condition	45
4.5.7	Test Results	46
4.6	Conducted Out of Band Emission Measurement	49
4.6.1	Limits of Conducted Out of Band Emission Measurement.....	49
4.6.2	Test Setup.....	49
4.6.3	Test Instruments	49
4.6.4	Test Procedure	49
4.6.5	Deviation from Test Standard	49
4.6.6	EUT Operating Condition	49
4.6.7	Test Results	49
5	Pictures of Test Arrangements.....	60
	Appendix – Information on the Testing Laboratories	61

Release Control Record

Issue No.	Description	Date Issued
RF180330E07	Original release.	May 11, 2018

1 Certificate of Conformity

Product: AC 1750 Wireless Cable Gateway

Brand: NETGEAR

Test Model: C6300v2

Sample Status: ENGINEERING SAMPLE

Applicant: NETGEAR, Inc.

Test Date: Apr. 18 to 19, 2018

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Wendy Wu , **Date:** May 11, 2018
Wendy Wu / Specialist

Approved by : May Chen , **Date:** May 11, 2018
May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -5.04dB at 0.32188MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 2390.00MHz, 2483.50MHz, 2386.60MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex(MHF) not a standard connector.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.84 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.53 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.08 dB
	6GHz ~ 18GHz	4.98 dB
	18GHz ~ 40GHz	5.19 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	AC 1750 Wireless Cable Gateway
Brand	NETGEAR
Test Model	C6300v2
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	12Vdc from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode only
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 450Mbps 802.11ac: up to 1300Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.18 ~ 5.24GHz, 5.745 ~ 5.825GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20): 11 802.11n (HT40): 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 9 802.11n (HT40), 802.11ac (VHT40): 4 802.11ac (VHT80): 2
Output Power	2.4GHz: 1TX Mode: 558.47mW CDD Mode: 975.119mW Beamforming Mode: 993.724mW 5GHz: CDD Mode: 5.18 ~ 5.24GHz: 906.062mW 5.745 ~ 5.825GHz: 688.966mW Beamforming Mode: 5.18 ~ 5.24GHz: 937.444mW 5.745 ~ 5.825GHz: 720.127mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x1
Data Cable Supplied	NA

Note:

1. Simultaneously transmission condition.

Condition	Technology	
1	WLAN (2.4GHz)	WLAN (5GHz)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

2. The EUT must be supplied power adapter and following different models could be chosen as following table:

No.	Brand	Model No.	P/N	Spec.
1	Netgear	2ABN042F1 NJ	332-10951-01	Input: 100-240Vac, 1.0A, 50/60Hz Output: 12V, 3.5A DC Output cable: Unshielded, 1.8m
2	Netgear	AD2080F10	332-10875-01	Input: 100-240Vac, 1.0A, 50/60Hz Output: 12V, 3.5A DC Output cable: Unshielded, 1.8m

From the above adapters, the worse radiated emissions was found in Adapter 1. Therefore only the test data of the mode was recorded in this report.

3. The antennas provided to the EUT, please refer to the following table:

Frequency Range (GHz)	Directional Antenna Gain (dBi)
2.4~2.4835	5.76
5.15~5.25	6.20
5.725~5.85	6.20

4. The EUT incorporates a MIMO function:

2.4GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11b	1 ~ 11Mbps	1TX diversity	1RX diversity
802.11g	6 ~ 54Mbps	3TX	3RX
802.11n (HT20)	MCS 0~7	3TX	3RX
	MCS 8~15	3TX	3RX
	MCS 16~23	3TX	3RX
802.11n (HT40)	MCS 0~7	3TX	3RX
	MCS 8~15	3TX	3RX
	MCS 16~23	3TX	3RX
5GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11a	6 ~ 54Mbps	3TX	3RX
802.11n (HT20)	MCS 0~7	3TX	3RX
	MCS 8~15	3TX	3RX
	MCS 16~23	3TX	3RX
802.11n (HT40)	MCS 0~7	3TX	3RX
	MCS 8~15	3TX	3RX
	MCS 16~23	3TX	3RX
802.11ac (VHT20)	MCS 0~8, Nss=1	3TX	3RX
	MCS 0~8, Nss=2	3TX	3RX
	MCS 0~9, Nss=3	3TX	3RX
802.11ac (VHT40)	MCS 0~9, Nss=1	3TX	3RX
	MCS 0~9, Nss=2	3TX	3RX
	MCS 0~9, Nss=3	3TX	3RX
802.11ac (VHT80)	MCS 0~9, Nss=1	3TX	3RX
	MCS 0~9, Nss=2	3TX	3RX
	MCS 0~9, Nss=3	3TX	3RX

Note:

1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode.
2. The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
1	√	√	√	√	Power from adapter 1
2	-	-	√	-	Power from adapter 2

Where RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement
 RE<1G: Radiated Emission below 1GHz
 PLC: Power Line Conducted Emission
 APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

1TX Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
Beamforming Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Beamforming Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20)	1 to 11	6	OFDM	BPSK	6.5

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Beamforming Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20)	1 to 11	6	OFDM	BPSK	6.5

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

1TX Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
Beamforming Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	23deg. C, 70%RH	120Vac, 60Hz	Weiwei Lo
RE<1G	22deg. C, 65%RH	120Vac, 60Hz	Robert Cheng
PLC	25deg. C, 68%RH	120Vac, 60Hz	David Chuang
APCM	25deg. C, 60%RH	120Vac, 60Hz	Robert Cheng

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.


If duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11b: Duty cycle = $8.406/8.438 = 0.996$

802.11g: Duty cycle = $1.393/1.425 = 0.978$, Duty factor = $10 * \log(1/0.978) = 0.10$

802.11n (HT20): Duty cycle = $1.306/1.335 = 0.978$, Duty factor = $10 * \log(1/0.978) = 0.10$

802.11n (HT40): Duty cycle = $0.647/0.674 = 0.96$, Duty factor = $10 * \log(1/0.96) = 0.18$

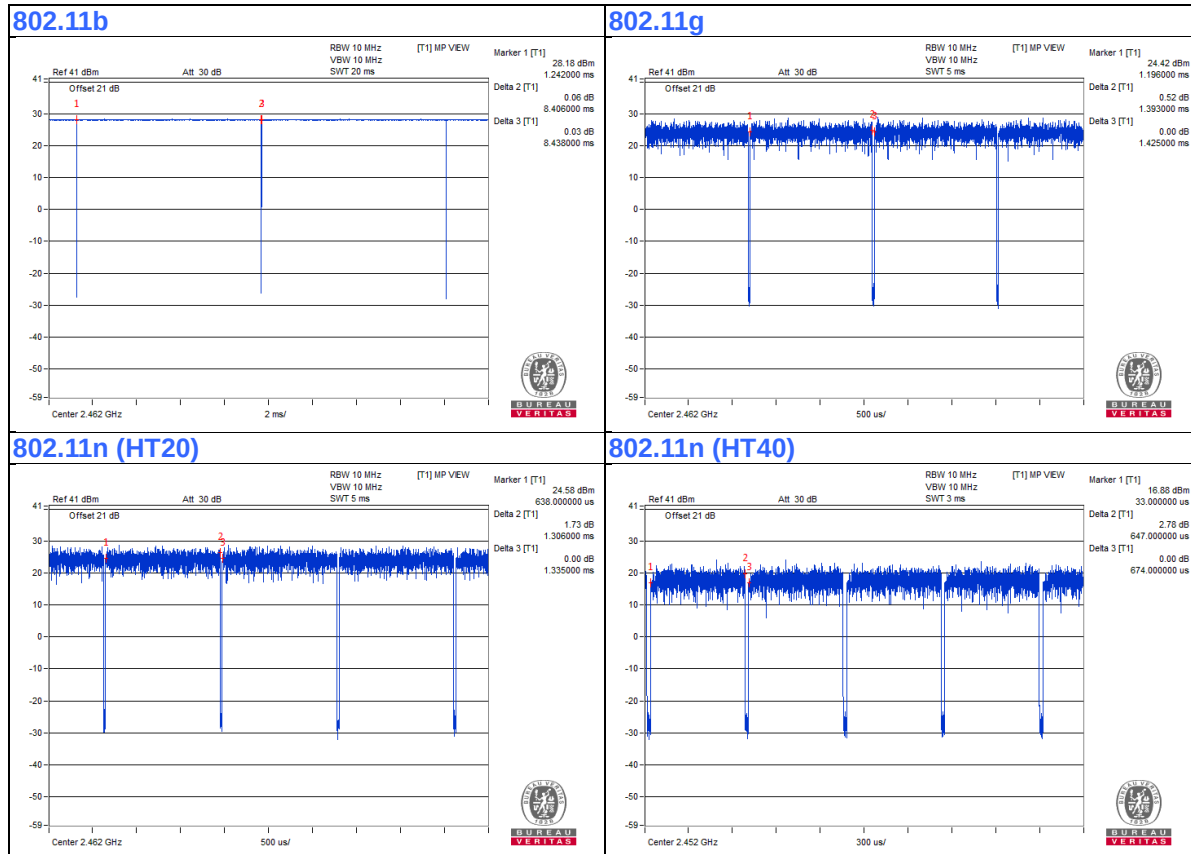

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E6420	B92T3R1	FCC DoC	Provided by Lab
B.	Laptop	DELL	E5430	HYV4VY1	FCC DoC	Provided by Lab
C.	iPod	Apple	MC749TA/A	CC4DN29UDFDM	NA	Provided by Lab


Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.8	No	0	Supplied by client
2.	RJ-45 Cable	1	10	No	0	Provided by Lab
3.	RJ-45 Cable	1	10	No	0	Provided by Lab
4.	Coaxial Cable	1	10	Yes	0	Provided by Lab
5.	USB Cable	1	0.1	Yes	0	Provided by Lab

Note: The core(s) is(are) originally attached to the cable(s).

3.4.1 Configuration of System under Test

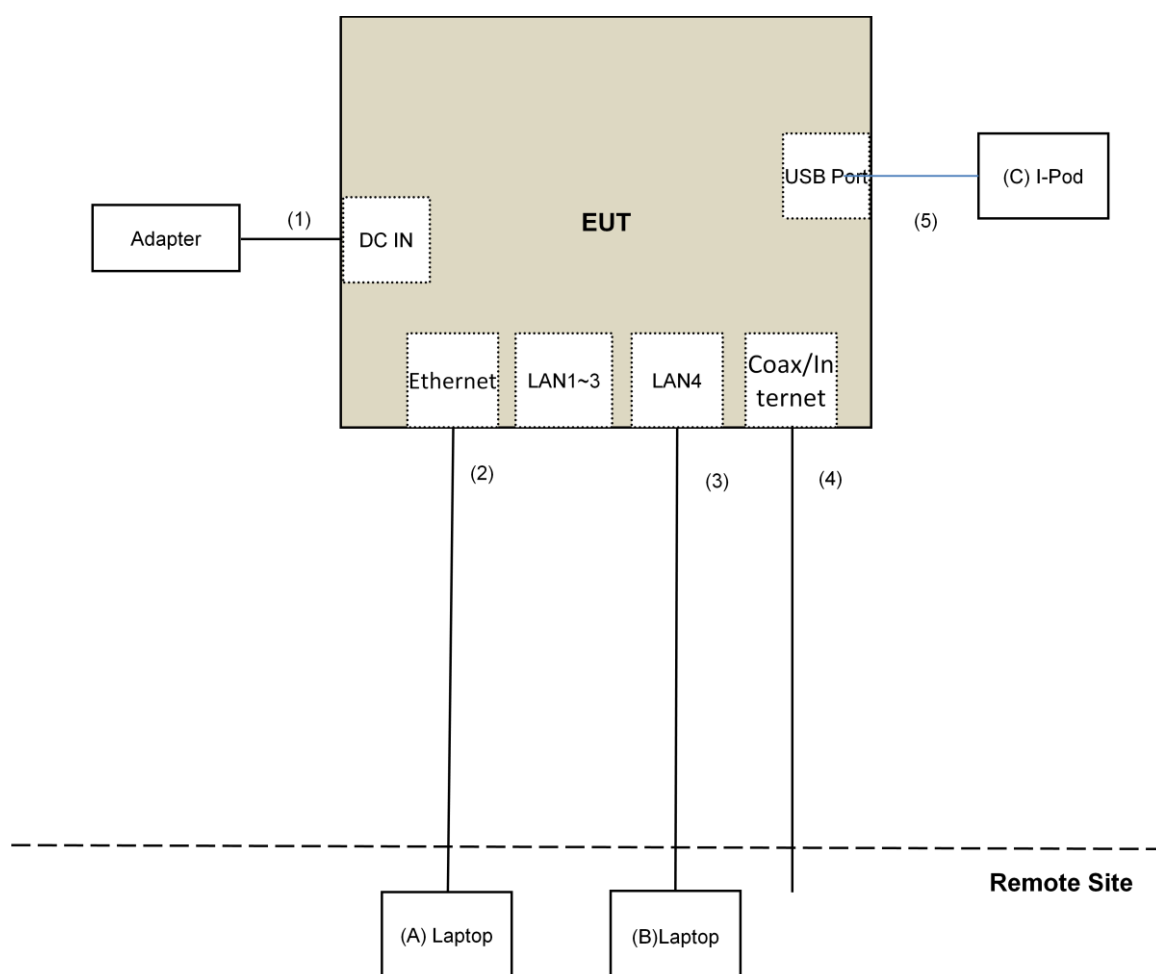

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
KDB 558074 D01 DTS Meas Guidance v04
KDB 662911 D01 Multiple Transmitter Output v02r01
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY50010156	July 12, 2017	July 11, 2018
Pre-Amplifier EMCI	EMC001340	980142	Feb. 09, 2018	Feb. 08, 2019
Loop Antenna ^(*) Electro-Metrics	EM-6879	264	Dec. 16, 2016	Dec. 15, 2018
RF Cable	NA	LOOPCAB-001 LOOPCAB-002	Jan. 15, 2018	Jan. 14, 2019
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-05	May 06, 2017	May 05, 2018
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Nov. 29, 2017	Nov. 28, 2018
RF Cable	8D	966-3-1 966-3-2 966-3-3	Mar. 20, 2018	Mar. 19, 2019
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-3-01	Oct. 03, 2017	Oct. 02, 2018
Horn_Antenna SCHWARZBECK	BBHA9120-D	9120D-406	Dec. 12, 2017	Dec. 11, 2018
Pre-Amplifier EMCI	EMC12630SE	980384	Jan. 29, 2018	Jan. 28, 2019
RF Cable	EMC104-SM-SM-1200 EMC104-SM-SM-2000 EMC104-SM-SM-5000	160922 150317 150322	Jan. 29, 2018	Jan. 28, 2019
Spectrum Analyzer Keysight	N9030A	MY54490679	July 25, 2017	July 24, 2018
Pre-Amplifier EMCI	EMC184045SE	980386	Jan. 29, 2018	Jan. 28, 2019
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170608	Dec. 14, 2017	Dec. 13, 2018
RF Cable	EMC102-KM-KM-1200	160924	Jan. 29, 2018	Jan. 28, 2019
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Spectrum Analyzer R&S	FSv40	100964	July 1, 2017	June 30, 2018
Power meter Anritsu	ML2495A	1014008	May 11, 2017	May 10, 2018
Power sensor Anritsu	MA2411B	0917122	May 11, 2017	May 10, 2018

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 3.
4. The CANADA Site Registration No. is 20331-1
5. Loop antenna was used for all emissions below 30 MHz.
6. Tested Date: Apr. 18 to 19, 2018

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

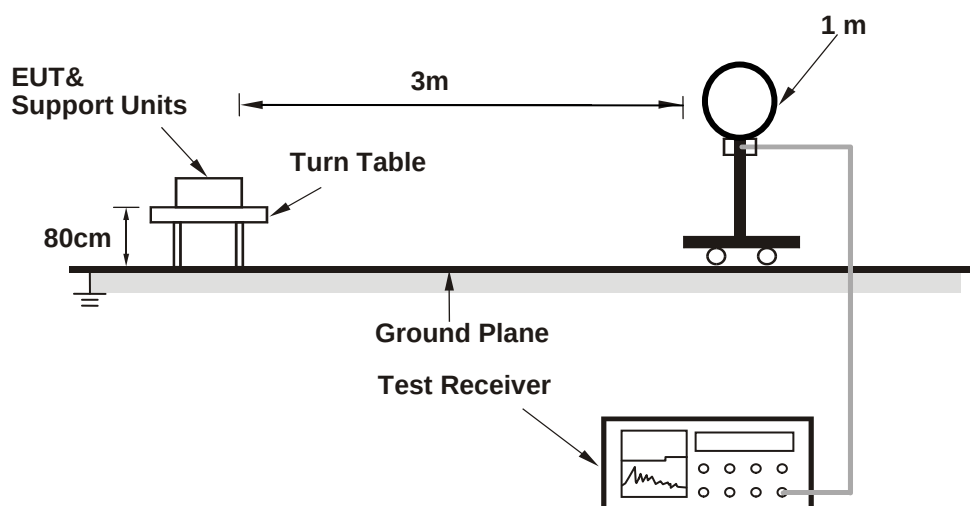

For Radiated emission 30MHz to 1GHz

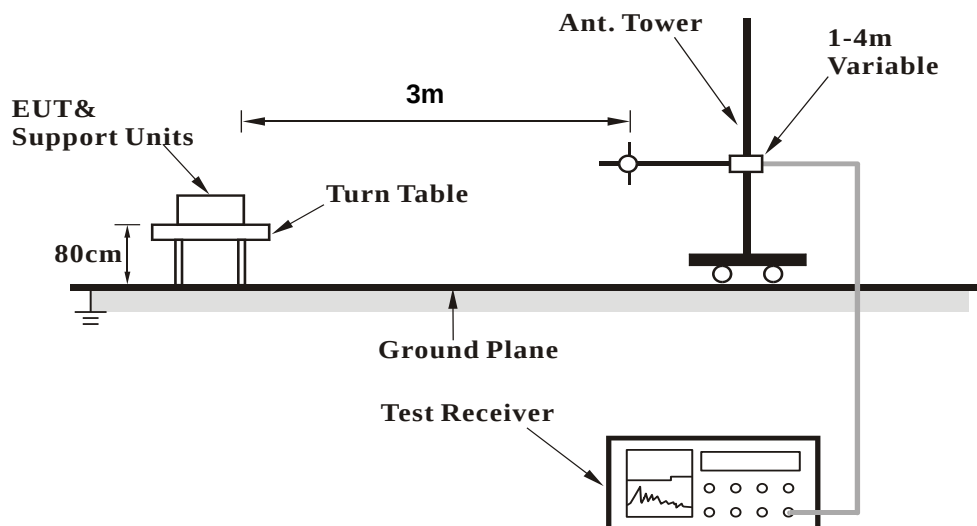

For Radiated emission above 1GHz

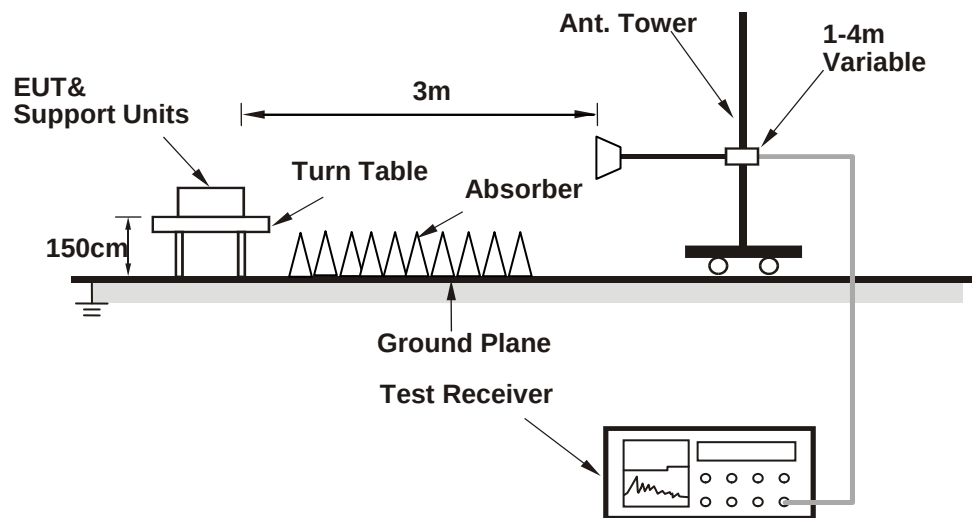

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Connected the EUT with the Laptop which is placed on remote site.
- Controlling software (Lantiq DUT version: 540.55) has been activated to set the EUT on specific status.

4.1.7 Test Results

Above 1GHz Data:

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.0 PK	74.0	-13.0	2.04 H	89	62.7	-1.7
2	2390.00	48.0 AV	54.0	-6.0	2.04 H	89	49.7	-1.7
3	*2412.00	120.1 PK			2.04 H	89	121.9	-1.8
4	*2412.00	112.1 AV			2.04 H	89	113.9	-1.8
5	4824.00	42.8 PK	74.0	-31.2	1.18 H	156	39.7	3.1
6	4824.00	37.1 AV	54.0	-16.9	1.18 H	156	34.0	3.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.2 PK	74.0	-16.8	3.82 V	191	58.9	-1.7
2	2390.00	44.6 AV	54.0	-9.4	3.82 V	191	46.3	-1.7
3	*2412.00	114.6 PK			3.82 V	191	116.4	-1.8
4	*2412.00	106.5 AV			3.82 V	191	108.3	-1.8
5	4824.00	40.7 PK	74.0	-33.3	1.83 V	261	37.6	3.1
6	4824.00	33.4 AV	54.0	-20.6	1.83 V	261	30.3	3.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2310.00	63.0 PK	74.0	-11.0	1.94 H	96	64.6	-1.6
2	2310.00	46.8 AV	54.0	-7.2	1.94 H	96	48.4	-1.6
3	*2437.00	117.9 PK			1.94 H	96	120.0	-2.1
4	*2437.00	112.3 AV			1.94 H	96	114.4	-2.1
5	2483.50	58.9 PK	74.0	-15.1	1.94 H	96	60.9	-2.0
6	2483.50	45.3 AV	54.0	-8.7	1.94 H	96	47.3	-2.0
7	4874.00	43.0 PK	74.0	-31.0	1.13 H	149	39.8	3.2
8	4874.00	37.5 AV	54.0	-16.5	1.13 H	149	34.3	3.2
9	7311.00	43.1 PK	74.0	-30.9	1.83 H	261	33.9	9.2
10	7311.00	29.0 AV	54.0	-25.0	1.83 H	261	19.8	9.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2310.00	59.2 PK	74.0	-14.8	3.86 V	180	60.8	-1.6
2	2310.00	42.7 AV	54.0	-11.3	3.86 V	180	44.3	-1.6
3	*2437.00	112.4 PK			3.86 V	180	114.5	-2.1
4	*2437.00	106.7 AV			3.86 V	180	108.8	-2.1
5	2483.50	55.1 PK	74.0	-18.9	3.86 V	180	57.1	-2.0
6	2483.50	41.2 AV	54.0	-12.8	3.86 V	180	43.2	-2.0
7	4874.00	40.4 PK	74.0	-33.6	1.81 V	276	37.2	3.2
8	4874.00	33.0 AV	54.0	-21.0	1.81 V	276	29.8	3.2
9	7311.00	43.8 PK	74.0	-30.2	1.65 V	321	34.6	9.2
10	7311.00	29.7 AV	54.0	-24.3	1.65 V	321	20.5	9.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	117.2 PK			1.96 H	98	119.2	-2.0
2	*2462.00	111.5 AV			1.96 H	98	113.5	-2.0
3	2483.50	60.4 PK	74.0	-13.6	1.96 H	98	62.4	-2.0
4	2483.50	47.5 AV	54.0	-6.5	1.96 H	98	49.5	-2.0
5	4924.00	42.4 PK	74.0	-31.6	1.19 H	153	39.1	3.3
6	4924.00	37.1 AV	54.0	-16.9	1.19 H	153	33.8	3.3
7	7386.00	43.3 PK	74.0	-30.7	1.81 H	246	33.9	9.4
8	7386.00	29.3 AV	54.0	-24.7	1.81 H	246	19.9	9.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.7 PK			3.81 V	179	113.7	-2.0
2	*2462.00	105.9 AV			3.81 V	179	107.9	-2.0
3	2483.50	56.6 PK	74.0	-17.4	3.81 V	179	58.6	-2.0
4	2483.50	43.4 AV	54.0	-10.6	3.81 V	179	45.4	-2.0
5	4924.00	40.3 PK	74.0	-33.7	1.85 V	291	37.0	3.3
6	4924.00	32.9 AV	54.0	-21.1	1.85 V	291	29.6	3.3
7	7386.00	44.2 PK	74.0	-29.8	1.61 V	329	34.8	9.4
8	7386.00	29.8 AV	54.0	-24.2	1.61 V	329	20.4	9.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2389.50	72.9 PK	74.0	-1.1	2.05 H	104	74.6	-1.7
2	2389.50	51.7 AV	54.0	-2.3	2.05 H	104	53.4	-1.7
3	*2412.00	116.9 PK			2.05 H	104	118.7	-1.8
4	*2412.00	102.1 AV			2.05 H	104	103.9	-1.8
5	4824.00	42.6 PK	74.0	-31.4	1.26 H	169	39.5	3.1
6	4824.00	28.9 AV	54.0	-25.1	1.26 H	169	25.8	3.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	73.1 PK	74.0	-0.9	2.08 V	298	74.8	-1.7
2	2390.00	53.7 AV	54.0	-0.3	2.08 V	298	55.4	-1.7
3	*2412.00	117.6 PK			2.08 V	298	119.4	-1.8
4	*2412.00	103.0 AV			2.08 V	298	104.8	-1.8
5	4824.00	43.1 PK	74.0	-30.9	3.32 V	105	40.0	3.1
6	4824.00	30.4 AV	54.0	-23.6	3.32 V	105	27.3	3.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.6 PK	74.0	-17.4	1.98 H	128	58.3	-1.7
2	2390.00	46.9 AV	54.0	-7.1	1.98 H	128	48.6	-1.7
3	*2437.00	116.3 PK			1.98 H	128	118.4	-2.1
4	*2437.00	106.2 AV			1.98 H	128	108.3	-2.1
5	2483.50	58.6 PK	74.0	-15.4	1.98 H	128	60.6	-2.0
6	2483.50	45.2 AV	54.0	-8.8	1.98 H	128	47.2	-2.0
7	4874.00	42.3 PK	74.0	-31.7	1.38 H	159	39.1	3.2
8	4874.00	28.8 AV	54.0	-25.2	1.38 H	159	25.6	3.2
9	7311.00	46.2 PK	74.0	-27.8	1.83 H	192	37.0	9.2
10	7311.00	31.7 AV	54.0	-22.3	1.83 H	192	22.5	9.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.3 PK	74.0	-8.7	2.96 V	303	67.0	-1.7
2	2390.00	48.6 AV	54.0	-5.4	2.96 V	303	50.3	-1.7
3	*2437.00	118.1 PK			2.96 V	303	120.2	-2.1
4	*2437.00	107.9 AV			2.96 V	303	110.0	-2.1
5	2483.50	62.5 PK	74.0	-11.5	2.96 V	303	64.5	-2.0
6	2483.50	45.7 AV	54.0	-8.3	2.96 V	303	47.7	-2.0
7	4874.00	43.1 PK	74.0	-30.9	3.35 V	91	39.9	3.2
8	4874.00	30.3 AV	54.0	-23.7	3.35 V	91	27.1	3.2
9	7311.00	44.6 PK	74.0	-29.4	1.05 V	258	35.4	9.2
10	7311.00	31.3 AV	54.0	-22.7	1.05 V	258	22.1	9.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	115.1 PK			2.20 H	131	117.1	-2.0
2	*2462.00	104.8 AV			2.20 H	131	106.8	-2.0
3	2483.50	72.7 PK	74.0	-1.3	2.20 H	131	74.7	-2.0
4	2483.50	53.7 AV	54.0	-0.3	2.20 H	131	55.7	-2.0
5	4924.00	42.0 PK	74.0	-32.0	1.34 H	153	38.7	3.3
6	4924.00	28.7 AV	54.0	-25.3	1.34 H	153	25.4	3.3
7	7386.00	45.9 PK	74.0	-28.1	1.78 H	207	36.5	9.4
8	7386.00	31.3 AV	54.0	-22.7	1.78 H	207	21.9	9.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	114.2 PK			2.00 V	303	116.2	-2.0
2	*2462.00	103.7 AV			2.00 V	303	105.7	-2.0
3	2483.50	71.9 PK	74.0	-2.1	2.00 V	303	73.9	-2.0
4	2483.50	53.1 AV	54.0	-0.9	2.00 V	303	55.1	-2.0
5	4924.00	43.1 PK	74.0	-30.9	3.30 V	77	39.8	3.3
6	4924.00	30.3 AV	54.0	-23.7	3.30 V	77	27.0	3.3
7	7386.00	44.3 PK	74.0	-29.7	1.00 V	253	34.9	9.4
8	7386.00	31.2 AV	54.0	-22.8	1.00 V	253	21.8	9.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.9 PK	74.0	-3.1	2.27 H	105	72.6	-1.7
2	2390.00	51.7 AV	54.0	-2.3	2.27 H	105	53.4	-1.7
3	*2412.00	113.2 PK			2.27 H	105	115.0	-1.8
4	*2412.00	101.2 AV			2.27 H	105	103.0	-1.8
5	4824.00	41.9 PK	74.0	-32.1	1.34 H	136	38.8	3.1
6	4824.00	28.4 AV	54.0	-25.6	1.34 H	136	25.3	3.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.9 PK	74.0	-2.1	2.03 V	308	73.6	-1.7
2	2390.00	53.9 AV	54.0	-0.1	2.03 V	308	55.6	-1.7
3	*2412.00	115.2 PK			2.03 V	308	117.0	-1.8
4	*2412.00	103.8 AV			2.03 V	308	105.6	-1.8
5	4824.00	43.2 PK	74.0	-30.8	3.29 V	72	40.1	3.1
6	4824.00	30.6 AV	54.0	-23.4	3.29 V	72	27.5	3.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.7 PK	74.0	-8.3	1.93 H	94	67.4	-1.7
2	2390.00	47.7 AV	54.0	-6.3	1.93 H	94	49.4	-1.7
3	*2437.00	116.8 PK			1.93 H	94	118.9	-2.1
4	*2437.00	107.2 AV			1.93 H	94	109.3	-2.1
5	2483.50	64.9 PK	74.0	-9.1	1.93 H	94	66.9	-2.0
6	2483.50	46.9 AV	54.0	-7.1	1.93 H	94	48.9	-2.0
7	4874.00	41.6 PK	74.0	-32.4	1.37 H	156	38.4	3.2
8	4874.00	28.3 AV	54.0	-25.7	1.37 H	156	25.1	3.2
9	7311.00	46.4 PK	74.0	-27.6	1.85 H	192	37.2	9.2
10	7311.00	31.9 AV	54.0	-22.1	1.85 H	192	22.7	9.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.3 PK	74.0	-5.7	2.06 V	310	70.0	-1.7
2	2390.00	49.7 AV	54.0	-4.3	2.06 V	310	51.4	-1.7
3	*2437.00	117.7 PK			2.06 V	310	119.8	-2.1
4	*2437.00	109.2 AV			2.06 V	310	111.3	-2.1
5	2483.50	66.8 PK	74.0	-7.2	2.06 V	310	68.8	-2.0
6	2483.50	46.9 AV	54.0	-7.1	2.06 V	310	48.9	-2.0
7	4874.00	43.0 PK	74.0	-31.0	3.31 V	68	39.8	3.2
8	4874.00	30.4 AV	54.0	-23.6	3.31 V	68	27.2	3.2
9	7311.00	44.6 PK	74.0	-29.4	1.07 V	261	35.4	9.2
10	7311.00	31.5 AV	54.0	-22.5	1.07 V	261	22.3	9.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	115.7 PK			2.01 H	127	117.7	-2.0
2	*2462.00	104.6 AV			2.01 H	127	106.6	-2.0
3	2483.50	73.8 PK	74.0	-0.2	2.01 H	127	75.8	-2.0
4	2483.50	53.9 AV	54.0	-0.1	2.01 H	127	55.9	-2.0
5	4924.00	41.5 PK	74.0	-32.5	1.38 H	141	38.2	3.3
6	4924.00	28.1 AV	54.0	-25.9	1.38 H	141	24.8	3.3
7	7386.00	46.2 PK	74.0	-27.8	1.79 H	186	36.8	9.4
8	7386.00	32.1 AV	54.0	-21.9	1.79 H	186	22.7	9.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	114.8 PK			2.02 V	312	116.8	-2.0
2	*2462.00	103.1 AV			2.02 V	312	105.1	-2.0
3	2483.50	72.7 PK	74.0	-1.3	2.02 V	312	74.7	-2.0
4	2483.50	51.8 AV	54.0	-2.2	2.02 V	312	53.8	-2.0
5	4924.00	42.2 PK	74.0	-31.8	3.26 V	71	38.9	3.3
6	4924.00	29.9 AV	54.0	-24.1	3.26 V	71	26.6	3.3
7	7386.00	44.7 PK	74.0	-29.3	1.09 V	256	35.3	9.4
8	7386.00	31.6 AV	54.0	-22.4	1.09 V	256	22.2	9.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.2 PK	74.0	-6.8	1.99 H	111	68.9	-1.7
2	2390.00	52.2 AV	54.0	-1.8	1.99 H	111	53.9	-1.7
3	*2422.00	108.4 PK			1.99 H	111	110.4	-2.0
4	*2422.00	97.1 AV			1.99 H	111	99.1	-2.0
5	4844.00	41.3 PK	74.0	-32.7	1.35 H	126	38.2	3.1
6	4844.00	27.7 AV	54.0	-26.3	1.35 H	126	24.6	3.1
7	7266.00	46.4 PK	74.0	-27.6	1.75 H	191	37.2	9.2
8	7266.00	32.4 AV	54.0	-21.6	1.75 H	191	23.2	9.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.8 PK	74.0	-6.2	1.91 V	310	69.5	-1.7
2	2390.00	53.9 AV	54.0	-0.1	1.91 V	310	55.6	-1.7
3	*2422.00	110.7 PK			1.91 V	310	112.7	-2.0
4	*2422.00	98.2 AV			1.91 V	310	100.2	-2.0
5	4844.00	43.2 PK	74.0	-30.8	3.41 V	87	40.1	3.1
6	4844.00	30.9 AV	54.0	-23.1	3.41 V	87	27.8	3.1
7	7266.00	44.8 PK	74.0	-29.2	1.11 V	277	35.6	9.2
8	7266.00	31.5 AV	54.0	-22.5	1.11 V	277	22.3	9.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.60	72.4 PK	74.0	-1.6	2.03 H	111	74.1	-1.7
2	2386.60	52.5 AV	54.0	-1.5	2.03 H	111	54.2	-1.7
3	*2437.00	110.9 PK			2.03 H	111	113.0	-2.1
4	*2437.00	99.8 AV			2.03 H	111	101.9	-2.1
5	2483.50	64.3 PK	74.0	-9.7	2.03 H	111	66.3	-2.0
6	2483.50	48.4 AV	54.0	-5.6	2.03 H	111	50.4	-2.0
7	4874.00	42.0 PK	74.0	-32.0	1.36 H	140	38.8	3.2
8	4874.00	28.5 AV	54.0	-25.5	1.36 H	140	25.3	3.2
9	7311.00	46.2 PK	74.0	-27.8	1.74 H	188	37.0	9.2
10	7311.00	32.2 AV	54.0	-21.8	1.74 H	188	23.0	9.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.60	73.7 PK	74.0	-0.3	2.16 V	304	75.4	-1.7
2	2386.60	53.9 AV	54.0	-0.1	2.16 V	304	55.6	-1.7
3	*2437.00	113.2 PK			2.16 V	304	115.3	-2.1
4	*2437.00	100.9 AV			2.16 V	304	103.0	-2.1
5	2483.50	65.7 PK	74.0	-8.3	2.16 V	304	67.7	-2.0
6	2483.50	49.9 AV	54.0	-4.1	2.16 V	304	51.9	-2.0
7	4874.00	43.3 PK	74.0	-30.7	3.36 V	65	40.1	3.2
8	4874.00	31.0 AV	54.0	-23.0	3.36 V	65	27.8	3.2
9	7311.00	44.5 PK	74.0	-29.5	1.05 V	273	35.3	9.2
10	7311.00	31.2 AV	54.0	-22.8	1.05 V	273	22.0	9.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	110.3 PK			1.82 H	131	112.3	-2.0
2	*2452.00	98.9 AV			1.82 H	131	100.9	-2.0
3	2483.50	73.4 PK	74.0	-0.6	1.82 H	131	75.4	-2.0
4	2483.50	53.8 AV	54.0	-0.2	1.82 H	131	55.8	-2.0
5	4904.00	41.1 PK	74.0	-32.9	1.36 H	140	37.8	3.3
6	4904.00	27.6 AV	54.0	-26.4	1.36 H	140	24.3	3.3
7	7356.00	46.6 PK	74.0	-27.4	1.81 H	192	37.2	9.4
8	7356.00	32.5 AV	54.0	-21.5	1.81 H	192	23.1	9.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	109.4 PK			1.82 V	322	111.4	-2.0
2	*2452.00	98.1 AV			1.82 V	322	100.1	-2.0
3	2483.50	72.3 PK	74.0	-1.7	1.82 V	322	74.3	-2.0
4	2483.50	52.5 AV	54.0	-1.5	1.82 V	322	54.5	-2.0
5	4904.00	43.3 PK	74.0	-30.7	3.36 V	76	40.0	3.3
6	4904.00	30.7 AV	54.0	-23.3	3.36 V	76	27.4	3.3
7	7356.00	45.1 PK	74.0	-28.9	1.12 V	282	35.7	9.4
8	7356.00	31.6 AV	54.0	-22.4	1.12 V	282	22.2	9.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz Data:

802.11n (HT20)

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	94.00	34.0 QP	43.5	-9.5	1.50 H	264	47.4	-13.4
2	186.15	35.2 QP	43.5	-8.3	1.50 H	260	45.5	-10.3
3	270.24	37.5 QP	46.0	-8.5	1.00 H	304	45.9	-8.4
4	375.00	37.5 QP	46.0	-8.5	1.00 H	86	43.0	-5.5
5	625.00	35.7 QP	46.0	-10.3	1.50 H	68	35.4	0.3
6	874.99	34.9 QP	46.0	-11.1	1.50 H	80	31.0	3.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	33.10	36.6 QP	40.0	-3.4	1.00 V	122	45.7	-9.1
2	55.77	35.3 QP	40.0	-4.7	1.00 V	143	43.6	-8.3
3	94.55	36.8 QP	43.5	-6.7	1.50 V	288	50.2	-13.4
4	125.01	34.1 QP	43.5	-9.4	1.00 V	324	43.7	-9.6
5	186.15	34.1 QP	43.5	-9.4	1.00 V	143	44.4	-10.3
6	445.35	35.0 QP	46.0	-11.0	1.00 V	211	38.4	-3.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Nov. 01, 2017	Oct. 31, 2018
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK-8127	8127-523	Oct. 06, 2017	Oct. 05, 2018
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100071	Nov. 15, 2017	Nov. 14, 2018
RF Cable	5D-FB	COACAB-001	May 23, 2017	May 22, 2018
10 dB PAD EMEC	STI02-2200-10	002	Mar. 16, 2018	Mar. 15, 2019
50 ohms Terminator	50	3	Nov. 01, 2017	Oct. 31, 2018
50 ohms Terminator	N/A	EMC-04	Nov. 01, 2017	Oct. 31, 2018
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conducted Room D
3. The VCCI Con D Registration No. is C-20005.
4. Tested Date: Apr. 18, 2018

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

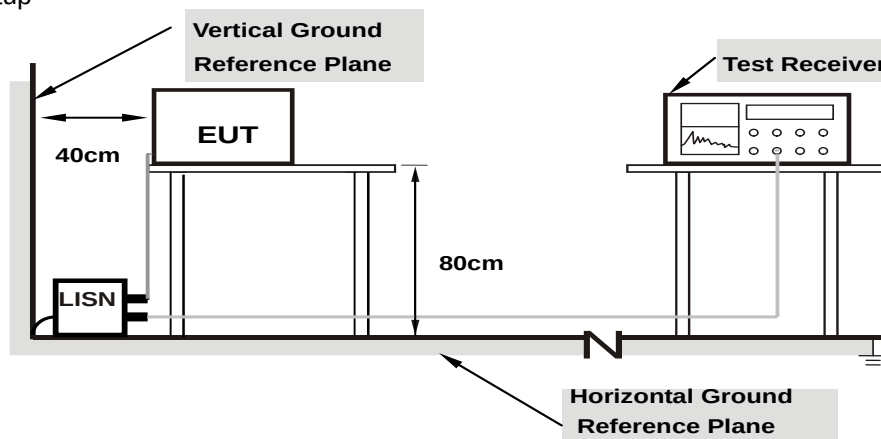

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results (Mode 1)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	9.89	39.71	30.48	49.60	40.37	65.38	55.38	-15.78	-15.01
2	0.25156	9.90	38.32	28.84	48.22	38.74	61.71	51.71	-13.49	-12.97
3	0.32578	9.90	39.88	33.55	49.78	43.45	59.56	49.56	-9.78	-6.11
4	0.41953	9.90	36.25	24.80	46.15	34.70	57.46	47.46	-11.31	-12.76
5	0.67344	9.91	30.76	21.66	40.67	31.57	56.00	46.00	-15.33	-14.43
6	1.75391	9.95	28.56	20.78	38.51	30.73	56.00	46.00	-17.49	-15.27

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

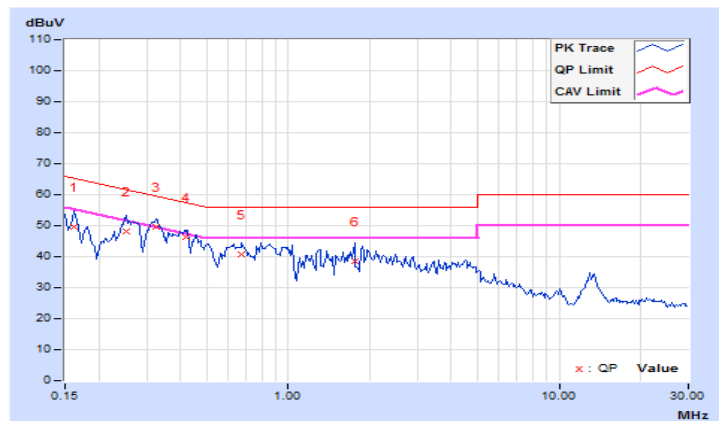


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	9.88	39.63	27.65	49.51	37.53	65.58	55.58	-16.07	-18.05
2	0.24766	9.89	38.08	30.99	47.97	40.88	61.84	51.84	-13.87	-10.96
3	0.32188	9.89	40.63	34.73	50.52	44.62	59.66	49.66	-9.14	-5.04
4	0.40000	9.89	37.95	29.58	47.84	39.47	57.85	47.85	-10.01	-8.38
5	0.96250	9.90	30.88	22.56	40.78	32.46	56.00	46.00	-15.22	-13.54
6	1.21484	9.90	29.83	21.16	39.73	31.06	56.00	46.00	-16.27	-14.94

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

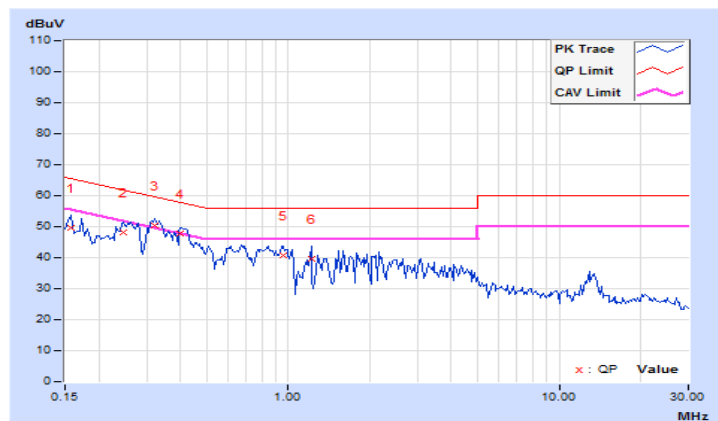


4.2.8 Test Results (Mode 2)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	9.89	39.19	25.13	49.08	35.02	65.58	55.58	-16.50	-20.56
2	0.18906	9.90	35.53	20.40	45.43	30.30	64.08	54.08	-18.65	-23.78
3	0.32969	9.90	22.55	8.84	32.45	18.74	59.46	49.46	-27.01	-30.72
4	0.52109	9.91	12.77	3.42	22.68	13.33	56.00	46.00	-33.32	-32.67
5	12.16016	10.18	16.17	11.24	26.35	21.42	60.00	50.00	-33.65	-28.58
6	23.12891	10.37	20.38	18.19	30.75	28.56	60.00	50.00	-29.25	-21.44

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

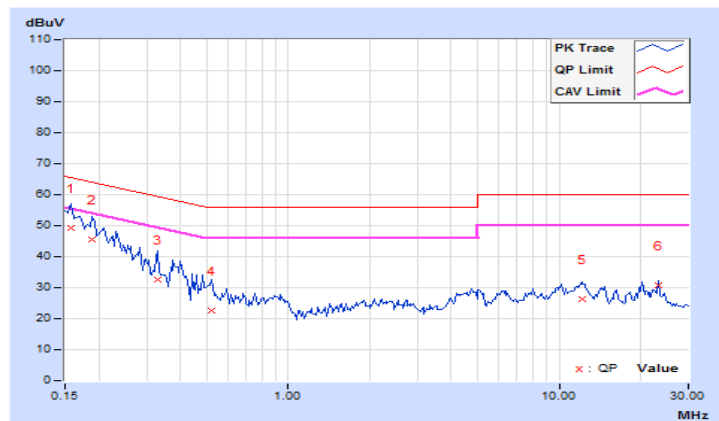


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.88	37.18	23.65	47.06	33.53	65.79	55.79	-18.73	-22.26
2	0.18125	9.89	32.32	18.78	42.21	28.67	64.43	54.43	-22.22	-25.76
3	0.27109	9.89	24.99	14.53	34.88	24.42	61.08	51.08	-26.20	-26.66
4	4.73828	9.98	14.90	8.96	24.88	18.94	56.00	46.00	-31.12	-27.06
5	9.83203	10.09	15.00	9.59	25.09	19.68	60.00	50.00	-34.91	-30.32
6	23.12891	10.35	18.90	16.60	29.25	26.95	60.00	50.00	-30.75	-23.05

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

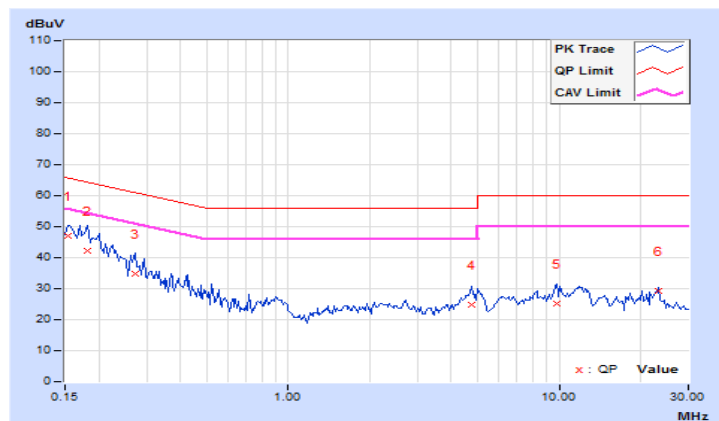


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

1TX Mode

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	8.11	0.5	PASS
6	2437	8.03	0.5	PASS
11	2462	7.19	0.5	PASS

CDD Mode

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
1	2412	16.40	16.42	16.41	0.5	PASS
6	2437	16.36	16.37	16.38	0.5	PASS
11	2462	16.38	16.38	16.39	0.5	PASS

Beamforming Mode

802.11n (HT20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
1	2412	17.60	17.36	17.63	0.5	PASS
6	2437	17.60	17.60	17.60	0.5	PASS
11	2462	17.62	17.63	17.62	0.5	PASS

802.11n (HT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
3	2422	35.86	35.95	35.70	0.5	Pass
6	2437	36.10	35.74	35.88	0.5	Pass
9	2452	35.87	35.75	35.99	0.5	Pass

Spectrum Plot of Worst Value


802.11b / CH11

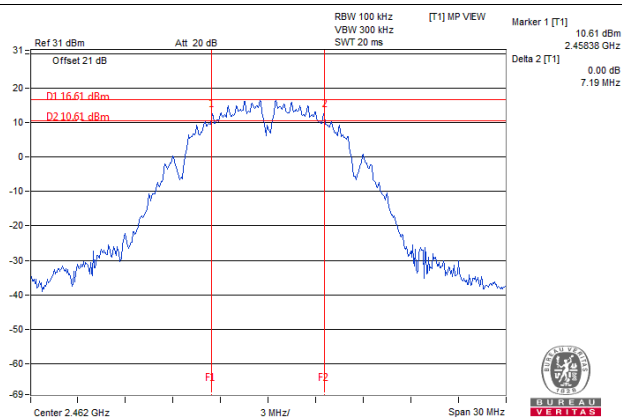


802.11g / Chain 0 : CH6

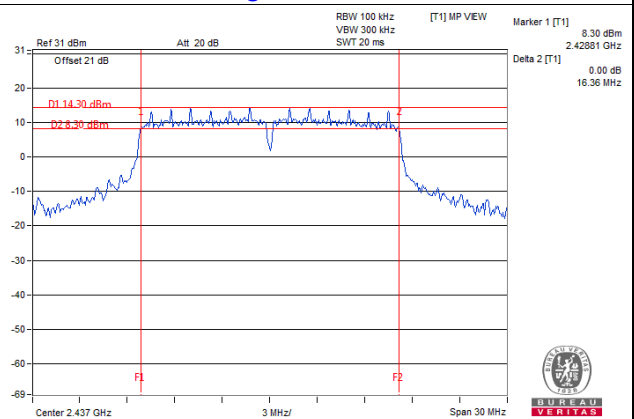

802.11n (HT20) / Chain 1 : CH1

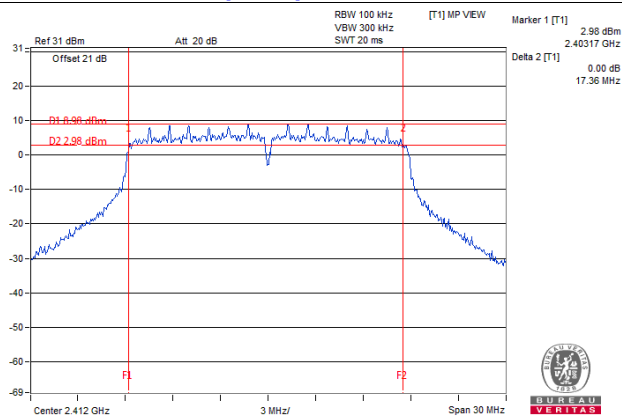

802.11n (HT40) / Chain 2 : CH3

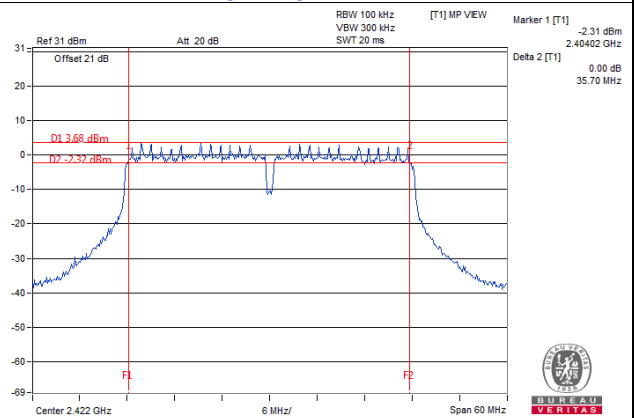

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value..

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

1TX Mode

802.11b

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)	Limit (dBm)	Pass/Fail
1	2412	511.682	27.09	30	Pass
6	2437	558.47	27.47	30	Pass
11	2462	543.25	27.35	30	Pass

CDD Mode

802.11g

Chan.	Chan. Freq. (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
1	2412	21.98	21.62	22.53	482.033	26.83	30	Pass
6	2437	25.79	24.66	24.82	975.119	29.89	30	Pass
11	2462	23.99	22.87	22.89	638.789	28.05	30	Pass

Beamforming Mode

802.11n (HT20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
1	2412	20.65	20.61	20.91	354.535	25.50	30	Pass
6	2437	25.88	24.66	24.97	993.724	29.97	30	Pass
11	2462	23.43	22.26	22.41	562.741	27.50	30	Pass

Note: 1. Directional gain = 5.76dBi < 6dBi , so the power limit shall not be reduced.

802.11n (HT40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
3	2422	18.24	17.67	18.04	188.84	22.76	30	Pass
6	2437	22.08	21.39	21.83	451.562	26.55	30	Pass
9	2452	21.62	20.88	21.36	404.446	26.07	30	Pass


Note: 1. Directional gain = 5.76dBi < 6dBi , so the power limit shall not be reduced.

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

802.11b

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

802.11g, 802.11n (HT20), 802.11n (HT40)

- Measure the duty cycle (x).
- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- Sweep time = auto couple.
- Do not use sweep triggering. Allow sweep to "free run".
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

1TX Mode

802.11b

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
1	2412	-3.49	8	Pass
6	2437	-2.76	8	Pass
11	2462	-3.04	8	Pass

CDD Mode

802.11g

TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/3kHz)	10 log (N=3) dB	Duty Factor (dB)	TOTAL PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-9.62	4.77	0.10	-4.75	8.00	Pass
	6	2437	-6.61	4.77	0.10	-1.74	8.00	Pass
	11	2462	-8.78	4.77	0.10	-3.91	8.00	Pass
1	1	2412	-10.06	4.77	0.10	-5.19	8.00	Pass
	6	2437	-6.66	4.77	0.10	-1.79	8.00	Pass
	11	2462	-9.36	4.77	0.10	-4.49	8.00	Pass
2	1	2412	-9.66	4.77	0.10	-4.79	8.00	Pass
	6	2437	-7.73	4.77	0.10	-2.86	8.00	Pass
	11	2462	-9.31	4.77	0.10	-4.44	8.00	Pass

- Note:**
1. Directional gain = 5.76dBi < 6dBi , so the power density limit shall not be reduced.
 2. Refer to section 3.3 for duty cycle spectrum plot.

Beamforming Mode

802.11n (HT20)

TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/3kHz)	10 log (N=3) dB	Duty Factor (dB)	TOTAL PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-11.83	4.77	0.10	-6.96	8.00	Pass
	6	2437	-6.74	4.77	0.10	-1.87	8.00	Pass
	11	2462	-9.39	4.77	0.10	-4.52	8.00	Pass
1	1	2412	-11.73	4.77	0.10	-6.86	8.00	Pass
	6	2437	-7.63	4.77	0.10	-2.76	8.00	Pass
	11	2462	-10.82	4.77	0.10	-5.95	8.00	Pass
2	1	2412	-11.51	4.77	0.10	-6.64	8.00	Pass
	6	2437	-7.07	4.77	0.10	-2.20	8.00	Pass
	11	2462	-9.58	4.77	0.10	-4.71	8.00	Pass

Note: 1. Directional gain = 5.76dBi < 6dBi , so the power density limit shall not be reduced.

802.11n (HT40)


TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/3kHz)	10 log (N=3) dB	Duty Factor (dB)	TOTAL PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	3	2422	-17.68	4.77	0.18	-12.73	8.00	Pass
	6	2437	-13.11	4.77	0.18	-8.16	8.00	Pass
	9	2452	-13.32	4.77	0.18	-8.37	8.00	Pass
1	3	2422	-17.42	4.77	0.18	-12.47	8.00	Pass
	6	2437	-13.78	4.77	0.18	-8.83	8.00	Pass
	9	2452	-14.78	4.77	0.18	-9.83	8.00	Pass
2	3	2422	-16.98	4.77	0.18	-12.03	8.00	Pass
	6	2437	-13.74	4.77	0.18	-8.79	8.00	Pass
	9	2452	-14.35	4.77	0.18	-9.40	8.00	Pass

Note: 1. Directional gain = 5.76dBi < 6dBi , so the power density limit shall not be reduced.


2. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11b / CH6

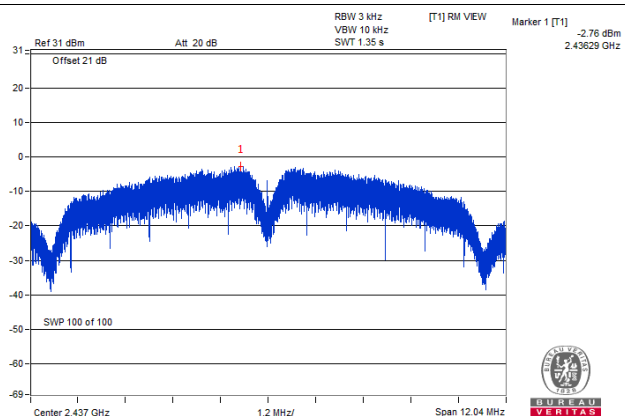


802.11g / Chain 1 : CH6

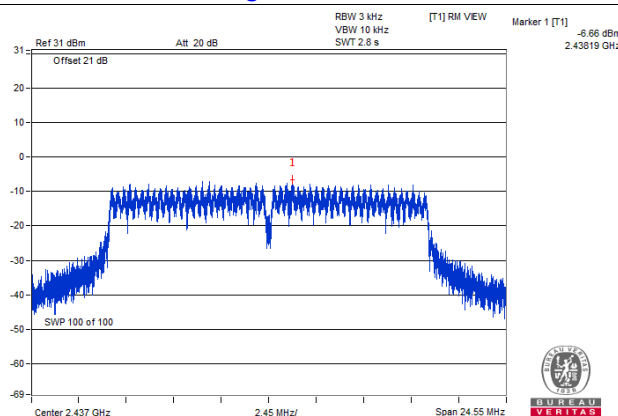

802.11n (HT20) / Chain 0 : CH6

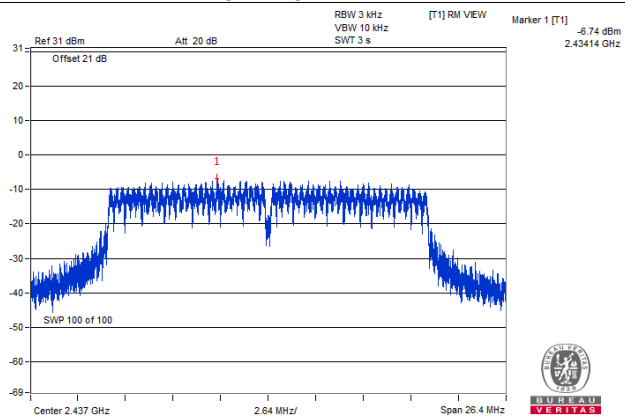

802.11n (HT40) / Chain 0 : CH6

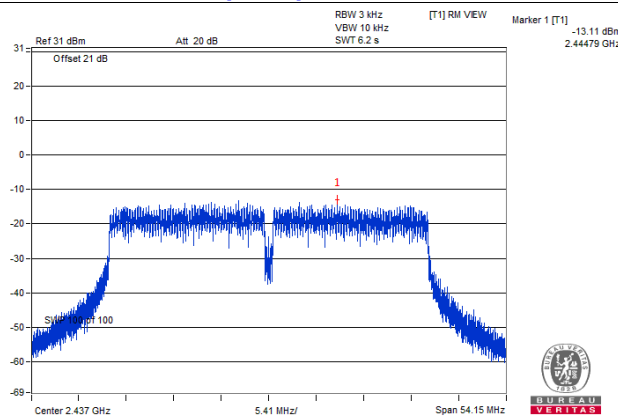


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below -30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.


4.6.6 EUT Operating Condition

Same as Item 4.3.6


4.6.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.


802.11b

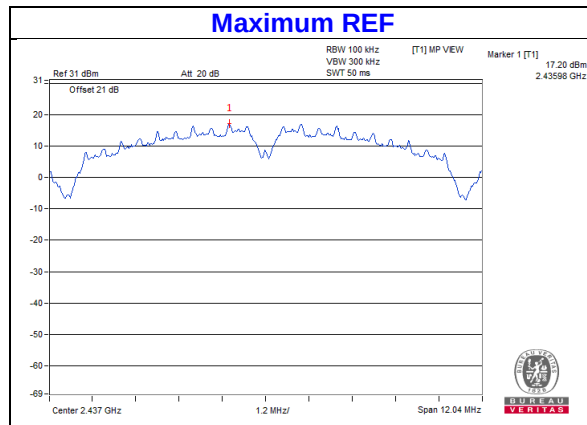


CH 1

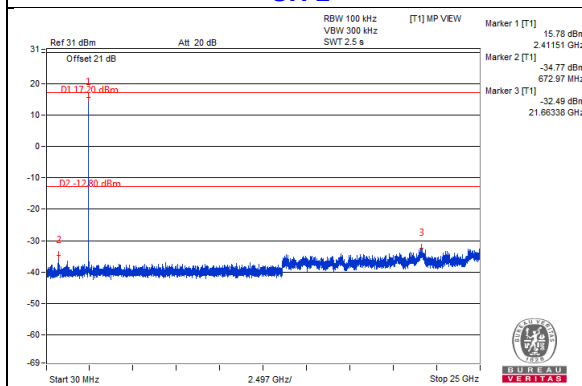


CH 6

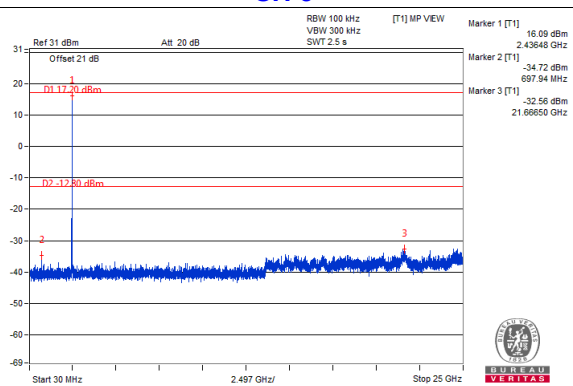


CH 11

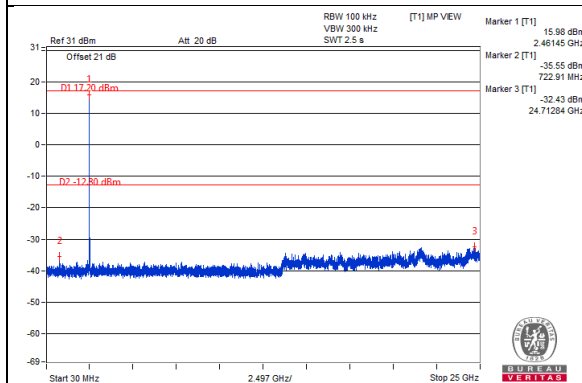


CH 1 Band edge

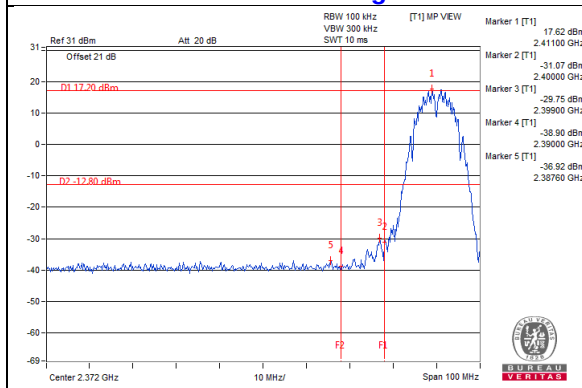


CH 11 Band edge

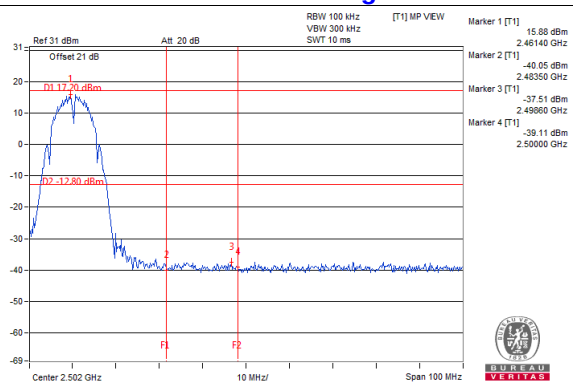


802.11g

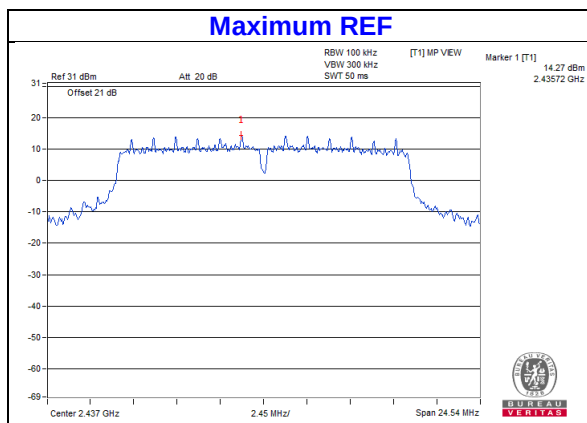


Chain 0

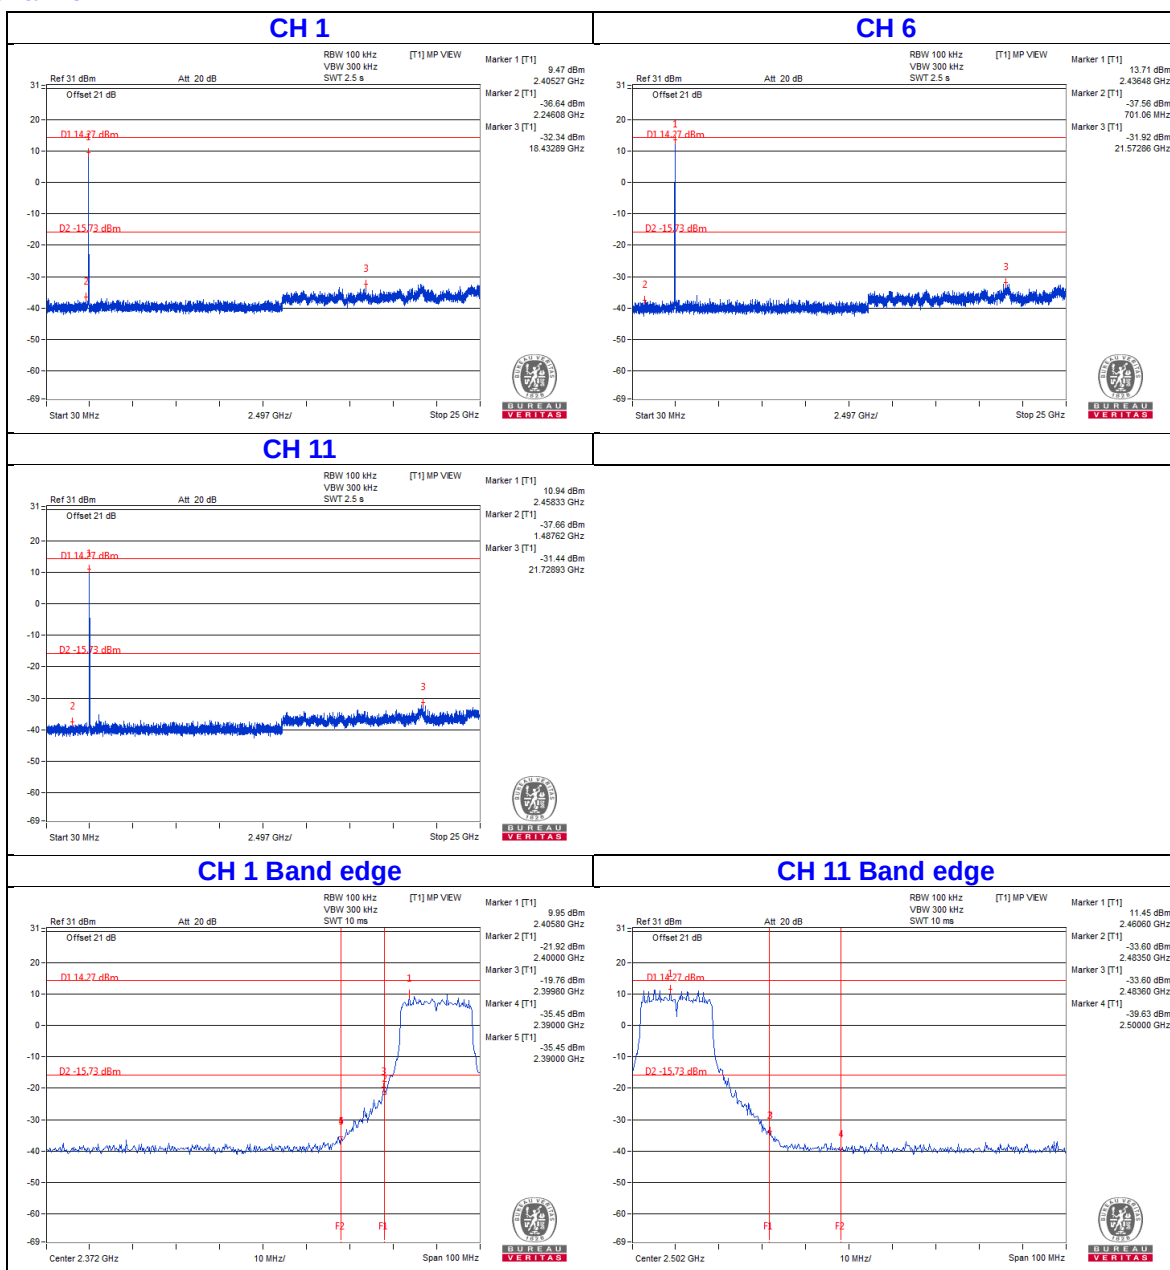


Chain 1

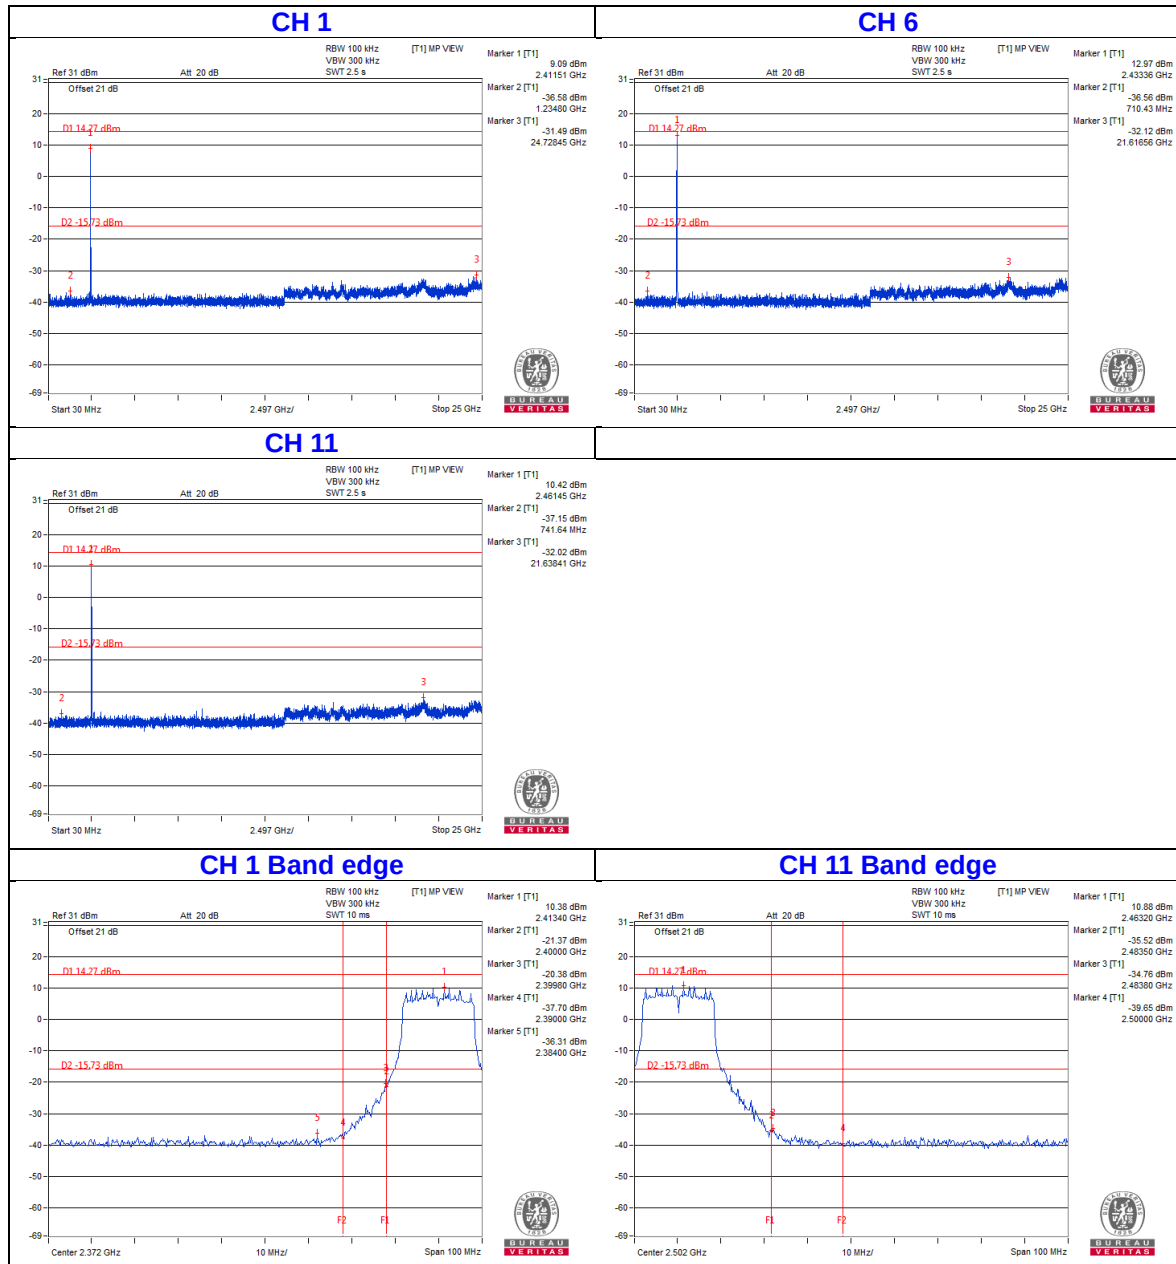


Chain 2

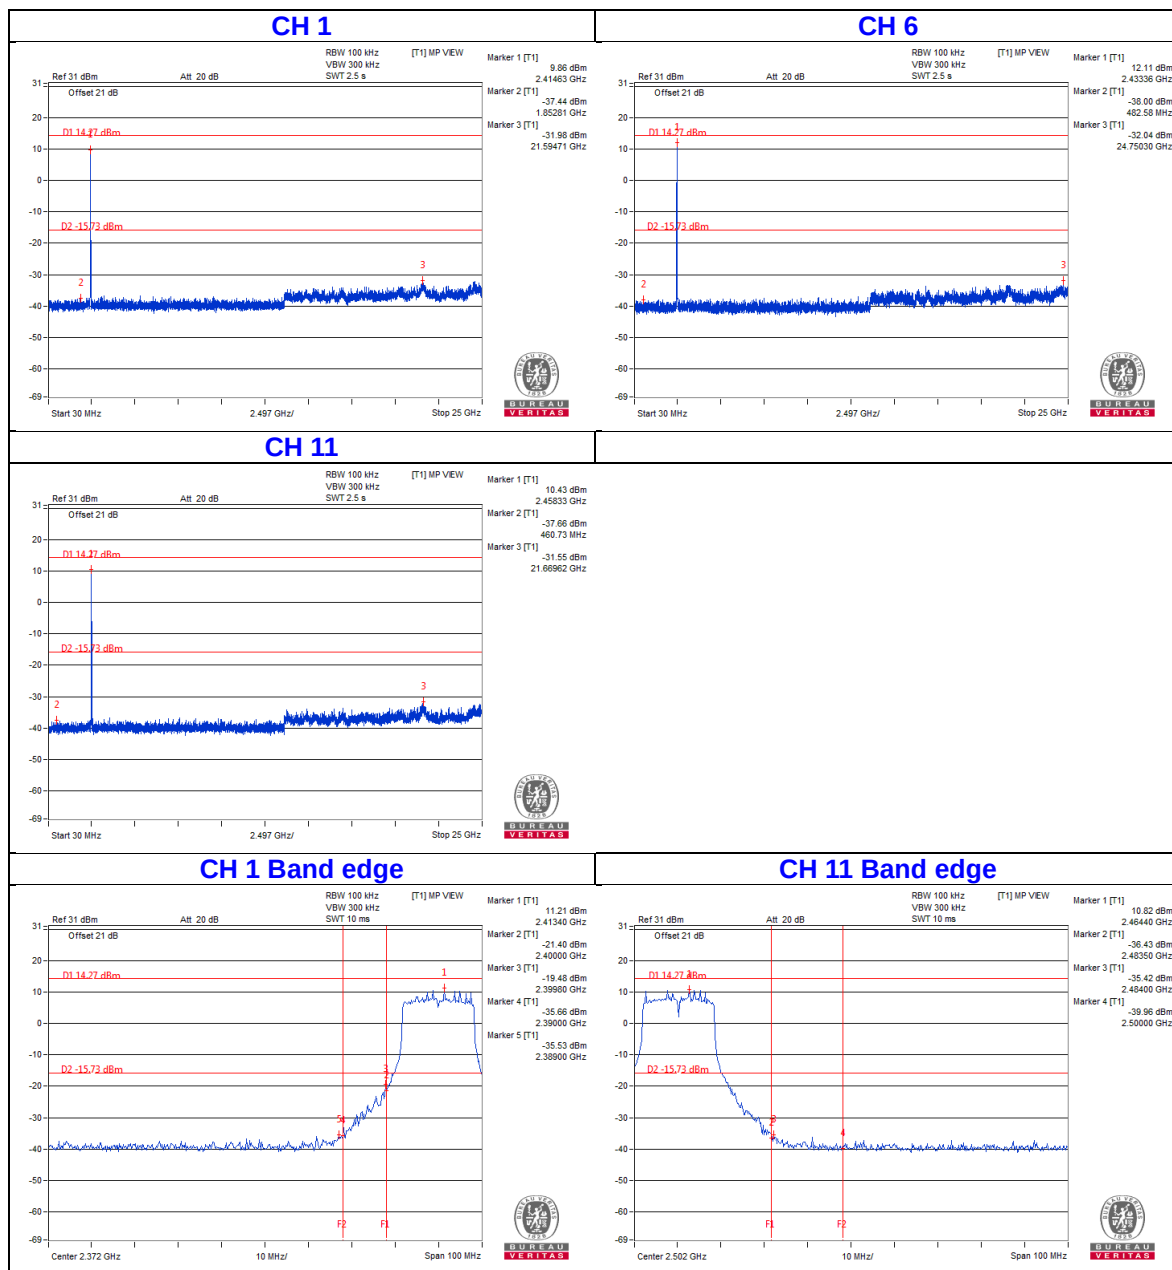


802.11n (HT20)

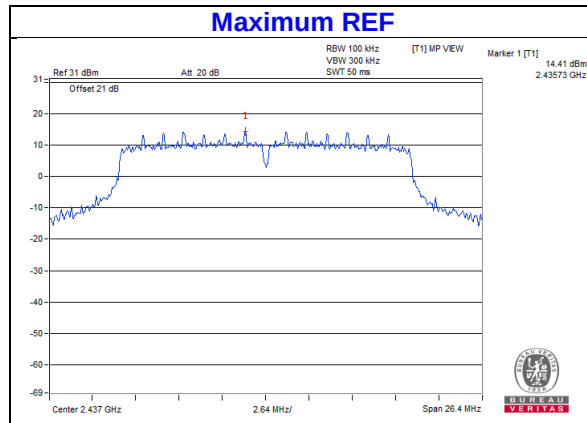


Chain 0

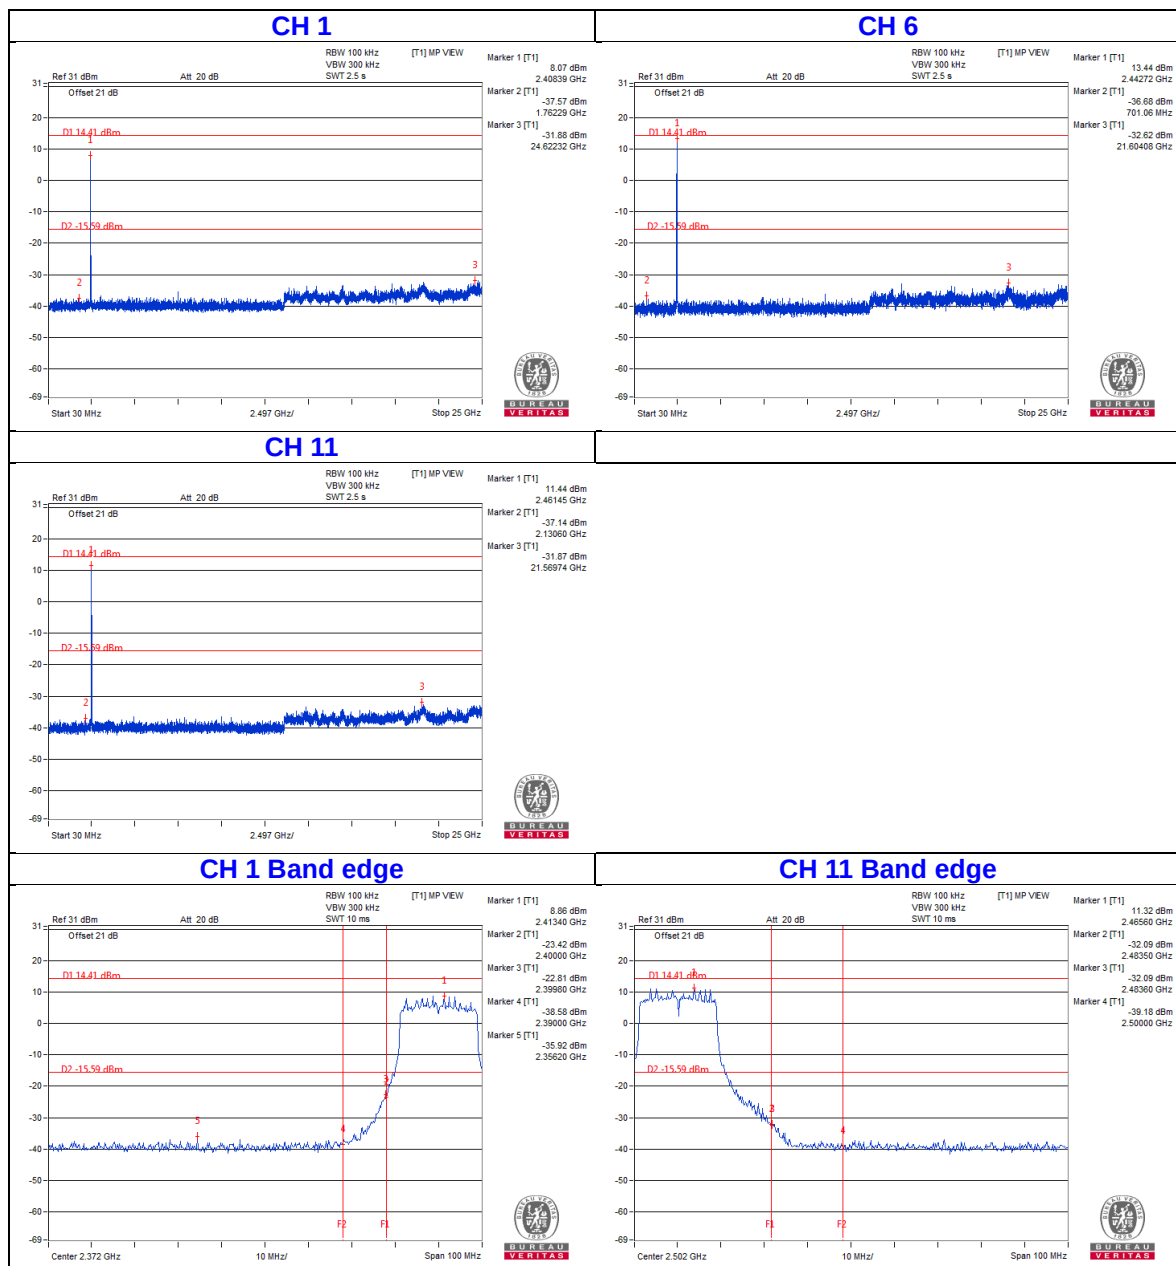


Chain 1

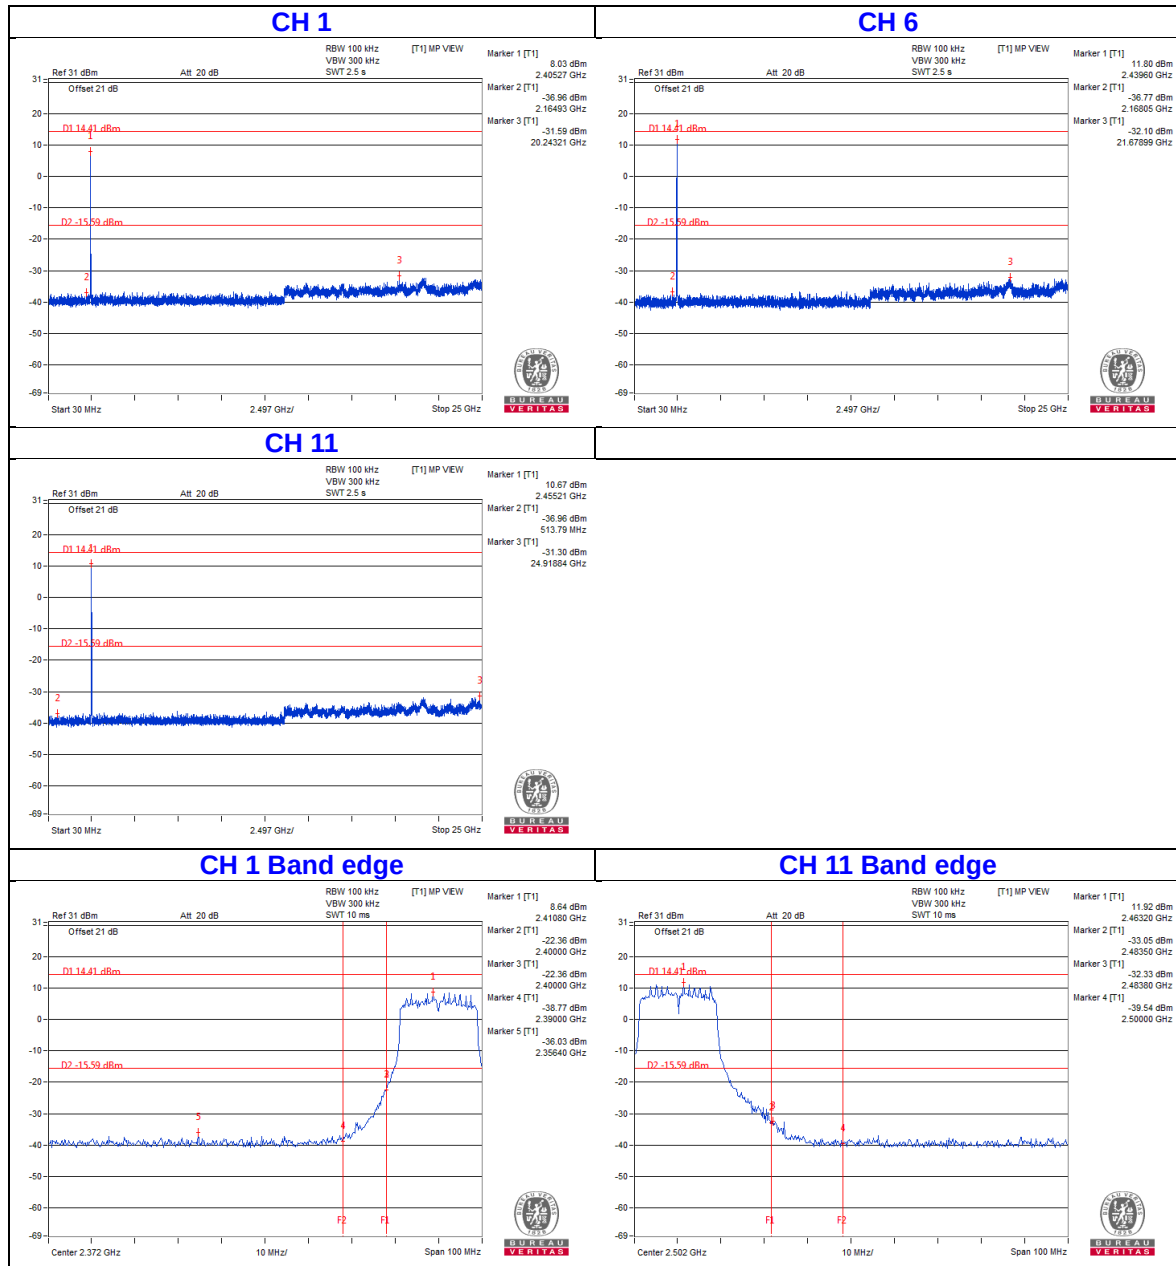


Chain 2

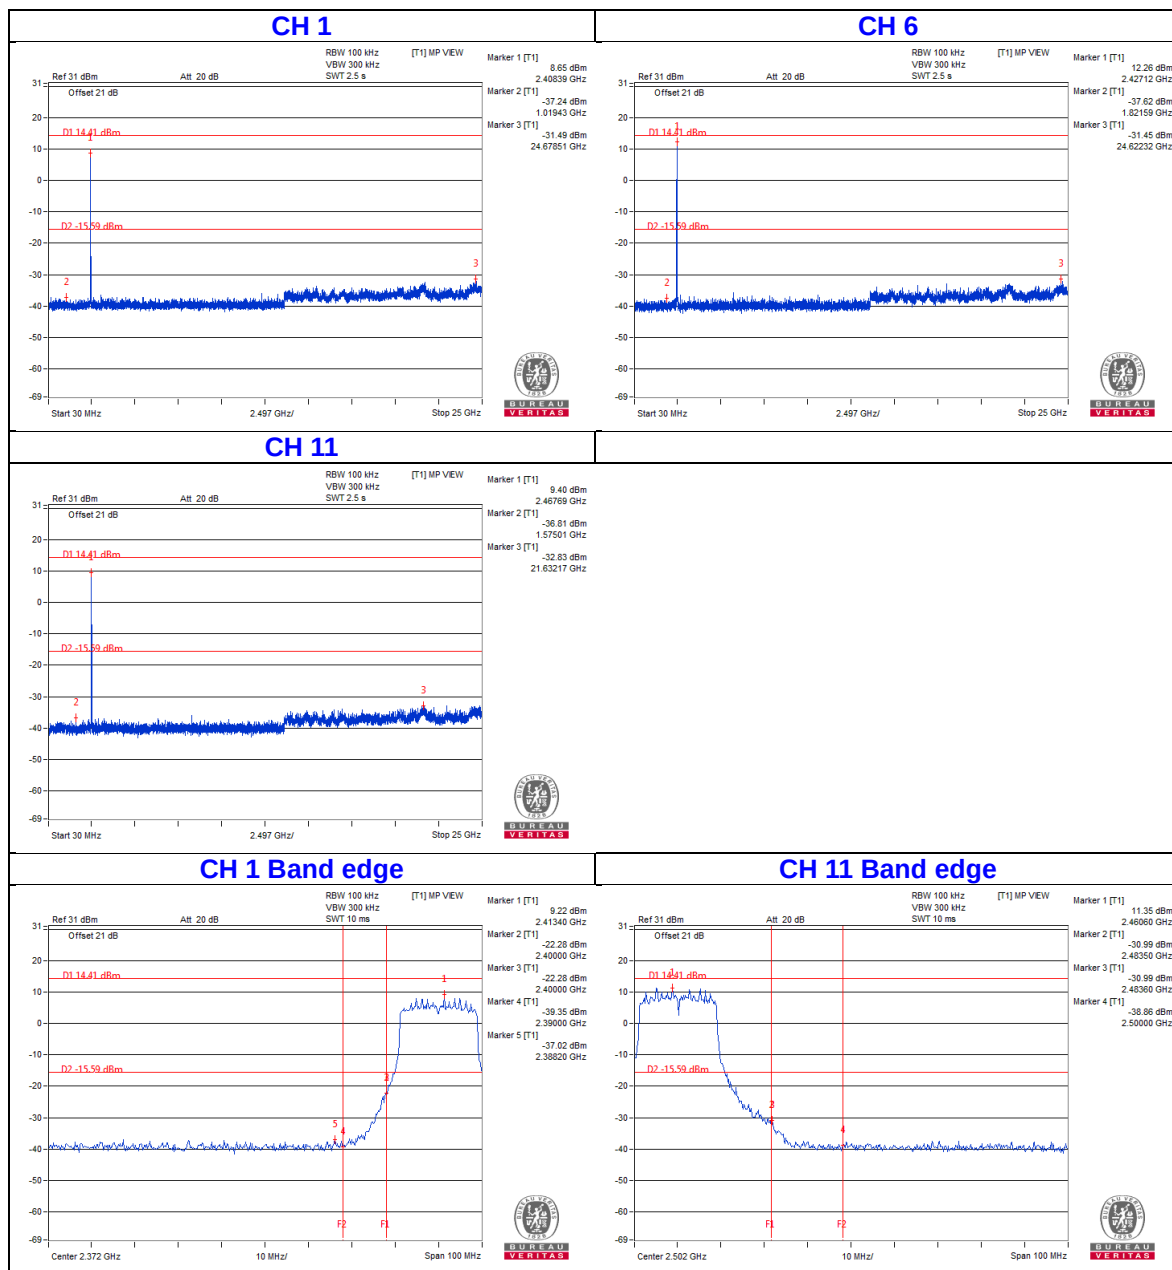


802.11n (HT40)

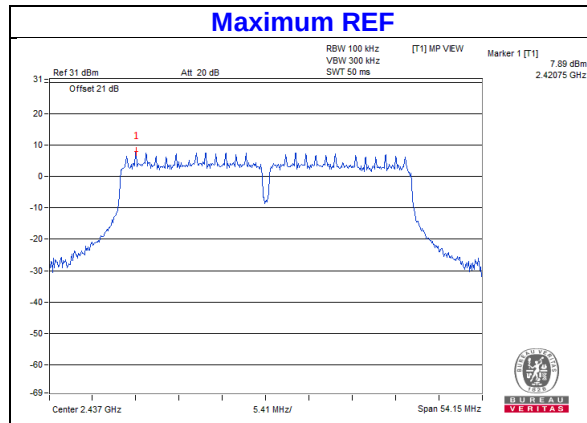


Chain 0

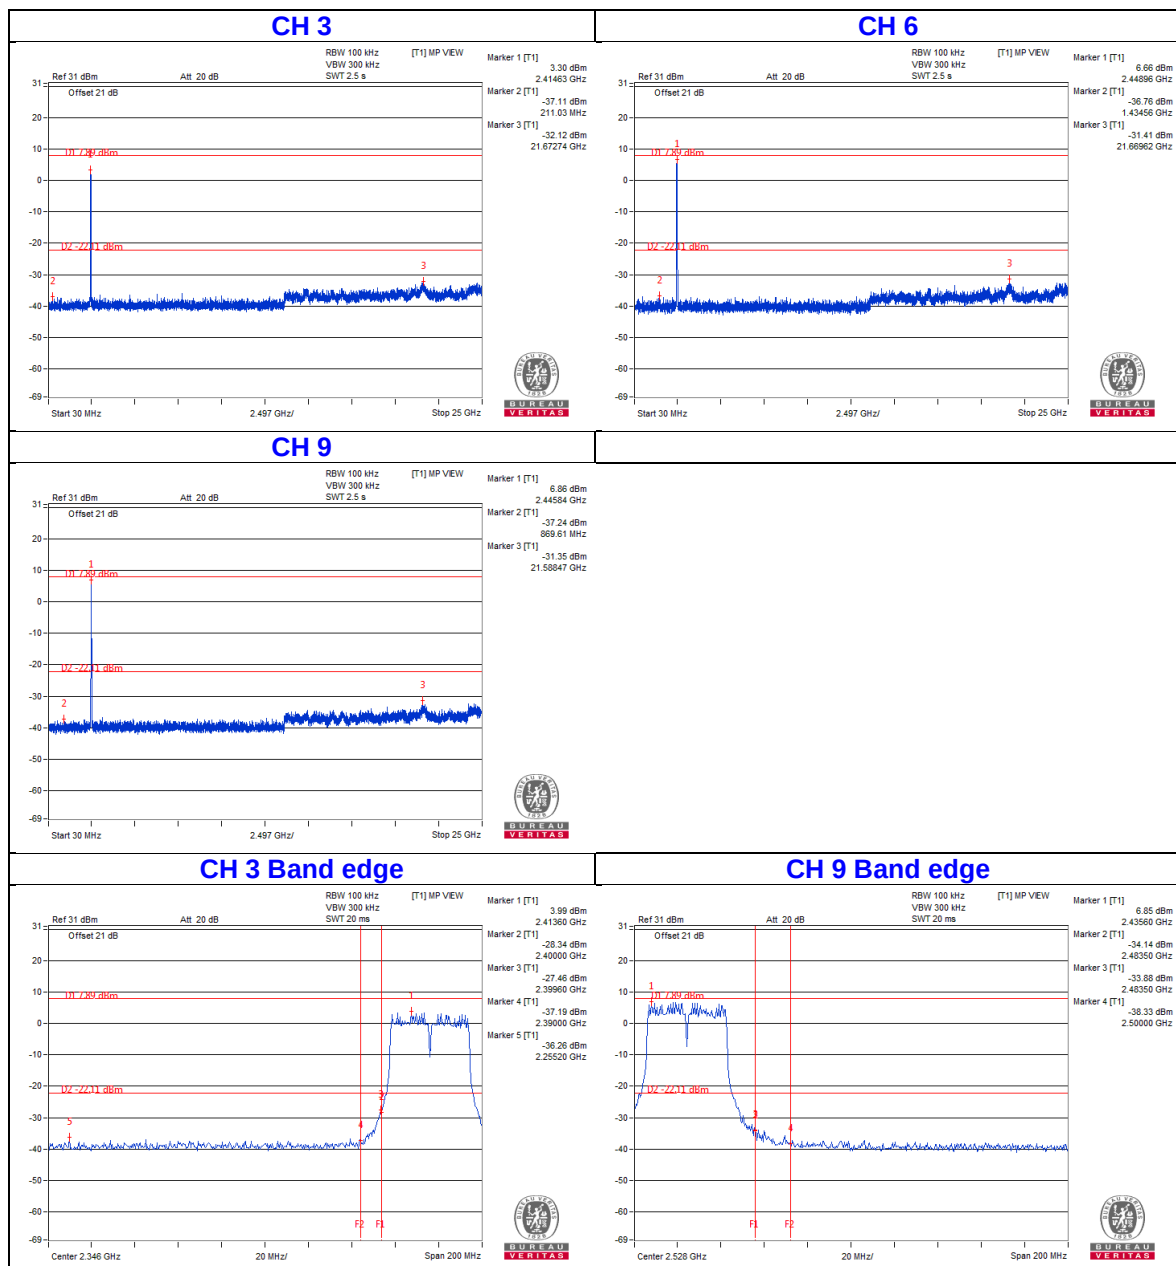

Chain 1

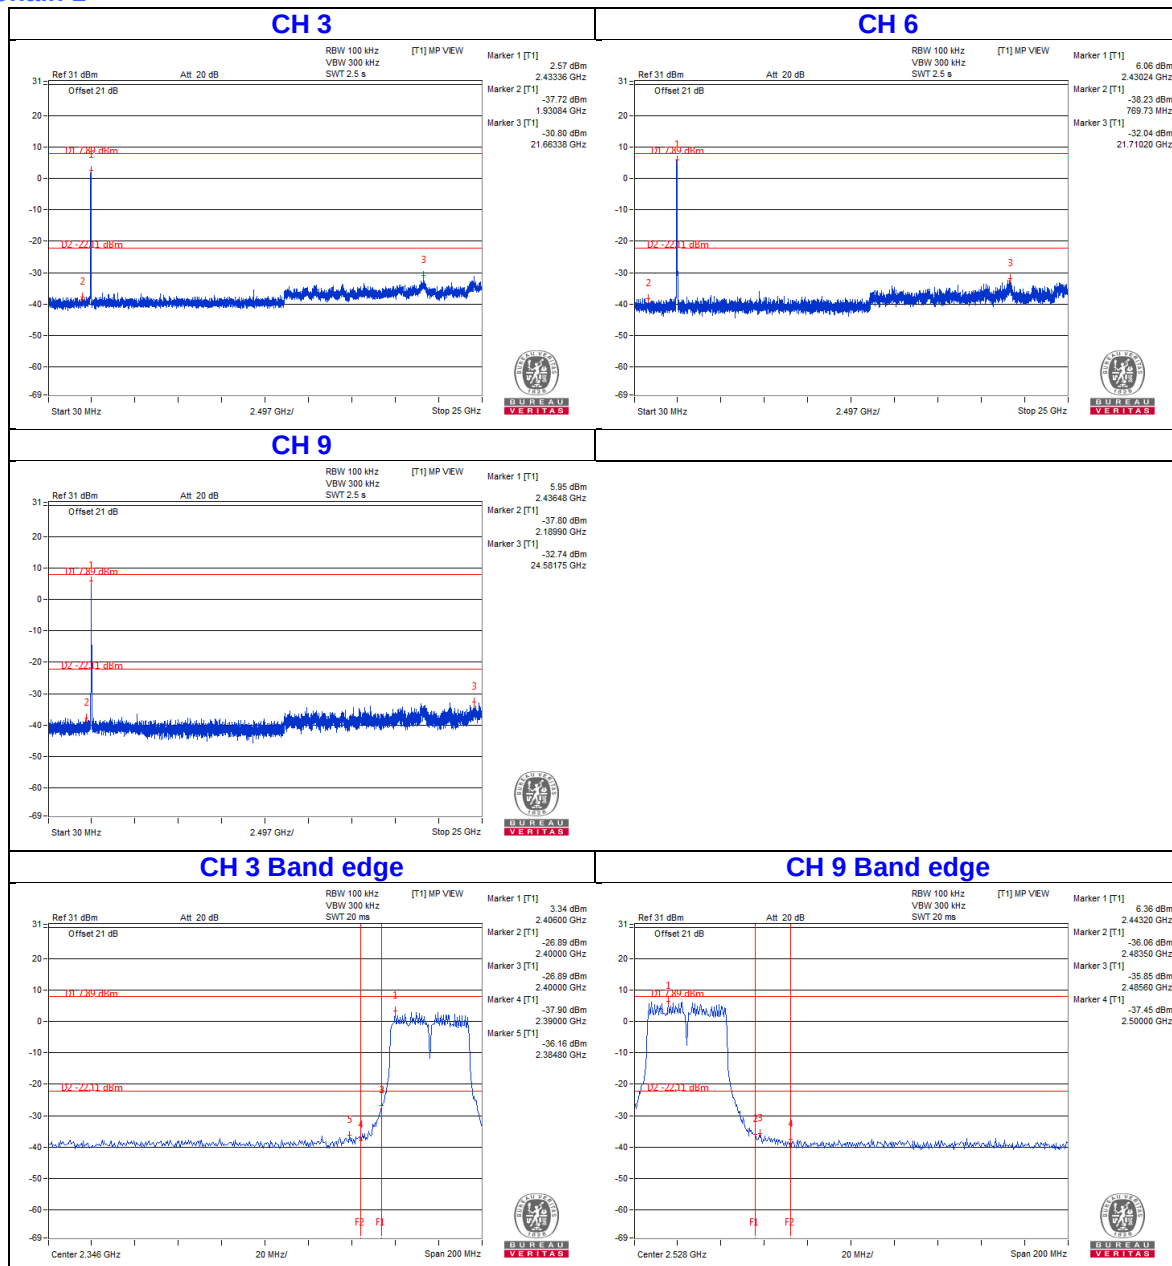

Chain 2

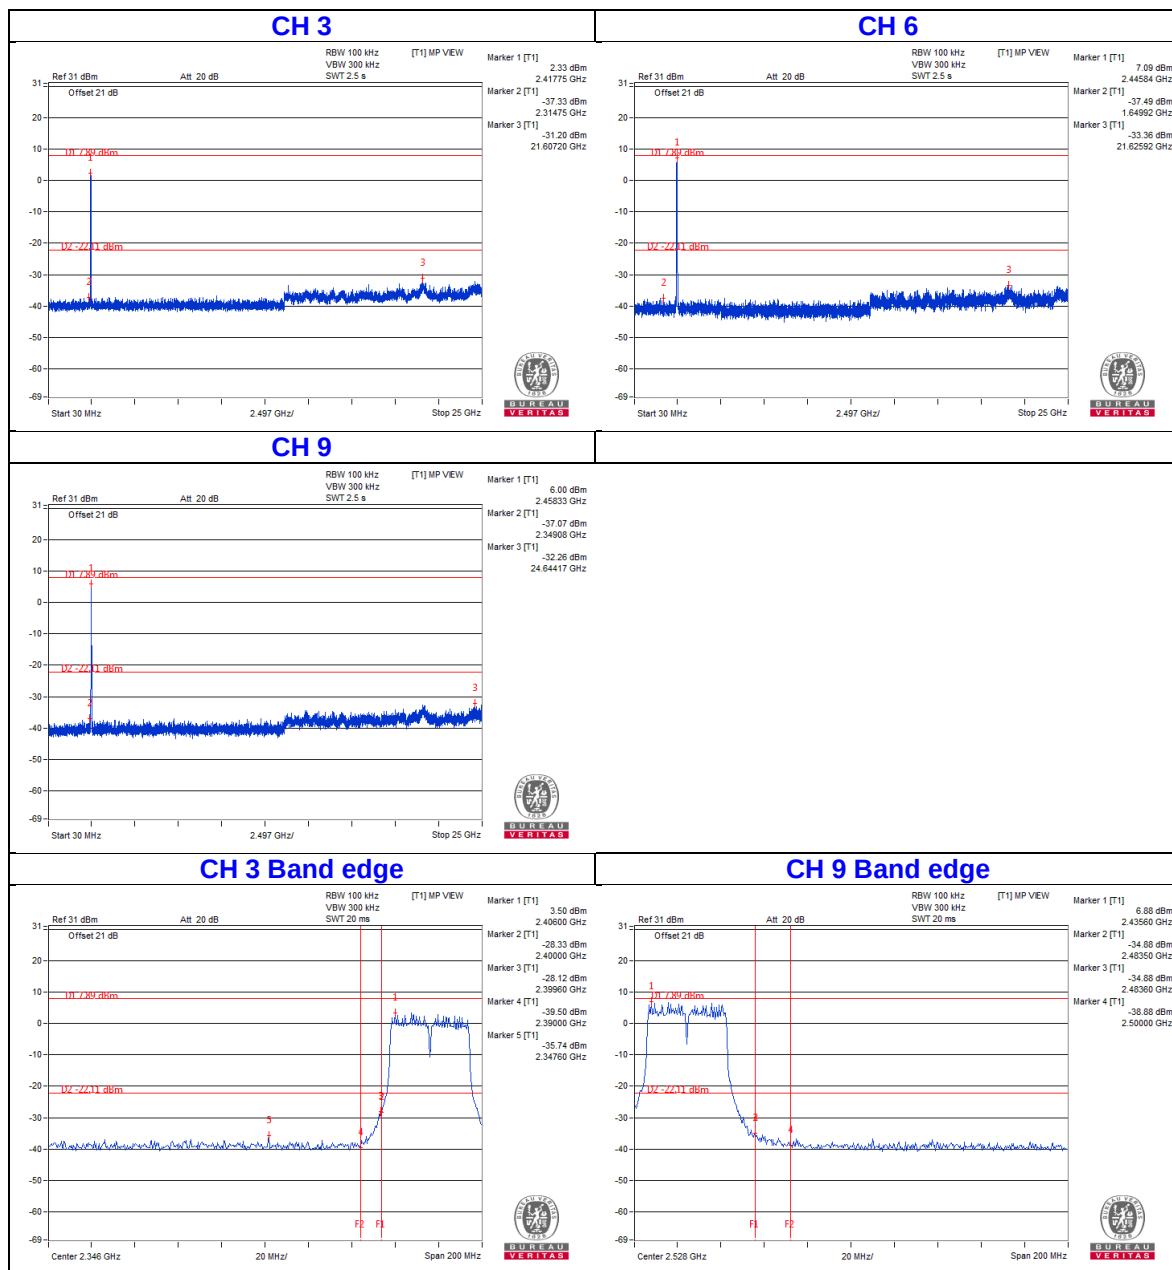

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linkou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---