

## MPE Report

**Applicant** : Google LLC

**Product Name** : wireless device

**Trade Name** : Google

**Model Number** : GJQ8U

**Applicable Standard** : 47 CFR § 2.1091

**Received Date** : Feb. 01, 2024

**Issued Date** : Mar. 08, 2024

Eurofins E&E Wireless Taiwan Co., Ltd.  
No. 140-1, Changan Street, Bade District,  
Taoyuan City 334025, Taiwan (R.O.C.)  
Tel : +886-3-2710188 / Fax : +886-3-2710190

Taiwan Accreditation Foundation accreditation number: 1330

**Note:**

- 1.The test results are valid only for samples provided by customers and under the test conditions described in this report.
- 2.This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
- 3.The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

**Approved By :**



## Table of Contents

1.	General Information.....	4
2.	Description of Equipment under Test (EUT).....	5
3.	RF Exposure Limit.....	7
4.	RF Exposure Assessment.....	8
5.	Maximum Transmitting Mode Evaluation .....	10
6.	Result.....	10
7.	Conclusion .....	10

## Revision History

Rev.	Issued Date	Description	Revised by
00	Mar. 08, 2024	Initial Issue	Rowan Hsieh

## 1. General Information

### 1.1 Reference Applicable Standard

Standard	Description	Version
IEEE C95.1	American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300 KHz to 100 GHz, New York.	1992
47 CFR § 2.1091	Radiofrequency radiation exposure evaluation: mobile devices.	-
47 CFR § 1.1310	Radiofrequency radiation exposure limits.	-

### 1.2 Testing Location

#### Test Facilities

Company Name: Eurofins E&E Wireless Taiwan Co., Ltd.  
Address: No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan  
Website: <https://www.atl.com.tw>  
Telephone: +886-3-271-0188  
Fax: +886-3-271-0190  
E-mail: [infoEETW@eurofins.com](mailto:infoEETW@eurofins.com)

#### Test Site Location

- ☒ No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan  
☐ No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan

#### Laboratory Accreditation

Location	TAF	FCC	ISED
No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan	Accreditation No.: 1330	Designation No.: TW0010	Company No.: 7381A CAB ID: TW1330
No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan	Accreditation No.: 1330	Designation No.: TW0034	Company No.: 28922 CAB ID: TW1330

## 2. Description of Equipment under Test (EUT)

Applicant	Google LLC 1600 Amphitheatre Parkway, Mountain View, California, United States			
Product Name	wireless device			
Trade Name	Google			
Model Number	GJQ8U			
FCC ID	A4R-GJQ8U			
Use Distance	20 cm			
Antenna Information	Type		Gain (dBi)	
	IFA Antenna		2402 – 2480	0.6
			5180 – 5240	1.0
			5260 – 5320	0.3
			5500 – 5700	1.5
			5745 – 5825	2.4
	Chip Antenna		61250 – 61250	3.0
Accessory Information				
Base Plate	Trade Name	Google	Model Number	GJQ8U

**Note:**

The above information of DUT was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 2.1 RF Specification

Wi-Fi 2.4G				
Support type:	<input checked="" type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input checked="" type="checkbox"/> 802.11n	<input type="checkbox"/> 802.11ax
Support bandwidth:	<input checked="" type="checkbox"/> 20 MHz	<input type="checkbox"/> 40 MHz		
Wi-Fi 5G				
Operation Band:	<input checked="" type="checkbox"/> U-NII-1	<input checked="" type="checkbox"/> U-NII-2A	<input checked="" type="checkbox"/> U-NII-2C	<input checked="" type="checkbox"/> U-NII-3
	<input type="checkbox"/> U-NII-5			
Support type:	<input checked="" type="checkbox"/> 802.11a	<input checked="" type="checkbox"/> 802.11n	<input type="checkbox"/> 802.11ac	<input type="checkbox"/> 802.11ax
Support bandwidth:	<input checked="" type="checkbox"/> 20 MHz	<input type="checkbox"/> 40 MHz	<input type="checkbox"/> 80 MHz	<input type="checkbox"/> 160 MHz
Bluetooth				
Support type:	<input type="checkbox"/> BR	<input type="checkbox"/> EDR	<input checked="" type="checkbox"/> BLE-1 Mbps	<input checked="" type="checkbox"/> BLE-2 Mbps
60GHz Radar				
Operation Frequency	61250 – 61250			
Modulation	FMCW			

### 3. RF Exposure Limit

For devices that operate at larger distances from persons, where there are minimal RF coupling interactions between a device and the user or nearby persons, RF exposure compliance using maximum permissible exposure (MPE) limits is applied. The limits for MPE is listed as below:

<b>Limits for General Population / Uncontrolled Exposure</b>				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm <sup>2</sup> )	Averaging Time E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824 / f	2.19 / f	(180 / f <sup>2</sup> )*	30
30-300	27.5	0.073	0.2	30
300-1500	-	-	F / 1,500	30
1,500-100,000	-	-	1.0	30
<b>Limits for Occupational / Controlled Exposure</b>				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm <sup>2</sup> )	Averaging Time E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1,842 / f	4.89 / f	(900 / f <sup>2</sup> )*	6
30-300	61.4	0.163	1.0	6
300-1,500	-	-	F / 300	6
1,500-100,000	-	-	5	6


f = frequency in MHz. \* = Plane-wave equivalent power density.

## 4. RF Exposure Assessment

### 4.1 Exemption Evaluation

Exemption evaluation was performed according to the appendix A and B in KDB447498 D04.

The General Sequence for Determination of Procedure demonstrated in Figure A.1 of KDB447498 D04 was applied.

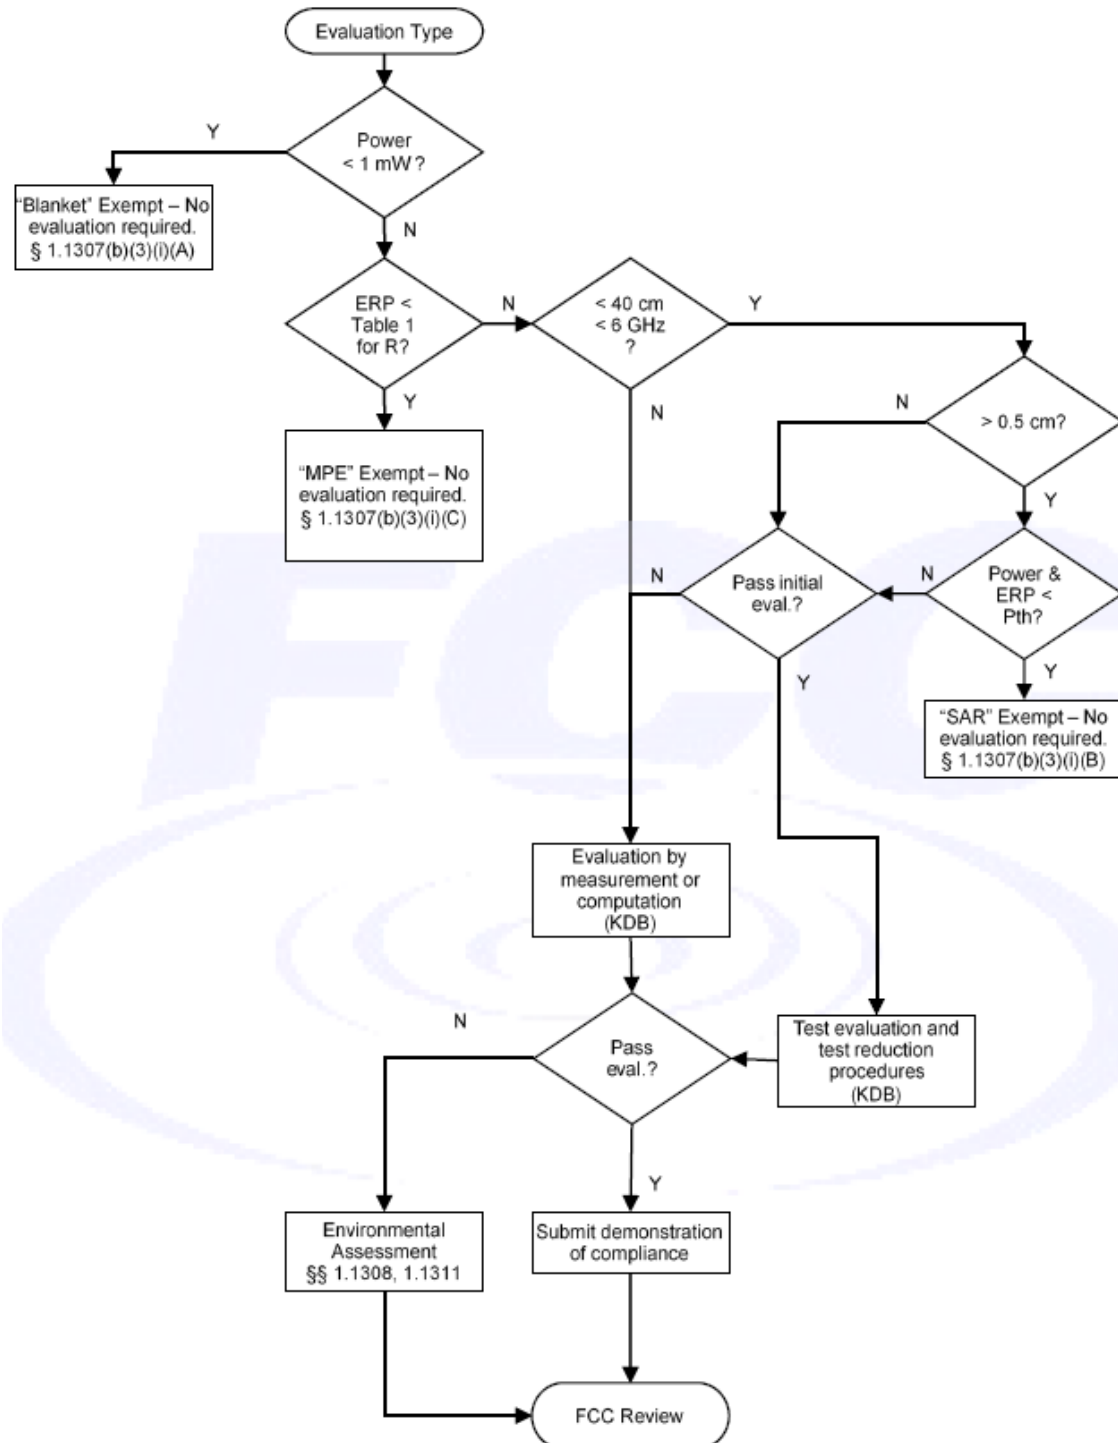

## 4.2 Human Exposure Assessment

Due to the design and installation of this product, it is not possible to conduct SAR evaluation. This is because client either manufactures or supplies the antenna(s) that will be used in the installation of this product. Therefore, this product will be evaluated as a mobile device per 47 CFR § 1.1310 titled "Radiofrequency radiation exposure limits", generally referred to as MPE limits.

In 47 CFR § 2.1091, paragraph (b) defines a mobile device as "a transmitting device designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 cm is normally maintained between the transmitter's radiating structure(s) and the body of the user or nearby persons."

### Exposure evaluation

$$S_{exp} = \frac{EIRP}{4\pi d^2} = \frac{PG}{4\pi d^2} (W / m^2)$$

Where

S: is the input power (W);

G: is the antenna gain;

d : is the distance between antennas and evaluation point (m).

## 5. Maximum Transmitting Mode Evaluation

Antenna transmission description
WLAN 2.4 GHz : 1TX (Diversity) WLAN 5 GHz : 1TX (Diversity) Bluetooth : 1TX (Diversity) 60GHz Radar : 1TX (Diversity)

## 6. Result

Band	Frequency (MHz)	Tune-up Power (dBm) [P]	ANT Gain (dBi)	Numeric Gain [G]	Power with Duty cycle (mW) [P]x[G]	Power Density (mW/cm <sup>2</sup> ) [S]	Standalone Limit (mW/cm <sup>2</sup> )	Evaluated / Exposure Limit
WLAN 2.4 GHz	2412 - 2472	20.50	0.60	1.15	129.03	0.03	1.00	0.03
WLAN 5.2 GHz	5150 - 5250	20.00	1.00	1.26	126.00	0.03	1.00	0.03
WLAN 5.3 GHz	5250 - 5350	21.50	0.30	1.07	151.14	0.03	1.00	0.03
WLAN 5.6 GHz	5470 - 5725	21.50	1.50	1.41	199.17	0.04	1.00	0.04
WLAN 5.8 GHz	5725 - 5850	20.50	2.40	1.74	195.23	0.04	1.00	0.04
Bluetooth	2402 - 2480	11.00	0.60	1.15	14.48	0.00	1.00	0.00

### Note:

1. The calculation uses the minimum distance defined by the regulations of 20 cm, which is more conservative than the actual use distance of the product.
2. The maximum power and gain were applied to evaluate MPE.
3. This Device does not support simultaneous transmission.

Band	Frequency (MHz)	Near-Field Result (dBuV/m)	Power Density (mW/cm <sup>2</sup> )	Standalone Limit (mW/cm <sup>2</sup> )
60GHz Radar	61250	105.23	0.00199	1

### Note:

1. Power Density of 60GHz Radar is Converted by the Near-Field radiated test result.

**MAX MPE** = 0.04 mW/cm<sup>2</sup>

## 7. Conclusion

The result shows that this device is compliance with the exposure limits in 47 CFR §1.1310.

\*\*\*\*\* End of Report \*\*\*\*\*