

FCC Measurement/Technical Report on

C400 ECU MID NA 4.5G
Type 1589.1

FCC ID: 2AJW515891
IC: 21979-15891

Test Report Reference: MDE_CONTI_2134_FCC_03

Test Laboratory:

7layers GmbH
Borsigstrasse 11
40880 Ratingen
Germany



Deutsche
Akkreditierungsstelle
D-PL-12140-01-00

Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7layers GmbH

Borsigstraße 11
40880 Ratingen, Germany
T +49 (0) 2102 749 0
F +49 (0) 2102 749 350

Geschäftsführer/
Managing Directors:
Sebastian Doose
Bernhard Retka

Registergericht/registered:
Düsseldorf HRB 75554
USt-Id.-Nr./VAT-No. DE203159652
Steuer-Nr./TAX-No. 147/5869/0385

a Bureau Veritas
Group Company

www.7layers.com

Table of Contents

1	Applied Standards and Test Summary	3
1.1	Applied Standards	3
1.2	FCC-IC Correlation Table	4
1.3	Measurement Summary	5
2	Revision History / Signatures	9
3	Administrative Data	10
3.1	Testing Laboratory	10
3.2	Project Data	10
3.3	Applicant Data	10
3.4	Manufacturer Data	10
4	Test object Data	11
4.1	General EUT Description	11
4.2	EUT Main components	12
4.3	Ancillary Equipment	12
4.4	Auxiliary Equipment	12
4.5	EUT Setups	13
4.6	Operating Modes / Test Channels	13
4.7	Product labelling	14
5	Test Results	15
5.1	Occupied Bandwidth (6 dB)	15
5.2	Occupied Bandwidth (99%)	19
5.3	Peak Power Output	23
5.4	Spurious RF Conducted Emissions	27
5.5	Transmitter Spurious Radiated Emissions	32
5.6	Band Edge Compliance Conducted	47
5.7	Band Edge Compliance Radiated	54
5.8	Power Density	65
6	Test Equipment	70
6.1	Test Equipment Hardware	70
6.2	Test Equipment Software	73
7	Antenna Factors, Cable Loss and Sample Calculations	74
7.1	Antenna R&S HFH2-Z2 (9 kHz – 30 MHz)	74
7.2	Antenna R&S HL562 (30 MHz – 1 GHz)	75
7.3	Antenna R&S HF907 (1 GHz – 18 GHz)	76
7.4	Antenna EMCO 3160-09 (18 GHz – 26.5 GHz)	77
8	Measurement Uncertainties	78
9	Photo Report	79

1 APPLIED STANDARDS AND TEST SUMMARY

1.1 APPLIED STANDARDS

Type of Authorization

Certification for an Intentional Radiator.

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15 (10-1-23 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz

Note:

The tests were selected and performed with reference to the FCC Public Notice "Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of the FCC Rules, 558074 D01 15.247 Meas Guidance v05r02, 2019-04-02".
ANSI C63.10-2013 is applied.

1.2 FCC-IC CORRELATION TABLE

Correlation of measurement requirements for DTS (e.g. WLAN 2.4 GHz, BT LE) equipment from FCC and IC

DTS equipment

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 5 & AMD 1 & AMD 2: 8.8
Occupied bandwidth	§ 15.247 (a) (2)	RSS-247 Issue 3: 5.2 (a)
Peak conducted output power	§ 15.247 (b) (3), (4)	RSS-247 Issue 3: 5.4 (d)
Transmitter spurious RF conducted emissions	§ 15.247 (d)	RSS-Gen Issue 5 & AMD 1 & AMD 2: 6.13 / 8.9/8.10; RSS-247 Issue 3: 5.5
Transmitter spurious radiated emissions	§ 15.247 (d); § 15.209 (a)	RSS-Gen Issue 5 & AMD 1 & AMD 2: 6.13 / 8.9/8.10; RSS-247 Issue 3: 5.5
Band edge compliance	§ 15.247 (d)	RSS-247 Issue 3: 5.5
Power density	§ 15.247 (e)	RSS-247 Issue 3: 5.2 (b)
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 5 & AMD 1 & AMD 2: 8.3
Receiver spurious emissions	–	–

1.3 MEASUREMENT SUMMARY

47 CFR CHAPTER I FCC PART 15 Subpart C §15.247

§ 15.247 (a) (2)

Occupied Bandwidth (6 dB)

The measurement was performed according to ANSI C63.10, chapter 11.8.1

Final Result

OP-Mode	Setup	Date	FCC	IC
Radio Technology, Operating Frequency				
Bluetooth LE 1 Mbps, high	S01_AC02	2023-10-05	Passed	Passed
Bluetooth LE 1 Mbps, low	S01_AC02	2023-10-05	Passed	Passed
Bluetooth LE 1 Mbps, mid	S01_AC02	2023-10-05	Passed	Passed
WLAN b, high	S01_AD03	2024-03-07	Passed	Passed
WLAN b, low	S01_AD03	2024-03-07	Passed	Passed
WLAN b, mid	S01_AD03	2024-03-07	Passed	Passed
WLAN g, high	S01_AD03	2024-03-07	Passed	Passed
WLAN g, low	S01_AD03	2024-03-07	Passed	Passed
WLAN g, mid	S01_AD03	2024-03-07	Passed	Passed
WLAN n 20 MHz, high	S01_AD03	2024-03-07	Passed	Passed
WLAN n 20 MHz, low	S01_AD03	2024-03-07	Passed	Passed
WLAN n 20 MHz, mid	S01_AD03	2024-03-07	Passed	Passed
WLAN n 40 MHz, high	S01_AD03	2024-05-14	Passed	Passed
WLAN n 40 MHz, low	S01_AD03	2024-05-14	Passed	Passed
WLAN n 40 MHz, mid	S01_AD03	2024-05-14	Passed	Passed

47 CFR CHAPTER I FCC PART 15 Subpart C §15.247

IC RSS-Gen; Ch. 6.7 & Ch. 8

Occupied Bandwidth (99%)

The measurement was performed according to ANSI C63.10, chapter 6.9.3

Final Result

OP-Mode	Setup	Date	FCC	IC
Radio Technology, Operating Frequency				
Bluetooth LE 1 Mbps, high	S01_AC02	2023-10-05	N/A	Performed
Bluetooth LE 1 Mbps, low	S01_AC02	2023-10-05	N/A	Performed
Bluetooth LE 1 Mbps, mid	S01_AC02	2023-10-05	N/A	Performed
WLAN b, high	S01_AD03	2024-03-07	N/A	Performed
WLAN b, low	S01_AD03	2024-03-07	N/A	Performed
WLAN b, mid	S01_AD03	2024-03-07	N/A	Performed
WLAN g, high	S01_AD03	2024-03-07	N/A	Performed
WLAN g, low	S01_AD03	2024-03-07	N/A	Performed
WLAN g, mid	S01_AD03	2024-03-07	N/A	Performed
WLAN n 20 MHz, high	S01_AD03	2024-03-07	N/A	Performed
WLAN n 20 MHz, low	S01_AD03	2024-03-07	N/A	Performed
WLAN n 20 MHz, mid	S01_AD03	2024-03-07	N/A	Performed
WLAN n 40 MHz, high	S01_AD03	2024-05-14	N/A	Performed
WLAN n 40 MHz, low	S01_AD03	2024-05-14	N/A	Performed
WLAN n 40 MHz, mid	S01_AD03	2024-05-14	N/A	Performed

47 CFR CHAPTER I FCC PART 15
Subpart C §15.247

§ 15.247 (b) (3)

Peak Power Output

The measurement was performed according to ANSI C63.10, chapter 11.9.1.3

Final Result

OP-Mode	Setup	Date	FCC	IC
Radio Technology, Operating Frequency, Measurement method				
Bluetooth LE 1 Mbps, high, conducted	S01_AC02	2023-10-05	Passed	Passed
Bluetooth LE 1 Mbps, low, conducted	S01_AC02	2023-10-05	Passed	Passed
Bluetooth LE 1 Mbps, mid, conducted	S01_AC02	2023-10-05	Passed	Passed
WLAN b, high, conducted	S01_AD03	2024-03-07	Passed	Passed
WLAN b, low, conducted	S01_AD03	2024-03-07	Passed	Passed
WLAN b, mid, conducted	S01_AD03	2024-03-07	Passed	Passed
WLAN g, high, conducted	S01_AD03	2024-03-07	Passed	Passed
WLAN g, low, conducted	S01_AD03	2024-03-07	Passed	Passed
WLAN g, mid, conducted	S01_AD03	2024-03-07	Passed	Passed
WLAN n 20 MHz, high, conducted	S01_AD03	2024-03-07	Passed	Passed
WLAN n 20 MHz, low, conducted	S01_AD03	2024-03-07	Passed	Passed
WLAN n 20 MHz, mid, conducted	S01_AD03	2024-03-07	Passed	Passed
WLAN n 40 MHz, high, conducted	S01_AD03	2024-05-14	Passed	Passed
WLAN n 40 MHz, low, conducted	S01_AD03	2024-05-14	Passed	Passed
WLAN n 40 MHz, mid, conducted	S01_AD03	2024-05-14	Passed	Passed

47 CFR CHAPTER I FCC PART 15
Subpart C §15.247

§ 15.247 (d)

Spurious RF Conducted Emissions

The measurement was performed according to ANSI C63.10, chapter 11.11

Final Result

OP-Mode	Setup	Date	FCC	IC
Radio Technology, Operating Frequency				
Bluetooth LE 1 Mbps, high	S01_AC02	2023-11-27	Passed	Passed
Bluetooth LE 1 Mbps, low	S01_AC02	2023-11-27	Passed	Passed
Bluetooth LE 1 Mbps, mid	S01_AC02	2023-11-27	Passed	Passed
WLAN b, high	S01_AD03	2024-03-07	Passed	Passed
WLAN b, low	S01_AD03	2024-03-07	Passed	Passed
WLAN b, mid	S01_AD03	2024-03-07	Passed	Passed
WLAN g, high	S01_AD03	2024-03-07	Passed	Passed
WLAN g, low	S01_AD03	2024-03-07	Passed	Passed
WLAN g, mid	S01_AD03	2024-03-07	Passed	Passed
WLAN n 20 MHz, high	S01_AD03	2024-03-07	Passed	Passed
WLAN n 20 MHz, low	S01_AD03	2024-03-07	Passed	Passed
WLAN n 20 MHz, mid	S01_AD03	2024-03-07	Passed	Passed
WLAN n 40 MHz, high	S01_AD03	2024-05-14	Passed	Passed
WLAN n 40 MHz, low	S01_AD03	2024-05-14	Passed	Passed
WLAN n 40 MHz, mid	S01_AD03	2024-05-14	Passed	Passed

47 CFR CHAPTER I FCC PART 15
Subpart C §15.247
§ 15.247 (d)

Transmitter Spurious Radiated Emissions

The measurement was performed according to ANSI C63.10, chapter 6.4, 6.5, 6.6.5

Final Result

OP-Mode	Setup	Date	FCC	IC
Radio Technology, Operating Frequency, Measurement range, Antenna				
WLAN b, high, 1 GHz - 26 GHz, internal	S02_AD03	2024-05-20	Passed	Passed
WLAN b, high, 1 GHz - 26 GHz, external	S02_AD03	2024-03-30	Passed	Passed
WLAN b, high, 30 MHz - 1 GHz, external	S02_AD03	2024-03-10	Passed	Passed
WLAN b, low, 1 GHz - 26 GHz, external	S02_AD03	2024-03-30	Passed	Passed
WLAN b, low, 30 MHz - 1 GHz, external	S02_AD03	2024-03-10	Passed	Passed
WLAN b, mid, 1 GHz - 26 GHz, external	S02_AD03	2024-03-30	Passed	Passed
WLAN b, mid, 30 MHz - 1 GHz, external	S02_AD03	2024-03-10	Passed	Passed
WLAN b, mid, 9 kHz - 30 MHz, external	S02_AD03	2024-03-09	Passed	Passed
WLAN g, high, 1 GHz - 8 GHz, external	S02_AD03	2024-03-30	Passed	Passed
WLAN g, low, 1 GHz - 8 GHz, external	S02_AD03	2024-03-30	Passed	Passed
WLAN g, mid, 1 GHz - 8 GHz, external	S02_AD03	2024-03-30	Passed	Passed

47 CFR CHAPTER I FCC PART 15
Subpart C §15.247
§ 15.247 (d)

Band Edge Compliance Conducted

The measurement was performed according to ANSI C63.10, chapter 11.11

Final Result

OP-Mode	Setup	Date	FCC	IC
Radio Technology, Operating Frequency, Band Edge				
Bluetooth LE 1 Mbps, high, high	S01_AC02	2023-10-05	Passed	Passed
Bluetooth LE 1 Mbps, low, low	S01_AC02	2023-10-05	Passed	Passed
WLAN b, high, high	S01_AD03	2024-03-07	Passed	Passed
WLAN b, low, low	S01_AD03	2024-03-07	Passed	Passed
WLAN g, high, high	S01_AD03	2024-03-07	Passed	Passed
WLAN g, low, low	S01_AD03	2024-03-07	Passed	Passed
WLAN n 20 MHz, high, high	S01_AD03	2024-03-07	Passed	Passed
WLAN n 20 MHz, low, low	S01_AD03	2024-03-07	Passed	Passed
WLAN n 40 MHz, high, high	S01_AD03	2024-05-14	Passed	Passed
WLAN n 40 MHz, low, low	S01_AD03	2024-05-14	Passed	Passed

47 CFR CHAPTER I FCC PART 15
§ 15.247 (d)
Subpart C §15.247

Band Edge Compliance Radiated

The measurement was performed according to ANSI C63.10, chapter 6.6.5

Final Result
OP-Mode

Radio Technology, Operating Frequency, Band Edge, Antenna

Setup
Date
FCC
IC

WLAN b, high, high, external	S02_AD03	2024-03-30	Passed	Passed
WLAN b, high, high, internal	S02_AD03	2024-05-20	Passed	Passed
WLAN g, high, high, external	S02_AD03	2024-03-30	Passed	Passed
WLAN g, high, high, internal	S02_AD03	2024-03-30	Passed	Passed
WLAN n 20 MHz, high, high, external	S02_AD03	2024-03-30	Passed	Passed
WLAN n 20 MHz, high, high, internal	S02_AD03	2024-03-30	Passed	Passed
WLAN n 40 MHz, high, high, external	S02_AD03	2024-04-01	Passed	Passed
WLAN n 40 MHz, high, high, internal	S02_AD03	2024-04-01	Passed	Passed

47 CFR CHAPTER I FCC PART 15
§ 15.247 (e)
Subpart C §15.247

Power Density

The measurement was performed according to ANSI C63.10, chapter 11.10.2

Final Result
OP-Mode

Radio Technology, Operating Frequency

Setup
Date
FCC
IC

Bluetooth LE 1 Mbps, high	S01_AC02	2023-10-05	Passed	Passed
Bluetooth LE 1 Mbps, low	S01_AC02	2023-10-05	Passed	Passed
Bluetooth LE 1 Mbps, mid	S01_AC02	2023-10-05	Passed	Passed
WLAN b, high	S01_AD03	2024-03-07	Passed	Passed
WLAN b, low	S01_AD03	2024-03-07	Passed	Passed
WLAN b, mid	S01_AD03	2024-03-07	Passed	Passed
WLAN g, high	S01_AD03	2024-03-07	Passed	Passed
WLAN g, low	S01_AD03	2024-03-07	Passed	Passed
WLAN g, mid	S01_AD03	2024-03-07	Passed	Passed
WLAN n 20 MHz, high	S01_AD03	2024-03-07	Passed	Passed
WLAN n 20 MHz, low	S01_AD03	2024-03-07	Passed	Passed
WLAN n 20 MHz, mid	S01_AD03	2024-03-07	Passed	Passed
WLAN n 40 MHz, high	S01_AD03	2024-05-14	Passed	Passed
WLAN n 40 MHz, low	S01_AD03	2024-05-14	Passed	Passed
WLAN n 40 MHz, mid	S01_AD03	2024-05-14	Passed	Passed

N/A: Not applicable

N/P: Not performed

2 REVISION HISTORY / SIGNATURES

Report version control			
Version	Release date	Change Description	Version validity
initial	2024-09-12	--	valid
--	--	--	--

COMMENT: -



(responsible for accreditation scope)
Dipl.-Ing. Daniel Gall



(responsible for testing and report)
BSc. Mhd Mouaz Saad



7 layers GmbH, Borsigstr. 11
40880 Ratingen, Germany
Phone +49 (0)2102 749 0

3 ADMINISTRATIVE DATA

3.1 TESTING LABORATORY

Company Name: 7layers GmbH
Address: Borsigstr. 11
40880 Ratingen
Germany

The test facility is accredited by the following accreditation organisation:

Laboratory accreditation no: DAKKS D-PL-12140-01-00
FCC Designation Number: DE0015
FCC Test Firm Registration: 929146
ISED CAB Identifier DE0007; ISED#: 3699A

Responsible for accreditation scope: Dipl.-Ing. Daniel Gall
Report Template Version: 2023-09-29

3.2 PROJECT DATA

Responsible for testing and report: BSc. Mhd Mouaz Saad
Employees who performed the tests: documented internally at 7Layers
Date of Report: 2024-09-12
Testing Period: 2023-10-05 to 2024-05-20

3.3 APPLICANT DATA

Company Name: Continental Automotive Technologies GmbH
Address: Heinrich-Hertz-Straße 45
78052 Villingen-Schwenningen
Germany
Contact Person: Patrick Seng

3.4 MANUFACTURER DATA

Company Name: please see Applicant Data
Address:
Contact Person:

4 TEST OBJECT DATA

4.1 GENERAL EUT DESCRIPTION

Kind of Device product description	The CM4 is a communication module with several wired interfaces to the vehicle. Additional functions as GNSS, mobile communication, WiFi and Bluetooth are provided.
Product name	C400 ECU MID EU/ROW 4.5G
Type	Type 1589.1
Declared EUT data by the supplier	
Voltage Type	DC
Voltage Level	24 V
Antenna / Gain	@ 2.4 GHz: Internal / 2.8 dBi external / 4.4 dBi
Tested Modulation Type	BTLE: GFSK WLAN: WLAN b: DSSS, WLAN g/n: OFDM
Specific product description	The EUT supports Bluetooth and WLAN. In the 2.4 GHz band SISO Mode only. Supported technologies are Bluetooth classic, Bluetooth low Energy and WLAN a, b, g, n and ac. Relevant for this report is Bluetooth Low Energy and WLAN. The Bluetooth Low Energy transmitter supports 1 Mbits, the WLAN transmitter supports WLAN b, g and n in 20 MHz BW as well as n in 40 MHz BW.
EUT ports (connected cables during testing):	- DC cable Harness (unshielded, 2m) - GNSS/Cellular/WiFi/Bluetooth antenna ports (shielded, 1.6 m) - USB connector (for testing purposes only)
Tested datarates	BTLE: 1Mbps WLAN b: 1 Mbps, WLAN g: 6 Mbps, WLAN n: MCS0
Special software used for testing	ADB Shell, QRCT from Qualcomm

4.2 EUT MAIN COMPONENTS

Sample Name	Sample Code	Description
EUT_AC02	DE1480003ac02	Conducted/ Radiated Sample
Sample Parameter	Value	
Serial No.	000066	
HW Version	CM4	
SW Version	TRATON_CM4_26.12.1.12	
Comment	-	

Sample Name	Sample Code	Description
EUT_AD03	DE1480003ad03	Conducted/ Radiated Sample
Sample Parameter	Value	
Serial No.	23325-0004	
HW Version	CM4	
SW Version	TRATON_CM4_26.12.1.16	
Comment	-	

NOTE: The short description is used to simplify the identification of the EUT in this test report.

4.3 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Device	Details(Manufacturer, Type Model, OUT Code)	Description
ANC1	DESAY SV, 4829.01 roof top antenna, DE1480003AUX1	GNSS, Cellular Antenna
ANC2	DESAY SV, 4828.01 roof top antenna, DE1480003AUX2	WIFI/BT, Cellular Antenna

4.4 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Device	Details (Manufacturer, Type Model, HW, SW, S/N)	Description
AUX A	continental, -, -, -, -	Harness Cable

4.5 EUT SETUPS

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup	Combination of EUTs	Description and Rationale
S01_AC02	EUT_AC02, AUX A	Conducted Setup
S02_AD03	EUT_AD03, ANC1, ANC2, AUX A	Radiated Setup
S01_AD03	EUT_AD03, AUX A	Conducted Setup

4.6 OPERATING MODES / TEST CHANNELS

This chapter describes the operating modes of the EUTs used for testing.

WLAN
20 MHz Test Channels:
Channel:
Frequency [MHz]

2.4 GHz ISM 2400 - 2483.5 MHz		
low	mid	high
1	6	11
2412	2437	2462


40 MHz Test Channels:
Channel:
Frequency [MHz]

low	mid	high
3	6	9
2422	2437	2452

BT LE Test Channels:
Channel:
Frequency [MHz]

2.4 GHz ISM 2400 - 2483.5 MHz		
low	mid	high
0	19	39
2402	2440	2480

Duty Cycle:

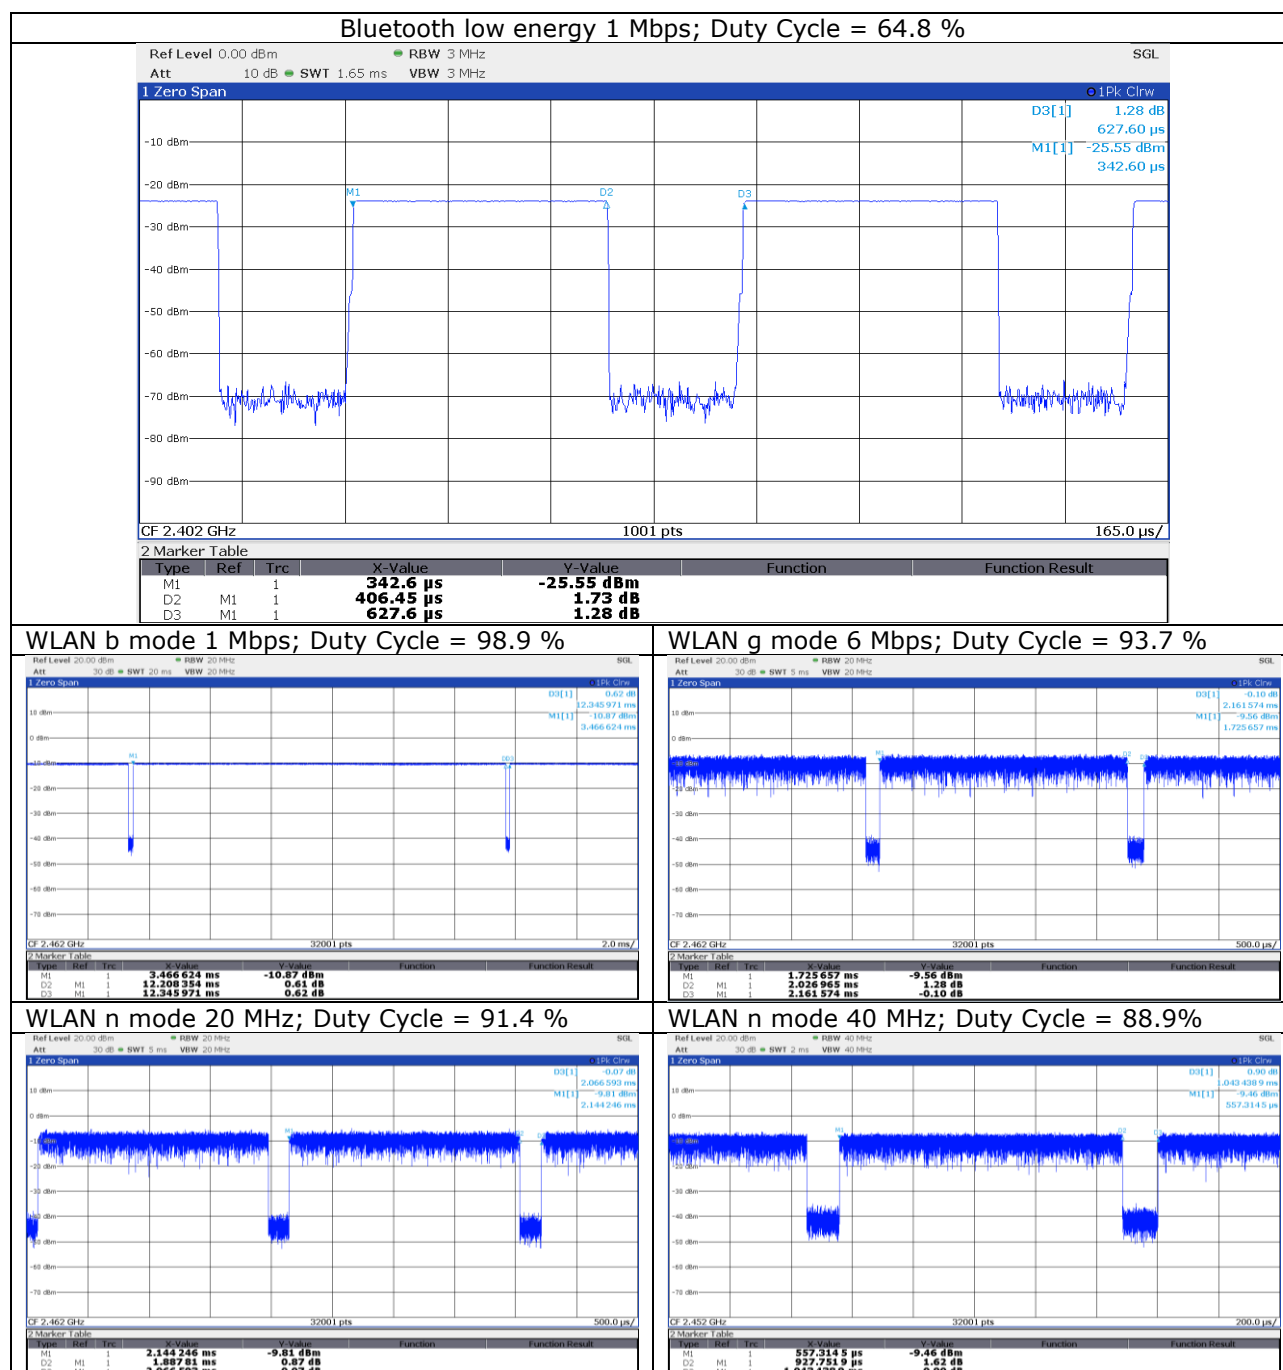

4.7 PRODUCT LABELLING

4.7.1 FCC ID LABEL

Please refer to the documentation of the applicant.

4.7.2 LOCATION OF THE LABEL ON THE EUT

Please refer to the documentation of the applicant.

5 TEST RESULTS

5.1 OCCUPIED BANDWIDTH (6 DB)

Standard **FCC Part 15 Subpart C**

The test was performed according to:

ANSI C63.10, chapter 11.8.1

5.1.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.


The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (smallest) emission bandwidth.

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.

Analyser settings:

- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Span: Two times nominal bandwidth
- Trace: Maxhold
- Sweeps: Till stable (min. 500, max. 15000)
- Sweptime: Auto
- Detector: Peak

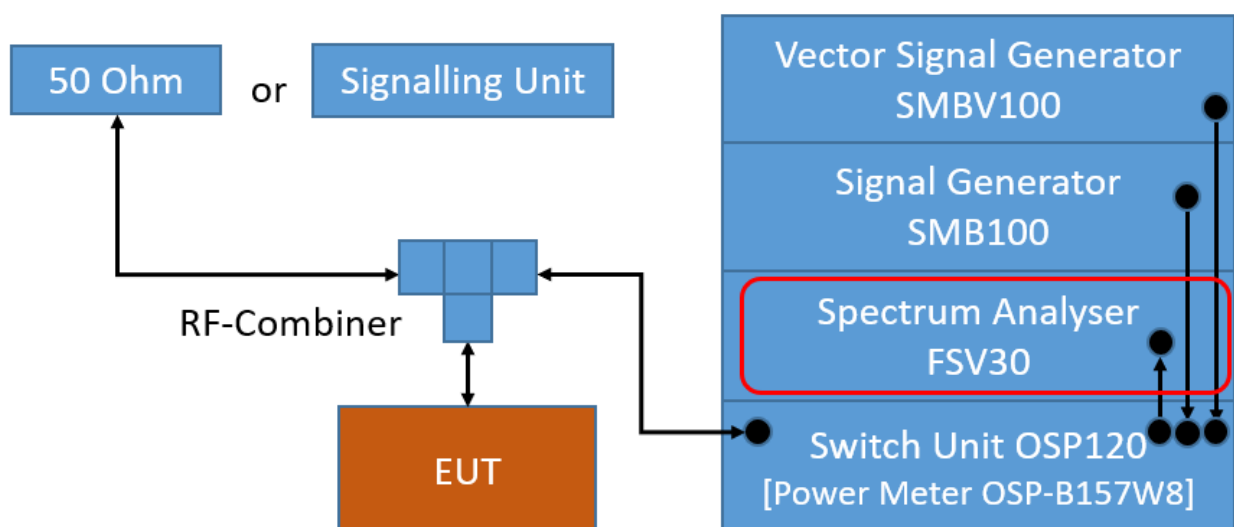

TS8997; Channel Bandwidth

5.1.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (a) (2)

Systems using digital modulation techniques may operate in the 902-928 MHz and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.1.3 TEST PROTOCOL

Ambient temperature: 21 °C
 Air Pressure: 998 hPa
 Humidity: 37 %
 BT LE 1 Mbit/s

Band / Mode	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	0	2402	0.808	0.5	0.308
	19	2440	0.792	0.5	0.292
	39	2480	0.808	0.5	0.308

Ambient temperature: 21 °C
 Air Pressure: 998 hPa
 Humidity: 37 %
 WLAN b-Mode; 20 MHz; 1 Mbit/s

Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	8.2	0.5	7.7
	6	2437	8.2	0.5	7.7
	11	2462	7.7	0.5	7.2

WLAN g-Mode; 20 MHz; 6 Mbit/s

Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	15.8	0.5	15.3
	6	2437	15.8	0.5	15.3
	11	2462	15.8	0.5	15.3

WLAN n-Mode; 20 MHz; MCS0

Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	16.4	0.5	15.9
	6	2437	16.4	0.5	15.9
	11	2462	16.4	0.5	15.9


WLAN n-Mode; 40 MHz; MCS0

Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	3	2422	32.6	0.5	32.1
	6	2437	26.4	0.5	25.9
	9	2452	36.4	0.5	35.9

Remark: Please see next sub-clause for the measurement plot.

5.1.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)


Modulation= Bluetooth LE 1 Mbps, Operating Channel = mid
(S01_AC02)

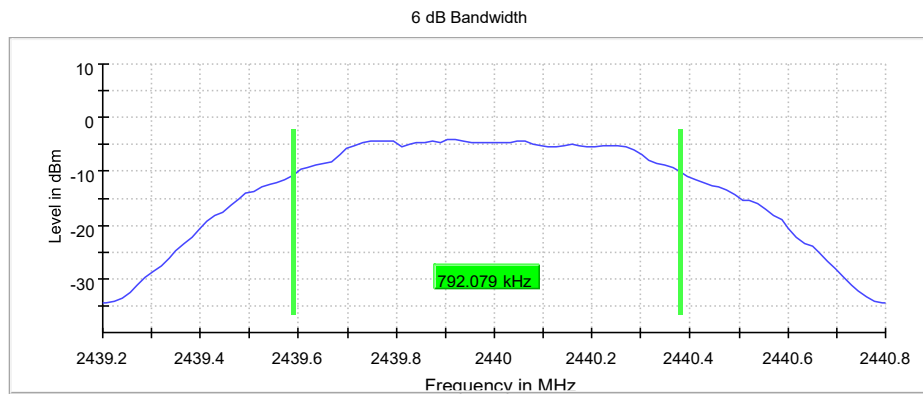

Measurement

Setting	Instrument Value
Start Frequency	2.43920 GHz
Stop Frequency	2.44080 GHz
Span	1.600 MHz
RBW	100.000 kHz
VBW	300.000 kHz
SweepPoints	101
Sweeptime	41.920 μ s
Reference Level	0.000 dBm
Attenuation	10.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	12 / max. 150
Stable	5 / 5
Max Stable Difference	0.02 dB


Modulation= WLAN b, Operating Channel = high
(S01_AD03)

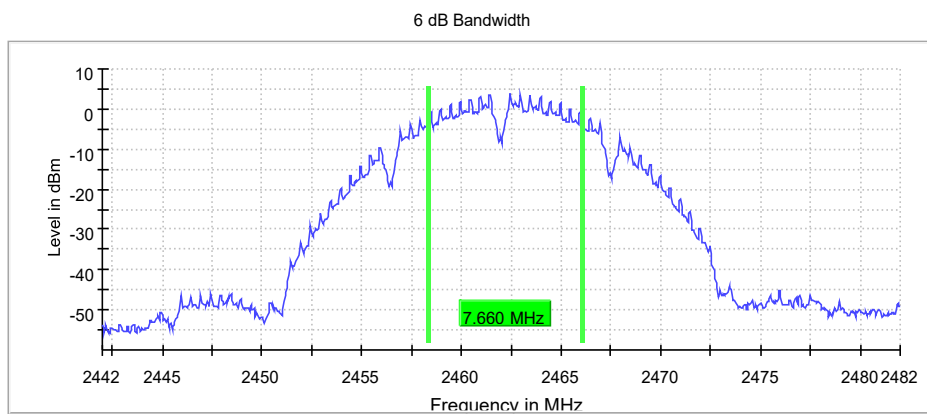

Measurement

Setting	Instrument Value
Start Frequency	2.44200 GHz
Stop Frequency	2.48200 GHz
Span	40.000 MHz
RBW	100.000 kHz
VBW	300.000 kHz
SweepPoints	800
Sweeptime	1.040 ms
Reference Level	0.000 dBm
Attenuation	10.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	Sweep
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	23 / max. 150
Stable	5 / 5
Max Stable Difference	0.26 dB


Modulation= WLAN g, Operating Channel = high
(S01_AD03)

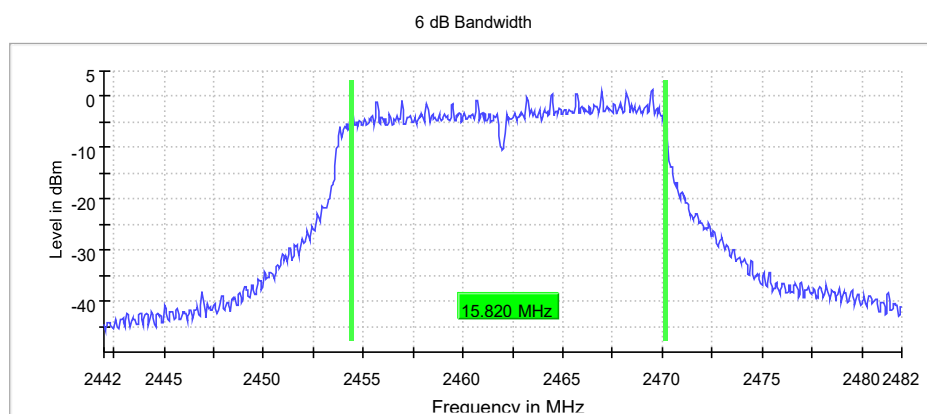

Measurement

Setting	Instrument Value
Start Frequency	2.44200 GHz
Stop Frequency	2.48200 GHz
Span	40.000 MHz
RBW	100.000 kHz
VBW	300.000 kHz
SweepPoints	800
Sweeptime	1.040 ms
Reference Level	0.000 dBm
Attenuation	10.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	Sweep
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	68 / max. 150
Stable	5 / 5
Max Stable Difference	0.50 dB


Modulation= WLAN n 20 MHz, Operating Channel = low
(S01_AD03)

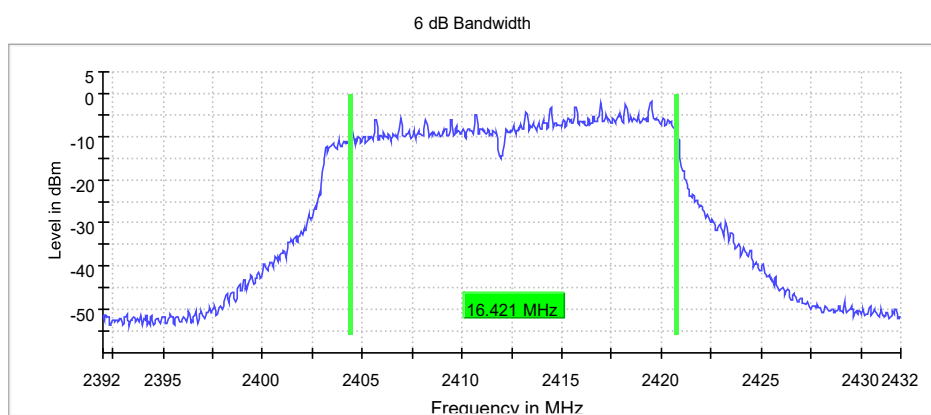

Measurement

Setting	Instrument Value
Start Frequency	2.39200 GHz
Stop Frequency	2.43200 GHz
Span	40.000 MHz
RBW	100.000 kHz
VBW	300.000 kHz
SweepPoints	800
Sweptime	1.040 ms
Reference Level	0.000 dBm
Attenuation	10.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	Sweep
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	44 / max. 150
Stable	5 / 5
Max Stable Difference	0.45 dB

Modulation= WLAN n 40 MHz, Operating Channel = mid
(S01_AD03)

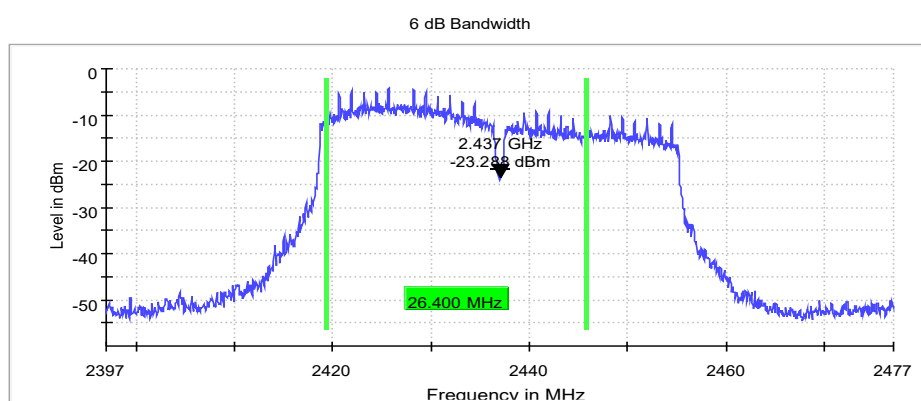

Measurement

Setting	Instrument Value
Start Frequency	2.39700 GHz
Stop Frequency	2.47700 GHz
Span	80.000 MHz
RBW	100.000 kHz
VBW	300.000 kHz
SweepPoints	1600
Sweptime	94.727 μ s
Reference Level	-10.000 dBm
Attenuation	10.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	26 / max. 150
Stable	5 / 5
Max Stable Difference	0.22 dB

5.1.5 TEST EQUIPMENT USED

- R&S TS8997

5.2 OCCUPIED BANDWIDTH (99%)

Standard **FCC Part 15 Subpart C**

The test was performed according to:

ANSI C63.10, chapter 6.9.3

5.2.1 TEST DESCRIPTION


The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.

Analyser settings:

- Resolution Bandwidth (RBW): 1 to 5 % of the OBW
- Video Bandwidth (VBW): ≥ 3 times the RBW
- Span: 1.5 to 5 times the OBW
- Trace: Maxhold
- Sweeps: Till stable (min. 500, max. 75000)
- Sweep time: Auto
- Detector: Peak

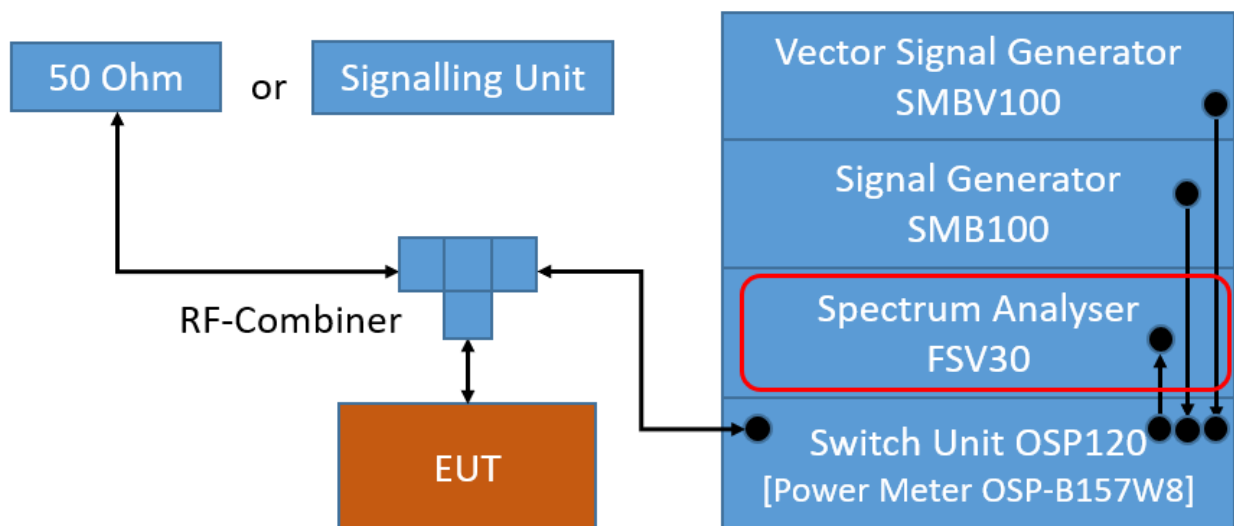

TS8997; Channel Bandwidth

5.2.2 TEST REQUIREMENTS / LIMITS

No applicable limit.

5.2.3 TEST PROTOCOL

Ambient temperature: 21 °C
 Air Pressure: 998 hPa
 Humidity: 37 %
 BT LE 1 Mbit/s

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	0	2402	1.060
	19	2440	1.060
	39	2480	1.060

Ambient temperature: 21 °C
 Air Pressure: 998 hPa
 Humidity: 37 %
 WLAN b-Mode; 20 MHz; 1 Mbit/s

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	1	2412	13.2
	6	2437	13.2
	11	2462	13.3

WLAN g-Mode; 20 MHz; 6 Mbit/s

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	1	2412	16.5
	6	2437	16.5
	11	2462	16.5

WLAN n-Mode; 20 MHz; MCS0

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	1	2412	17.6
	6	2437	17.6
	11	2462	17.6


WLAN n-Mode; 40 MHz; MCS0

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	3	2422	35.8
	6	2437	36.3
	9	2452	37.0

Remark: Please see next sub-clause for the measurement plot.

5.2.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)


Modulation= Bluetooth LE 1 Mbps, Operating Channel = low
(S01_AC02)

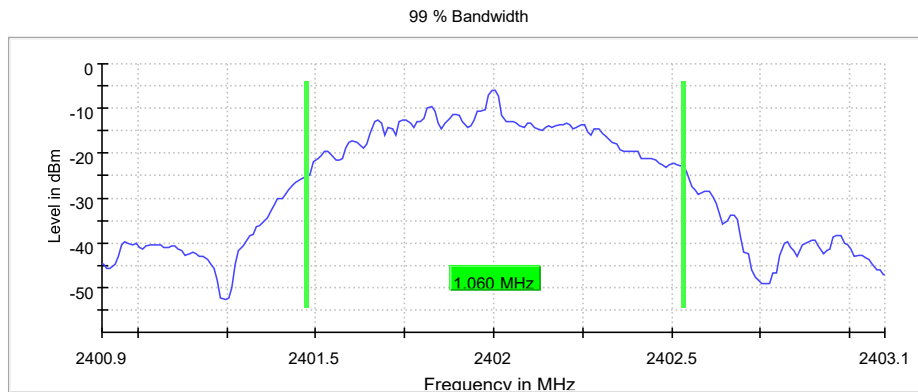

Measurement

Setting	Instrument Value
Start Frequency	2.40090 GHz
Stop Frequency	2.40310 GHz
Span	2.200 MHz
RBW	20.000 kHz
VBW	100.000 kHz
SweepPoints	220
SweepTime	210.000 μ s
Reference Level	0.000 dBm
Attenuation	10.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamp	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	7 / max. 150
Stable	3 / 3
Max Stable Difference	0.05 dB


Modulation= WLAN b, Operating Channel = high
(S01_AD03)

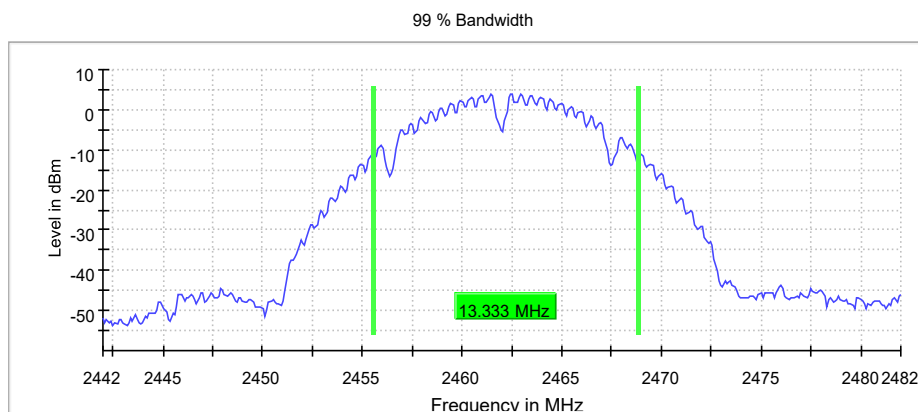

Measurement

Setting	Instrument Value
Start Frequency	2.44200 GHz
Stop Frequency	2.48200 GHz
Span	40.000 MHz
RBW	200.000 kHz
VBW	1.000 MHz
SweepPoints	400
SweepTime	1.000 ms
Reference Level	0.000 dBm
Attenuation	10.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	Sweep
Preamp	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	7 / max. 150
Stable	3 / 3
Max Stable Difference	0.25 dB


Modulation= WLAN g, Operating Channel = mid
(S01_AD03)

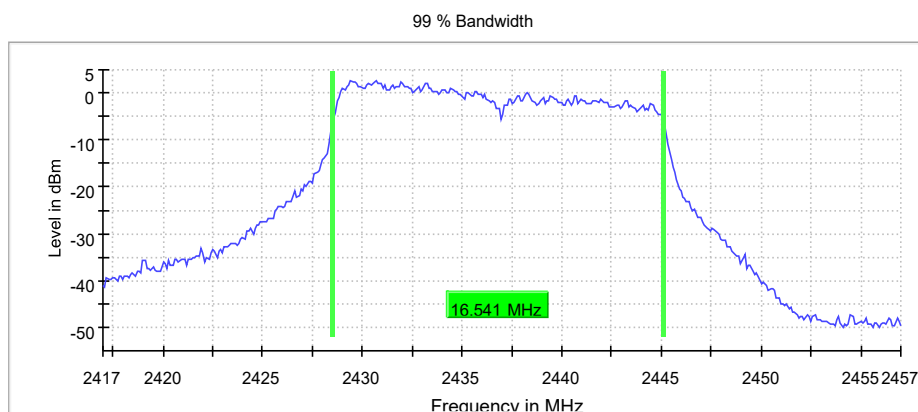

Measurement

Setting	Instrument Value
Start Frequency	2.41700 GHz
Stop Frequency	2.45700 GHz
Span	40.000 MHz
RBW	200.000 kHz
VBW	1.000 MHz
SweepPoints	400
SweepTime	1.000 ms
Reference Level	0.000 dBm
Attenuation	10.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	Sweep
Preamp	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	57 / max. 150
Stable	3 / 3
Max Stable Difference	0.27 dB


Modulation= WLAN n 20 MHz, Operating Channel = low
(S01_AD03)

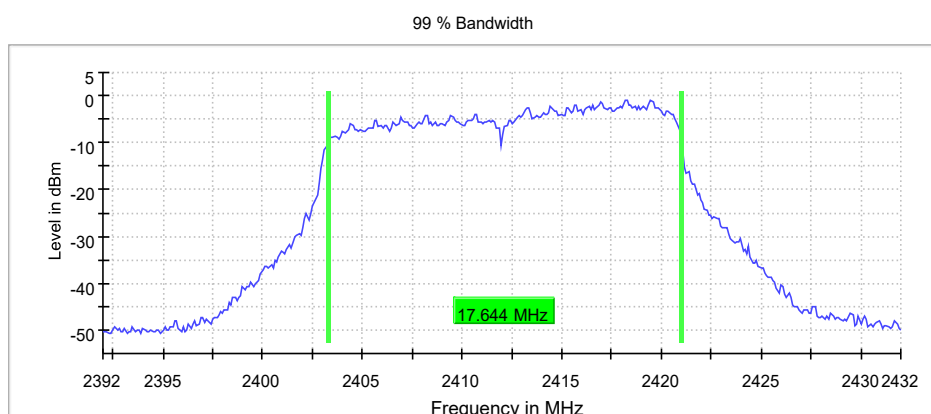

Measurement

Setting	Instrument Value
Start Frequency	2.39200 GHz
Stop Frequency	2.43200 GHz
Span	40.000 MHz
RBW	200.000 kHz
VBW	1.000 MHz
SweepPoints	400
SweepTime	1.000 ms
Reference Level	-10.000 dBm
Attenuation	0.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	Sweep
Preamp	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	40 / max. 150
Stable	3 / 3
Max Stable Difference	0.00 dB

Modulation= WLAN n 40 MHz, Operating Channel = high
(S01_AD03)

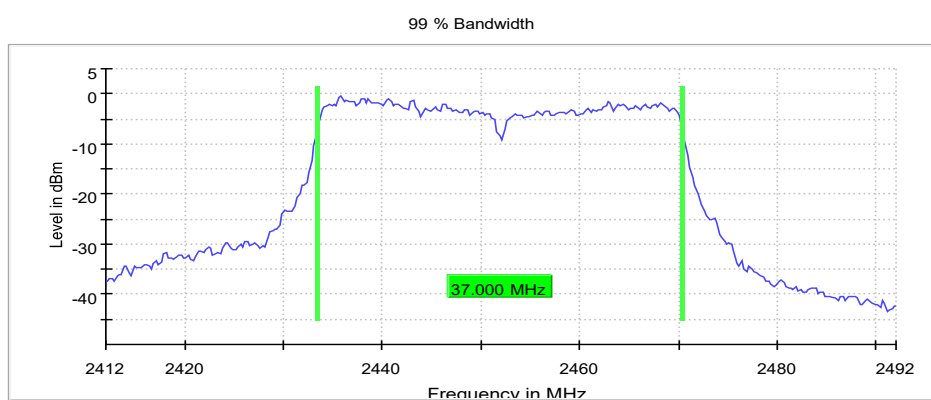

Measurement

Setting	Instrument Value
Start Frequency	2.41200 GHz
Stop Frequency	2.49200 GHz
Span	80.000 MHz
RBW	500.000 kHz
VBW	2.000 MHz
SweepPoints	320
SweepTime	18.906 μ s
Reference Level	-10.000 dBm
Attenuation	10.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamp	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	38 / max. 150
Stable	3 / 3
Max Stable Difference	0.14 dB

5.2.5 TEST EQUIPMENT USED

- R&S TS8997

5.3 PEAK POWER OUTPUT

Standard **FCC Part 15 Subpart C**

The test was performed according to:

ANSI C63.10, chapter 11.9.1.3

5.3.1 TEST DESCRIPTION

DTS EQUIPMENT:

The Equipment Under Test (EUT) was set up to perform the output power measurements. The results recorded were measured with the modulation which produces the worst-case (highest) output power.

Maximum peak conducted output power (e.g. Bluetooth Low Energy):


The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered. The reference level of the spectrum analyser was set higher than the output power of the EUT.

Analyser settings:


- Resolution Bandwidth (RBW): $\geq$ DTS bandwidth
- Video Bandwidth (VBW): $\geq$ 3 times RBW or maximum of analyzer
- Span: $\geq$ 3 times RBW
- Trace: Maxhold
- Sweeps: Till stable (min. 300, max. 15000)
- Sweep time: Auto
- Detector: Peak

Maximum conducted average output power (e.g. WLAN):


The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered. Measurement is performed using the gated RF average power meter integrated in the OSP 120 module OSP-B157W8 with signal bandwidth >300 MHz.

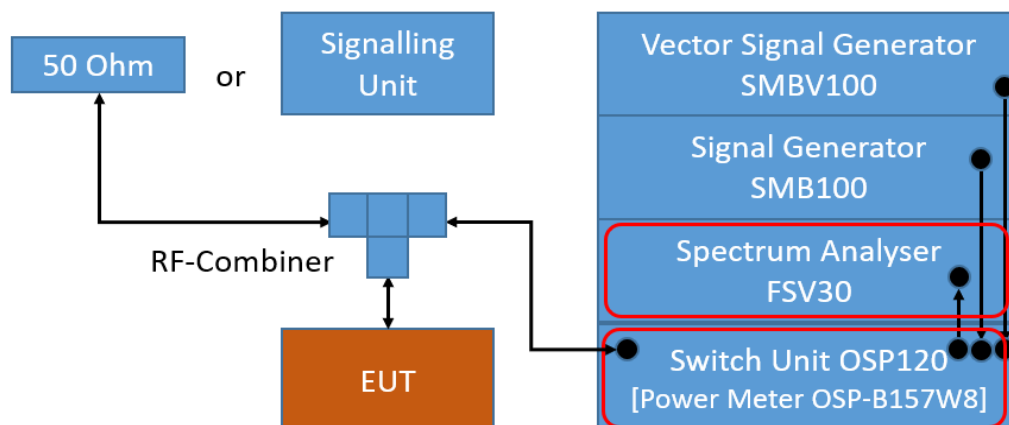

TS8997; Output Power

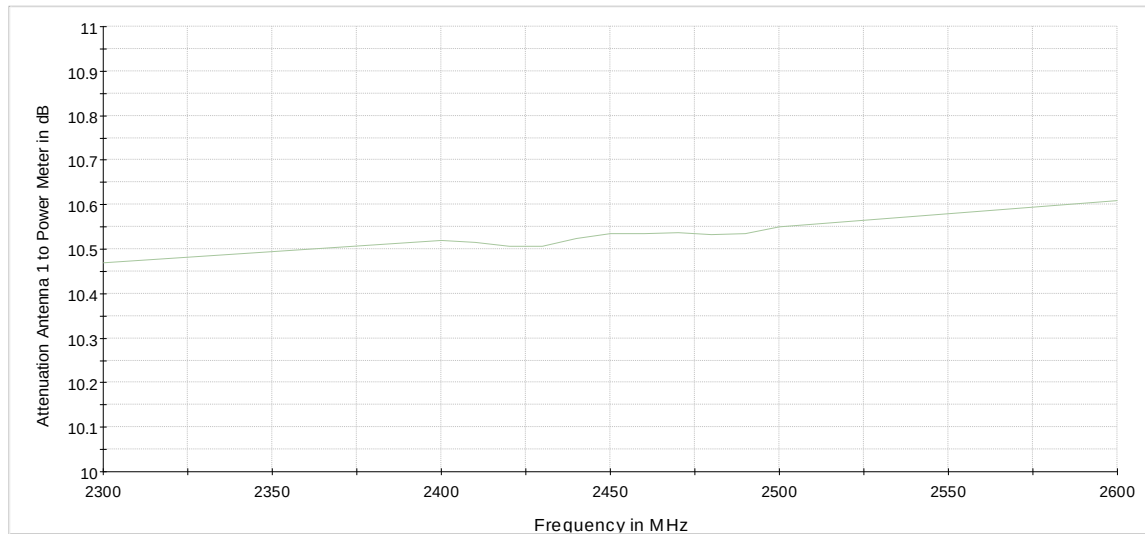

Attenuation of the measurement path to Power Meter

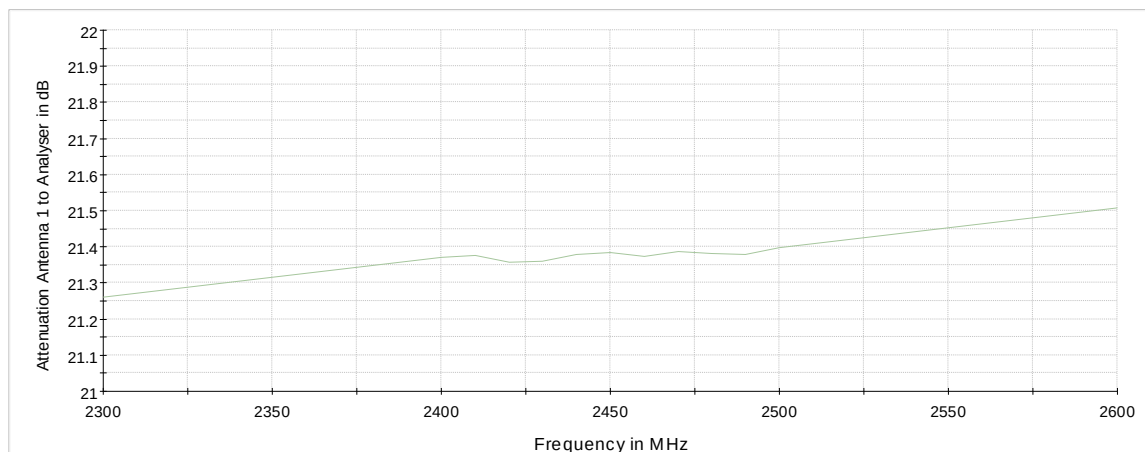

Attenuation of the measurement path to Analyser

5.3.2 TEST REQUIREMENTS / LIMITS

DTS devices:

FCC Part 15, Subpart C, §15.247 (b) (3)

For systems using digital modulation techniques in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands: 1 watt.

==> Maximum conducted peak output power: 30 dBm (excluding antenna gain, if antennas with directional gains that do not exceed 6 dBi are used).

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW)

5.3.3 TEST PROTOCOL

Ambient temperature: 21 °C
 Air Pressure: 998 hPa
 Humidity: 37 %
 BT LE 1 Mbit/s

Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	0	2402	-3.0	30.0	33.0	1.4
	19	2440	-2.2	30.0	32.2	2.2
	39	2480	-2.0	30.0	32.0	2.4

Ambient temperature: 21 °C
 Air Pressure: 998 hPa
 Humidity: 37 %
 WLAN b-Mode; 20 MHz; 1 Mbit/s

Band	Channel No.	Frequency [MHz]	Maximum Average Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	1	2412	8.4	30.0	21.6	8.4
	6	2437	11.3	30.0	18.7	11.3
	11	2462	11.5	30.0	18.5	11.5

WLAN g-Mode; 20 MHz; 6 Mbit/s

Band	Channel No.	Frequency [MHz]	Maximum Average Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	1	2412	8.3	30.0	21.7	8.3
	6	2437	10.9	30.0	19.1	10.9
	11	2462	11.3	30.0	18.7	11.3

WLAN n-Mode; 20 MHz; MCS0

Band	Channel No.	Frequency [MHz]	Maximum Average Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	1	2412	7.2	30.0	22.8	7.2
	6	2437	9.8	30.0	20.2	9.8
	11	2462	10.1	30.0	19.9	10.1


WLAN n-Mode; 40 MHz; MCS0

Band	Channel No.	Frequency [MHz]	Maximum Average Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	3	2422	6.8	30.0	22.0	6.8
	6	2437	7.4	30.0	21.3	7.4
	9	2452	8.2	30.0	21.1	8.2

Remark: Please see next sub-clause for the measurement plot.
 No plots are provided for WLAN (power meter measurements)

5.3.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Modulation= Bluetooth LE 1 Mbps, Operating Channel = low
(S01_AC02)

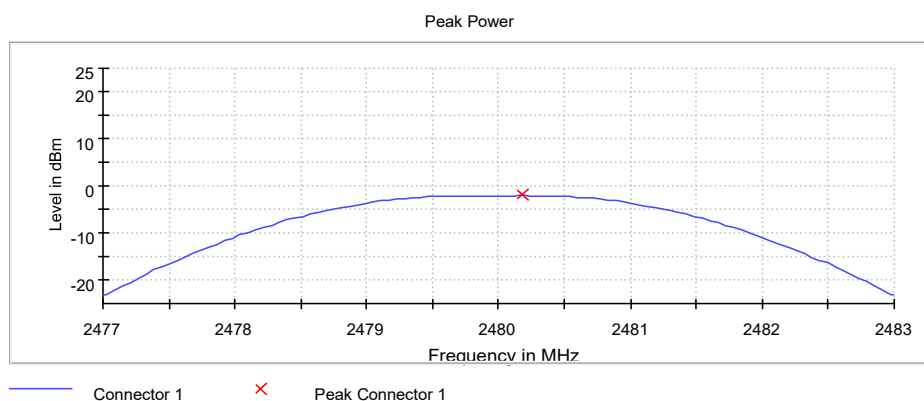

Measurement

Setting	Instrument Value
Start Frequency	2.47700 GHz
Stop Frequency	2.48300 GHz
Span	6.000 MHz
RBW	2.000 MHz
VBW	10.000 MHz
SweepPoints	101
Sweeptime	1.000 ms
Reference Level	10.000 dBm
Attenuation	20.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
Sweeptype	Sweep
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	4 / max. 150
Stable	3 / 3
Max Stable Difference	0.05 dB

5.3.5 TEST EQUIPMENT USED

- R&S TS8997

5.4 SPURIOUS RF CONDUCTED EMISSIONS

Standard **FCC Part 15 Subpart C**

The test was performed according to:

ANSI C63.10, chapter 11.11

5.4.1 TEST DESCRIPTION


The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements.

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.


Analyser settings:

- Frequency range: 30 – 26000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Trace: Maxhold
- Sweeps: Till Stable (max. 120)
- Sweep Time: Auto
- Detector: Peak

The reference value for the measurement of the spurious RF conducted emissions is determined during the test "band edge compliance conducted". This value is used to calculate the 20 dBc or 30 dBc limit.

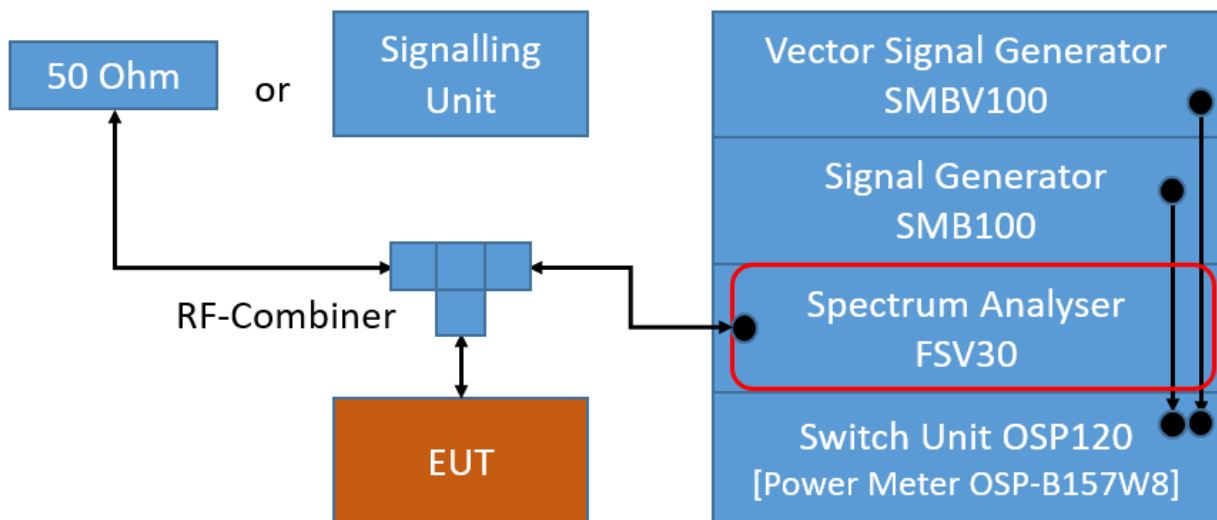

TS8997; Spurious RF Conducted Emissions

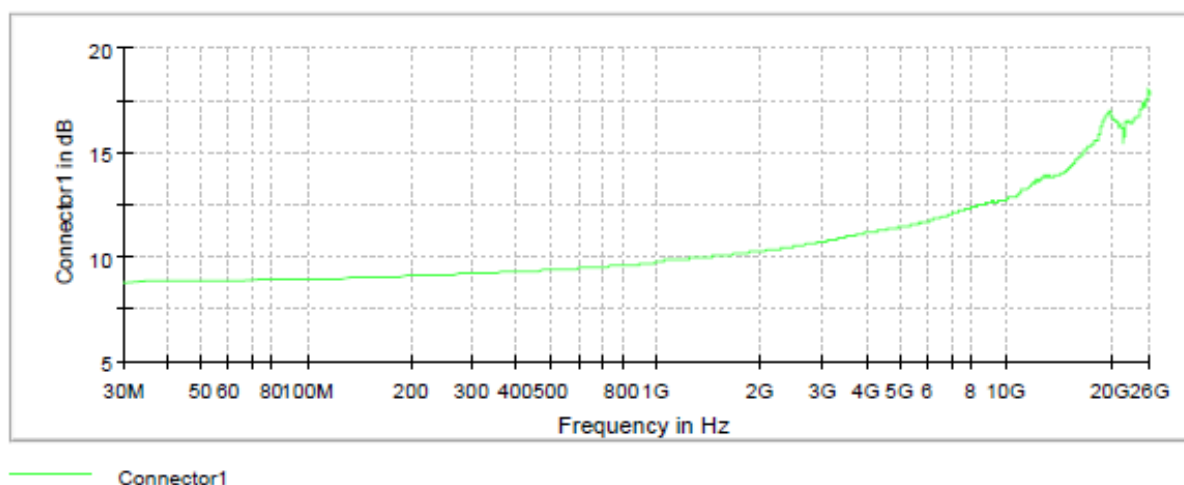

Attenuation of the measurement part

5.4.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

5.4.3 TEST PROTOCOL

Ambient temperature: 21 °C
Air Pressure: 998 hPa
Humidity: 37 %
BT LE 1 Mbit/s

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
0	2402	2395.0	-60.9	PEAK	100	-4.2	-24.2	36.7
19	2440	4877.1	-72.2	PEAK	100	-3.7	-23.7	48.5
39	2480	2488.5	-66.8	PEAK	100	-1.5	-21.5	45.3

Ambient temperature: 21 °C
Air Pressure: 998 hPa
Humidity: 37 %
WLAN b-Mode; 20 MHz; 1 Mbit/s

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2390.0	-57.8	PEAK	100	0.3	-29.7	28.1
6	2437	4873.1	-53.8	PEAK	100	2.6	-27.4	26.4
11	2462	25690.0	-47.1	PEAK	100	1.2	-28.8	18.3

WLAN g-Mode; 20 MHz; 6 Mbit/s

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2390.0	-50.3	PEAK	100	-1.1	-31.1	19.2
6	2437	2390.0	-54.8	PEAK	100	1.8	-28.2	26.6
11	2462	26000.0	-46.3	PEAK	100	-0.8	-30.8	15.5

WLAN n-Mode; 20 MHz; MCS0

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2390.0	-52.7	PEAK	100	-5.6	-35.6	17.1
6	2437	2390.0	-56.1	PEAK	100	-2.7	-32.7	23.4
11	2462	25980.0	-47.4	PEAK	100	-0.8	-30.8	16.6

WLAN n-Mode; 40 MHz; MCS0


Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
3	2422	2390.0	-52.5	PEAK	100	-4.1	-34.1	18.4
6	2437	2390.0	-53.9	PEAK	100	-3.3	-33.3	20.6
9	2452	25960.0	-47.6	PEAK	100	-2.8	-32.8	14.8

Remark: Please see next sub-clause for the measurement plot.


The used limit in the following BTLE plot is not correct, the correct limits are defined in the previous table.

5.4.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)


Modulation= Bluetooth LE 1 Mbps, Operating Channel = low
(S01_AC02)
Spurious

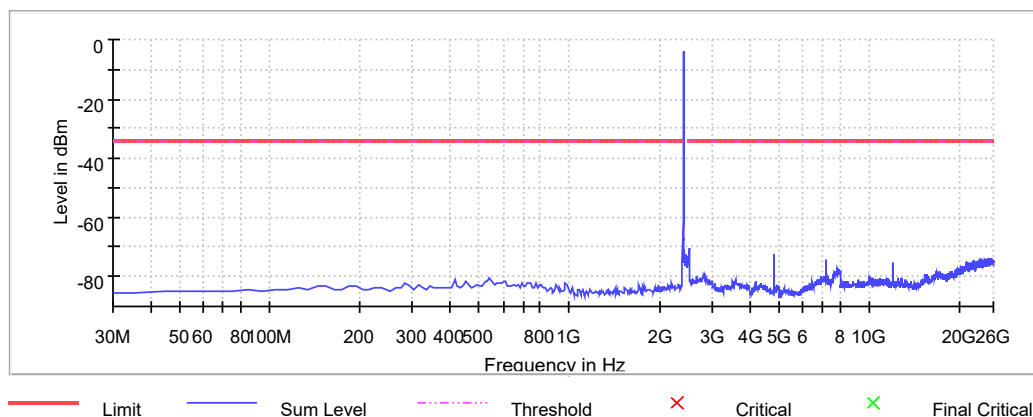


Modulation= WLAN b, Operating Channel = mid
(S01_AD03)
Spurious

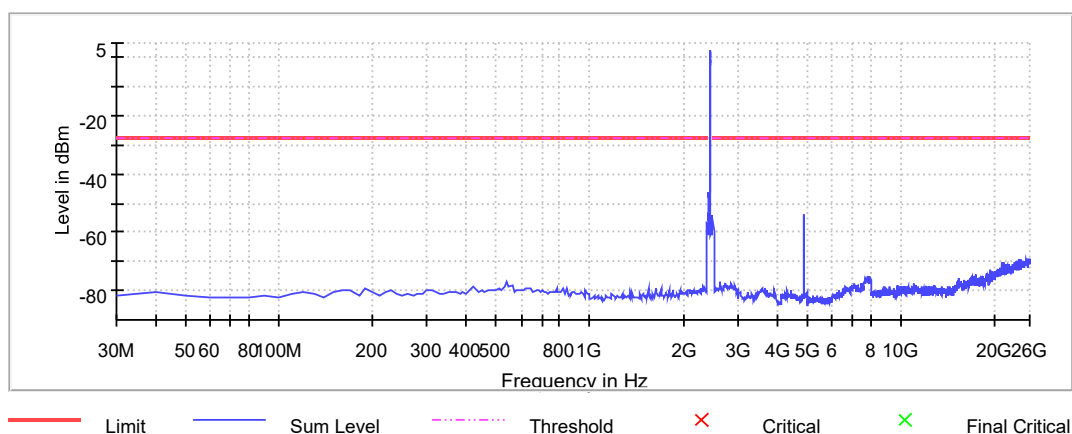


Modulation= WLAN g, Operating Channel = high
(S01_AD03)
Spurious

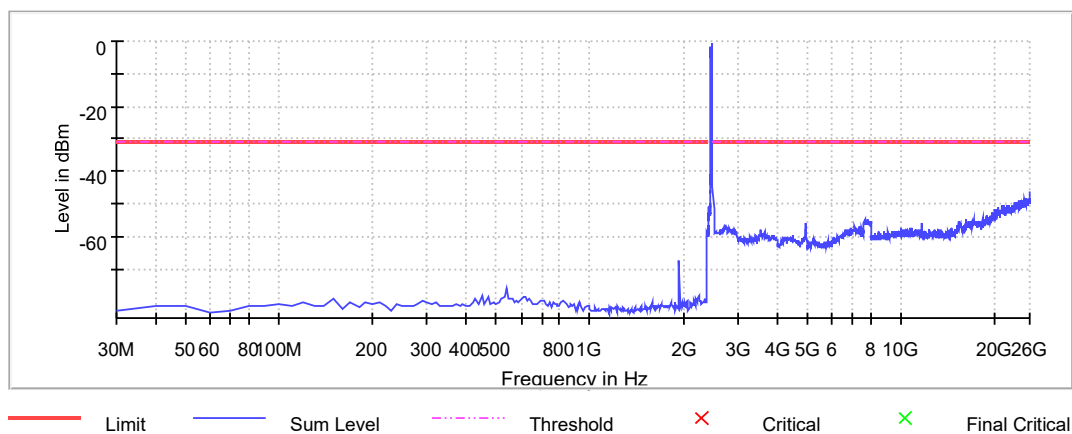

Modulation= WLAN n 20 MHz, Operating Channel = high
(S01_AD03)
Spurious

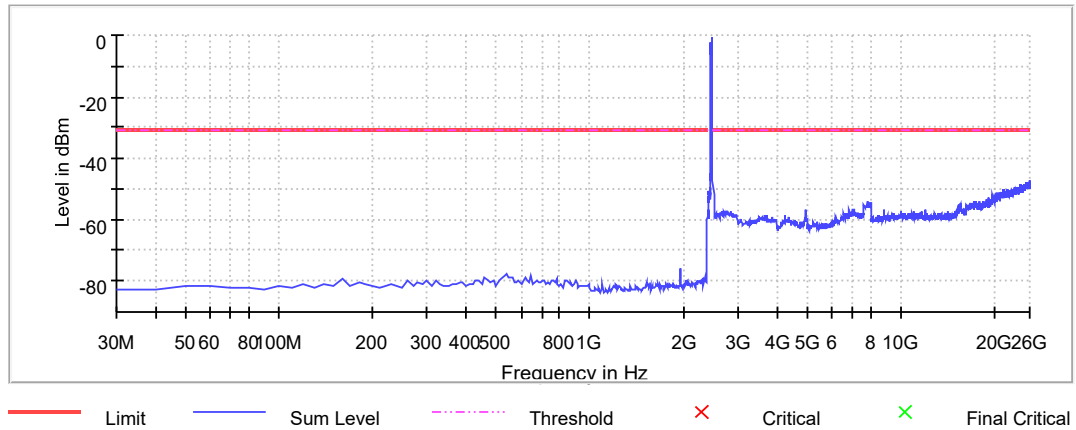

Modulation= WLAN n 40 MHz, Operating Channel = high
(S01_AD03)
Spurious

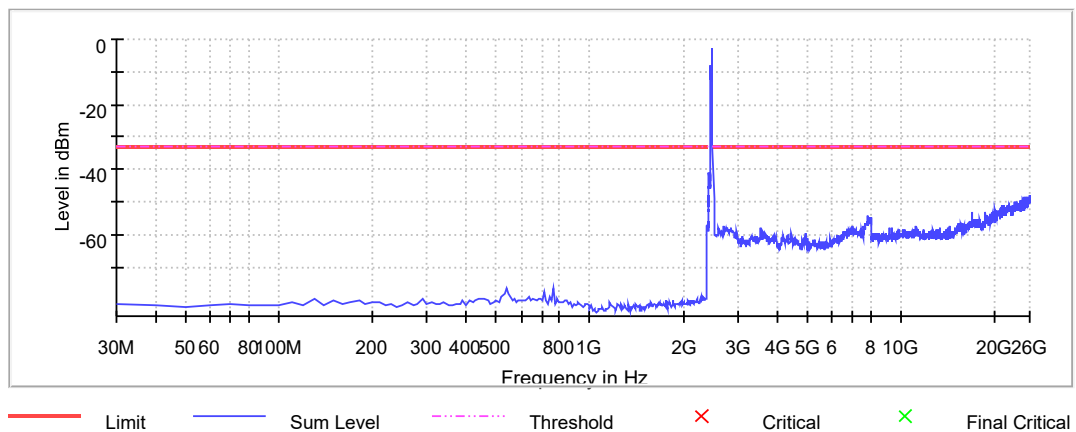

5.4.5 TEST EQUIPMENT USED

- R&S TS8997

5.5 TRANSMITTER SPURIOUS RADIATED EMISSIONS

Standard **FCC Part 15 Subpart C**

The test was performed according to:

ANSI C63.10, chapter 6.4, 6.5, 6.6.5

5.5.1 TEST DESCRIPTION

The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The measurements were performed according the following sub-chapters of ANSI C63.10:


- < 30 MHz: Chapter 6.4
- 30 MHz – 1 GHz: Chapter 6.5
- > 1 GHz: Chapter 6.6 (procedure according 6.6.5 used)

The measurement procedure is implemented into the EMI test software EMC32 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is also performed at 3 axes. A pre-check is performed while the EUT is powered.

Below 1 GHz:

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

1. Measurement up to 30 MHz

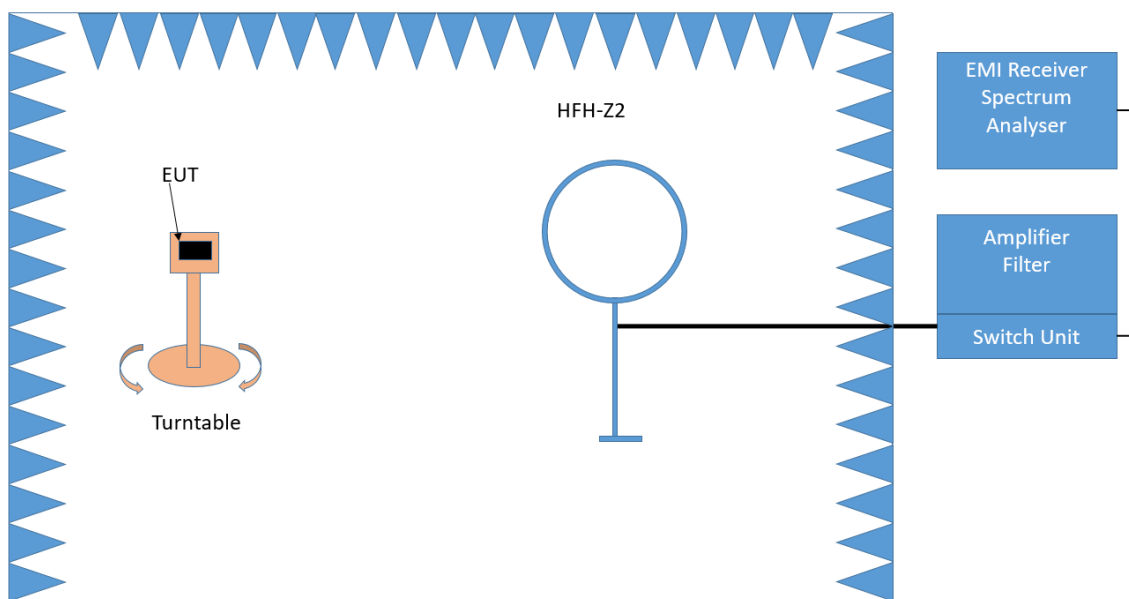

Test Setup; Spurious Emission Radiated (SAC), 9 kHz – 30 MHz

The Loop antenna HFH2-Z2 is used.

Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 3 m
- Antenna height: 1 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 MHz and 0.15 - 30 MHz
- Frequency steps: 0.05 kHz and 2.25 kHz
- IF-Bandwidth: 0.2 kHz and 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)


Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Detector: Quasi-Peak (9 kHz - 150 kHz, Peak / Average 150 kHz- 30 MHz)
- Frequency range: 0.009 - 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 0.2 - 10 kHz
- Measuring time / Frequency step: 1 s

2. Measurement above 30 MHz and up to 1 GHz

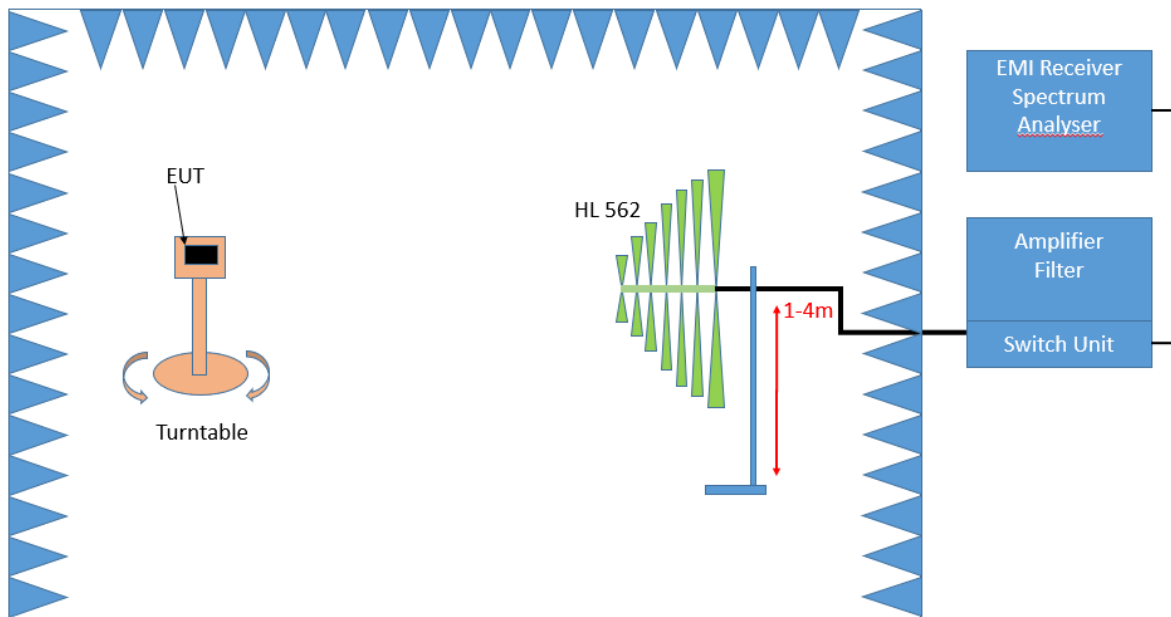

Test Setup; Spurious Emission Radiated (SAC), 30 MHz- 1GHz

Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold / Quasipeak (FFT-based)
- Frequency range: 30 - 1000 MHz
- Frequency steps: 30 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 ms
- Turntable angle range: -180° to 90°

- Turntable step size: 90°
- Height variation range: 1 – 4 m
- Height variation step size: 1.5 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: Adjustment measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by 360°. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary between 1 – 4 meter. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: 360 °
- Height variation range: 1 – 4 m
- Antenna Polarisation: max. value determined in step 1

Step 3: Final measurement with QP detector

With the settings determined in step 2, the final measurement will be performed:

EMI receiver settings for step 3:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s


After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

Above 1 GHz:

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only.

3. Measurement above 1 GHz

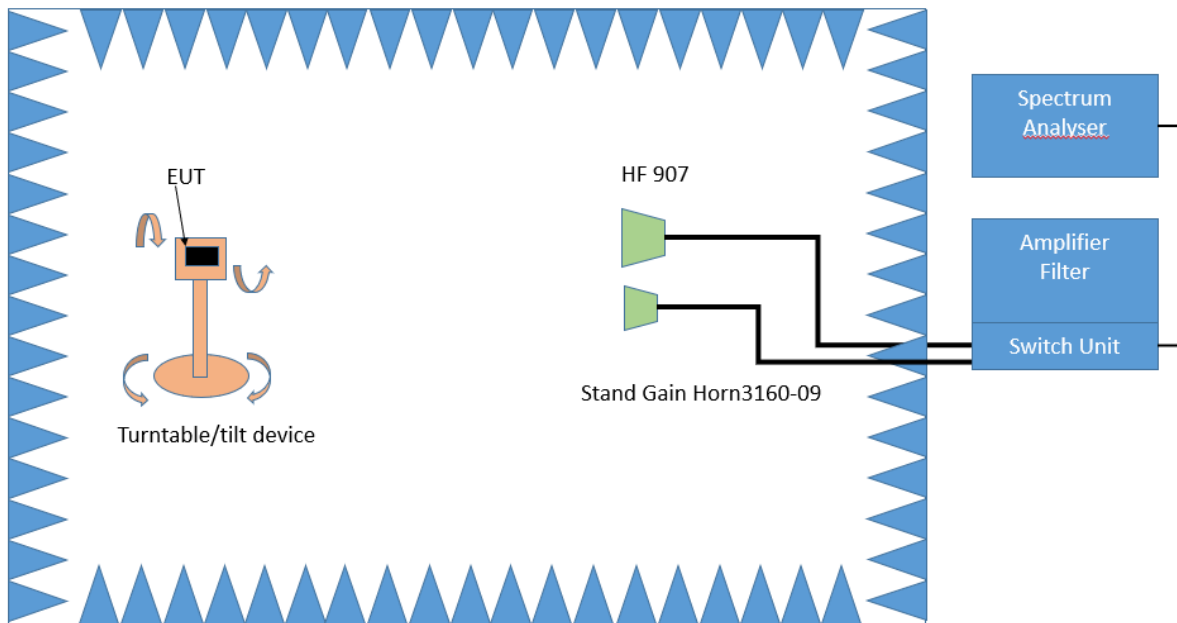

Test Setup; Spurious Emission Radiated (FAC), 1 GHz-26.5 GHz

Step 1:

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of 90 °.

The turn table step size (azimuth angle) for the preliminary measurement is 45 °.

Spectrum analyser settings:

- Detector: Peak, Average
- RBW = 1 MHz
- VBW = 3 MHz

Step 2:

The turn table azimuth will slowly vary by $\pm 22.5^\circ$.

The elevation angle will slowly vary by $\pm 45^\circ$

Spectrum analyser settings:

- Detector: Peak

Step 3:

Spectrum analyser settings for step 3:

- Detector: Peak / CISPR Average
- Measured frequencies: in step 1 determined frequencies
- RBW = 1 MHz
- VBW = 3 MHz
- Measuring time: 1 s

5.5.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (μV/m)	Measurement distance (m)	Limits (dBμV/m)
0.009 – 0.49	2400/F(kHz)@300m	3	(48.5 – 13.8)@300m
0.49 – 1.705	24000/F(kHz)@30m	3	(33.8 – 23.0)@30m
1.705 – 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit (μV/m)	Measurement distance (m)	Limits (dBμV/m)
30 – 88	100@3m	3	40.0@3m
88 – 216	150@3m	3	43.5@3m
216 – 960	200@3m	3	46.0@3m
960 – 26000	500@3m	3	54.0@3m
26000 – 40000	500@3m	1	54.0@3m

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: $\text{Limit (dB}\mu\text{V/m)} = 20 \log (\text{Limit } (\mu\text{V/m})/1\mu\text{V/m})$

5.5.3 TEST PROTOCOL

Ambient temperature: 22 °C
 Air Pressure: 989 hPa
 Humidity: 39 %
 WLAN b-Mode; 20 MHz; 1 Mbit/s
 Applied duty cycle correction (AV): 0.1 dB

Antenna	Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]	Limit Type
external	1	2412	2718.8	51.4	PEAK	1000	74.0	22.6	RB
external	1	2412	2718.8	38.7	AV	1000	54.0	15.3	RB
external	1	2412	15675.3	54.9	PEAK	1000	74.0	19.1	RB
external	1	2412	15675.3	41.8	AV	1000	54.0	12.2	RB
external	1	2412	17972.1	59.0	PEAK	1000	74.0	15.0	RB
external	1	2412	17972.1	46.3	AV	1000	54.0	7.7	RB
external	1	2412	21308.9	50.7	PEAK	1000	74.0	23.3	RB
external	1	2412	21308.9	37.9	AV	1000	54.0	16.1	RB
external	1	2412	23884.8	52.4	PEAK	1000	74.0	21.6	RB
external	1	2412	23884.8	40.1	AV	1000	54.0	13.9	RB
external	6	2437	15637.2	41.7	AV	1000	54.0	12.3	RB
external	6	2437	15637.2	54.5	PEAK	1000	74.0	19.5	RB
external	6	2437	17799.8	46.0	AV	1000	54.0	8.0	RB
external	6	2437	17799.8	59.6	PEAK	1000	74.0	14.4	RB
external	6	2437	17973.9	46.3	AV	1000	54.0	7.7	RB
external	6	2437	17973.9	59.0	PEAK	1000	74.0	15.0	RB
external	11	2462	15605.9	41.9	AV	1000	54.0	12.1	RB
external	11	2462	15605.9	54.8	PEAK	1000	74.0	19.2	RB
internal	11	2462	- - -	- - -	- - -	- - -	- - -	- - -	RB

WLAN g-Mode; 20 MHz; 6 Mbit/s
 Applied duty cycle correction (AV): 0.6 dB

Antenna	Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]	Limit Type
external	1	2412	2387.8	55.8	PEAK	1000	74.0	18.2	RB
external	1	2412	2387.8	42.7	AV	1000	54.0	11.3	RB
external	1	2412	2868.1	51.9	PEAK	1000	74.0	22.1	RB
external	1	2412	2862.1	39.2	AV	1000	54.0	14.8	RB
external	6	2437	2389.9	55.0	PEAK	1000	74.0	19.0	RB
external	6	2437	2389.9	42.8	AV	1000	54.0	11.2	RB
external	6	2437	2484.3	54.6	PEAK	1000	74.0	19.4	RB
external	6	2437	2484.2	42.0	AV	1000	54.0	12.0	RB
external	6	2437	2825.2	51.4	PEAK	1000	74.0	22.6	RB
external	6	2437	2825.2	39.3	AV	1000	54.0	14.7	RB
external	11	2462	2824.8	51.0	PEAK	1000	74.0	23.0	RB
external	11	2462	2824.8	39.3	AV	1000	54.0	14.7	RB


Remark: Please see next sub-clause for the measurement plot.

Comment:

- “transmitter spurious radiated Emission” measurements were not performed In “Bluetooth low energy” mode, because Bluetooth Classic mode represent the worst-case scenario by “Peak Power Output” measurements. These measurements can be found in “MDE_CONTI_2134_FCC_01” test report.
- These measurements were performed with external Antenna because the external Antenna has higher Antenna Gain and represent the worst-case scenario. Only spot check was performed on the internal Antenna.

5.5.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)


Modulation= WLAN b, Operating Channel = mid,
 Measurement range = 9 kHz – 30 MHz
 (S02_AD03, external Antenna)

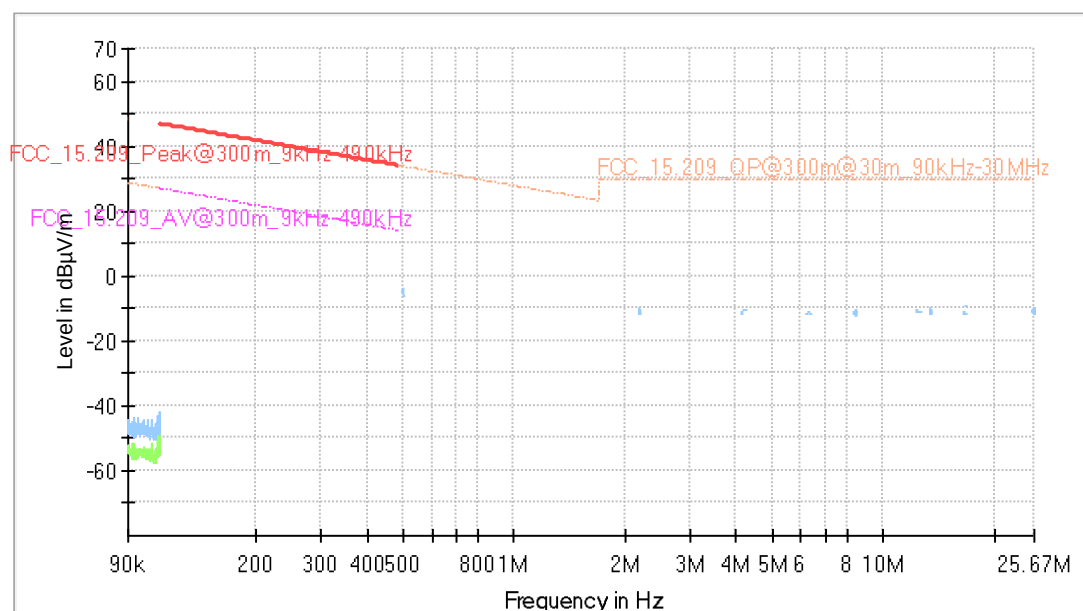

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---	---	---


Modulation= WLAN b, Operating Channel = high,
 Measurement range = 30 MHz – 1 GHz
 (S02_AD03, external Antenna)

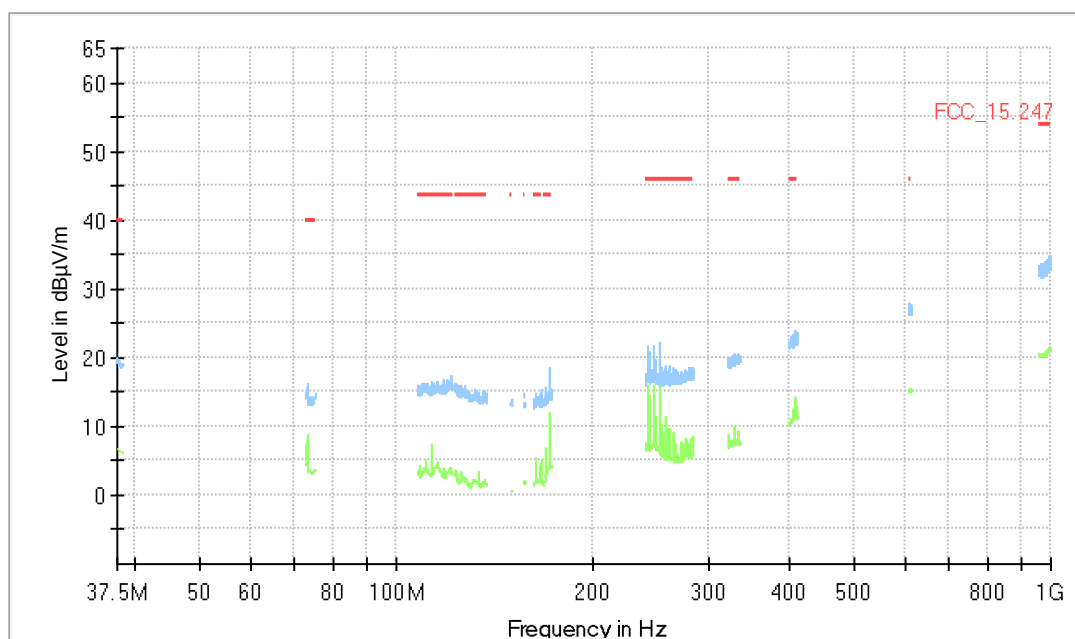

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---	---	---


Modulation= WLAN b, Operating Channel = low,
Measurement range = 1 GHz - 26 GHz
(S02_AD03, external Antenna)

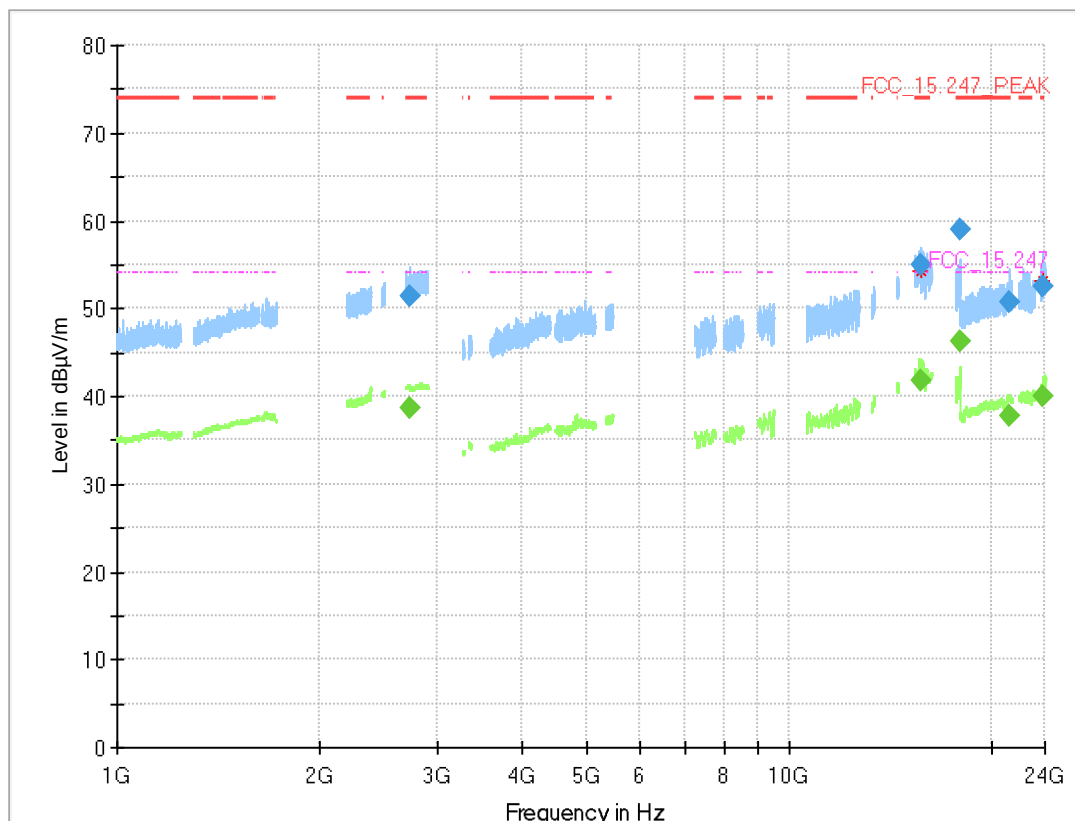

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2718.770	---	38.6	54.00	15.35	1000.0	1000.000	150.0	V	11.0	5.0	9.0
2718.770	51.4	---	74.00	22.62	1000.0	1000.000	150.0	V	11.0	5.0	9.0
15675.267	---	41.7	54.00	12.30	1000.0	1000.000	150.0	H	144.0	105.0	-0.1
15675.267	54.9	---	74.00	19.07	1000.0	1000.000	150.0	H	144.0	105.0	-0.1
17972.100	---	46.2	54.00	7.82	1000.0	1000.000	150.0	H	7.0	11.0	2.9
17972.100	59.0	---	74.00	15.00	1000.0	1000.000	150.0	H	7.0	11.0	2.9
21308.880	---	37.8	54.00	16.20	1000.0	1000.000	150.0	V	-116.0	-6.0	18.6
21308.880	50.7	---	74.00	23.33	1000.0	1000.000	150.0	V	-116.0	-6.0	18.6
23884.800	---	40.0	54.00	13.97	1000.0	1000.000	150.0	V	-143.0	6.0	20.4
23884.800	52.4	---	74.00	21.57	1000.0	1000.000	150.0	V	-143.0	6.0	20.4


Modulation= WLAN b, Operating Channel = mid,
Measurement range = 1 GHz - 26 GHz
(S02_AD03, external Antenna)

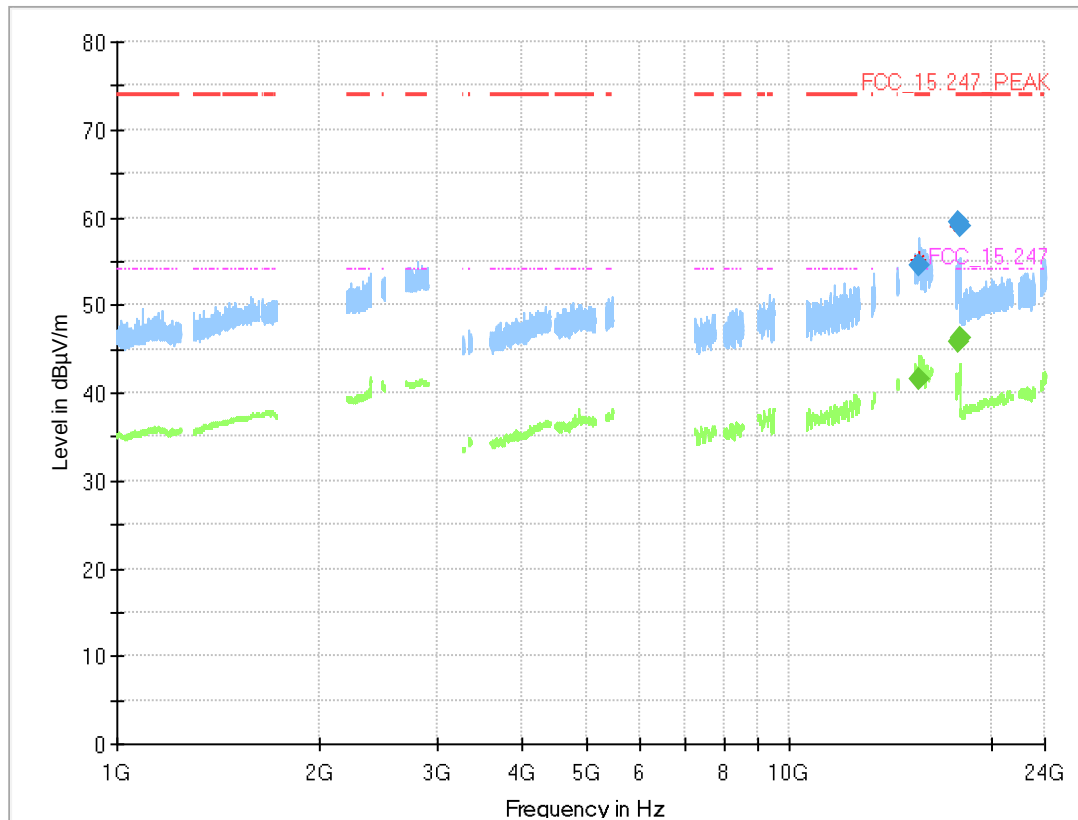

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
15637.158	---	41.6	54.00	12.44	1000.0	1000.000	150.0	V	-176.0	10.0	-0.4
15637.158	54.5	---	74.00	19.54	1000.0	1000.000	150.0	V	-176.0	10.0	-0.4
17799.750	---	45.9	54.00	8.13	1000.0	1000.000	150.0	H	-41.0	-1.0	2.5
17799.750	59.6	---	74.00	14.45	1000.0	1000.000	150.0	H	-41.0	-1.0	2.5
17973.900	---	46.2	54.00	7.78	1000.0	1000.000	150.0	H	147.0	105.0	3.0
17973.900	59.0	---	74.00	14.97	1000.0	1000.000	150.0	H	147.0	105.0	3.0


Modulation= WLAN b, Operating Channel = high,
Measurement range = 1 GHz - 26 GHz
(S02_AD03, external Antenna)

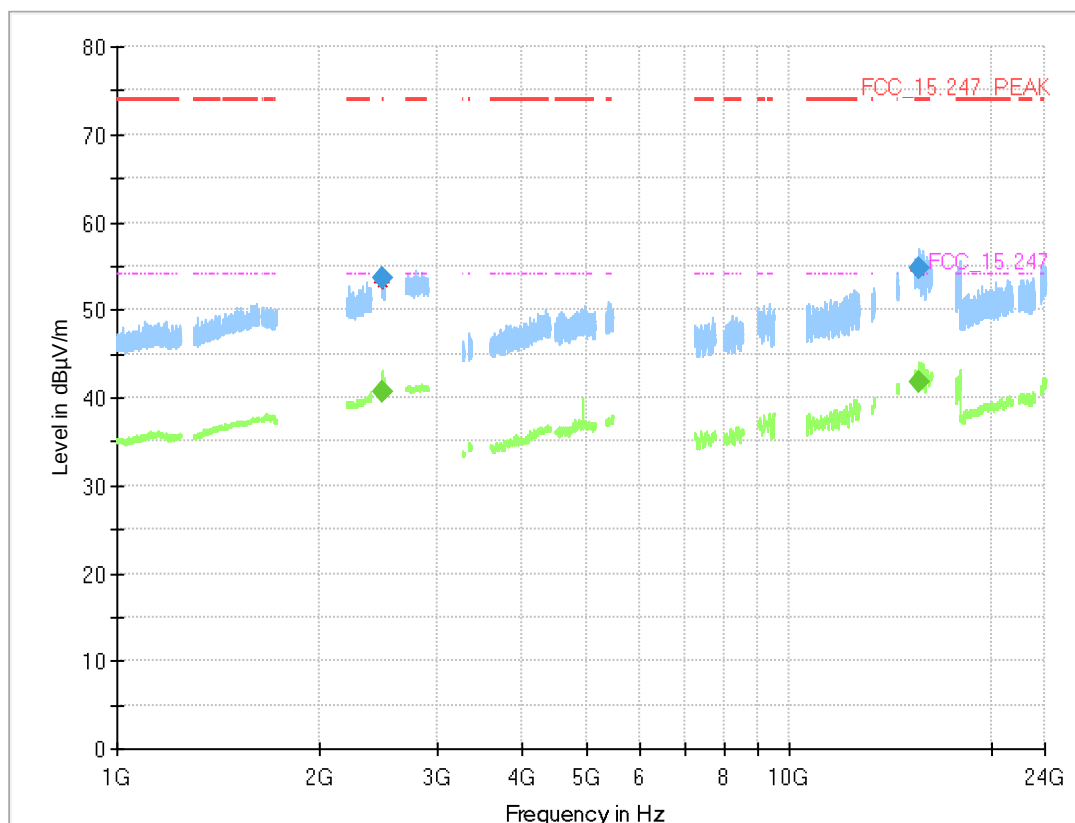

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.500	---	40.7	54.00	13.33	1000.0	1000.000	150.0	H	-52.0	105.0	7.8
2483.500	53.5	---	74.00	20.45	1000.0	1000.000	150.0	H	-52.0	105.0	7.8
15605.850	---	41.8	54.00	12.25	1000.0	1000.000	150.0	H	-156.0	11.0	0.4
15605.850	54.8	---	74.00	19.19	1000.0	1000.000	150.0	H	-156.0	11.0	0.4


Modulation= WLAN b, Operating Channel = high,
 Measurement range = 1 GHz - 26 GHz
 (S02_AD03, internal Antenna)

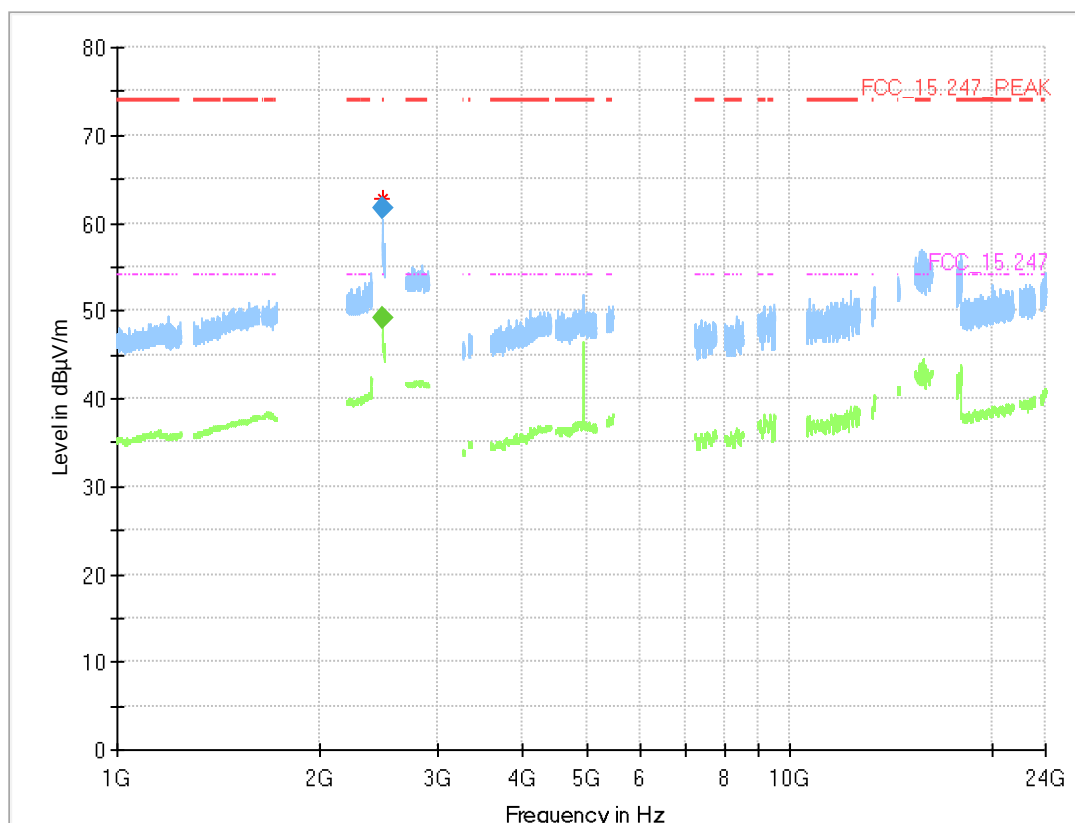

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.913	---	49.1	54.00	4.85	1000.0	1000.000	150.0	H	-41.0	86.0	7.8
2483.913	61.6	---	74.00	12.42	1000.0	1000.000	150.0	H	-41.0	86.0	7.8


Modulation= WLAN g, Operating Channel = low,
Measurement range = 1 GHz - 8 GHz
(S02_AD03, external Antenna)

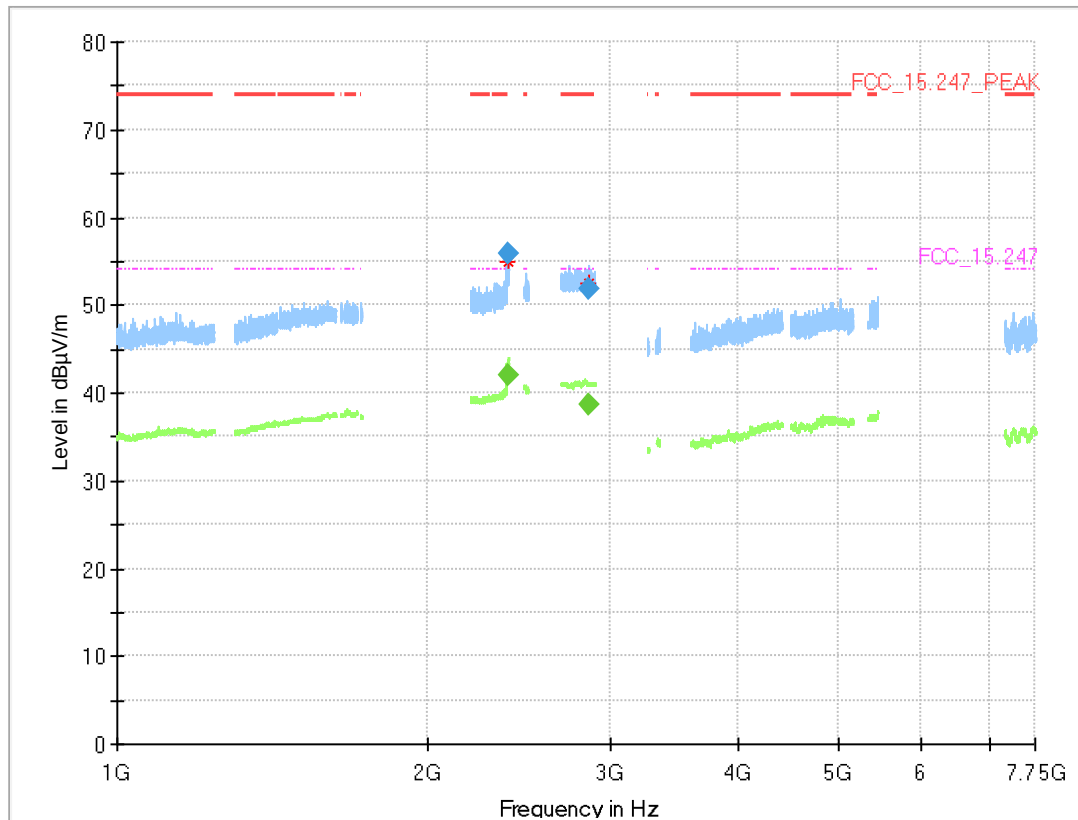

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2387.840	---	42.1	54.00	11.94	1000.0	1000.000	150.0	H	-44.0	93.0	7.5
2387.840	55.8	---	74.00	18.24	1000.0	1000.000	150.0	H	-44.0	93.0	7.5
2868.080	---	38.6	54.00	15.35	1000.0	1000.000	150.0	V	69.0	-33.0	9.0
2868.080	51.9	---	74.00	22.07	1000.0	1000.000	150.0	V	69.0	-33.0	9.0


Modulation= WLAN g, Operating Channel = mid,
Measurement range = 1 GHz - 8 GHz
(S02_AD03, external Antenna)

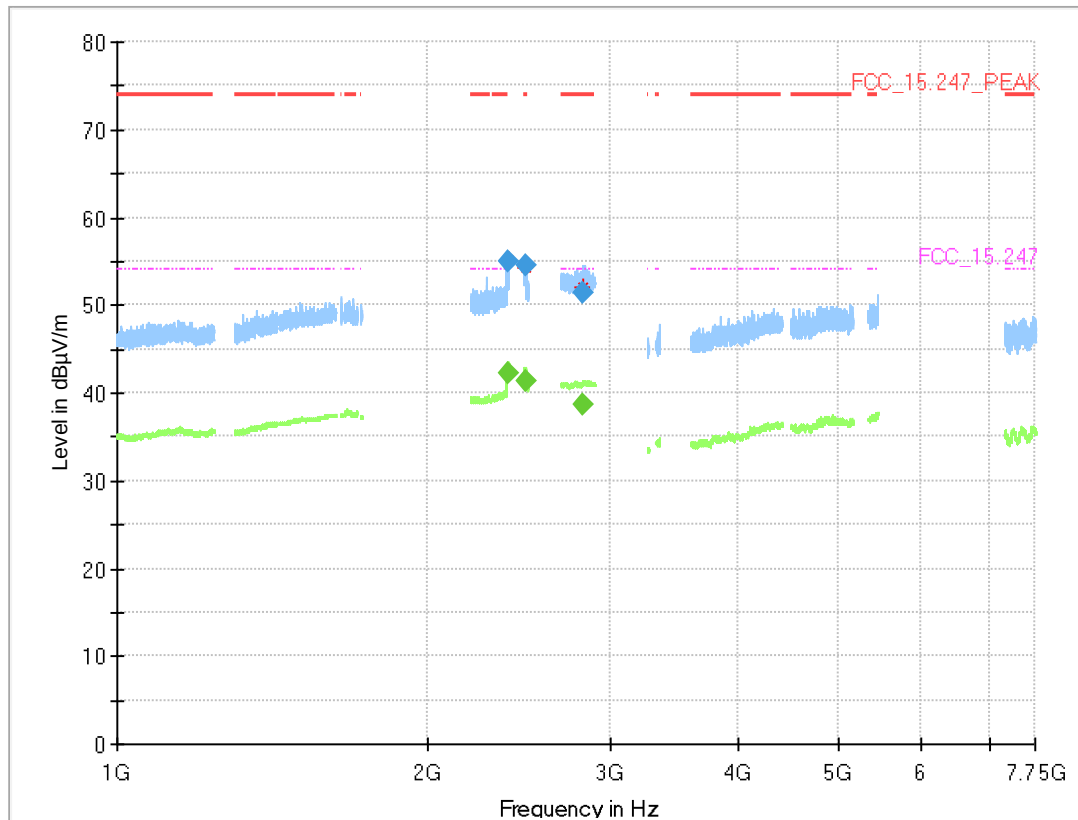

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2389.920	---	42.2	54.00	11.80	1000.0	1000.000	150.0	H	-45.0	95.0	7.6
2389.920	55.0	---	74.00	18.98	1000.0	1000.000	150.0	H	-45.0	95.0	7.6
2484.325	---	41.4	54.00	12.64	1000.0	1000.000	150.0	H	-33.0	75.0	7.8
2484.325	54.6	---	74.00	19.44	1000.0	1000.000	150.0	H	-33.0	75.0	7.8
2825.240	---	38.7	54.00	15.30	1000.0	1000.000	150.0	H	-102.0	55.0	9.0
2825.240	51.4	---	74.00	22.62	1000.0	1000.000	150.0	H	-102.0	55.0	9.0

Modulation= WLAN g, Operating Channel = high,
Measurement range = 1 GHz - 8 GHz
(S02_AD03, external Antenna)

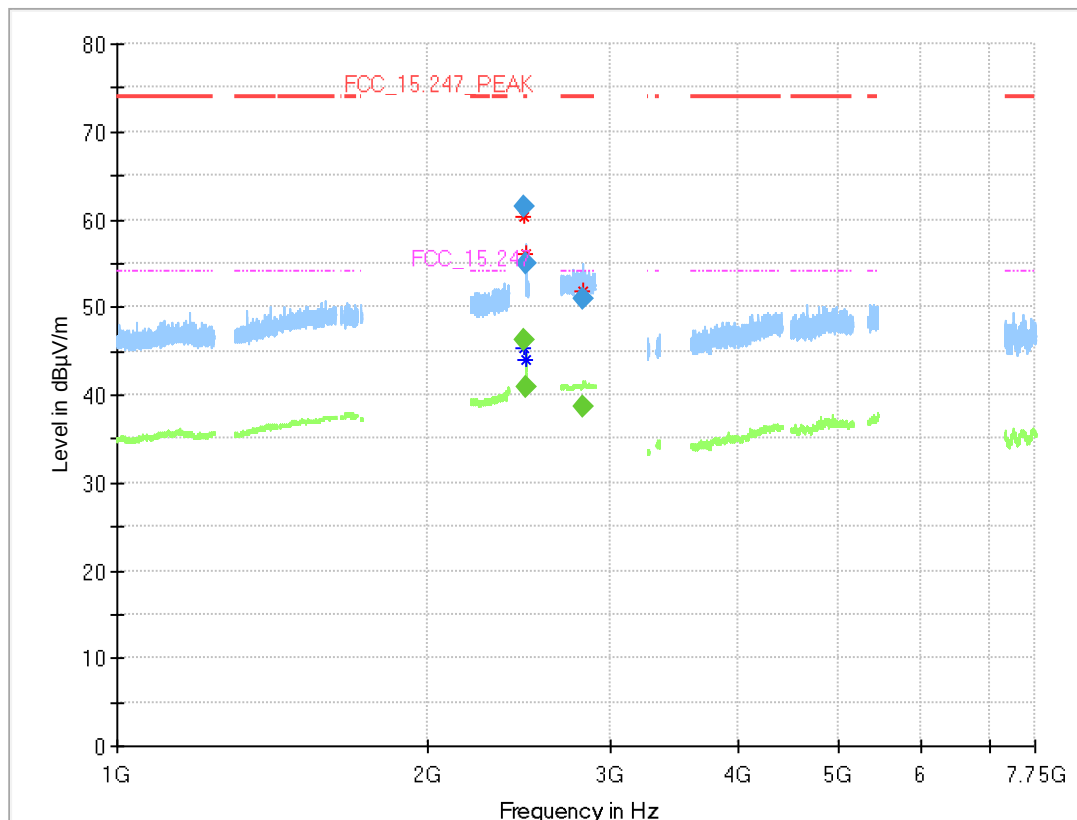

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.500	---	46.3	54.00	7.71	1000.0	1000.000	150.0	H	-45.0	71.0	7.8
2483.500	61.4	---	74.00	12.62	1000.0	1000.000	150.0	H	-45.0	71.0	7.8
2484.325	---	41.0	54.00	13.04	1000.0	1000.000	150.0	H	62.0	48.0	7.8
2484.325	55.0	---	74.00	18.97	1000.0	1000.000	150.0	H	62.0	48.0	7.8
2824.820	---	38.7	54.00	15.31	1000.0	1000.000	150.0	V	62.0	7.0	9.0
2824.820	51.0	---	74.00	23.00	1000.0	1000.000	150.0	V	62.0	7.0	9.0

5.5.5 TEST EQUIPMENT USED

- Radiated Emissions FAR 2.4 GHz FCC
- Radiated Emissions SAC H-Field
- Radiated Emissions SAC up to 1 GHz

5.6 BAND EDGE COMPLIANCE CONDUCTED

Standard **FCC Part 15 Subpart C**

The test was performed according to:

ANSI C63.10, chapter 11.11


5.6.1 TEST DESCRIPTION

For the conducted measurement, the Equipment Under Test (EUT) is placed in a shielded room. The reference power was measured in the test case "Spurious RF Conducted Emissions".


The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.

Analyser settings:

- Lower Band Edge:
Measured range: 2310.0 MHz to 2483.5 MHz
- Upper Band Edge
Measured range: 2400.0 MHz to 2500 MHz
- Detector: Peak
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweptime: Auto
- Sweeps: Till stable (min. 300, max. 15000)
- Trace: Maxhold

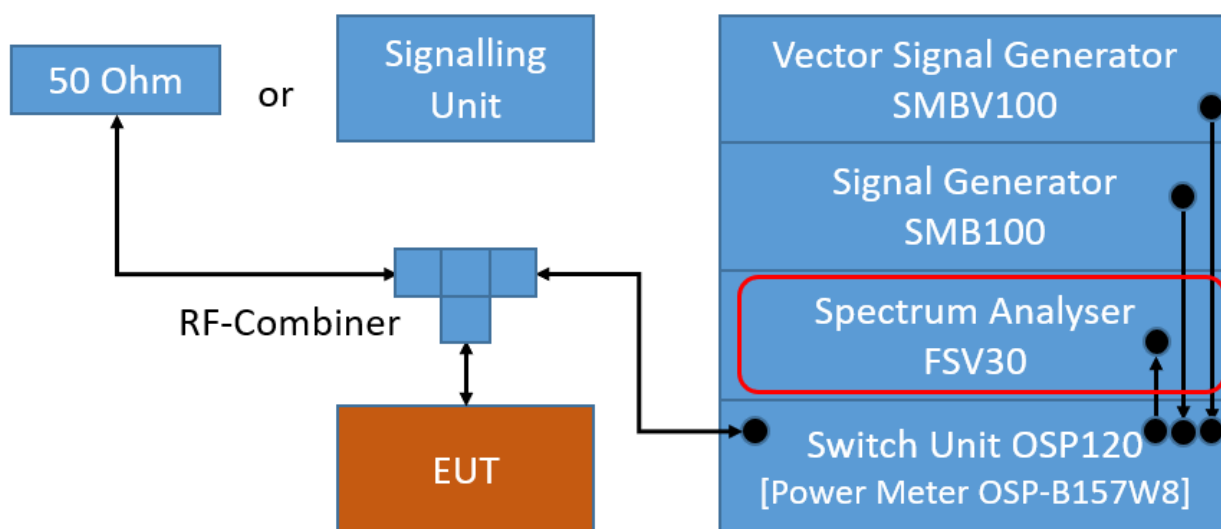

TS8997; Band Edge Conducted

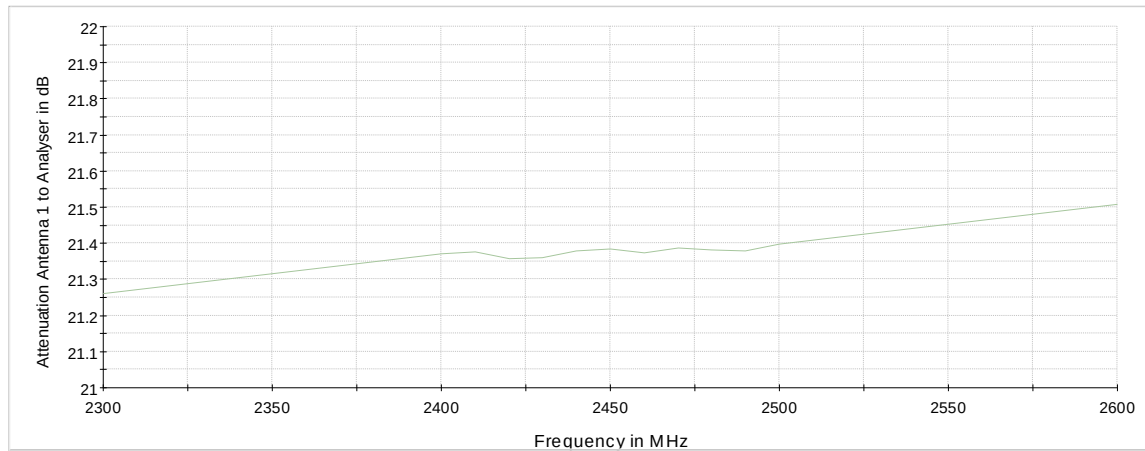

Attenuation of the measurement path

5.6.2 TEST REQUIREMENTS / LIMITS

FCC Part 15.247 (d)

"In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. ...

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c))."

For the conducted measurement the RF power at the band edge shall be "at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power..."

5.6.3 TEST PROTOCOL

Ambient temperature: 21 °C
 Air Pressure: 998 hPa
 Humidity: 37 %
 BT LE 1 Mbit/s

Channel No.	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
0	2402	2400.0	-56.5	PEAK	100	-3.4	-23.4	33.1
39	2480	2483.5	-58.7	PEAK	100	-2.4	-22.4	36.3

Ambient temperature: 21 °C
 Air Pressure: 998 hPa
 Humidity: 37 %
 WLAN b-Mode; 20 MHz; 1 Mbit/s

Channel No.	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2400.0	-53.7	PEAK	100	0.5	-29.5	24.2
11	2462	2483.5	-49.8	PEAK	100	3.7	-26.3	23.5

WLAN g-Mode; 20 MHz; 6 Mbit/s

Channel No.	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2400.0	-38.1	PEAK	100	-1.1	-31.1	7.0
11	2462	2483.5	-40.3	PEAK	100	1.3	-28.7	11.6

WLAN n-Mode; 20 MHz; MCS0

Channel No.	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2400.0	-40.3	PEAK	100	-1.9	-31.9	8.4
11	2462	2483.5	-44.2	PEAK	100	0.3	-29.7	14.5


WLAN n-Mode; 40 MHz; MCS0

Channel No.	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
3	2422	2400.0	-39.4	PEAK	100	-5.4	-35.4	4.0
9	2452	2483.5	-44.1	PEAK	100	-4.5	-34.5	9.6


Remark: Please see next sub-clause for the measurement plot.

5.6.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)


Modulation= Bluetooth LE 1 Mbps, Operating Channel = low, Band Edge = low
(S01_AC02)
Band Edge

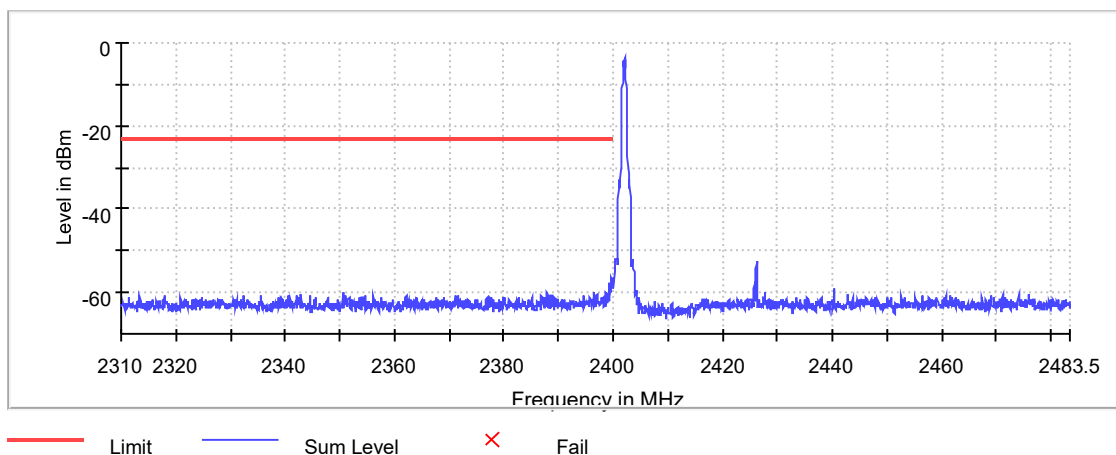


Modulation= Bluetooth LE 1 Mbps, Operating Channel = high, Band Edge = high
(S01_AC02)
Band Edge

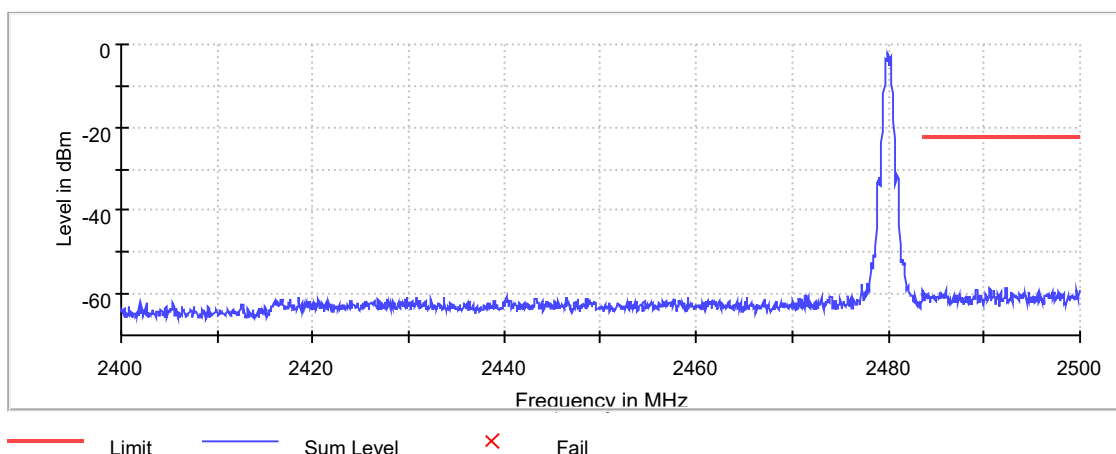


Modulation= WLAN b, Operating Channel = low, Band Edge = low
(S01_AD03)
Band Edge

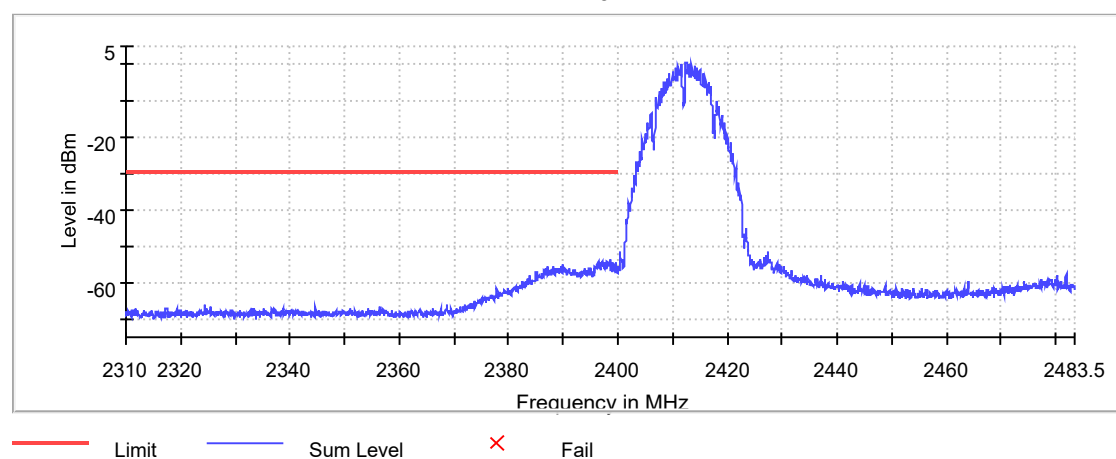


Modulation= WLAN b, Operating Channel = high, Band Edge = high
(S01_AD03)
Band Edge

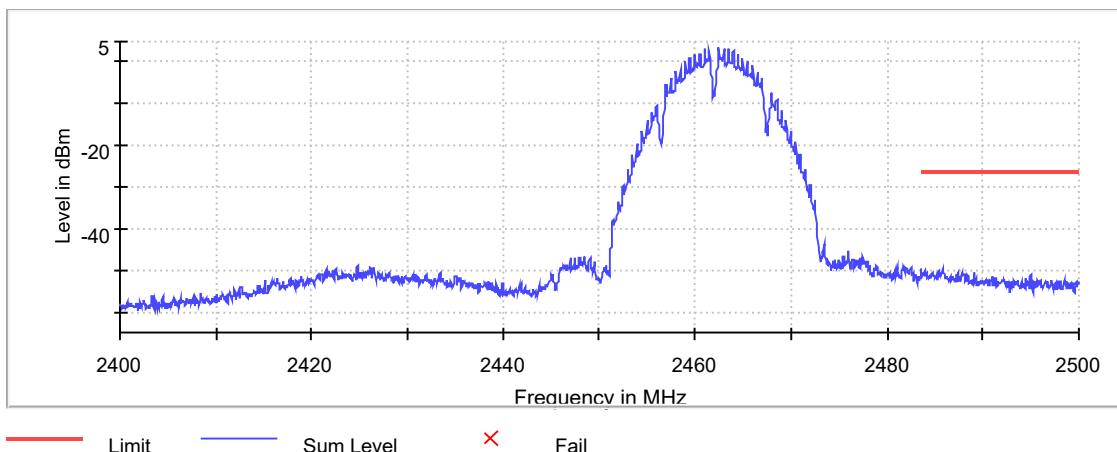


Modulation= WLAN g, Operating Channel = low, Band Edge = low
(S01_AD03)
Band Edge

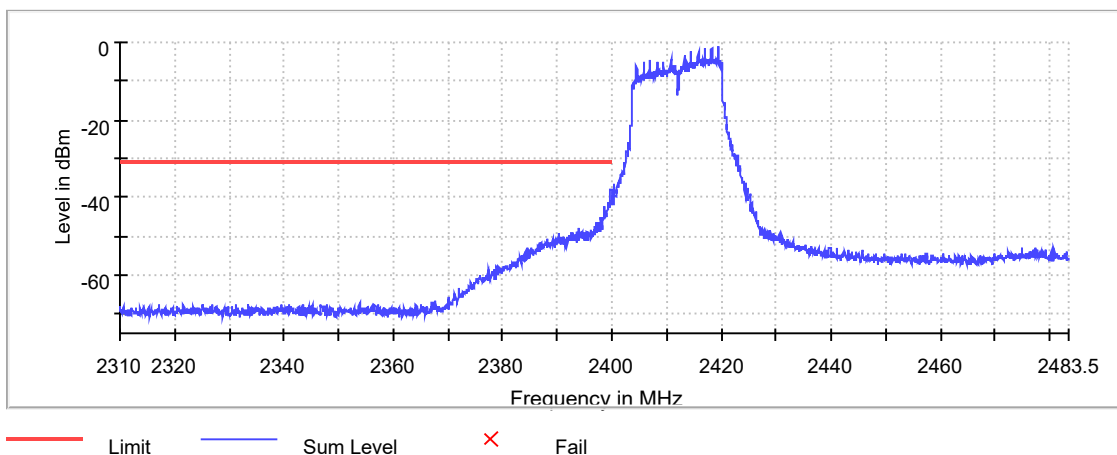

Modulation= WLAN g, Operating Channel = high, Band Edge = high
(S01_AD03)
Band Edge

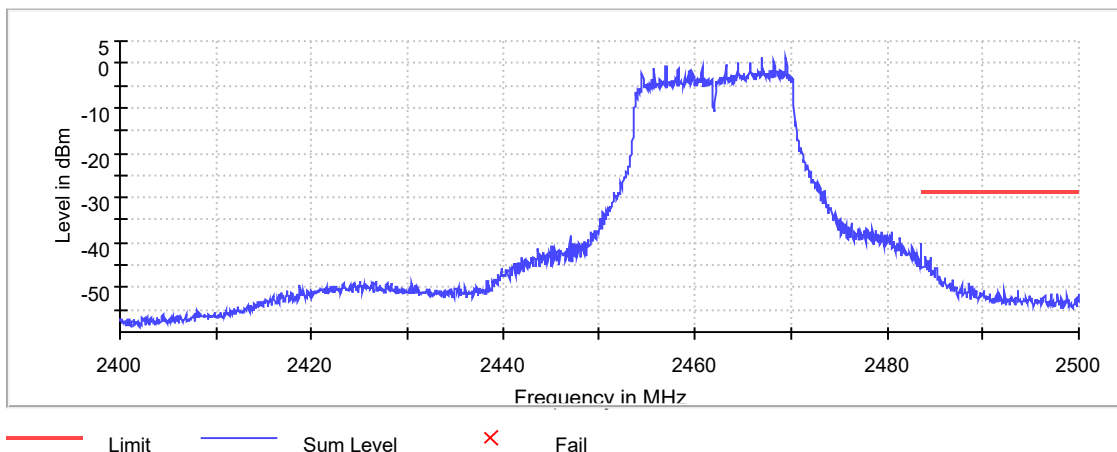


Modulation= WLAN n 20 MHz, Operating Channel = low, Band Edge = low
(S01_AD03)
Band Edge

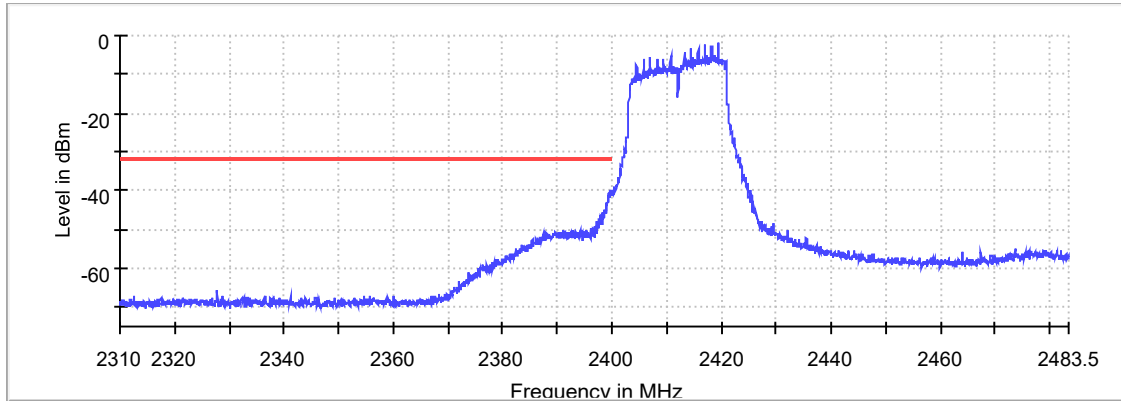


— Limit — Sum Level × Fail

Modulation= WLAN n 20 MHz, Operating Channel = high, Band Edge = high
(S01_AD03)
Band Edge

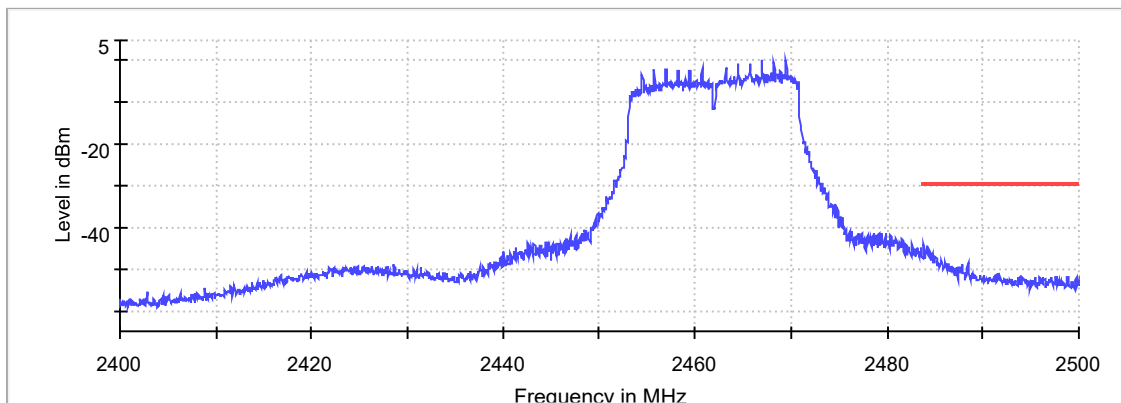


— Limit — Sum Level × Fail

Modulation= WLAN n 40 MHz, Operating Channel = low, Band Edge = low
(S01_AD03)
Band Edge

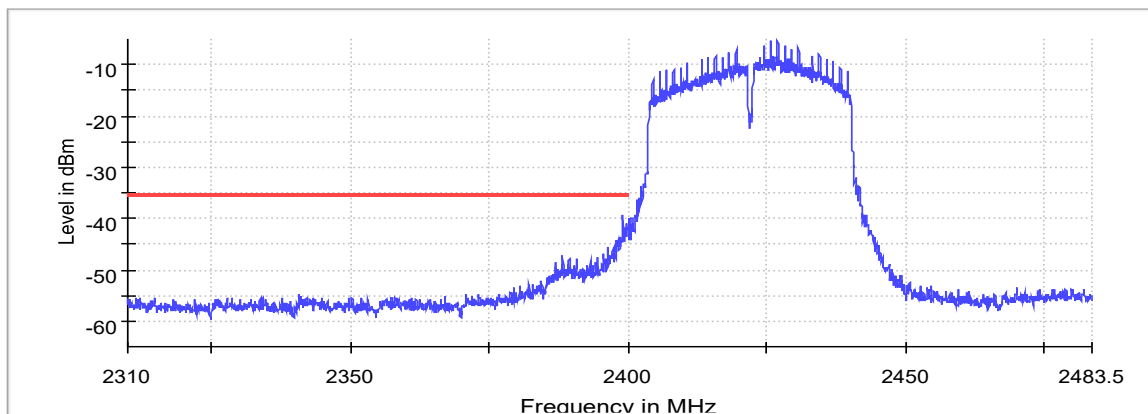

— Limit — Sum Level × Fail

Modulation= WLAN n 40 MHz, Operating Channel = high, Band Edge = high
(S01_ AD03)

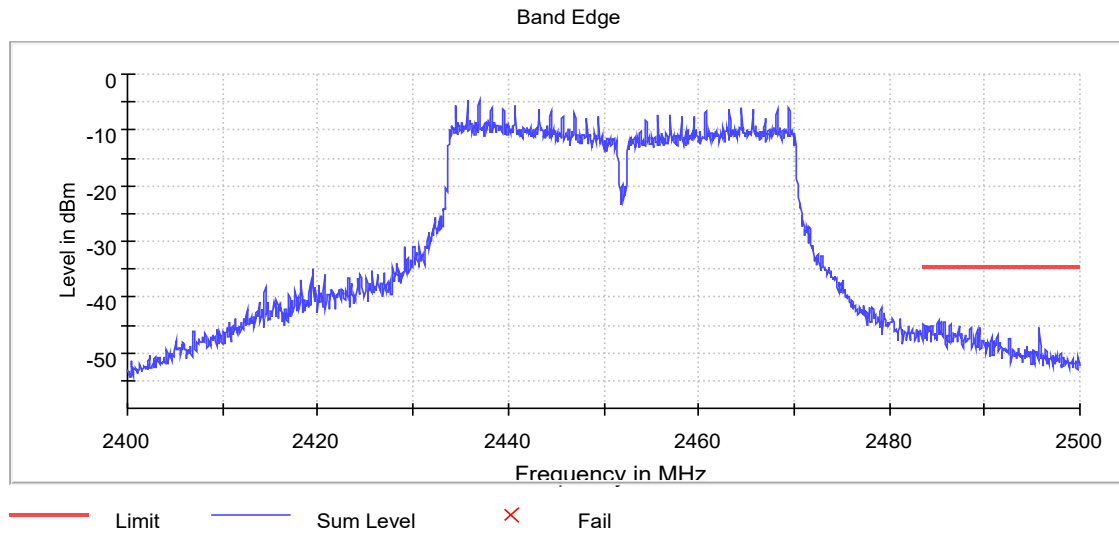

5.6.5 TEST EQUIPMENT USED

- R&S TS8997

5.7 BAND EDGE COMPLIANCE RADIATED

Standard **FCC Part 15 Subpart C**

The test was performed according to:

ANSI C63.10, chapter 6.6.5

5.7.1 TEST DESCRIPTION


The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The measurements were performed according the following sub-chapter of ANSI C63.10:

- Chapter 6.10.5

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only (procedure according ANSI C63.10, chapter 6.6.5).

3. Measurement above 1 GHz

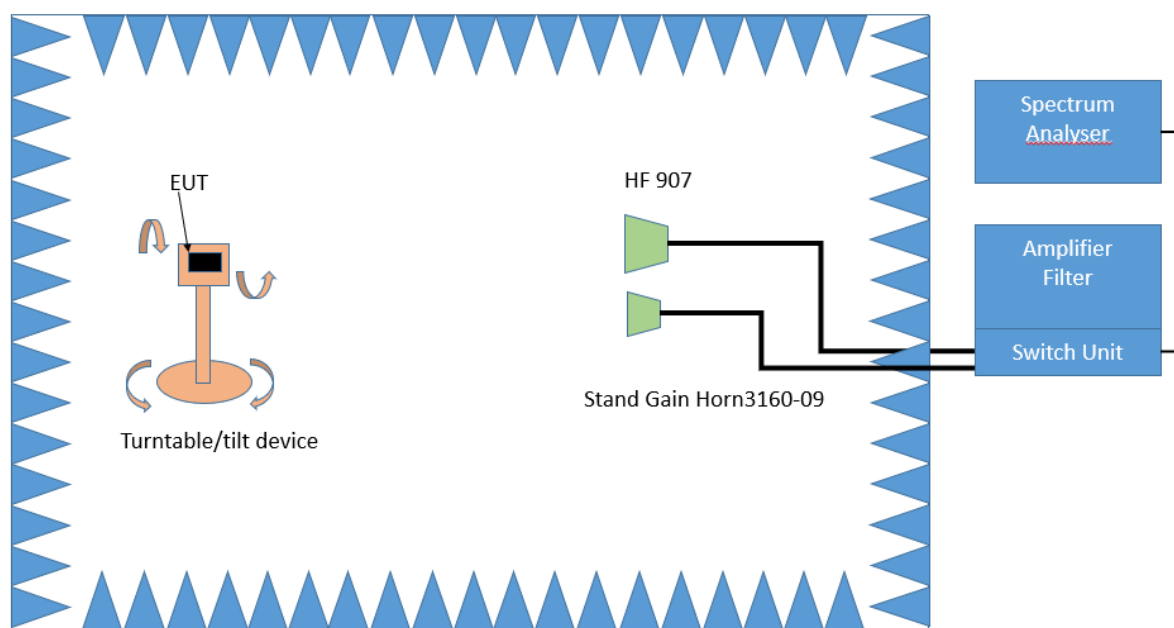

Test Setup; Spurious Emission Radiated (FAC), 1 GHz-26.5 GHz

Step 1:

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of 90 °.

The turn table step size (azimuth angle) for the preliminary measurement is 45 °.

Spectrum analyser settings:

- Detector: Peak, Average
- RBW = 1 MHz
- VBW = 3 MHz

Step 2:

The turn table azimuth will slowly vary by $\pm 22.5^\circ$.

The elevation angle will slowly vary by $\pm 45^\circ$

Spectrum analyser settings:

- Detector: Peak

Step 3:

Spectrum analyser settings for step 3:

- Detector: Peak / CISPR Average
- Measured frequencies: in step 1 determined frequencies
- RBW = 1 MHz
- VBW = 3 MHz
- Measuring time: 1 s

5.7.2 TEST REQUIREMENTS / LIMITS

For band edges connected to a restricted band, the limits are specified in Section 15.209(a)

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit ($\mu\text{V}/\text{m}$)	Measurement distance (m)	Limits ($\text{dB}\mu\text{V}/\text{m}$)
0.009 – 0.49	2400/F(kHz)@300m	3	(48.5 – 13.8)@300m
0.49 – 1.705	24000/F(kHz)@30m	3	(33.8 – 23.0)@30m
1.705 – 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit ($\mu\text{V}/\text{m}$)	Measurement distance (m)	Limits ($\text{dB}\mu\text{V}/\text{m}$)
30 – 88	100@3m	3	40.0@3m
88 – 216	150@3m	3	43.5@3m
216 – 960	200@3m	3	46.0@3m
960 – 26000	500@3m	3	54.0@3m
26000 – 40000	500@3m	1	54.0@3m

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: $\text{Limit (dB}\mu\text{V}/\text{m)} = 20 \log (\text{Limit (}\mu\text{V}/\text{m)})/1\mu\text{V}/\text{m}$

5.7.3 TEST PROTOCOL

Ambient temperature: 22 °C
 Air Pressure: 989 hPa
 Humidity: 39 %
 WLAN b-Mode; 20 MHz; 1 Mbit/s
 Applied duty cycle correction (AV): 0.1 dB

Antenna	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]
external	11	2462	2483.5	53.5	PEAK	1000	74.0	20.5
external	11	2462	2483.5	40.8	AV	1000	54.0	13.2
internal	11	2462	2483.5	61.6	PEAK	1000	74.0	12.4
internal	11	2462	2483.5	49.2	AV	1000	54.0	4.8

WLAN g-Mode; 20 MHz; 6 Mbit/s
 Applied duty cycle correction (AV): 0.6 dB

Antenna	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]
external	11	2462	2483.5	61.4	PEAK	1000	74.0	12.6
external	11	2462	2483.5	46.9	AV	1000	54.0	7.1
internal	11	2462	2483.5	66.5	PEAK	1000	74.0	7.5
internal	11	2462	2483.5	50.2	AV	1000	54.0	3.8

WLAN n-Mode; 20 MHz; MCS0
 Applied duty cycle correction (AV): 0.8 dB

Antenna	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]
external	11	2462	2483.5	59.0	PEAK	1000	74.0	15.0
external	11	2462	2483.5	45.4	AV	1000	54.0	8.6
internal	11	2462	2483.5	66.0	PEAK	1000	74.0	8.0
internal	11	2462	2483.5	51.6	AV	1000	54.0	2.4


WLAN n-Mode; 40 MHz; MCS0
 Applied duty cycle correction (AV): 1.0 dB

Antenna	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]
external	9	2452	2483.5	64.8	PEAK	1000	74.0	9.2
external	9	2452	2483.5	46.8	AV	1000	54.0	7.2
internal	9	2462	2483.5	70.6	PEAK	1000	74.0	3.4
internal	9	2462	2483.5	51.9	AV	1000	54.0	2.1

Remark: Please see next sub-clause for the measurement plot.

5.7.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)


Modulation= WLAN b, Operating Channel = high, Band Edge = high
(S02_AD03, external Antenna)

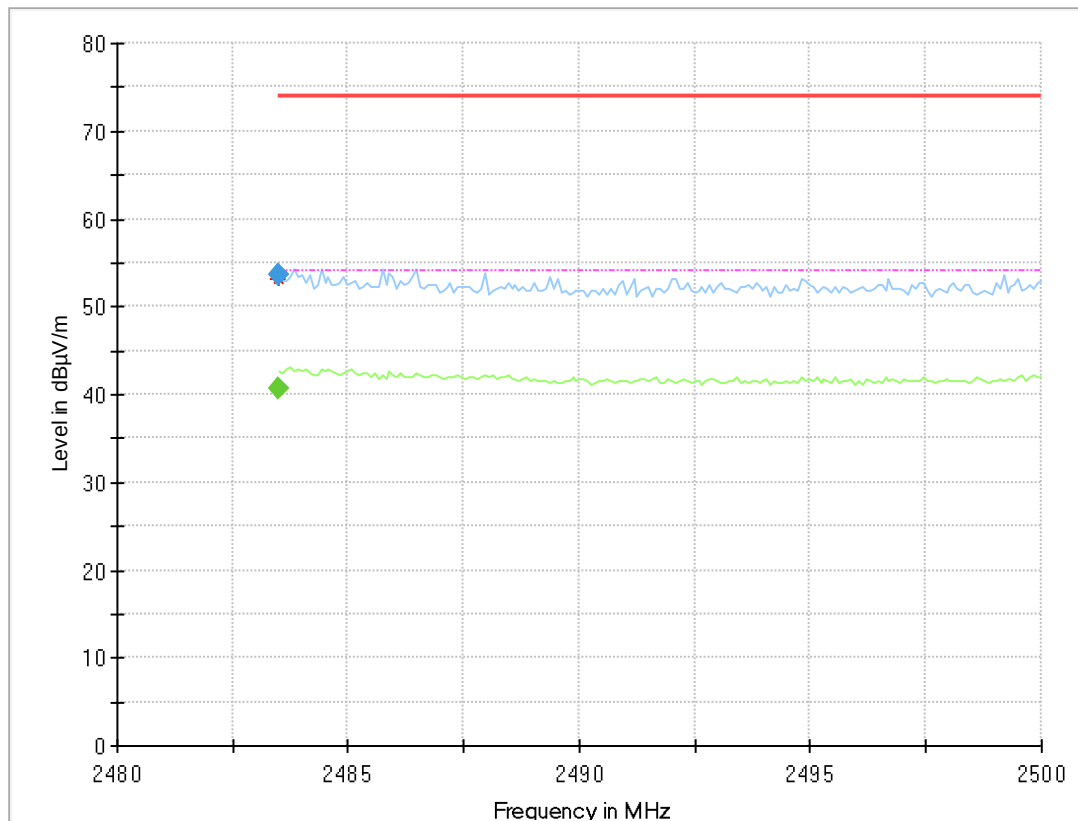

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.500	---	40.7	54.00	13.33	1000.0	1000.000	150.0	H	-52.0	105.0	7.8
2483.500	53.5	---	74.00	20.45	1000.0	1000.000	150.0	H	-52.0	105.0	7.8
15605.850	---	41.8	54.00	12.25	1000.0	1000.000	150.0	H	-156.0	11.0	0.4
15605.850	54.8	---	74.00	19.19	1000.0	1000.000	150.0	H	-156.0	11.0	0.4


Modulation= WLAN b, Operating Channel = high, Band Edge = high
(S02_AD03, internal Antenna)

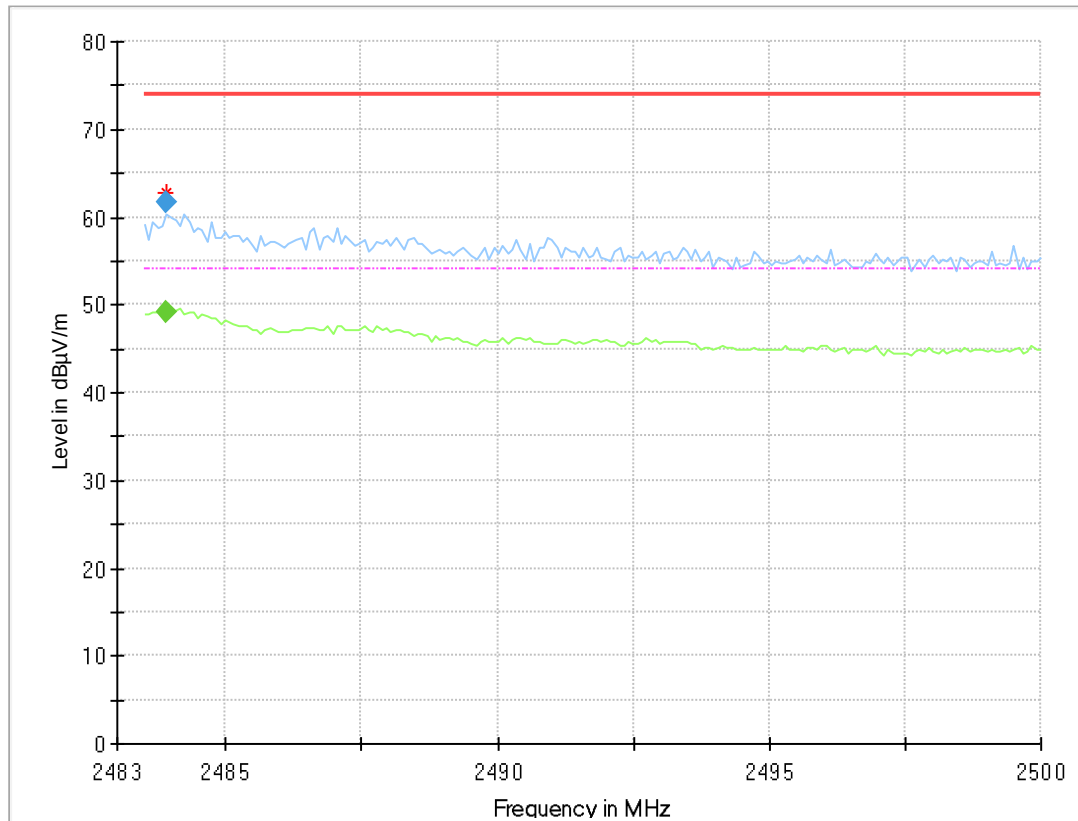

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.913	61.6	---	74.00	12.42	1000.0	1000.000	150.0	H	-41.0	86.0	7.8
2483.913	---	49.1	54.00	4.85	1000.0	1000.000	150.0	H	-41.0	86.0	7.8


Modulation= WLAN g, Operating Channel = high, Band Edge = high
 (S02_AD03, external Antenna)

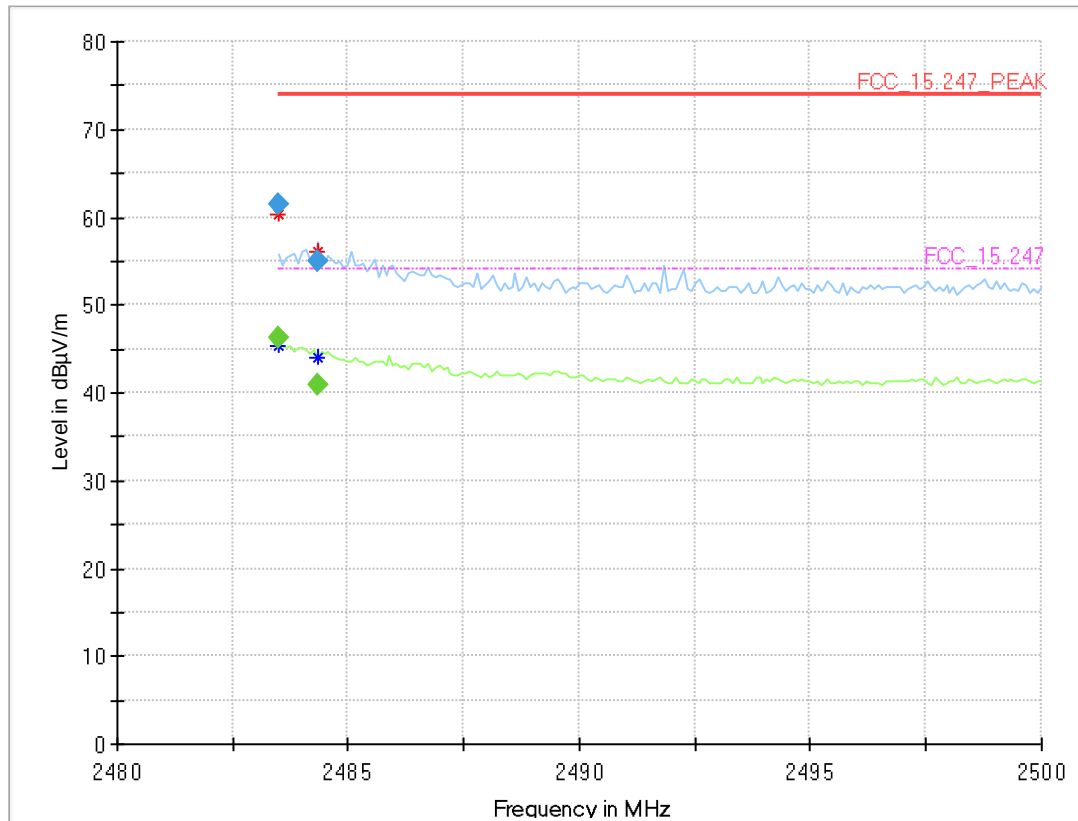

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.500	---	46.3	54.00	7.71	1000.0	1000.000	150.0	H	-45.0	71.0	7.8
2483.500	61.4	---	74.00	12.62	1000.0	1000.000	150.0	H	-45.0	71.0	7.8
2484.325	---	41.0	54.00	13.04	1000.0	1000.000	150.0	H	62.0	48.0	7.8
2484.325	55.0	---	74.00	18.97	1000.0	1000.000	150.0	H	62.0	48.0	7.8
2824.820	---	38.7	54.00	15.31	1000.0	1000.000	150.0	V	62.0	7.0	9.0
2824.820	51.0	---	74.00	23.00	1000.0	1000.000	150.0	V	62.0	7.0	9.0


Modulation= WLAN g, Operating Channel = high, Band Edge = high
(S02_AD03, internal Antenna)

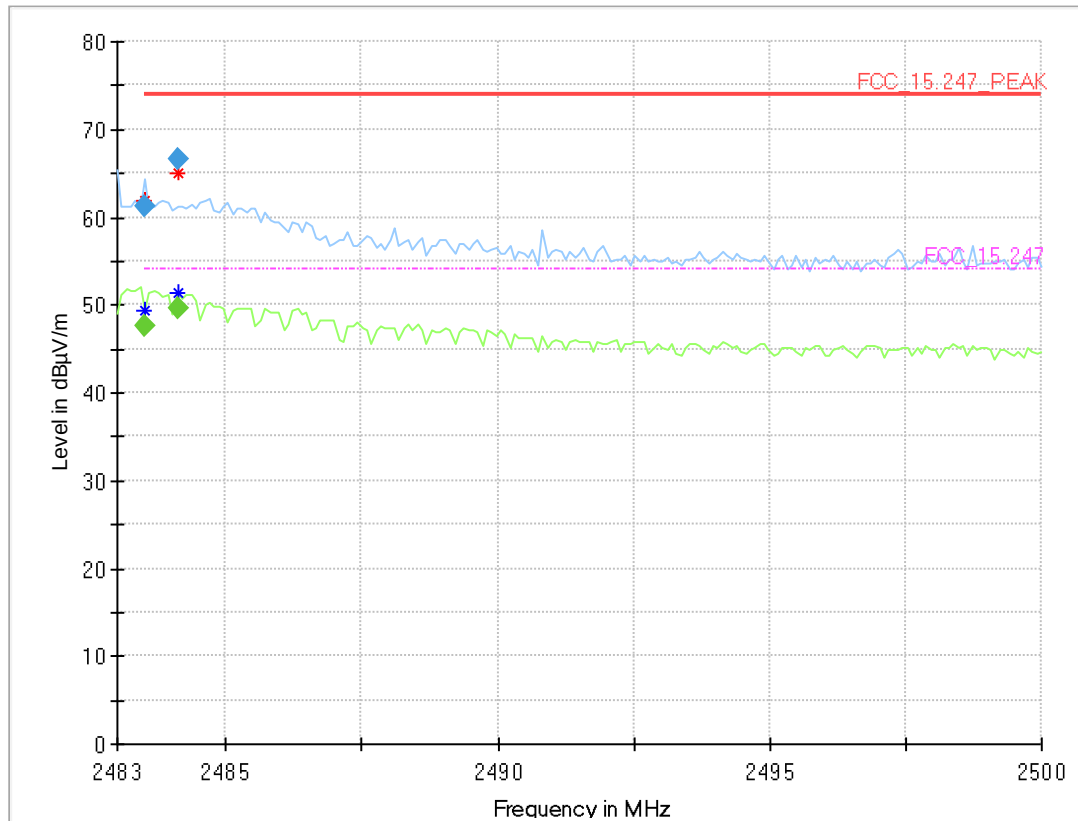

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.510	---	47.5	54.00	6.46	1000.0	1000.000	150.0	V	-191.0	-11.0	7.8
2483.510	61.2	---	74.00	12.78	1000.0	1000.000	150.0	V	-191.0	-11.0	7.8
2484.105	---	49.6	54.00	4.40	1000.0	1000.000	150.0	H	-41.0	86.0	7.8
2484.105	66.5	---	74.00	7.50	1000.0	1000.000	150.0	H	-41.0	86.0	7.8


Modulation= WLAN n 20 MHz, Operating Channel = high, Band Edge = high
(S02_AD03, external Antenna)

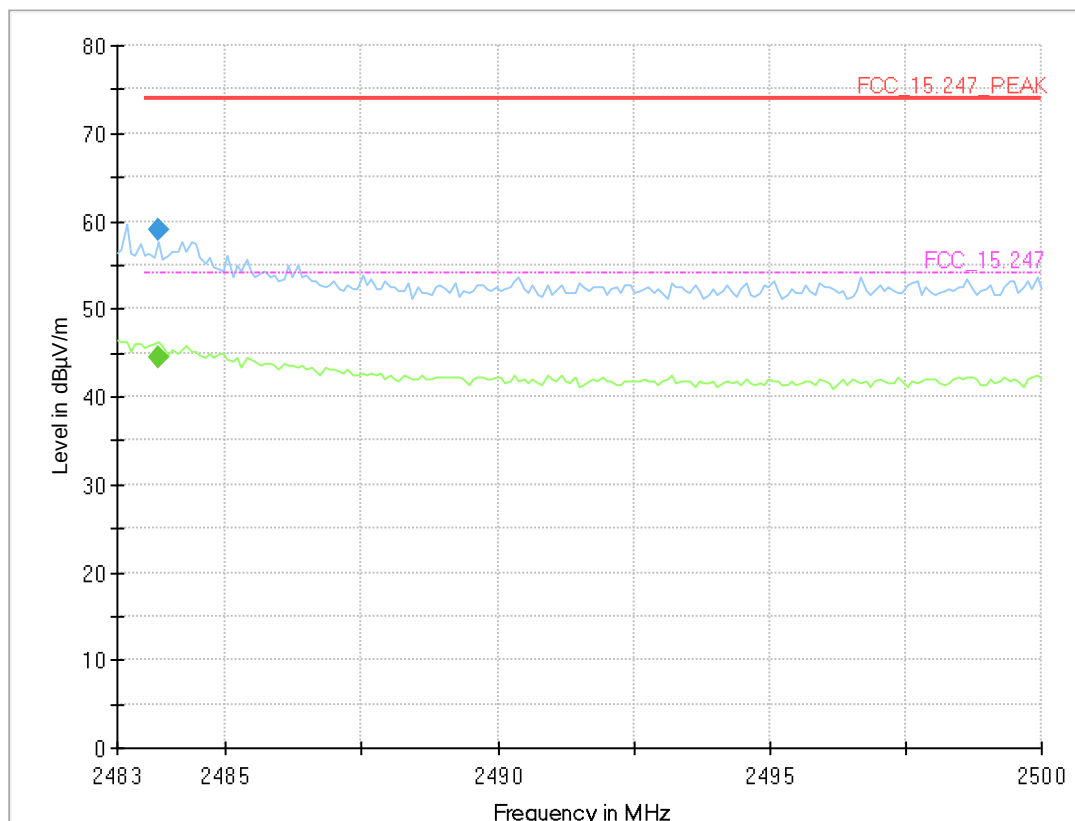

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.765	---	44.6	54.00	9.45	1000.0	1000.000	150.0	H	54.0	105.0	7.8
2483.765	59.0	---	74.00	14.98	1000.0	1000.000	150.0	H	54.0	105.0	7.8


Modulation= WLAN n 20 MHz, Operating Channel = high, Band Edge = high
(S02_AD03, internal Antenna)

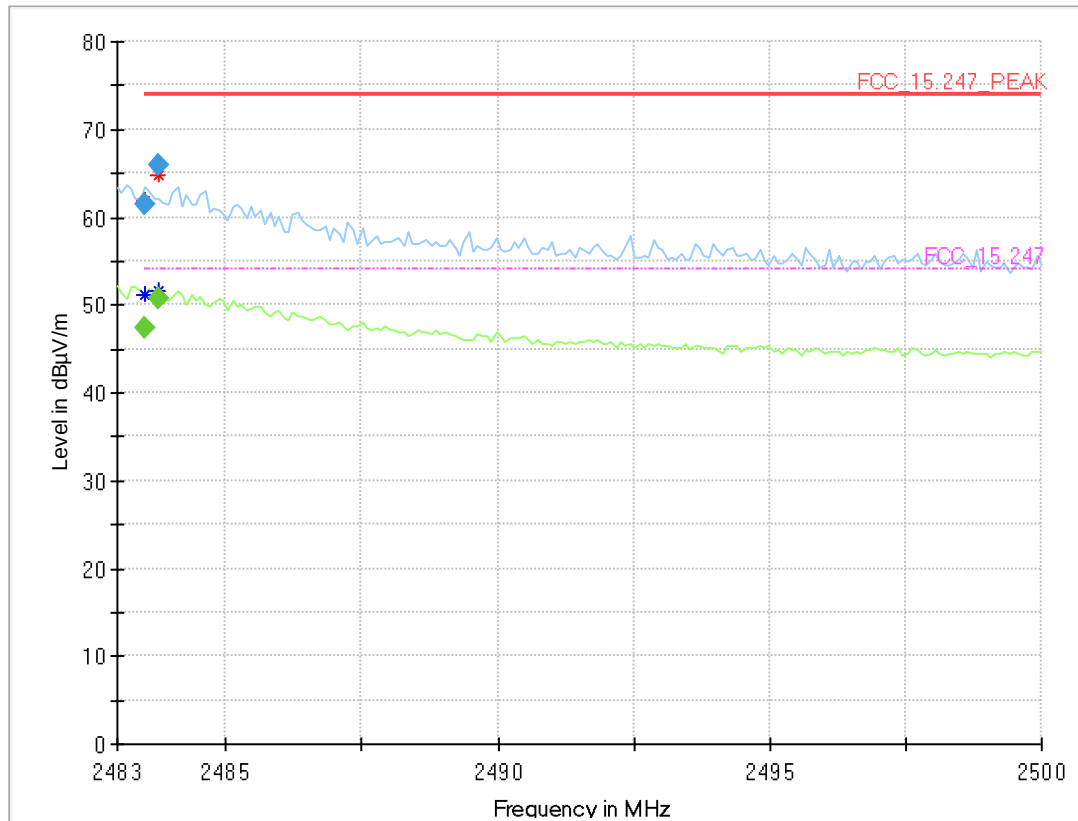

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2483.510	---	47.4	54.00	6.60	1000.0	1000.000	150.0	V	-191.0	-12.0	7.8
2483.510	61.5	---	74.00	12.46	1000.0	1000.000	150.0	V	-191.0	-12.0	7.8
2483.765	---	50.8	54.00	3.20	1000.0	1000.000	150.0	H	-41.0	87.0	7.8
2483.765	66.0	---	74.00	7.97	1000.0	1000.000	150.0	H	-41.0	87.0	7.8


Modulation= WLAN n 40 MHz, Operating Channel = high, Band Edge = high
(S02_AD03, external Antenna)

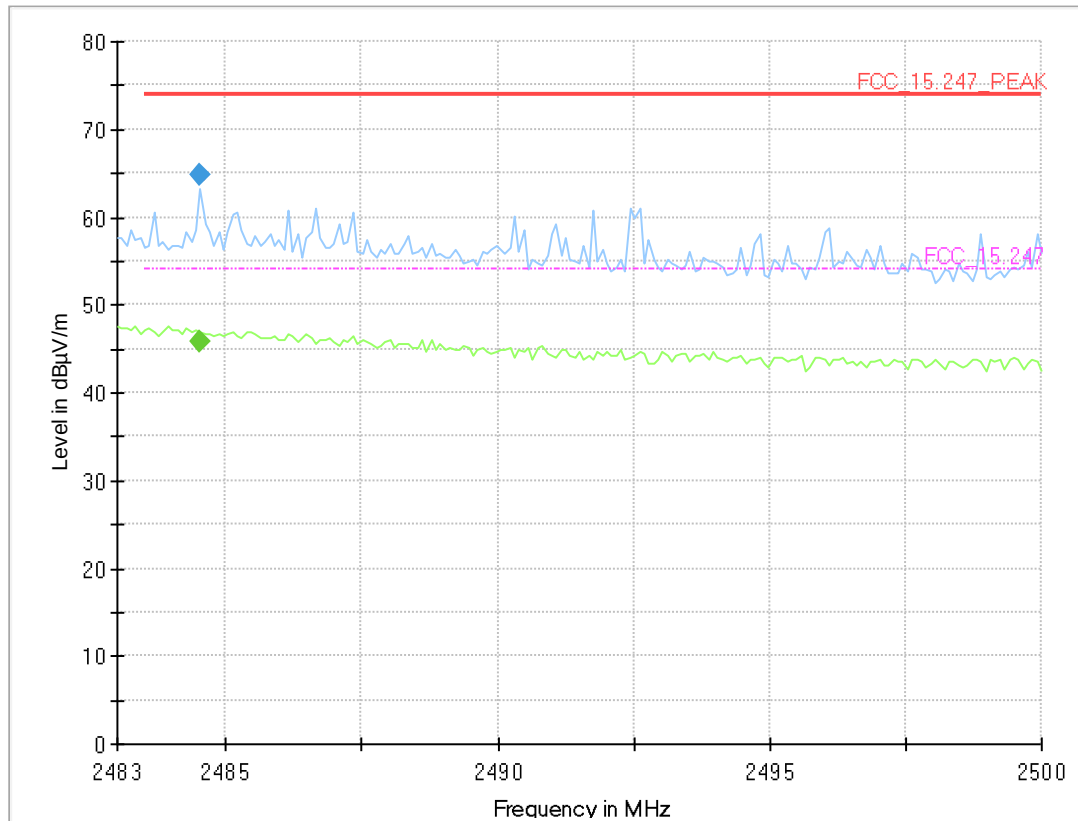

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2484.530	---	45.8	54.00	8.16	1000.0	1000.000	150.0	H	52.0	102.0	7.8
2484.530	64.8	---	74.00	9.17	1000.0	1000.000	150.0	H	52.0	102.0	7.8

Modulation= WLAN n 40 MHz, Operating Channel = high, Band Edge = high
(S02_AD03, internal Antenna)

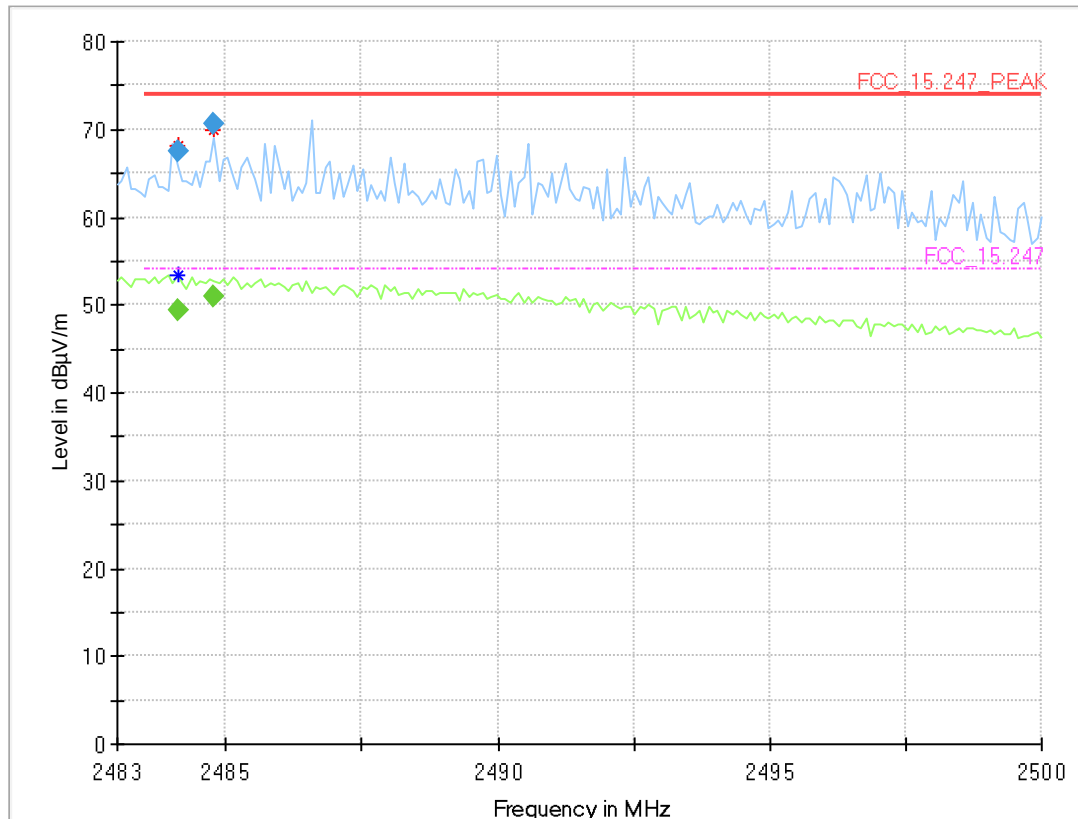

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2484.105	---	49.3	54.00	4.70	1000.0	1000.000	150.0	V	-124.0	15.0	7.8
2484.105	67.5	---	74.00	6.45	1000.0	1000.000	150.0	V	-124.0	15.0	7.8
2484.785	---	50.9	54.00	3.14	1000.0	1000.000	150.0	H	-122.0	-15.0	7.8
2484.785	70.6	---	74.00	3.42	1000.0	1000.000	150.0	H	-122.0	-15.0	7.8

5.7.5 TEST EQUIPMENT USED

- Radiated Emissions FAR 2.4 GHz FCC

5.8 POWER DENSITY

Standard **FCC Part 15 Subpart C**

The test was performed according to:

ANSI C63.10, chapter 11.10.2

5.8.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up in a shielded room to perform the Power Density measurements.

The results recorded were measured with the modulation which produces the worst-case (highest) power density.

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.

Maximum Peak Power Spectral Density (e.g. Bluetooth low energy):


Analyser settings:

- Resolution Bandwidth (RBW): 100 kHz, 10 kHz or 3 kHz
- Video Bandwidth (VBW): ≥ 3 times RBW
- Trace: Maxhold
- Sweeps: Till stable (min. 200, max. 15000)
- Sweeptime: Auto
- Detector: Peak


Maximum Average Power Spectral Density (e.g. WLAN):

Analyser settings:

- Resolution Bandwidth (RBW): 100 kHz, 10 kHz or 3 kHz
- Video Bandwidth (VBW): ≥ 3 times RBW
- Sweep Points: ≥ 2 times span / RBW
- Trace: Maxhold
- Sweeps: Till stable (max. 150)
- Sweeptime: $\leq$ Number of Sweep Points x minimum transmission duration
- Detector: RMS

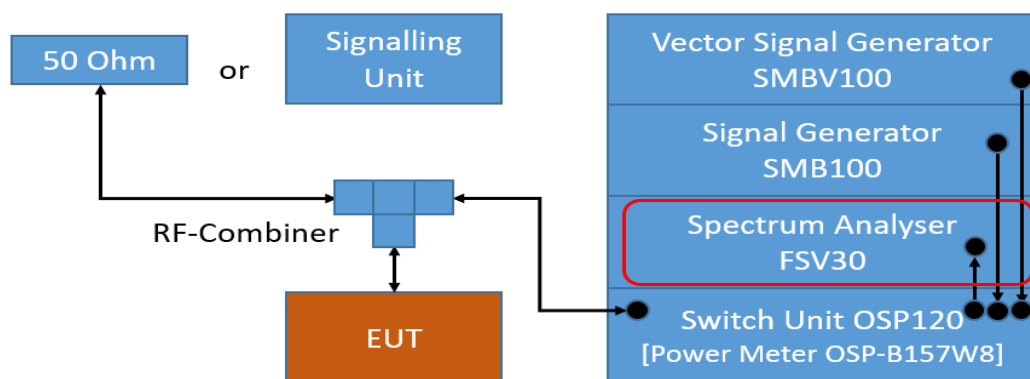

TS8997; Power Spectral Density

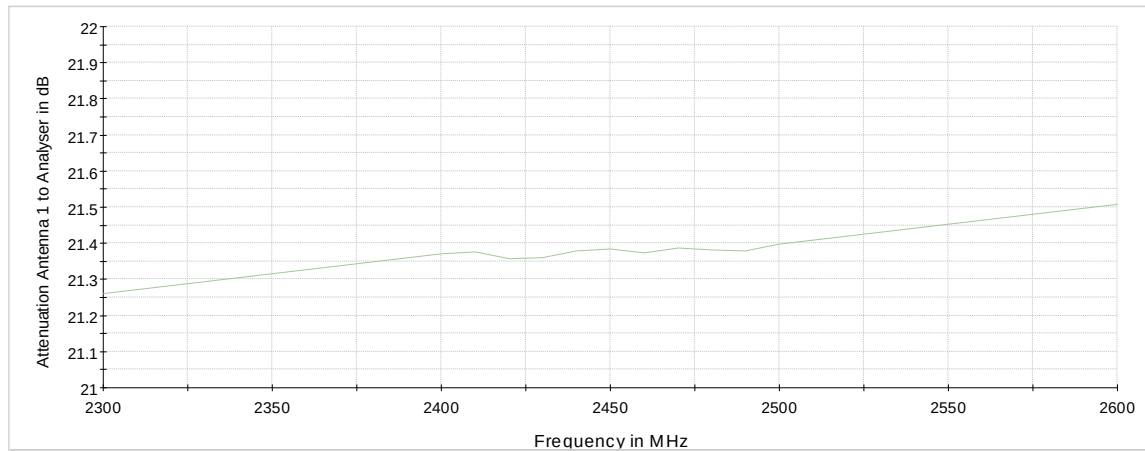

Attenuation of the measurement path

5.8.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (e)

For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

...

The same method of determining the conducted output power shall be used to determine the power spectral density.

FCC Part 15, Subpart C, §15.247 (f)

(f) For the purposes of this section, hybrid systems are those that employ a combination of both frequency hopping and digital modulation techniques.

...

The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission

5.8.3 TEST PROTOCOL

Ambient temperature: 21 °C
 Air Pressure: 998 hPa
 Humidity: 37 %
 BT LE 1 Mbit/s

Band	Channel No.	Frequency [MHz]	Power Density [dBm / RBW]	RBW [kHz]	Limit [dBm/3kHz]	Margin to Limit [dB]
2.4 GHz ISM	0	2402	-9.8	10.0	8.0	17.8
	19	2440	-8.9	10.0	8.0	16.9
	39	2480	-8.8	10.0	8.0	16.8

Ambient temperature: 21 °C
 Air Pressure: 998 hPa
 Humidity: 37 %
 WLAN b-Mode; 20 MHz; 1 Mbit/s

Band	Channel No.	Frequency [MHz]	Power Density [dBm / RBW]	RBW [kHz]	Limit [dBm/3kHz]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	-7.7	100.0	8.0	15.7
	6	2437	-4.8	100.0	8.0	12.8
	11	2462	-4.4	100.0	8.0	12.4

WLAN g-Mode; 20 MHz; 6 Mbit/s

Band	Channel No.	Frequency [MHz]	Power Density [dBm / RBW]	RBW [kHz]	Limit [dBm/3kHz]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	-9.8	100.0	8.0	17.8
	6	2437	-7.2	100.0	8.0	15.2
	11	2462	-7.7	100.0	8.0	15.7

WLAN n-Mode; 20 MHz; MCS0

Band	Channel No.	Frequency [MHz]	Power Density [dBm / RBW]	RBW [kHz]	Limit [dBm/3kHz]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	-11.3	100.0	8.0	19.3
	6	2437	-8.4	100.0	8.0	16.4
	11	2462	-9.0	100.0	8.0	17.0


WLAN n-Mode; 40 MHz; MCS0

Band	Channel No.	Frequency [MHz]	Power Density [dBm / RBW]	RBW [kHz]	Limit [dBm/3kHz]	Margin to Limit [dB]
2.4 GHz ISM	3	2422	-15.0	100.0	8.0	23.0
	6	2437	-13.4	100.0	8.0	21.4
	9	2452	-14.7	100.0	8.0	22.7

Remark: Please see next sub-clause for the measurement plot.

5.8.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)


Modulation= Bluetooth LE 1 Mbps, Operating Channel = high
(S01_AC02)

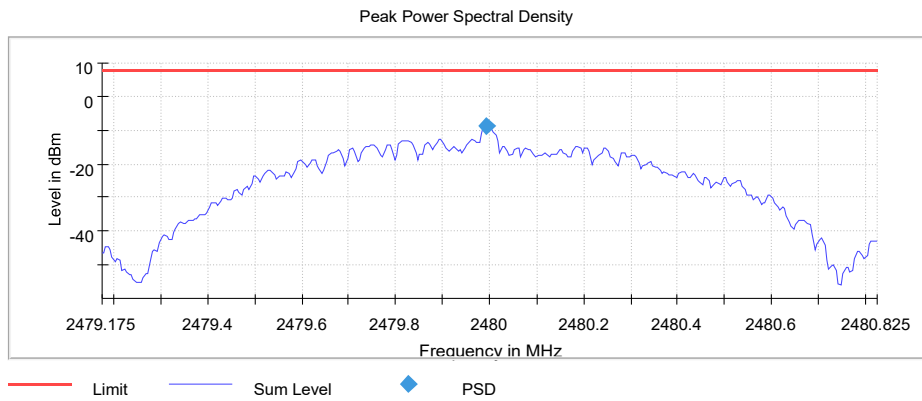

Measurement

Setting	Instrument Value
Start Frequency	2.47918 GHz
Stop Frequency	2.48083 GHz
Span	1.650 MHz
RBW	10.000 kHz
VBW	30.000 kHz
SweepPoints	330
SweepTime	1.650 ms
Reference Level	0.000 dBm
Attenuation	10.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	Sweep
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	4 / max. 150
Stable	2 / 2
Max Stable Difference	0.08 dB


Modulation= WLAN b, Operating Channel = high
(S01_AD03)

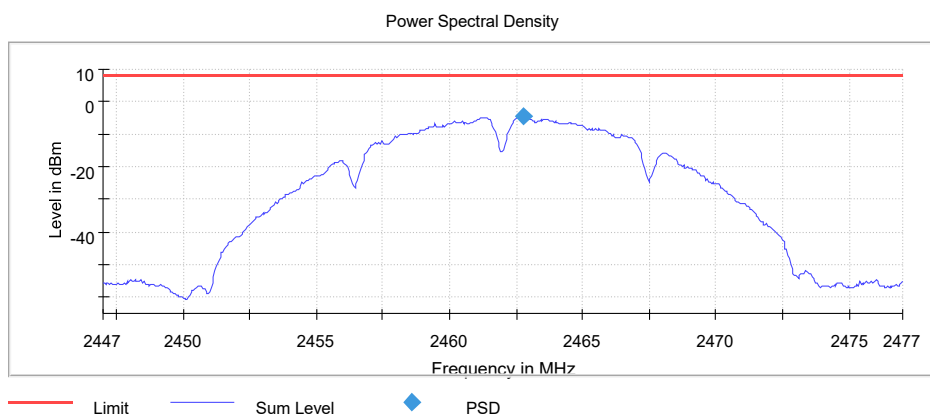

Measurement

Setting	Instrument Value
Start Frequency	2.44700 GHz
Stop Frequency	2.47700 GHz
Span	30.000 MHz
RBW	100.000 kHz
VBW	300.000 kHz
SweepPoints	600
SweepTime	600.000 ms
Reference Level	0.000 dBm
Attenuation	10.000 dB
Detector	RMS
SweepCount	1
Filter	3 dB
Trace Mode	Max Hold
SweepType	Sweep
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	19 / max. 150
Stable	3 / 3
Max Stable Difference	0.31 dB


Modulation= WLAN g, Operating Channel = mid
(S01_AD03)

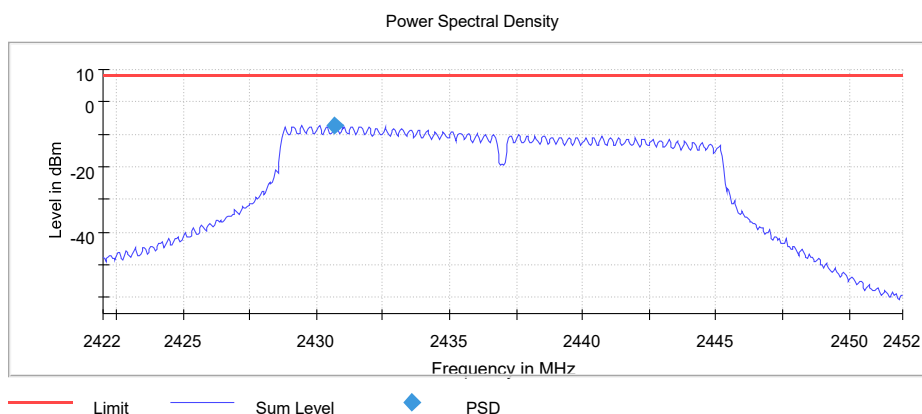

Measurement

Setting	Instrument Value
Start Frequency	2.42200 GHz
Stop Frequency	2.45200 GHz
Span	30.000 MHz
RBW	100.000 kHz
VBW	300.000 kHz
SweepPoints	600
SweepTime	600.000 ms
Reference Level	0.000 dBm
Attenuation	10.000 dB
Detector	RMS
SweepCount	1
Filter	3 dB
Trace Mode	Max Hold
SweepType	Sweep
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	15 / max. 150
Stable	3 / 3
Max Stable Difference	0.50 dB


Modulation= WLAN n 20 MHz, Operating Channel = mid
(S01_AD03)

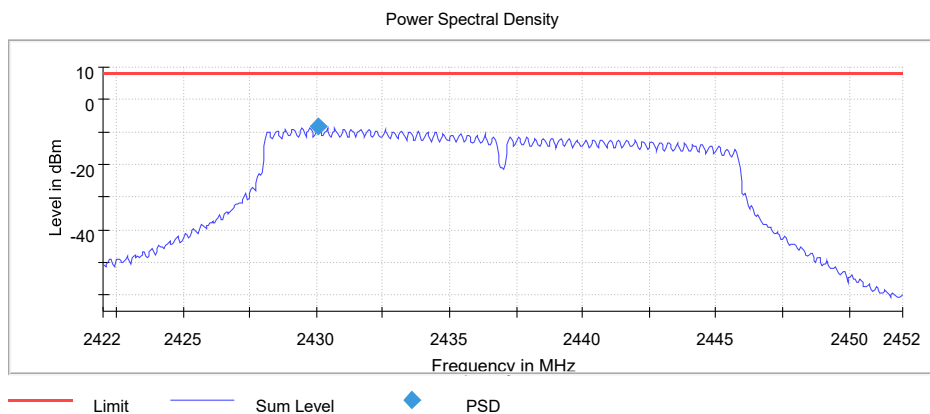

Measurement

Setting	Instrument Value
Start Frequency	2.42200 GHz
Stop Frequency	2.45200 GHz
Span	30.000 MHz
RBW	100.000 kHz
VBW	300.000 kHz
SweepPoints	600
SweepTime	600.000 ms
Reference Level	0.000 dBm
Attenuation	10.000 dB
Detector	RMS
SweepCount	1
Filter	3 dB
Trace Mode	Max Hold
SweepType	Sweep
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	13 / max. 150
Stable	3 / 3
Max Stable Difference	0.37 dB

Modulation= WLAN n 40 MHz, Operating Channel = mid
(S01_AD03)

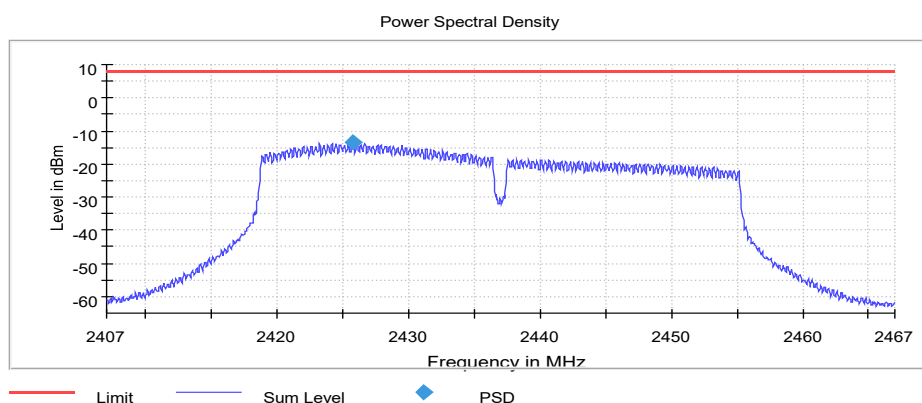

Measurement

Setting	Instrument Value
Start Frequency	2.40700 GHz
Stop Frequency	2.46700 GHz
Span	60.000 MHz
RBW	100.000 kHz
VBW	300.000 kHz
SweepPoints	1200
SweepTime	1.200 s
Reference Level	-10.000 dBm
Attenuation	10.000 dB
Detector	RMS
SweepCount	1
Filter	3 dB
Trace Mode	Max Hold
SweepType	Sweep
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	5 / max. 150
Stable	3 / 3
Max Stable Difference	0.29 dB

5.8.5 TEST EQUIPMENT USED

- R&S TS8997

6 TEST EQUIPMENT

6.1 TEST EQUIPMENT HARDWARE

- 1 R&S TS8997
2.4 and 5 GHz Bands Conducted Test Lab

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
1.1	Opus10 TPR (8253.00)	T/P Logger 13	Lufft Mess- und Regeltechnik GmbH	13936	2023-12	2025-12
1.2	SMB100A	Signal Generator 9 kHz - 6 GHz	Rohde & Schwarz	107695	2021-06	2024-06
1.3	EX520	Digital Multimeter 12	Extech Instruments Corp	05157876	2022-06	2024-06
1.4	FSV30	Signal Analyzer 10 Hz - 30 GHz	Rohde & Schwarz	103005	2023-08	2025-08
1.5	Temperature Chamber VT 4002	Temperature Chamber Vötsch 03	Vötsch	58566002150010	2022-05	2024-05
1.6	FSW43	Signal Analyser	Rohde & Schwarz GmbH & Co. KG	102013	2023-07	2025-07
1.7	Opus10 THI (8152.00)	T/H Logger 14	Lufft Mess- und Regeltechnik GmbH	13993	2023-12	2025-12
1.8	HMP2020	Programmable Power Supply	Rohde & Schwarz GmbH & Co. KG	101992	N/A	N/A
1.9	SMBV100A	Vector Signal Generator 9 kHz - 6 GHz	Rohde & Schwarz	259291	2023-01	2026-01
1.10	OSP120	Contains Power Meter and Switching Unit OSP-B157W8 PLUS	Rohde & Schwarz	101158	2021-08	2024-08
1.11	CS-RUB6	Rubidium Frequency Standard	Rohde & Schwarz GmbH & Co. KG	100321	2023-10	2024-10

- 2 Radiated Emissions FAR 2.4 GHz FCC
Radiated emission tests for 2.4 GHz ISM devices in a fully anechoic room

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
2.1	Opus10 TPR (8253.00)	T/P Logger 13	Lufft Mess- und Regeltechnik GmbH	13936	2023-12	2025-12
2.2	Innco Systems CO3000	Controller for bore sight mast FAC	innco systems GmbH	CO3000/1460/54740522/P	N/A	N/A
2.3	AMF-7D00101800-30-10P-R	Broadband Amplifier 100 MHz - 18 GHz	Miteq		N/A	N/A
2.4	Anechoic Chamber 03	FAR, 8.80m x 4.60m x 4.05m (l x w x h)	Albatross Projects	P26971-647-001-PRB	N/A	N/A

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
2.5	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2023-08	2025-08
2.6	JS4-18002600-32-5P	Broadband Amplifier 18 GHz - 26 GHz	Miteq	849785	N/A	N/A
2.7	FSW43	Spectrum Analyzer	Rohde & Schwarz GmbH & Co. KG	103779	2023-04	2025-04
2.8	EP 1200/B, NA/B1	AC Source, Amplifier with integrated variable Oscillator	Spitzenberger & Spies GmbH & Co. KG	B6278	N/A	N/A
2.9	3160-09	Standard Gain / Pyramidal Horn Antenna 26.5 GHz	EMCO Elektronik GmbH	00083069	N/A	N/A
2.10	WHKX 7.0/18G-8SS	High Pass Filter	Wainwright Instruments GmbH	09	N/A	N/A
2.11	MA3000/0800-XP-ET-compact	Bore Sight Antenna Mast	innco systems GmbH	9210522	N/A	N/A
2.12	TT 1.5 WI	Turn Table	Maturo GmbH	-	N/A	N/A
2.13	5HC3500/18000-1.2-KK	High Pass Filter	Trilithic	200035008	N/A	N/A
2.14	Opus 20 THI (8120.00)	ThermoHygro Datalogger	Lufft Mess- und Regeltechnik GmbH	115.0318.0802.033	2023-08	2025-08
2.15	TD1.5-10kg	EUT Tilt Device (Rohacell)	Maturo GmbH	TD1.5-10kg/024/3790709	N/A	N/A
2.16	AFS42-00101800-25-S-42	Broadband Amplifier 25 MHz - 18 GHz	Miteq	2035324	N/A	N/A
2.17	HF 907	Double-ridged horn	Rohde & Schwarz	102444	2021-09	2024-09

3 Radiated Emissions SAC H-Field
Radiated emission tests in the H-Field in a semi anechoic room

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
3.1	N5000/NP	Filter for EUT, 2 Lines, 250 V, 16 A	ETS-LINDGREN	241515	N/A	N/A
3.2	Opus10 TPR (8253.00)	T/P Logger 13	Lufft Mess- und Regeltechnik GmbH	13936	2023-12	2025-12
3.3	ESW44	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz GmbH & Co. KG	101603		
3.4	Anechoic Chamber 01	SAC/FAR, 10.58 m x 6.38 m x 6.00 m	Frankonia Germany EMC Solution GmbH	none	N/A	N/A
3.5	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2023-08	2025-08
3.6	Opus10 THI (8152.00)	T/H Logger 10	Lufft Mess- und Regeltechnik GmbH	12488	2023-12	2025-12

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
3.7	EP 1200/B, NA/B1	AC Source, Amplifier with integrated variable Oscillator	Spitzenberger & Spies GmbH & Co. KG	B6278	N/A	N/A
3.8	DS 420S	Turn Table 2 m diameter	HD GmbH	420/573/99	N/A	N/A
3.9	HFH2-Z2	Loop Antenna + 3 Axis Tripod	Rohde & Schwarz GmbH & Co. KG	829324/006		
3.10	CS-RUB6	Rubidium Frequency Standard	Rohde & Schwarz GmbH & Co. KG	100321	2023-10	2024-10

4 Radiated Emissions SAC up to 1 GHz
Radiated emission tests up to 1 GHz in a semi anechoic room

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
4.1	N5000/NP	Filter for EUT, 2 Lines, 250 V, 16 A	ETS-LINDGREN	241515	N/A	N/A
4.2	Opus10 TPR (8253.00)	T/P Logger 13	Lufft Mess- und Regeltechnik GmbH	13936	2023-12	2025-12
4.3	ESW44	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz GmbH & Co. KG	101603		
4.4	Anechoic Chamber 01	SAC/FAR, 10.58 m x 6.38 m x 6.00 m	Frankonia Germany EMC Solution GmbH	none	N/A	N/A
4.5	HL 562 ULTRALOG	Biconical-log-per antenna (30 MHz - 3 GHz) with HL 562E biconicals	Rohde & Schwarz GmbH & Co. KG	830547/003	2021-09	2024-09
4.6	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2023-08	2025-08
4.7	Opus10 THI (8152.00)	T/H Logger 10	Lufft Mess- und Regeltechnik GmbH	12488	2023-12	2025-12
4.8	EP 1200/B, NA/B1	AC Source, Amplifier with integrated variable Oscillator	Spitzenberger & Spies GmbH & Co. KG	B6278	N/A	N/A
4.9	DS 420S	Turn Table 2 m diameter	HD GmbH	420/573/99	N/A	N/A
4.10	CS-RUB6	Rubidium Frequency Standard	Rohde & Schwarz GmbH & Co. KG	100321	2023-10	2024-10
4.11	AM 4.0	Antenna Mast 4 m	Maturo GmbH	AM4.0/180/1192 0513	N/A	N/A

The calibration interval is the time interval between "Last Calibration" and "Calibration Due"

6.2 TEST EQUIPMENT SOFTWARE

Semi-Anechoic Chamber:	
Software	Version
EMC32 Measurement Software	10.60.10
INNCO Mast Controller	1.02.62
INNCO Mast Height	34.10
INNCO Mast Elevation	36.11
MATURO Controller	1.24
MATURO Mast	12.19
MATURO Turn-Table	30.10
Fully-Anechoic Chamber:	
Software	Version
EMC32 Measurement Software	10.60.10
MATURO Controller	1.30
MATURO Turn-Unit	11.10
MATURO Mast	12.10
MATURO Turntable	12.11
INNCO Controller	1.03.02
INNCO Mast Height	34.10
INNCO Mast Elevation	36.11
TS 8997	
WMS32 Measurement Software	11.60.00 (till 2024-03-19), 11.70.00 + Hotfix 01
Conducted AC Emissions:	
Software	Version
EMC32 Measurement Software	10.60.20

7 ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas as well as the insertion loss of the LISN.

7.1 ANTENNA R&S HFH2-Z2 (9 KHZ – 30 MHZ)

Frequency MHz	AF HFH-Z2) dB (1/m)	Corr. dB	cable loss 1 (inside chamber) dB	cable loss 2 (outside chamber) dB	cable loss 3 (switch unit) dB	cable loss 4 (to receiver) dB	distance corr. (-40 dB/ decade) dB	d _{Limit} (meas. distance (limit) m	d _{used} (meas. distance (used) m
0.009	20.50	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.01	20.45	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.015	20.37	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.02	20.36	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.025	20.38	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.03	20.32	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.05	20.35	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.08	20.30	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.1	20.20	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.2	20.17	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.3	20.14	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.49	20.12	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.490001	20.12	-39.6	0.1	0.1	0.1	0.1	-40	30	3
0.5	20.11	-39.6	0.1	0.1	0.1	0.1	-40	30	3
0.8	20.10	-39.6	0.1	0.1	0.1	0.1	-40	30	3
1	20.09	-39.6	0.1	0.1	0.1	0.1	-40	30	3
2	20.08	-39.6	0.1	0.1	0.1	0.1	-40	30	3
3	20.06	-39.6	0.1	0.1	0.1	0.1	-40	30	3
4	20.05	-39.5	0.2	0.1	0.1	0.1	-40	30	3
5	20.05	-39.5	0.2	0.1	0.1	0.1	-40	30	3
6	20.02	-39.5	0.2	0.1	0.1	0.1	-40	30	3
8	19.95	-39.5	0.2	0.1	0.1	0.1	-40	30	3
10	19.83	-39.4	0.2	0.1	0.2	0.1	-40	30	3
12	19.71	-39.4	0.2	0.1	0.2	0.1	-40	30	3
14	19.54	-39.4	0.2	0.1	0.2	0.1	-40	30	3
16	19.53	-39.3	0.3	0.1	0.2	0.1	-40	30	3
18	19.50	-39.3	0.3	0.1	0.2	0.1	-40	30	3
20	19.57	-39.3	0.3	0.1	0.2	0.1	-40	30	3
22	19.61	-39.3	0.3	0.1	0.2	0.1	-40	30	3
24	19.61	-39.3	0.3	0.1	0.2	0.1	-40	30	3
26	19.54	-39.3	0.3	0.1	0.2	0.1	-40	30	3
28	19.46	-39.2	0.3	0.1	0.3	0.1	-40	30	3
30	19.73	-39.1	0.4	0.1	0.3	0.1	-40	30	3

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-40 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values

7.2 ANTENNA R&S HL562 (30 MHZ – 1 GHZ)

($d_{\text{Limit}} = 3 \text{ m}$)

Frequency	AF R&S HL562	Corr.
MHz	dB (1/m)	dB
30	18.6	0.6
50	6.0	0.9
100	9.7	1.2
150	7.9	1.6
200	7.6	1.9
250	9.5	2.1
300	11.0	2.3
350	12.4	2.6
400	13.6	2.9
450	14.7	3.1
500	15.6	3.2
550	16.3	3.5
600	17.2	3.5
650	18.1	3.6
700	18.5	3.6
750	19.1	4.1
800	19.6	4.1
850	20.1	4.4
900	20.8	4.7
950	21.1	4.8
1000	21.6	4.9

cable loss 1 (inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit)	cable loss 4 (to receiver)	distance corr. (-20 dB/ decade)	d_{Limit} (meas. distance (limit))	d_{used} (meas. distance (used))
dB	dB	dB	dB	dB	m	m
0.29	0.04	0.23	0.02	0.0	3	3
0.39	0.09	0.32	0.08	0.0	3	3
0.56	0.14	0.47	0.08	0.0	3	3
0.73	0.20	0.59	0.12	0.0	3	3
0.84	0.21	0.70	0.11	0.0	3	3
0.98	0.24	0.80	0.13	0.0	3	3
1.04	0.26	0.89	0.15	0.0	3	3
1.18	0.31	0.96	0.13	0.0	3	3
1.28	0.35	1.03	0.19	0.0	3	3
1.39	0.38	1.11	0.22	0.0	3	3
1.44	0.39	1.20	0.19	0.0	3	3
1.55	0.46	1.24	0.23	0.0	3	3
1.59	0.43	1.29	0.23	0.0	3	3
1.67	0.34	1.35	0.22	0.0	3	3
1.67	0.42	1.41	0.15	0.0	3	3
1.87	0.54	1.46	0.25	0.0	3	3
1.90	0.46	1.51	0.25	0.0	3	3
1.99	0.60	1.56	0.27	0.0	3	3
2.14	0.60	1.63	0.29	0.0	3	3
2.22	0.60	1.66	0.33	0.0	3	3
2.23	0.61	1.71	0.30	0.0	3	3

($d_{\text{Limit}} = 10 \text{ m}$)

30	18.6	-9.9
50	6.0	-9.6
100	9.7	-9.2
150	7.9	-8.8
200	7.6	-8.6
250	9.5	-8.3
300	11.0	-8.1
350	12.4	-7.9
400	13.6	-7.6
450	14.7	-7.4
500	15.6	-7.2
550	16.3	-7.0
600	17.2	-6.9
650	18.1	-6.9
700	18.5	-6.8
750	19.1	-6.3
800	19.6	-6.3
850	20.1	-6.0
900	20.8	-5.8
950	21.1	-5.6
1000	21.6	-5.6

0.29	0.04	0.23	0.02	-10.5	10	3
0.39	0.09	0.32	0.08	-10.5	10	3
0.56	0.14	0.47	0.08	-10.5	10	3
0.73	0.20	0.59	0.12	-10.5	10	3
0.84	0.21	0.70	0.11	-10.5	10	3
0.98	0.24	0.80	0.13	-10.5	10	3
1.04	0.26	0.89	0.15	-10.5	10	3
1.18	0.31	0.96	0.13	-10.5	10	3
1.28	0.35	1.03	0.19	-10.5	10	3
1.39	0.38	1.11	0.22	-10.5	10	3
1.44	0.39	1.20	0.19	-10.5	10	3
1.55	0.46	1.24	0.23	-10.5	10	3
1.59	0.43	1.29	0.23	-10.5	10	3
1.67	0.34	1.35	0.22	-10.5	10	3
1.67	0.42	1.41	0.15	-10.5	10	3
1.87	0.54	1.46	0.25	-10.5	10	3
1.90	0.46	1.51	0.25	-10.5	10	3
1.99	0.60	1.56	0.27	-10.5	10	3
2.14	0.60	1.63	0.29	-10.5	10	3
2.22	0.60	1.66	0.33	-10.5	10	3
2.23	0.61	1.71	0.30	-10.5	10	3

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

7.3 ANTENNA R&S HF907 (1 GHZ – 18 GHZ)

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
1000	24.4	-19.4
2000	28.5	-17.4
3000	31.0	-16.1
4000	33.1	-14.7
5000	34.4	-13.7
6000	34.7	-12.7
7000	35.6	-11.0

cable loss 1 (relay + cable inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit, atten- uator & pre-amp)	cable loss 4 (to receiver)		
dB	dB	dB	dB		
0.99	0.31	-21.51	0.79		
1.44	0.44	-20.63	1.38		
1.87	0.53	-19.85	1.33		
2.41	0.67	-19.13	1.31		
2.78	0.86	-18.71	1.40		
2.74	0.90	-17.83	1.47		
2.82	0.86	-16.19	1.46		

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
3000	31.0	-23.4
4000	33.1	-23.3
5000	34.4	-21.7
6000	34.7	-21.2
7000	35.6	-19.8

cable loss 1 (relay inside chamber)	cable loss 2 (inside chamber)	cable loss 3 (outside chamber)	cable loss 4 (switch unit, atten- uator & pre-amp)	cable loss 5 (to receiver)	used for FCC 15.247
dB	dB	dB	dB	dB	
0.47	1.87	0.53	-27.58	1.33	
0.56	2.41	0.67	-28.23	1.31	
0.61	2.78	0.86	-27.35	1.40	
0.58	2.74	0.90	-26.89	1.47	
0.66	2.82	0.86	-25.58	1.46	

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
7000	35.6	-57.3
8000	36.3	-56.3
9000	37.1	-55.3
10000	37.5	-56.2
11000	37.5	-55.3
12000	37.6	-53.7
13000	38.2	-53.5
14000	39.9	-56.3
15000	40.9	-54.1
16000	41.3	-54.1
17000	42.8	-54.4
18000	44.2	-54.7

cable loss 1 (relay inside chamber)	cable loss 2 (High Pass)	cable loss 3 (pre- amp)	cable loss 4 (inside chamber)	cable loss 5 (outside chamber)	cable loss 6 (to receiver)
dB	dB	dB	dB	dB	dB
0.56	1.28	-62.72	2.66	0.94	1.46
0.69	0.71	-61.49	2.84	1.00	1.53
0.68	0.65	-60.80	3.06	1.09	1.60
0.70	0.54	-61.91	3.28	1.20	1.67
0.80	0.61	-61.40	3.43	1.27	1.70
0.84	0.42	-59.70	3.53	1.26	1.73
0.83	0.44	-59.81	3.75	1.32	1.83
0.91	0.53	-63.03	3.91	1.40	1.77
0.98	0.54	-61.05	4.02	1.44	1.83
1.23	0.49	-61.51	4.17	1.51	1.85
1.36	0.76	-62.36	4.34	1.53	2.00
1.70	0.53	-62.88	4.41	1.55	1.91

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

7.4 ANTENNA EMCO 3160-09 (18 GHZ – 26.5 GHZ)

Frequency	AF EMCO 3160-09	Corr.	cable loss 1 (inside chamber)	cable loss 2 (pre- amp)	cable loss 3 (inside chamber)	cable loss 4 (switch unit)	cable loss 5 (to receiver)
MHz	dB (1/m)	dB	dB	dB	dB	dB	dB
18000	40.2	-23.5	0.72	-35.85	6.20	2.81	2.65
18500	40.2	-23.2	0.69	-35.71	6.46	2.76	2.59
19000	40.2	-22.0	0.76	-35.44	6.69	3.15	2.79
19500	40.3	-21.3	0.74	-35.07	7.04	3.11	2.91
20000	40.3	-20.3	0.72	-34.49	7.30	3.07	3.05
20500	40.3	-19.9	0.78	-34.46	7.48	3.12	3.15
21000	40.3	-19.1	0.87	-34.07	7.61	3.20	3.33
21500	40.3	-19.1	0.90	-33.96	7.47	3.28	3.19
22000	40.3	-18.7	0.89	-33.57	7.34	3.35	3.28
22500	40.4	-19.0	0.87	-33.66	7.06	3.75	2.94
23000	40.4	-19.5	0.88	-33.75	6.92	3.77	2.70
23500	40.4	-19.3	0.90	-33.35	6.99	3.52	2.66
24000	40.4	-19.8	0.88	-33.99	6.88	3.88	2.58
24500	40.4	-19.5	0.91	-33.89	7.01	3.93	2.51
25000	40.4	-19.3	0.88	-33.00	6.72	3.96	2.14
25500	40.5	-20.4	0.89	-34.07	6.90	3.66	2.22
26000	40.5	-21.3	0.86	-35.11	7.02	3.69	2.28
26500	40.5	-21.1	0.90	-35.20	7.15	3.91	2.36

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)


Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

8 MEASUREMENT UNCERTAINTIES

Test Case	Parameter	Uncertainty
AC Power Line	Power	± 3.4 dB
Field Strength of spurious radiation	Power	± 5.5 dB
6 dB / 26 dB / 99% Bandwidth	Power Frequency	± 2.9 dB ± 11.2 kHz
Conducted Output Power	Power	± 2.2 dB
Band Edge Compliance	Power Frequency	± 2.2 dB ± 11.2 kHz
Frequency Stability	Frequency	± 25 Hz
Power Spectral Density	Power	± 2.2 dB

The measurement uncertainties for all parameters are calculated with an expansion factor (coverage factor) $k = 1.96$. This means, that the true value is in the corresponding interval with a probability of 95 %.

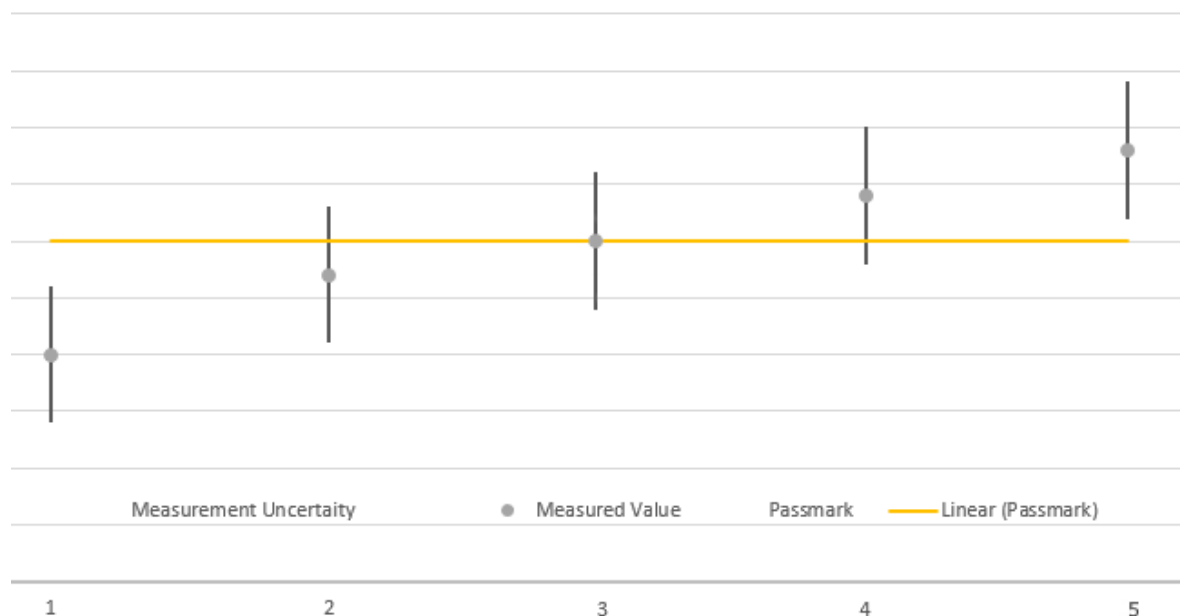

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	on pass mark	within pass mark	Passed
4	above pass mark	within pass mark	Failed
5	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so-called shared risk principle.

9 PHOTO REPORT

Please see separate photo report.

*****END OF TEST REPORT*****