

FCC TEST REPORT

REPORT NO.: RF910611R01

MODEL NO.: BT-0101

(For other models please refer to page 6)

RECEIVED: June 11, 2002

TESTED: June 13 ~ June 24, 2002

APPLICANT: CC&C TECHNOLOGIES INC.

ADDRESS: 8F, 150, Jian Yi Road, Chung Ho City, Taipei,
Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 62 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



Lab Code: 200102-0

TABLE OF CONTENTS

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS	8
4	TEST PROCEDURES AND RESULTS	9
4.1	CONDUCTED EMISSION MEASUREMENT	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	9
4.1.2	TEST INSTRUMENTS	9
4.1.3	TEST PROCEDURES	10
4.1.4	DEVIATION FROM TEST STANDARD	10
4.1.5	TEST SETUP	11
4.1.6	TEST RESULTS	12
4.2	NUMBER OF HOPPING FREQUENCY USED	18
4.2.1	LIMIT OF HOPPING FREQUENCY USED	18
4.2.2	TEST INSTRUMENTS	18
4.2.3	TEST PROCEDURES	19
4.2.4	DEVIATION FROM TEST STANDARD	19
4.2.5	TEST SETUP	19
4.2.6	TEST RESULTS	19
4.3	DWELL TIME ON EACH CHANNEL	22
4.3.1	LIMIT OF DWELL TIME USED	22
4.3.2	TEST INSTRUMENTS	22
4.3.3	TEST PROCEDURES	23
4.3.4	DEVIATION FROM TEST STANDARD	23
4.3.5	TEST SETUP	23
4.3.6	TEST RESULTS	24
4.4	CHANNEL BANDWIDTH	28
4.4.1	LIMITS OF CHANNEL BANDWIDTH	28
4.4.2	TEST INSTRUMENTS	28
4.4.3	TEST PROCEDURE	29
4.4.4	DEVIATION FROM TEST STANDARD	29
4.4.5	TEST SETUP	29
4.4.6	EUT OPERATING CONDITION	29

4.4.7	TEST RESULTS	30
4.5	HOPPING CHANNEL SEPARATION	34
4.5.1	LIMIT OF HOPPING CHANNEL SEPARATION	34
4.5.2	TEST INSTRUMENTS.....	34
4.5.3	TEST PROCEDURES	35
4.5.4	DEVIATION FROM TEST STANDARD	35
4.5.5	TEST SETUP.....	35
4.5.6	TEST RESULTS	36
4.6	MAXIMUM PEAK OUTPUT POWER	40
4.6.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	40
4.6.2	INSTRUMENTS.....	40
4.6.3	TEST PROCEDURES	41
4.6.4	DEVIATION FROM TEST STANDARD	41
4.6.5	TEST SETUP.....	41
4.6.6	EUT OPERATING CONDITION.....	42
4.6.7	TEST RESULTS	42
4.7	RADIATED EMISSION MEASUREMENT	46
4.7.1	LIMITS OF RADIATED EMISSION MEASUREMENT	46
4.7.2	TEST INSTRUMENTS.....	47
4.7.3	TEST PROCEDURES	48
4.7.4	DEVIATION FROM TEST STANDARD	48
4.7.5	TEST SETUP.....	49
4.7.6	TEST RESULTS	50
4.8	BAND EDGES MEASUREMENT	55
4.8.1	LIMITS OF BAND EDGES MEASUREMENT.....	55
4.8.2	TEST INSTRUMENTS.....	55
4.8.3	TEST PROCEDURE.....	55
4.8.4	DEVIATION FROM TEST STANDARD	55
4.8.5	EUT OPERATING CONDITION.....	56
4.8.6	TEST RESULTS	56
4.9	ANTENNA REQUIREMENT	59
4.9.1	STANDARD APPLICABLE	59
4.9.2	ANTENNA CONNECTED CONSTRUCTION	59
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	60
6	INFORMATION ON THE TESTING LABORATORIES	62



1 CERTIFICATION

PRODUCT : Bluetooth Compact Flash Card
BRAND NAME : CC&C
MODEL NO. : BT-0101
(For other models please refer to page 6)
APPLICANT : CC&C TECHNOLOGIES INC.
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from June 13 ~ June 24, 2002. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

CHECKED BY: Rennie Wang, **DATE:** July 1, 2002
Rennie Wang

APPROVED BY: Dr. Alan Lane for, **DATE:** July 1, 2002
Dr. Alan Lane
Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission Limit: 48dBuV	PASS	Meet the requirement of limit Minimum passing margin is -8.62dBuV at 25.23 MHz
15.247(a)(1)(I)-(ii)	Number of Hopping Frequency Used Spec.: At least 75 channels	PASS	Meet the requirement of limit
15.247(a)(1)(ii)	Dwell Time on Each Channel Spec. : Max. 0.4 second within 30 second	PASS	Meet the requirement of limit
15.247(a)(1)(I)-(ii)	Hopping Channel Separation Spec. : Min. 25 kHz or 20 dB bandwidth	PASS	Meet the requirement of limit
15.247(a)(2)	Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System Spec.: Max. 1 MHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Spec.: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Spec.: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -9.00dBuV at 4882.00MHz
15.247(c)	Band Edge Measurement	PASS	Meet the requirement of limit

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Bluetooth Compact Flash Card
MODEL NO.	BT-0101 BT-0101M BT100S
POWER SUPPLY	5.0VDC from host equipment
MODULATION TYPE	FHSS (GFSK)
FREQUENCY RANGE	2402MHz ~ 2480MHz
NUMBER OF CHANNEL	79
OUTPUT POWER	1.52dBm
ANTENNA TYPE	Printed Antenna
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. Three model names are identical expect for their model number due to marketing requirement.
2. For a more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Bluetooth Compact Flash Card. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR 47 Part 15, Subpart C. (15.247)
ANSI C63.4 : 1992

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	PP01L	TW-09C748-12800-190-B220	FCC DoC APPROVED
2	PRINTER	EPSON	LQ-300+	DCGY017096	FCC DoC APPROVED
3	MODEM	ACEEX	1414	980020503	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
3	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.

NOTE: All power cords of the above support units are non shielded (1.8m).

4 TEST PROCEDURES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.45 – 30	48	-	48	-

Notes:

1. The lower limit shall apply at the transition frequencies.
1. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS30	847793/022	Mar. 12, 2003
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH2-Z5	828075/003	July 19, 2002
ROHDE & SCHWARZ 200-A Four-line V-Network	ENV4200	830326/018	Oct. 25, 2002
* ROHDE & SCHWARZ 4-wire ISN	ENY41	838119/028	Dec. 2, 2002
* ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/018	Dec. 2, 2002
EMCO-L.I.S.N. (for peripheral)	3825/2	90031627	July 19, 2002
Software	Cond-V2L	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C05.01	July 19, 2002
LYNICS Terminator (For EMCO LISN)	0900510	E1-01-305	Feb. 20, 2003
LYNICS Terminator (For EMCO LISN)	0900510	E1-01-306	Feb. 20, 2003
Shielded Room	Site 5	ADT-C05	NA
VCCI Site Registration No.	Site 5	C-1093	NA

NOTE: 1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.

2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

3. “*”: These equipment are used for conducted telecom port test only (if tested).




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 450 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

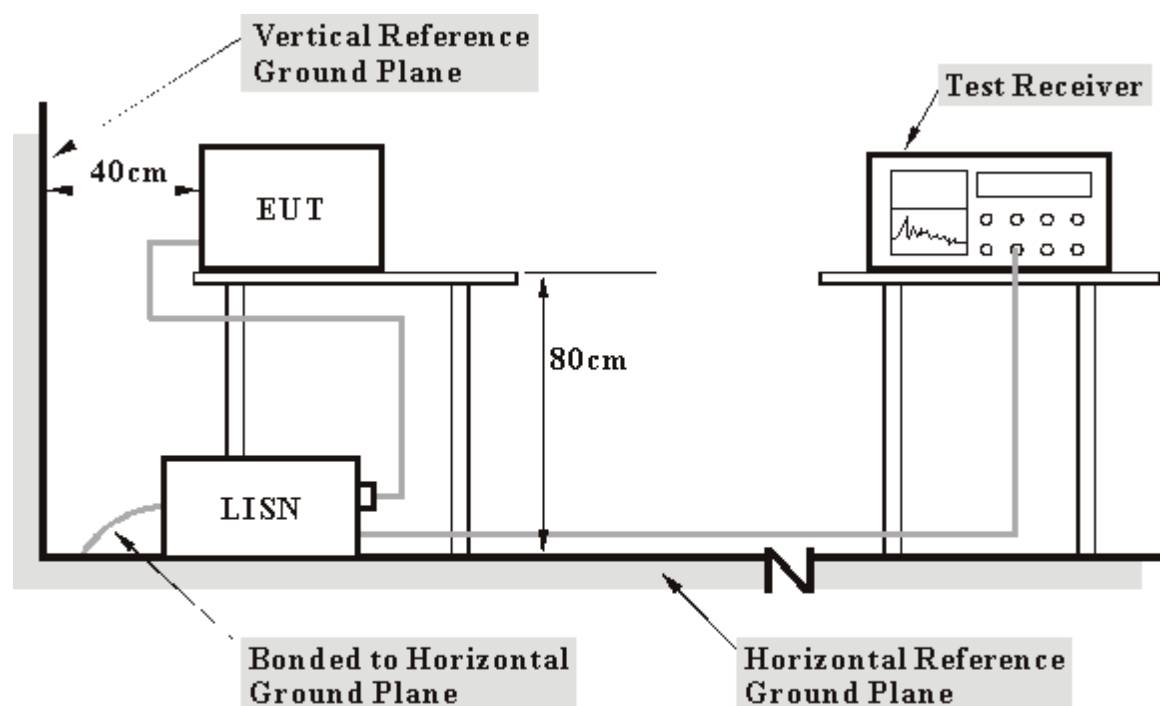

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.


4.1.6 TEST RESULTS

EUT	Bluetooth Compact Flash Card	MODEL	BT-0101
CHANNEL	0	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	30 deg. C, 70%RH, 1005 hPa	TESTED BY: Bunny Yao	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.516	0.12	28.09	-	28.21	-	48.00	-	-19.79	-
2	0.688	0.15	24.37	-	24.52	-	48.00	-	-23.48	-
3	3.055	0.31	28.59	-	28.90	-	48.00	-	-19.10	-
4	12.969	0.66	29.86	-	30.52	-	48.00	-	-17.48	-
5	22.570	1.10	37.83	-	38.93	-	48.00	-	-9.07	-
6	26.992	1.24	29.79	-	31.03	-	48.00	-	-16.97	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

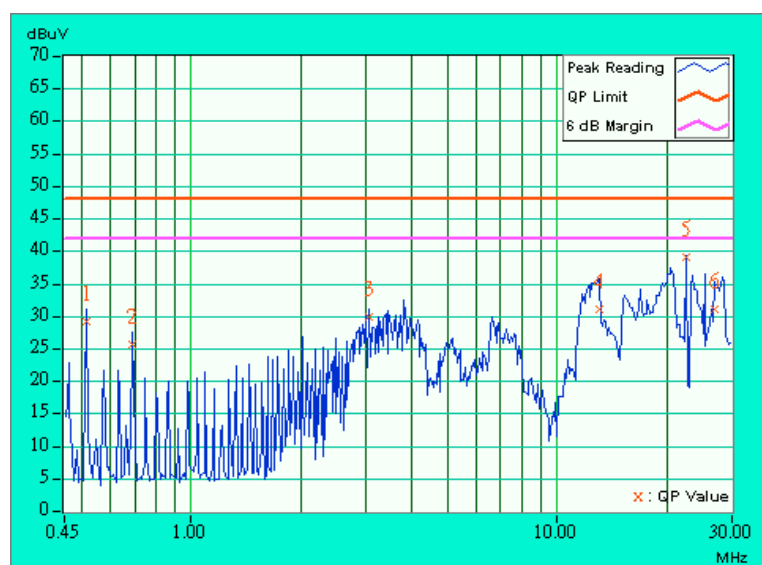


EUT	Bluetooth Compact Flash Card	MODEL	BT-0101
MODE	Channel 0	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	30 deg. C, 70%RH, 1005 hPa	TESTED BY: Bunny Yao	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.516	0.12	27.41	-	27.53	-	48.00	-	-20.47	-
2	0.809	0.17	16.57	-	16.74	-	48.00	-	-31.26	-
3	3.551	0.28	28.52	-	28.80	-	48.00	-	-19.20	-
4	12.598	0.45	24.44	-	24.89	-	48.00	-	-23.11	-
5	22.570	0.75	38.25	-	39.00	-	48.00	-	-9.00	-
6	25.230	0.70	38.68	-	39.38	-	48.00	-	-8.62	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

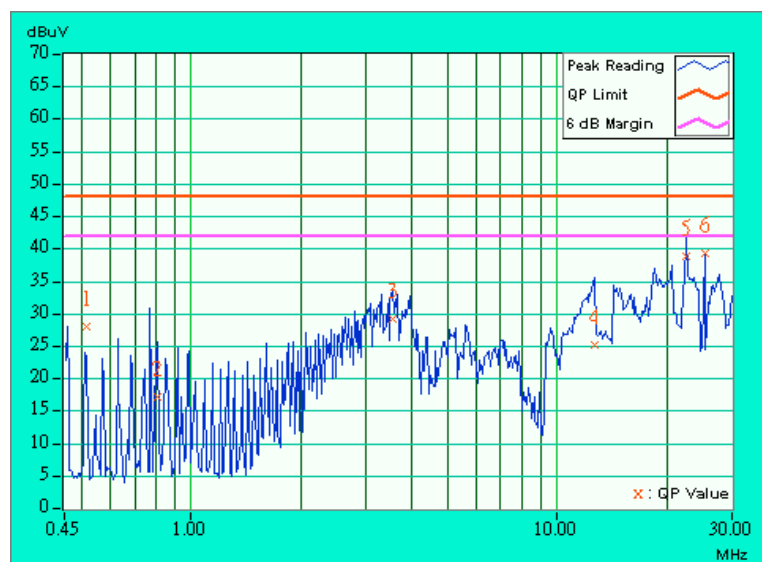


EUT	Bluetooth Compact Flash Card	MODEL	BT-0101
MODE	Channel 39	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	30 deg. C, 70%RH, 1005 hPa	TESTED BY: Bunny Yao	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.575	0.13	28.57	-	28.70	-	48.00	-	-19.30	-
2	0.977	0.20	23.72	-	23.92	-	48.00	-	-24.08	-
3	3.168	0.32	28.70	-	29.02	-	48.00	-	-18.98	-
4	7.027	0.50	24.76	-	25.26	-	48.00	-	-22.74	-
5	20.504	1.02	31.47	-	32.49	-	48.00	-	-15.51	-
6	26.984	1.24	29.83	-	31.07	-	48.00	-	-16.93	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

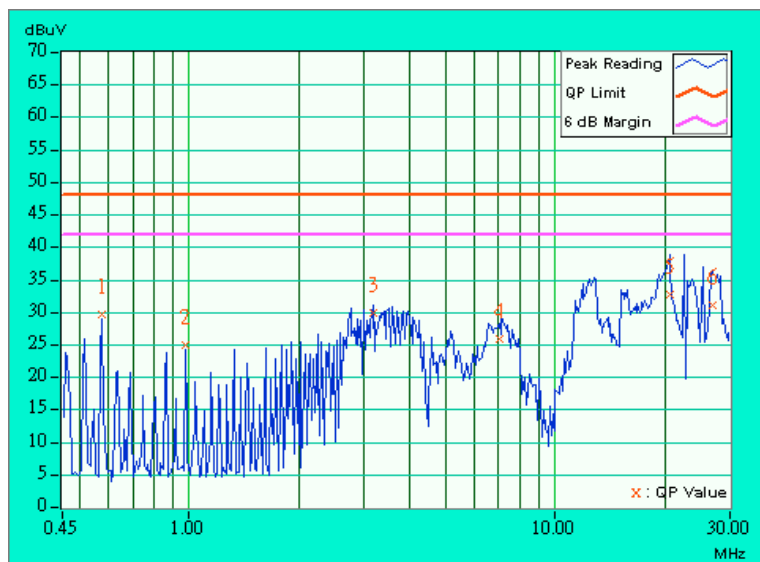


EUT	Bluetooth Compact Flash Card	MODEL	BT-0101
MODE	Channel 39	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	30 deg. C, 70%RH, 1005 hPa	TESTED BY: Bunny Yao	

No	Freq.	Corr. Factor	Reading Value [dB (Uv)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.571	0.13	25.10	-	25.23	-	48.00	-	-22.77	-
2	0.860	0.18	25.47	-	25.65	-	48.00	-	-22.35	-
3	3.672	0.28	32.20	-	32.48	-	48.00	-	-15.52	-
4	12.113	0.44	25.05	-	25.49	-	48.00	-	-22.51	-
5	22.570	0.75	38.23	-	38.98	-	48.00	-	-9.02	-
6	25.230	0.70	38.54	-	39.24	-	48.00	-	-8.76	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

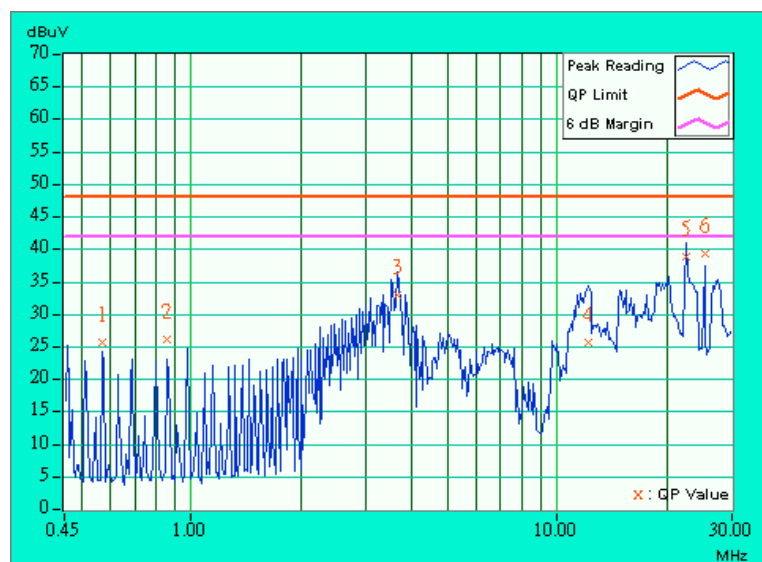


EUT	Bluetooth Compact Flash Card	MODEL	BT-0101
MODE	Channel 78	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	30 deg. C, 70%RH, 1005 hPa	TESTED BY: Bunny Yao	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.497	0.12	17.23	-	17.35	-	48.00	-	-30.65	-
2	1.055	0.20	16.91	-	17.11	-	48.00	-	-30.89	-
3	3.910	0.39	26.67	-	27.06	-	48.00	-	-20.94	-
4	12.887	0.66	26.86	-	27.52	-	48.00	-	-20.48	-
5	21.008	1.04	30.11	-	31.15	-	48.00	-	-16.85	-
6	25.230	1.20	37.41	-	38.61	-	48.00	-	-9.39	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

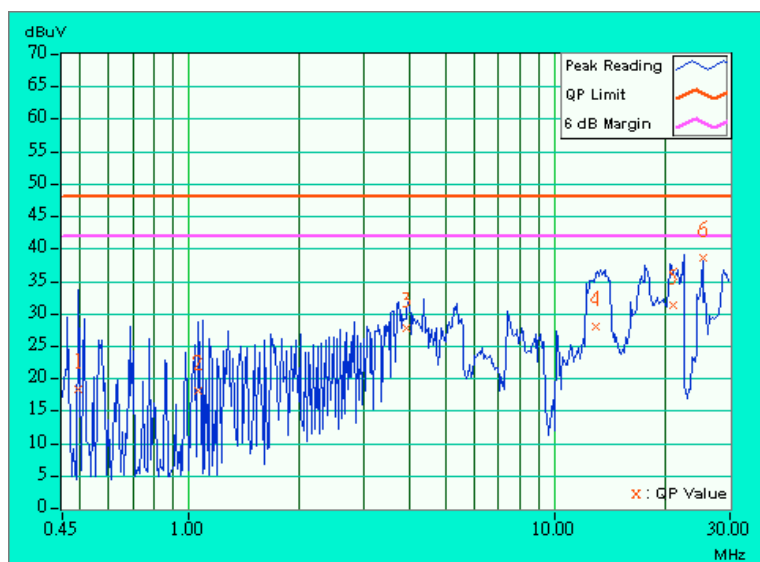


EUT	Bluetooth Compact Flash Card	MODEL	BT-0101
MODE	Channel 78	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Netural (N)
ENVIRONMENTAL CONDITIONS	30 deg. C, 70%RH, 1005 hPa	TESTED BY: Bunny Yao	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.516	0.12	27.03	-	27.15	-	48.00	-	-20.85	-
2	0.649	0.14	11.50	-	11.64	-	48.00	-	-36.36	-
3	3.906	0.30	31.43	-	31.73	-	48.00	-	-16.27	-
4	14.770	0.50	25.64	-	26.14	-	48.00	-	-21.86	-
5	22.570	0.75	37.99	-	38.74	-	48.00	-	-9.26	-
6	26.297	0.73	26.47	-	27.20	-	48.00	-	-20.80	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

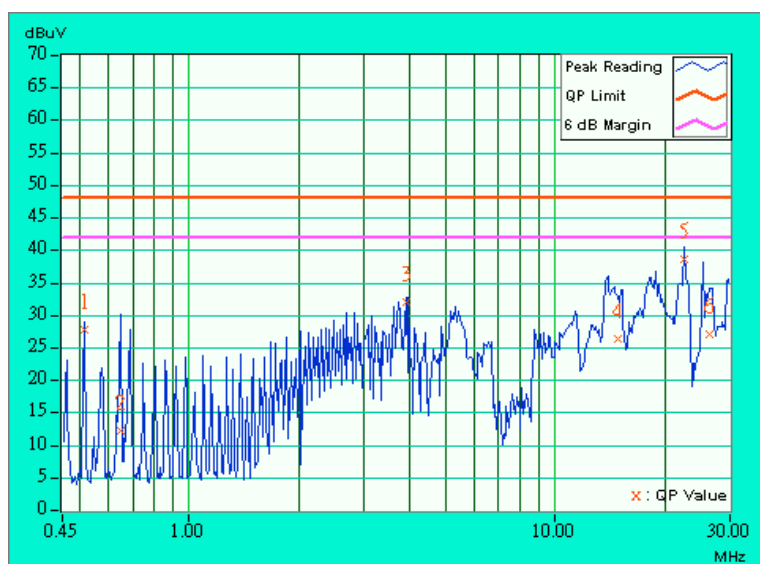

4.2 NUMBER OF HOPPING FREQUENCY USED

4.2.1 LIMIT OF HOPPING FREQUENCY USED

At least 75 hopping frequencies, and should be equally spaced.

4.2.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 17, 2002

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.


4.2.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP



4.2.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.





4.3 DWELL TIME ON EACH CHANNEL

4.3.1 LIMIT OF DWELL TIME USED

For FHSS, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period. For hybrid systems, the average time of occupancy on any frequency should not exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 17, 2002

NOTES:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 TEST RESULTS


CHANNEL	DWELL TIME
0	284.35ms
39	284.35ms
78	284.35ms

Note : This product is averagely hopped on 79 frequencies. The maximum hopping rate is 1600 hops/sec. The longest pulse duration is 468.00 μ sec.

So, the longest Dwell Time = $468.00 \mu \text{ sec} \times 1600 \div 79 \times 30 = 284.35 \text{ msec}$. which is smaller than 0.4sec.

Test plots of the transmitting time slot are shown on next three pages.

Channel 0

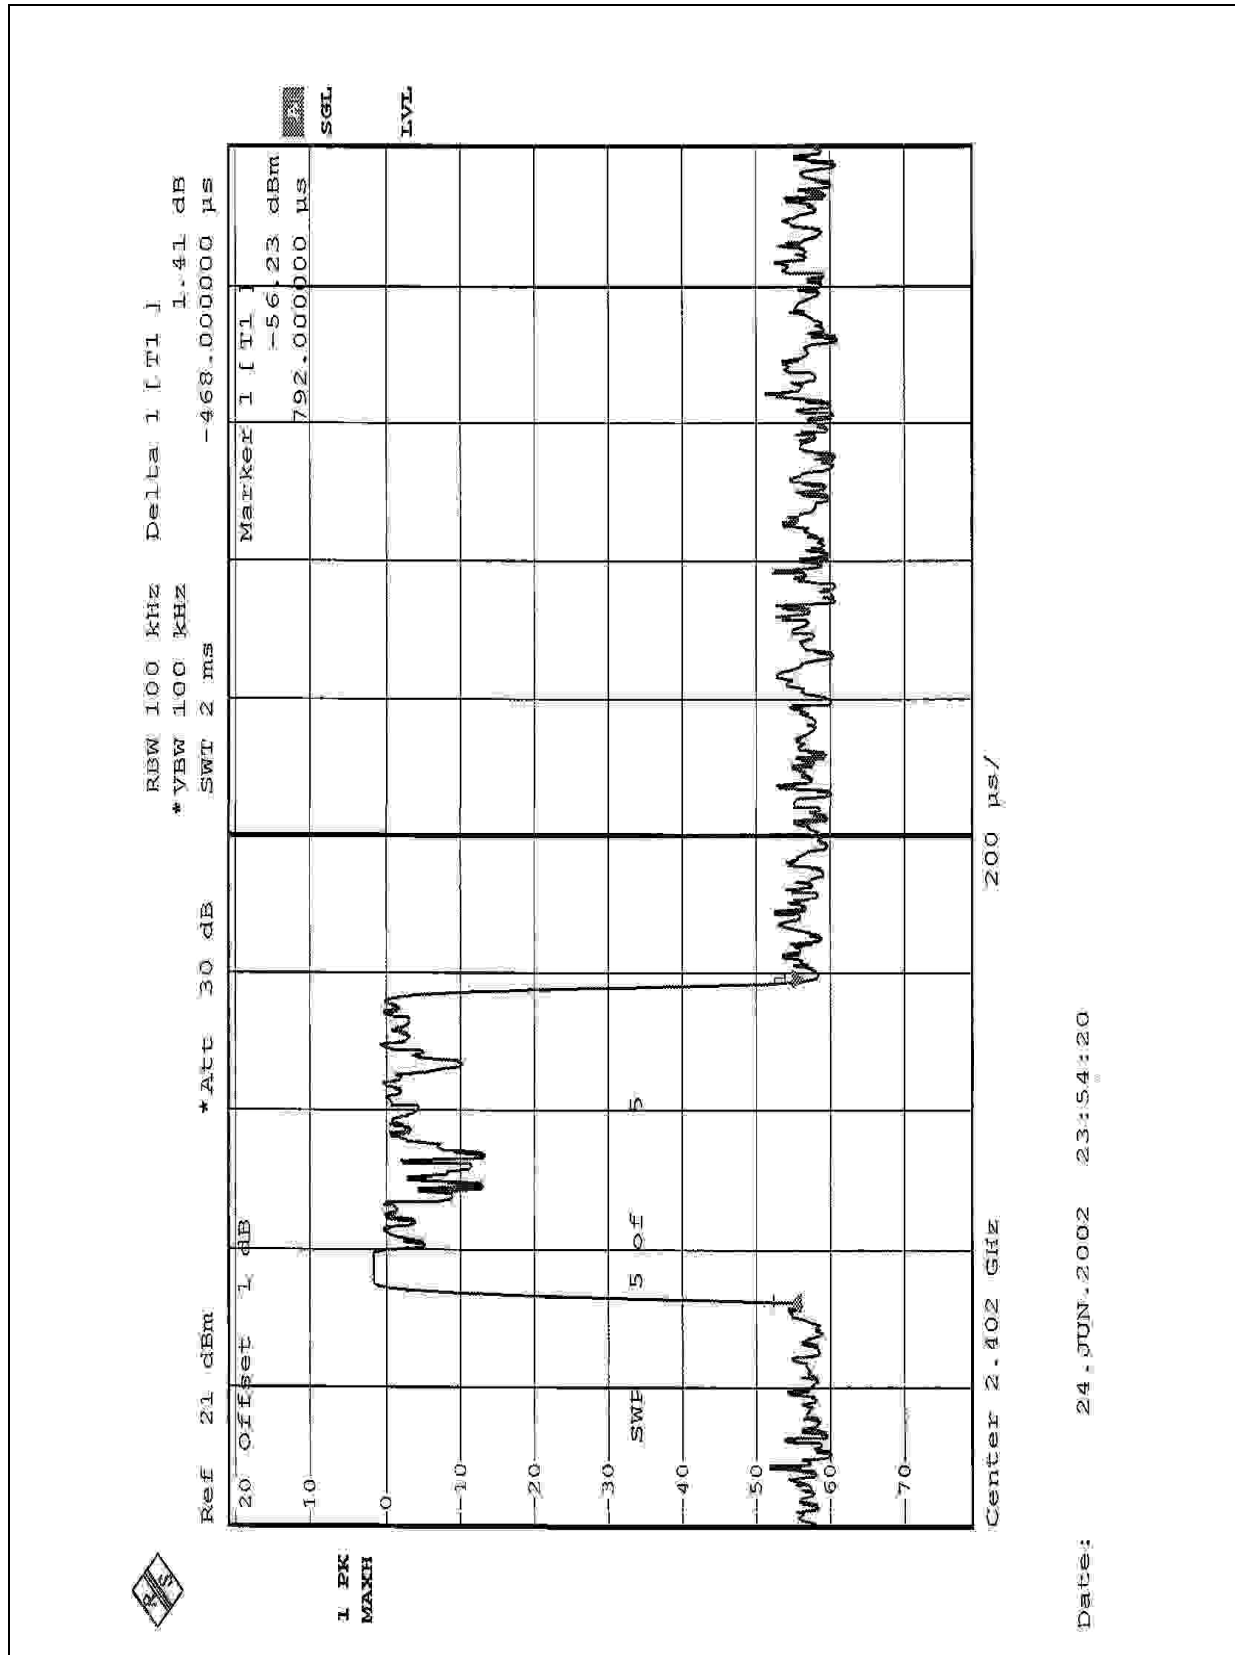

Channel 60

RBW 100 kHz Delta 1 [T1] -1.23 dB
 *VEW 100 kHz SWT 2 ms
 Ref 21 dBm *Att 30 dB
 20 Offset 1 dB

I PK MAXH

Center 2.439 GHz


SWP 5 OF 5

Power level for 100 kHz

200 us/

Date: 24. JUN. 2002 23:55:26

Channel 78

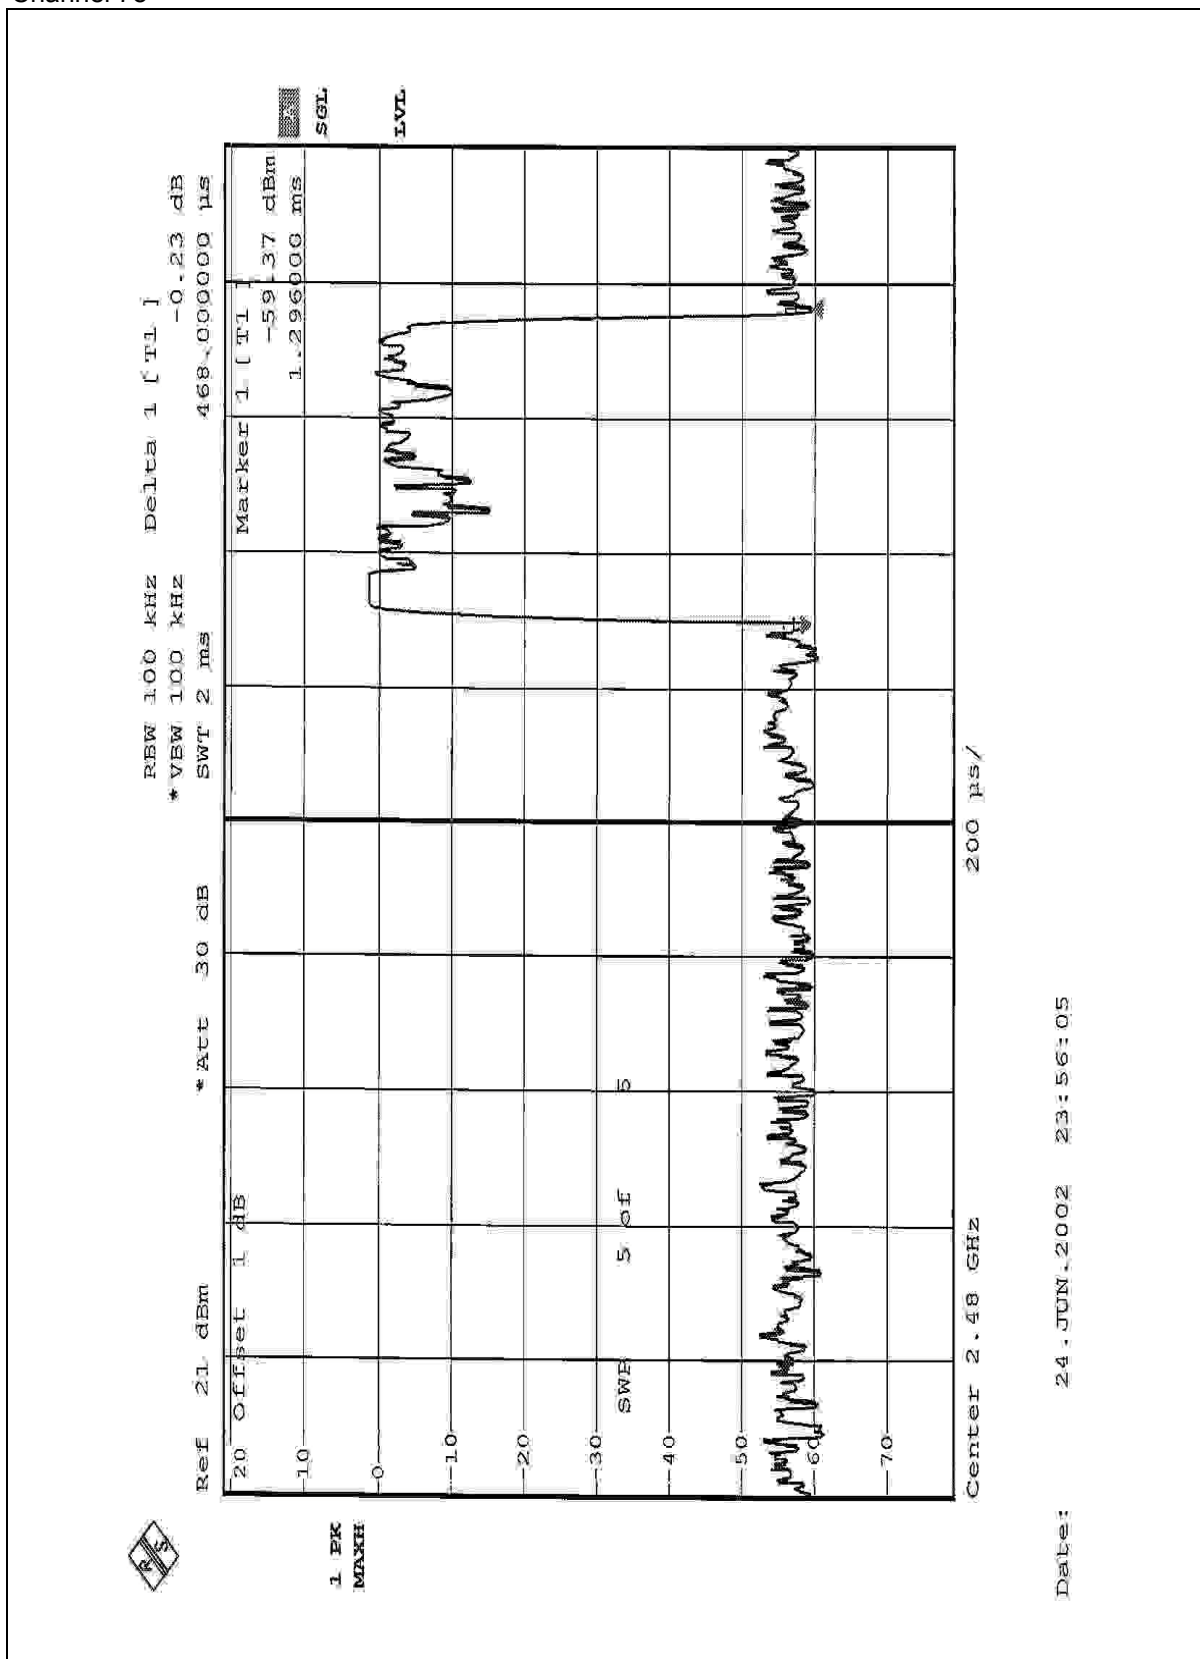

Date: 24 JUN 2002 23:56:05

4.4 CHANNEL BANDWIDTH

4.4.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5 MHz and 5725-5850 MHz bands, the maximum 20 dB bandwidth of the hopping channel is 1 MHz.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 17, 2002

NOTES:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP




4.4.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.


4.4.7 TEST RESULTS

CHANNEL	CHANNEL FREQUENCY (MHz)	20 dB BANDWIDTH (kHz)	MAXIMUM LIMIT (MHz)	PASS/FAIL
0	2402	864.00	1	PASS
39	2441	846.00	1	PASS
78	2480	864.00	1	PASS


Channel 0

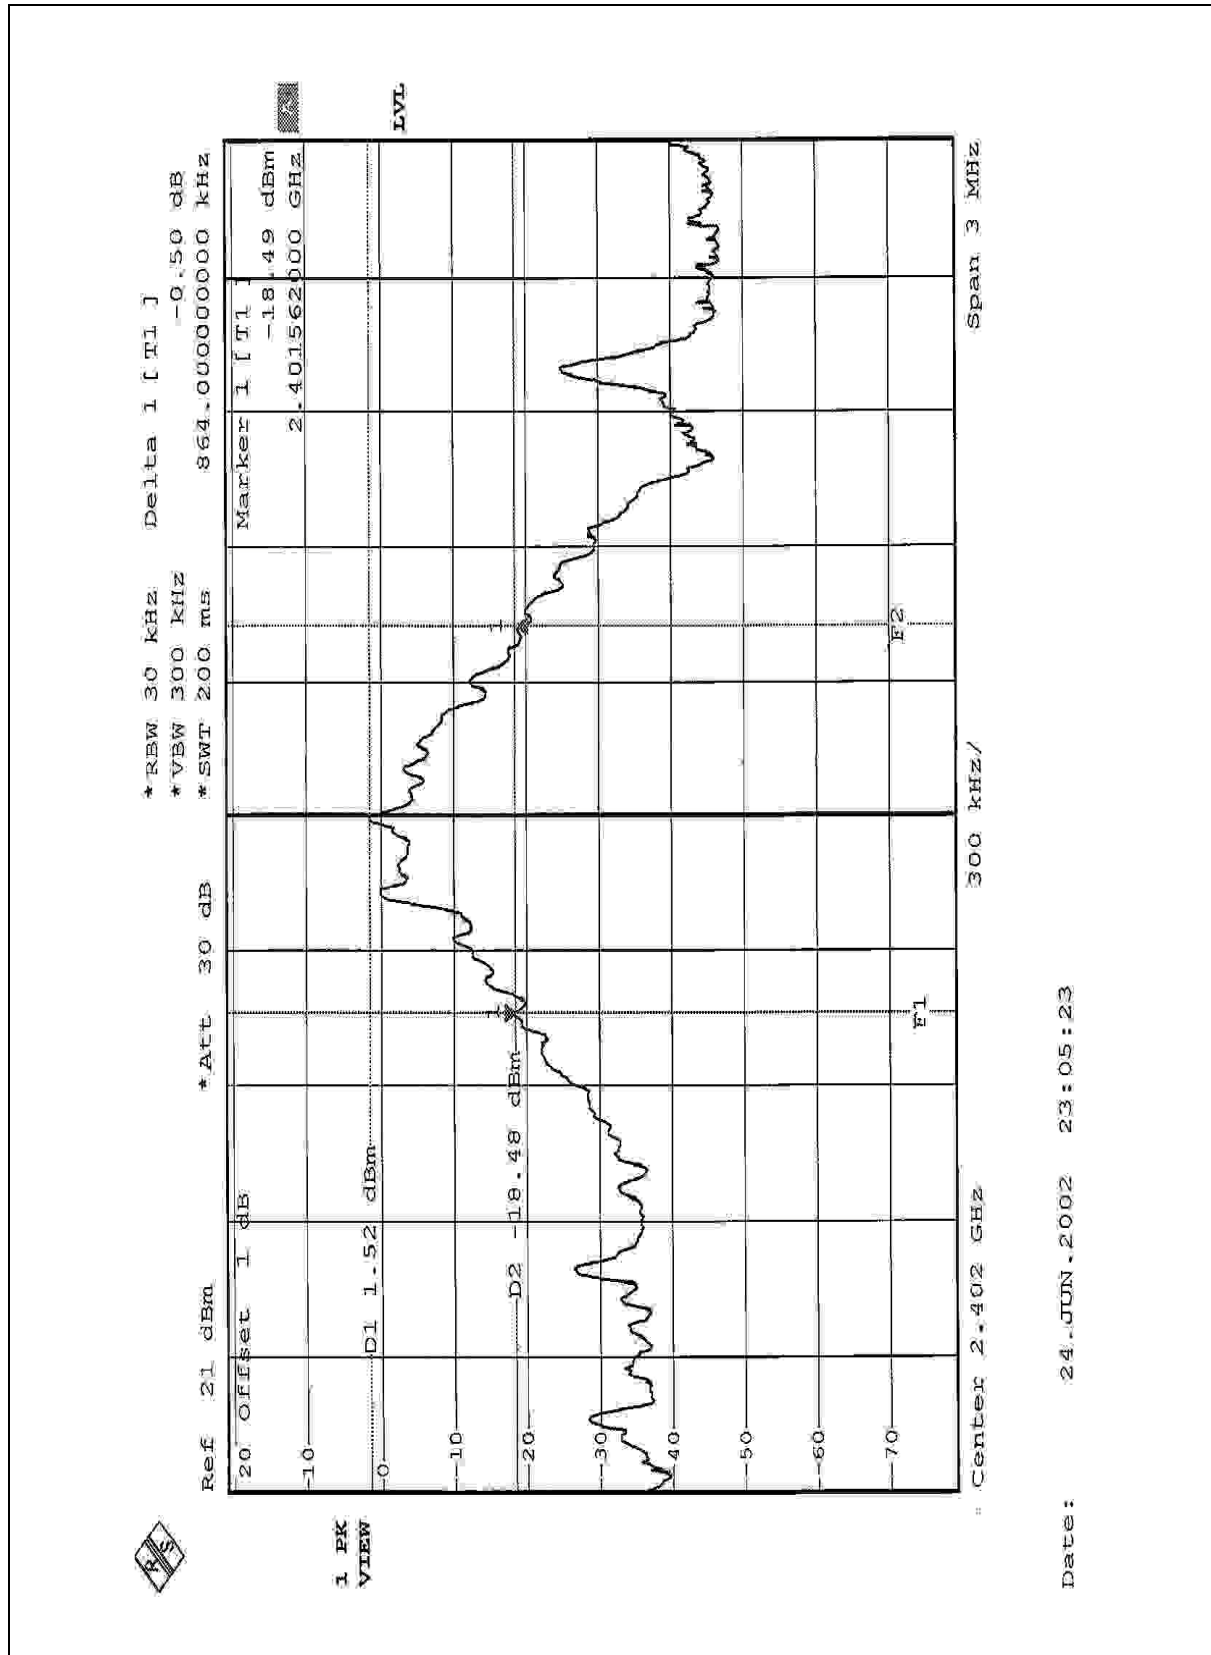

Channel 39

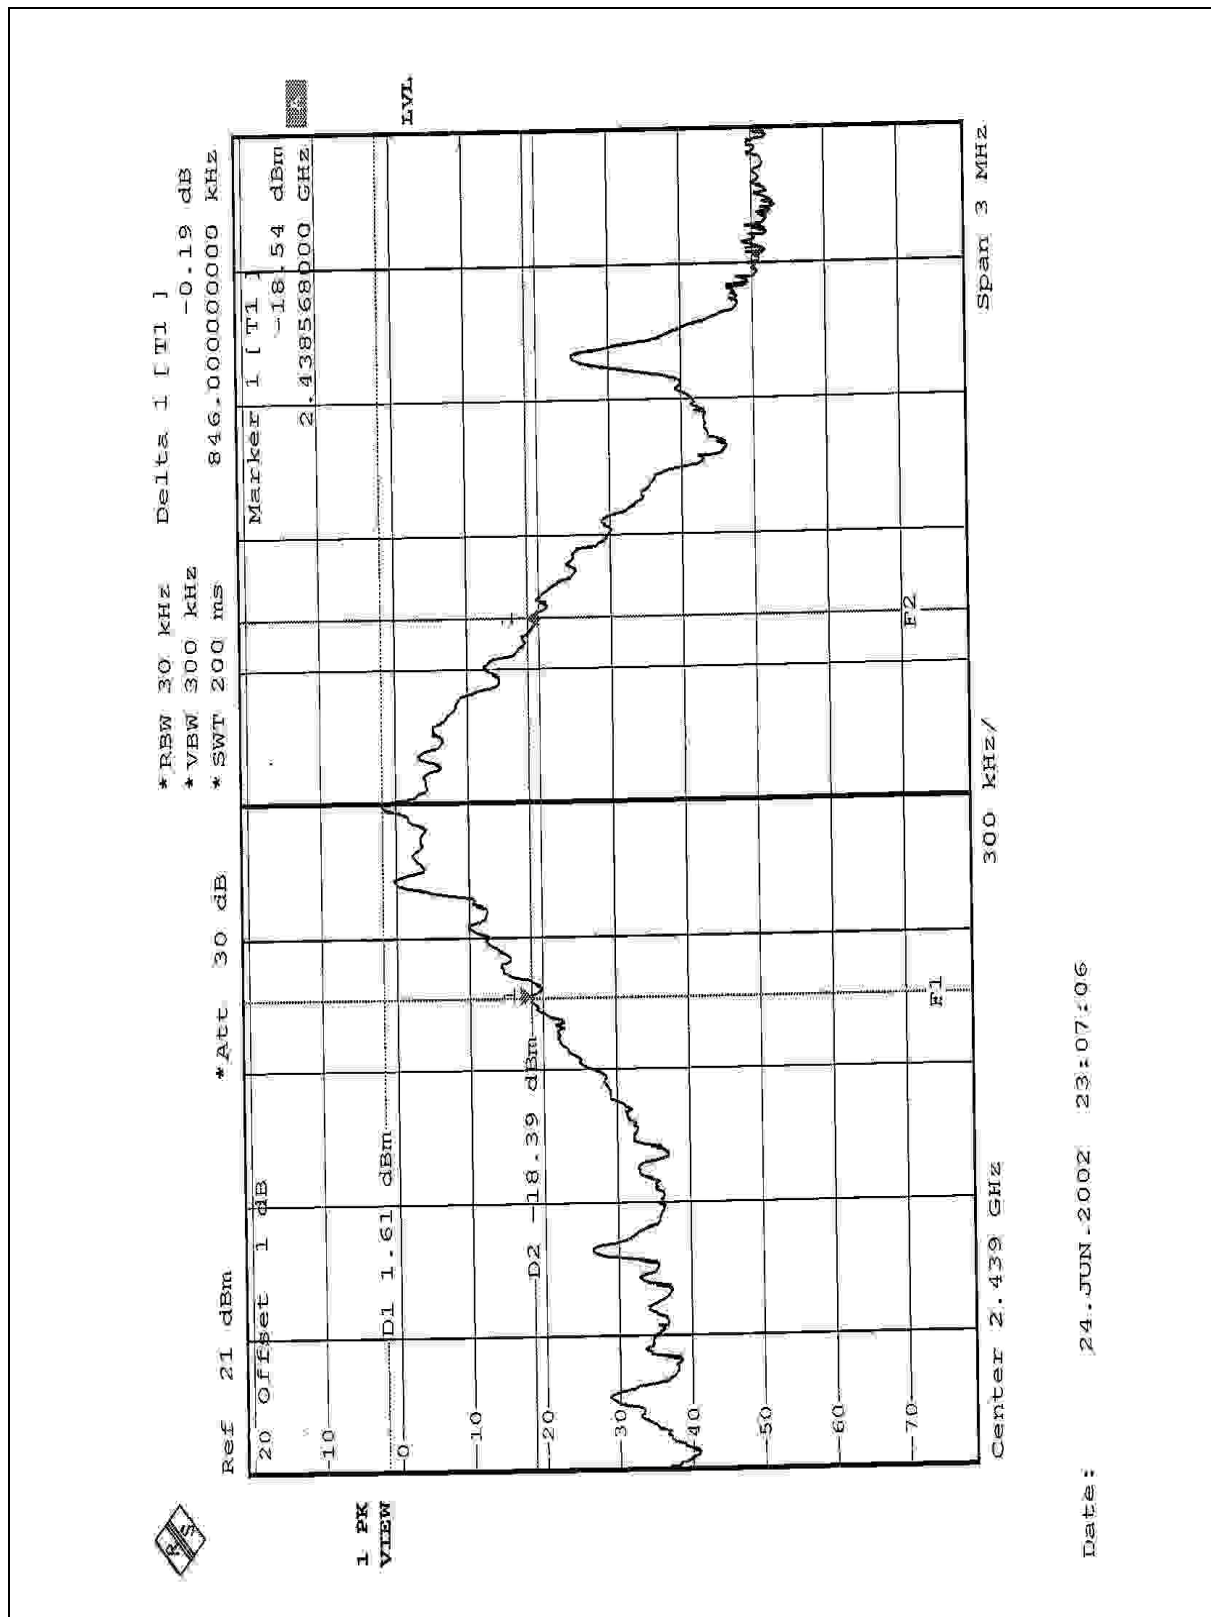

Channel 78

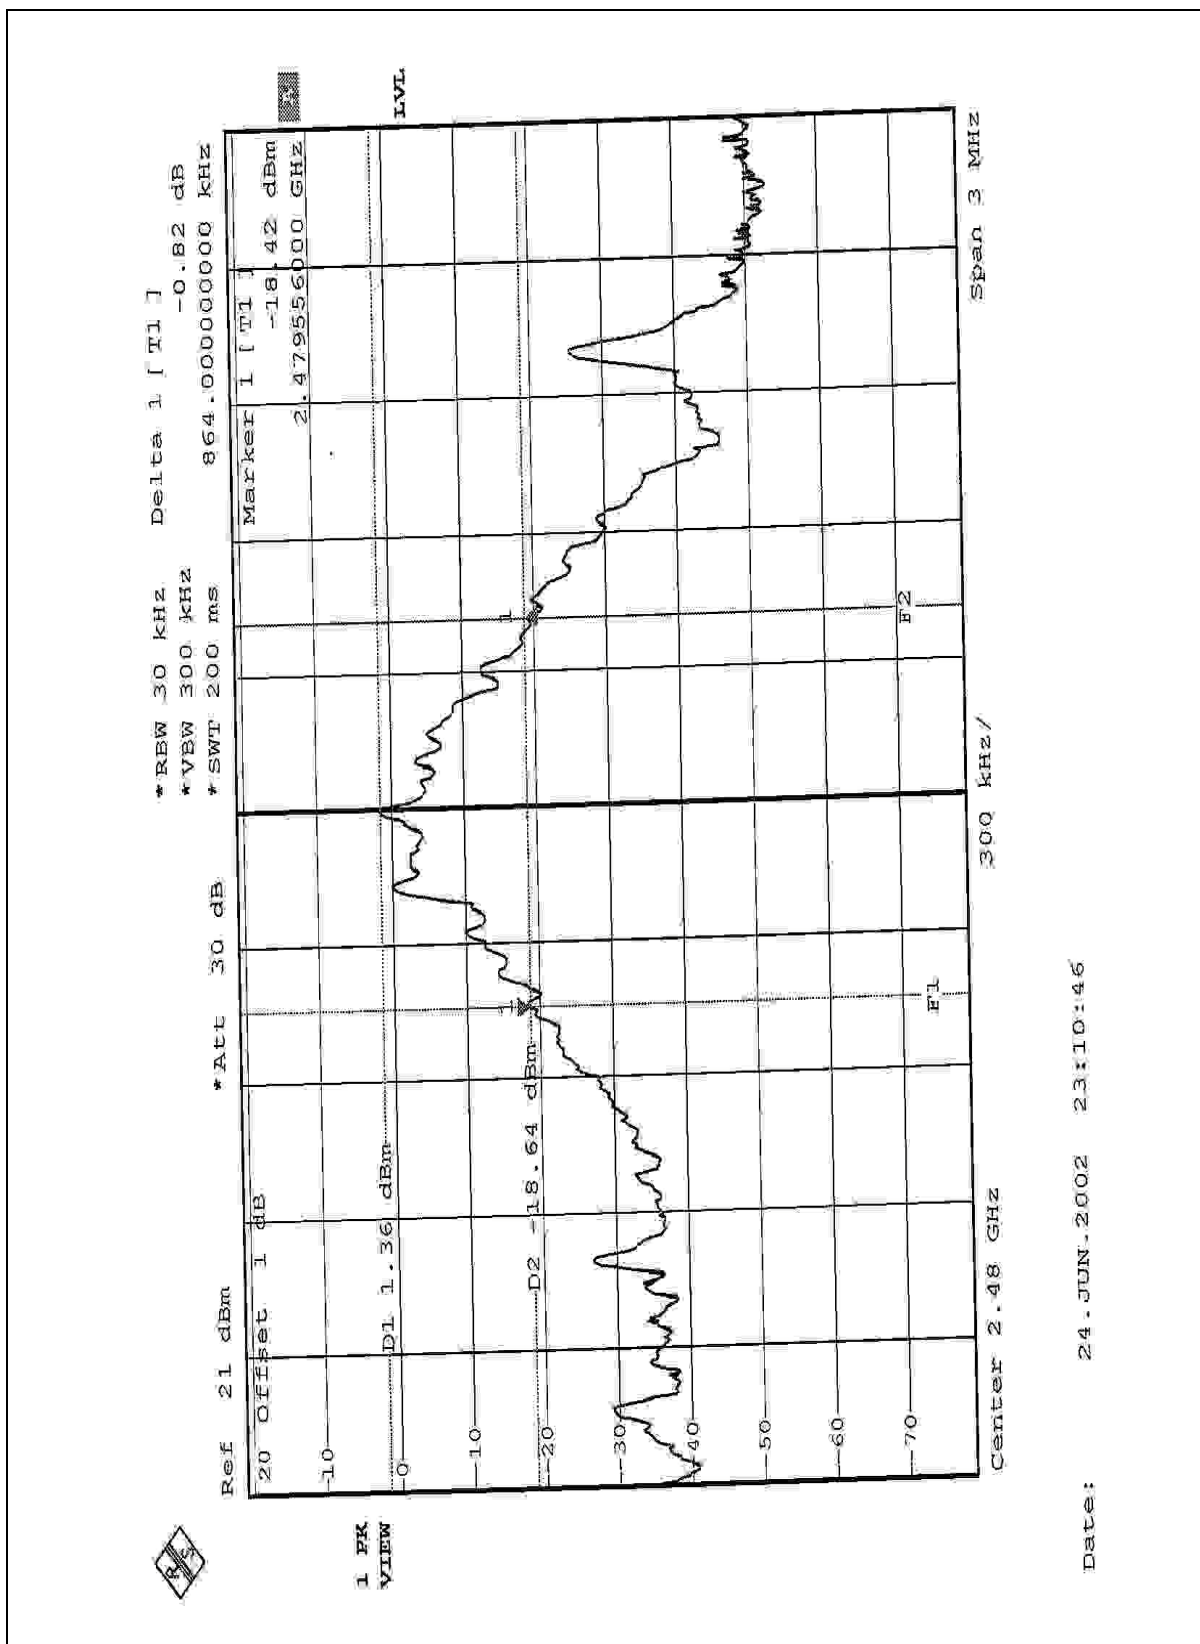

Date: 24 JUN 2002 23:10:46