

# TEST REPORT

of

## FCC Part 15 Subpart C

☒ New Application; ☐ Class I PC; ☐ Class II PC

**Product :** Display Unit  
**Brand:** Aulisa  
**Model:** GA-DU0003, GA-DU0003HDMI  
**Model Difference:** For market segmentation  
**FCC ID:** 2AI5QGA-DU0003  
**FCC Rule Part:** §15.247, Cat: DTS  
**Applicant:** Taiwan Aulisa Medical Devices Technologies Inc  
**Address:** 10F., No.3-2, YuanQu St., Nangang Dist., Taipei City, Taiwan 115

**Test Performed by:**  
**International Standards Laboratory**

<LT Lab.>

\*Site Registration No.

BSMI: SL2-IN-E-0013; MRA TW0997; TAF: 0997; IC: IC4067B-4;

\*Address:

No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.

Lung-Tan Hsiang, Tao Yuan County 325, Taiwan

\*Tel : 886-3-407-1718; Fax: 886-3-407-1738

Report No.: **ISL-18LR287FCDTS**

Issue Date : **2018/11/01**



Test results given in this report apply only to the specific sample(s) tested and are traceable to national or international standard through calibration of the equipment and evaluating measurement uncertainty herein.

This report MUST not be used to claim product endorsement by TAF, NVLAP or any agency of the Government.

This test report shall not be reproduced except in full, without the written approval of International Standards Laboratory.

## VERIFICATION OF COMPLIANCE

**Applicant:** Taiwan Aulisa Medical Devices Technologies Inc  
**Product Description:** Display Unit  
**Brand Name:** Aulisa  
**Model No.:** GA-DU0003, GA-DU0003HDMI  
**Model Difference:** For market segmentation  
**FCC ID:** 2AI5QGA-DU0003  
**Date of test:** 2018/09/13 ~ 2018/10/30  
**Date of EUT Received:** 2018/09/13

### We hereby certify that:

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent electromagnetic compatibility consultant, International Standards Laboratory.

The test results contained in this report accurately represent the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test. The sample equipment tested as described in this report is in compliance with the limits of above standards.

**Test By:**

*Barry Lee*

**Date:**

2018/11/01

*Barry Lee / Senior Engineer*

**Prepared By:**

*Gigi Yeh*

**Date:**

2018/11/01

*Gigi Yeh / Senior Engineer*

**Approved By:**

*Dino Chen*

**Date:**

2018/11/01

*Dino Chen / Senior Engineer*

## Version

Version No.	Date	Description
00	2018/11/01	Initial creation of document

## Uncertainty of Measurement

Description Of Test	Uncertainty
Conducted Emission (AC power line)	2.586 dB
Field Strength of Spurious Radiation	$\leq 30\text{MHz}$ : 2.96dB 30-1GHz: 4.22 dB 1-40 GHz: 4.08 dB
Conducted Power	2.412 GHz: 1.30 dB 5.805 GHz: 1.55 dB
Power Density	2.412 GHz: 1.30 dB 5.805 GHz: 1.67 dB
Frequency	0.0032%
Time	0.01%
DC Voltage	1%

## Table of Contents

<b>1</b>	<b>General Information .....</b>	<b>7</b>
1.1	Related Submittal(s) / Grant (s) .....	9
1.2	Test Methodology .....	9
1.3	Test Facility .....	9
1.4	Special Accessories .....	9
1.5	Equipment Modifications .....	9
<b>2</b>	<b>System Test Configuration .....</b>	<b>10</b>
2.1	EUT Configuration .....	10
2.2	EUT Exercise .....	10
2.3	Test Procedure .....	10
2.4	Configuration of Tested System .....	11
<b>3</b>	<b>Summary of Test Results .....</b>	<b>12</b>
<b>4</b>	<b>Description of Test Modes .....</b>	<b>12</b>
<b>5</b>	<b>Conducted Emission Test .....</b>	<b>13</b>
5.1	Standard Applicable: .....	13
5.2	Measurement Equipment Used: .....	13
5.3	EUT Setup: .....	13
5.4	Measurement Procedure: .....	14
5.5	Measurement Result: .....	14
<b>6</b>	<b>Peak Output Power .....</b>	<b>17</b>
6.1	Standard Applicable: .....	17
6.2	Measurement Equipment Used: .....	18
6.3	Test Set-up: .....	18
6.4	Measurement Procedure: .....	18
6.5	Measurement Result: .....	19
<b>7</b>	<b>6dB Bandwidth .....</b>	<b>21</b>
7.1	Standard Applicable: .....	21
7.2	Measurement Equipment Used: .....	21
7.3	Test Set-up: .....	21
7.4	Measurement Procedure: .....	21
7.5	Measurement Result: .....	22
<b>8</b>	<b>100kHz Bandwidth of Band Edges Measurement .....</b>	<b>32</b>
8.1	Standard Applicable: .....	32
8.2	Measurement Equipment Used: .....	32
8.3	Test SET-UP: .....	34
8.4	Measurement Procedure: .....	35
8.5	Field Strength Calculation: .....	35
8.6	Measurement Result: .....	35
<b>9</b>	<b>Spurious Radiated Emission Test .....</b>	<b>56</b>
9.1	Standard Applicable .....	56
9.2	Measurement Equipment Used: .....	56
9.3	Test SET-UP: .....	56
9.4	Measurement Procedure: .....	56
9.5	Field Strength Calculation .....	57
9.6	Measurement Result: .....	57
<b>10</b>	<b>Peak Power Spectral Density .....</b>	<b>88</b>
10.1	Standard Applicable: .....	88
10.2	Measurement Equipment Used: .....	88
10.3	Test Set-up: .....	88
10.4	Measurement Procedure: .....	88

10.5	Measurement Result: .....	89
<b>11</b>	<b>Antenna Requirement .....</b>	<b>98</b>
11.1	Standard Applicable: .....	98
11.2	Antenna Connected Construction: .....	98

## 1 General Information

General:

Product Name	Display Unit	
Brand Name	Aulisa	
Model Name	GA-DU0003, GA-DU0003HDMI	
Model Difference	For market segmentation	
Power Supply	12Vdc from AC/DC adapter	
	Adapter:	1. Model : MPU12A-102

Bluetooth:

Frequency Range:	2402 – 2480MHz	
Bluetooth Version:	V2.1 + EDR	V4.0
Channel number:	79 channels	40 channels, 2MHz step
Modulation type	GFSK $+\pi$ / 4DQPSK + 8DPSK	Wide band Modulation (GFSK)
Tune up power:	7.07 dBm Peak, +/- 1 dB	7.37 dBm (Peak), +/- 1 dB
Dwell Time:	$\leq 0.4s$	N/A
Antenna Designation:	Fixed Antenna Type: PIFA, 0.5Bi	

2.4GHz WLAN: 1TX/1RX SM-MIM; 5GHz WLAN: 1TX/1RX SM-MIMO

Wi-Fi	Frequency Range (MHz)	Channels	Peak / Average Rated Power	Modulation Technology	
802.11b	2412 – 2462(DTS)	11	22.75dBm (PK)	DSSS	
802.11g	2412 – 2462(DTS)	11	25.20dBm (PK)	OFDM	
802.11n (2.4G)	HT20 2412 – 2462(DTS)	11	25.01dBm (PK)		
	HT40 2422 – 2452(DTS)	7	25.12dBm (PK)		
802.11a	5150 – 5350(NII)	8	12.01dBm (AV)		
	5470 – 5725(NII)	8	11.63dBm (AV)		
	5725 – 5850(NII)	5	9.15dBm (AV)		
802.11n(5G)	HT20 5150 – 5350(NII)	8	11.69dBm (AV)		
	HT20 5470 – 5725(NII)	8	11.30dBm (AV)		
	HT20 5725 – 5850(NII)	5	8.95dBm (AV)		
	HT40 5150 – 5350(NII)	7	12.15dBm (AV)		
	HT40 5470 – 5725(NII)	6	12.09dBm (AV)		
	HT40 5725 – 5850(NII)	2	9.24dBm (AV)		
Modulation type		CCK, DQPSK, DBPSK for DSSS 256QAM.64QAM. 16QAM, QPSK, BPSK for OFDM			
Antenna Designation		Fixed PIFA Antenna WiFi 2.4G Antenna 1 : 0.5dBi WiFi 5G Antenna : 0.5 dBi  According to KDB662911 D01 SM-MIMO signals could be considered uncorrelated for purposes of directional gain computation. Directional gain = GANT			

The EUT is compliance with IEEE 802.11 a/b/g/n/ac Standard.

This report applies for 2.4GHz Wifi + BLE.

**Remark:** The above DUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.1 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AI5QGA-DU0003** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules

### 1.2 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at an antenna to EUT distance 3 meters.

KDB Document: 558074 D01 15.247 Meas Guidance v0.5

### 1.3 Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of International Standards Laboratory <LT Lab.> No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist., Tao Yuan City 325, Taiwan which are constructed and calibrated to meet the FCC requirements in documents . FCC Registration Number is: 487532; Designation Number is: TW0997, Canada Registration Number: 4067B-4.

### 1.4 Special Accessories

Not available for this EUT intended for grant.

### 1.5 Equipment Modifications

Not available for this EUT intended for grant.

## **2 System Test Configuration**

### **2.1 EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### **2.2 EUT Exercise**

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

### **2.3 Test Procedure**

#### **2.3.1 Conducted Emissions**


The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 6 of ANSI C63.10: 2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR 16-1-1 Quasi-Peak and Average detector mode.

#### **2.3.2 Radiated Emissions**

The EUT is placed on a turn table which is 0.8 m/1.5m (Frequency above 1GHz) above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 6 and 11 of ANSI C63.10: 2013.

## 2.4 Configuration of Tested System

**Fig. 2-1 Configuration of Tested System (Fixed channel)**

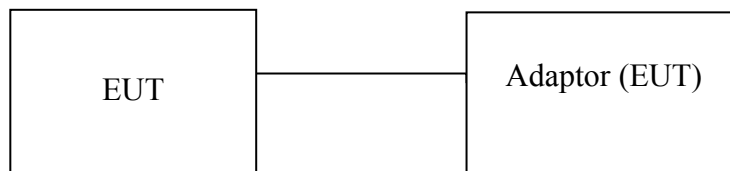

**Table 2-1 Equipment Used in Tested System**

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1	N/A					

### 3 Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b) (3),(4)	Peak Output Power/ EIRP	Compliant
§15.247(a)(2)	6dB Power Bandwidth	Compliant
§15.247(d)	100 kHz Bandwidth Of Frequency Band Edges	Compliant
§15.247(d)	Spurious Emission	Compliant
§15.247(e)	Peak Power Density	Compliant
§15.203	Antenna Requirement	Compliant

### 4 Description of Test Modes

The EUT has been tested under engineering operating condition.

Test program used to control the EUT for staying in continuous transmitting mode is programmed.

Wifi:

802.11 b mode: Channel low (2412MHz), mid (2437MHz), high (2462MHz) with 1Mbps lowest data rate are chosen for full testing.

802.11 g mode: Channel low (2412MHz), mid (2437MHz), high (2462MHz) with 6Mbps lowest data rate are chosen for full testing.

802.11 n \_20MHz: Channel low (2412MHz), mid (2437MHz), high (2462MHz) with 6.5Mbps lowest data rate are chosen for full testing.

802.11 n \_40MHz: Channel low (2422MHz), mid (2437MHz), high (2452MHz) with 13.5Mbps lowest data rate are chosen for full testing.

The product supports HT20 MIMO, and HT40 on support SISO.

BLE:

Channel low (2402MHz), mid (2442MHz) and high (2480MHz) with each modulation were chosen for full testing.

The worst case 802.11g MHz mode was reported for Radiated Emission.

## 5 Conducted Emission Test

### 5.1 Standard Applicable:

According to §15.207, frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range MHz	Limits dB(uV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Note		
1.The lower limit shall apply at the transition frequencies		
2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.		

### 5.2 Measurement Equipment Used:

Conducted Emission Test Site					
Equipment Type	MFR	Model Number	Serial Number	Last Cal.	Cal Due.
Conduction 04-3 Cable	WOKEN	CFD 300-NL	Conduction 04-3	09/11/2018	09/10/2019
EMI Receiver 16	Rohde & Schwarz	ESCI	101221	10/23/2018	10/22/2019
LISN 18	ROHDE & SCHWARZ	ENV216	101424	02/04/2018	02/03/2019
LISN 19	ROHDE & SCHWARZ	ENV216	101425	03/06/2018	03/05/2019
Test Software	Farad	EZEMC Ver:ISL-03A2	N/A	N/A	N/A

### 5.3 EUT Setup:

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10: 2014.
2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
3. The LISN was connected with 120Vac/60Hz power source.

#### **5.4 Measurement Procedure:**

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.


#### **5.5 Measurement Result:**

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Note: Refer to next page for measurement data and plots.

## AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	Normal Operation	Test Date:	2018/10/16
Test By:	Barry		

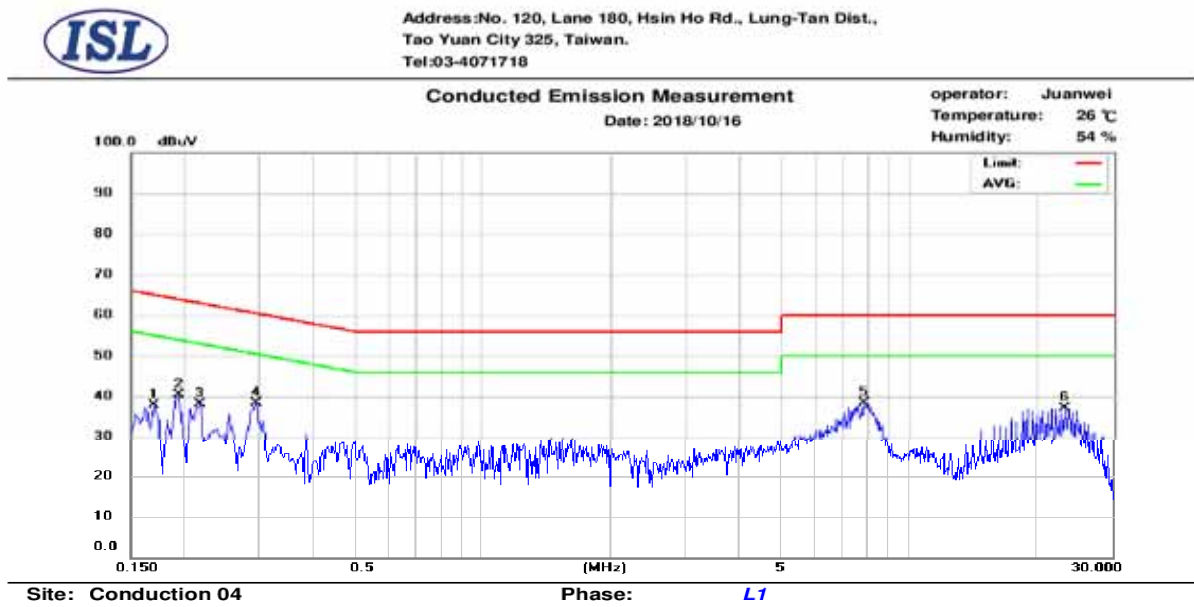

No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	0.170	31.22	13.07	9.70	40.92	64.96	-24.04	22.77	54.96	-32.19
2	0.194	27.01	9.64	9.69	36.70	63.86	-27.16	19.33	53.86	-34.53
3	0.218	24.14	9.92	9.69	33.83	62.89	-29.06	19.61	52.89	-33.28
4	0.294	27.71	18.82	9.70	37.41	60.41	-23.00	28.52	50.41	-21.89
5	7.830	24.69	17.67	9.90	34.59	60.00	-25.41	27.57	50.00	-22.43
6	23.066	25.08	19.10	10.13	35.21	60.00	-24.79	29.23	50.00	-20.77



Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,  
Tao Yuan City 325, Taiwan.  
Tel: 03-4071718


### Conducted Emission Measurement

Date: 2018/10/16

operator: Juanwei

Temperature: 26 °C

Humidity: 54 %

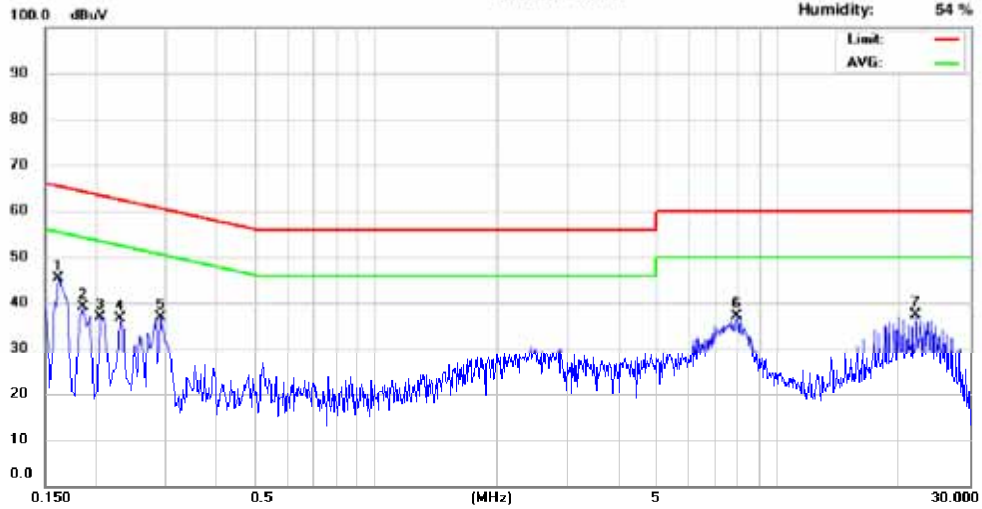

Site: Conduction 04

Phase: N

No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	0.162	32.31	13.71	9.70	42.01	65.36	-23.35	23.41	55.36	-31.95
2	0.186	28.15	11.05	9.69	37.84	64.20	-26.36	20.74	54.20	-33.46
3	0.206	24.85	9.67	9.69	34.54	63.37	-28.83	19.36	53.37	-34.01
4	0.230	22.56	10.80	9.69	32.25	62.45	-30.20	20.49	52.45	-31.96
5	0.290	26.62	18.49	9.70	36.32	60.52	-24.20	28.19	50.52	-22.33
6	7.854	24.49	17.46	9.91	34.40	60.00	-25.60	27.37	50.00	-22.63
7	22.010	23.40	16.64	10.22	33.62	60.00	-26.38	26.86	50.00	-23.14



## 6 Peak Output Power

### 6.1 Standard Applicable:

According to §15.247(b)(3),(4)(b)

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:


(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

## 6.2 Measurement Equipment Used:

Conducted Emission Test Site					
Equipment Type	MFR	Model Number	Serial Number	Last Cal.	Cal Due.
Power Meter 05	Anritsu	ML2495A	1116010	09/07/2018	09/06/2019
Power Sensor 05	Anritsu	MA2411B	34NKF50	09/07/2018	09/06/2019
Power Sensor 06	DARE	RPR3006W	13I00030SN O33	12/12/2017	12/11/2018
Power Sensor 07	DARE	RPR3006W	13I00030SN O34	12/12/2017	12/11/2018
Temperature Chamber	KSON	THS-B4H100	2287	12/02/2017	12/01/2018
DC Power supply	ABM	8185D	N/A	11/06/2017	11/05/2018
AC Power supply	EXTECH	CFC105W	NA	12/25/2017	12/24/2018
Attenuator	Woken	Watt-65m3502	11051601	NA	NA
Splitter	MCLI	PS4-199	12465	12/26/2017	12/25/2019
Spectrum analyzer	keysight	N9010A	MY56070257	07/07/2018	07/06/2019
Spectrum analyzer	R&S	FSP40	100143	11/02/2017	11/01/2018
Test Software	DARE	Radimation Ver:2013.1.23	NA	NA	NA

## 6.3 Test Set-up:

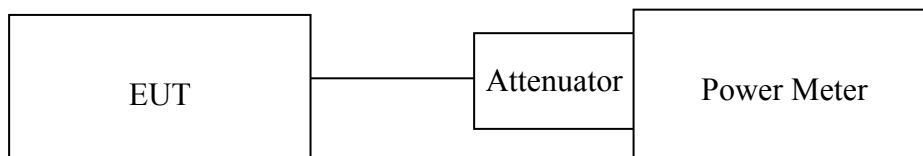

## 6.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter
3. Record the max. reading.
4. Repeat above procedures until all frequency measured were complete.

## 6.5 Measurement Result:

### 802.11b

Cable loss = 0	Output Power		Limit (dBm)
CH	Detector		
	PK (dBm)	AV (dBm)	
Low	21.46	18.47	30.00
Mid	22.54	19.61	
High	22.75	19.85	

### 802.11g

Cable loss = 0	Output Power		Limit (dBm)
CH	Detector		
	PK (dBm)	AV (dBm)	
Low	24.22	15.32	30.00
Mid	25.14	18.20	
High	25.20	18.65	

### 802.11N HT20

Cable loss = 0	Output Power		Limit (dBm)
CH	Detector		
	PK (dBm)	AV (dBm)	
Low	24.19	15.41	30.00
Mid	24.98	18.04	
High	25.01	18.49	

### 802.11N HT40

Cable loss = 0	Output Power		Limit (dBm)
CH	Detector		
	PK (dBm)	AV (dBm)	
Low	25.01	16.79	30.00
Mid	25.08	17.44	
High	25.12	17.89	

**LE Mode 4.0**

Frequency (MHz)	Peak Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
Low	6.72	0.00	6.72	0.00470	1
Mid	7.16	0.00	7.16	0.00520	1
High	7.37	0.00	7.37	0.00546	1

Offset: 0.5dB

## 7 6dB Bandwidth


### 7.1 Standard Applicable:

According to §15.247(a)(2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

### 7.2 Measurement Equipment Used:

Refer to section 6.2 for details.

### 7.3 Test Set-up:

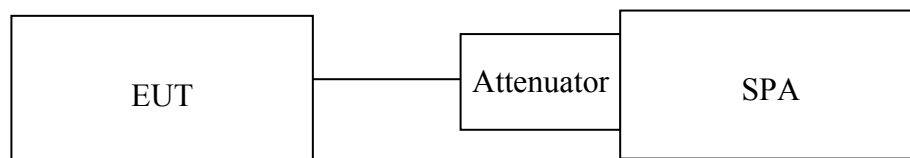

### 7.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=100kHz, VBW = 3\*RBW, Span= cover the complete power envelope of the signal of the UUT Sweep=auto
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat above procedures until all frequency measured were complete.

## 7.5 Measurement Result:

### 802.11b

Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	10.10	> 500	PASS
Mid	9.60	> 500	PASS
High	10.09	> 500	PASS

### 802.11g

Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	15.17	> 500	PASS
Mid	16.37	> 500	PASS
High	16.36	> 500	PASS

### 802.11n HT20

Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	17.62	> 500	PASS
Mid	15.16	> 500	PASS
High	15.16	> 500	PASS

### 802.11n HT40

Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	36.01	> 500	PASS
Mid	35.35	> 500	PASS
High	36.08	> 500	PASS


BLE

Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	0.70	> 500	PASS
Mid	0.71	> 500	PASS
High	0.71	> 500	PASS


Note: Refer to next page for plots.

802.11b

## 6dB Band Width Test Data CH-Low

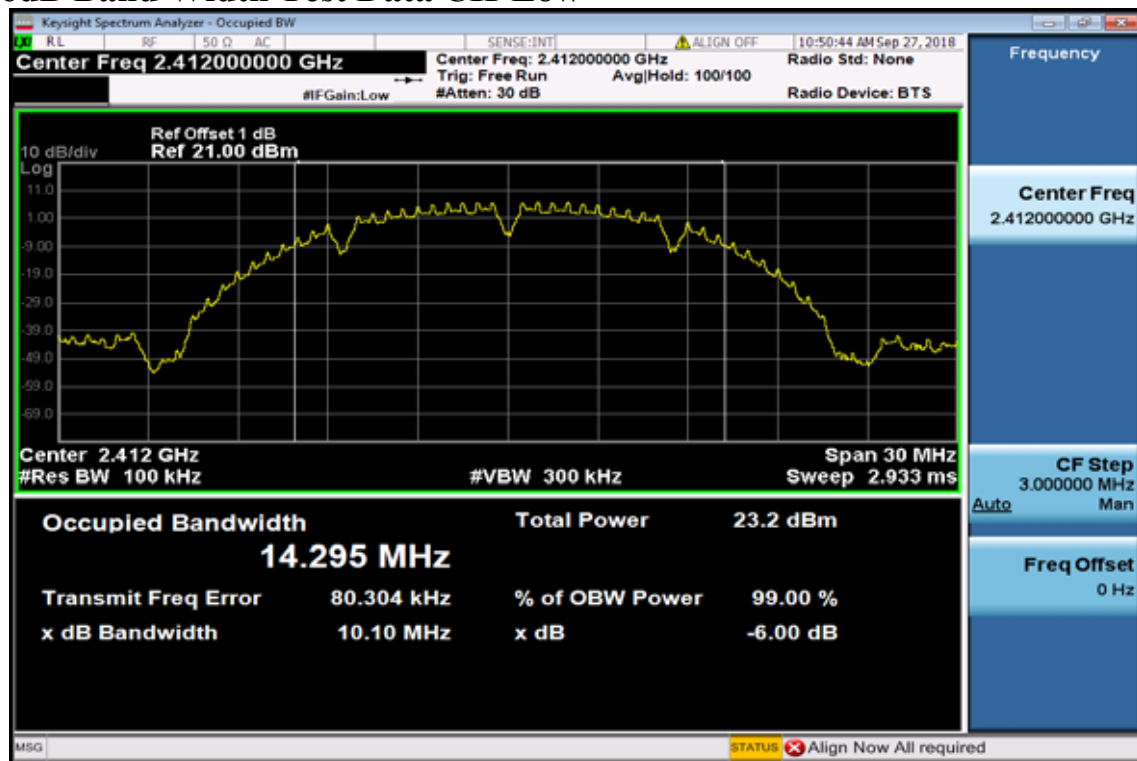


## 6dB Band Width Test Data CH-Mid

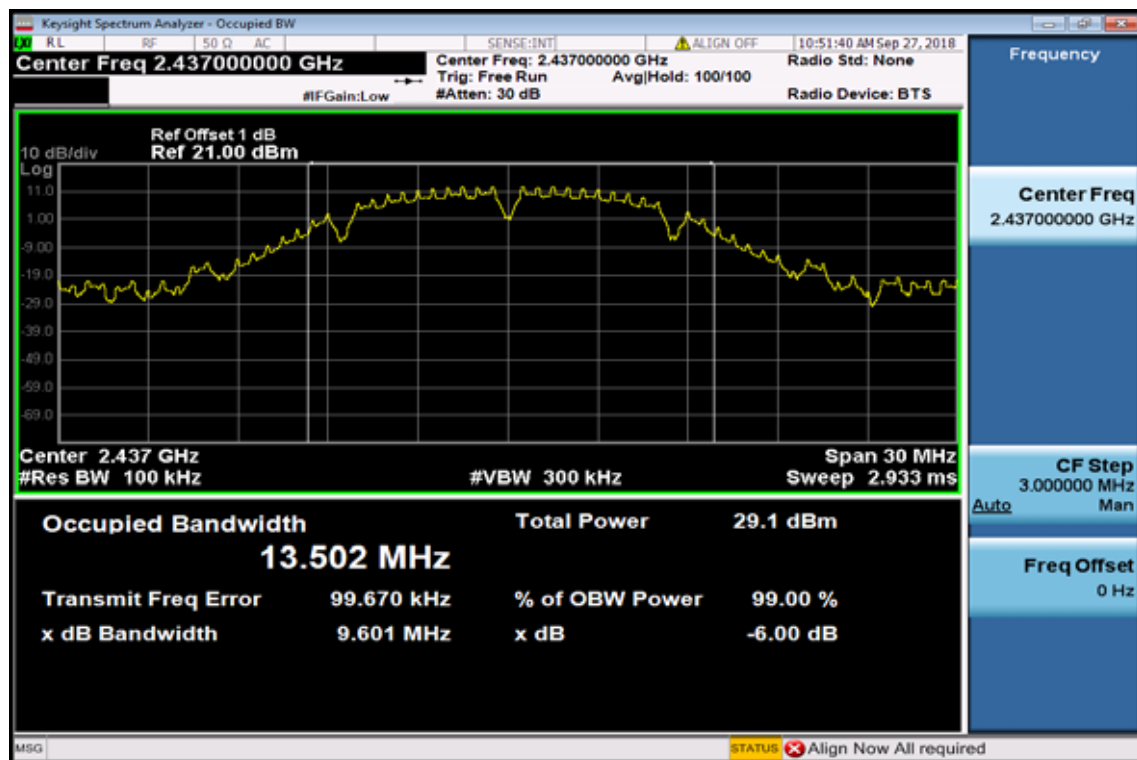




## 6dB Band Width Test Data CH-High

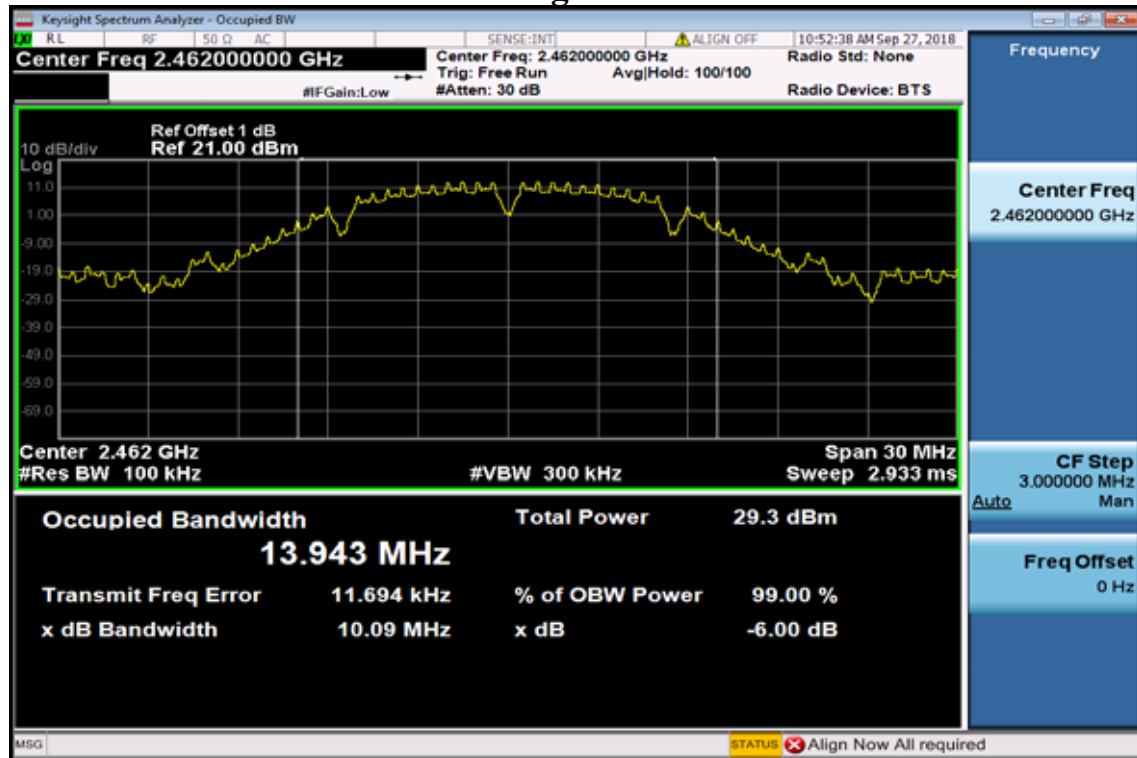


802.11g


## 6dB Band Width Test Data CH-Low

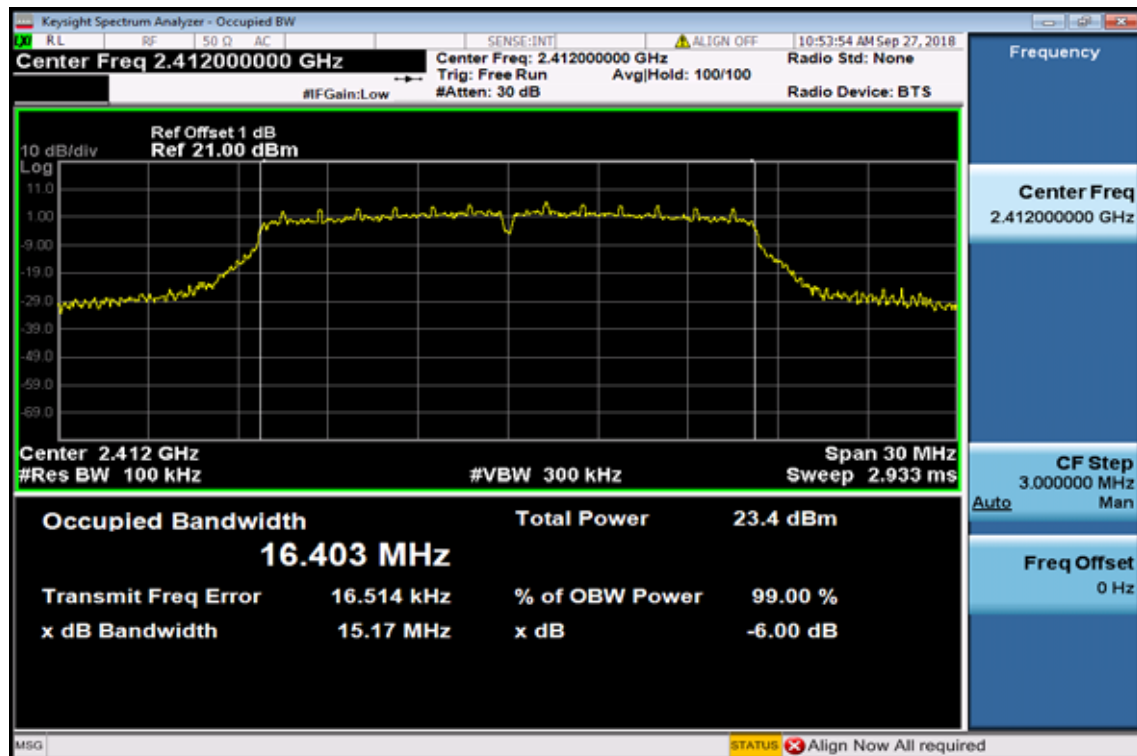

## 6dB Band Width Test Data CH-Mid

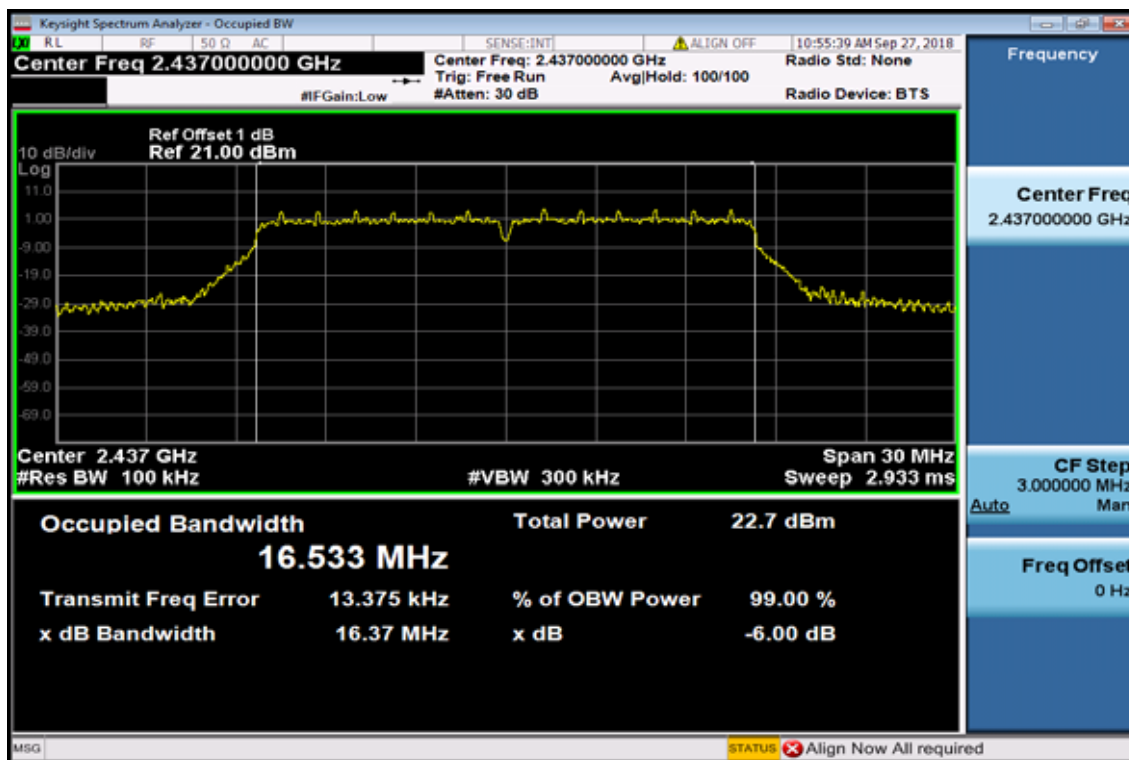


## 6dB Band Width Test Data CH-High

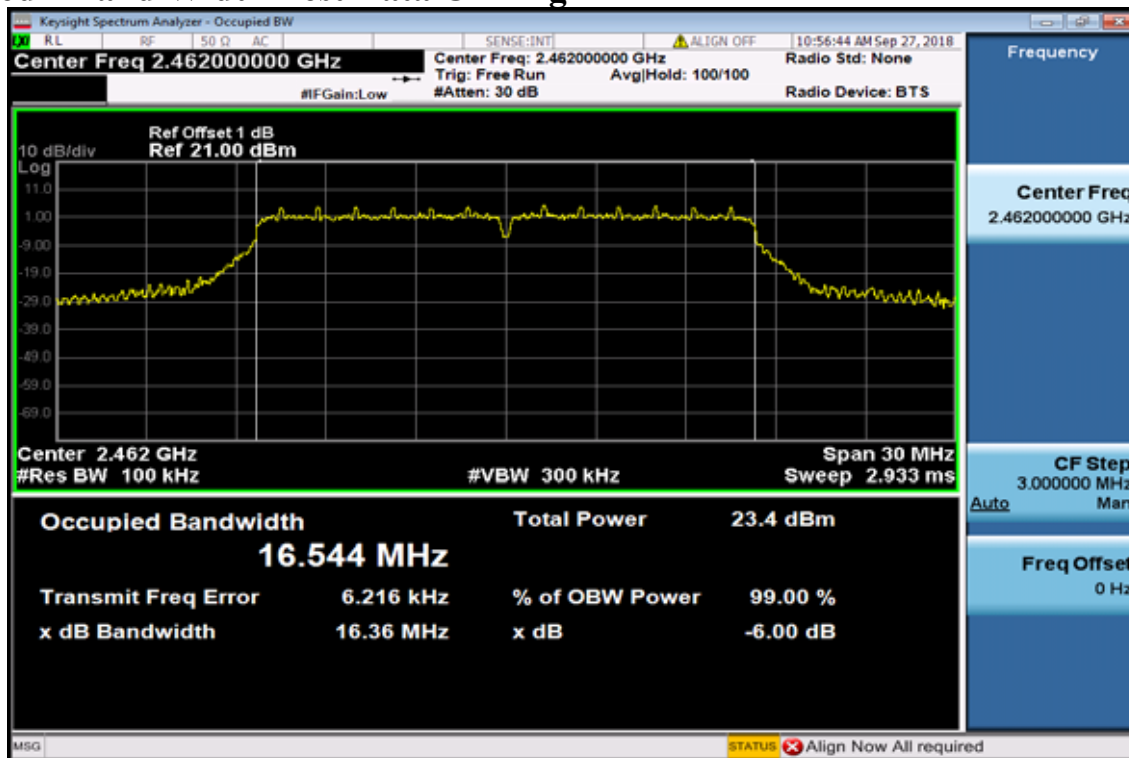


## 802.11n\_20M


### 6dB Band Width Test Data CH-Low

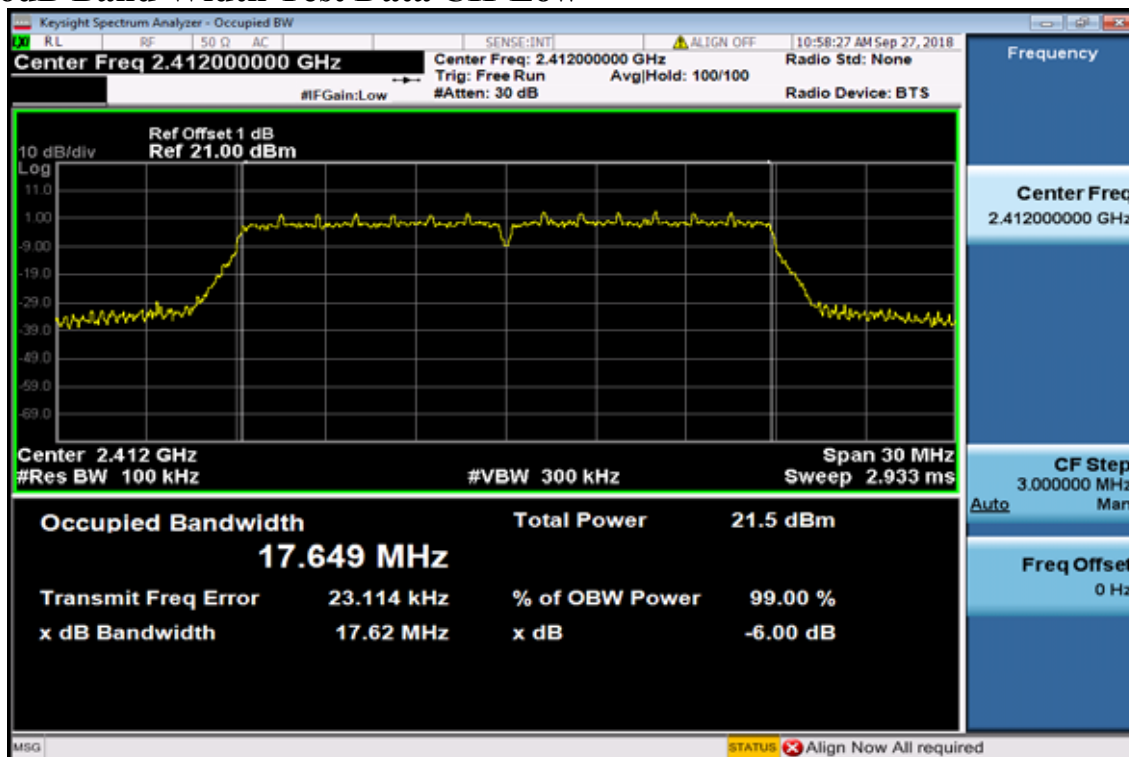

### 6dB Band Width Test Data CH-Mid

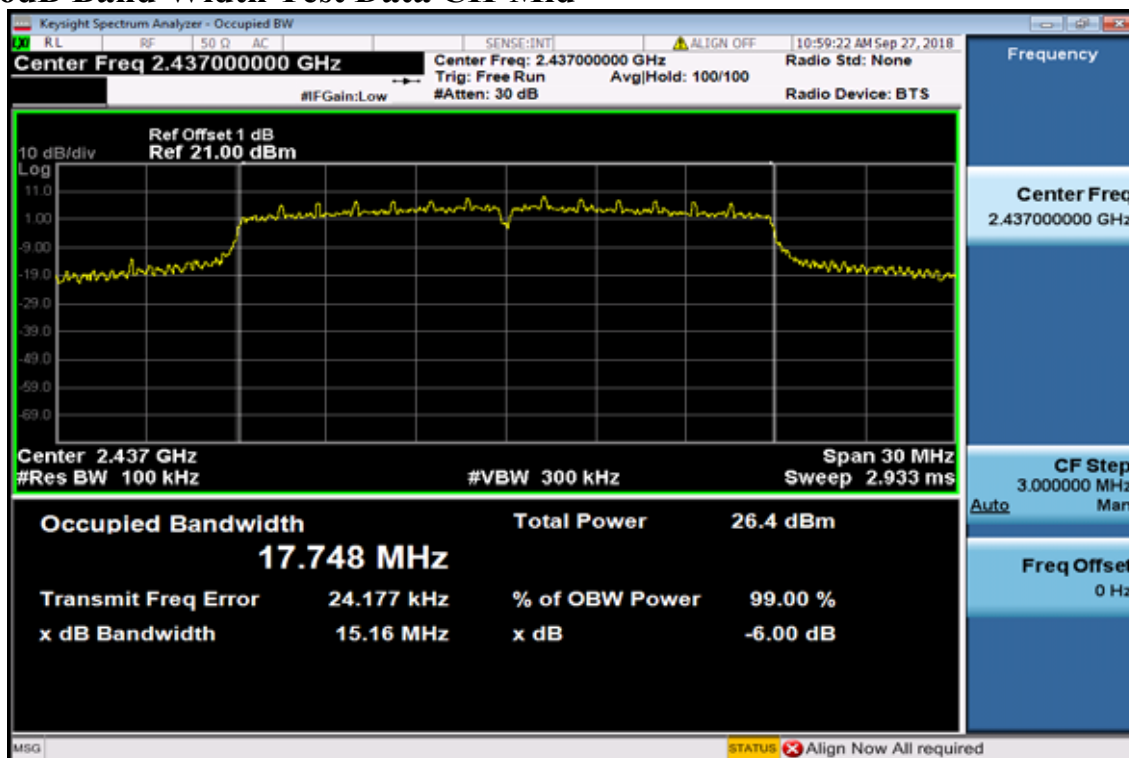


## 6dB Band Width Test Data CH-High

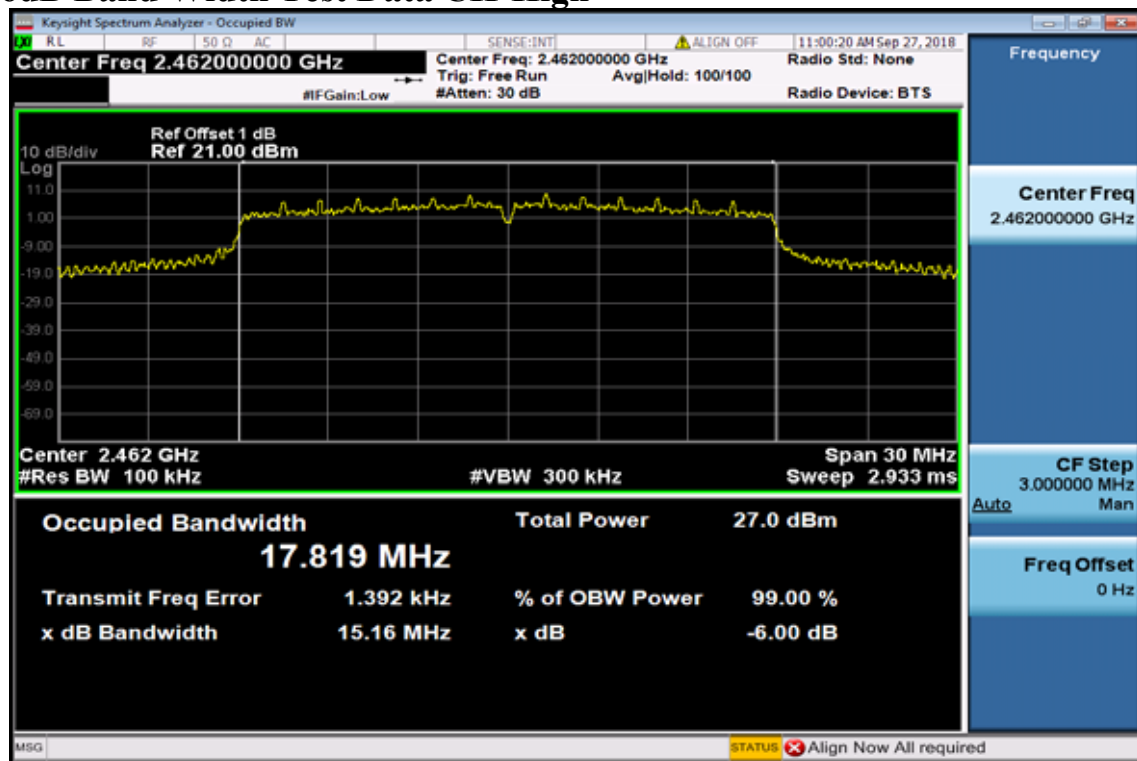


## 802.11n\_40M


## 6dB Band Width Test Data CH-Low

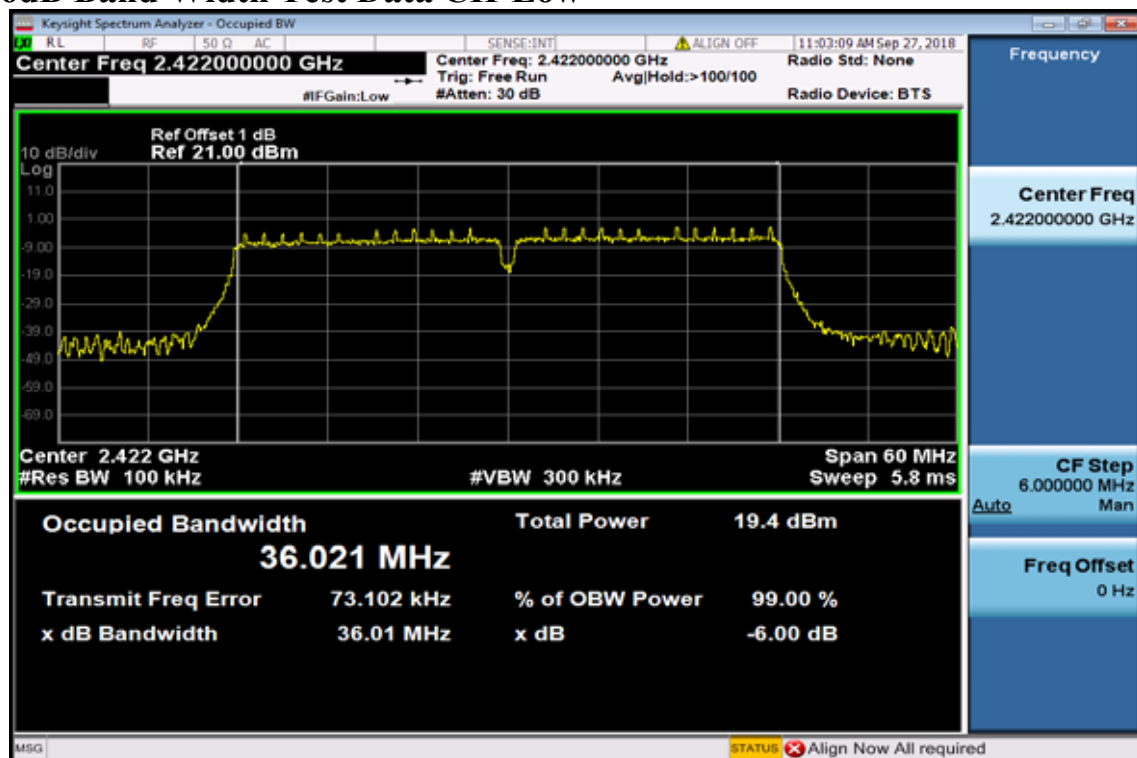

## 6dB Band Width Test Data CH-Mid

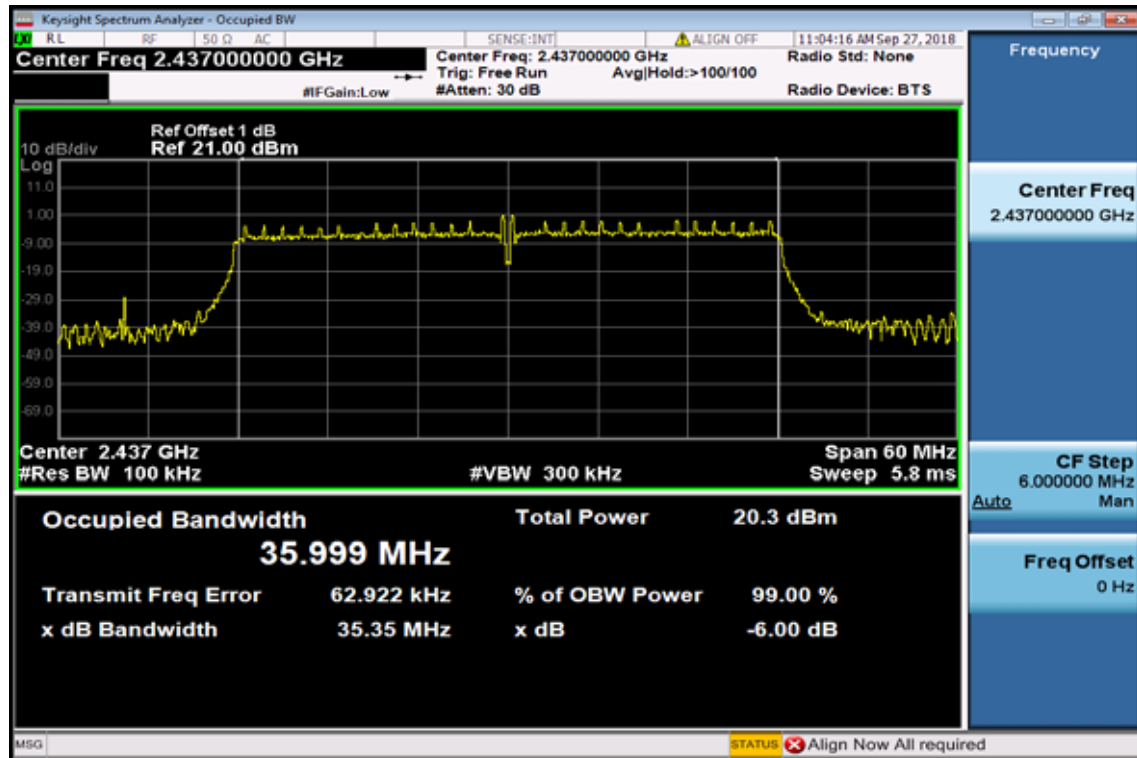


## 6dB Band Width Test Data CH-High

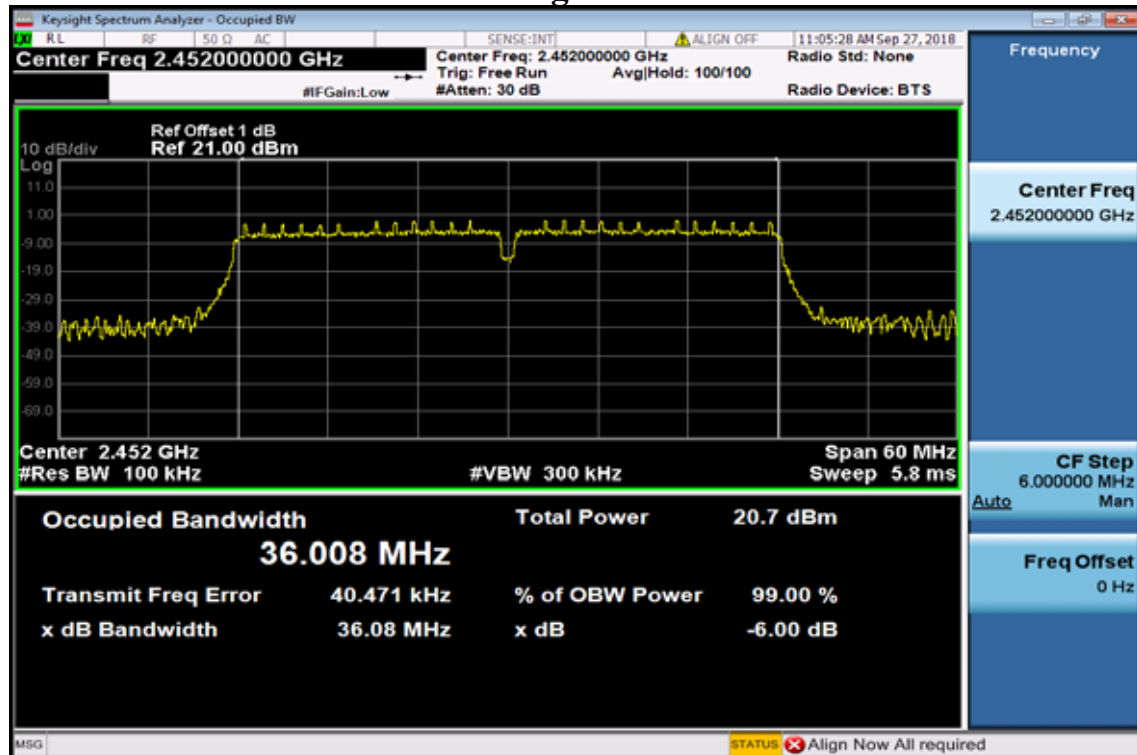




## BT BLE


### 6dB Band Width Test Data CH-Low

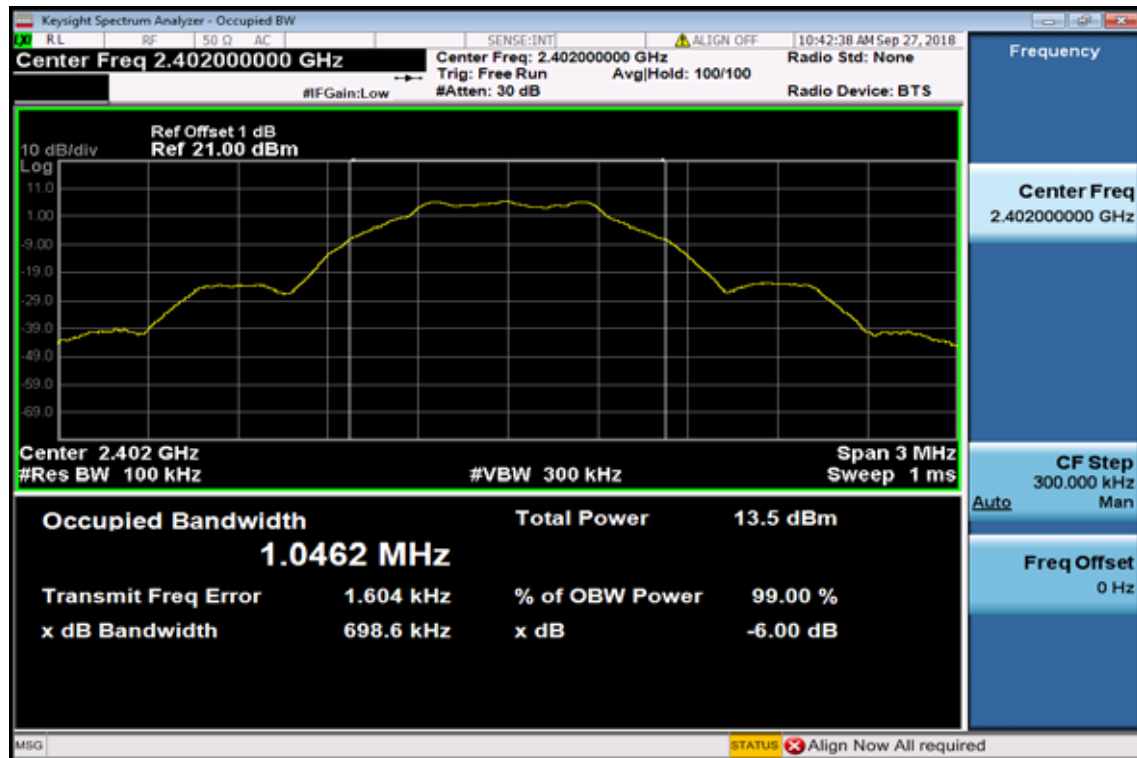

### 6dB Band Width Test Data CH-Mid

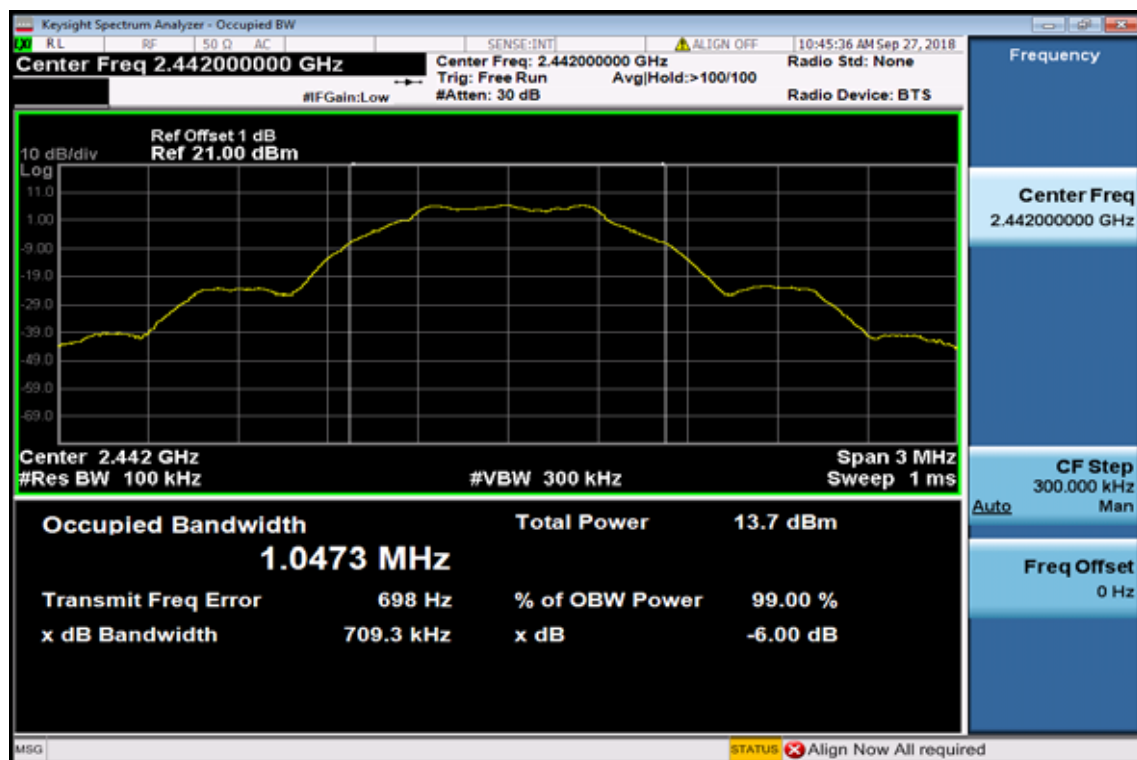

## 6dB Band Width Test Data CH-High

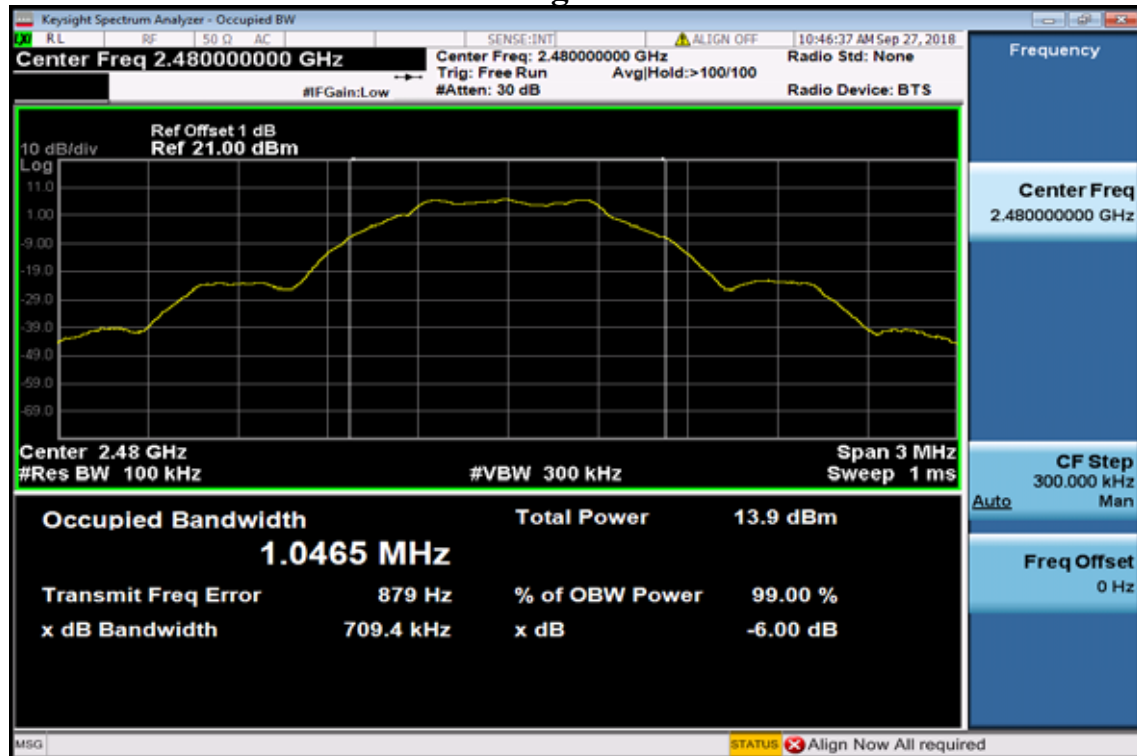

## **8 100kHz Bandwidth of Band Edges Measurement**

### **8.1 Standard Applicable:**

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### **8.2 Measurement Equipment Used:**

#### **8.2.1. Conducted Emission at antenna port:**

Refer to section 6.2 for details.




## 8.2.2. Radiated emission:

Chamber 19(966)					
Equipment Type	MFR	Model Number	Serial Number	Last Cal.	Cal Due.
966 Chamber	Chance Most	Chamber 19	N/A	08/13/2018	08/12/2019
Spectrum Analyzer 21(3Hz-44GHz)	Agilent	N9030A	MY51360021	11/20/2017	11/19/2018
EMI Receiver	SCHWARZBECK	FCVU1534	1534149	12/07/2017	12/06/2018
Loop Antenna(9K-30M)	EM	EM-6879	271	06/06/2018	06/05/2020
Bilog Antenna (30M-1G)	SCHWARZBECK	VULB9168 w 5dB Att	736	11/16/2017	11/25/2018
Horn antenna (1G-18G)	SCHWARZBECK	9120D	9120D-1627	11/27/2017	11/26/2019
Horn antenna (18G-26G)	Com-power	AH-826	081001	11/21/2017	11/20/2019
Horn antenna (26G-40G)	Com-power	AH-640	100A	02/22/2017	02/21/2019
Preamplifier (9k-1000M)	HP	8447F	3113A04621	12/08/2017	12/07/2018
Preamplifier(1G-26G)	Agilent	8449B	3008A02471	08/23/2018	08/22/2019
Preamplifier (26G-40G)	MITEQ	JS4-26004000- 27-5A	818471	11/20/2017	07/21/2019
RF Cable (9k-18G)	HUBER SUHNER	SUCOFLEX 104A	MY1397/4A	11/02/2017	11/01/2018
RF cable (18G~40G)	HUBER SUHNER	Sucoflex 102	27963/2&37421/2	11/02/2017	11/01/2018
Turn Table	MF	Turn Table-19	Turn Table-19	N/A	N/A
Mast Tower	MF	JSDES-15A	1308283	N/A	N/A
Controller	MF	MF-7802BS	MF780208460	N/A	N/A
AC power source	T-Power	TFC-1005	40006471	N/A	N/A
Signal Generator	R&S	SMU200A	102330	03/14/2018	03/13/2019
Signal Generator	Anritsu	MG3692A	20311	12/07/2017	12/06/2018
2.4G Filter	Micro-Tronics	Brm50702	76	12/25/2017	12/24/2018
Test Software	Audix	E3 Ver:6.12023	N/A	N/A	N/A


### 8.3 Test SET-UP:

The test item only performed radiated mode

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

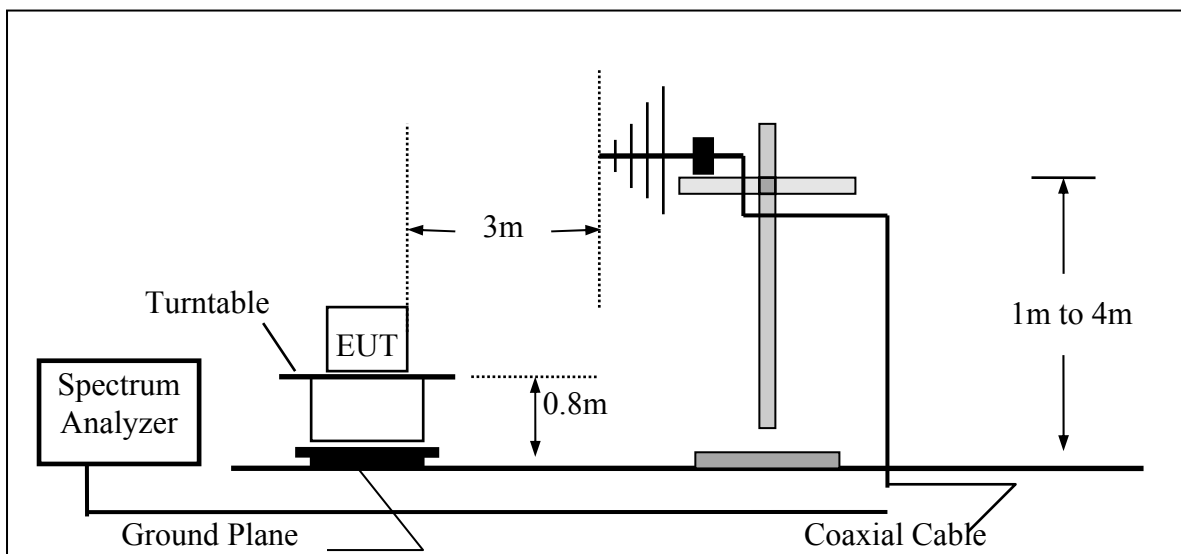

(B) Radiated Emission Test Set-Up Frequency Over 1 GHz

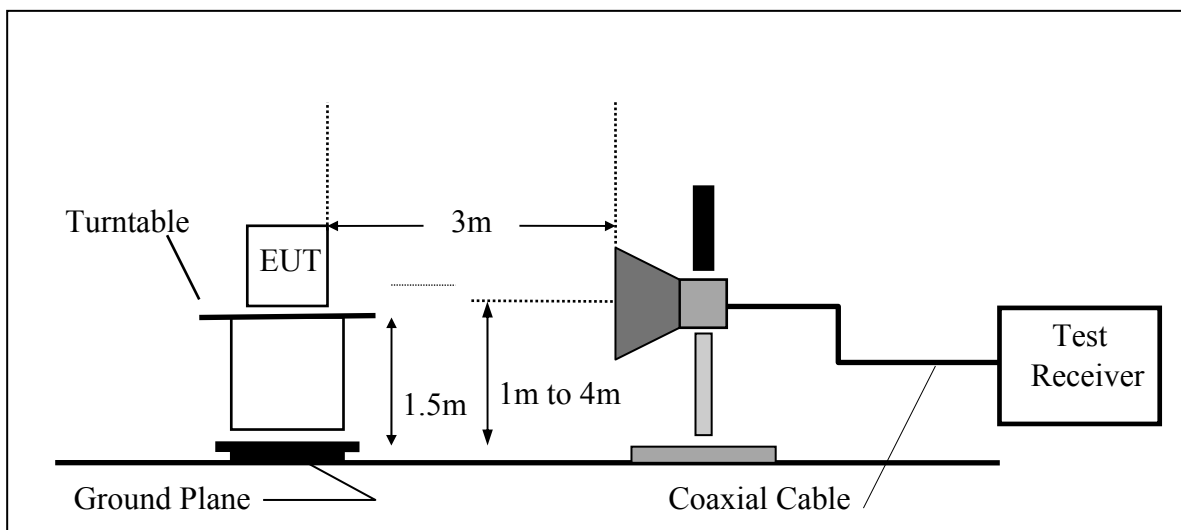

#### 8.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=100kHz, Span=25MHz, Sweep = auto
5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
6. Repeat above procedures until all frequency measured were complete.

#### 8.5 Field Strength Calculation:

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	


#### 8.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

# **Radiated Emission: 802.11 b mode**

Operation Mode TX CH Low  
Fundamental Frequency 2412 MHz  
Temperature 25

Test Date 2017/06/15  
Test By Barry  
Humidity 60 %

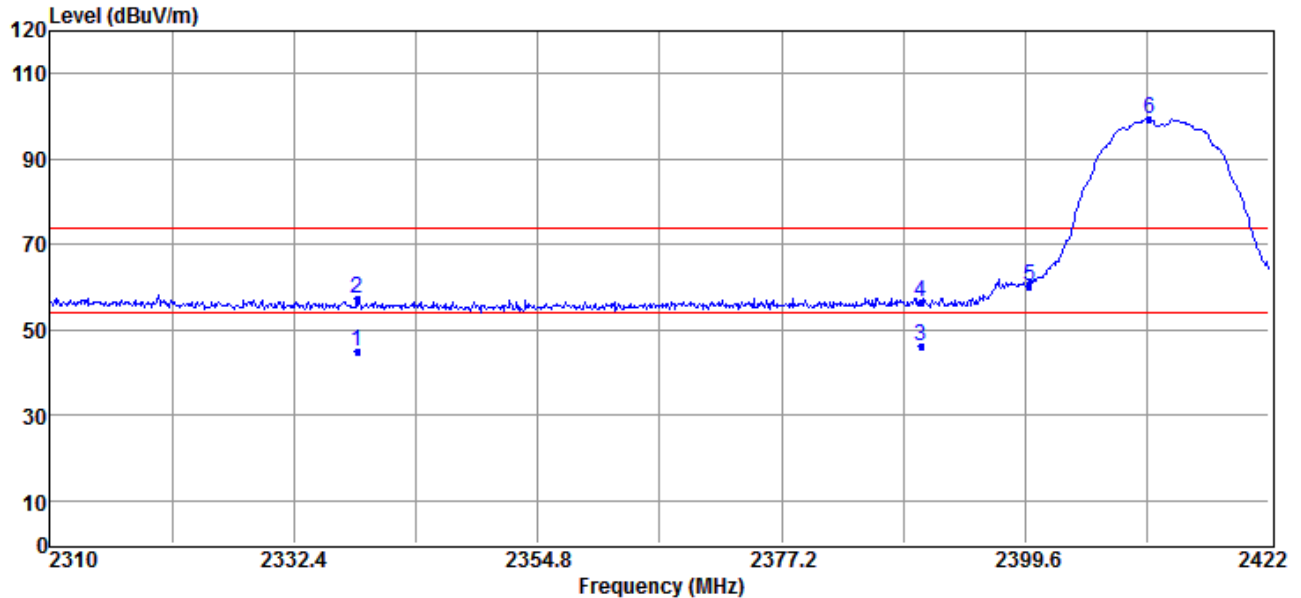


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2338.22	12.36	32.75	45.11	54.00	-8.89	Average	VERTICAL
2	2338.22	24.43	32.75	57.18	74.00	-16.82	Peak	VERTICAL
3	2390.00	13.67	32.72	46.39	54.00	-7.61	Average	VERTICAL
4	2390.00	23.86	32.72	56.58	74.00	-17.42	Peak	VERTICAL
3	2400.00	27.38	32.71	60.09	79.33	-19.24	Peak	VERTICAL
4	2411.02	66.61	32.72	99.33	F	--	Peak	VERTICAL

## Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Note: “F” denotes fundamental frequency**

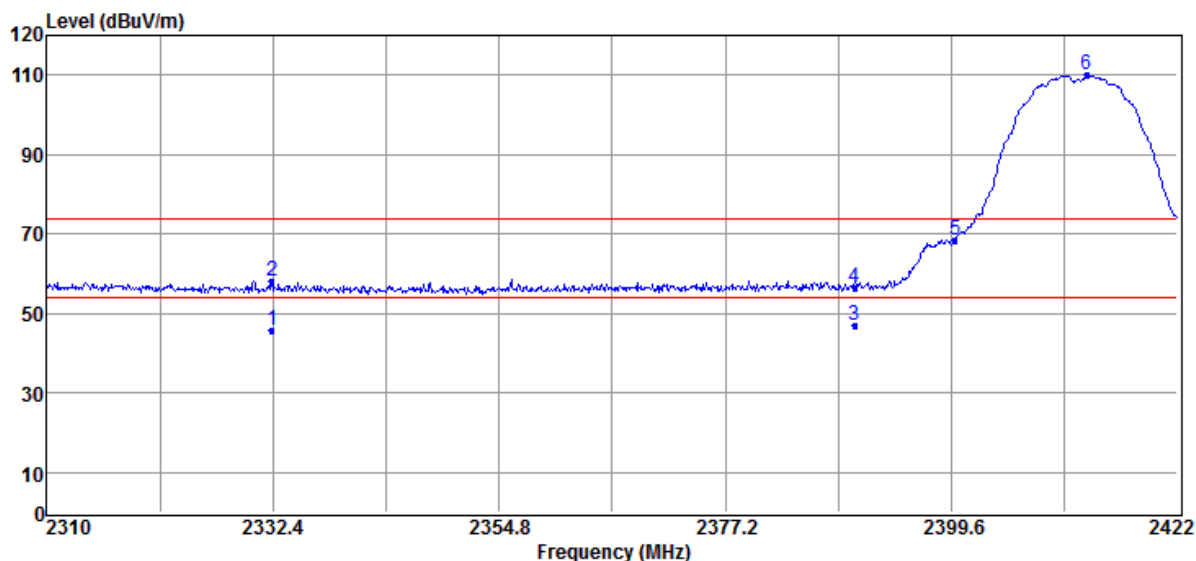

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2332.29	12.89	32.75	45.64	54.00	-8.36	Average	HORIZONTAL
2	2332.29	25.24	32.75	57.99	74.00	-16.01	Peak	HORIZONTAL
3	2390.00	14.35	32.72	47.07	54.00	-6.93	Average	HORIZONTAL
4	2390.00	23.62	32.72	56.34	74.00	-17.66	Peak	HORIZONTAL
5	2400.00	35.88	32.71	68.59	89.92	-21.33	Peak	HORIZONTAL
6	2413.04	77.21	32.71	109.92	F	--	Peak	HORIZONTAL


Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Note: “F” denotes fundamental frequency**

Operation Mode TX CH High  
Fundamental Frequency 2462 MHz  
Temperature 25

Test Date 2017/06/15  
Test By Barry  
Humidity 60 %

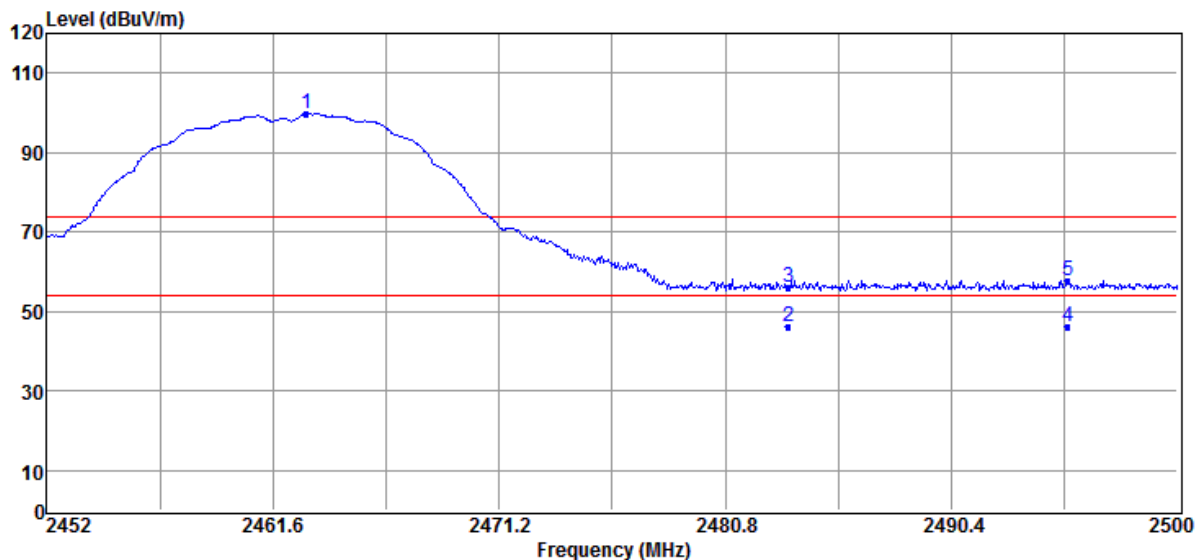


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2463.04	67.03	32.74	99.77	F	--	Peak	VERTICAL
2	2483.50	13.35	32.76	46.11	54.00	-7.89	Average	VERTICAL
3	2483.50	23.42	32.76	56.18	74.00	-17.82	Peak	VERTICAL
4	2495.34	13.61	32.77	46.38	54.00	-7.62	Average	VERTICAL
5	2495.34	25.00	32.77	57.77	74.00	-16.23	Peak	VERTICAL

**Remark:**

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Note: “F” denotes fundamental frequency**

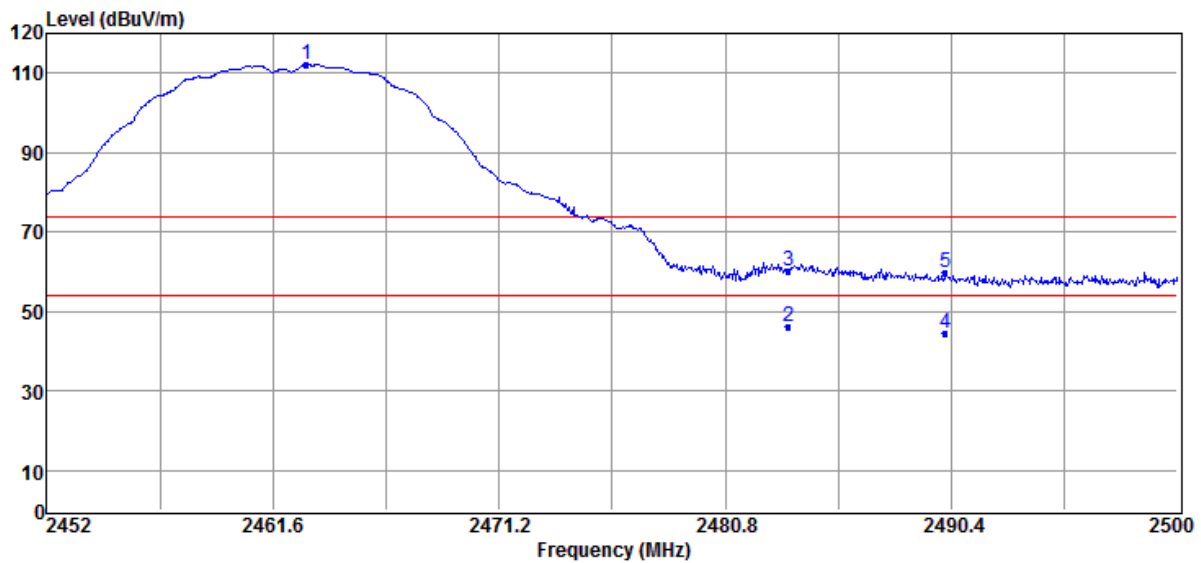

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2463.04	79.42	32.74	112.16	F	--	Peak	HORIZONTAL
2	2483.50	13.46	32.76	46.22	54.00	-7.78	Average	HORIZONTAL
3	2483.50	27.59	32.76	60.35	74.00	-13.65	Peak	HORIZONTAL
4	2490.16	11.71	32.76	44.47	54.00	-9.53	Average	HORIZONTAL
5	2490.16	27.21	32.76	59.97	74.00	-14.03	Peak	HORIZONTAL

**Remark:**


- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Note: “F” denotes fundamental frequency**

# Radiated Emission: 802.11 g mode

Operation Mode TX CH Low  
Fundamental Frequency 2412 MHz  
Temperature 25

Test Date 2017/06/15  
Test By Barry  
Humidity 60 %

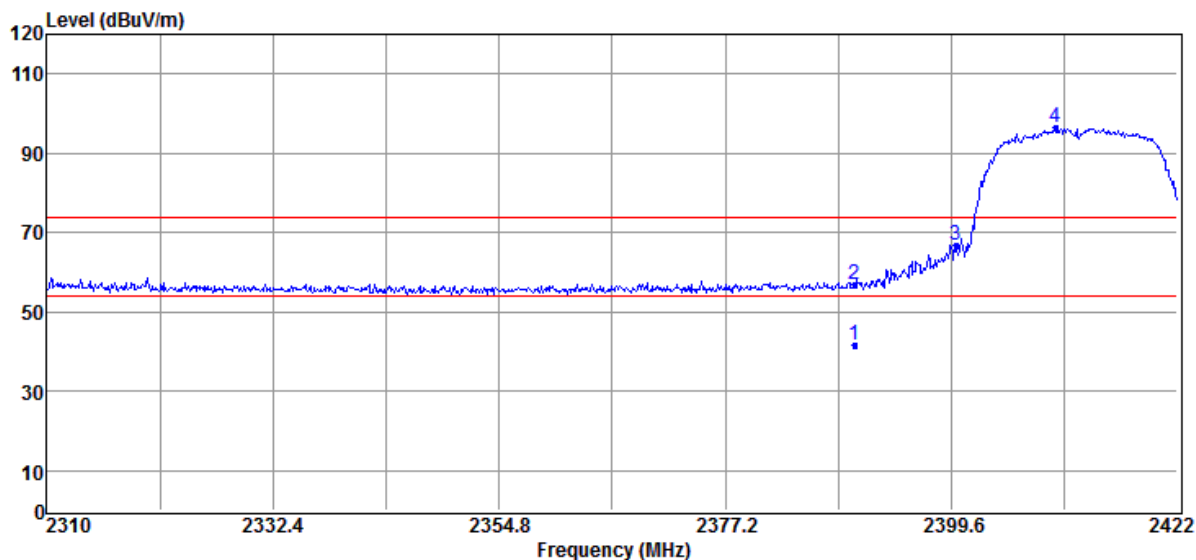


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2390.00	9.12	32.72	41.84	54.00	-12.16	Average	VERTICAL
2	2390.00	24.29	32.72	57.01	74.00	-16.99	Peak	VERTICAL
3	2400.05	34.13	32.71	66.84	76.38	-7.16	Peak	VERTICAL
4	2409.90	63.66	32.72	96.38	F	--	Peak	VERTICAL

## Remark:

- Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Note: “F” denotes fundamental frequency**



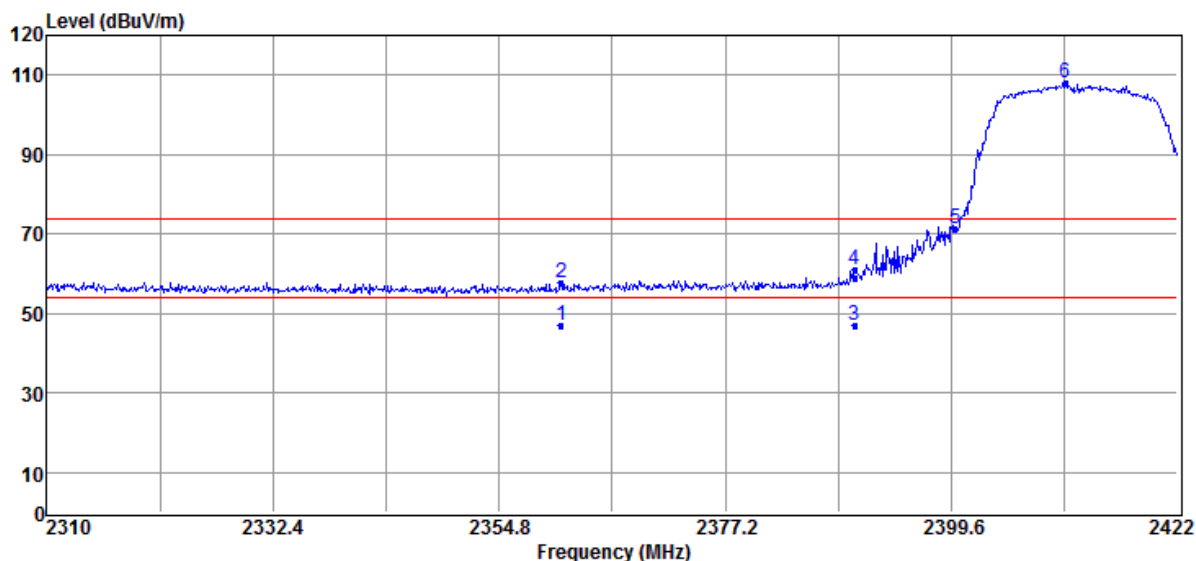

No	Freq MHz	Reading dBUV	Factor dB/m	Level dBUV/m	Limit dBUV/m	Margin dB	Remark	Pol V/H
1	2360.96	14.22	32.73	46.95	54.00	-7.05	Average	HORIZONTAL
2	2360.96	25.04	32.73	57.77	74.00	-16.23	Peak	HORIZONTAL
3	2390.00	14.33	32.72	47.05	54.00	-6.95	Average	HORIZONTAL
4	2390.00	28.44	32.72	61.16	74.00	-12.84	Peak	HORIZONTAL
5	2400.00	38.69	32.71	71.40	88.01	-16.61	Peak	HORIZONTAL
6	2410.91	75.29	32.72	108.01	F	--	Peak	HORIZONTAL


Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Note: “F” denotes fundamental frequency**

Operation Mode TX CH High  
Fundamental Frequency 2462 MHz  
Temperature 25

Test Date 2017/06/15  
Test By Barry  
Humidity 60 %

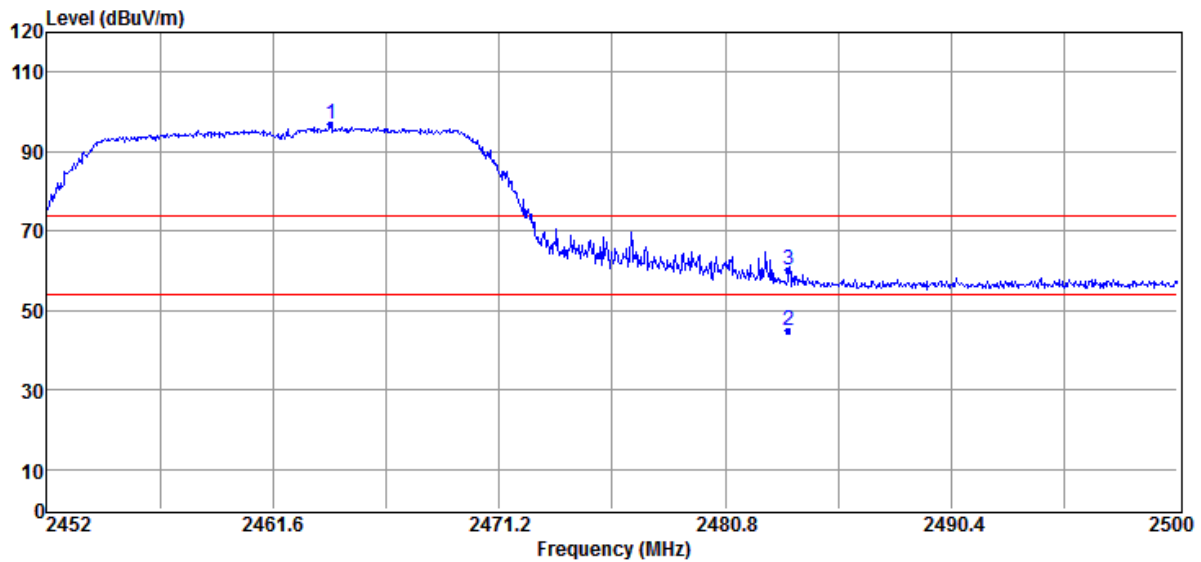


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2464.05	64.14	32.74	96.88	F	--	Peak	VERTICAL
2	2483.50	12.17	32.76	44.93	54.00	-9.07	Average	VERTICAL
3	2483.50	27.52	32.76	60.28	74.00	-13.72	Peak	VERTICAL

Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Note: “F” denotes fundamental frequency**

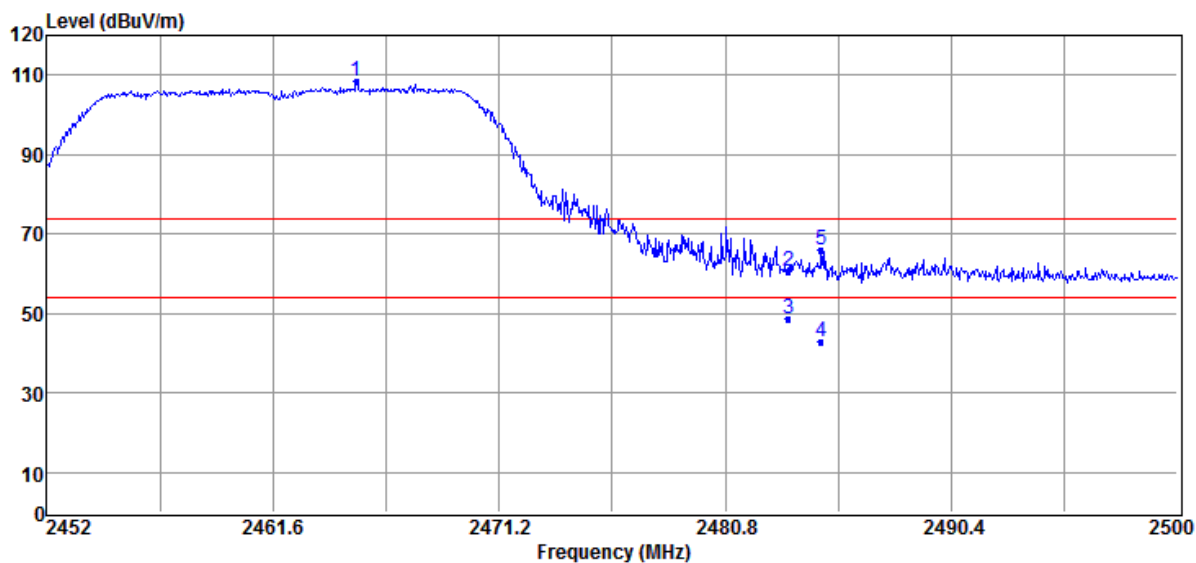

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2465.15	75.77	32.74	108.51	F	--	Peak	HORIZONTAL
2	2483.49	28.00	32.76	60.76	74.00	-13.24	Peak	HORIZONTAL
3	2483.50	15.98	32.76	48.74	54.00	-5.26	Average	HORIZONTAL
4	2484.88	10.24	32.76	43.00	54.00	-11.00	Average	HORIZONTAL
5	2484.88	33.13	32.76	65.89	74.00	-8.11	Peak	HORIZONTAL

**Remark:**


- Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Note: “F” denotes fundamental frequency**

# Radiated Emission: 802.11 n\_20 mode

Operation Mode TX CH Low  
Fundamental Frequency 2412 MHz  
Temperature 25

Test Date 2017/06/15  
Test By Barry  
Humidity 60 %

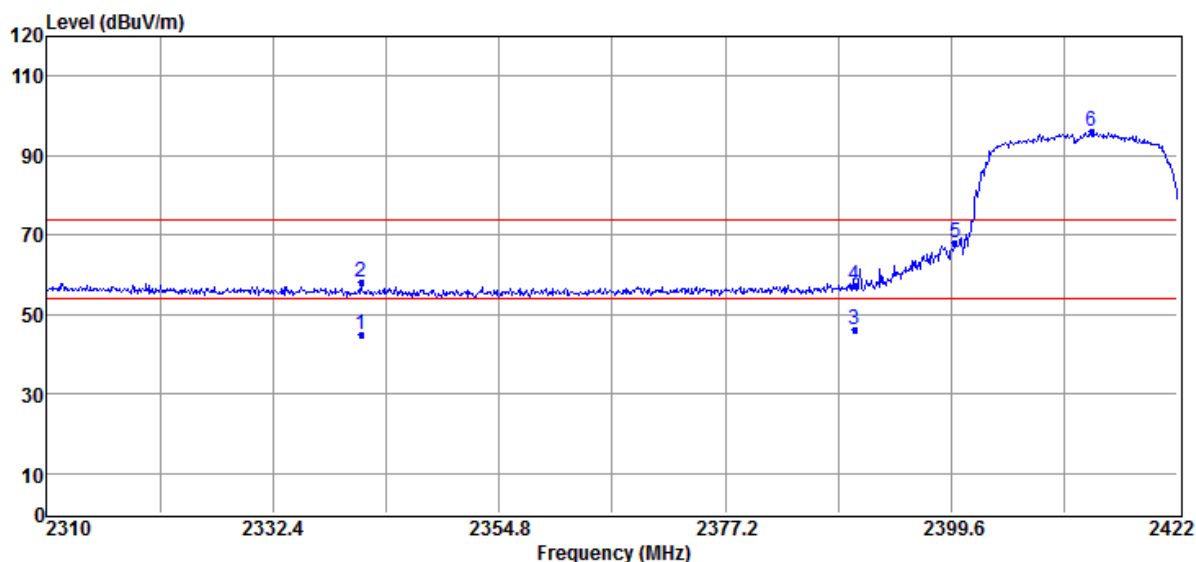


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2341.14	12.21	32.75	44.96	54.00	-9.04	Average	VERTICAL
2	2341.14	25.36	32.75	58.11	74.00	-15.89	Peak	VERTICAL
3	2390.00	13.45	32.72	46.17	54.00	-7.83	Average	VERTICAL
4	2390.00	24.58	32.72	57.30	74.00	-16.70	Peak	VERTICAL
5	2400.00	35.48	32.71	68.19	76.13	-7.94	Peak	VERTICAL
6	2413.49	63.42	32.71	96.13	F	--	Peak	VERTICAL

## Remark:

- Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Note: “F” denotes fundamental frequency**

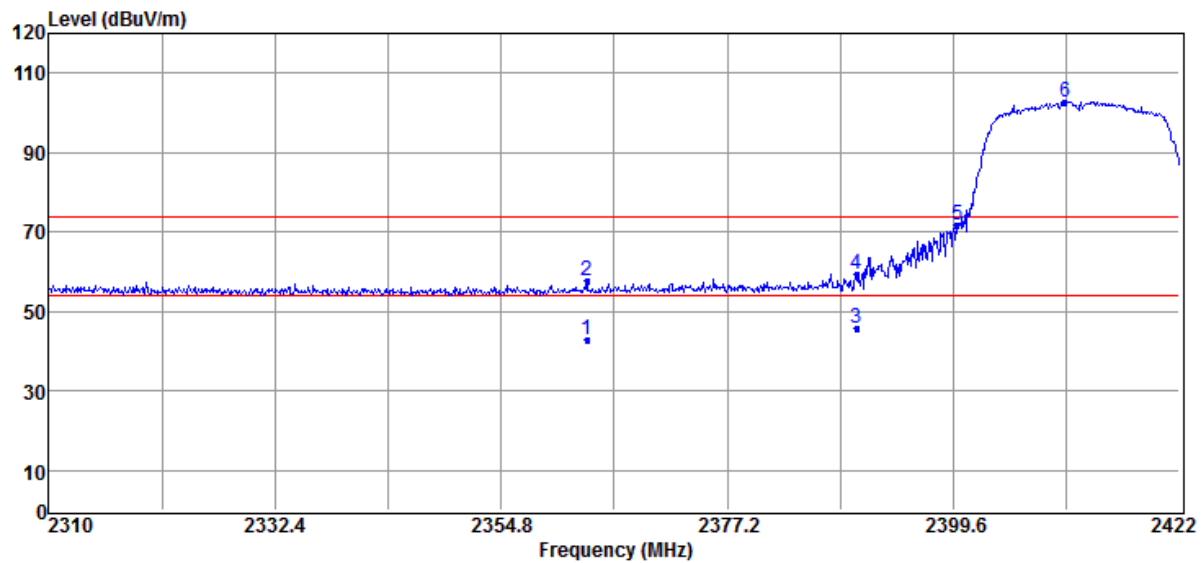

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2363.31	10.12	32.74	42.86	54.00	-11.14	Average	HORIZONTAL
2	2363.31	24.87	32.74	57.61	74.00	-16.39	Peak	HORIZONTAL
3	2390.00	13.22	32.72	45.94	54.00	-8.06	Average	HORIZONTAL
4	2390.00	26.57	32.72	59.29	74.00	-14.71	Peak	HORIZONTAL
5	2400.00	39.16	32.71	71.87	82.77	-10.9	Peak	HORIZONTAL
6	2410.69	70.05	32.72	102.77	F	--	Peak	HORIZONTAL


**Remark:**

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Note: “F” denotes fundamental frequency**

Operation Mode TX CH High  
Fundamental Frequency 2462 MHz  
Temperature 25

Test Date 2017/06/15  
Test By Barry  
Humidity 60 %

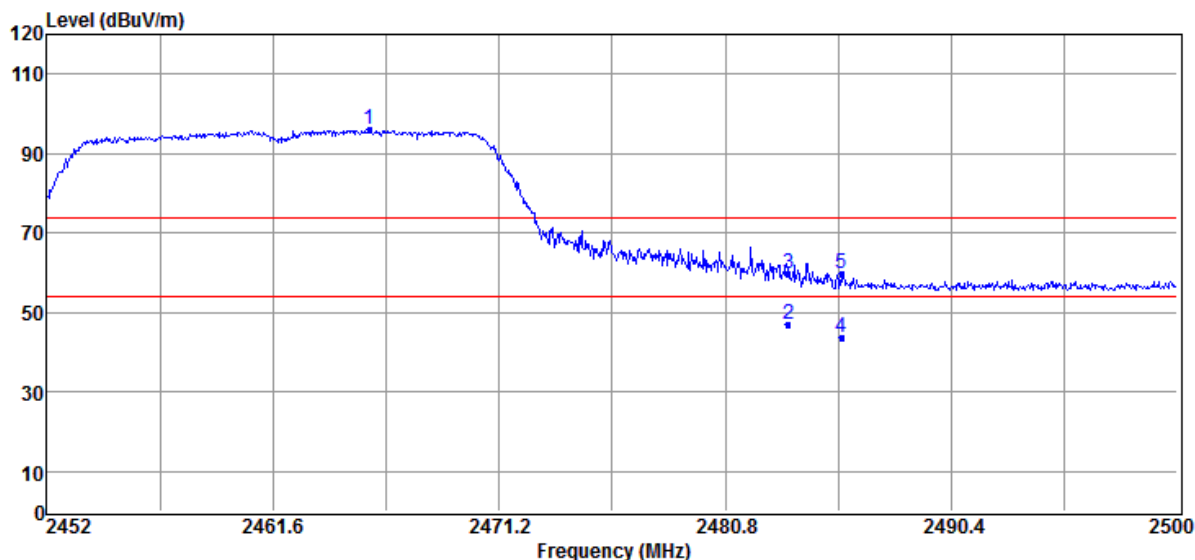


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2465.68	63.25	32.74	95.99	F	--	Peak	VERTICAL
2	2483.50	14.12	32.76	46.88	54.00	-7.12	Average	VERTICAL
3	2483.50	27.23	32.76	59.99	74.00	-14.01	Peak	VERTICAL
4	2485.74	10.99	32.77	43.76	54.00	-10.24	Average	VERTICAL
5	2485.74	27.15	32.77	59.92	74.00	-14.08	Peak	VERTICAL

**Remark:**

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Note: “F” denotes fundamental frequency**

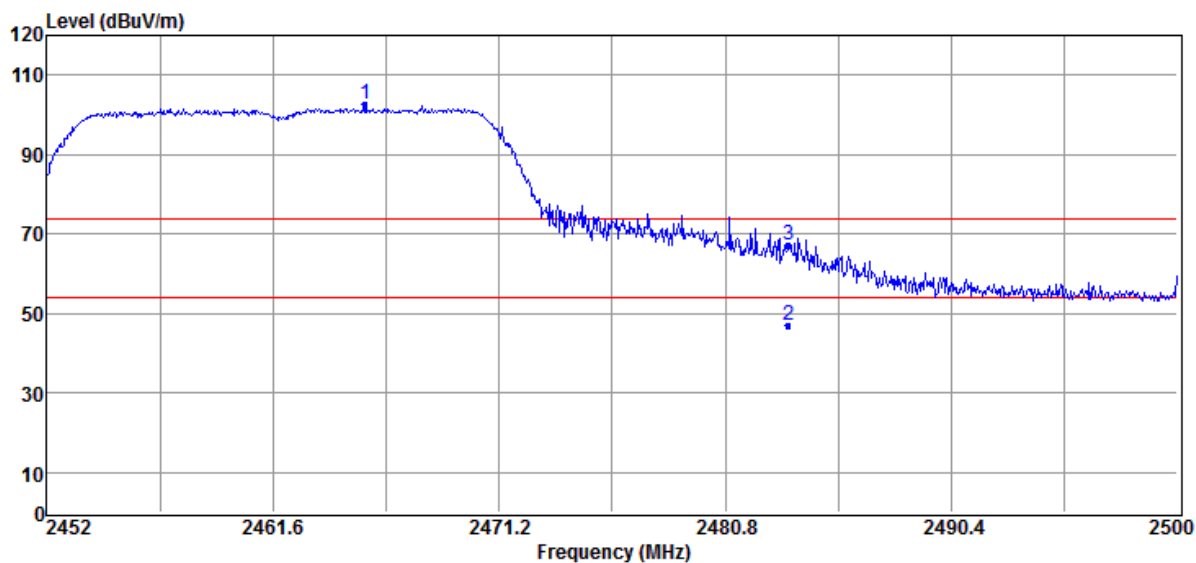

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2465.54	69.84	32.74	102.58	F	--	Peak	HORIZONTAL
2	2483.50	14.21	32.76	46.97	54.00	-7.03	Average	HORIZONTAL
3	2483.50	34.30	32.76	67.06	74.00	-6.94	Peak	HORIZONTAL

**Remark:**


- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Note: “F” denotes fundamental frequency**

# Radiated Emission: 802.11 n\_40 mode

Operation Mode TX CH Low  
Fundamental Frequency 2422 MHz  
Temperature 25

Test Date 2017/06/15  
Test By Barry  
Humidity 60 %

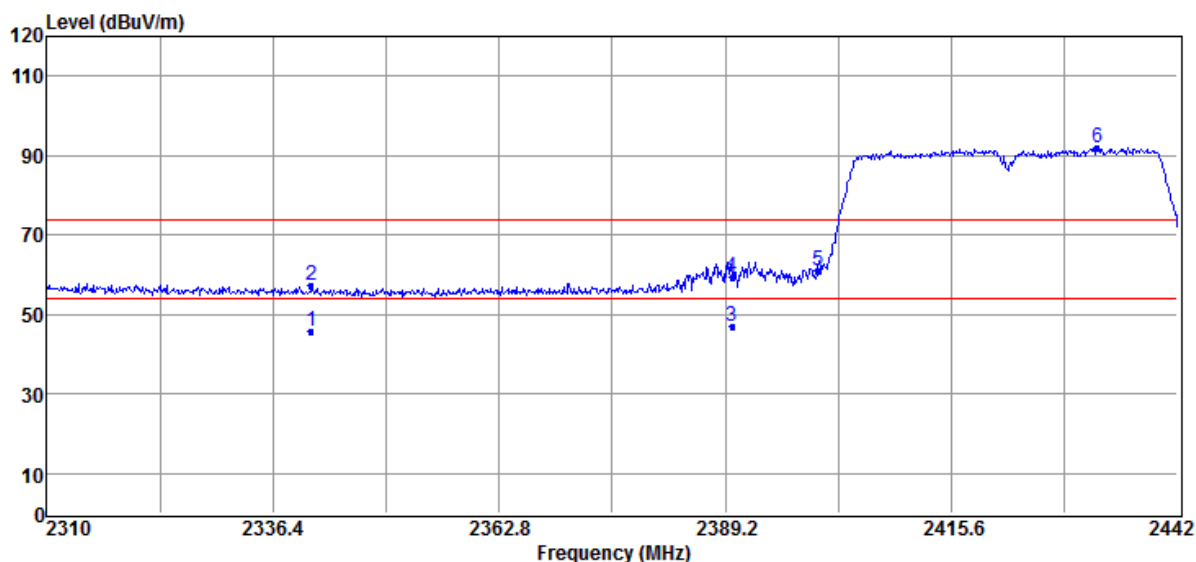


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2340.89	13.21	32.75	45.96	54.00	-8.04	Average	VERTICAL
2	2340.89	24.51	32.75	57.26	74.00	-16.74	Peak	VERTICAL
3	2390.00	14.11	32.72	46.83	54.00	-7.17	Average	VERTICAL
4	2390.00	26.75	32.72	59.47	74.00	-14.53	Peak	VERTICAL
5	2400.00	28.34	32.71	61.05	72.15	-11.1	Peak	VERTICAL
6	2432.63	59.42	32.73	92.15	F	--	Peak	VERTICAL

## Remark:

- Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Note: “F” denotes fundamental frequency**



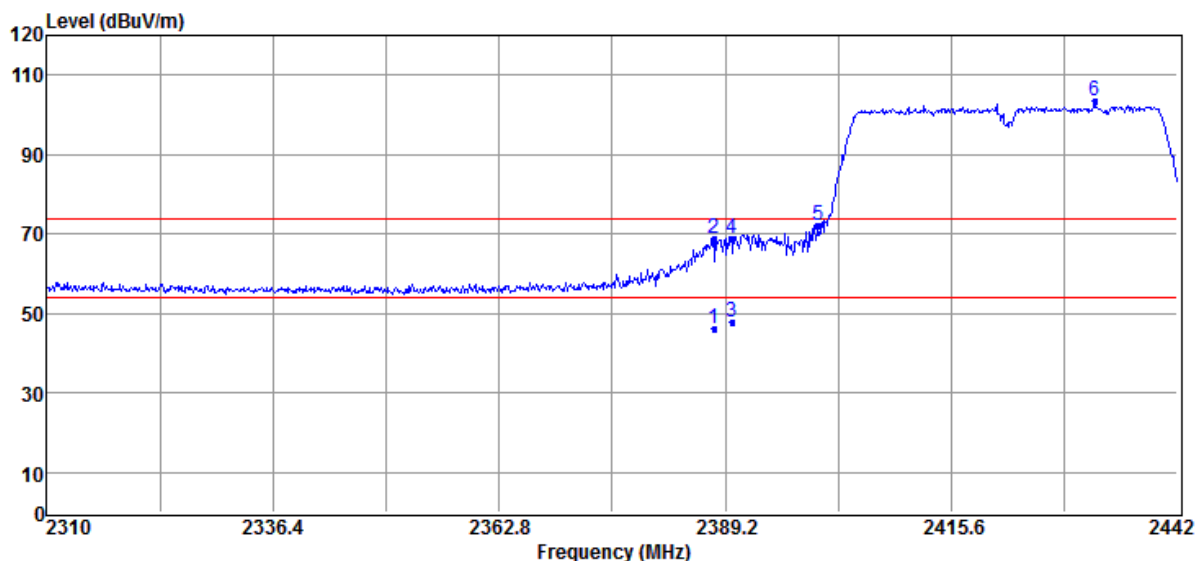

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2387.88	13.35	32.71	46.06	54.00	-7.94	Average	HORIZONTAL
2	2387.88	36.09	32.71	68.80	74.00	-5.20	Peak	HORIZONTAL
3	2390.00	15.21	32.72	47.93	54.00	-6.07	Average	HORIZONTAL
4	2390.00	36.33	32.72	69.05	74.00	-4.95	Peak	HORIZONTAL
5	2400.00	39.46	32.71	72.17	83.58	-10.88	Peak	HORIZONTAL
6	2432.36	70.85	32.73	103.58	F	--	Peak	HORIZONTAL


Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Note: “F” denotes fundamental frequency**

Operation Mode TX CH High  
Fundamental Frequency 2452 MHz  
Temperature 25

Test Date 2017/06/15  
Test By Barry  
Humidity 60 %

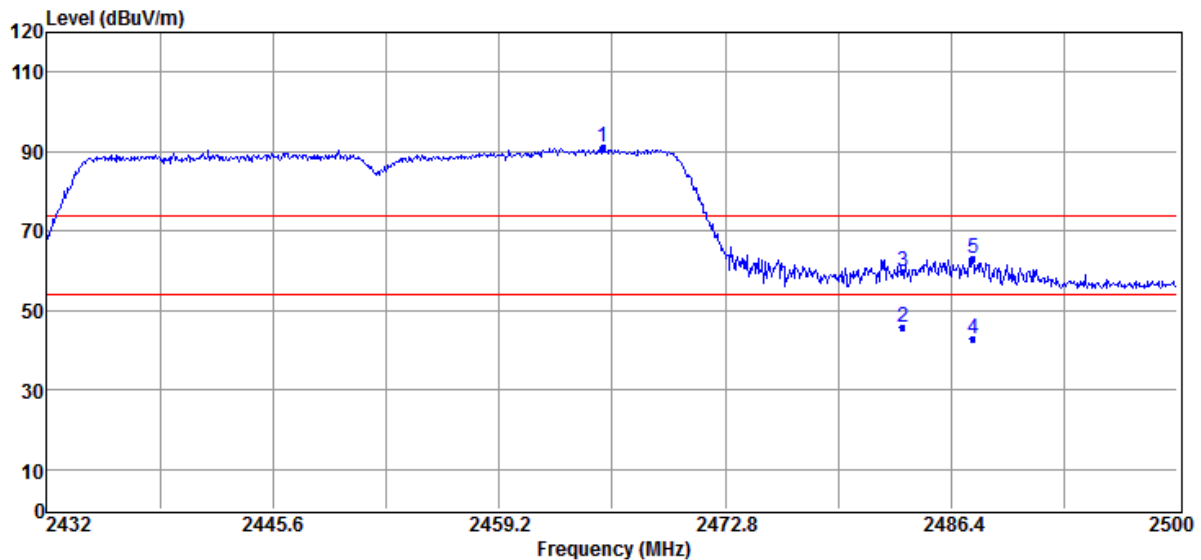


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2465.46	58.28	32.74	91.02	F	--	Peak	VERTICAL
2	2483.50	13.21	32.76	45.97	54.00	-8.03	Average	VERTICAL
3	2483.50	26.97	32.76	59.73	74.00	-14.27	Peak	VERTICAL
4	2487.69	10.23	32.76	42.99	54.00	-11.01	Average	VERTICAL
5	2487.69	30.22	32.76	62.98	74.00	-11.02	Peak	VERTICAL

**Remark:**

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Note: “F” denotes fundamental frequency**

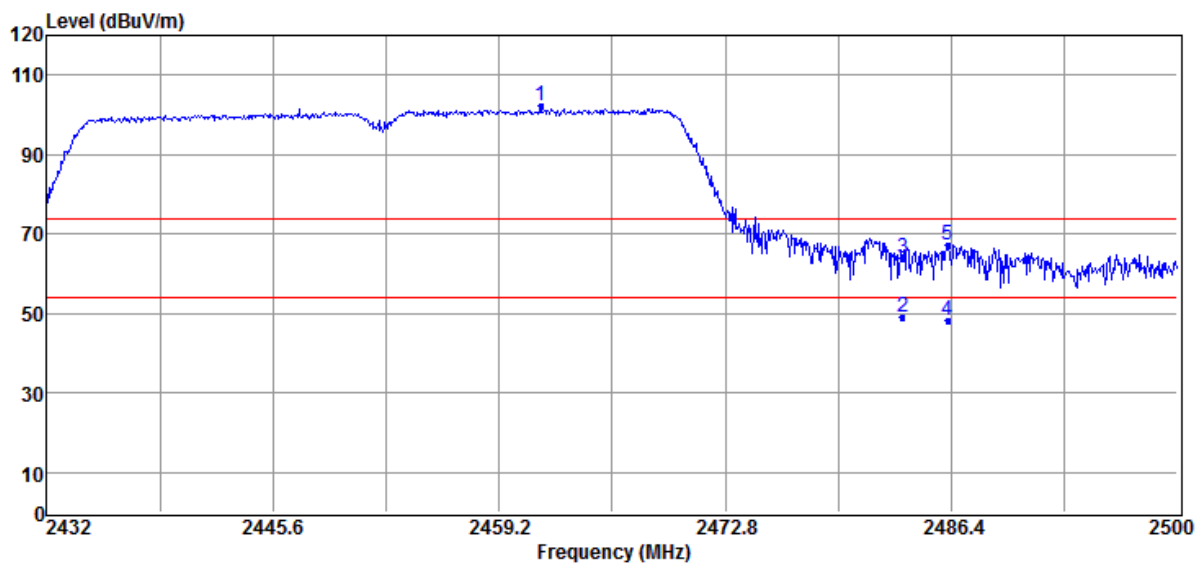

No	Freq MHz	Reading dBUV	Factor dB/m	Level dBUV/m	Limit dBUV/m	Margin dB	Remark	Pol V/H
1	2461.72	69.57	32.75	102.32	F	--	Peak	HORIZONTAL
2	2483.50	16.23	32.76	48.99	54.00	-5.01	Average	HORIZONTAL
3	2483.50	31.04	32.76	63.80	74.00	-10.20	Peak	HORIZONTAL
4	2486.20	15.31	32.77	48.08	54.00	-5.92	Average	HORIZONTAL
5	2486.20	34.47	32.77	67.24	74.00	-6.76	Peak	HORIZONTAL

**Remark:**


- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Note: “F” denotes fundamental frequency**

# Radiated Emission: BT LE mode

Operation Mode TX CH Low  
Fundamental Frequency 2402 MHz  
Temperature 25

Test Date 2017/06/15  
Test By Barry  
Humidity 60 %

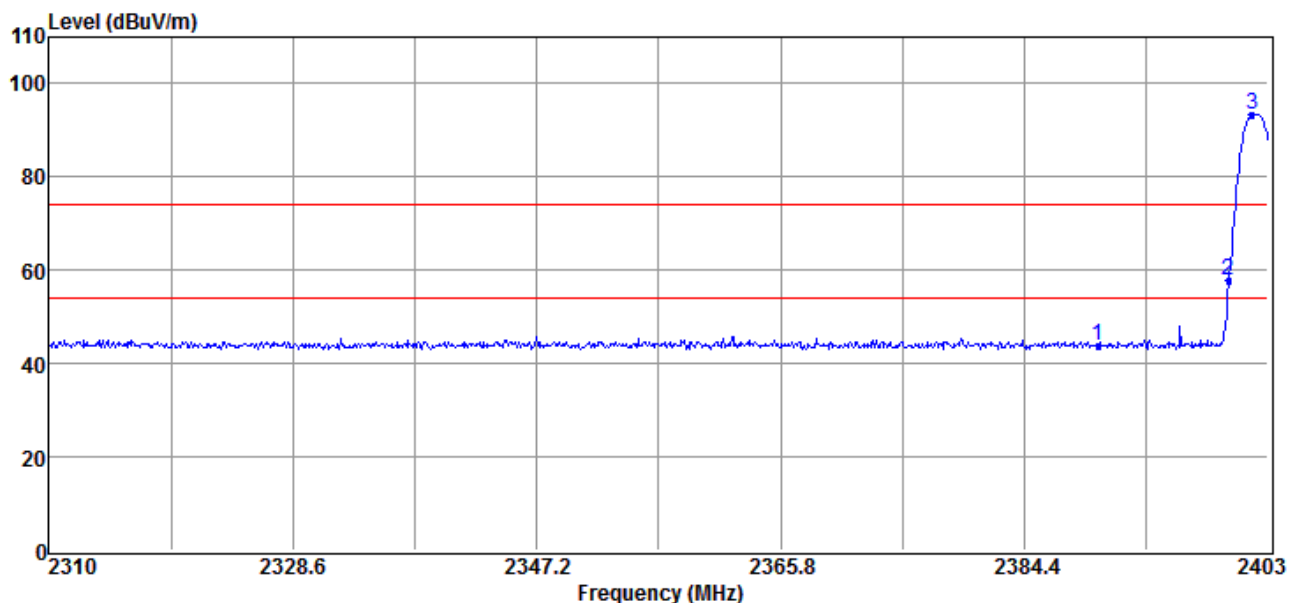


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2390.00	59.57	-15.71	43.86	74.00	-30.14	Peak	VERTICAL
2	2400.00	73.50	-15.73	57.77	73.32	-15.55	Peak	VERTICAL
3	2401.79	109.05	-15.73	93.32	F	--	Peak	VERTICAL

## Remark:

- Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Note: “F” denotes fundamental frequency**

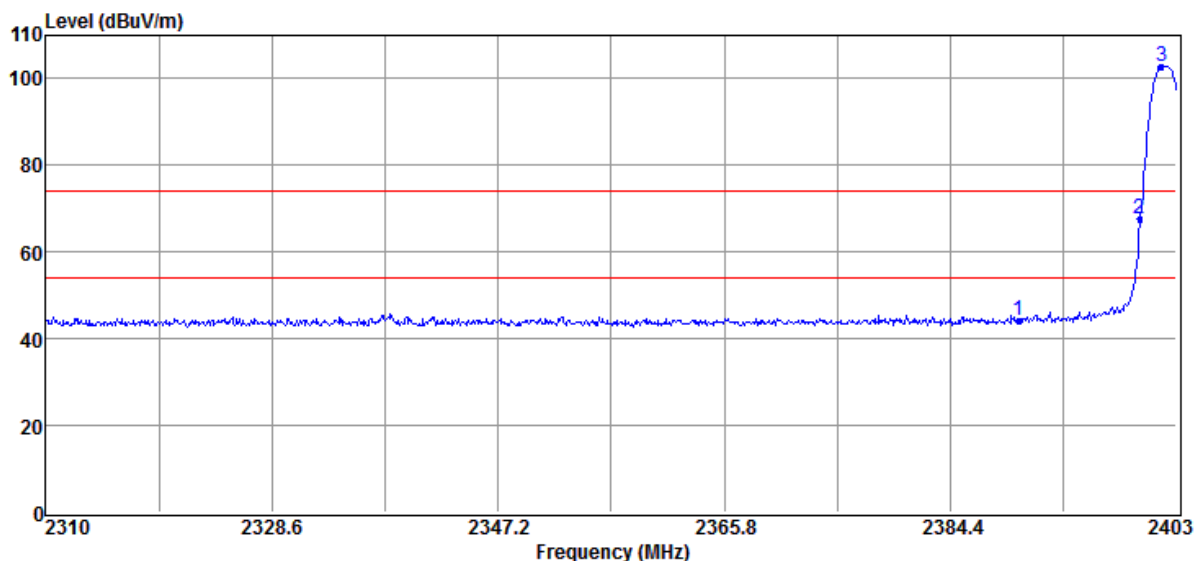

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2390.00	60.08	-15.71	44.37	74.00	-29.63	Peak	HORIZONTAL
2	2400.00	83.28	-15.73	67.55	82.87	-15.32	Peak	HORIZONTAL
3	2401.79	118.60	-15.73	102.87	F	--	Peak	HORIZONTAL


**Remark:**

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Note: “F” denotes fundamental frequency**

Operation Mode TX CH High  
Fundamental Frequency 2480 MHz  
Temperature 25

Test Date 2017/06/15  
Test By Barry  
Humidity 60 %

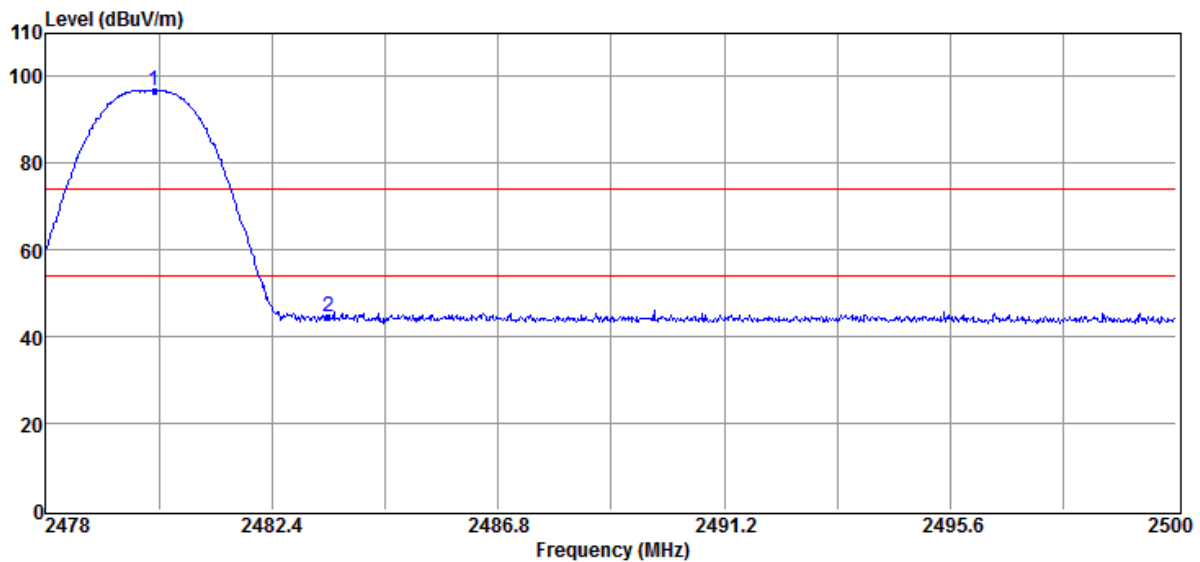


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2480.11	112.46	-15.71	96.75	F	--	Peak	VERTICAL
2	2483.50	60.13	-15.71	44.42	74.00	-29.58	Peak	VERTICAL

**Remark:**

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Note: “F” denotes fundamental frequency**

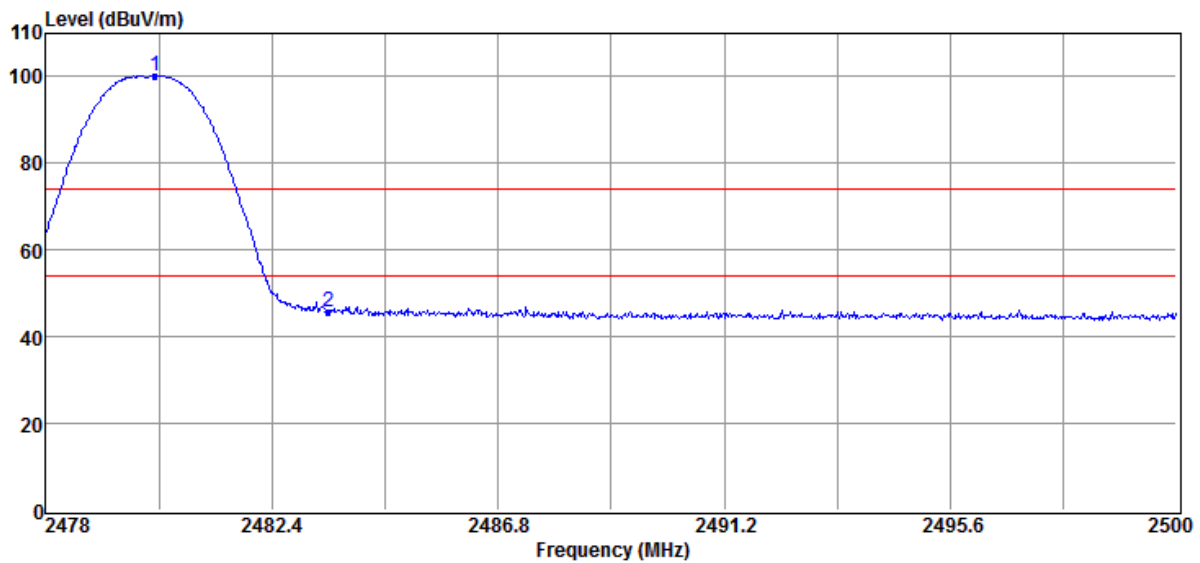

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2480.13	115.76	-15.71	100.05	F	--	Peak	HORIZONTAL
2	2483.50	61.43	-15.71	45.72	74.00	-28.28	Peak	HORIZONTAL

9 Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Note: “F” denotes fundamental frequency**

## **9 Spurious Radiated Emission Test**

### **9.1 Standard Applicable**

According to §15.247(d), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

### **9.2 Measurement Equipment Used:**

#### **9.2.1 Conducted Emission at antenna port:**

Refer to section 6.2 for details.

#### **9.2.2 Radiated emission:**

Refer to section 8.2 for details.

### **9.3 Test SET-UP:**

The test item only performed radiated mode

Refer to section 8.3 for details.

### **9.4 Measurement Procedure:**

- 1 According 414788 section 2, Either OATS or chamber for radiated emission below 30MHz, the test was done at 966 chamber, the test site was evaluated with OATS and the Chamber has test signals level greater than OATS's .
- 2 The EUT was placed on a turn table which is 0.8m/1.5m above ground plane in 966 chamber.
- 3 The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4 EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5 When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.
- 6 Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 7 And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 8 Repeat above procedures until all frequency measured were complete.



## 9.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

## 9.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

### Radiated Spurious Emission Measurement Result (below 1GHz) (802.11b mode)

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH Low	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	30.00	44.97	-8.12	36.85	40.00	-3.15	Peak	VERTICAL
2	64.92	35.44	-8.63	26.81	40.00	-13.19	Peak	VERTICAL
3	558.65	28.92	-1.40	27.52	46.00	-18.48	Peak	VERTICAL
4	647.89	28.72	0.14	28.86	46.00	-17.14	Peak	VERTICAL
5	806.00	29.38	2.77	32.15	46.00	-13.85	Peak	VERTICAL
6	940.83	28.46	5.12	33.58	46.00	-12.42	Peak	VERTICAL
1	64.92	34.67	-8.63	26.04	40.00	-13.96	Peak	HORIZONTAL
2	95.96	38.14	-12.70	25.44	43.50	-18.06	Peak	HORIZONTAL
3	106.63	34.91	-11.00	23.91	43.50	-19.59	Peak	HORIZONTAL
4	409.27	30.57	-3.75	26.82	46.00	-19.18	Peak	HORIZONTAL
5	750.71	29.70	2.20	31.90	46.00	-14.10	Peak	HORIZONTAL
6	797.27	29.27	2.66	31.93	46.00	-14.07	Peak	HORIZONTAL

#### Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100kHz, VBW=300kHz.

# **Radiated Spurious Emission Measurement Result (below 1GHz) (802.11b mode)**

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH Mid	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	30.00	43.79	-8.12	35.67	40.00	-4.33	Peak	VERTICAL
2	95.96	36.56	-12.70	23.86	43.50	-19.64	Peak	VERTICAL
3	149.31	28.18	-7.03	21.15	43.50	-22.35	Peak	VERTICAL
4	401.51	29.08	-3.90	25.18	46.00	-20.82	Peak	VERTICAL
5	559.62	31.06	-1.38	29.68	46.00	-16.32	Peak	VERTICAL
6	709.97	28.72	1.25	29.97	46.00	-16.03	Peak	VERTICAL
1	95.96	38.29	-12.70	25.59	43.50	-17.91	Peak	HORIZONTAL
2	143.49	32.25	-7.30	24.95	43.50	-18.55	Peak	HORIZONTAL
3	352.04	29.01	-4.99	24.02	46.00	-21.98	Peak	HORIZONTAL
4	522.76	30.54	-2.06	28.48	46.00	-17.52	Peak	HORIZONTAL
5	625.58	30.31	-0.12	30.19	46.00	-15.81	Peak	HORIZONTAL
6	722.58	29.36	1.55	30.91	46.00	-15.09	Peak	HORIZONTAL

## **Remark:**

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100kHz, VBW=300kHz.

# **Radiated Spurious Emission Measurement Result (below 1GHz) (802.11b mode)**

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH High	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	32.91	36.47	-8.04	28.43	40.00	-11.57	Peak	VERTICAL
2	64.92	34.46	-8.63	25.83	40.00	-14.17	Peak	VERTICAL
3	95.96	35.34	-12.70	22.64	43.50	-20.86	Peak	VERTICAL
4	315.18	29.59	-5.65	23.94	46.00	-22.06	Peak	VERTICAL
5	589.69	29.17	-0.65	28.52	46.00	-17.48	Peak	VERTICAL
6	618.79	29.74	-0.19	29.55	46.00	-16.45	Peak	VERTICAL
1	95.96	39.10	-12.70	26.40	43.50	-17.10	Peak	HORIZONTAL
2	106.63	33.91	-11.00	22.91	43.50	-20.59	Peak	HORIZONTAL
3	144.46	29.02	-7.25	21.77	43.50	-21.73	Peak	HORIZONTAL
4	418.97	28.79	-3.54	25.25	46.00	-20.75	Peak	HORIZONTAL
5	553.80	29.30	-1.52	27.78	46.00	-18.22	Peak	HORIZONTAL
6	771.08	29.59	2.41	32.00	46.00	-14.00	Peak	HORIZONTAL

## **Remark:**

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100kHz, VBW=300kHz.

# **Radiated Spurious Emission Measurement Result (below 1GHz) (802.11g mode)**

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH Low	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	30.00	38.96	-8.12	30.84	40.00	-9.16	Peak	VERTICAL
2	62.01	32.56	-8.08	24.48	40.00	-15.52	Peak	VERTICAL
3	376.29	29.23	-4.46	24.77	46.00	-21.23	Peak	VERTICAL
4	418.97	28.85	-3.54	25.31	46.00	-20.69	Peak	VERTICAL
5	594.54	29.61	-0.53	29.08	46.00	-16.92	Peak	VERTICAL
6	802.12	28.68	2.71	31.39	46.00	-14.61	Peak	VERTICAL
1	95.96	38.23	-12.70	25.53	43.50	-17.97	Peak	HORIZONTAL
2	106.63	35.31	-11.00	24.31	43.50	-19.19	Peak	HORIZONTAL
3	342.34	28.80	-5.17	23.63	46.00	-22.37	Peak	HORIZONTAL
4	600.36	29.22	-0.40	28.82	46.00	-17.18	Peak	HORIZONTAL
5	699.30	30.51	1.00	31.51	46.00	-14.49	Peak	HORIZONTAL
6	877.78	29.18	3.93	33.11	46.00	-12.89	Peak	HORIZONTAL

## **Remark:**

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100kHz, VBW=300kHz.

# **Radiated Spurious Emission Measurement Result (below 1GHz) (802.11g mode)**

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH Mid	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	30.97	40.41	-8.09	32.32	40.00	-7.68	Peak	VERTICAL
2	95.96	35.90	-12.70	23.20	43.50	-20.30	Peak	VERTICAL
3	365.62	29.54	-4.68	24.86	46.00	-21.14	Peak	VERTICAL
4	556.71	28.23	-1.45	26.78	46.00	-19.22	Peak	VERTICAL
5	640.13	29.01	0.05	29.06	46.00	-16.94	Peak	VERTICAL
6	761.38	28.81	2.31	31.12	46.00	-14.88	Peak	VERTICAL
1	95.96	37.71	-12.70	25.01	43.50	-18.49	Peak	HORIZONTAL
2	106.63	34.15	-11.00	23.15	43.50	-20.35	Peak	HORIZONTAL
3	144.46	30.36	-7.25	23.11	43.50	-20.39	Peak	HORIZONTAL
4	373.38	30.25	-4.51	25.74	46.00	-20.26	Peak	HORIZONTAL
5	580.96	30.74	-0.87	29.87	46.00	-16.13	Peak	HORIZONTAL
6	807.94	29.70	2.80	32.50	46.00	-13.50	Peak	HORIZONTAL

## **Remark:**

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100kHz, VBW=300kHz.

# **Radiated Spurious Emission Measurement Result (below 1GHz) (802.11g mode)**

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH High	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	30.00	43.25	-8.12	35.13	40.00	-4.87	Peak	VERTICAL
2	62.98	35.85	-8.27	27.58	40.00	-12.42	Peak	VERTICAL
3	489.78	29.53	-2.53	27.00	46.00	-19.00	Peak	VERTICAL
4	616.85	29.02	-0.21	28.81	46.00	-17.19	Peak	VERTICAL
5	712.88	29.09	1.32	30.41	46.00	-15.59	Peak	VERTICAL
6	830.25	30.44	3.13	33.57	46.00	-12.43	Peak	VERTICAL
1	95.96	40.18	-12.70	27.48	43.50	-16.02	Peak	HORIZONTAL
2	106.63	34.57	-11.00	23.57	43.50	-19.93	Peak	HORIZONTAL
3	421.88	29.05	-3.49	25.56	46.00	-20.44	Peak	HORIZONTAL
4	704.15	30.48	1.11	31.59	46.00	-14.41	Peak	HORIZONTAL
5	757.50	30.58	2.27	32.85	46.00	-13.15	Peak	HORIZONTAL
6	860.32	29.39	3.60	32.99	46.00	-13.01	Peak	HORIZONTAL

## **Remark:**

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100kHz, VBW=300kHz.

# **Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n HT20 mode)**

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH Low	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	30.00	42.54	-8.12	34.42	40.00	-5.58	Peak	VERTICAL
2	61.04	32.80	-7.90	24.90	40.00	-15.10	Peak	VERTICAL
3	95.96	35.33	-12.70	22.63	43.50	-20.87	Peak	VERTICAL
4	527.61	29.37	-1.98	27.39	46.00	-18.61	Peak	VERTICAL
5	639.16	30.15	0.04	30.19	46.00	-15.81	Peak	VERTICAL
6	854.50	30.42	3.50	33.92	46.00	-12.08	Peak	VERTICAL
1	95.96	38.50	-12.70	25.80	43.50	-17.70	Peak	HORIZONTAL
2	141.55	31.09	-7.39	23.70	43.50	-19.80	Peak	HORIZONTAL
3	397.63	29.92	-3.98	25.94	46.00	-20.06	Peak	HORIZONTAL
4	592.60	30.04	-0.58	29.46	46.00	-16.54	Peak	HORIZONTAL
5	707.06	30.13	1.17	31.30	46.00	-14.70	Peak	HORIZONTAL
6	799.21	28.35	2.68	31.03	46.00	-14.97	Peak	HORIZONTAL

## Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100kHz, VBW=300kHz.



# **Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n HT20 mode)**

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH Mid	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	31.94	38.63	-8.07	30.56	40.00	-9.44	Peak	VERTICAL
2	62.98	31.48	-8.27	23.21	40.00	-16.79	Peak	VERTICAL
3	519.85	32.58	-2.11	30.47	46.00	-15.53	Peak	VERTICAL
4	615.88	30.21	-0.22	29.99	46.00	-16.01	Peak	VERTICAL
5	753.62	27.83	2.24	30.07	46.00	-15.93	Peak	VERTICAL
6	861.29	29.29	3.63	32.92	46.00	-13.08	Peak	VERTICAL
1	95.96	38.42	-12.70	25.72	43.50	-17.78	Peak	HORIZONTAL
2	397.63	30.09	-3.98	26.11	46.00	-19.89	Peak	HORIZONTAL
3	533.43	29.97	-1.89	28.08	46.00	-17.92	Peak	HORIZONTAL
4	667.29	28.73	0.46	29.19	46.00	-16.81	Peak	HORIZONTAL
5	871.96	31.25	3.82	35.07	46.00	-10.93	Peak	HORIZONTAL
6	933.07	29.77	4.98	34.75	46.00	-11.25	Peak	HORIZONTAL

## **Remark:**

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100kHz, VBW=300kHz.

# **Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n HT20 mode)**

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH High	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	30.00	39.48	-8.12	31.36	40.00	-8.64	Peak	VERTICAL
2	486.87	29.48	-2.57	26.91	46.00	-19.09	Peak	VERTICAL
3	615.88	30.45	-0.22	30.23	46.00	-15.77	Peak	VERTICAL
4	734.22	28.99	1.82	30.81	46.00	-15.19	Peak	VERTICAL
5	806.00	30.05	2.77	32.82	46.00	-13.18	Peak	VERTICAL
6	916.58	29.23	4.66	33.89	46.00	-12.11	Peak	VERTICAL
1	95.96	38.42	-12.70	25.72	43.50	-17.78	Peak	HORIZONTAL
2	321.97	29.88	-5.53	24.35	46.00	-21.65	Peak	HORIZONTAL
3	451.95	28.73	-2.92	25.81	46.00	-20.19	Peak	HORIZONTAL
4	473.29	29.71	-2.70	27.01	46.00	-18.99	Peak	HORIZONTAL
5	785.63	30.60	2.54	33.14	46.00	-12.86	Peak	HORIZONTAL
6	865.17	29.53	3.70	33.23	46.00	-12.77	Peak	HORIZONTAL

## **Remark:**

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100kHz, VBW=300kHz.

# **Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n HT40 mode)**

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH Low	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	496.57	43.13	-1.68	41.45	46.00	-4.55	Peak	VERTICAL
2	499.48	43.08	-1.66	41.42	46.00	-4.58	Peak	VERTICAL
3	514.03	34.32	-1.42	32.90	46.00	-13.10	Peak	VERTICAL
4	522.76	40.39	-1.27	39.12	46.00	-6.88	Peak	VERTICAL
5	746.83	27.78	3.02	30.80	46.00	-15.20	Peak	VERTICAL
6	789.51	27.96	3.49	31.45	46.00	-14.55	Peak	VERTICAL
1	494.63	43.41	-1.69	41.72	46.00	-4.28	Peak	HORIZONTAL
2	499.48	37.93	-1.66	36.27	46.00	-9.73	Peak	HORIZONTAL
3	513.06	41.83	-1.43	40.40	46.00	-5.60	Peak	HORIZONTAL
4	729.37	28.31	2.60	30.91	46.00	-15.09	Peak	HORIZONTAL
5	784.66	29.02	3.44	32.46	46.00	-13.54	Peak	HORIZONTAL
6	919.49	27.13	5.69	32.82	46.00	-13.18	Peak	HORIZONTAL

## **Remark:**

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100kHz, VBW=300kHz.

# **Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n HT40 mode)**

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH Mid	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	424.79	27.61	-2.53	25.08	46.00	-20.92	Peak	VERTICAL
2	495.60	43.36	-1.69	41.67	46.00	-4.33	Peak	VERTICAL
3	514.03	42.37	-1.42	40.95	46.00	-5.05	Peak	VERTICAL
4	516.94	37.26	-1.37	35.89	46.00	-10.11	Peak	VERTICAL
5	655.65	27.92	1.11	29.03	46.00	-16.97	Peak	VERTICAL
6	789.51	29.35	3.49	32.84	46.00	-13.16	Peak	VERTICAL
1	497.54	40.16	-1.68	38.48	46.00	-7.52	Peak	HORIZONTAL
2	500.45	39.55	-1.64	37.91	46.00	-8.09	Peak	HORIZONTAL
3	514.03	36.21	-1.42	34.79	46.00	-11.21	Peak	HORIZONTAL
4	522.76	38.53	-1.27	37.26	46.00	-8.74	Peak	HORIZONTAL
5	765.26	27.73	3.24	30.97	46.00	-15.03	Peak	HORIZONTAL
6	800.18	28.57	3.59	32.16	46.00	-13.84	Peak	HORIZONTAL

## Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100kHz, VBW=300kHz.

# **Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n HT40 mode)**

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH High	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	435.46	27.85	-2.34	25.51	46.00	-20.49	Peak	VERTICAL
2	493.66	37.90	-1.70	36.20	46.00	-9.80	Peak	VERTICAL
3	499.48	40.20	-1.66	38.54	46.00	-7.46	Peak	VERTICAL
4	513.06	42.44	-1.43	41.01	46.00	-4.99	Peak	VERTICAL
5	520.82	31.68	-1.30	30.38	46.00	-15.62	Peak	VERTICAL
6	861.29	28.61	4.57	33.18	46.00	-12.82	Peak	VERTICAL
1	495.60	39.75	-1.69	38.06	46.00	-7.94	Peak	HORIZONTAL
2	499.48	37.93	-1.66	36.27	46.00	-9.73	Peak	HORIZONTAL
3	514.03	41.77	-1.42	40.35	46.00	-5.65	Peak	HORIZONTAL
4	522.76	38.21	-1.27	36.94	46.00	-9.06	Peak	HORIZONTAL
5	734.22	29.00	2.70	31.70	46.00	-14.30	Peak	HORIZONTAL
6	791.45	28.48	3.51	31.99	46.00	-14.01	Peak	HORIZONTAL

## **Remark:**

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100kHz, VBW=300kHz.

# **Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b mode)**

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH Low	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	3702.00	48.07	-13.07	35.00	74.00	-39.00	Peak	VERTICAL
2	4824.00	43.50	-9.22	34.28	74.00	-39.72	Peak	VERTICAL
1	4824.00	43.40	-9.22	34.18	74.00	-39.82	Peak	HORIZONTAL
2	7236.00	42.14	-1.68	40.46	74.00	-33.54	Peak	HORIZONTAL

## Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

# **Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b mode)**

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH Mid	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2512.00	49.37	-15.68	33.69	74.00	-40.31	Peak	VERTICAL
2	4874.00	42.74	-9.09	33.65	74.00	-40.35	Peak	VERTICAL
1	2386.00	47.47	-15.71	31.76	74.00	-42.24	Peak	HORIZONTAL
2	4874.00	44.36	-9.09	35.27	74.00	-38.73	Peak	HORIZONTAL

## Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

### Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b mode)

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH High	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	3639.00	48.69	-13.21	35.48	74.00	-38.52	Peak	VERTICAL
2	4924.00	44.55	-8.96	35.59	74.00	-38.41	Peak	VERTICAL
1	3639.00	49.21	-13.21	36.00	74.00	-38.00	Peak	HORIZONTAL
2	4924.00	45.44	-8.96	36.48	74.00	-37.52	Peak	HORIZONTAL

#### Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



# **Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g mode)**

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH Low	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	1812.00	61.82	-18.72	43.10	74.00	-30.90	Peak	VERTICAL
2	4874.00	43.51	-9.09	34.42	74.00	-39.58	Peak	VERTICAL
1	2155.00	60.66	-16.00	44.66	74.00	-29.34	Peak	HORIZONTAL
2	4874.00	42.49	-9.09	33.40	74.00	-40.60	Peak	HORIZONTAL

## **Remark:**

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

# **Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g mode)**

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH Mid	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	1812.00	60.51	-18.72	41.79	74.00	-32.21	Peak	VERTICAL
2	4874.00	42.58	-9.09	33.49	74.00	-40.51	Peak	VERTICAL
1	2155.00	59.61	-16.00	43.61	74.00	-30.39	Peak	HORIZONTAL
2	4874.00	42.59	-9.09	33.50	74.00	-40.50	Peak	HORIZONTAL

## Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

# **Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g mode)**

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH High	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2148.00	55.93	-16.06	39.87	74.00	-34.13	Peak	VERTICAL
2	4924.00	43.31	-8.96	34.35	74.00	-39.65	Peak	VERTICAL
1	1805.00	61.88	-18.75	43.13	74.00	-30.87	Peak	HORIZONTAL
2	4924.00	42.22	-8.96	33.26	74.00	-40.74	Peak	HORIZONTAL

## Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

# **Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n HT20 mode)**

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH Low	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	1812.00	61.82	-18.72	43.10	74.00	-30.90	Peak	VERTICAL
2	4874.00	43.51	-9.09	34.42	74.00	-39.58	Peak	VERTICAL
1	2155.00	60.66	-16.00	44.66	74.00	-29.34	Peak	HORIZONTAL
2	4874.00	42.49	-9.09	33.40	74.00	-40.60	Peak	HORIZONTAL

## Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

# **Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n HT20 mode)**

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH Mid	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	1812.00	60.51	-18.72	41.79	74.00	-32.21	Peak	VERTICAL
2	4874.00	42.58	-9.09	33.49	74.00	-40.51	Peak	VERTICAL
1	2155.00	59.61	-16.00	43.61	74.00	-30.39	Peak	HORIZONTAL
2	4874.00	42.59	-9.09	33.50	74.00	-40.50	Peak	HORIZONTAL

## Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

# **Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n HT20 mode)**

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH High	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2148.00	55.93	-16.06	39.87	74.00	-34.13	Peak	VERTICAL
2	4924.00	43.31	-8.96	34.35	74.00	-39.65	Peak	VERTICAL
1	1805.00	61.88	-18.75	43.13	74.00	-30.87	Peak	HORIZONTAL
2	4924.00	42.22	-8.96	33.26	74.00	-40.74	Peak	HORIZONTAL

## Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

# **Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n HT40 mode)**

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH Low	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2148.00	56.16	-16.06	40.10	74.00	-33.90	Peak	VERTICAL
2	4844.00	42.35	-9.17	33.18	74.00	-40.82	Peak	VERTICAL
1	2155.00	56.72	-16.00	40.72	74.00	-33.28	Peak	HORIZONTAL
2	4844.00	42.59	-9.17	33.42	74.00	-40.58	Peak	HORIZONTAL

## Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

# **Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n HT40 mode)**

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH Mid	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	3555.00	48.71	-13.48	35.23	74.00	-38.77	Peak	VERTICAL
2	4874.00	45.74	-9.09	36.65	74.00	-37.35	Peak	VERTICAL
1	2260.00	49.47	-15.63	33.84	74.00	-40.16	Peak	HORIZONTAL
2	4874.00	45.56	-9.09	36.47	74.00	-37.53	Peak	HORIZONTAL

## Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



# **Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n HT40 mode)**

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH High	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2176.00	49.79	-15.84	33.95	74.00	-40.05	Peak	VERTICAL
2	4904.00	45.92	-9.00	36.92	74.00	-37.08	Peak	VERTICAL
1	2659.00	53.53	-15.31	38.22	74.00	-35.78	Peak	HORIZONTAL
2	4904.00	45.15	-9.00	36.15	74.00	-37.85	Peak	HORIZONTAL

## Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

# **Radiated Spurious Emission Measurement Result (below 1GHz) BLE Mode**

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH Low	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	106.63	33.22	-10.07	23.15	43.50	-20.35	Peak	VERTICAL
2	385.99	27.73	-3.26	24.47	46.00	-21.53	Peak	VERTICAL
3	496.57	37.50	-1.68	35.82	46.00	-10.18	Peak	VERTICAL
4	517.91	38.61	-1.35	37.26	46.00	-8.74	Peak	VERTICAL
5	765.26	27.09	3.24	30.33	46.00	-15.67	Peak	VERTICAL
6	966.05	27.76	6.50	34.26	54.00	-19.74	Peak	VERTICAL
1	494.63	42.31	-1.69	40.62	46.00	-5.38	Peak	HORIZONTAL
2	499.48	44.62	-1.66	42.96	46.00	-3.04	Peak	HORIZONTAL
3	513.06	40.53	-1.43	39.10	46.00	-6.90	Peak	HORIZONTAL
4	518.88	33.19	-1.34	31.85	46.00	-14.15	Peak	HORIZONTAL
5	619.76	27.24	0.65	27.89	46.00	-18.11	Peak	HORIZONTAL
6	770.11	29.07	3.29	32.36	46.00	-13.64	Peak	HORIZONTAL

## **Remark:**

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100kHz, VBW=300kHz.

# **Radiated Spurious Emission Measurement Result (below 1GHz) BLE Mode**

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH Mid	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	489.78	29.66	-1.73	27.93	46.00	-18.07	Peak	VERTICAL
2	494.63	34.59	-1.69	32.90	46.00	-13.10	Peak	VERTICAL
3	497.54	44.52	-1.68	42.84	46.00	-3.16	Peak	VERTICAL
4	514.03	41.18	-1.42	39.76	46.00	-6.24	Peak	VERTICAL
5	522.76	34.97	-1.27	33.70	46.00	-12.30	Peak	VERTICAL
6	862.26	27.66	4.59	32.25	46.00	-13.75	Peak	VERTICAL
1	423.82	28.44	-2.55	25.89	46.00	-20.11	Peak	HORIZONTAL
2	492.69	33.82	-1.72	32.10	46.00	-13.90	Peak	HORIZONTAL
3	499.48	35.81	-1.66	34.15	46.00	-11.85	Peak	HORIZONTAL
4	516.94	38.55	-1.37	37.18	46.00	-8.82	Peak	HORIZONTAL
5	595.51	27.88	0.31	28.19	46.00	-17.81	Peak	HORIZONTAL
6	788.54	29.51	3.48	32.99	46.00	-13.01	Peak	HORIZONTAL

## **Remark:**

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100kHz, VBW=300kHz.

### Radiated Spurious Emission Measurement Result (below 1GHz) BLE Mode

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH High	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	493.66	35.64	-1.70	33.94	46.00	-12.06	Peak	VERTICAL
2	499.48	35.46	-1.66	33.80	46.00	-12.20	Peak	VERTICAL
3	514.03	42.97	-1.42	41.55	46.00	-4.45	Peak	VERTICAL
4	516.94	36.77	-1.37	35.40	46.00	-10.60	Peak	VERTICAL
5	522.76	30.84	-1.27	29.57	46.00	-16.43	Peak	VERTICAL
6	769.14	29.58	3.28	32.86	46.00	-13.14	Peak	VERTICAL
1	494.63	36.33	-1.69	34.64	46.00	-11.36	Peak	HORIZONTAL
2	500.45	37.18	-1.64	35.54	46.00	-10.46	Peak	HORIZONTAL
3	518.88	36.05	-1.34	34.71	46.00	-11.29	Peak	HORIZONTAL
4	726.46	27.69	2.52	30.21	46.00	-15.79	Peak	HORIZONTAL
5	804.06	28.63	3.65	32.28	46.00	-13.72	Peak	HORIZONTAL
6	835.10	27.88	4.13	32.01	46.00	-13.99	Peak	HORIZONTAL

#### Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100kHz, VBW=300kHz.

# **Radiated Spurious Emission Measurement Result (above 1GHz) BLE Mode**

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH Low	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	1602.00	58.79	-19.02	39.77	74.00	-34.23	Peak	VERTICAL
2	4528.00	53.74	-10.22	43.52	74.00	-30.48	Peak	VERTICAL
1	1595.00	61.75	-19.03	42.72	74.00	-31.28	Peak	HORIZONTAL
2	4192.00	52.79	-11.37	41.42	74.00	-32.58	Peak	HORIZONTAL

## **Remark:**

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

# **Radiated Spurious Emission Measurement Result (above 1GHz) BLE Mode**

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH Mid	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	1602.00	52.58	-19.02	33.56	74.00	-40.44	Peak	VERTICAL
2	5746.00	50.79	-6.74	44.05	74.00	-29.95	Peak	VERTICAL
1	1595.00	52.34	-19.03	33.31	74.00	-40.69	Peak	HORIZONTAL
2	5361.00	51.67	-7.95	43.72	74.00	-30.28	Peak	HORIZONTAL

## **Remark:**

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

# **Radiated Spurious Emission Measurement Result (above 1GHz) BLE Mode**

Operation Mode	TX mode	Test Date	2018/10/01
Channel number	CH High	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	4017.00	50.07	-11.91	38.16	74.00	-35.84	Peak	VERTICAL
2	5326.00	50.71	-8.02	42.69	74.00	-31.31	Peak	VERTICAL
1	3632.00	49.84	-13.22	36.62	74.00	-37.38	Peak	HORIZONTAL
2	5760.00	51.56	-6.69	44.87	74.00	-29.13	Peak	HORIZONTAL

## **Remark:**

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

## **10 Peak Power Spectral Density**

### **10.1 Standard Applicable:**

According to §15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### **10.2 Measurement Equipment Used:**

Refer to section 6.2 for details.

### **10.3 Test Set-up:**

Refer to section 7.3 for details.

### **10.4 Measurement Procedure:**

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Set the span to 1.5 DTS bandwidth., Sweep=Auto
4. Record the max. reading.
5. Repeat above procedures until all frequency measured were complete.



## 10.5 Measurement Result:

### 802.11b Mode

CH	Power Density Level dBm/3kHz	Maximum Limit (dBm)
Low	-7.43	8
Mid	-1.57	8
High	-1.80	8

### 802.11g Mode

CH	Power Density Level dBm/3kHz	Maximum Limit (dBm)
Low	-7.38	8
Mid	-9.46	8
High	-9.34	8

### 802.11n HT20 Mode

CH	Power Density Level dBm/3kHz	Maximum Limit (dBm)
Low	-10.53	8
Mid	-5.47	8
High	-5.38	8

### 802.11n HT40 Mode


CH	Power Density Level dBm/3kHz	Maximum Limit (dBm)
Low	-16.81	8
Mid	-15.58	8
High	-15.11	8

### BLE Mode

CH	Power Density Level dBm/3kHz	Maximum Limit (dBm)
Low	-7.81	8
Mid	-7.70	8
High	-7.51	8

## 802.11b

### Power Spectral Density Test Plot (CH-Low)

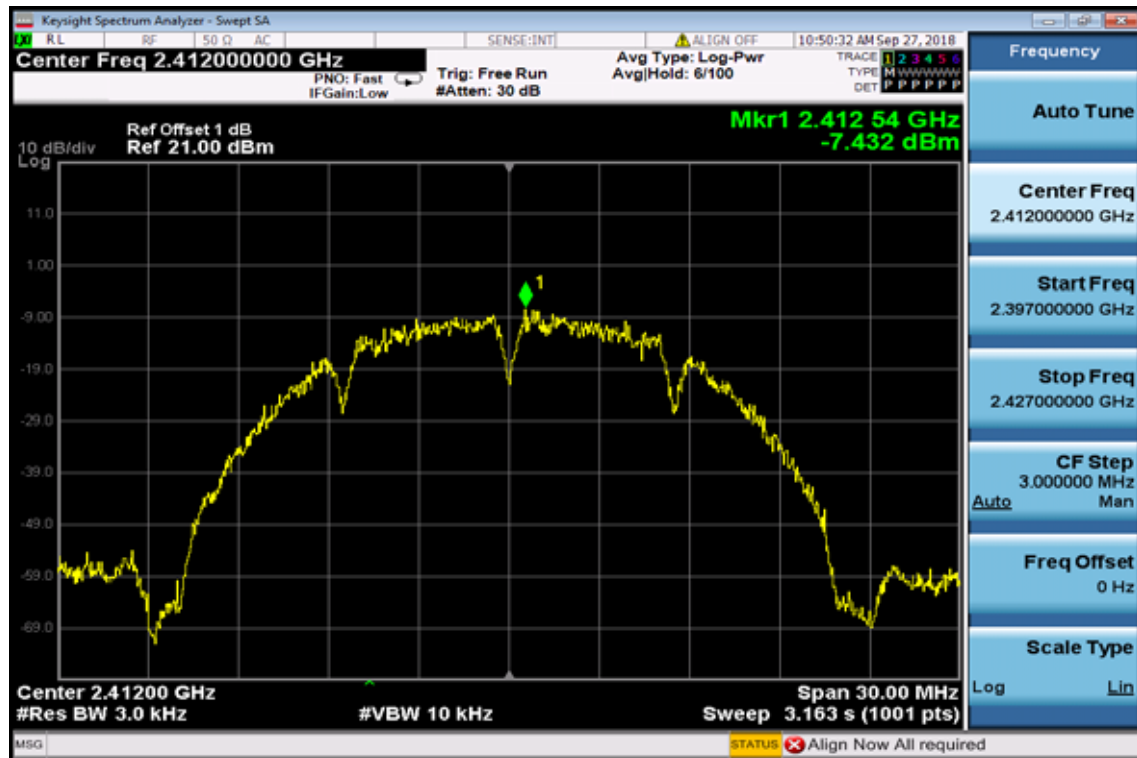

### Power Spectral Density Test Plot (CH-Mid)




## Power Spectral Density Test Plot (CH-High)




802.11g


## Power Spectral Density Test Plot (CH-Low)

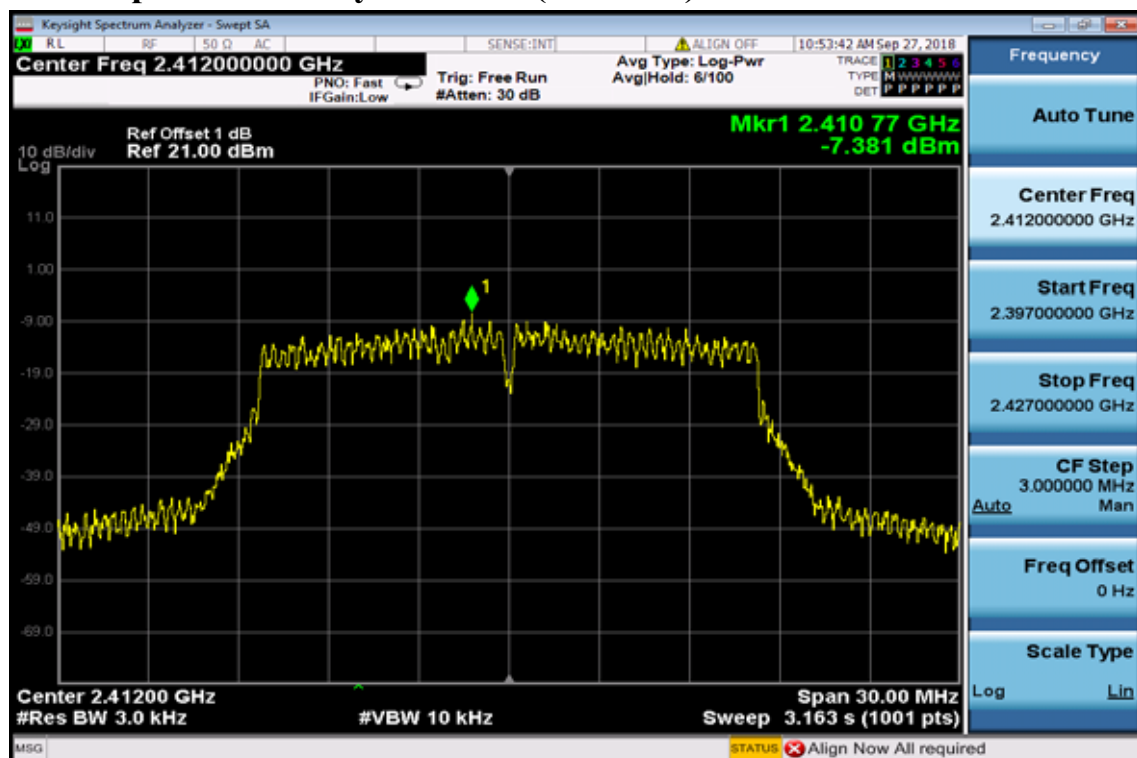

## Power Spectral Density Test Plot (CH-Mid)

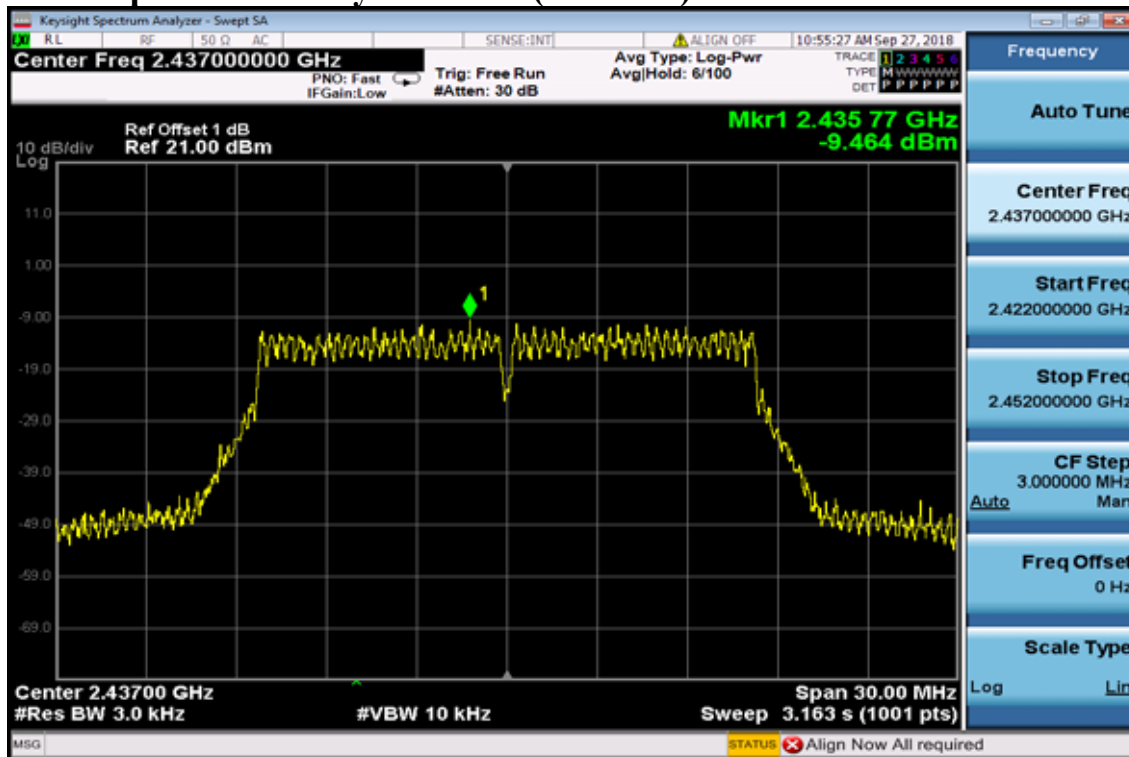


## Power Spectral Density Test Plot (CH-High)

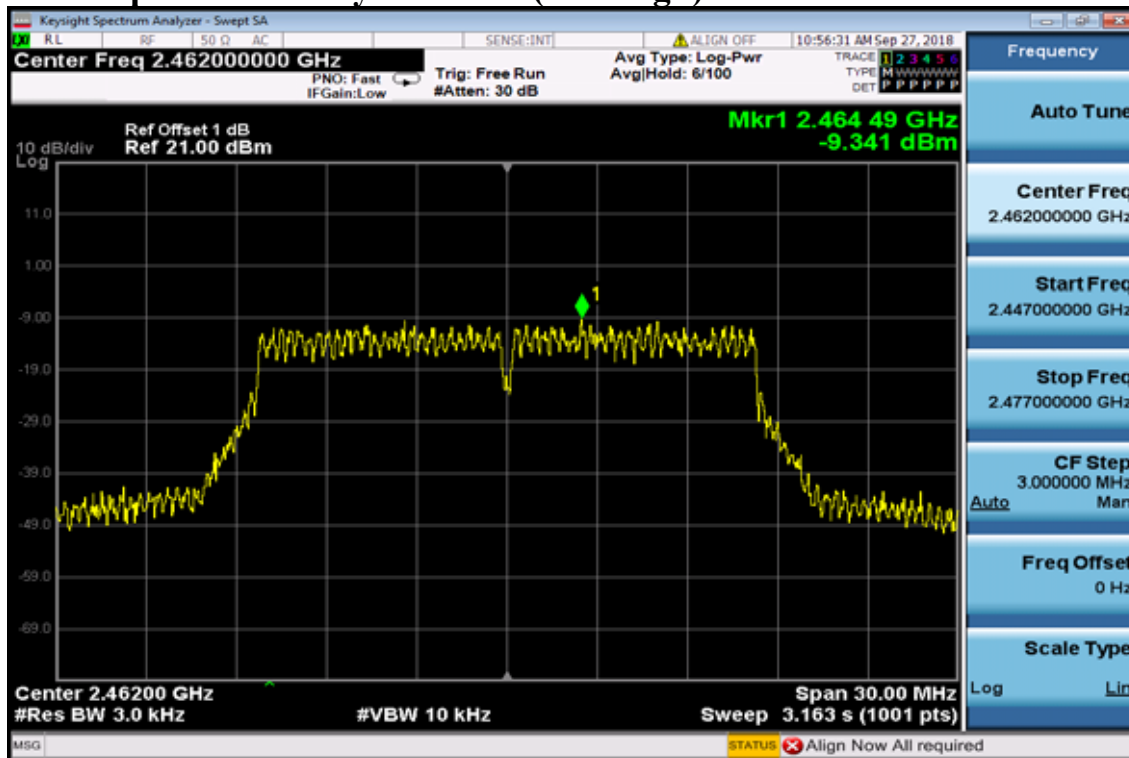


802.11n\_20M


Power Spectral Density Test Plot (CH-Low)

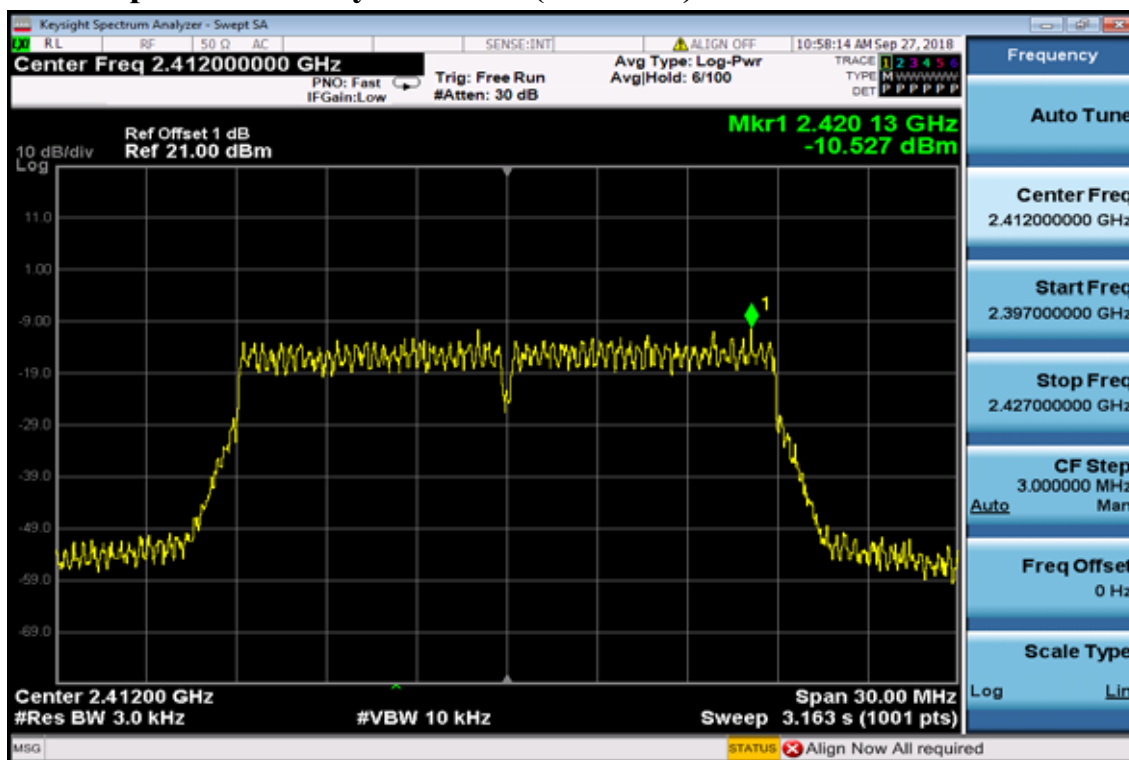

Power Spectral Density Test Plot (CH-Mid)

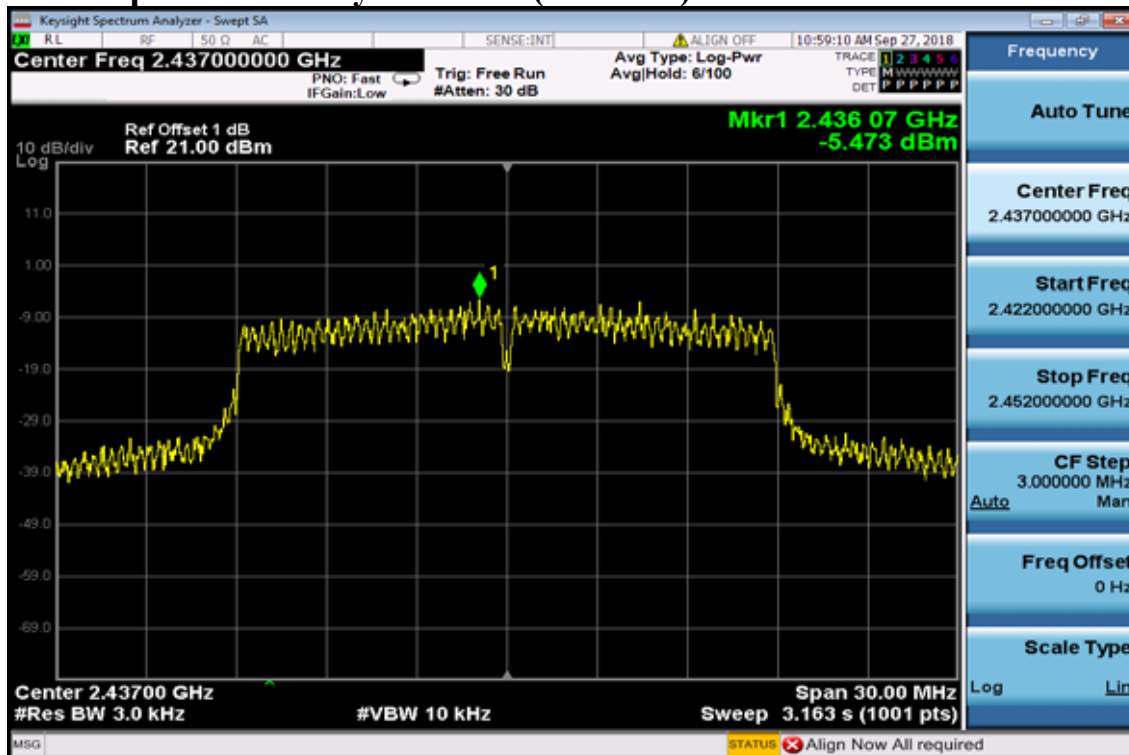


## Power Spectral Density Test Plot (CH-High)

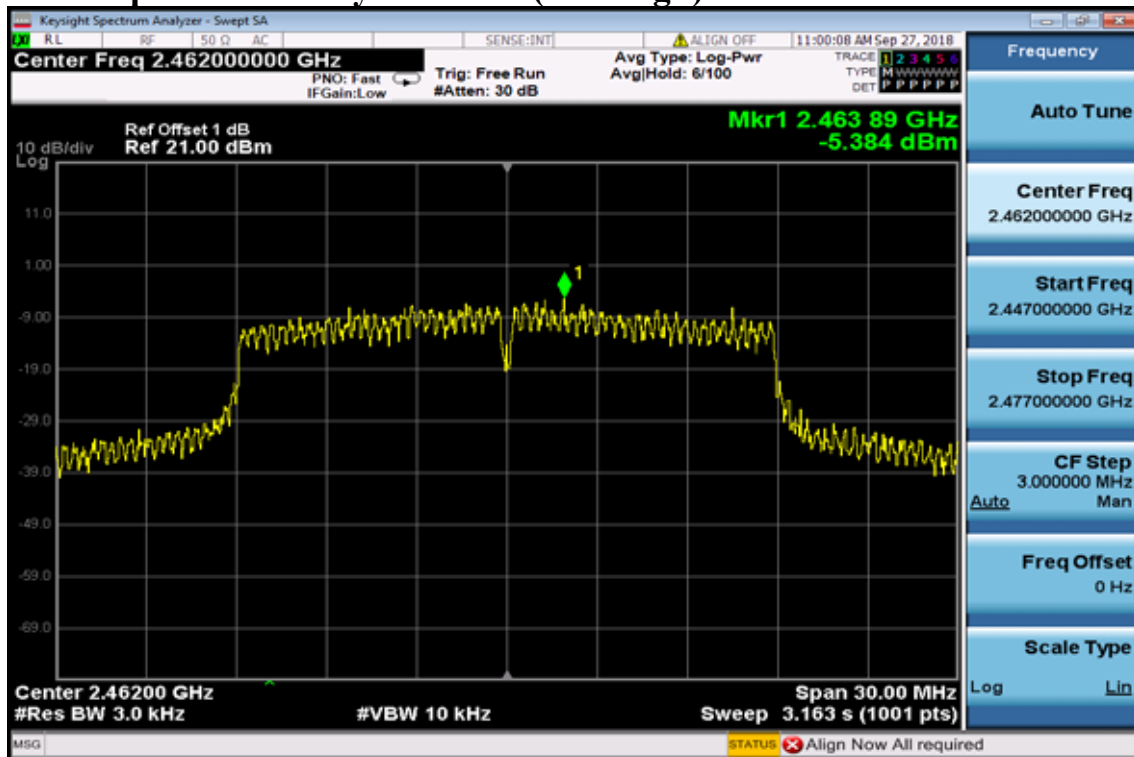


## 802.11n\_40M

## Power Spectral Density Test Plot (CH-Low)

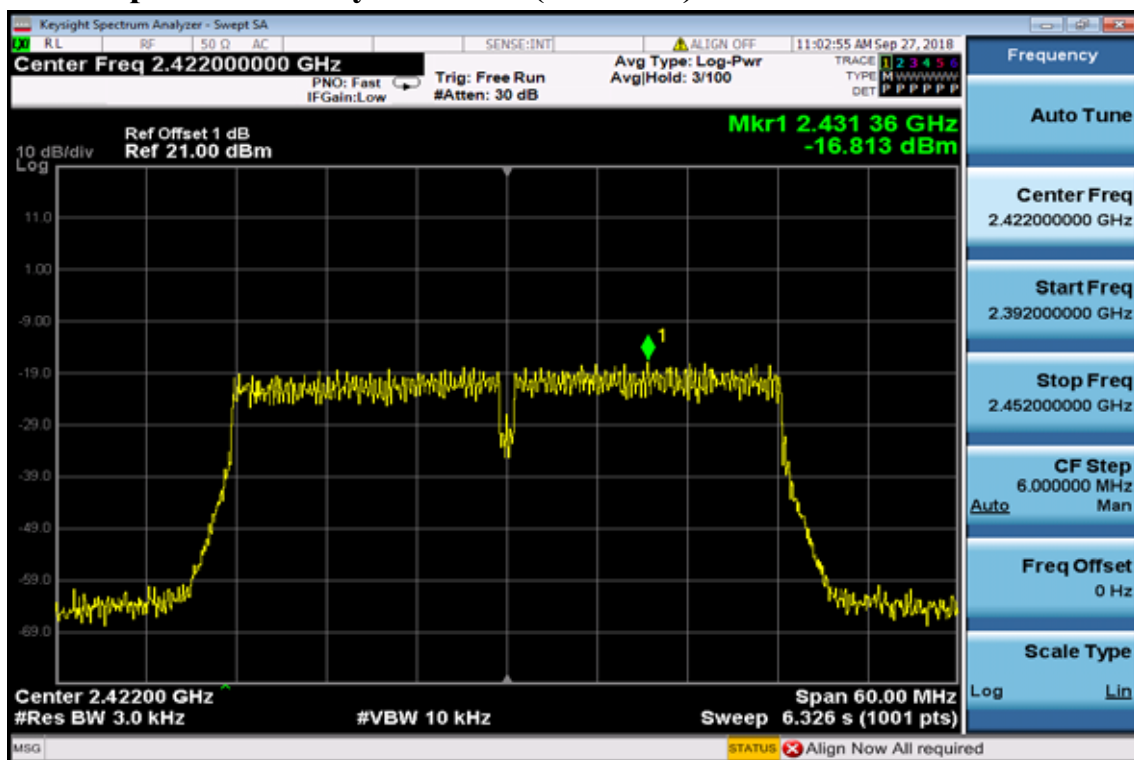





## Power Spectral Density Test Plot (CH-Mid)

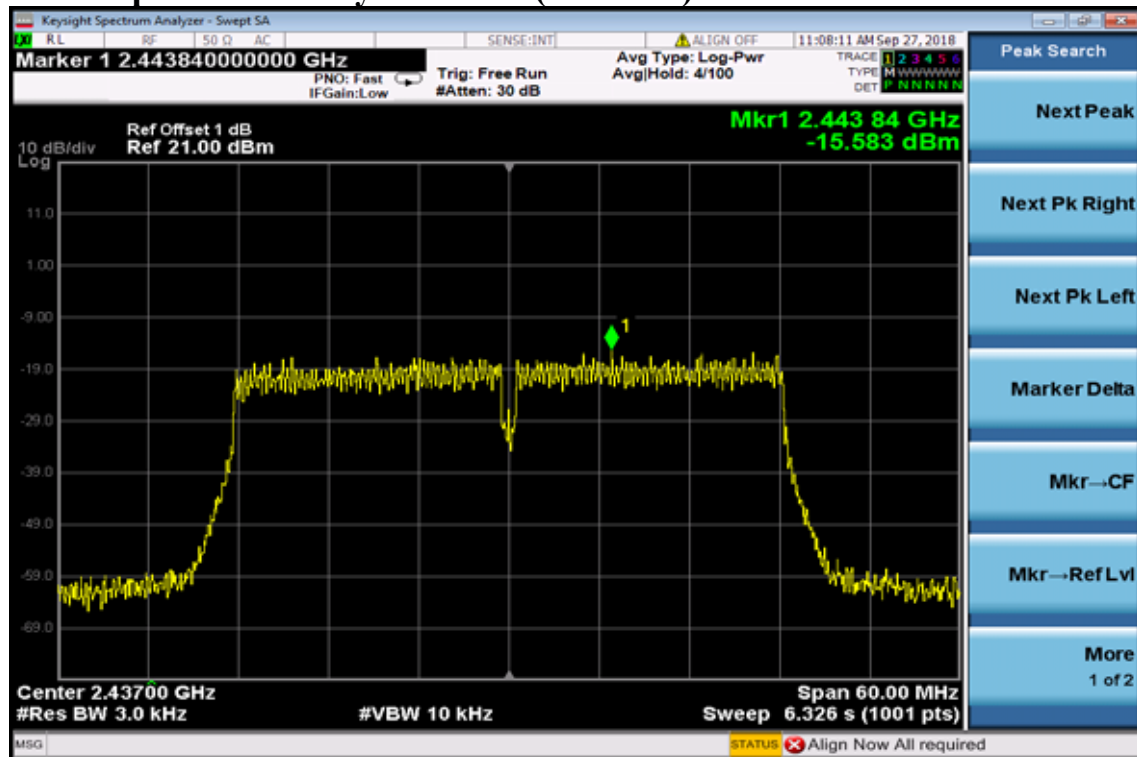


## Power Spectral Density Test Plot (CH-High)

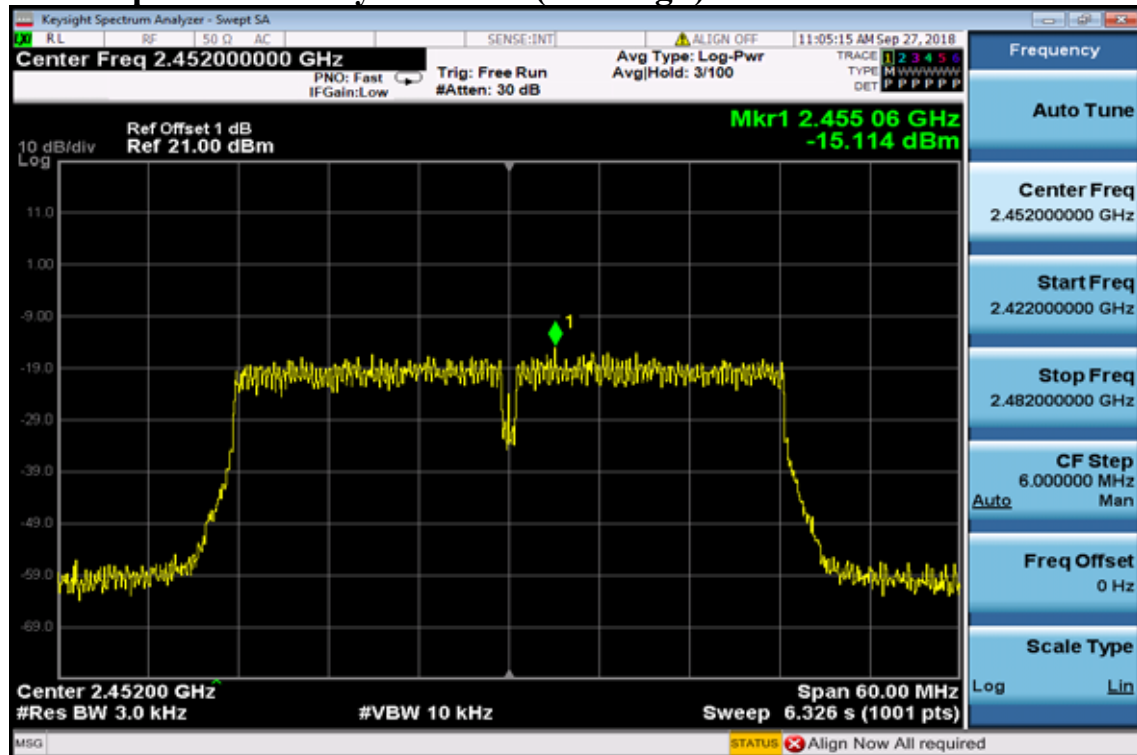

## BT BLE Power Spectral Density Test Plot (CH-Low)

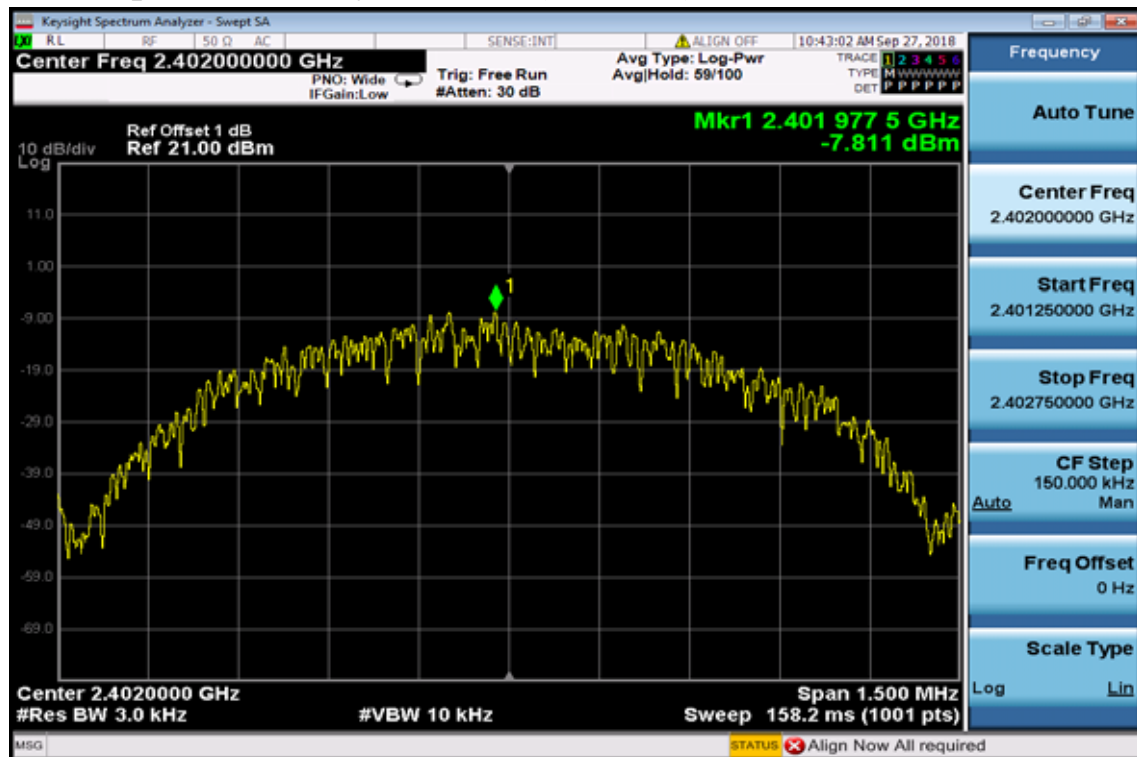


## Power Spectral Density Test Plot (CH-Mid)

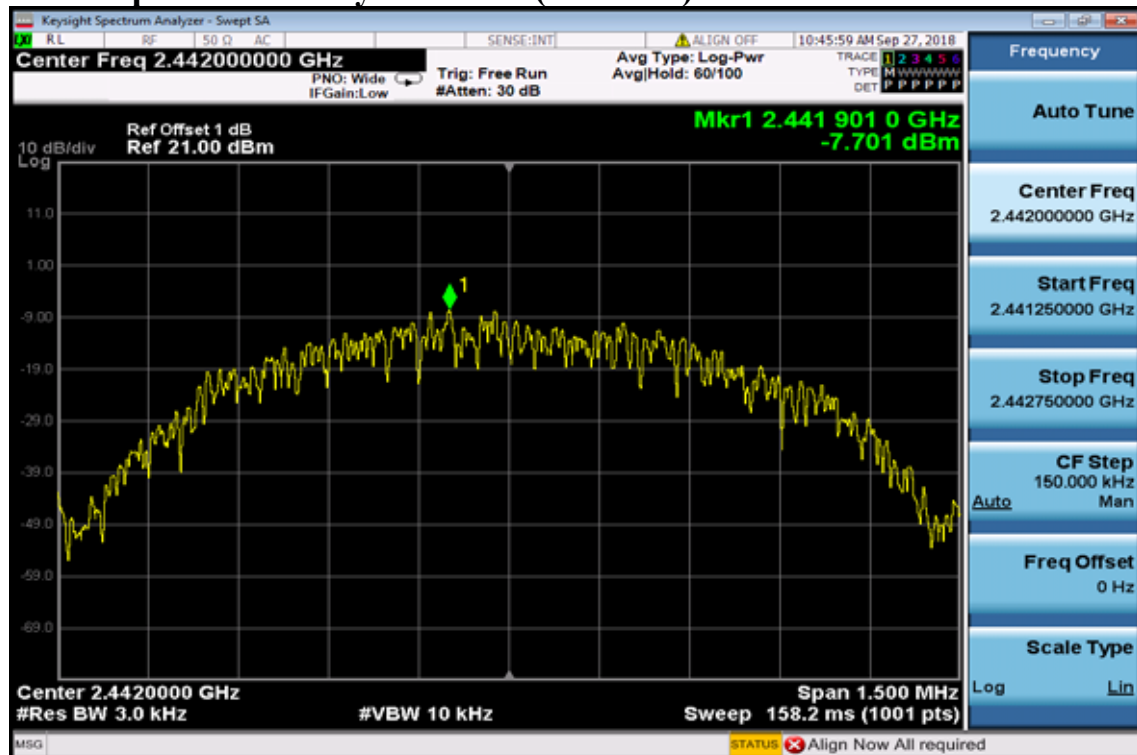



## Power Spectral Density Test Plot (CH-High)

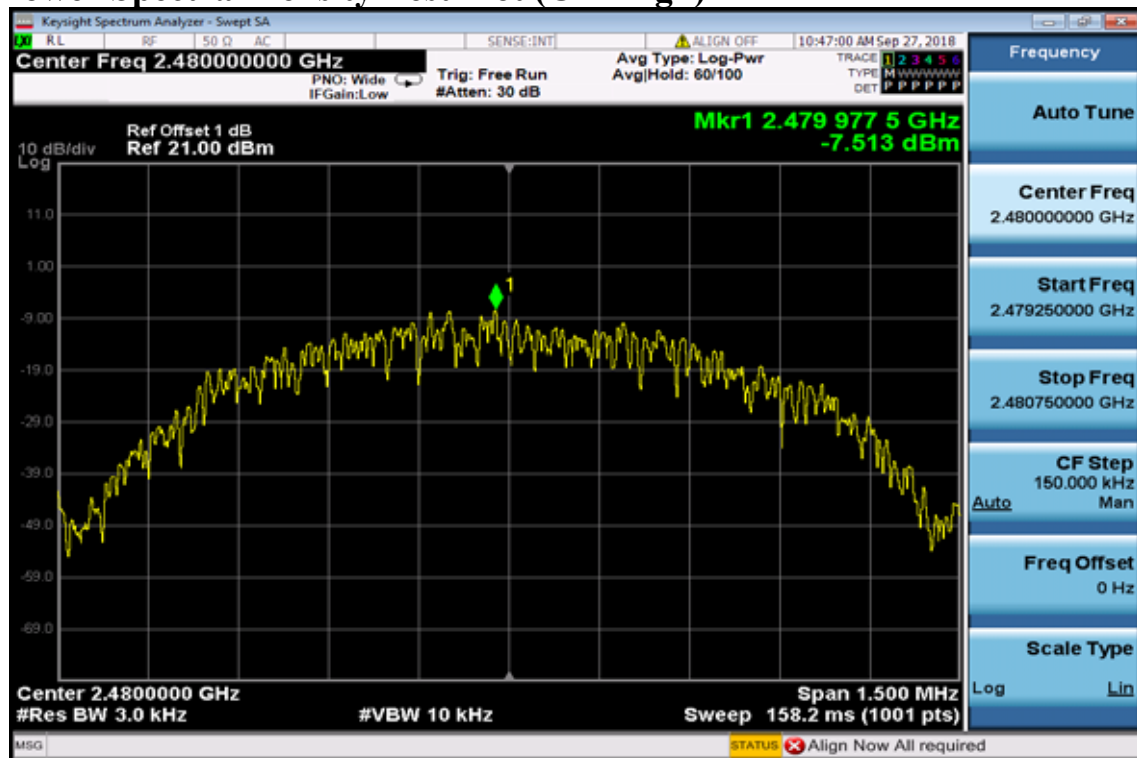

## **11 Antenna Requirement**

### **11.1 Standard Applicable:**

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

### **11.2 Antenna Connected Construction:**

The directional gains of antenna used for transmitting is 0.5dBi, which is revised PIFA antenna and no consideration of replacement by user. Please see EUT photo and antenna spec. for details.