

Test Plot 1#: GSM 850_Head Left Cheek_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.994$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.6 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.521 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.58 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.504 W/kg; SAR(10 g) = 0.332 W/kg

Maximum value of SAR (measured) = 0.511 W/kg

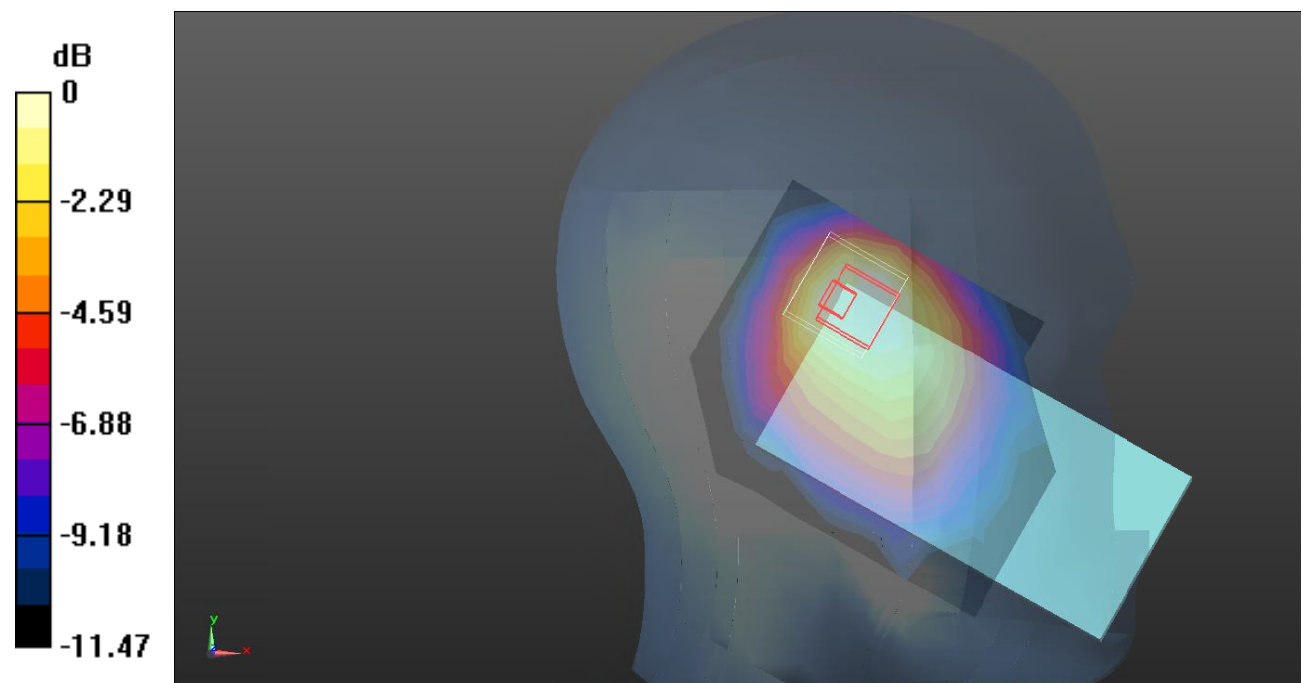

0 dB = 0.511 W/kg = -2.92 dB dBW/kg

Test Plot 2#: GSM 850_Head Left Tilt_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.994$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.6 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.510 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.16 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.550 W/kg; SAR(10 g) = 0.295 W/kg

Maximum value of SAR (measured) = 0.601 W/kg

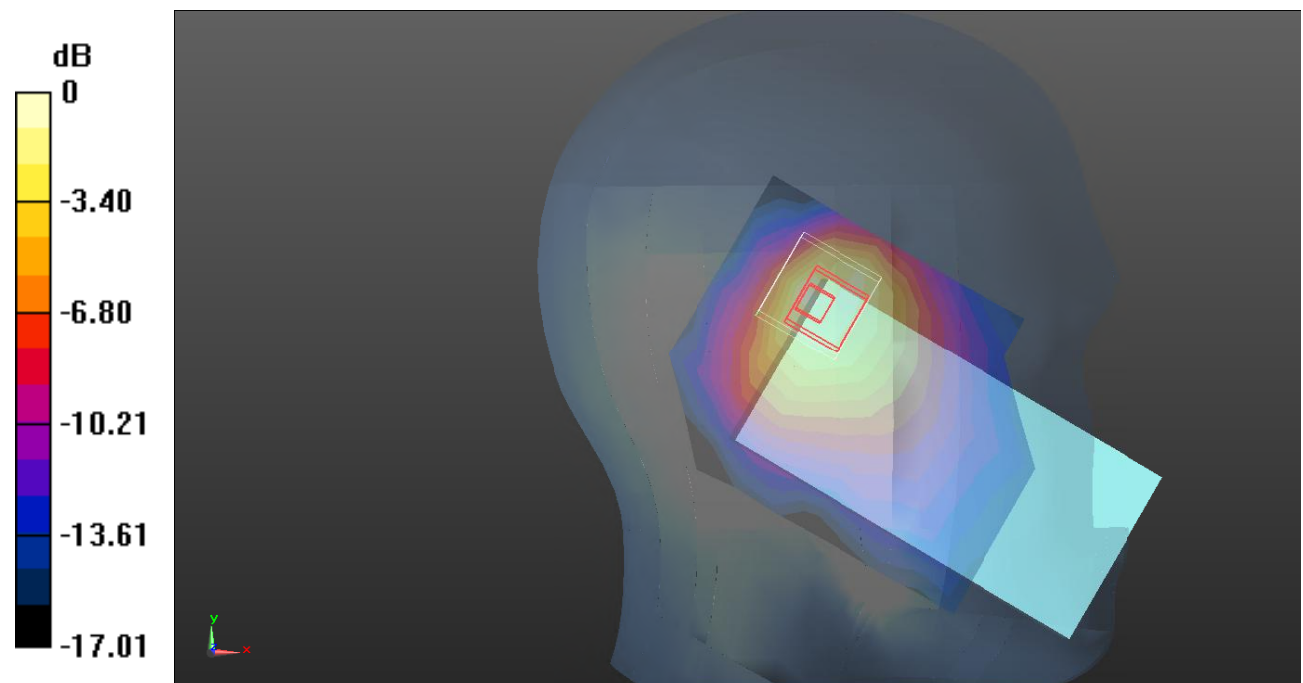

0 dB = 0.601 W/kg = -2.21 dB dBW/kg

Test Plot 3#: GSM 850_Head Right Cheek_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.994$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.6 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.484 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.31 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.759 W/kg

SAR(1 g) = 0.473 W/kg; SAR(10 g) = 0.311 W/kg

Maximum value of SAR (measured) = 0.507 W/kg

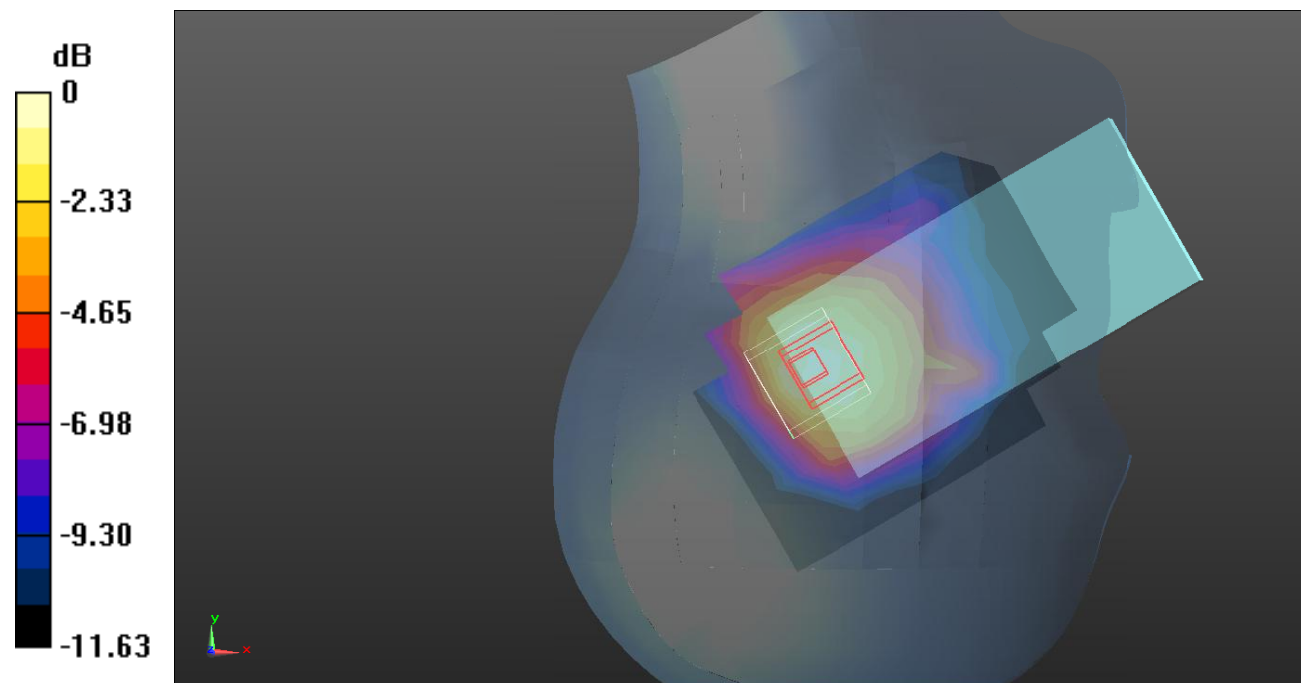

0 dB = 0.507 W/kg = -2.95 dB dBW/kg

Test Plot 4#: GSM 850_Head Right Tilt_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.994$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.6 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.431 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.37 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.761 W/kg

SAR(1 g) = 0.451 W/kg; SAR(10 g) = 0.277 W/kg

Maximum value of SAR (measured) = 0.490 W/kg

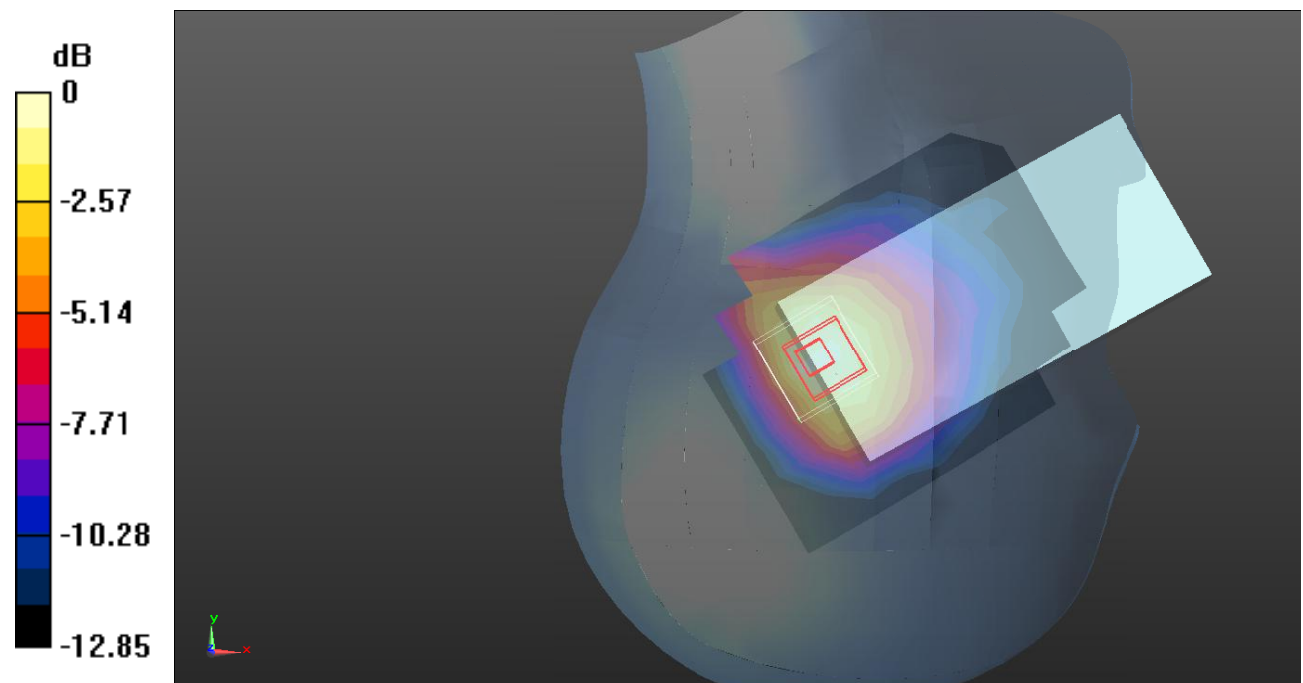

0 dB = 0.490 W/kg = -3.10 dB dBW/kg

Test Plot 5#: GSM 850_Body Worn Back_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.994$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.6 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.266 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.87 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.432 W/kg

SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.162 W/kg

Maximum value of SAR (measured) = 0.268 W/kg

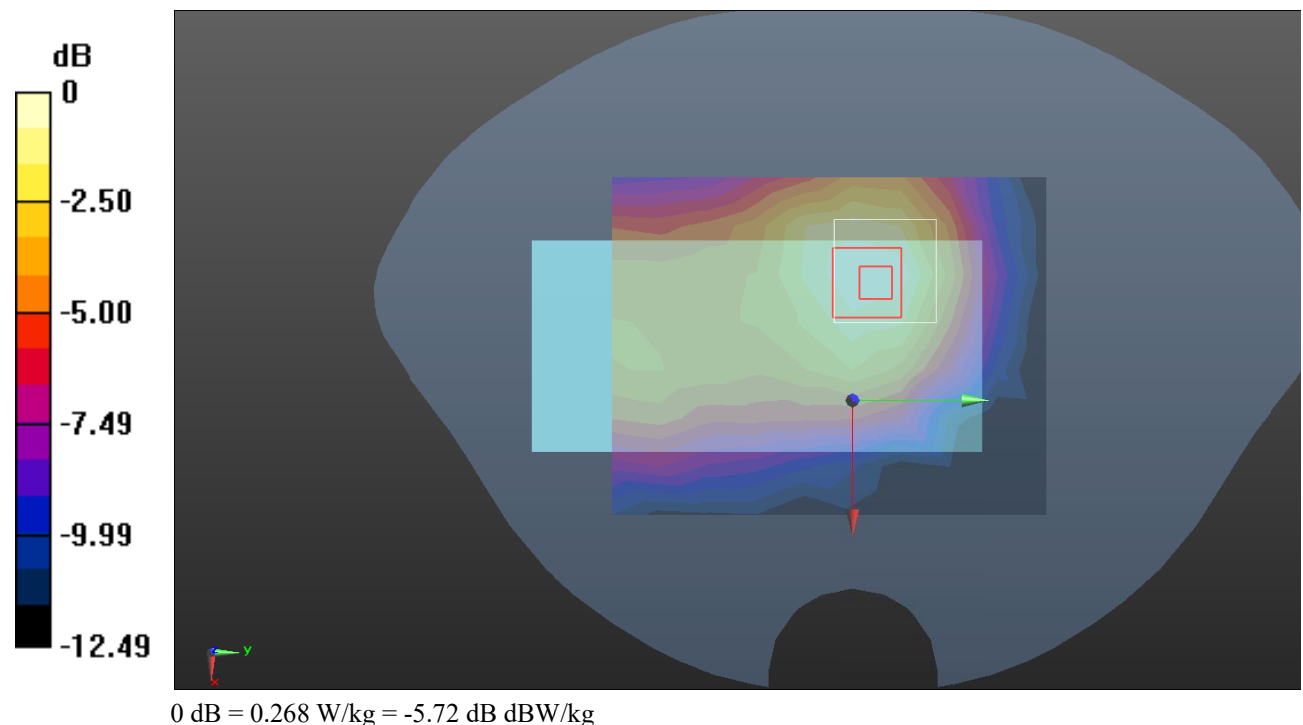

Test Plot 6#: GSM 850_Body Front_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.994$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.6 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.121 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.35 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.209 W/kg

SAR(1 g) = 0.131 W/kg; SAR(10 g) = 0.089 W/kg

Maximum value of SAR (measured) = 0.137 W/kg

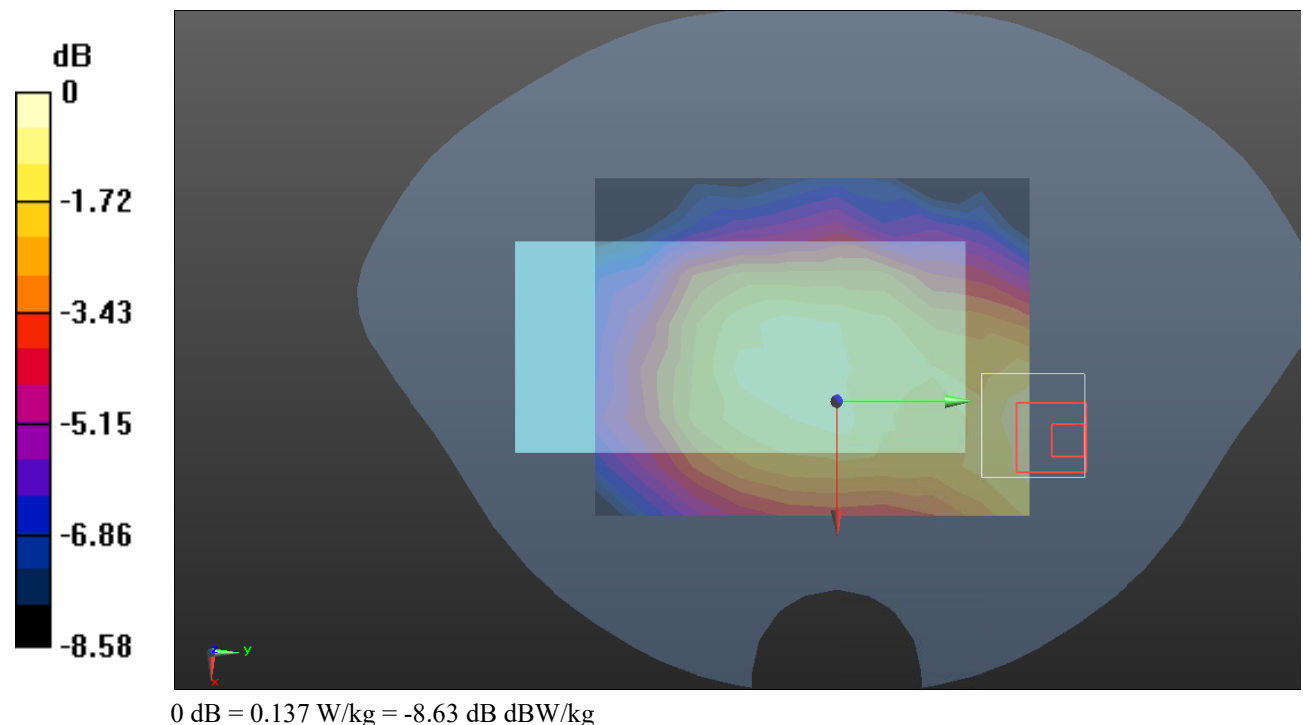

Test Plot 7#: GSM 850_Body Back_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.994$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.6 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.214 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.35 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.321 W/kg

SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 0.214 W/kg

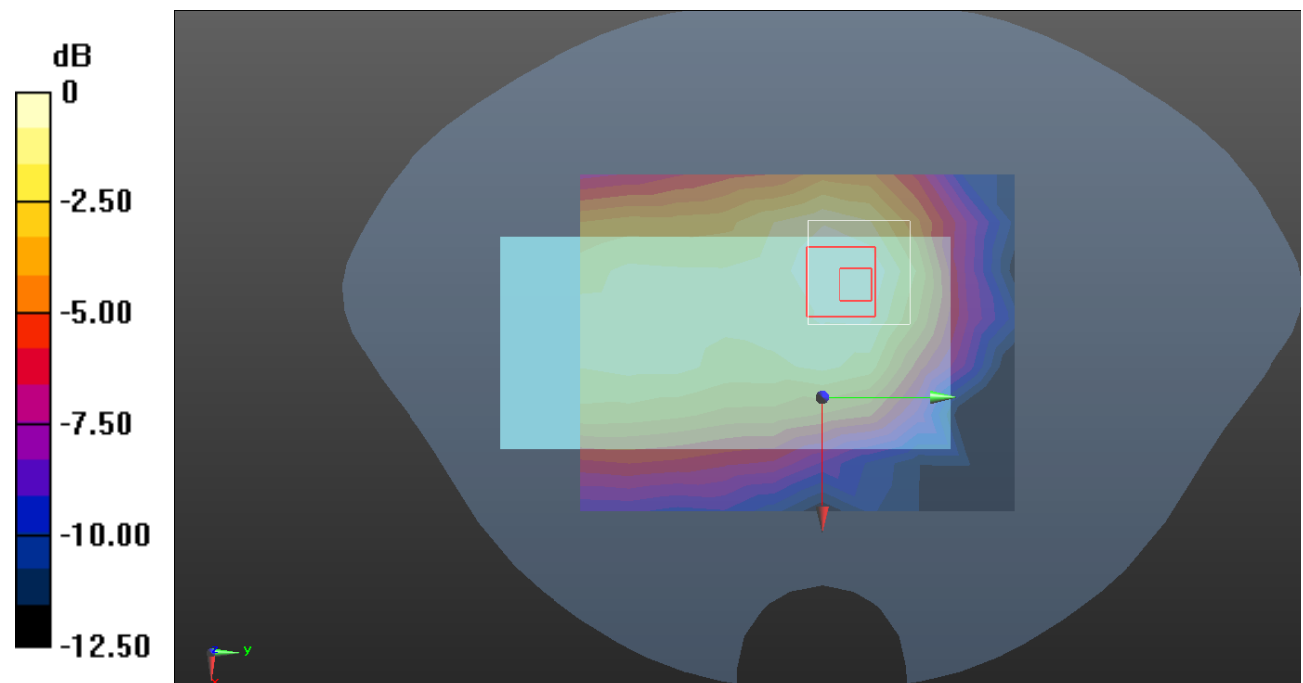

0 dB = 0.214 W/kg = -6.70 dB dBW/kg

Test Plot 8#: GSM 850_Body Right_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.994$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.6 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.111 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.943 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.146 W/kg

SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 0.114 W/kg

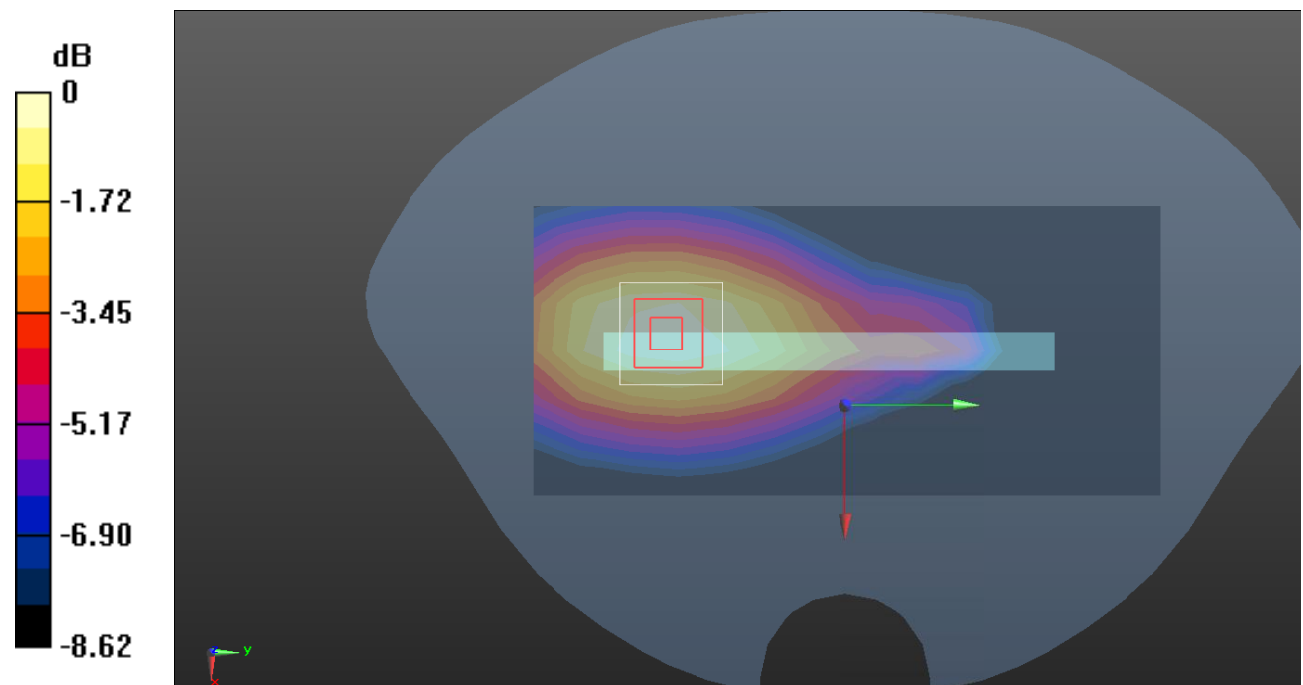

0 dB = 0.114 W/kg = -9.43 dB dBW/kg

Test Plot 9#: GSM 850_Body Top_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.994$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.6 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.154 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.33 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.281 W/kg

SAR(1 g) = 0.159 W/kg; SAR(10 g) = 0.096 W/kg

Maximum value of SAR (measured) = 0.171 W/kg

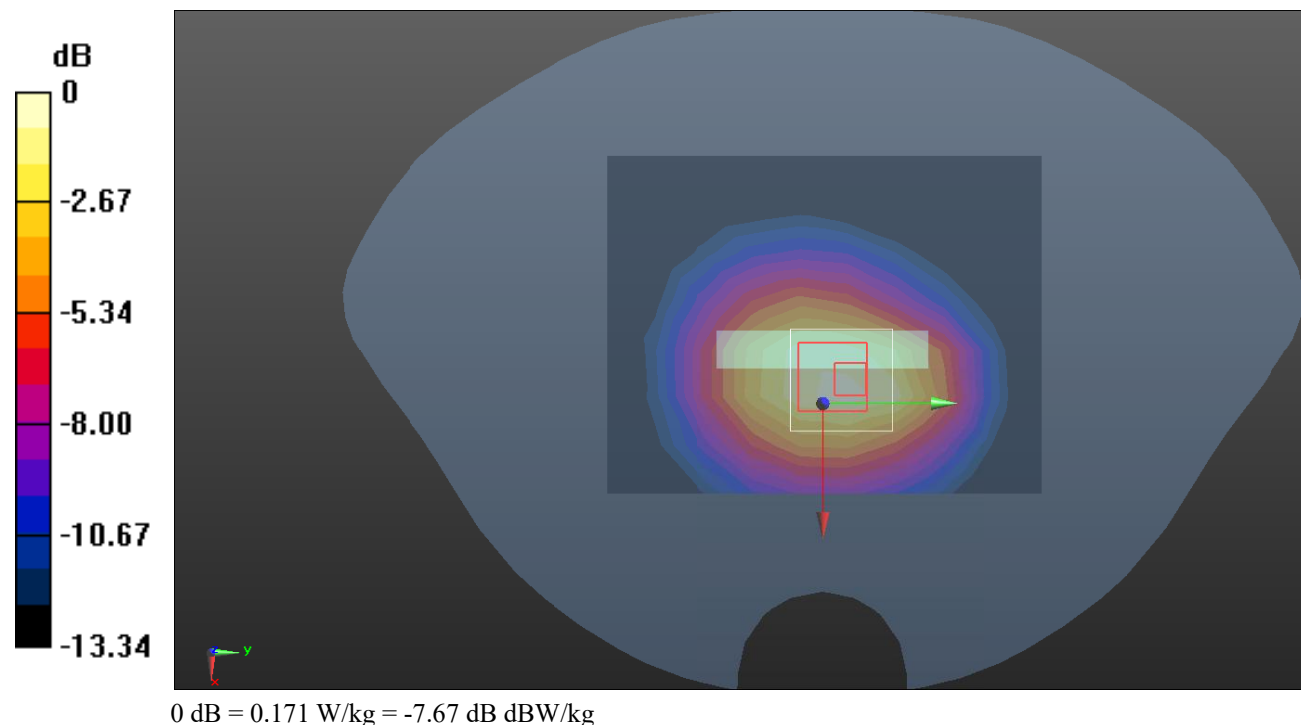

Test Plot 10#: PCS 1900_Head Left Cheek_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.457$ S/m; $\epsilon_r = 40.958$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.817 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.67 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.743 W/kg; SAR(10 g) = 0.381 W/kg

Maximum value of SAR (measured) = 0.791 W/kg

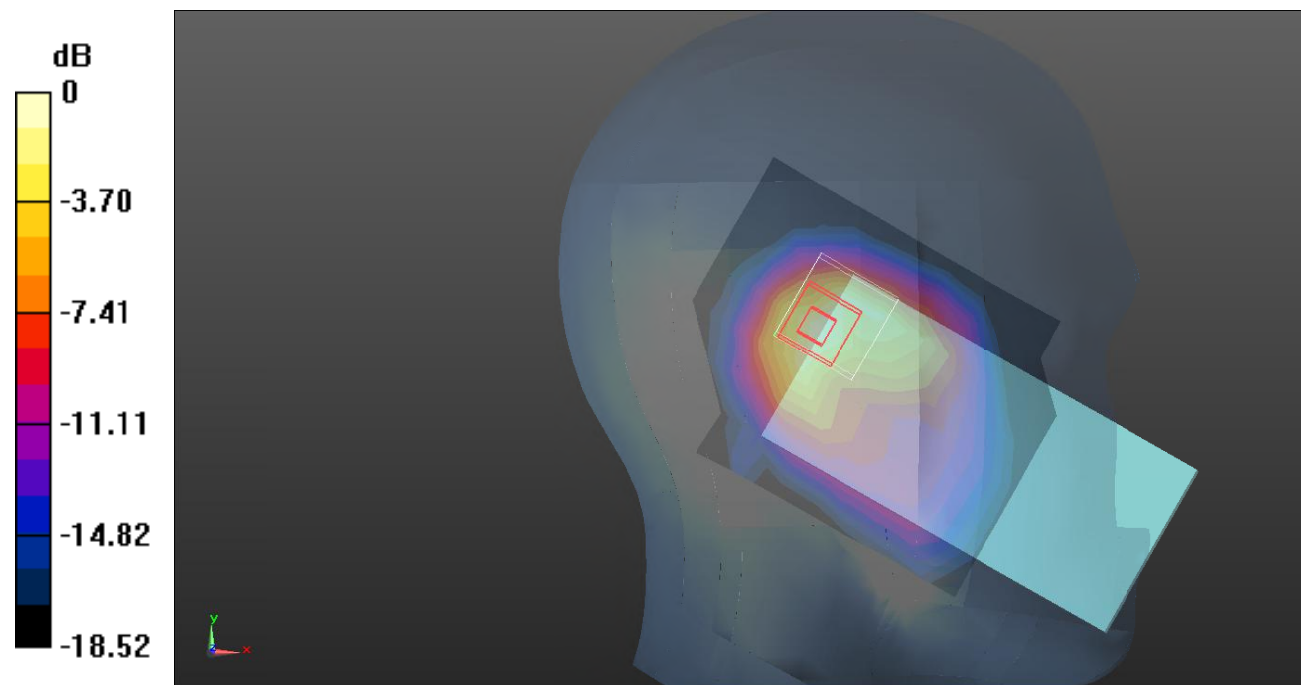

0 dB = 0.791 W/kg = -1.02 dB dBW/kg

Test Plot 11#: PCS 1900_Head Left Tilt_Low**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic GSM (0); Frequency: 1850.2 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.448$ S/m; $\epsilon_r = 40.390$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1850.2 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.10 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.72 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.03 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.532 W/kg

Maximum value of SAR (measured) = 1.15 W/kg

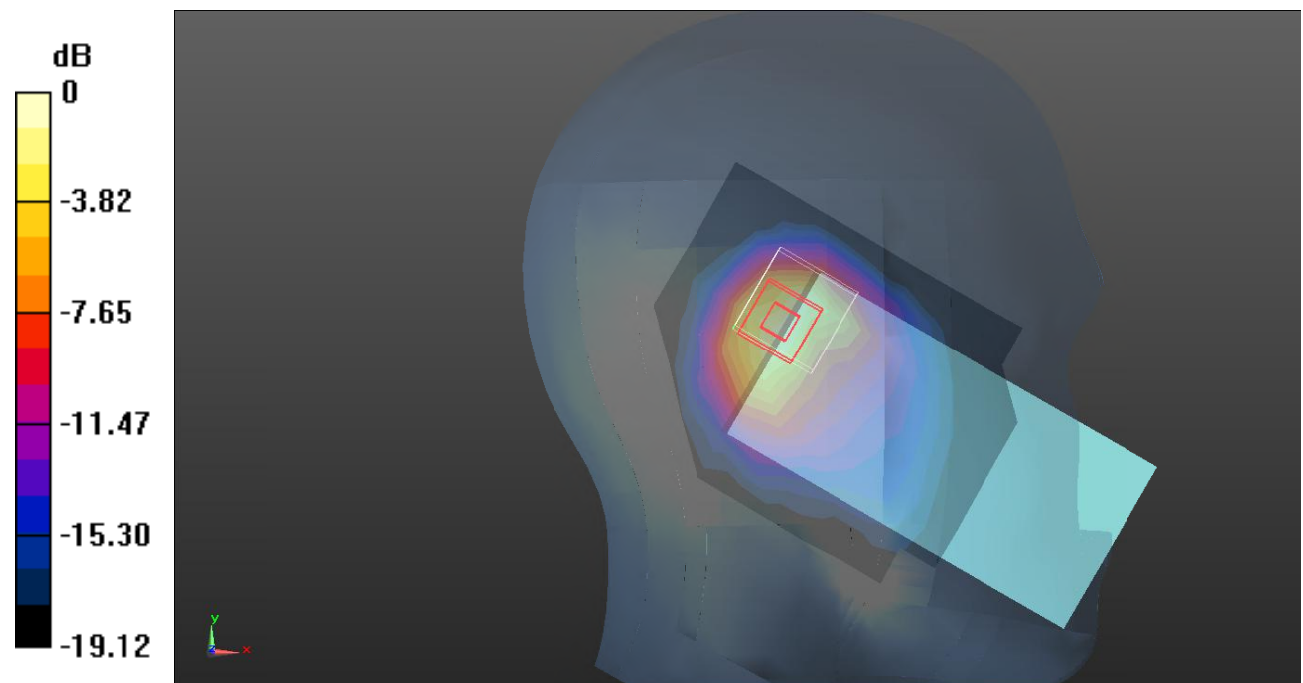

0 dB = 1.15 W/kg = 0.61 dB dBW/kg

Test Plot 12#: PCS 1900_Head Left Tilt_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.457$ S/m; $\epsilon_r = 40.958$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.16 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.03 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.520 W/kg

Maximum value of SAR (measured) = 1.19 W/kg

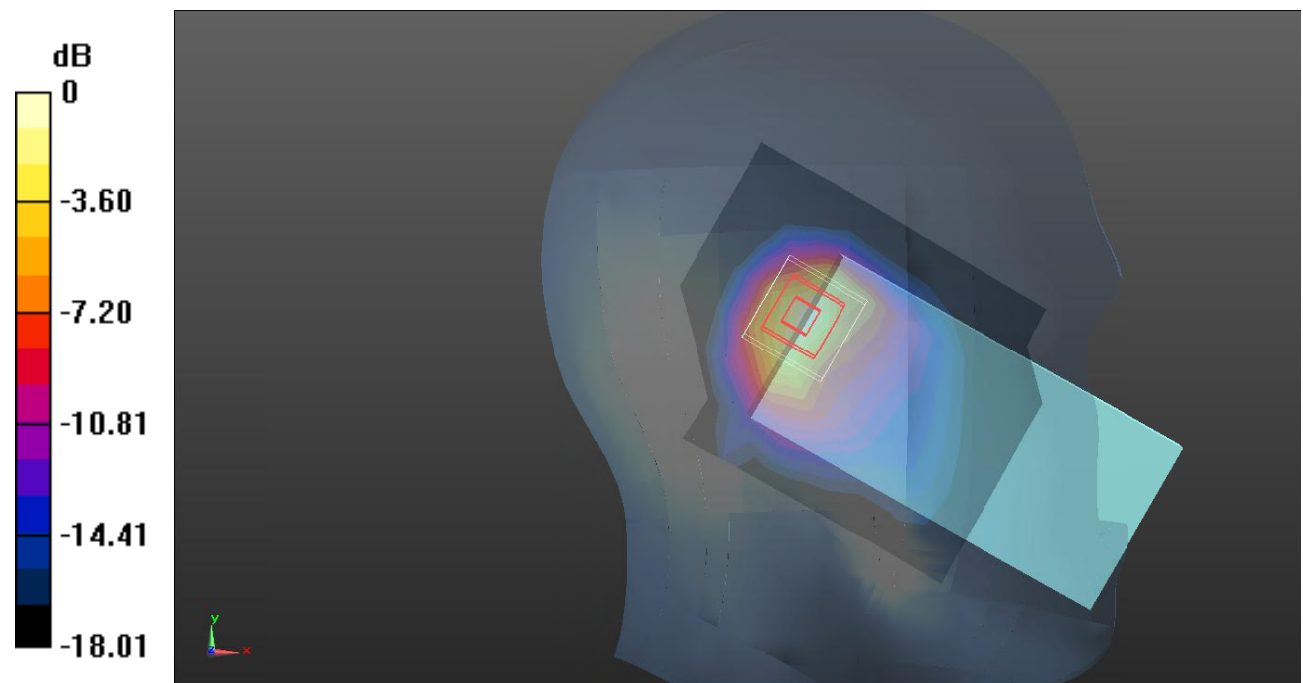

0 dB = 1.19 W/kg = 0.76 dB dBW/kg

Test Plot 13#: PCS 1900_Head Left Tilt_High**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic GSM (0); Frequency: 1909.8 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.457$ S/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1909.8 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.962 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.18 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.878 W/kg; SAR(10 g) = 0.434 W/kg

Maximum value of SAR (measured) = 1.02 W/kg

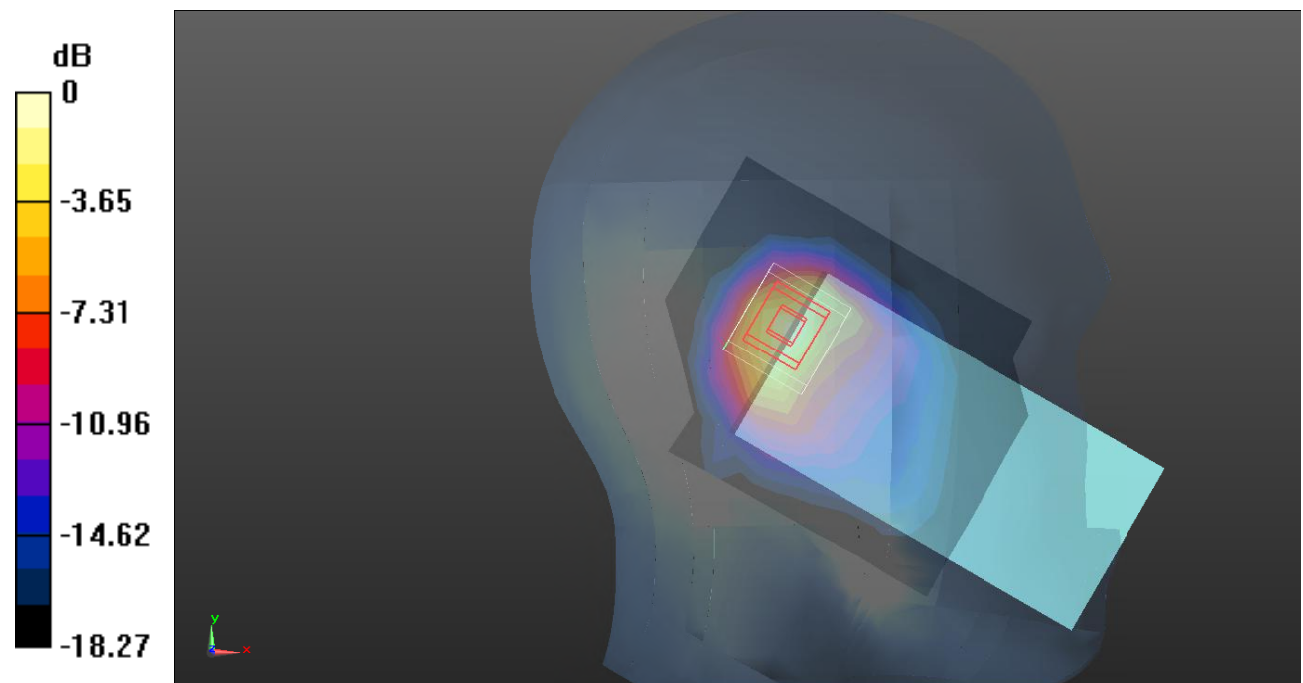

0 dB = 1.02 W/kg = 0.09 dB dBW/kg

Test Plot 14#: PCS 1900_Head Right Cheek_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.457$ S/m; $\epsilon_r = 40.958$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.542 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.04 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.861 W/kg

SAR(1 g) = 0.533 W/kg; SAR(10 g) = 0.316 W/kg

Maximum value of SAR (measured) = 0.610 W/kg

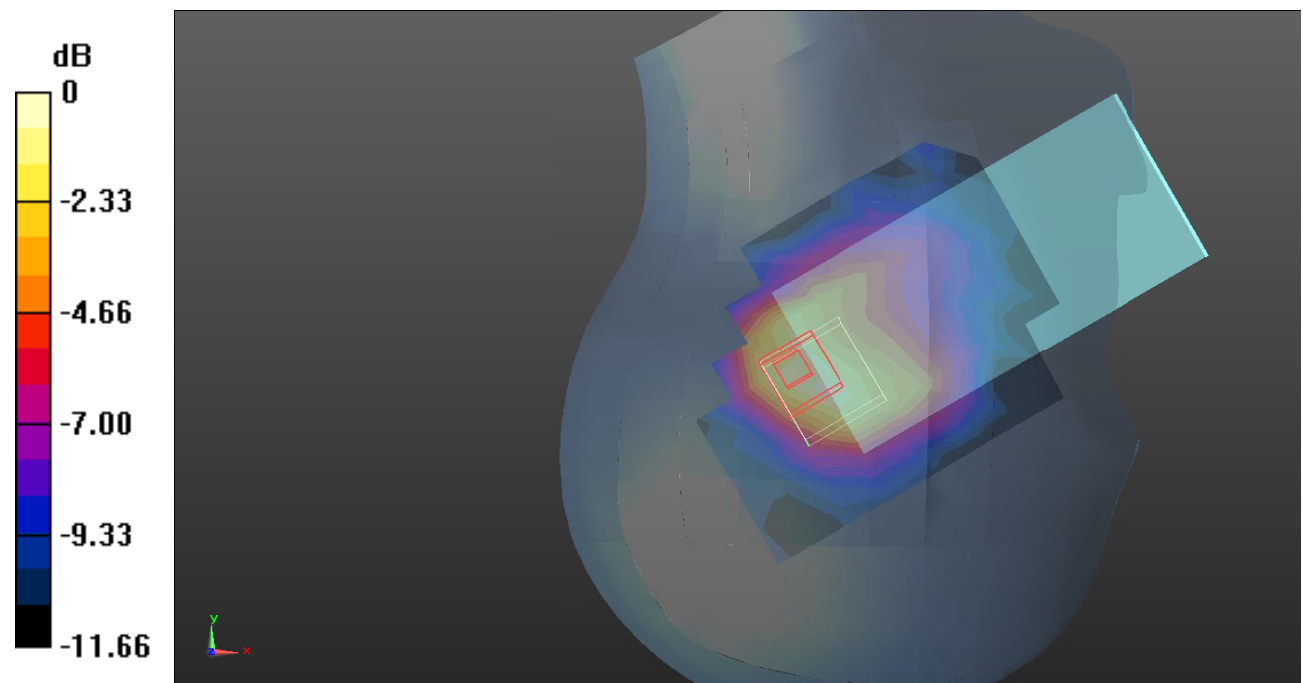

0 dB = 0.610 W/kg = -2.15 dB dBW/kg

Test Plot 15#: PCS 1900_Head Right Tilt_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.457$ S/m; $\epsilon_r = 40.958$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.677 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.44 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.601 W/kg; SAR(10 g) = 0.340 W/kg

Maximum value of SAR (measured) = 0.633 W/kg

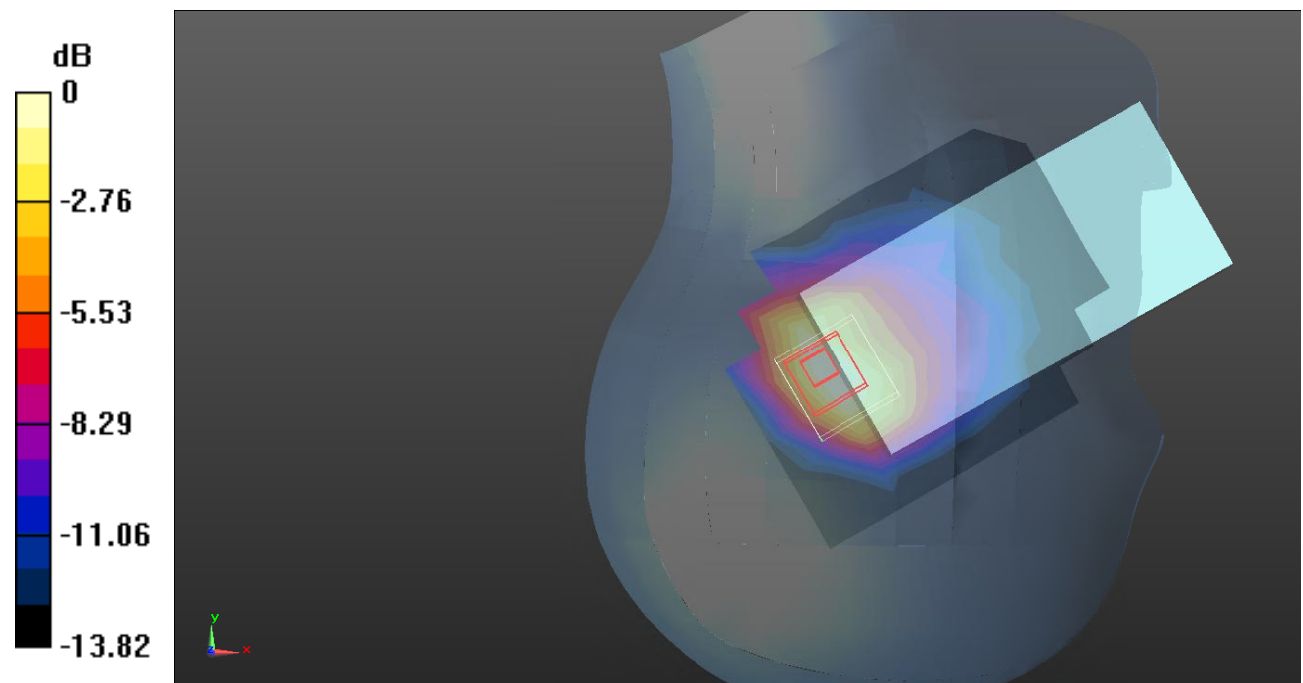

0 dB = 0.633 W/kg = -1.99 dB dBW/kg

Test Plot 16#: PCS 1900_Body Worn Back_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.457$ S/m; $\epsilon_r = 40.958$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.553 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.14 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.604 W/kg; SAR(10 g) = 0.330 W/kg

Maximum value of SAR (measured) = 0.688 W/kg

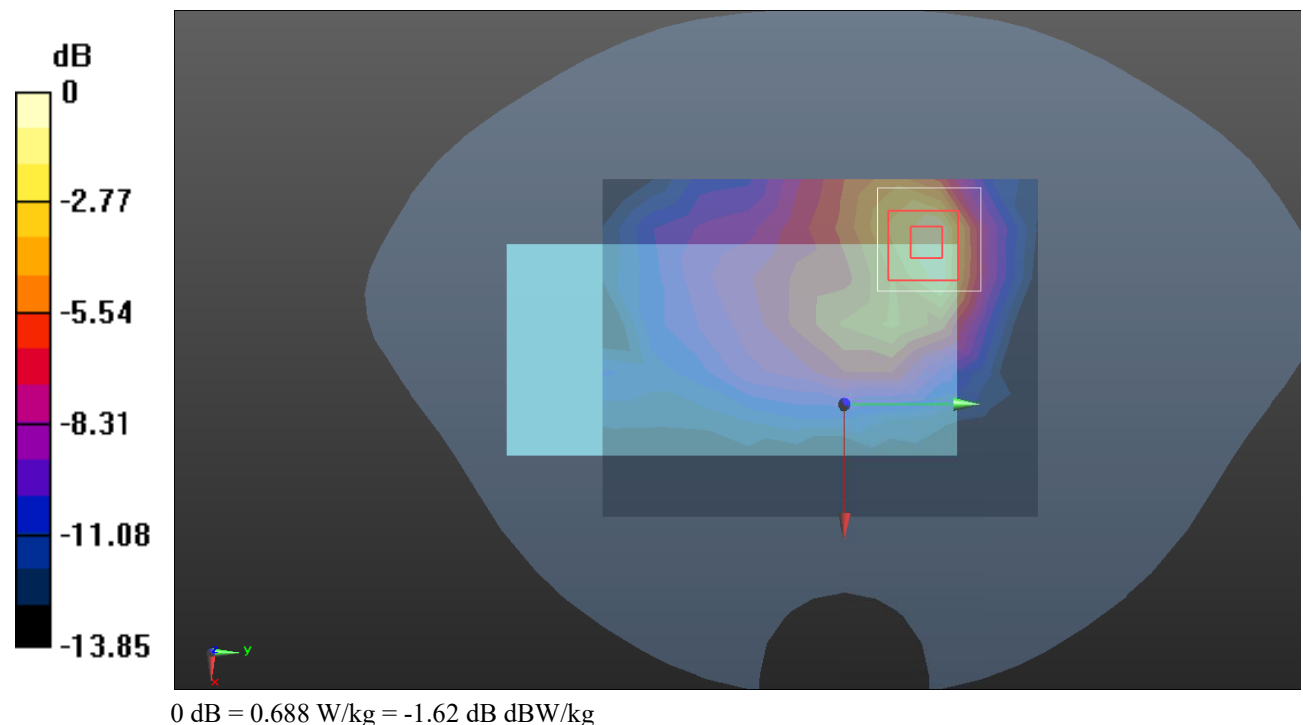

Test Plot 17#: PCS 1900_Body Front_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.457$ S/m; $\epsilon_r = 40.958$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.210 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.08 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.331 W/kg

SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.129 W/kg

Maximum value of SAR (measured) = 0.229 W/kg

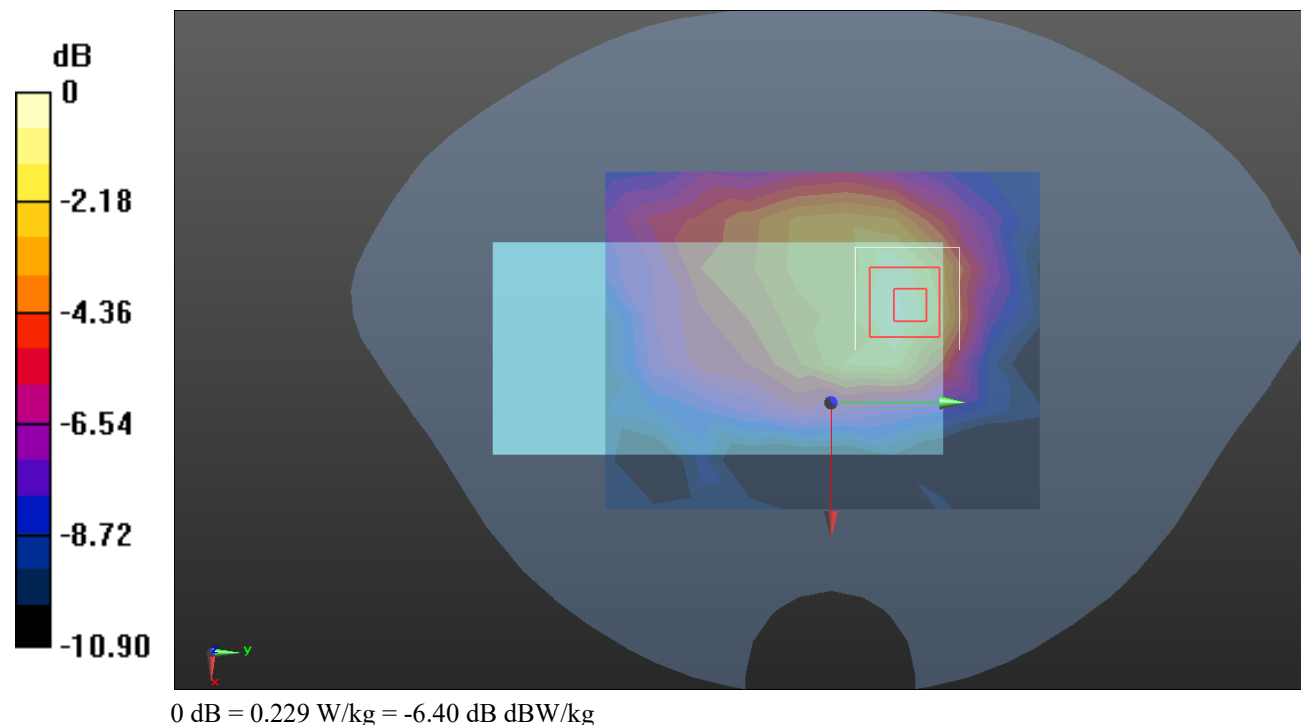

Test Plot 18#: PCS 1900_Body Back_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.457$ S/m; $\epsilon_r = 40.958$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.575 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.49 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.939 W/kg

SAR(1 g) = 0.558 W/kg; SAR(10 g) = 0.308 W/kg

Maximum value of SAR (measured) = 0.620 W/kg

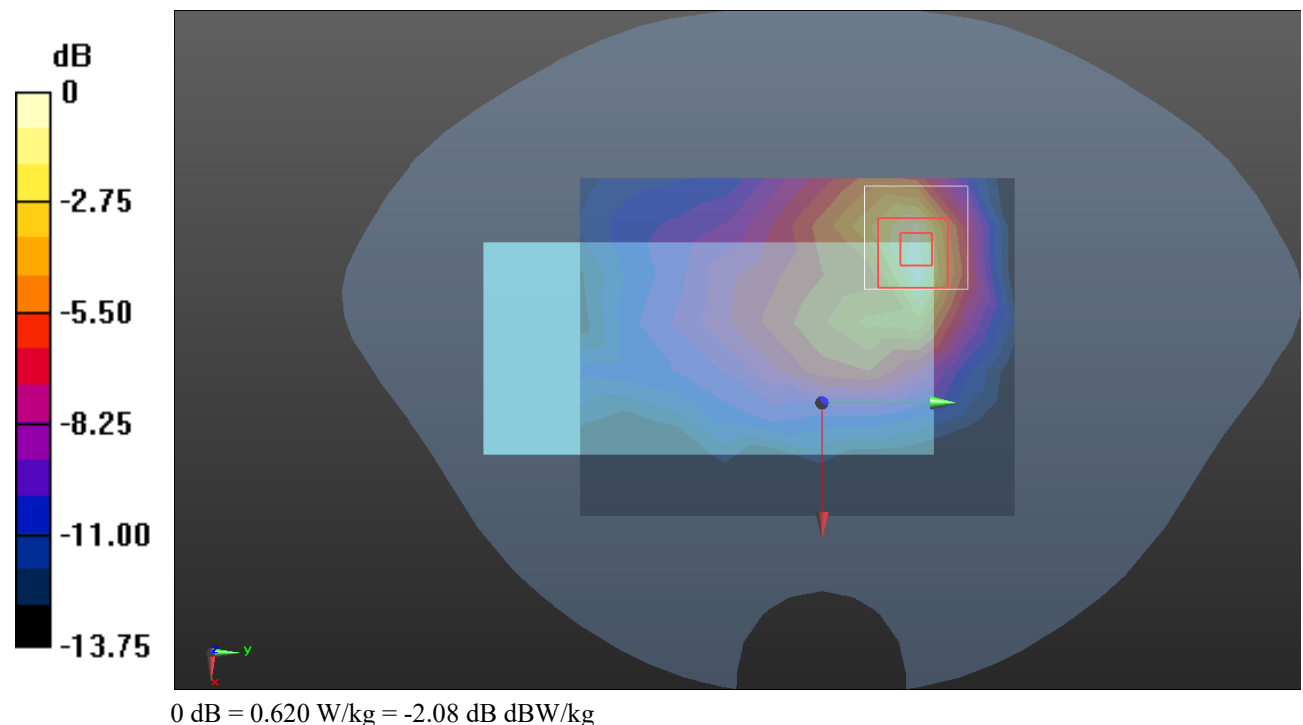

Test Plot 19#: PCS 1900_Body Right_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.457$ S/m; $\epsilon_r = 40.958$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0388 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.187 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0640 W/kg

SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0434 W/kg

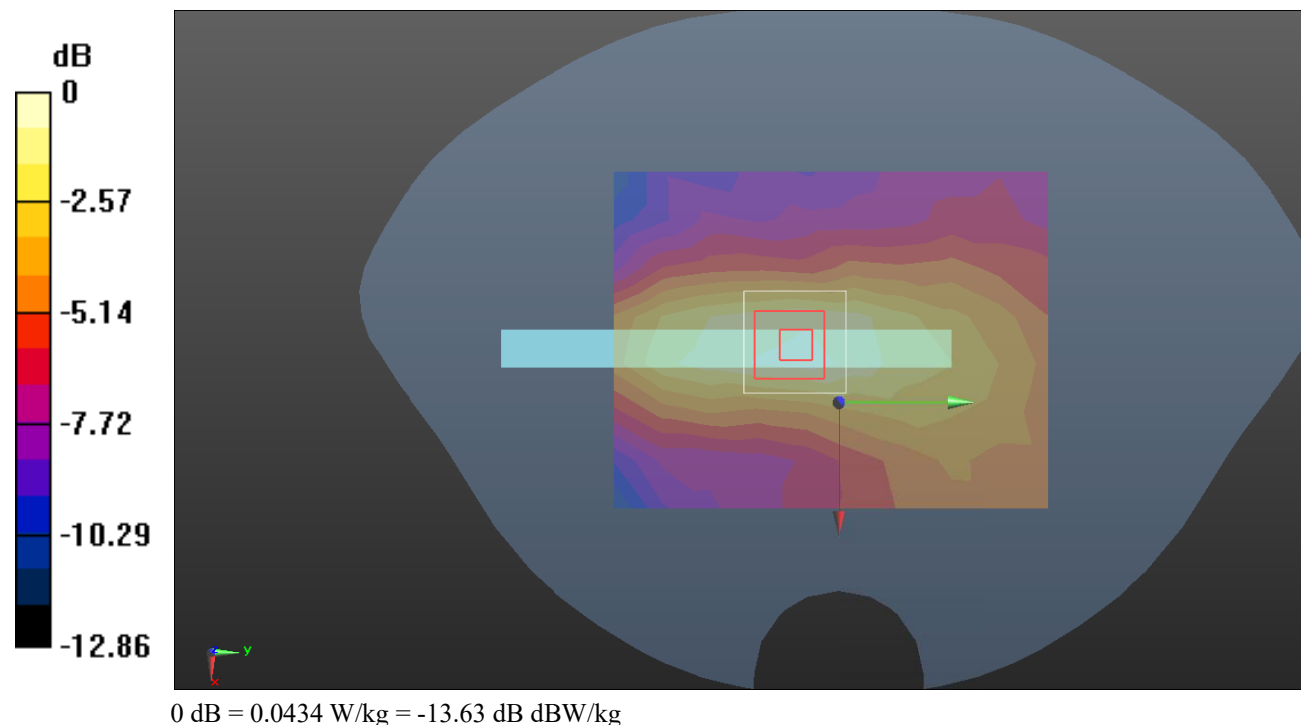

Test Plot 20#: PCS 1900_Body Top_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.457$ S/m; $\epsilon_r = 40.958$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.354 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.89 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.664 W/kg

SAR(1 g) = 0.396 W/kg; SAR(10 g) = 0.215 W/kg

Maximum value of SAR (measured) = 0.445 W/kg

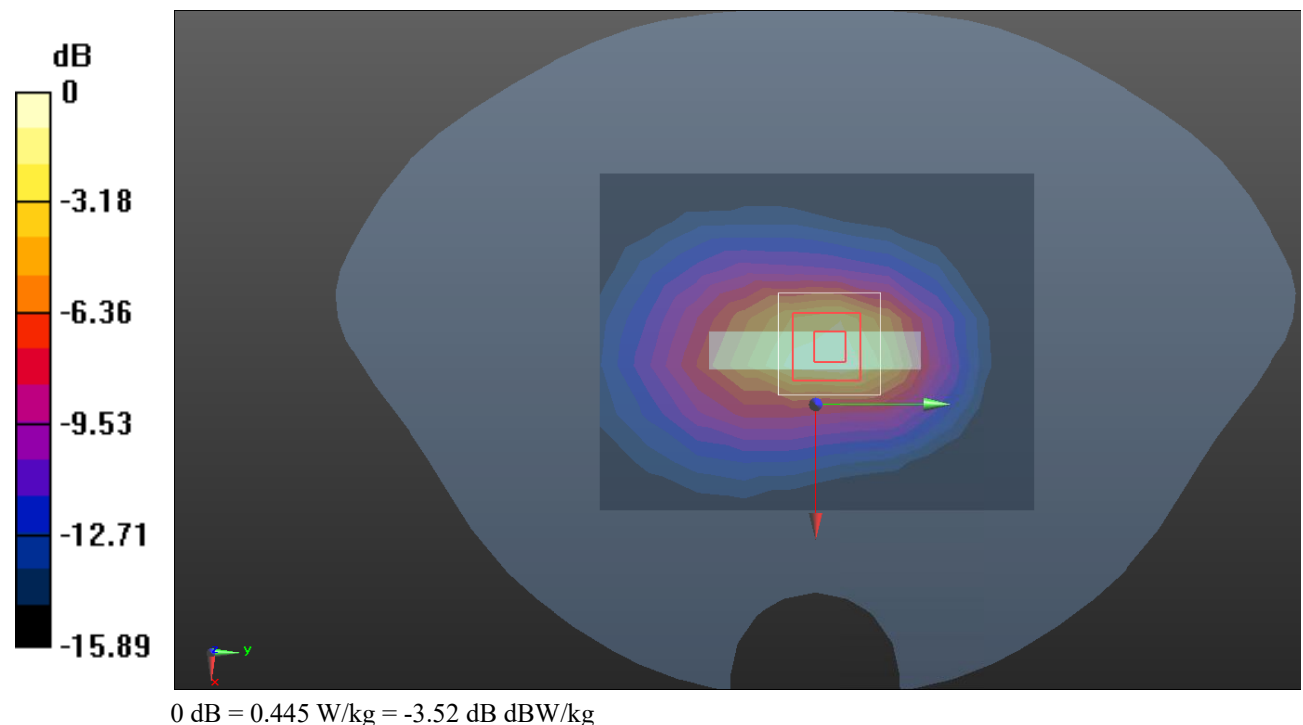

Test Plot 21#: LTE Band 5_Head Left Cheek_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.994$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.611 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.62 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.616 W/kg; SAR(10 g) = 0.398 W/kg

Maximum value of SAR (measured) = 0.626 W/kg

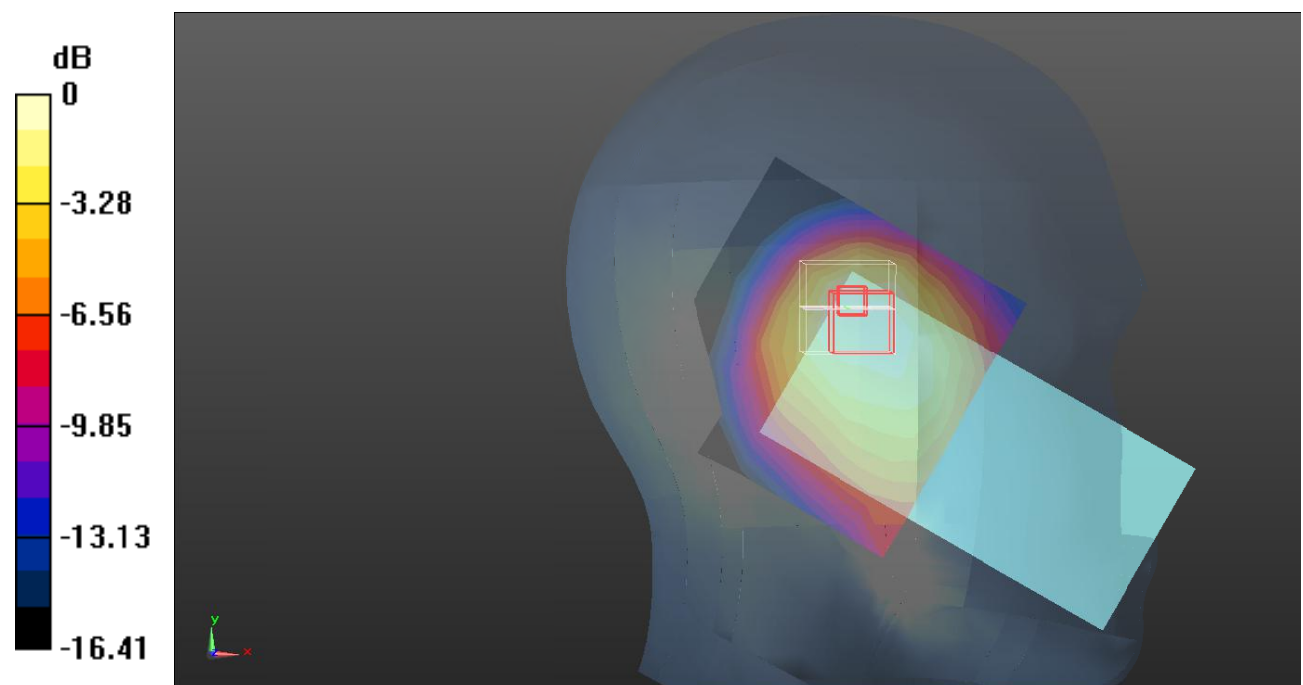

0 dB = 0.626 W/kg = -2.03 dB dBW/kg

Test Plot 22#: LTE Band 5_Head Left Cheek_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.994$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.491 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.93 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.939 W/kg

SAR(1 g) = 0.492 W/kg; SAR(10 g) = 0.317 W/kg

Maximum value of SAR (measured) = 0.501 W/kg

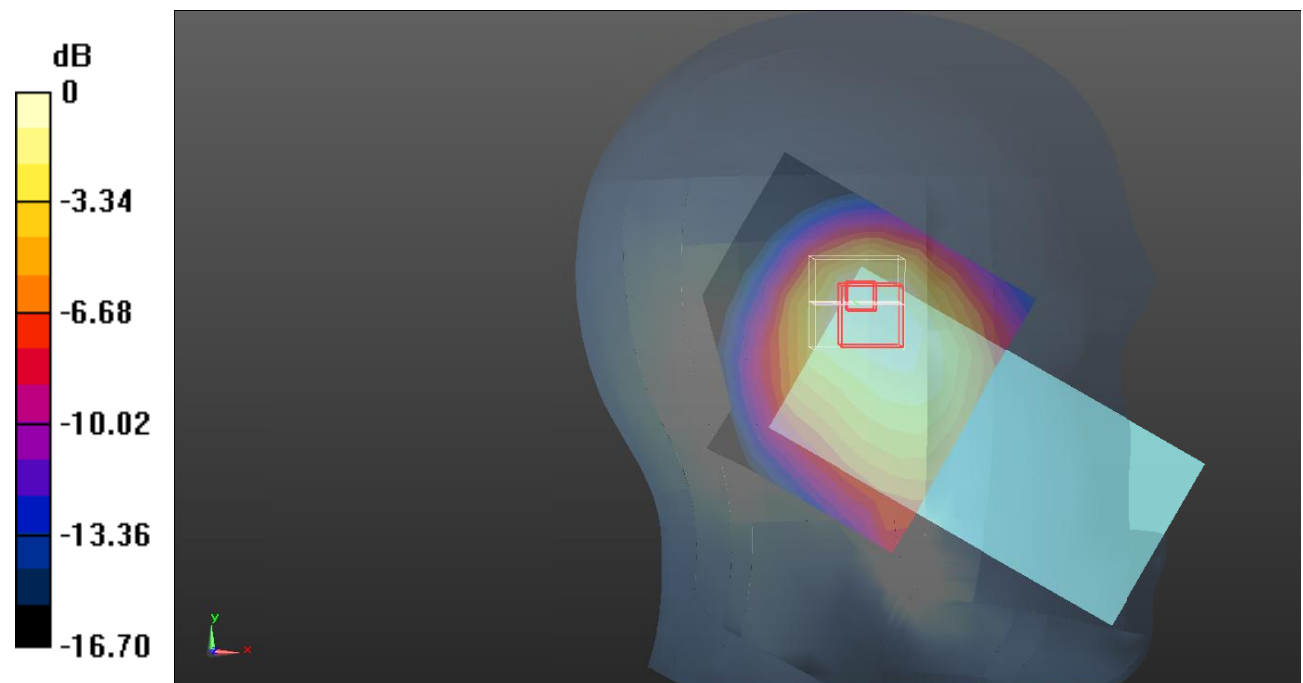

0 dB = 0.501 W/kg = -3.00 dB dBW/kg

Test Plot 23#: LTE Band 5_Head Left Tilt_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.994$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.506 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.27 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.544 W/kg; SAR(10 g) = 0.294 W/kg

Maximum value of SAR (measured) = 0.573 W/kg

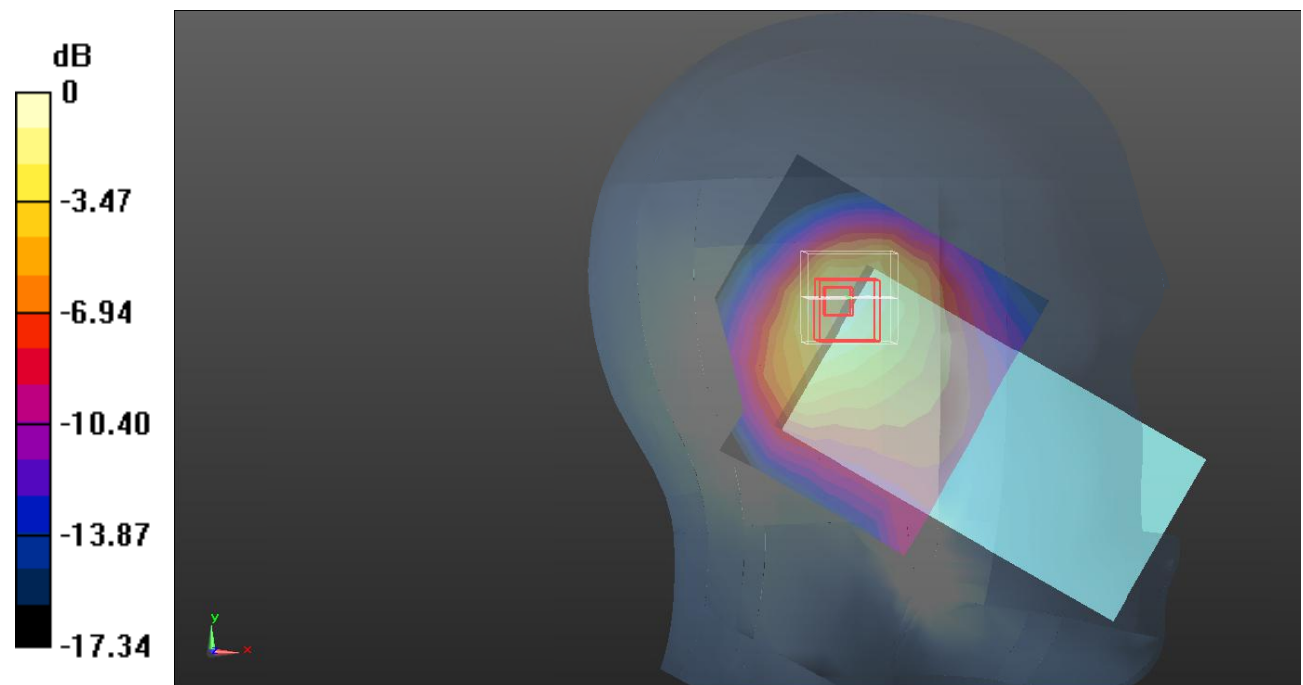

0 dB = 0.573 W/kg = -2.42 dB dBW/kg

Test Plot 24#: LTE Band 5_Head Left Tilt_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.994$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.394 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.27 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.981 W/kg

SAR(1 g) = 0.436 W/kg; SAR(10 g) = 0.235 W/kg

Maximum value of SAR (measured) = 0.455 W/kg

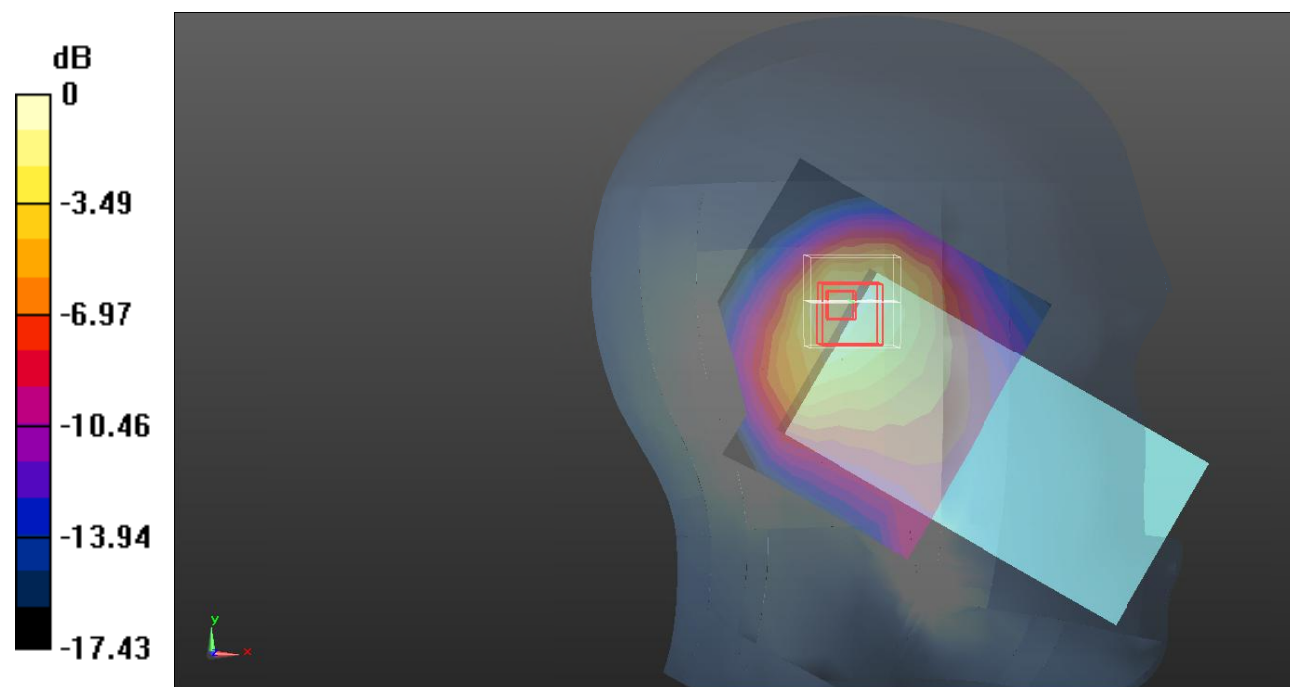

0 dB = 0.455 W/kg = -3.42 dB dBW/kg

Test Plot 25#: LTE Band 5_Head Right Cheek_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.994$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.595 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.71 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.990 W/kg

SAR(1 g) = 0.606 W/kg; SAR(10 g) = 0.394 W/kg

Maximum value of SAR (measured) = 0.631 W/kg

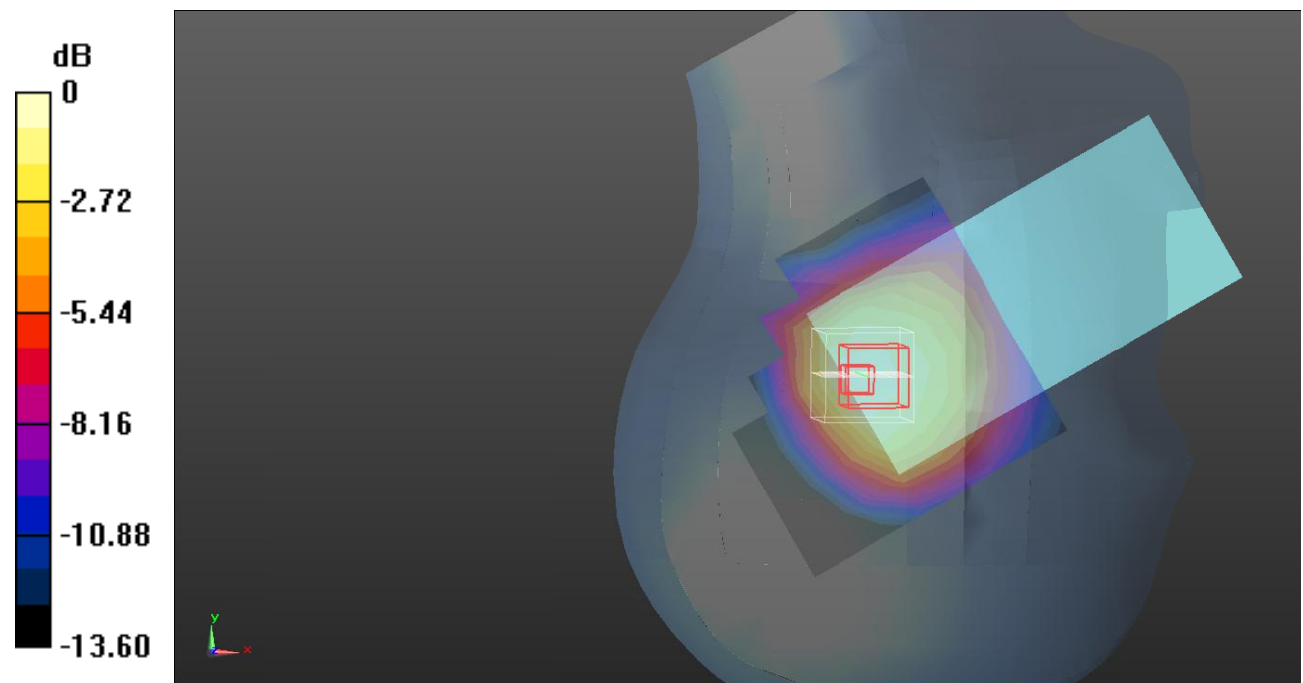

0 dB = 0.631 W/kg = -2.00 dB dBW/kg

Test Plot 26#: LTE Band 5_Head Right Cheek_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.994$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.479 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.72 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.794 W/kg

SAR(1 g) = 0.483 W/kg; SAR(10 g) = 0.313 W/kg

Maximum value of SAR (measured) = 0.504 W/kg

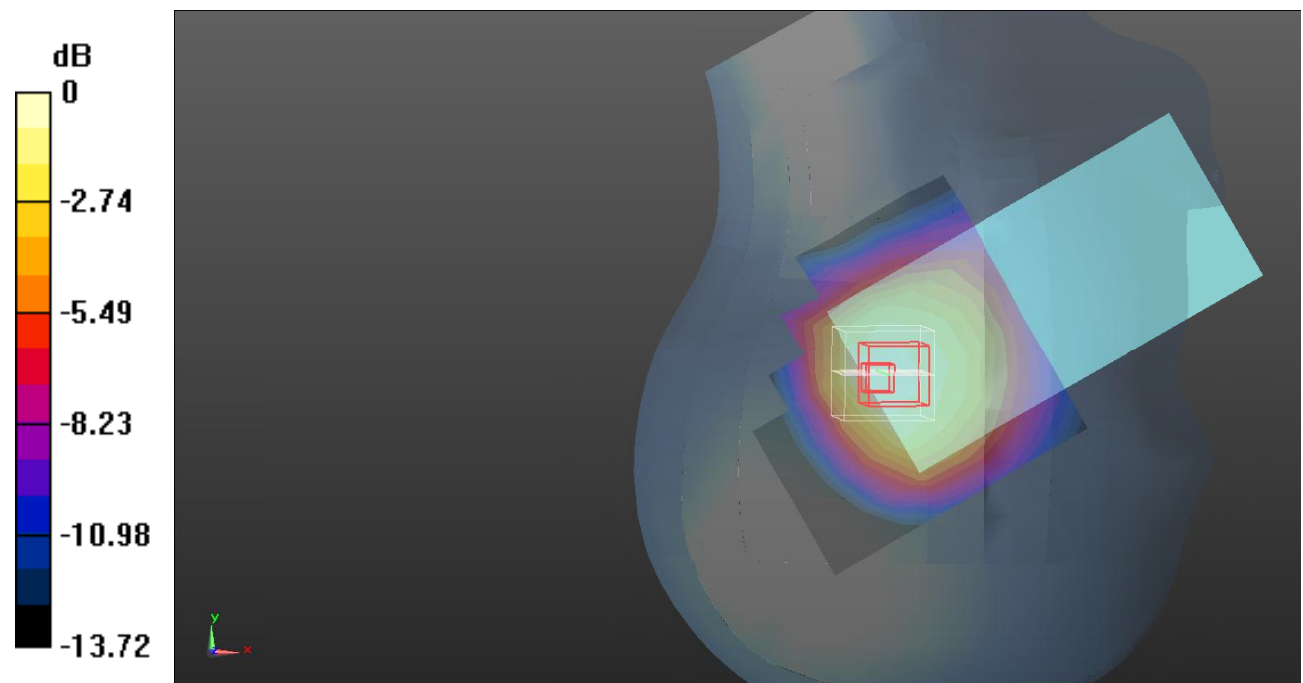

0 dB = 0.504 W/kg = -2.98 dB dBW/kg

Test Plot 27#: LTE Band 5_Head Right Tilt_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.994$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.523 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.78 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.898 W/kg

SAR(1 g) = 0.510 W/kg; SAR(10 g) = 0.304 W/kg

Maximum value of SAR (measured) = 0.540 W/kg

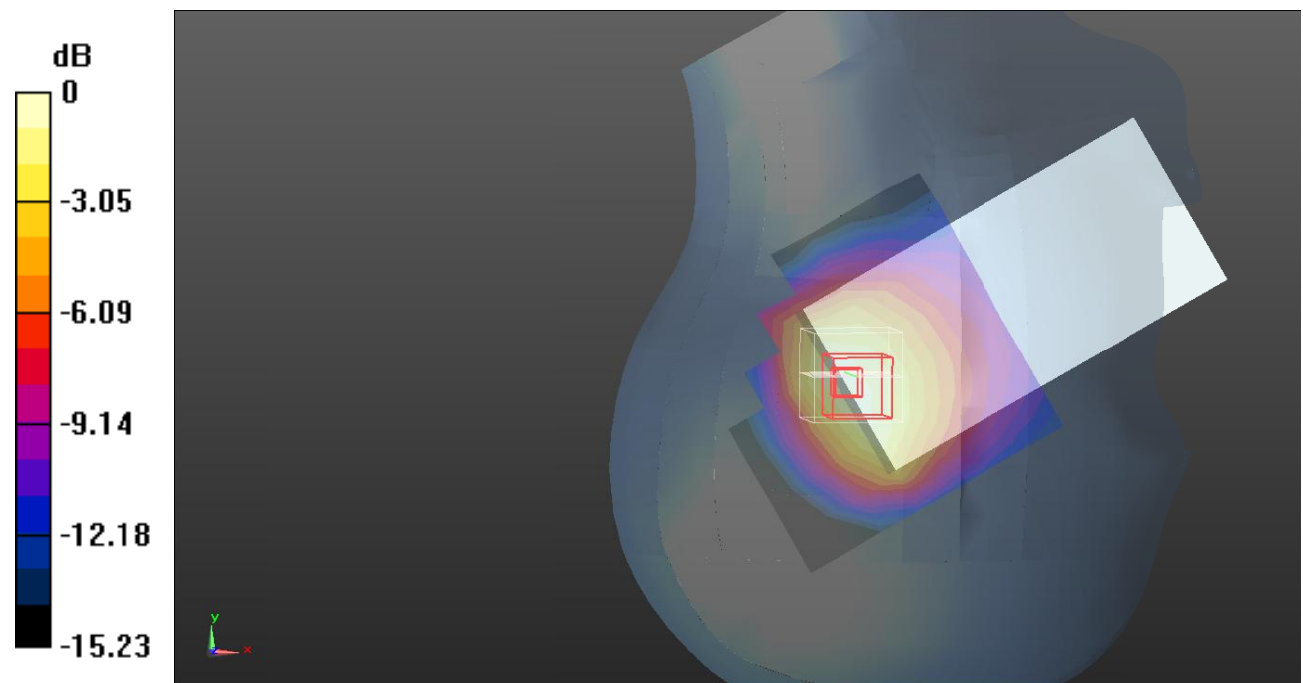

0 dB = 0.540 W/kg = -2.68 dB dBW/kg

Test Plot 28#: LTE Band 5_Head Right Tilt_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.994$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.418 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.30 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.717 W/kg

SAR(1 g) = 0.407 W/kg; SAR(10 g) = 0.243 W/kg

Maximum value of SAR (measured) = 0.431 W/kg

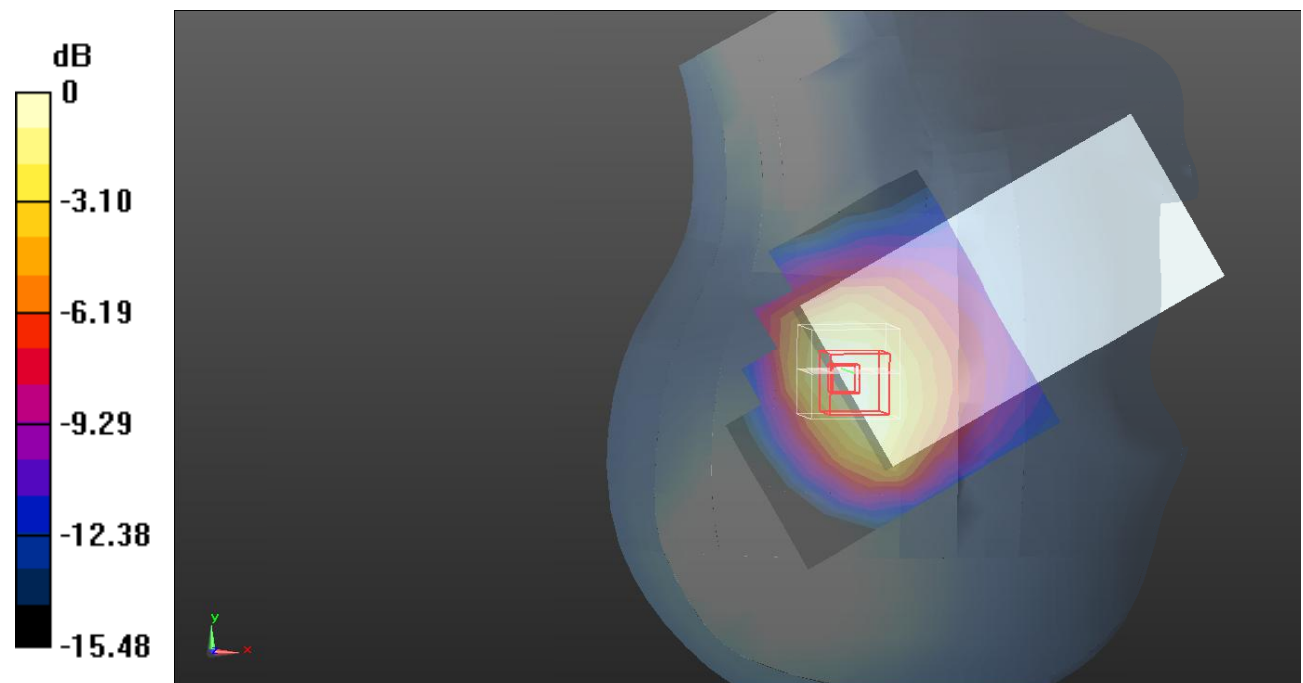

0 dB = 0.431 W/kg = -3.66 dB dBW/kg

Test Plot 29#: LTE Band 5_Body Front_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.994$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.210 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.57 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.312 W/kg

SAR(1 g) = 0.188 W/kg; SAR(10 g) = 0.119 W/kg

Maximum value of SAR (measured) = 0.198 W/kg

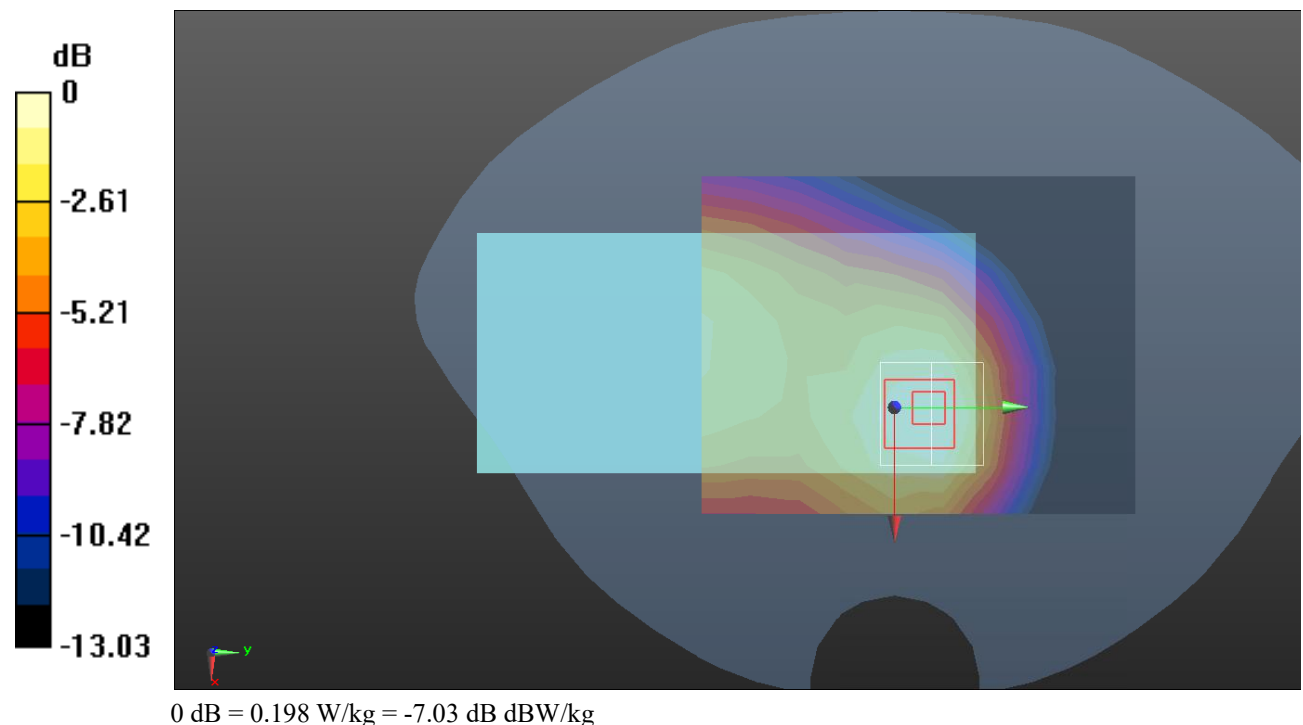

Test Plot 30#: LTE Band 5_Body Front_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.994$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.166 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.99 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.269 W/kg

SAR(1 g) = 0.163 W/kg; SAR(10 g) = 0.102 W/kg

Maximum value of SAR (measured) = 0.171 W/kg

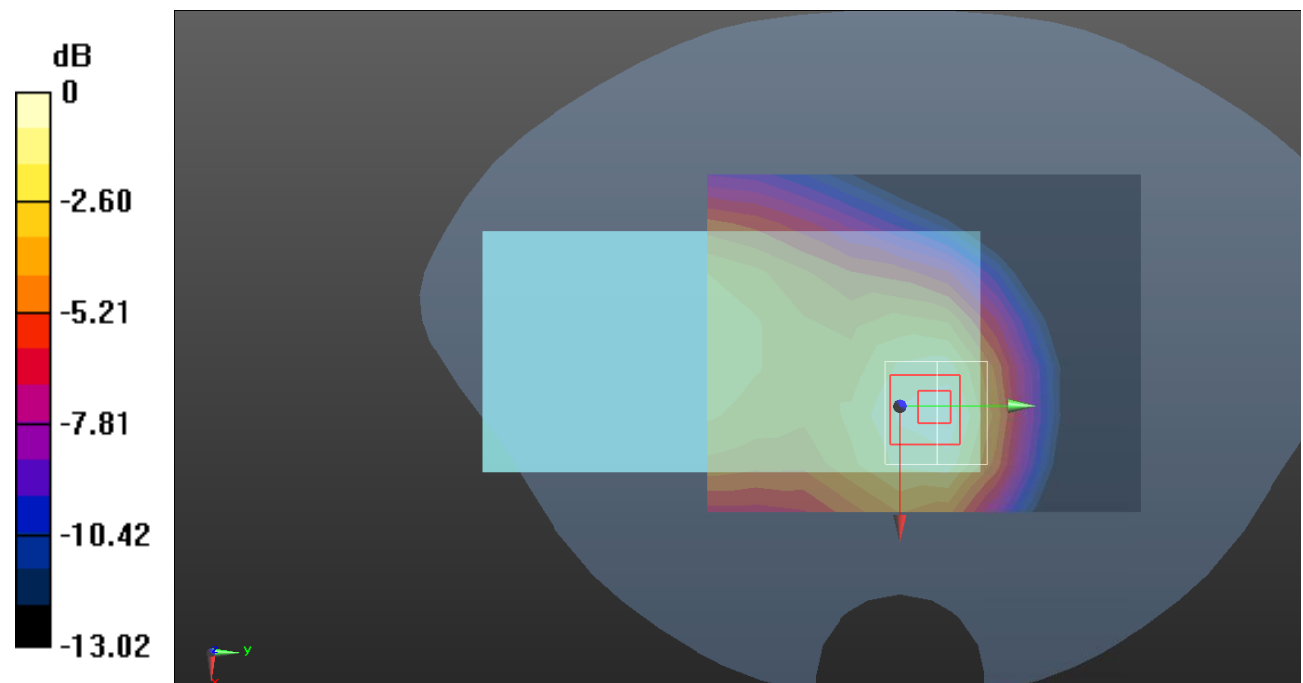

0 dB = 0.171 W/kg = -7.67 dB dBW/kg

Test Plot 31#: LTE Band 5_Body Back_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.994$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.244 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.94 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.354 W/kg

SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.147 W/kg

Maximum value of SAR (measured) = 0.236 W/kg

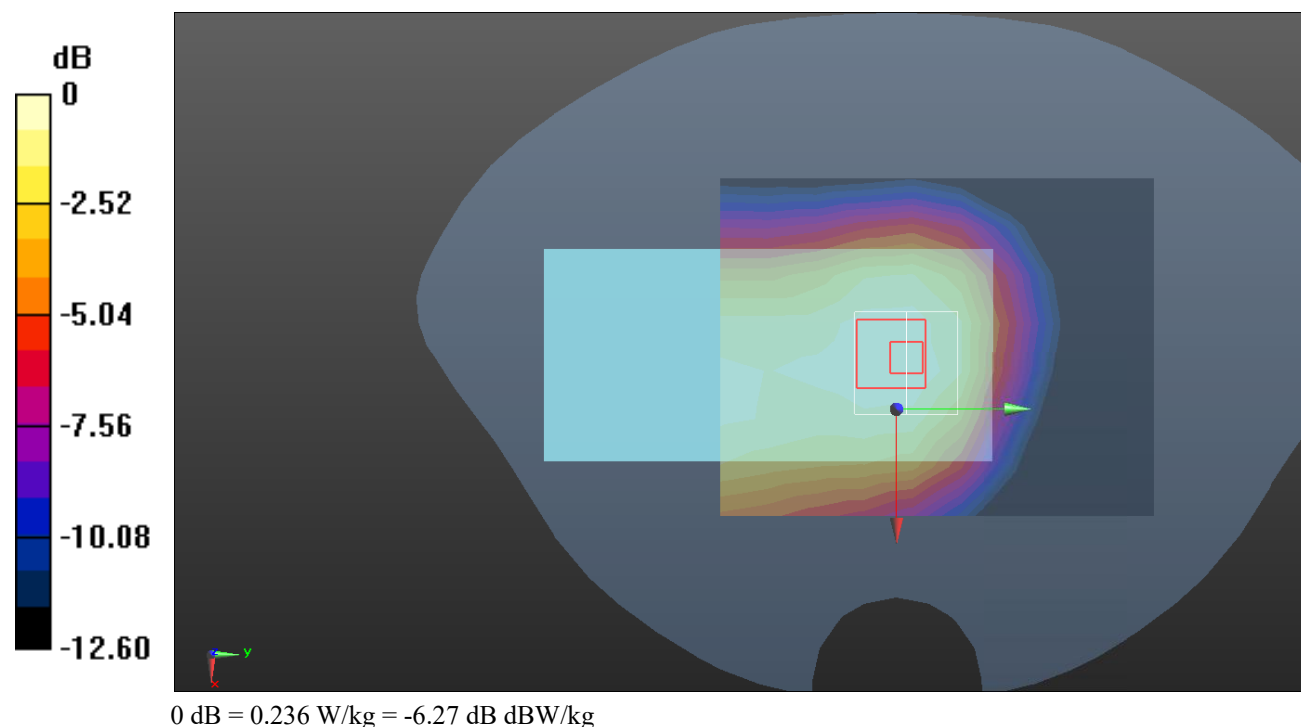

Test Plot 32#: LTE Band 5_Body Back_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.994$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.200 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.02 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.306 W/kg

SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.126 W/kg

Maximum value of SAR (measured) = 0.203 W/kg

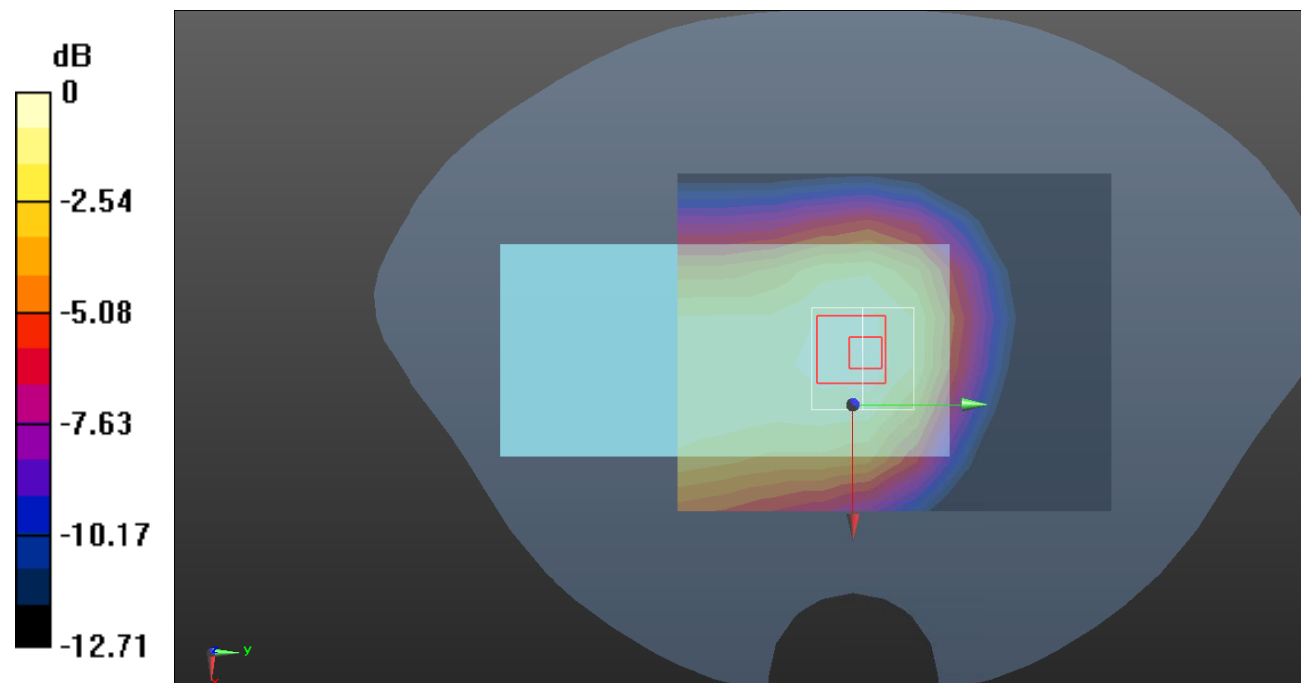

0 dB = 0.203 W/kg = -6.93 dB dBW/kg

Test Plot 33#: LTE Band 5_Body Right_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.994$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.211 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.75 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.276 W/kg

SAR(1 g) = 0.202 W/kg; SAR(10 g) = 0.145 W/kg

Maximum value of SAR (measured) = 0.211 W/kg

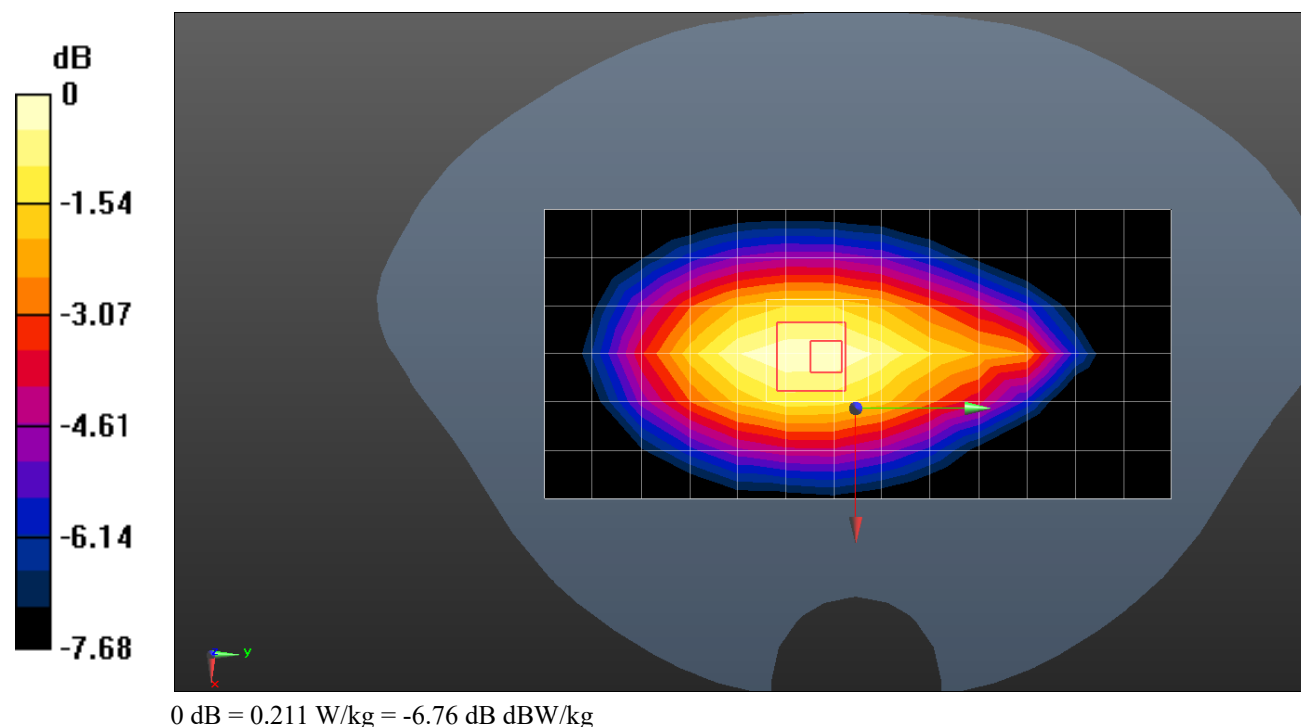

Test Plot 34#: LTE Band 5_Body Right_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.994$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.170 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.69 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.227 W/kg

SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.119 W/kg

Maximum value of SAR (measured) = 0.171 W/kg

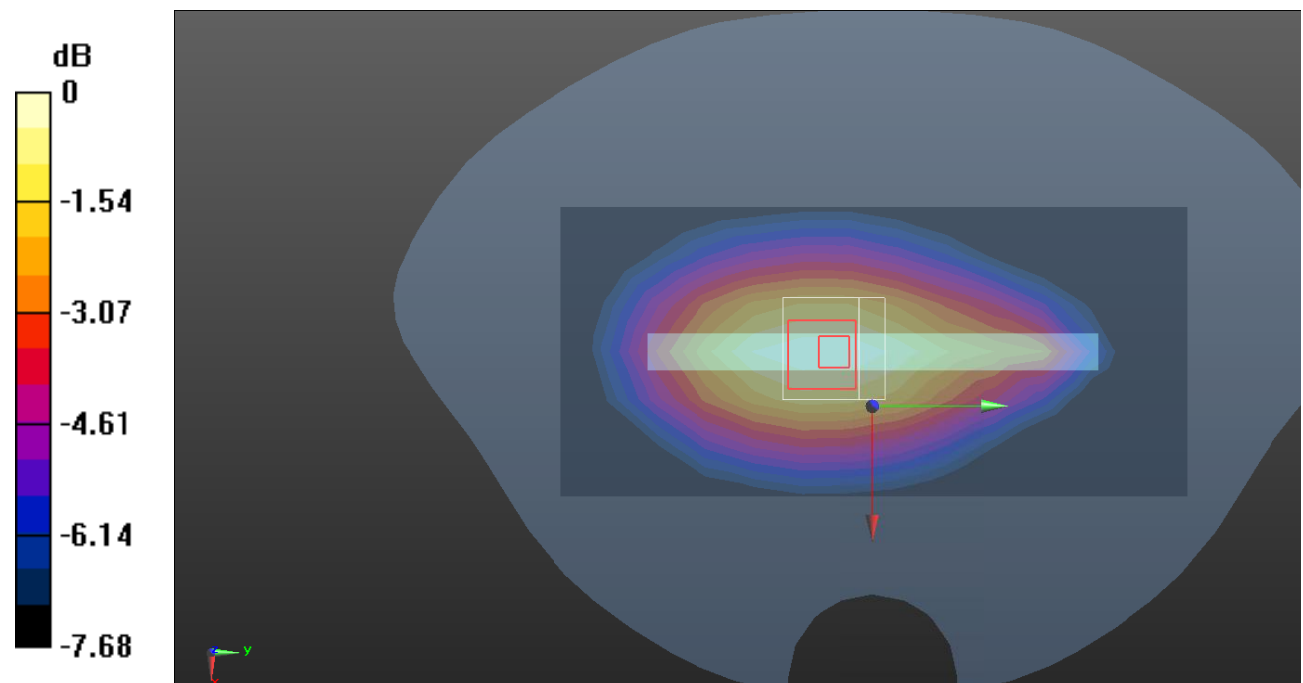

0 dB = 0.171 W/kg = -7.67 dB dBW/kg

Test Plot 35#: LTE Band 5_Body Top_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.994$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.171 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.65 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.316 W/kg

SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.189 W/kg

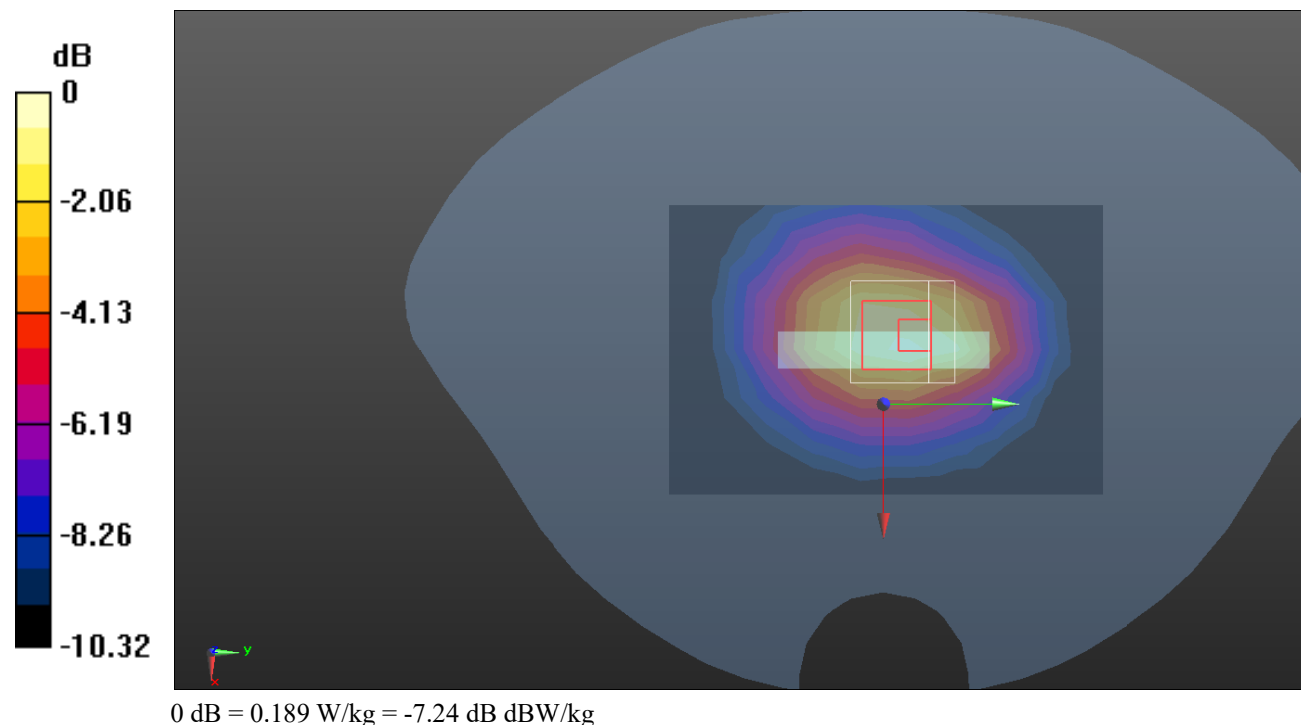

Test Plot 36#: LTE Band 5_Body Top_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.994$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.152 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.42 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.285 W/kg

SAR(1 g) = 0.158 W/kg; SAR(10 g) = 0.099 W/kg

Maximum value of SAR (measured) = 0.169 W/kg

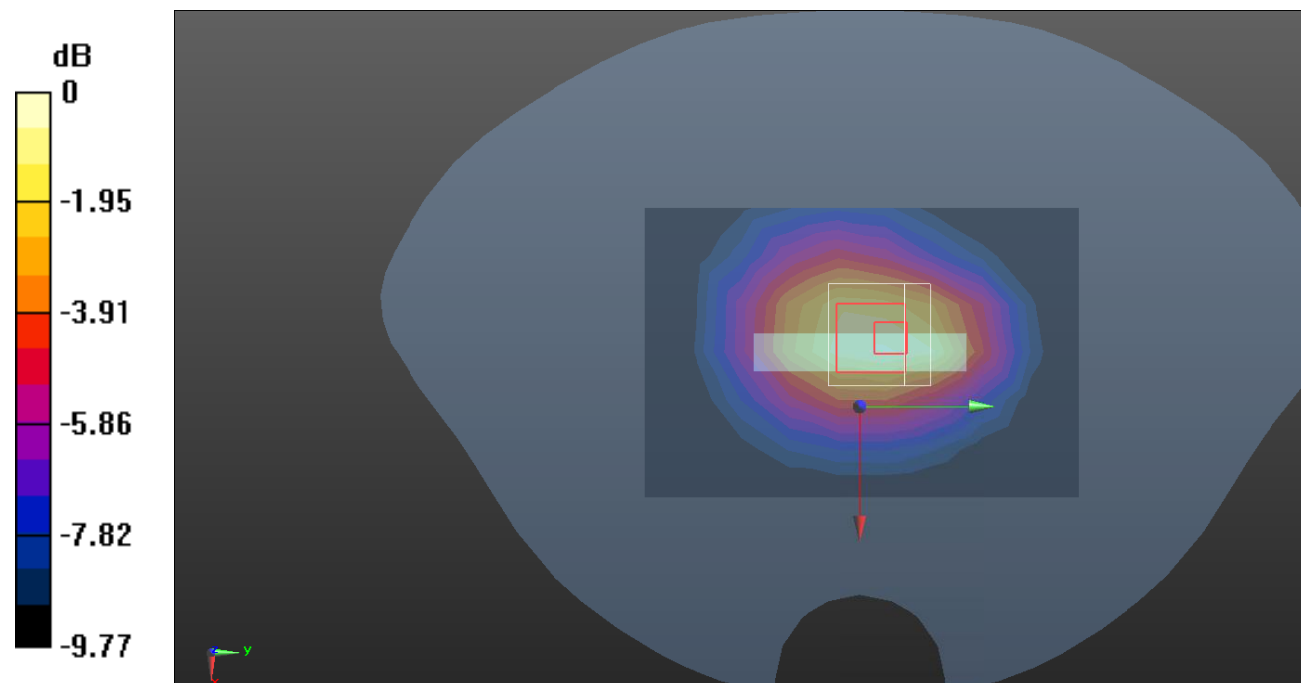

0 dB = 0.169 W/kg = -7.72 dB dBW/kg

Test Plot 37#: LTE Band 40A_Head Left Cheek_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.713$ S/m; $\epsilon_r = 39.964$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2310 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.358 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.51 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.690 W/kg

SAR(1 g) = 0.332 W/kg; SAR(10 g) = 0.188 W/kg

Maximum value of SAR (measured) = 0.366 W/kg

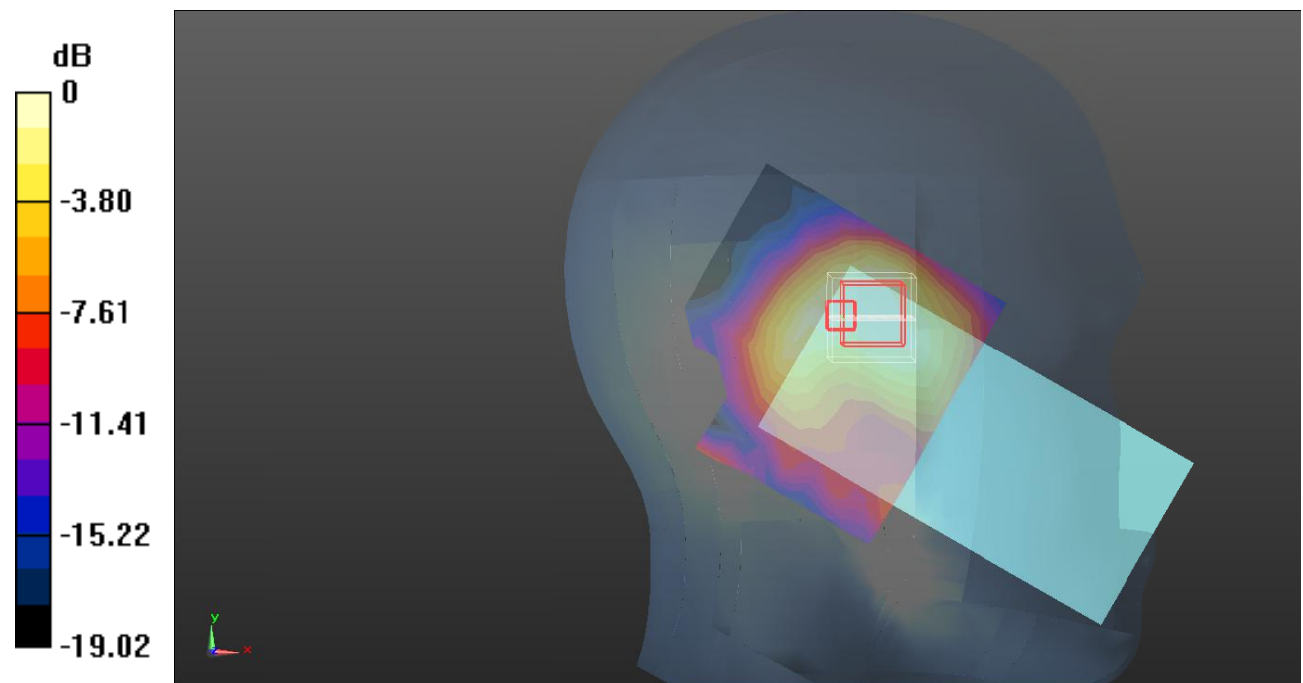

0 dB = 0.366 W/kg = -4.37 dB dBW/kg

Test Plot 38#: LTE Band 40A_Head Left Cheek_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.713$ S/m; $\epsilon_r = 39.964$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2310 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.267 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.233 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.531 W/kg

SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.276 W/kg

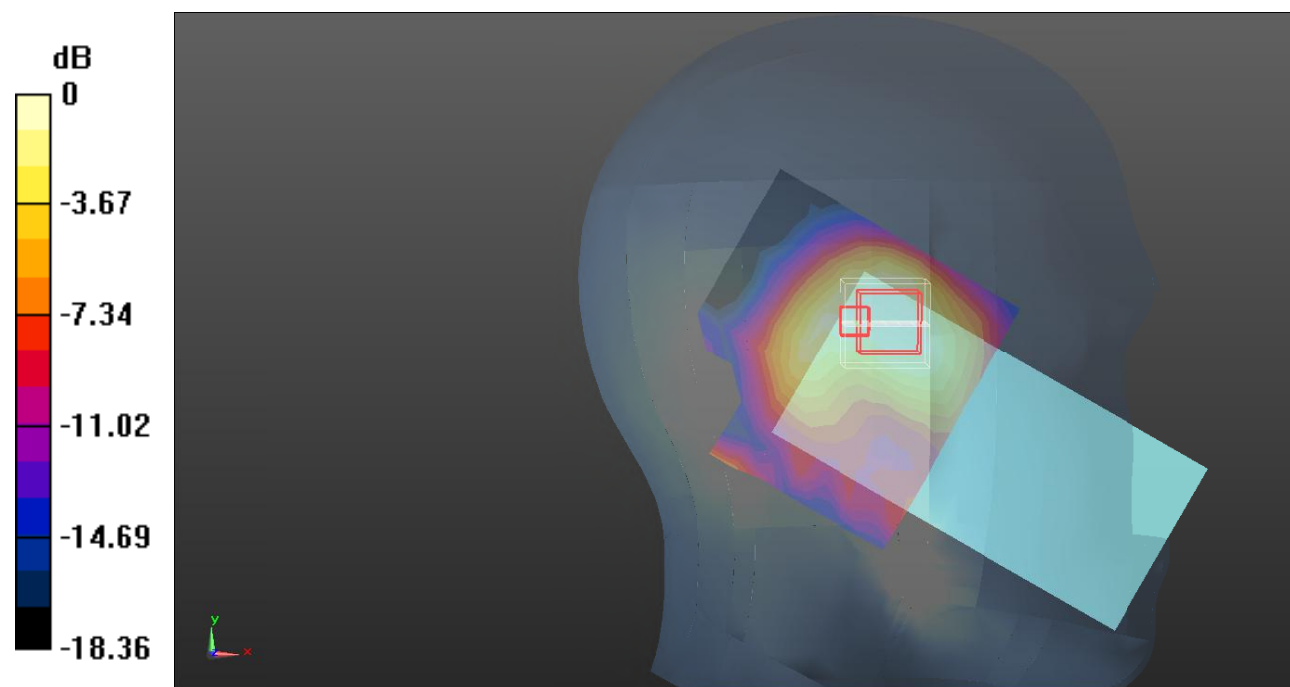

0 dB = 0.276 W/kg = -5.59 dB dBW/kg

Test Plot 39#: LTE Band 40A_Head Left Tilt_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.713$ S/m; $\epsilon_r = 39.964$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2310 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.346 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.97 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.740 W/kg

SAR(1 g) = 0.349 W/kg; SAR(10 g) = 0.171 W/kg

Maximum value of SAR (measured) = 0.401 W/kg

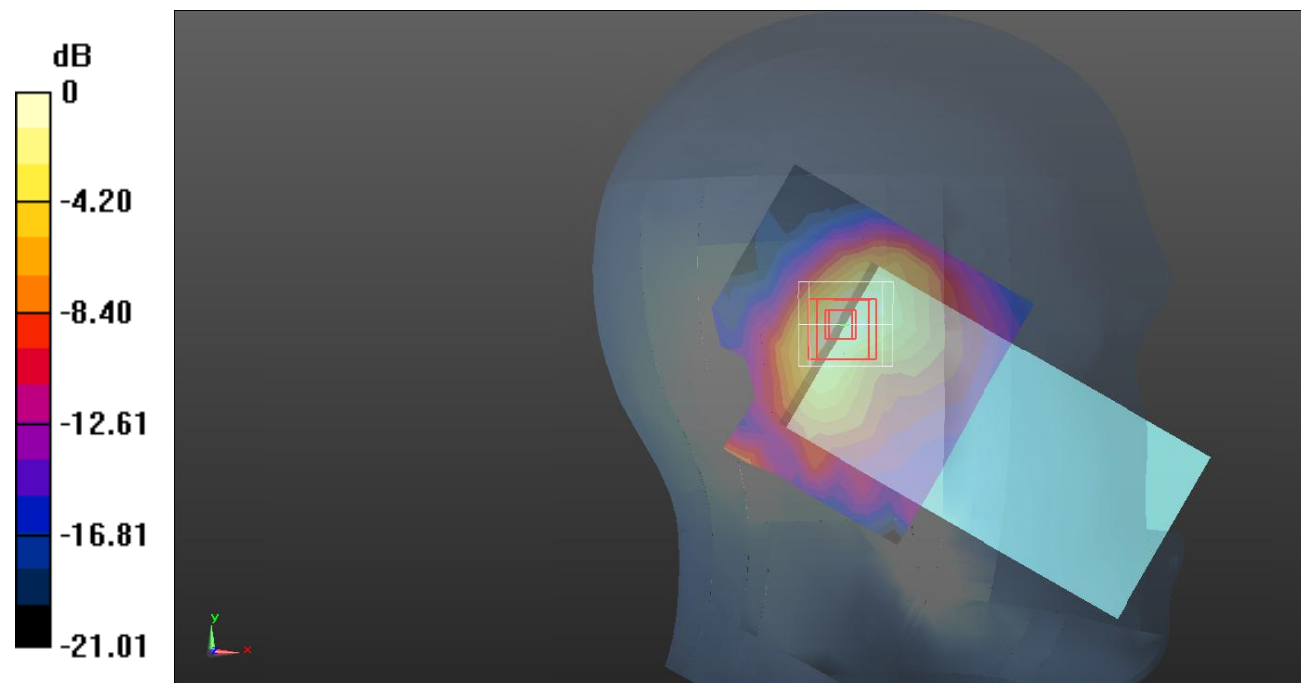

0 dB = 0.401 W/kg = -3.97 dB dBW/kg

Test Plot 40#: LTE Band 40A_Head Left Tilt_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.713$ S/m; $\epsilon_r = 39.964$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2310 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.272 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.804 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.579 W/kg

SAR(1 g) = 0.273 W/kg; SAR(10 g) = 0.134 W/kg

Maximum value of SAR (measured) = 0.313 W/kg

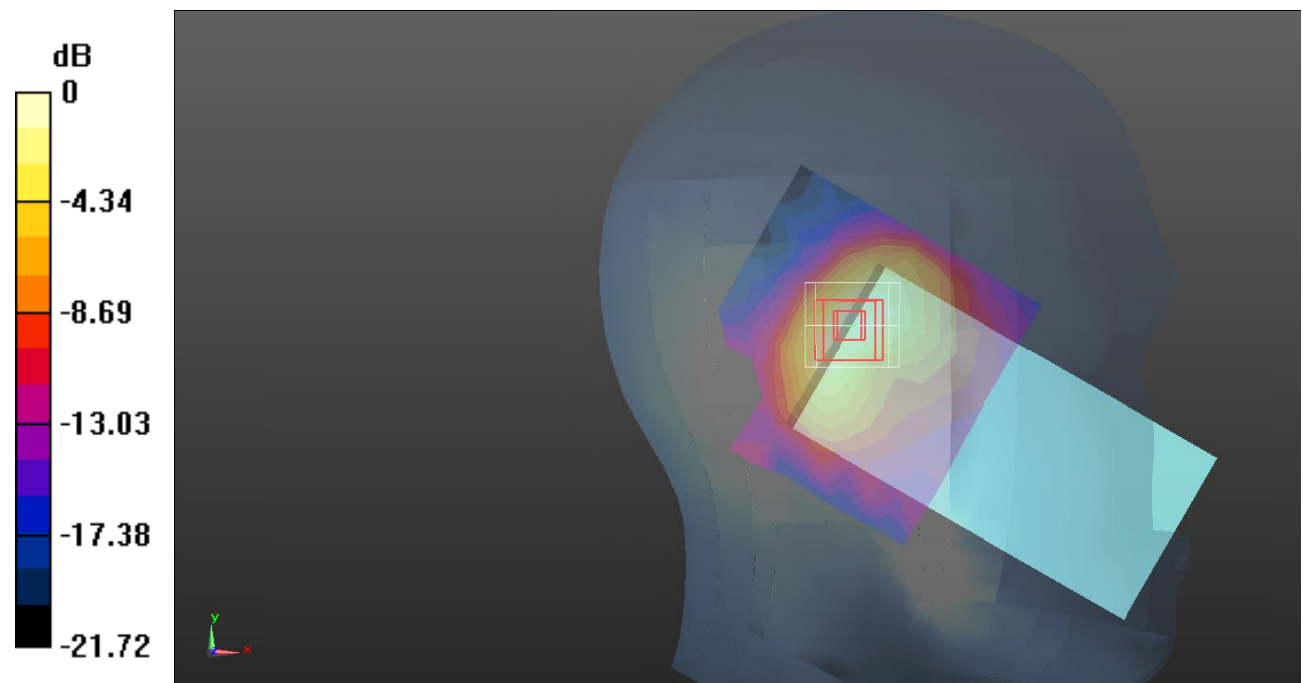

0 dB = 0.313 W/kg = -5.04 dB dBW/kg

Test Plot 41#: LTE Band 40A_Head Right Cheek_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.713$ S/m; $\epsilon_r = 39.964$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2310 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.313 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.03 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.526 W/kg

SAR(1 g) = 0.276 W/kg; SAR(10 g) = 0.147 W/kg

Maximum value of SAR (measured) = 0.306 W/kg

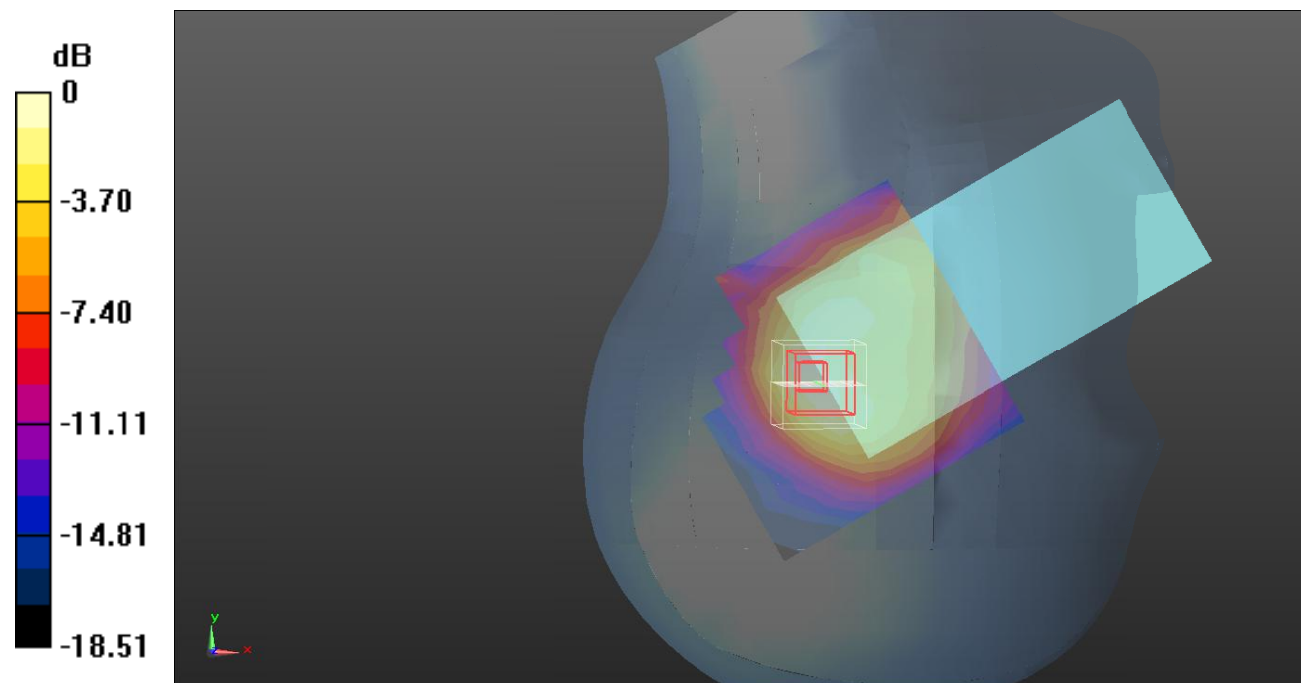

0 dB = 0.306 W/kg = -5.14 dB dBW/kg

Test Plot 42#: LTE Band 40A_Head Right Cheek_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.713$ S/m; $\epsilon_r = 39.964$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2310 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.233 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.201 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.391 W/kg

SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.113 W/kg

Maximum value of SAR (measured) = 0.232 W/kg

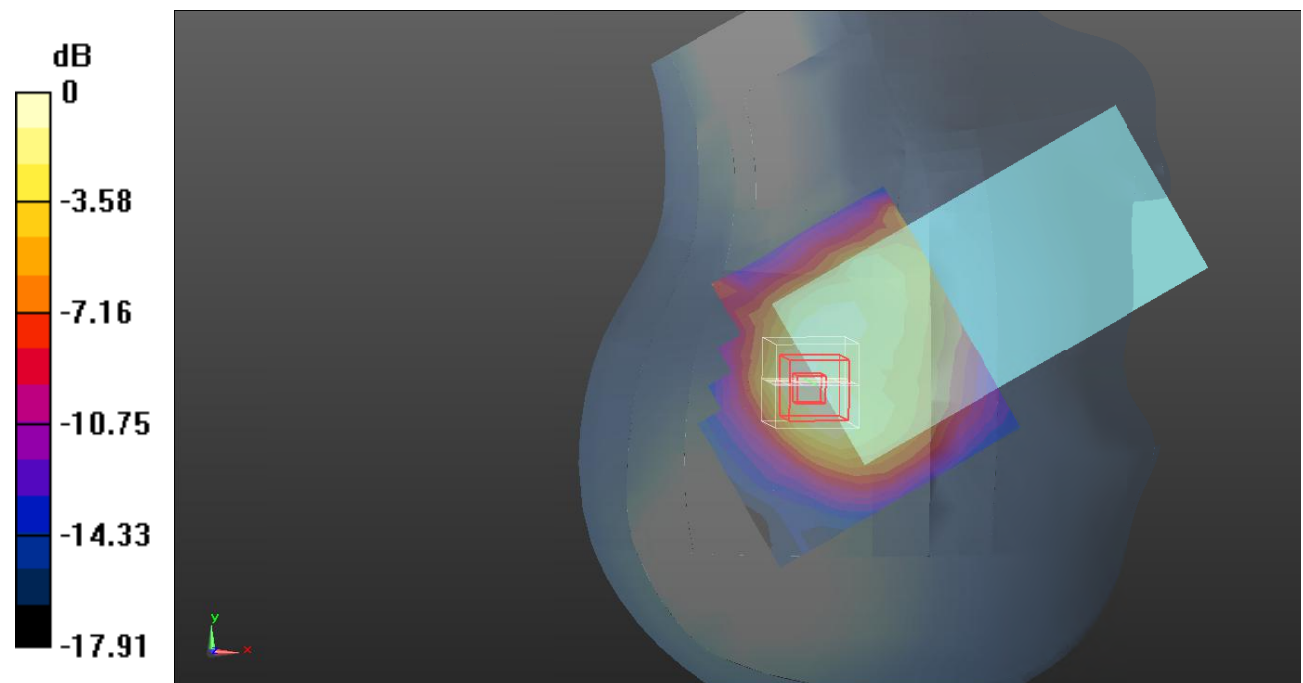

0 dB = 0.232 W/kg = -6.35 dB dBW/kg

Test Plot 43#: LTE Band 40A_Head Right Tilt_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.713$ S/m; $\epsilon_r = 39.964$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2310 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.353 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.25 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.586 W/kg

SAR(1 g) = 0.307 W/kg; SAR(10 g) = 0.159 W/kg

Maximum value of SAR (measured) = 0.347 W/kg

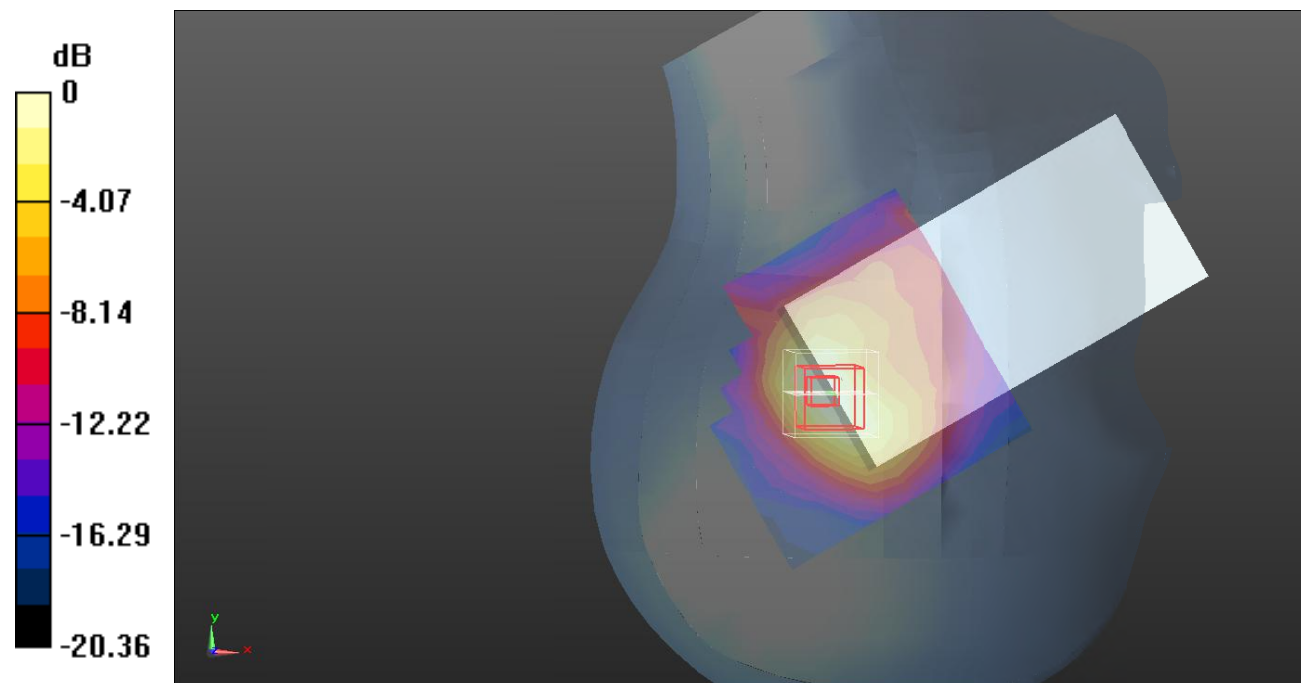

0 dB = 0.347 W/kg = -4.60 dB dBW/kg

Test Plot 44#: LTE Band 40A_Head Right Tilt_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.713$ S/m; $\epsilon_r = 39.964$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2310 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.275 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.875 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.459 W/kg

SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.121 W/kg

Maximum value of SAR (measured) = 0.265 W/kg

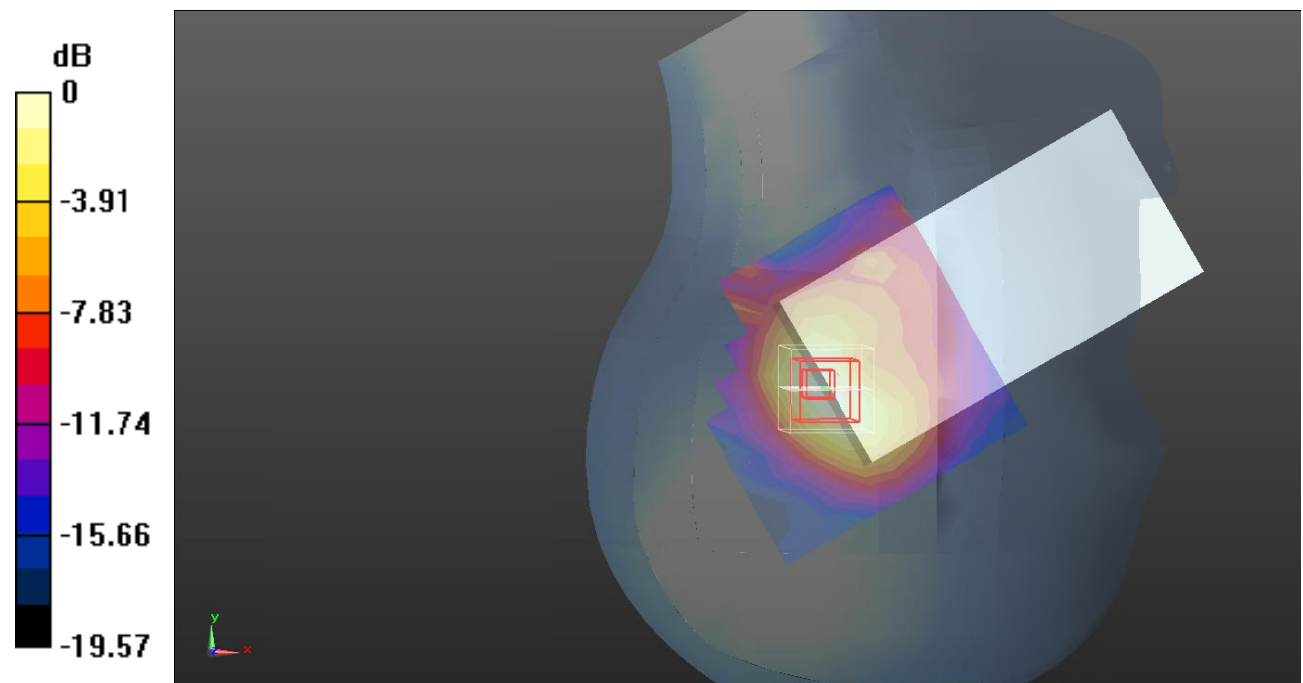

0 dB = 0.265 W/kg = -5.77 dB dBW/kg

Test Plot 45#: LTE Band 40A_Body Front_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.713$ S/m; $\epsilon_r = 39.964$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2310 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (12x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.108 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.348 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.167 W/kg

SAR(1 g) = 0.096 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.104 W/kg

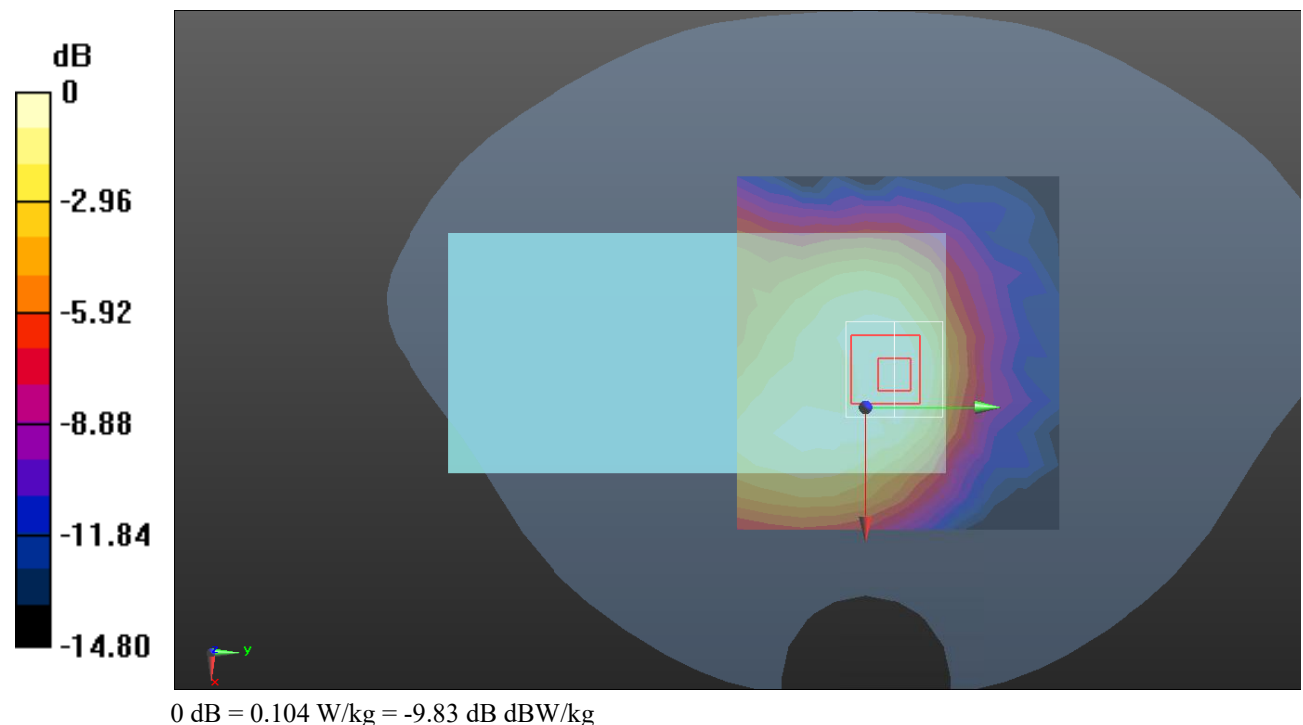

Test Plot 46#: LTE Band 40A_Body Front_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.713$ S/m; $\epsilon_r = 39.964$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2310 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (12x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0788 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.346 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.125 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.043 W/kg

Maximum value of SAR (measured) = 0.0772 W/kg

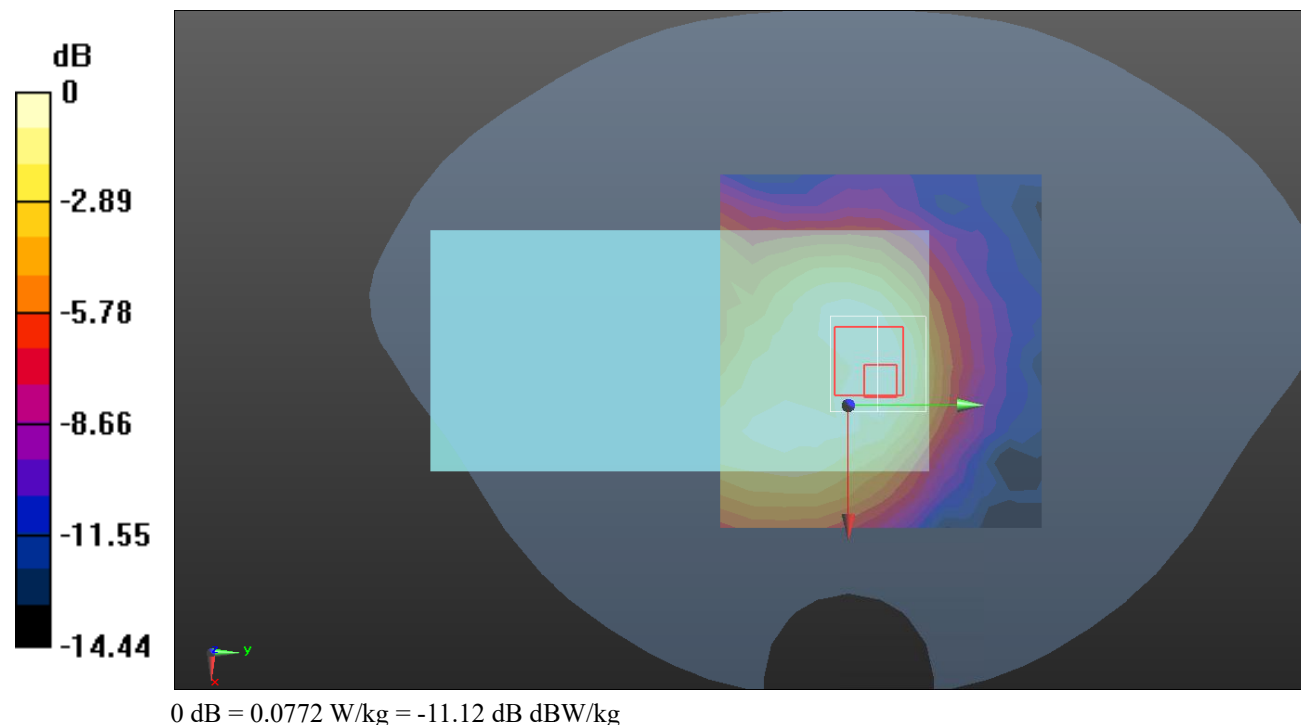

Test Plot 47#: LTE Band 40A_Body Back_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.713$ S/m; $\epsilon_r = 39.964$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2310 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (12x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.268 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.54 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.503 W/kg

SAR(1 g) = 0.261 W/kg; SAR(10 g) = 0.142 W/kg

Maximum value of SAR (measured) = 0.284 W/kg

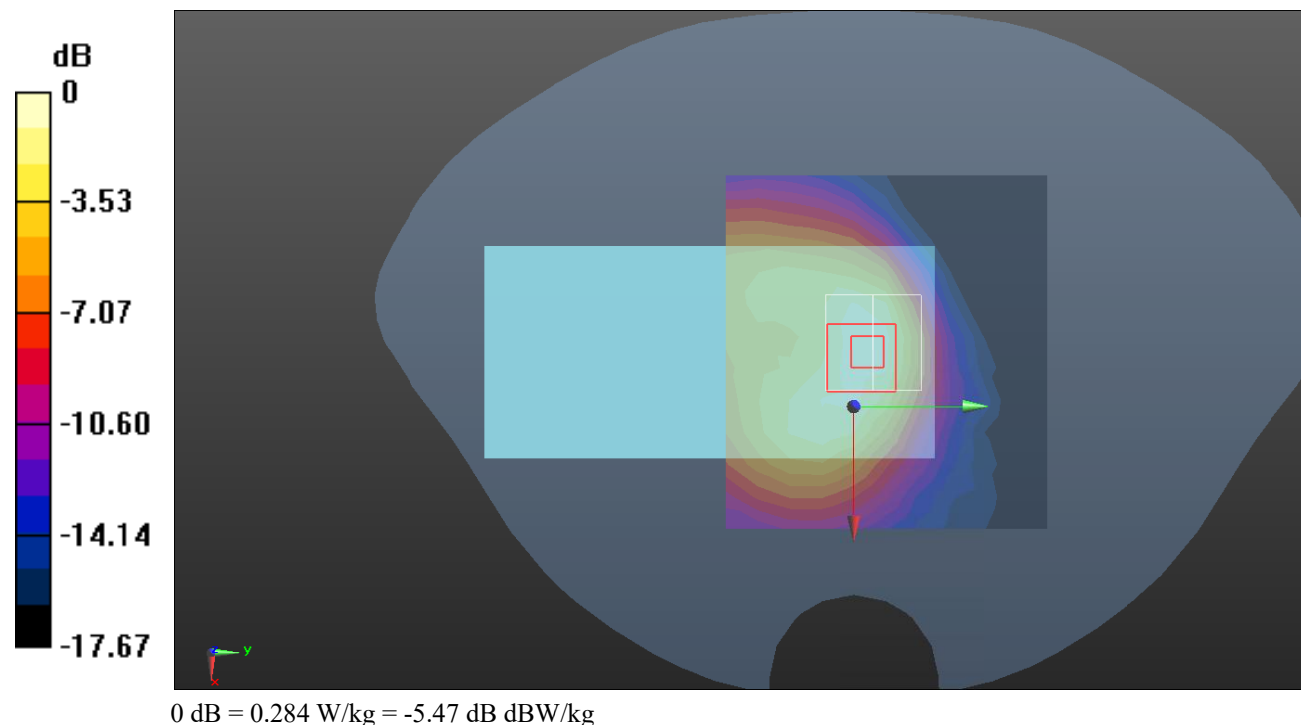

Test Plot 48#: LTE Band 40A_Body Back_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.713$ S/m; $\epsilon_r = 39.964$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2310 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (12x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.202 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.83 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.381 W/kg

SAR(1 g) = 0.195 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.216 W/kg

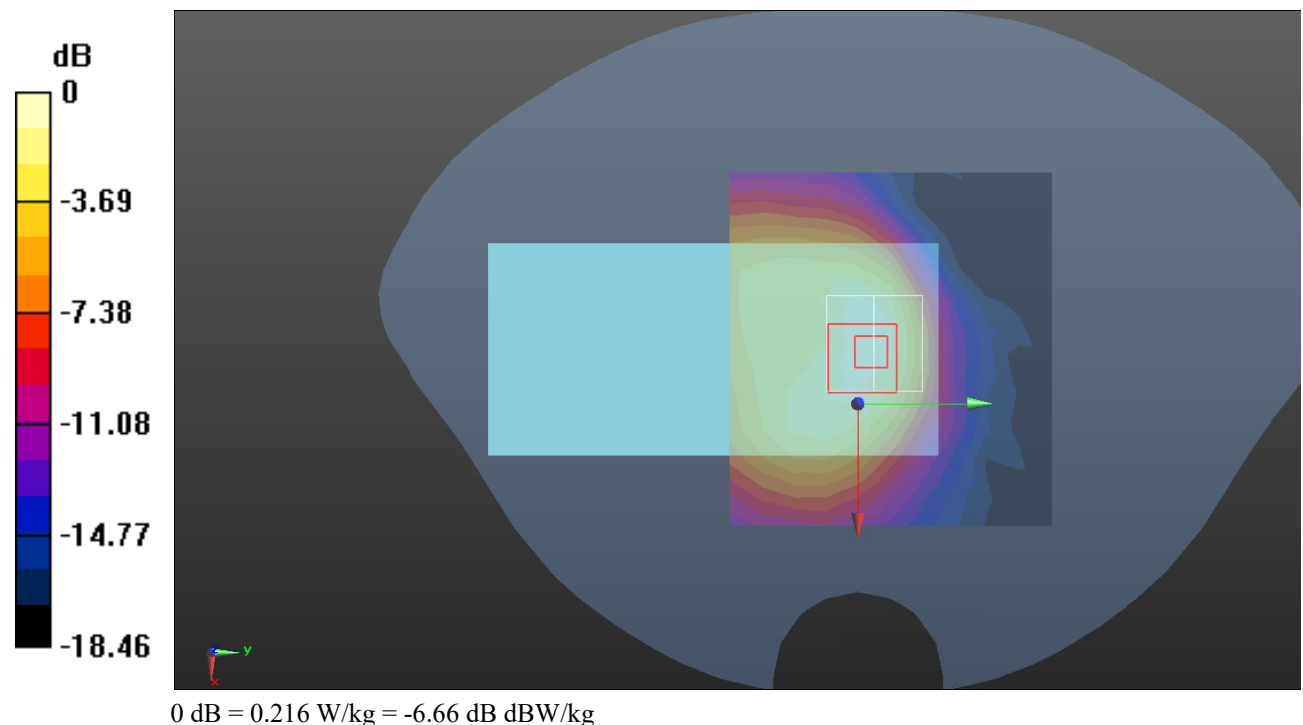

Test Plot 49#: LTE Band 40A_Body Right_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.713$ S/m; $\epsilon_r = 39.964$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2310 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (9x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.151 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.893 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.269 W/kg

SAR(1 g) = 0.154 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.174 W/kg

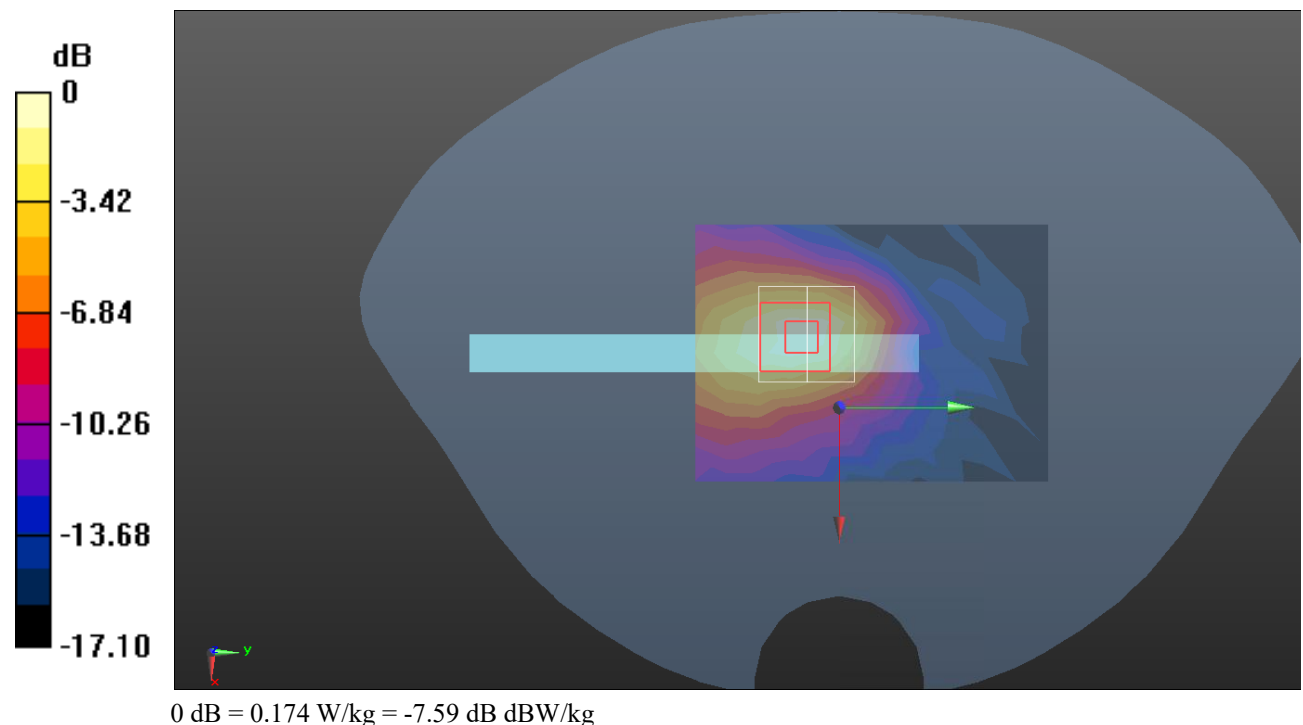

Test Plot 50#: LTE Band 40A_Body Right_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.713$ S/m; $\epsilon_r = 39.964$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2310 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (9x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.131 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.593 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.222 W/kg

SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.132 W/kg

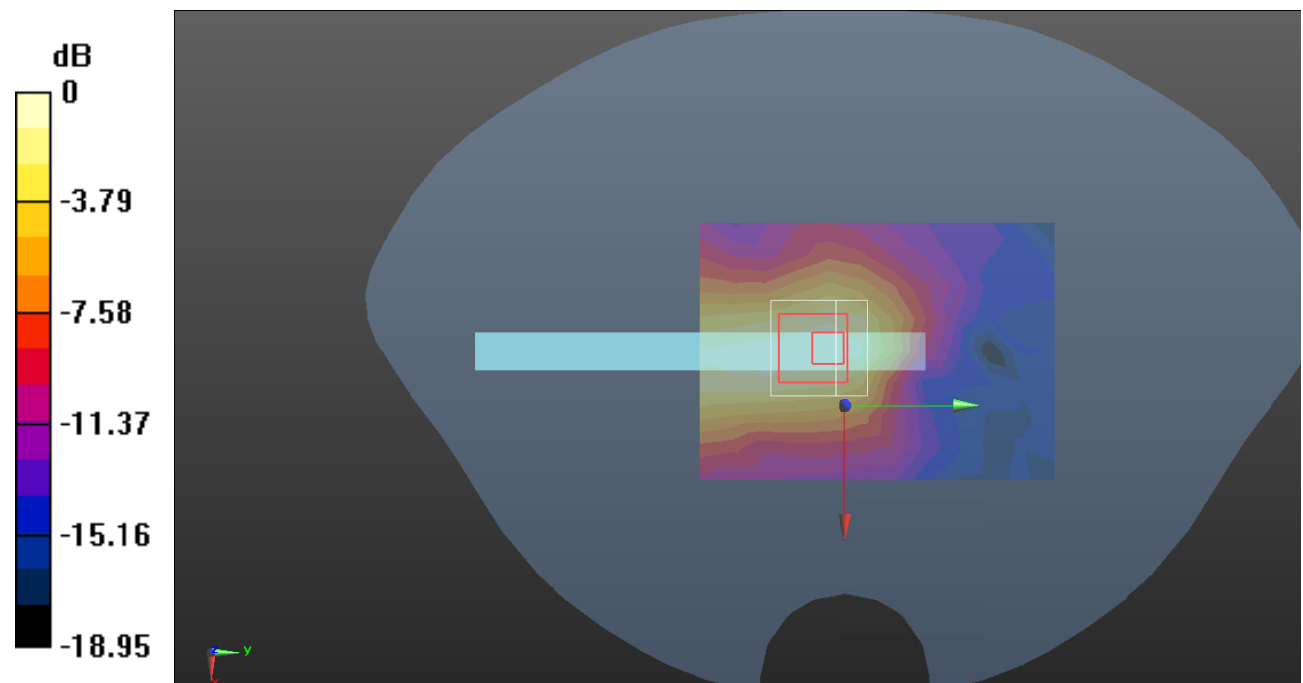

0 dB = 0.132 W/kg = -8.79 dB dBW/kg

Test Plot 51#: LTE Band 40A_Body Top_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.713$ S/m; $\epsilon_r = 39.964$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2310 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (9x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.167 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.436 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.325 W/kg

SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.092 W/kg

Maximum value of SAR (measured) = 0.198 W/kg

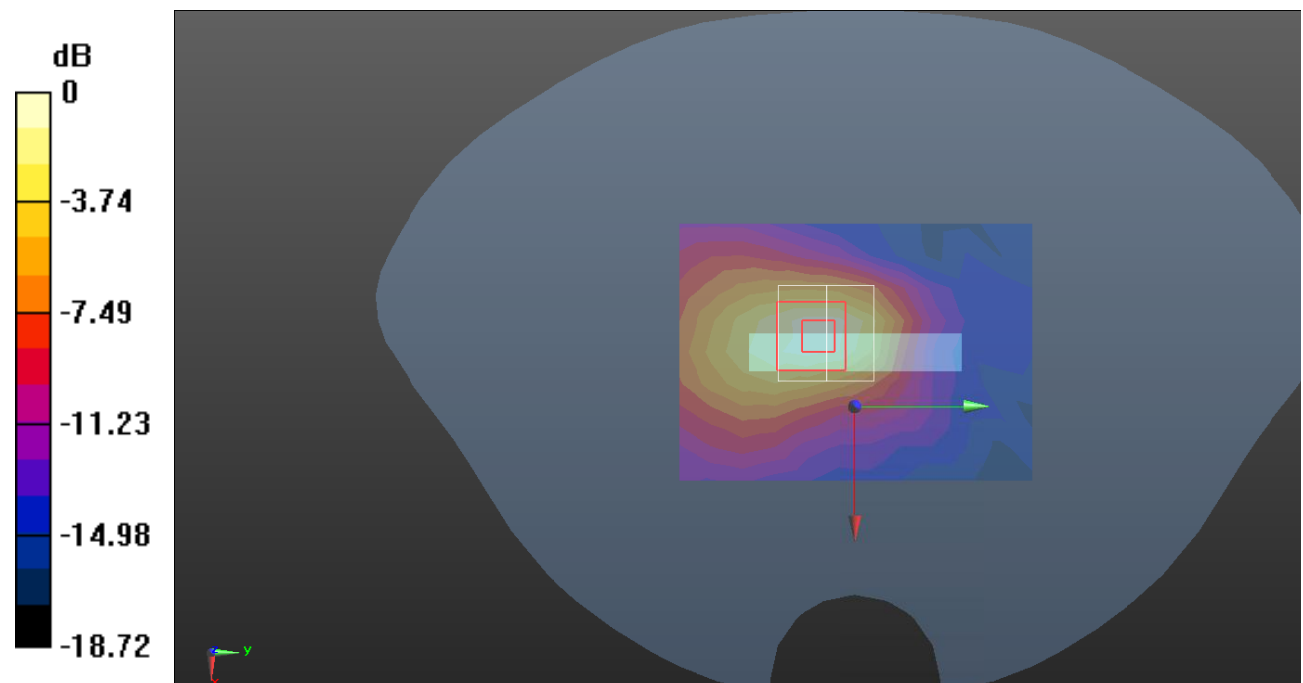

Test Plot 52#: LTE Band 40A_Body Top_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.713$ S/m; $\epsilon_r = 39.964$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2310 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (9x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.126 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.256 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.236 W/kg

SAR(1 g) = 0.132 W/kg; SAR(10 g) = 0.070 W/kg

Maximum value of SAR (measured) = 0.148 W/kg

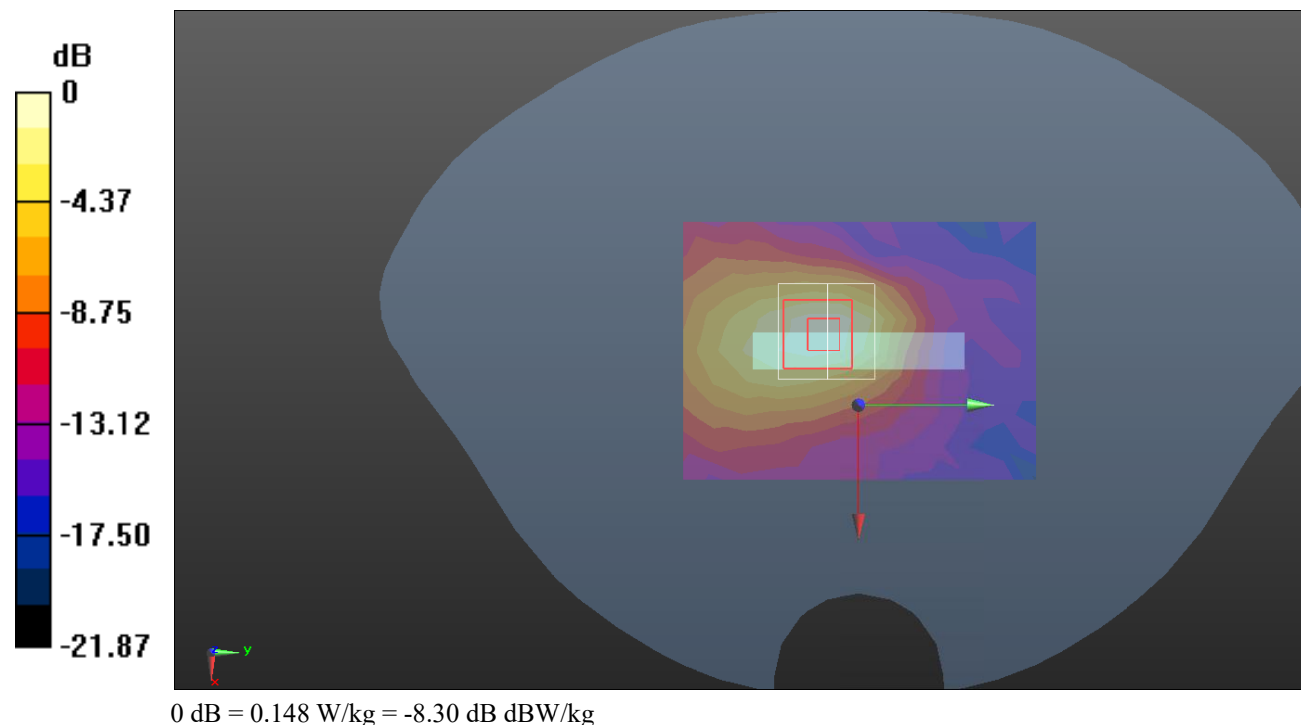

Test Plot 53#: LTE Band 40B_Head Left Cheek_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:1.58125
Medium parameters used: $f = 2355$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 40.614$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2355 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.278 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.089 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.571 W/kg

SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.293 W/kg

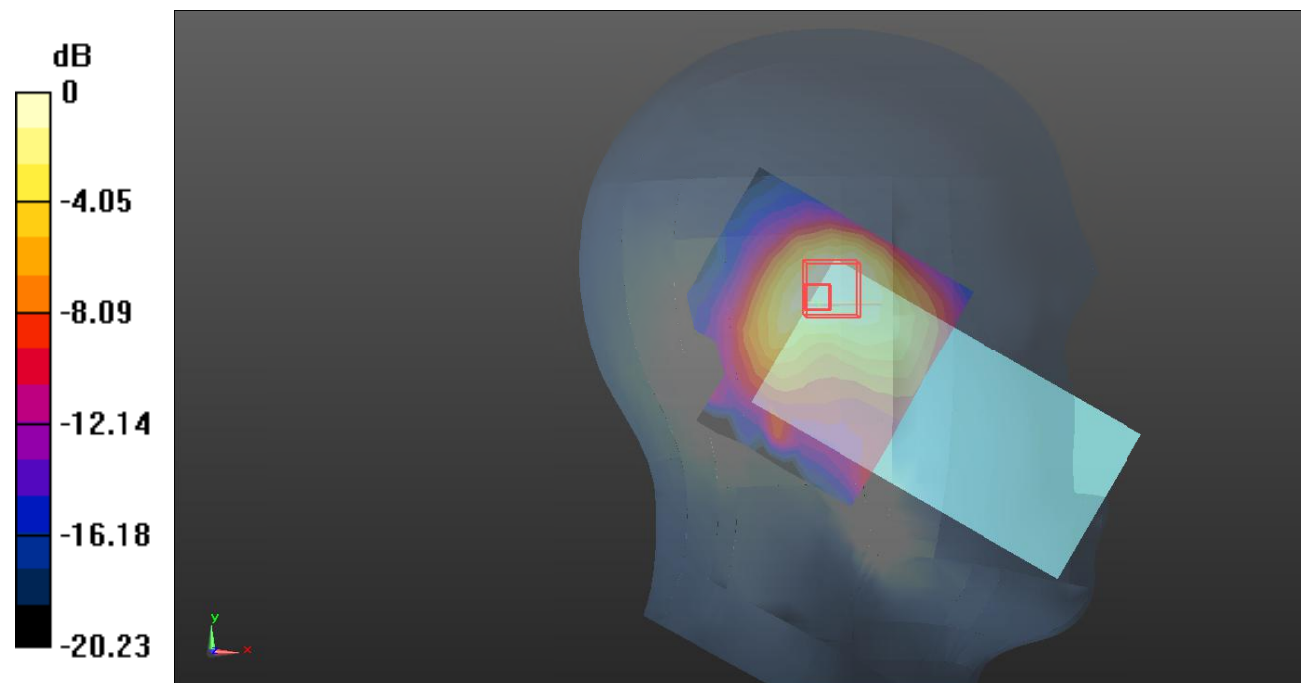

0 dB = 0.293 W/kg = -5.33 dB dBW/kg

Test Plot 54#: LTE Band 40B_Head Left Cheek_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:1.58125
Medium parameters used: $f = 2355$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 40.614$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2355 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.223 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.874 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.457 W/kg

SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.112 W/kg

Maximum value of SAR (measured) = 0.231 W/kg

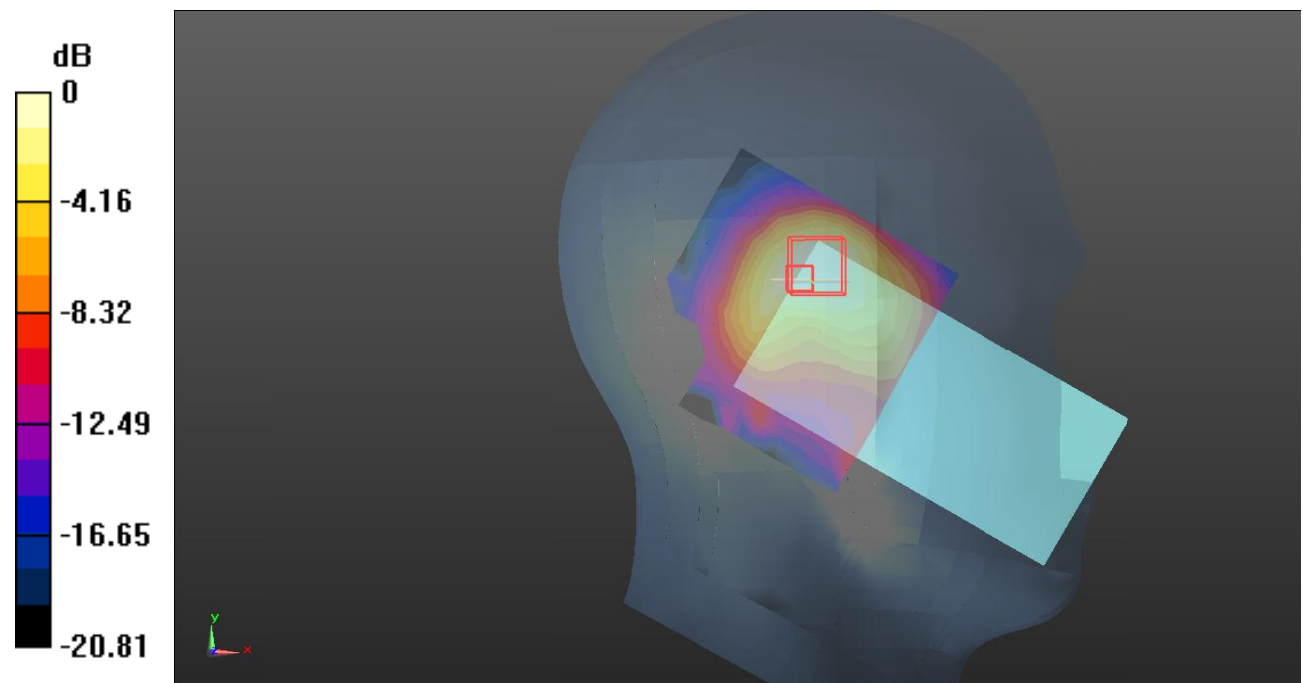

0 dB = 0.231 W/kg = -6.36 dB dBW/kg

Test Plot 55#: LTE Band 40B_Head Left Tilt_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:1.58125
Medium parameters used: $f = 2355$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 40.614$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2355 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.246 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.466 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.600 W/kg

SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.125 W/kg

Maximum value of SAR (measured) = 0.296 W/kg

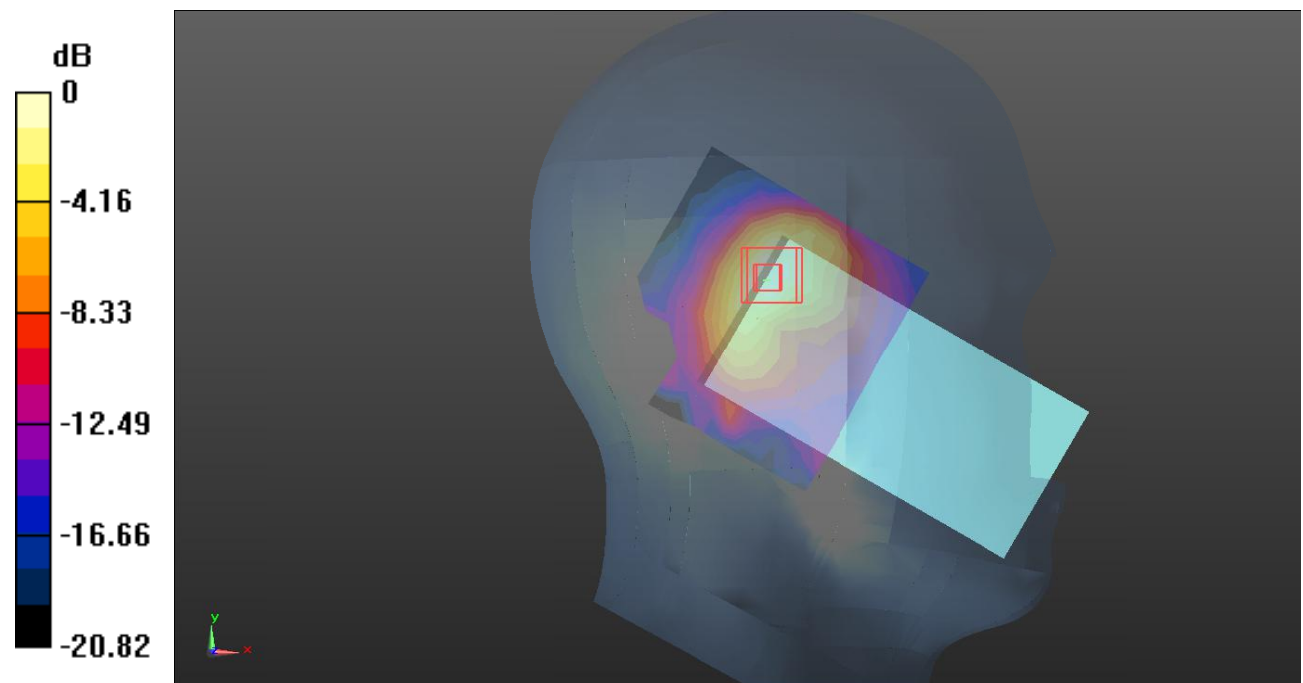

0 dB = 0.296 W/kg = -5.29 dB dBW/kg

Test Plot 56#: LTE Band 40B_Head Left Tilt_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2355$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 40.614$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2355 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.192 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.440 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.487 W/kg

SAR(1 g) = 0.211 W/kg; SAR(10 g) = 0.099 W/kg

Maximum value of SAR (measured) = 0.237 W/kg

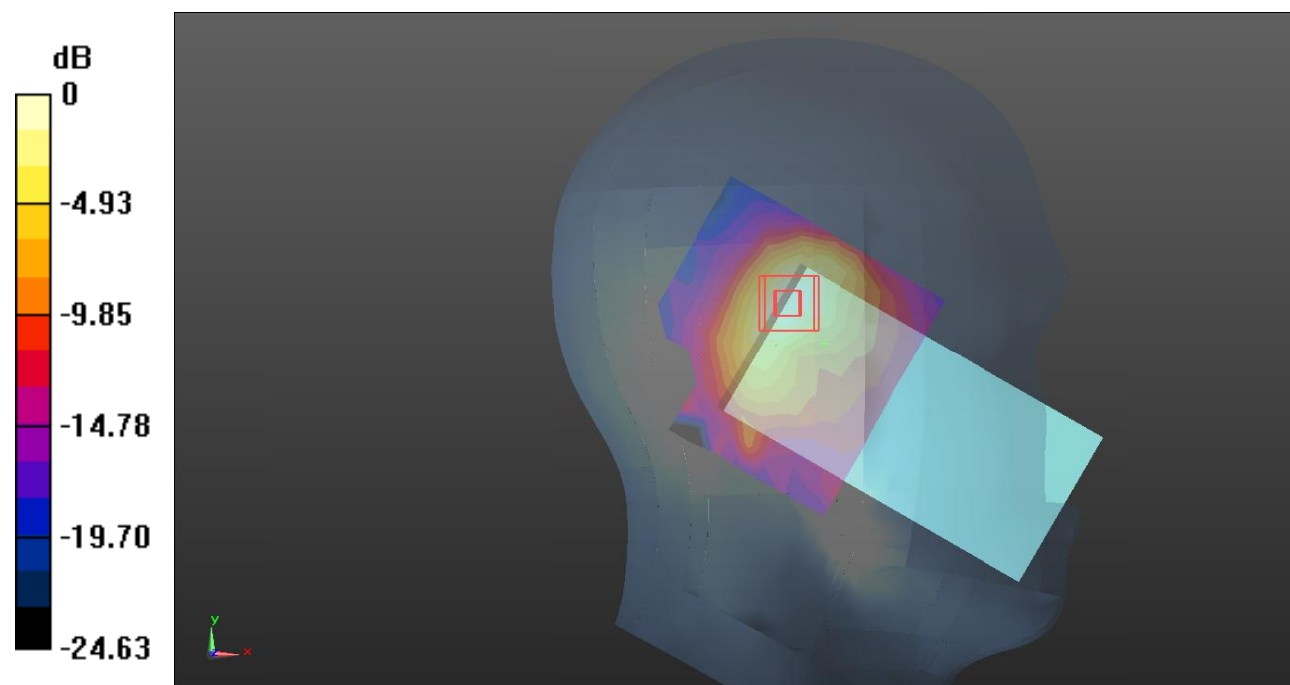

0 dB = 0.237 W/kg = -6.25 dB dBW/kg

Test Plot 57#: LTE Band 40B_Head Right Cheek_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2355$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 40.614$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2355 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.193 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.636 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.343 W/kg

SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.195 W/kg

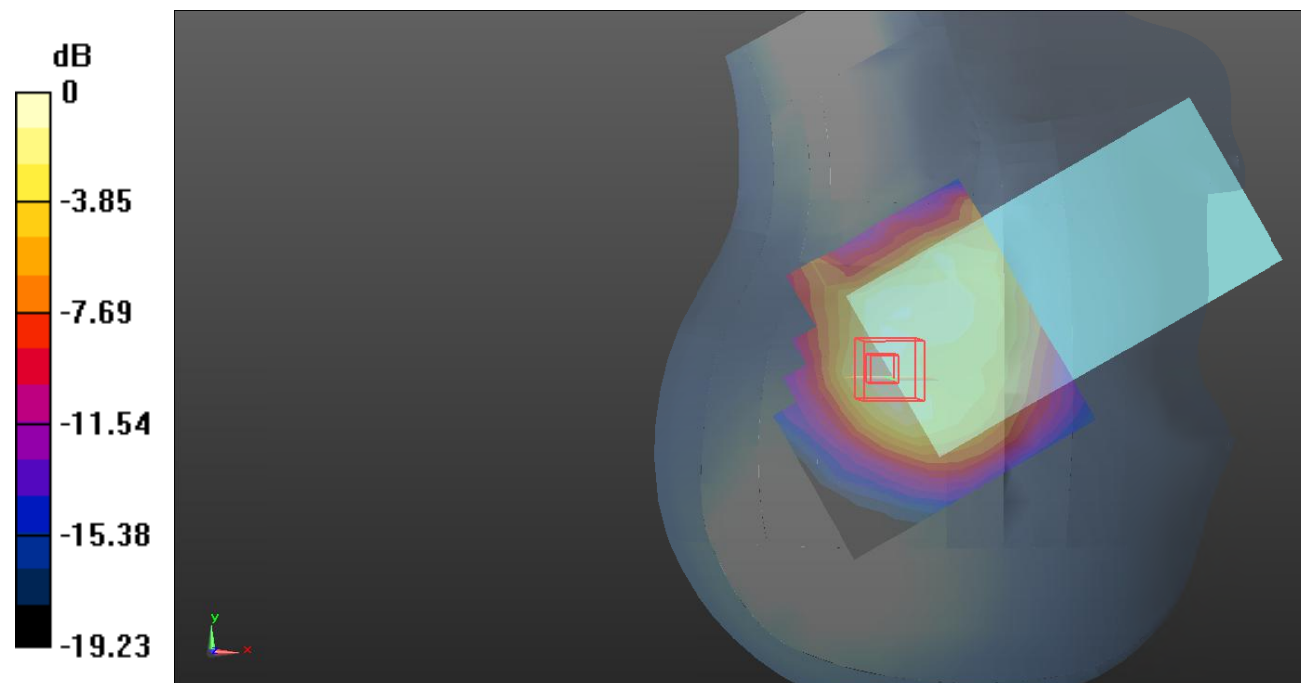

0 dB = 0.195 W/kg = -7.10 dB dBW/kg

Test Plot 58#: LTE Band 40B_Head Right Cheek_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2355$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 40.614$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2355 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.153 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.383 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.276 W/kg

SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.071 W/kg

Maximum value of SAR (measured) = 0.154 W/kg

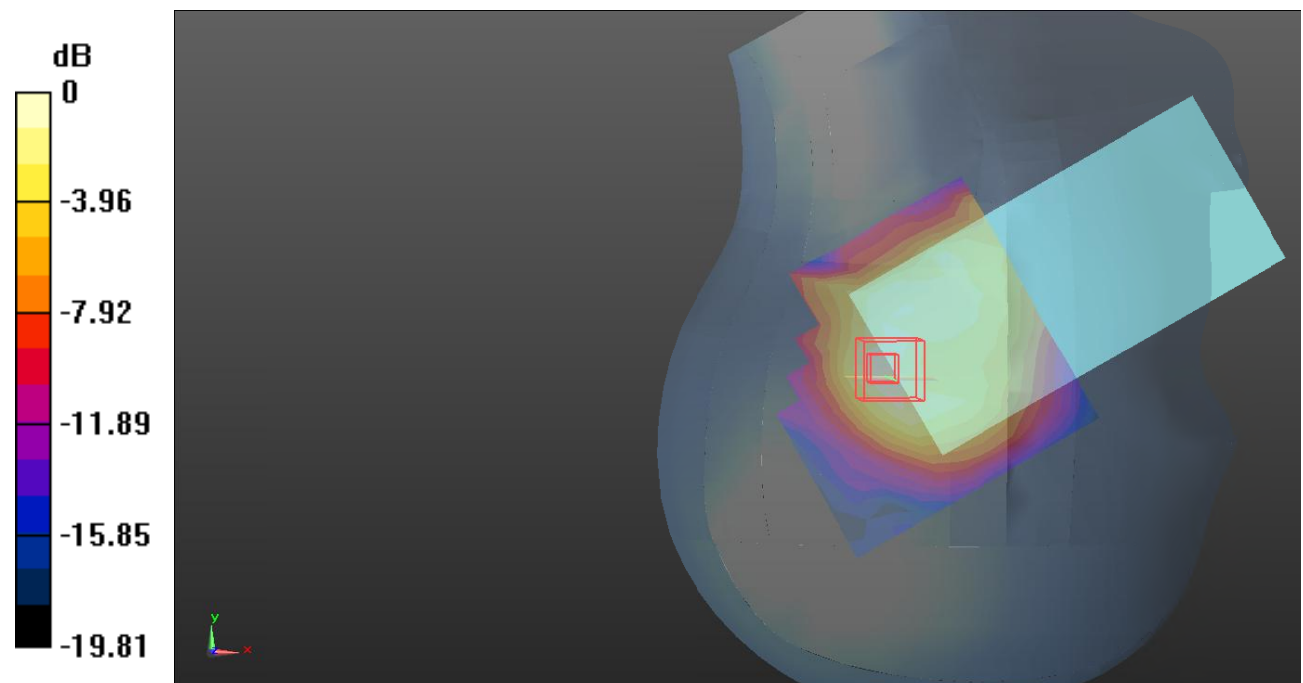

0 dB = 0.154 W/kg = -8.12 dB dBW/kg

Test Plot 59#: LTE Band 40B_Head Right Tilt_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2355$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 40.614$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2355 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.233 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.320 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.418 W/kg

SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.102 W/kg

Maximum value of SAR (measured) = 0.236 W/kg

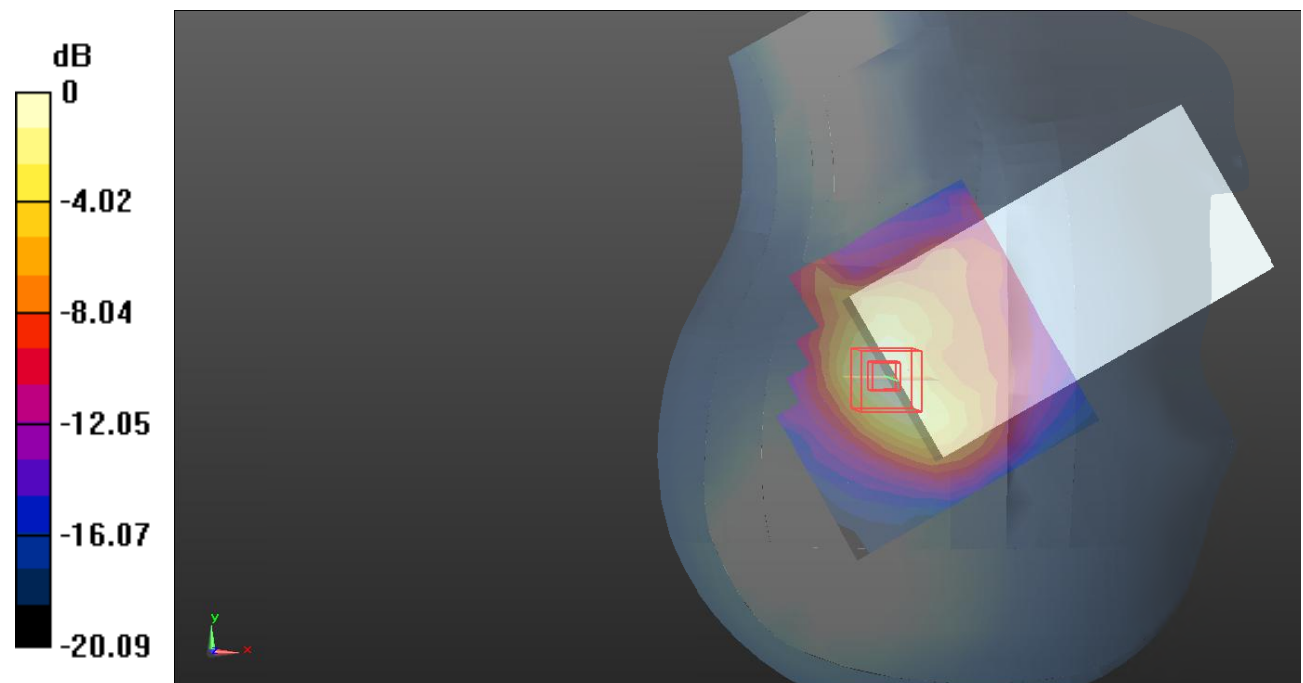

0 dB = 0.236 W/kg = -6.27 dB dBW/kg

Test Plot 60#: LTE Band 40B_Head Right Tilt_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2355$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 40.614$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2355 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.183 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.334 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.324 W/kg

SAR(1 g) = 0.163 W/kg; SAR(10 g) = 0.081 W/kg

Maximum value of SAR (measured) = 0.185 W/kg

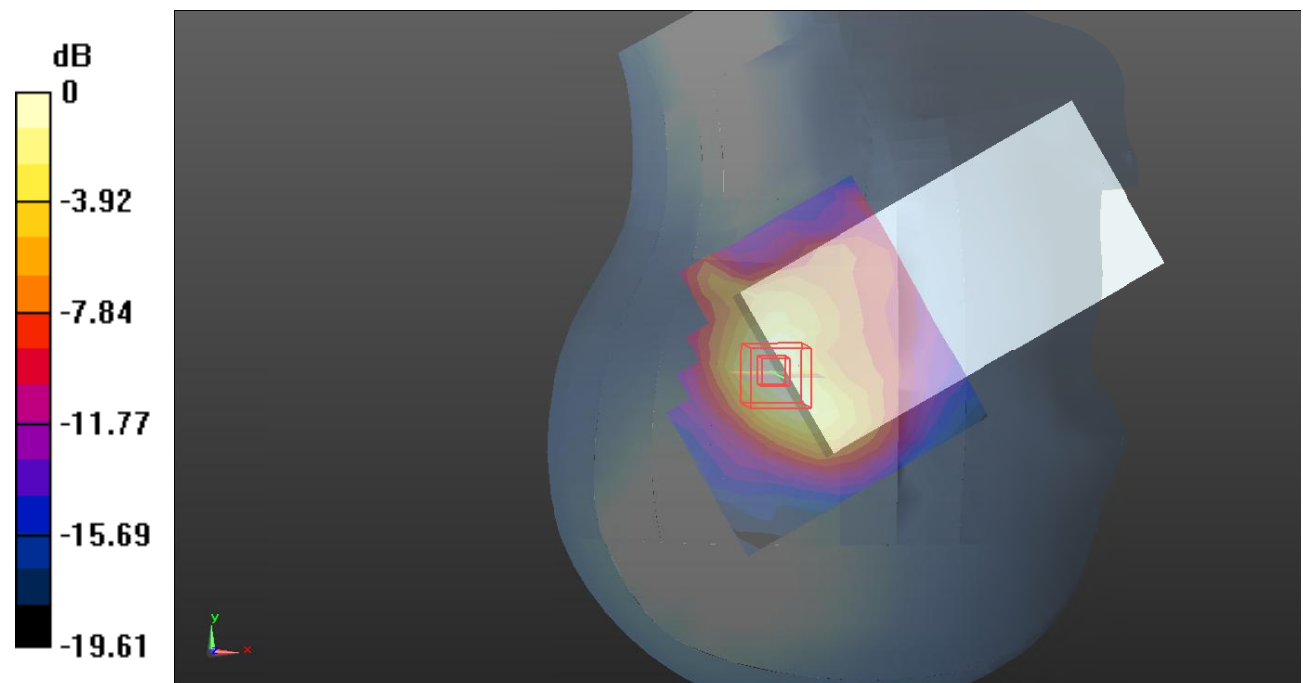

0 dB = 0.185 W/kg = -7.33 dB dBW/kg

Test Plot 61#: LTE Band 40B_Body Front_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2355$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 40.614$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2355 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (12x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0717 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.395 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.124 W/kg

SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.0686 W/kg

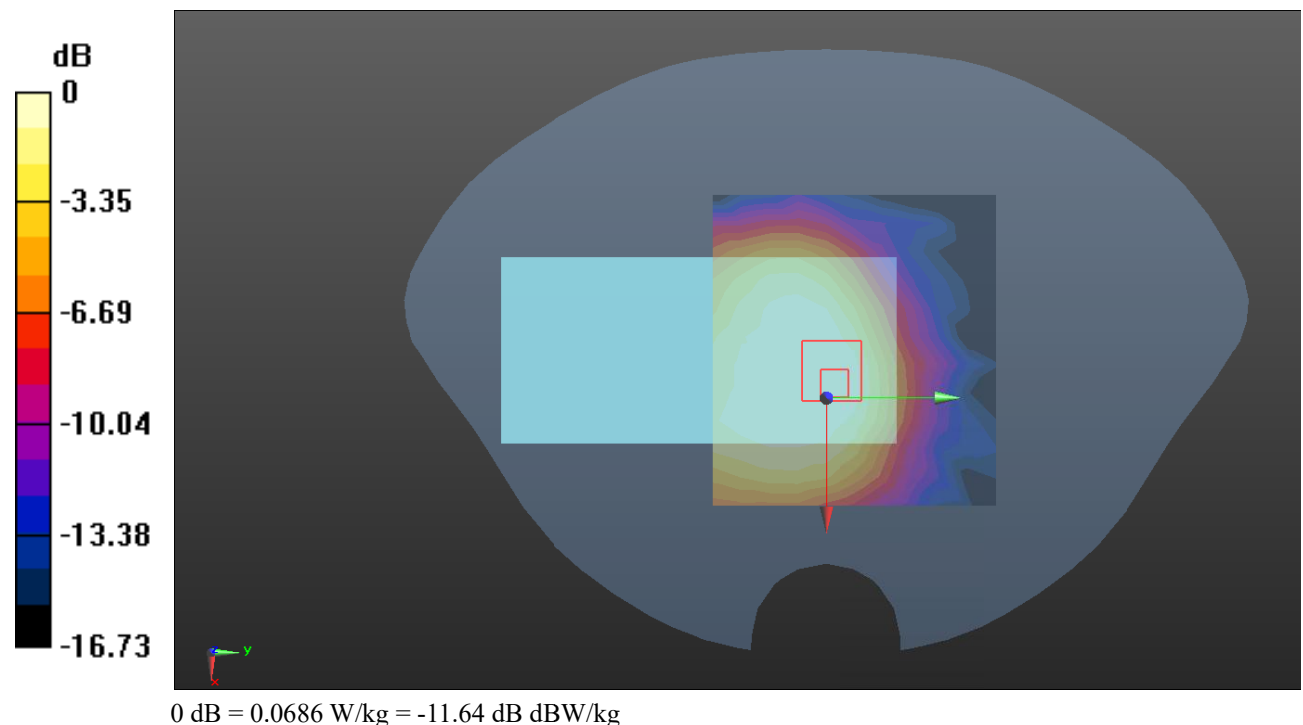

Test Plot 62#: LTE Band 40B_Body Front_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2355$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 40.614$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2355 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (12x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0533 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.333 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0960 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.0534 W/kg

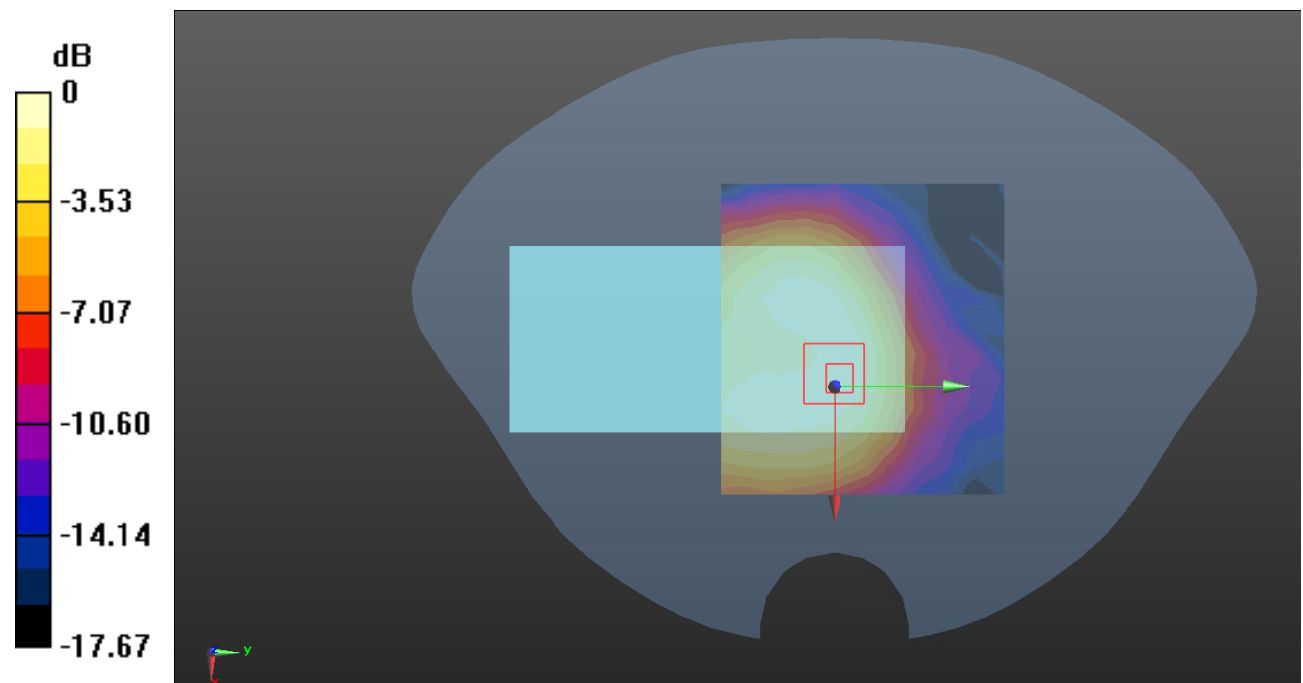

0 dB = 0.0534 W/kg = -12.72 dB dBW/kg

Test Plot 63#: LTE Band 40B_Body Back_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2355$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 40.614$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2355 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (12x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.239 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.36 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.481 W/kg

SAR(1 g) = 0.228 W/kg; SAR(10 g) = 0.112 W/kg

Maximum value of SAR (measured) = 0.257 W/kg

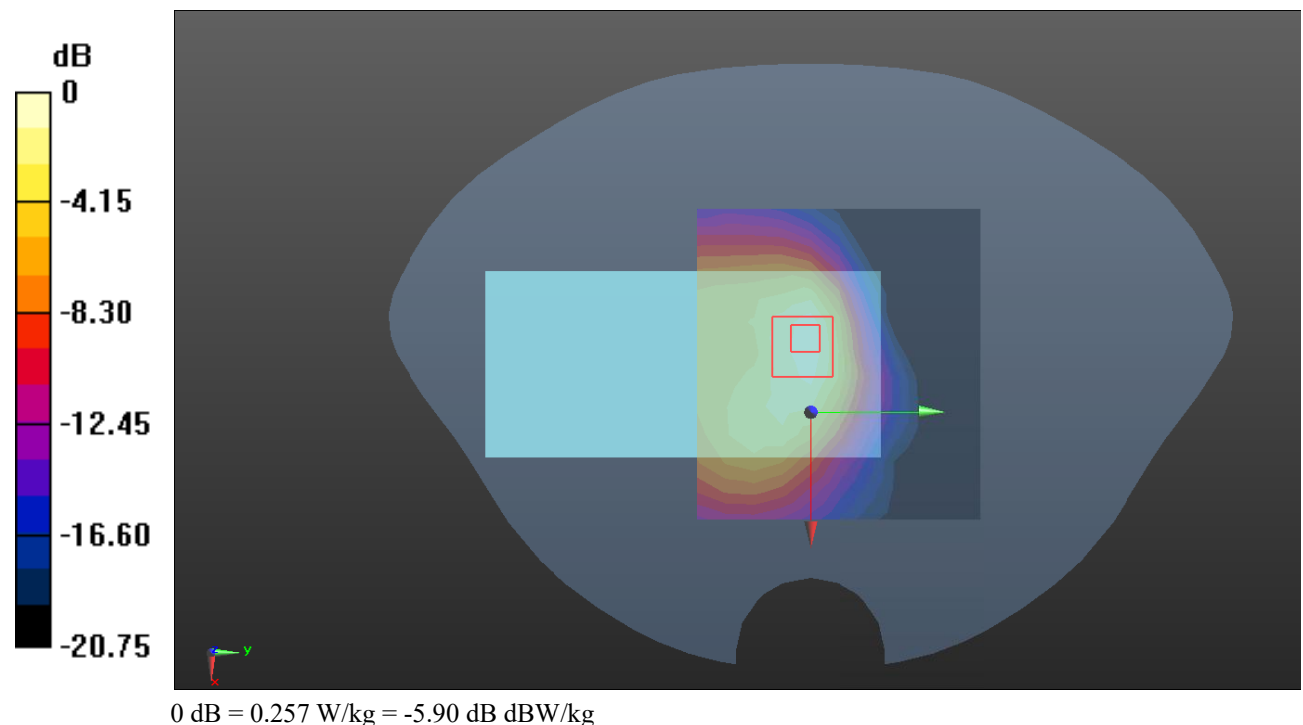

Test Plot 64#: LTE Band 40B_Body Back_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2355$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 40.614$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2355 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (12x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.193 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.19 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.389 W/kg

SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.089 W/kg

Maximum value of SAR (measured) = 0.206 W/kg

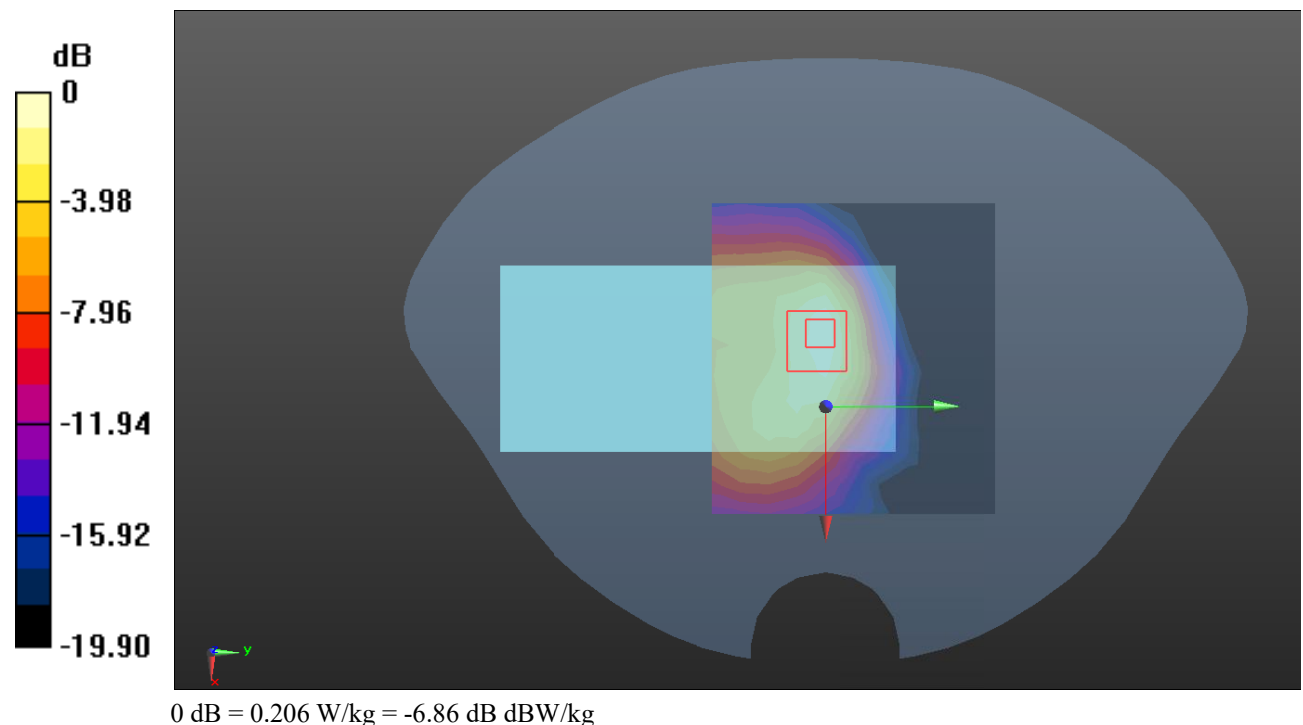

Test Plot 65#: LTE Band 40B_Body Right_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2355$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 40.614$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2355 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (9x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.125 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.311 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.236 W/kg

SAR(1 g) = 0.126 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.139 W/kg

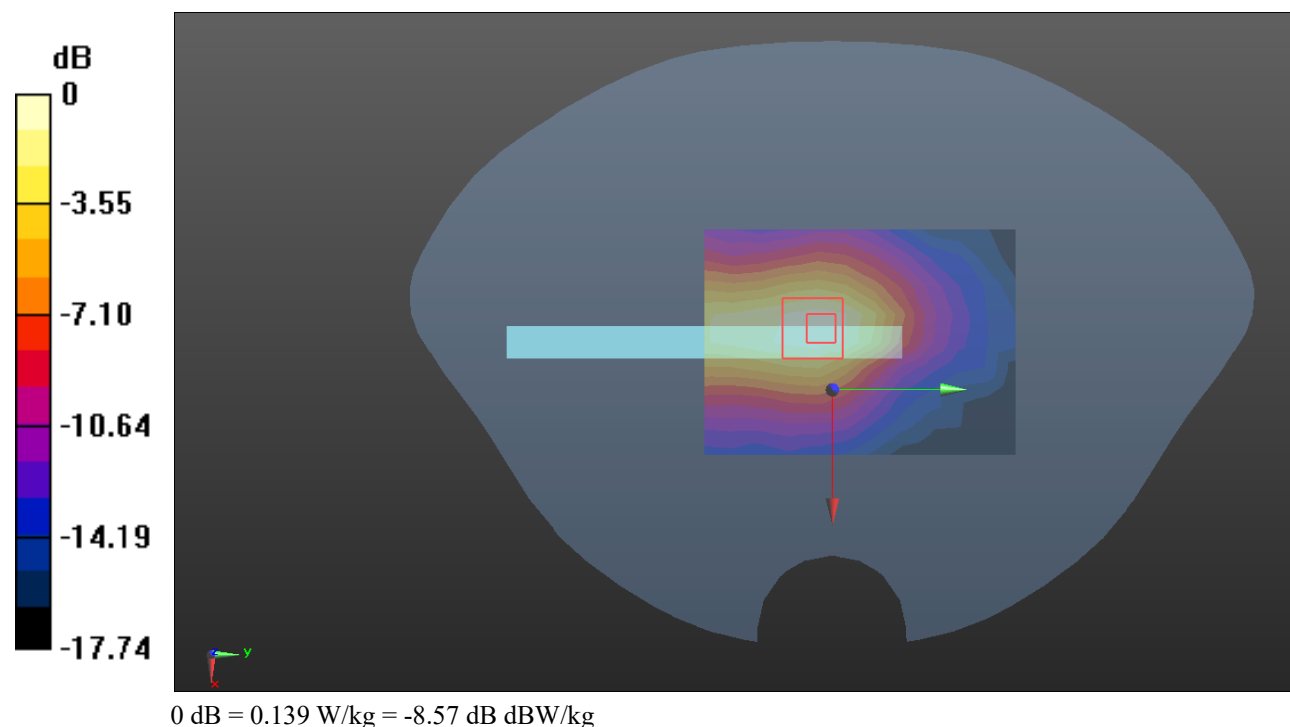

Test Plot 66#: LTE Band 40B_Body Right_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2355$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 40.614$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2355 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (9x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.102 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.565 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.196 W/kg

SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.055 W/kg

Maximum value of SAR (measured) = 0.115 W/kg

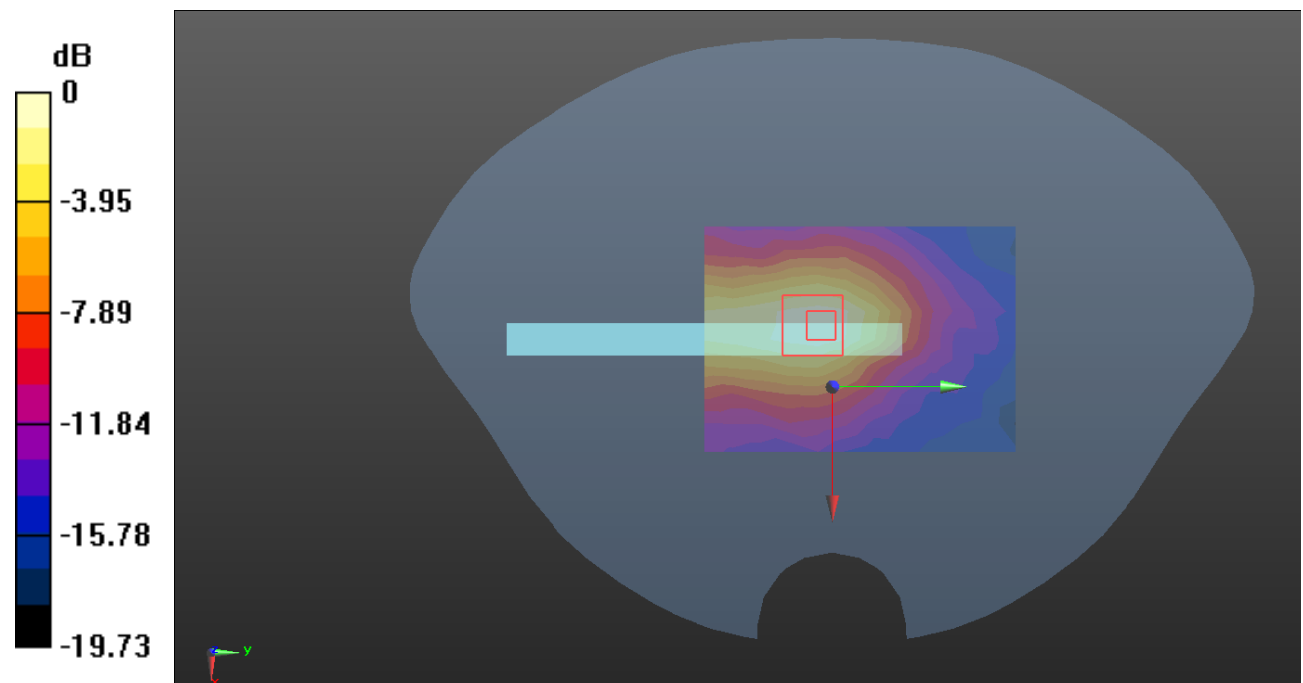

0 dB = 0.115 W/kg = -9.39 dB dBW/kg

Test Plot 67#: LTE Band 40B_Body Top_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2355$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 40.614$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2355 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (9x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.104 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.712 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.199 W/kg

SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.055 W/kg

Maximum value of SAR (measured) = 0.121 W/kg

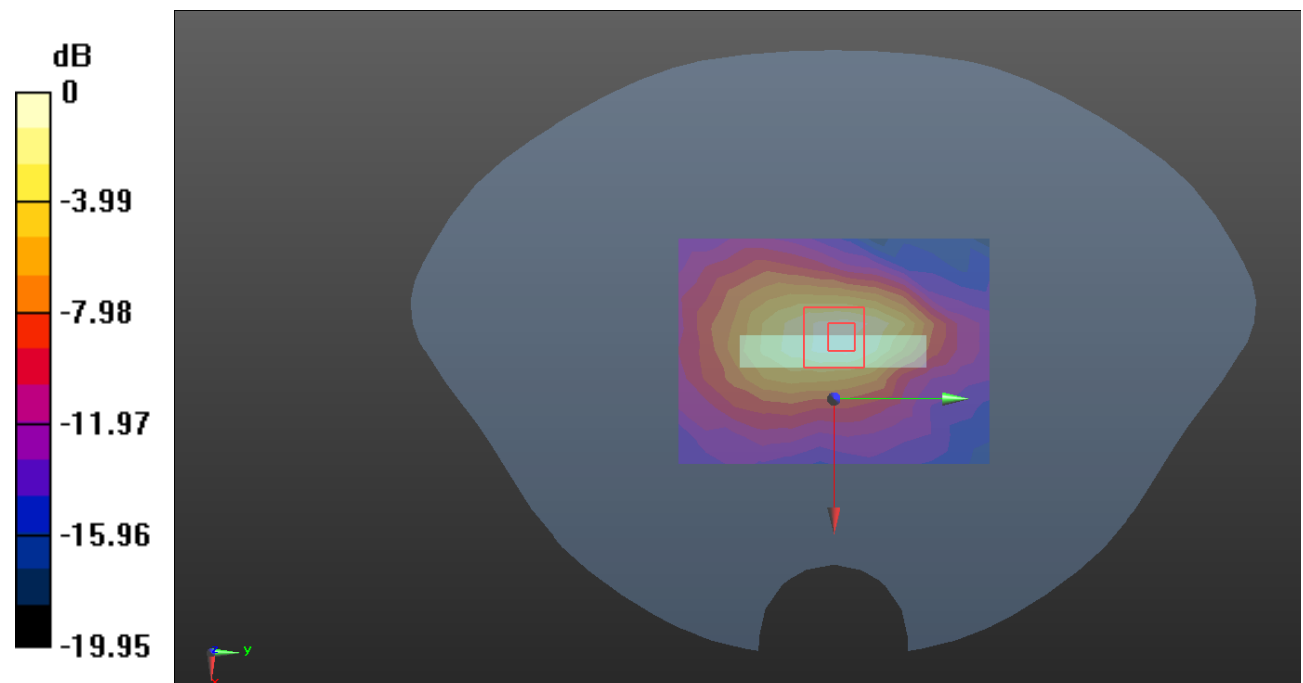

0 dB = 0.121 W/kg = -9.17 dB dBW/kg

Test Plot 68#: LTE Band 40B_Body Top_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:1.58125

Medium parameters used: $f = 2355$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 40.614$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.67, 7.67, 7.67) @2355 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (9x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0798 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.814 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.157 W/kg

SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.043 W/kg

Maximum value of SAR (measured) = 0.0947 W/kg

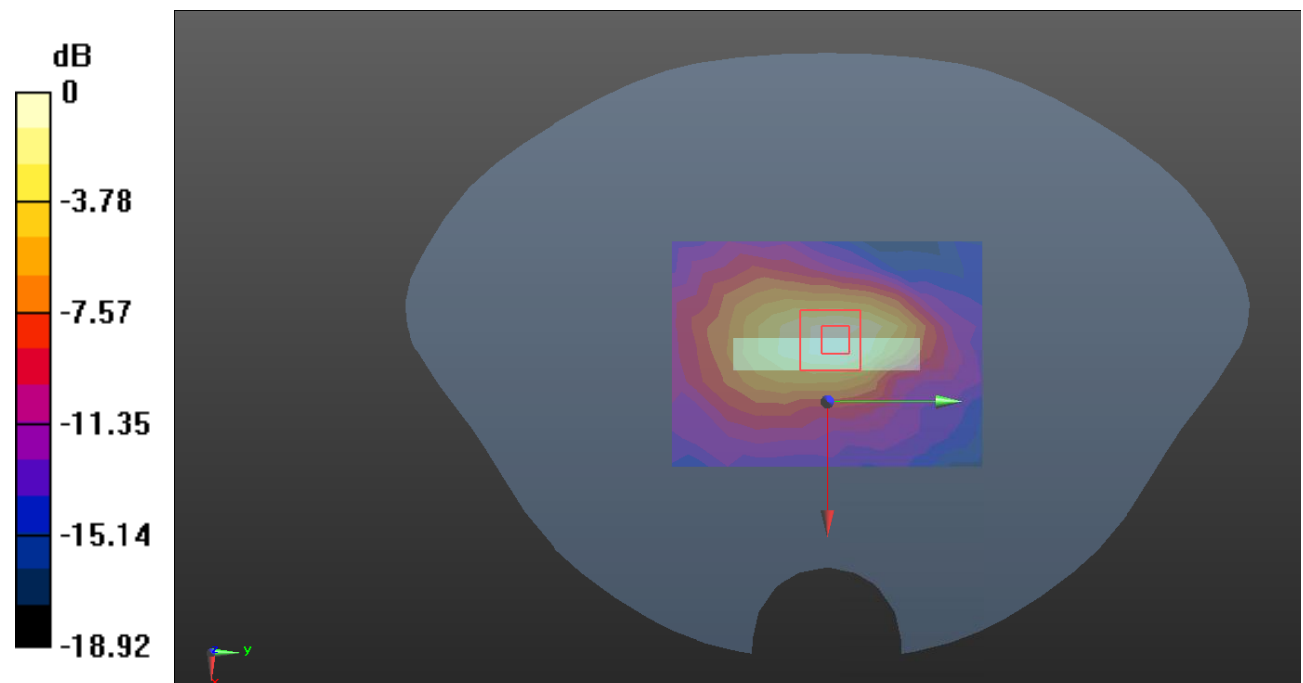

0 dB = 0.0947 W/kg = -10.24 dB dBW/kg

Test Plot 69#: LTE Band 41_Head Left Cheek_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.5787
Medium parameters used: $f = 2595$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 39.867$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2595 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.374 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.068 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.770 W/kg

SAR(1 g) = 0.358 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.394 W/kg

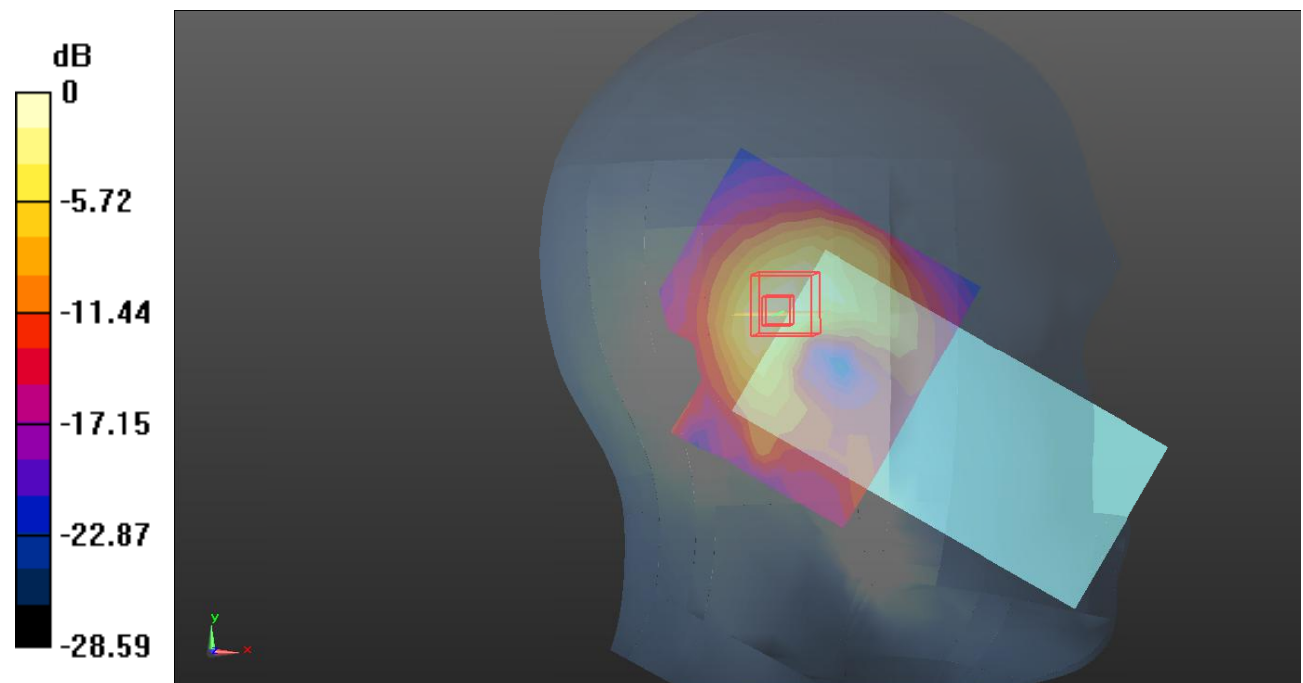

0 dB = 0.394 W/kg = -4.05 dB dBW/kg

Test Plot 70#: LTE Band 41_Head Left Cheek_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.5787
Medium parameters used: $f = 2595$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 39.867$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2595 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.308 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.414 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.654 W/kg

SAR(1 g) = 0.297 W/kg; SAR(10 g) = 0.122 W/kg

Maximum value of SAR (measured) = 0.325 W/kg

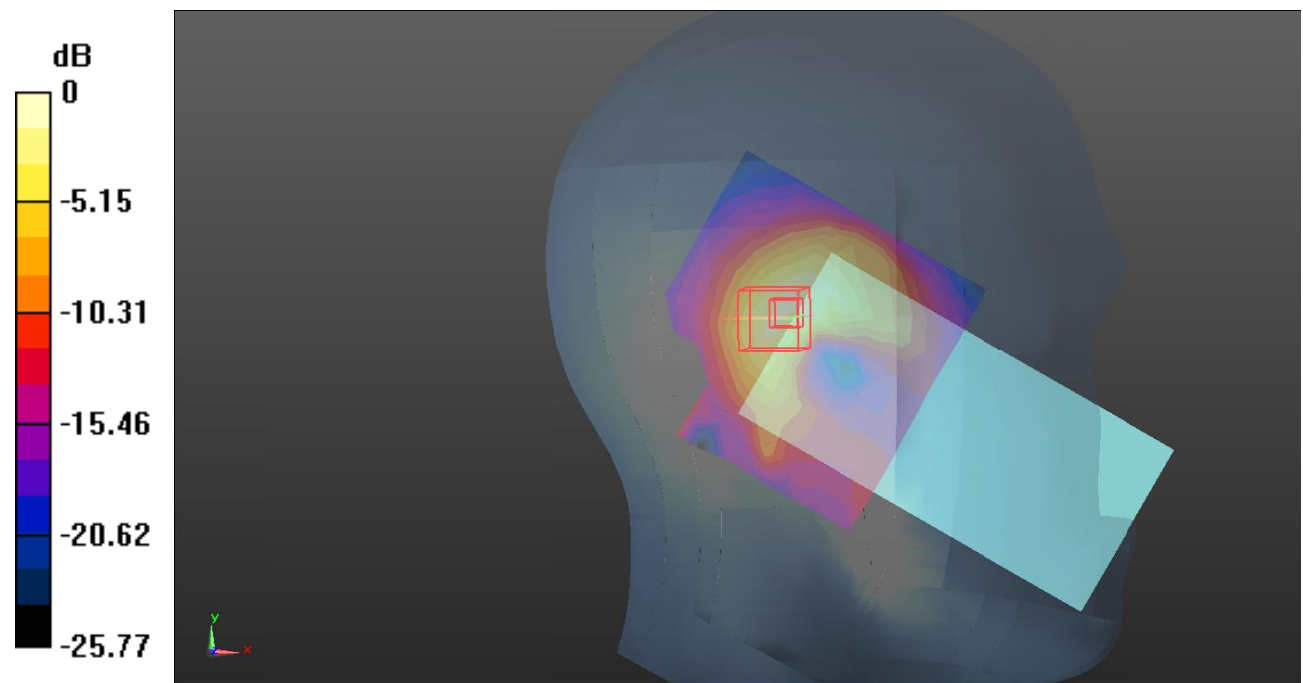

0 dB = 0.325 W/kg = -4.88 dB dBW/kg

Test Plot 71#: LTE Band 41_Head Left Tilt_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.5787
Medium parameters used: $f = 2595$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 39.867$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2595 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.574 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.425 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.553 W/kg; SAR(10 g) = 0.243 W/kg

Maximum value of SAR (measured) = 0.620 W/kg

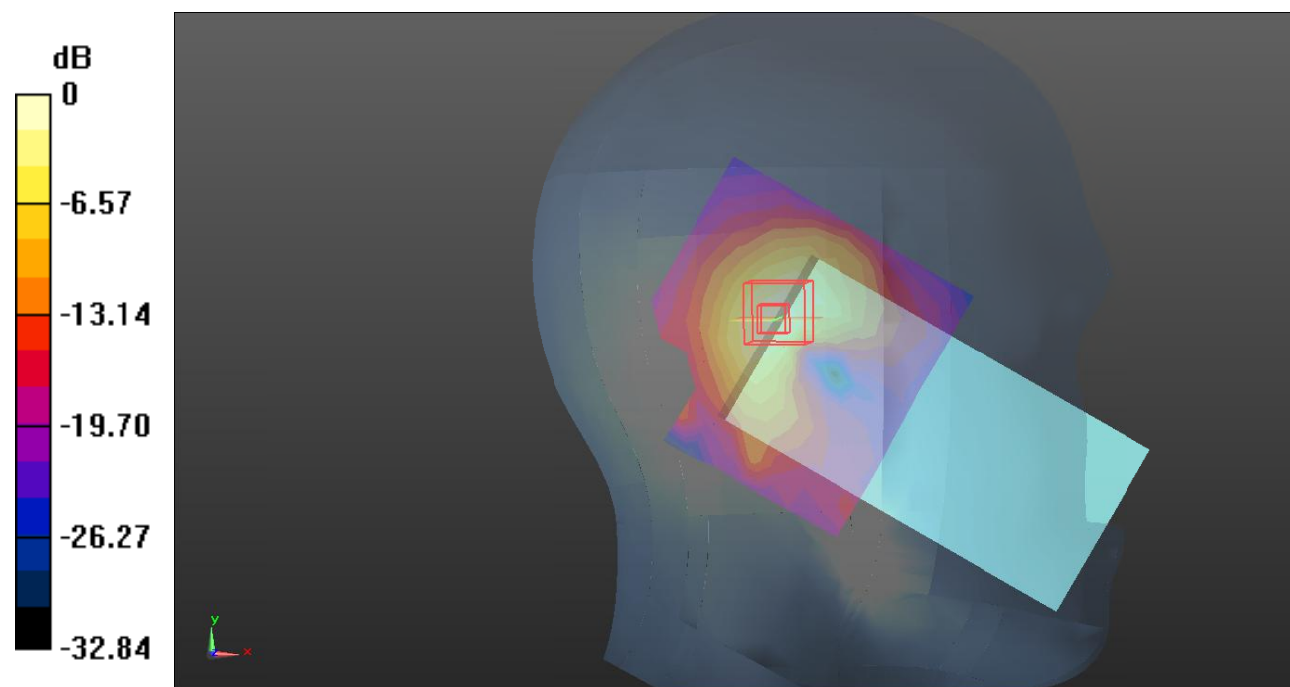

0 dB = 0.620 W/kg = -2.08 dB dBW/kg

Test Plot 72#: LTE Band 41_Head Left Tilt_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.5787
Medium parameters used: $f = 2595$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 39.867$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2595 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.459 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.897 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.988 W/kg

SAR(1 g) = 0.451 W/kg; SAR(10 g) = 0.197 W/kg

Maximum value of SAR (measured) = 0.509 W/kg

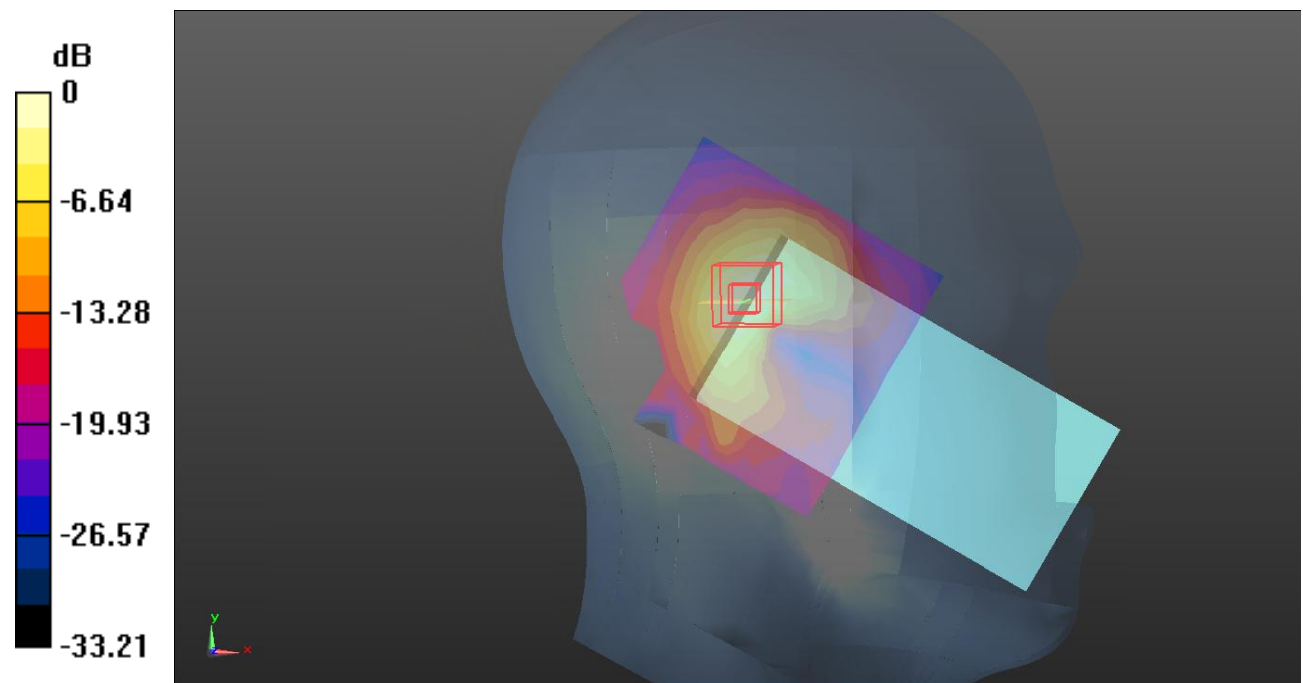

Test Plot 73#: LTE Band 41_Head Right Cheek_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.5787
Medium parameters used: $f = 2595$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 39.867$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2595 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.239 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.032 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.558 W/kg

SAR(1 g) = 0.256 W/kg; SAR(10 g) = 0.116 W/kg

Maximum value of SAR (measured) = 0.284 W/kg

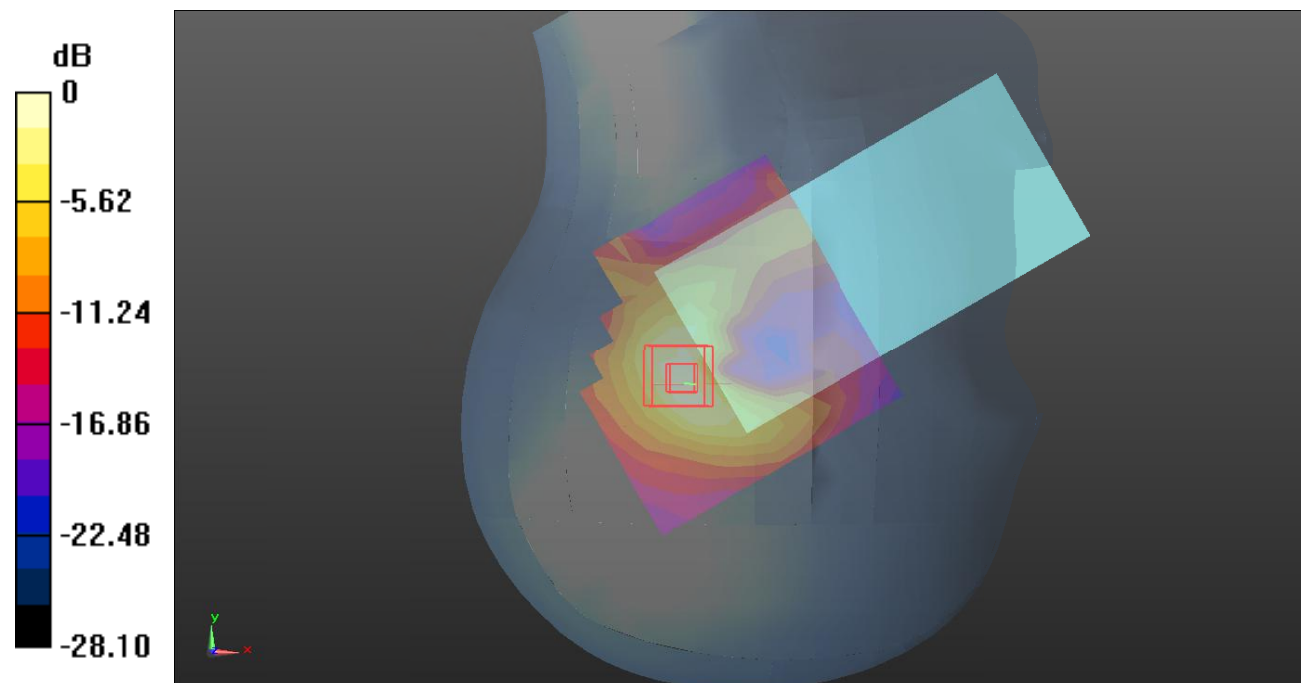

0 dB = 0.284 W/kg = -5.47 dB dBW/kg

Test Plot 74#: LTE Band 41_Head Right Cheek_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.5787
Medium parameters used: $f = 2595$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 39.867$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2595 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.191 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.876 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.448 W/kg

SAR(1 g) = 0.204 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.218 W/kg

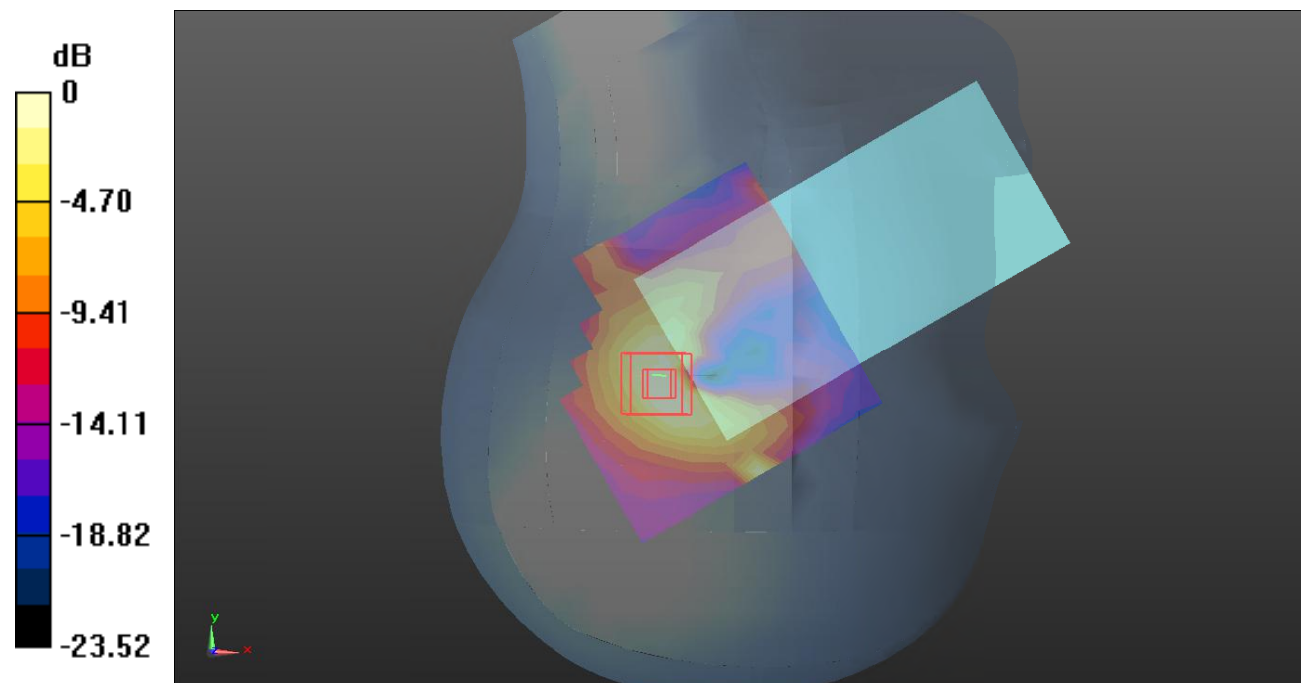

0 dB = 0.218 W/kg = -6.62 dB dBW/kg

Test Plot 75#: LTE Band 41_Head Right Tilt_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.5787
Medium parameters used: $f = 2595$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 39.867$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2595 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.363 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.447 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.879 W/kg

SAR(1 g) = 0.402 W/kg; SAR(10 g) = 0.179 W/kg

Maximum value of SAR (measured) = 0.435 W/kg

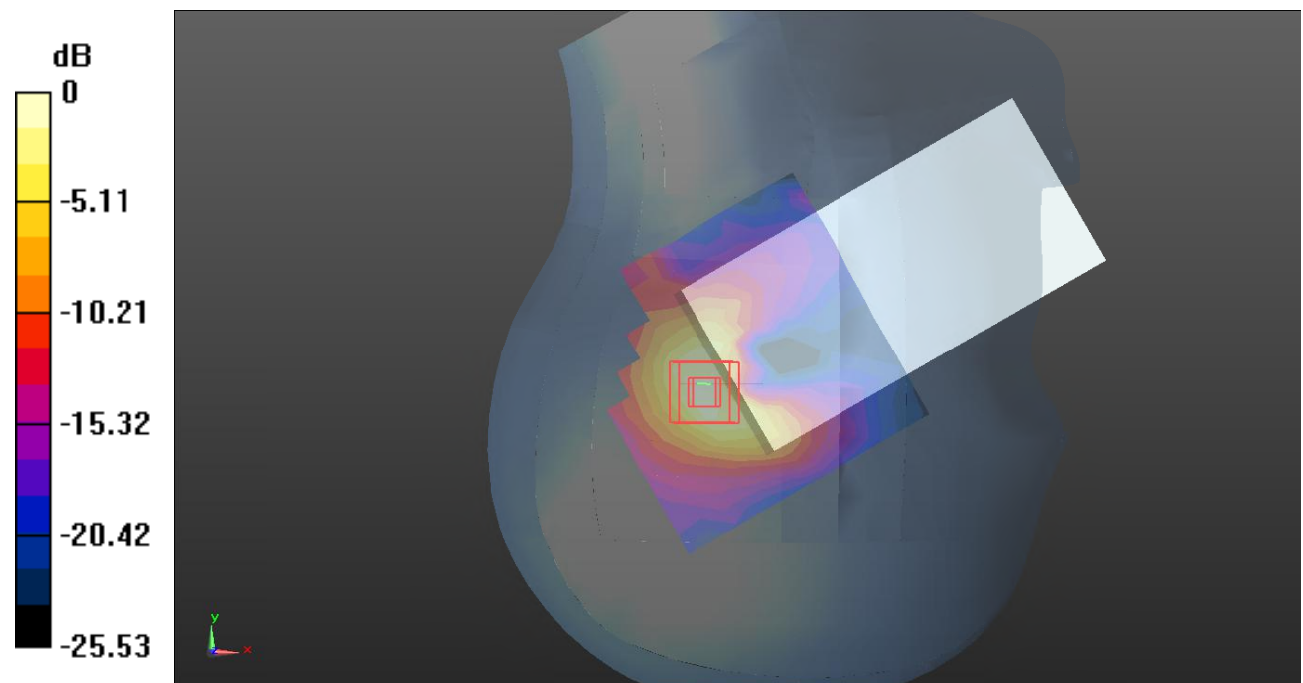

0 dB = 0.435 W/kg = -3.62 dB dBW/kg

Test Plot 76#: LTE Band 41_Head Right Tilt_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.5787
Medium parameters used: $f = 2595$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 39.867$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2595 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.310 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.094 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.949 W/kg

SAR(1 g) = 0.321 W/kg; SAR(10 g) = 0.134 W/kg

Maximum value of SAR (measured) = 0.590 W/kg

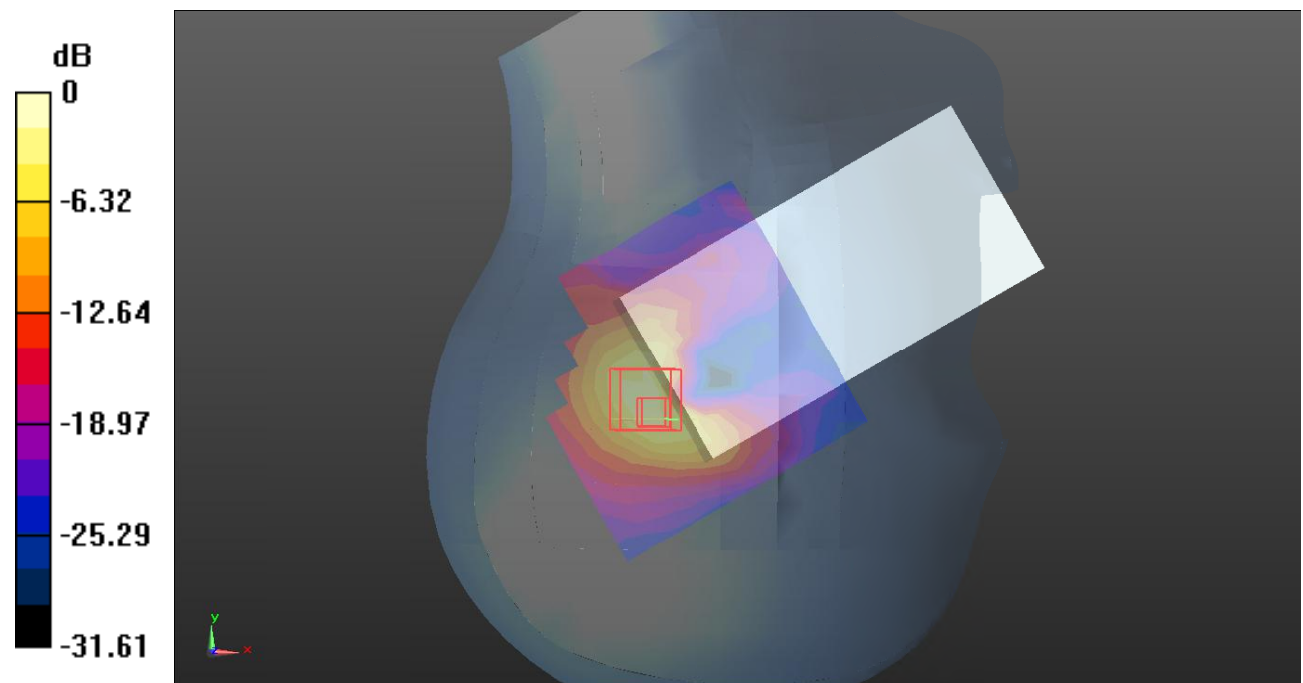

0 dB = 0.590 W/kg = -2.29 dB dBW/kg

Test Plot 77#: LTE Band 41_Body Front_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.5787
Medium parameters used: $f = 2595$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 39.867$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2595 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (12x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.137 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.798 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.248 W/kg

SAR(1 g) = 0.132 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.143 W/kg

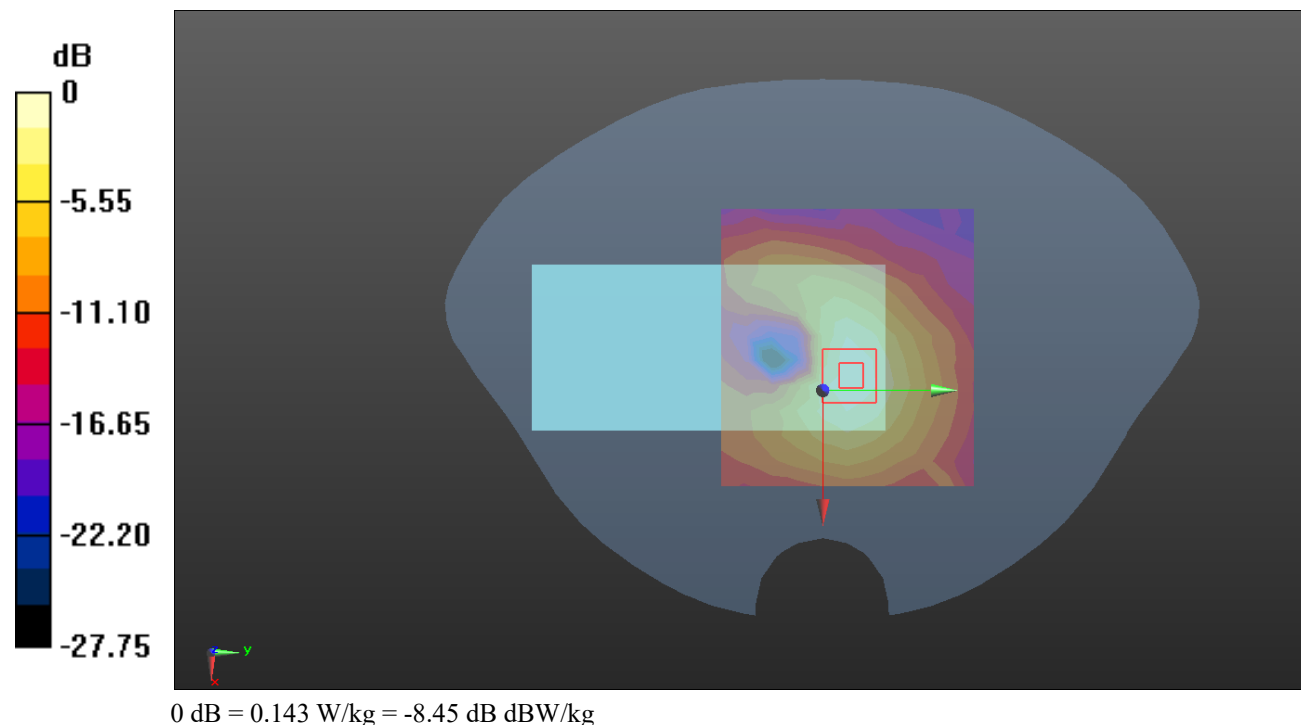

Test Plot 78#: LTE Band 41_Body Front_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.5787
Medium parameters used: $f = 2595$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 39.867$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2595 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (12x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.109 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.663 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.203 W/kg

SAR(1 g) = 0.106 W/kg; SAR(10 g) = 0.055 W/kg

Maximum value of SAR (measured) = 0.117 W/kg

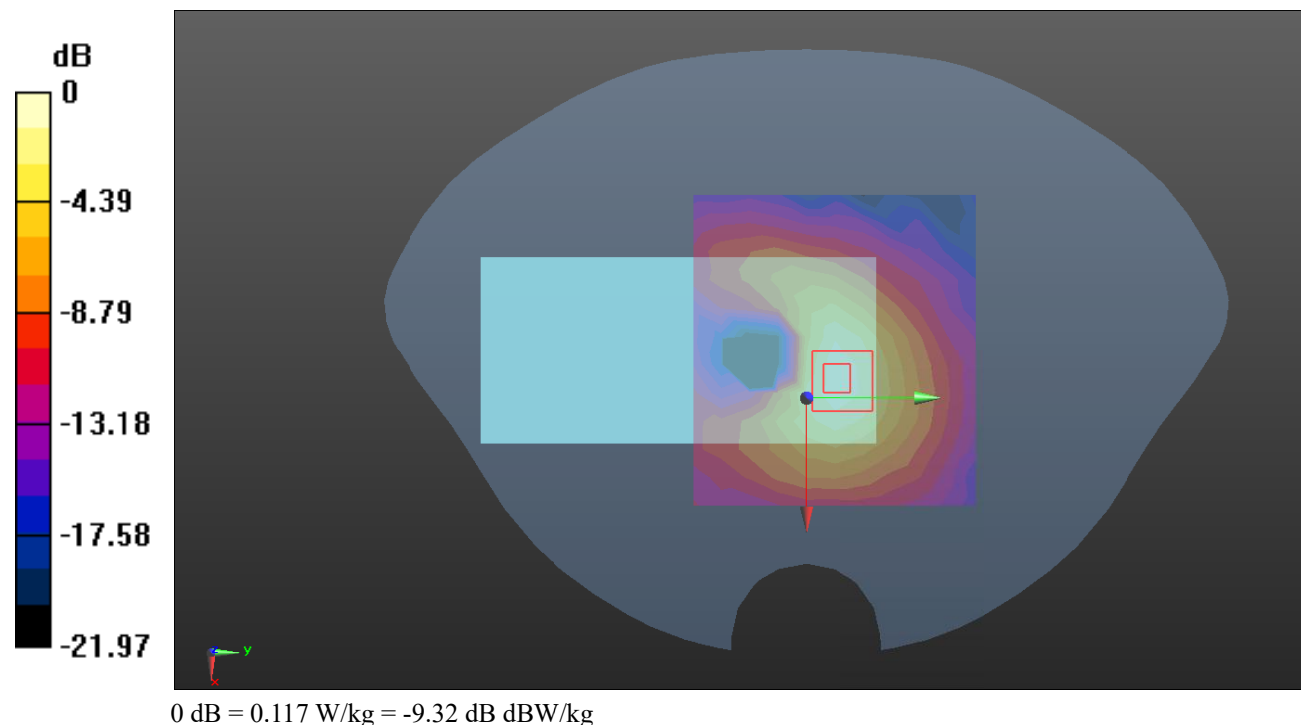

Test Plot 79#: LTE Band 41_Body Back_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.5787
Medium parameters used: $f = 2595$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 39.867$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2595 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (12x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.842 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.72 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.759 W/kg; SAR(10 g) = 0.320 W/kg

Maximum value of SAR (measured) = 0.889 W/kg

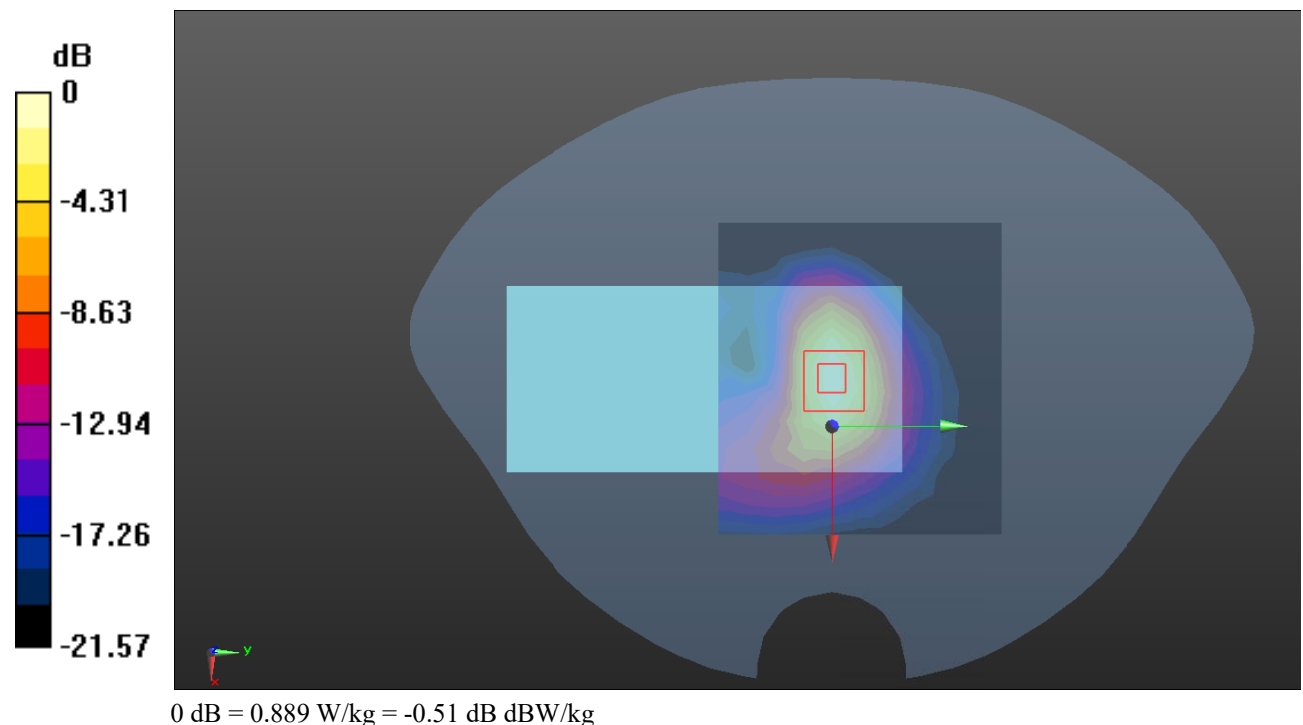

Test Plot 80#: LTE Band 41_Body Back_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.5787
Medium parameters used: $f = 2595$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 39.867$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2595 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (12x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.638 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.51 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.575 W/kg; SAR(10 g) = 0.260 W/kg

Maximum value of SAR (measured) = 0.650 W/kg

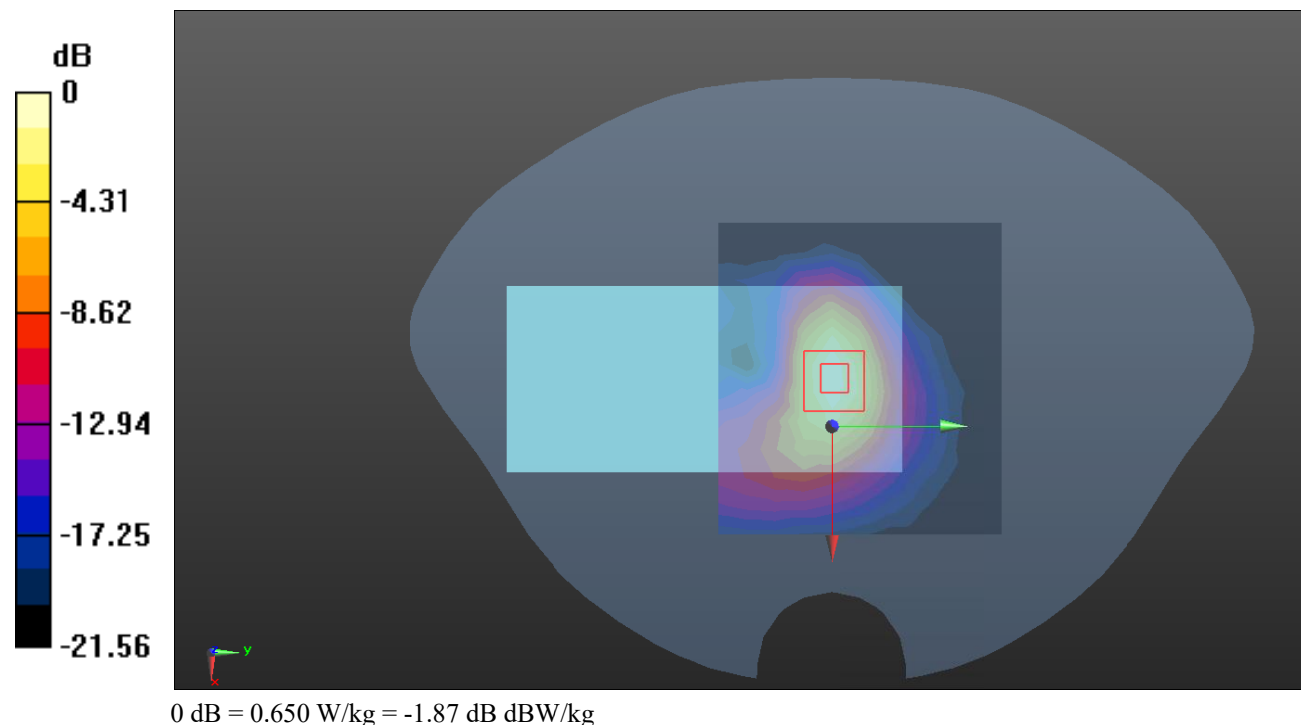

Test Plot 81#: LTE Band 41_Body Right_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.5787

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 39.867$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2595 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (9x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0465 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.091 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.0880 W/kg

SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0472 W/kg

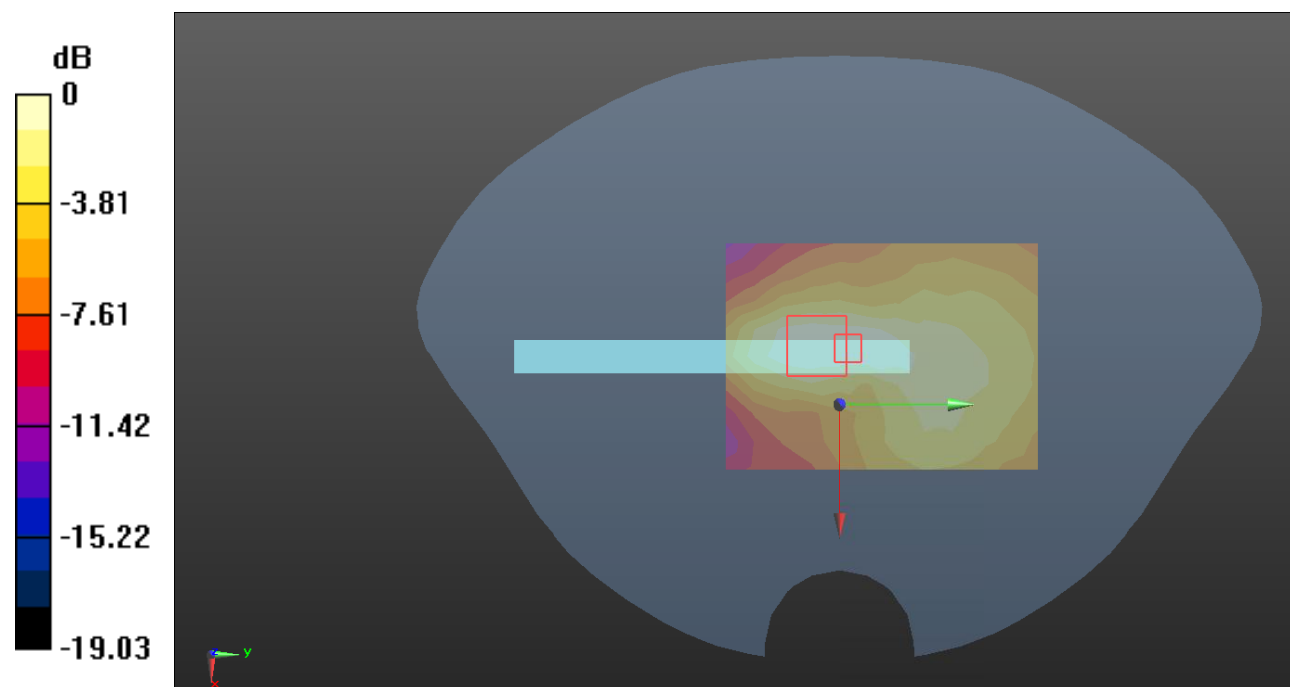

0 dB = 0.0472 W/kg = -13.26 dB dBW/kg

Test Plot 82#: LTE Band 41_Body Right_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.5787

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 39.867$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2595 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (9x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0327 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.214 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.0620 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.0327 W/kg

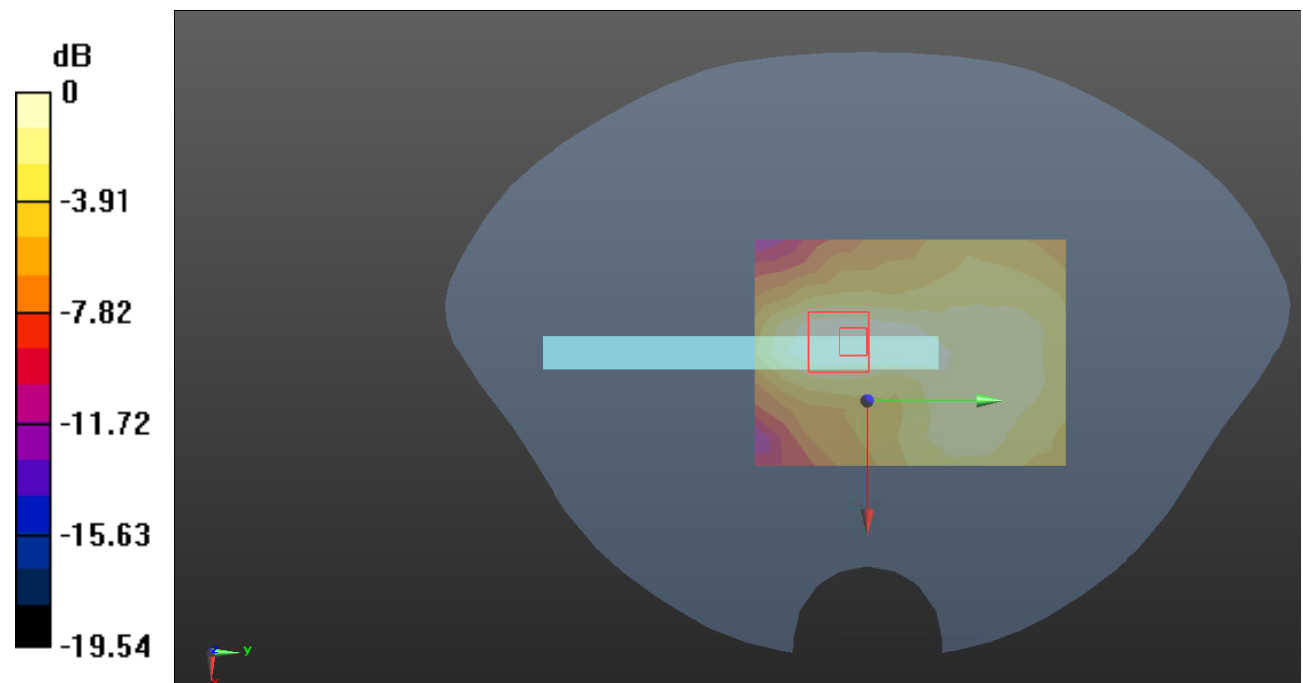

0 dB = 0.0327 W/kg = -14.85 dB dBW/kg

Test Plot 83#: LTE Band 41_Body Top_1RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.5787
Medium parameters used: $f = 2595$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 39.867$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2595 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (9x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.609 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.144 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.600 W/kg; SAR(10 g) = 0.285 W/kg

Maximum value of SAR (measured) = 0.674 W/kg

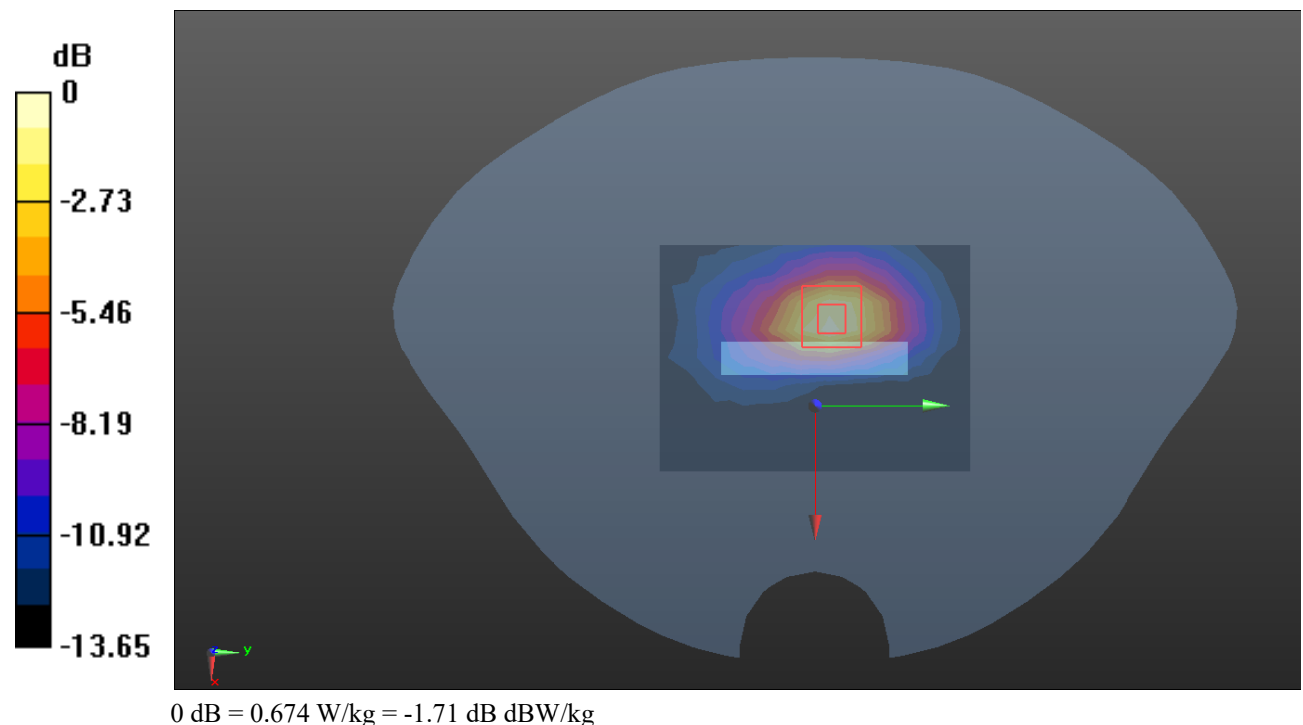

Test Plot 84#: LTE Band 41_Body Top_50%RB_Middle**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.5787

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 39.867$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2595 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (9x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.484 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.295 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.961 W/kg

SAR(1 g) = 0.482 W/kg; SAR(10 g) = 0.231 W/kg

Maximum value of SAR (measured) = 0.538 W/kg

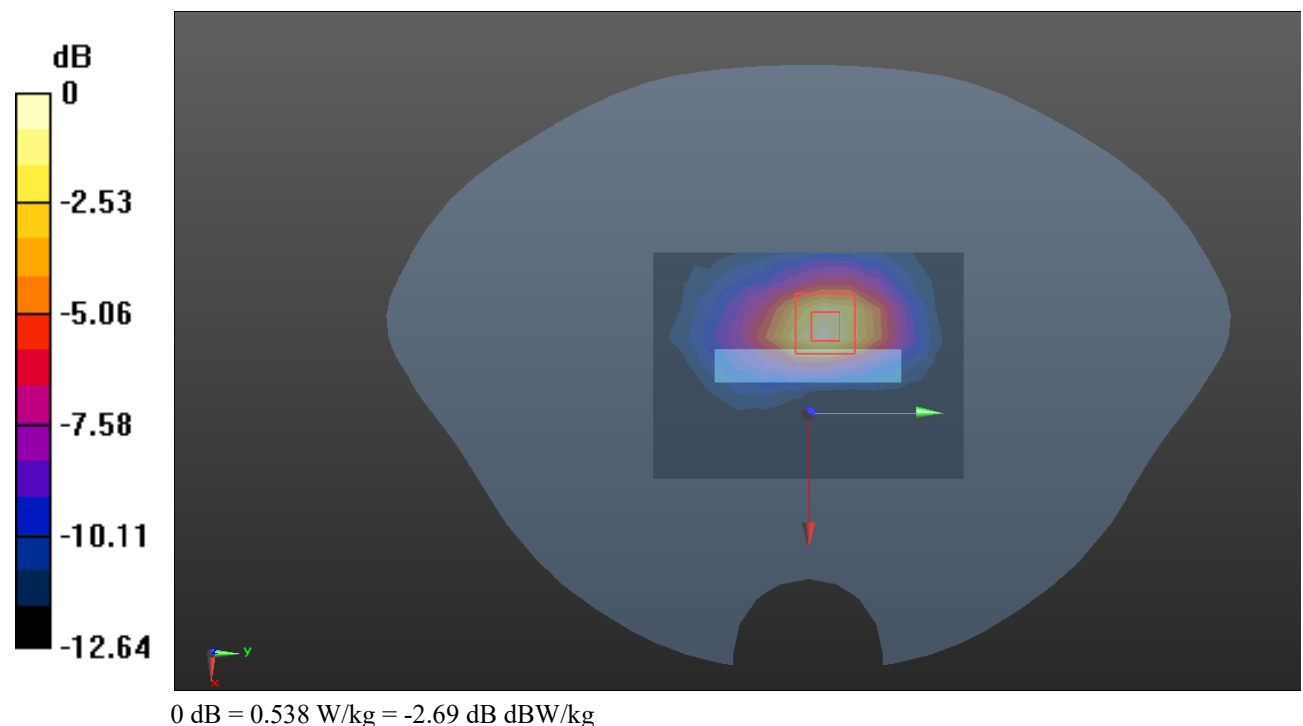

Test Plot 85#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 39.426$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2442 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Head Left Cheek/WLAN 802.11b Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.117 W/kg


Head Left Cheek/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.196 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.214 W/kg

SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.113 W/kg

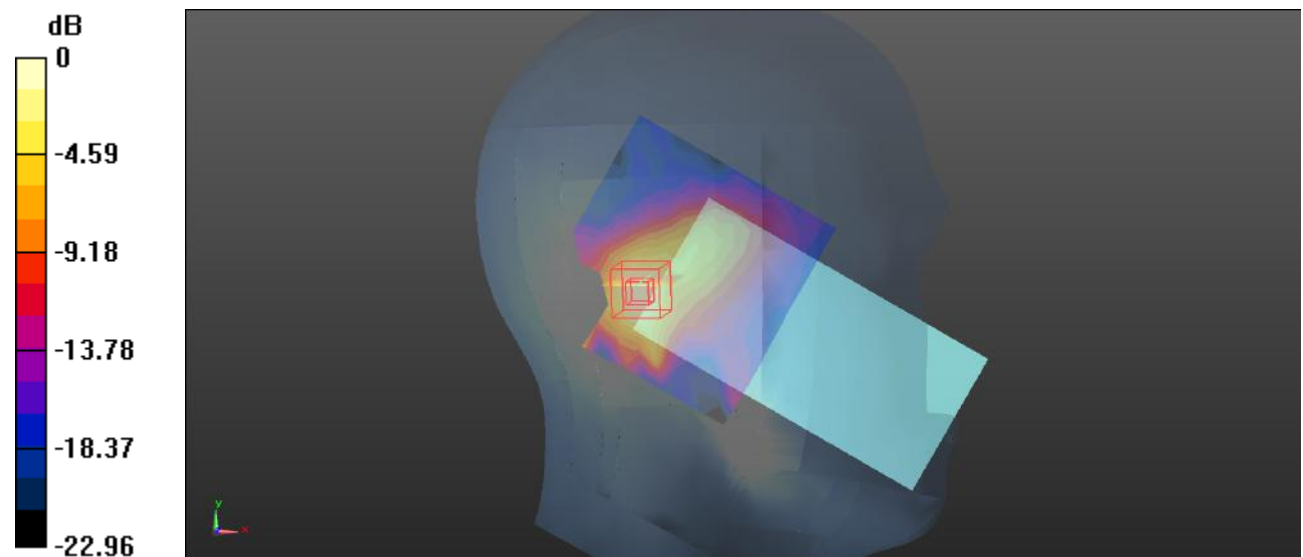

0 dB = 0.113 W/kg = -9.47 dBW/kg

Test Plot 86#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 39.426$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2442 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Head Left Tilt/WLAN 802.11b Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.154 W/kg


Head Left Tilt/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.346 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.334 W/kg

SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.180 W/kg

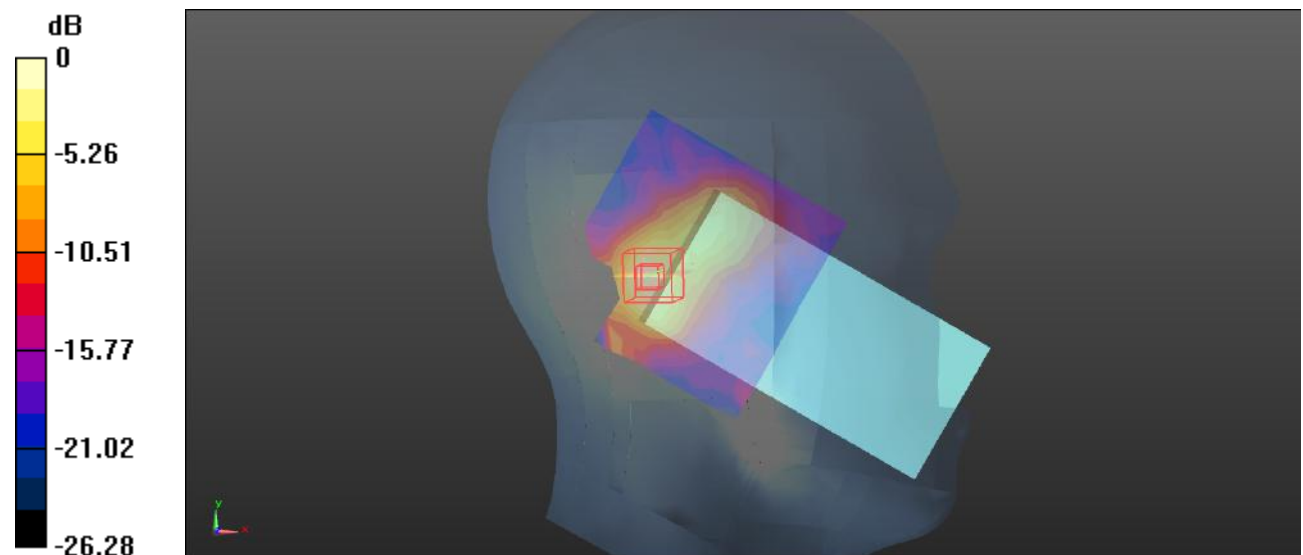

0 dB = 0.180 W/kg = -7.45 dBW/kg

Test Plot 87#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 39.426$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2442 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Head Right Cheek/WLAN 802.11b Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.193 W/kg


Head Right Cheek/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.399 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.486 W/kg

SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.073 W/kg

Maximum value of SAR (measured) = 0.225 W/kg

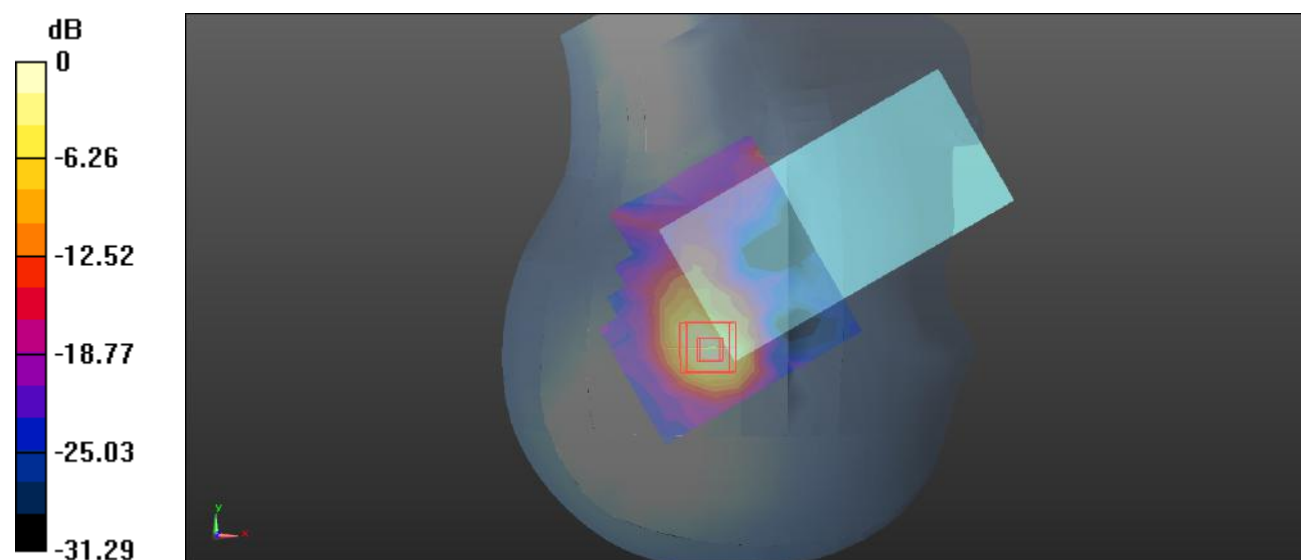

0 dB = 0.225 W/kg = -6.48 dBW/kg

Test Plot 88#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 39.426$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2442 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Head Right Tilt/WLAN 802.11b Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.249 W/kg


Head Right Tilt/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.530 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.667 W/kg

SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.095 W/kg

Maximum value of SAR (measured) = 0.295 W/kg

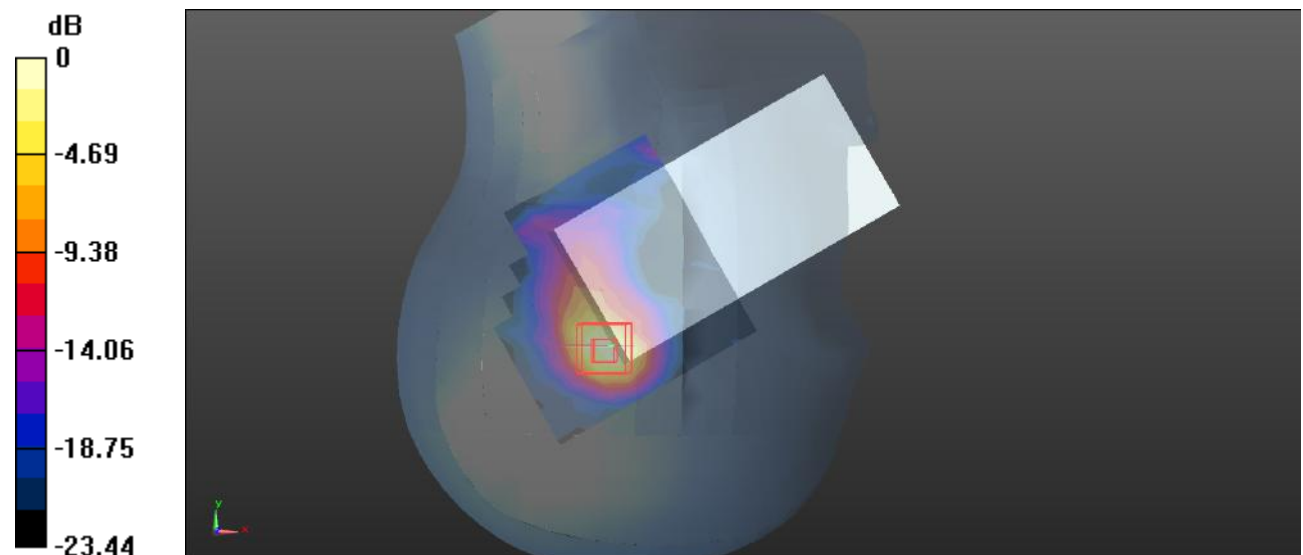

0 dB = 0.295 W/kg = -5.30 dBW/kg

Test Plot 89#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 39.426$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2442 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Front/WLAN 802.11b Mid/Area Scan (11x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0458 W/kg


Body Front/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.464 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0900 W/kg

SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.0492 W/kg

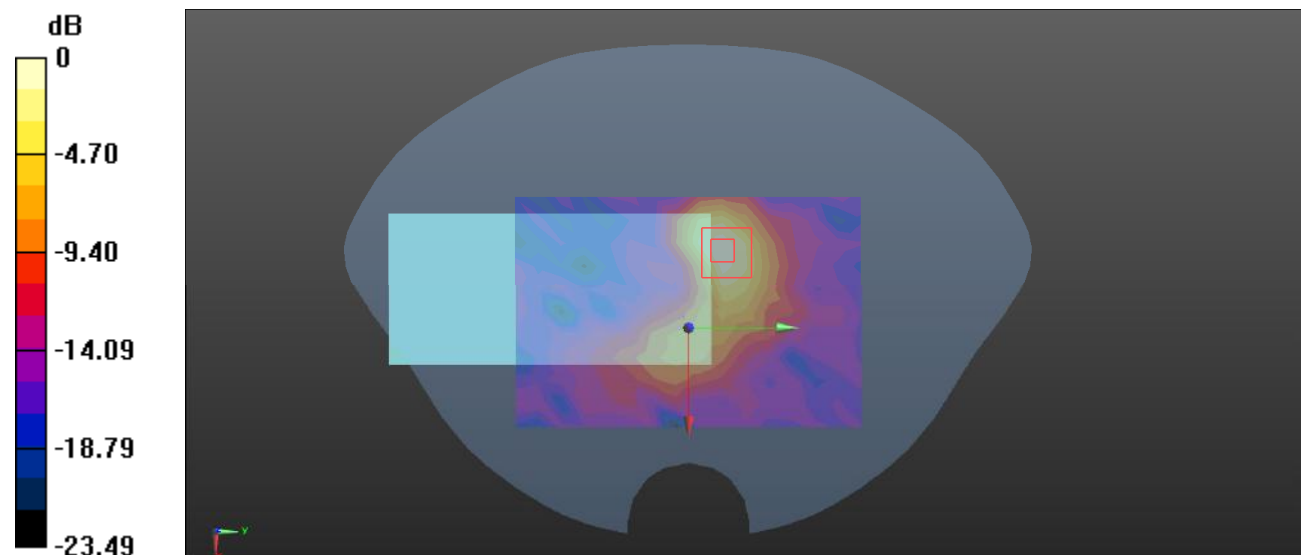

0 dB = 0.0492 W/kg = -13.08 dBW/kg

Test Plot 90#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 39.426$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2442 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Back/WLAN 802.11b Mid/Area Scan (11x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0622 W/kg


Body Back/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.925 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.126 W/kg

SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.031 W/kg

Maximum value of SAR (measured) = 0.0736 W/kg

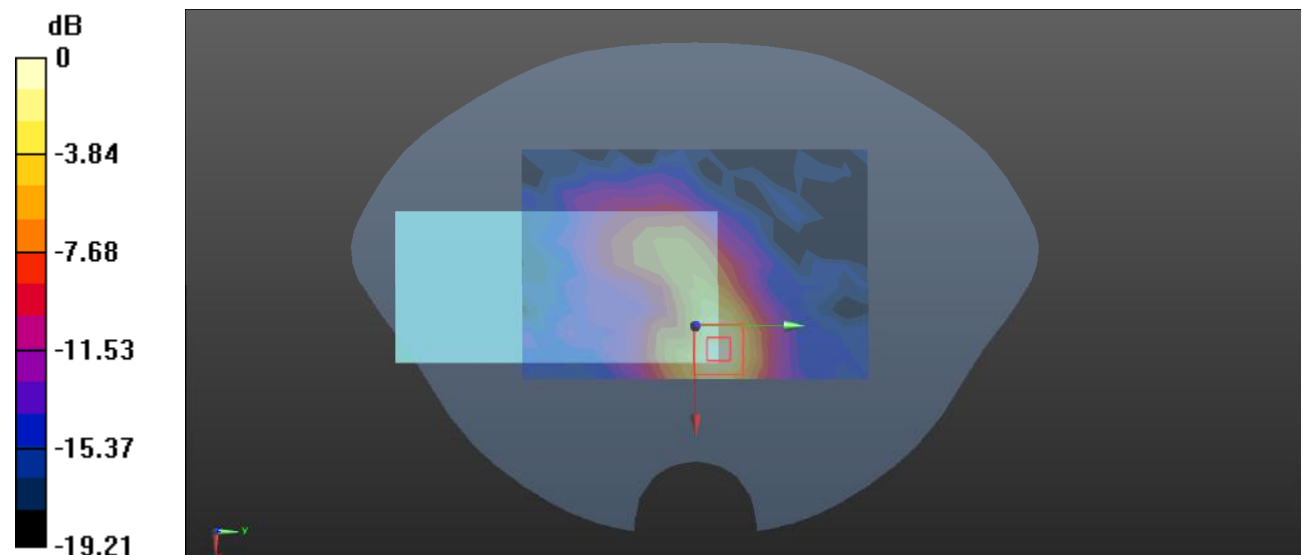

0 dB = 0.0736 W/kg = -11.33 dBW/kg

Test Plot 91#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 39.426$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2442 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Left/WLAN 802.11b Mid/Area Scan (9x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0251 W/kg


Body Left/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.799 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0460 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0275 W/kg

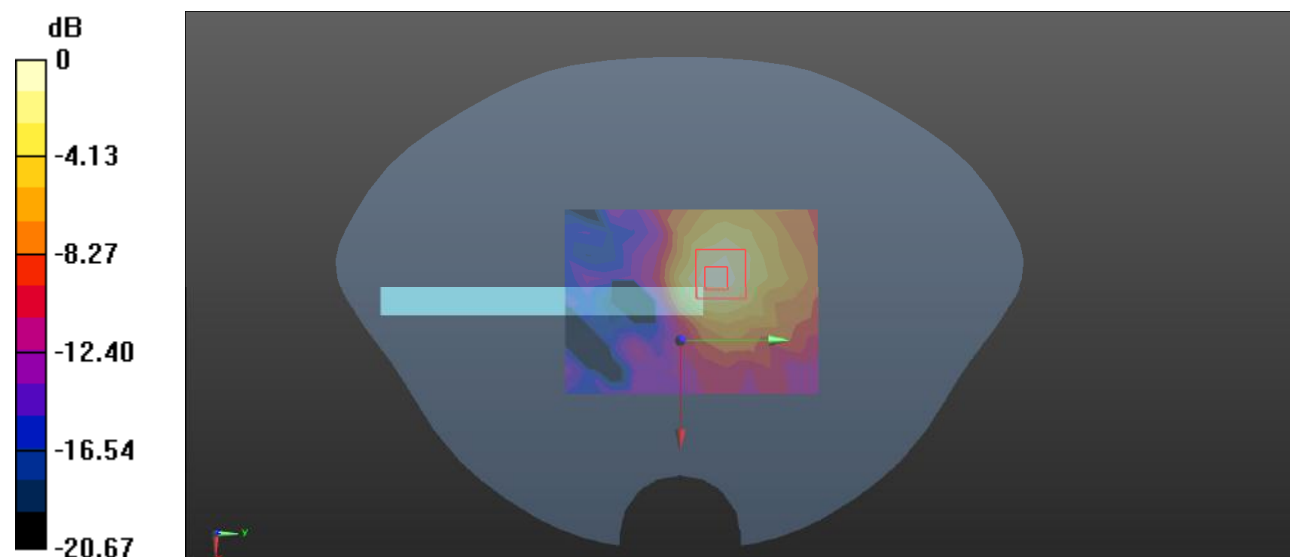

0 dB = 0.0275 W/kg = -15.61 dBW/kg

Test Plot 92#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 39.426$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2442 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Top/WLAN 802.11b Mid/Area Scan (9x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0705 W/kg


Body Top/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.607 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.144 W/kg

SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.0773 W/kg

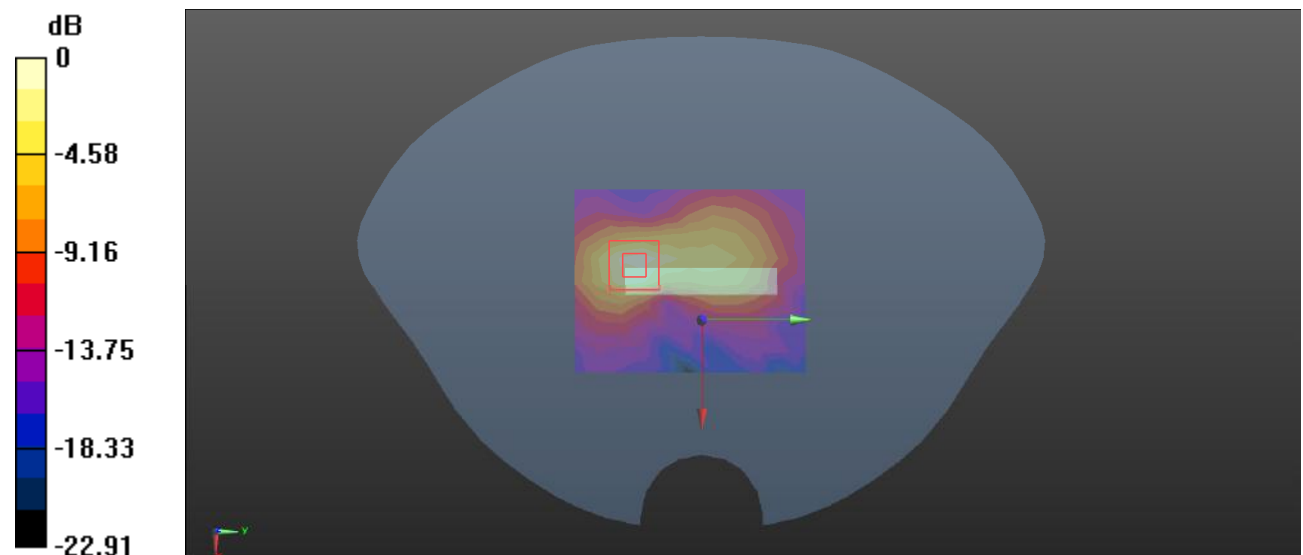

0 dB = 0.0773 W/kg = -11.12 dBW/kg

Test Plot 93#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.697 \text{ S/m}$; $\epsilon_r = 37.37$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Head Left Cheek/WLAN 5.2G 802.11a Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.251 W/kg


Head Left Cheek/WLAN 5.2G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.793 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.545 W/kg

SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.032 W/kg

Maximum value of SAR (measured) = 0.233 W/kg

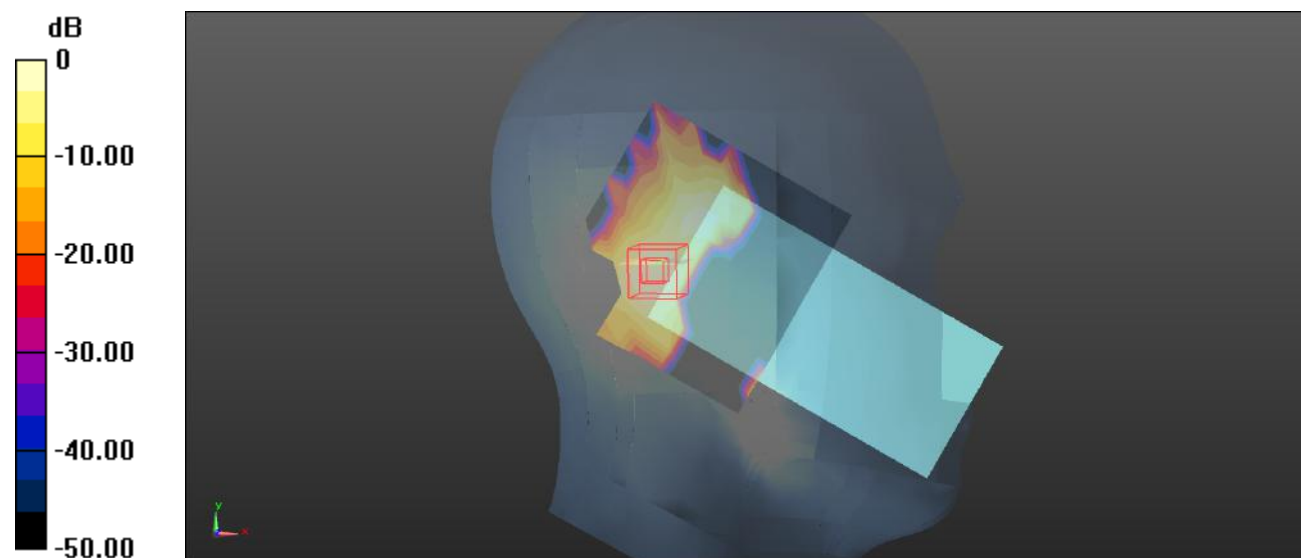

0 dB = 0.233 W/kg = -6.33 dBW/kg

Test Plot 94#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**


Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.697 \text{ S/m}$; $\epsilon_r = 37.37$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

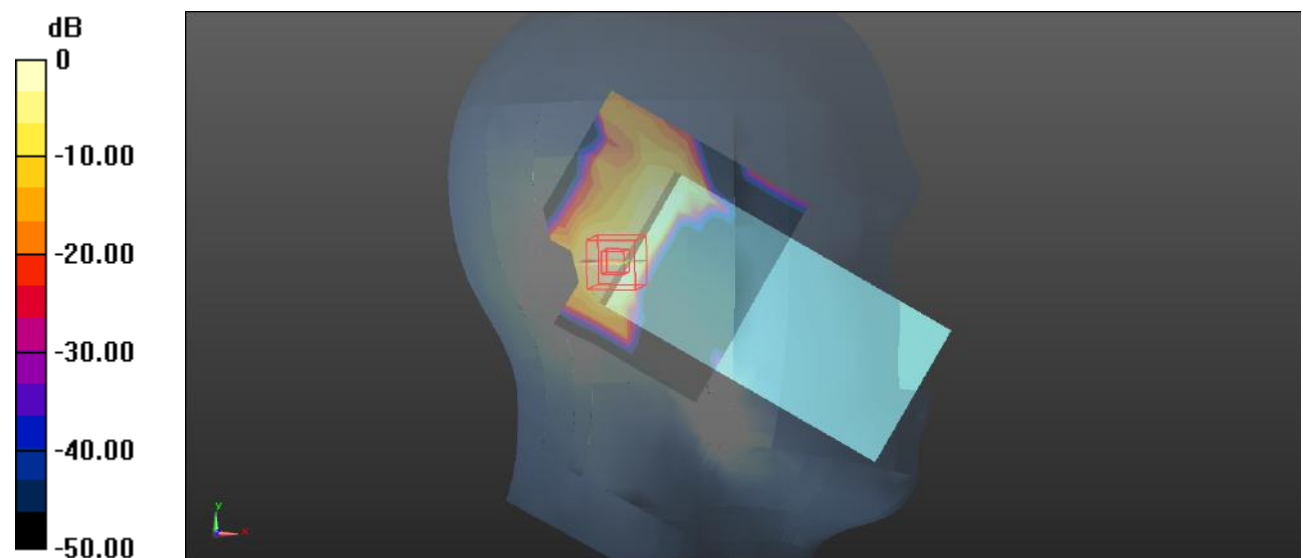Head Left Tilt/WLAN 5.2G 802.11a Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.362 W/kg **Head Left Tilt/WLAN 5.2G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 2.340 V/m ; Power Drift = 0.77 dB Peak SAR (extrapolated) = 0.652 W/kg **SAR(1 g) = 0.205 W/kg ; SAR(10 g) = 0.062 W/kg** Maximum value of SAR (measured) = 0.397 W/kg  $0 \text{ dB} = 0.397 \text{ W/kg} = -4.01 \text{ dBW/kg}$

Test Plot 95#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.697 \text{ S/m}$; $\epsilon_r = 37.37$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Head Right Cheek/WLAN 5.2G 802.11a Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.330 W/kg


Head Right Cheek/WLAN 5.2G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.660 W/kg

SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.037 W/kg

Maximum value of SAR (measured) = 0.284 W/kg

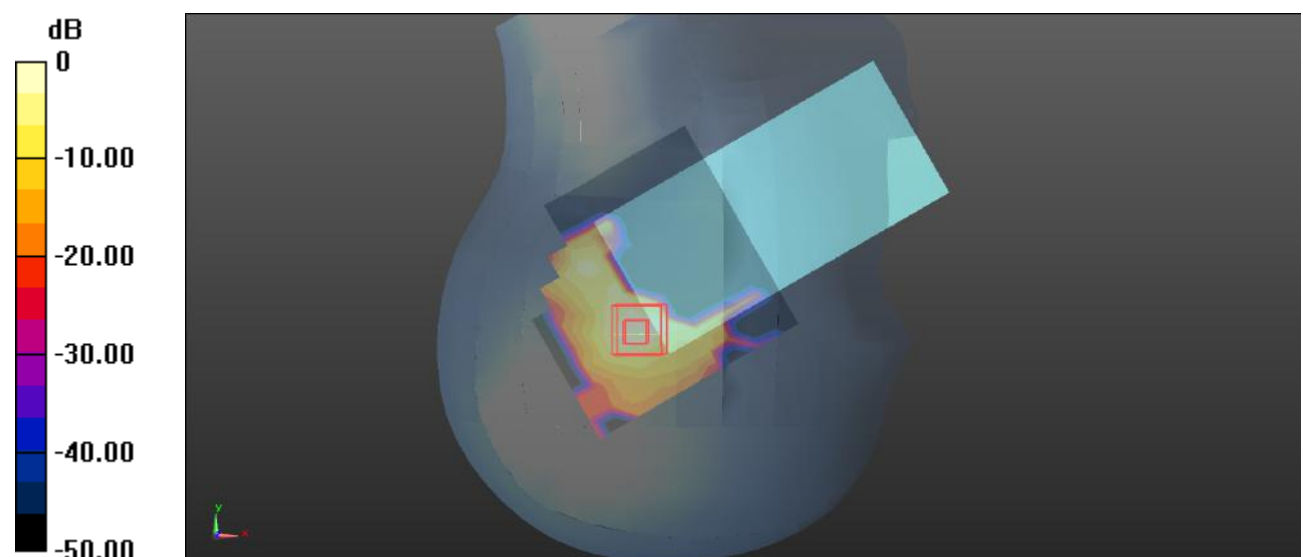

0 dB = 0.284 W/kg = -5.47 dBW/kg

Test Plot 96#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**


Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.697 \text{ S/m}$; $\epsilon_r = 37.37$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

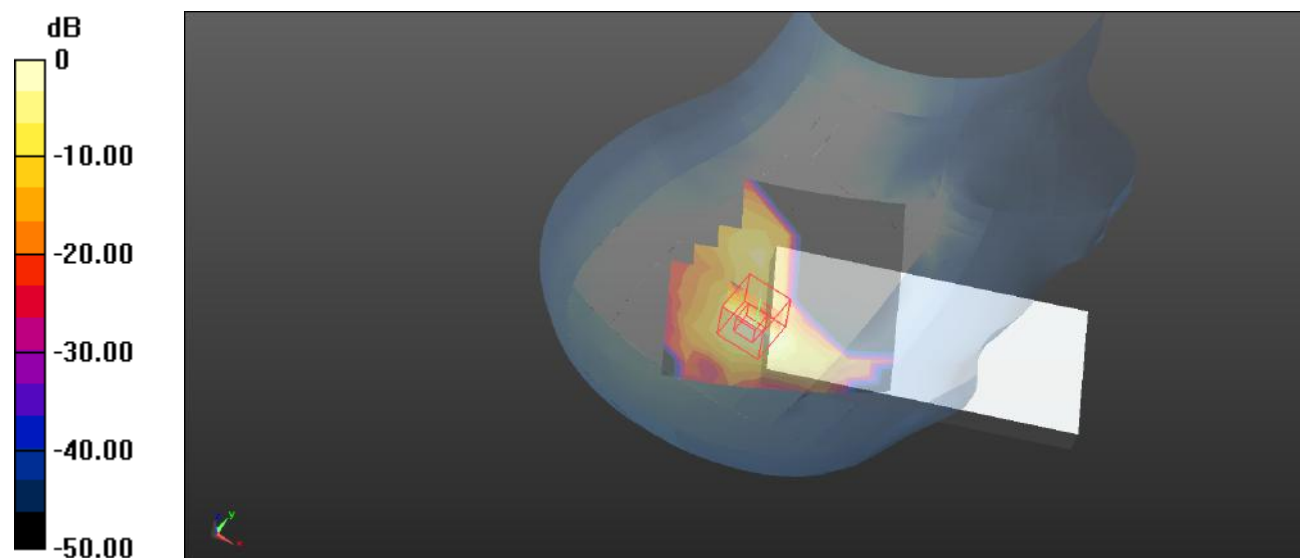Head Right Tilt/WLAN 5.2G 802.11a Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.413 W/kg **Head Right Tilt/WLAN 5.2G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 1.070 V/m ; Power Drift = -0.04 dB Peak SAR (extrapolated) = 0.700 W/kg **SAR(1 g) = 0.201 W/kg ; SAR(10 g) = 0.056 W/kg** Maximum value of SAR (measured) = 0.422 W/kg  $0 \text{ dB} = 0.422 \text{ W/kg} = -3.75 \text{ dBW/kg}$

Test Plot 97#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**


Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.697 \text{ S/m}$; $\epsilon_r = 37.37$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

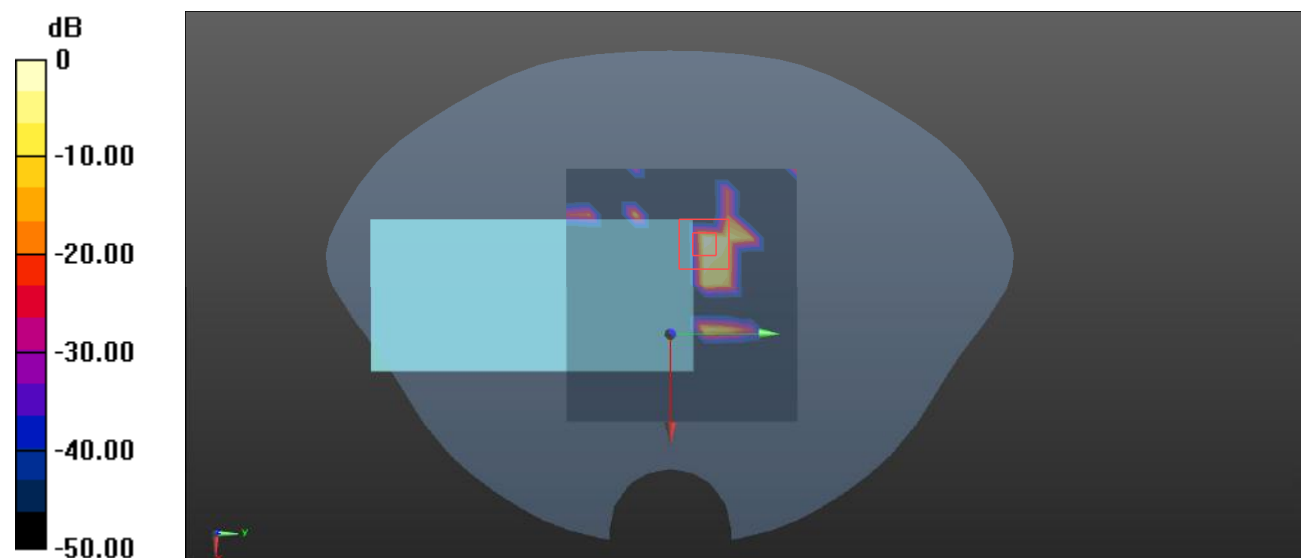Body Front/WLAN 5.2G 802.11a Mid/Area Scan (12x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.0707 W/kg **Body Front/WLAN 5.2G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 0 V/m ; Power Drift = 0.07 dB Peak SAR (extrapolated) = 0.555 W/kg **SAR(1 g) = 0.052 W/kg ; SAR(10 g) = 0.012 W/kg** Maximum value of SAR (measured) = 0.103 W/kg  $0 \text{ dB} = 0.103 \text{ W/kg} = -9.87 \text{ dBW/kg}$

Test Plot 98#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.697 \text{ S/m}$; $\epsilon_r = 37.37$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Back/WLAN 5.2G 802.11a Mid/Area Scan (12x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.273 W/kg


Body Back/WLAN 5.2G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.885 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.827 W/kg

SAR(1 g) = 0.271 W/kg; SAR(10 g) = 0.091 W/kg

Maximum value of SAR (measured) = 0.480 W/kg

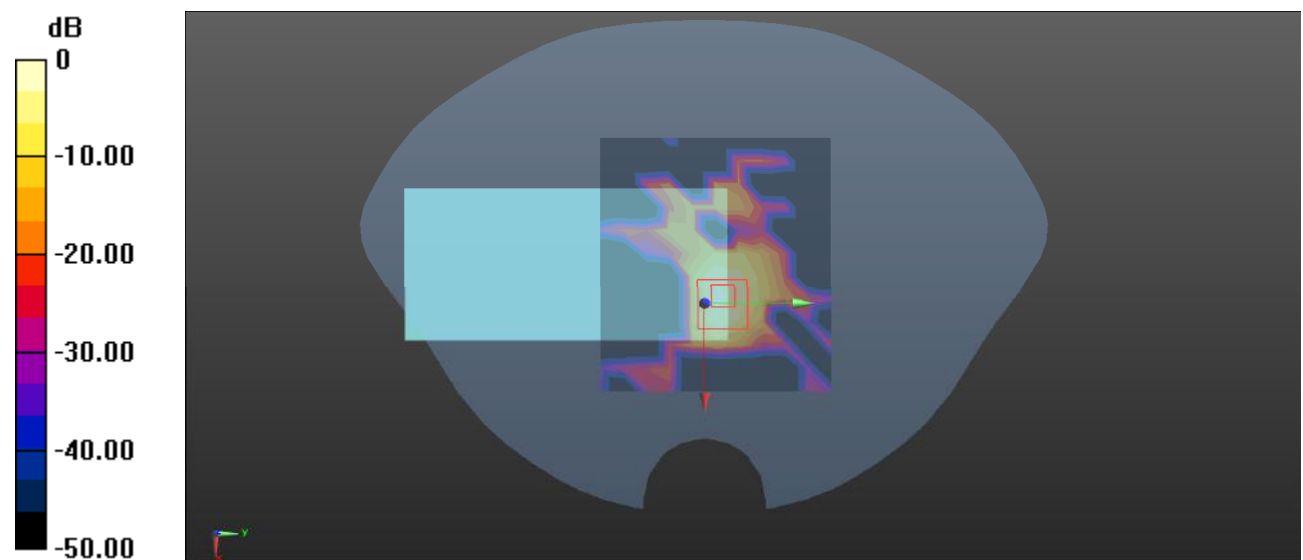

0 dB = 0.480 W/kg = -3.19 dBW/kg

Test Plot 99#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.697$ S/m; $\epsilon_r = 37.37$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Left/WLAN 5.2G 802.11a Mid/Area Scan (9x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0308 W/kg


Body Left/WLAN 5.2G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.960 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.294 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.00744 W/kg

Maximum value of SAR (measured) = 0.0665 W/kg

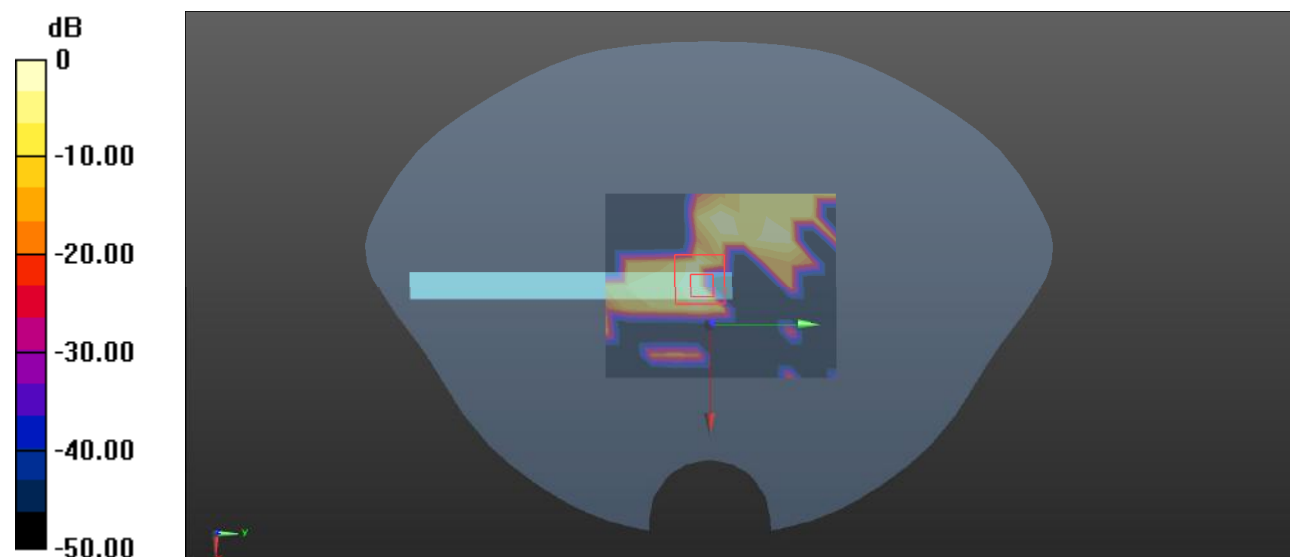

0 dB = 0.0665 W/kg = -11.77 dBW/kg

Test Plot 100#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.697 \text{ S/m}$; $\epsilon_r = 37.37$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Top/WLAN 5.2G 802.11a Mid/Area Scan (10x12x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.291 W/kg


Body Top/WLAN 5.2G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.635 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.495 W/kg

SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.281 W/kg

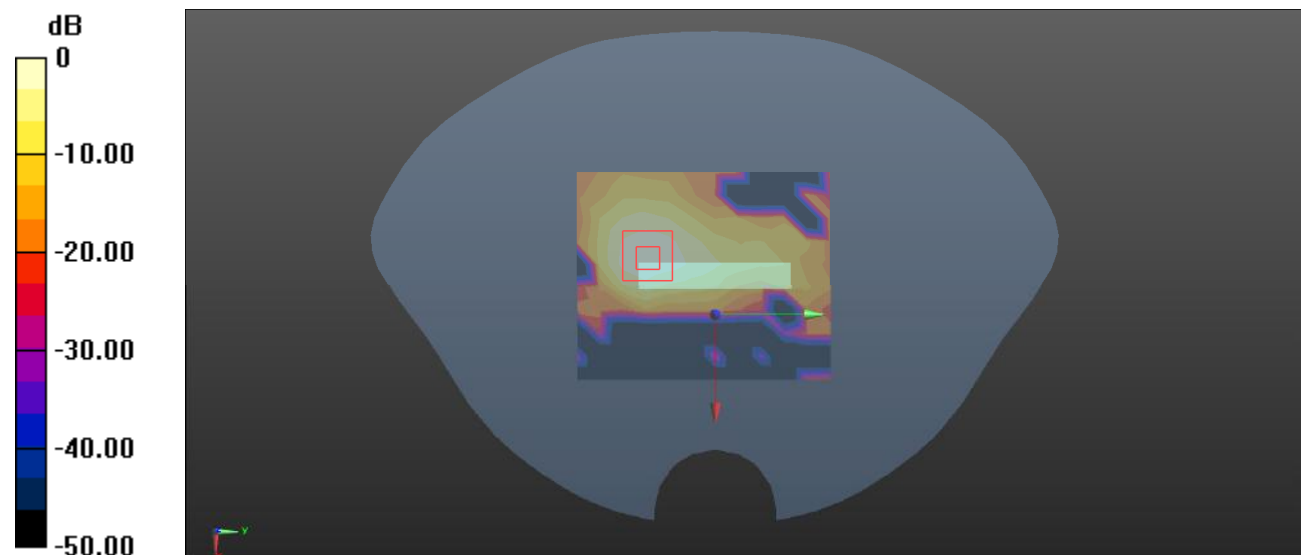

Test Plot 101#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5280$ MHz; $\sigma = 4.809$ S/m; $\epsilon_r = 36.541$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Head Left Cheek/WLAN 5.3G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.218 W/kg


Head Left Cheek/WLAN 5.3G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.618 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.723 W/kg

SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.215 W/kg

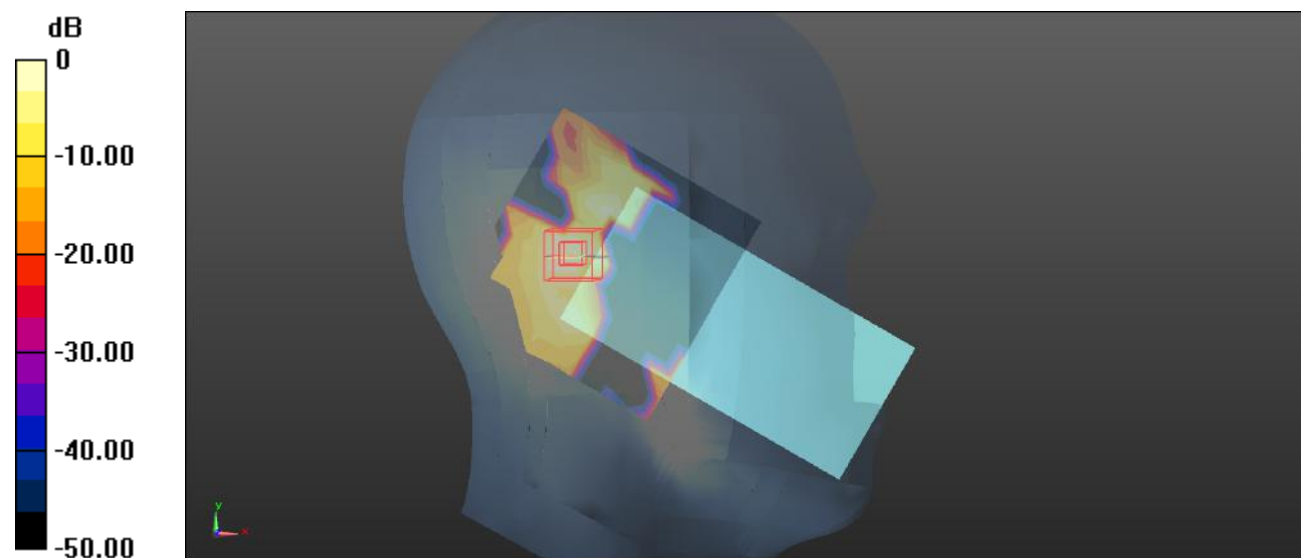

0 dB = 0.215 W/kg = -6.68 dBW/kg

Test Plot 102#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5280$ MHz; $\sigma = 4.809$ S/m; $\epsilon_r = 36.541$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Head Left Tilt/WLAN 5.3G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.251 W/kg


Head Left Tilt/WLAN 5.3G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.031 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.558 W/kg

SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.053 W/kg

Maximum value of SAR (measured) = 0.332 W/kg

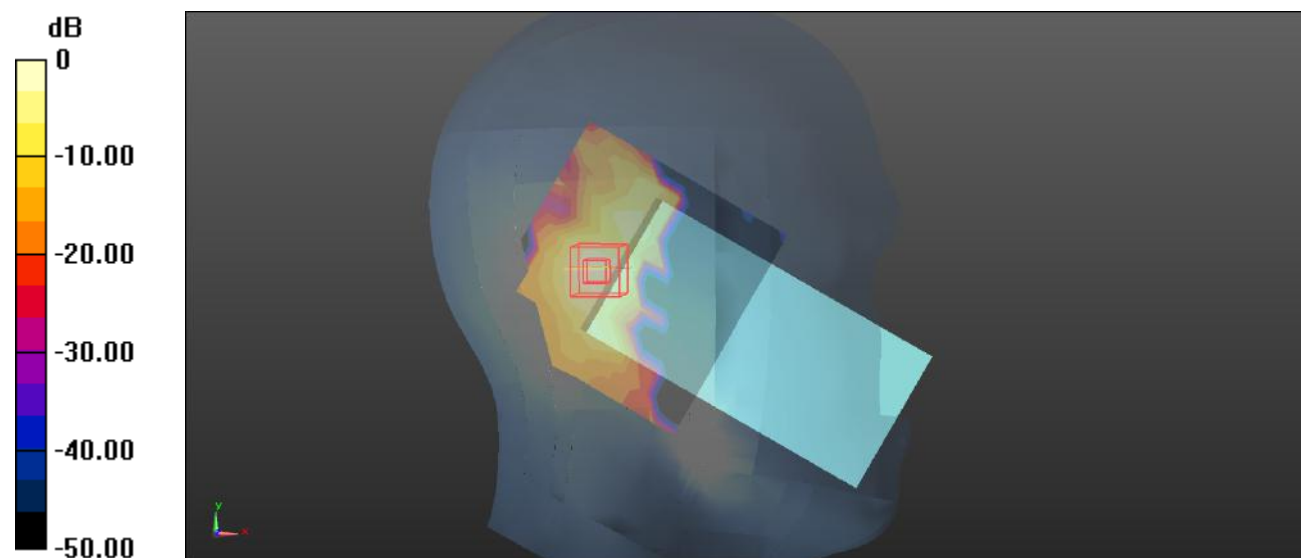

0 dB = 0.332 W/kg = -4.79 dBW/kg

Test Plot 103#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5280$ MHz; $\sigma = 4.809$ S/m; $\epsilon_r = 36.541$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Head Right Cheek/WLAN 5.3G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.136 W/kg


Head Right Cheek/WLAN 5.3G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.195 W/kg

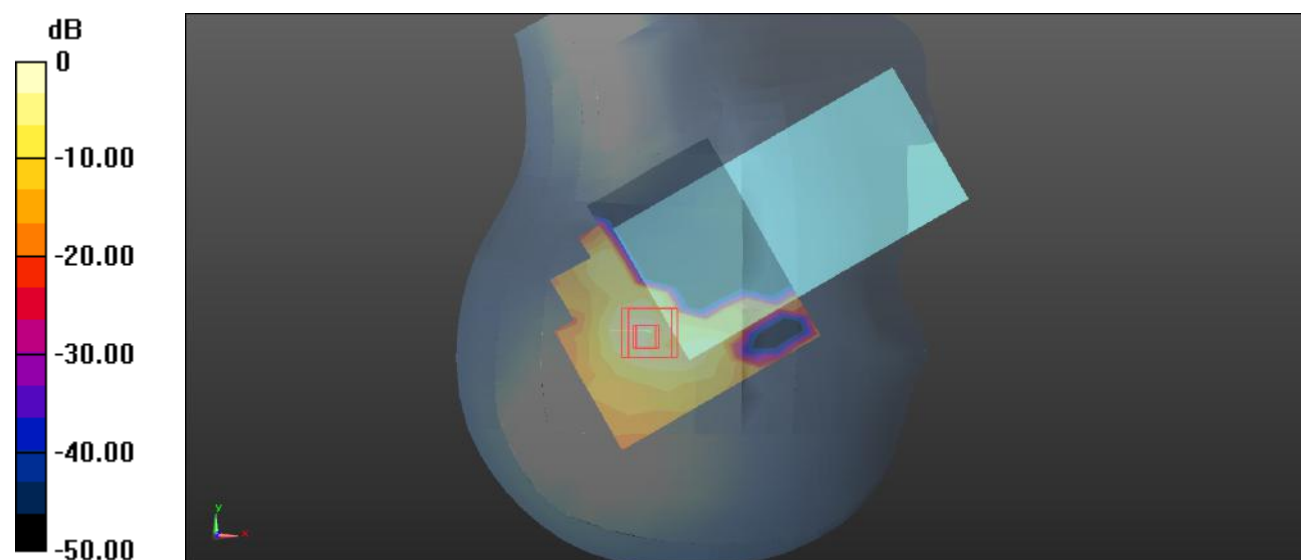

0 dB = 0.195 W/kg = -7.10 dBW/kg

Test Plot 104#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5280$ MHz; $\sigma = 4.809$ S/m; $\epsilon_r = 36.541$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Head Right Tilt/WLAN 5.3G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.231 W/kg


Head Right Tilt/WLAN 5.3G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.211 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.583 W/kg

SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.301 W/kg

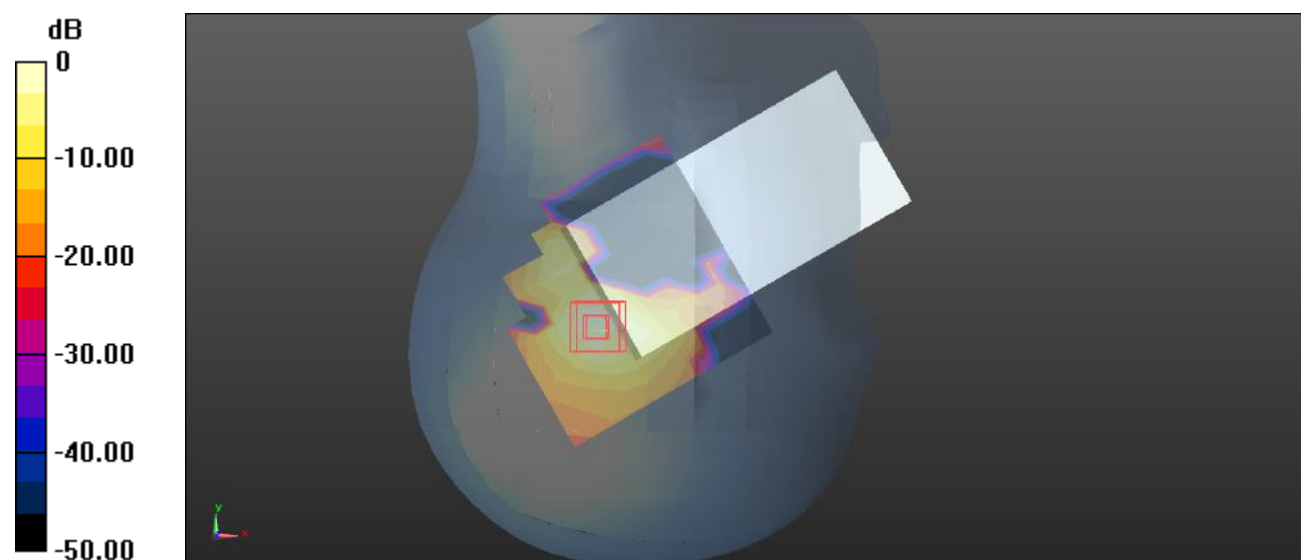

0 dB = 0.301 W/kg = -5.21 dBW/kg

Test Plot 105#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5280$ MHz; $\sigma = 4.809$ S/m; $\epsilon_r = 36.541$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Front/WLAN 5.3G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0886 W/kg


Body Front/WLAN 5.3G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.503 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.00294 W/kg

Maximum value of SAR (measured) = 0.0853 W/kg

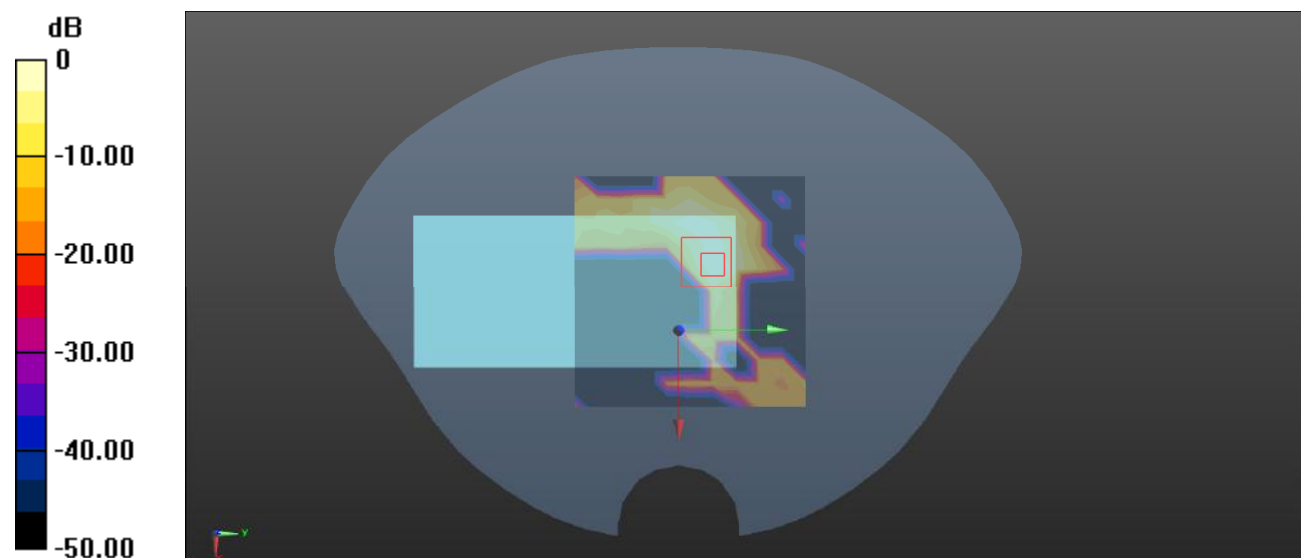

0 dB = 0.0853 W/kg = -10.69 dBW/kg

Test Plot 106#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5280$ MHz; $\sigma = 4.809$ S/m; $\epsilon_r = 36.541$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Back/WLAN 5.3G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.376 W/kg


Body Back/WLAN 5.3G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.719 W/kg

SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.082 W/kg

Maximum value of SAR (measured) = 0.428 W/kg

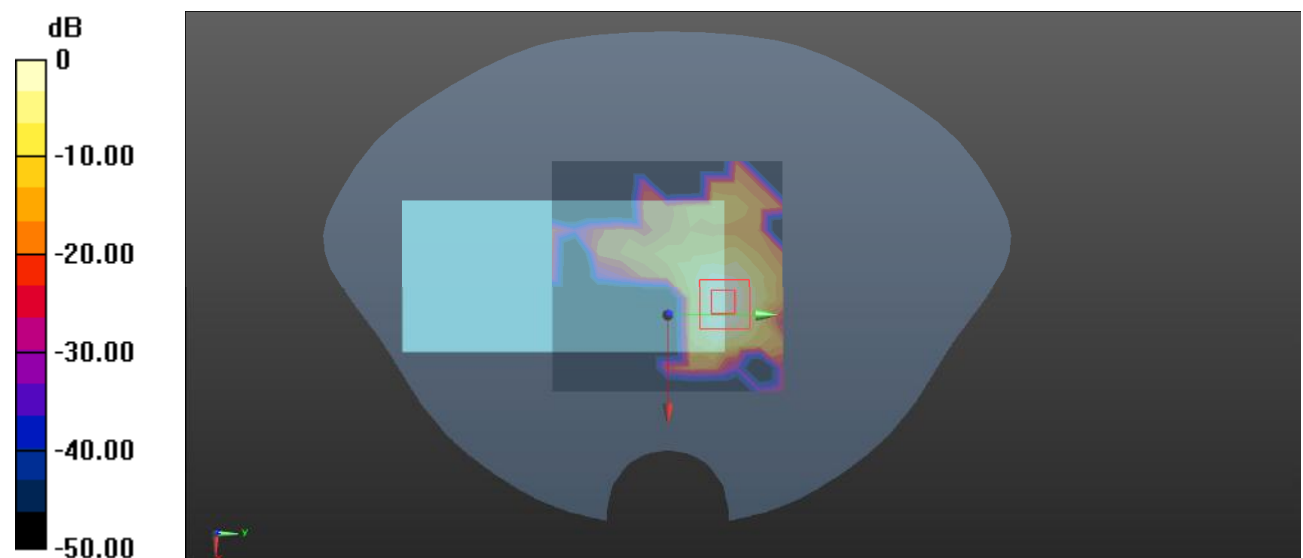

Test Plot 107#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5280$ MHz; $\sigma = 4.809$ S/m; $\epsilon_r = 36.541$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Left/WLAN 5.3G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.113 W/kg


Body Left/WLAN 5.3G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.400 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.441 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0902 W/kg

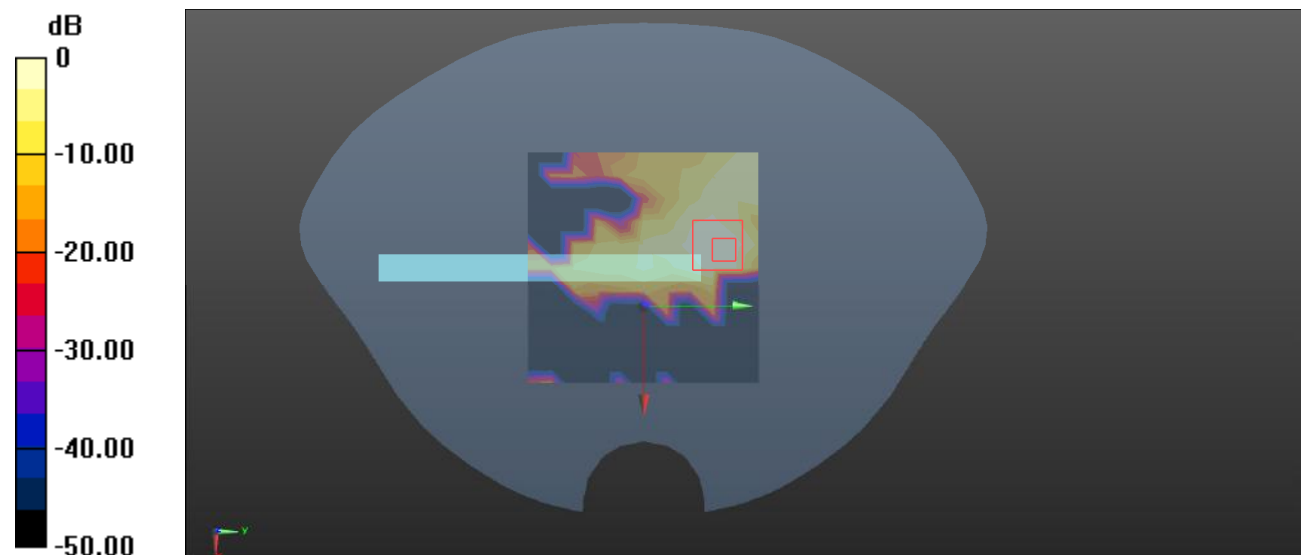

0 dB = 0.0902 W/kg = -10.45 dBW/kg

Test Plot 108#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5280$ MHz; $\sigma = 4.809$ S/m; $\epsilon_r = 36.541$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Top/WLAN 5.3G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.199 W/kg


Body Top/WLAN 5.3G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.085 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.931 W/kg

SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.231 W/kg

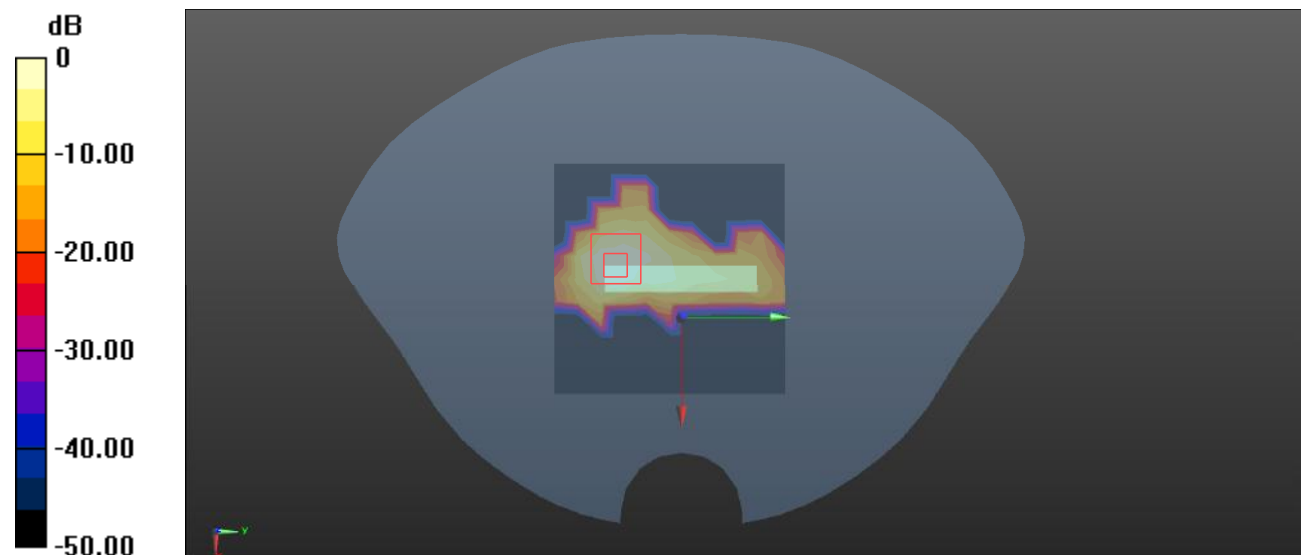

Test Plot 109#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5580$ MHz; $\sigma = 5.027$ S/m; $\epsilon_r = 36.426$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.85, 4.85, 4.85) @ 5580 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Head Left Cheek/WLAN 5.6G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.233 W/kg


Head Left Cheek/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.709 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.263 W/kg

SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.132 W/kg

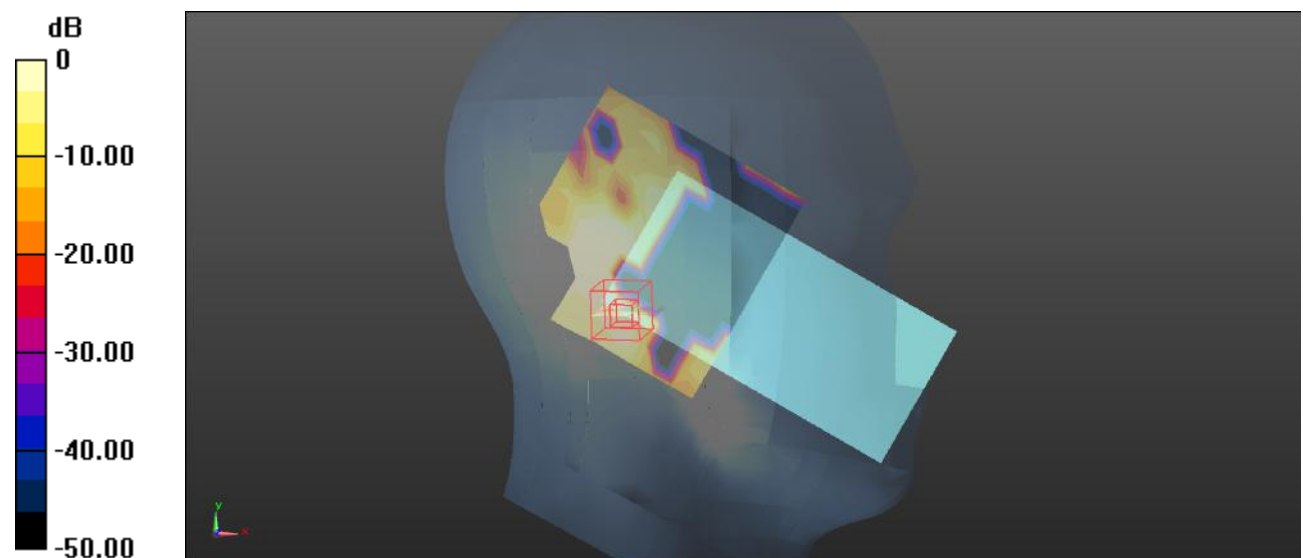

0 dB = 0.132 W/kg = -8.79 dBW/kg

Test Plot 110#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5580$ MHz; $\sigma = 5.027$ S/m; $\epsilon_r = 36.426$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.85, 4.85, 4.85) @ 5580 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Head Left Tilt/WLAN 5.6G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.460 W/kg


Head Left Tilt/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.070 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.730 W/kg

SAR(1 g) = 0.233 W/kg; SAR(10 g) = 0.076 W/kg

Maximum value of SAR (measured) = 0.423 W/kg

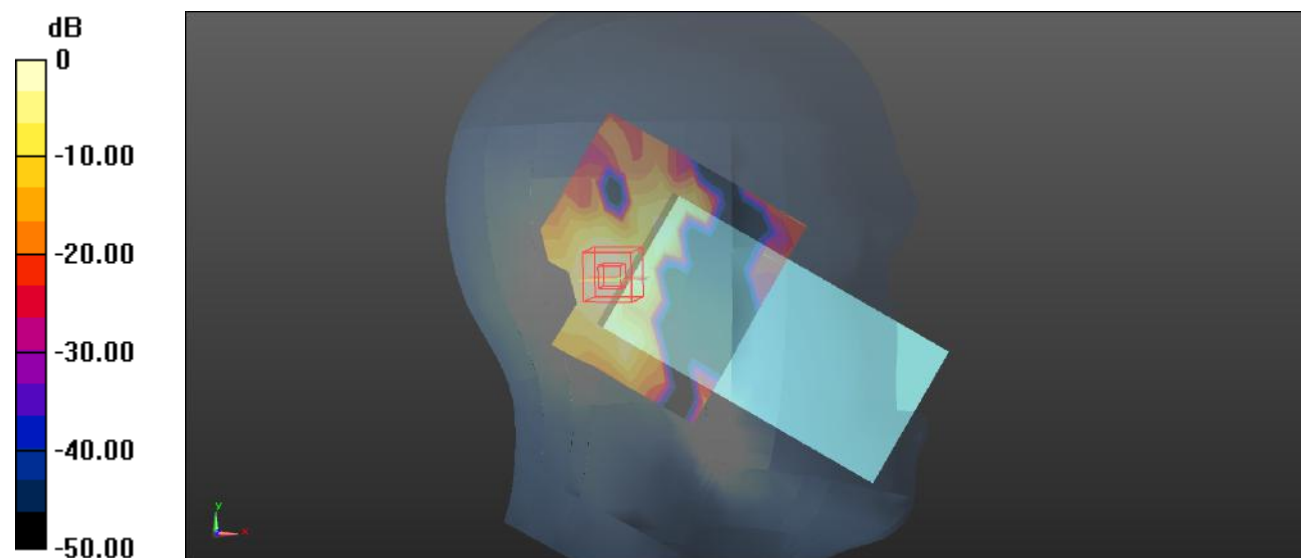

0 dB = 0.423 W/kg = -3.74 dBW/kg

Test Plot 111#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5580$ MHz; $\sigma = 5.027$ S/m; $\epsilon_r = 36.426$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.85, 4.85, 4.85) @ 5580 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Head Right Cheek/WLAN 5.6G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.214 W/kg


Head Right Cheek/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.514 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.039 W/kg

Maximum value of SAR (measured) = 0.262 W/kg

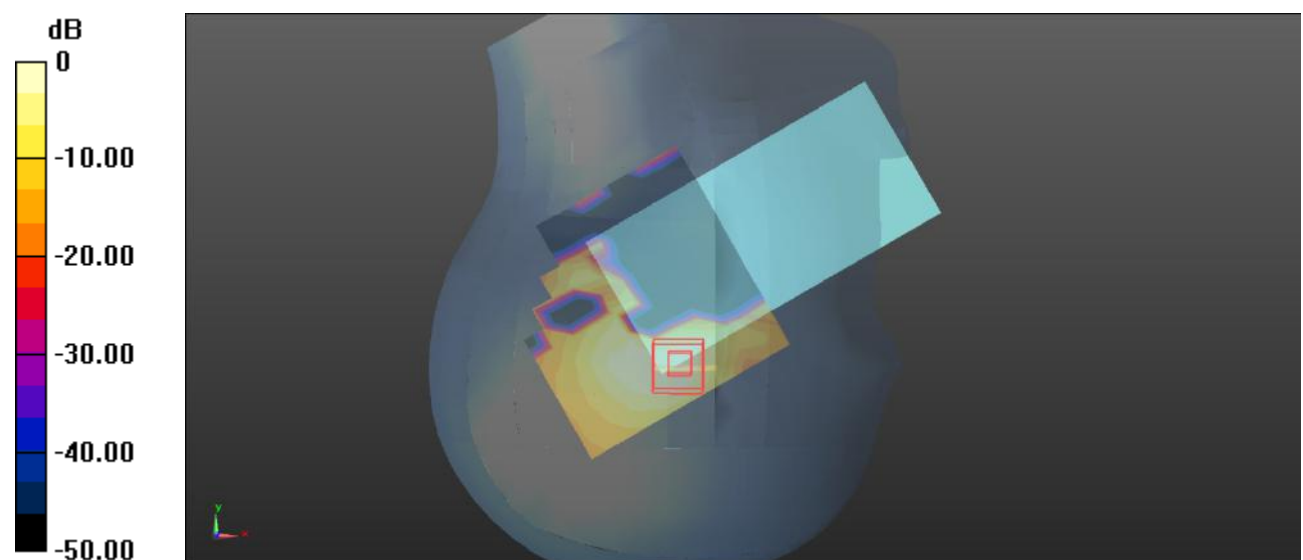

0 dB = 0.262 W/kg = -5.82 dBW/kg

Test Plot 112#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5580$ MHz; $\sigma = 5.027$ S/m; $\epsilon_r = 36.426$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.85, 4.85, 4.85) @ 5580 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Head Right Tilt/WLAN 5.6G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.434 W/kg


Head Right Tilt/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.877 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.917 W/kg

SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.060 W/kg

Maximum value of SAR (measured) = 0.501 W/kg

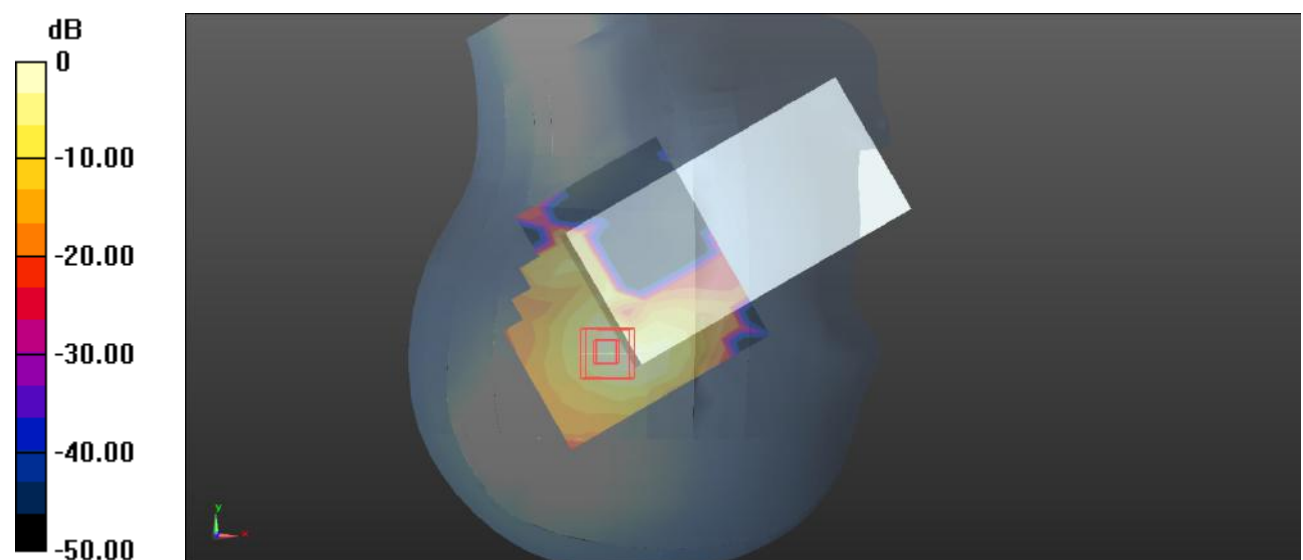

0 dB = 0.501 W/kg = -3.00 dBW/kg

Test Plot 113#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5580$ MHz; $\sigma = 5.027$ S/m; $\epsilon_r = 36.426$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.85, 4.85, 4.85) @ 5580 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Front/WLAN 5.6G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0513 W/kg


Body Front/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.155 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.00584 W/kg

Maximum value of SAR (measured) = 0.0560 W/kg

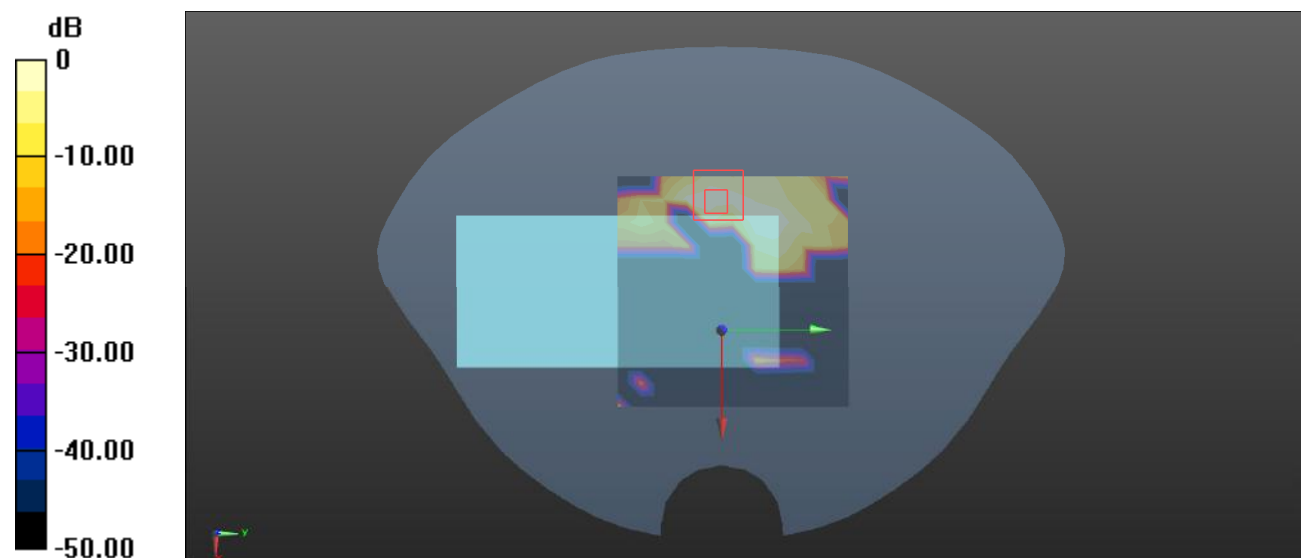

0 dB = 0.0560 W/kg = -12.52 dBW/kg

Test Plot 114#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5580$ MHz; $\sigma = 5.027$ S/m; $\epsilon_r = 36.426$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.85, 4.85, 4.85) @ 5580 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Back/WLAN 5.6G 802.11a Mid 2/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.380 W/kg


Body Back/WLAN 5.6G 802.11a Mid 2/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.995 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.830 W/kg

SAR(1 g) = 0.249 W/kg; SAR(10 g) = 0.076 W/kg

Maximum value of SAR (measured) = 0.490 W/kg

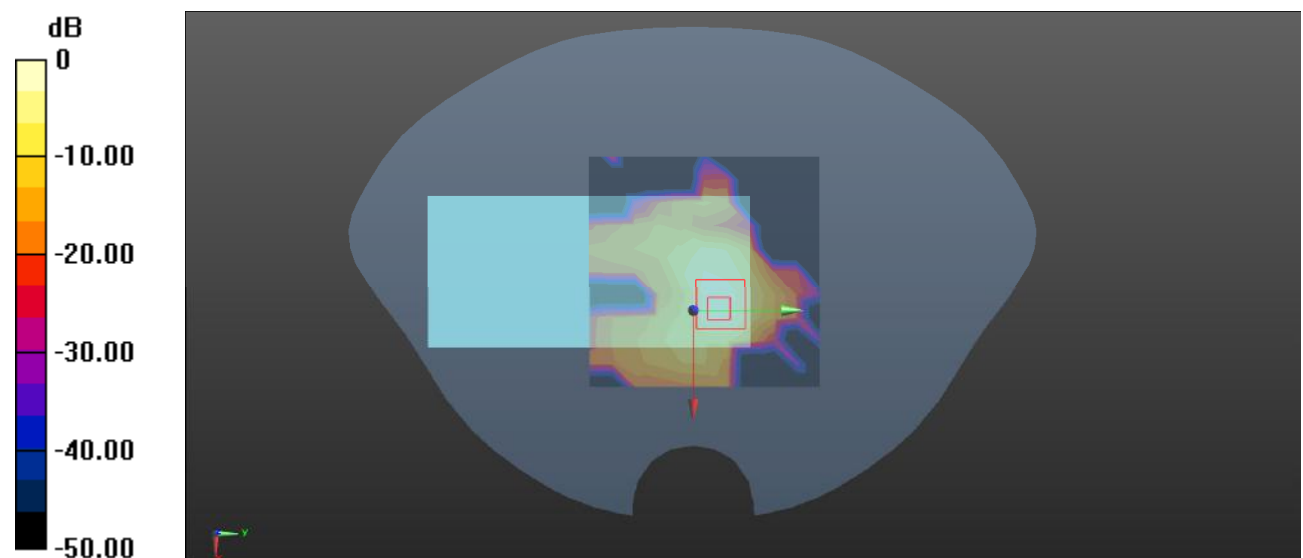

0 dB = 0.490 W/kg = -3.10 dBW/kg

Test Plot 115#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5580$ MHz; $\sigma = 5.027$ S/m; $\epsilon_r = 36.426$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.85, 4.85, 4.85) @ 5580 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Left/WLAN 5.6G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.295 W/kg


Body Left/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.404 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.567 W/kg

SAR(1 g) = 0.157 W/kg; SAR(10 g) = 0.055 W/kg

Maximum value of SAR (measured) = 0.280 W/kg

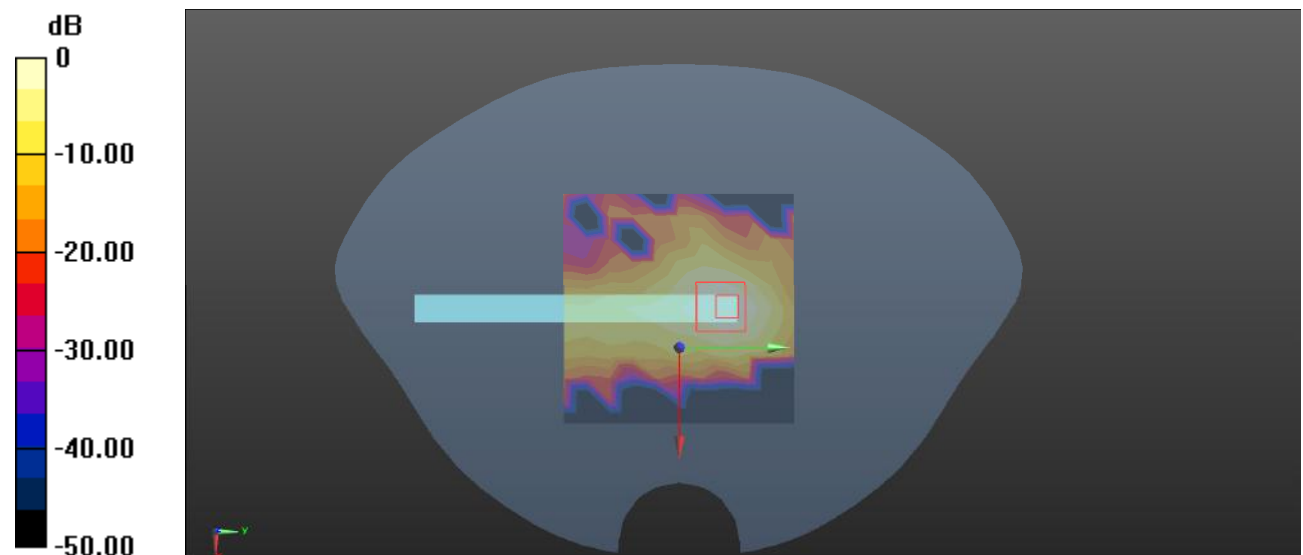

Test Plot 116#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5580$ MHz; $\sigma = 5.027$ S/m; $\epsilon_r = 36.426$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.85, 4.85, 4.85) @ 5580 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Top/WLAN 5.6G 802.11a Mid/Area Scan (9x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.490 W/kg


Body Top/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.317 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.880 W/kg

SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.092 W/kg

Maximum value of SAR (measured) = 0.485 W/kg

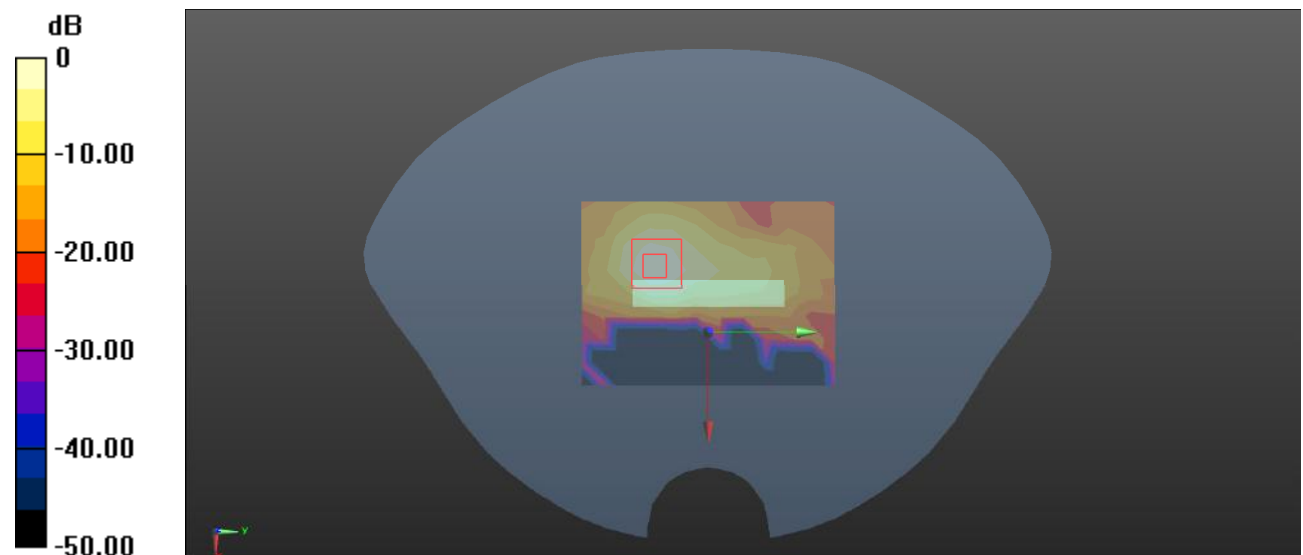

0 dB = 0.485 W/kg = -3.14 dBW/kg

Test Plot 117#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2441 MHz; Duty Cycle: 1:1.30310

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.784$ S/m; $\epsilon_r = 39.452$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2441 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Head Left Cheek/Bluetooth BDR(GFSK) Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0163 W/kg


Head Left Cheek/Bluetooth BDR(GFSK) Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.302 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0260 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00328 W/kg

Maximum value of SAR (measured) = 0.0215 W/kg

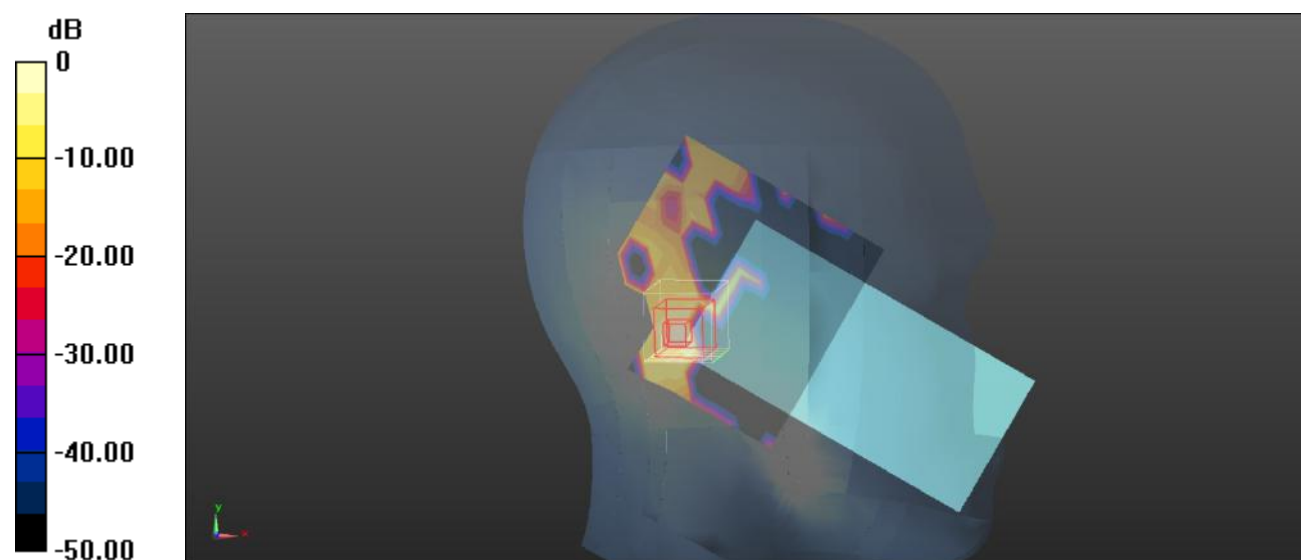

0 dB = 0.0215 W/kg = -16.68 dBW/kg

Test Plot 118#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2441 MHz; Duty Cycle: 1:1.30310

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.784$ S/m; $\epsilon_r = 39.452$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2441 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Head Left Tilt/Bluetooth BDR(GFSK) Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0227 W/kg


Head Left Tilt/Bluetooth BDR(GFSK) Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.441 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0490 W/kg

SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.00697 W/kg

Maximum value of SAR (measured) = 0.0319 W/kg

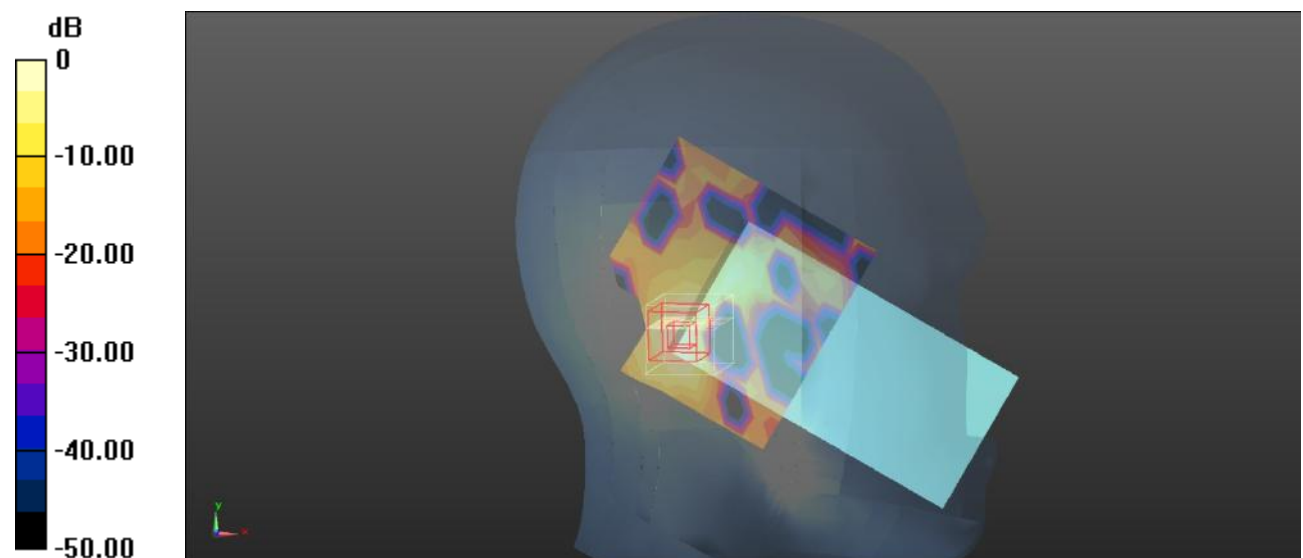

0 dB = 0.0319 W/kg = -14.96 dBW/kg

Test Plot 119#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2441 MHz; Duty Cycle: 1:1.30310

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.784$ S/m; $\epsilon_r = 39.452$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2441 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Head Right Cheek/Bluetooth BDR(GFSK) Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0641 W/kg


Head Right Cheek/Bluetooth BDR(GFSK) Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.8780 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.0940 W/kg

SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0644 W/kg

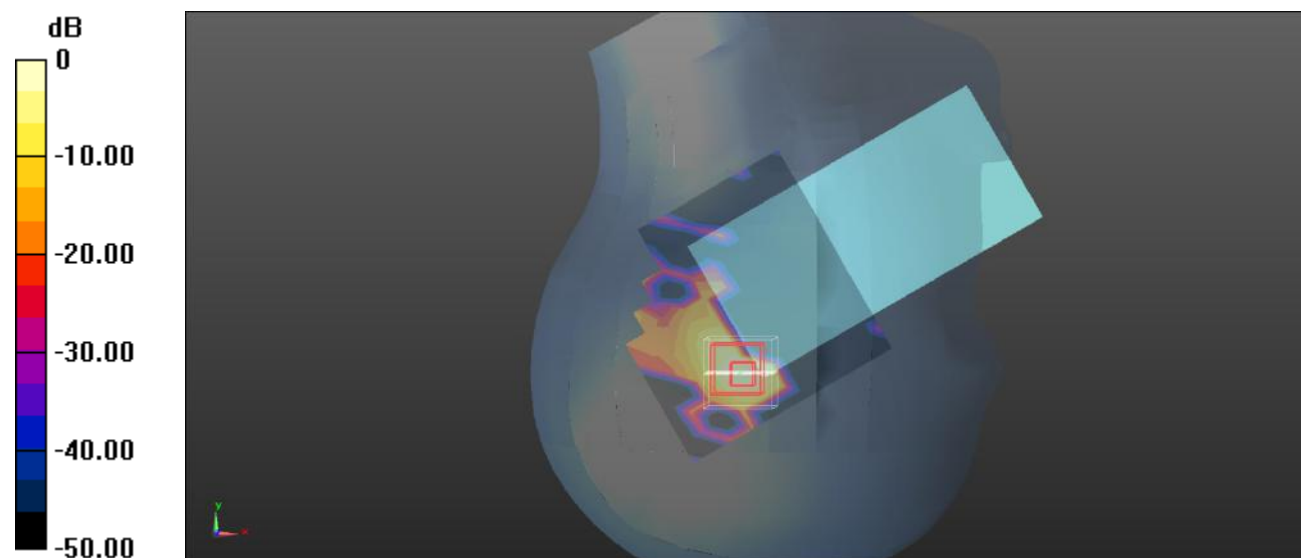

0 dB = 0.0644 W/kg = -11.91 dBW/kg

Test Plot 120#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2441 MHz; Duty Cycle: 1:1.30310

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.784$ S/m; $\epsilon_r = 39.452$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2441 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Head Right Tilt/Bluetooth BDR(GFSK) Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0627 W/kg


Head Right Tilt/Bluetooth BDR(GFSK) Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.079 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.117 W/kg

SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0770 W/kg

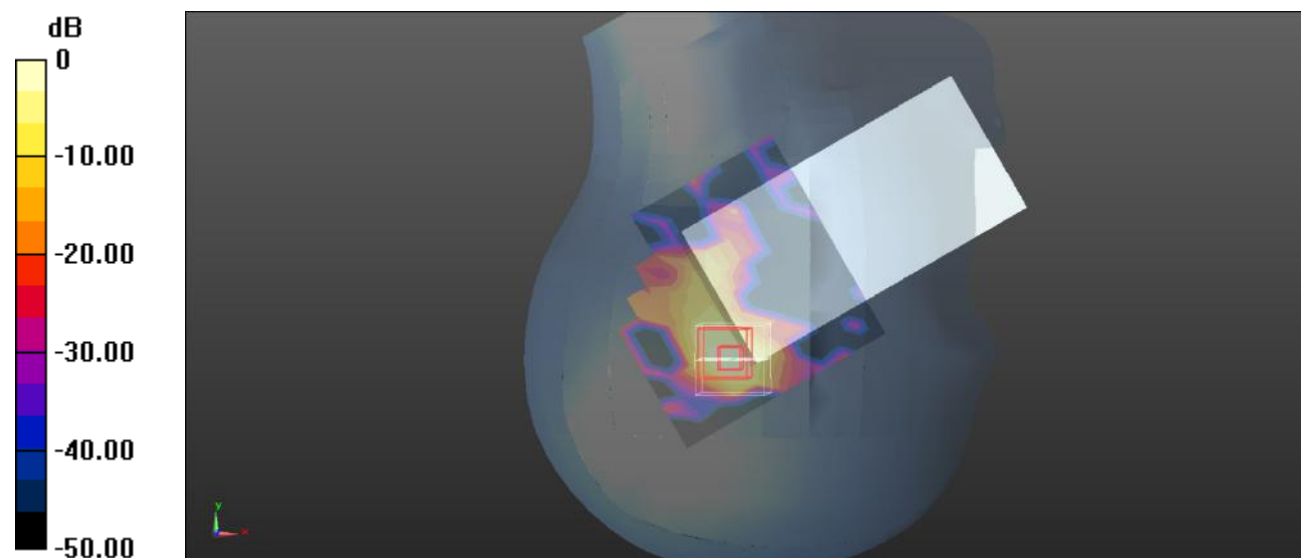

0 dB = 0.0770 W/kg = -11.14 dBW/kg

Test Plot 121#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2441 MHz; Duty Cycle: 1:1.30310

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.784$ S/m; $\epsilon_r = 39.452$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2441 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Front/Bluetooth BDR(GFSK) Mid/Area Scan (12x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.00659 W/kg


Body Front/Bluetooth BDR(GFSK) Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0370 W/kg

SAR(1 g) = 0.000611 W/kg; SAR(10 g) = 0.000126 W/kg

Maximum value of SAR (measured) = 0.0373 W/kg

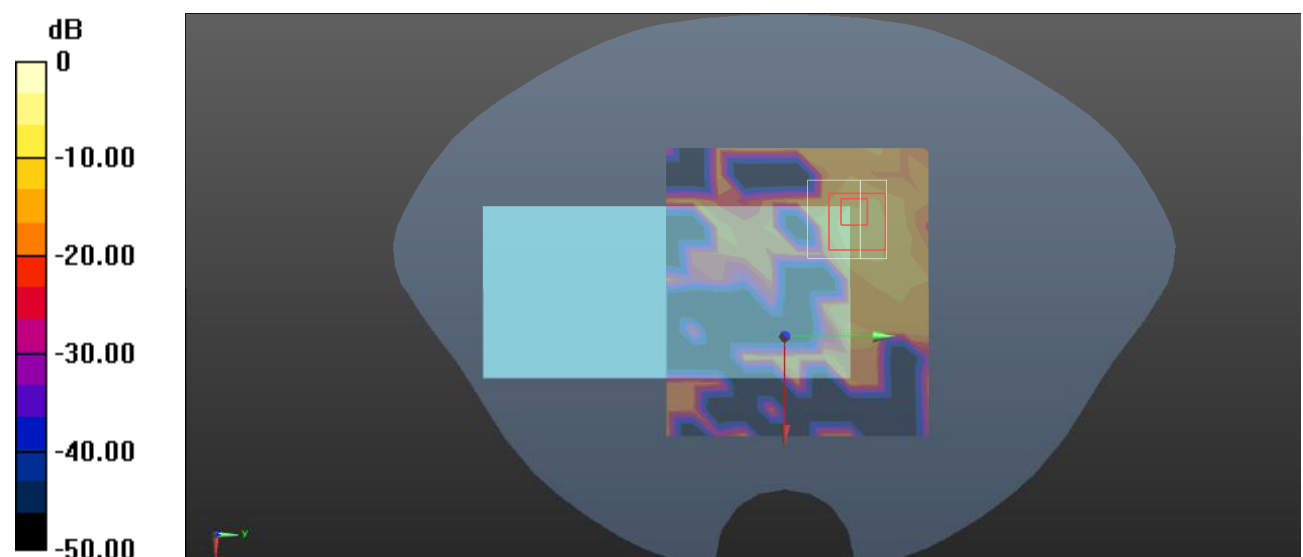

0 dB = 0.0373 W/kg = -14.28 dBW/kg

Test Plot 122#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2441 MHz;Duty Cycle: 1:1.30310

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.784$ S/m; $\epsilon_r = 39.452$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2441 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Back/Bluetooth BDR(GFSK) Mid/Area Scan (12x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0138 W/kg


Body Back/Bluetooth BDR(GFSK) Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.6570 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0320 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00379 W/kg

Maximum value of SAR (measured) = 0.0132 W/kg

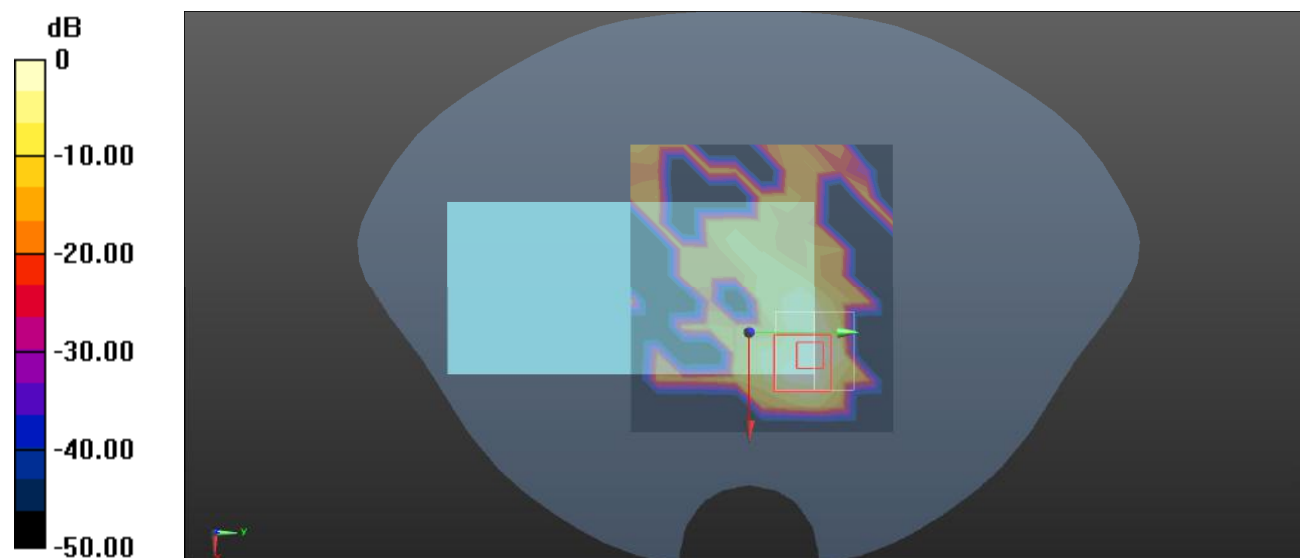

0 dB = 0.0132 W/kg = -18.79 dBW/kg

Test Plot 123#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2441 MHz; Duty Cycle: 1:1.30310

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.784$ S/m; $\epsilon_r = 39.452$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2441 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Left/Bluetooth BDR(GFSK) Mid/Area Scan (9x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.00384 W/kg


Body Left/Bluetooth BDR(GFSK) Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.1070 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0130 W/kg

SAR(1 g) = 0.00296 W/kg; SAR(10 g) = 0.000788 W/kg

Maximum value of SAR (measured) = 0.00384 W/kg

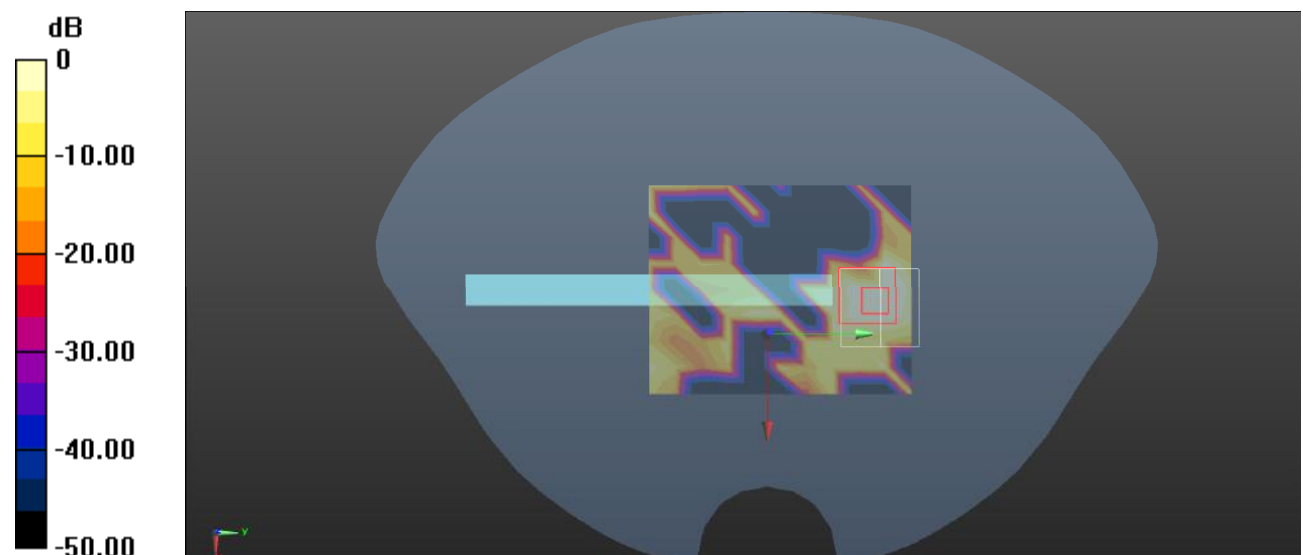

0 dB = 0.00384 W/kg = -24.16 dBW/kg

Test Plot 124#**DUT: Mobile Phone; Type: LEX401; Serial: 2C4T-6;**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2441 MHz; Duty Cycle: 1:1.30310

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.784$ S/m; $\epsilon_r = 39.452$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2441 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Top/Bluetooth BDR(GFSK) Mid/Area Scan (9x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.00802 W/kg

Body Top/Bluetooth BDR(GFSK) Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0240 W/kg

SAR(1 g) = 0.00881 W/kg; SAR(10 g) = 0.00287 W/kg

Maximum value of SAR (measured) = 0.0109 W/kg

