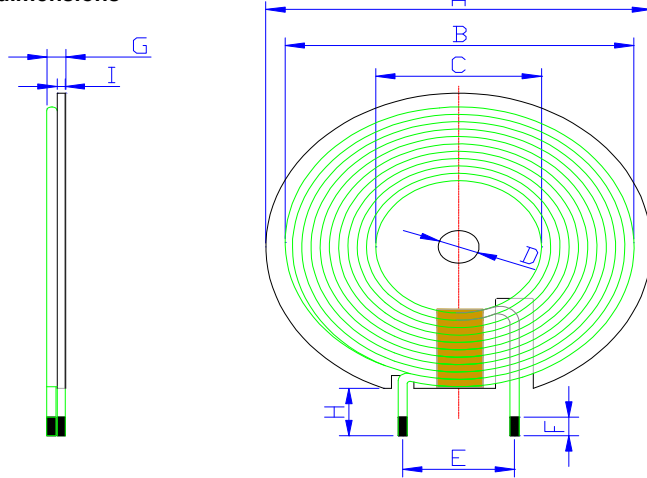


Product specification document

customer name		Shenzhen Jingzhuo Industrial Co., LTD		Customer material number				
Admidia elegant material number		TD-JZ20230811001-43.50pen double slotL=15MM		Specification number		20230811001		
				edition version		001		
◆、external dimensions 				(unit: mm)				
				A	43.5 ±0.5			
				B	40.0 ±0.5			
				C	20.5 ±0.5			
				D	5.7			
				E	18.0 ref			
				F	3 ±1			
				G	1.5 Max			
				H	15.0 ±2			
				I	0.60 ±0.1(Magnetic sheet thickness)			
				(1)Line diameter: 0.08 * 24P bare copper wire				
				(2)Number of winding coil: 10TS				
				(3)Whether the start and tail line crosses: Yes				
				(4)Coil 8MM high temperature tape				
				(5)Coils and magnets need to be pasted in the middle.				
				(6) The back side of the magnetic sheet is 43 round slotted back glue				
◆、Electrical character:								
Parameter		Specifications		Test condition		Test instrument		
L0		6.5 ±10% μH		100KHz/1V		■TH1816B		
Q		>40 min		100KHz/1V		■TH1816B		
DCR		<50 mΩ		@ 25℃		■CH-502BC		
◆、Temperature grade :								
Operating temperature		-40℃~ 125℃						
◆、List of material:								
serial number		Classification		material specification		Supplier		
num. one		Magnetic sheet		43.5*5.3*0.6T 0Pen double slots		PC95Galvanised		
num. two		Copper line		0.08*24Pbare copper wire		Bare copper wire		
num. three		High temperature t		high temperature glue		Environmental protection tape		
num. four		Stannum		107H		Thousand Island environmental protectiontin		
num.five		Glue		Yellow gum		Environmentally friendly glue		
num.six		Glue						
Weave				Check		Ratify		
Xiao Shu Fang				Peng Yong		Zhu Hui		

Manufacturer: Shenzhen Jingzhuo Industrial Co., LTD

Address: Room 502, Building B, Weihuada Industrial Park, No. 5, Lirong Road, Xinshi Community, Dalang Street, Longhua District, Shenzhen