


EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

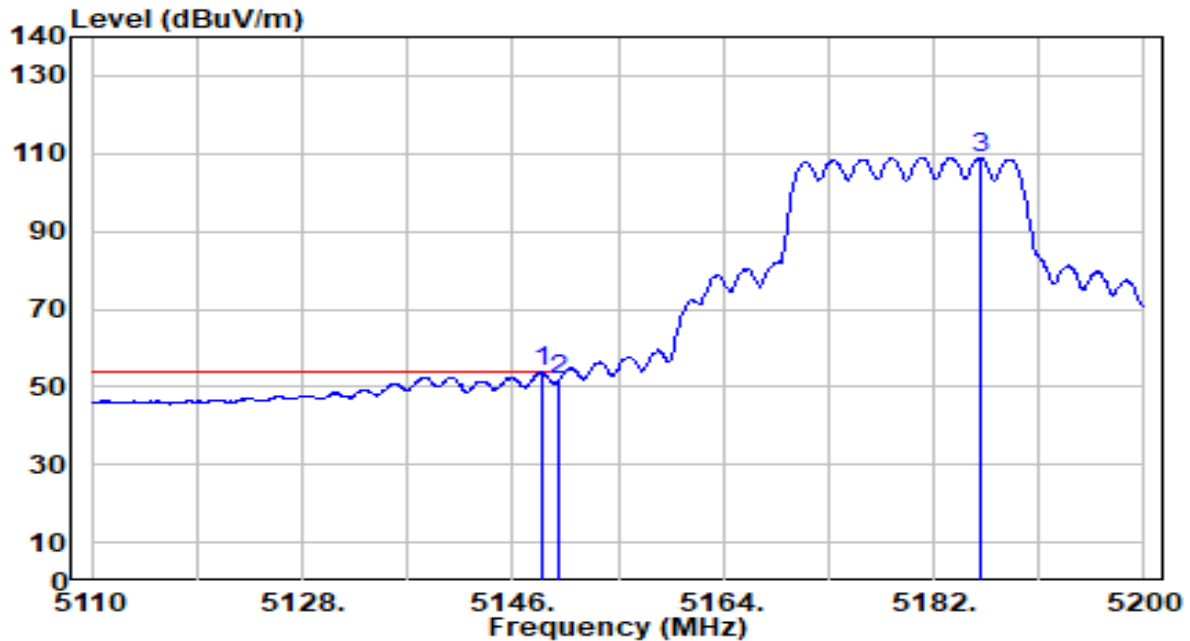


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.610	53.14	0.65	53.79	-0.21	54.00	150	359	Average
2		5150.000	51.13	0.65	51.78	-2.22	54.00	150	359	Average
3		5185.960	108.29	0.69	108.98	N/A	N/A	150	359	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

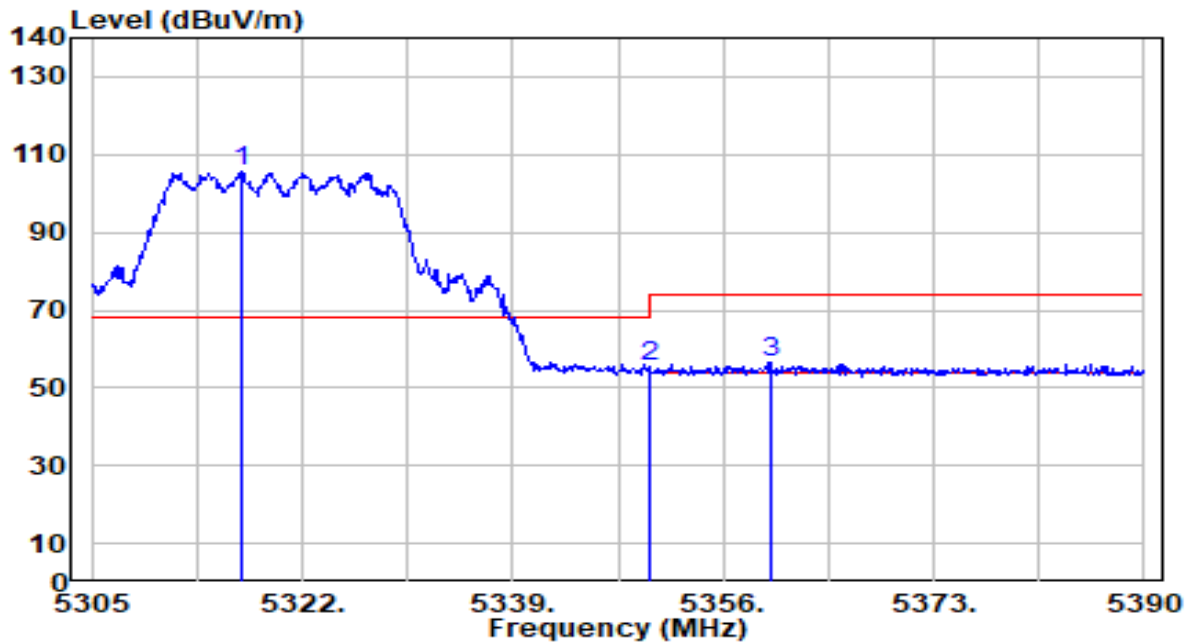


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5317.155	105.24	0.52	105.76	N/A	N/A	150	17	Peak
2	5350.000	54.86	0.47	55.33	-18.67	74.00	150	17	Peak
3	* 5359.825	55.94	0.46	56.40	-17.60	74.00	150	17	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

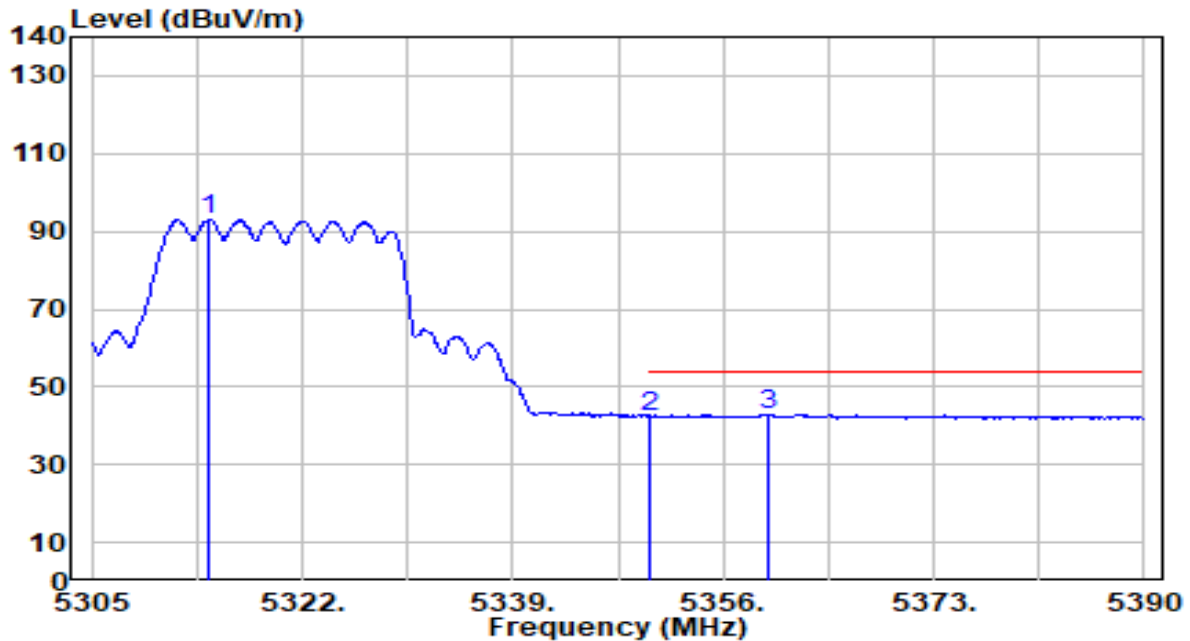


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.435	92.45	0.53	92.98	N/A	N/A	150	17	Average
2	5350.000	41.97	0.47	42.44	-11.56	54.00	150	17	Average
3	* 5359.655	42.45	0.46	42.91	-11.09	54.00	150	17	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

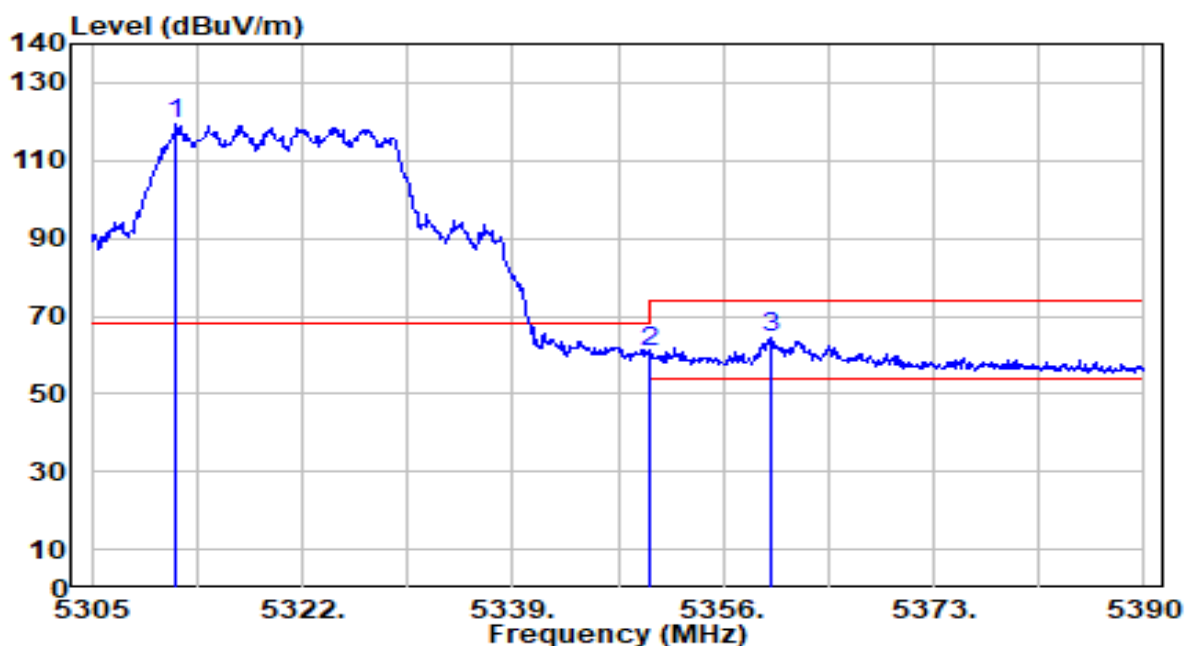


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.800	118.98	0.53	119.51	N/A	N/A	150	354	Peak
2	5350.000	60.39	0.47	60.87	-13.13	74.00	150	354	Peak
3	* 5359.825	64.17	0.46	64.62	-9.38	74.00	150	354	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

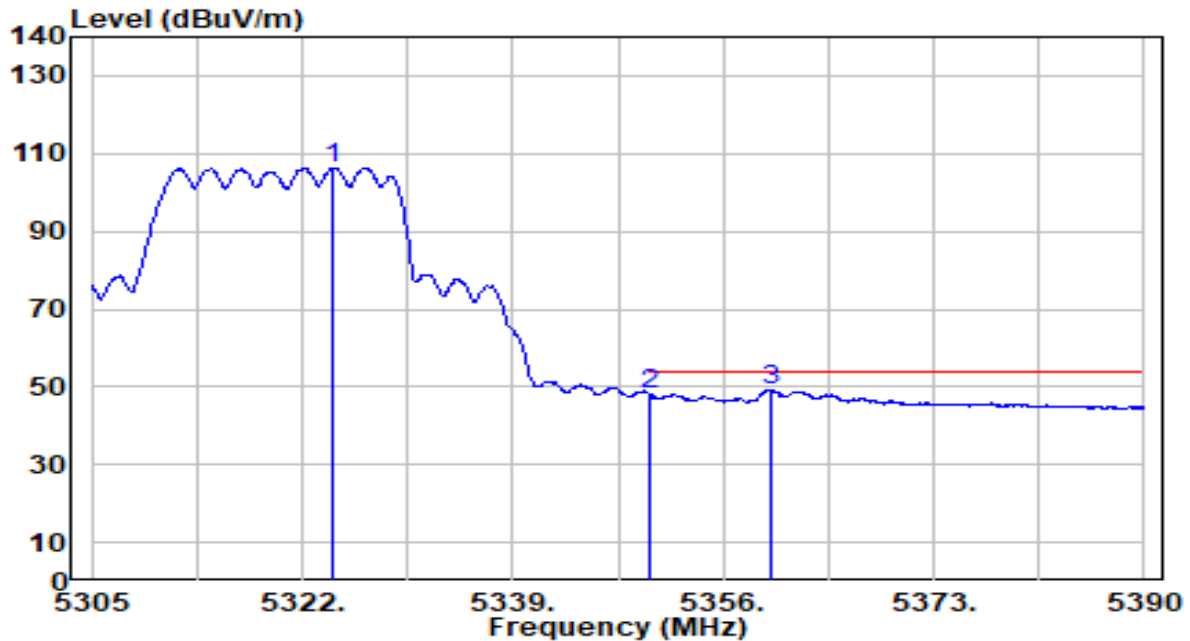


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5324.380	105.87	0.51	106.38	N/A	N/A	150	354	Average
2	5350.000	47.80	0.47	48.27	-5.73	54.00	150	354	Average
3	* 5359.910	48.85	0.46	49.30	-4.70	54.00	150	354	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

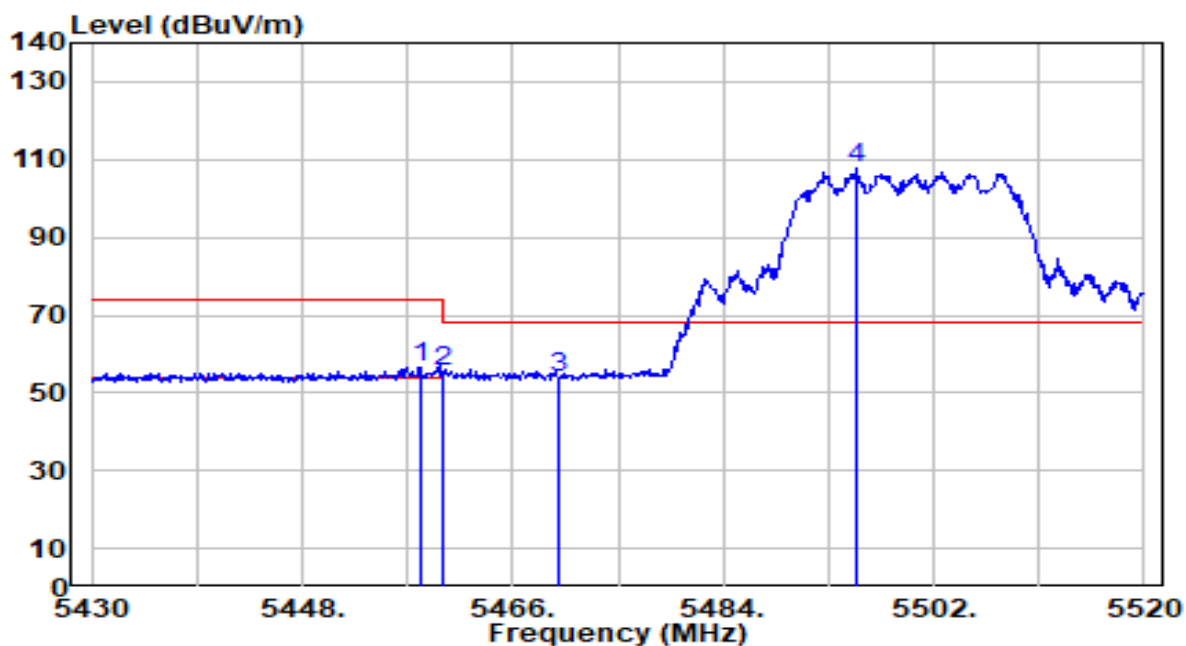


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.080	55.83	0.65	56.48	-17.52	74.00	150	15	Peak
2	5460.000	54.69	0.66	55.35	-18.65	74.00	150	15	Peak
3	* 5470.000	53.31	0.71	54.01	-14.19	68.20	150	15	Peak
4	5495.340	106.83	0.82	107.65	N/A	N/A	150	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

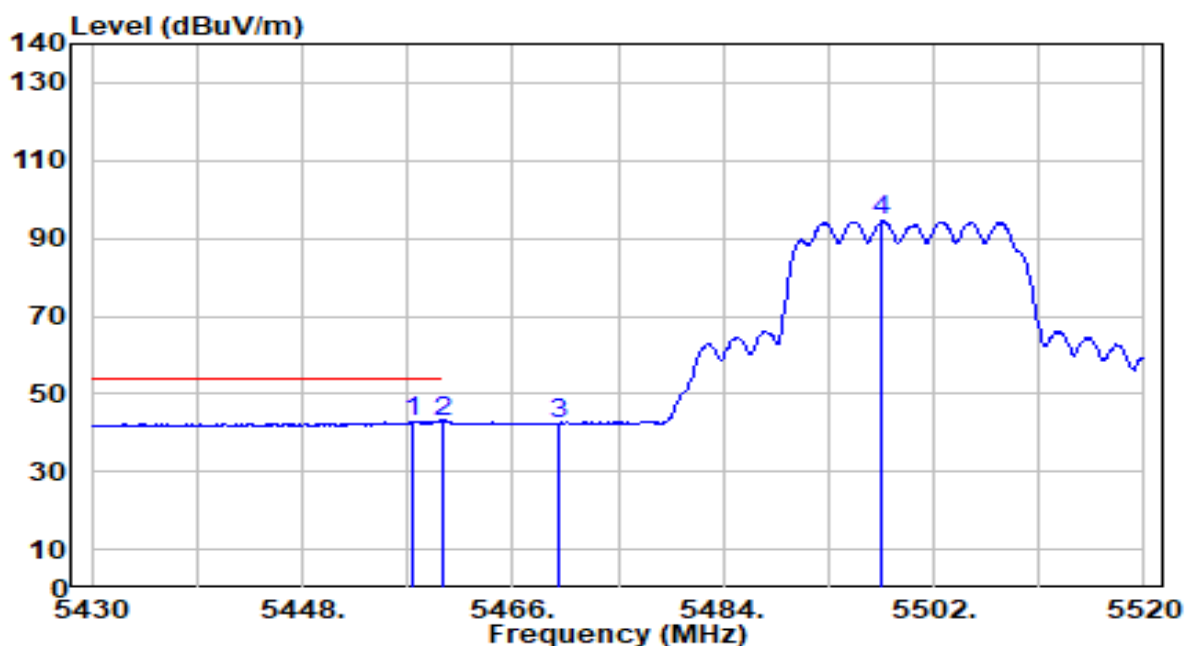


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5457.360	42.17	0.65	42.82	-11.18	54.00	150	15	Average
2	*	5460.000	42.34	0.66	43.00	-11.00	54.00	150	15	Average
3		5470.000	41.70	0.71	42.41	N/A	N/A	150	15	Average
4		5497.590	93.55	0.83	94.38	N/A	N/A	150	15	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

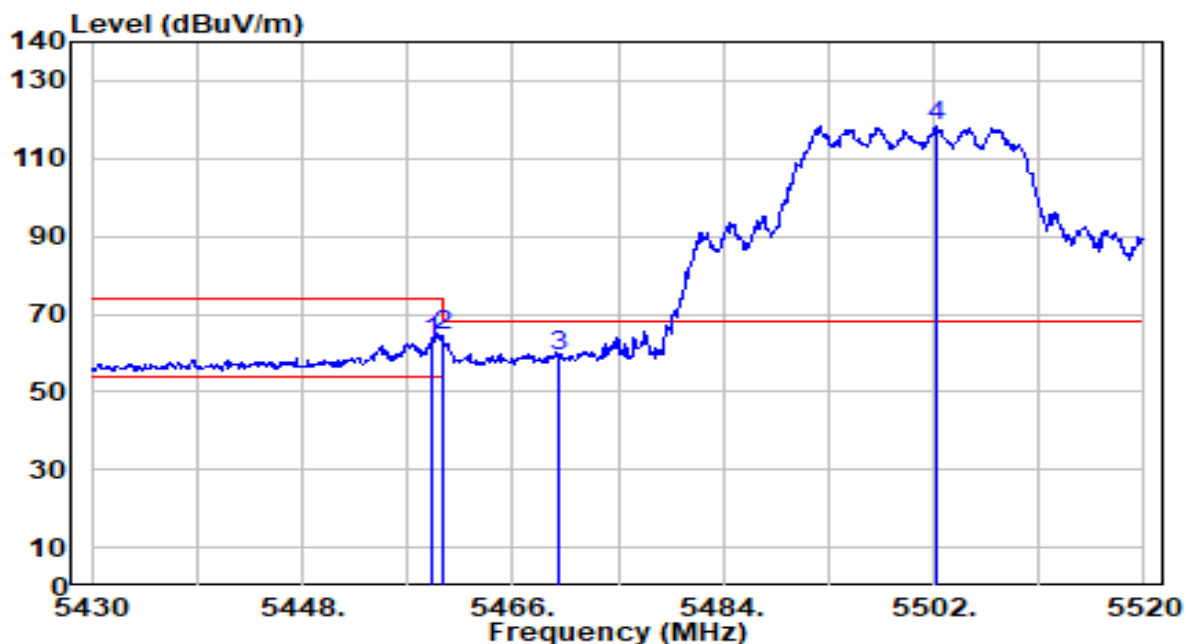


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.980	62.01	0.66	62.67	-11.33	74.00	120	185	Peak
2	5460.000	64.04	0.66	64.71	-9.29	74.00	120	185	Peak
3	* 5470.000	58.29	0.71	59.00	-9.20	68.20	120	185	Peak
4	5502.180	117.55	0.85	118.40	N/A	N/A	120	185	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

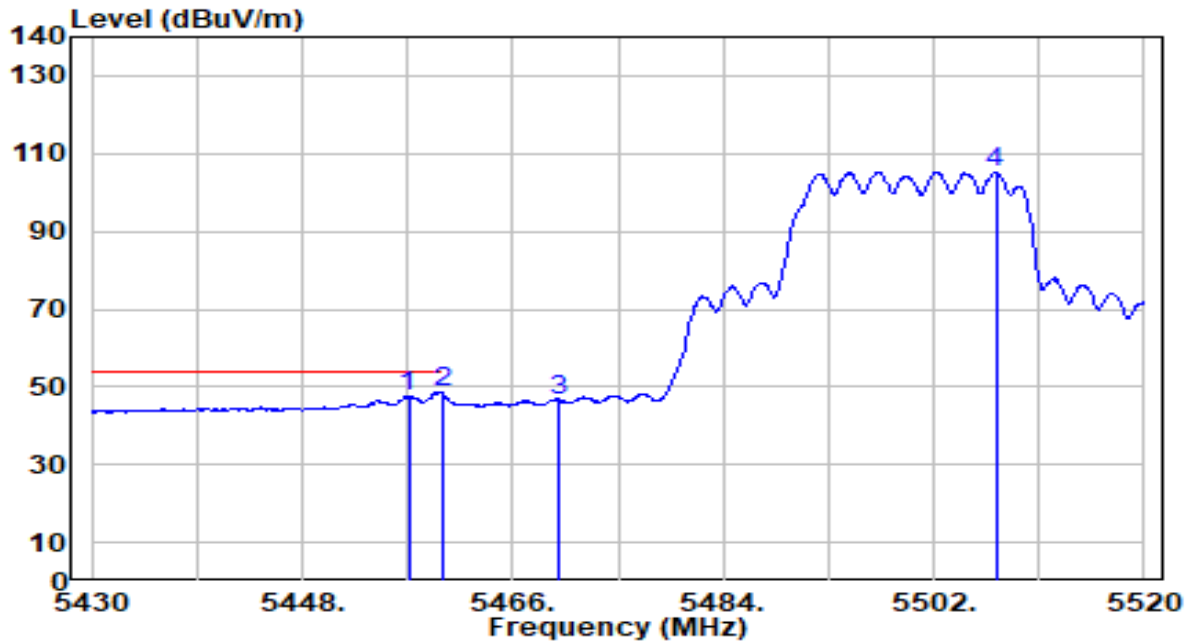


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5457.090	47.00	0.65	47.65	-6.35	54.00	120	185	Average
2	*	5460.000	47.76	0.66	48.43	-5.57	54.00	120	185	Average
3		5470.000	46.02	0.71	46.72	N/A	N/A	120	185	Average
4		5507.310	104.34	0.87	105.21	N/A	N/A	120	185	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

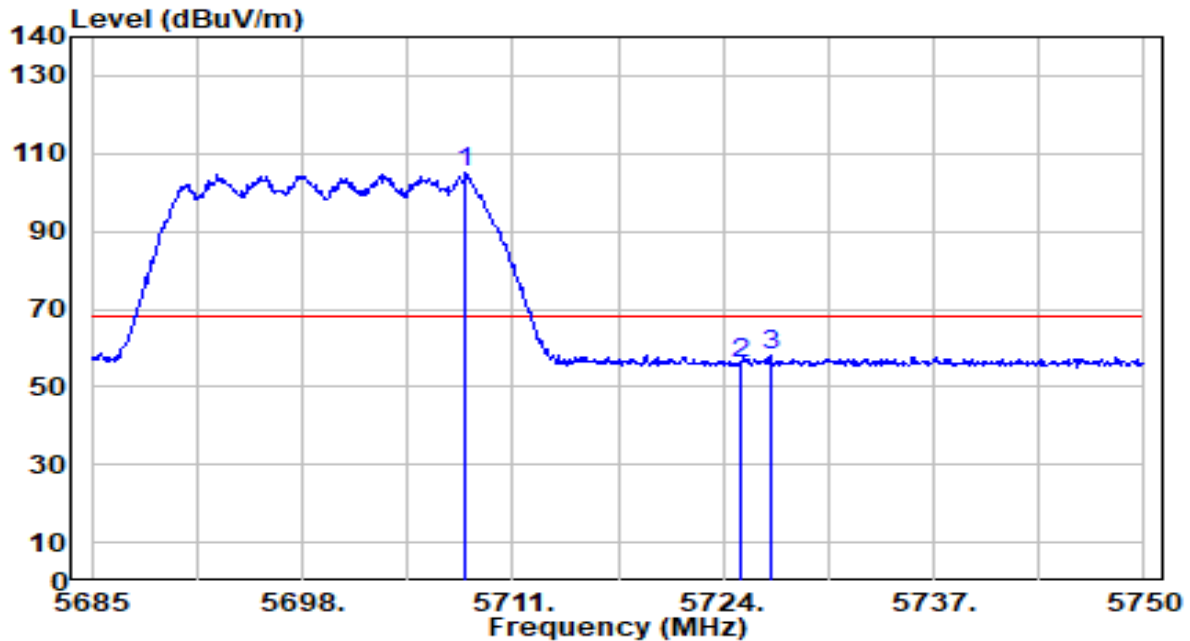


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5708.075	103.06	1.81	104.87	N/A	N/A	130	14	Peak
2	5725.000	54.11	1.89	56.00	-12.20	68.20	130	14	Peak
3	* 5726.925	56.03	1.90	57.93	-10.27	68.20	130	14	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

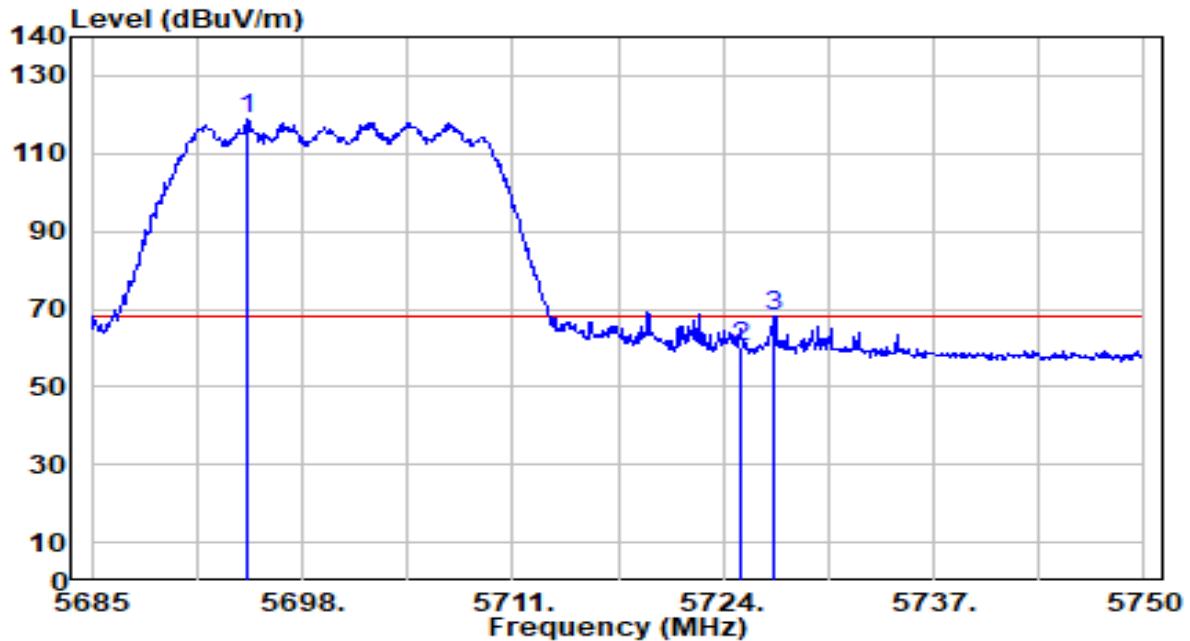


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5694.555	116.90	1.75	118.65	N/A	N/A	200	313	Peak
2	5725.000	58.54	1.89	60.43	-7.77	68.20	200	313	Peak
3	* 5727.185	66.11	1.90	68.01	-0.19	68.20	200	313	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

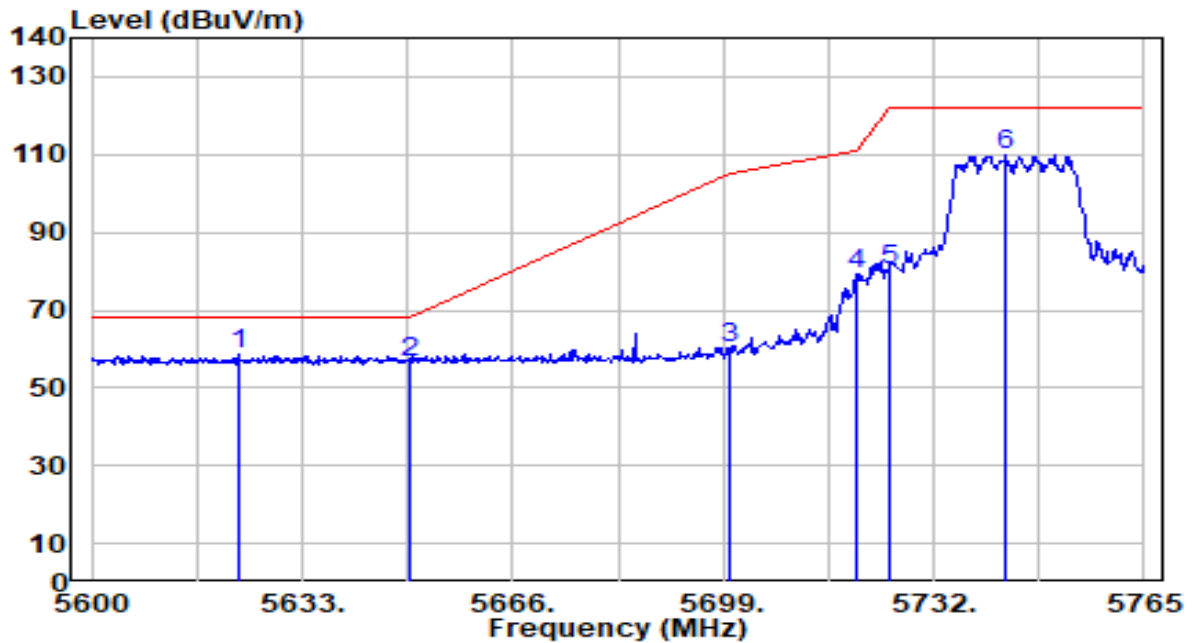


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5622.935	57.05	1.42	58.46	-9.74	68.20	141	13	Peak
2		5650.000	55.08	1.54	56.62	-11.58	68.20	141	13	Peak
3		5700.000	58.52	1.78	60.30	-44.90	105.20	141	13	Peak
4		5720.000	77.21	1.87	79.08	-31.72	110.80	141	13	Peak
5		5725.000	78.48	1.89	80.37	-41.83	122.20	141	13	Peak
6		5743.220	107.91	1.98	109.88	N/A	N/A	141	13	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

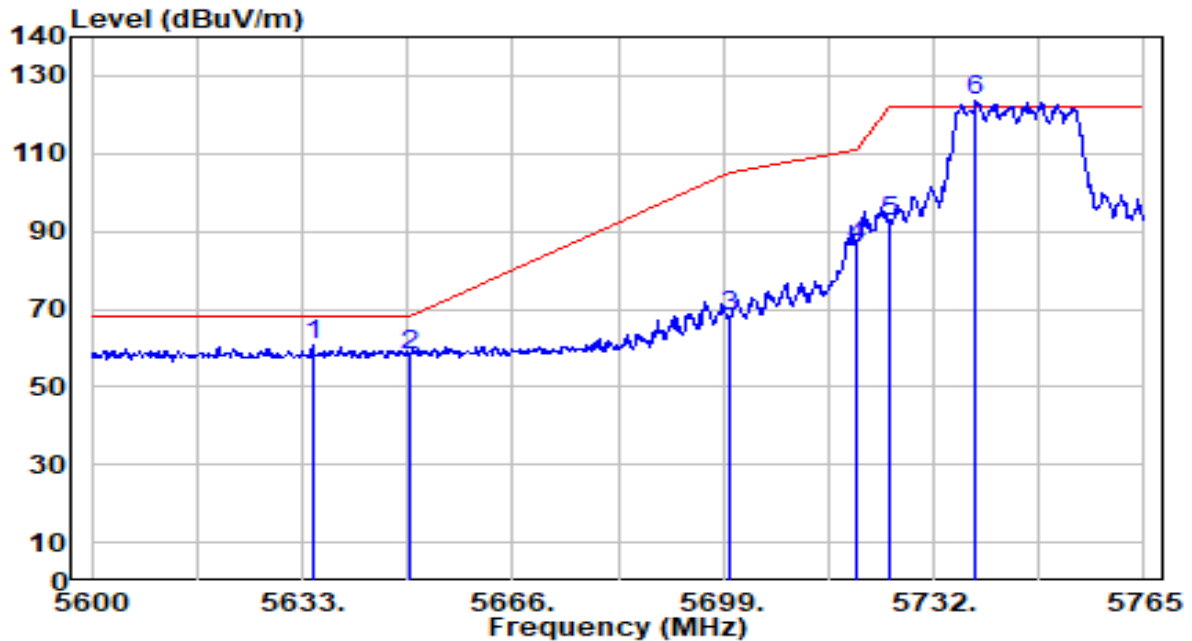


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5634.650	59.52	1.47	60.99	-7.21	68.20	187	349	Peak
2		5650.000	56.55	1.54	58.09	-10.11	68.20	187	349	Peak
3		5700.000	66.28	1.78	68.06	-37.14	105.20	187	349	Peak
4		5720.000	84.46	1.87	86.33	-24.47	110.80	187	349	Peak
5		5725.000	90.52	1.89	92.41	-29.79	122.20	187	349	Peak
6		5738.600	121.47	1.96	123.43	N/A	N/A	187	349	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

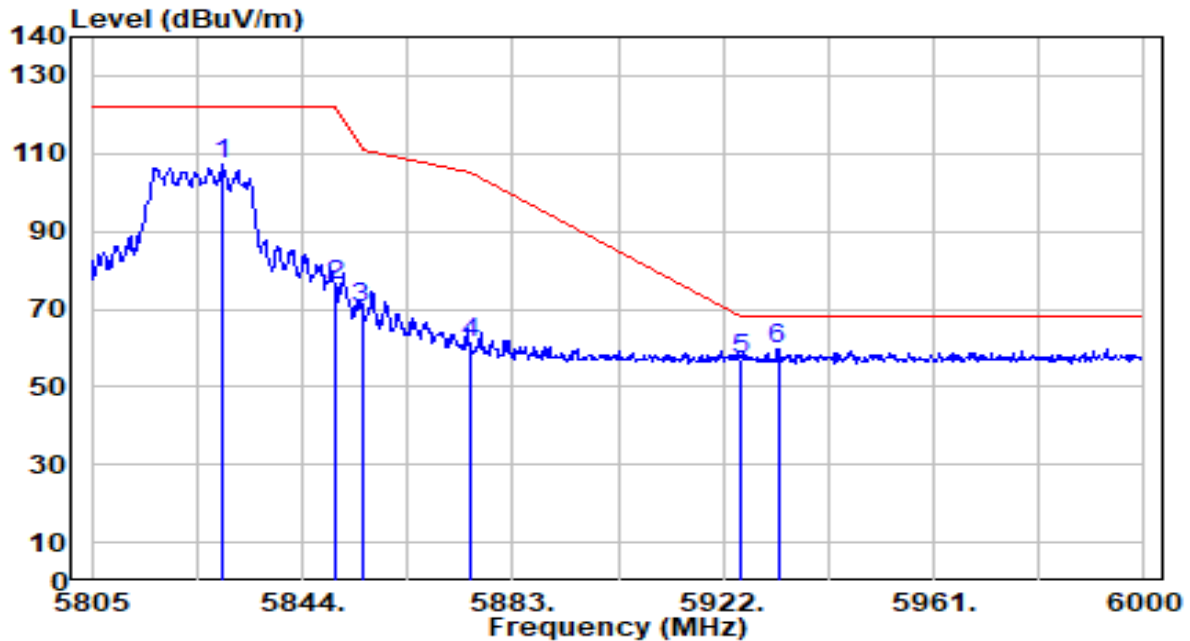


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5828.985	105.07	2.25	107.32	N/A	N/A	150	349	Peak
2	5850.000	73.60	2.25	75.85	-46.35	122.20	150	349	Peak
3	5855.000	67.76	2.25	70.01	-40.79	110.80	150	349	Peak
4	5875.000	58.99	2.26	61.25	-43.95	105.20	150	349	Peak
5	5925.000	54.92	2.27	57.19	-11.01	68.20	150	349	Peak
6	* 5932.140	57.69	2.27	59.95	-8.25	68.20	150	349	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

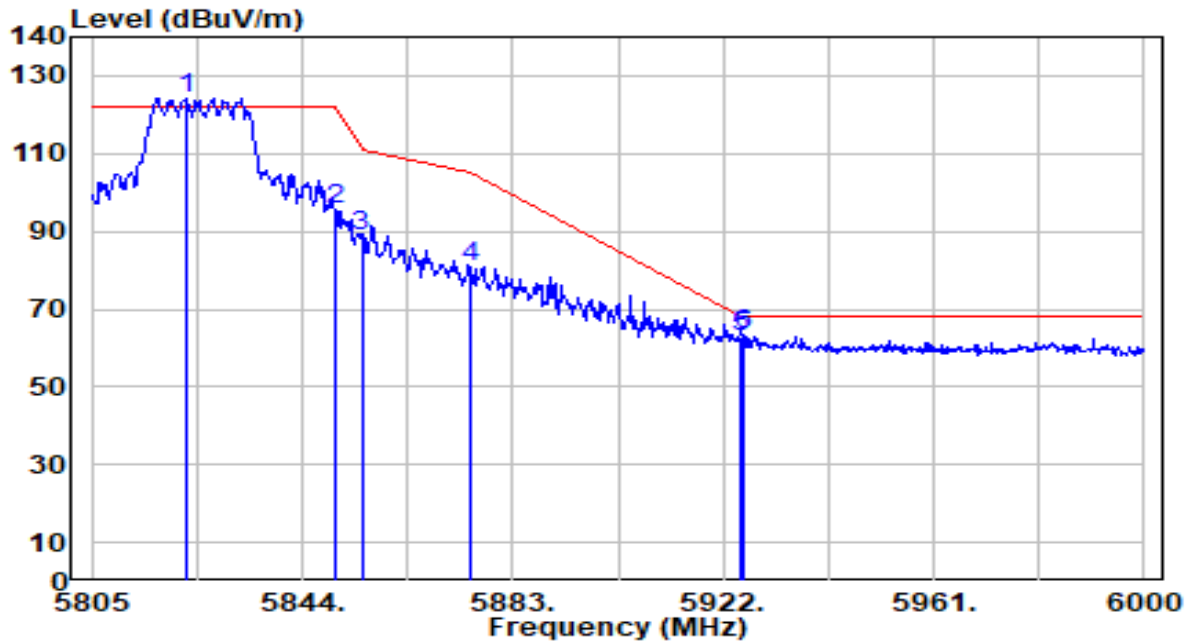


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5822.745	122.15	2.25	124.40	N/A	N/A	180	248	Peak
2	5850.000	93.58	2.25	95.83	-26.37	122.20	180	248	Peak
3	5855.000	86.72	2.25	88.97	-21.83	110.80	180	248	Peak
4	5875.000	78.71	2.26	80.97	-24.23	105.20	180	248	Peak
5	5925.000	60.56	2.27	62.83	-5.37	68.20	180	248	Peak
6	* 5925.900	60.89	2.27	63.15	-5.05	68.20	180	248	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

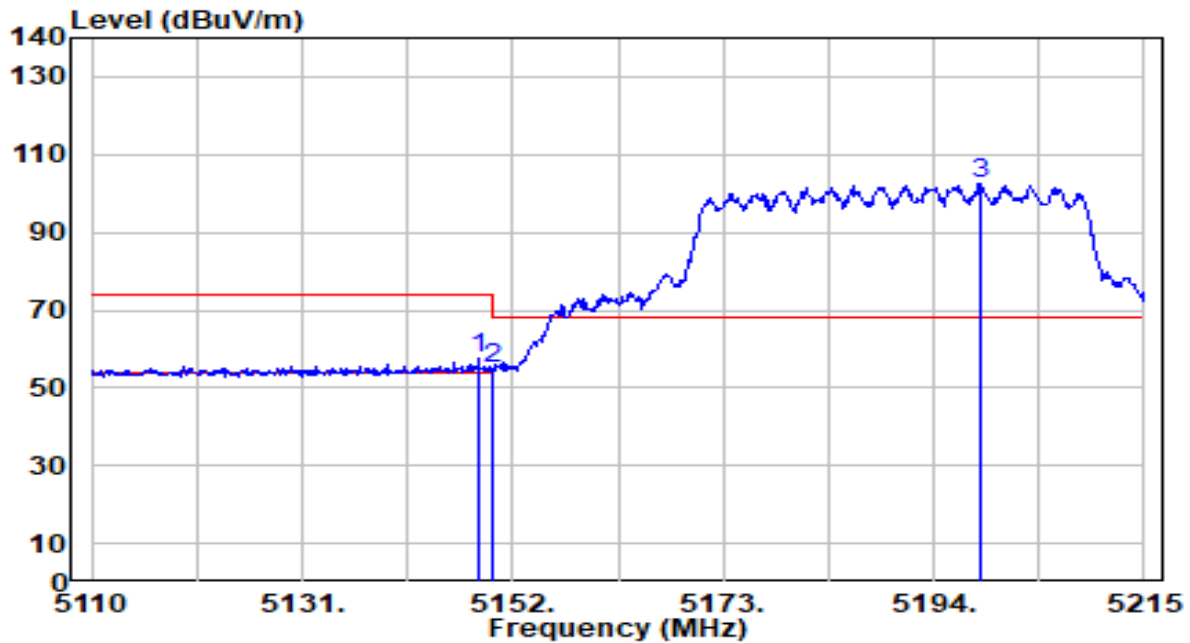


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.640	56.72	0.65	57.37	-16.63	74.00	150	269	Peak
2		5150.000	54.26	0.65	54.91	-19.09	74.00	150	269	Peak
3		5198.620	102.00	0.70	102.70	N/A	N/A	150	269	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

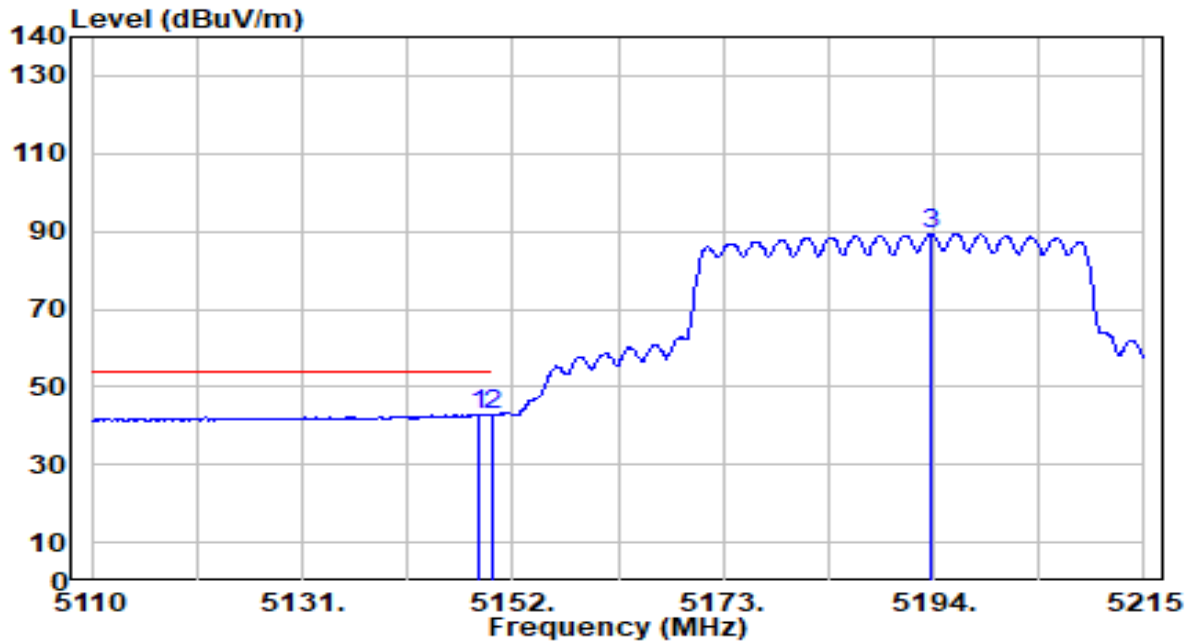


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.535	42.22	0.65	42.88	-11.12	54.00	150	269	Average
2		5150.000	41.97	0.65	42.62	-11.38	54.00	150	269	Average
3		5193.685	88.79	0.70	89.48	N/A	N/A	150	269	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

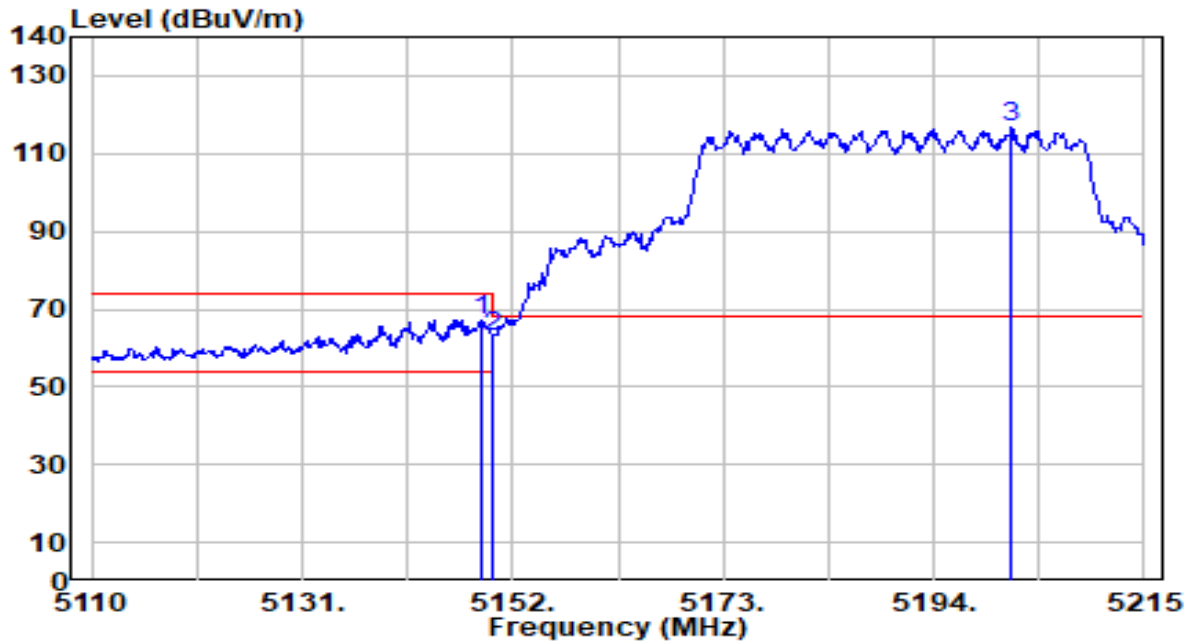


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.955	66.57	0.65	67.23	-6.77	74.00	100	27	Peak
2		5150.000	62.24	0.65	62.90	-11.10	74.00	100	27	Peak
3		5201.665	116.22	0.70	116.92	N/A	N/A	100	27	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

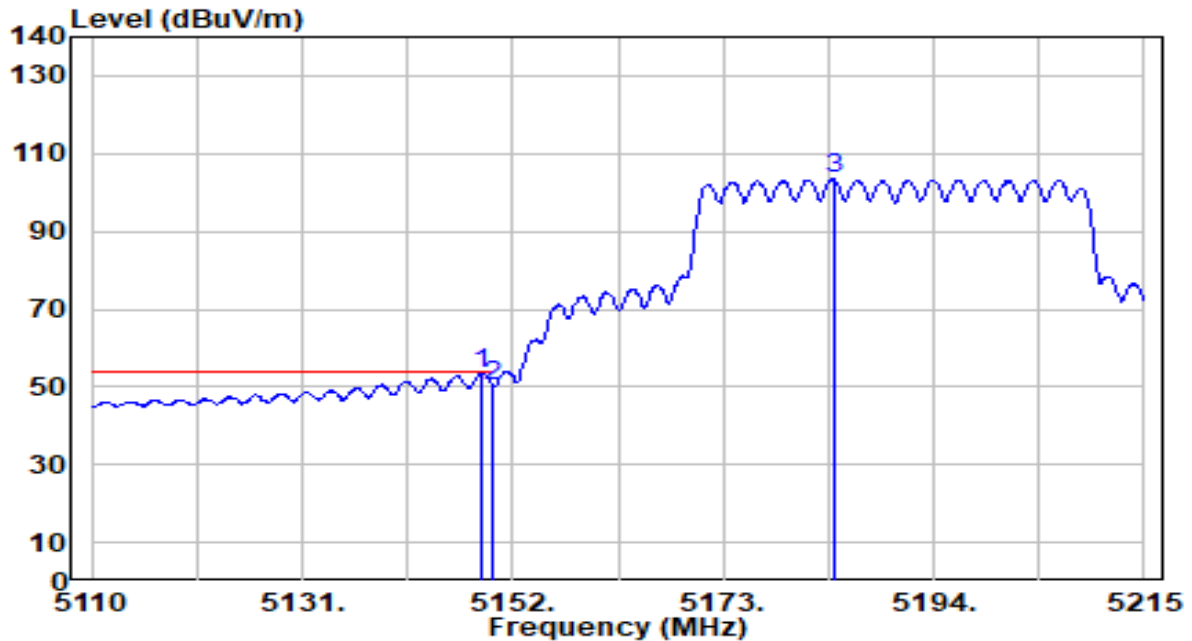


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.850	52.81	0.65	53.46	-0.54	54.00	100	27	Average
2		5150.000	49.74	0.65	50.40	-3.60	54.00	100	27	Average
3		5184.025	102.75	0.69	103.44	N/A	N/A	100	27	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

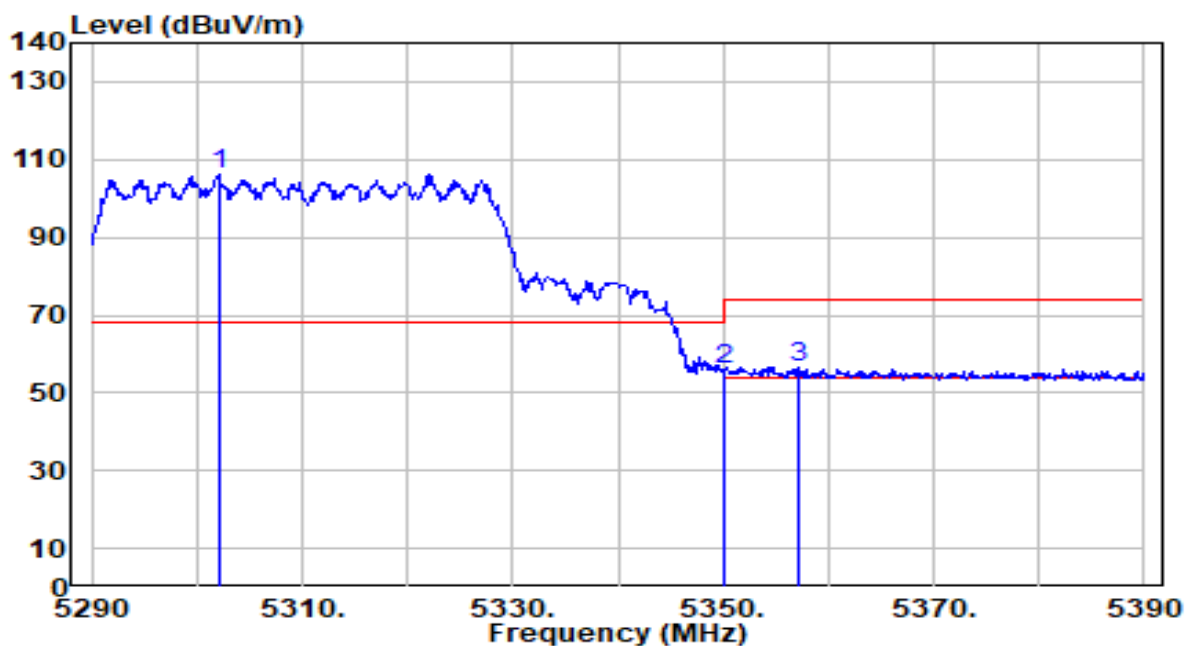


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5302.100	105.57	0.54	106.11	N/A	N/A	158	16	Peak
2	5350.000	55.29	0.47	55.77	-18.23	74.00	158	16	Peak
3	* 5357.100	55.96	0.46	56.42	-17.58	74.00	158	16	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

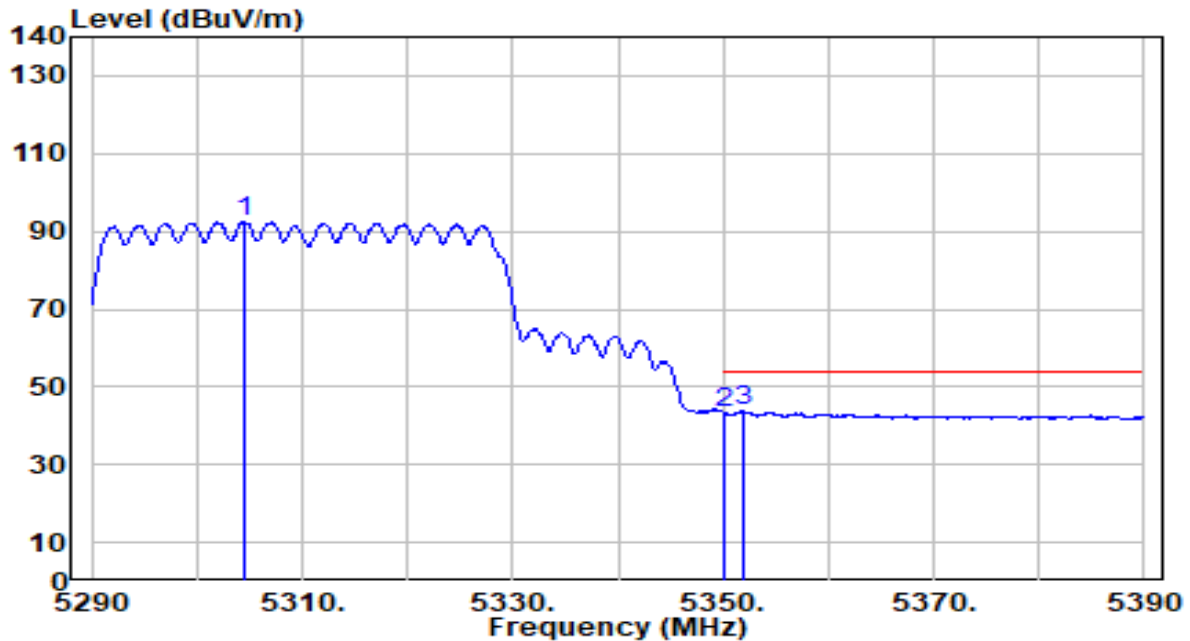


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5304.500	91.81	0.54	92.35	N/A	N/A	158	16	Average
2	5350.000	42.94	0.47	43.41	-10.59	54.00	158	16	Average
3	* 5351.900	43.34	0.47	43.81	-10.19	54.00	158	16	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

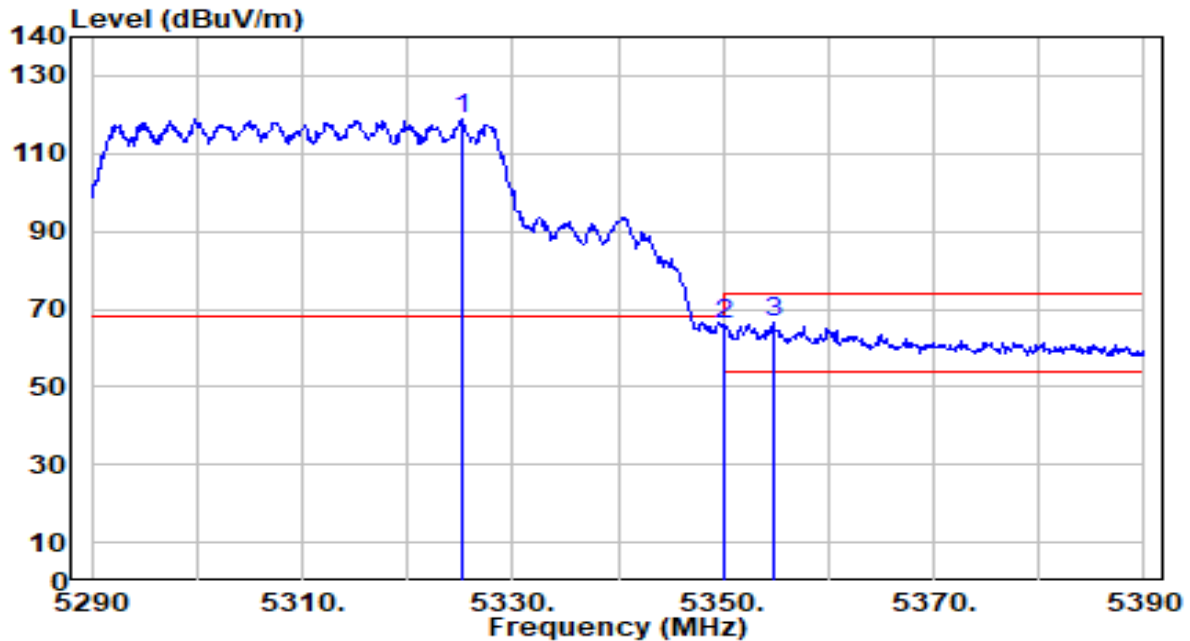


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5325.100	118.33	0.51	118.84	N/A	N/A	100	241	Peak
2	5350.000	65.52	0.47	65.99	-8.01	74.00	100	241	Peak
3	* 5354.800	65.85	0.46	66.31	-7.69	74.00	100	241	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

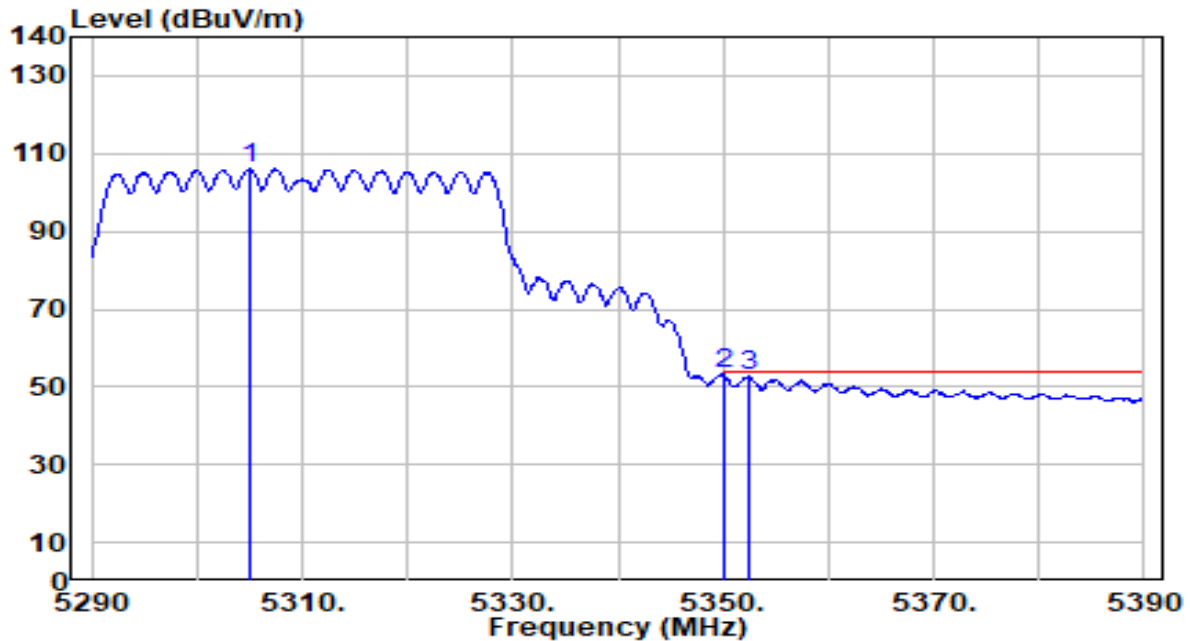


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5305.000	105.51	0.54	106.05	N/A	N/A	100	241	Average
2	*	5350.000	52.76	0.47	53.23	-0.77	54.00	100	241	Average
3		5352.500	52.19	0.47	52.66	-1.34	54.00	100	241	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

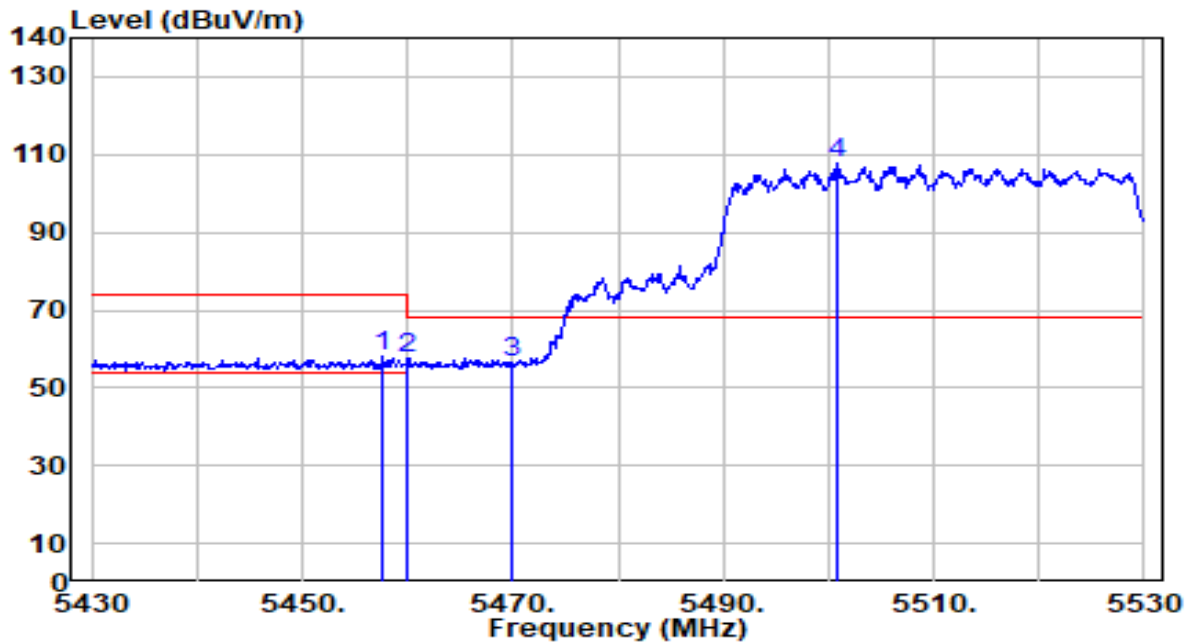


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.700	57.37	0.65	58.02	-15.98	74.00	200	99	Peak
2	5460.000	56.67	0.66	57.33	-16.67	74.00	200	99	Peak
3	* 5470.000	55.57	0.71	56.28	-11.92	68.20	200	99	Peak
4	5500.900	106.83	0.84	107.67	N/A	N/A	200	99	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

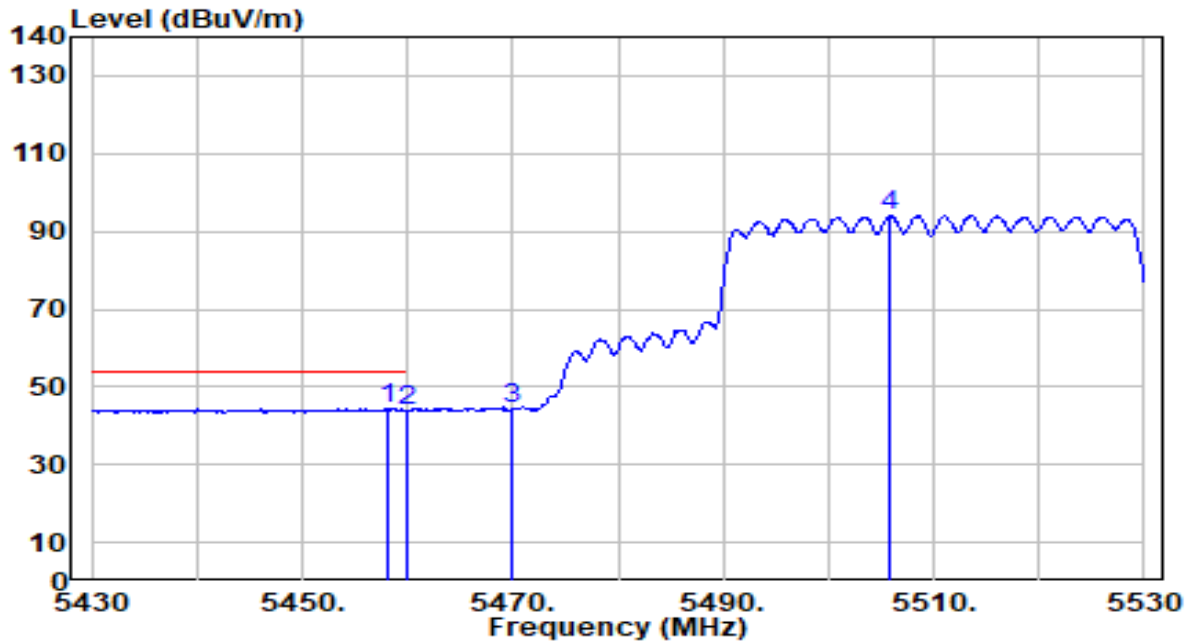


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.200	43.63	0.65	44.29	-9.71	54.00	200	99	Average
2		5460.000	43.23	0.66	43.89	-10.11	54.00	200	99	Average
3		5470.000	43.49	0.71	44.19	N/A	N/A	200	99	Average
4		5505.900	93.21	0.87	94.08	N/A	N/A	200	99	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

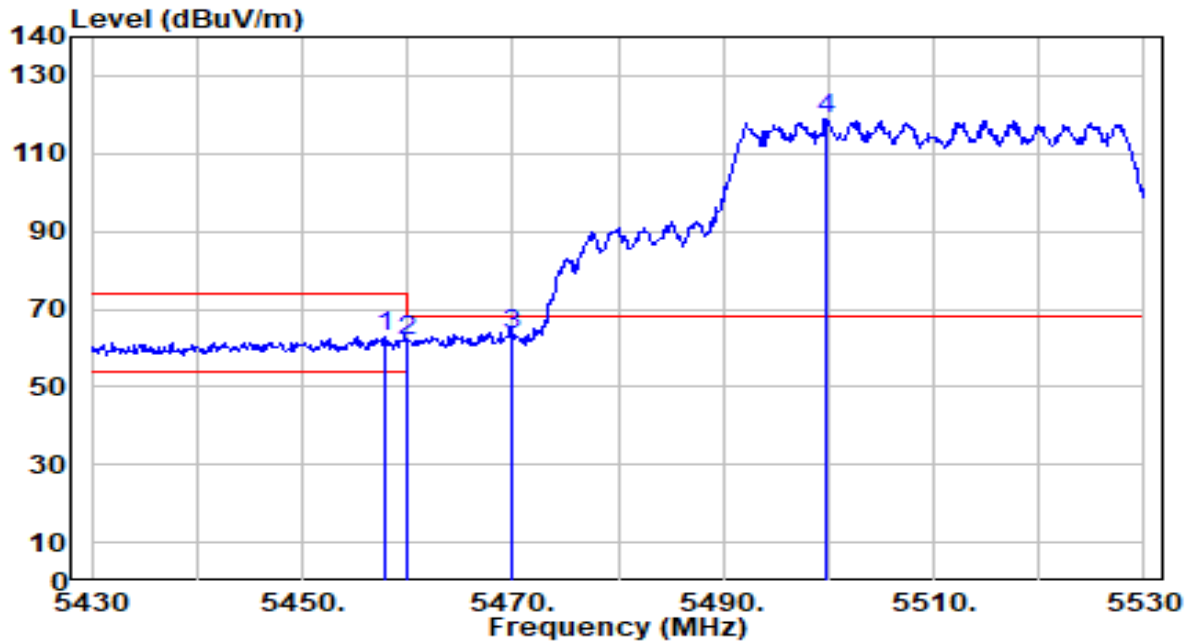


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.900	62.22	0.65	62.87	-11.13	74.00	114	187	Peak
2	5460.000	60.95	0.66	61.61	-12.39	74.00	114	187	Peak
3	* 5470.000	62.65	0.71	63.36	-4.84	68.20	114	187	Peak
4	5499.700	118.11	0.84	118.95	N/A	N/A	114	187	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

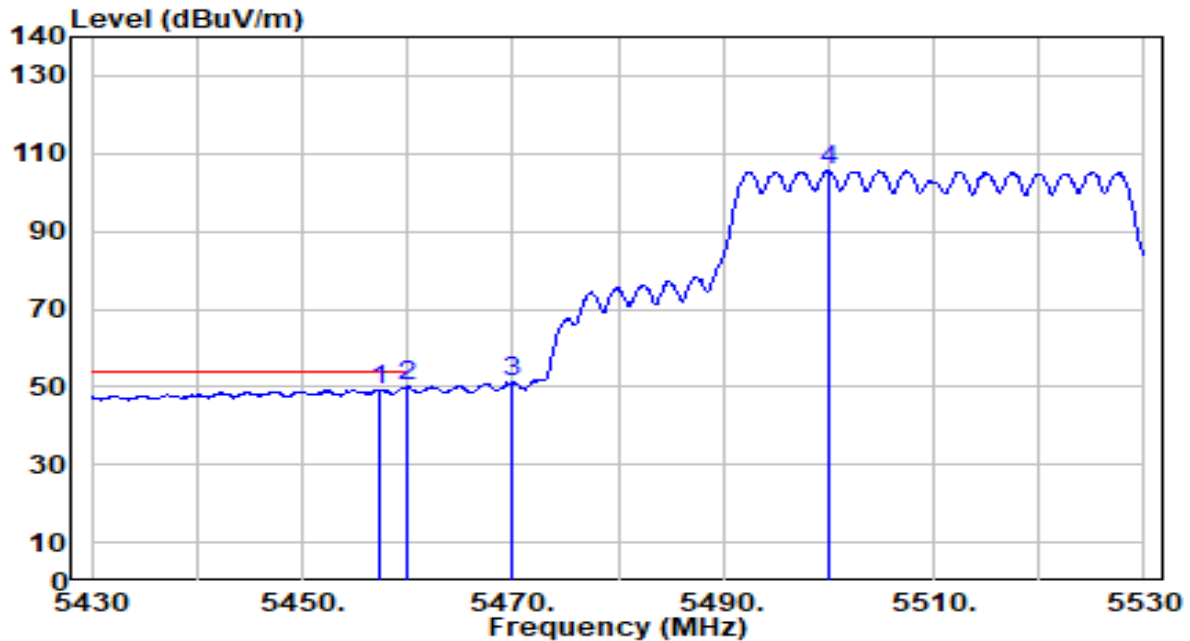


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5457.300	48.72	0.65	49.37	-4.63	54.00	114	187	Average
2	*	5460.000	49.33	0.66	50.00	-4.00	54.00	114	187	Average
3		5470.000	50.65	0.71	51.35	N/A	N/A	114	187	Average
4		5500.000	104.79	0.84	105.63	N/A	N/A	114	187	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

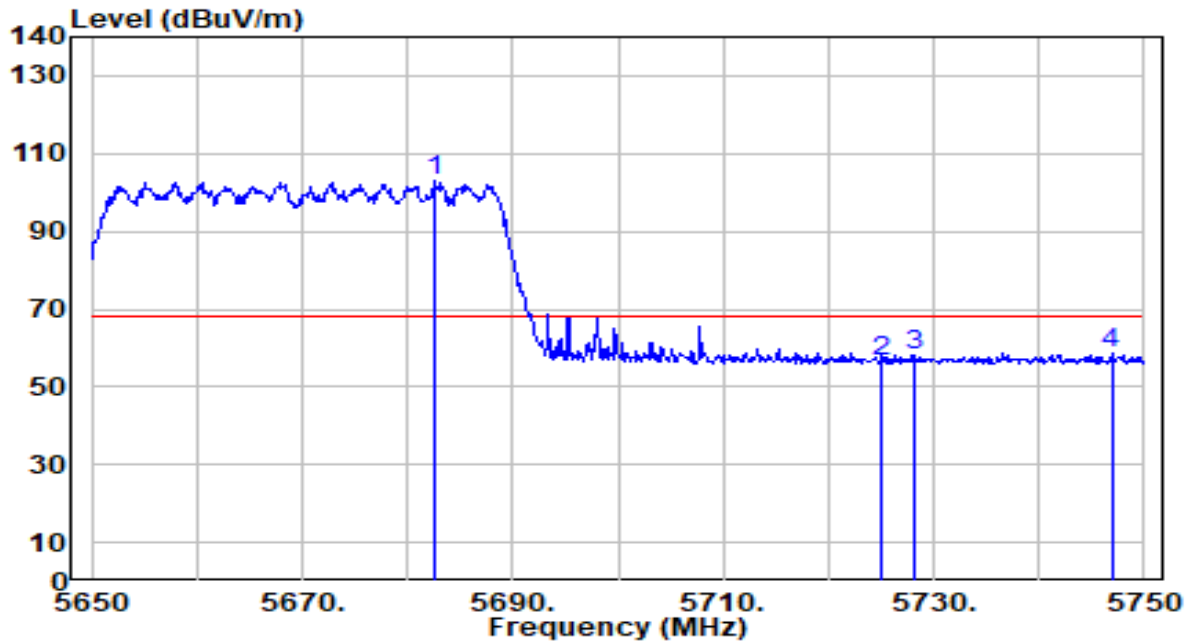


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5682.500	101.09	1.69	102.78	N/A	N/A	130	14	Peak
2	5725.000	54.58	1.89	56.48	-11.72	68.20	130	14	Peak
3	5728.200	56.08	1.91	57.98	-10.22	68.20	130	14	Peak
4	* 5746.900	56.57	2.00	58.56	-9.64	68.20	130	14	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

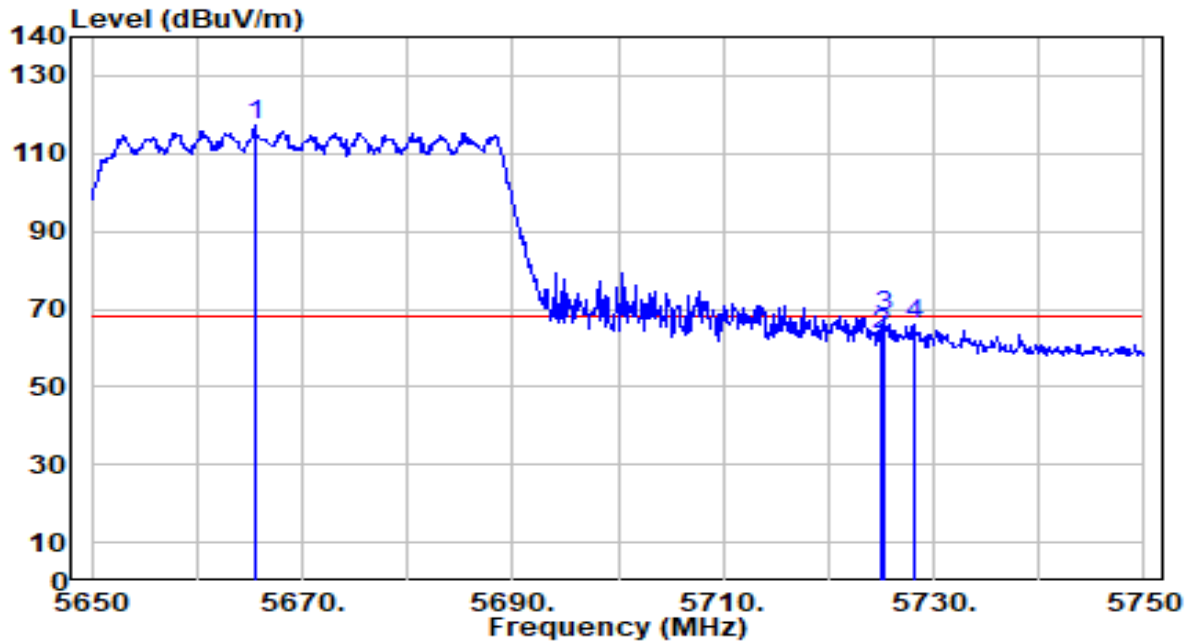


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5665.500	115.75	1.61	117.37	N/A	N/A	200	352	Peak
2	5725.000	61.70	1.89	63.59	-4.61	68.20	200	352	Peak
3	* 5725.200	66.11	1.89	68.01	-0.19	68.20	200	352	Peak
4	5728.100	63.98	1.91	65.89	-2.31	68.20	200	352	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

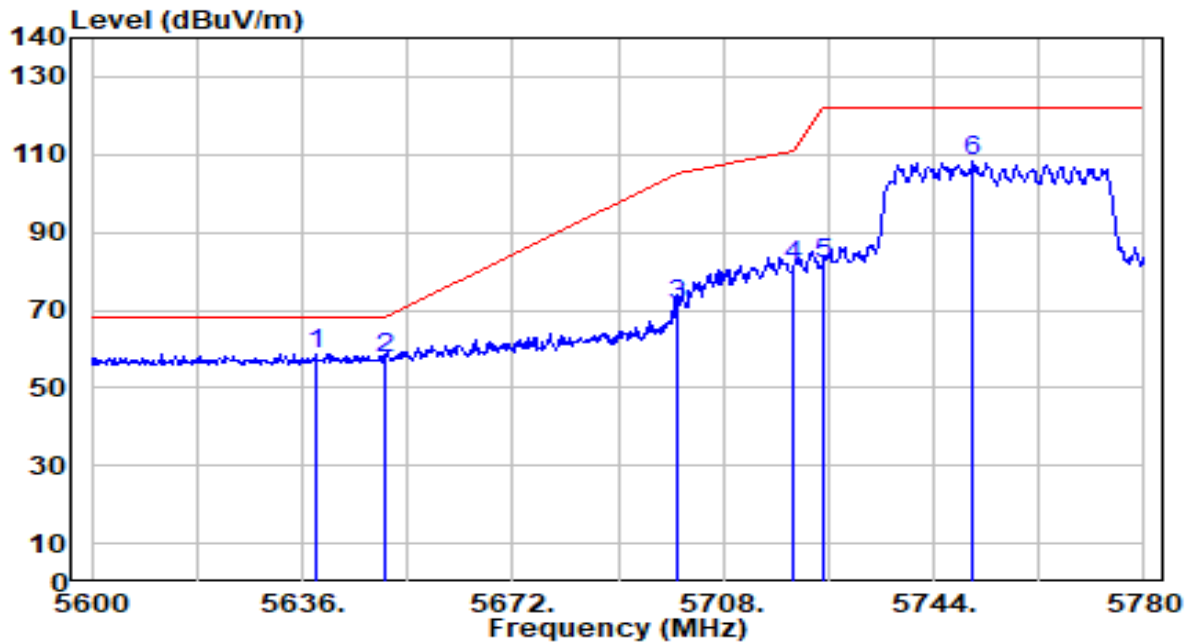


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5638.160	57.32	1.49	58.81	-9.39	68.20	150	95	Peak
2		5650.000	55.82	1.54	57.36	-10.84	68.20	150	95	Peak
3		5700.000	69.80	1.78	71.58	-33.62	105.20	150	95	Peak
4		5720.000	79.33	1.87	81.20	-29.60	110.80	150	95	Peak
5		5725.000	80.11	1.89	82.01	-40.19	122.20	150	95	Peak
6		5750.660	106.40	2.01	108.41	N/A	N/A	150	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

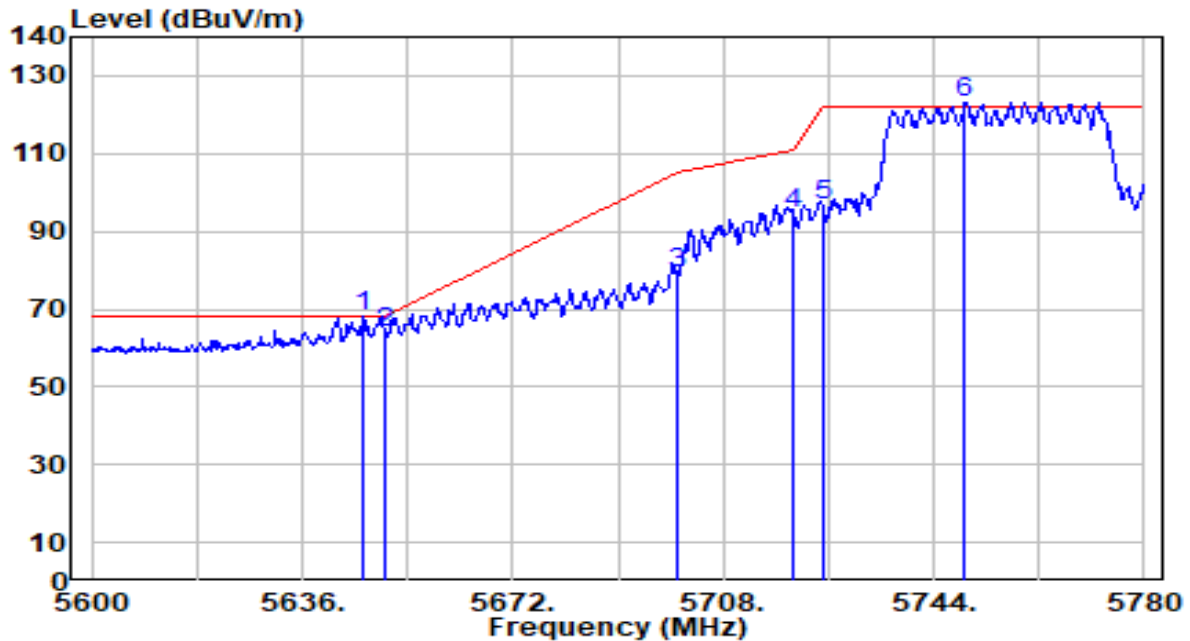


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.440	66.54	1.53	68.06	-0.14	68.20	200	250	Peak
2		5650.000	62.45	1.54	63.99	-4.21	68.20	200	250	Peak
3		5700.000	77.40	1.78	79.17	-26.03	105.20	200	250	Peak
4		5720.000	92.54	1.87	94.41	-16.39	110.80	200	250	Peak
5		5725.000	94.91	1.89	96.81	-25.39	122.20	200	250	Peak
6		5749.400	121.21	2.01	123.22	N/A	N/A	200	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

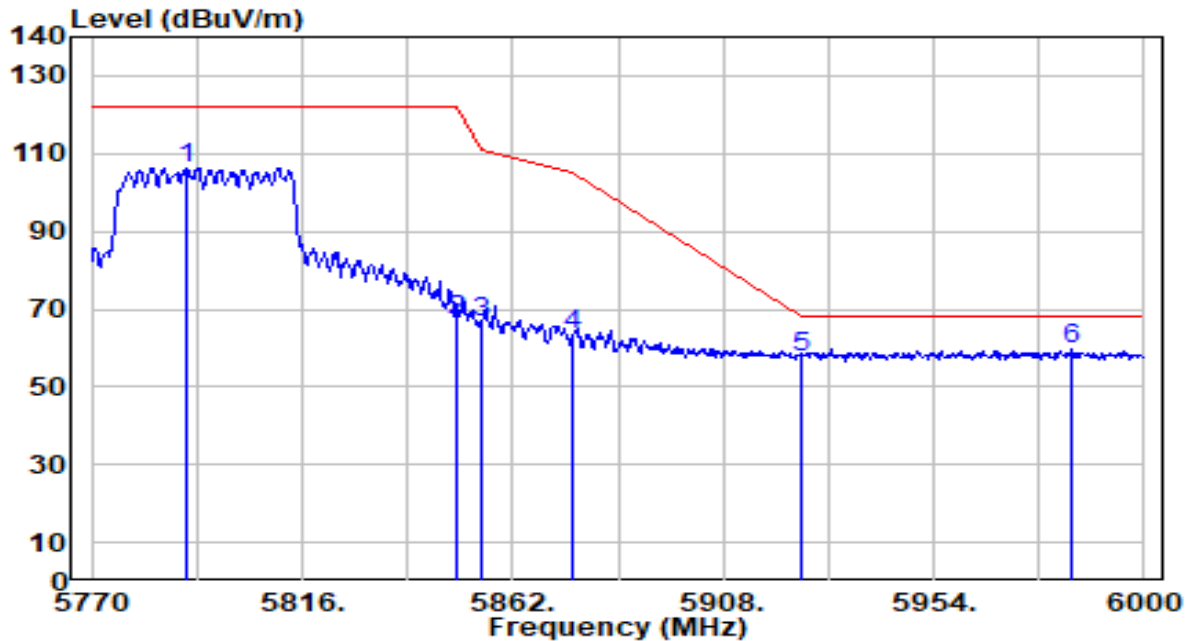


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5790.700	104.19	2.20	106.39	N/A	N/A	150	243	Peak
2	5850.000	65.11	2.25	67.36	-54.84	122.20	150	243	Peak
3	5855.000	64.52	2.25	66.78	-44.02	110.80	150	243	Peak
4	5875.000	61.01	2.26	63.27	-41.93	105.20	150	243	Peak
5	5925.000	55.11	2.27	57.37	-10.83	68.20	150	243	Peak
6	* 5984.360	57.59	2.28	59.87	-8.33	68.20	150	243	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

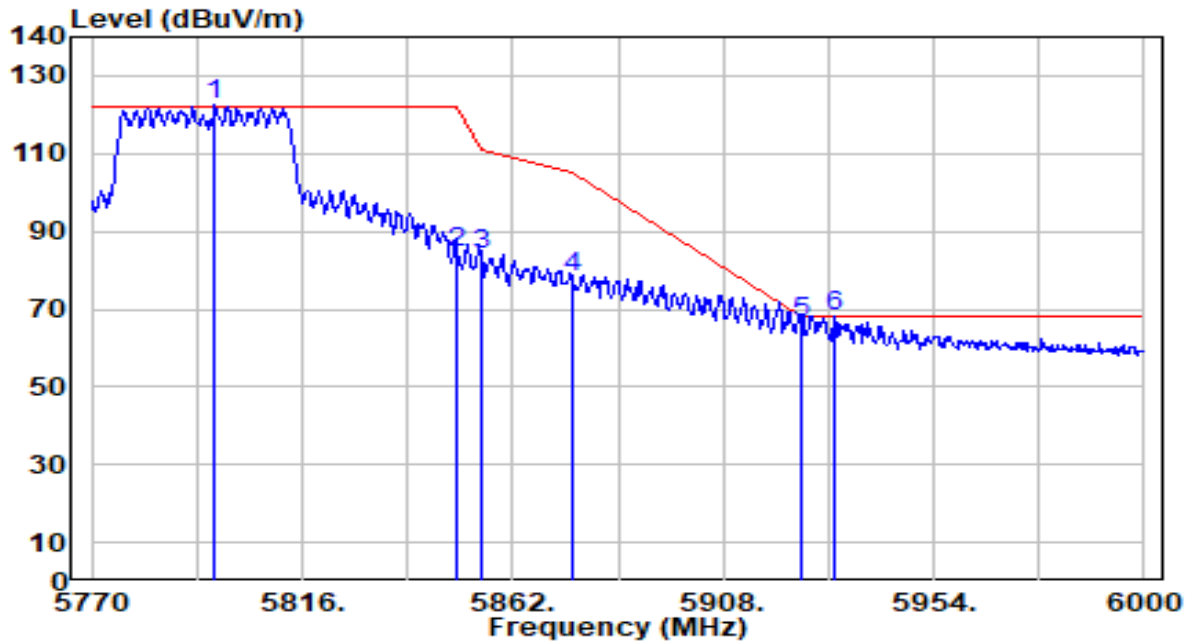


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5796.680	120.20	2.23	122.43	N/A	N/A	200	11	Peak
2	5850.000	82.02	2.25	84.27	-37.93	122.20	200	11	Peak
3	5855.000	81.66	2.25	83.91	-26.89	110.80	200	11	Peak
4	5875.000	75.88	2.26	78.13	-27.07	105.20	200	11	Peak
5	5925.000	64.11	2.27	66.38	-1.82	68.20	200	11	Peak
6	* 5932.380	65.78	2.27	68.05	-0.15	68.20	200	11	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

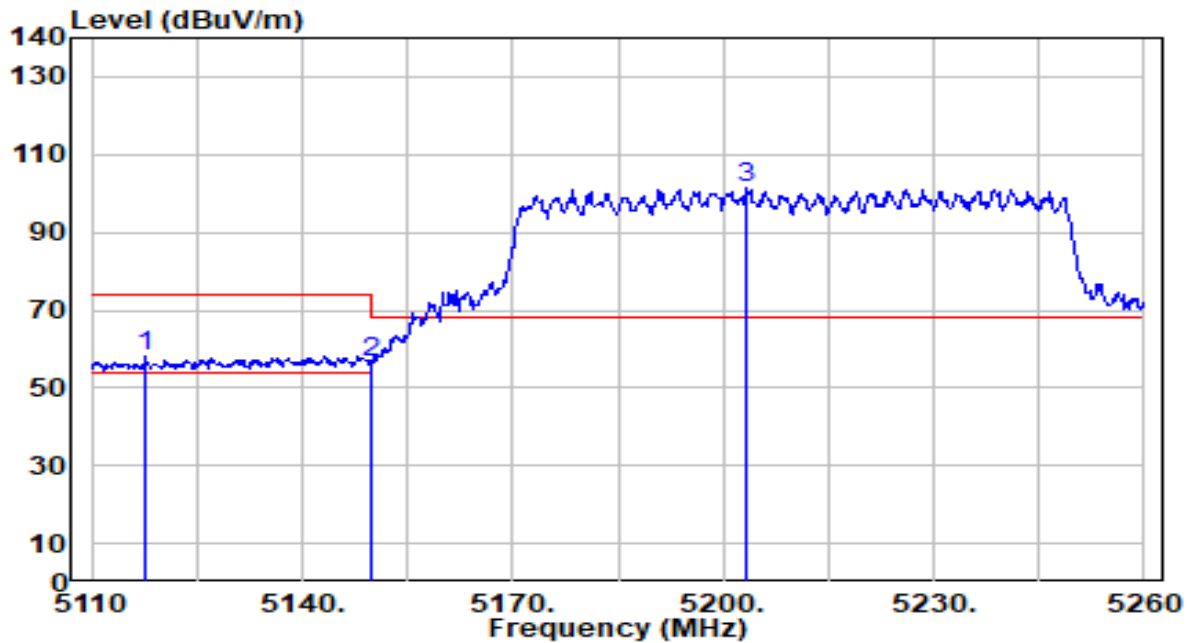


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5117.650	57.74	0.62	58.36	-15.64	74.00	150	237	Peak
2		5150.000	55.80	0.65	56.45	-17.55	74.00	150	237	Peak
3		5203.450	100.60	0.70	101.29	N/A	N/A	150	237	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

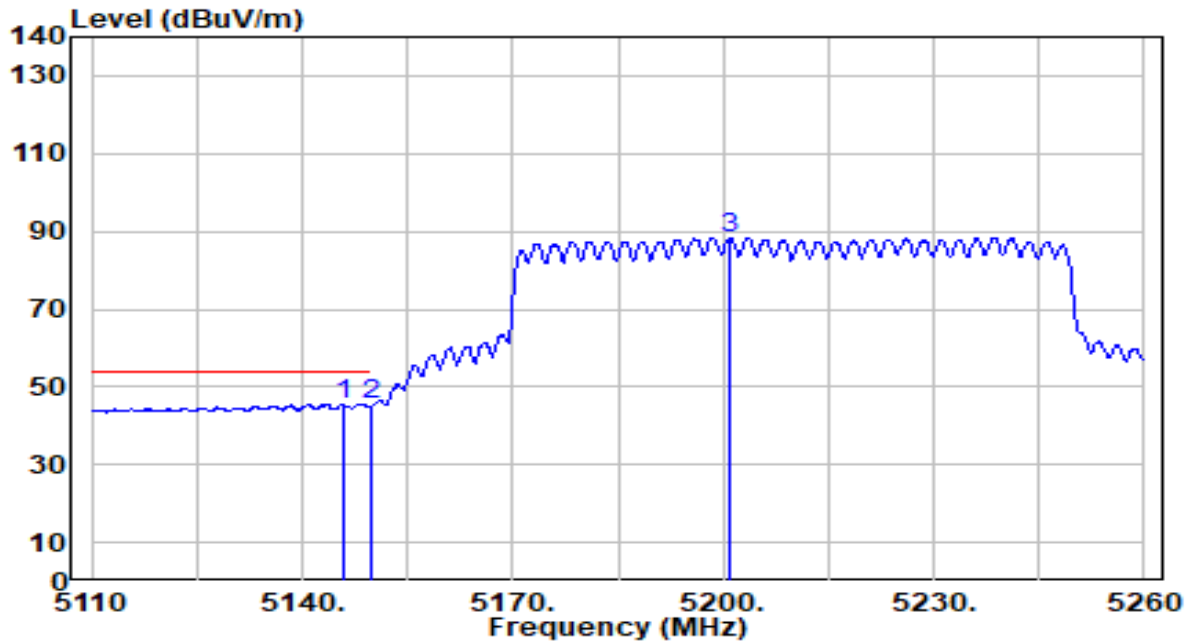


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.850	44.92	0.65	45.57	-8.43	54.00	150	237	Average
2		5150.000	44.69	0.65	45.34	-8.66	54.00	150	237	Average
3		5201.050	87.76	0.70	88.46	N/A	N/A	150	237	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

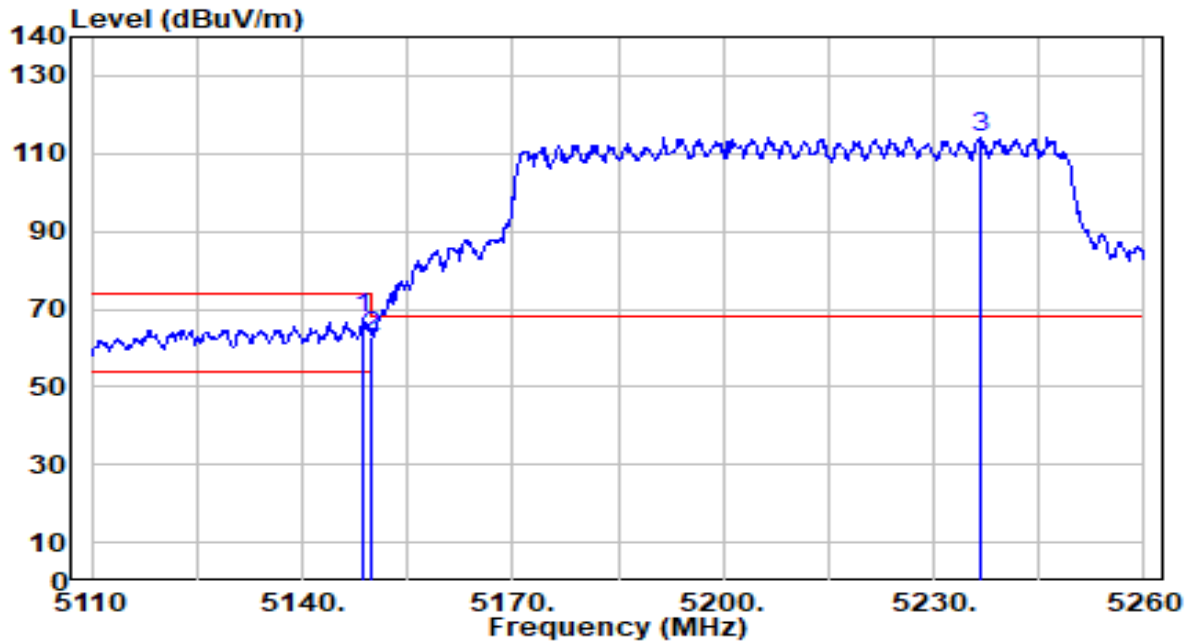


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.700	67.19	0.65	67.84	-6.16	74.00	100	185	Peak
2		5150.000	62.48	0.65	63.13	-10.87	74.00	100	185	Peak
3		5236.600	113.61	0.65	114.25	N/A	N/A	100	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

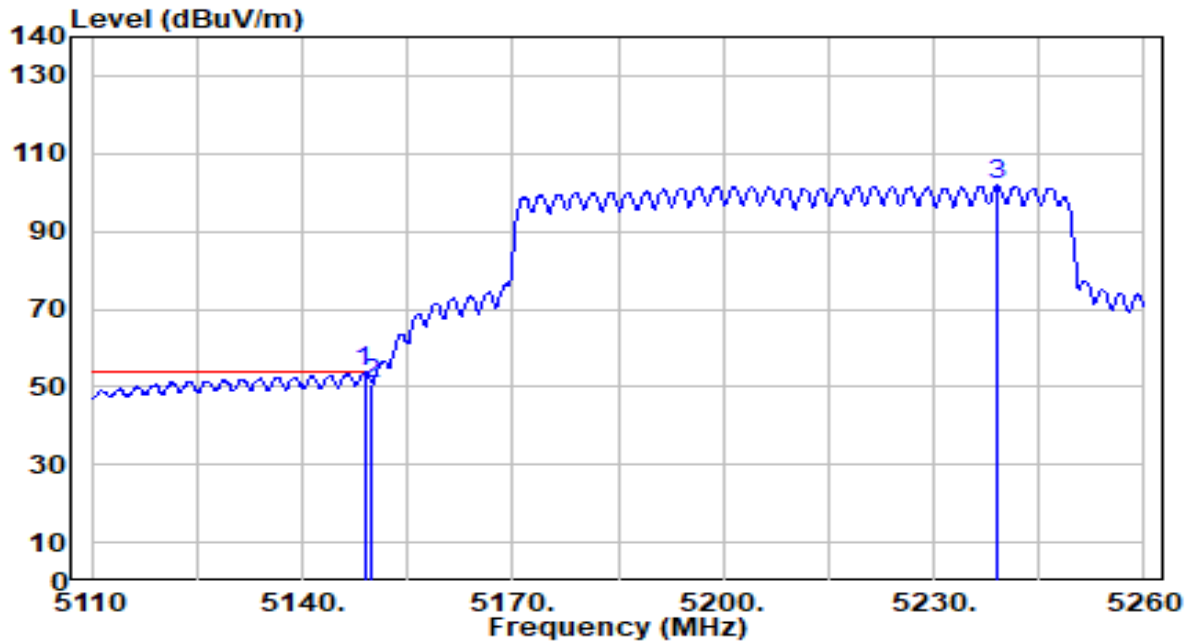


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.850	53.12	0.65	53.77	-0.23	54.00	100	185	Average
2		5150.000	50.17	0.65	50.82	-3.18	54.00	100	185	Average
3		5239.150	101.25	0.64	101.89	N/A	N/A	100	185	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

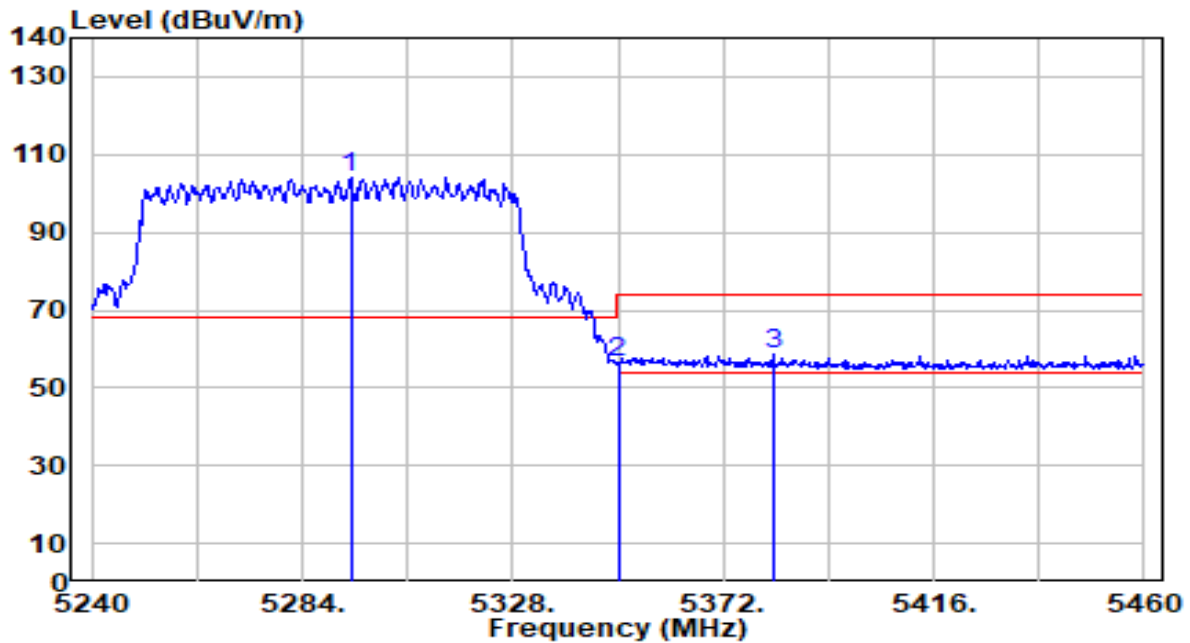


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5294.120	103.61	0.56	104.17	N/A	N/A	150	24	Peak
2	5350.000	55.90	0.47	56.37	-17.63	74.00	150	24	Peak
3	* 5382.560	58.33	0.42	58.75	-15.25	74.00	150	24	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

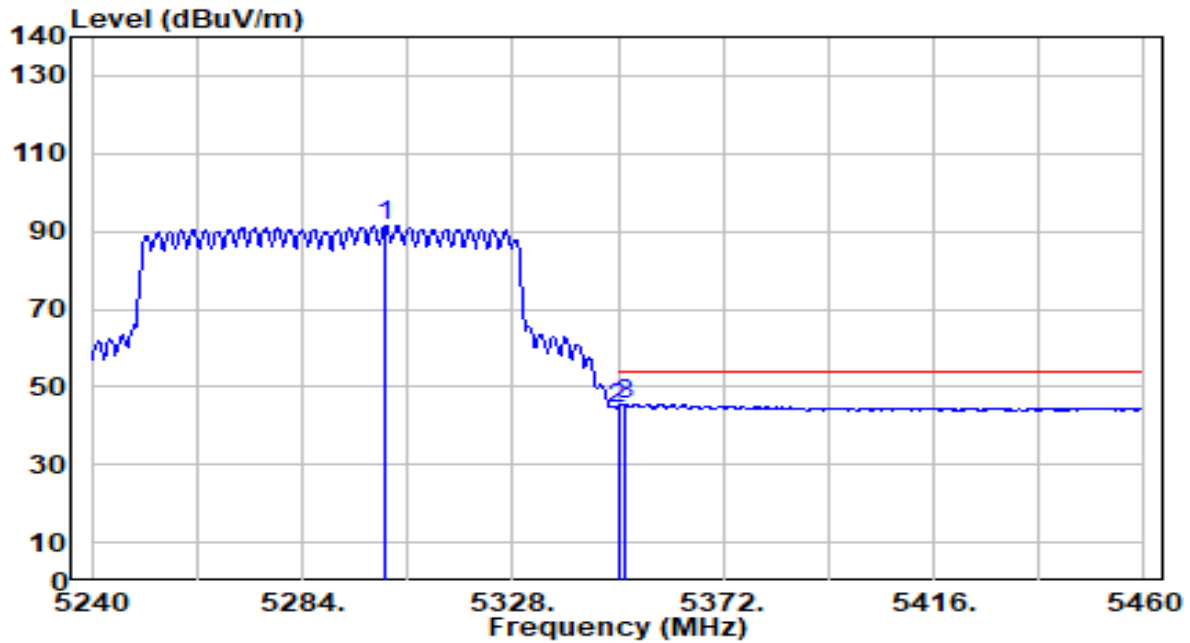


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5301.380	90.97	0.55	91.52	N/A	N/A	150	24	Average
2	5350.000	44.16	0.47	44.63	-9.37	54.00	150	24	Average
3	* 5351.540	45.18	0.47	45.65	-8.35	54.00	150	24	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

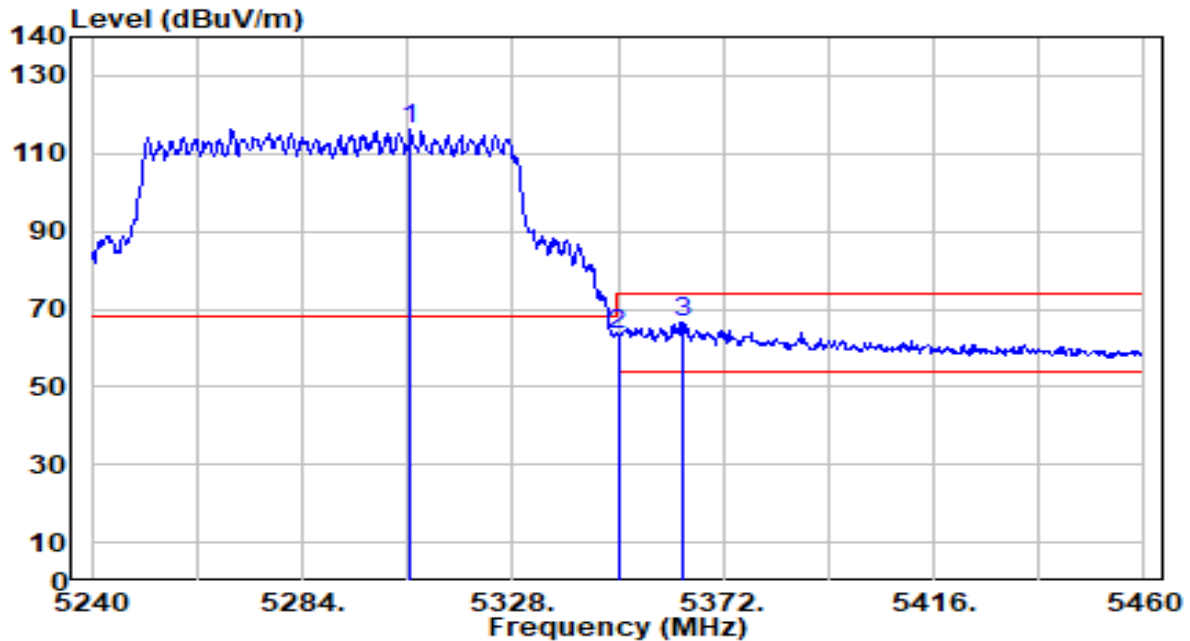


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5306.660	115.53	0.54	116.07	N/A	N/A	100	158	Peak
2	5350.000	63.15	0.47	63.62	-10.38	74.00	100	158	Peak
3	* 5363.420	66.04	0.45	66.49	-7.51	74.00	100	158	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

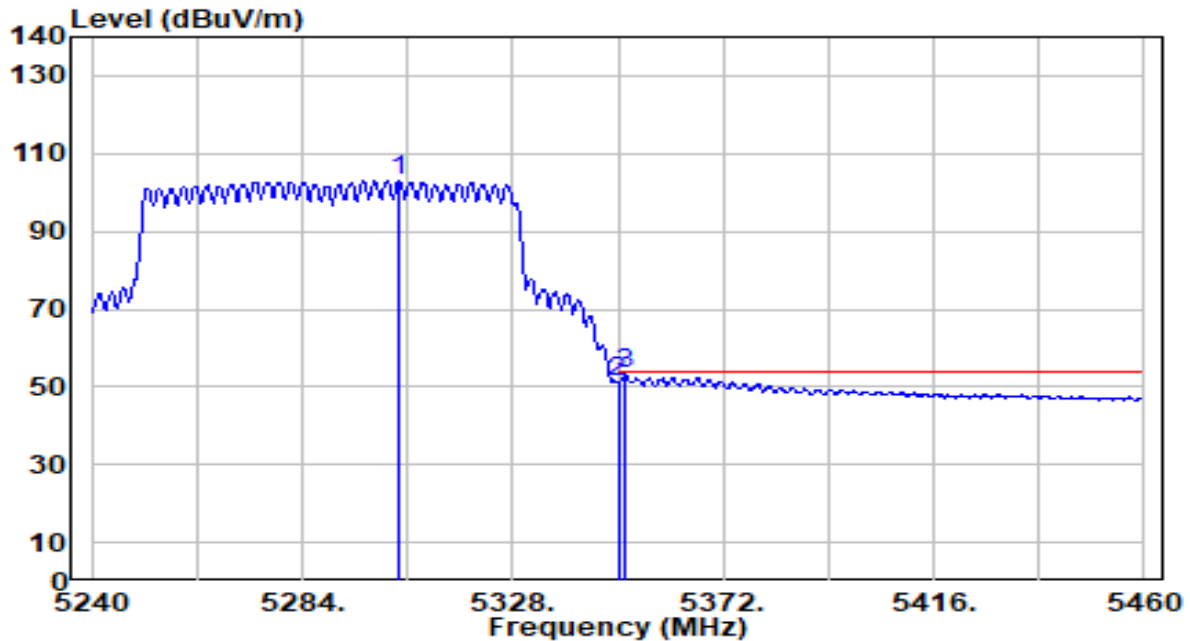


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5304.240	102.47	0.54	103.01	N/A	N/A	100	158	Average
2	5350.000	50.59	0.47	51.06	-2.94	54.00	100	158	Average
3	* 5351.540	52.66	0.47	53.13	-0.87	54.00	100	158	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

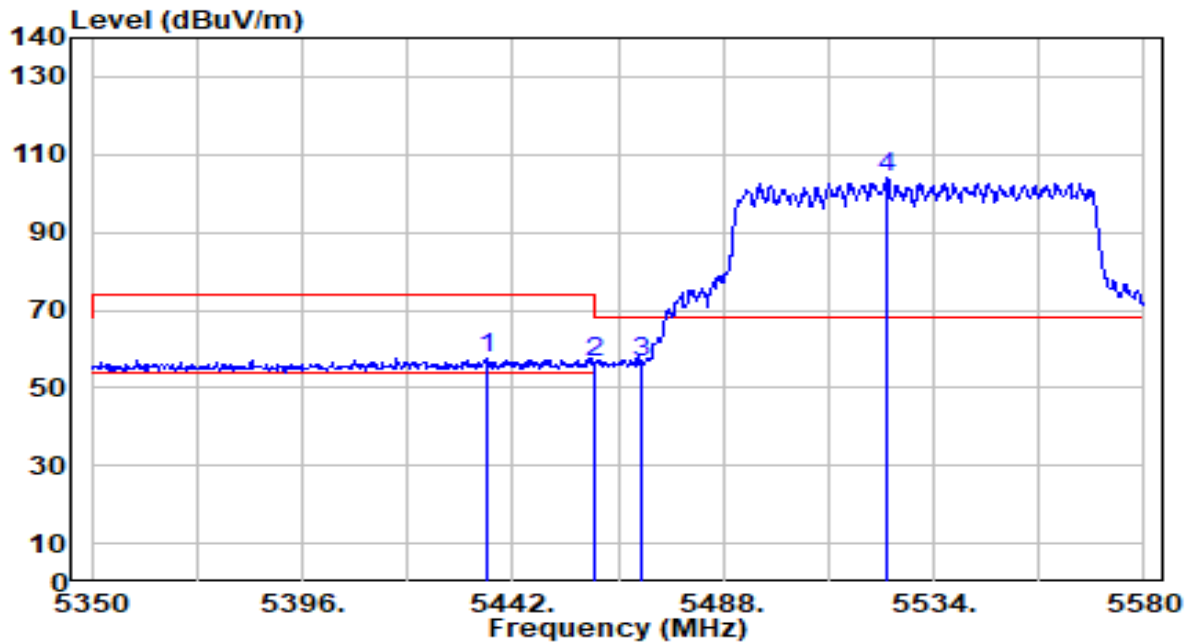


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5436.480	57.06	0.56	57.62	-16.38	74.00	158	98	Peak
2	5460.000	56.12	0.66	56.78	-17.22	74.00	158	98	Peak
3	* 5470.000	55.97	0.71	56.67	-11.53	68.20	158	98	Peak
4	5523.880	103.15	0.95	104.10	N/A	N/A	158	98	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

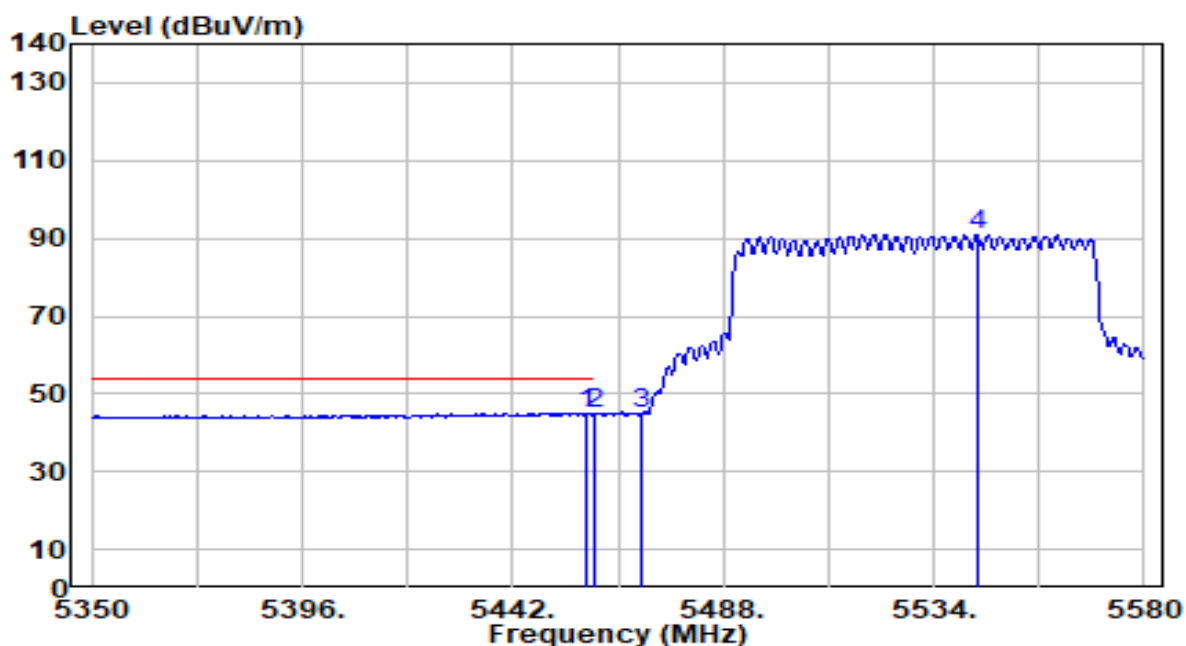


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.100	44.50	0.65	45.15	-8.85	54.00	158	98	Average
2		5460.000	44.05	0.66	44.71	-9.29	54.00	158	98	Average
3		5470.000	44.07	0.71	44.78	N/A	N/A	158	98	Average
4		5543.430	89.91	1.04	90.95	N/A	N/A	158	98	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

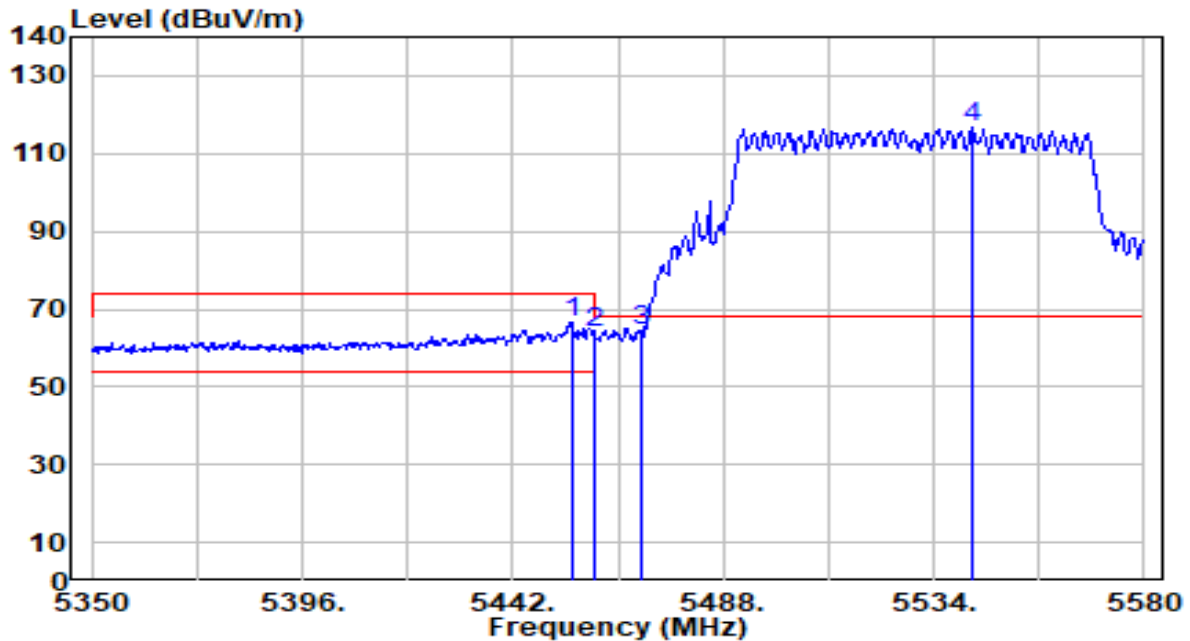


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.880	66.03	0.64	66.67	-7.33	74.00	120	187	Peak
2	5460.000	63.08	0.66	63.74	-10.26	74.00	120	187	Peak
3	* 5470.000	63.63	0.71	64.33	-3.87	68.20	120	187	Peak
4	5542.510	115.62	1.04	116.66	N/A	N/A	120	187	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

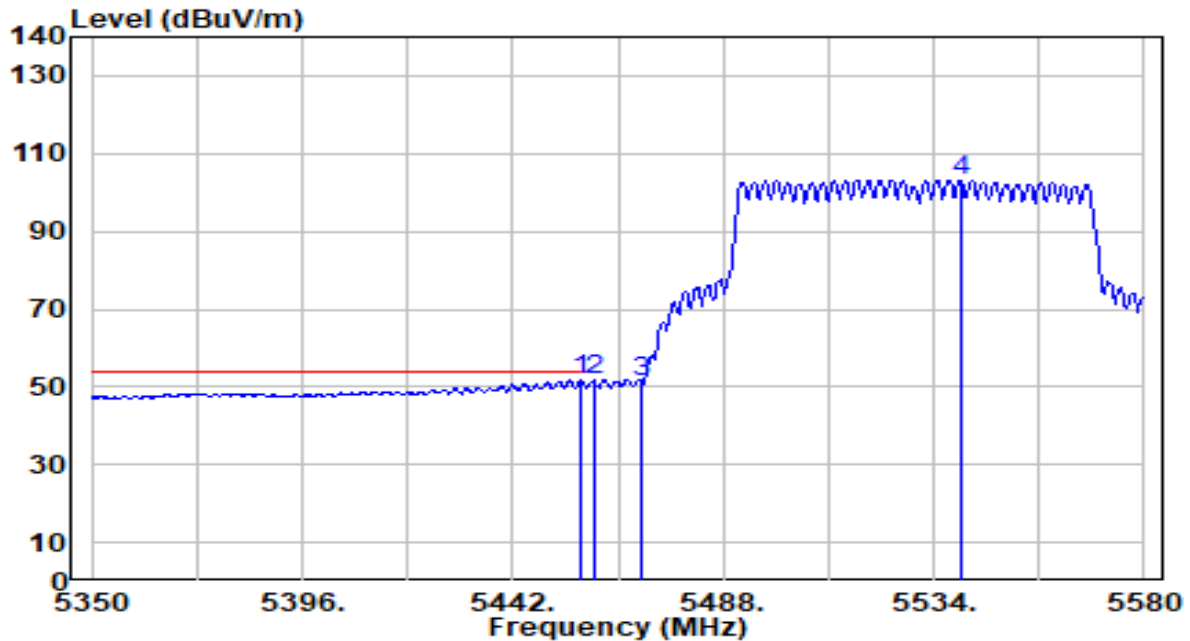


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5456.720	50.92	0.65	51.57	-2.43	54.00	120	187	Average
2	*	5460.000	50.95	0.66	51.62	-2.38	54.00	120	187	Average
3		5470.000	50.68	0.71	51.39	N/A	N/A	120	187	Average
4		5539.750	102.15	1.03	103.18	N/A	N/A	120	187	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

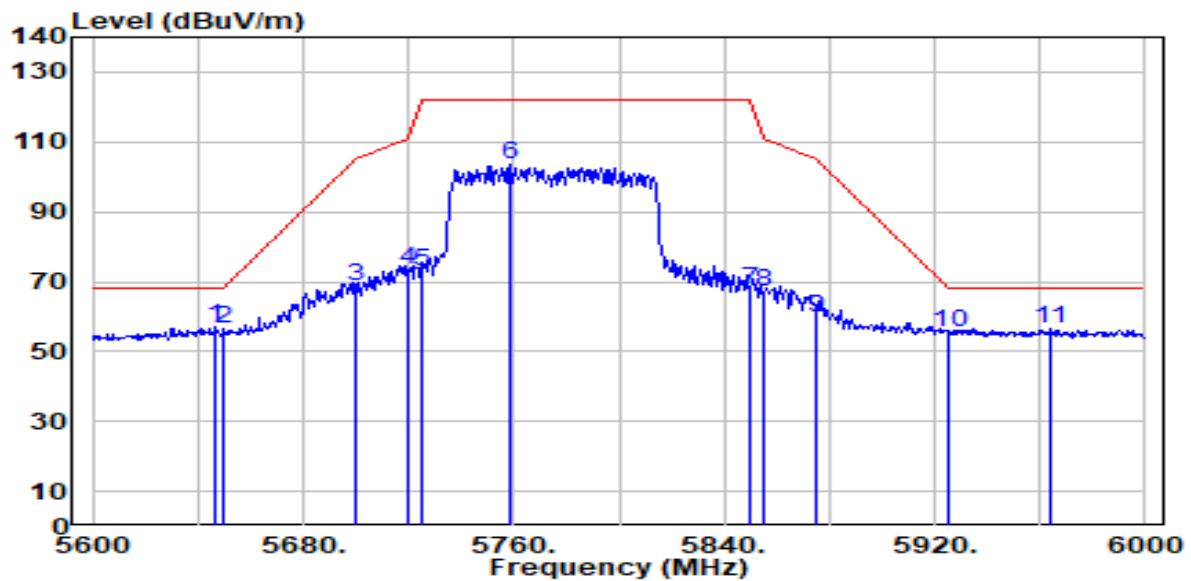


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.800	55.70	1.53	57.23	-10.97	68.20	150	245	Peak
2		5650.000	55.12	1.54	56.66	-11.54	68.20	150	245	Peak
3		5700.000	66.93	1.78	68.70	-36.50	105.20	150	245	Peak
4		5720.000	71.45	1.87	73.32	-37.48	110.80	150	245	Peak
5		5725.000	71.08	1.89	72.98	-49.22	122.20	150	245	Peak
6		5758.400	101.31	2.05	103.36	N/A	N/A	150	245	Peak
7		5850.000	65.12	2.25	67.38	-54.82	122.20	150	245	Peak
8		5855.000	65.02	2.25	67.27	-43.53	110.80	150	245	Peak
9		5875.000	57.44	2.26	59.70	-45.50	105.20	150	245	Peak
10		5925.000	53.28	2.27	55.55	-12.65	68.20	150	245	Peak
11		5963.600	54.06	2.27	56.33	-11.87	68.20	150	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

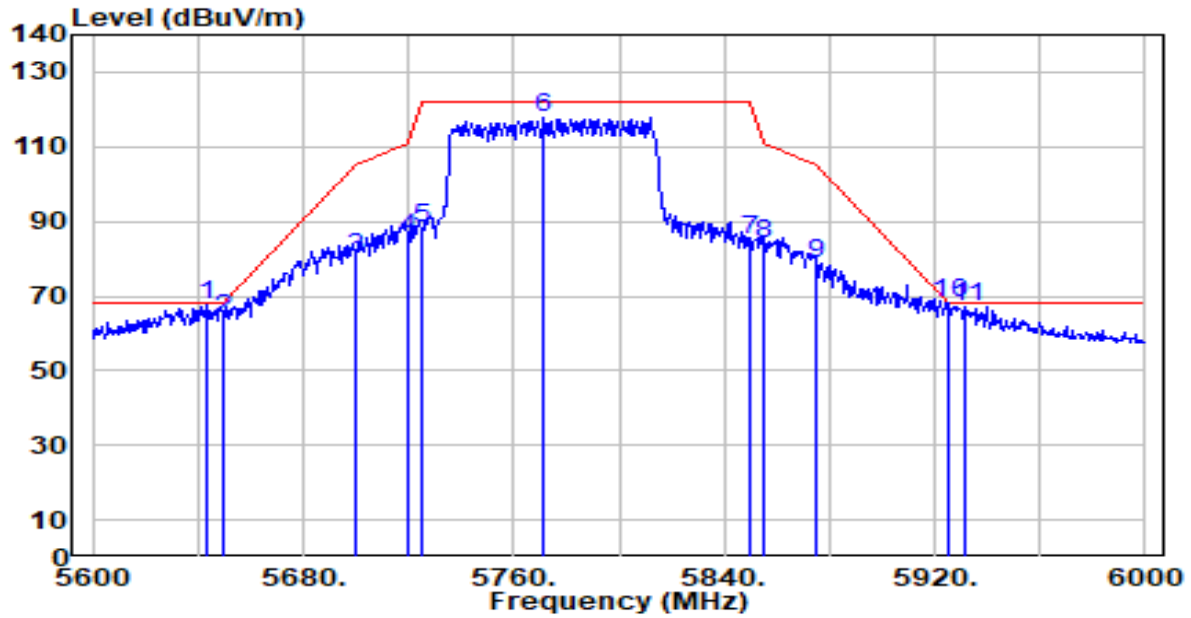


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5643.200	66.35	1.51	67.86	-0.34	68.20	200	319	Peak
2	5650.000	62.18	1.54	63.72	-4.48	68.20	200	319	Peak
3	5700.000	78.31	1.78	80.08	-25.12	105.20	200	319	Peak
4	5720.000	83.56	1.87	85.43	-25.37	110.80	200	319	Peak
5	5725.000	86.46	1.89	88.35	-33.85	122.20	200	319	Peak
6	5771.600	115.63	2.11	117.74	N/A	N/A	200	319	Peak
7	5850.000	83.04	2.25	85.30	-36.90	122.20	200	319	Peak
8	5855.000	81.65	2.25	83.90	-26.90	110.80	200	319	Peak
9	5875.000	76.64	2.26	78.90	-26.30	105.20	200	319	Peak
10 *	5925.000	65.66	2.27	67.92	-0.28	68.20	200	319	Peak
11	5932.000	65.06	2.27	67.33	-0.87	68.20	200	319	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

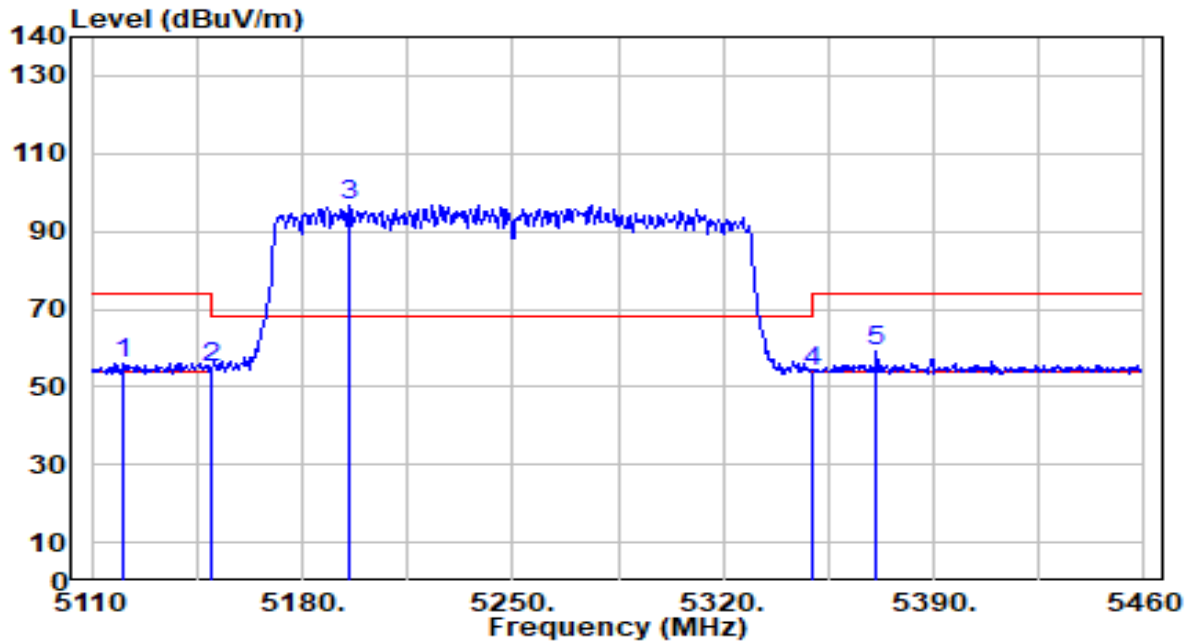


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5120.850	55.61	0.63	56.23	-17.77	74.00	150	236	Peak
2	5150.000	54.30	0.65	54.96	-19.04	74.00	150	236	Peak
3	5195.400	96.16	0.70	96.85	N/A	N/A	150	236	Peak
4	5350.000	53.57	0.47	54.04	-19.96	74.00	150	236	Peak
5	* 5371.100	58.59	0.44	59.03	-14.97	74.00	150	236	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

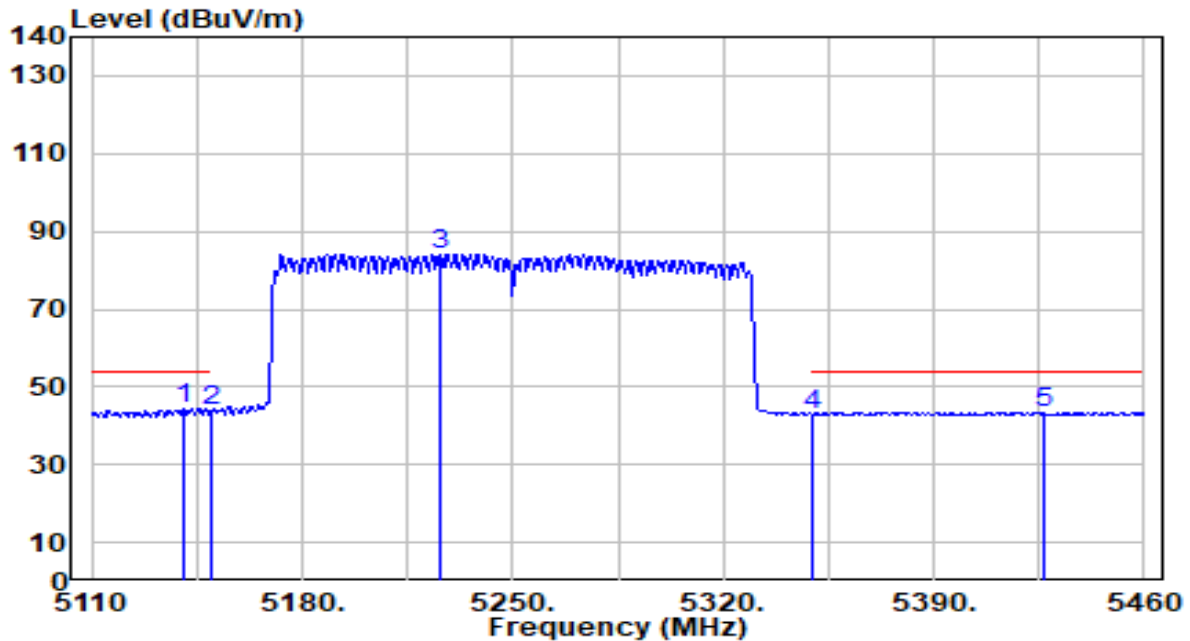


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5140.450	43.85	0.64	44.49	-9.51	54.00	150	236	Average
2		5150.000	43.00	0.65	43.66	-10.34	54.00	150	236	Average
3		5225.850	83.44	0.66	84.10	N/A	N/A	150	236	Average
4		5350.000	42.46	0.47	42.93	-11.07	54.00	150	236	Average
5		5426.400	42.96	0.51	43.47	-10.53	54.00	150	236	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

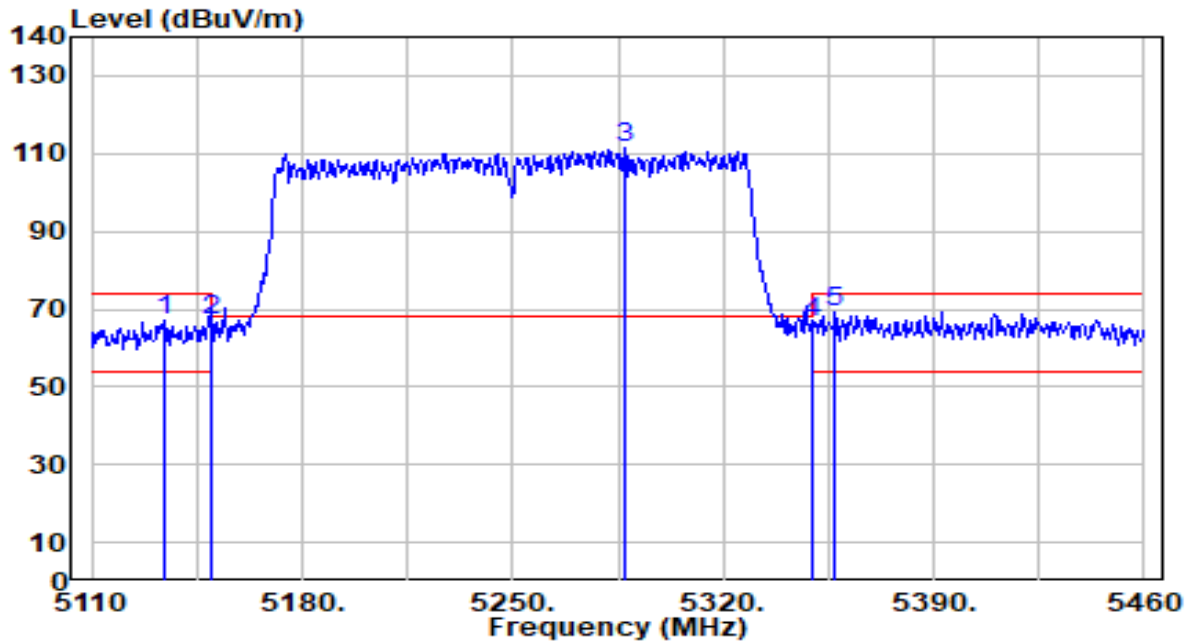


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5134.500	66.59	0.64	67.22	-6.78	74.00	100	188	Peak
2	5150.000	66.65	0.65	67.31	-6.69	74.00	100	188	Peak
3	5287.450	110.78	0.57	111.35	N/A	N/A	100	188	Peak
4	5350.000	66.08	0.47	66.55	-7.45	74.00	100	188	Peak
5	* 5357.100	68.66	0.46	69.12	-4.88	74.00	100	188	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

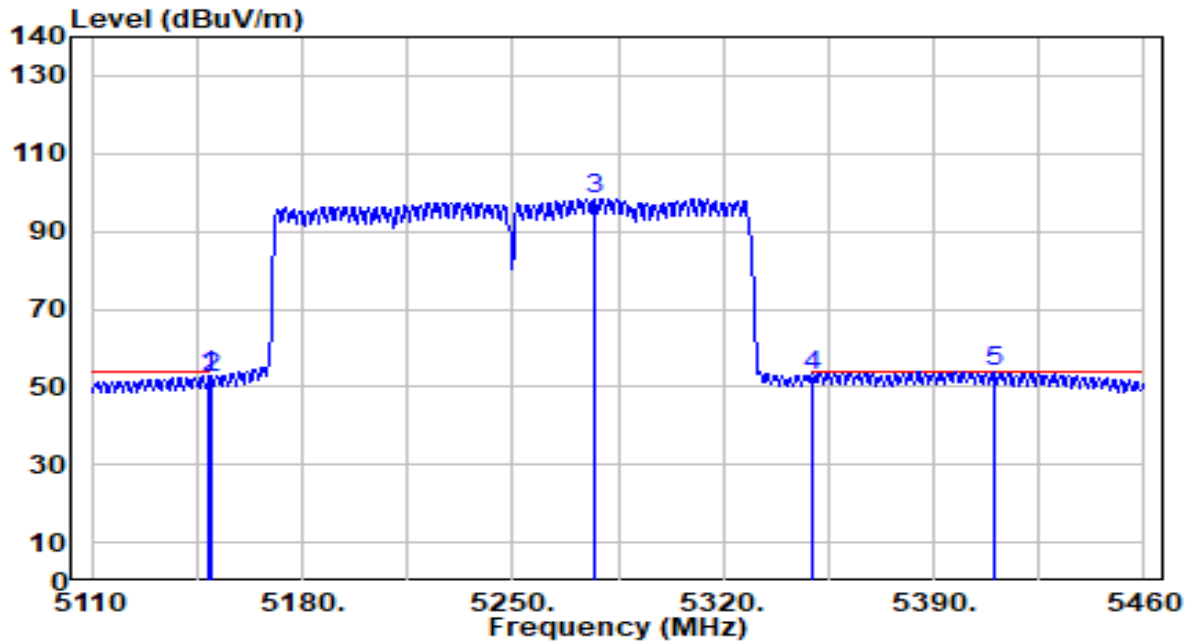


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.200	52.07	0.65	52.73	-1.27	54.00	100	188	Average
2	5150.000	51.41	0.65	52.06	-1.94	54.00	100	188	Average
3	5276.950	97.90	0.58	98.49	N/A	N/A	100	188	Average
4	5350.000	52.58	0.47	53.05	-0.95	54.00	100	188	Average
5	* 5409.950	53.38	0.44	53.82	-0.18	54.00	100	188	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

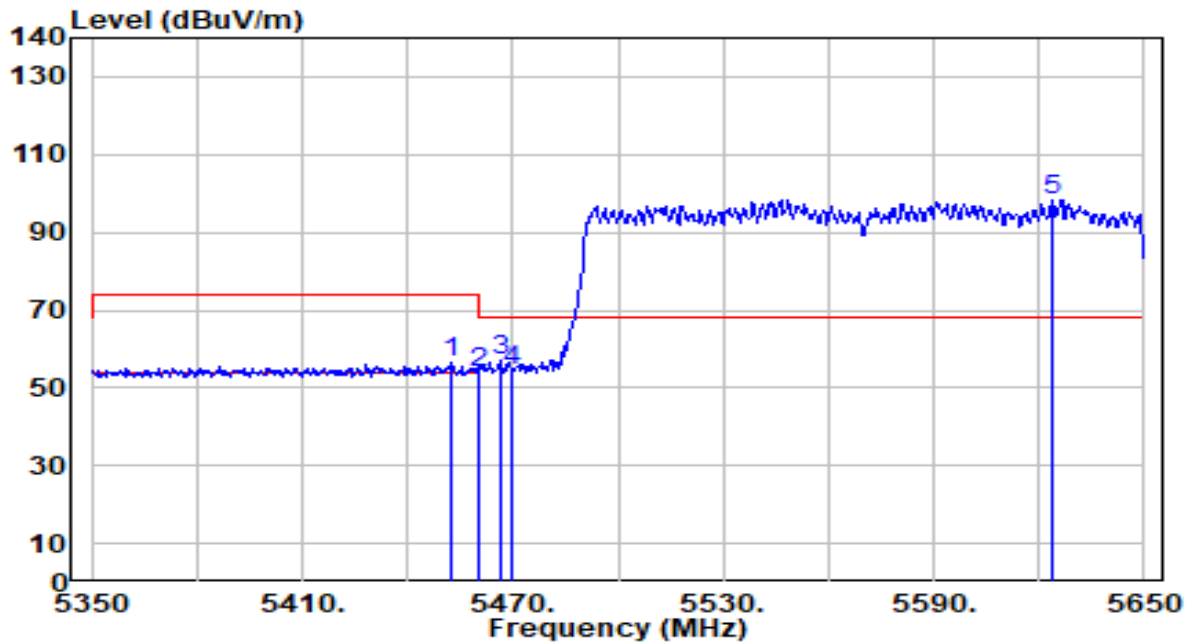


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5452.600	56.02	0.63	56.65	-17.35	74.00	150	100	Peak
2	5460.000	53.08	0.66	53.74	-20.26	74.00	150	100	Peak
3	* 5466.400	56.21	0.69	56.90	-11.30	68.20	150	100	Peak
4	5470.000	53.59	0.71	54.30	-13.90	68.20	150	100	Peak
5	5623.900	96.98	1.42	98.40	N/A	N/A	150	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

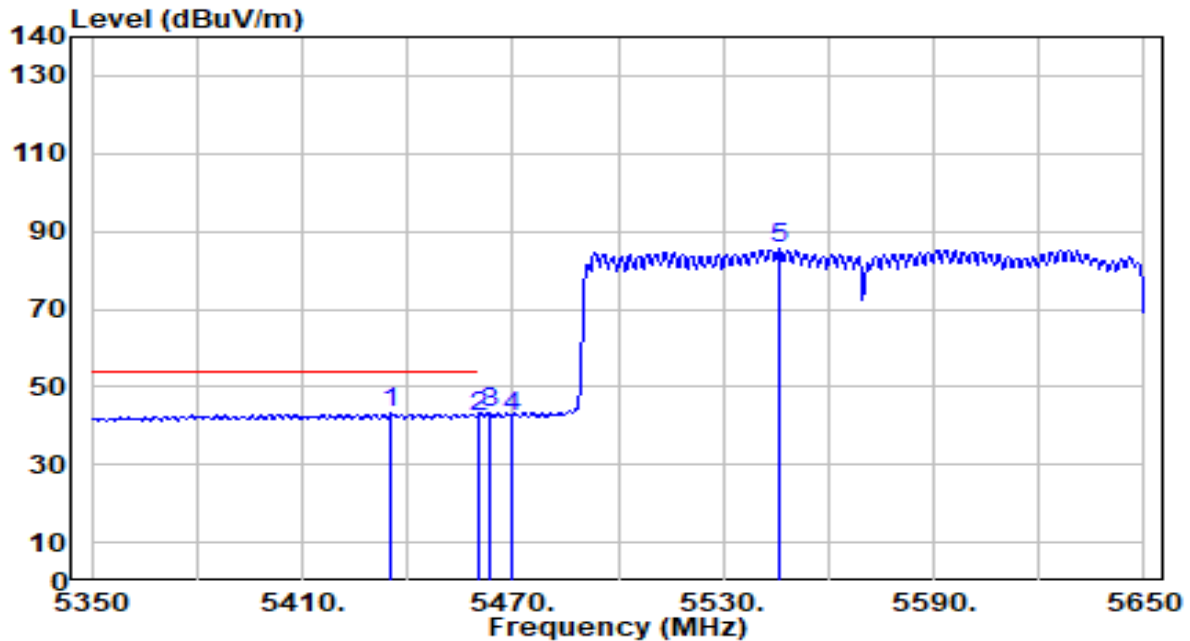


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5435.500	42.52	0.55	43.07	-10.93	54.00	150	100	Average
2		5460.000	41.77	0.66	42.43	-11.57	54.00	150	100	Average
3		5463.100	42.81	0.68	43.48	N/A	N/A	150	100	Average
4		5470.000	41.74	0.71	42.44	N/A	N/A	150	100	Average
5		5545.900	84.57	1.05	85.62	N/A	N/A	150	100	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

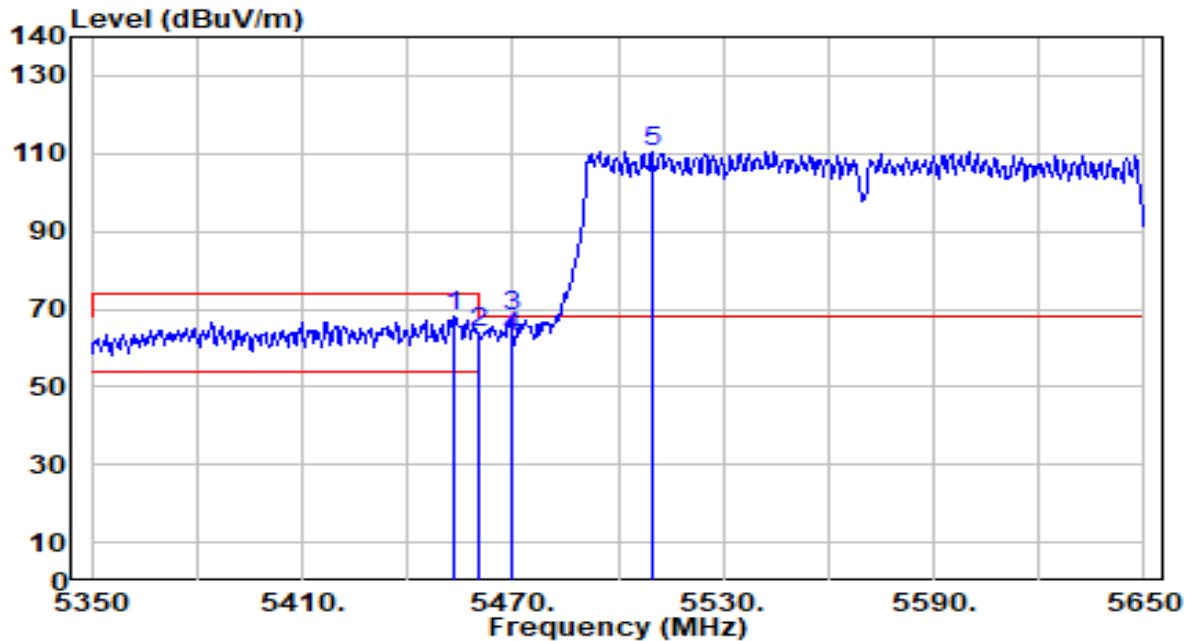


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5453.500	67.72	0.63	68.35	-5.65	74.00	120	186	Peak
2	5460.000	63.38	0.66	64.05	-9.95	74.00	120	186	Peak
3	* 5469.400	67.34	0.70	68.04	-0.16	68.20	120	186	Peak
4	5470.000	61.95	0.71	62.66	-5.54	68.20	120	186	Peak
5	5509.600	109.61	0.88	110.50	N/A	N/A	120	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

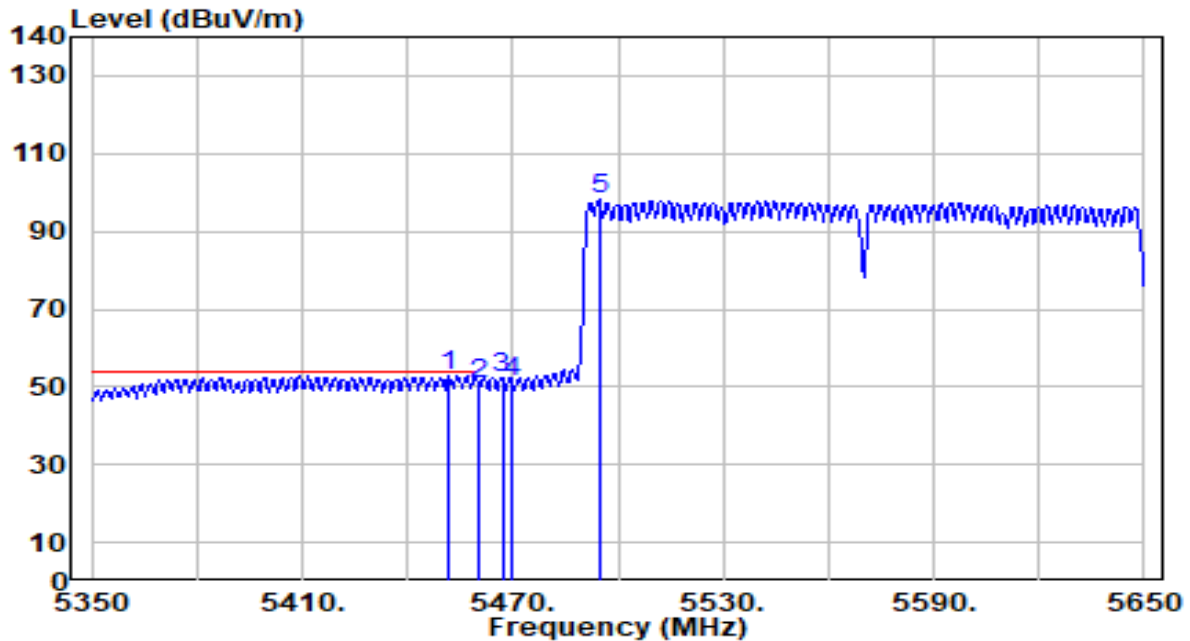


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5451.700	52.10	0.62	52.73	-1.27	54.00	120	186	Average
2		5460.000	50.24	0.66	50.91	-3.09	54.00	120	186	Average
3		5467.000	51.66	0.69	52.35	N/A	N/A	120	186	Average
4		5470.000	50.59	0.71	51.30	N/A	N/A	120	186	Average
5		5494.600	97.22	0.82	98.04	N/A	N/A	120	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

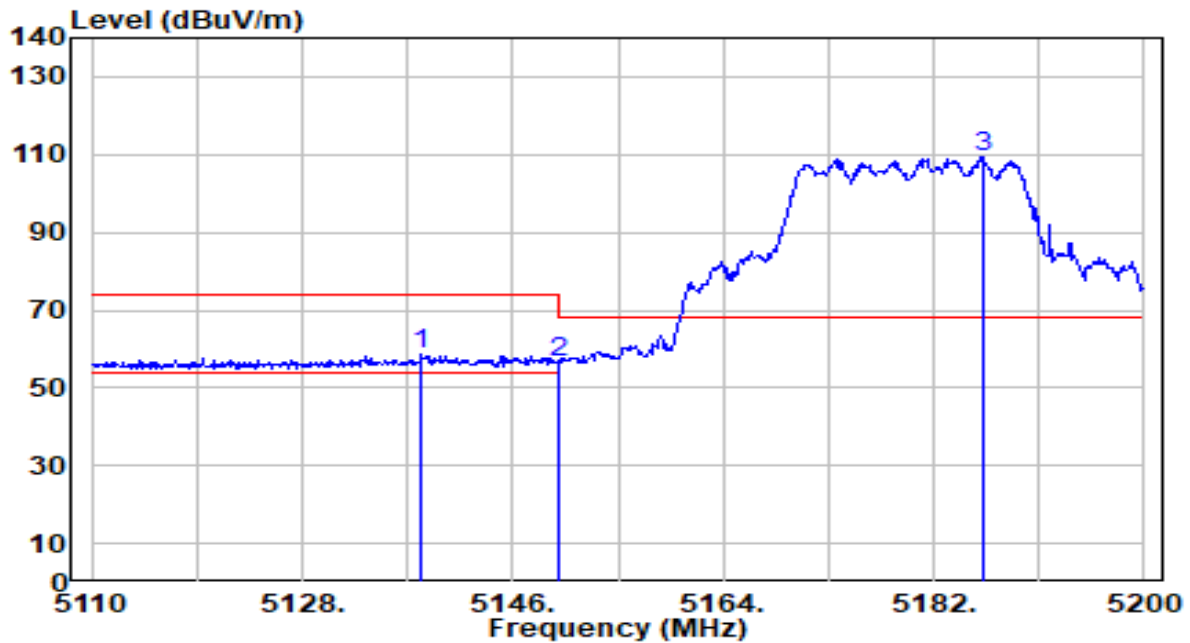


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5138.170	57.94	0.64	58.59	-15.41	74.00	150	259	Peak
2		5150.000	55.77	0.65	56.43	-17.57	74.00	150	259	Peak
3		5186.140	108.91	0.69	109.59	N/A	N/A	150	259	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

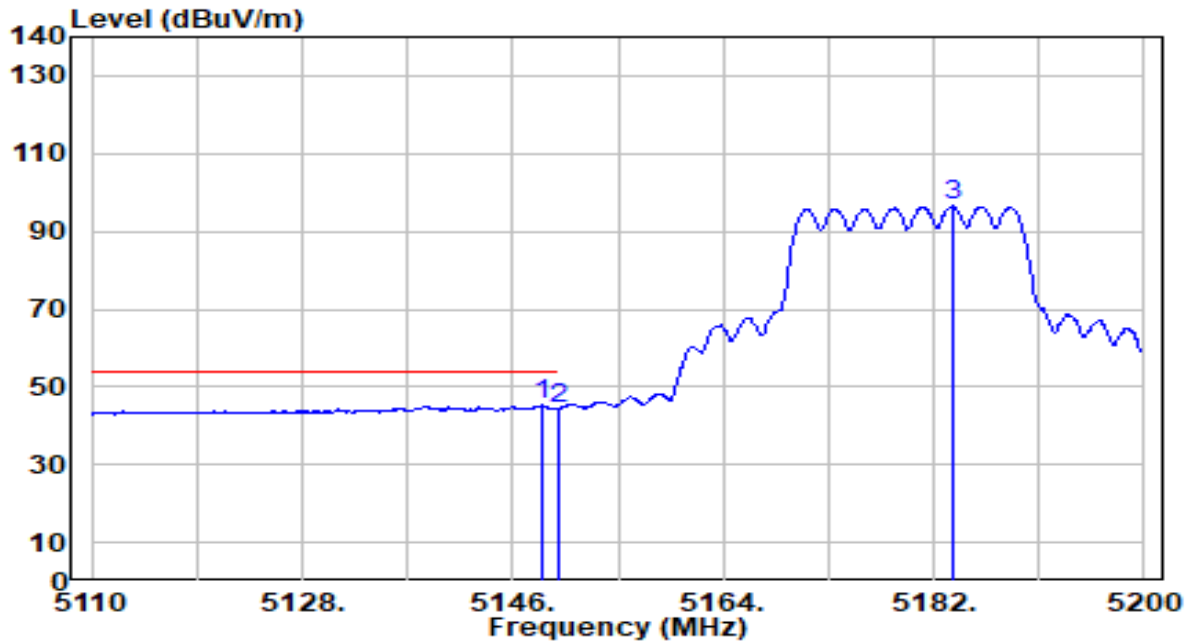


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.610	44.65	0.65	45.30	-8.70	54.00	150	259	Average
2		5150.000	43.99	0.65	44.64	-9.36	54.00	150	259	Average
3		5183.710	95.80	0.69	96.49	N/A	N/A	150	259	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

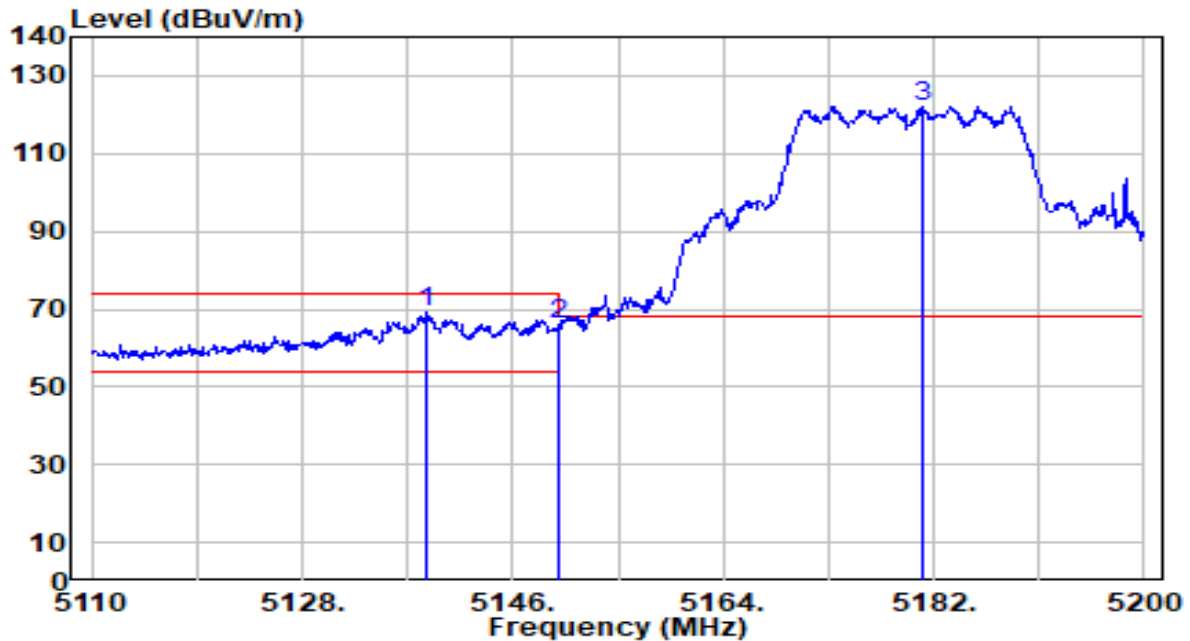


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5138.710	68.62	0.64	69.26	-4.74	74.00	100	230	Peak
2		5150.000	65.28	0.65	65.93	-8.07	74.00	100	230	Peak
3		5181.100	121.55	0.68	122.24	N/A	N/A	100	230	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

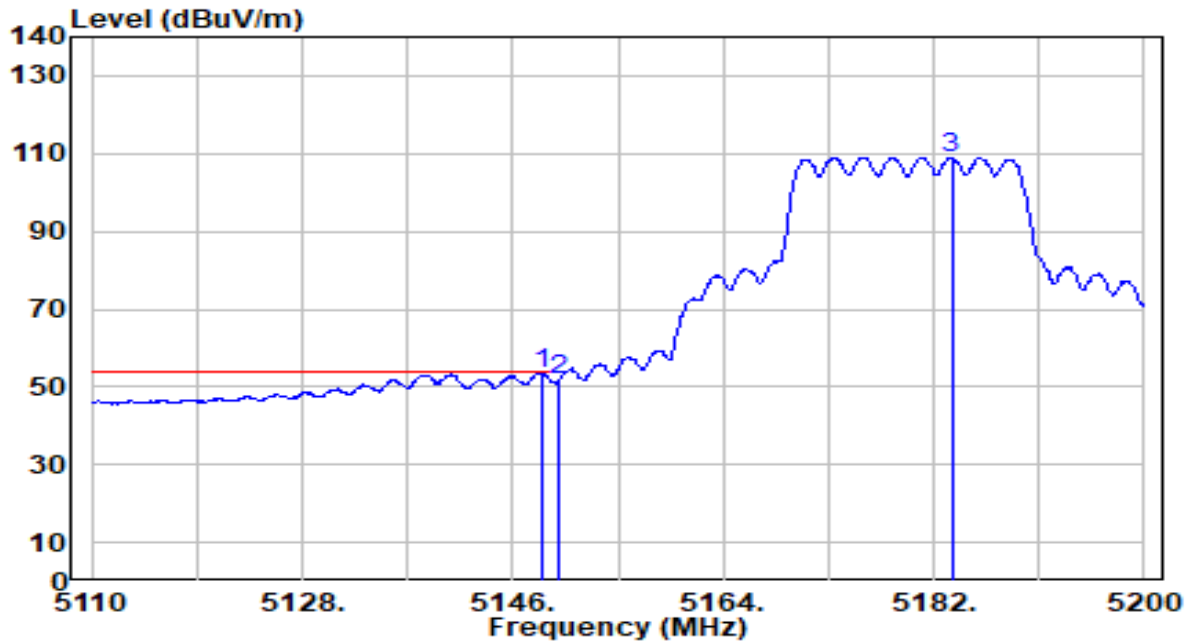


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.520	52.88	0.65	53.53	-0.47	54.00	100	230	Average
2		5150.000	51.27	0.65	51.93	-2.07	54.00	100	230	Average
3		5183.530	108.41	0.69	109.09	N/A	N/A	100	230	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

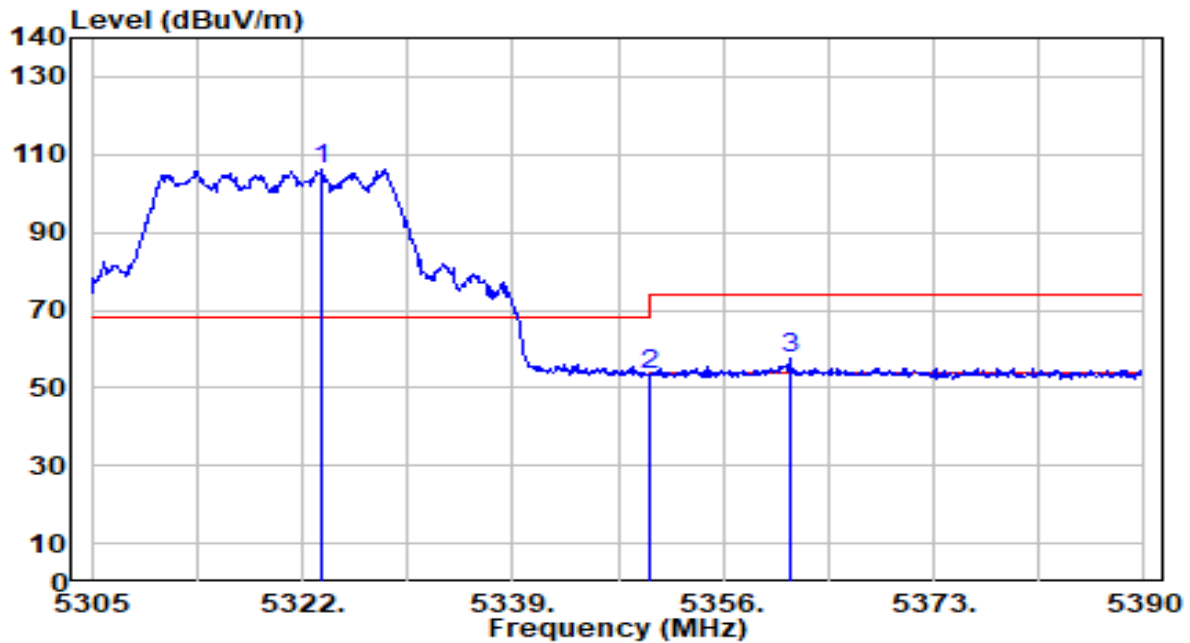


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5323.615	105.60	0.51	106.11	N/A	N/A	150	27	Peak
2	5350.000	52.80	0.47	53.27	-20.73	74.00	150	27	Peak
3	* 5361.355	57.20	0.45	57.66	-16.34	74.00	150	27	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

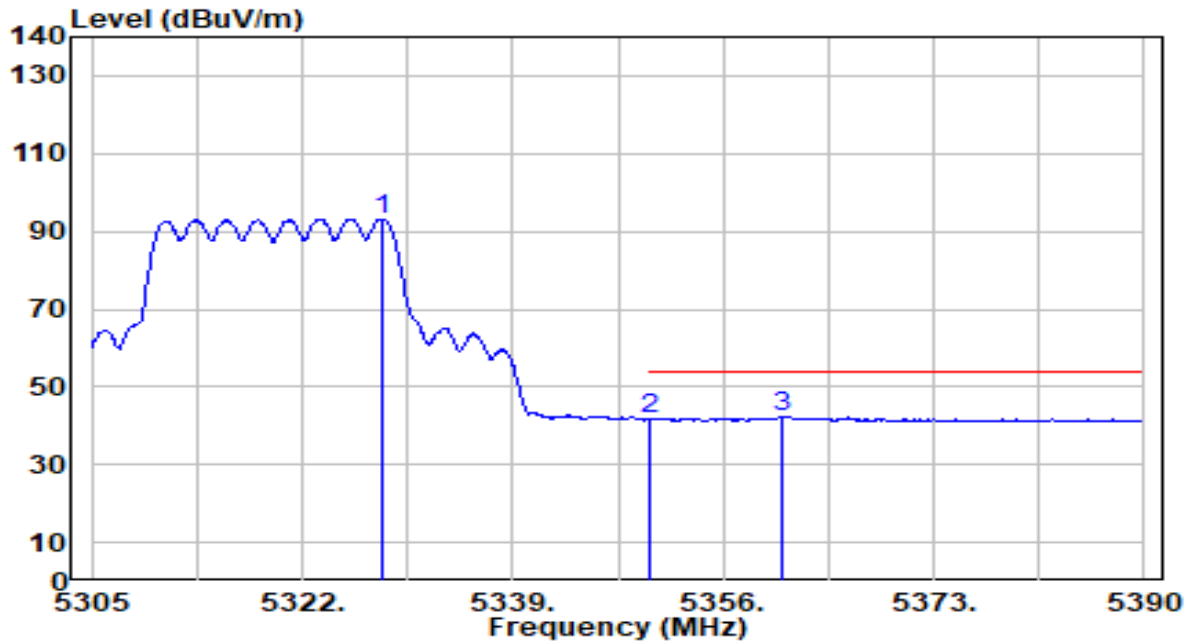


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5328.545	92.65	0.50	93.15	N/A	N/A	150	27	Average
2	5350.000	41.27	0.47	41.74	-12.26	54.00	150	27	Average
3	* 5360.760	42.01	0.45	42.46	-11.54	54.00	150	27	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

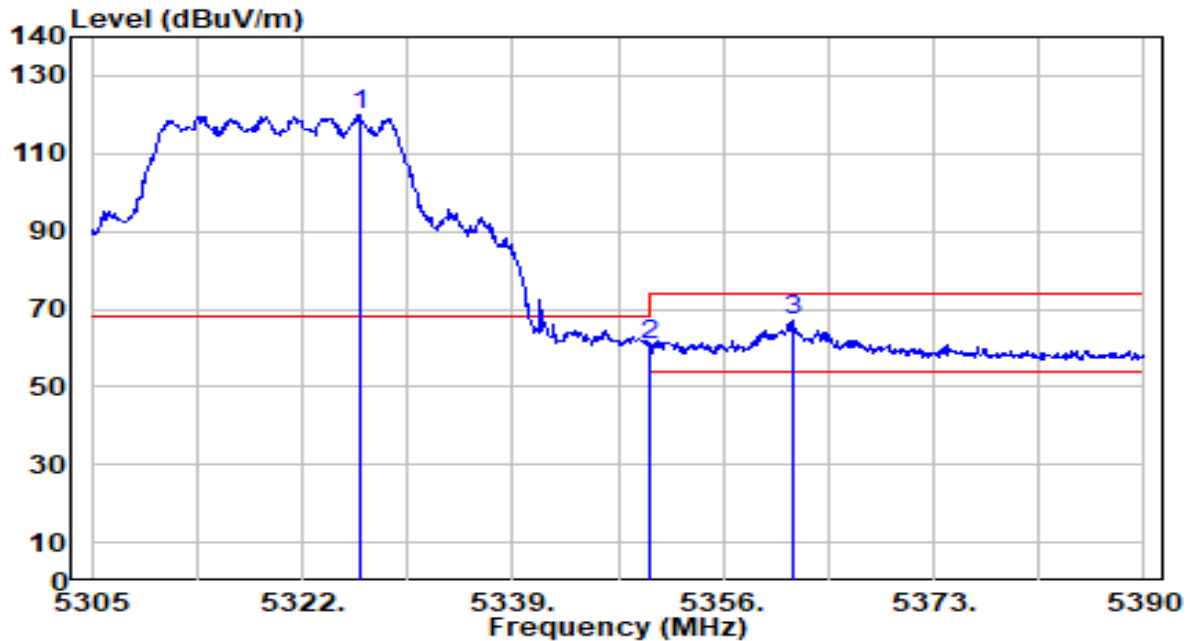


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.590	119.42	0.51	119.93	N/A	N/A	100	328	Peak
2	5350.000	60.37	0.47	60.84	-13.16	74.00	100	328	Peak
3	* 5361.610	66.59	0.45	67.04	-6.96	74.00	100	328	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

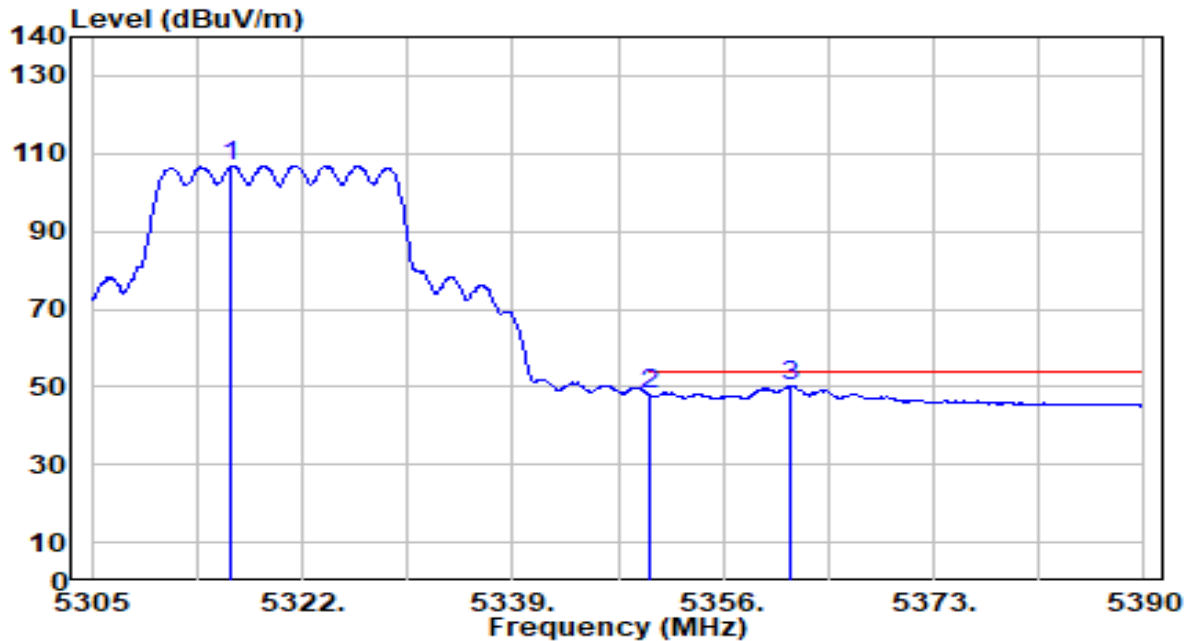


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5316.305	106.24	0.52	106.77	N/A	N/A	100	328	Average
2	5350.000	47.46	0.47	47.94	-6.06	54.00	100	328	Average
3	* 5361.525	49.64	0.45	50.09	-3.91	54.00	100	328	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

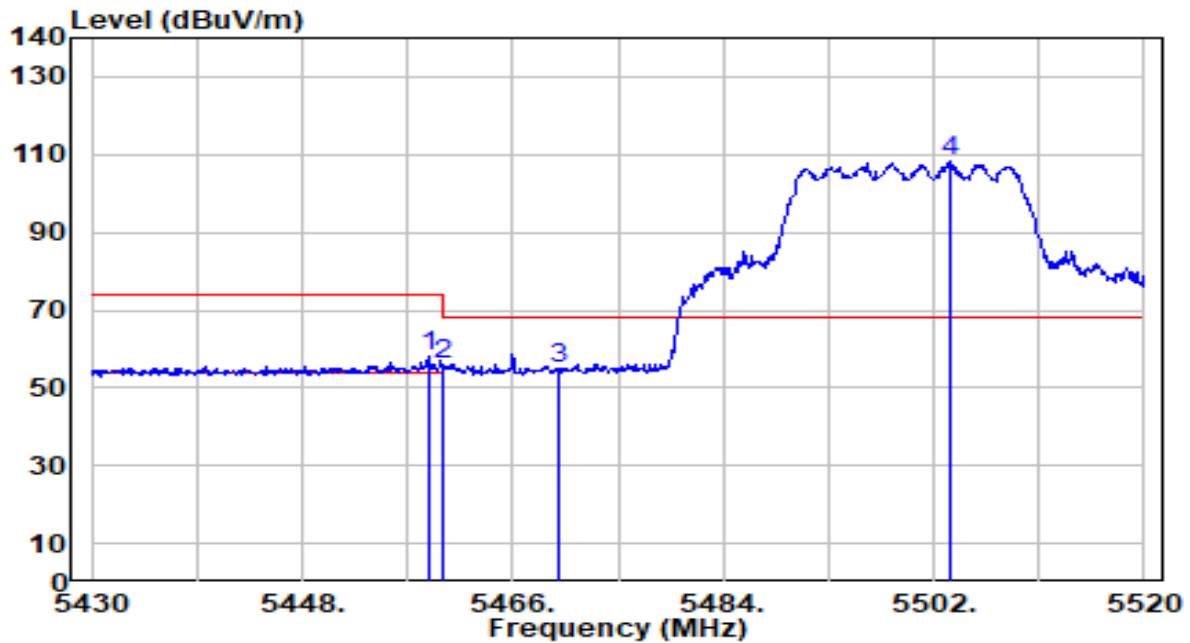


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.800	57.22	0.66	57.88	-16.12	74.00	200	97	Peak
2	5460.000	55.19	0.66	55.85	-18.15	74.00	200	97	Peak
3	* 5470.000	54.49	0.71	55.20	-13.00	68.20	200	97	Peak
4	5503.350	107.54	0.86	108.40	N/A	N/A	200	97	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

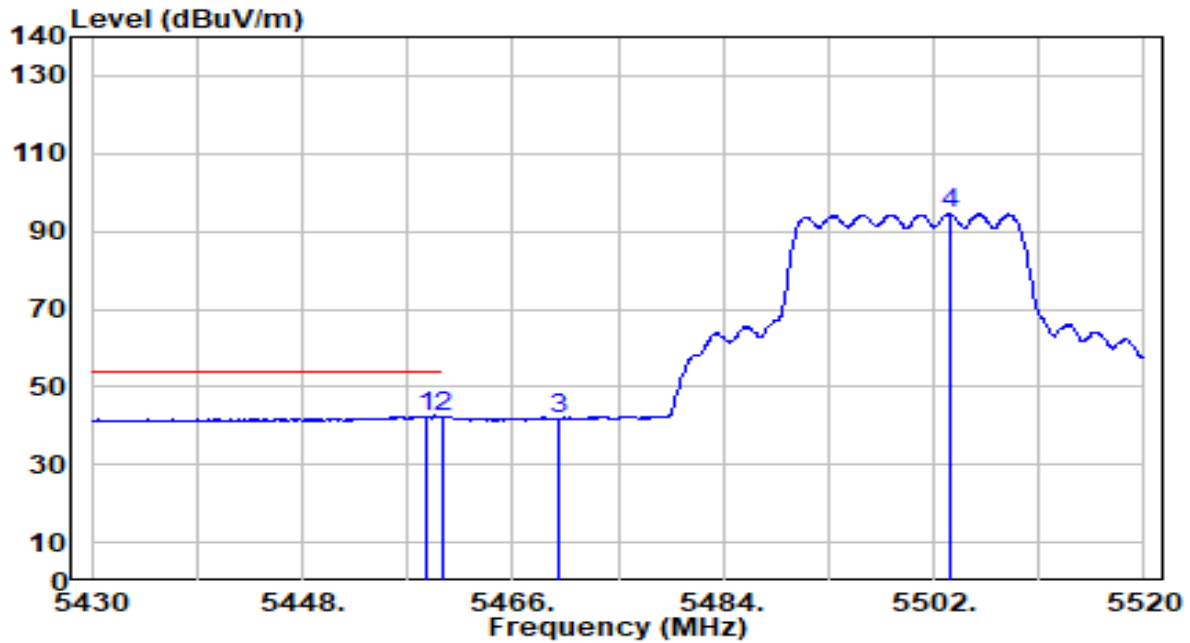


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.530	41.69	0.66	42.34	-11.66	54.00	200	97	Average
2		5460.000	41.49	0.66	42.15	-11.85	54.00	200	97	Average
3		5470.000	41.06	0.71	41.77	N/A	N/A	200	97	Average
4		5503.350	93.57	0.86	94.43	N/A	N/A	200	97	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

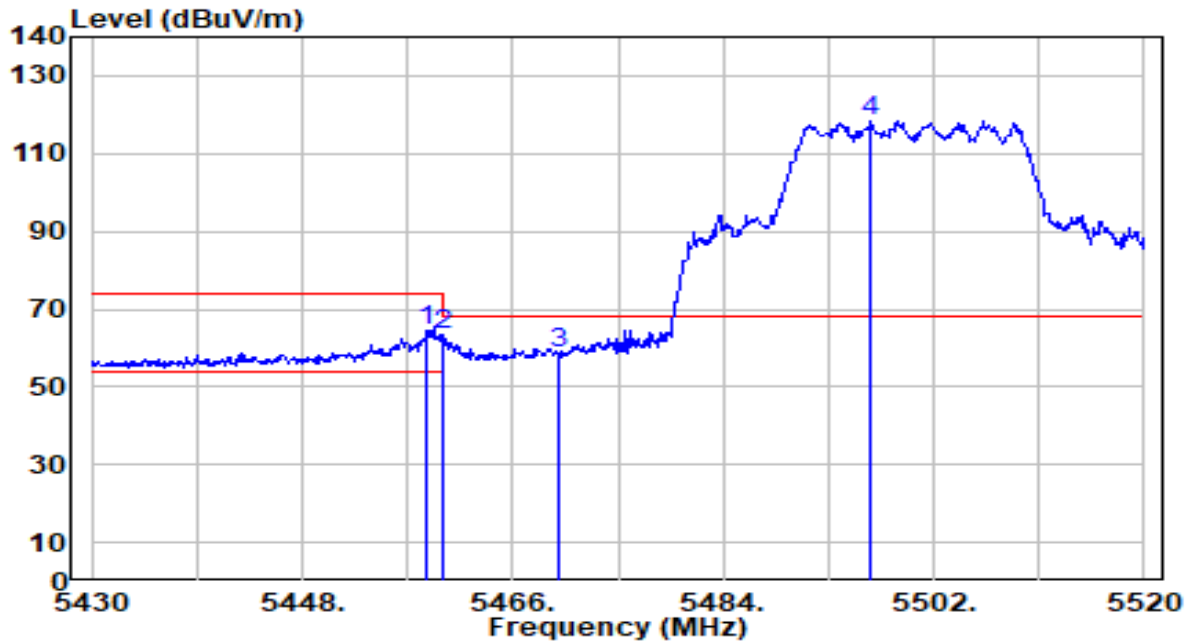


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.620	63.65	0.66	64.30	-9.70	74.00	120	330	Peak
2	5460.000	62.80	0.66	63.46	-10.54	74.00	120	330	Peak
3	* 5470.000	57.85	0.71	58.55	-9.65	68.20	120	330	Peak
4	5496.690	117.66	0.83	118.49	N/A	N/A	120	330	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

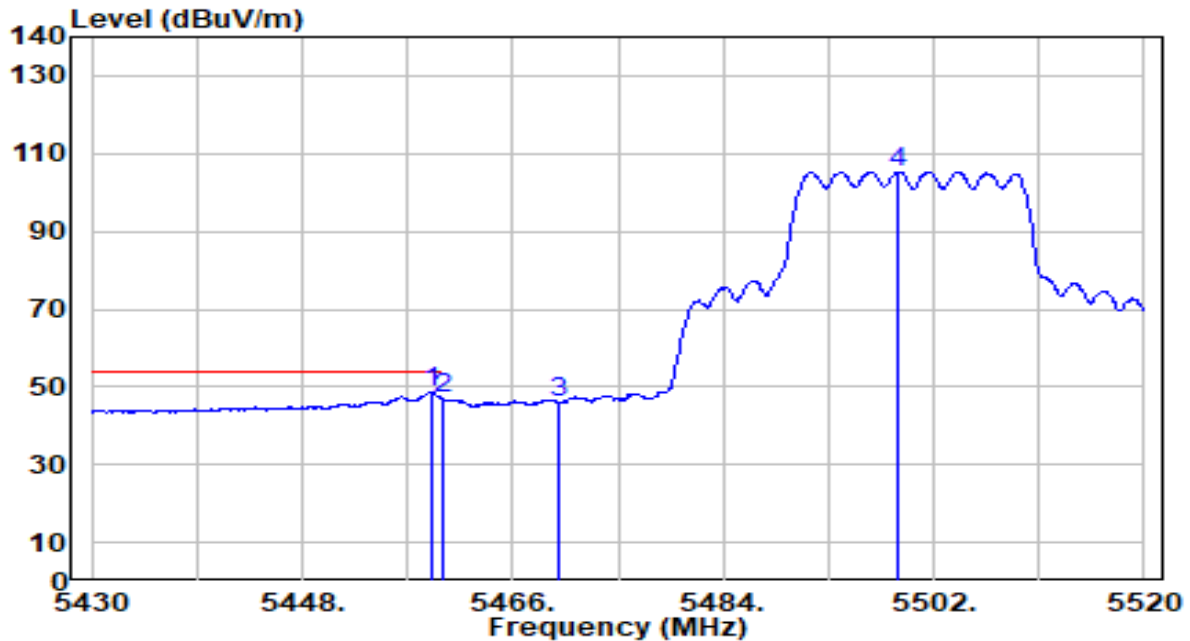


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.980	47.99	0.66	48.64	-5.36	54.00	120	330	Average
2		5460.000	46.18	0.66	46.84	-7.16	54.00	120	330	Average
3		5470.000	45.41	0.71	46.12	N/A	N/A	120	330	Average
4		5498.940	104.55	0.84	105.39	N/A	N/A	120	330	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

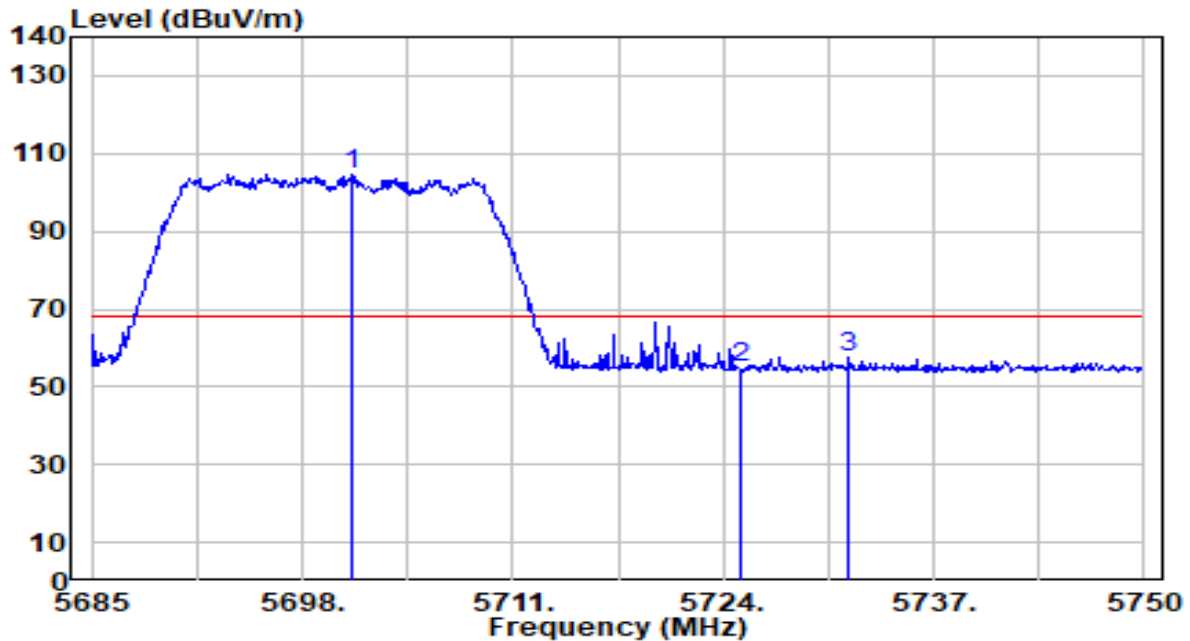


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5701.055	103.04	1.78	104.82	N/A	N/A	200	217	Peak
2	5725.000	53.05	1.89	54.94	-13.26	68.20	200	217	Peak
3	* 5731.800	55.61	1.92	57.54	-10.66	68.20	200	217	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

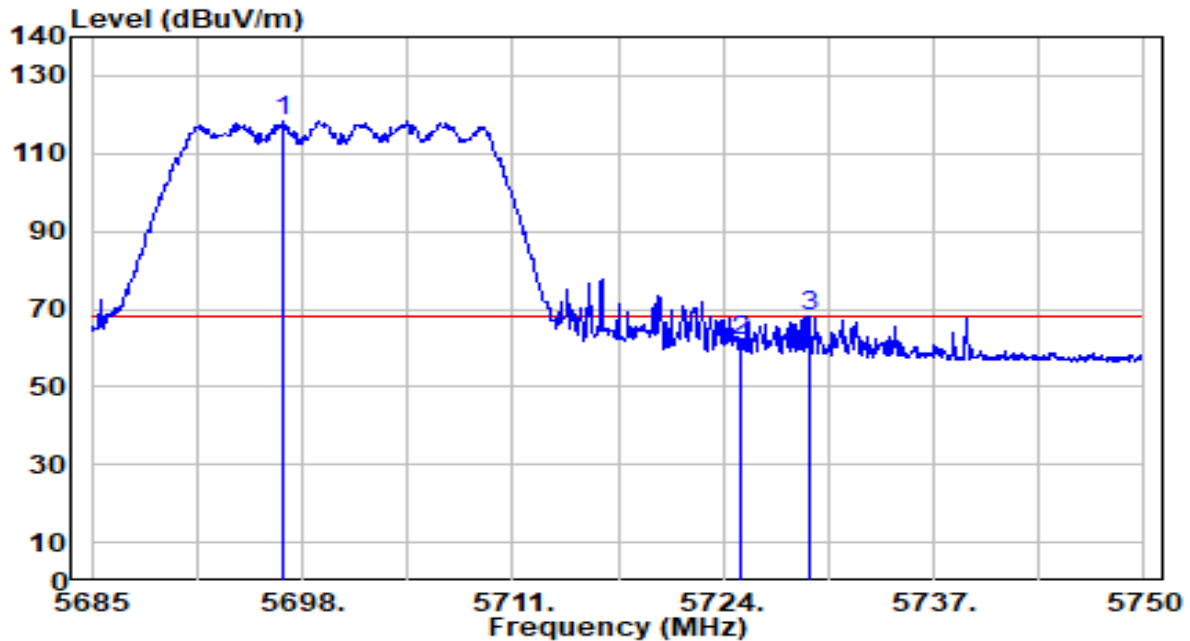


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5696.765	116.65	1.76	118.41	N/A	N/A	200	246	Peak
2	5725.000	59.90	1.89	61.80	-6.40	68.20	200	246	Peak
3	* 5729.265	66.10	1.91	68.01	-0.19	68.20	200	246	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

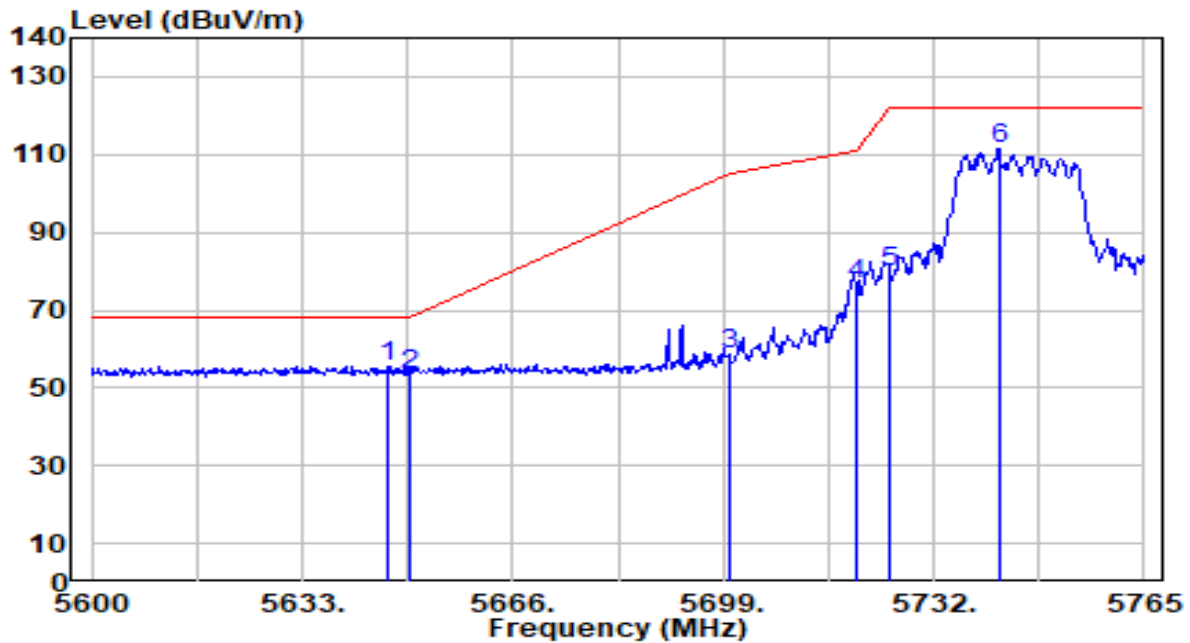


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.365	54.14	1.52	55.66	-12.54	68.20	150	2	Peak
2		5650.000	51.88	1.54	53.42	-14.78	68.20	150	2	Peak
3		5700.000	56.84	1.78	58.61	-46.59	105.20	150	2	Peak
4		5720.000	74.58	1.87	76.45	-34.35	110.80	150	2	Peak
5		5725.000	77.89	1.89	79.78	-42.42	122.20	150	2	Peak
6		5742.230	109.65	1.97	111.62	N/A	N/A	150	2	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

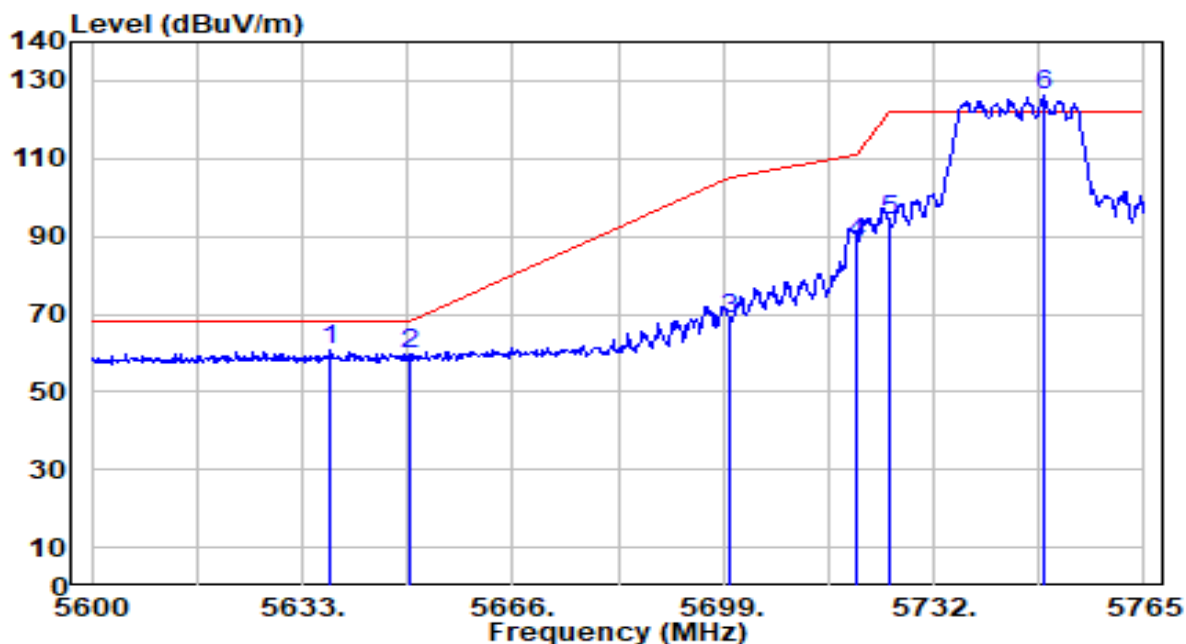


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5637.455	59.06	1.48	60.54	-7.66	68.20	200	242	Peak
2		5650.000	58.26	1.54	59.81	-8.39	68.20	200	242	Peak
3		5700.000	67.07	1.78	68.85	-36.35	105.20	200	242	Peak
4		5720.000	86.57	1.87	88.44	-22.36	110.80	200	242	Peak
5		5725.000	91.94	1.89	93.83	-28.37	122.20	200	242	Peak
6		5749.160	124.39	2.01	126.40	N/A	N/A	200	242	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

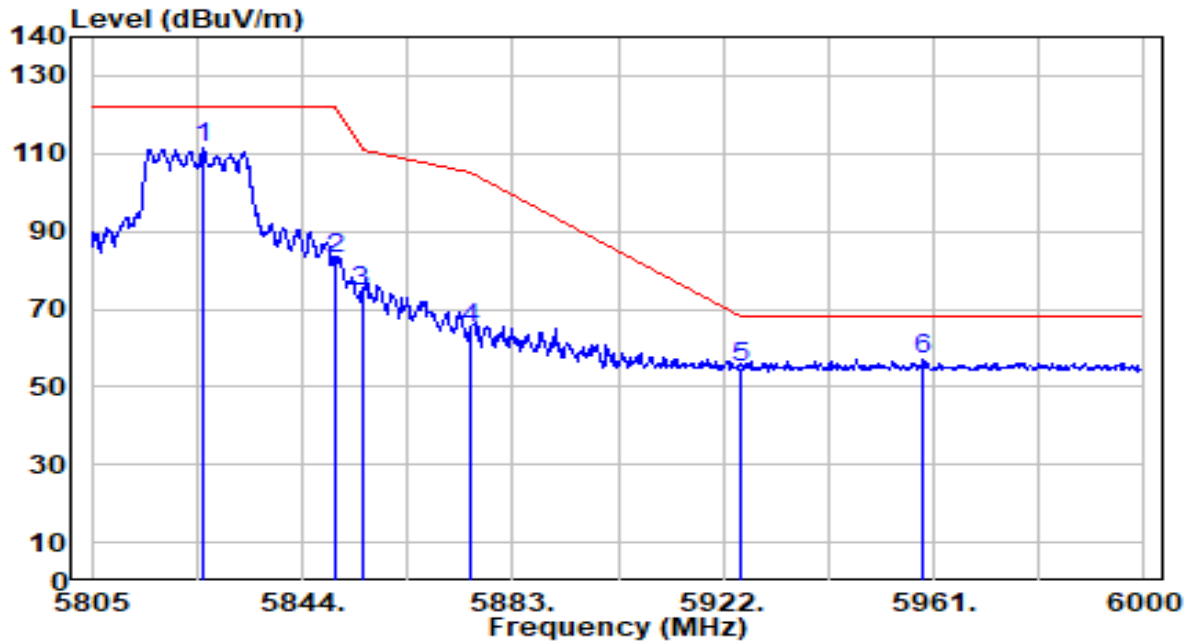


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5825.865	109.06	2.25	111.31	N/A	N/A	150	237	Peak
2	5850.000	80.65	2.25	82.90	-39.30	122.20	150	237	Peak
3	5855.000	72.50	2.25	74.75	-36.05	110.80	150	237	Peak
4	5875.000	62.55	2.26	64.80	-40.40	105.20	150	237	Peak
5	5925.000	52.90	2.27	55.16	-13.04	68.20	150	237	Peak
6	* 5959.050	54.77	2.27	57.05	-11.15	68.20	150	237	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

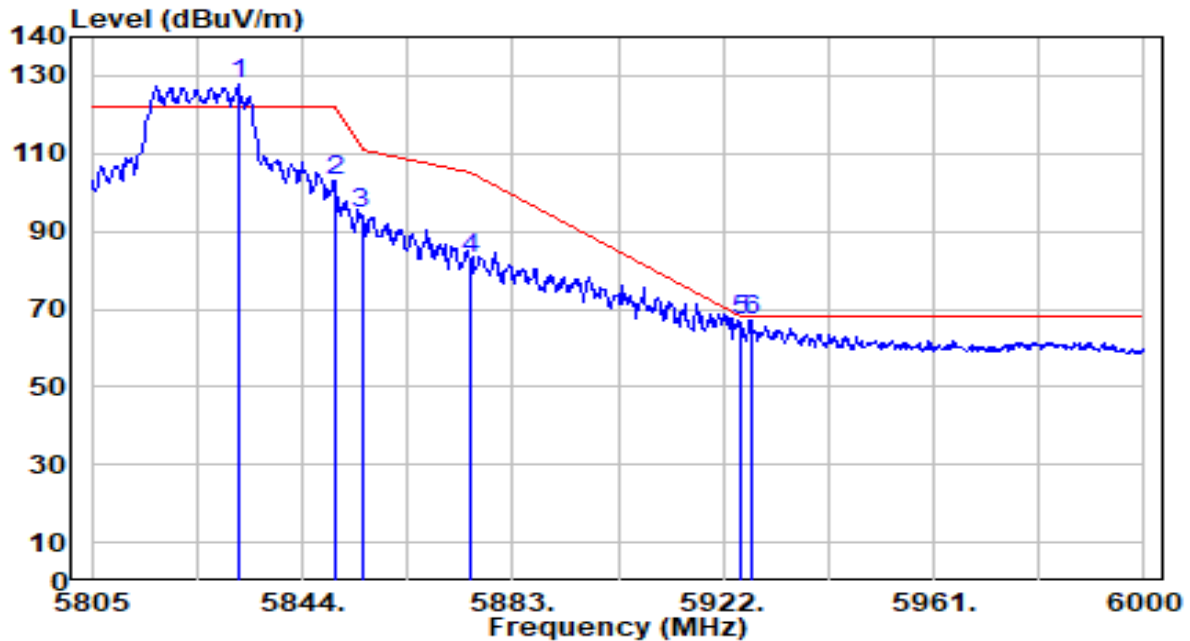


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5832.105	125.65	2.25	127.90	N/A	N/A	200	244	Peak
2	5850.000	100.87	2.25	103.12	-19.08	122.20	200	244	Peak
3	5855.000	92.09	2.25	94.35	-16.45	110.80	200	244	Peak
4	5875.000	80.62	2.26	82.88	-22.32	105.20	200	244	Peak
5	* 5925.000	64.91	2.27	67.18	-1.02	68.20	200	244	Peak
6	5927.070	64.84	2.27	67.11	-1.09	68.20	200	244	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

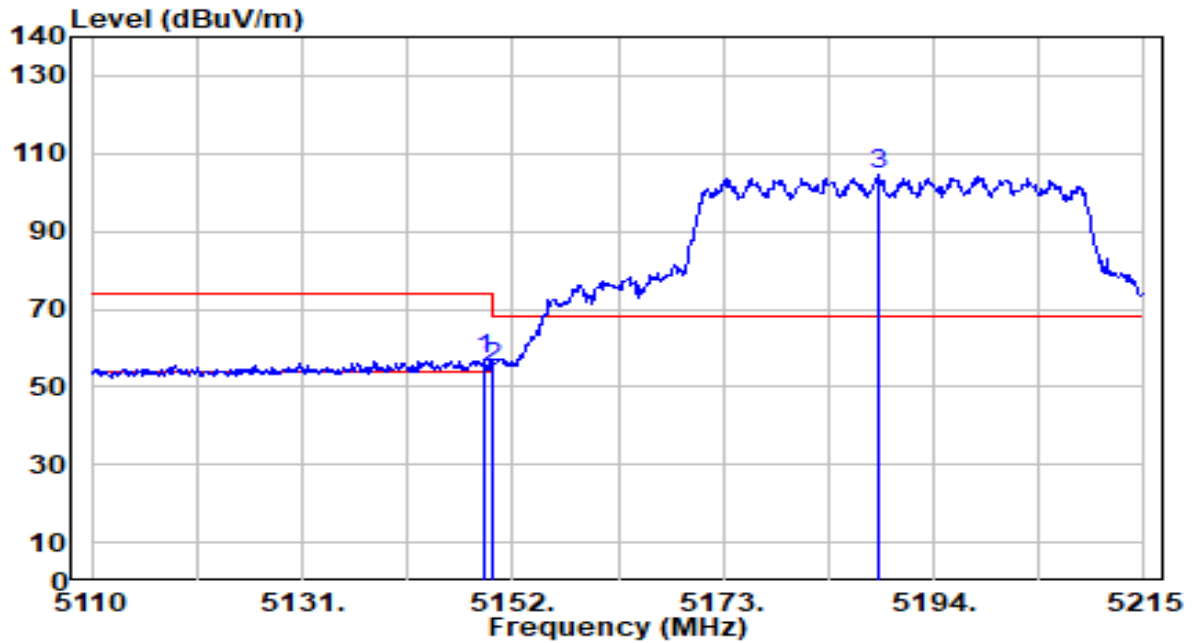


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.270	56.25	0.65	56.91	-17.09	74.00	150	232	Peak
2		5150.000	54.45	0.65	55.11	-18.89	74.00	150	232	Peak
3		5188.435	103.81	0.69	104.50	N/A	N/A	150	232	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

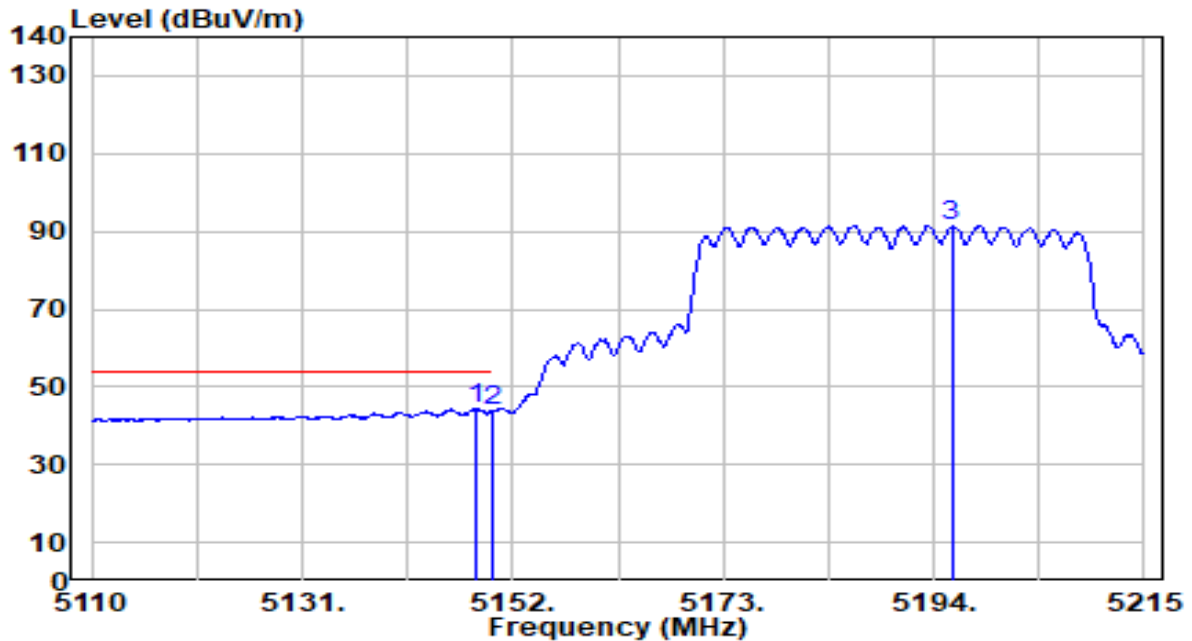


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.220	43.98	0.65	44.63	-9.37	54.00	150	232	Average
2		5150.000	42.94	0.65	43.60	-10.40	54.00	150	232	Average
3		5195.785	90.66	0.70	91.36	N/A	N/A	150	232	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

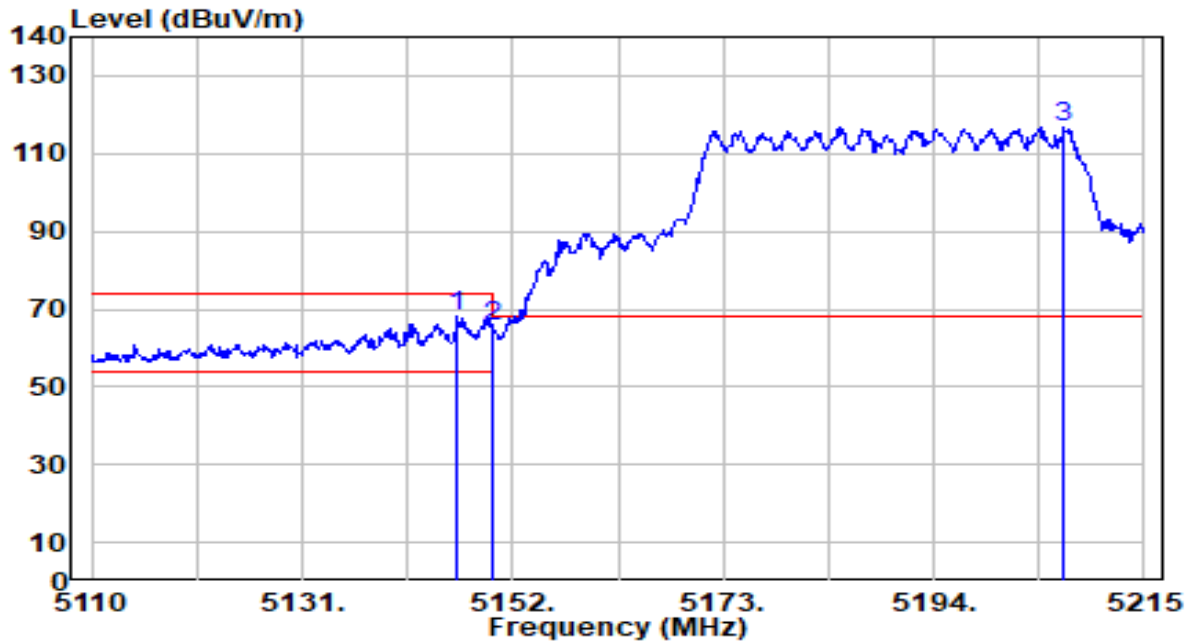


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.540	67.24	0.65	67.89	-6.11	74.00	108	186	Peak
2		5150.000	64.67	0.65	65.32	-8.68	74.00	108	186	Peak
3		5206.915	116.14	0.69	116.83	N/A	N/A	108	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

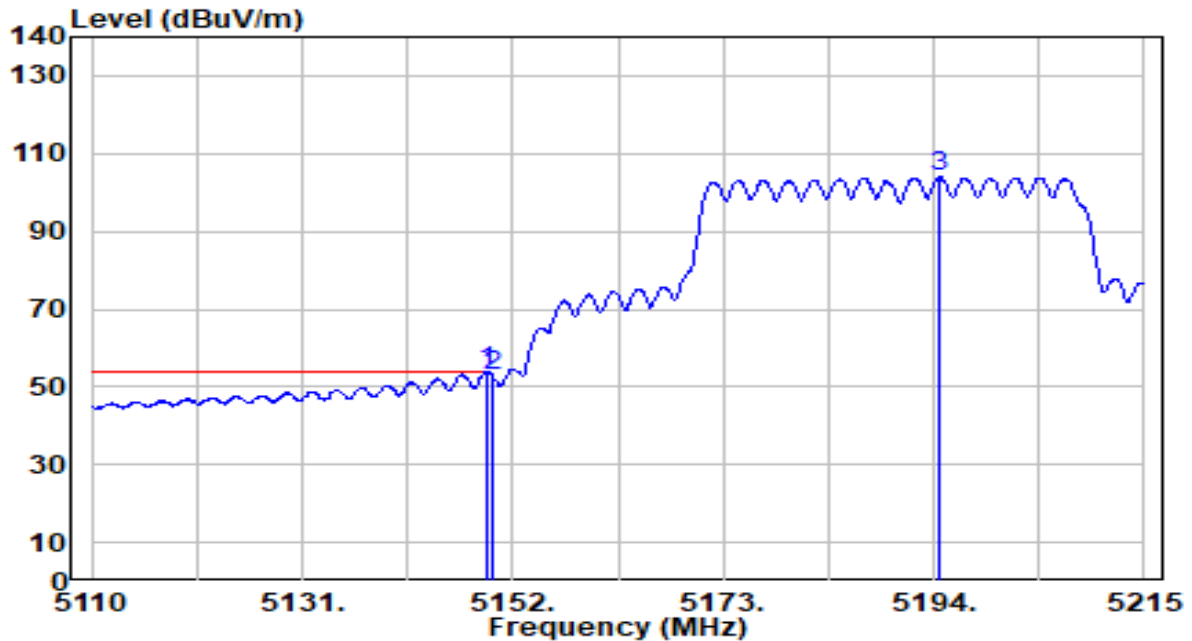


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.480	53.20	0.65	53.85	-0.15	54.00	108	186	Average
2		5150.000	52.26	0.65	52.91	-1.09	54.00	108	186	Average
3		5194.525	103.16	0.70	103.86	N/A	N/A	108	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

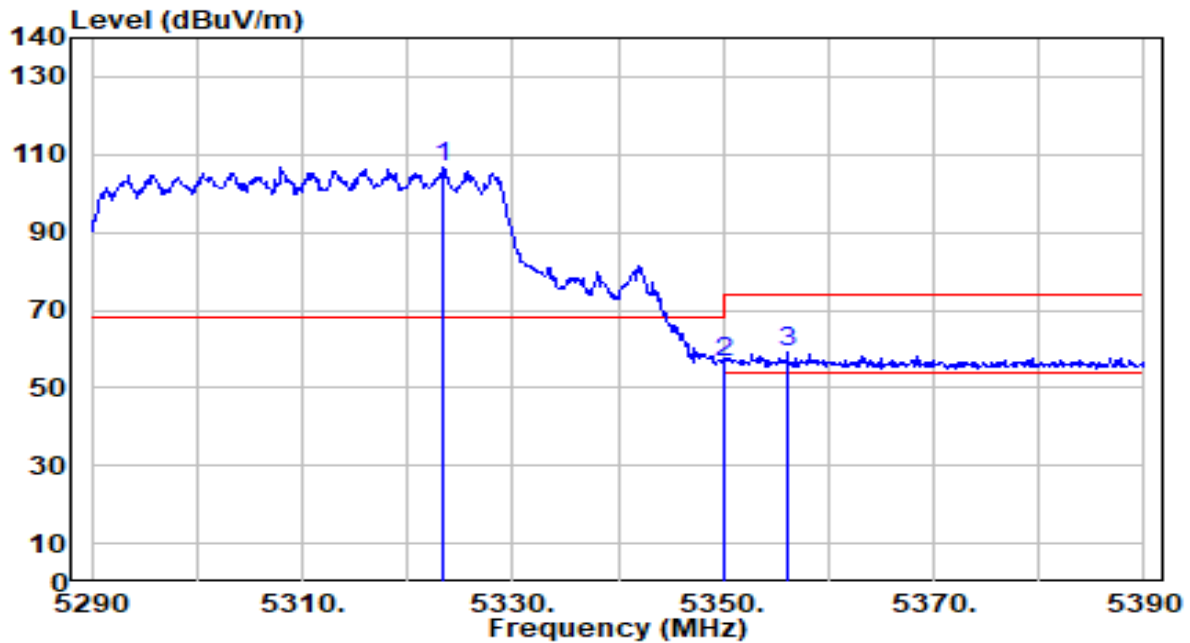


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5323.300	106.20	0.51	106.71	N/A	N/A	150	98	Peak
2	5350.000	56.19	0.47	56.67	-17.33	74.00	150	98	Peak
3	* 5356.100	58.58	0.46	59.05	-14.95	74.00	150	98	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

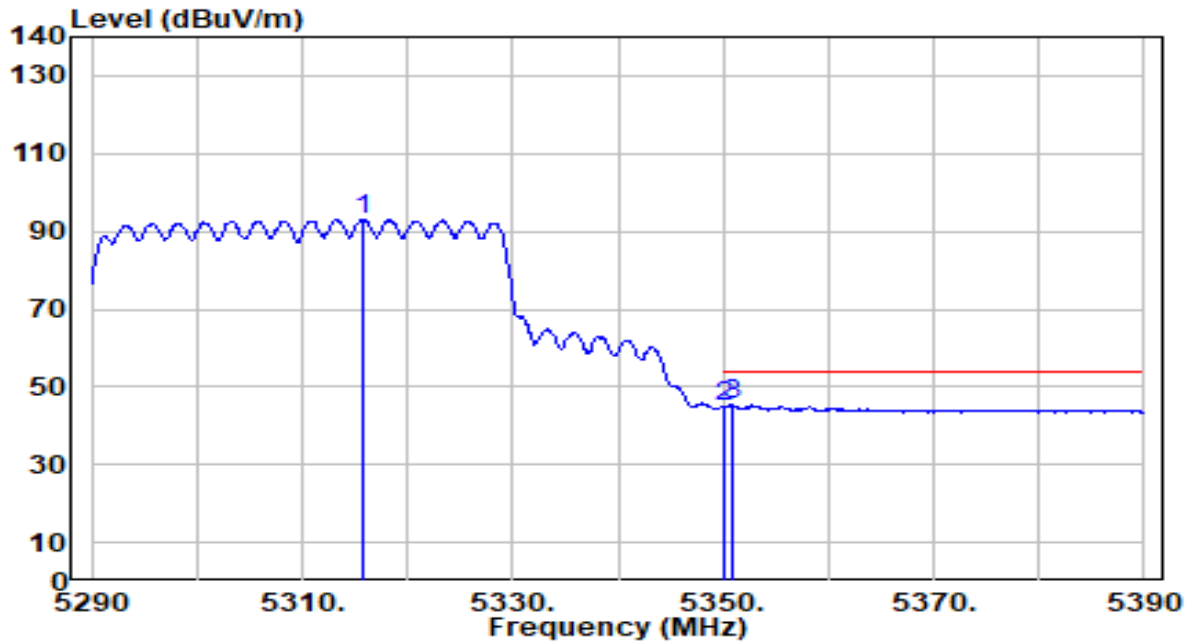


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5315.700	92.47	0.52	92.99	N/A	N/A	150	98	Average
2	5350.000	44.22	0.47	44.69	-9.31	54.00	150	98	Average
3	* 5351.000	44.90	0.47	45.36	-8.64	54.00	150	98	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

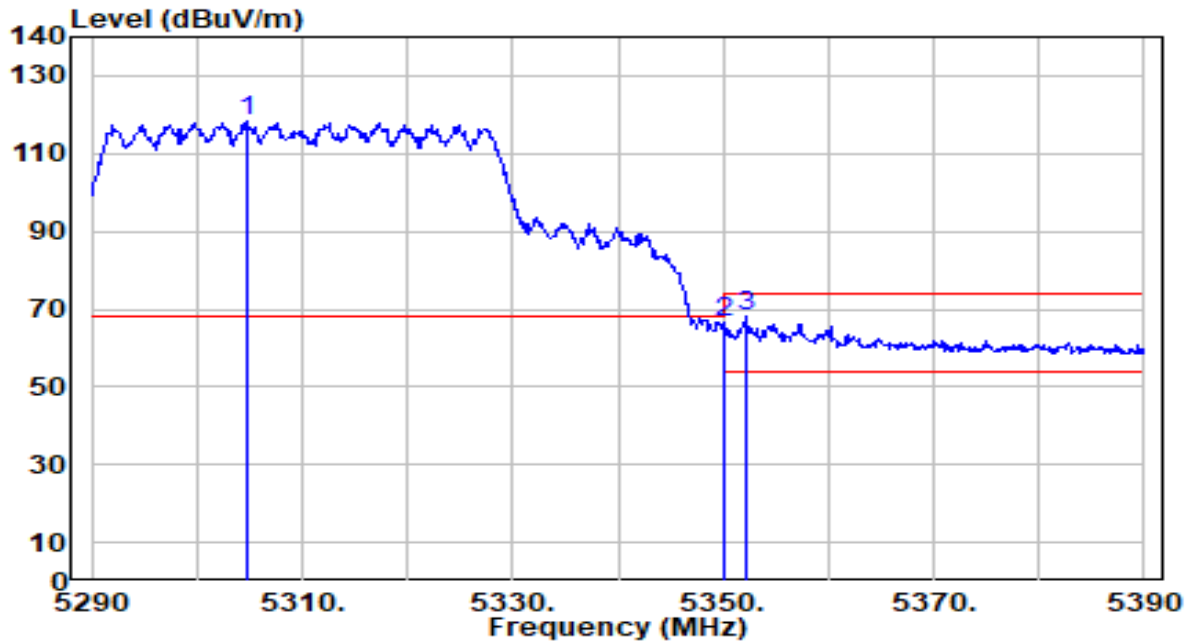


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5304.800	118.05	0.54	118.60	N/A	N/A	100	238	Peak
2	5350.000	66.01	0.47	66.48	-7.52	74.00	100	238	Peak
3	* 5352.200	67.49	0.47	67.95	-6.05	74.00	100	238	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

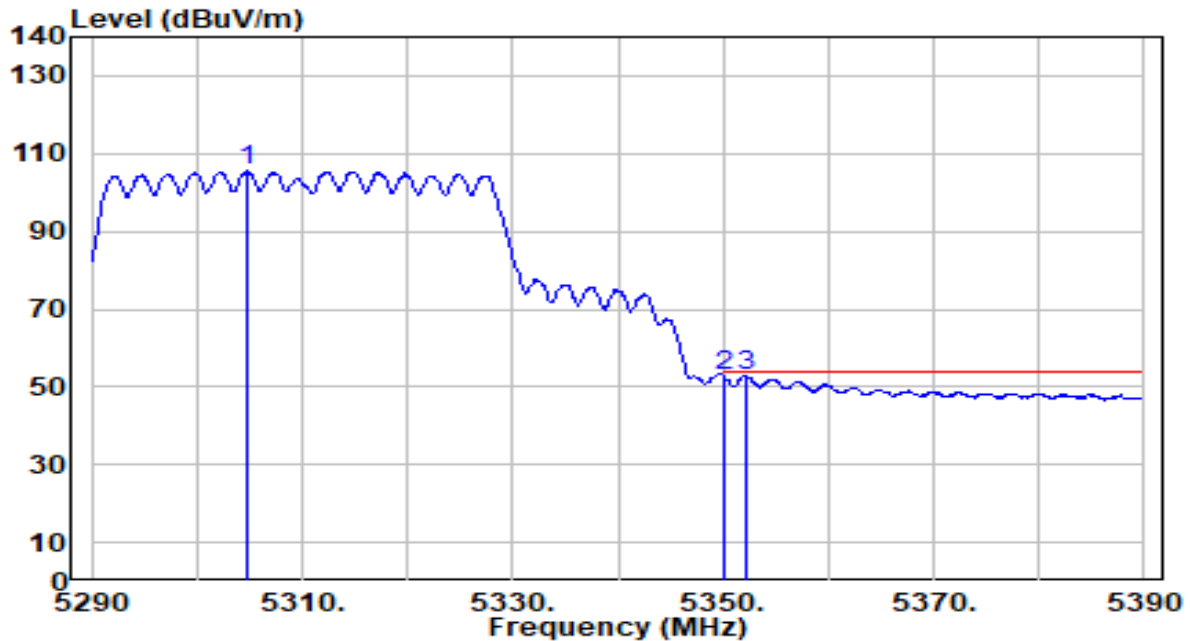


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5304.700	104.95	0.54	105.50	N/A	N/A	100	238	Average
2	*	5350.000	52.33	0.47	52.80	-1.20	54.00	100	238	Average
3		5352.100	52.16	0.47	52.62	-1.38	54.00	100	238	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

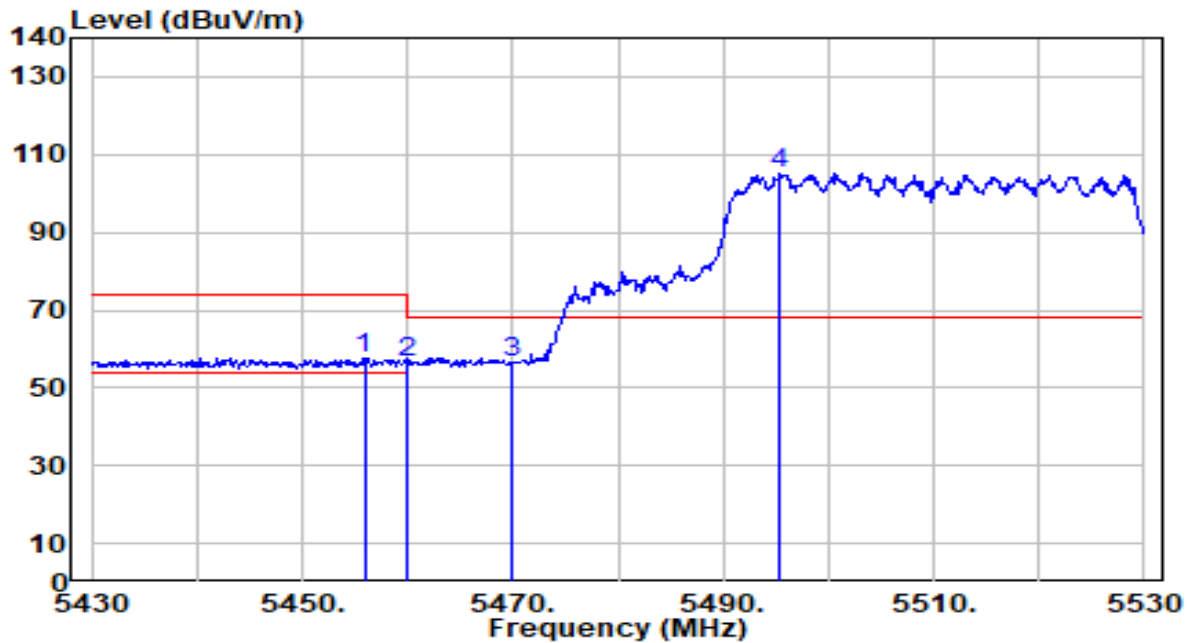


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.900	57.11	0.64	57.75	-16.25	74.00	158	93	Peak
2	5460.000	56.04	0.66	56.70	-17.30	74.00	158	93	Peak
3	* 5470.000	55.78	0.71	56.49	-11.71	68.20	158	93	Peak
4	5495.400	104.36	0.82	105.18	N/A	N/A	158	93	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

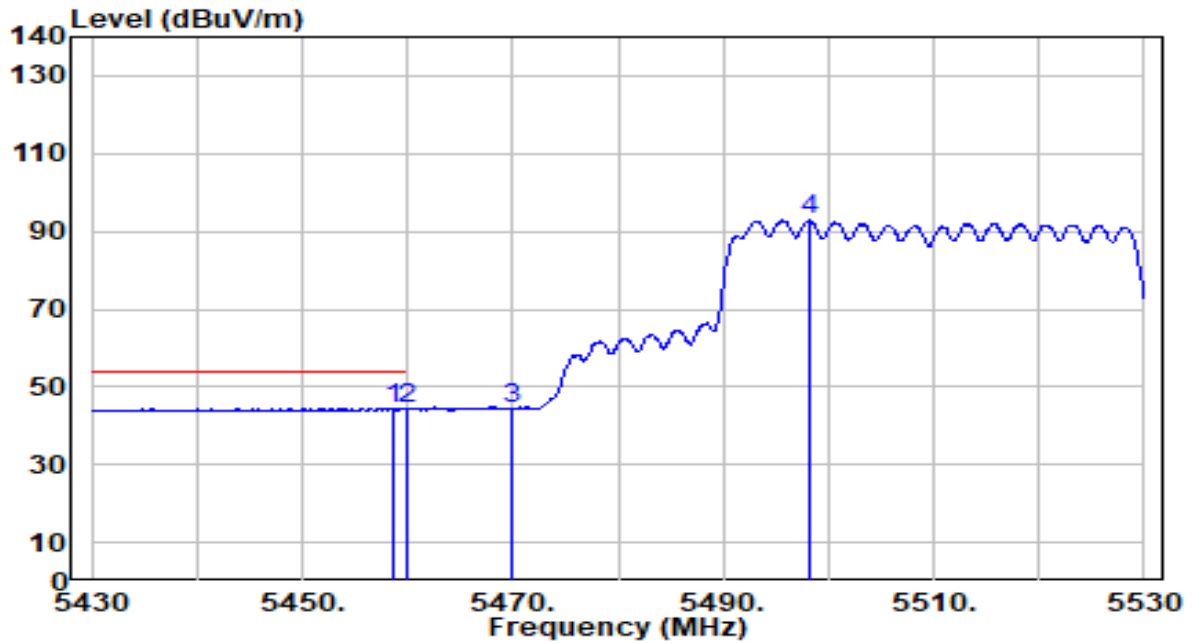


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5458.700	43.70	0.66	44.36	-9.64	54.00	158	93	Average
2	*	5460.000	43.79	0.66	44.45	-9.55	54.00	158	93	Average
3		5470.000	43.61	0.71	44.32	N/A	N/A	158	93	Average
4		5498.300	91.97	0.83	92.80	N/A	N/A	158	93	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

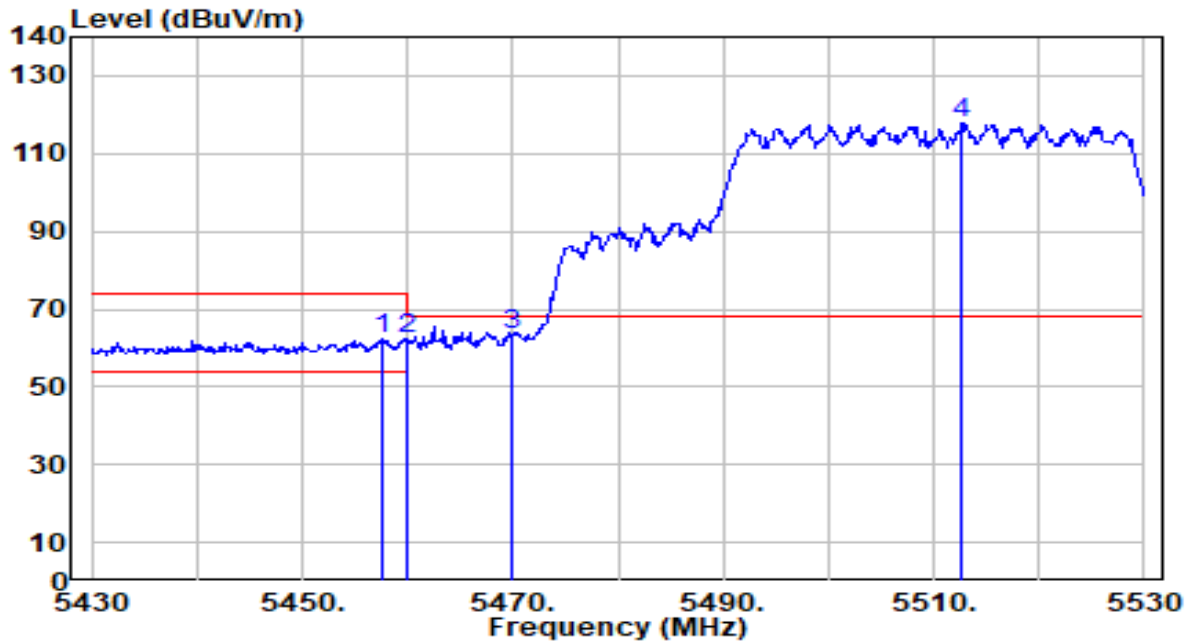


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.500	61.57	0.65	62.22	-11.78	74.00	120	236	Peak
2	5460.000	61.88	0.66	62.54	-11.46	74.00	120	236	Peak
3	* 5470.000	62.84	0.71	63.55	-4.65	68.20	120	236	Peak
4	5512.700	116.83	0.90	117.73	N/A	N/A	120	236	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

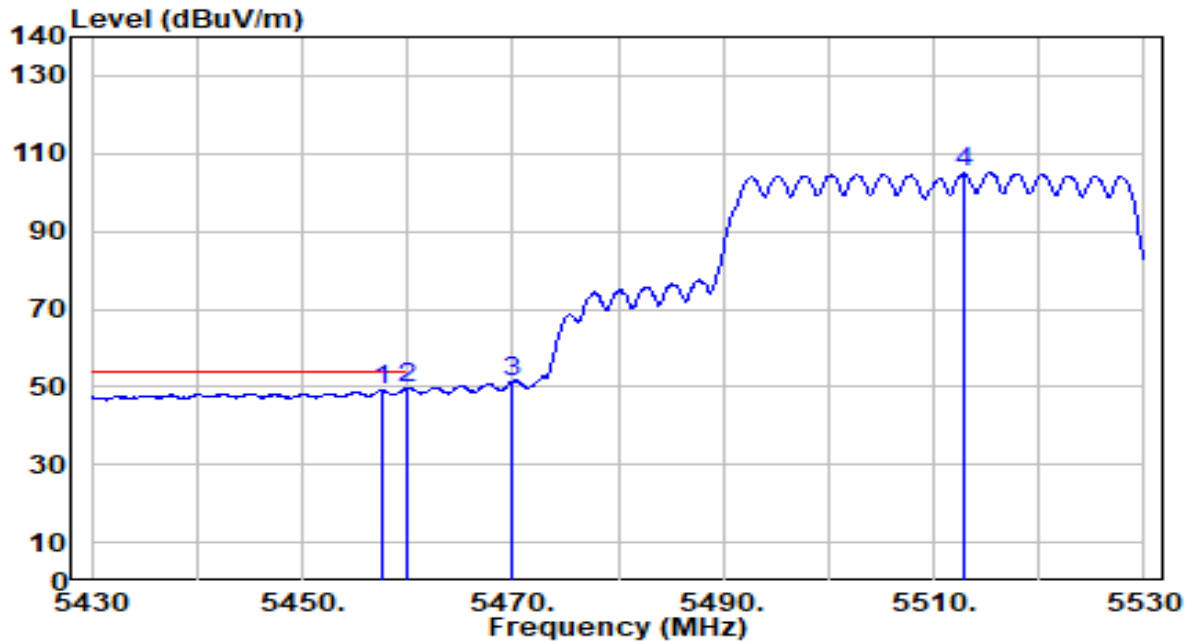


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5457.700	48.45	0.65	49.10	-4.90	54.00	120	236	Average
2	*	5460.000	48.89	0.66	49.55	-4.45	54.00	120	236	Average
3		5470.000	50.49	0.71	51.19	N/A	N/A	120	236	Average
4		5512.800	104.10	0.90	105.00	N/A	N/A	120	236	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

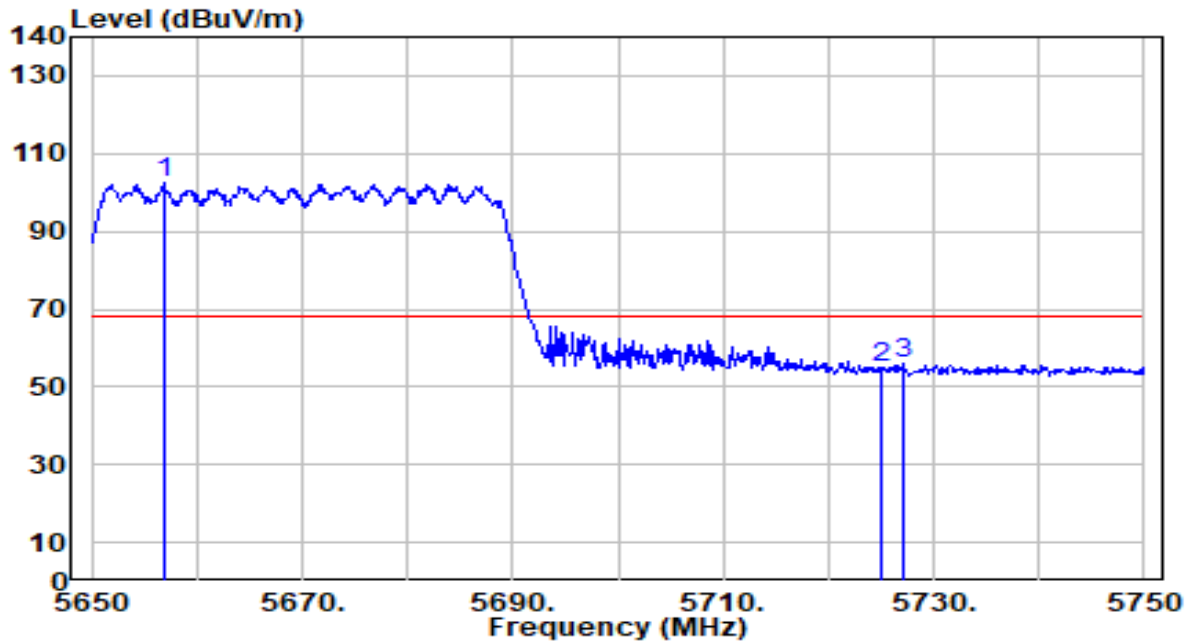


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5656.800	100.76	1.57	102.33	N/A	N/A	130	22	Peak
2	5725.000	52.94	1.89	54.83	-13.37	68.20	130	22	Peak
3	* 5727.000	54.06	1.90	55.96	-12.24	68.20	130	22	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

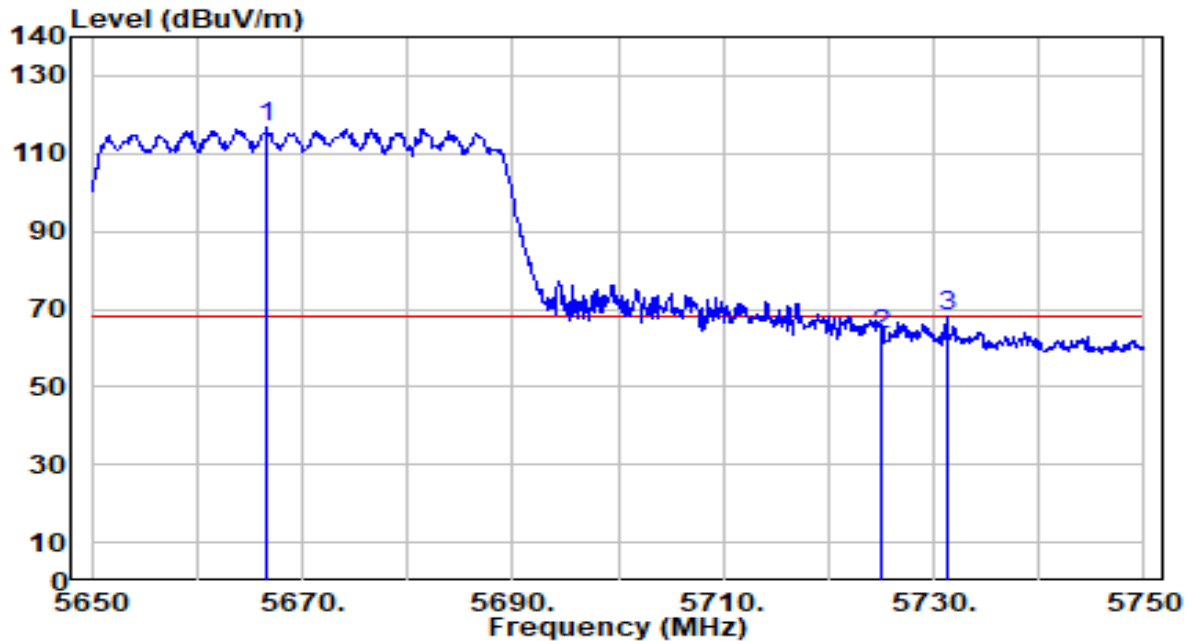


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5666.700	114.89	1.62	116.51	N/A	N/A	200	246	Peak
2	5725.000	61.53	1.89	63.43	-4.77	68.20	200	246	Peak
3	* 5731.200	66.10	1.92	68.02	-0.18	68.20	200	246	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

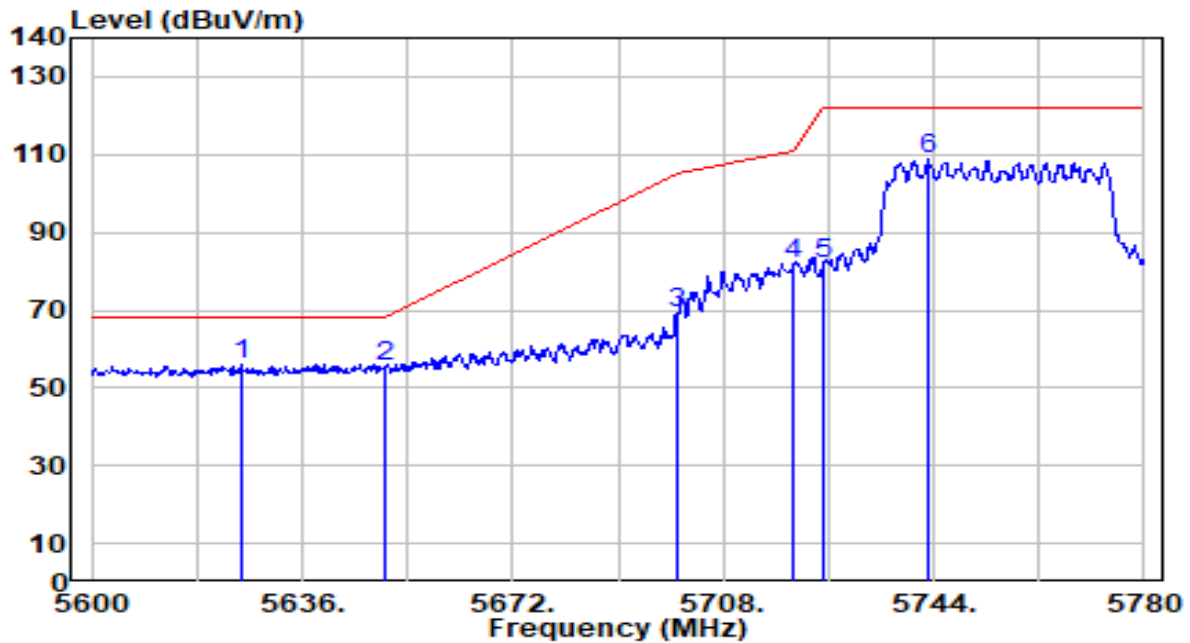


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5625.560	54.46	1.43	55.89	-12.31	68.20	150	237	Peak
2		5650.000	54.16	1.54	55.70	-12.50	68.20	150	237	Peak
3		5700.000	67.44	1.78	69.22	-35.98	105.20	150	237	Peak
4		5720.000	80.02	1.87	81.88	-28.92	110.80	150	237	Peak
5		5725.000	80.00	1.89	81.90	-40.30	122.20	150	237	Peak
6		5743.100	106.84	1.98	108.82	N/A	N/A	150	237	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

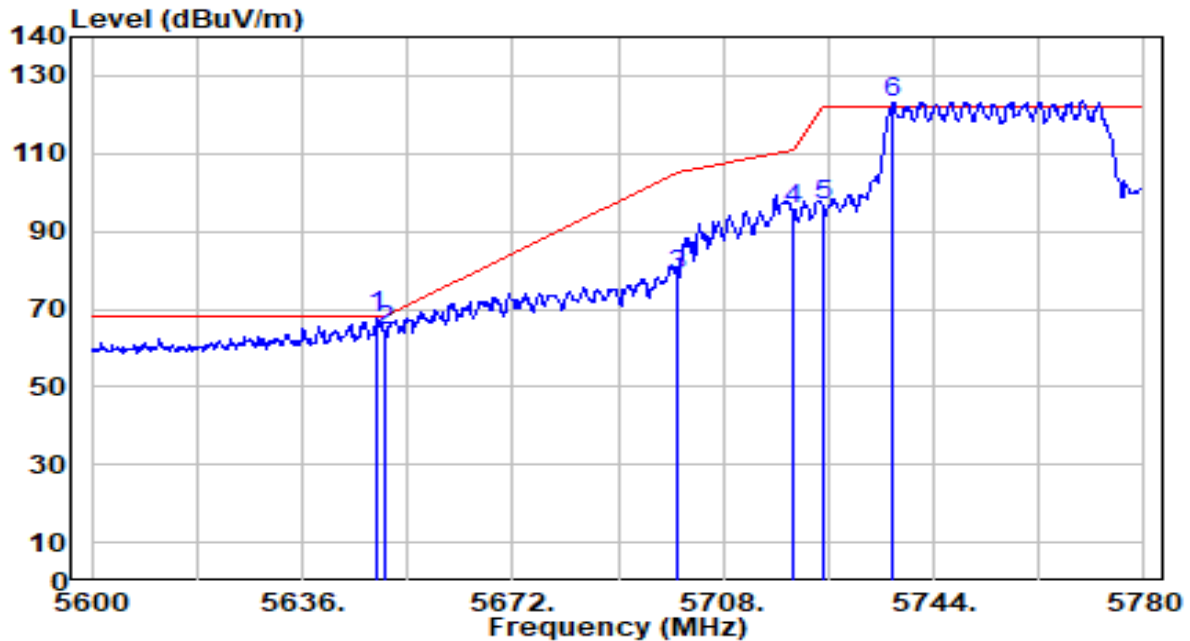


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.780	66.44	1.54	67.97	-0.23	68.20	200	246	Peak
2		5650.000	62.90	1.54	64.45	-3.75	68.20	200	246	Peak
3		5700.000	77.14	1.78	78.92	-26.28	105.20	200	246	Peak
4		5720.000	93.61	1.87	95.48	-15.32	110.80	200	246	Peak
5		5725.000	94.68	1.89	96.58	-25.62	122.20	200	246	Peak
6		5736.800	121.30	1.95	123.25	N/A	N/A	200	246	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

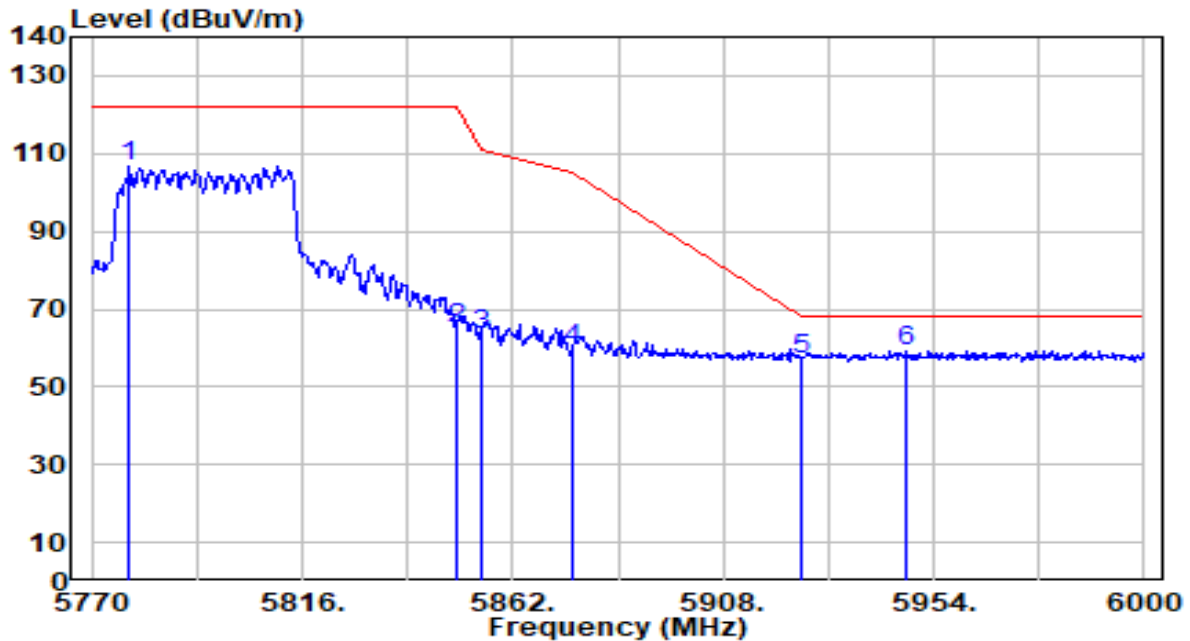


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5778.280	104.60	2.14	106.74	N/A	N/A	150	238	Peak
2	5850.000	62.99	2.25	65.24	-56.96	122.20	150	238	Peak
3	5855.000	61.18	2.25	63.43	-47.37	110.80	150	238	Peak
4	5875.000	57.32	2.26	59.58	-45.62	105.20	150	238	Peak
5	5925.000	54.77	2.27	57.04	-11.16	68.20	150	238	Peak
6	* 5948.020	57.13	2.27	59.40	-8.80	68.20	150	238	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

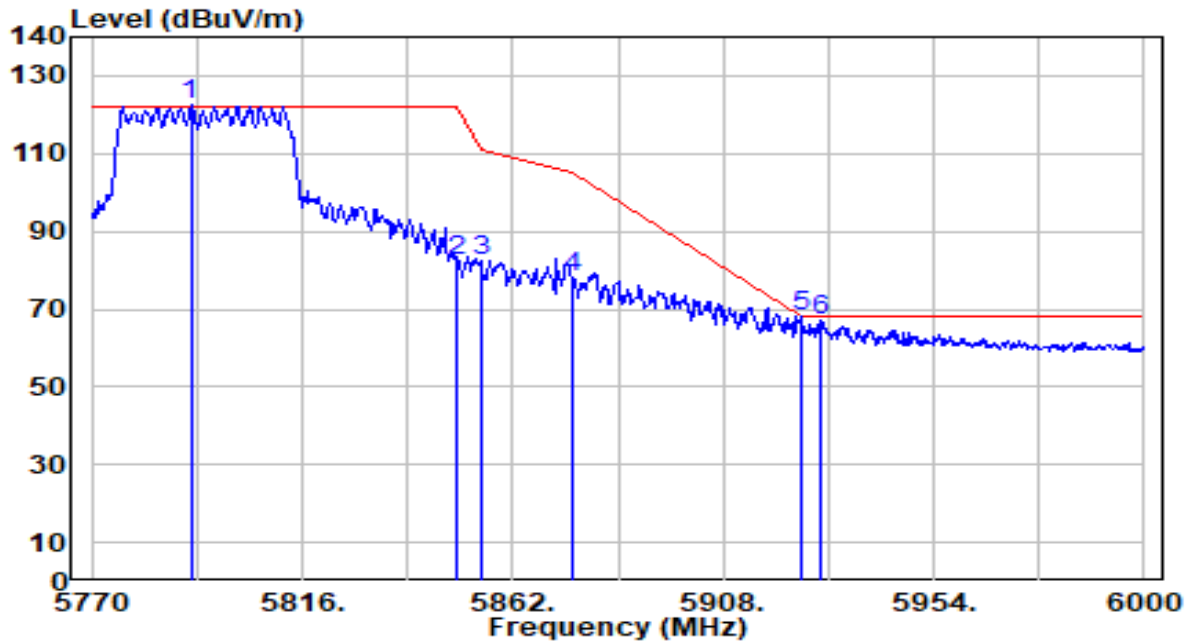


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5791.620	120.34	2.20	122.55	N/A	N/A	200	245	Peak
2	5850.000	80.42	2.25	82.67	-39.53	122.20	200	245	Peak
3	5855.000	80.00	2.25	82.25	-28.55	110.80	200	245	Peak
4	5875.000	75.82	2.26	78.08	-27.12	105.20	200	245	Peak
5	* 5925.000	65.76	2.27	68.03	-0.17	68.20	200	245	Peak
6	5929.390	65.07	2.27	67.34	-0.86	68.20	200	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

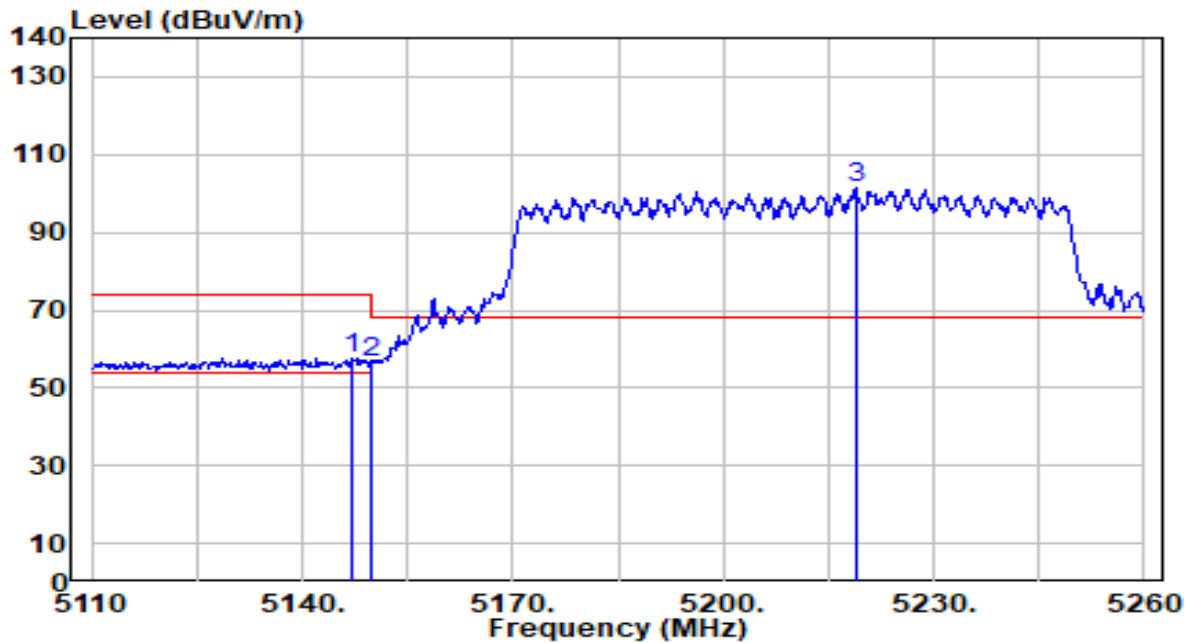


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.050	57.12	0.65	57.77	-16.23	74.00	150	25	Peak
2		5150.000	56.04	0.65	56.70	-17.30	74.00	150	25	Peak
3		5218.900	100.72	0.67	101.39	N/A	N/A	150	25	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

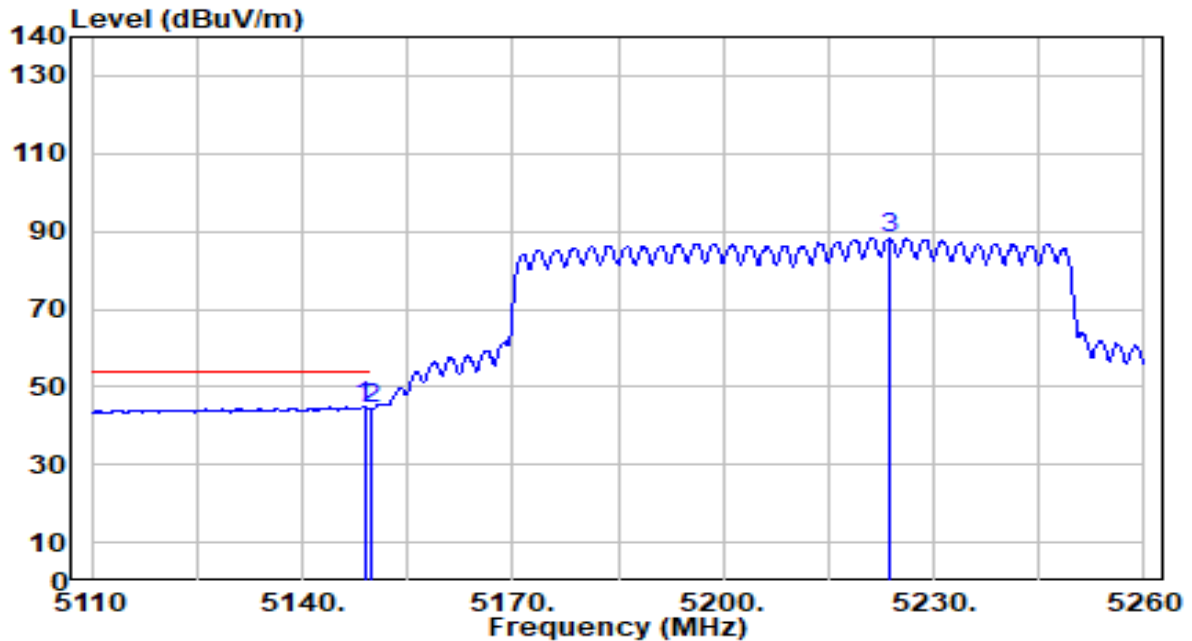


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.850	44.18	0.65	44.84	-9.16	54.00	150	25	Average
2		5150.000	43.69	0.65	44.34	-9.66	54.00	150	25	Average
3		5223.700	87.74	0.67	88.41	N/A	N/A	150	25	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

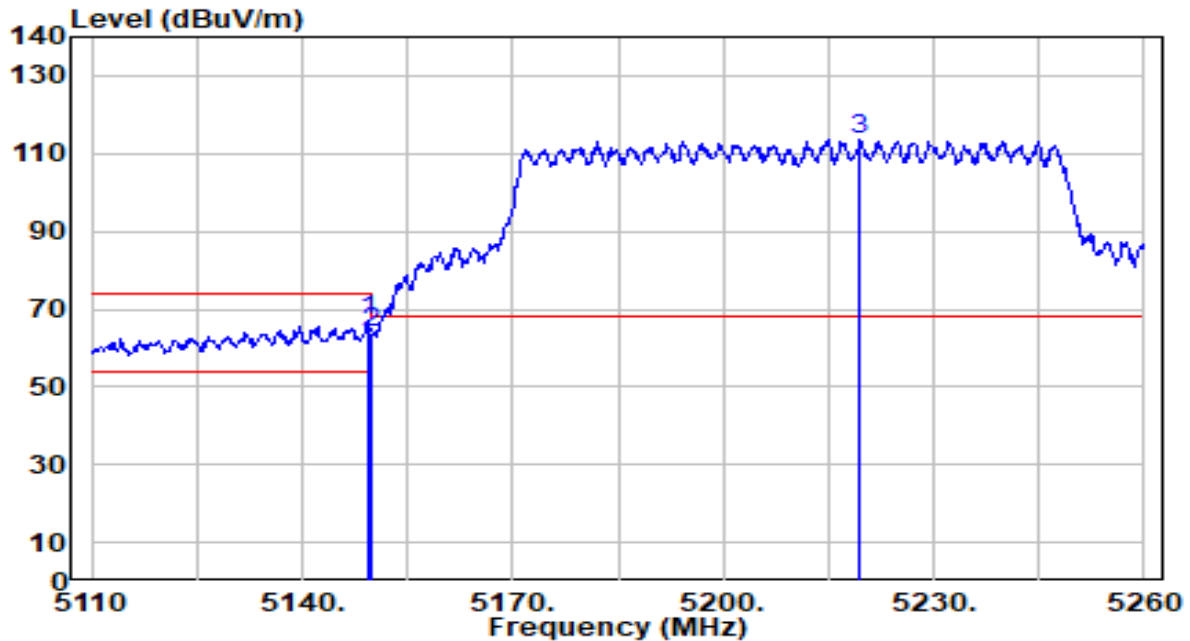


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.450	66.23	0.65	66.89	-7.11	74.00	108	201	Peak
2		5150.000	63.19	0.65	63.84	-10.16	74.00	108	201	Peak
3		5219.500	112.99	0.67	113.66	N/A	N/A	108	201	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

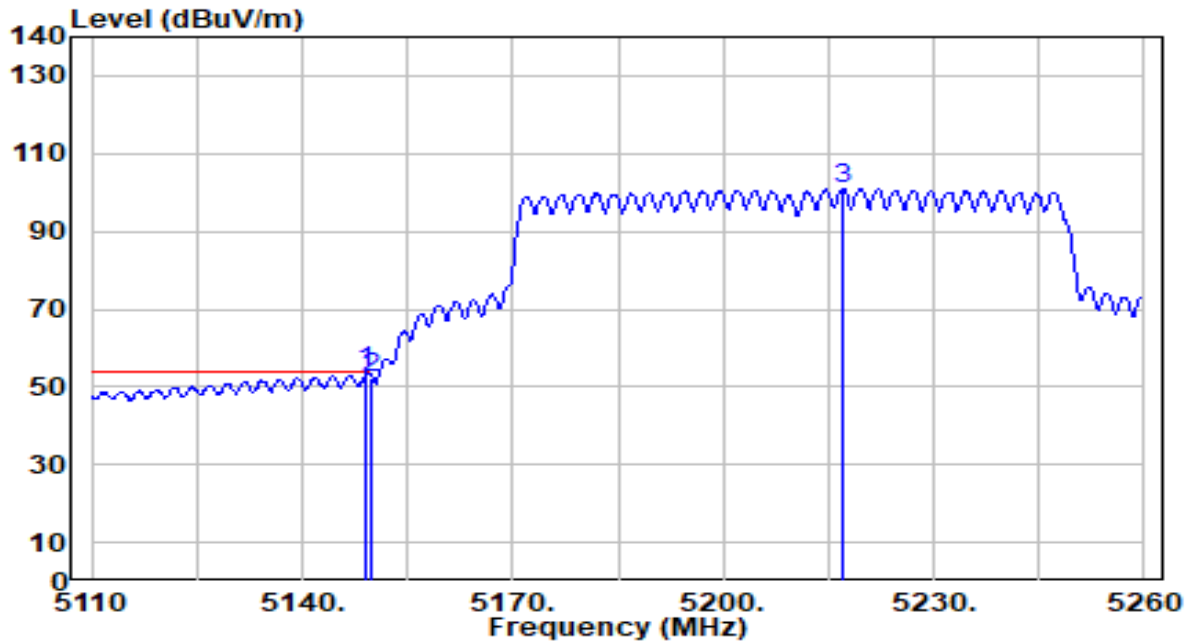


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.150	53.10	0.65	53.76	-0.24	54.00	108	201	Average
2		5150.000	51.44	0.65	52.09	-1.91	54.00	108	201	Average
3		5216.950	100.30	0.68	100.98	N/A	N/A	108	201	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-17
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

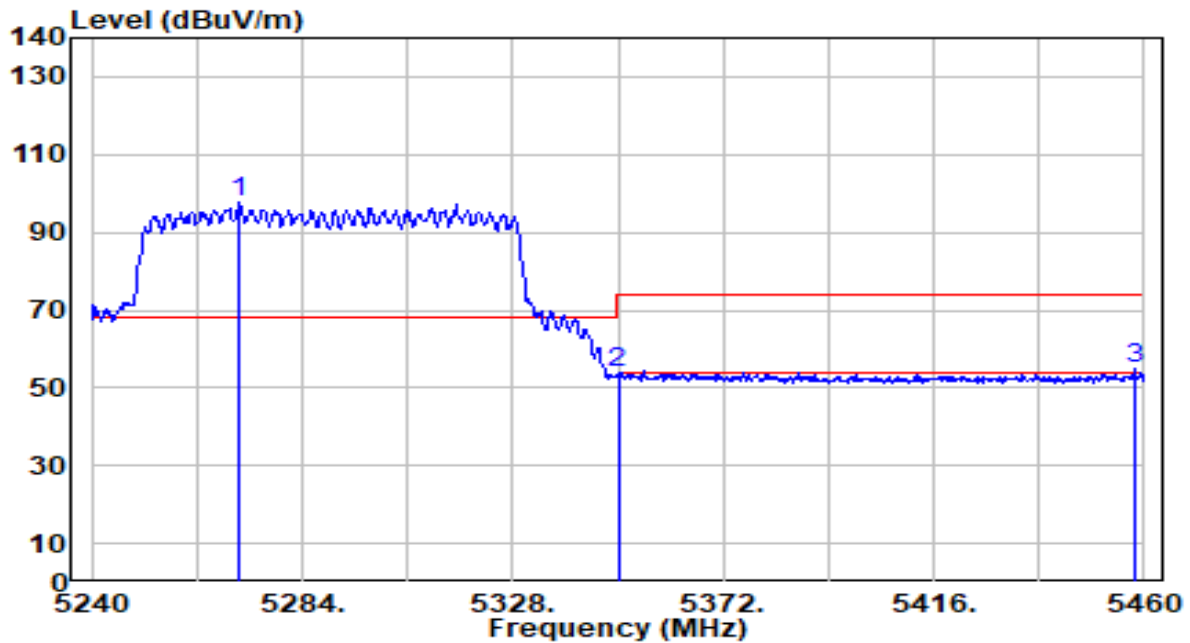


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5270.800	96.91	0.59	97.51	N/A	N/A	150	25	Peak
2	5350.000	53.61	0.47	54.08	-19.92	74.00	150	25	Peak
3	* 5458.020	54.19	0.65	54.84	-19.16	74.00	150	25	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-17
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

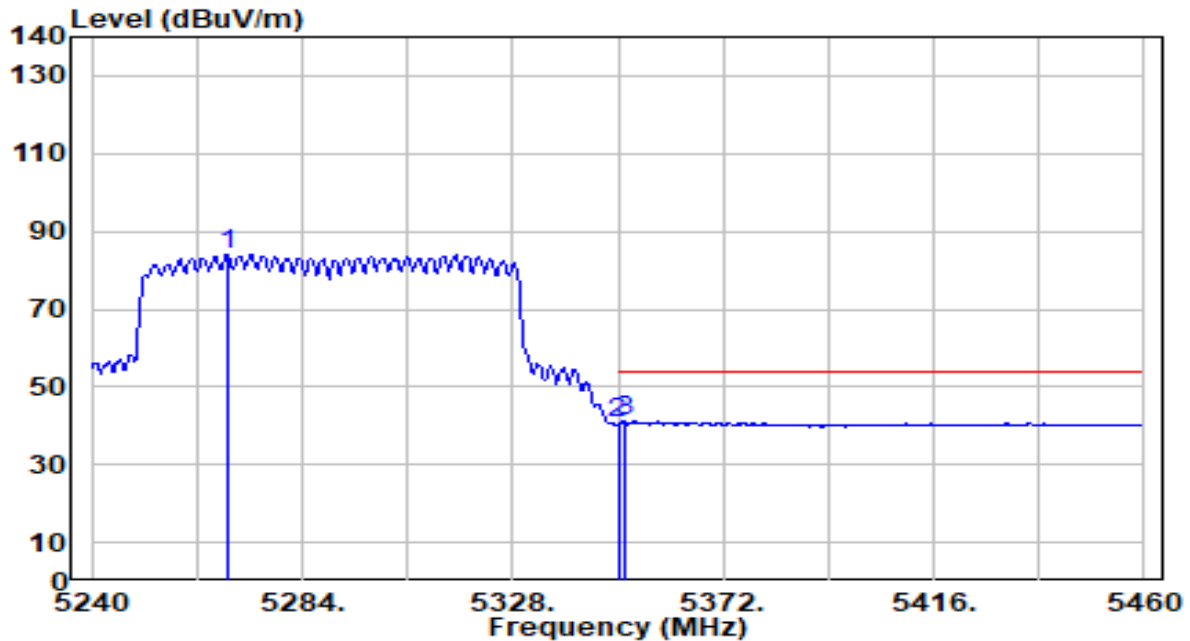


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5268.380	83.37	0.60	83.97	N/A	N/A	150	25	Average
2	5350.000	40.16	0.47	40.63	-13.37	54.00	150	25	Average
3	* 5351.320	40.75	0.47	41.22	-12.78	54.00	150	25	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-17
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

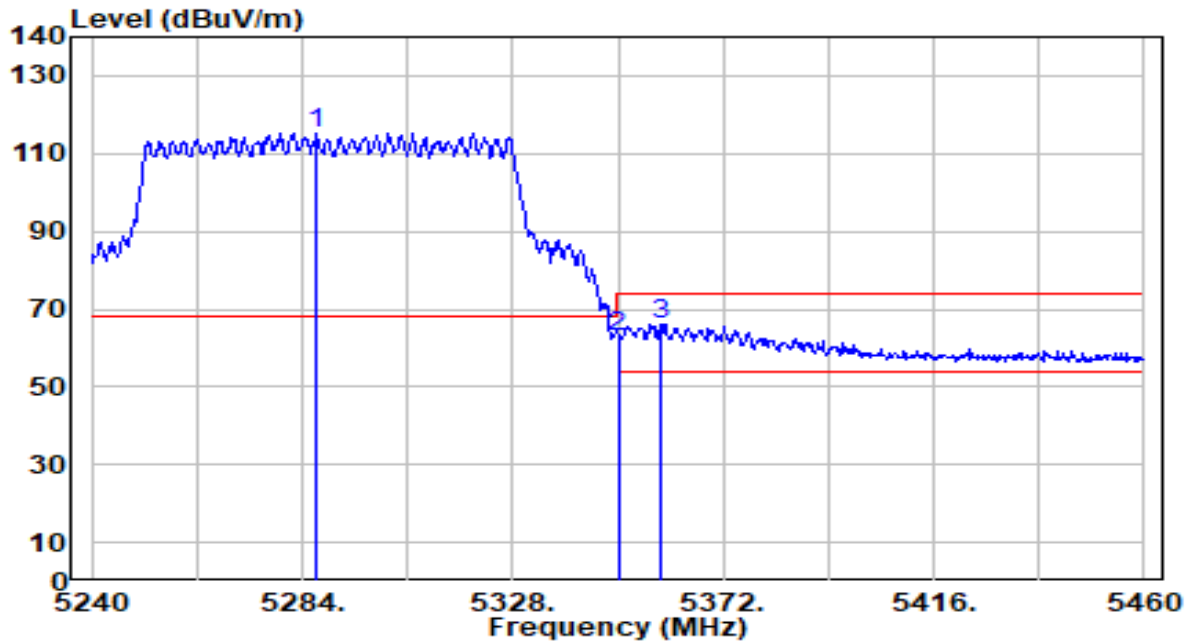


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5286.860	114.66	0.57	115.23	N/A	N/A	100	236	Peak
2	5350.000	62.58	0.47	63.05	-10.95	74.00	100	236	Peak
3	* 5358.800	65.75	0.46	66.20	-7.80	74.00	100	236	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-17
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

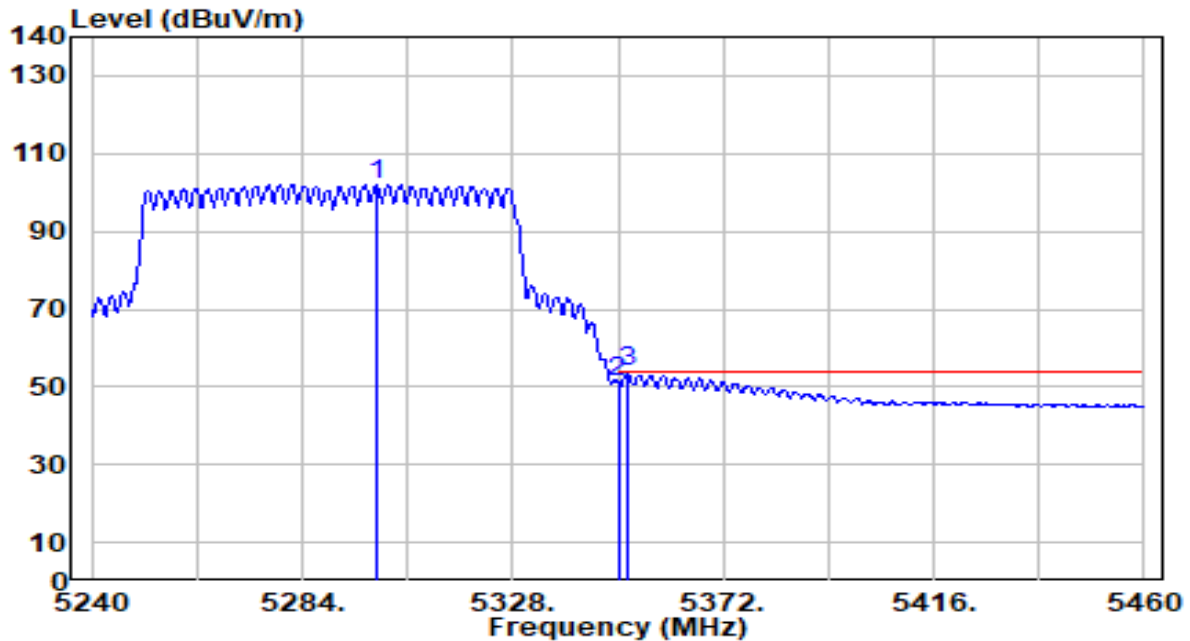


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5299.400	101.44	0.55	101.99	N/A	N/A	100	236	Average
2	5350.000	50.69	0.47	51.16	-2.84	54.00	100	236	Average
3	* 5351.980	53.35	0.47	53.81	-0.19	54.00	100	236	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

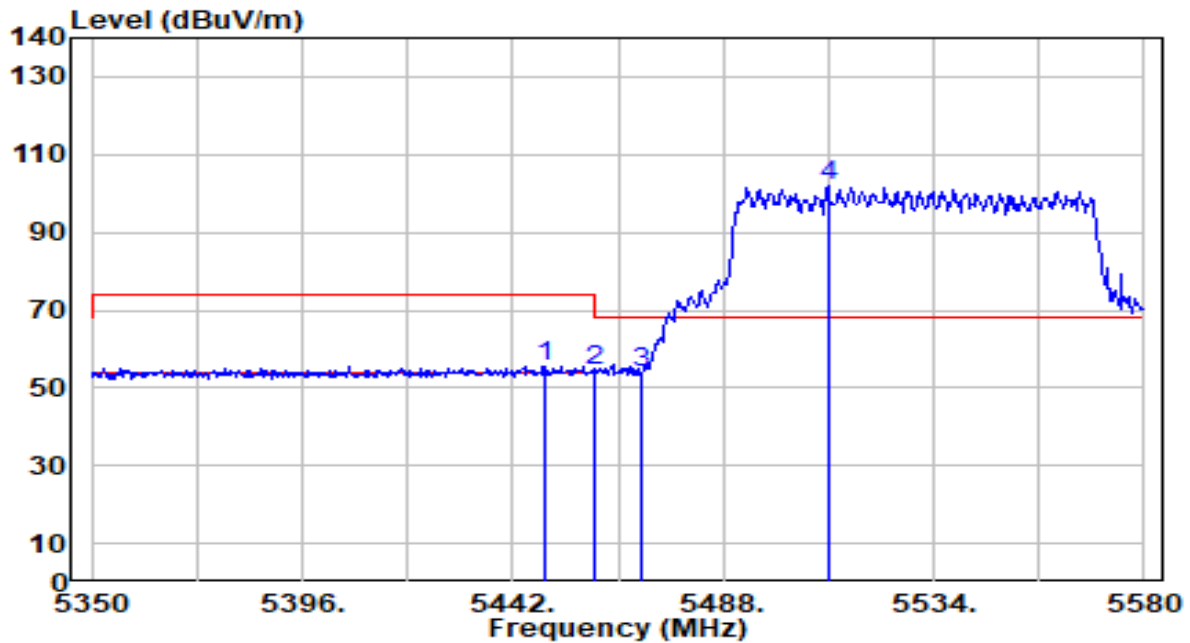


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5448.900	54.93	0.61	55.54	-18.46	74.00	158	96	Peak
2	5460.000	53.83	0.66	54.49	-19.51	74.00	158	96	Peak
3	* 5470.000	53.10	0.71	53.81	-14.39	68.20	158	96	Peak
4	5511.000	101.27	0.89	102.16	N/A	N/A	158	96	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

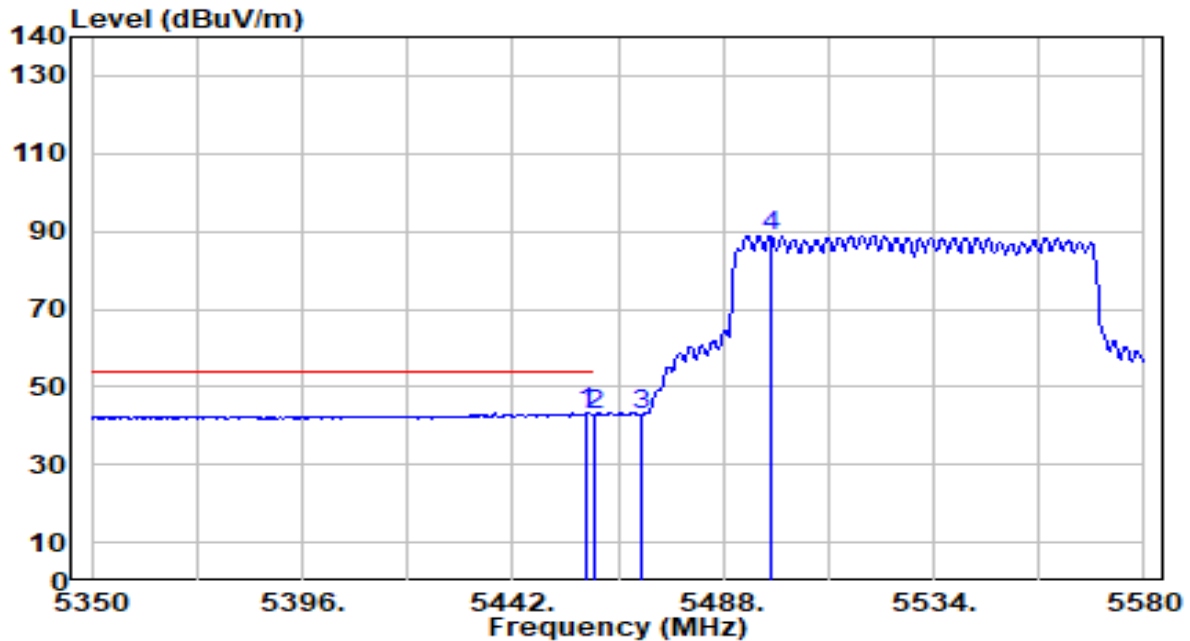


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.100	42.53	0.65	43.18	-10.82	54.00	158	96	Average
2		5460.000	42.23	0.66	42.89	-11.11	54.00	158	96	Average
3		5470.000	42.11	0.71	42.82	N/A	N/A	158	96	Average
4		5498.350	88.02	0.83	88.85	N/A	N/A	158	96	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

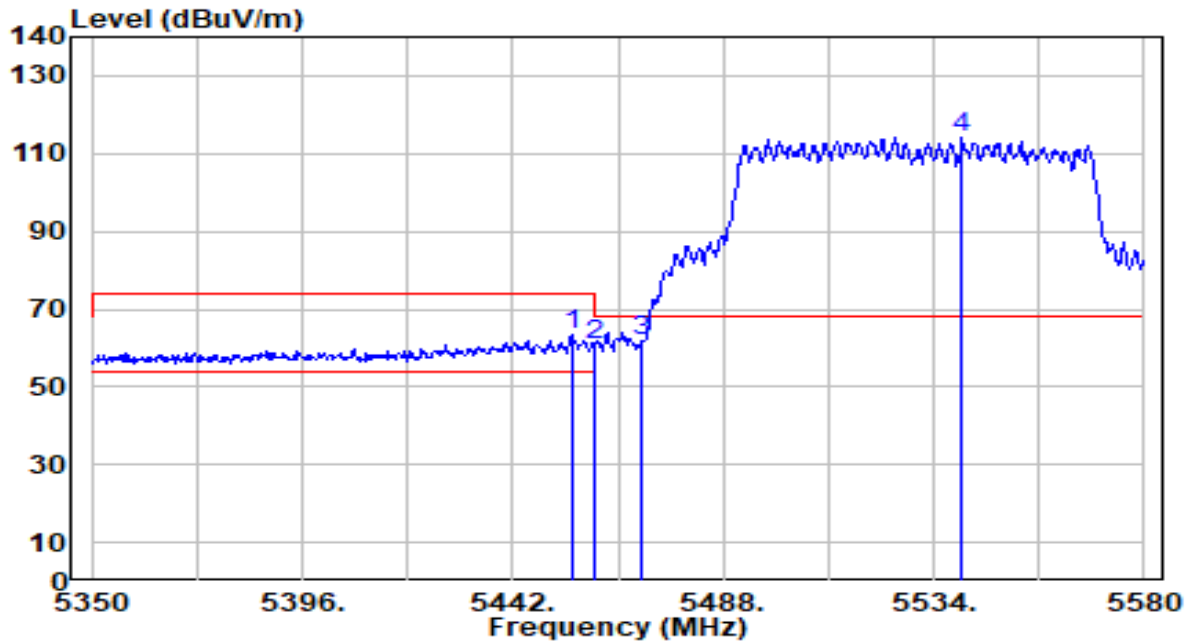


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.340	62.94	0.64	63.58	-10.42	74.00	120	235	Peak
2	5460.000	60.34	0.66	61.00	-13.00	74.00	120	235	Peak
3	* 5470.000	61.17	0.71	61.88	-6.32	68.20	120	235	Peak
4	5540.210	113.19	1.03	114.21	N/A	N/A	120	235	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

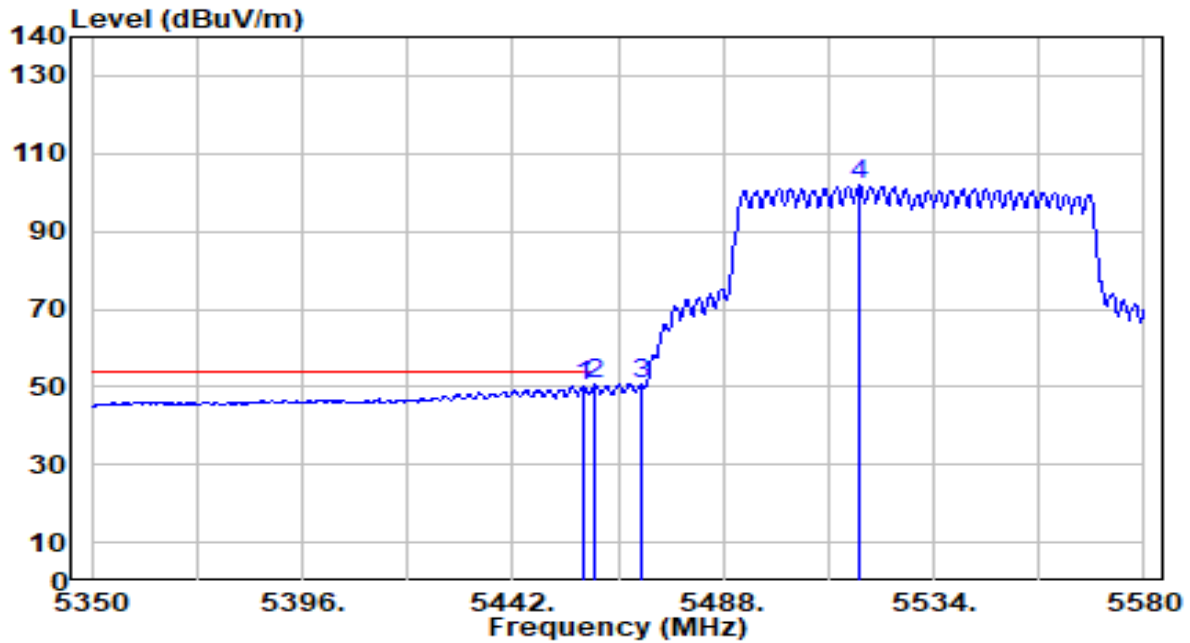


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5457.410	49.35	0.65	50.00	-4.00	54.00	120	235	Average
2	*	5460.000	50.06	0.66	50.72	-3.28	54.00	120	235	Average
3		5470.000	49.79	0.71	50.50	N/A	N/A	120	235	Average
4		5517.670	100.86	0.92	101.78	N/A	N/A	120	235	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

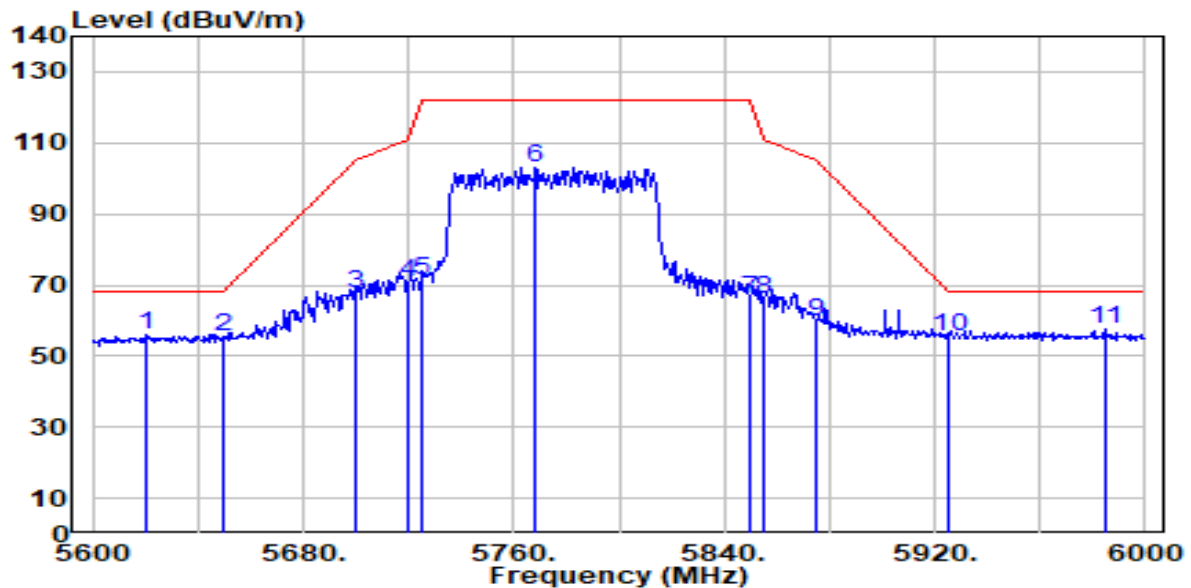


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5620.000	54.72	1.40	56.12	-12.08	68.20	150	237	Peak
2	5650.000	54.08	1.54	55.62	-12.58	68.20	150	237	Peak
3	5700.000	65.94	1.78	67.71	-37.49	105.20	150	237	Peak
4	5720.000	69.11	1.87	70.98	-39.82	110.80	150	237	Peak
5	5725.000	69.56	1.89	71.46	-50.74	122.20	150	237	Peak
6	5768.400	100.89	2.10	102.99	N/A	N/A	150	237	Peak
7	5850.000	63.78	2.25	66.04	-56.16	122.20	150	237	Peak
8	5855.000	63.98	2.25	66.24	-44.56	110.80	150	237	Peak
9	5875.000	57.69	2.26	59.95	-45.25	105.20	150	237	Peak
10	5925.000	53.12	2.27	55.39	-12.81	68.20	150	237	Peak
11 *	5984.800	55.08	2.28	57.36	-10.84	68.20	150	237	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

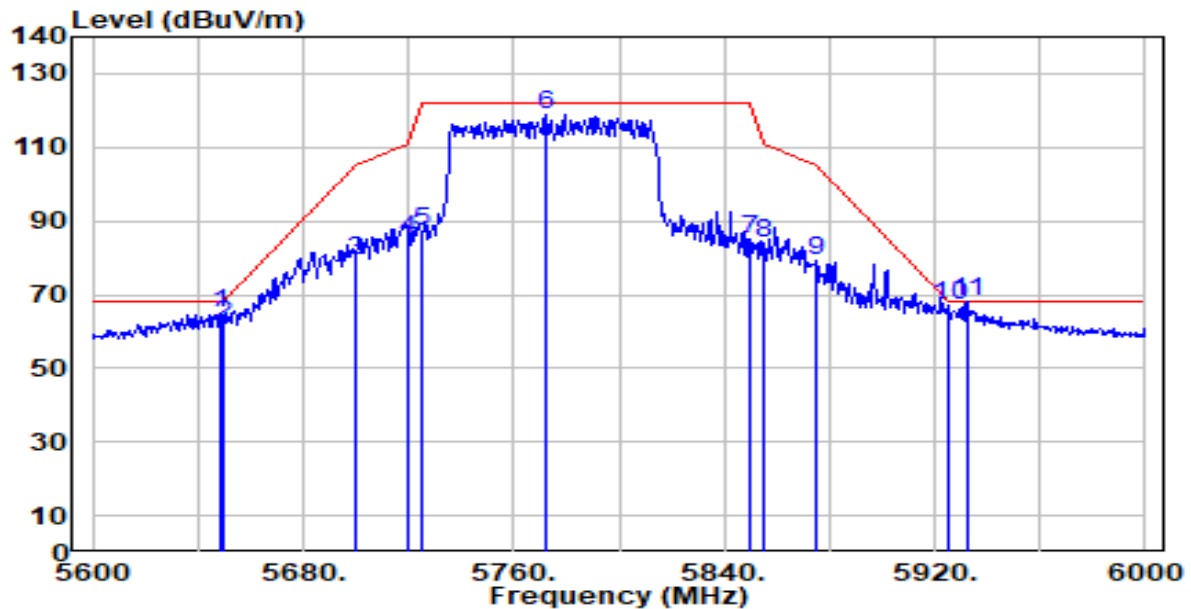


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5648.400	63.65	1.53	65.18	-3.02	68.20	200	243	Peak
2	5650.000	60.34	1.54	61.88	-6.32	68.20	200	243	Peak
3	5700.000	77.69	1.78	79.47	-25.73	105.20	200	243	Peak
4	5720.000	83.24	1.87	85.11	-25.69	110.80	200	243	Peak
5	5725.000	85.22	1.89	87.11	-35.09	122.20	200	243	Peak
6	5772.000	116.59	2.11	118.70	N/A	N/A	200	243	Peak
7	5850.000	82.79	2.25	85.04	-37.16	122.20	200	243	Peak
8	5855.000	81.81	2.25	84.06	-26.74	110.80	200	243	Peak
9	5875.000	77.23	2.26	79.49	-25.71	105.20	200	243	Peak
10	5925.000	64.61	2.27	66.88	-1.32	68.20	200	243	Peak
11 *	5932.400	65.71	2.27	67.98	-0.22	68.20	200	243	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-16
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

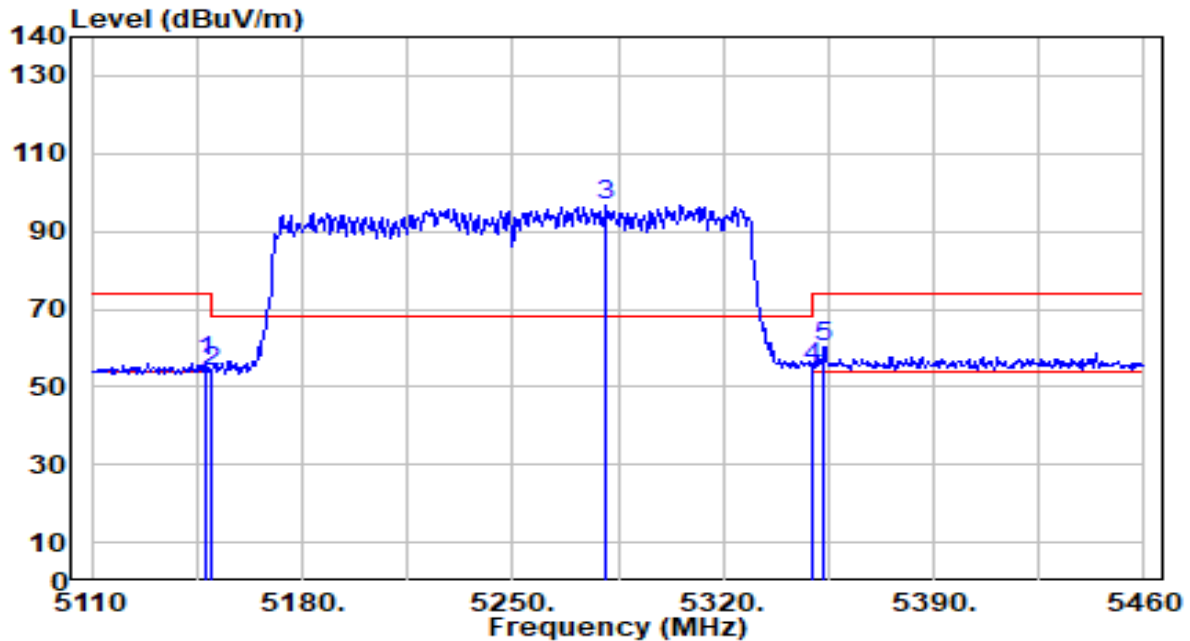

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.150	55.70	0.65	56.35	-17.65	74.00	150	26	Peak
2	5150.000	53.23	0.65	53.89	-20.11	74.00	150	26	Peak
3	5280.800	96.03	0.58	96.61	N/A	N/A	150	26	Peak
4	5350.000	54.57	0.47	55.04	-18.96	74.00	150	26	Peak
5	* 5353.600	60.02	0.47	60.48	-13.52	74.00	150	26	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.