



FCC TEST REPORT

REPORT NO.: RF90031503

MODEL NO.: LM-WU110

RECEIVED: March 15, 2001

TESTED: March 28, 2001

APPLICANT: Delta Networks, Inc.

ADDRESS: No.8, Kon Jan West Road, Liutu Industrial Zone,
Keelung, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 13-1, Lane 19, Wen Shan 3rd St., Kweishan,
Taoyuan Hsien, Taiwan, R.O.C.

This test report consists of 48 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by NVLAP or any U.S. government agencies. The test results in the report only apply to the tested sample.



Accredited Laboratory



Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS.....	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	6
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS.....	7
4	TEST PROCEDURES AND TEST RESULTS	8
4.1	CONDUCTED EMISSION MEASUREMENT	8
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	8
4.1.2	TEST INSTRUMENTS	8
4.1.3	TEST PROCEDURES	9
4.1.4	TEST SETUP	10
4.1.5	TEST RESULTS	11
4.2	RADIATED EMISSION MEASUREMENT	17
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	17
4.2.2	TEST INSTRUMENTS	18
4.2.3	TEST PROCEDURES	19
4.2.4	TEST SETUP	20
4.2.5	TEST RESULTS	21
4.3	6dB BANDWIDTH MEASUREMENT	25
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	25
4.3.2	TEST INSTRUMENTS	25
4.3.3	TEST PROCEDURE.....	26
4.3.4	TEST SETUP	26
4.3.5	EUT OPERATING CONDITION.....	26
4.3.6	TEST RESULTS	27
4.4	MAXIMUM PEAK OUTPUT POWER.....	31
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT.....	31
4.4.2	INSTRUMENTS.....	31
4.4.3	TEST PROCEDURES	32
4.4.4	TEST SETUP	32
4.4.5	EUT OPERATING CONDITION.....	32
4.4.6	TEST RESULTS	33
4.5	POWER SPECTRAL DENSITY MEASUREMENT	34
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	34
4.5.2	TEST INSTRUMENTS	34
4.5.3	TEST PROCEDURE.....	35



4.5.4	TEST SETUP	35
4.5.5	EUT OPERATING CONDITION.....	35
4.5.6	TEST RESULTS	36
4.6	BAND EDGES MEASUREMENT	40
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	40
4.6.2	TEST INSTRUMENTS	40
4.6.3	TEST PROCEDURE.....	40
4.6.4	EUT OPERATING CONDITION.....	41
4.6.5	TEST RESULTS	41
4.6.6	NOTE ON BAND EDGE EMISSION.....	42
4.7	ANTENNA REQUIREMENT	45
4.7.1	STANDARD APPLICABLE	45
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	45
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	46
6	INFORMATION ON THE TESTING LABORATORIES	48
ANNEX 1	PROCESSING GAIN OF DIRECT SEQUENCE SPREAD SPECTRUM MEASUREMENT	
ANNEX 2	DSSS INFORMATION	
ANNEX 3	PHOTOGRAPHS OF EUT	



1 CERTIFICATION

PRODUCT : WLAN USB Adapter
BRAND NAME : Delta Networks
MODEL NO. : LM-WU110
APPLICANT : Delta Networks, Inc.
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-1992
SITE REGISTRATION NO. : 90422 (FCC)
IC 3789-5 (Canada IC)

We, **Advance Data Technology Corporation**, hereby certify that one sample LM-WU110, of the designation has been tested in our facility on March 28, 2001.

The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

Tested by	: <u>Steven Lu</u>	Date: <u>Mar. 29, 2001</u>
	Steven Lu	
Prepared by	: <u>Demi Chen</u>	Date: <u>Mar. 29, 2001</u>
	Demi Chen	
Approved by	: <u>Alan Lane</u>	Date: <u>Mar. 29, 2001</u>
	Mr. Alan Lane, Manager	

NVLAQ®

Accredited Laboratory

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
STANDARD PARAGRAPH	TEST REQUIREMENTS	RESULT	REMARK
15.107	AC Power Conducted Emissions Spec.: 48dBuV	Yes	Minimum passing margin is -7.82dBuV At 2.69400MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Spec.: min. 500Khz	Yes	9.56 MHz > 500 kHz
15.247(b)	Maximum Peak Output Power Spec.: max. 30dBm	Yes	17.26dBm < 30 dBm
15.247(c)	Transmitter Radiated Emissions Spec.: Table 15.209	Yes	Minimum passing margin is -2.9 dBuV At 747.99 MHz
15.247(d)	Power Spectral Density Spec.: max. 8dBm	Yes	-12.01dBm < 8 dBm
15.247(c)	Band Edge Measurement	Yes	N/A
15.247(e)	Processing Gain of Direct Sequence Spread Spectrum System Spec.: min. 10 dB	Yes	11.4dB \geq 10dB

NOTE:

The receiver portion of the EUT has been tested in ADT. The test result has been verified to comply with FCC Part 15, Subpart B, Class B – Computing Devices (FCC DoC). The engineering test report can be provided upon FCC requests.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	WLAN USB Adapter
MODEL NO.	LM-WU110
POWER SUPPLY	5VDC from PC
DATA CABLE	1m (Shielded)
I/O PORTS	NA
MODULATION TYPE	CCK, BPSK, QPSK
RADIO TECHNOLOGY	DSSS
TRANSFER RATE	1/2/5.5/11Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	13dBm
ANTENNA TYPE	Dual monopole
ASSOCIATED DEVICES	NA
DESCRIPTION OF MODELS	LM-WU110RA is a Wireless-to-USB product which provides a USB-to-wireless seamless connection. The Wireless interface is IEEE802.11b standard compatible. Its data transmission rate is 11Mbps. The USB interface is USB 1.0 compliant. It provides 12Mbps data rate. In this design, no extra power supply needs.

3.2 DESCRIPTION OF TEST MODES

1.Eleven channels are provided in this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a WLAN USB Adapter, according to the specifications of the manufacturers, it must comply with the requirements of the following standards:

FCC CFR 47 Part 15, Subpart C. (15.247)

All tests have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No	Product	Brand	Model No.	Serial No.	I/O Cable
1	NOTEBOOK	IBM	2635	97-84L54	NA
2	PRINTER	HP	2225C+	3123S97230	Shielded signal (1.2m)
3	Modem	ACEEX	1414	980020503	Shielded signal (1.2m)

4 TEST PROCEDURES AND TEST RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.45 – 30	48	-	48	-

Notes:

- 1.The lower limit shall apply at the transition frequencies.
- 2.All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESHS30	828109/007	July 6, 2001
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	839135/006	July 9, 2001
ROHDE & SCHWARZ 4-wire ISN	ENY41	837032/016	Nov. 28, 2001
ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Dec. 3, 2001
EMCO-L.I.S.N. (for peripheral)	3825/2	9204-1964	July 9, 2001
Software	Cond-V2e	NA	NA
RF cable (JYEBAO)	RG-58A/U	Cable-C02.01	July 9, 2001
HP Terminator (For EMCO LISN)	11593A	E1-01-298	Feb. 20, 2002
HP Terminator (For EMCO LISN)	11593A	E1-01-299	Feb. 20, 2002
Shielded Room	Site 2	ADT-C02	NA
VCCI Site Registration No.	Site 2	C-240	NA


- Notes: 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months.
And the calibrations are traceable to NML/ROC and NIST/USA.



4.1.3 TEST PROCEDURES

1. Place the EUT at 0.4 meter away from the conduction wall of the shielded room.
2. Connect the EUT to the power mains through a Line Impedance Stabilization Network (LISN).
3. Connect the other support units to the other LISN too.
4. Make sure the $50\Omega/50\mu\text{H}$ coupling impedance is provided to the measurement instrument by the LISNs.
5. Measure the maximum conducted interference on both lines of the power mains connects to the EUT, within frequency range 450KHz ~ 30MHz.
6. The emission level under limit by 10dB is not needed to be reported.

4.1.4 TEST SETUP

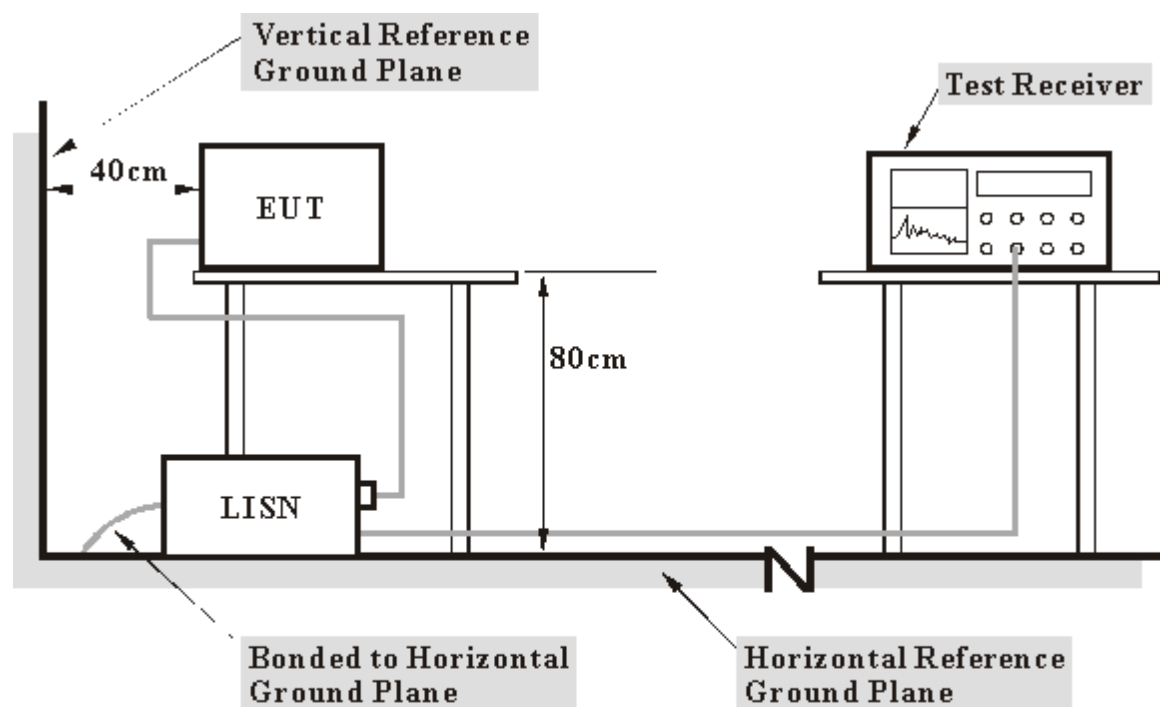


- Note:** 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related Item in this test report (**Photographs of the Test Configuration**).

4.1.5 TEST RESULTS

EUT	WLAN USB Adapter	Model	LM-WU110
Channel	Channel 1	Phase	L
Environmental Conditions	20°C, 60%RH	Tested By	Steven Lu


No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.49200	0.20	19.45	-	19.65	-	48.00	-	-28.35	-
2	2.69400	0.27	39.91	-	40.18	-	48.00	-	-7.82	-
3	3.56700	0.36	33.24	-	33.60	-	48.00	-	-14.40	-
4	8.88200	0.64	32.77	-	33.41	-	48.00	-	-14.59	-
5	12.50300	0.85	32.50	-	33.35	-	48.00	-	-14.65	-
6	22.56800	1.25	36.36	-	37.61	-	48.00	-	-10.39	-

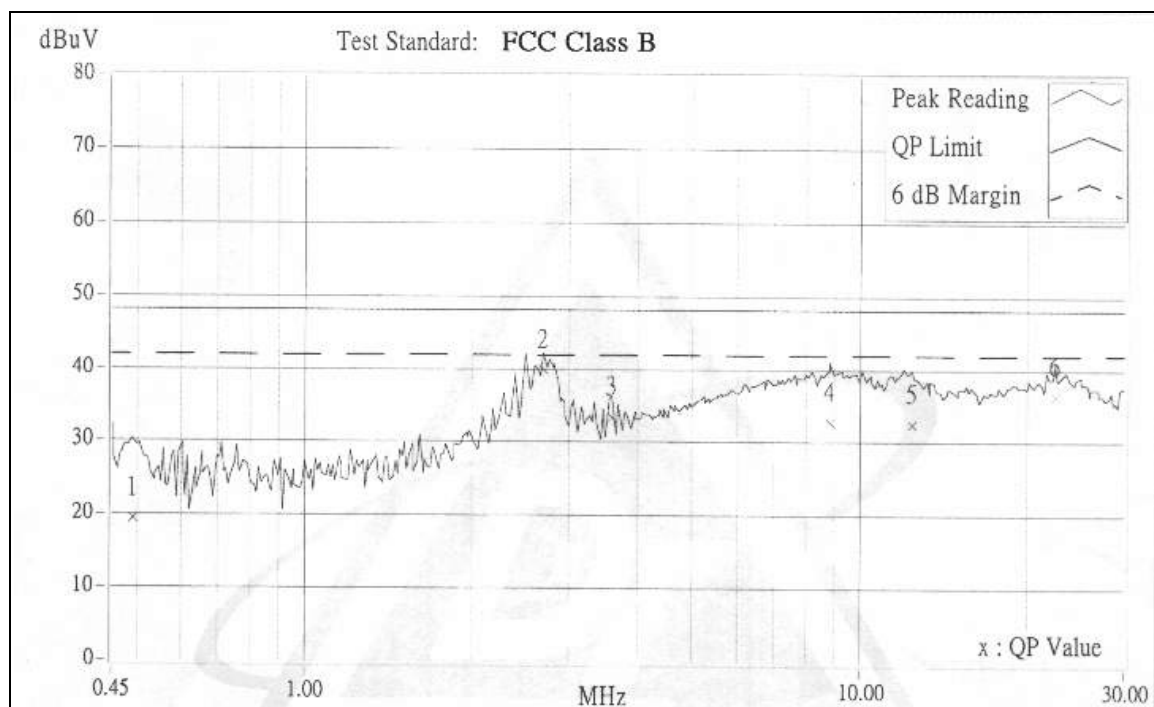

- Remarks:
1. "x": Undetectable
 2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

EUT	WLAN USB Adapter	Model	LM-WU110
Channel	Channel 1	Phase	N
Environmental Conditions	20°C , 60%RH	Tested By	Steven Lu


No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.54000	0.20	18.40	-	18.60	-	48.00	-	-29.40	-
2	0.65400	0.20	25.16	-	25.36	-	48.00	-	-22.64	-
3	2.68500	0.27	37.96	-	38.23	-	48.00	-	-9.77	-
4	10.03700	0.60	33.32	-	33.92	-	48.00	-	-14.08	-
5	12.67100	0.76	32.84	-	33.60	-	48.00	-	-14.40	-
6	23.90600	1.23	32.21	-	33.44	-	48.00	-	-14.56	-

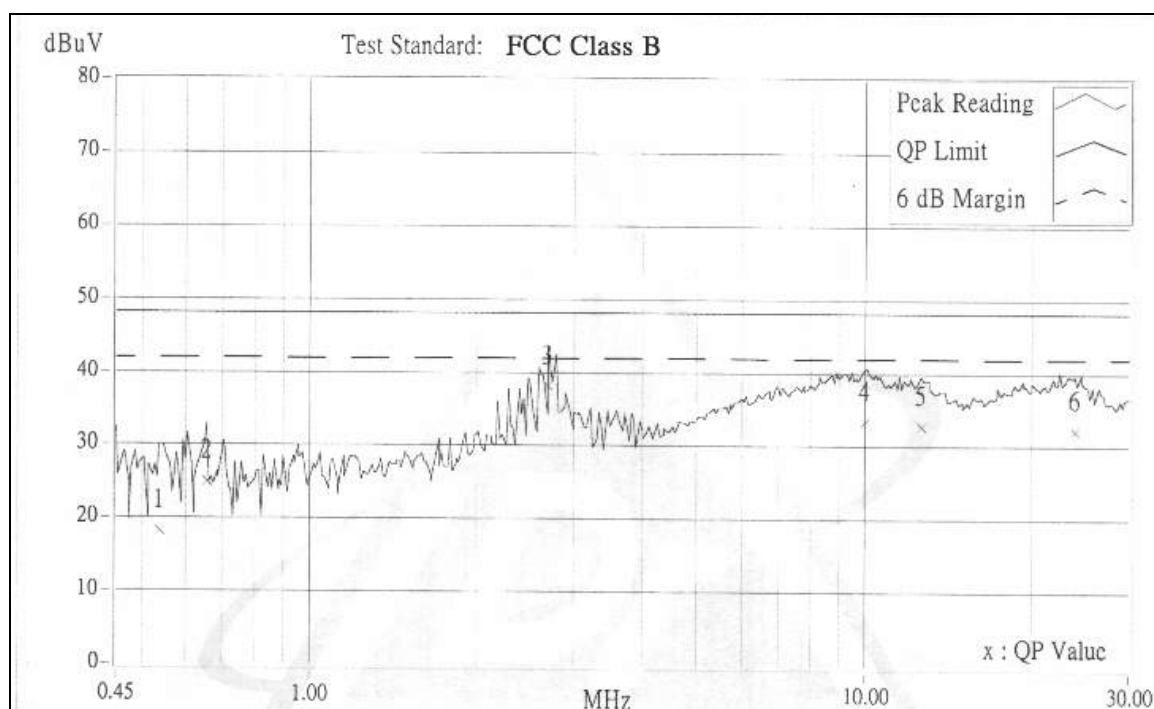

- Remarks:
1. "": Undetectable
 2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

EUT	WLAN USB Adapter	Model	LM-WU110
Channel	Channel 6	Phase	L
Environmental Conditions	20°C, 60%RH	Tested By	Steven Lu


No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.50400	0.20	21.49	-	21.69	-	48.00	-	-26.31	-
2	2.70671	0.27	33.80	-	34.07	-	48.00	-	-13.93	-
3	3.56897	0.36	27.64	-	28.00	-	48.00	-	-20.00	-
4	8.26700	0.61	31.72	-	32.33	-	48.00	-	-15.67	-
5	12.29000	0.84	32.51	-	33.35	-	48.00	-	-14.65	-
6	22.56800	1.25	36.20	-	37.45	-	48.00	-	-10.55	-

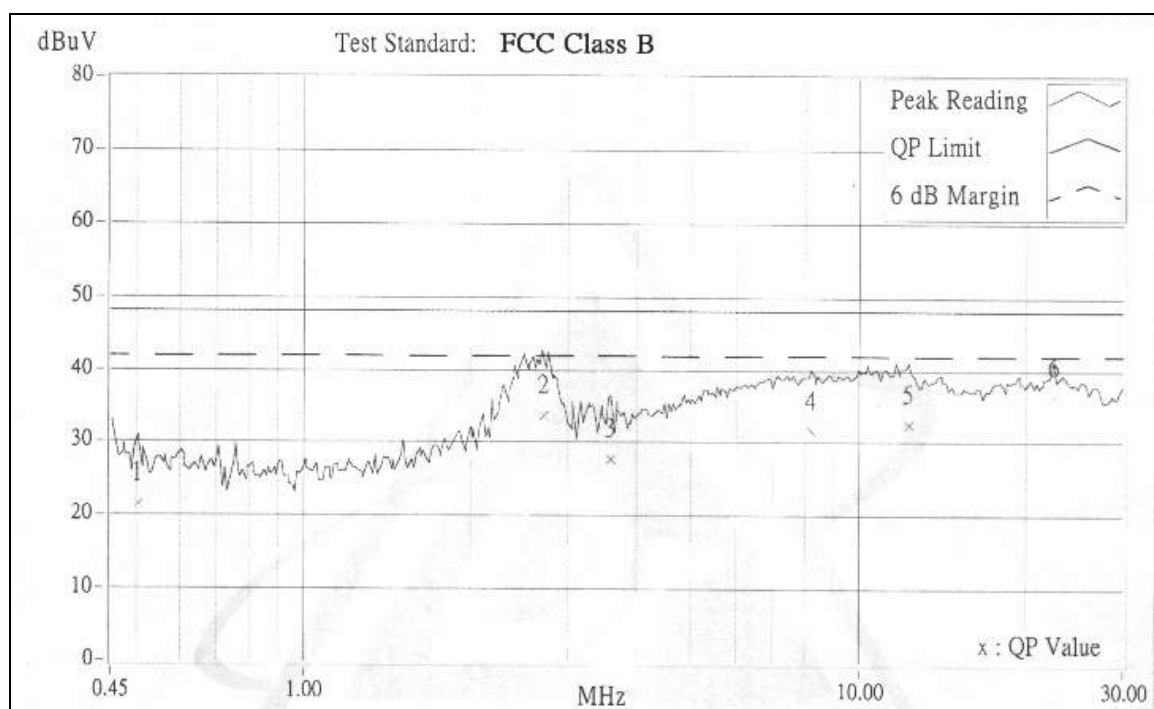

- Remarks:
1. "": Undetectable
 2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

EUT	WLAN USB Adapter	Model	LM-WU110
Channel	Channel 6	Phase	N
Environmental Conditions	20°C, 60%RH	Tested By	Steven Lu


No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.50019	0.20	24.75	-	24.95	-	48.00	-	-23.05	-
2	2.70000	0.27	38.16	-	38.43	-	48.00	-	-9.57	-
3	3.55200	0.36	33.54	-	33.90	-	48.00	-	-14.10	-
4	10.21400	0.61	33.96	-	34.57	-	48.00	-	-13.43	-
5	13.09100	0.79	32.21	-	33.00	-	48.00	-	-15.00	-
6	22.56800	1.15	36.20	-	37.35	-	48.00	-	-10.65	-

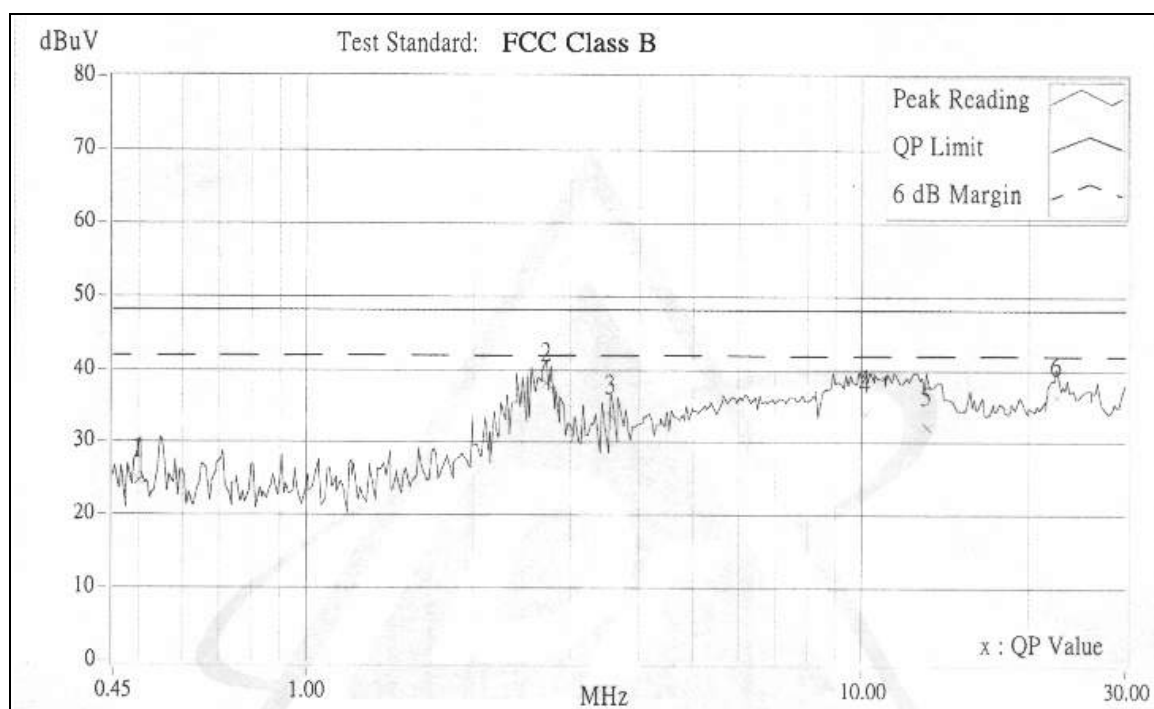

- Remarks:
1. "": Undetectable
 2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

EUT	WLAN USB Adapter	Model	LM-WU110
Channel	Channel 11	Phase	L
Environmental Conditions	20°C, 60%RH	Tested By	Steven Lu


No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.54900	0.20	25.82	-	26.02	-	48.00	-	-21.98	-
2	2.65200	0.27	38.41	-	38.68	-	48.00	-	-9.32	-
3	5.66600	0.48	32.06	-	32.54	-	48.00	-	-15.46	-
4	9.72500	0.69	34.08	-	34.77	-	48.00	-	-13.23	-
5	12.20000	0.83	33.38	-	34.21	-	48.00	-	-13.79	-
6	22.57100	1.25	35.59	-	36.84	-	48.00	-	-11.16	-

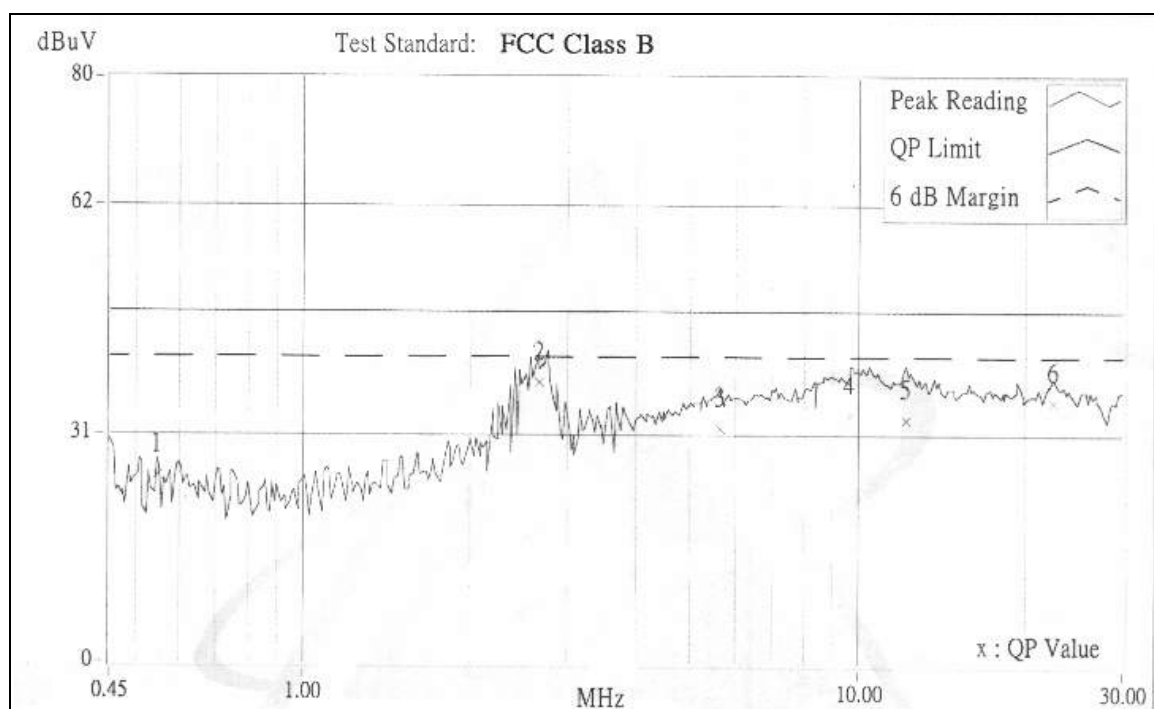

- Remarks:
1. "": Undetectable
 2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

EUT	WLAN USB Adapter	Model	LM-WU110
Channel	Channel 11	Phase	N
Environmental Conditions	20°C, 60%RH	Tested By	Steven Lu

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.50100	0.20	24.83	-	25.03	-	48.00	-	-22.97	-
2	2.74500	0.27	31.66	-	31.93	-	48.00	-	-16.07	-
3	3.54900	0.35	33.62	-	33.97	-	48.00	-	-14.03	-
4	9.93800	0.60	33.47	-	34.07	-	48.00	-	-13.93	-
5	12.44000	0.75	34.01	-	34.76	-	48.00	-	-13.24	-
6	22.56800	1.15	36.40	-	37.55	-	48.00	-	-10.45	-

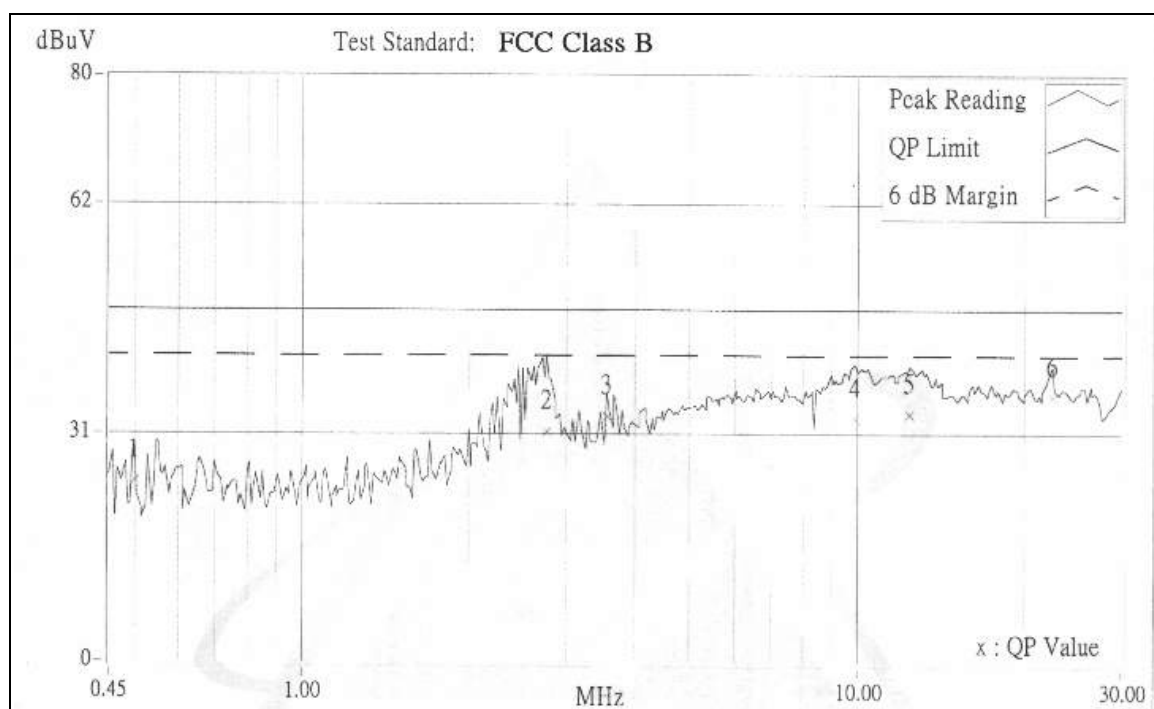

- Remarks:
1. "": Undetectable
 2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field Strength of Fundamental	
	$\mu\text{V}/\text{meter}$	$\text{dB}\mu\text{V}/\text{meter}$
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHz

FREQUENCY (MHz)	Class A (at 10m)		Class B (at 3m)	
	$\mu\text{V}/\text{m}$	$\text{dB}\mu\text{V}/\text{m}$	$\mu\text{V}/\text{m}$	$\text{dB}\mu\text{V}/\text{m}$
Above 1000	300	49.5	500	54.0

Note: 1 The lower limit shall apply at the transition frequencies.

2 Emission level ($\text{dB}\mu\text{V}/\text{m}$) = $20 \log$ Emission level ($\mu\text{V}/\text{m}$).

3 All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Spectrum Analyzer	8590L	3544A01176	April 18, 2001
HP Preamplifier	8447D	2944A08485	April 26, 2001
* HP Preamplifier	8449B	3008A01201	Dec. 13, 2001
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Jan. 25, 2002
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 23, 2001
* CHASE BILOG Antenna	CBL6112A	2221	Aug. 4, 2001
* EMCO Turn Table	1060	1115	NA
* SHOSHIN Tower	AP-4701	A6Y005	NA
* Software	AS61D	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Aug. 4, 2001
* TIMES RF cable	LMR-600	CABLE-ST5-01	Aug. 4, 2001
Open Field Test Site	Site 5	ADT-R05	July 28, 2001
VCCI Site Registration No.	Site 5	R-1039	NA

NOTE: 1. The measurement uncertainty is less than +/- 3.0dB, which is calculated as per the NAMAS document NIS81.

2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

3. "*" = These equipments are used for the final measurement.




4.2.3 TEST PROCEDURES

1. The EUT was placed on the turn table 0.8 meter above ground in 3 meter open area test site.
2. Set the resolution bandwidth to 120KHz in the test receiver and select Peak function to scan the frequency below 1 GHz.
3. Shift the interference-receiving antenna located in antenna tower upwards and downwards between 1 and 4 meters above ground and find out the local peak emission on frequency domain.
4. Locate the interference-receiving antenna at the position where the local peak reach the maximum emission.
5. Rotate the turn table and stop at the angle where the measurement device has maximum reading
6. Shift the interference-receiving antenna again to detect the maximum emission of the local peak
7. If the reading of the local peak under Peak function is lower than limit by 6dB, then Quasi Peak detection is not needed and this reading should be recorded. And if it is higher than Peak limit, then the test is fail. Others, switch the receiver to Quasi Peak function, set the resolution bandwidth to 100kHz and repeat the procedures C ~ F. If the reading is lower than limit, this reading should be recorded, otherwise, the test is fail.
8. Set the resolution and video bandwidth of the spectrum analyzer to 1MHz and repeat procedures C ~ F for frequency band from 1 GHz to 10 times carrier frequency.
9. If the reading for the local peak is lower than the Average limit, no further testing is needed in this local peak and this reading should be recorded. If it is higher than Average limit but lower than Peak limit, then set the resolution bandwidth to 1MHz and video bandwidth to 300Hz. Repeat procedures C ~ F. If the maximum reading is lower than Average limit, then this reading should be recorded. If it is higher, then the test is fail.

Notes:

1. The frequency range of verification is either from 30 MHz to 1GHz or from 30 MHz up to 10 times carrier frequency of EUT (whichever is the highest frequency range).
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for frequency below 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for frequency above 1GHz.

4.2.4 TEST SETUP

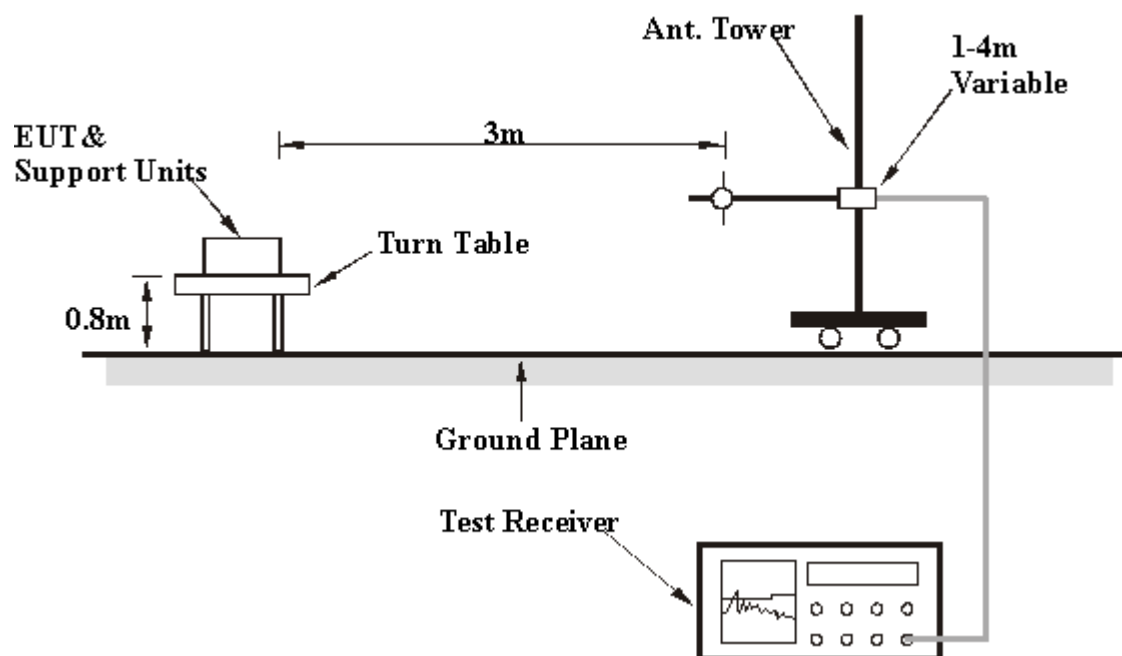

For the actual test configuration, please refer to the related Item in this test report **(Photographs of the Test Configuration)**.

4.2.5 TEST RESULTS

Digital Portion

EUT	WLAN USB Adapter	Model	LM-WU110
Mode	Channel 11	Detector Function	Quasi-Peak
Frequency Range	30-1000 MHz	Test Distance	3M
Environmental Conditions	20°C, 60%RH	Tested By	Steven Lu

ANTENNA POLARITY: VERTICAL							
Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
144.00	13.00	11.60	24.6	43.5	-18.9	124	108
307.99	15.92	16.58	32.5	46.0	-13.5	102	285
336.02	16.73	11.57	28.3	46.0	-17.7	115	201
384.02	18.92	11.31	29.6	46.0	-16.4	104	257
395.99	18.68	14.92	33.6	46.0	-12.4	131	186
428.98	19.11	9.49	28.6	46.0	-17.4	100	236
432.30	19.13	17.07	36.2	46.0	-9.8	145	176
747.99	23.02	19.98	43.0	46.0	-3.0	145	106

ANTENNA POLARITY: HORIZONTAL							
Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
144.00	13.00	21.50	34.5	43.5	-9.0	135	203
307.99	15.92	11.18	27.1	46.0	-18.9	189	164
336.03	16.73	11.57	28.3	46.0	-17.7	165	106
384.03	18.29	9.31	27.6	46.0	-18.4	107	260
395.99	18.68	13.92	32.6	46.0	-13.4	143	232
483.99	20.20	12.00	32.2	46.0	-13.8	120	178
747.99	23.02	20.08	43.1	46.0	-2.9	100	120

- Notes:
- 1 Emission level (dBuV/m) = Correction Factor (dB) + Reading value (dBuV).
 - 2 Correction Factor (dB) = Ant. Factor (dB)+Cable loss (dB)
 - 3 The other emission levels were very low against the limit.
 - 4 Margin value = Emission level - Limit value

RF Portion

EUT	WLAN USB Adapter	Model	LM-WU110
Mode	Channel 1	Detector Function	Peak Average
Frequency Range	Above 1000 MHz	Test Distance	3M
Environmental Conditions	20°C, 60%RH	Tested By	Steven Lu

ANTENNA POLARITY: Vertical		Detector Function :				6dB Bandwidth : 1MHz				Frequency Range : Above 1GHz	
Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)		Antenna Height (cm)	Table Angle (Degree)
		P.K.	A.V.	P.K.	A.V.	P.K.	A.V.	P.K.	A.V.		
2038.1	31.19	13.31	-	44.5	-	74.0	54.0	-29.5	-	107	106
*2413.4	32.40	72.8	65.1	105.2	97.5	-	-	-	-	100	221
4076.0	37.13	16.87	11.07	54.0	48.2	74.0	54.0	-20.0	-5.8	100	242
4824.2	38.05	16.55	11.45	54.6	49.5	74.0	54.0	-20.6	-4.5	109	172

ANTENNA POLARITY: Horizontal		Detector Function :				6dB Bandwidth:1MHz				Frequency Range: Above 1GHz	
Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)		Antenna Height (cm)	Table Angle (Degree)
		P.K.	A.V.	P.K.	A.V.	P.K.	A.V.	P.K.	A.V.		
2037.8	31.19	18.61	-	49.8	-	74.0	54.0	-24.2	-	104	149
*2413.4	32.40	70.7	62.8	103.1	95.2	-	-	-	-	101	207
4076.0	37.13	14.97	-	52.1	-	74.0	54.0	-21.9	-	100	158
4824.1	38.05	17.05	4.55	55.1	42.6	74.0	54.0	-18.9	-11.4	110	201

- NOTES:**
1. Emission level (dBuV/m) = Correction Factor (dB) + Reading value (dBuV).
 2. Correction Factor (dB) = Ant. Factor (dB)+Cable loss (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

EUT	WLAN USB Adapter	Model	LM-WU110
Mode	Channel 6	Detector Function	Peak Average
Frequency Range	Above 1000 MHz	Test Distance	3M
Environmental Conditions	20°C , 60%RH	Tested By	Steven Lu

ANTENNA POLARITY: Vertical		Detector Function :				6dB Bandwidth:1MHz				Frequency Range: Above 1GHz	
Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)		Antenna Height (cm)	Table Angle (Degree)
		P.K.	A.V.	P.K.	A.V.	P.K.	A.V.	P.K.	A.V.		
2063.1	31.26	18.94	-	50.2	-	74.0	54.0	-23.8	-	108	235
*2437.9	32.49	71.40	63.91	103.9	96.4	-	-	-	-	100	117
4126.1	37.14	13.86	-	51.0	-	74.0	54.0	-23.0	-	110	152
4874.2	38.19	8.31	-	46.5	-	74.0	54.0	-27.5	-	105	269

ANTENNA POLARITY: Horizontal		Detector Function :				6dB Bandwidth:1MHz.				Frequency Range: Above 1GHz.	
Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)		Antenna Height (cm)	Table Angle (Degree)
		P.K.	A.V.	P.K.	A.V.	P.K.	A.V.	P.K.	A.V.		
2063.0	31.26	20.04	11.34	51.3	42.6	74.0	54.0	-22.7	-11.4	100	141
*2437.0	32.49	72.11	64.41	104.6	96.9	-	-	-	-	109	196
4126.1	37.14	12.46	-	49.6	-	74.0	54.0	-24.4	-	100	141
4874.6	38.19	11.41	-	49.6	-	74.0	54.0	-24.4	-	107	105

- NOTES:**
1. Emission level (dBuV/m) = Correction Factor (dB) + Reading value (dBuV).
 2. Correction Factor (dB) = Ant. Factor (dB)+Cable loss (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

EUT	WLAN USB Adapter	Model	LM-WU110
Mode	Channel 11	Detector Function	Peak Average
Frequency Range	Above 1000 MHz	Test Distance	3M
Environmental Conditions	20°C, 60%RH	Tested By	Steven Lu

ANTENNA POLARITY: Vertical		Detector Function :				6dB Bandwidth:1MHz.				Frequency Range: Above 1GHz	
Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)		Antenna Height (cm)	Table Angle (Degree)
		P.K.	A.V.	P.K.	A.V.	P.K.	A.V.	P.K.	A.V.		
2088.0	31.35	17.05	-	48.4	-	74.0	54.0	-25.6	-	102	84
*2462.0	32.56	71.74	64.54	104.3	97.1	-	-	-	-	102	277
4176.0	37.14	17.06	11.26	54.2	48.4	74.0	54.0	-22.2	-5.6	108	241
4924.2	38.33	16.87	5.17	55.2	43.5	74.0	54.0	-18.8	-10.5	100	302

ANTENNA POLARITY: Horizontal		Detector Function :				6dB Bandwidth:1MHz.				Frequency Range: Above 1GHz	
Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)		Antenna Height (cm)	Table Angle (Degree)
		P.K.	A.V.	P.K.	A.V.	P.K.	A.V.	P.K.	A.V.		
2088.1	31.35	17.85	-	49.2	-	74.0	54.0	-24.8	-	100	237
*2462.3	32.56	71.34	64.24	103.9	96.8	-	-	-	-	100	305
4176.0	37.14	-	11.76	-	48.9	74.0	54.0	-	-5.1	100	305
4924.0	38.33	-	7.57	-	45.9	74.0	54.0	-	-8.1	100	305

- NOTES:**
1. Emission level (dBuV/m) = Correction Factor (dB) + Reading value (dBuV).
 2. Correction Factor (dB) = Ant. Factor (dB)+Cable loss (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The Limit of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ROHDE & SCHWARZ TEST RECEIVER	ESMI	839379/002	Aug. 04, 2001
HP ATTENUATOR	8496B	3247A18505	Cal. on use
HP PLOTTER	7475A	2641V27755	N/A


Notes:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.




4.3.6 TEST RESULTS


EUT	WLAN USB Adapter	Model	LM-WU110
Environmental Conditions	20°C , 60%RH	Tested By	Steven Lu

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	9.56	0.5	PASS
6	2437	9.58	0.5	PASS
11	2462	9.56	0.5	PASS


CHI

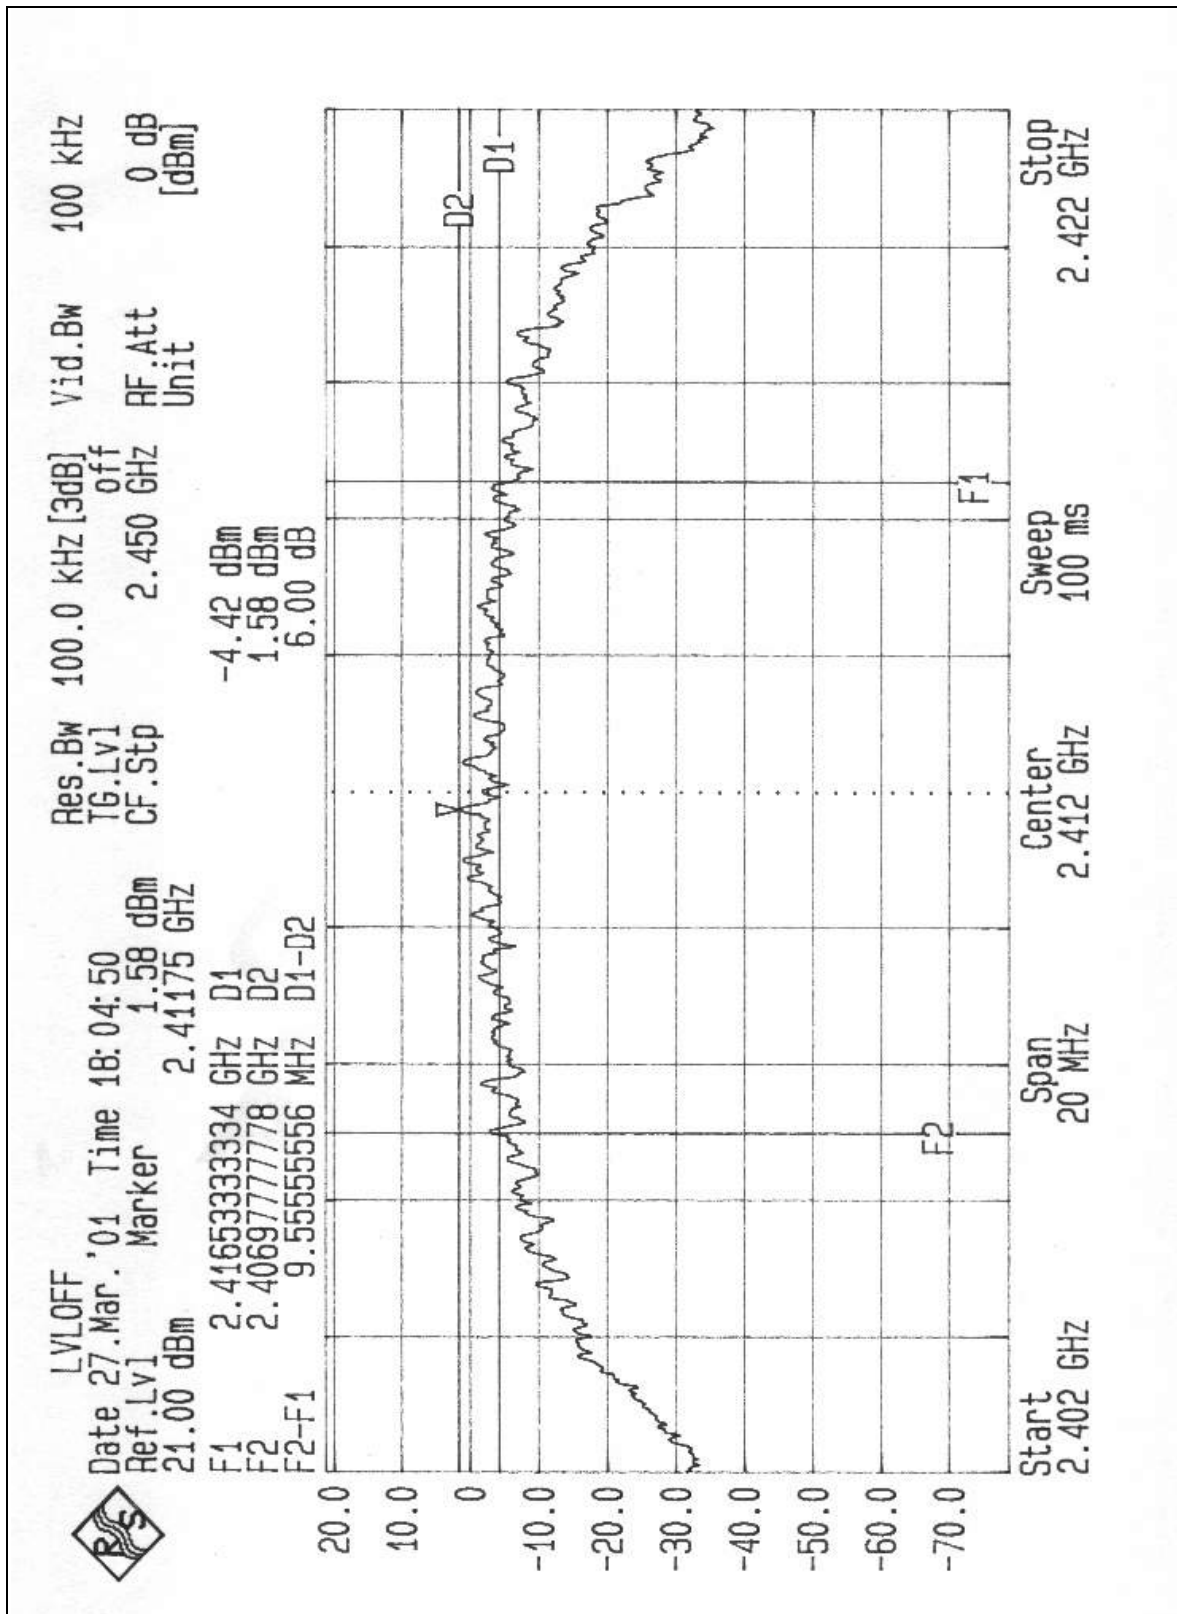

CH6

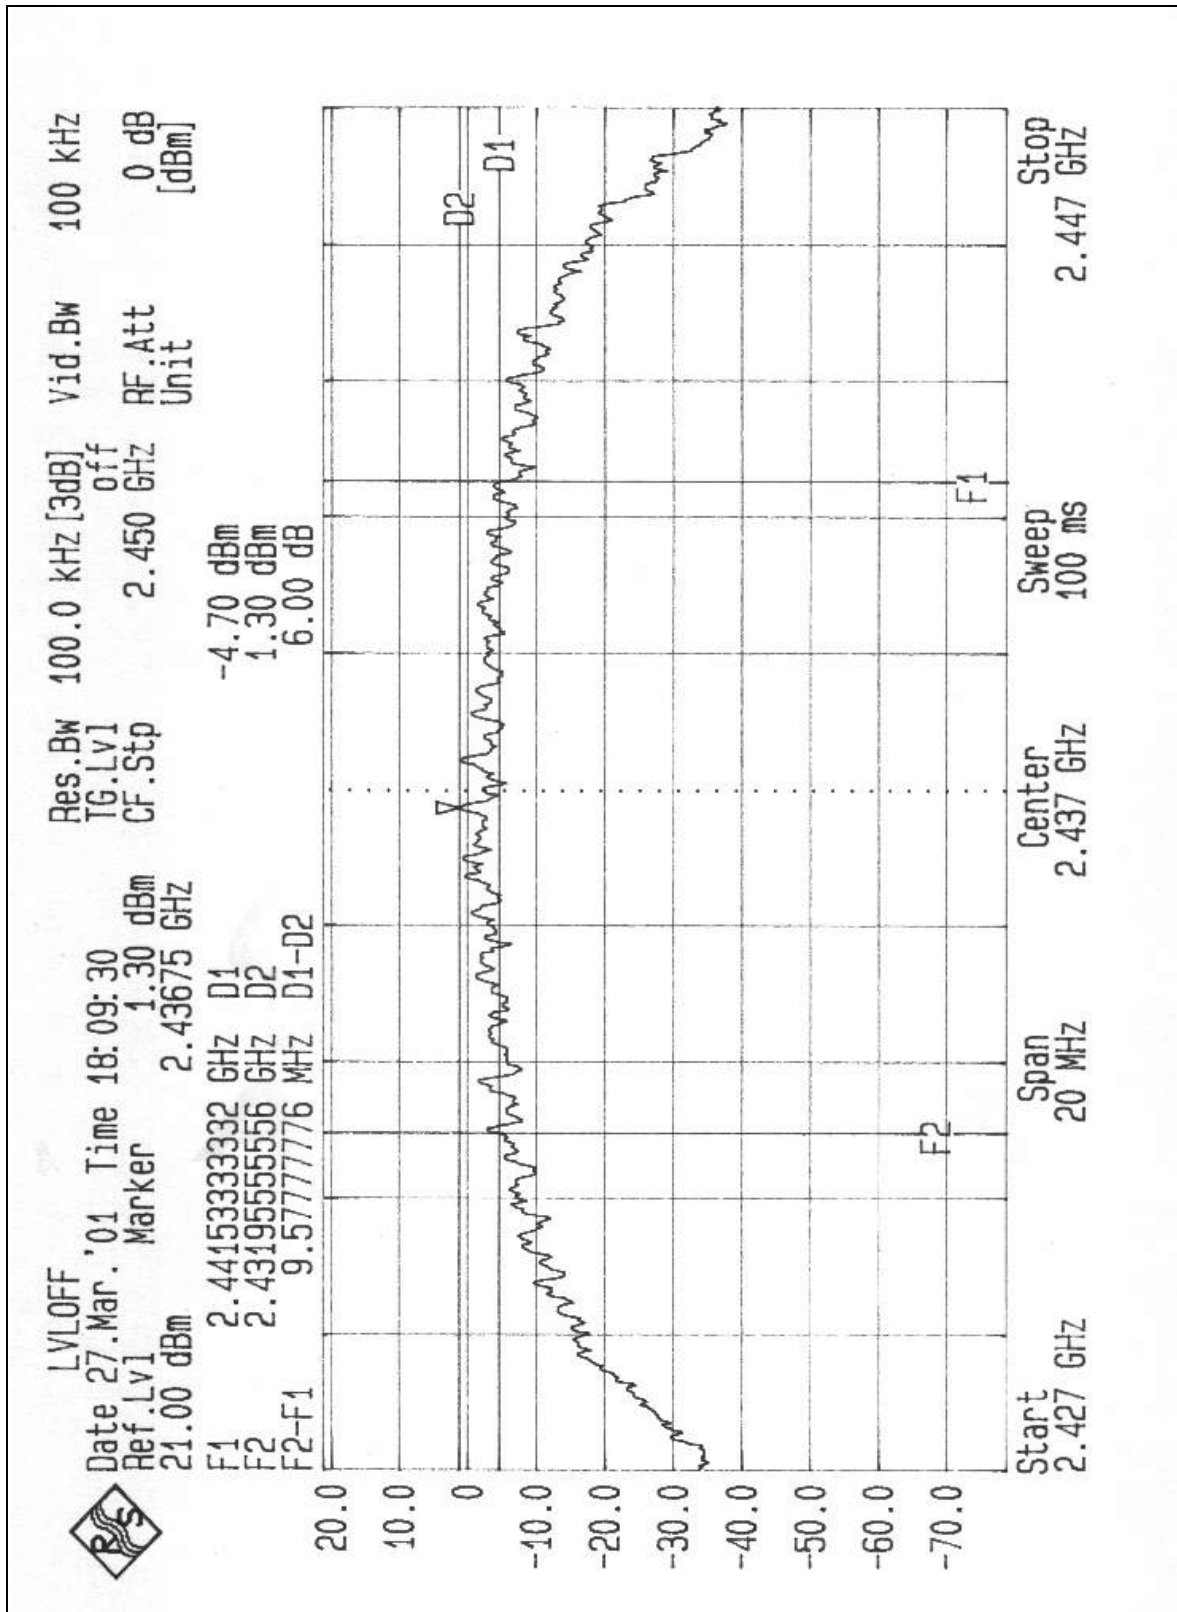

CH11

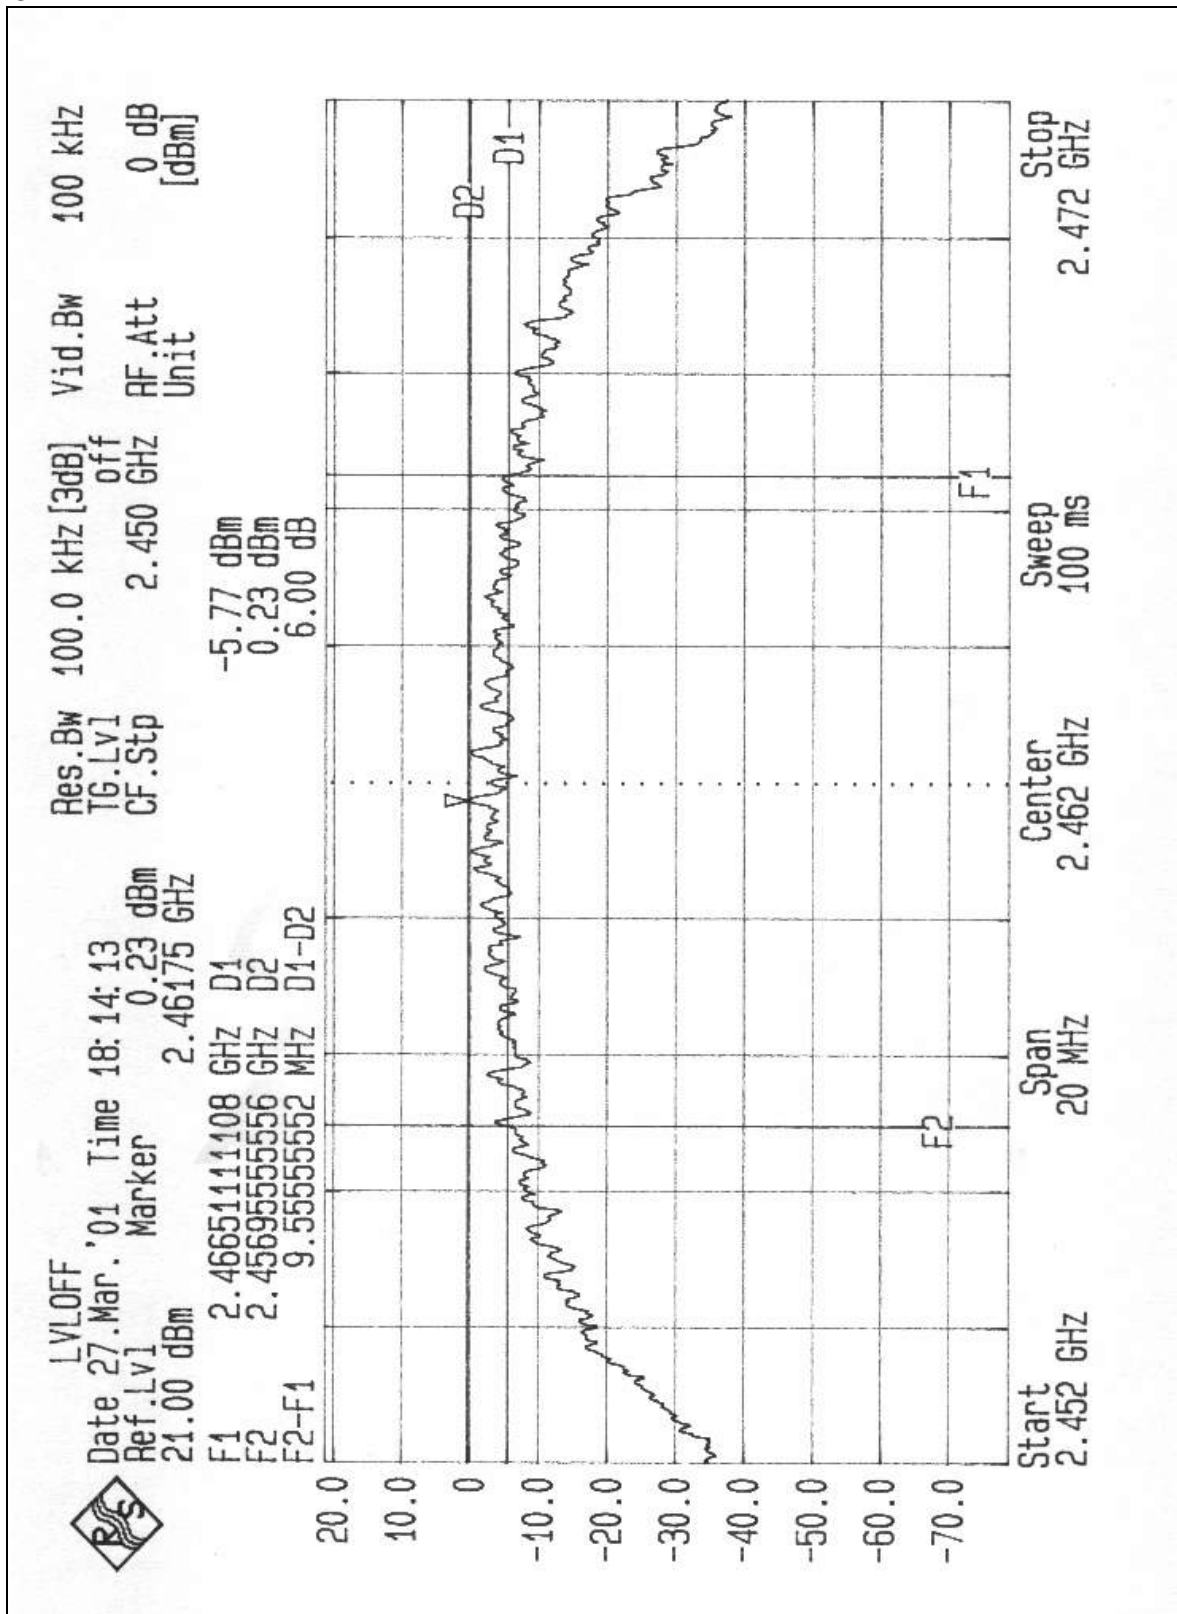

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Limit of Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ROHDE & SCHWARZ TEST RECEIVER	ESMI	839379/002	Aug. 04, 2001
HP ATTENUATOR	8496B	3247A18505	Cal. on use
HP PLOTTER	7475A	2641V27755	N/A

Notes:


- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3 MHz RBW and 3 MHz VBW.
3. The span of the spectrum analyzer should be larger than 6dB BandWidth plus 10MHz.
4. Use Peak Search to read the peak power after Maximum Hold function is activated.
5. Shift the marker to +/- 3MHz and +/-6MHz, and record the reading.
6. The Maximum Peak Output Power is the linear summation of the 5 readings in (4) and (5).

Note: This measurement is the total power of 15MHz bandwidth which is far more wider than 6dB bandwidth.

4.4.4 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.4.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.



4.4.6 TEST RESULTS

Output Power Into Antenna:

EUT	WLAN USB Adapter	Model	LM-WU110
Environmental Conditions	20°C , 60%RH	Tested By	Steven Lu

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	16.93	30	PASS
6	2437	17.26	30	PASS
11	2462	16.09	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Limit of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ROHDE & SCHWARZ TEST RECEIVER	ESMI	839379/002	Aug. 04, 2001
HP ATTENUATOR	8496B	3247A18505	Cal. on use
HP PLOTTER	7475A	2641V27755	N/A

Notes:


- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 TEST SETUP

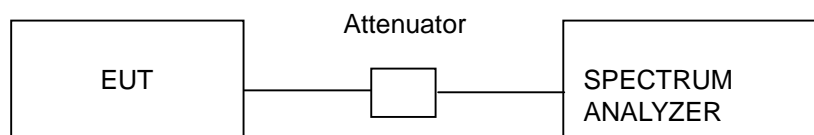

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.5.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.




4.5.6 TEST RESULTS


EUT	WLAN USB Adapter	Model	LM-WU110
Environmental Conditions	20°C , 60%RH	Tested By	Steven Lu

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-12.01	8	PASS
6	2437	-12.03	8	PASS
11	2462	-13.38	8	PASS


CHI

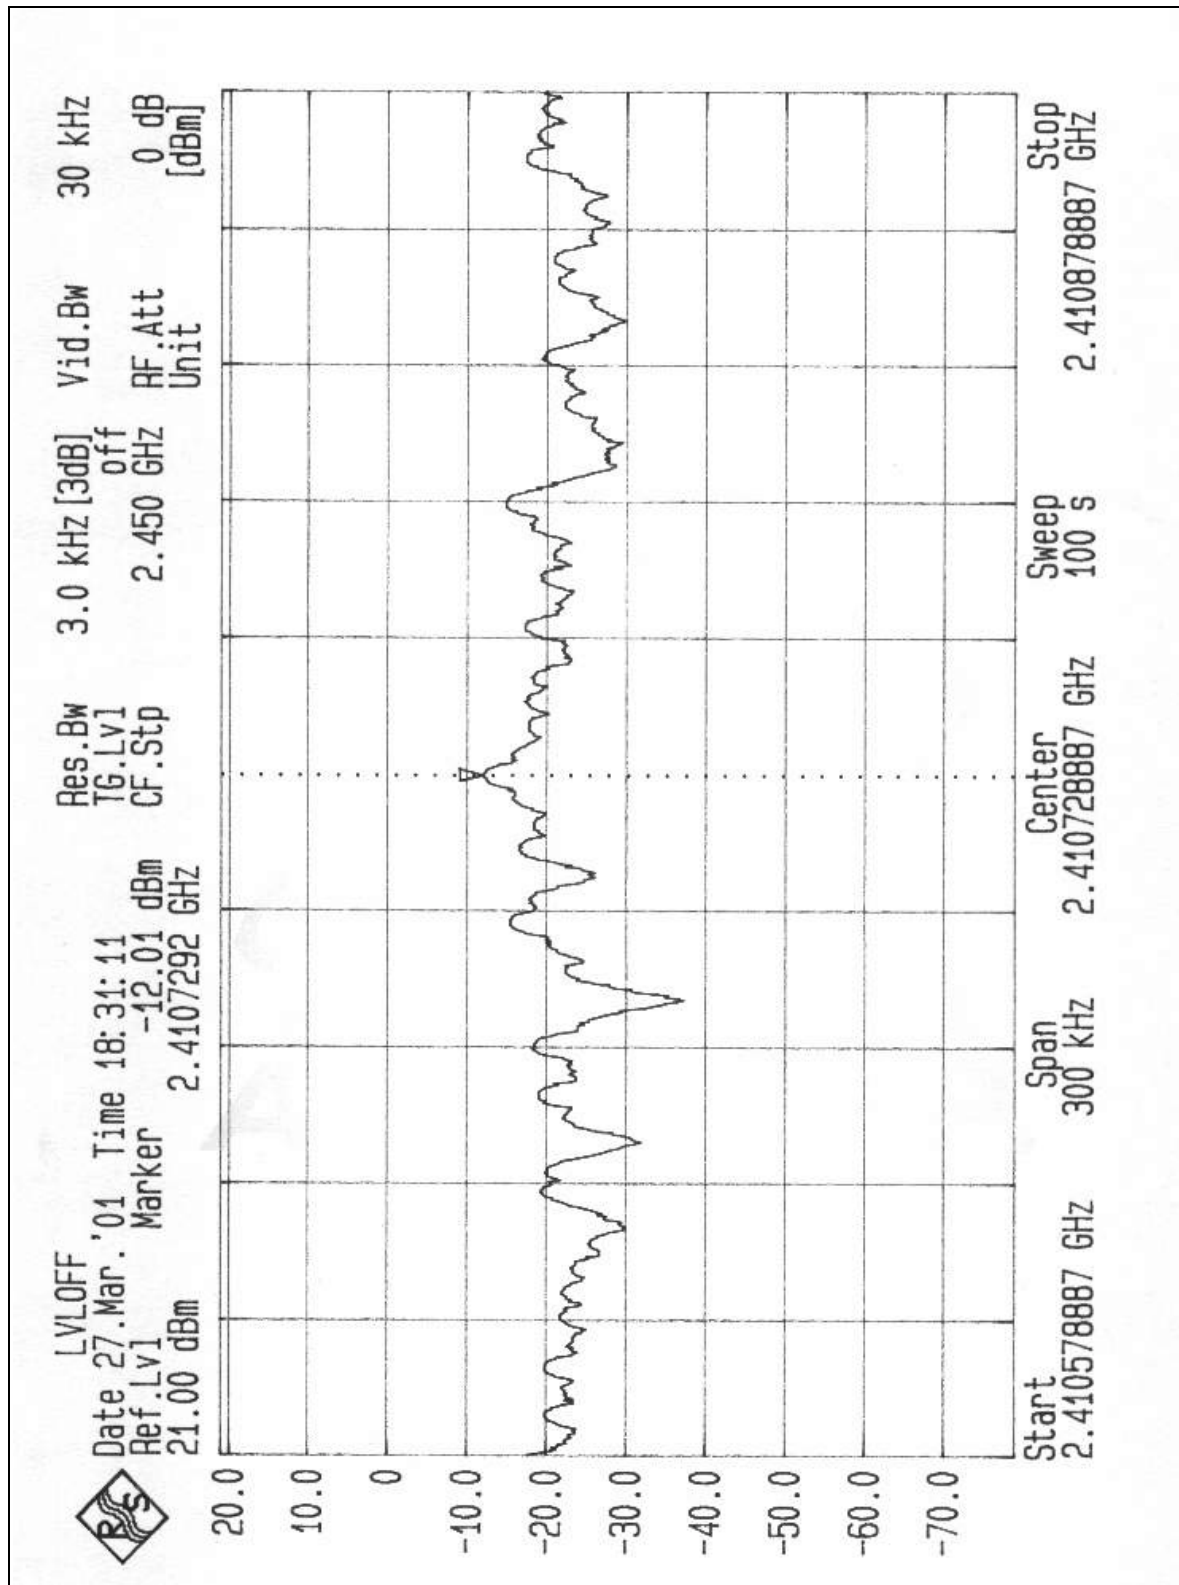

CH6

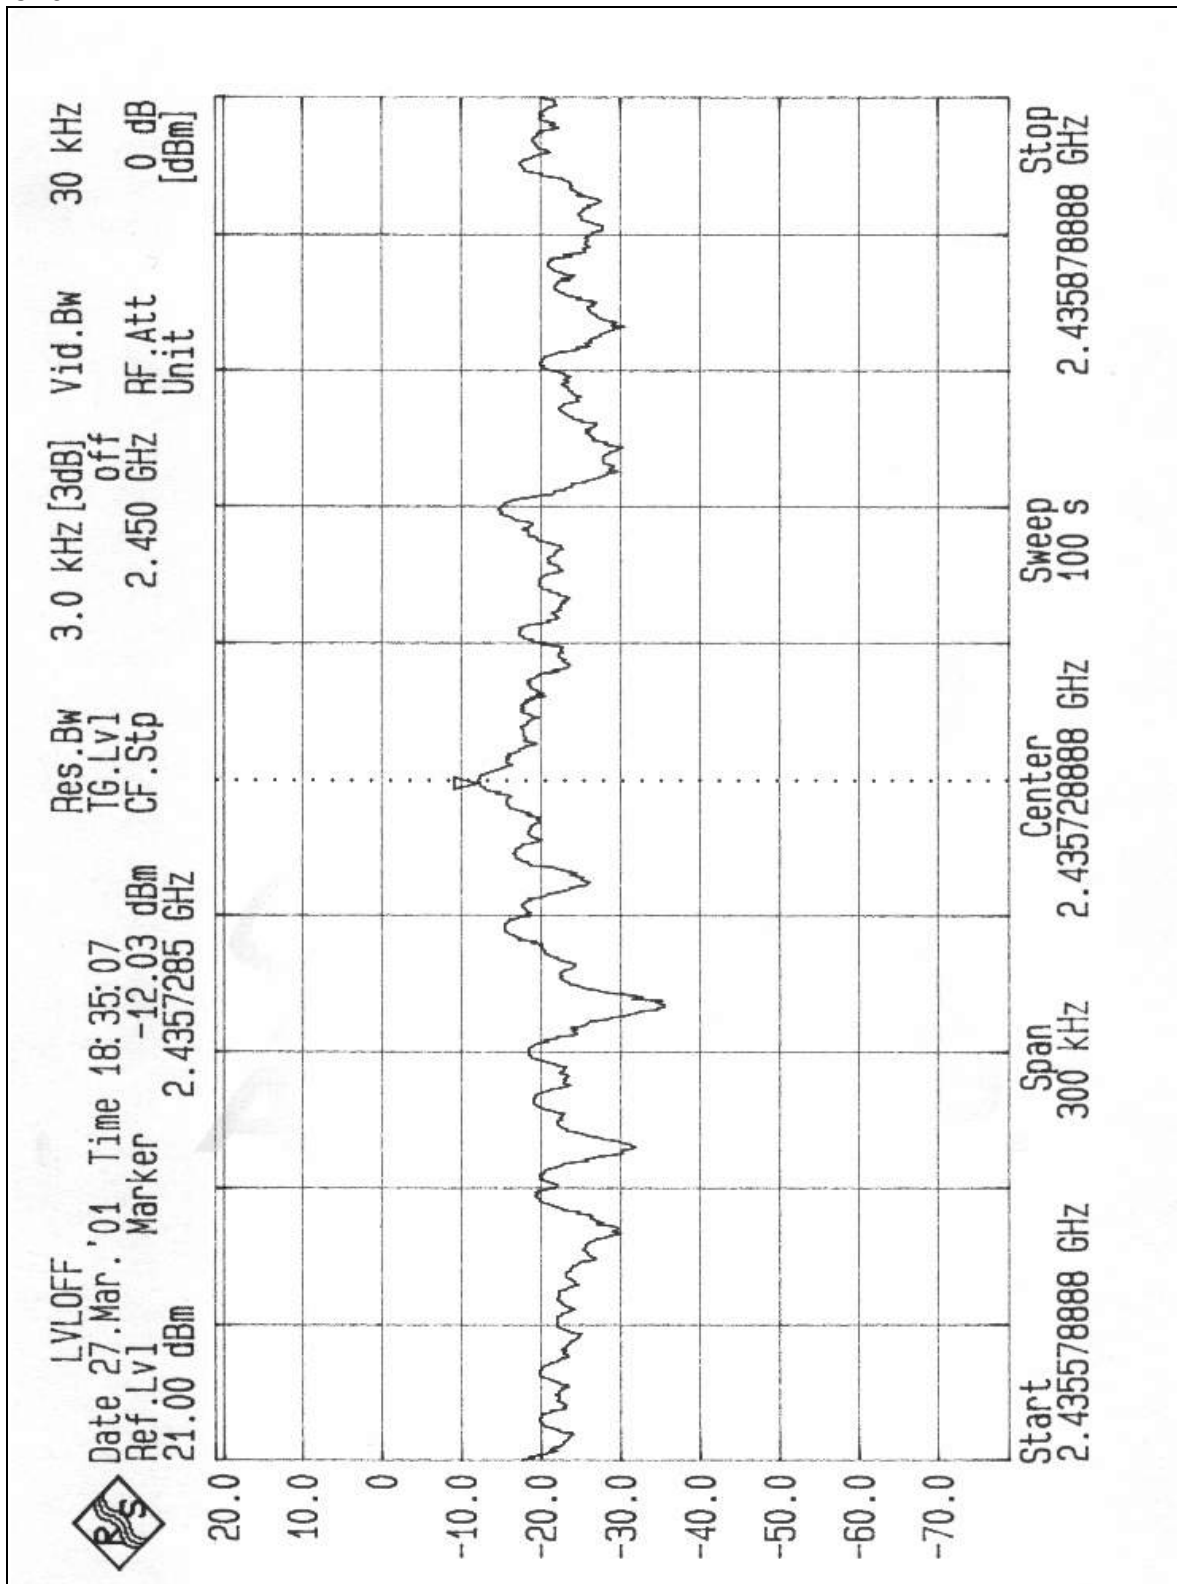

CH11

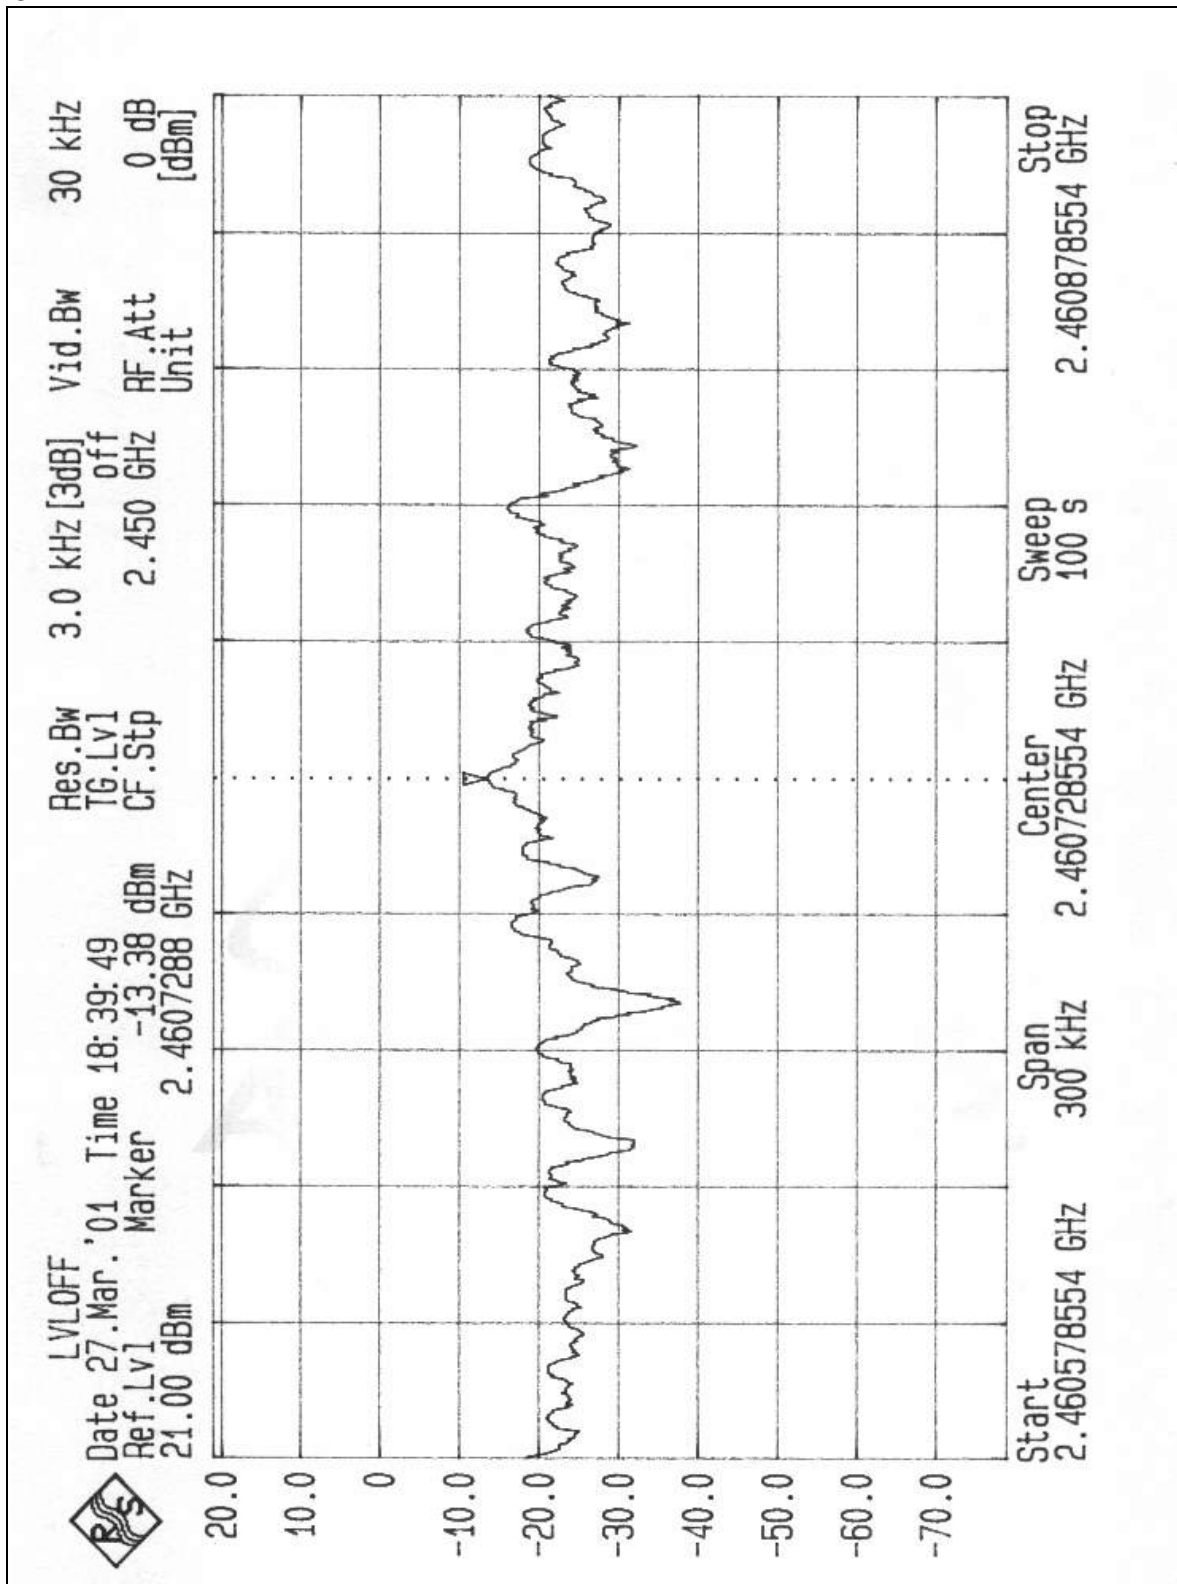

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RB).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ROHDE & SCHWARZ TEST RECEIVER	ESMI	848926/005 846839/018	Dec 03, 2001
HP ATTENUATOR	8496B	3247A18505	Cal. on use
HP PLOTTER	7475A	2641V27755	N/A

Notes:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.



4.6.4 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.


4.6.5 TEST RESULTS


The spectrum plots are attached below. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).



4.6.6 NOTE ON BAND EDGE EMISSION

The band edge emission plot on page 43 shows 43.7dB delta between carrier maximum power and local maximum emission in restrict band (2.484GHz). The emission of carrier strength list in table of page 24 is 97.1dB μ V/m, so the maximum field strength in restrict band is $97.1 - 43.7 = 53.4$ dB μ V/m which is under 54 dB μ V/m limit.

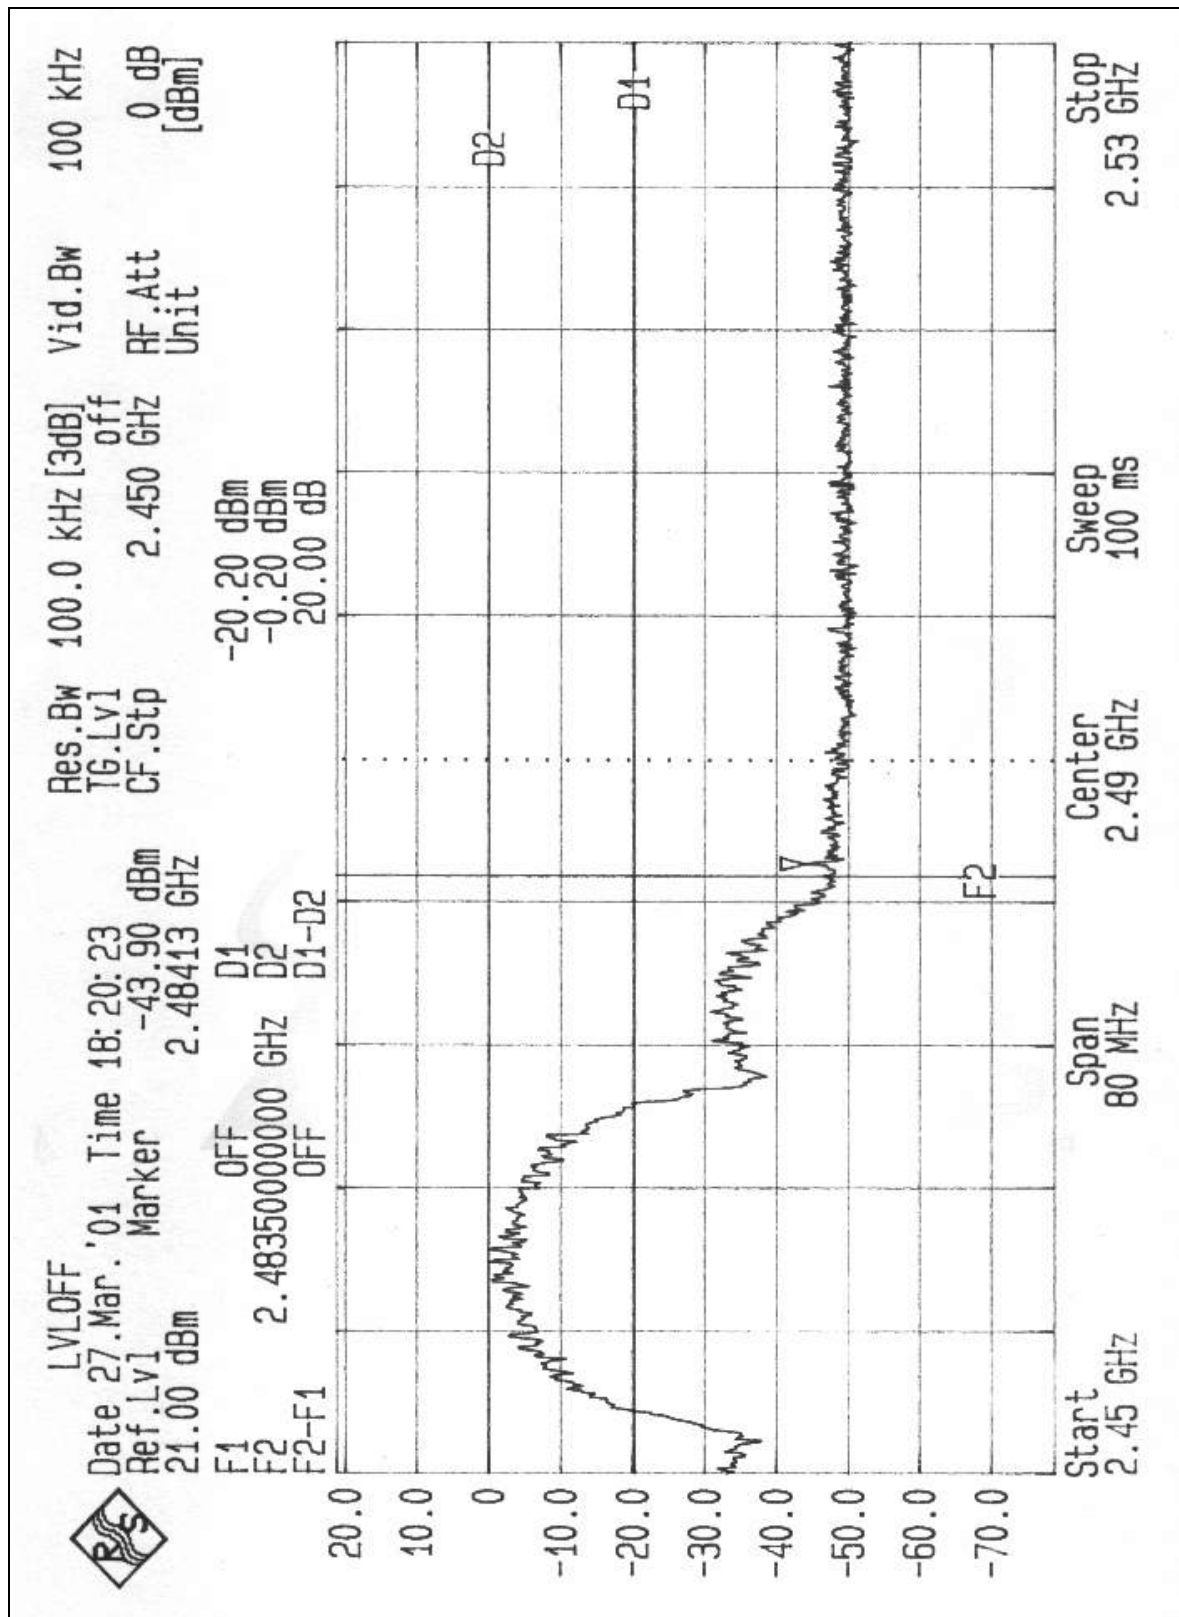

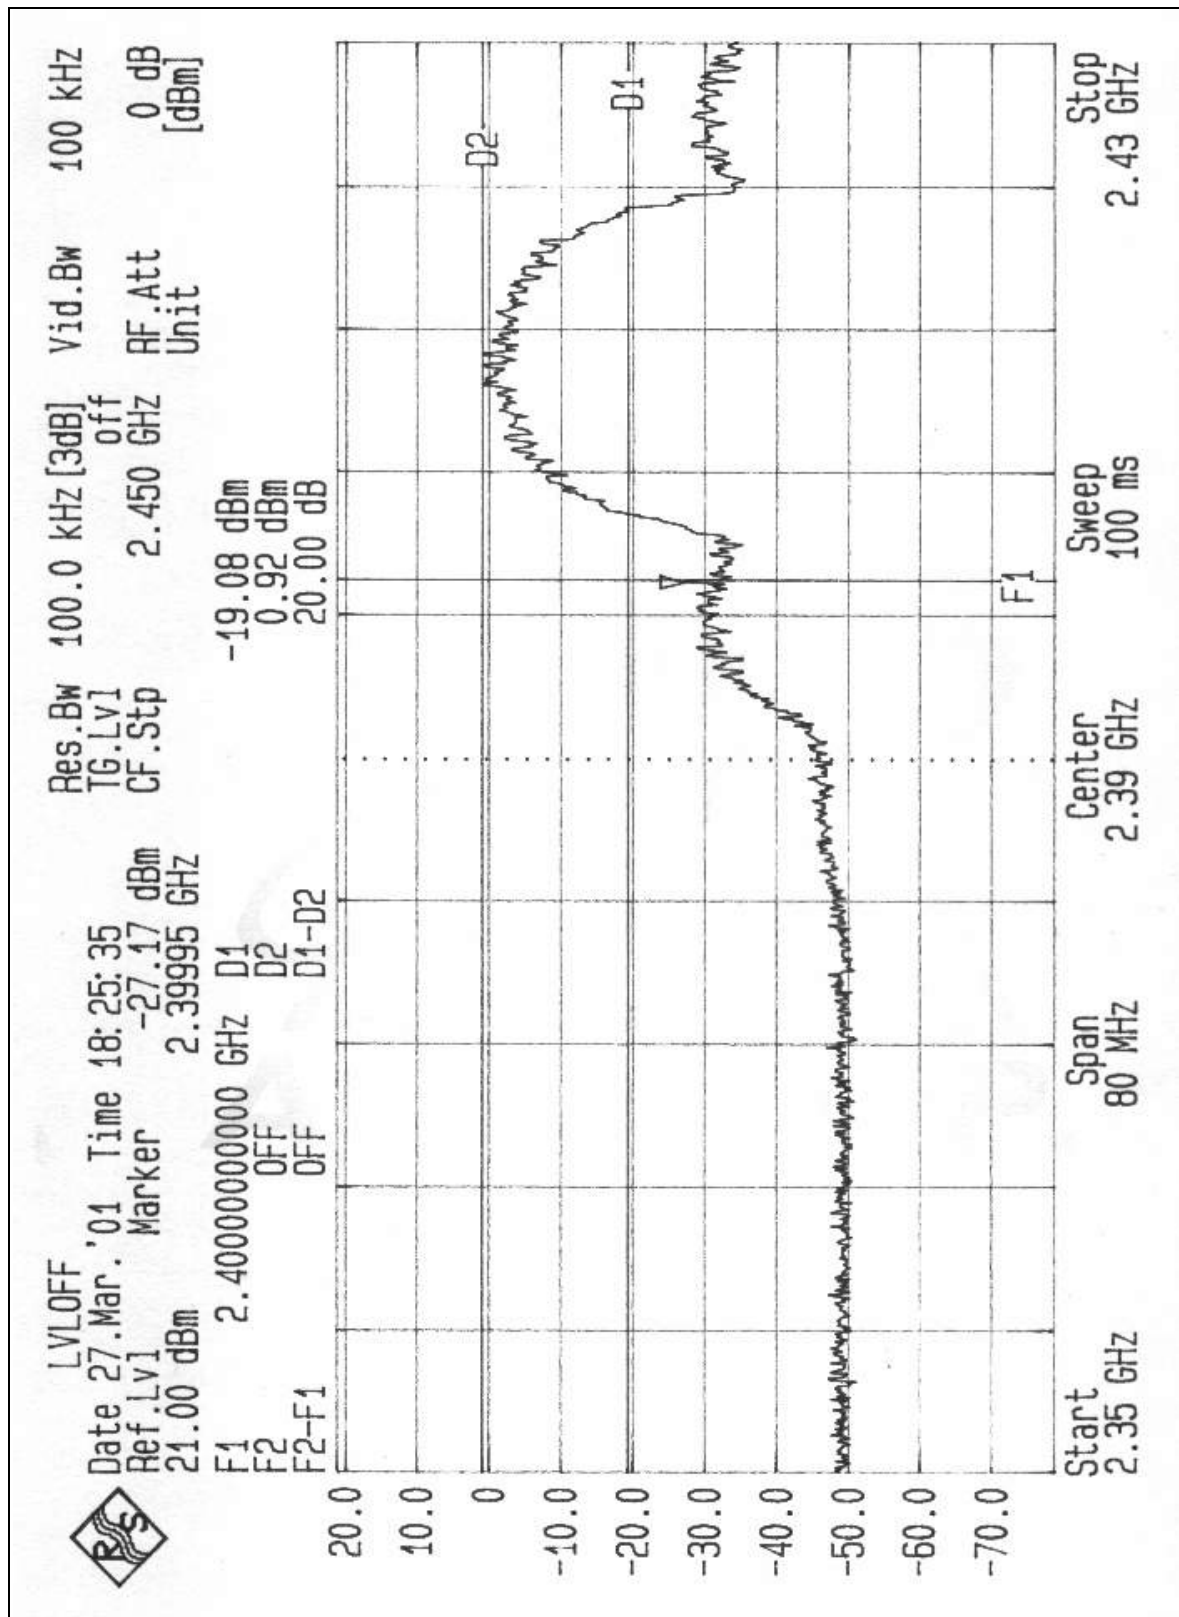



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dual monopole antenna. There is no antenna connector. And the maximum Gain of this antenna is only 1dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION CONDUCTED EMISSION TEST



RADIATED EMISSION TEST





6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited by the following approval agencies according to ISO/IEC Guide 25 or EN 45001:

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
New Zealand	RFS
Norway	NEMKO, DNV
U.K.	INCHCAPE
R.O.C.	BSMI

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195

Fax: 886-2-26093184

Design Center:

Tel: 886-2-26093195

Fax: 886-2-26093184

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw